Statement of Work
09512280 Cave Creek blw Cottonwood Creek near Cave Creek
Cableway Removal

I. Project Identification

A. **Title:** Removal of Discontinued Cableway Structures

B. **Location:** 33° 53’ 14” N, 111° 57’ 12” W, Maricopa County, AZ

II. Objectives

To procure services to dismantle a discontinued cableway structure, cable, and right and left bank saddle blocks. The awarded contractor will be removing the cableway structures and hauling away all debris including the length of cable, saddle blocks on both sides, all connecting equipment, and cutting off U bars at concrete surface.

This requirement is solely for dismantling and removal of existing structures and does not include construction, alteration, or repair of a public building or public work.

III. Special Requirements

Access to the site is made by a paved and dirt road on the left bank side of the stream. The road continues down onto the landowner’s property. Vehicles can be driven to within 50 feet of the left bank end of the cableway.

Work under this contract shall be performed in accordance with the requirements of this Statement of Work, specifications for this contract, and all applicable federal, state and local regulations. It is very important that the successful bidder understand that this project includes removal of debris made by deconstruction.

The contractor shall be responsible for providing all labor, equipment, supervision, transportation, and materials necessary to perform the work.

IV. Inspections, certifications and compliance

A. Contractor will be responsible for ensuring that all debris will be removed from the site.
B. Contractor will be responsible for returning area to as close to natural as possible
C. All work shall comply with applicable safety and environmental regulations, including OSHA requirements.
D. The Government will perform a final inspection to verify that all work has been completed in accordance with this Statement of Work. The Contractor shall

correct any deficiencies identified during inspection at no additional cost to the Government.

V. PICTURES

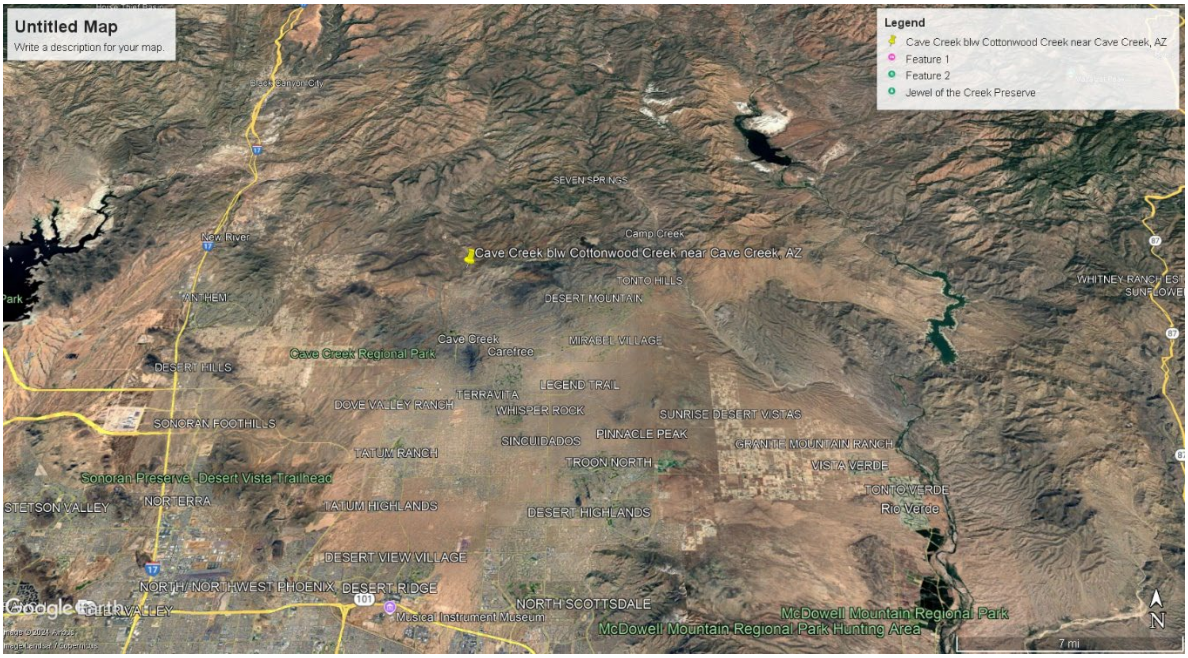

Cave Creek below Cottonwood Creek near Cave Creek, AZ

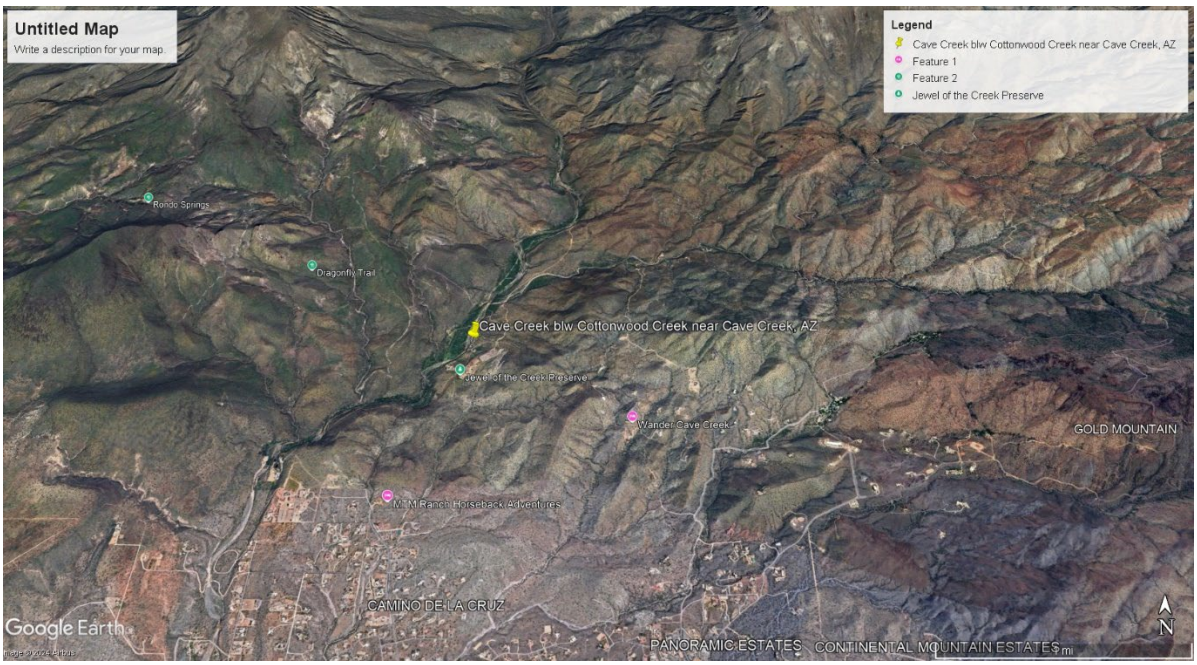

Cave Creek below Cottonwood Creek near Cave Creek, AZ - Zoomed

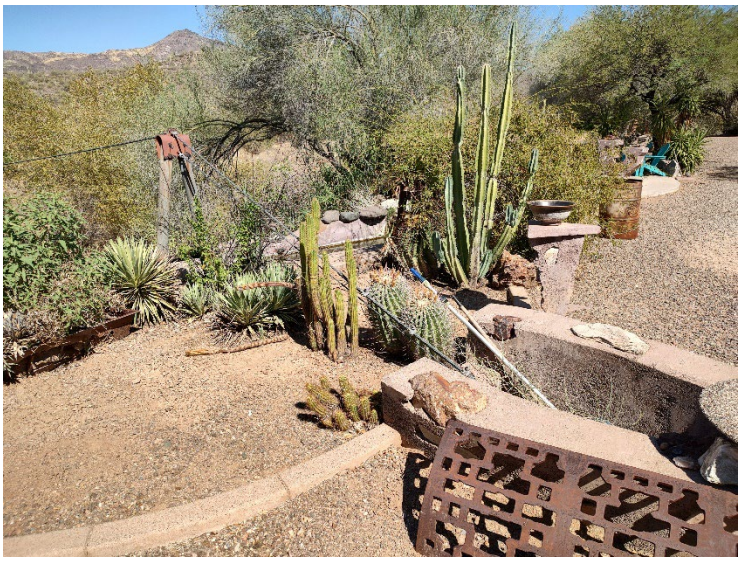

Left Bank Cableway Structure

Left Bank Cableway U Bar

Left Bank Cableway A Frame

Right Bank Cableway Structure

Right Bank Cableway U Bar

Right Bank Cableway A Frame

VI. DELIVERIES OR PERFORMANCE

Commencement, Prosecution, and Completion of Work: Normal working hours shall be 7:00am-5:00pm, Monday –Friday. The contractor shall not work Saturdays, Sundays, legal holidays, or non-normal working hours, unless otherwise authorized by the Contracting Officer's Technical Representative (COTR). Request to work times other than normal hours shall be made in writing.

The contractor shall employ sufficient personnel and equipment and order supplies to accomplish the work of this contract within 90 calendar days of the Notice to Proceed.

Progress Schedule: The Contractor shall submit a project schedule to the Contracting Officer's Representative (COR) for approval within **five days after receipt of the Notice to Proceed**.

The progress schedule shall be a chart, which graphically depicts the proposed sequence to accomplish each work feature or operation. It shall show start dates and completion dates for each event on a horizontal time scale. The progress schedule time scale shall begin with the Notice to Proceed and indicate the number of days to completion. The schedule will be the reference to which the contractor progress and effort are compared.

The Contractor shall furnish a list of all subcontractors to the Contracting Officer upon request.

Transporting of Debris and Material: All materials and construction debris shall be removed from the work area and removed from the site daily.

Disposal of debris: All materials and debris shall be disposed of properly by the contractor.

Organization at the site: The site is located at the end of the property owner's driveway and there is access to the channel bottom below the driveway.

Site Cleanliness: The contractor shall maintain the site free of construction debris in contractor furnished containers (barrels, bags, dumpsters). The contractor will maintain cleanliness of the work site by promptly removing debris, tools, and excess material.

Contractor Parking: Parking can be accessed either in the channel or above the property owners driveway along the main road.

Environmental Protection: The contractor shall perform all work and activities in accordance with local, state, and federal environmental regulations.

Outages and Interruptions: N/A

The Contractor shall attend a pre-performance meeting prior to beginning work. The technical liaison will review contract requirements and site conditions.

All work listed shall be coordinated with the technical liaison.

The Contractor shall be responsible for obtaining all permits, licenses, and approvals required to perform the work under this contract.

This includes, but is not limited to:

- Local permits
- State permits
- Environmental permits
- Hauling and disposal permits

The Contractor shall comply with all permit conditions and shall provide copies of permits to the Contracting Officer upon request. All costs associated with permitting shall be the responsibility of the Contractor.

Unless otherwise directed by the Contracting Officer:

The Contractor shall retain ownership of all materials removed from the site. Materials may be reused, recycled, or disposed of in accordance with applicable laws and regulations.

The Government has determined that any salvage value of the removed materials is incidental and does not warrant compensation to the Government.

CODES, STANDARDS AND DEPARTMENTAL PUBLICATIONS

The following manuals, handbooks, industry standards and codes are incorporated by reference.

American with Disabilities Act
ANSI/AIHA Z9.5 2003
Building Factory Mutual verification guidance
Construction Specifications Institute Standards
DOE Energy Conservation Standards 10 CFR Part 435
Facilities Standards for two public buildings service - GSA PBS-PQ100.1
ICBO Uniform Building Code
National Electrical Code
NFPA, National Fire Codes
NFPA, 101 LIFE SAFETY CODE
NFPA 30
NFPA 45
OSHA 29CFR 1910
Underwriters Laboratories Building Materials Directory
Underwriters Laboratories Fire Resistance Directory
Uniform Federal Accessibility Standards
Uniform Mechanical Code