Agency-Specific Requirements

USGS NGTOC Rolla Office

Rolla, Missouri

December 2023

IN ADDITION TO THE REQUIREMENTS SET FORTH IN THE REQUEST FOR LEASE PROPOSAL (RLP) AND LEASE (GSA FORM L202), THE FOLLOWING AGENCY-SPECIFIC REQUIREMENTS (ASR) DEFINES ALL ITEMS THAT ARE TO BE FURNISHED, INSTALLED, AND MAINTAINED BY THE LESSOR UNLESS INDICATED OTHERWISE. THE RLP AND LEASE ESTABLISHES THE MINIMUM REQUIREMENTS. THIS DOCUMENT IS A SUPPLEMENT TO THE RLP AND LEASE AND MAY ESTABLISH MORE STRINGENT REQUIREMENTS.

THE SPECIFIC REQUIREMENTS CONTAINED HEREIN SUPERSEDE ANY CONTRADICTORY ITEMS WHICH MAY BE CONTAINED IN OTHER PARTS OF THE REQUEST FOR LEASE PROSAL AND LEASE. ALL ITEMS FOUND IN THESE REQUIREMENTS SHALL BE AMORTIZED IN THE OVERALL RENTAL CONSIDERATION, UNLESS SPECIFIED OTHERWISE.

Contents

1.0 PURPOSE OF PROJECT 3

1.1 INTRODUCTION 3
1.2 MISSION AND FUNCTION 3
1.3 GREEN BUILDING 3

2.0 GENERAL SPACE REQUIREMENTS 4

2.1 AMOUNT OF SPACE 4
2.1.1 Square Footage Requirement 4
2.1.2 Space Break Down (Refer to Attachment A for Library of Space Types) 4
2.2 DELINEATED AREA 5
2.2.1 Boundaries 5
2.3 TERM OF LEASE 5
2.4 BUILDING WIDE PARAMETERS 6
2.4.1 Site 6
2.4.2 Operating Hours: 7
2.4.3 Security 7
2.4.4 Warehouse 7
2.4.5 Government Parking 7
2.4.6 Fenestration 7
2.4.7 Antennas 7
2.4.8 Loading Dock 8
2.4.9 Computer Room 8

3.0 DETAILED REQUIREMENTS 8

3.1 GENERAL PURPOSE SPACE 8

1.0 Purpose of Project

1.1 Introduction

The following Agency-Specific Requirements (ASR) is intended to further describe the lease requirements for the U.S. Geological Survey National Geospatial Technical Operations Center (NGTOC). This ASR defines the USGS tenant improvement requirements (modifications) for offices, support spaces, parking, and special spaces. Furthermore, it is intended to provide design and test-fit guidance to the owner in the submittal of leased space offered.

The information provided in the ASR is here to assist the lessors in preparing their offers. The square footages of individual rooms listed are approximate and are provided as a guideline for space layout and to ensure that the space and site offered will provide for an efficient layout and accommodate the needs of the U.S. Geological Survey in an efficient and effective manner. It should be noted that this ASR has been developed prior to the award of a lease. When the offered space becomes available, it may be necessary to refine this program to adjust and accommodate the offered space.

1.2 Mission and Function

The USGS serves the Nation by providing reliable scientific information to describe and understand the Earth; minimize loss of life and property from natural disasters; manage water, biological, energy, and mineral resources; and enhance and protect our quality of life. USGS has become a world leader in the natural sciences thanks to our scientific excellence and responsiveness to society's needs.

The U.S. Geological Survey National Geospatial Technical Operations Center (NGTOC) provides leadership and world-class technical expertise in the acquisition and management of trusted geospatial data, services, and map products for the Nation. NGTOC supports The National Map as part of the National Geospatial Program (NGP).

1.3 Green Building

A commitment to sustainable design is a priority for this project. Federal law and Executive Orders require the Government to apply good sound Green Building Principles for construction, environmental management, operation, and maintenance of federally funded buildings. Government agencies are called upon to promote energy efficiency, water conservation, and the use of renewable energy sources. The lease requirements incorporate all the required Green Building requirements for this procurement.

It should be the building owner’s intent to optimize the use of emerging energy management technologies through the implementation of a building design that employs all the following:

- Optimize Site Potential: Creating sustainable buildings starts with proper site selection, including consideration of the reuse or rehabilitation of existing buildings. The location, orientation, and landscaping of a building affects the local ecosystem, transportation methods, and energy use.
- Minimize Energy Consumption: A building should rely on optimizing system efficiencies and employing conservation measures. Renewable energy technologies should be used in facility projects whenever feasible and cost effective.
- Protect and Conserve Water: Fresh water in an increasingly scarce resource. A sustainable building should reduce, control or treat site runoff, use water efficiently, and implement as many Federal Energy Management Program Water Efficiency Improvement Best Management Practices as practicable.
- Use Environmentally Preferable Products: Buildings should be constructed of materials that minimize lifecycle environmental impacts such as global warming, resource depletion, and toxicity.
- Enhance Indoor Environmental Quality (IEQ): The IEQ of a building has a significant impact on occupant health, comfort, and productivity. Among other attributes, a building should optimize day lighting, be well ventilated, control moisture/humidity, and avoid the use of materials with high-VOC emissions.
- Optimize Operational and Maintenance Practices: Buildings should be designed to consider the energy and environmental impacts of operating and maintaining the building. Designers are encouraged to specify materials and systems that reduced maintenance requirements, and/or require less water, energy and toxic chemicals to maintain.

2.0 General Space Requirements

2.1 Amount of Space

2.1.1 Square Footage Requirement

The US Geological Survey is interested in leasing approximately **27,438** – **30,182** rentable square feet of Office, Special Use, and Light Industrial. The rentable space shall yield a minimum of 23,859 ANSI/BOMA Office Area (ABOA) square feet to a maximum of 26,245 ANSI/BOMA Office Area square feet.

2.1.2 Space Break Down (Refer to Attachment A for Space Type Characteristics)

Section/ Business Unit	Space Type	Qty.	Room Sq Ft.	USABLE/ABOA SQ Ft Total
GENERAL OFFICE (UTILIZED)				
Private Offices				
	DELUXE PRIVATE OFFICE	4	140	560
	STANDARD PRIVATE OFFICE	20	120	2400
	ECONOMY PRIVATE OFFICE	15	100	1500
	SHARED PRIVATE OFFICE	15	120	1800
	Total Number of Private Offices	**54**		
	Subtotal			**6,260**
Open Workstations				
	STANDARD OPEN OFFICE WORKSTATION	38	64	2432
	Total Number of Workstations	**38**		
	Subtotal			**2,432**
Meeting Space				
	LARGE CONFERENCE ROOM	1	300	300
	MEDIUM CONFERENCE ROOM	3	150	450
	OPEN COLLABORATION SPACE	3	150	450
	Subtotal			**1,200**
GENERAL SUPPORT SPACE (UTILIZED)				
Support	BREAK ROOM	1	150	150
	UTILITY ROOM	3	100	300
	RECEPTION DESK AND WAITING	1	144	144
	SMALL LIBRARY	1	500	500
			Subtotal	**1,094**
	Subtotal Square Feet (Utilized) (Includes General Office and General Support Spaces)			**10,986**
	30% Gross Square Foot Factor Addition (Includes Wall Thicknesses, Circulation Space, etc.)			**3,296**
TOTAL USABLE SF OFFICE AREA - *"UTILIZED"*				**14,282**

SPECIAL USE SPACE (NON-UTILIZED)				
	ELECTRONICS LAB	1	225	225
	AUDITORIUM	1	750	750
	IT/COMM ROOM	4	100	400
	Data Center *(Must be 999 SF or less)*	1	1000	1,000
	Subtotal Special Use Space Square Feet			**2,375**
	30% Gross Square Foot Factor Addition (Includes Wall Thicknesses, Circulation Space, etc.)			**713**
TOTAL USABLE SF - *"SPECIAL USE SPACE"*				**3,088**

INDUSTRIAL SPACE				
	LIGHT INDUSTRIAL WAREHOUSE	1	5,500	5,500
	CAGE/FENCE STORAGE	1	400	400
	Subtotal Industrial Space Square Feet			**5,900**
	10% Gross Square Foot Factor Addition (Includes Wall Thicknesses, Circulation Space, etc.)			**590**
TOTAL USABLE SF - *"INDUSTRIAL"*				**6,490**

EXTERIOR AND PARKING SPACE *(Not included in SF Figures)*				
	SECURED OPEN PRK (STANDARD V.) GOV	4	sp.	
	USA ACCESS BADGING VISITOR PARKING	4	sp.	
TOTAL ASSIGNED GOV/VISITOR PARKING				**8**

TOTAL USABLE OFFICE SQUARE FEET RANGE	**FROM**	**14,282**	**TO**	**15,710**
TOTAL USABLE SPECIAL USE SQUARE FEET	**FROM**	**3,088**	**TO**	**3,396**
TOTAL USABLE INDUSTRIAL SF	**FROM**	**6,490**	**TO**	**7,139**
TOTAL USABLE SQUARE FEET *(ACQUISITION RANGE)*	**FROM**	**23,859**	**TO**	**26,245**

2.2 Delineated Area

2.2.1 Boundaries

All prospective properties must be physically located within, or front the boundaries as identified below:

City Limits of Rolla, MO

2.3 Term of Lease

The lease term shall be for 20 years. The lease may be terminated in whole or in part after 10 Years (10 Year Firm Term) on 120 days' written notice to the Lessor.

- 20 Year Lease, 10 Year Firm Term

2.4 Building Wide Parameters

2.4.1 Site

General Description of Space/Building Type:

USGS Science Center Offices are typically located in a mixed use, single tenant, professional office/flex type developments or business districts allowing (Flex) space that easily accommodate office, special use, and light industrial operations.

The USGS requires a professional office/building/site appearance and presentation. Key factors in site selection should include a modern professional appearance and good site circulation. Space and site layout typically provides for professional office environment at the front of the facility/site with light industrial space (garage access, warehouse, loading dock) toward the rear or side of the facility in order to maintain a professional and attractive appearance for visitors and partners.

Below are pictures of representative samples of similar USGS Locations:

General Building Components and Design:

Outdoor lighting must be sufficient for safety, and to ensure preventive lighting for GOV vehicles parked overnight in the parking lot.

The Offeror is required to provide a large USGS logo Identifier sign on or in front of the building or as approved by the contracting officer and agency representative. The USGS Logo is trademarked and USGS will provide all the necessary electronic media and dimensions for design of the sign.

2.4.2 Operating Hours:

Services and maintenance shall be provided daily, 7:00 am to 5:00 pm except Saturdays, Sundays, and federal Holidays.

Overtime Usage: When heating or cooling is required on an overtime basis, such services will be ordered orally or in writing by the GSA Contracting Officer or Buildings Manager with the approval of the appropriate USGS official.

Computer Room Utilities and O&M shall be included in the base rent.

2.4.3 Security

Primary security specification and level identification for USGS (FSL II + security systems) are incorporated into the RLP/Lease. The USGS intends to install PACS, CCTV/VSS, and Intrusion Detection systems as part of our BSAC for their space and building perimeter. The lessor share be responsible for installation and maintenance of the systems while USGS will operate, control, and monitor the systems.

2.4.4 Warehouse

The USGS intends to install and utilize a dense high density shelving system in the warehouse. Although a manufacturer has not been selected, high floor loading in excess of 200 psf may be required depending on multiple design considerations such as density and height of the shelving system.

Warehouse/Industrial space shall have a minimum clear working ceiling height of 16 feet throughout and include a minimum access of one (1) 16' Wide x 12' high overhead door along with access to a loading dock to serve the warehouse space.

2.4.5 Government Parking

A minimum of 8 parking spaces shall be available for USGS and will provide for 4 assigned GOV Vehicles and 4 USA ACCESS BADGING Visitor spaces near the entrance to USGS space.

2.4.6 Fenestration

The offered location should maximize fenestration for office space as much as practical to include industry standard bay depths to provide interior daylighting design for large scale/bay depth buildings.

2.4.7 Antennas

The Lessor shall allow the Government and/or its designated telecommunications providers to affix telecommunications antennae (high frequency, mobile, microwave, satellite, or other emerging technologies), subject to weight and wind

load conditions, to roof, parapet, or building envelope as required. Access/penetrations for the antenna(s) to the leased space shall be provided by the lessor.

2.4.8 Loading Dock

USGS Requires access to a standard height loading dock for loading and unloading of materials. This may be achieved through several possible design options.

2.4.9 Computer Room/Comm Closets

The USGS requires a 24/7/365 secured computer room not to exceed 999 usable square feet with a minimum of the following features to be operated and maintained by the lessor as part of the lease to include utilities.

- Smart Energy/Green Design to reduce energy usage.
- 24/7 Emergency Power (Generator)
- Dual CRAC Units alternating usage for redundancy and uptime.
- Computer Room/Comm Closets Utilities to be included in Base Rent for 24/7 operation.
- Room Sized (Floor/Cabinet) intelligent Power Data Unit (PDU) to provide for the following:
    - Clean/stable consistent power
    - Surge Protection
    - Remote monitoring
    - Energy monitoring
- 15 Minute Room level UPS to cover the time frame between power off and generator on gaps.
- The USGS also may require up to 4 IT/COMM closets (IDF) for network routing and switch gear depending on the layout of the building and space. All closets shall be individually cooled 24/7/365.

3.0 Detailed Requirements

3.1 General Purpose Space

See **Attachment A** for individual room characteristics for general scope of tenant improvement build out expectations.

Department of the Interior
United States Geological Survey
Facilities Leasing and Management Branch
OMS_LEASING@USGS.GOV

Space Assessment Template Typical Library
Agency Specific Requirements
Tenant Improvement Models

Version 12/2023

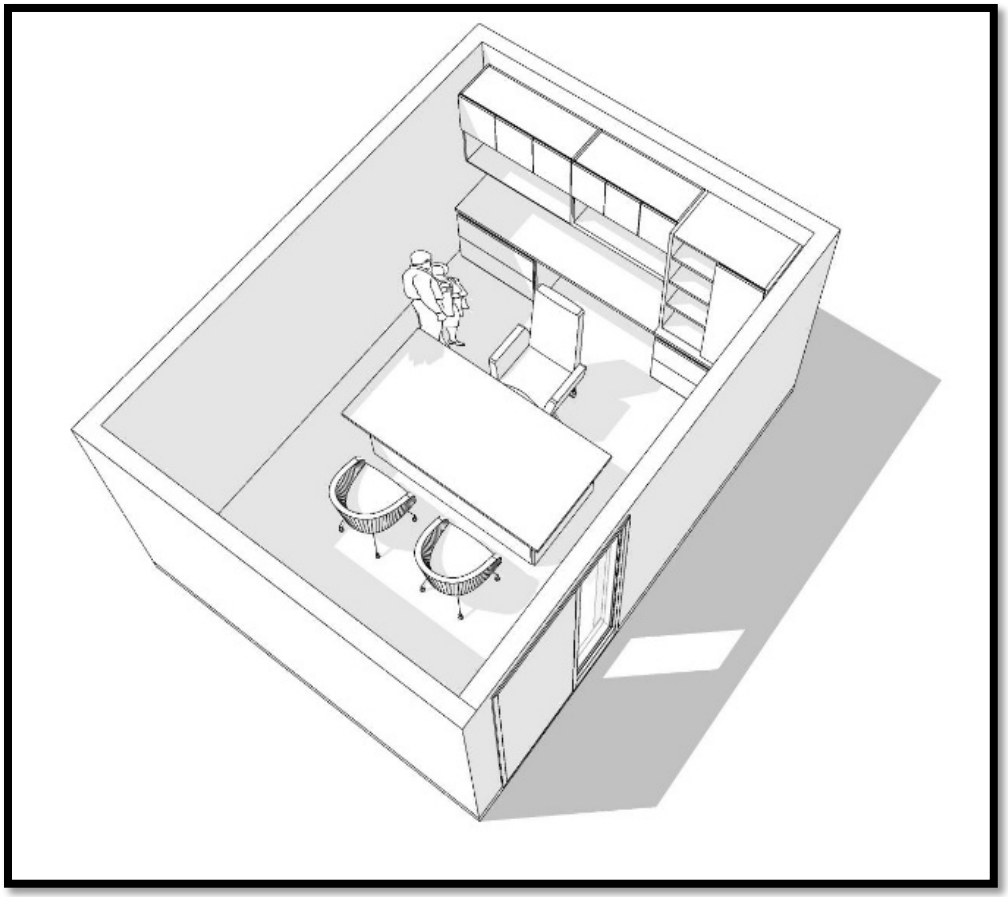

TABLE OF CONTENTS

- Introduction page 4
- Private Offices
  - Deluxe page 5
  - Standard page 6
  - Economy page 7
  - Shared page 8
- Open Workstations
  - Deluxe page 9
  - Standard page 10
  - Small page 11
  - Touchdown page 12
- Meeting Space
  - Large Conference Room page 13
  - Medium Conference Room page 14
  - Small Conference Room page 15
  - Phone Room page 16
  - Open Collaboration Space page 17
- General Support Space
  - Break Room page 18
  - Utility Room page 19
  - Layout Room page 20
  - Shower Room page 21
  - Computer Lab page 22
  - Reception Desk and Waiting Room page 23
  - Small Library page 24

TABLE OF CONTENTS – RELATED TO SPACE ASSESSMENT WORKSHEET TABS

- Special Use Space (Non-Utilized)
  - Auditorium (750 sf or greater) page 25
  - Large Library (750 sf or greater) page 26
  - Wet Lab #1 page 27
  - Wet Lab #2 page 28
  - Dry Lab #1 page 29
  - Dry Lab #2 page 30
  - Clean Lab page 31
  - Electronics Lab page 32
  - Lab Storage page 33
  - Sample Prep Room page 34
  - Refrigerator Room page 35
  - IT/Comm Room page 36
- Light Industrial & Warehouse
  - Light Industrial Vehicle Bay page 37
  - Light Industrial Warehouse page 38
  - Fabrication Shop page 39
  - Cage Storage page 40
- Parking Spaces page 41
  - Secured Open Park (Standard Vehicle)
  - Secured Open Park (Oversized Vehicle)
  - Secured Covered Parking
  - General Employee/Visitor Parking

INTRODUCTION

The U.S. Geological Survey (USGS) utilizes a base library of typical space types and levels of construction for the development of our agency specific space requirements and overall footprint. These design typicals are utilized in leased projects that incorporate a tenant improvement allowance where more detailed design elements will be developed after lease award with an Architect/Engineer through the Design Intent Drawing (DID) process. This library is intended to further describe the **general characteristics** of principal areas in more detail such as offices, support spaces, parking, ware yard, special spaces, and laboratories.

Information provided in this library is here to assist the lessor/offeror in preparing their offers based on the Amount of Space as identified in the Agency Specific Requirements (ASR) and better defines the overall scope of construction (Level of Effort) and expectations of the tenant improvement build out to be provided by the lessor. Lessor/offeror shall rely on the General Space Requirements – Amount of Space section in the ASR for specific space sizes to ensure that the space and site offered will provide for an efficient layout and accommodate the needs of the USGS in an efficient and effective manner. Any square footages that may be listed in the Library are approximate or for reference only during programming.

DELUXE PRIVATE OFFICE	0	150	0
STANDARD PRIVATE OFFICE	0	120	0
ECONOMY PRIVATE OFFICE	0	120	0
SHARED PRIVATE OFFICE	2	120	240
Total Number of Employees In Offices	**2**		
Subtotal			**240**
DELUXE OPEN OFFICE WORKSTATION	10	80	800
STANDARD OPEN OFFICE WORKSTATION	5	64	320
SMALL OPEN OFFICE WORKSTATION	5	36	180
TOUCHDOWN OPEN OFFICE WORKSTATION	0	36	0
Total Number of Employees In Workstations	**20**		
Subtotal			**1,300**
LARGE CONFERENCE ROOM	1	300	300
MEDIUM CONFERENCE ROOM	0	150	0
SMALL CONFERENCE ROOM	2	110	220
PHONE ROOM	1	50	50
OPEN COLLABORATION SPACE	1	125	125
Subtotal			**695**

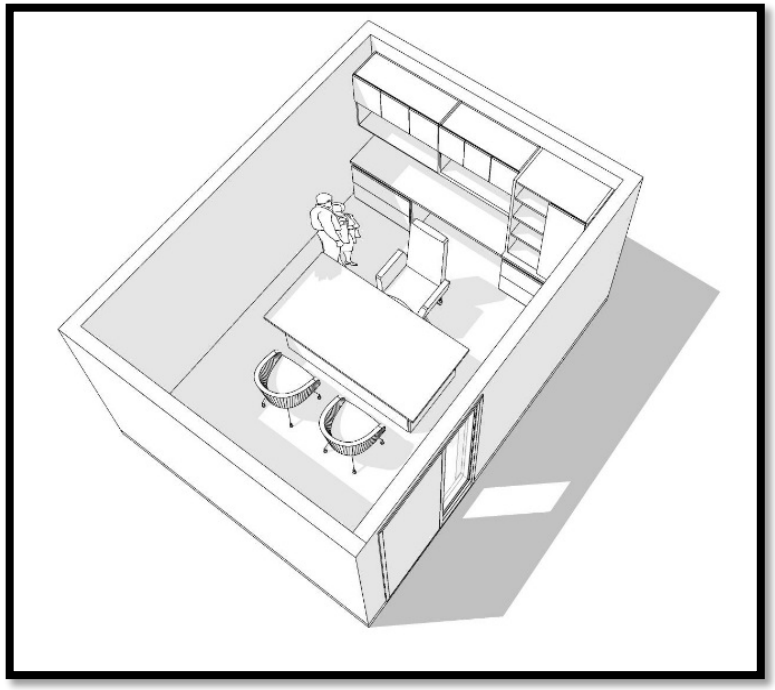

PRIVATE OFFICES - DELUXE

Key Features	
Approx Size:	Refer to the ASR – General Space Requirements
Seat Count:	1, up to 4 guests
Walls:	Drywall with painted finish, installed from finish floor to 6" above ceiling, acoustically treated to provide an STC rating of 45
Floor:	Building standard carpet with rubber base
Ceiling:	Building standard acoustical lay-in ceiling, with minimum NRC of 0.55, CAC of 35, and LR of 85
Door/Glazing:	Stained, solid-core wood interior door with sound gaskets, full-length glass sidelite 18" wide, building standard frame. Building standard window coverings at exterior glazing. *optional - full glass office front, check in upgrades below if desired
Lighting:	Building standard office lighting, 35 foot-candles at a height of 30", dual level switch and daylighting controls
Electrical:	6 duplex outlets, 2 data drops
HVAC:	Building standard heating and air conditioning with private thermostat (**Note by checking full height wall upgrade below it could affect mechanical systems and cause a mechanical cost increase - it causes returns to be ducted instead of having the possibility of plenum returns - also adds cost for working around full height framing)
Casework:	None
Signage:	Building standard identification sign outside door
AV:	None
Equipment:	None
Furniture:	Desk and desk with storage, 2 guest chairs
Not Included:	AV, Equipment, and Furniture listed above is for reference only, it is not included in this budget.

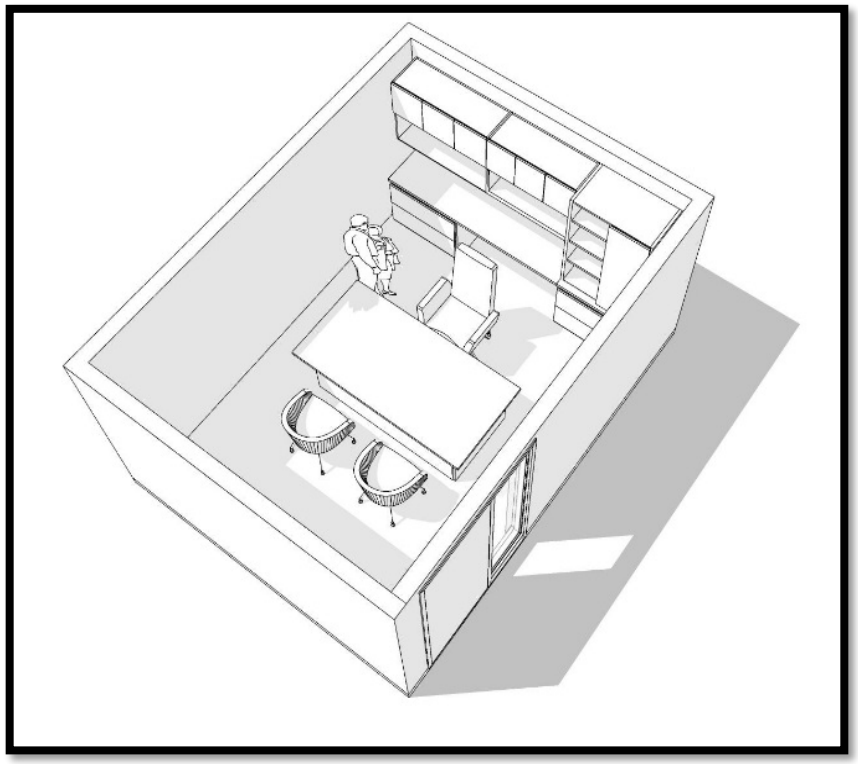

PRIVATE OFFICES - STANDARD

Key Features	
Approx Size:	Refer to the ASR – General Space Requirements
Seat Count:	1, up to 2 guests
Walls:	Drywall with painted finish, installed from finish floor to 6" above ceiling, acoustically treated to provide an STC rating of 45
Floor:	Building standard carpet with rubber base
Ceiling:	Building standard acoustical lay-in ceiling, with minimum NRC of 0.55, CAC of 35, and LR of 85
Door/Glazing:	Stained, solid-core wood interior door with sound gaskets, full-length glass sidelite 18" wide, building standard frame. Building standard window coverings at exterior glazing. *optional - full glass office front, check in upgrades below if desired
Lighting:	Building standard office lighting, 35 foot-candles at a height of 30", dual level switch and daylighting controls
Electrical:	4 duplex outlets, 2 data drops
HVAC:	Building standard heating and air conditioning with private thermostat (**Note by checking full height wall upgrade below it could affect mechanical systems and cause a mechanical cost increase - it causes returns to be ducted instead of having the possibility of plenum returns - also adds cost for working around full height framing)
Casework:	None
Signage:	Building standard identification sign outside door
AV:	None
Equipment:	None
Furniture:	Desk and desk with storage, Guest chair
Not Included:	AV, Equipment, and Furniture listed above is for reference only, it is not included in this budget.

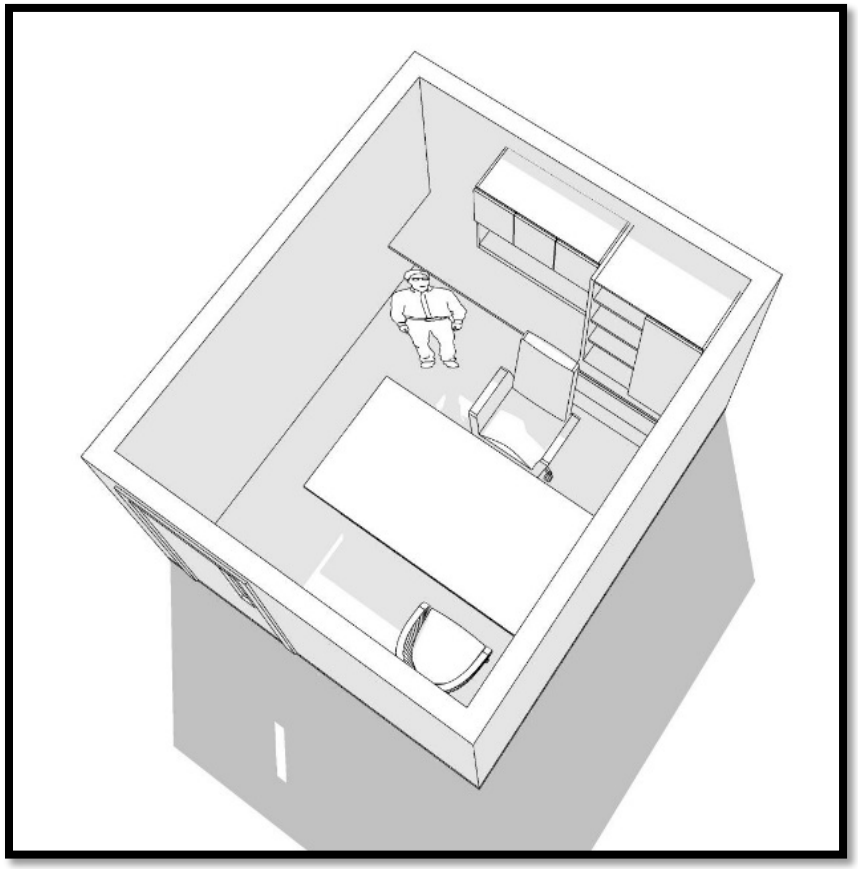

PRIVATE OFFICE – ECONOMY

Key Features	
Approx Size:	Refer to the ASR – General Space Requirements
Seat Count:	1, up to 2 guests
Walls:	Drywall with painted finish, installed from finish floor to underside of suspended ceiling, acoustically treated to provide an STC rating of 35
Floor:	Building standard carpet with rubber base
Ceiling:	Building standard acoustical lay-in ceiling, with minimum NRC of 0.55, CAC of 35, and LR of 85
Door/Glazing:	Stained, solid-core wood interior door with sound gaskets and vision lite, building standard frame. Building standard window coverings at exterior glazing. *optional - full glass office front, check in upgrades below if desired
Lighting:	Building standard office lighting, 35 foot-candles at a height of 30", single level switch and daylighting controls
Electrical:	2 duplex outlets, 1 data drops
HVAC:	Building standard heating and air conditioning with shared thermostat (**Note by checking full height wall upgrade below it could affect mechanical systems and cause a mechanical cost increase - it causes returns to be ducted instead of having the possibility of plenum returns - also adds cost for working around full height framing)
Casework:	None
Signage:	Building standard identification sign outside door
AV:	None
Equipment:	None
Furniture:	Desk with Storage - Guest chair
Not Included:	AV, Equipment, and Furniture listed above is for reference only, it is not included in this budget.

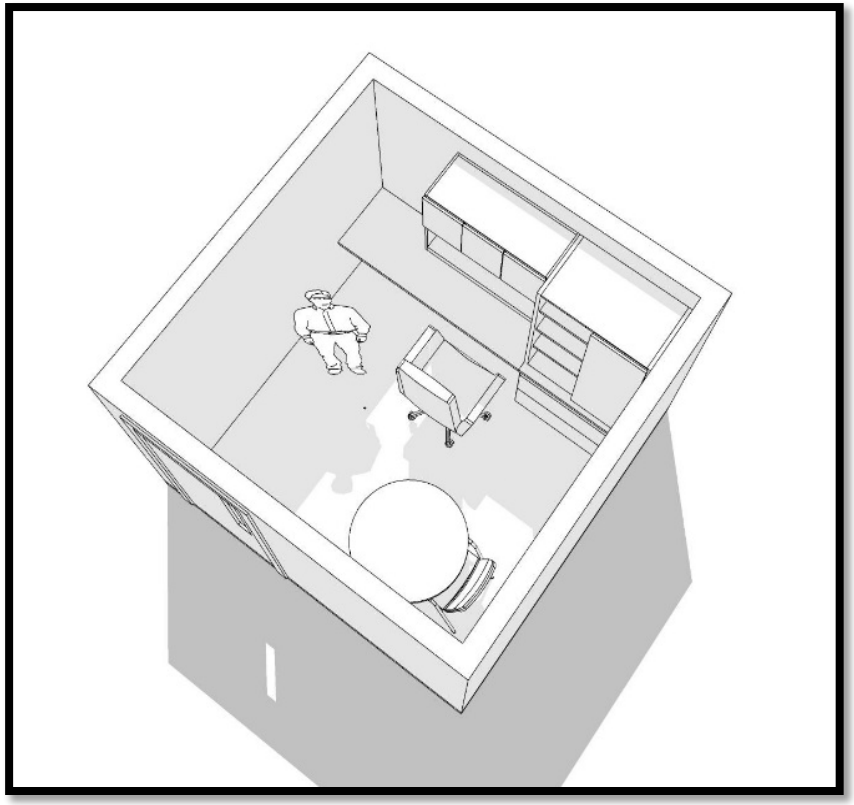

PRIVATE OFFICES - SHARED

Key Features	
Approx Size:	Refer to the ASR – General Space Requirements
Seat Count:	2
Walls:	Drywall with painted finish, installed from finish floor to underside of suspended ceiling, acoustically treated to provide an STC rating of 35
Floor:	Building standard carpet with rubber base
Ceiling:	Building standard acoustical lay-in ceiling, with minimum NRC of 0.55, CAC of 35, and LR of 85
Door/Glazing:	Stained, solid-core wood interior door with sound gaskets, full-length glass sidelite 18" wide, building standard frame. Building standard window coverings at exterior glazing. *optional - full glass office front, check on front page
Lighting:	Building standard office lighting, 35 foot-candles at a height of 30", dual level switch and daylighting controls
Electrical:	4 duplex outlets, 2 data drops
HVAC:	Building standard heating and air conditioning with shared thermostat (**Note by checking full height wall upgrade below it could affect mechanical systems and cause a mechanical cost increase - it causes returns to be ducted instead of having the possibility of plenum returns - also adds cost for working around full height framing)
Casework:	None
Signage:	Building standard identification sign outside door
AV:	None
Equipment:	None
Furniture:	(2) desks with storage
Not Included:	AV, Equipment, and Furniture listed above is for reference only, it is not included in this budget.

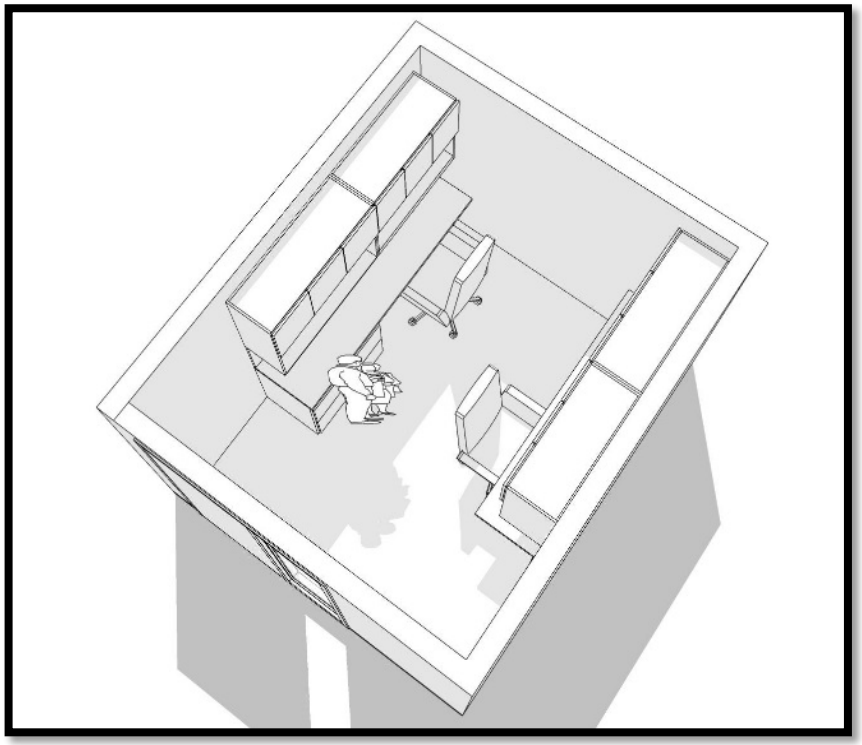

OPEN OFFICE WORKSTATIONS – DELUXE

Key Features	
Approx Size:	Refer to the ASR – General Space Requirements
Seat Count:	1, up to 2 guests
Walls:	None
Floor:	Building standard carpet with rubber base
Ceiling:	Building standard acoustical lay-in ceiling, with minimum NRC of 0.55, CAC of 35, and LR of 85
Door/Glazing:	None
Lighting:	Building standard office lighting, 35 foot-candles at a height of 30"
Electrical:	J-box for furniture power connection, 1 data drop
HVAC:	Building standard heating and air conditioning with shared thermostat
Casework:	None
Signage:	None
AV:	None
Equipment:	None
Furniture:	Panel partitions on 3 sides, U-shape desk, 2 guest chairs
Not Included:	AV, Equipment, and Furniture listed above is for reference only, it is not included in this budget.

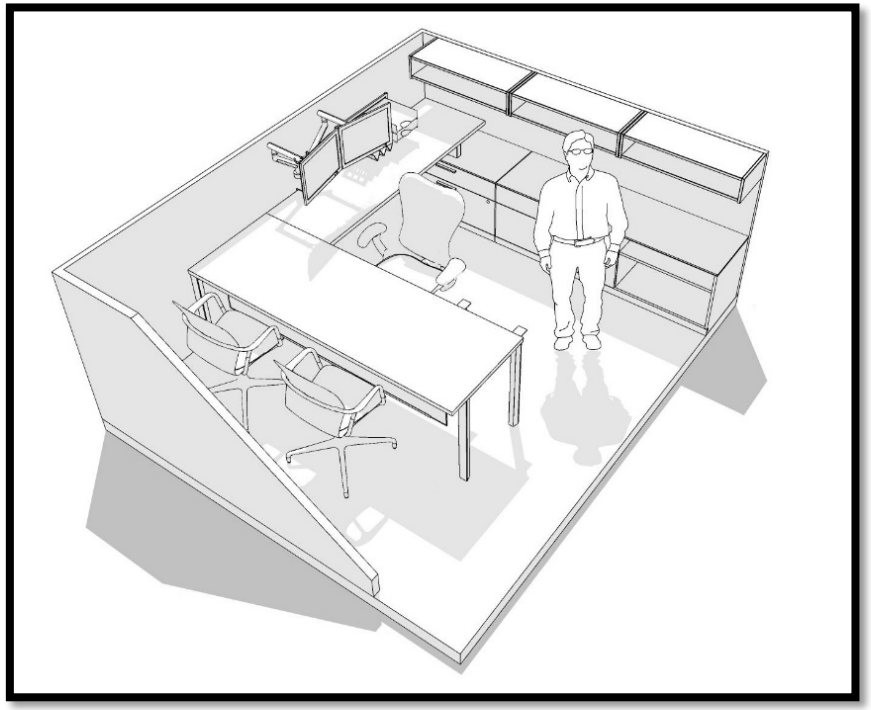

OPEN OFFICE WORKSTATION – STANDARD

Key Features	
Approx Size:	Refer to the ASR – General Space Requirements
Seat Count:	1
Walls:	None
Floor:	Building standard carpet with rubber base
Ceiling:	Building standard acoustical lay-in ceiling, with minimum NRC of 0.55, CAC of 35, and LR of 85
Door/Glazing:	None
Lighting:	Building standard office lighting, 35 foot-candles at a height of 30"
Electrical:	J-box for furniture power connection, 1 data drop
HVAC:	Building standard heating and air conditioning with shared thermostat
Casework:	None
Signage:	None
AV:	None
Equipment:	None
Furniture:	Panel partitions on 3 sides, U-shape desk
Not Included:	AV, Equipment, and Furniture listed above is for reference only, it is not included in this budget.

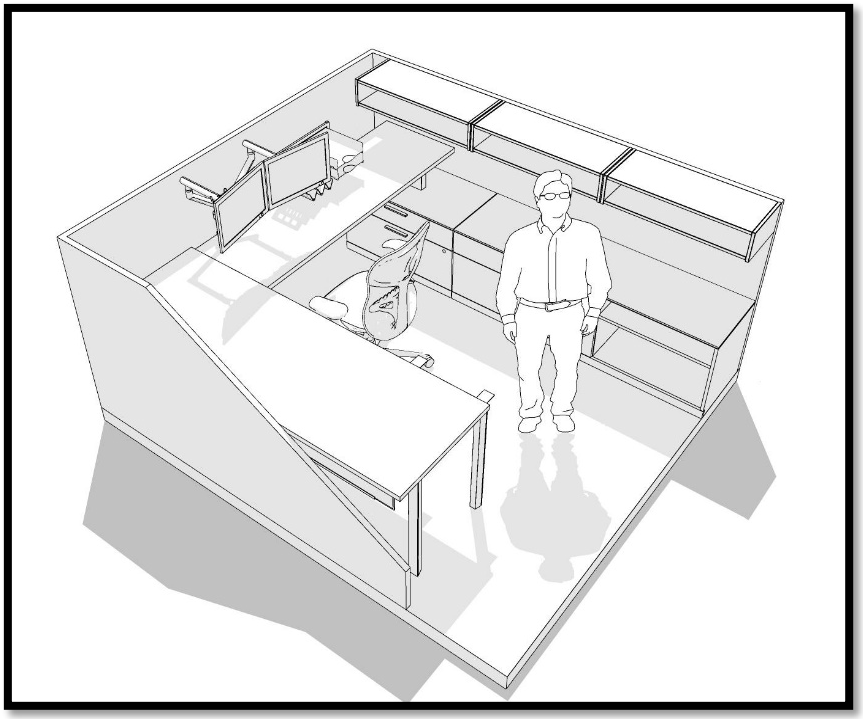

OPEN OFFICE WORKSTATION – SMALL

Key Features	
Approx Size:	Refer to the ASR – General Space Requirements
Seat Count:	1
Walls:	None
Floor:	Building standard carpet with rubber base
Ceiling:	Building standard acoustical lay-in ceiling, with minimum NRC of 0.55, CAC of 35, and LR of 85
Door/Glazing:	None
Lighting:	Building standard office lighting, 35 foot-candles at a height of 30"
Electrical:	J-box for furniture power connection, 1 data drop
HVAC:	Building standard heating and air conditioning with shared thermostat
Casework:	None
Signage:	None
AV:	None
Equipment:	None
Furniture:	Panel partitions on 2 sides, L-shape desk
Not Included:	AV, Equipment, and Furniture listed above is for reference only, it is not included in this budget.

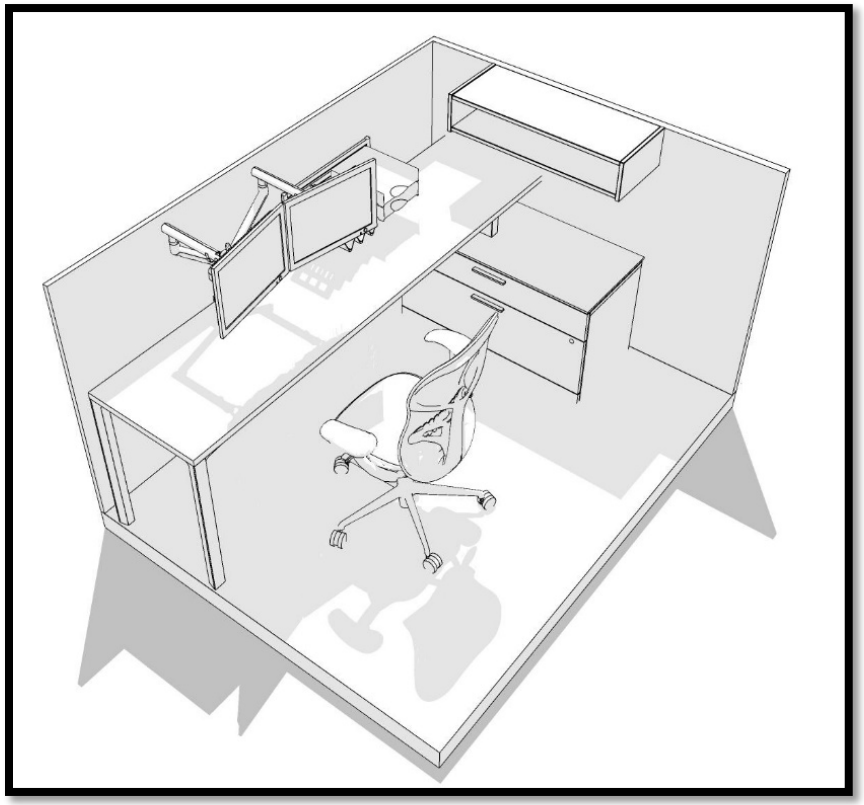

OPEN OFFICE WORKSATION – TOUCHDOWN

Key Features	
Approx Size:	Refer to the ASR – General Space Requirements
Seat Count:	1
Walls:	None
Floor:	Building standard carpet with rubber base
Ceiling:	Building standard acoustical lay-in ceiling, with minimum NRC of 0.55, CAC of 35, and LR of 85
Door/Glazing:	None
Lighting:	Building standard office lighting, 35 foot-candles at a height of 30"
Electrical:	J-box for furniture power connection, 1 data drop
HVAC:	Building standard heating and air conditioning with shared thermostat
Casework:	None
Signage:	None
AV:	None
Equipment:	None
Furniture:	Panel partitions on 1 side, straight desk
Not Included:	AV, Equipment, and Furniture listed above is for reference only, it is not included in this budget.

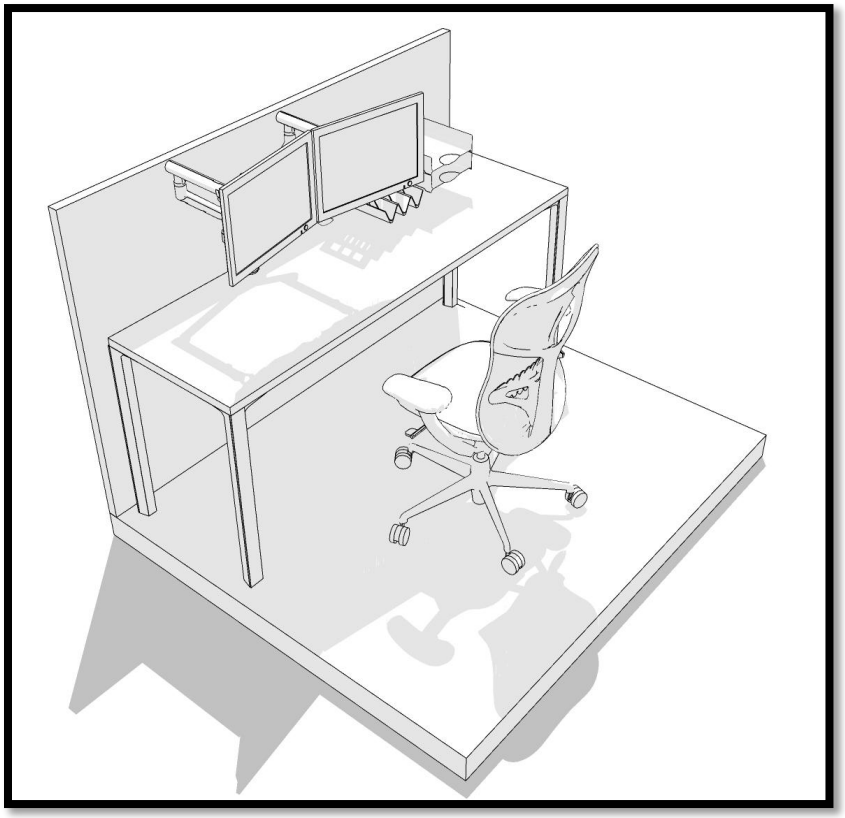

MEETING SPACE – LARGE CONFERENCE ROOM

Key Features	
Approx Size:	Refer to the ASR – General Space Requirements
Seat Count:	12 to 18
Walls:	Drywall with painted finish, installed from finish floor to underside of deck above, acoustically treated to provide an STC rating of 45. Blocking for TV on end wall
Floor:	Building standard carpet with rubber base
Ceiling:	Building standard acoustical lay-in ceiling, with minimum NRC of 0.55, CAC of 35, and LR of 85
Door/Glazing:	Stained, solid-core wood interior door with sound gaskets, full-length glass sidelite 18" wide, building standard frame. Building standard window coverings at exterior glazing. *optional - full glass office front, check on front page
Lighting:	Building standard office lighting, 50 foot-candles at a height of 30", dimmable switch and daylighting controls
Electrical:	duplex outlets every 6 feet, central floor box with power, data, and AV connections
HVAC:	Building standard heating and air conditioning with private thermostat
Casework:	None
Signage:	Building standard identification sign outside door
AV:	Large TV display, connectivity at table
Equipment:	Marker board
Furniture:	Large conference table with power in top, 12 to 18 chairs, credenza
Not Included:	AV, Equipment, and Furniture listed above is for reference only, it is not included in this budget.

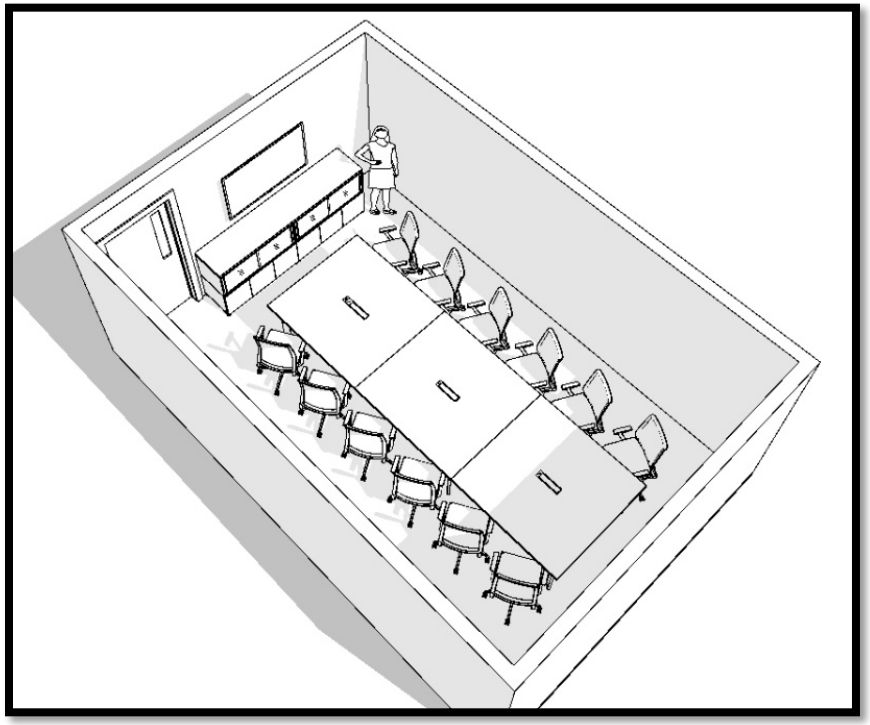

MEETING SPACE – MEDIUM CONFERENCE ROOM

Key Features	
Approx Size:	Refer to the ASR – General Space Requirements
Seat Count:	8 to 10
Walls:	Drywall with painted finish, installed from finish floor to underside of deck above, acoustically treated to provide an STC rating of 45. Blocking for TV on end wall
Floor:	Building standard carpet with rubber base
Ceiling:	Building standard acoustical lay-in ceiling, with minimum NRC of 0.55, CAC of 35, and LR of 85
Door/Glazing:	Stained, solid-core wood interior door with sound gaskets, full-length glass sidelite 18" wide, building standard frame. Building standard window coverings at exterior glazing. *optional - full glass office front, check on front page
Lighting:	Building standard office lighting, 50 foot-candles at a height of 30", dual level switch and daylighting controls
Electrical:	duplex outlets every 6 feet, central floor box with power, data, and AV connections
HVAC:	Building standard heating and air conditioning with private thermostat
Casework:	None
Signage:	Building standard identification sign outside door
AV:	Large TV display, connectivity at table
Equipment:	Marker board
Furniture:	Conference table with power in top, 6 to 10 chairs, credenza
Not Included:	AV, Equipment, and Furniture listed above is for reference only, it is not included in this budget.

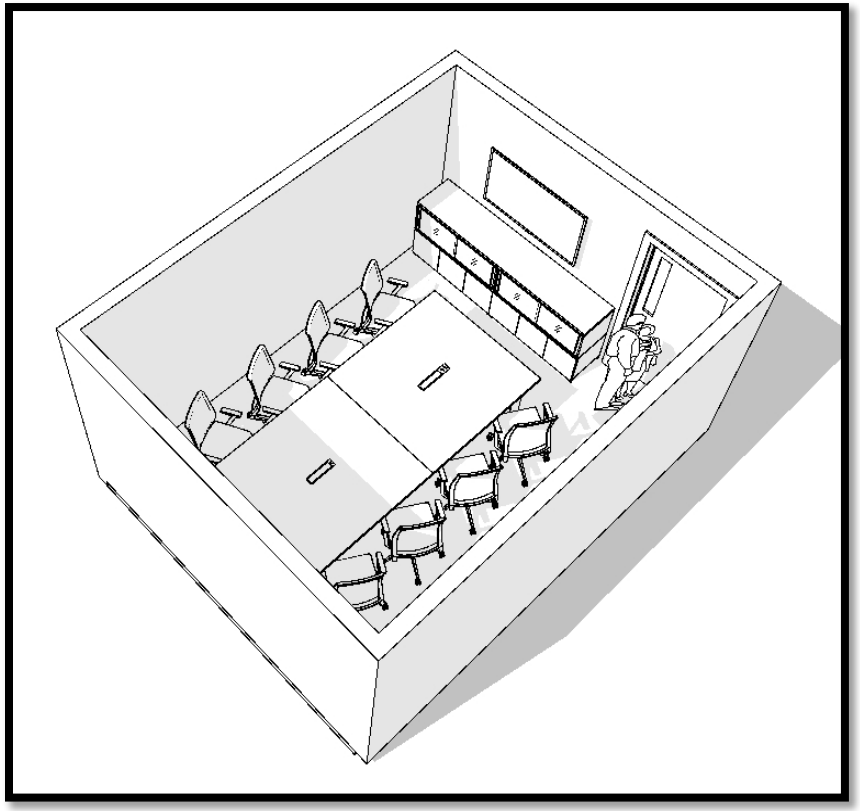

MEETING SPACE – SMALL CONFERENCE ROOM

Key Features	
Approx Size:	Refer to the ASR – General Space Requirements
Seat Count:	4 to 5 people
Walls:	Drywall with painted finish, installed from finish floor to underside of deck above, acoustically treated to provide an STC rating of 45. Blocking for TV on end wall
Floor:	Building standard carpet with rubber base
Ceiling:	Building standard acoustical lay-in ceiling, with minimum NRC of 0.55, CAC of 35, and LR of 85
Door/Glazing:	Stained, solid-core wood interior door with sound gaskets, full-length glass sidelite 18" wide, building standard frame. Building standard window coverings at exterior glazing. *optional - full glass office front, check on front page
Lighting:	Building standard office lighting, 50 foot-candles at a height of 30", dual level switch and daylighting controls
Electrical:	4 duplex outlets, 2 data drops
HVAC:	Building standard heating and air conditioning with shared thermostat
Casework:	None
Signage:	Building standard identification sign outside door
AV:	TV display
Equipment:	Marker board
Furniture:	Conference table, 4 to 5 chairs
Not Included:	AV, Equipment, and Furniture listed above is for reference only, it is not included in this budget.

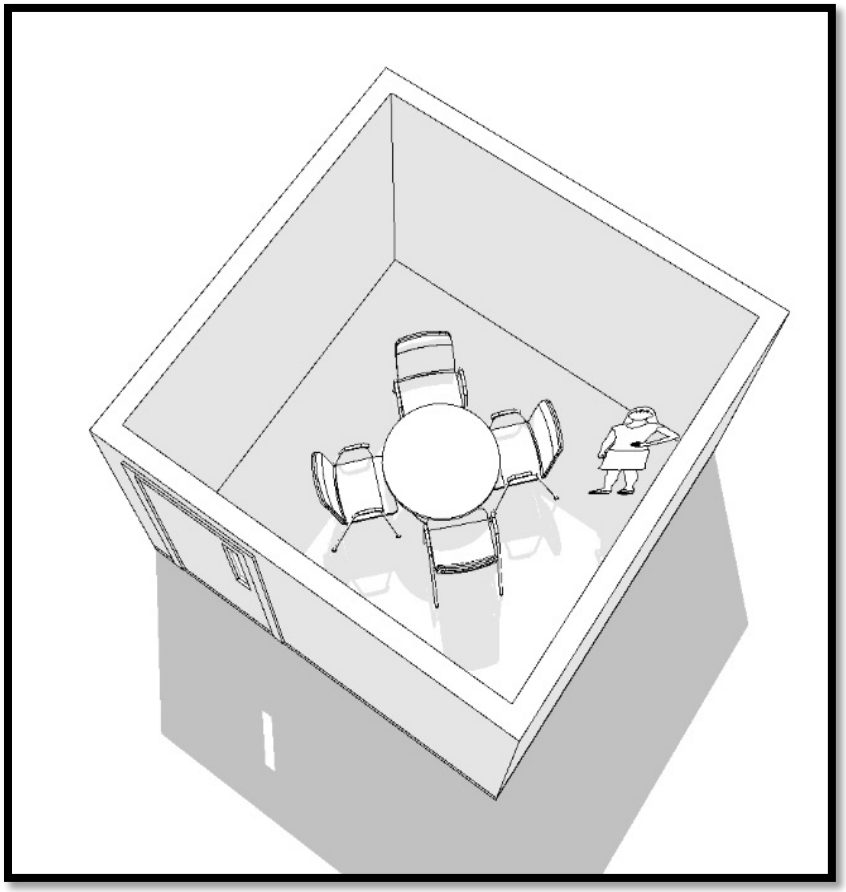

MEETING SPACE – PHONE ROOM

Key Features	
Approx Size:	Refer to the ASR – General Space Requirements
Seat Count:	1
Walls:	Drywall with painted finish, installed from finish floor to underside of deck above, acoustically treated to provide an STC rating of 45.
Floor:	Building standard carpet with rubber base
Ceiling:	Building standard acoustical lay-in ceiling, with minimum NRC of 0.55, CAC of 35, and LR of 85
Door/Glazing:	Stained, solid-core wood interior door with sound gaskets and vision lite, building standard frame. Building standard window coverings at exterior glazing.
Lighting:	Building standard office lighting, 35 foot-candles at a height of 30", single level switch
Electrical:	1 duplex outlet, 1 data drop
HVAC:	Building standard heating and air conditioning with shared thermostat
Casework:	None
Signage:	Building standard identification sign outside door
AV:	None
Equipment:	None
Furniture:	Straight table or chair with side table
Not Included:	AV, Equipment, and Furniture listed above is for reference only, it is not included in this budget.

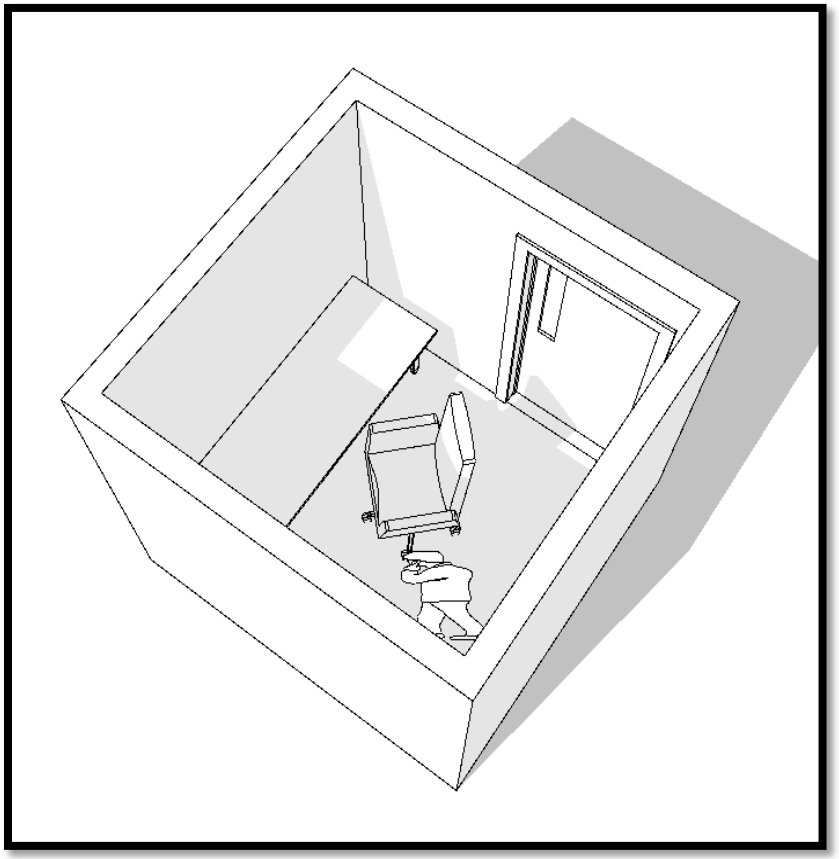

MEETING SPACE – OPEN COLLABORATION SPACE

Key Features	
Approx Size:	Refer to the ASR – General Space Requirements
Seat Count:	6 to 8
Walls:	None
Floor:	Building standard carpet with rubber base
Ceiling:	Building standard acoustical lay-in ceiling, with minimum NRC of 0.55, CAC of 35, and LR of 85
Door/Glazing:	None
Lighting:	Building standard office lighting, 35 foot-candles at a height of 30"
Electrical:	1 duplex outlet
HVAC:	Building standard heating and air conditioning with shared thermostat
Casework:	None
Signage:	None
AV:	None
Equipment:	None
Furniture:	Table with chairs or soft seating
Not Included:	AV, Equipment, and Furniture listed above is for reference only, it is not included in this budget.

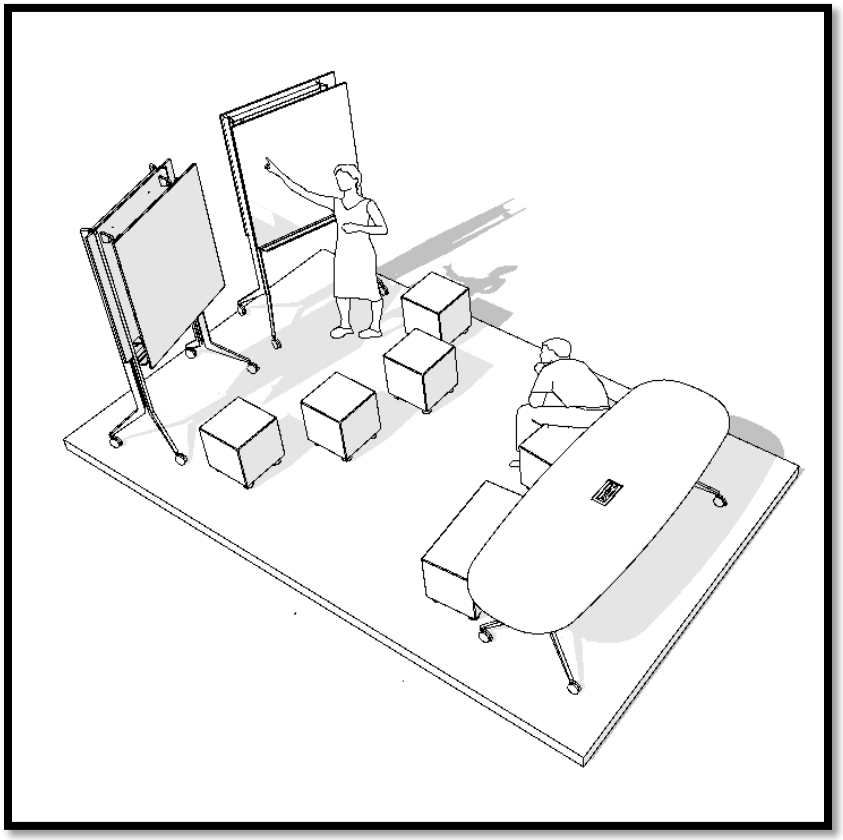

GENERAL SUPPORT SPACE – BREAK ROOM

Key Features	
Approx Size:	Refer to the ASR – General Space Requirements
Seat Count:	4-6 Persons
Walls:	Drywall with painted finish, installed from finish floor to 6" above suspended ceiling, acoustically treated to provide an STC rating of 35
Floor:	Vinyl composition tile, 12" x 12" x 1/8". Vinyl resilient base, with factory formed external and internal corners.
Ceiling:	Building standard acoustical lay-in ceiling, with minimum NRC of 0.55, CAC of 35, and LR of 85
Door/Glazing:	Stained, solid-core wood interior door with sound gaskets and vision lite, building standard frame.
Lighting:	Building standard lighting.
Electrical:	6 double duplex outlets with 1 data drop. Outlets will of necessary type to be code compliant (GFI), and of enough power to support various appliances (refrigerator, coffee pots, microwaves, etc.). Dedicated circuit breakers for each appliance.
HVAC:	Building standard heating and air condition.
Casework:	Minimum of 10 linear feet of high quality commercial laminate wood base cabinets with matching wall cabinets. Base cabinets shall include a high grade/quality commercial laminate counter top with back and side splash plates as necessary.
Signage:	Building standard identification sign outside door.
AV:	None.
Equipment:	Refrigerator, Microwave
Furniture:	Table with (4) Chairs
Not Included:	AV, Equipment, and Furniture listed above is for reference only, it is not included in this budget.

GENERAL SUPPORT SPACE – UTILITY ROOM

Key Features	
Approx Size:	Refer to the ASR – General Space Requirements
Seat Count:	None.
Walls:	Drywall with painted finish, installed from finish floor to 6" above suspended ceiling, acoustically treated to provide an STC rating of 35
Floor:	Vinyl composition tile, 12" x 12" x 1/8", with vinyl resilient base. Factory formed external and internal corners, coved at hard surface flooring.
Ceiling:	Building standard acoustical lay-in ceiling, with minimum NRC of 0.55, CAC of 35, and LR of 85
Door/Glazing:	Stained, solid-core wood interior door with sound gaskets and vision lite, building standard frame.
Lighting:	Building standard lighting.
Electrical:	6 duplex outlets with 1 data drop. 2 outlets at cabinet counter height.
HVAC:	Building standard heating and air condition.
Casework:	Minimum of 10 linear feet of high quality commercial laminate wood base cabinets with matching wall cabinets. Base cabinets shall include a high grade/quality commercial laminate counter top with back and side splash plates as necessary.
Signage:	Building standard identification sign outside door.
AV:	None.
Equipment:	None.
Furniture:	None.
Not Included:	AV, Equipment, and Furniture listed above is for reference only, it is not included in this budget.

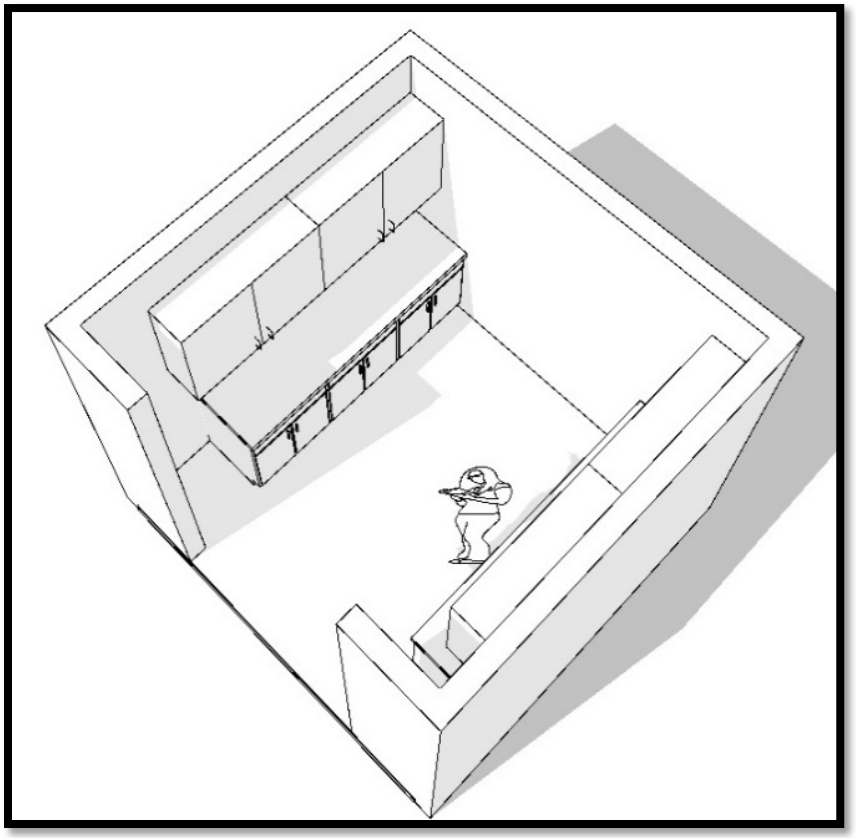

GENERAL SUPPORT SPACE – LAYOUT ROOM

Key Features	
Approx Size:	Refer to the ASR – General Space Requirements
Seat Count:	None.
Walls:	Drywall with painted finish, installed from finish floor to 6" above suspended ceiling, acoustically treated to provide an STC rating of 35
Floor:	Building standard carpet with rubber base
Ceiling:	Building standard acoustical lay-in ceiling, with minimum NRC of 0.55, CAC of 35, and LR of 85
Door/Glazing:	Stained, solid-core wood interior door with sound gaskets and vision lite, building standard frame.
Lighting:	Building standard office lighting, 50 foot-candles at a height of 30 inches.
Electrical:	4 duplex outlets, 1 data drops.
HVAC:	Building standard heating and air condition.
Casework:	Minimum of 10 linear feet of high quality commercial laminate wood base cabinets with matching wall cabinets. Base cabinets shall include a high grade/quality commercial laminate counter top with back and side splash plates as necessary.
Signage:	Building standard identification sign outside door.
AV:	None.
Equipment:	None.
Furniture:	None.
Not Included:	AV, Equipment, and Furniture listed above is for reference only, it is not included in this budget.

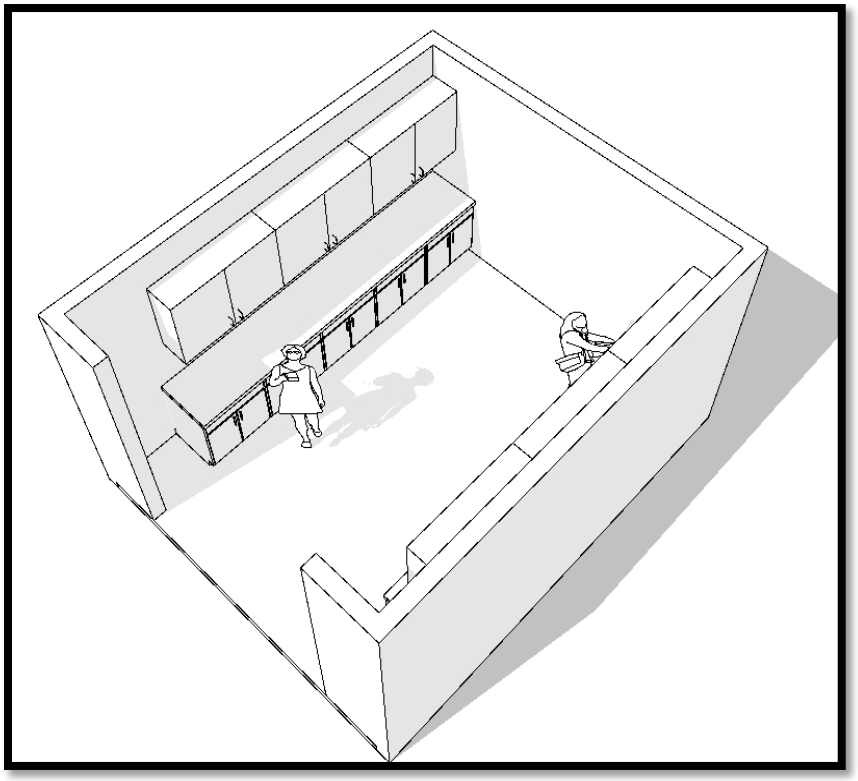

GENERAL SUPPORT SPACE – SHOWER ROOM

Key Features	
Approx Size:	Refer to the ASR – General Space Requirements
Seat Count:	None.
Walls:	Moisture resistant drywall with painted finish to 6" above ceiling, ceramic tile on backerboard up to 6'-0" above finish floor around the entirety of the room.
Floor:	Ceramic tile flooring and tile wall base, ABA compliant slope for shower and drains.
Ceiling:	Moisture resistant drywall with painted finish.
Door/Glazing:	Stained, solid-core wood interior door with sound gaskets, building standard frame.
Lighting:	Light over mirror, 2 can lights
Electrical:	2 duplex outlets one below and one above countertop height. Outlets will of necessary type to be code compliant (GFI)
HVAC:	Restroom ceiling fan. Building standard heating and air condition.
Casework:	None.
Signage:	Building standard identification sign outside door.
Plumbing:	Wall hung sink with associated mirror. Shower with associated ABA compliant shower bench.
AV:	None.
Equipment:	None.
Furniture:	None.
Not Included:	AV, Equipment, and Furniture listed above is for reference only, it is not included in this budget.

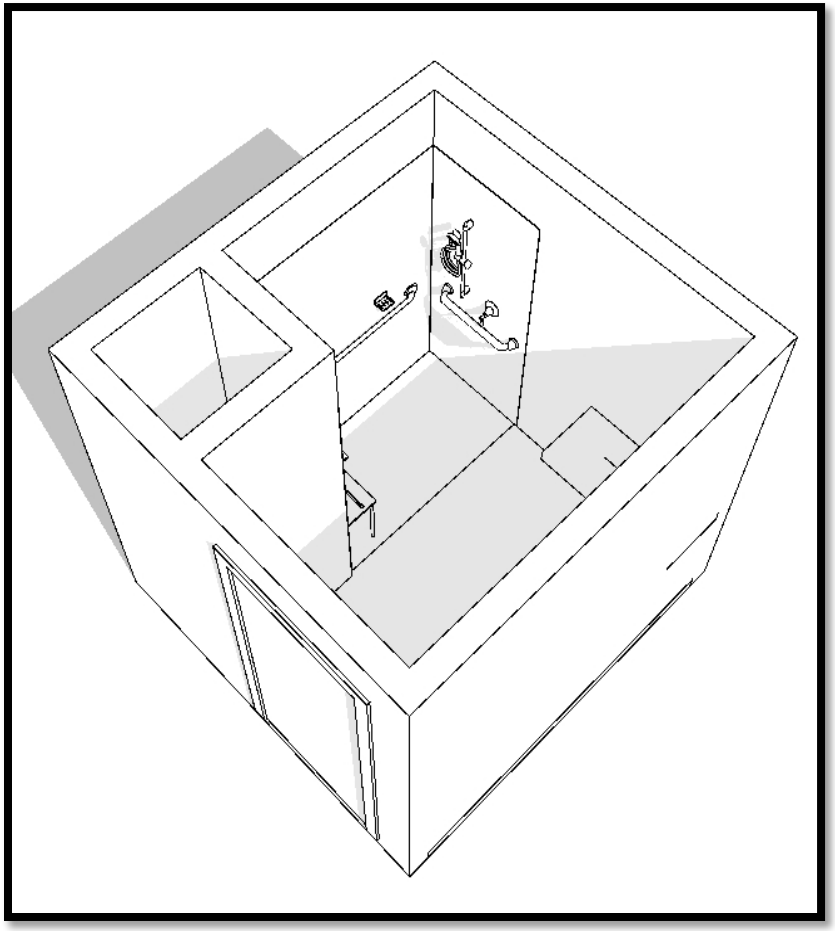

GENERAL SUPPORT SPACE – COMPUTER LAB

Key Features	
Approx Size:	Refer to the ASR – General Space Requirements
Seat Count:	4-8 Persons
Walls:	Drywall with painted finish, installed from finish floor to 6" above suspended ceiling, acoustically treated to provide an STC rating of 35
Floor:	Building standard carpet with rubber base
Ceiling:	Building standard acoustical lay-in ceiling, with minimum NRC of 0.55, CAC of 35, and LR of 85
Door/Glazing:	Stained, solid-core wood interior door with sound gaskets and vision lite, building standard frame.
Lighting:	Building standard office lighting, 50 foot-candles at a height of 30 inches.
Electrical:	8 duplex outlets, 8 data drops.
HVAC:	Building standard heating and air condition.
Casework:	None.
Signage:	Building standard identification sign outside door.
AV:	None.
Equipment:	Computers
Furniture:	Desks, chairs, etc.
Not Included:	AV, Equipment, and Furniture listed above is for reference only, it is not included in this budget.

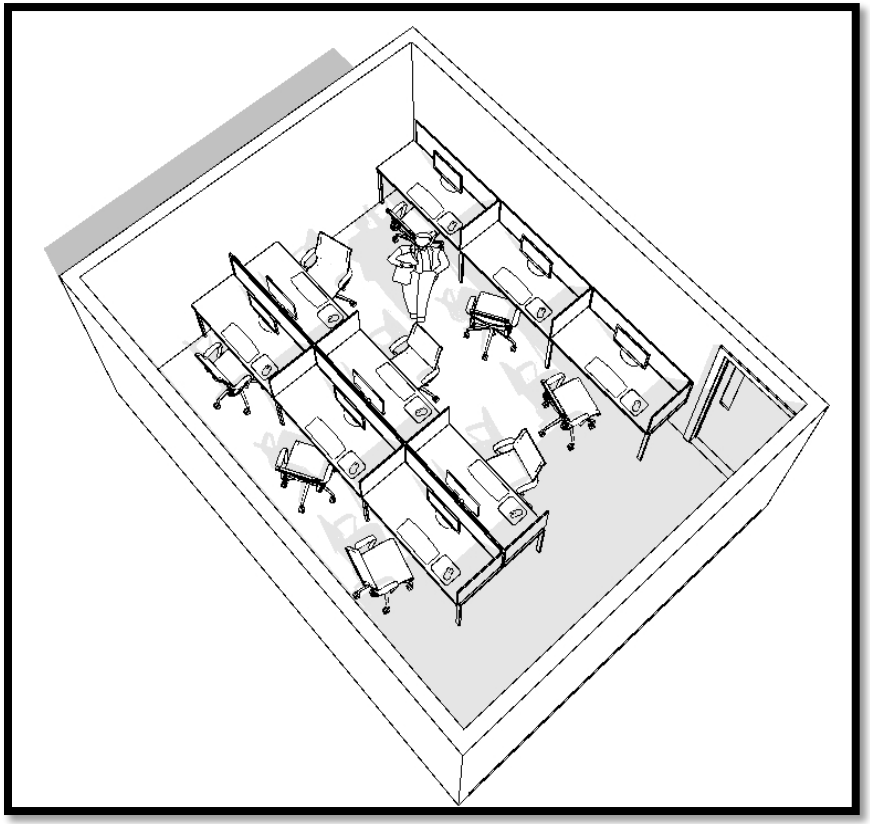

GENERAL SUPPORT SPACE – RECEPTION DESK AND WAITING

Key Features	
Approx Size:	Refer to the ASR – General Space Requirements
Seat Count:	1-4 Persons
Walls:	(2) Walls factored in. Drywall with painted finish, installed from finish floor to 6" above suspended ceiling, acoustically treated to provide an STC rating of 35
Floor:	Building standard carpet with rubber base
Ceiling:	Building standard acoustical lay-in ceiling, with minimum NRC of 0.55, CAC of 35, and LR of 85
Door/Glazing:	Area to be open to surroundings.
Lighting:	Building standard office lighting, 50 foot-candles at a height of 30 inches.
Electrical:	4 duplex outlets, 2 data drops.
HVAC:	Building standard heating and air condition.
Casework:	Built in 7'x7' Reception Desk
Signage:	None.
AV:	TV display
Equipment:	None.
Furniture:	Table, waiting chairs, etc.
Not Included:	AV, Equipment, and Furniture listed above is for reference only, it is not included in this budget.

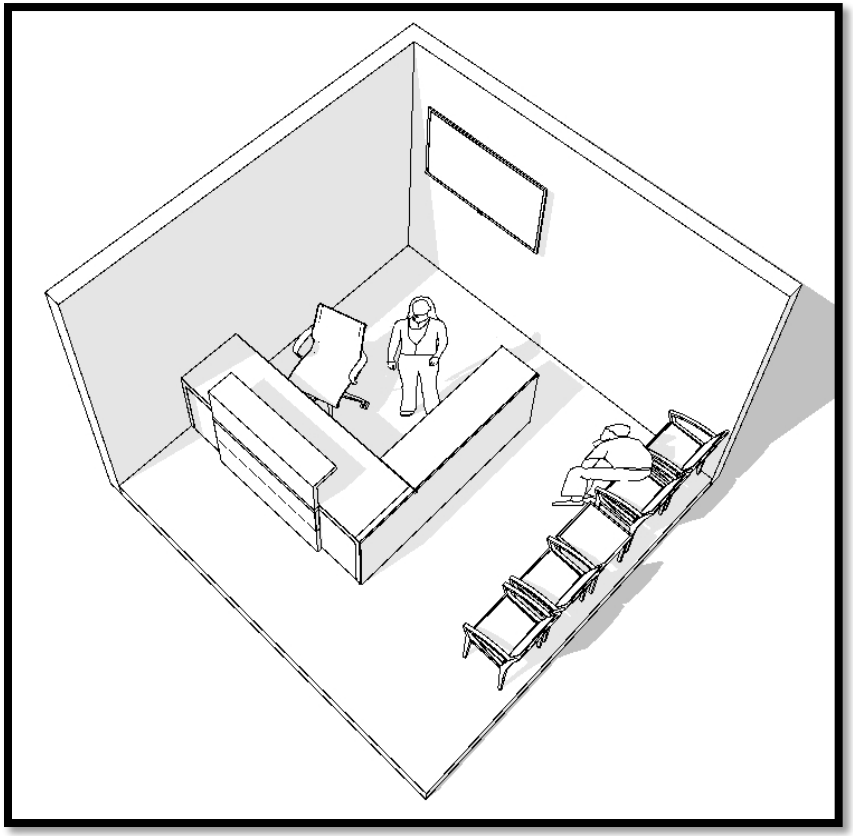

GENERAL SUPPORT SPACE – SMALL LIBRARY

Key Features	
Approx Size:	Refer to the ASR – General Space Requirements
Seat Count:	None.
Walls:	Drywall with painted finish, installed from finish floor to underside of deck above, acoustically treated to provide an STC rating of 45.
Floor:	Building standard carpet with rubber base
Ceiling:	Building standard acoustical lay-in ceiling, with minimum NRC of 0.55, CAC of 35, and LR of 85
Door/Glazing:	Stained, solid-core wood interior door with sound gaskets, full-length glass sidelite 18" wide, building standard frame.
Lighting:	Building standard lighting.
Electrical:	Building standard electrical. 4 duplex outlets.
HVAC:	Building standard heating and air condition.
Casework:	None.
Signage:	Building standard identification sign outside door.
AV:	None.
Equipment:	None.
Furniture:	Library stacks.
Not Included:	AV, Equipment, and Furniture listed above is for reference only, it is not included in this budget.
NOTE:	Space Maximum is 749 SF. 750 SF and over becomes Special Use Space, See Special Use Space Tab for Large Library

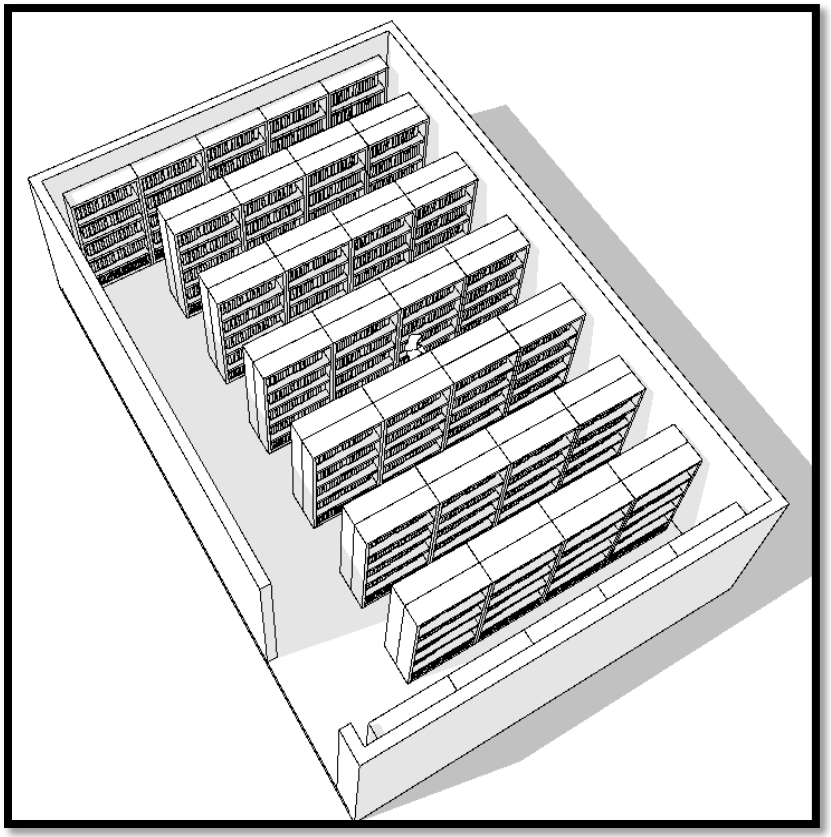

SPECIAL USE SPACE (NON-UTILIZED) - AUDITORIUM

Key Features	
Approx Size:	Refer to the ASR – General Space Requirements (Must be larger than 750 SF)
Seat Count:	49 persons or fewer (49 or fewer in order to utilize a single exit door per code)
Walls:	Drywall with painted finish, installed from finish floor to underside of deck above, acoustically treated to provide an STC rating of 45. Blocking for TV on end wall
Floor:	Building standard carpet with rubber base
Ceiling:	Building standard acoustical lay-in ceiling, with minimum NRC of 0.55, CAC of 35, and LR of 85
Door/Glazing:	Stained, solid-core wood interior door with sound gaskets, full-length glass sidelite 18" wide, building standard frame.
Lighting:	Building standard lighting.
Electrical:	Enhanced electrical power access via floor and wall outlets, enough to support full auditorium. Also to support transition between Auditorium and classroom use.
HVAC:	Building standard heating and air condition. Separate controls for dedicated larger capacity of auditorium.
Casework:	None.
Signage:	Building standard identification sign outside door.
AV:	Room is to have an integrated A/V system to include retractable screen and projector or some other projected visual interface. Must be useful.
Equipment:	None.
Furniture:	Tables, chairs, and speaker podium.
Not Included:	AV, Equipment, and Furniture listed above is for reference only, it is not included in this budget.
NOTE:	Space Minimum is 750 SF. Under 750 SF becomes Office Support Space (Utilized) -- See Meeting Space Tab for Conference Rooms

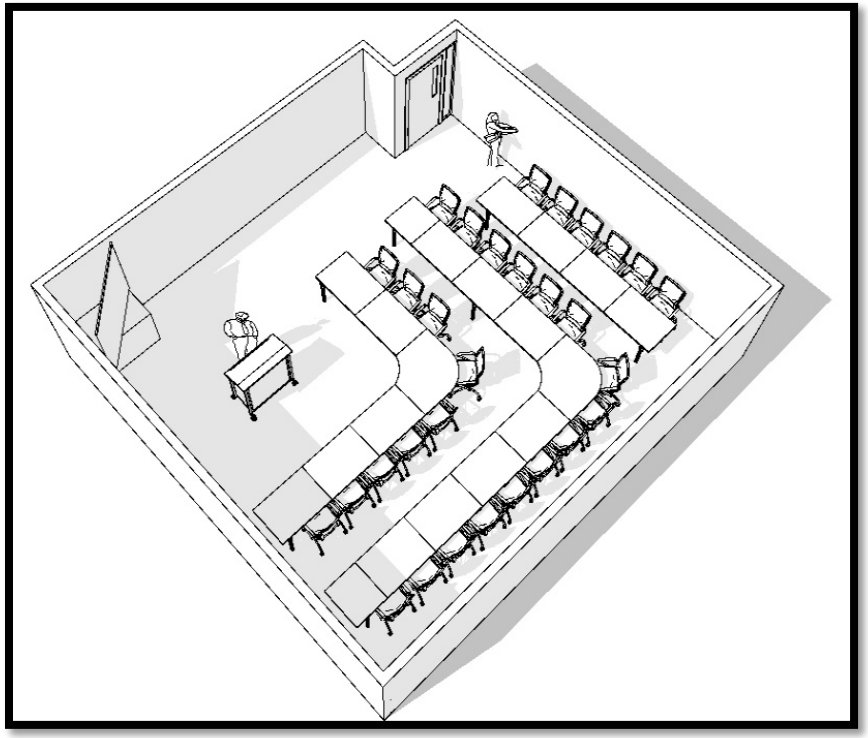

SPECIAL USE SPACE (NON-UTILIZED) – LARGE LIBRARY

Key Features	
Approx Size:	Refer to the ASR – General Space Requirements (Dedicated Space only)
Seat Count:	None.
Walls:	Drywall with painted finish, installed from finish floor to underside of deck above, acoustically treated to provide an STC rating of 45.
Floor:	Building standard carpet with rubber base
Ceiling:	Building standard acoustical lay-in ceiling, with minimum NRC of 0.55, CAC of 35, and LR of 85
Door/Glazing:	Stained, solid-core wood interior door with sound gaskets, full-length glass sidelite 18" wide, building standard frame.
Lighting:	Building standard lighting.
Electrical:	Building standard electrical. 4 duplex outlets.
HVAC:	Building standard heating and air condition.
Casework:	None.
Signage:	Building standard identification sign outside door.
AV:	None.
Equipment:	None.
Furniture:	Library stacks.
Not Included:	AV, Equipment, and Furniture listed above is for reference only, it is not included in this budget.
NOTE:	Space Minimum is 750 SF. Under 750 SF becomes General Support Space -- See General Support Space Tab for Small Library

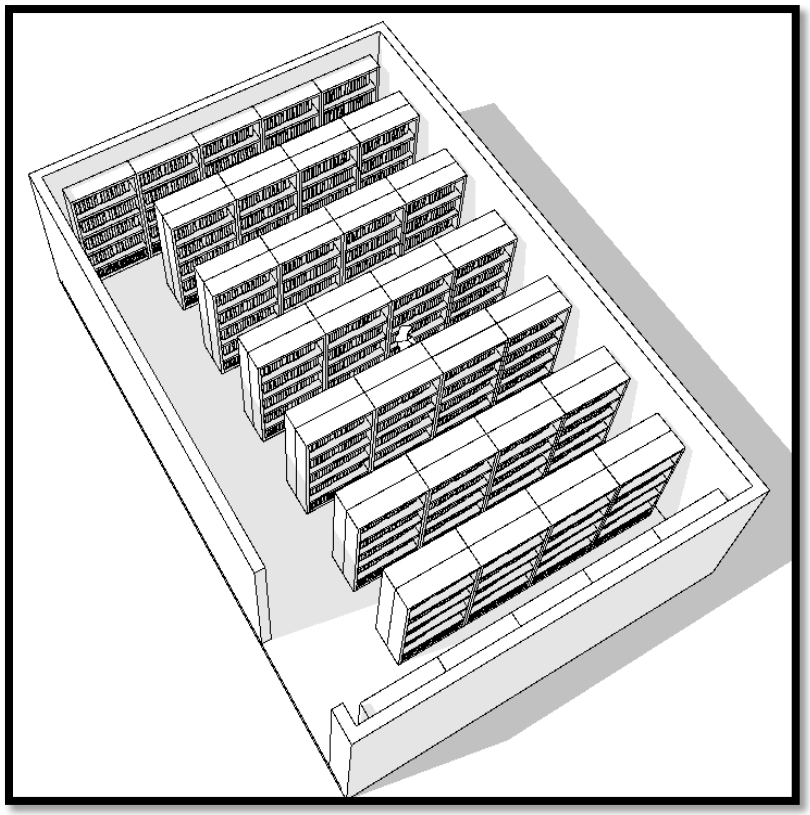

SPECIAL USE SPACE (NON-UTILIZED) – WET LAB #1

Key Features	
Approx Size:	Refer to the ASR – General Space Requirements
Seat Count:	None.
Walls:	Partitioning to be drywall, installed from slab to slab, acoustically treated to provide an STC rating of 45. Walls shall be properly constructed and reinforced to accommodate wall hanging cabinets through the work area. One coat of best quality interior primer and two coats paint. Paint per RLP. No texture unless prior approval by government. . Waterproof backsplash behind sinks and dishwasher.
Floor:	ACID, BASE, AND SOLVENT RESISTANT - Vinyl composite tile, 12” x 12” x 1/8”. Vinyl resilient base, top set, 1/8” x 4”, with factory formed external and internal corners.
Ceiling:	Washable surface acoustical lay-in ceiling, minimum NRC of 0.55, CAC of 35, and LR of 85
Windows:	None.
Door/Glazing:	Stained, solid-core wood interior door with sound gaskets and vision lite, building standard frame.
Lighting:	Energy efficient standard lab lighting, 50 foot-candles over all work surfaces.
Electrical:	Electrical power placed every 8'-0" around perimeter of room.
HVAC:	Dedicated HVAC for all labs, special design to accommodate for lab operations.
Casework:	Minimum of 20 linear feet of high quality ACID, BASE, AND SOLVENT RESISTANT counter tops with lab grade laminate finishes on the upper and lower casework.
Signage:	Building standard identification sign outside door.
AV:	None.
Equipment:	None.
Plumbing:	All required lines and infrastructure for utility sinks, epoxy sinks, floor drains, traps, hot/cold/deionized water, and necessary filtration systems.
Special Construction:	***Note*** - This is the major difference between Wet Lab #1 and Wet Lab #2 - Fume hoods (2) and associated mechanical connections. Lab grade cabinets and countertops with integrated compressed gas connection. (THESE ITEMS ARE FACTORED INTO THE BUDGET NUMBER)
Furniture:	None.
Not Included:	AV, Equipment, and Furniture above is for reference only, not included in this budget.

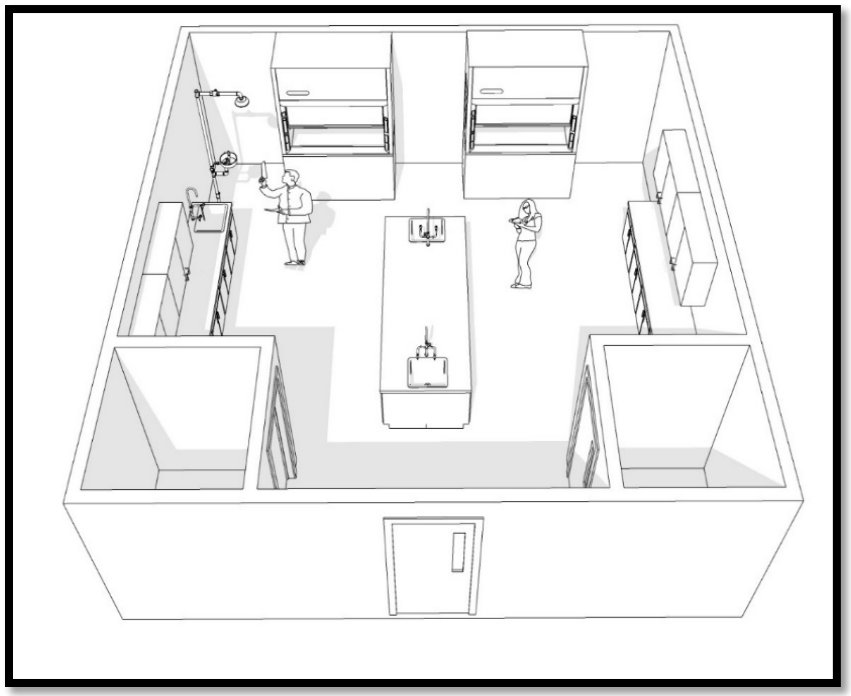

SPECIAL USE SPACE (NON-UTILIZED) – WET LAB #2

Key Features	
Approx Size:	Refer to the ASR – General Space Requirements
Seat Count:	None.
Walls:	Partitioning to be drywall, installed from slab to slab, acoustically treated to provide an STC rating of 45. Walls shall be properly constructed and reinforced to accommodate wall hanging cabinets through the work area. One coat of best quality interior primer and two coats paint. Paint per RLP. No texture unless prior approval by government. . Waterproof backsplash behind sinks and dishwasher.
Floor:	ACID, BASE, AND SOLVENT RESISTANT - Vinyl composite tile, 12” x 12” x 1/8”. Vinyl resilient base, top set, 1/8” x 4”, with factory formed external and internal corners.
Ceiling:	Washable surface acoustical lay-in ceiling, with minimum NRC of 0.55, CAC of 35, and LR of 85
Windows:	None.
Door/Glazing:	Stained, solid-core wood interior door with sound gaskets and vision lite, building standard frame.
Lighting:	Energy efficient standard lab lighting, 50 foot-candles over all work surfaces.
Electrical:	Electrical power placed every 8'-0" around perimeter of room.
HVAC:	Dedicated HVAC for all labs, special design to accommodate for lab operations.
Casework:	Minimum of 20 linear feet of high quality ACID, BASE, AND SOLVENT RESISTANT counter tops with lab grade laminate finishes on the upper and lower casework.
Signage:	Building standard identification sign outside door.
AV:	None.
Equipment:	None.
Plumbing:	All required lines and infrastructure for utility sinks, epoxy sinks, floor drains, traps, hot/cold/deionized water, and necessary filtration systems.
Furniture:	None.
Not Included:	AV, Equipment, and Furniture listed above is for reference only, it is not included in this budget.

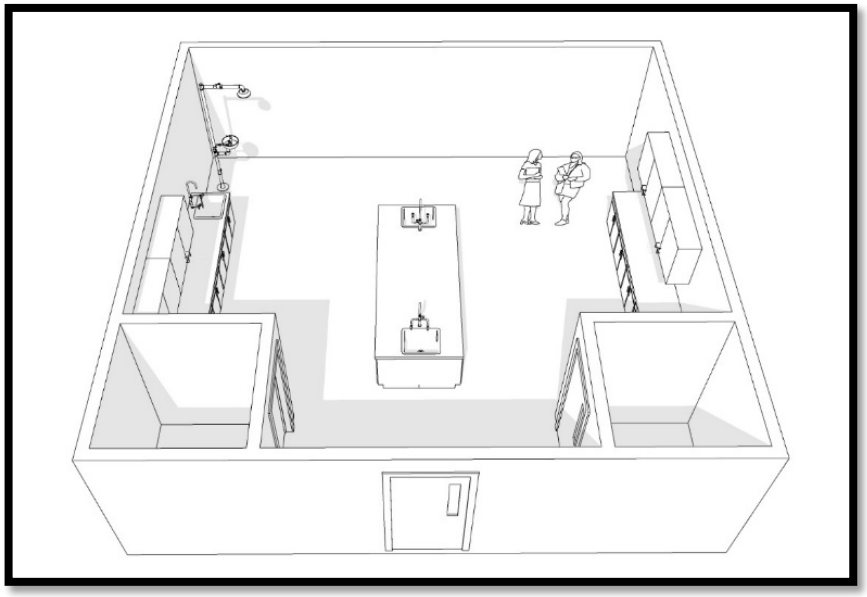

SPECIAL USE SPACE (NON-UTILIZED) – DRY LAB #1

Key Features	
Approx Size:	Refer to the ASR – General Space Requirements
Seat Count:	None.
Walls:	Partitioning to be drywall, installed from slab to slab, acoustically treated to provide an STC rating of 45. Walls shall be properly constructed and reinforced to accommodate wall hanging cabinets through the work area.
Floor:	ACID, BASE, AND SOLVENT RESISTANT - Vinyl composite tile, 12” x 12” x 1/8”. Vinyl resilient base, top set, 1/8” x 4”, with factory formed external and internal corners.
Ceiling:	Washable surface acoustical lay-in ceiling, minimum NRC of 0.55, CAC of 35, and LR of 85
Windows:	None.
Door/Glazing:	Stained, solid-core wood interior door with sound gaskets and vision lite, building standard frame.
Lighting:	Energy efficient standard lab lighting, 50 foot-candles over all work surfaces.
Electrical:	Electrical power placed every 8'-0" around perimeter of room.
HVAC:	Dedicated HVAC for all labs, special design to accommodate for lab operations.
Casework:	Minimum of 20 linear feet of high quality ACID, BASE, AND SOLVENT RESISTANT counter tops with lab grade laminate finishes on the upper and lower casework.
Signage:	Building standard identification sign outside door.
AV:	None.
Equipment:	None.
Plumbing:	All required lines and infrastructure for utility sinks, epoxy sinks, floor drains, traps, hot/cold/deionized water, and necessary filtration systems.
Special Construction:	***Note*** - This is the major difference between Dry Lab #1 and Dry Lab #2 - Fume hoods (2) and associated mechanical connections. Lab grade cabinets and countertops with integrated compressed gas connection. (THESE ITEMS ARE FACTORED INTO THE BUDGET NUMBER)
Furniture:	None.
Not Included:	AV, Equipment, and Furniture listed above is for reference only, it is not included in this budget.

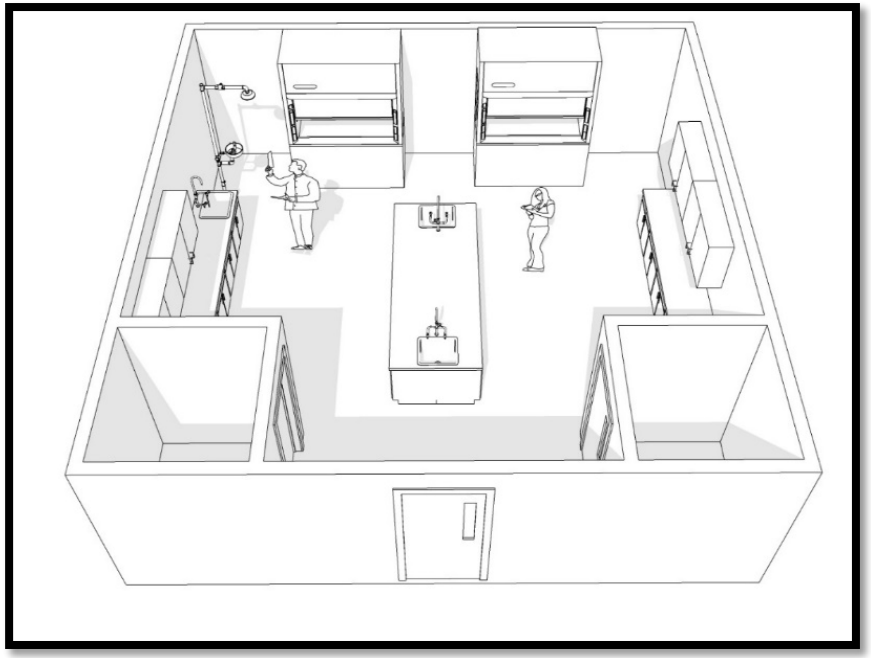

SPECIAL USE SPACE (NON-UTILIZED) – DRY LAB #2

Key Features	
Approx Size:	Refer to the ASR – General Space Requirements
Seat Count:	None.
Walls:	Partitioning to be drywall, installed from slab to slab, acoustically treated to provide an STC rating of 45. Walls shall be properly constructed and reinforced to accommodate wall hanging cabinets through the work area.
Floor:	ACID, BASE, AND SOLVENT RESISTANT - Vinyl composite tile, 12” x 12” x 1/8”. Vinyl resilient base, top set, 1/8” x 4”, with factory formed external and internal corners.
Ceiling:	Washable surface acoustical lay-in ceiling, minimum NRC of 0.55, CAC of 35, and LR of 85
Windows:	None.
Door/Glazing:	Stained, solid-core wood interior door with sound gaskets and vision lite, building standard frame.
Lighting:	Energy efficient standard lab lighting, 50 foot-candles over all work surfaces.
Electrical:	Electrical power placed every 8'-0" around perimeter of room.
HVAC:	Dedicated HVAC for all labs, special design to accommodate for lab operations.
Casework:	Minimum of 20 linear feet of high quality ACID, BASE, AND SOLVENT RESISTANT counter tops with lab grade laminate finishes on the upper and lower casework.
Signage:	Building standard identification sign outside door.
AV:	None.
Equipment:	None.
Plumbing:	All required lines and infrastructure for utility sinks, epoxy sinks, floor drains, traps, hot/cold/deionized water, and necessary filtration systems.
Furniture:	None.
Not Included:	AV, Equipment, and Furniture listed above is for reference only, it is not included in this budget.

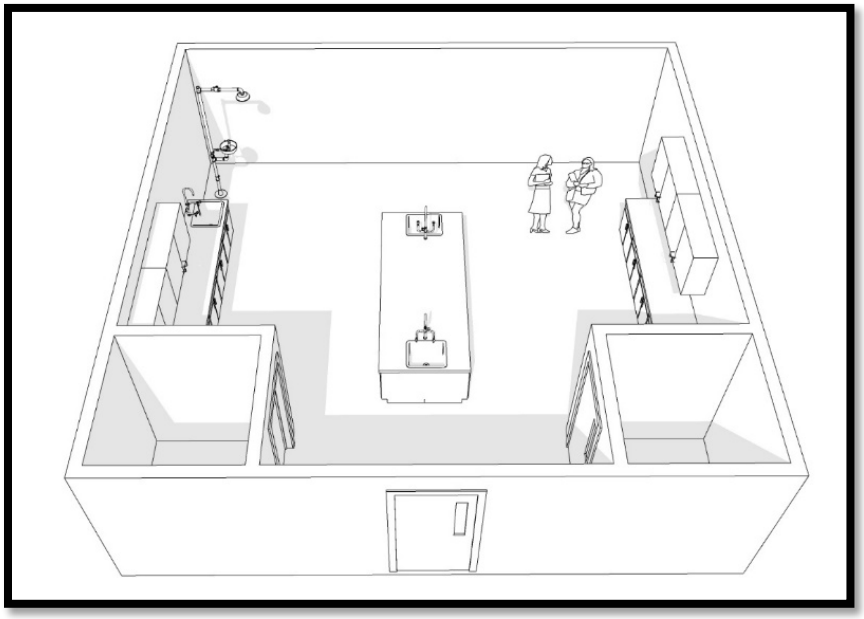

SPECIAL USE SPACE (NON-UTILIZED) – CLEAN LAB

Key Features	
Approx Size:	Refer to the ASR – General Space Requirements
Seat Count:	None.
Walls:	Partitioning to be drywall, installed from slab to slab, acoustically treated to provide an STC rating of 45. Walls shall be properly constructed and reinforced to accommodate wall hanging cabinets through the work area.
Floor:	ACID, BASE, AND SOLVENT RESISTANT - Vinyl composite tile, 12” x 12” x 1/8”. Vinyl resilient base, top set, 1/8” x 4”, with factory formed external and internal corners.
Ceiling:	Washable surface acoustical lay-in ceiling, with minimum NRC of 0.55, CAC of 35, and LR of 85
Windows:	None.
Door/Glazing:	Stained, solid-core wood interior door with sound gaskets and vision lite, building standard frame.
Lighting:	Energy efficient standard lab lighting, 50 foot-candles over all work surfaces.
Electrical:	Electrical power placed every 8'-0" around perimeter of room.
HVAC:	Dedicated HVAC for all labs, special design to accommodate for lab operations.
Casework:	Minimum of 15 linear feet of high quality ACID, BASE, AND SOLVENT RESISTANT counter tops with lab grade laminate finishes on the upper and lower casework.
Signage:	Building standard identification sign outside door.
AV:	None.
Equipment:	None.
Plumbing:	All required lines and infrastructure for utility sinks, epoxy sinks, floor drains, traps, hot/cold/deionized water, and necessary filtration systems.
Furniture:	None.
Not Included:	AV, Equipment, and Furniture listed above is for reference only, it is not included in this budget.

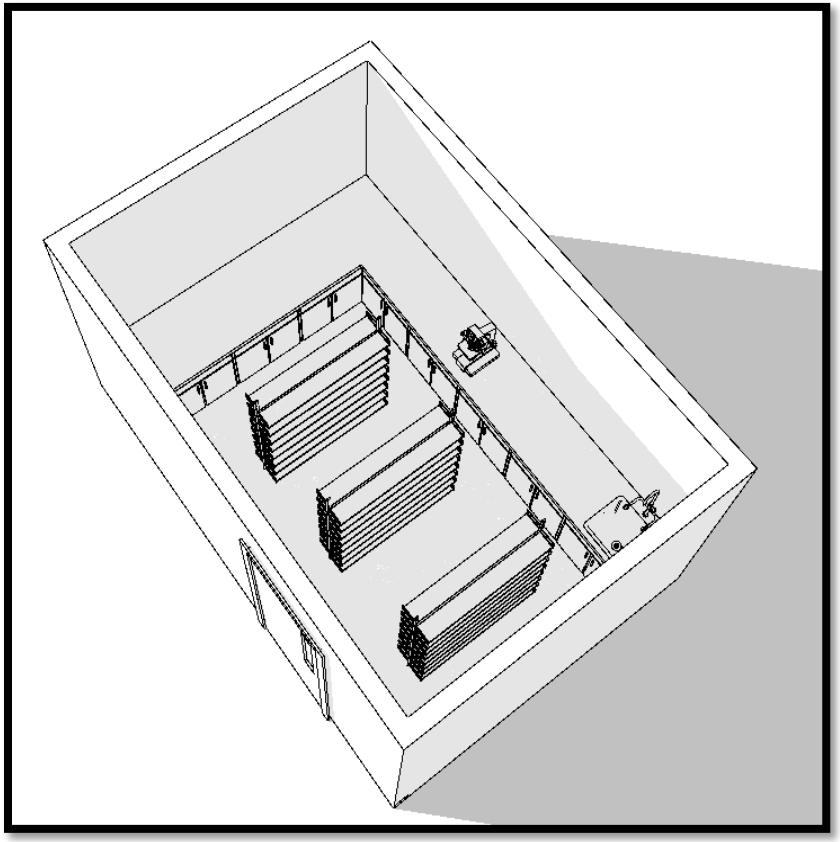

SPECIAL USE SPACE (NON-UTILIZED) – ELECTRONICS LAB

Key Features	
Approx Size:	Refer to the ASR – General Space Requirements
Seat Count:	None
Walls:	Partitioning to be drywall, installed from slab to slab, acoustically treated to provide an STC rating of 45. Walls shall be properly constructed and reinforced to accommodate wall hanging cabinets through the work area. One coat of best quality interior primer and two coats paint. Paint per RLP. No texture unless prior approval by government.
Floor:	Static resistant vinyl ESD tile, Vinyl resilient base, top set, 1/8” x 4”, with factory formed external and internal corners.
Ceiling:	Standard acoustical, with insulation above.
Windows:	Mini-Blinds as applicable per RLP.
Door/Glazing:	Stained, solid-core wood interior door with sound gaskets and vision lite, building standard frame.
Lighting:	Building standard lab lighting, 50 foot-candles over all work surfaces.
Electrical:	Electrical power placed every 8'-0" around perimeter of room.
HVAC:	Dedicated HVAC for all labs, special design to accommodate for lab operations.
Casework:	Minimum of 10 linear feet of high quality commercial laminate wood base cabinets with matching wall cabinets. Base cabinets shall include a high grade/quality commercial laminate counter top with back and side splash plates as necessary.
Signage:	Building standard identification sign outside door.
AV:	None.
Equipment:	None.
Plumbing	All required lines and infrastructure for utility sinks, epoxy sinks, floor drains, traps, hot/cold/deionized water, and necessary filtration systems.
Special Construction:	Bench and workstations to be constructed IAW necessary electro static discharge precautions
Not Included:	AV, Equipment, and Furniture listed above is for reference only, it is not included in this budget.

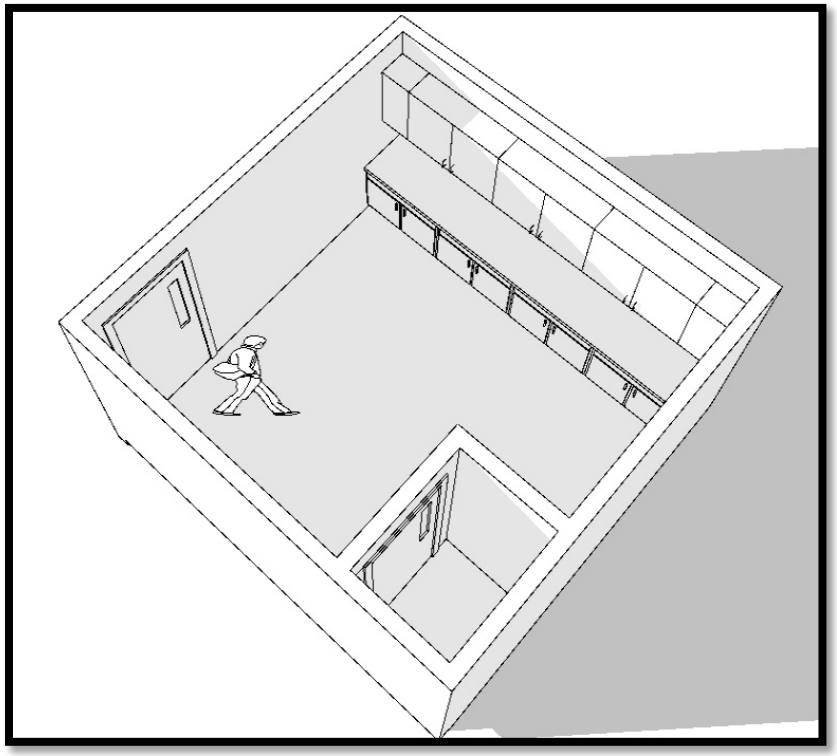

SPECIAL USE SPACE (NON-UTILIZED) – LAB STORAGE

Key Features	
Approx Size:	Refer to the ASR – General Space Requirements
Seat Count:	None.
Walls:	Drywall with painted finish, installed from finish floor to 6" above suspended ceiling, acoustically treated to provide an STC rating of 35
Floor:	Vinyl composition tile, 12" x 12" x 1/8", with vinyl resilient base. Factory formed external and internal corners, coved at hard surface flooring.
Ceiling:	Washable surface acoustical lay-in ceiling, with minimum NRC of 0.55, CAC of 35, and LR of 85
Door/Glazing:	Stained, solid-core wood interior door with sound gaskets and vision lite, building standard frame.
Lighting:	Building standard lighting.
Electrical:	6 duplex outlets with 1 data drop.
HVAC:	Building standard heating and air condition.
Casework:	Minimum of 10 linear feet of high quality commercial laminate wood base cabinets with matching wall cabinets. Base cabinets shall include a high grade/quality commercial laminate counter top with back and side splash plates as necessary.
Signage:	Building standard identification sign outside door.
AV:	None.
Equipment:	None.
Furniture:	Storage cabinets and racks.
Not Included:	AV, Equipment, and Furniture listed above is for reference only, it is not included in this budget.

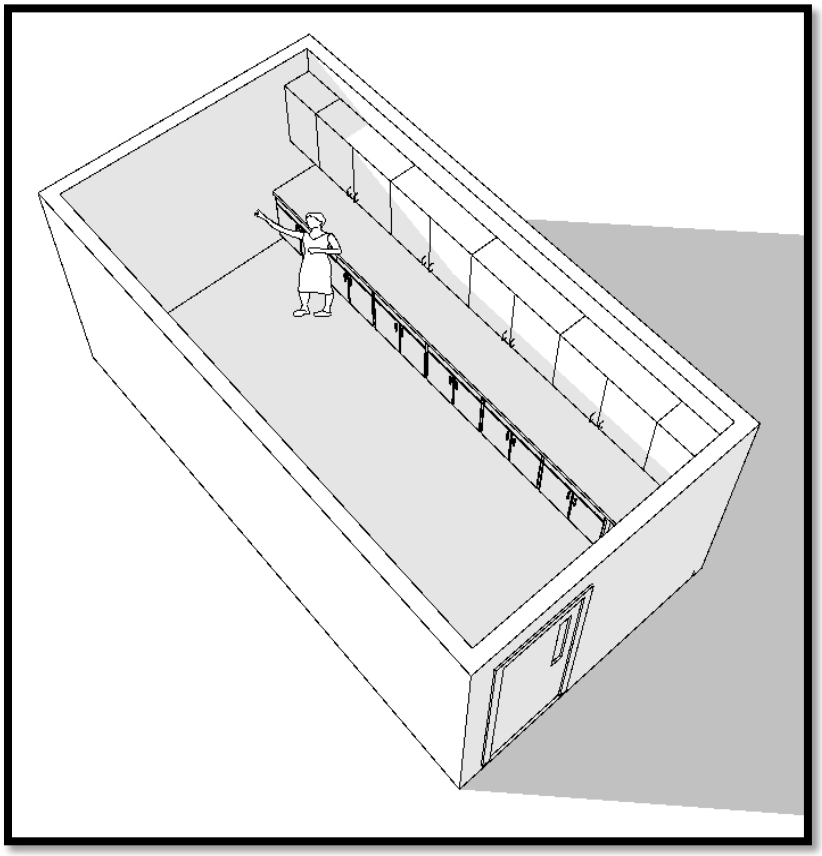

SPECIAL USE SPACE (NON-UTILIZED) – SAMPLE PREP ROOM

Key Features	
Approx Size:	Refer to the ASR – General Space Requirements
Seat Count:	None.
Walls:	Drywall with painted finish, installed from finish floor to 6" above suspended ceiling, acoustically treated to provide an STC rating of 35
Floor:	Vinyl composition tile, 12" x 12" x 1/8", with vinyl resilient base. Factory formed external and internal corners, coved at hard surface flooring.
Ceiling:	Washable surface acoustical lay-in ceiling, with minimum NRC of 0.55, CAC of 35, and LR of 85
Door/Glazing:	Stained, solid-core wood interior door with sound gaskets and vision lite, building standard frame.
Lighting:	Building standard lighting.
Electrical:	6 duplex outlets with 1 data drop.
HVAC:	Building standard heating and air condition.
Casework:	Minimum of 20 linear feet of standard chemical resistant laminate wood base cabinets with matching wall cabinets. Base cabinets shall include a standard chemical laminate counter top with back and side splash plates as necessary.
Plumbing	Deep Sink mounted on countertop with all necessary plumbing connections.
Signage:	Building standard identification sign outside door.
AV:	None.
Equipment:	None.
Furniture:	None.
Not Included:	AV, Equipment, and Furniture listed above is for reference only, it is not included in this budget.

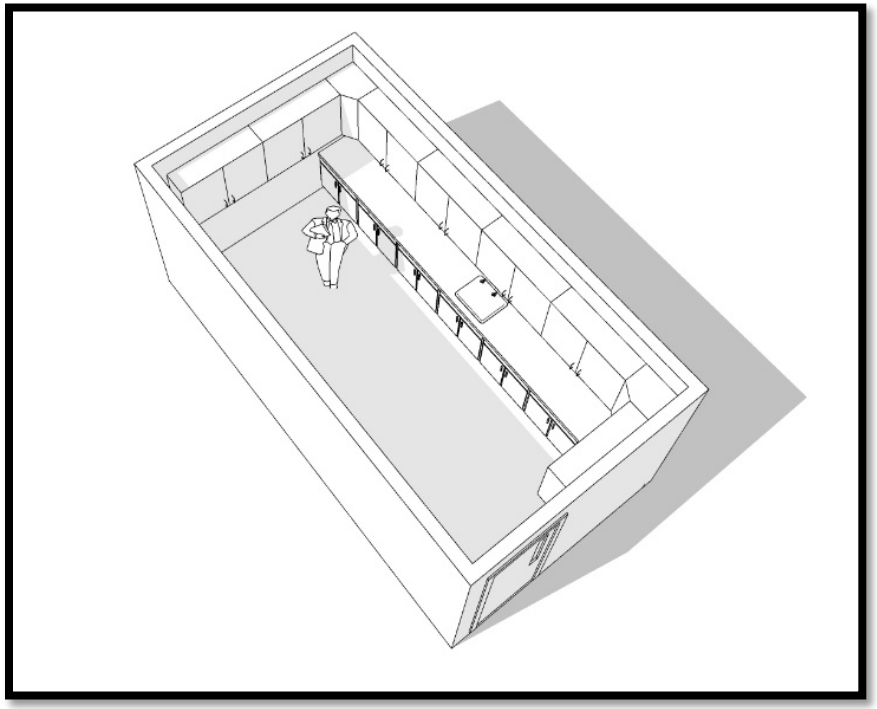

SPECIAL USE SPACE (NON-UTILIZED) – REFRIGERATOR ROOM

Key Features	
Approx Size:	Refer to the ASR – General Space Requirements
Seat Count:	None.
Walls:	Drywall with painted finish, installed from finish floor to 6" above suspended ceiling, acoustically treated to provide an STC rating of 35
Floor:	Vinyl composition tile, 12" x 12" x 1/8", with vinyl resilient base. Factory formed external and internal corners, coved at hard surface flooring.
Ceiling:	Washable surface acoustical lay-in ceiling, with minimum NRC of 0.55, CAC of 35, and LR of 85
Door/Glazing:	Stained, solid-core wood interior door with sound gaskets and vision lite, building standard frame.
Lighting:	Building standard lighting.
Electrical:	Duplex outlets to account for (4) Stand-a-lone refrigerators with 1 data drop.
HVAC:	Building standard heating and air condition. Additional exhaust as necessary.
Casework:	None.
Signage:	Building standard identification sign outside door.
AV:	None.
Equipment:	Refrigerators.
Furniture:	None.
Not Included:	AV, Equipment, and Furniture listed above is for reference only, it is not included in this budget.

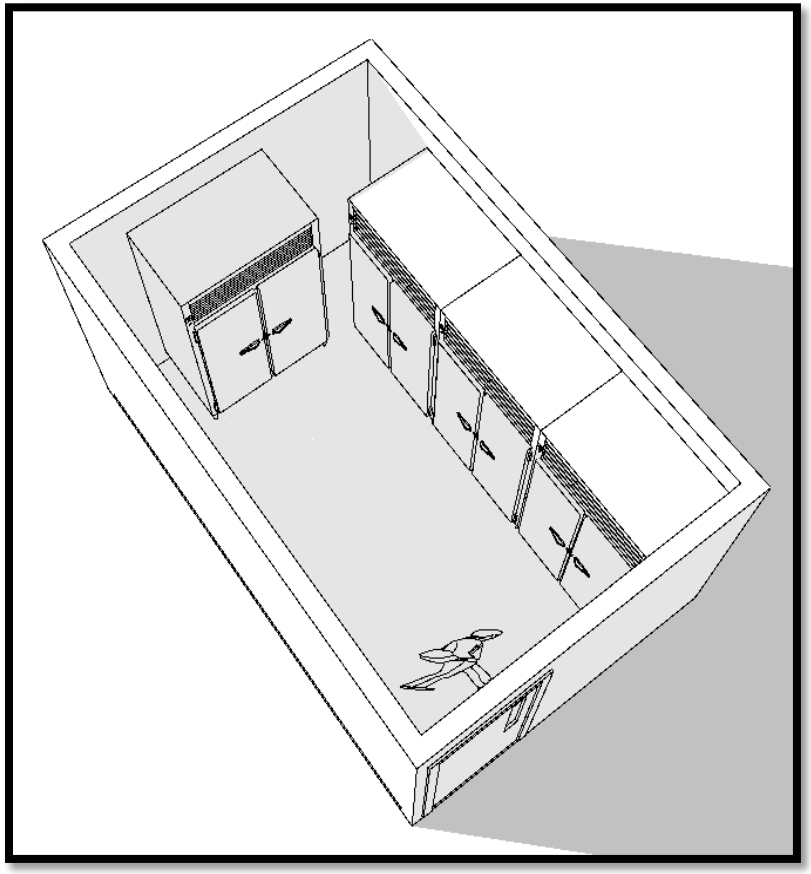

GENERAL SUPPORT SPACE – IT/COMM ROOM (NON-UTILIZED)

Key Features	
Approx Size:	Refer to the ASR – General Space Requirements
Seat Count:	None.
Walls:	Drywall with painted finish, installed from finish floor to 6" above suspended ceiling, acoustically treated to provide an STC rating of 35
Floor:	Building standard carpet with rubber base
Ceiling:	Building standard acoustical lay-in ceiling, with minimum NRC of 0.55, CAC of 35, and LR of 85
Door/Glazing:	Stained, solid-core wood interior door with sound gaskets and vision lite, building standard frame.
Lighting:	Building standard office lighting, 50 foot-candles at a height of 30 inches.
Electrical:	(2) 20 amp circuits for rack power.
HVAC:	Dedicated cooling unit for room along with building standard heating and air condition.
Casework:	None.
Signage:	Building standard identification sign outside door.
AV:	None.
Equipment:	Data Racks, patch panels, data cabling and associated items.
Furniture:	None.
Not Included:	AV, Equipment, and Furniture listed above is for reference only, it is not included in this budget.

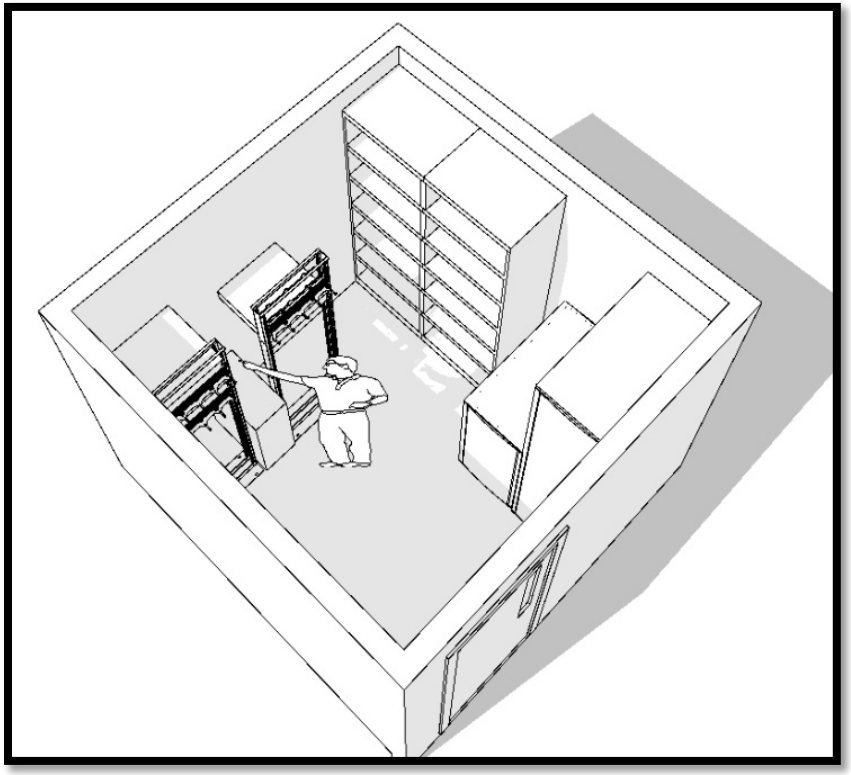

LIGHT INDUSTRIAL & WAREHOUSE – LIGHT INDUSTRIAL VEHICLE BAY

Key Features	
Approx Size:	Refer to the ASR – General Space Requirements
Seat Count:	None.
Walls:	High-bay construction part of the building shell and core provisions.
Floor:	Assumed Concrete slab is already in place. Slab on grade, level, sealed reinforced concrete to support live load.
Ceiling:	Unfinished – Overhead door opener and other penetrations may not protrude into this working height.
Door/Glazing:	3'-0"x7'-0" Insulated hollow metal door and frame personnel doors (oversized in materials movement areas). Vehicle door - overhead type with headache bar, bumper guards, and weather seal
Lighting:	Building standard warehouse lighting that maintains 50 foot-candles of lighting.
Electrical:	Wall duplex outlets every 20 feet. To contain (4) 220V outlets.
HVAC:	Hanging radiant heat units. Minimum heat with large exhaust fans.
Casework:	None.
Signage:	Building standard identification sign outside door.
AV:	None.
Equipment:	Necessary Vehicle Equipment
Plumbing:	All required lines and infrastructure for utility sinks, floor drains, traps, hot/cold.
Furniture:	None.
Not Included:	AV, Equipment, and Furniture listed above is for reference only, it is not included in this budget.

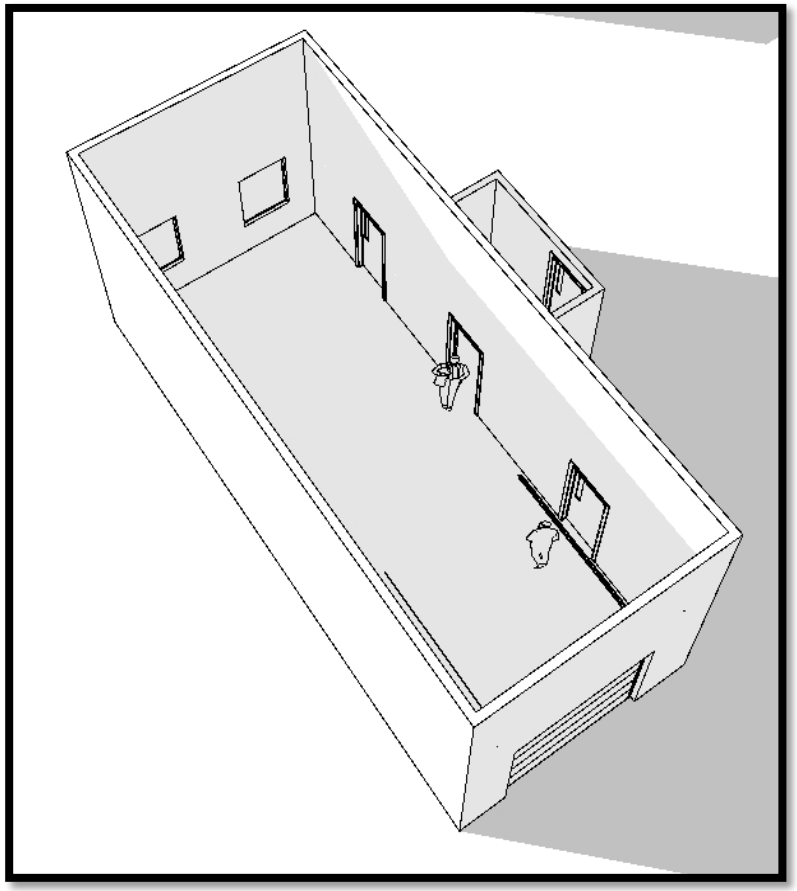

LIGHT INDUSTRIAL & WAREHOUSE – LIGHT INDUSTRIAL WAREHOUSE

Key Features	
Approx Size:	Refer to the ASR – General Space Requirements
Seat Count:	
Walls:	High-bay construction part of the building shell and core provisions.
Floor:	Assumed Concrete slab is already in place. Slab on grade, level, sealed reinforced concrete to support live load.
Ceiling:	Unfinished – Overhead door opener and other penetrations may not protrude into this working height.
Door/Glazing:	3'-0"x7'-0" Insulated hollow metal door and frame personnel doors (oversized in materials movement areas). Shipping dock door - overhead type with headache bar, bumper guards, and weather seal
Lighting:	Building standard warehouse lighting that maintains 50 foot-candles of lighting.
Electrical:	Wall mounted outlets every 20 feet.,,, To contain (4) 220V outlets. One duplex electrical outlet on every other column (where occurs). Provide high voltage service to every shop area and provide a dedicated circuit for every machine station at 250 SF per machine station.
HVAC:	Hanging radiant heat units. Minimum heat with large exhaust fans.
Casework:	None.
Signage:	Building standard identification sign outside door.
AV:	None.
Equipment:	None.
Plumbing:	All required lines and infrastructure for utility sinks, floor drains, traps, hot/cold.
Furniture:	None.
Not Included:	AV, Equipment, and Furniture listed above is for reference only, it is not included in this budget.

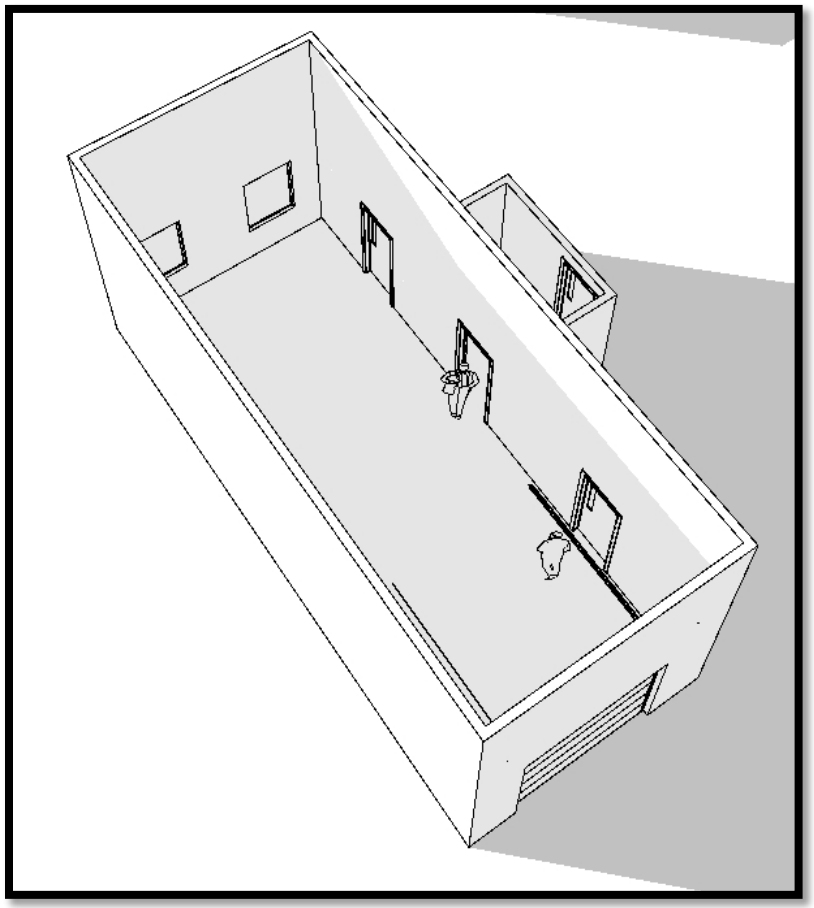

LIGHT INDUSTRIAL & WAREHOUSE – FABRICATION SHOP

Key Features	
Approx Size:	Refer to the ASR – General Space Requirements
Seat Count:	None.
Walls:	High-bay construction part of the building shell and core provisions.
Floor:	Assumed Concrete slab is already in place. Slab on grade, level, sealed reinforced concrete to support live load. Epoxy floor coating.
Ceiling:	Unfinished – Overhead door opener and other penetrations may not protrude into this working height.
Door/Glazing:	3'-0"x7'-0" Insulated hollow metal door and frame personnel doors (oversized in materials movement areas). Overhead door - with headache bar, bumper guards and weather seal
Lighting:	Building standard warehouse lighting that maintains 50 foot-candles of lighting.
Electrical:	Wall mounted duplex outlets every 12 feet at Bench Table Height. To contain (4) 220V outlets. One duplex electrical outlet on every other column (where occurs). Provide high voltage service to every shop area and provide a dedicated circuit for every machine station at 250 SF per machine station.
HVAC:	Hanging radiant heat units. Minimum heat with large exhaust fans.
Casework:	None.
Signage:	Building standard identification sign outside door.
AV:	None.
Equipment:	None.
Plumbing:	All required lines and infrastructure for utility sinks, floor drains, traps, hot/cold. Combined eyewash and shower station with floor drain.
Furniture:	None.
Not Included:	AV, Equipment, and Furniture listed above is for reference only, it is not included in this budget.

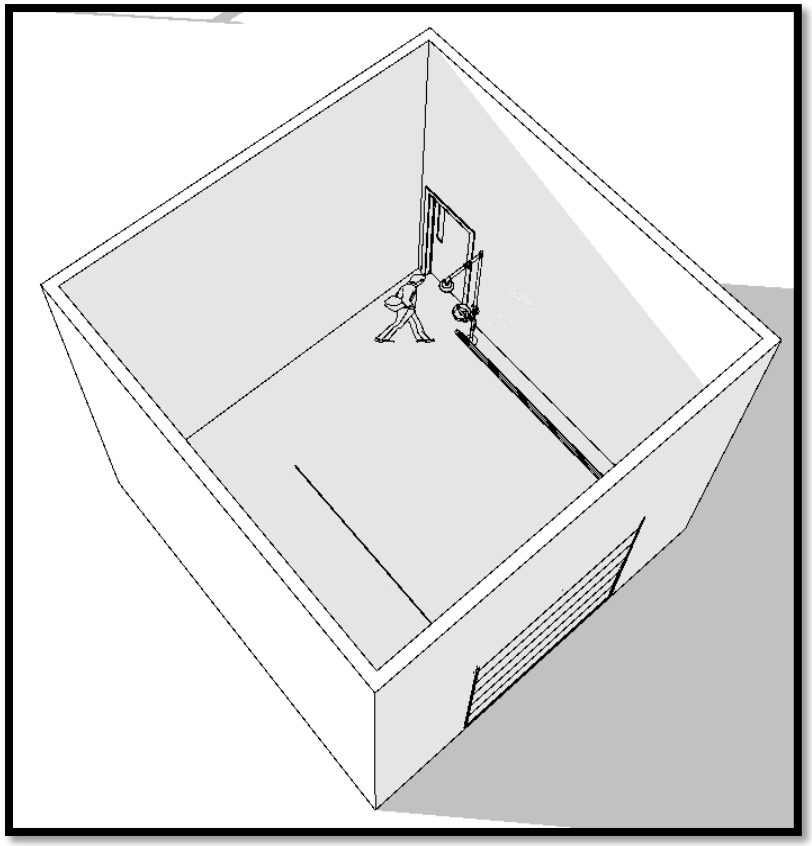

LIGHT INDUSTRIAL & WAREHOUSE – CAGE STORAGE

Key Features	
Approx Size:	Refer to the ASR – General Space Requirements
Seat Count:	None.
Walls:	Chain Link Fencing surrounding entire perimeter.
Floor:	Assumed Concrete slab is already in place. Slab on grade, level, sealed reinforced concrete to support live load.
Ceiling:	Unfinished.
Door/Glazing:	Chain link gate and lock.
Lighting:	Building standard warehouse lighting that maintains 50 foot-candles of lighting.
Electrical:	None.
HVAC:	Hanging radiant heat units. Minimum heat with large exhaust fans.
Casework:	None.
Signage:	Building standard identification sign outside area.
AV:	None.
Equipment:	None.
Plumbing:	None.
Furniture:	None.
Not Included:	AV, Equipment, and Furniture listed above is for reference only, it is not included in this budget.

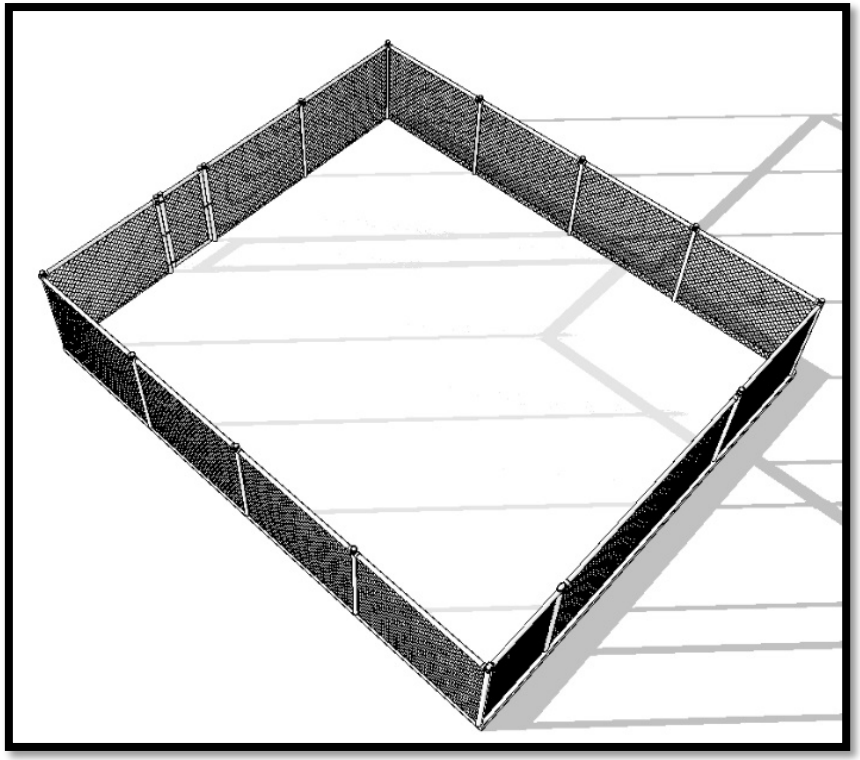

PARKING SPACES

SECURED OPEN PARKING – STANDARD VEHICLE:

Typical space size 10’ x 20’
(200 SF + Circulation Factor = 350 SF)

SECURED OPEN PARKING – OVERSIZED VEHICLE:

Typical space size 12’ x 24’
(288 SF + Circulation Factor = 500 SF)

SECURED COVERED PARKING – CARPORT TYPE OVERSIZED VEHICLE:

Typical space size 12’ x 24’
(288 SF + Circulation Factor = 500 SF)

WARE YARD – Space for storage of materials, staging, and equipment

Circulation Factors includes backup circulation and traffic lanes.