

**Maintenance and Repair of Emergency Power and Power
Generation Systems consisting of
Emergency Power System (EPS), Uninterruptible Power Supply
(UPS) and Photovoltaic (PV) throughout USAG Wiesbaden**

DRAFT

Table of Contents

1. GENERAL INFORMATION	6
1.1 Overview.....	6
1.1.1 Workload Requirement.....	6
1.1.2 Diagnosis and Analysis.....	6
1.2 Components.....	7
1.3 Work Management and Control.....	7
1.4 Quality Control Plan (QCP)	7
1.4.1 Analysis & Timeliness.....	8
1.4.2 Potential issues	8
1.5 Quality Assurance	8
1.6 Recognized Holidays.....	8
1.7 Holidays	8
1.7.1 US Holidays.....	8
1.7.2 Training Holidays.....	9
1.7.3 Host Nation Holidays.....	9
1.8 Operating Hours.....	9
1.8.1 Government Facility Office Hours	10
1.8.2 Government Facility Operating Hours.....	10
1.8.3 Contractor Support Hours.....	10
1.9 Place of Performance.....	10
1.10 Security Requirements.....	10
1.10.1 Installation Access.....	10
1.10.2 Background Checks.....	11
1.10.3 Physical Security	12
1.10.4 Operations Security (OPSEC) Requirements.....	12

1.11 Key Control	12
1.12 Post Award Conference/Periodic Progress Meetings	13
1.12.1 Meetings.....	13
1.13 Contracting Officer's Representative (COR).....	13
1.13 Key Personnel.....	13
1.13.1 Other Contractor Personnel Qualifications	14
1.14 Identification of Contractor Employees	15
1.14.1 Contractor Identification Badges	15
1.15 Data Rights	15
1.16 Non-Disclosure Requirements.....	15
1.17 Protection of Government and Contract Information.....	15
1.18 Non-Disclosure Statements.....	16
1.19 Organizational Conflict of Interest (OCI).....	16
1.20 Phase In /Phase Out Period	16
1.21 Safety.....	16
1.22 Environmental Compliance:.....	16
1.22.1 Environmental Compliance Plan and Program.....	16
1.23 Required Training.....	17
1.23.1 Anti-Terrorism (AT) Level I Training.....	17
1.23.2 OPSEC Training	18
1.23.3 Suspicious Activity Reporting Program Training	18
1.23.4 Threat Awareness Reporting Program Training	18
1.23.5 Personally Identifiable Information (PII)	18
1.24 Authorization to Perform Services in Germany	18
1.24.1 Contractors performing services in the Federal Republic of Germany	18
1.24.2 Contractor employees.....	19

1.24.3 Compliance with this requirement and German law	19
1.25 Notice to Proceed.....	19
1.26 Electromagnetic Compatibility Directive.....	19
1.27 Contractor Furnished Property and Services	19
1.27.1 General.....	19
1.27.2 Secret Facility Clearance	19
1.27.3 Materials	19
1.27.4 Vehicles and Equipment	20
1.27.5 Background Checks.....	20
1.28 Conventional Forces Europe (CFE) Treaty Verification Inspection	20
1.29 Definitions and Acronyms.....	20
1.29.1 Definitions.....	20
1.29.2 Acronyms	22
2.0 DESCRIPTION OF SERVICES.	25
2.1 Emergency Power Systems (EPS).....	25
2.1.1 Preventive Maintenance EPS	26
2.1.2 On-demand repair service EPS	27
2.2 Uninterruptible Power Supply (UPS) Systems.....	27
2.2.1 Preventive Maintenance UPS	28
2.2.2 On-demand repair service UPS	29
2.3 Photovoltaic (PV)	30
2.3.1 Preventive Maintenance (PV)	31
2.3.2 On-demand repair service PV.....	31
2.3.3 Cleaning solar module	32
2.4 Functional Areas	32
2.5 Meetings, Conferences, and Briefings.....	32

2.6 Training	32
2.7 Service Contract Reporting	33
2.8 Manufacturer Manuals:.....	33
2.9 Inventorylist and Labeling:.....	33
2.10 Technical Logbooks:	33
2.11 Risk Assessment and Condition Analysis:.....	34
2.12 Maintenance Schedule	34
2.13 Maintenance Documentation	34
2.13.1 Maintenance Work Certificate	34
2.14 On-demand Repair Documentation	35
2.14.1 On-demand repair work certificate	35
2.15 Repair Parts	35

1. General Information

1.1 Overview.

The Contractor shall inspect, repair and maintain all existing Emergency Power Systems (EPS), Uninterruptable Power Systems (UPS) and Photovoltaic Systems (PV) equipment listed in Inventory List (Technical Exhibit 01, Inventory).

1.1.1 Workload Requirement.

The following paragraphs describe all facets involved in the management of maintenance; they include terms used to classify work; provide information on the level of effort that will be required at USAG Wiesbaden in terms of workload and trade distributions; and describe the way in which work will be received, managed, and documented. The Contractor is responsible for the maintenance and repair of systems (**TE 01, Inventory**).

1.1.2 Diagnosis and Analysis.

The Contractor shall provide follow-up analysis and diagnosis of equipment failure as described below

1.1.2.1. Factors

The primary aim is to identify the factors that contributed to and/or resulted in the failure of maintenance, service, repair and/or operation of real property, infrastructure, and systems at USAG Wiesbaden, and to identify and implement actions to prevent repeated future failure due to the same failure reasons. The Contractor shall:

- a. Provide a detailed description and explanation of the failure
- b. Identify the root cause or causes of the problem
- c. Provide possible actions and solutions to prevent future occurrences, an explanation of the pros and cons of these actions, a cost analysis of these actions, and the Contractor's recommended action

1.1.2.2 Analysis or Diagnosis

The Contractor shall provide additional analysis or diagnosis when:

- a. Directed by the Contracting Officer (KO), Contracting Officer Representative (COR).
- b. The Contractor or DPW determines it necessary due to unfavorable maintenance, repair, and
- c. After catastrophic, unusual, or unforeseen events that result in adverse maintenance, repair, and service requirements
- d. When notified of unsatisfactory performance by Garrison or other Regulatory Agencies (Safety, Occupational Safety and Health Administration (OSHA), Industrial Hygiene, Directorate of Emergency Services (DES), etc.)
- e. After any unplanned stoppage, outage, or failure of a power system or major power system component

1.2 Components

The Contractor shall perform Preventive maintenance (PM) and repairs. Components covered under this Common Level of Support include, but are not limited to, the following (**TE# 4_Inventorystorylist_EPSUPSPV**)

PV	EPS	UPS
Solar Panels (Modules)	Diesel Generator	Batteries (various types: Lead-Acid, Lithium-Ion etc.)
Inverters	Automatic Transfer Switch (ATS)	Power Electronics (Rectifiers, Inverters)
Mounting Structure (Racking System)	Control System (Controller, Monitoring System)	Control System (Controller, Monitoring Software)
DC Wiring & Connections	Cooling System (Radiator, Fan, Coolant)	Bypass Switch (manual/automatic)
Protective Devices (DC Disconnects, Surge Protectors, Fuses)	Fuel Tank & Lines	DC-Link Capacitors
String Monitoring System	Exhaust System (Muffler, Exhaust Pipe)	Transformers
DC Combiner Boxes	Engine Starting System (Battery, Starter)	Heat Sinks & Fans
Grounding System	Generator Control Panel	Enclosure & Wiring
		Communication Interfaces (SNMP, Modbus)

1.3 RESERVED

1.4 Quality Control Plan (QCP)

The Contractor shall develop and maintain a QCP (**Deliverable #1**) to ensure services are performed in accordance with (IAW) this PWS. The Contractor shall develop and implement procedures to identify, prevent, and ensure non-recurrence of defective services. The Contractor's QCP is the means by which it assures that the work provided complies with the requirements of the contract.

At a minimum, the QCP must include the following to be acceptable:

- A chart showing the organizational structure and lines of authority, the names, qualifications, duties, responsibilities, and classification of each member of the Contractor's Quality Control Team.
- How the Contractor will monitor work to ensure that performance complies with all timelines, deadlines, and goals.
- How the Contractor will monitor work to ensure that performance complies with all specifications and requirements of the contract, including clauses.
- How the Contractor will monitor and ensure staff qualifications remain current and valid throughout contract performance.
- How the Contractor will ensure all keys issued will remain controlled items (See 1.11 Key Control).
- How the Contractor will identify, investigate, and correct any non-conforming performance and prevent similar deficiencies in the future.

- g. How the Contractor will file and save all Quality Control related documents for the life of the contract plus 5 years.
- h. A comprehensive maintenance and repair plan.

1.4.1 Analysis & Timeliness

An Analysis of Quality Control Plan and Timeliness of Submittals Plan (i.e. deliverables) shall be provided once within ten (10) days after contract award and no later than thirty (30) workdays prior to any anticipated changes and or upon completion of each option period or task order (**Deliverable #1**).

1.4.2 Potential issues

The Contractor shall inform the COR of issues or potential issues that might affect the performance within two (2) workdays of identifying those issues. Verbal reports shall be followed up by a written report to the COR within three (3) workdays after the issue, or potential issue(s) are identified. The Contractor shall be compliant with this deliverable 98% of the time (**Deliverable #2**).

1.5 Quality Assurance

The Government will evaluate the Contractor's performance under this contract in accordance with the Quality Assurance Surveillance Plan (QASP). This plan is primarily focused on what the Government must do to ensure that the Contractor has performed in accordance with the performance standards specified herein. It defines how the performance standards will be applied, the frequency of surveillance, and the minimum acceptable defect rates, and the acceptable quality levels (performance thresholds).

1.6 Recognized Holidays

The following provides information on recognized holidays for the purpose of the PWS. If submittal of any documentation (e.g. deliverables, submittals, etc.) deadlines fall on a holiday, the closest workday prior to the holiday will apply as the deadline for submittal.

1.7 Holidays

1.7.1 US Holidays

Work shall not be performed on U.S. federally recognized holidays occurring during the normal workweek unless otherwise directed by the Contracting Officer. When a U.S. holiday occurs on a Saturday or a Sunday, the holiday is observed on the preceding Friday or following Monday, respectively.

New Year's Day January 1st

M. L. King Memorial Day 3rd Monday in January

Presidents Day 3rd Monday in February

Memorial Day last Monday in May

Juneteenth June 19th

Independence Day July 4th

Labor Day 1st Monday in September

Columbus Day 2nd Monday in October
Veteran's Day November 11th
Thanksgiving Day 4th Thursday in November
Christmas Day December 25th

1.7.2 Training Holidays

USAREUR has historically granted military personnel training holidays as compensation for time that they spent in field training. These are typically combined with regular holiday leave schedules (for example, Christmas half days or day on day off schedules). Training holidays may affect access to military operated facilities. If scheduled work or access to facilities is required, coordination with occupants will be necessary or the work in affected facilities shall be rescheduled after the training holiday. However, announced training holidays or exodus of military personnel may provide the Contractor with an opportunity for unrestricted access to facilities and areas. The Contractor shall take full advantage of such opportunities by planning maintenance or actions that are better accomplished when such areas are vacant.

1.7.3 Host Nation Holidays

Work shall not be performed on local Host Nation holidays occurring during the normal workweek unless otherwise directed by the Contracting Officer.

Neujahrstag	New Year's Day
Karfreitag	Good Friday
Ostersonntag	Easter Sunday
Ostermontag	Easter Monday
Tag der Arbeit	Labour Day / May Day
Christi Himmelfahrt	Ascension Day
Pfingstsonntag	Whit Sunday / Pentecost Sunday
Pfingstmontag	Whit Monday / Pentecost Monday
Fronleichnam	Corpus Christi
Tag der Deutschen Einheit	Day of German Unity
Heiligabend	Christmas Eve
1. Weihnachtstag	Christmas Day
2. Weihnachtstag	Christmas Day

1.8 Operating Hours

The Government facility office hours, facility operating hours, and the Contractor support hour requirements often coincide, however, they may differ.

The Government facility office hours are: 0715 to 1600 Monday through Friday except U.S. Holidays identified in paragraph 1.7.1 above or when the Government facility is closed due to local or national emergencies, administrative closings, or similar Government directed facility closings.

1.8.1 Government Facility Office Hours

The Government facility office hours are specified in paragraph 1.8 above.

1.8.2 Government Facility Operating Hours

The Government facility operating hours occur between the hours of 0715 to 1600, Monday through Friday. If Government facility is closed during local or national emergencies, administrative closings, or similar Government directed facility closings, the COR will notify the Contractor immediately. Work outside of the above times shall only be performed upon consultation with and confirmation from the COR.

1.8.3 Contractor Support Hours

The Contractor shall provide support between the hours of 0715 to 1600, Monday through Friday. If the Government facility is closed during local or national emergencies, administrative closings, or similar Government directed facility closings, the COR will notify the Contractor immediately. The Contractor shall maintain an adequate workforce at all times for the uninterrupted performance of all tasks defined within this PWS when the Government facility is not closed for the above reasons. When hiring personnel, the Contractor shall keep in mind that the stability and continuity of the workforce is essential.

1.9 Place of Performance

The work to be performed under this contract will be performed at various locations and buildings within USAG Wiesbaden as specified in TE# 3_Location and Types of Facilities

1.10 Security Requirements

1.10.1 Installation Access

Access to U.S. installations, buildings and controlled areas is limited to personnel who meet security criteria and are authorized by Host Nation law to work in Germany. Failure to submit required information/data and obtain required documentation or clearances will be grounds for denying access to U.S. installations, buildings and controlled areas. The Contractor shall ensure that any subcontractors used in performance of this contract complies with these requirements and that all employees, of both the Contractor and any subcontractor utilized by the Contractor, are made aware of and comply with these requirements.

The Contractor shall be aware of and comply with the requirements associated with Installation Access Control. The Government is not liable for any costs associated with performance delays due solely to a firm's failure to comply with Installation Access Control System (IACS) processing requirements.

For the Installation Pass request (**Deliverable #3a**), the following documents must be forwarded to the COR no later than thirty (30) calendar days after the award:

1. The completely filled out form "Self Disclosure" (TE# 6.1_Self-disclosure), which must not be older than three (3) months.
2. The completely filled out form AEF190-16A (TE# 6.2_AEF190-16A), which must not be older than three (3) months.

3. The completely filled out form AEF 604-1B (TE# 6.3_AEF604-1B), which must not be older than three (3) months. (Please do not fill in or sign the signature and date digitally).
4. The certificate "Führungszeugnis" must not be older than one (1) year. (Persons from EU countries (only non-German citizens) require a "europäisches Führungszeugnis")

The Contractor shall return installation passes to the issuing IACS office when the contract is completed or when a Contractor employee no longer requires access.

1.10.1.1 Installation Pass Log

In addition, the Contractor shall provide the COR an Initial Installation Pass Log within three (3) calendar days after contract award. The log must at a minimum contain the following information: Employee name, address, date and place of birth. The log shall be updated as employees are added or removed. The Updated Installation Pass Log shall be current and available at any time upon request by the Government and submitted to the COR within five (5) calendar days after any changes to the log (**Deliverable #3b**).

1.10.1.2 Individual Termination or Expiration of Employment

The Contractor shall collect the installation access passes the same day employment of an individual has expired or has been terminated and shall return them to the issuing office within two (2) workdays (**Deliverable #4**).

1.10.1.3 Contract Termination or Cancellation

Upon termination or cancellation of this contract, the Contractor shall collect all outstanding installation access passes and return them to the issuing office within five (5) workdays (**Deliverable #5**).

1.10.2 Background Checks

The Contractor shall provide Background Checks (police good conduct; Polizeiliches Führungszeugnis) in accordance with PWS 1.10.2 and as determined by the Government. Army in Europe (AE) Regulation 604-1 (TE# 6.3_AEF604-1), provides guidance pertaining to background checks for U.S. and Host Nation Contractors. The Contractor shall provide all information required for background checks to meet installation access requirements to be accomplished by the installation Provost Marshal Office, Director of Emergency Services, or Security Office, and residence permits for local national installation passes and access rosters. The Contractor workforce shall comply with all personal identity verification requirements as directed by DoD, HQDA, and local policy. The Contractor may have to complete additional security training to comply with the security standards of this contract. In addition to the changes otherwise authorized by the changes clause of this contract, should the Force Protection Condition (FPCON) at any individual facility or installation change, the Government may require changes in Contractor security matters or processes (**Deliverable #6**).

1.10.2.1 U.S. Citizen

The Requiring Activity Manager will determine the extent of background checks required. The Contractor employee may begin performance of the contract after receiving a favorable local background check. The Contractor agrees to replace the employee should results of the background check, if required, be unfavorable as determined by the Requiring Activity Manager. The

Contractor's replacement of the employee with the unfavorable background check shall be within a timeframe provided by the Requiring Activity Manager. The Contractor shall also replace employees whose background check, during their tenure of employment, renders them with an unfavorable local or stateside background check, as determined by the Requiring Activity Manager. The Contractor shall forward a copy to the Contracting Officer via the COR and the Requiring Activity Manager of each favorable background check within five (5) workdays of receipt by the Contractor, identifying such with the appropriate contract number. The Contractor shall forward a copy to the Contracting Officer via the COR and the Requiring Activity Manager of each unfavorable background check within five (5) workdays of receipt by the Contractor, identifying such with the appropriate contract number. When the Government awards a non-personal services contract directly to an individual, the failure of the individual to provide a favorable background check would be grounds for termination **(Deliverable #6)**.

1.10.2.2 Local Nationals and Third Country Nationals

As a minimum prior to beginning performance, Contractors employing local national and third country nationals shall furnish the Contracting Officer via the COR and the Requiring Activity Manager current documents required for working on a US installation, no later than five (5) workdays after contract award. Forwarding correspondence from the Contractors shall identify the associated contract number **(Deliverable #6)**.

1.10.3 Physical Security

The Contractor shall safeguard all Government equipment and information provided for Contractor use. At the close of each work period, Government facilities, equipment, and materials shall be secured IAW the Army Physical Security Program (AR 190-13).

1.10.4 Operations Security (OPSEC) Requirements

Contractor personnel shall adhere to facility security policies and restrictions. The Contractor shall immediately report suspicious activities to security personnel.

1.11 Key Control

The Contractor shall establish and implement methods of making sure all keys issued to the Contractor by the Government are not lost or misplaced and are not used by unauthorized persons. NOTE: All references to keys include key cards. No keys issued to the Contractor by the Government shall be duplicated. The Contractor shall develop procedures covering key control that shall be included in the Quality Control Plan **(Deliverable #1)**. Such procedures shall include turn-in of any issued keys by personnel who no longer require access to locked areas. The Contractor shall immediately report any incidents of lost or duplicate keys to the Contracting Officer. In the event keys, other than master keys, are lost or duplicated, the Contractor shall, upon direction of the Contracting Officer, re-key or replace the affected lock or locks; however, the Government, at its option, may replace the affected lock or locks or perform re-keying. When the replacement of locks or re-keying is performed by the Government, the total cost of re-keying or the replacement of the lock or locks shall be deducted from payment due to the Contractor. In the event a master key is lost or duplicated, all locks and keys for that system shall be replaced by the Government and the total cost deducted from the payment due to the Contractor. The Contractor shall prohibit the use of Government issued keys by any persons other than the Contractor's employees. The Contractor shall prohibit the opening of locked areas by Contractor employees to permit entrance of persons other than Contractor employees engaged in the performance of assigned work in those areas, or personnel

authorized entrance by the Contracting Officer. The Contractor shall establish and implement methods of ensuring that all lock combinations are not revealed to unauthorized persons. The Contractor shall ensure that lock combinations are changed when personnel having access to the combinations no longer have a need to know such combinations. These procedures shall be included in the Quality Control Plan.

1.12 Post Award Conference/Periodic Progress Meetings

The Contractor shall attend any post award conference convened by the contracting activity or contract administration office in accordance with FAR Subpart 42.5. The Contracting Officer, COR, and other Government personnel, as appropriate, may meet periodically with the Contractor to review the Contractor's performance. At these meetings the Contracting Officer will apprise the Contractor of how the Government views the Contractor's performance and the Contractor shall apprise the Government of problems, if any, being experienced. Appropriate action shall be taken to resolve outstanding issues. These meetings shall be at no additional cost to the Government.

1.12.1 Meetings

The Contractor shall attend, participate in, and furnish input to scheduled and unscheduled meetings, conferences, and briefings that relate to the functions and services herein as required by the Government to provide effective communication and impart necessary information. The Contract Manager or designated representative shall attend meetings as requested by the Government. Meeting attendees shall at times include Contractor managerial, supervisory, and other personnel knowledgeable of the subject matter. Meetings may start or end outside of regular work hours.

1.12.2 Contracting Officer's Representative (COR)

Refer to Part 1.29 of this PWS for the definition of a COR. As determined by the Contracting Officer, a COR will be appointed and identified by letter of designation, a copy of which will be provided to the Contractor by the Contracting Officer. The designation letter states the responsibilities and limitations of the COR, especially with regard to changes in cost or price, estimates, or changes in delivery dates. The COR is not authorized to change any of the terms and conditions of the resulting order. The COR monitors all technical aspects of the contract and assists in contract administration. The COR is not authorized to obligate the Government. If the work is not written in the contract, the COR is not authorized to request new work. The COR is authorized to perform the following functions: assure that the Contractor performs the technical requirements of the contract, perform inspections necessary in connection with contract performance, maintain written and oral communications with the Contractor concerning technical aspects of the contract, issue written interpretations of technical requirements, including Government drawings, designs, specifications, monitor Contractor's performance and notifies both the Contracting Officer and Contractor of any deficiencies, coordinate availability of Government property, and coordinate site entry of Contractor personnel.

1.13 Key Personnel

The following personnel are considered key personnel by the Government: Contract Manager, Alternate Contract Manager and Quality Control Manager. The Contractor shall provide a Contract Manager who shall be responsible for the performance of the work. The name of this person and an Alternate Contract Manager, who shall act for the Contractor when the Contract Manager is absent, along with a Curriculum Vitae (CV) for each of these individuals, shall be provided in writing to the Contracting Officer no later than five (5) workdays after contract award (**Deliverable #7**). The

Contract Manager and Alternate Contract Manager shall have full authority to act for the Contractor on all contract matters relating to daily operation of this contract. The Contract Manager or Alternate Contract Manager shall be available between 0715-1600 Monday- Friday.

Qualifications for all key personnel are listed below:

- a) Contract Manager and Alternate Contract Manager: Certified Engineer or Master (Ingenieur, Techniker oder Meister) in electronic or mechanical field with a minimum of three (3) years' work experience in a company that manages or supervises maintenance or repair contracts. Employee must be proficient in speaking and writing in both English and German languages.
- b) Quality Control (QC) Manager: Certified Engineer or Master (Ingenieur, Techniker oder Meister) in electronic or mechanical field or with a minimum of three (3) years' work experience in a company that carries out all QC measures to ensure quality performance. An employee that is fluent in German, but can speak and write in English is desirable, but not mandatory.

The Contractor shall be 100% compliant for this deliverable. Contract Manager and Quality Control Manager can be one person.

1.13.1 Other Contractor Personnel Qualifications

The Contractor shall provide certified, fully qualified and trained personnel for maintaining and repairing Emergency Power Generators, Uninterruptible Power Supply Systems and Photo voltaic systems. The Work Supervisor (Arbeitsverantwortlicher) shall have a minimum of three (3) years experience performing the required services. Work supervisors (Arbeitsverantwortliche) shall have at a minimum one of the following diplomas:

- a) Apprenticeship diploma electrical engineering (unaltered German version ("Gesellenbrief/Facharbeiterbrief Elektrotechnik")
- b) Apprenticeship diploma mechanical engineering (unaltered German version ("Gesellenbrief/Facharbeiterbrief Mechanik")
- c) Apprenticeship diploma mechatronic engineering (unaltered German version ("Gesellenbrief/Facharbeiterbrief Mechatronik"), and

Certificates of training to perform maintenance and repair on Emergency Power Generator, Uninterruptible Power Supply Systems and Photo voltaic systems located throughout USAG Wiesbaden (see TE# 4 – Inventorylist EPSUPSPV) shall provide within five (5) work-days after contract award to the COR (**Deliverable #8**). All certifications obtained abroad must be translated to German and certified by the Federal Ministry for Education (Bundesministerium fuer Bildung und Forschung) per www.anerkennung-in-deutschland.de. If an employee has similar or comparable apprenticeship and can cover the above-mentioned areas, this must be confirmed by an apprenticeship certificate.

NOTE: The Contractor shall designate and demonstrate at two employees per facility (EPS, UPS, and PV) with the corresponding experience and qualification as a Work Supervisor (Arbeitsverantwortlichen).

The contractor must fulfill this service 100%.

1.14 Identification of Contractor Employees

All Contractor personnel attending meetings, answering Government telephones, and working in other situations where their Contractor status is not obvious to third parties must identify themselves, to include proper marking of signature blocks in correspondence, to avoid creating an impression in the minds of members of the public that they are Government officials. The Contractor shall ensure that all documents or reports, produced by Contractors are suitably marked as Contractor products or that Contractor participation is appropriately disclosed.

1.14.1 Contractor Identification Badges

Contractor personnel shall be easily identifiable through the display of badges IAW Contractor Identification (AE Reg. 27-715). (For services at Child, Youth, and School Services where children are present, recommend personnel wear identification when children are present.) The Contractor (to include subcontractors) shall provide each of their employees an easily readable identification badge. The badge must include the employee's name, the contractor's company name, the functional area of assignment, and a recent color photograph of the employee. Companies with U.S. Government contracts will require their employees to wear these badges visibly when performing work at Government workplaces unless this would be impractical because of mission or safety considerations. The Contractor shall collect all ID Badges upon completion of the contract or termination of employee. A listing of issued ID cards shall be furnished to the COR prior to the contract performance date and updated as needed to reflect Contractor personnel changes no later than five (5) workdays (**Deliverable #9**).

1.15 Data Rights

The Government has unlimited rights to all documents and materials produced under this contract. All documents and materials, to include the source codes of software, produced under this contract shall be Government owned and are the property of the Government with all rights and privileges of ownership and copyright belonging exclusively to the Government. These documents and materials may not be used or sold by the Contractor without written permission from the Contracting Officer. All materials supplied to the Government shall be the sole property of the Government and may not be used for any other purpose. This right does not abrogate any other Government rights.

1.16 Non-Disclosure Requirements

Performance under this contract may require the Contractor to access data and information proprietary to a Government agency, another Government Contractor, or of such nature that its dissemination or use other than as specified in this work statement would be adverse to the interests of the Government or others. The Contractor and Contractor personnel, shall not divulge or release data or information developed, or obtained under performance of this PWS, except to authorized Government personnel or upon written approval of the Contracting Officer. The Contractor shall not use, disclose, or reproduce proprietary data, which bears a restrictive legend, other than as specified in this PWS. All documentation showing individual names or other personal information shall be controlled and protected under the provisions of the Privacy Act of 1974, Public Law 93-579, 5 United States Code (U.S.C.) Section 552a.

1.17 Protection of Government and Contract Information

Per Public Use Notice of Limitations stated by Defense imagery Management operations Center and contained at www.dimoc.mil/resources/limitations/, the Contractor shall not cite any

information (e.g., contract information, pictures, locations, etc.) obtained through this contract on any hard copy or digital marketing tools to include its company website.

1.18 RESERVED

1.19 Organizational Conflict of Interest (OCI)

Contractor and subcontractor personnel performing work under this contract may receive, have access to or participate in the development of proprietary or source selection information (e.g., cost or pricing information, budget information or analyses, specifications or work statements, etc.) or perform evaluation services which may create a current or subsequent OCI as defined in FAR Subpart 9.5. The Contractor shall notify the Contracting Officer (KO) and COR immediately whenever it becomes aware that such access or participation may result in any actual or potential OCI and shall promptly submit a plan to the Contracting Officer to avoid or mitigate any such OCI (**Deliverable #10**).

The Contractor's OCI Mitigation Plan will be determined to be acceptable solely at the discretion of the Contracting Officer. In the event the Contracting Officer unilaterally determines that any such OCI cannot be satisfactorily avoided or mitigated, the Contracting Officer may affect other remedies as he or she deems necessary, including prohibiting the Contractor from participation in subsequent contracted requirements which may be affected by the OCI.

1.20 Phase In /Phase Out Period

Reserved

1.21 Safety

The following provides information pertaining to Safety and Accident Prevention. The Contractor shall be 100% compliant with the requirements of this section, to include zero safety violations that threaten life, limb, or property.

1.21.1. Safety Notification

The Contractor shall complete and provide safety notifications required by host nation authorities and will provide documented proof to the COR, no later than three (3) workdays after such notifications were made (**Deliverable #11**).

1.22 Environmental Compliance:

The following provides information on Environmental Compliance. The Contractor shall be 100% compliant with the requirements of this section, to include zero violations that threaten life, limb, or property.

1.22.1 Environmental Compliance Plan and Program

The Contractor shall ensure that all of its operations and activities conform to the USAG Wiesbaden's environmental policy requirements. The Contractor shall ensure that all contract personnel have received appropriate levels of training in the handling, use, storage, and disposal of hazardous material. In addition, the Contractor shall ensure that all Contractor controlled activities on USAG Wiesbaden installations are conducted in accordance with the USAG Wiesbaden Spill Prevention

and Response Plan, Solid Waste Policy, Final Governing Standards-Germany, and applicable German environmental laws/standards. If contract requires the use of hazardous materials/substances, the Contractor shall, prior to mobilization, inform the Contracting Officer (KO)/COR of the types and amount of hazardous materials needed to be brought onto the Garrison in order to fulfill their contractual requirements. Contractor shall also provide the Safety Data Sheets, storage requirements and proposed storage locations for the hazardous material. The KO/COR shall provide a copy of this information to the Garrison Fire Department and the Environmental Division. Prior to contract completion, the Contractor shall remove all hazardous materials and dispose of all hazardous waste (HW) generated in accordance with Final Governing Standards Germany and applicable German environmental laws/standards. A copy of the HW disposal documents must be forwarded to the HW program manager at the DPW Environmental Division.

The Contractor shall clean up, at its own expense, any contamination, including soil and ground water contamination caused by hazardous materials/substances brought onto the garrison, or by his activities. The Contractor must immediately report any hazardous substance spills to the Garrison Fire Department at CIV 0611-705-117. The Contractor shall contact the COR or the USAG Wiesbaden Directorate of Public Works-Environmental Division (DPW-ED), DSN 548-4092, CIV 0611143-548-4092, Bldg. 1059, Clay Kaserne for a copy of the Garrison Environmental Policy, Spill Prevention and Response Red Plan, Garrison Solid Waste Policy and German Final Governing Standards.

Current Environmental Policy (Garrison policy Number 22) is available at the Garrison website:
<http://www.wiesbaden.army.mil/policies/22EnvironmentalManagementSystem.pdf>

Current Prohibited Refuse Disposal Practices Policy (Garrison policy Number 27) is available at the Garrison website:

http://www.wiesbaden.army.mil/policies/27Prohibited_Refuse_Disposal_Practices.pdf

1.23 Required Training

The following provides information on training requirements.

1.23.1 Anti-Terrorism (AT) Level I Training

All Contractor employees, including subcontractor employees, who are employed under the contract, shall complete AT Level I Training within thirty (30) workdays after contract start date or effective date of incorporation of this requirement into the contract, whichever applies, or thirty (30) days after employment of new personnel. The Contractor shall submit certificates of completion for each affected Contractor employee and subcontractor employee to the COR within three (3) workdays after completion of this training by all employees and subcontractor personnel. AT Level I awareness training is available at <https://jkodirect.jten.mil>.

Contractor personnel shall complete refresher training every twelve (12) months except AOR specific AT Level I training which shall be completed as required by local AT policies

If training cannot be conducted on the website, the Contractor shall coordinate with the COR who will contact the local AT Officer at their assigned location for classroom training. Contractor personnel completing training in the classroom will receive a certificate or the training attendance roster signed by the AT Officer. Verification of the training shall be provided to the COR within three (3) workdays after completion of the training (**Deliverable #12**).

1.23.2 OPSEC Training

Contractor employees, including subcontractors, shall complete Level I OPSEC training within thirty (30) workdays after contract award and within thirty (30) days after employment of new personnel. Verification of the training shall be provided to the COR within three (3) workdays after completion of the training. OPSEC Level I training is available at <http://www.cdse.edu/catalog/elearning/GS130.html>. Contractor personnel must complete refresher training every 12 months. Verification of the training shall be provided to the COR within three (3) work days after completion of the training.

If training cannot be conducted on the website, the Contractor shall coordinate with the COR, who will contact the local OPSEC Officer at their assigned location for classroom training. Contractor personnel completing training in the classroom will receive a certificate or the training attendance roster signed by the OPSEC Officer. Verification of the training shall be provided to the COR within three (3) workdays after completion of the training (**Deliverable #13**).

1.23.3 Suspicious Activity Reporting Program Training

The Contractor and all associated subcontractors will brief all employees on the local suspicious activity reporting program (training standards provided by the requiring activity ATO). This locally developed training will be used to inform employees of the types of behavior to watch for and instruct employees to report suspicious activity to the COR. This training will be completed within thirty (30) workdays after contract award and within thirty (30) workdays after new employees commence contract performance, with the results reported to the COR within three (3) workdays after completion of the training (**Deliverable #14**).

This training replaces the former iWATCH Program. Coordinate with the COR for current training requirements and guidelines.

1.23.4 Threat Awareness Reporting Program Training

The Contractor and all associated subcontractors, must receive annual Threat Awareness and Reporting Program (TARP) training by an authorized trainer. The Contractor shall coordinate with the COR, who will contact the local trainer at their assigned location. Contractor personnel completing training will receive a certificate or the training attendance roster signed by authorized CI representative. This training will be completed within thirty (30) workdays after contract award and within thirty (30) workdays after new employees commence contract performance. Verification of the training shall be provided to the COR within three (3) workdays after completion of the training (**Deliverable #15**).

1.23.5 RESERVED

1.24 Authorization to Perform Services in Germany

1.24.1 Contractors performing services in the Federal Republic of Germany

Contractors performing services in the Federal Republic of Germany (FRG) shall comply with German law. The Contractor shall determine whether performance requires registration with German authorities or authorization to do business in Germany and, if so, shall comply with all requirements. Whether or not registration or authorization to do business is required, the Contractor shall determine what documents or authorization its employees and any subcontractor employees must

possess to work in Germany. The Contractor shall ensure affirmatively that its employees and subcontractor employees possess such documents or authorizations.

1.24.2 Contractor employees

Contractor employees who: (a) are not nationals of Germany or other European Union countries; (b) are not members of the force, the civilian component or their dependents; or c) do not have assimilated status under Articles 71, 72, or 73 of the Supplementary Agreement to the North Atlantic Treaty Organization Status of Forces Agreement shall possess work and residence permits.

1.24.3 Compliance with this requirement and German law

By acceptance of and performance under this contract, the Contractor affirms that it has complied with the requirements above. Compliance with this requirement and German law is a material contract requirement. Noncompliance by the Contractor or subcontractor at any tier shall be grounds for issuing a negative past performance evaluation and terminating this contract for default.

1.25 Notice to Proceed

The effective date of contract will constitute the date of notice to proceed.

1.26 Electromagnetic Compatibility Directive

The Contractor certifies that all electrical and electronic equipment and appliances furnished are in compliance with the Electromagnetic Compatibility Directive 2014/30/EU. For radio transmitting and telecommunication devices furnished in the FRG, the Contractor certifies that all such items have been approved by the Bundesamt fuer Zulassungen. Any penalties for noncompliance imposed by the Government of the European country where the equipment or appliances are delivered or product liability claims caused by interference generated by furnished appliances or equipment are solely the responsibility of the Contractor.

1.27 Contractor Furnished Property and Services

1.27.1 General

The Contractor shall furnish all supplies, equipment, facilities and services required to perform work under this contract that are not listed under Section 3 of this PWS.

1.27.2 RESERVED

1.27.3 Materials

The Contractor shall furnish all materials required in accordance with pertinent German accident and safety regulations to meet the requirements under this PWS. The Contractor shall be responsible for providing all personal protective equipment, office supplies and materials, such as paper, printer cartridges, and all other office supplies and materials needed to perform this contract.

All parts and materials utilized for the services under this contract shall be factory new and original. Upon request of the COR, exchanged parts shall be handed over to the COR for verification. The Contractor shall dispose of all exchanged parts and when no longer needed at no additional costs. The Contractor shall provide a warranty of at least 12 months after the repair date or installation date for all work performed.

Contractor shall be 100% compliant with the requirements of this section.

1.27.4 Vehicles and Equipment

The Contractor shall provide all necessary vehicles, or other transportation (no Government-owned vehicles will be provided to the Contractor), and any other equipment necessary to perform the work described in this PWS. All Contractor provided vehicles and equipment shall have the company name prominently displayed on both sides of the vehicle or equipment and present a neat, professional appearance. Contractor's vehicles and equipment used in the performance of this contract shall meet all local and Host Nation traffic, safety, and environmental requirements. Vehicles and equipment found to be unsafe shall be removed from the installation and replaced. The Contractor shall not use any Government-owned tools, materials, or parts to maintain Contractor vehicles and equipment without prior written approval of the Contracting Officer. The COR may inspect the Contractor's vehicles and equipment at any time.

1.27.5 Background Checks

The Contractor shall provide Background Checks in accordance with this PWS and as determined by the Government. See Part 1 for details.

1.28 Conventional Forces Europe (CFE) Treaty Verification Inspection

Contractor-owned or controlled structures and containers located on U.S. Government installations are subject to short-notice inspections by CFE treaty inspection teams. The Government will endeavor to provide the Contractor as much notice as possible in the event of such inspections. The contractor shall provide access to such structures and containers at the request of the Government. The Contractor shall report such inspections to the KO through the COR in writing within ten (10) calendar days of completion of the inspection. Contractor-owned or controlled structures and/or containers on U.S. installations may have to be inspected to comply with the CFE treaty even if Contractor personnel are unavailable to provide access. Any costs borne by the Contractor or any impact on contract performance as a result of the inspection will be a matter of negotiation between the Contractor and the KO.

1.29 Definitions and Acronyms

1.29.1 Definitions

Although not inclusive of every term used within this PWS, the following provides a list of definitions used throughout this PWS and commonly used in the acquisition field.

Contracting Officer – means a person with the authority to enter into, administer, and/or terminate contracts and make related determinations and findings on behalf of the Government. Note: The only individual who can legally bind the Government.

Contracting Officer's Representative (COR) – As defined in DFARS 202.101, means an individual designated and authorized in writing by the Contracting Officer to perform specific technical or administrative functions. DoD Instruction (DoDI) 5000.72, Part II Definitions states the following when defining a COR: “Defined in subpart 202.101 of Reference (f). Any individual delegated responsibilities pursuant to subpart 1.602-2 of Reference (e), regardless of local terminology, must be certified in accordance with this instruction. For example, local terminology can be COR, Contracting Officer's technical representative, technical point of contact, technical representative, alternate COR, administrative COR, assistant COR, line item manager, task order manager, quality assurance personnel, quality assurance evaluator, or COR management.” In addition, Army Regulation 70-13, Chapter 2, paragraph 2-2g, states, in part, the following when providing other surveillance support personnel to assist the COR when needed, “...These other surveillance support personnel may serve as on-site representatives of the COR in performance of actual contract surveillance if they meet all COR requirements and have been appointed by the Contracting Officer as alternate CORs.”

Contractor – means a supplier or vendor awarded a contract to provide specific supplies or service to the Government. The term used in this contract refers to the prime.

Contractor-acquired Property - means property acquired, fabricated, or otherwise provided by the Contractor for performing a contract and to which the Government has title.

Day – means, unless otherwise specified, a calendar day.

Defective Service – means a service output that does not meet the standard of performance associated with the Performance Work Statement.

Deliverable – means anything that can be physically delivered, but may include non-manufactured things such as meeting minutes or reports.

Government-furnished Property – As reflected in FAR 52.245-1, Government-furnished Property “means property in the possession of, or directly acquired by, the Government and subsequently furnished to the Contractor for performance of a contract. Government-furnished property includes, but is not limited to, spares and property furnished for repair, maintenance, overhaul, or modification. Government-furnished property also includes contractor-acquired property if the contractor-acquired property is a deliverable under a cost contract when accepted by the Government for continued use under the contract.

Government Property - means all property owned or leased by the Government. Government property includes both Government-furnished and Contractor-acquired property. Government property includes material, equipment, special tooling, special test equipment, and real property. Government property does not include intellectual property and software.

Property Administrator - means an authorized representative of the Contracting Officer appointed in accordance with agency procedures, responsible for administering the contract requirements and obligations relating to Government property in the possession of a Contractor.

Physical Security – means that part of security concerned with physical measures designed to safeguard personnel; to prevent unauthorized access to equipment, installations, material, and documents; and to safeguard against espionage, sabotage, damage, and theft.

Quality Assurance – (or Government contract quality assurance) means the various functions, including, inspection, performed by the Government to determine whether a Contractor has fulfilled the contract obligations pertaining to quality and quantity.

Quality Assurance Surveillance Plan (QASP) – means the key Government-developed surveillance process document, and is applied to Performance-Based Service Contracting (PBSC). The QASP is used for managing Contractor performance assessment by ensuring that systematic quality assurance methods validate that Contractor quality control efforts are timely, effective, and are delivering the results specified in the contract or task order. The QASP directly corresponds to the performance objectives and standards (i.e., quality, quantity, timeliness) specified in the Performance Work Statement (PWS). It provides specific details on how the Government will survey, observe, test, sample, evaluate, and document Contractor performance results to determine if the Contractor has met the required standards for each objective in the PWS. The QASP, with very few if any exceptions, is an internal to Government document.

Quality Control – means all necessary measures taken by the Contractor to assure that the quality of an end product or service shall meet contract requirements.

Statement – means the specific results-based activities required to satisfy HLOs. A statement contains a result, the context of the statement, and the required action(s). Statements focus on “what” is to be accomplished; however they are not prescriptive in describing “how” the outcome is to be achieved. Each HLO may have several statements to flesh out the areas necessary to meet the objective. Statements are similar to Level 3 in a Work Breakdown Structure.

Subcontractor – means one that enters into a contract with a prime Contractor. The Government does not have privity of contract with the subcontractor.

Work Day - The number of hours per day the Contractor provides services in accordance with the contract.

Work Week - Monday through Friday, unless otherwise specified.

1.29.2 Acronyms

Although not inclusive of every term used within this PWS, or that may be included in an acquisition, the following provides a list of acronyms commonly used in the acquisition field.

ACOR	Alternate Contracting Officer's Representative
AE	Army in Europe
AFARS	Army Federal Acquisition Regulation Supplement
AHA	Activity Hazard Analysis
AOR	Area of Responsibility
AR	Army Regulation
AT	Anti-terrorism
ATCTS	Army Training Certification Tracking System
Betr-SichV	Betriebssicherheitverordnung
Bldg.	Building
CAC	Common Access Card
CCE	Contracting Center of Excellence
CFE	Conventional Forces Europe
CFR	Code of Federal Regulations

CONUS	Continental United States (excludes Alaska and Hawaii)
COR	Contracting Officer's Representative
COTS	Commercial-Off-the-Shelf
DA	Department of the Army
DD250	Department of Defense Form 250 (Receiving Report)
DD254	Department of Defense Contract Security Requirement List
DFARS	Defense Federal Acquisition Regulation Supplement
DGUV	Deutsche gesetzliche Unfallversicherung
DIN	Deutsches Institut fuer Normung
DoD	Department of Defense
DoDI	Department of Defense Instruction
DPW	Department of Public Works
DPW-ED	Department of Public Works – Environmental Division
FAR	Federal Acquisition Regulation
FRG	Federal Republic of Germany
GFP	Government Furnished Property
HLO	High Level Objective
HIPAA	Health Insurance Portability and Accountability Act of 1996
IA	Information Awareness
IAC	Installation Access Control
IACO	Installation Access Control Office
ID	Identification
IGCE	Independent Government Cost Estimate
IT	Information Technology
JTR	Joint Travel Regulation
JPAS	Joint Personnel Adjudication System
KO	Contracting Officer
OCI	Organizational Conflict of Interest
OCONUS	Outside Continental United States (includes Alaska and Hawaii)
ODC	Other Direct Costs
OPSEC	Operations Security
PA	Property Administrator
PII	Personally Identifiable Information
PIPO	Phase In/Phase Out
POC	Point of Contact
PRS	Performance Requirements Summary
PWS	Performance Work Statement
QA	Quality Assurance
QAP	Quality Assurance Program
QASP	Quality Assurance Surveillance Plan
QC	Quality Control
QCP	Quality Control Program
RA	Requiring Activity
RCO	Regional Contracting Office
SIGE	Safety and Health Protection Plan
TE	Technical Exhibit
USAG	United States Army Garrison
USAREUR	United States Army Europe
UOM	Unit of Measure
VDE	Verband Der Elektrotechnik, Elektronik & Informationstechnik
VDI	Verband Deutscher Ingenieure

DRAFT

2.0 Description of Services.

The Contractor shall develop, submit and execute a comprehensive plan for the preventive maintenance and repair of all EPS, UPS and PV systems. This plan shall detail all planning, procedures and tasks required to successfully perform the scheduled maintenance, inspection, and repair services per this PWS. Preventive maintenance shall primarily consist of inspection, cleaning, lubrication, adjustment, calibration, and the replacement of minor parts and components associated with systems identified within TE#4_Inventory_EPSUPSPV.

The Contractor shall submit this comprehensive maintenance and repair plan as part of their QCP (Quality Control Plan) – PWS para 1.4 during the proposal phase as part of their quote. This submission must clearly demonstrate a thorough understanding of the Performance Work Statement (PWS) in conjunction with the provided Inventory List and the scope of work derived therefrom, presented in a clear and structured manner. Following contract award, the Contractor shall adhere to this plan as part of the Quality Control Plan.

Work not falling within the scope of Preventive Maintenance Operations (PMO) shall be executed under Directed Maintenance Operations (DMO) or Other Work Orders (OWO).

2.1 Emergency Power Systems (EPS)

There are 27 EPS systems which are listed in TE#4.1_Inventory_EPS. Contractor shall repair and maintain Emergency Power Supply Systems for proper operations. These systems are installed within USAG Wiesbaden. The Contractor shall provide to the KO/COR schedules, inspection and maintenance records on a weekly, monthly or as required basis (**Deliverable #16**). The inventory of EPS can be found on TE#4.1_Inventory_EPS and TE#4_Inventorylist_EPSUPSPV.

These services shall be performed in accordance with all applicable German accident and safety regulations, as well as U.S. Government regulations, DIN standards, VDE and VDI guidelines, VDMA “unit sheets,” manufacturer specifications, equipment manufacturer handbooks, and the “Industry Standards” of the German Engineering Federation and OSHA.

The services shall further include annual maintenance and inspection of the mechanical, electrical, and electronic components of the EPS. The Contractor shall procure and adhere to the operation and maintenance instructions provided by the EPS manufacturers. All inspection and maintenance activities shall be performed in compliance with the manufacturers’ technical specifications. Regularly scheduled inspections, maintenance work, and functional tests shall be conducted in accordance with a predetermined schedule.

The Contractor shall provide all necessary tools, spare parts, and materials required to remedy Equipment failures and restore the Equipment to full operational condition.

SYSTEM	100% TEST FREQUENCY
Emergency Power Supply Systems	annually

The equipment are listed in the following Inventory Lists:

- TE#4.1_Inventory_EPS
- TE#4_Inventorylist_EPSUPSPV

2.1.1 Preventive Maintenance EPS

This non-personal service contract provides for the Preventive maintenance of Emergency Power Systems (EPS) as an integral part of the emergency power infrastructure at US-AG Wiesbaden. The service encompasses all required maintenance, on-demand repair services, and the provision of repair parts and materials for each EPS. The Contractor shall perform complete Preventive maintenance and all other related work necessary to maintain the installed EPS in fully operable condition. Specifically, the following equipment systems will be maintained in accordance with the manufacturers' recommended Preventive maintenance (PM) schedules and procedures. This maintenance covers all components integral to power generation and consumption, including but not limited to diesel generators, aggregates, control cabinets, and associated switchgear. Maintenance shall be performed following the manufacturer's instructions. The Contractor shall propose adjustments to individual EPS maintenance intervals, provided such adjustments are supported by a documented risk assessment and approved in writing by the COR and KO. All services shall be performed during the regular work hours.

Maintenance according to manufacturer's instructions, minimum requirement is as follows:

- a. -Fuel system
- b. -Cooling water system
- c. -MCP (Master Control Panel)
- d. -Alarms MCP (Master Control Panel)
- e. -Function Test MCP (Master Control Panel)
- f. -Load test MCP (Master Control Panel)
- g. -Load tests
- h. -Couplings
- i. -Starter battery
- j. -Control battery
- k. -Exhaust system
- l. -Air inlet/outlet system
- m. -Generator
- n. -Switchboard
- o. -Checking alarms
- p. -Function test
- q. -Load test
- r. -Measurement of all insulation resistance
- s. -Low resistance test
- t. -Vibration test
- u. -Synchronization test
- v. -Change components on engine, i.e.:
- w. -Oil change: If necessary after Oil-Analysis (annually), also according to manufacturer (at least every two/2 years last changing 2024)
- x. -Oil Filters change: If necessary, according to manufacturer, together with oil change
- y. -Fuel Filters change: If necessary, according to manufacturer - at least annually
- z. -Air Filters change: If necessary, according to manufacturer - at least every three/3 years (last changing 2023)
- aa. -Endoscopic of the Cylinder Liner, also changing of Cylinder seals if necessary, according to manufacturer – at least every 6 years (last check 2024)
- bb. -Cooling water change: according to manufacturer -at least every four/4 years (last changing 2024).

2.1.2 On-demand repair service EPS

All on-demand repair services shall commence with the technician's arrival at the work site and terminate with the technician's departure. Contractor personnel receiving on-demand repair service orders shall be authorized to act for the Contractor and shall possess sufficient English language proficiency to accurately record information pertaining to all orders.

The Contractor shall perform repair services only upon written authorization from the COR or a representative duly authorized by the COR.

If the Contractor is unable to perform the repairs on US Government property and removal of the equipment to the Contractor's facility is necessary, a written hand receipt shall be executed, authorizing the Contractor to remove the equipment. The hand receipt shall include an estimated return date.

A repair order will be issued following submission and approval of a cost estimate by the Contractor. The process shall be as follows: a fault shall first be reported. The Contractor shall assess the fault on-site. If the fault can be rectified immediately without significant cost or effort, the Contractor shall proceed with the repair and submit an invoice accordingly. However, if the repair requires substantial effort, the Contractor must submit a cost estimate for approval. The Contractor shall not order replacement parts or commence work until the cost estimate has been approved in writing by the COR.

On-demand repair orders will be placed by the COR by email during normal working hours in accordance with PWS Para 1.8. The Contractor shall respond to a routine service call no later than 10:00 a.m. next working day after its receipt. If a call is placed on a Friday or on a day preceding a holiday, the Contractor shall respond to the COR the next workday. Routine repairs shall be completed as soon as possible. All services shall be performed during the regular work hours.

2.2 Uninterruptible Power Supply (UPS) Systems.

There are 20 UPS systems; which are listed in TE#4.2_Inventory_UPS. The Contractor shall repair and maintain Uninterruptible Power Supply Systems (UPS) for proper operations. These systems are installed within USAG Wiesbaden. The Contractor shall provide to the KO/COR schedules, inspection and maintenance records on a weekly, monthly or as required basis (**Deliverable #16**).

These services shall be performed in accordance with all applicable German accident and safety regulations, as well as U.S. Government regulations, DIN standards, VDE and VDI guidelines, VDMA "unit sheets," manufacturer specifications, equipment manufacturer handbooks, and the "Industry Standards" of the German Engineering Federation and OSHA.

The services shall further include annual maintenance and inspection of the mechanical, electrical, and electronic components of the UPS. The Contractor shall procure and adhere to the operation and maintenance instructions provided by the UPS manufacturers. All inspection and maintenance activities shall be performed in compliance with the manufacturers' technical specifications. Regularly scheduled inspections, maintenance work, and functional tests shall be conducted in accordance with a predetermined schedule.

The Contractor shall provide all necessary tools, spare parts, and materials required to remedy Equipment failures and restore the Equipment to full operational condition.

SYSTEM	100% TEST FREQUENCY
Uninterruptible Power Supply Systems	annually

The equipment is listed in the following Inventory Lists:

- TE#4_Inventorylist_EPSUPSPV
- TE#4.2_Inventory_UPS

2.2.1 Preventive Maintenance UPS

This non-personal service contract provides for the preventive maintenance of Uninterruptible Power Supply (UPS) Systems as an integral part of the emergency power infrastructure at USAG Wiesbaden. The service encompasses all required maintenance, on-demand repair services, and the provision of repair parts and materials for each UPS. The Contractor shall perform complete preventive maintenance and all other related work necessary to maintain the installed UPS in fully operable condition. Specifically, the following UPS systems will be maintained in accordance with the manufacturers' recommended preventive maintenance (PM) schedules and procedures. This maintenance covers all components integral to Uninterruptible Power and consumption, including but not limited to batteries, rechargeable batteries, filters, fans or other lifetime cycle replacement spare parts, control cabinets, and associated switchgear. Maintenance shall be performed following the manufacturer's instructions. The Contractor shall propose adjustments to individual UPS maintenance intervals, provided such adjustments are supported by a documented risk assessment and approved in writing by the COR and KO. All services shall be performed during the regular work hours.

Maintenance according to manufacturer's instructions, minimum requirement is as follows:

- Replacement of Defective/End-of-Life Batteries: Batteries can be replaced if they are defective, have reached the end of their lifecycle (5 years).
- Extended Lifecycle Batteries: If longer-lifecycle batteries are used, a valid warranty or a certificate from the battery manufacturer confirming the extended lifecycle must be provided.
- Maintenance Coverage: New batteries and equipment installed are covered under this maintenance contract and must be maintained according to the contract and manufacturer's instructions at no additional cost.
- Proper Disposal: The delivery and installation of new batteries (or other limited-life replacement parts) includes the proper removal and environmentally compliant disposal of old batteries and parts, in accordance with German law (specifically the Kreislaufwirtschafts- und Abfallgesetz - KrW-/AbfG - Circular Economy and Waste Management Act).
- Delivery and Installation: New batteries for the UPS systems will be delivered and installed to replace defective batteries.
- Suitable Location: The room in which the batteries are installed must be suitable for this purpose. This is checked by a "room check". once a year with the maintenance and noted on the PM certificate (**Deliverable #17**).
- Proper Arrangement: The batteries and spare parts must be arranged so that they are easily accessible and maintenance is simple. The manufacturer's instructions must be followed.
- Scalability: The new battery system must be expandable. This means it must be possible to add additional batteries later to increase capacity (this is referred to as a "modular concept").
- Energy Efficiency and Runtime: The new batteries must be energy-efficient and have a long lifespan. They must be able to power the entire UPS system for at least 30 minutes at full load in the event of a power outage.

- j. Bypass Switch Installation: If needed, an external bypass switch will be installed and Integrated into the existing system by the contractor.
- k. Materials Provision: The required cabling and all associated parts are provided and installed by the contractor.
- l. Bypass Function: The bypass switch must allow maintenance work to be carried out on the UPS without interrupting power to the connected equipment. This means the equipment will continue to receive power while the UPS is being serviced.
- m. Battery Optimization System: Installation of a system that maximizes the performance and lifespan of the batteries.
- n. Battery Condition Monitoring: Additionally, a system to monitor the condition of the batteries will be installed, such as a Battery Analysis & Care System (BACS).
- o. Data Transmission and Display: The collected data will be transmitted to a display that shows the current status of the UPS.
- p. Visible Location: The display must be installed in a highly visible location.
- q. Critical Alerts: In the event of critical errors, a message must appear on the display and simultaneously an audible alarm will sound.
- r. Alarm Reset: The audible alarm can be reset via a push button, but the error message on the display will remain until the problem is resolved.
- s. Equipment Labeling: All equipment must be completely and informatively labeled.
- t. Battery Labels: Labels will be provided and attached to each battery containing the installation date, expiration date, and battery number.
- u. Shelf/Position Labeling: A label with the same battery number will be attached to the shelf (or the designated position for the battery). This serves for clear assignment and easy identification.
- u. On-Site Commissioning: All systems are commissioned in their actual operating environment on-site.
- v. Commissioning Record: A detailed record of the initial commissioning of the UPS will be created.
- w. Test & Certificate: A test log will be created to objectively demonstrate functionality. The static load test is also included. A meaningful graphical load curve with interpolation of the estimated time in which the system should deliver nominal power must be created. These PM certificates and sheets are considered part of the documentation of the maintenance carried out and must be delivered with the PM certificate (**Deliverable #17**).
- x. Power Outage Simulation: A power outage will be simulated, with the permission of all stakeholders, to test the system's function under real-world conditions.
- y. Functional Verification: It will be ensured that the system can provide the required electrical power and achieve the necessary ride-through time (the time the UPS maintains power during an outage).
- z. Air conditioning: Preparation of an assessment as to whether (additional) air conditioning is required in the battery rooms.

Notice: Maintenance services encompass all repairs caused by normal wear and tear of the system. Any defects identified during maintenance must be rectified. Upon completion of maintenance, load and functional testing shall be conducted annually, scheduled and performed jointly by the Government and the Contractor. A condition report, as outlined in this Performance Work Statement (PWS), is to be submitted after each maintenance event.

2.2.2 On-demand repair service UPS

All on-demand repair services shall commence with the technician's arrival at the work site and terminate with the technician's departure. Contractor personnel receiving on-demand repair service

orders shall be authorized to act for the Contractor and shall possess sufficient English language proficiency to accurately record information pertaining to all orders.

The Contractor shall perform repair services only upon written authorization from the COR or a representative duly authorized by the COR.

If the Contractor is unable to perform the repairs on US Government property and removal of the equipment to the Contractor's facility is necessary, a written hand receipt shall be executed, authorizing the Contractor to remove the equipment. The hand receipt shall include an estimated return date.

A repair order will be issued following submission and approval of a cost estimate by the Contractor. The process shall be as follows: a fault shall first be reported. The Contractor shall assess the fault on-site. If the fault can be rectified immediately without significant cost or effort, the Contractor shall proceed with the repair and submit an invoice accordingly. However, if the repair requires substantial effort, the Contractor must submit a cost estimate for approval. The Contractor shall not order replacement parts or commence work until the cost estimate has been approved in writing by the COR.

On-demand repair orders will be placed by the COR by email during normal working hours in accordance with PWS Para 1.8. The Contractor shall respond to a routine service call no later than 10:00 a.m. next working day after its receipt. If a call is placed on a Friday or on a day preceding a holiday, the Contractor shall respond to the COR the next workday. Routine repairs shall be completed as soon as possible. All services shall be performed during the regular work hours.

2.3 Photovoltaic (PV)

There are 12 PV Systems which are listed in TE#4.3_Inventory_PV. Contractor shall repair and maintain Photo Voltaic (PV) for proper operations. These systems are installed within USAG Wiesbaden. The Contractor shall provide to the KO/COR schedules, inspection and maintenance records on a weekly, monthly or as required basis (**Deliverable #16**). The inventory of PV, is at TE#4.3_Inventory_PV.

These services shall be performed in accordance with all applicable German accident and safety regulations, as well as U.S. Government regulations, DIN standards, VDE and VDI guidelines, VDMA "unit sheets," manufacturer specifications, equipment manufacturer handbooks, and the "Industry Standards" of the German Engineering Federation and OSHA.

The services shall further include annual maintenance and inspection of the mechanical, electrical, and electronic components of the EPS. The Contractor shall procure and adhere to the operation and maintenance instructions provided by the EPS manufacturers. All inspection and maintenance activities shall be performed in compliance with the manufacturers' technical specifications. Regularly scheduled inspections, maintenance work, and functional tests shall be conducted in accordance with a predetermined schedule.

The Contractor shall provide all necessary tools, spare parts, and materials required to remedy Equipment failures and restore the Equipment to full operational condition.

SYSTEM	100% TEST FREQUENCY
Photovoltaic Systems	annually

The equipment are listed in the following Inventory Lists:

- TE#4_Inventory_EPSUPSPV
- TE#4.3_Inventorylist_PV

2.3.1 Preventive Maintenance (PV)

This non-personal service contract provides for the Preventive maintenance of Photovoltaic Systems (PV) as an integral part of the emergency power infrastructure at US-AG Wiesbaden. The service encompasses all required maintenance, on-demand repair services, and the provision of repair parts and materials for each PV. The Contractor shall perform complete preventive maintenance and all other related work necessary to maintain the installed PV in fully operable condition. Specifically, the following PV systems will be maintained in accordance with the manufacturers' recommended preventive maintenance (PM) schedules and procedures. This maintenance covers all components integral to PV and consumption, including but not limited to PV solar modules, inverters, mounting, substructure, switch cabinets and associated switchgear. Maintenance shall be performed following the manufacturer's instructions. The Contractor shall propose adjustments to individual PV maintenance intervals, provided such adjustments are supported by a documented risk assessment and approved in writing by the COR and KO. All services shall be performed during the regular work hours.

Maintenance according to manufacturer's instructions, minimum requirement is as follows:

- a. Inspection/Testing according to DIN VDE 0100-600 (IEC 60364-6)
- b. Inspection/Testing according to DIN VDE 0126-23 (DIN EN 62446) -
- c. Electrical Testing AC side of the PV system
- d. Inspection and maintenance of the PV Generator and sub-structure (earthing, equipotential bonding, cabling and connectors, substructure and fixing)
- e. PV System/ Protection against Overvoltage/ Electric Shock
- f. Alternating Current Circuit, Special Factors
- g. Labeling and Marking of the PV System
- h. General (Mechanical) Installation of the PV System

2.3.2 On-demand repair service PV

All on-demand repair services shall commence with the technician's arrival at the work site and terminate with the technician's departure. Contractor personnel receiving on-demand repair service orders shall be authorized to act for the Contractor and shall possess sufficient English language proficiency to accurately record information pertaining to all orders.

The Contractor shall perform repair services only upon written authorization from the COR or a representative duly authorized by the COR.

A repair order will be issued following submission and approval of a cost estimate by the Contractor. The process shall be as follows: a fault shall first be reported. The Contractor shall assess the fault on-site. If the fault can be rectified immediately without significant cost or effort, the Contractor shall proceed with the repair and submit an invoice accordingly. However, if the repair requires

substantial effort, the Contractor must submit a cost estimate for approval. The Contractor shall not order replacement parts or commence work until the cost estimate has been approved in writing by the COR.

On-demand repair orders will be placed by the COR by email during normal working hours in accordance with PWS Para 1.8. The Contractor shall respond to a routine service call no later than 10:00 a.m. next working day after its receipt. If a call is placed on a Friday or on a day preceding a holiday, the Contractor shall respond to the COR the next workday. Routine repairs shall be completed as soon as possible. All services shall be performed during the regular work hours.

2.3.3 Cleaning solar module

- a. Heavily contaminated solar modules whose performance is still within the tolerance specified by the manufacturer due to soiling will be cleaned as part of the next regular maintenance work.
- b. Heavily contaminated solar modules whose performance falls below the tolerance specified by the manufacturer will be cleaned as part of an on-demand repair order. The costs for this on-demand cleaning shall be borne in accordance with the conditions agreed in the contract.
- c. Irrespective of the performance of the modules, the entire solar installation shall be cleaned at least once during the five-year contract term cycle, either as part of scheduled maintenance (PM) or as an on-demand repair.

2.4 Functional Areas

The required service shall be performed in buildings, located within USAG Wiesbaden, listed in TE#3_Location_of_Facilities&Plants of this Contract.

2.5 Meetings, Conferences, and Briefings

The Contractor shall attend, participate in, and furnish input to scheduled and unscheduled meetings, conferences, and briefings that relate to the functions and services herein as required by the Government to provide effective communication and impart necessary information. The Contract Manager or designated representative shall attend meetings as requested by the Government. Meeting attendees shall at times include Contractor managerial, supervisory, and other personnel knowledgeable of the subject matter. The Contractor shall meet the requirements of this section 100% of the time.

2.6 Training

The contractor shall conduct annual training sessions for internal government employees (maximum of five (5) participants per session) on the systems specified in TE#4.1_Inventory_EPS, which shall extend over two (2) consecutive days. In addition, the contractor shall conduct an annual one-day course (maximum of five (5) participants per session) on each of the systems specified in TE#4.2_Inventory_UPS and TE#4.3_Inventroy_PV. This training shall qualify Government personnel to provide first-responder support as part of a 24/7 on-call team for the above mentioned systems. The training provided shall, at a minimum, detail manufacturer and Contractor standards by which Government personnel will perform first-responder support. The training shall also identify basic industry regulations applicable to the respective systems and enable Government personnel to perform weekly, monthly, and quarterly system controls designed to mitigate failures and minimize service calls between scheduled annual maintenance of these systems. Scheduling of this training shall be coordinated with the COR (Contracting Officer's Representative).

The required training for Government first responders shall be certified by the Contractor as complete and compliant with the requirements outlined herein, specifically demonstrating adherence to requirements regarding duration & participants, system coverage, qualification of personnel, comprehensive content including industry regulations, full conformity with all stipulations, proper documentation of completion, and timely submission of a schedule to the COR

A training schedule for all planned training events shall be submitted to the COR no later than thirty (30) workdays after the task order award (**Deliverable #22**). The Contractor shall meet the requirements of this section 100% of the time.

2.7 RESERVED

2.8 Manufacturer Manuals:

The contractor shall check the current technical manuals for all equipment to be maintained during maintenance, regardless of the country of manufacture, and replace them if they are missing. Technical manuals that are not fully described shall be replaced. The contractor must carry out maintenance work on equipment for which no technical manuals are available in accordance with current best commercial and industry practices. The contractor shall replace missing manufacturer's manuals in German by attaching them to the system within the plant in a weatherproof cover. The contractor shall enter all data required to identify the system, all maintenance and repair work carried out (e.g., quantity and type of substance recovered and refilled), and the data for the annual leak test for each system. The Manuals shall be submitted to the COR no later than thirty (30) workdays after the maintenance (**Deliverable #23**).

2.9 Inventorylist and Labeling:

The Contractor shall check during maintenance work whether numbered "aluminum identification tags" are attached. Missing aluminum tags shall be fixed until the next maintenance or repair work. The information contained on the tags shall consist of a series of numbers. Numbering shall be in accordance with COR specifications and shall correspond to the current system. The Contractor shall use the density list to create an inventory list (to include cost per building and per month), which shall contain, at a minimum, the information shown in TE#4_Inventorylist_EPSUPSPV. The Contractor shall keep the inventory list up-to-date as changes occur. The most current inventory list shall be forwarded to the COR no later than five (5) working days after the end of each month and/or upon request of the COR (**Deliverable #23**).

Labeling: The aluminum identification tag serves only as a sample. The lettering can also be replaced by an inexpensive alternative, as long as it is legible and well applied. This must be agreed with COR in advance.

The Contractor shall be in compliance with the requirement of this section no less than 90% of the time during the first three (3) months of the contract, and shall be no less than 95% compliance for the remainder of the contract.

See TE#5_Labeling for sample

2.10 Technical Logbooks:

The Contractor shall procure up-to-date technical inspection logbooks for all equipment to be serviced, irrespective of the manufacturer and origin of the equipment, and shall place these in a safe

and dry place in the immediate proximity of the equipment or in the equipment itself after each repair, maintenance or inspection within ten (10) workdays (**Deliverable #19**). The Contractor shall perform services on Equipment for which technical inspection books are not available in accordance with current best commercial and industry practices and shall replace them immediately. The Contractor shall meet the requirements of this section 100% of the time.

2.11 Risk Assessment and Condition Analysis:

The Contractor shall prepare a risk assessment (Gefährdungsbeurteilung) and condition analysis in accordance with Arbeitsschutzgesetz (ArbSchG) and Betriebssicherheitsverordnung (BetrSichV). During the maintenance, the Contractor shall renew the risk assessment and condition analysis as needed at each maintenance, repair or inspection. If multiple identical devices are installed in one location, the equipment with the lowest rated condition shall be documented. The condition analysis is also used to determine the maintenance frequencies of individual equipment. If an equipment condition deteriorates or the conditions in the building change (for examples, an exit becomes an emergency exit), the condition analysis serves as the basis for the necessary conversion or maintenance frequency. The Contractor shall submit a digital copy of each risk assessment and condition analysis to the COR within fifteen (15) workdays after the performance of the repair service (**Deliverable #20**). The Contractor shall meet the requirements of this section 100% of the time.

2.12 Maintenance Schedule

Within thirty (30) days of contract award, the Contractor shall submit to the COR for his coordination and approval, a detailed document in Microsoft EXCEL, containing the proposed Preventive Maintenance Inspection schedule. This schedule shall include all the individual systems identified in this contract, and shall encompass the contract period of performance (**Deliverable #16**). The COR reviews the schedule and will communicate any required changes within 5 working days.

Note: The Contractor shall provide the COR with an updated schedule, including actual work performed, on the 1st Monday of each month. The COR reviews the planned days, if there are any disagreements, these days will be communicated by the COR without delay.

2.13 Maintenance Documentation

The Contractor shall document the Preventive maintenance and inspection services performed on the work certificate. The work certificates shall be submitted to the COR as a readable digital file not later than fifteen (15) work days of completion of the inspection and/or maintenance work (**Deliverable #17**).

2.13.1 Maintenance Work Certificate

The Contractor shall keep records and submit work certificates for all services performed under this contract. Each work certificate shall contain, at a minimum:

1. Date, time, printed and signed name of the individual who performed the PM work on item (Equipment-No. according to Inventory List).
2. Installation, Bldg. No., Floor No., Room No., exact description of position, Equipment No., Description of Equipment.

3. Results of measurements and checks, range of allowed values including assessment of results (ok / not ok; description of deficiency).
4. Material consumed, such as number of filters exchanged within the filter zone, filter category, type of used filters including dimensions, date of latest filter exchange.
5. Assessment and documentation of condition and function (including software components).
6. Detailed scope of work for potential required major repairs.
7. Materials and spare parts for the required repairs.
8. Cost estimates for any required repairs.
9. Customer's printed name, customer signature and customer telephone number. If the customer is not available or refuses to sign, the Contractor shall notify the COR immediately by telephone.

Note: Preventive Maintenance Inspection confirmation stickers shall be placed on equipment after maintenance has been performed, and shall include month/year of inspection as well as month/year of next Preventive Maintenance Inspection.

2.14 On-demand Repair Documentation

The Contractor shall document the repair services on the work certificate. The work certificates shall be submitted to the COR as a readable digital file not later than fifteen (15) work days after the repair work has been carried out (**Deliverable #18**).

2.14.1 On-demand repair work certificate

The Contractor shall keep records and submit work certificates for all services performed under this contract. Each work certificate shall contain, at a minimum:

1. Contract Number.
2. Call number.
3. Type of system, serial number, and inventory number.
4. Location (Bldg. #, Room #).
5. Printed first and last name and title of the authorized Government representative who ordered the services.
6. Description of malfunction in English.
7. Date, start time, and completion time of services.
8. Printed first and last name(s) of individual(s) performing the services.
9. Type and amount of material and replacement parts required.
10. Information or recommendations pertaining to the condition or function of the system.
11. Number of labor hours.
12. Customer's printed first and last name, signed, dated and telephone number.

2.15 Repair Parts

- a) Contractor shall furnish all parts and materials required for repair of equipment under this contract and shall complete services during the initial scheduled maintenance or repair call.
- b) There may be instances where repair services cannot be completed during the initial visit due to unavailable parts or material. The equipment shall not be reassembled, but shall be left in such a manner that loose articles and parts are contained and protected until repairs can be completed. The original work certificate documenting the initial repair shall be used for the completion.

- c) All replacement parts installed under this contract shall conform to all applicable German and European standards and regulations currently in force. These parts must also bear the CE marking, demonstrating compliance with relevant European directives. The Contractor is responsible for ensuring that all supplied replacement parts meet these requirements prior to installation.

DRAFT

TECHNICAL EXHIBIT LISTING

Table of Contents

1.1 TECHNICAL EXHIBIT 1 PERFORMANCE REQUIREMENTS SUMMARY	38
1.2 TECHNICAL EXHIBIT 2 DELIVERABLES SCHEDULE	43
1.3 TECHNICAL EXHIBIT 3 LOCATION AND TYPES OF FACILITIES	47
1.4 TECHNICAL EXHIBIT 4 INVENTORY LIST	49
1.4.1 TE#4.1_Inventory_List_EPS.....	49
1.4.2 TE#4.2_Inventory_List_UPS.....	49
1.4.3 TE#4.3_Inventory_List_PV	49
1.5 TECHNICAL EXHIBIT 5 LABELING.....	49
1.6 TECHNICAL EXHIBIT 6 INSTALLATION PASS LOG	50
1.6.1 TE#6.1 Self -Disclosure Form.....	50
1.6.2 TE#6.2 AEF190-16A Form	50
1.6.3 TE#6.3 AEF604-1 Form.....	50
1.7 TECHNICAL EXHIBIT 7 SOLICITATION DOCUMENTS.....	50
1.7.1 TE#7.1_Pricebook EPS_UPS_PV_VENDOR	50
1.7.2 TE#7.2_Technical Evaluation Points	50

1.1 TECHNICAL EXHIBIT 1 PERFORMANCE REQUIREMENTS SUMMARY

The Contractor service requirements are summarized into performance objectives that relate directly to mission essential items. The performance threshold briefly describes the minimum acceptable levels of service required for each requirement. These thresholds are critical to mission success.

Performance Objective	Standard	Acceptable Quality Levels	Method of Surveillance
<u>PRS #1 – PWS 1.4 (Quality Control Plan)</u> Contractor shall report disruptions, or potential disruptions, to contract performance IAW the PWS.	Contractor shall verbally inform the COR of issues, or potential issues, within two (2) working hours of identifying the issue(s). Contractor shall follow up with the COR via written report within two (2) work days of identifying issues.	>98% compliance	100% Inspection
<u>PRS #2 – PWS 1.10 Security Requirements (Installation Access)</u> Contractor shall comply with the requirements associated with access control and security requirements IAW the PWS.	Contractor shall be in compliance with all security requirements and submission timelines IAW the PWS, to include: • Pass logs. • Turn-in of terminated, expired, cancelled employee passes and upon completion or termination of contract. • Background Checks Physical security of Government equipment/property	0 incidents in violation of Installation Access requirements 0 incidents of violation of Installation Information and Physical Security Measures 100% Compliance	100% Inspection
<u>PRS #3 – PWS para 1.13 Key Personnel</u> Contractor shall provide a Contract Manager and an Alternate Contract Manager to serve as a liaison between the Government and the Contractor IAW the PWS.	Contractor shall supply a Contract Manager at all times or provide an alternate manager if the primary manager is not available.	100% Compliance	100% Inspection

<u>PRS #4 – PWS para 1.13.1 Other Contractor Personnel Qualifications</u> Contractor shall maintain all appropriate and applicable licenses and certifications IAW the PWS. Contractor employees shall be in compliance with all certification requirements appropriate for the level and type of work they are performing, IAW the PWS.	Contractor, and Contractor personnel shall be fully qualified and licensed based on the requirements in PWS para 1.10.	100% Compliance	100% Inspection
<u>PRS #5 – PWS para 1.21.1 Safety Notification</u> Contractor, and employees, shall comply with the safety and accident prevention requirements IAW the PWS.	Contractor shall comply with all host nation laws and regulations, as well as all US Government safety regulations / policies.	0 incidents in violation of Installation Access requirements 0 incidents of violation of Installation Information and Physical Security Measures 100% Compliance	100% Inspection
<u>PRS #6 – PWS para 1.22.1 (Environmental)</u> Contractor and Contractor/ Subcontractor employees shall comply with the environmental requirements IAW the PWS.	Contractor shall comply with all host nation laws and regulations, as well as all US Government safety regulations / policies. Contractor shall report to the COR and provide appropriate response to address any environmental concern in which performance of this contract has caused.	100% Compliance	100% Inspection

<u>PRS #7 – PWS para 1.23 Required Training</u> Contractor shall comply with the training requirements IAW the PWS.	Contractor shall submit reports to the COR documenting training completion no later than thirty (30) days after contract award: • AT Level I • OPSEC • SARP • TARP	100% Compliance	100% Inspection
<u>PRS #8 – PWS Part 1.27</u> (Contractor Furnished Items & Services) Contractor shall comply with PWS provisions relating to Contractor Furnished Items and Services.	The Contractor shall furnish all materials required in accordance with pertinent German accident and safety regulations to meet the requirements under this PWS. All parts and materials utilized for the services under this contract shall be factory new and original. Upon request of the COR, exchanged parts shall be handed over to the COR for verification. The Contractor shall dispose of all exchanged parts and when no longer needed at no additional costs. The Contractor shall provide a warranty of at least 12 months after the repair date or installation date for all work performed.	>100% Compliance	Random Inspection

<u>PRS #9 – PWS para 2.1.1 Preventive Maintenance (EPS); 2.2.1 Preventive Maintenance (UPS); 2.3.1 Preventive Maintenance (PV)</u> Contractor shall comply with PWS provisions relating to Recurring Services (Preventative Maintenance) for equipment serviced by this contract.	Contractor shall ensure all work meets the level of service, timelines, performance standards, or tolerances specified in the PWS, or in any applicable referenced documents.	>90% compliance rate within the first three (3) months of contract; >95% compliance for the remainder of the contract.	Random Inspection Customer Feedback
<u>PRS #10 – (Scheduling & Documentation) PWS para 2.1 Emergency Power Systems (EPS); 2.2 Uninterruptible Power Supply (UPS); 2.3 Photovoltaic (PV)</u> Contractor shall comply with PWS provisions relating to Material and Repair Parts.	Contractor shall submit all schedules, work certificates, and any other documents listed in the PWS in accordance with the PWS prescribed timelines.	>95% Compliance	Random Inspection
<u>PRS #11 – PWS para 2.1.2 on demand repair service (EPS); 2.2.2 on demand repair service (UPS); 2.3.2 on demand repair service (PV)</u> Contractor shall comply with PWS provisions relating to Repair Service Records and Reports.	Contractor shall ensure all work meets the level of service, timelines, performance standards, or tolerances specified in the PWS, or in any applicable referenced documents.	>90% compliance rate within the first three (3) months of contract; >95% compliance for the remainder of the contract.	Random Inspections Customer Feedback
<u>PRS #12 – PWS para 2.15 Repair Parts</u>	All parts/materials for this contract shall be factory new and original. Exchanged parts shall be handled in accordance with the PWS.	100% Compliance	Random Inspection

<u>PRS #13 – PWS para 2.10 Technical Log-books</u> Contractor shall procure up-to-date technical inspection logbooks for all equipment to be serviced, irrespective of the manufacturer and origin of the equipment, IAW the PWS.	Contractor shall place logbooks in a safe and dry place in the immediate proximity of the equipment or in the equipment itself after each repair, maintenance or inspection within ten (10) workdays.	100% Compliance	Random Inspection
<u>PRS #14 – PWS para 2.11 Risk Assessment / Condition Analysis</u> Contractor shall prepare a risk assessment (Gefährdungsbeurteilung) and condition analysis in accordance with Arbeitsschutzgesetz (ArbSchG) and Betriebssicherheitsverordnung (BetrSichV).	The Contractor shall submit a digital copy of each risk assessment and condition analysis to the COR within fifteen (15) workdays after the performance of the repair service.	100% Compliance	Periodic Inspection
<u>PRS #15 – PWS para 2.9 Inventory & Labeling</u> Contractor shall provide and permanently affix pre-numbered “Aluminum Identification Tags” to the equipment during the maintenance services.	The most current inventory list shall be forwarded to the COR not later than five (5) working days after the end of each month and/or upon request of the COR.	>90% compliance rate within the first three (3) months of contract; >95% compliance for the remainder of the contract.	Periodic Inspection

<u>PRS #16 – PWS para 2.5 Meetings, Conferences, and Briefings</u> Contractor shall attend, participate in, and furnish input to scheduled and unscheduled meetings, conferences, and briefings that relate to the functions and services herein as required by the Government to provide effective communication and impart necessary information.	Contract Manager or designated representative shall attend meetings as requested by the Government.	100% Compliance	100% Inspection
<u>PRS #17 – PWS para 2.6 Training</u> Contractor shall conduct two (2) consecutive days of training twice annually to in-house Government personnel (up to 5 attendees per session) on systems covered by this contract.	The required training for Government first responders shall be certified by the Contractor. The training schedule for all planned trainings shall be submitted to the COR no later than thirty (30) workdays after the contract award, and thirty (30) days after each subsequent task order or option execution.	100% Inspection	Periodic Inspection

1.2 TECHNICAL EXHIBIT 2 DELIVERABLES SCHEDULE

<u>Number</u>	<u>Deliverable</u>	<u>Frequency</u>	<u># of Copies</u>	<u>Medium/Format</u>	<u>Submit To</u>
1	Quality Control Plan, Key Control, and Analysis & Timeliness of Submittals Plan (IAW PWS 1.4-1.4.1)	Once within 10 days after contract award and NLT thirty (30) days prior to any anticipated changes and or upon completion of each option period or task order	1	Digital	COR
2	Report of potential issues, which might affect performance (IAW PWS 1.4.2)	Within two (2) workdays of identifying those issues. Verbal reports shall be followed up by a written report to the COR within three (3)	1	Digital	COR

		workdays after the issue, or potential issue(s) are identified.			
3	a. Installation Pass Request (IAW PWS 1.10.1) b. Installation Pass Log (IAW PWS 1.10.1.1)	Request an Installation Pass: Within thirty (30) calendar days after contract award. Installation Pass Log: Within three (3) calendar days after contract award; Within five (5) calendar days following any changes to the log.	1	Digital	COR
4	Individual Termination or Expiration of Employment (IAW PWS 1.10.1.2)	Within two (2) workdays after any changes to the log.	1	Digital	COR
5	Contract Termination or Cancellation (IAW PWS 1.10.1.3)	Within five (5) workdays of Contract Termination or Cancellation of this contract.	1	Installation access pass	To the issuing office
6	Background Check U.S. Citizen IAW PWS 1.10.2.1) Local National / Third National (IAW PWS 1.10.2.2)	U.S. Citizen: within five (5) workdays of receipt by the contractor. Local Nationals: NLT five (5) workdays after contract award.	1	Digital	COR
7	Key Personnel (IAW PWS 1.13).	Within five (5) workdays after contract award.	1	Digital	COR
8	Qualifications – Other Contractor Personnel (IAW PWS 1.13.1).	Within five (5) workdays after contract award	1	Digital	COR
9	Contractor Identification Badges (IAW PWS 1.14.1)	Prior to the contract performance date and NLT NLT five (5) workdays for as needed to reflect personnel changes	1	Digital	COR
10	Organizational Conflict of Interest (OCI) (IAW PWS 1.19)	Notify immediately whenever it becomes aware that OCI or participation may result in any actual or potential OCI and shall promptly submit a plan.	1	Digital	KO & COR

11	Safety notifications (IAW PWS 1.21.1)	Provide documented proof to the Contracting Officer via the COR, no later than three (3) workdays after notifications.		Digital	
12	Certificate Anti-Terrorism training: Level 1 verification (IAW PWS 1.23.1)	Within thirty (30) workdays of contract award and after employment of new personnel. Verification of the training shall be provided to the COR within three (3) workdays after completion.	1	Digital	COR
13	OPSEC training Level 1 verification (IAW PWS 1.23.2)	Within thirty (30) workdays of contract award and after employment of new personnel. Verification of the training shall be provided to the COR within three (3) workdays after completion.	1	Digital	COR
14	SARP Training (IAW PWS 1.23.3)	Within thirty (30) workdays of contract award and after employment of new personnel. Verification of the training shall be provided to the COR within three (3) workdays after completion.	1	Digital	COR
15	TARP Training (IAW PWS 1.23.4)	Within thirty (30) workdays of contract award and after employment of new personnel. Verification of the training shall be provided to the COR within three (3) workdays after completion.	1	Digital	COR
16	Preventive Maintenance / Inspection Schedule for EPS, UPS and PV (IAW PWS 2.12)	Within thirty (30) days after contract award. The COR reviews the schedule and will communicate any required changes within five (5) work days	1	Digital, Microsoft EXCEL	COR
17	Preventive Maintenance Documentation– Work Certificate for EPS, UPS and PV (IAW PWS 2.13)	Within fifteen (15) work days after the inspection and/or maintenance work is complete.	1	Digital	COR
18	On–demand Repair Service Work Certificates for EPS, UPS	Within fifteen (15) work days after the repair work is complete.	1	Digital	COR

	and PV (IAW PWS 2.14)				
19	Technical Logbooks (IAW PWS 2.10)	after each repair, maintenance or inspection within ten (10) workdays.	1	Digital	COR
20	Risk Assessment and Condition Analysis (IAW PWS 2.11)	Within fifteen (15) workdays after the performance of service	1	Digital	COR
21	Training (IAW PWS 2.6)	Within thirty (30) days after contract award.	1	Digital	COR
22	Manufacturer Manuals (IAW PWS 2.8)	Within thirty (30) days after maintenance.	1	Digital	COR
23	Inventory list (IAW PWS 2.9) and Labeling (IAW PWS 2.9)	Not later than five (5) working days after the end of each month and/or upon request of the COR Missing aluminum tags shall be fixed until the next maintenance or repair work after report.	1	Digital Aluminum tag	COR

1.3 TECHNICAL EXHIBIT 3 LOCATION AND TYPES OF FACILITIES

The USAG Wiesbaden consists of 12 installations that are located in Hessen and Rheinland-Pfalz. All facilities, buildings, and areas within these installations are included in the service described in the PWS. Installation maps will be provided after contract award. The installations include the following:

Amelia Earhart Complex, Wiesbaden – Administrative and community support facilities

Aukamm Housing Area, Wiesbaden – Housing area and school

Crestview Housing Area, Wiesbaden – Housing area

Darmstadt Training Center – Administrative and community support facilities

Egelsbach Transmitter Facility

Finthen Local training area (Rheinland-Pfalz) – Facilities include a military operation in urban terrain Training site

Hainerberg Shopping and Housing Area, Wiesbaden – Shopping Center (PX), Commissary, Family housing area, church, schools, movie theater, lodging (Hotel) and bank

Lucius D. Clay Kaserne, Wiesbaden – Headquarter, Airfield, Housing area, Community support facilities

Mainz-Kastel Housing – Transportation Motor Pool, Community support facilities

Mainz-Kastel Storage Station – Transportation Motor Pool, Community support facilities

McCully Support Center, Wackernheim, (Rheinland-Pfalz) – Administrative facilities, warehouses, vehicle maintenance

Rheinblick Golf Course, Wiesbaden-Dotzheim – Golf course, Clubhouse, and a driving range

Wackernheim Regional Range Complex (Rheinland-Pfalz) – military training area providing rifle ranges and several facilities

DRAFT

1.4 TECHNICAL EXHIBIT 4 INVENTORY LIST

TE# 4_Inventorylist_EPSUPSPV



4_Inventorylist_EPS
UPSPV.xlsx

1.4.1 TE# 4.1_Inventory_List_EPS



4_1_Inventory_List_
EPS.xlsx

1.4.2 TE# 4.2_Inventory_List_UPS




4.2_Inventory_List_
UPS.xlsx

1.4.3 TE# 4.3_Inventory_List_PV



4.3_Inventory_List_P
V.xlsx

1.5 TECHNICAL EXHIBIT 5 LABELING

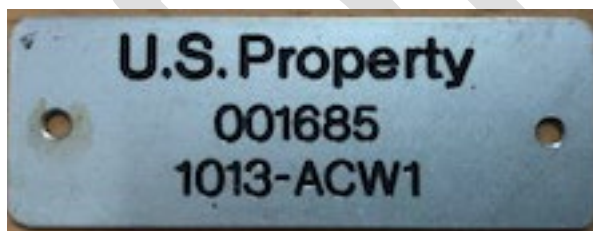

1.6 TECHNICAL EXHIBIT 6 INSTALLATION PASS LOG

1.6.1 TE# 6.1 Self -Disclosure Form



6.1_Self-disclosure.
docx

1.6.2 TE# 6.2 AEF190-16A Form



6.2_AEF190-16A.pdf

1.6.3 TE# 6.3 AEF604-1 Form



6.3_AEF604-1B.pdf

1.7 TECHNICAL EXHIBIT 7 SOLICITATION DOCUMENTS

1.7.1 TE#7.1_Pricebook EPS_UPS_PV_VENDOR



7.1_Pricebook_EPS_
UPS_PV_VENDOR.xls

1.7.2 TE#7.2_Technical Evaluation Points



7.2_Technical_evalu
ation_points.xlsx