



1	2	3	4	5	6	7	8	9	10
---	---	---	---	---	---	---	---	---	----

VA FORM 08-6231

A

B

C

D

E

F

2/23/2024 11:32:38 AM

Autodesk Docs\\VLEB-016 Sterile Storage Improvements\\VLEB-016-MEP_24.rvt

A

B

C

D

E


F

HYDRONIC GENERAL NOTES

- 1 REFER TO FACILITY'S INFECTION CONTROL AND RISK ASSESSMENT (ICRA) AND SPECIFICATION SECTION 01 55 26 (SAFETY REQUIREMENTS) FOR ADDITIONAL INFORMATION.
- 2 ALL WORK MUST BE SCHEDULED AND COORDINATED JOINTLY WITH THE MUST. A DETAILED JOB TIMELINE MUST BE ESTABLISHED AND SUBMITTED FOR REVIEW AND APPROVAL.
- 3 REFER TO ARCHITECTURAL FOR ADDITIONAL REQUIREMENTS.
- 4 MAINTAIN 6-IN MINIMUM CLEARANCE FROM RATED WALLS AND HVAC EQUIPMENT.
- 5 ALL BRANCH PIPING IS 3/4-IN UNLESS OTHERWISE NOTED EXCLUDING REFRIGERANT PIPING. REFRIGERANT PIPING SIZING MUST BE COMPLETED BY CONTRACTOR BASED ON MANUFACTURER'S RECOMMENDATIONS.
- 6 PROVIDE EXPANSION LOOPS, JOINTS, Z BENDS AND PIPING OFFSETS TO ACCOMMODATE THERMAL AND OTHER PIPING MOVEMENT.
- 7 CONTRACTOR RESPONSIBLE TO REMOVE EXISTING CEILING, REUSE AND REINSTALL TO GREATEST EXTENT POSSIBLE FOR LAY IN CEILINGS. GYP CEILINGS TO BE CUT AND PATCHED TO MATCH EXISTING. ALL SYSTEMS IN EXISTING CEILING TO REMAIN IN WORKING ORDER. ALL SPRINKLERS AND FIRE ALARMS IN AREA OF WORK TO REMAIN ACTIVE AT ALL TIMES.

KEYNOTES


- 1 1/2" CW PIPING CONNECT TO EXISTING PIPING IN WALL.
- 2 3/4" CONDENSATE DRAIN DOWN AND TERMINATE TO OSD WITH AIR GAP
- 3 MOUNT HEAT PUMP ON CONCRETE PAD.

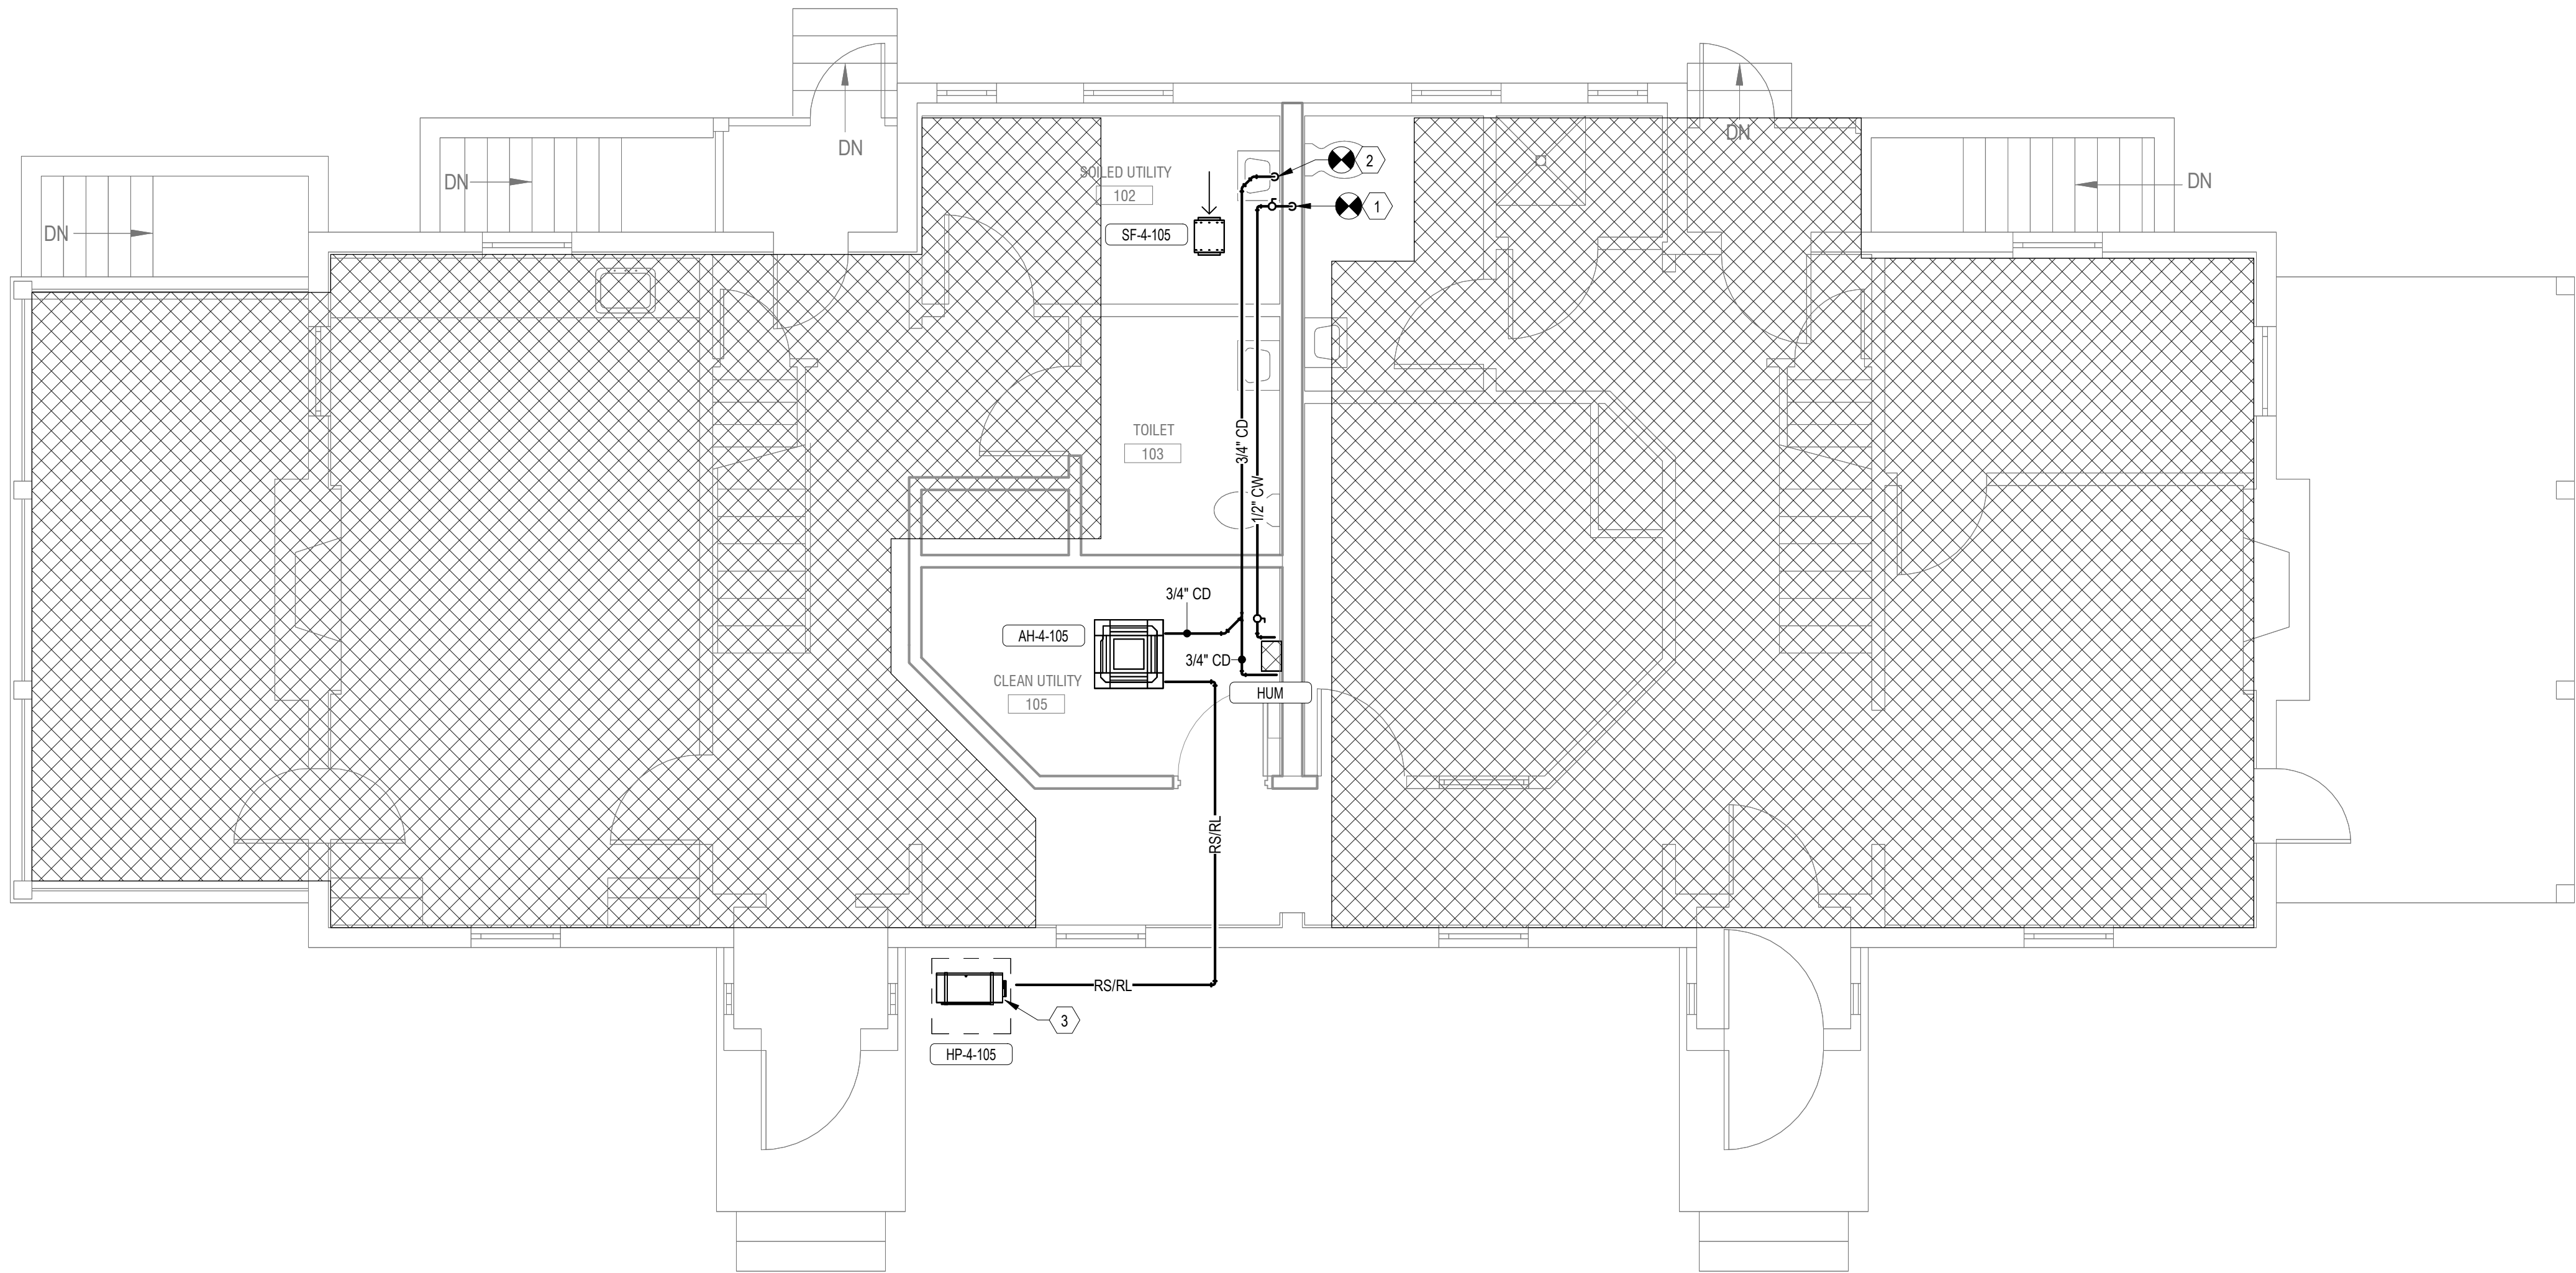

1


Bldg 04-01 FIRST FLOOR PIPING PLAN - ROOM 105

1/4" = 1'-0"



--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

1. REFER TO FACILITY'S SECTION ON DESIGN AND RISK ASSESSMENT (CDRA) AND SPECIFICATION SECTION 01.35.26 (SAFETY REQUIREMENTS) FOR ADDITIONAL INFORMATION. ALL WORK MUST BE SCHEDULED AND COORDINATED JOINTLY WITH THE MOST DETAILED TRADES MUST BE ESTABLISHED AND REVIEWED AND APPROVAL.
2. REFER TO ARCHITECTURAL FOR ADDITIONAL REQUIREMENTS.
3. MAINTAIN 6-IN MINIMUM CLEARANCE FROM RATED WALLS AND HVAC EQUIPMENT.
4. ALL BRANCH PIPING IS 3/4-IN UNLESS OTHERWISE NOTED EXCLUDING REFRIGERANT PIPING. REFRIGERANT PIPING SHALL BE INSTALLED AND COMPLETED BY CONTRACTOR BASED ON MANUFACTURER'S RECOMMENDATIONS.
5. PROVIDE EXPANSION LOOPS, JOINTS, ZENITS AND PIPING OFFSETS TO ACCOMMODATE THERMAL AND OTHER PIPING MOVEMENT.
6. PROVIDE PROTECTIVE CASING CONTRACTOR TO EXISTING CEILING, REUSE AND REINSTATE TO GREATEST EXTENT POSSIBLE FOR LAY IN CEILING. GYP CEILINGS TO BE CUT AND PATCHED TO MATCH EXISTING. ALL SYSTEMS IN EXISTING CEILING TO REMAIN ACTIVE AT ALL TIMES. ALL SPRINKLERS AND FIRE ALARMS IN AREA OF WORK TO REMAIN ACTIVE AT ALL TIMES.


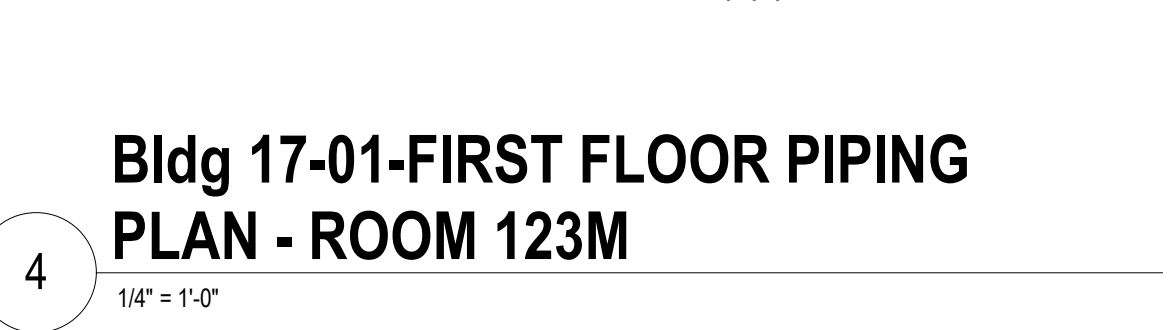


4 $1/4^\circ = 1'-0''$



KEYNOTES


- 1 3/4" CONDENSATE DRAIN CONNECT TO EXISTING CONDENSATE DRAIN PIPING.
- 2 1/2" CW PIPING CONNECT TO EXISTING PIPING IN WALL.
- 3 3/4" HUMIDIFIER DRAIN DOWN IN WALL AND TERMINATE TO OSD UNDER LAVATORY WITH AIR GAP.
- 4 EXISTING PERIMETER HEATING CONVECTORS (WHERE APPLICABLE) - FIELD-VERIFY WHETHER SYSTEM IS STEAM OR HOT WATER. REPLACE EXISTING CONVECTOR VALVE WITH NEW CONTROL VALVE, WIRED TO AND CONTROLLED BY SAME THERMOSTAT AS THE COOLING-ONLY FCU.

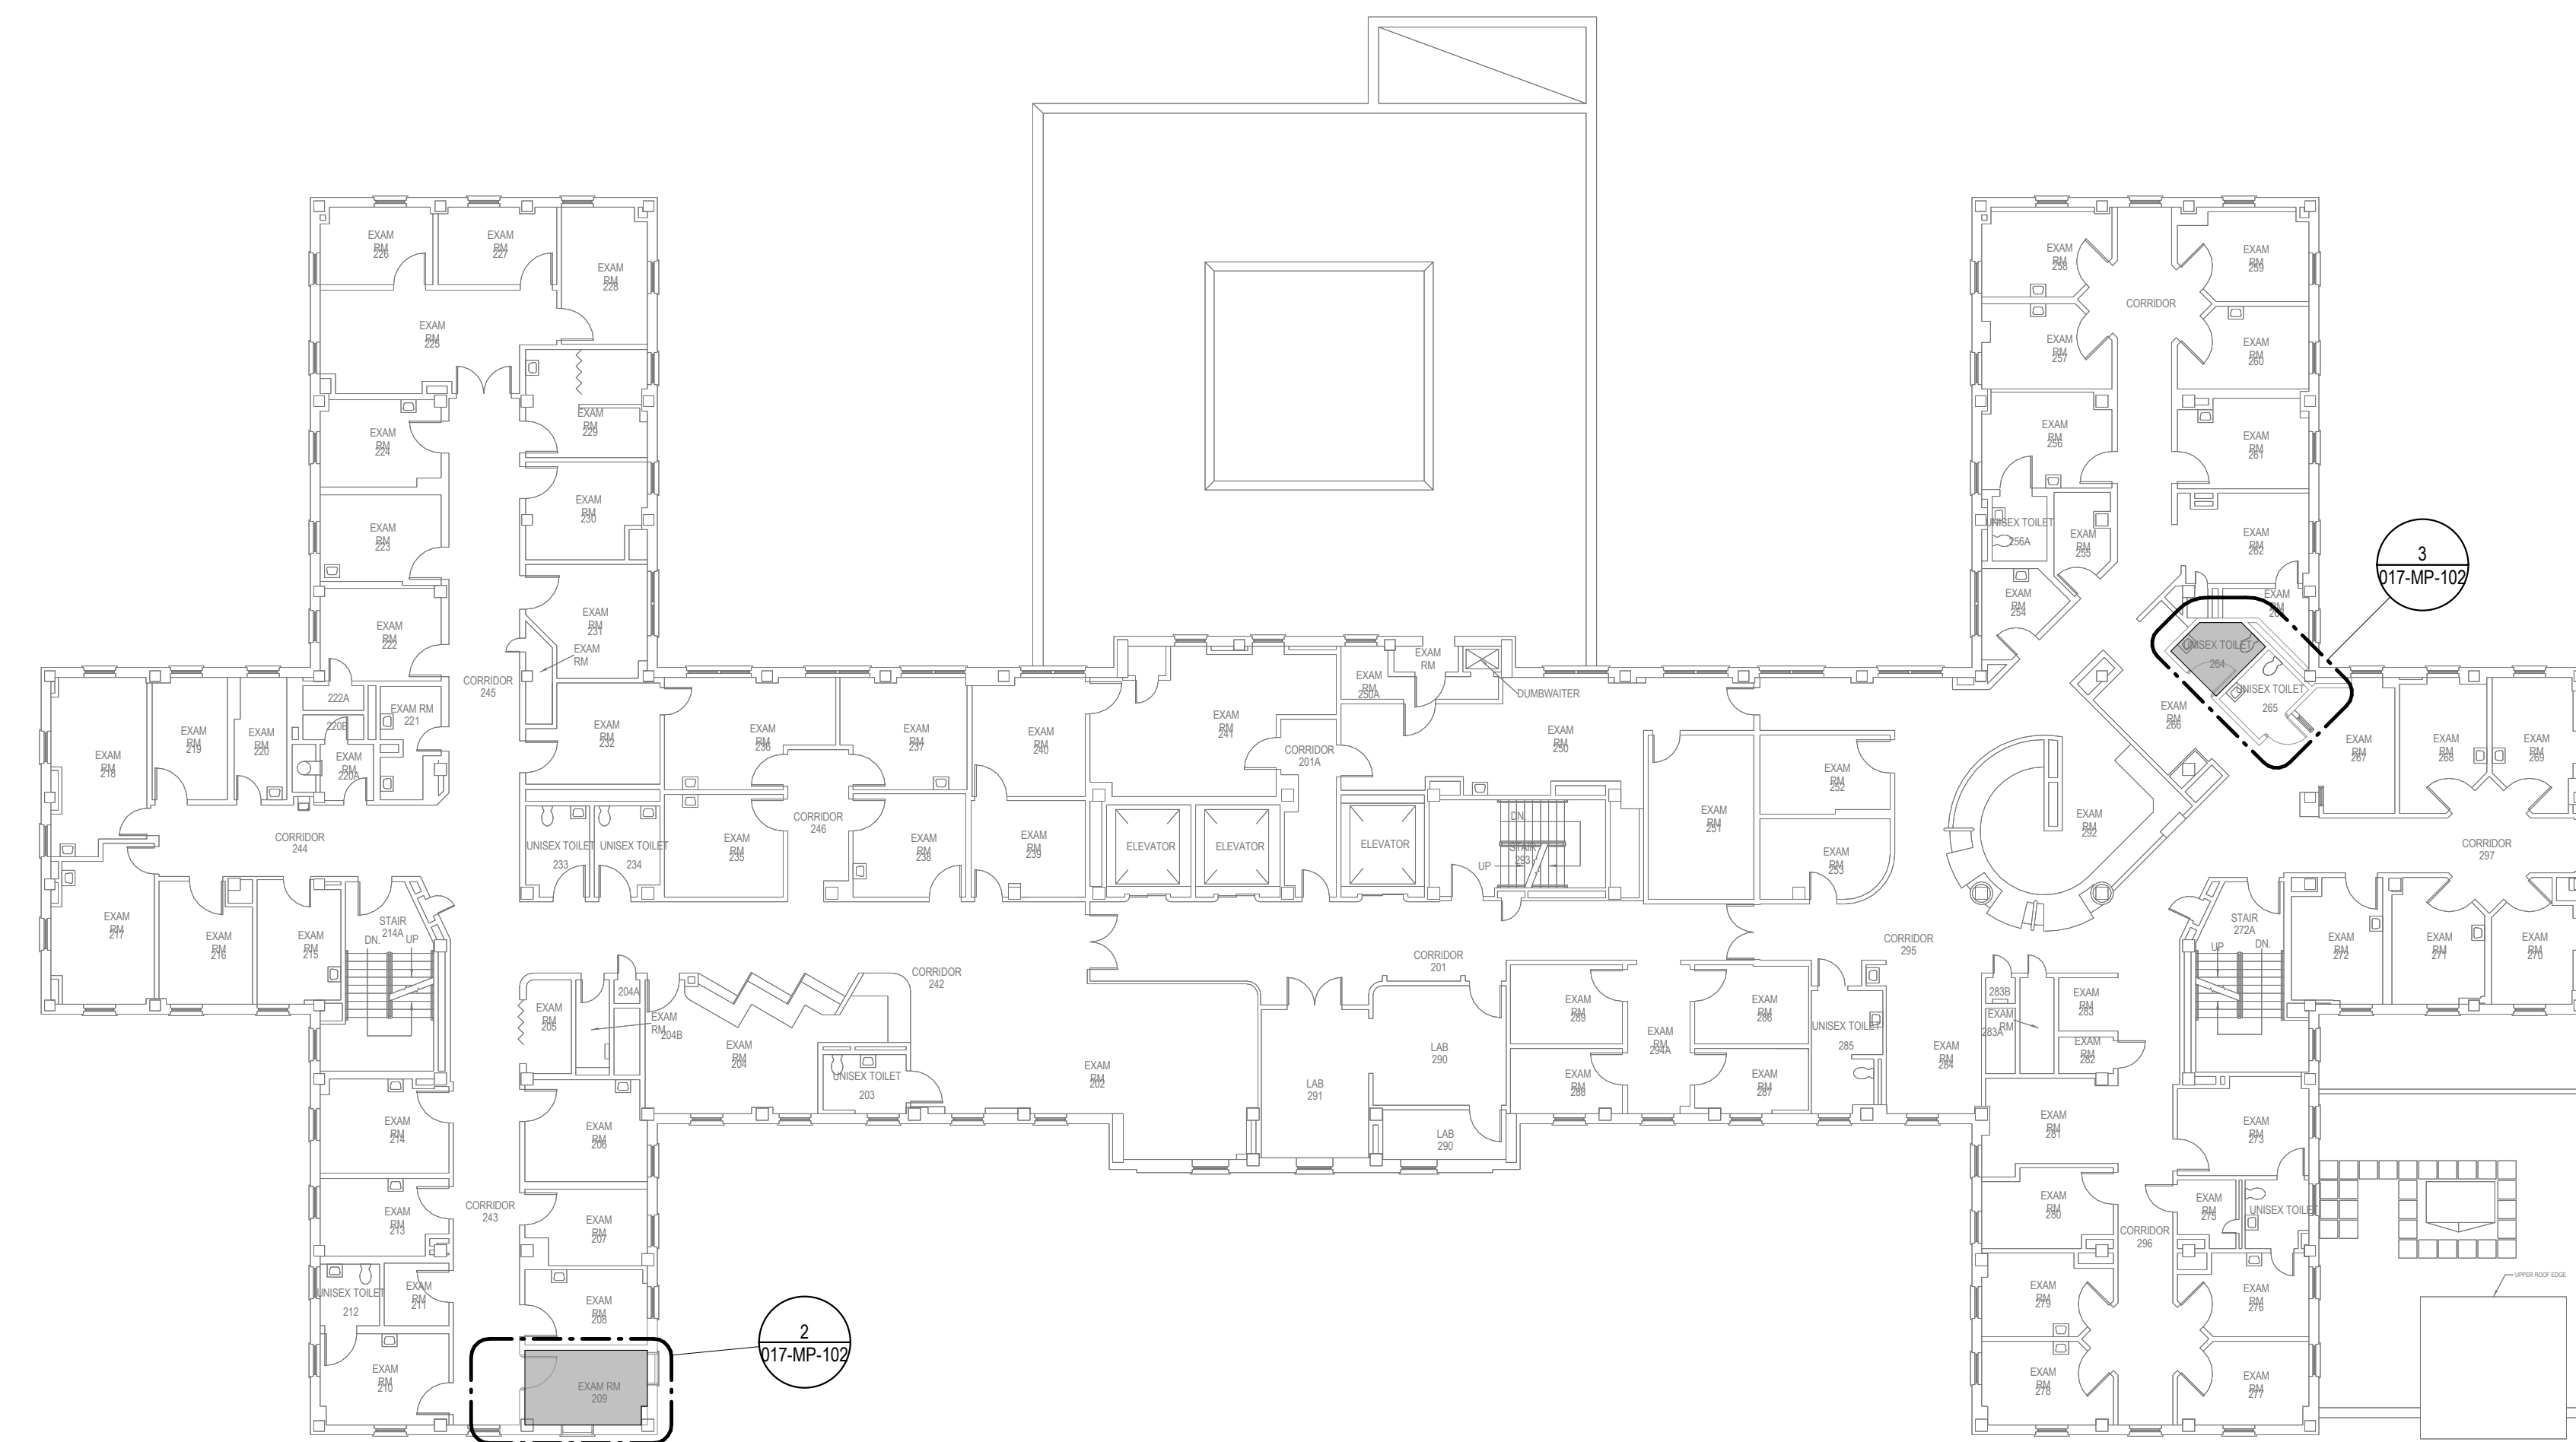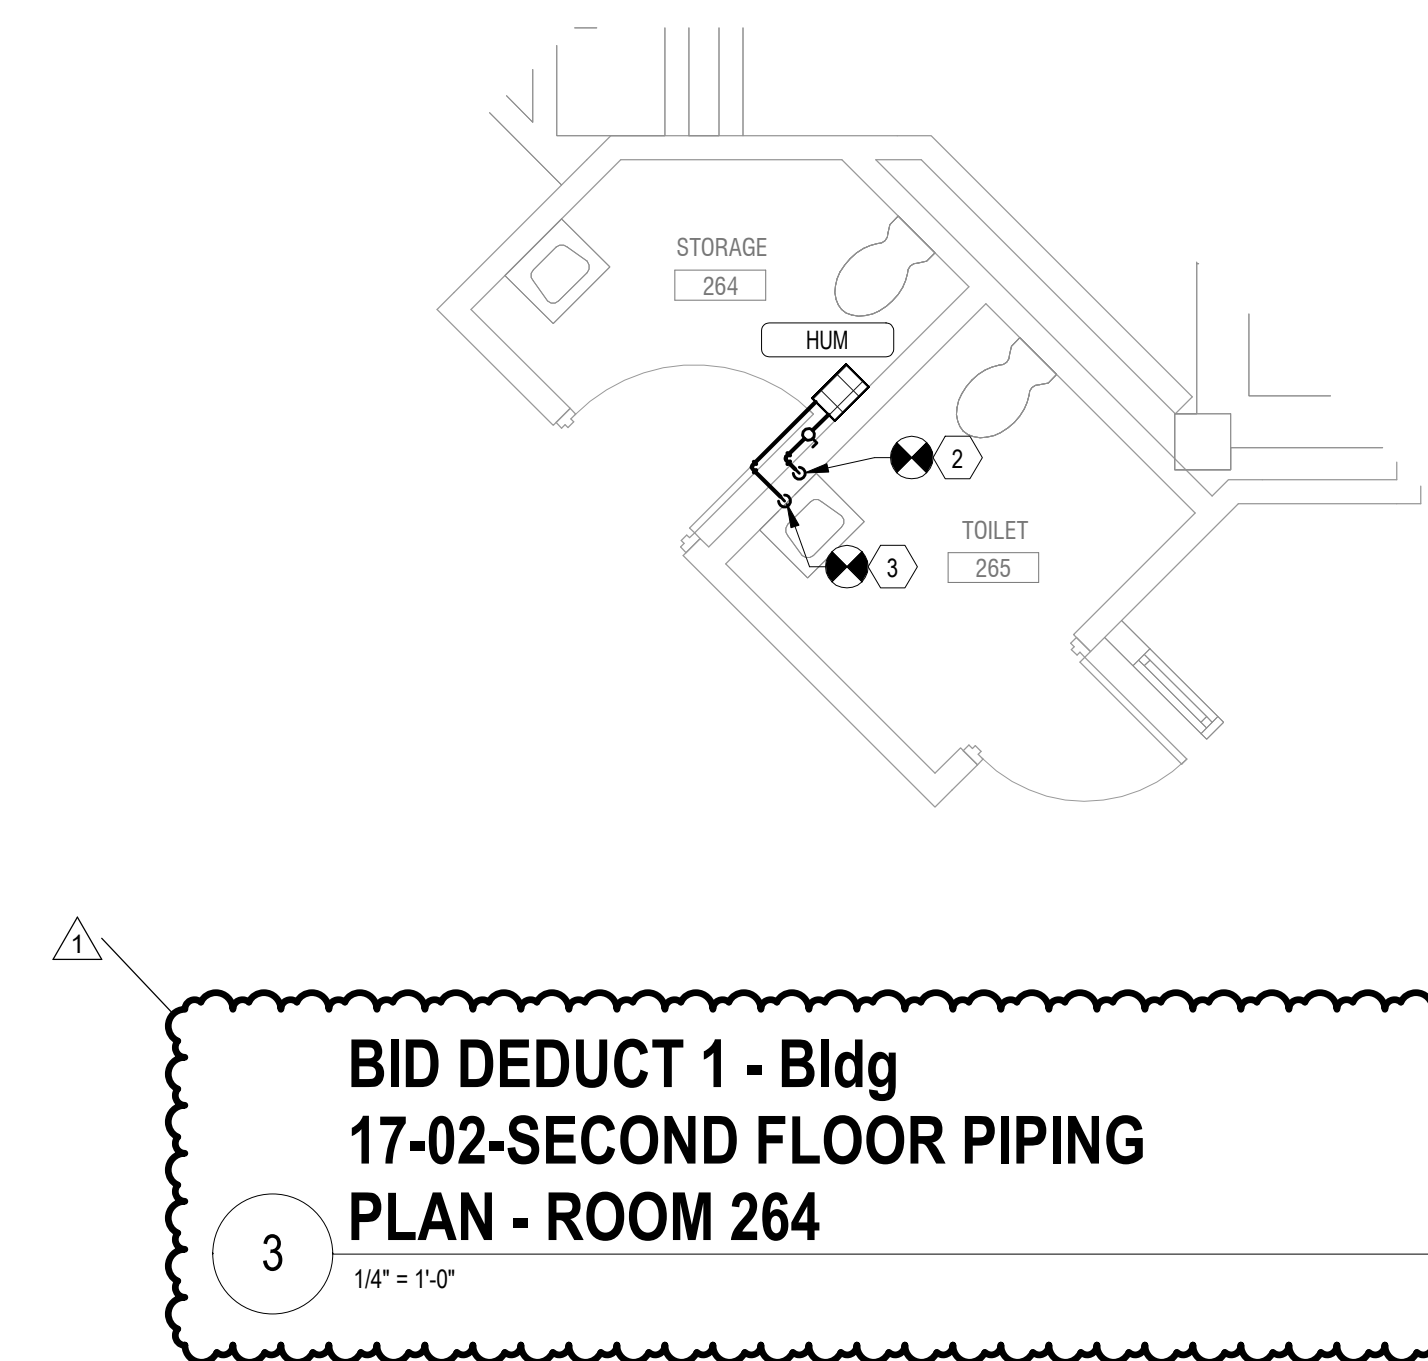 $1/16'' = 1'-4$ [illegible]


- 1 REFER TO FACILITY'S INFECTION CONTROL AND RISK ASSESSMENT (ICRA) AND SPECIFICATION SECTION D.35 (SAFE REQUIREMENTS) FOR ADDITIONAL INFORMATION.
- 2 WORK MUST BE SCHEDULED TO OCCUR AT THE SAME TIME WITH THE MOST DETAILED JOB TIMELINE MUST BE ESTABLISHED AND SUBMITTED FOR REVIEW AND APPROVAL.
- 3 REFER TO ARCHITECTURAL FOR ADDITIONAL REQUIREMENTS.
- 4 MAINTAIN 5-MINIMUM CLEARANCE FROM RATED WALLS AND HVAC EQUIPMENT.
- 5 ALL BRANCH PIPING IS 3/4" UNLESS OTHERWISE NOTED EXCLUDING REFRIGERANT PIPING.
- 6 REFRIGERANT PIPING SHALL BE COMPLETED BY CONTRACTOR BASED ON MANUFACTURER'S RECOMMENDATIONS.
- 7 PROVIDE EXPANSION LOOPS, JOINTS, Z-BENDS AND PIPING OFFSETS TO ACCOMMODATE THERMAL MOVEMENT.
- 8 CONTRACTOR RESPONSIBLE TO REMOVE EXISTING CEILING, REUSE AND REINSTALL TO GREATEST EXTENT POSSIBLE FOR LAY IN CEILING. GYP CEILING TO BE CUT AND PATCHED TO MATCH EXISTING. ALL SYSTEMS IN EXISTING CEILING TO REMAIN IN WORKING ORDER. ALL SPRINKLERS AND FIRE ALARMS IN AREA OF GYM TO REMAIN ACTIVE AT ALL TIMES.

- 1 1/2" CW PIPING CONNECT TO EXISTING PIPING.
- 2 3/4" CONDENSATE DRAIN CONNECT TO EXISTING CONDENSATE DRAIN PIPING.
- 3 3/4" CHW/SR PIPING CONNECT TO EXISTING PIPING.
- 4 EXISTING PERIMETER HEATING CONVECTORS (WHERE APPLICABLE) -
FIELD-VERIFY WHETHER SYSTEM IS STEAM OR HOT WATER. REPLACE EXISTING
CONVECTOR VALVE WITH NEW CONTROL VALVE, WIRED TO AND CONTROLLED BY
SAME THERMOSTAT AS THE COOLING-ONLY FCU.




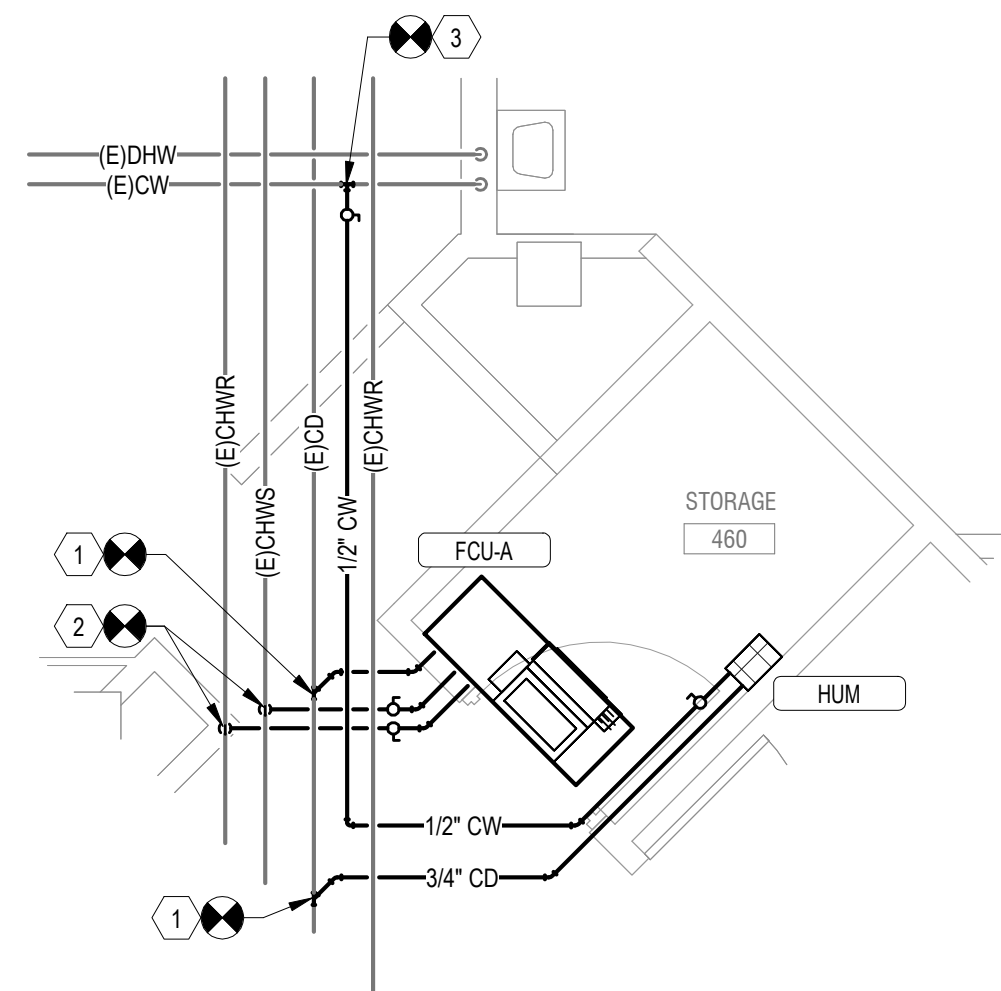


**BID DEDUCT 1 - Bldg 17-04 FOURTH
FLOOR PIPING PLAN - ROOM 460**

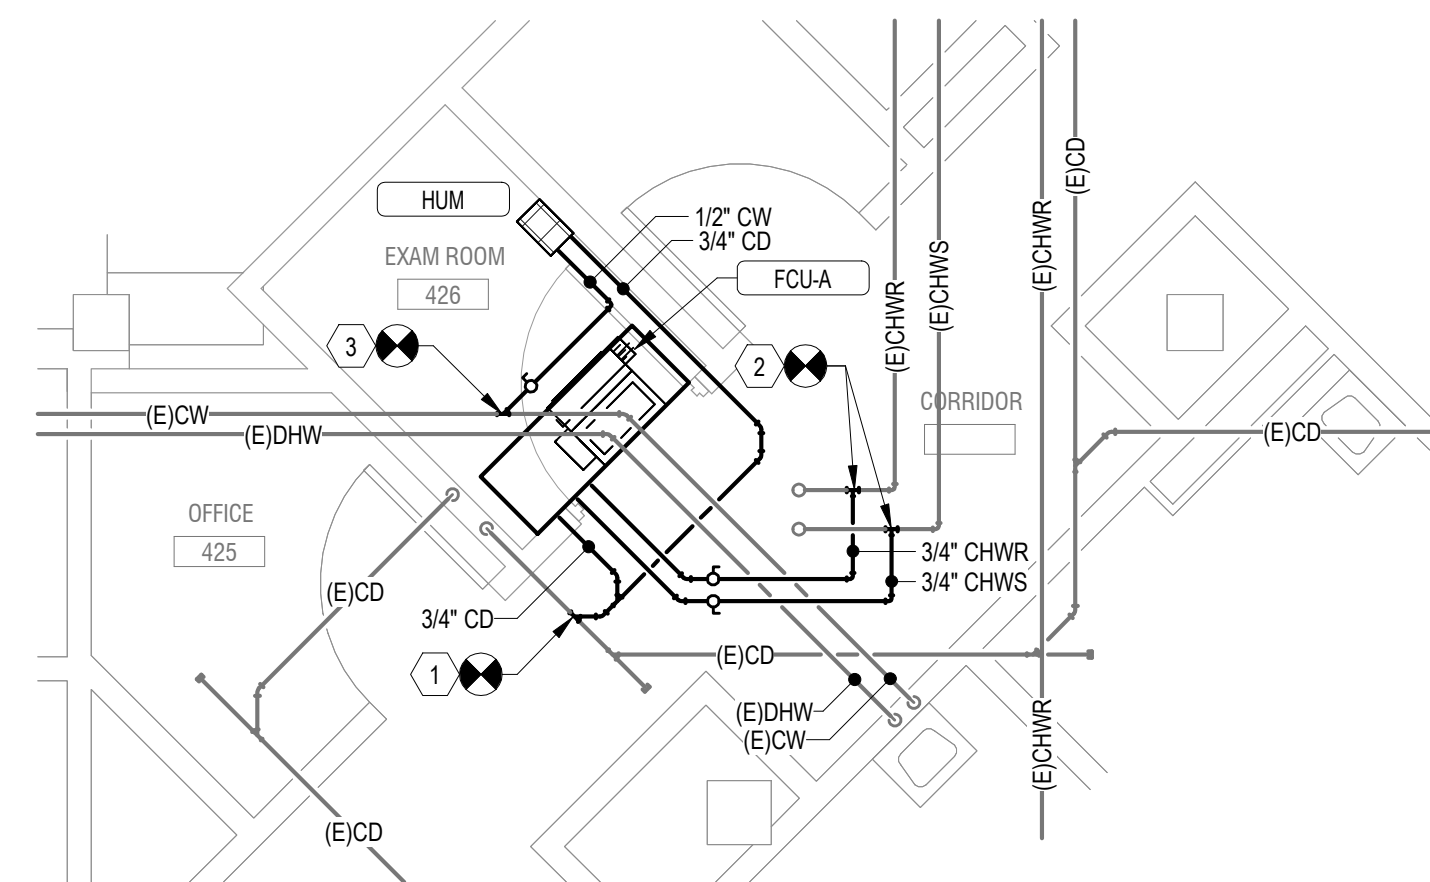

BID DEDUCT 1 - Bldg 17-04 FOURTH FLOOR PIPING PLAN - ROOM 426



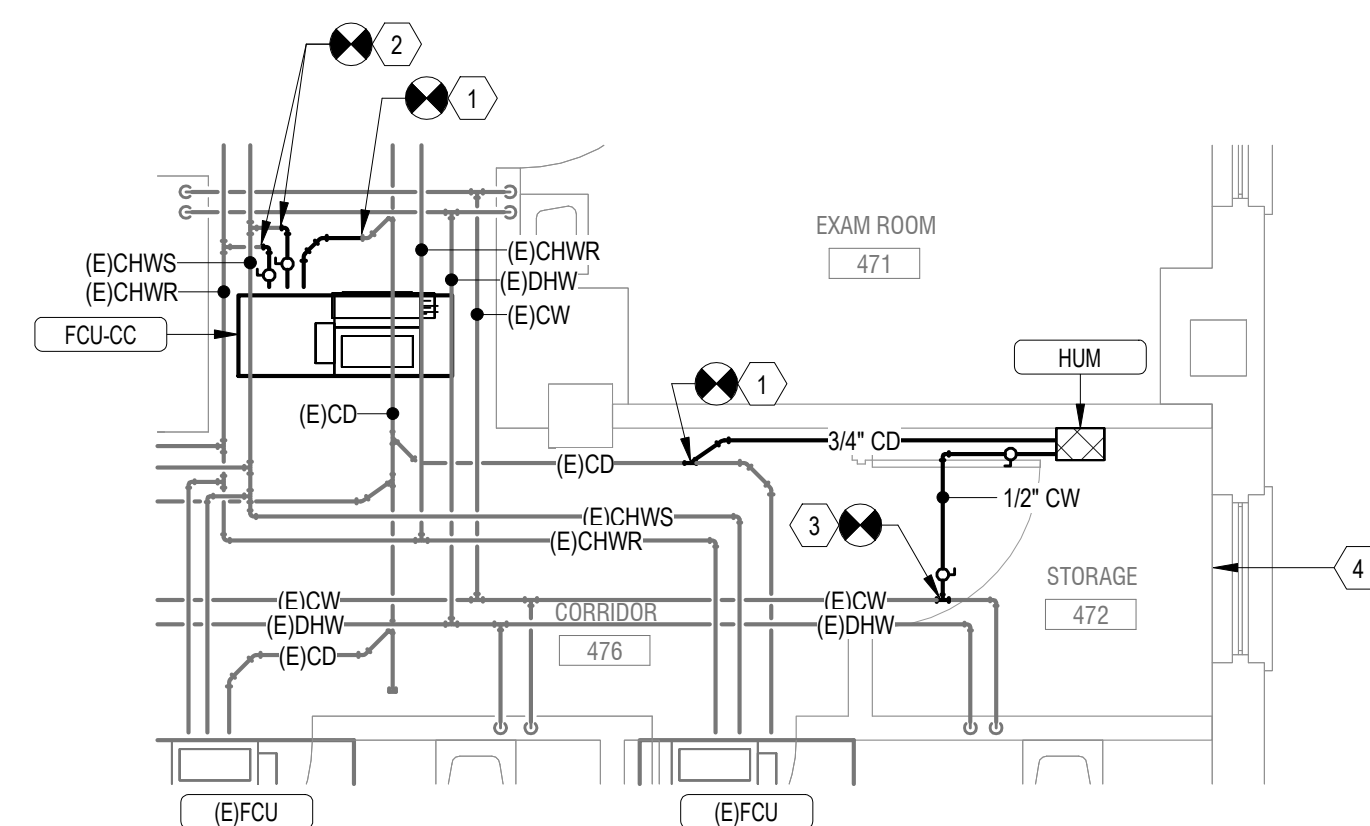


**BID DEDUCT 1 - Bldg 17-04 FOURTH
FLOOR PIPING PLAN - ROOM 472**

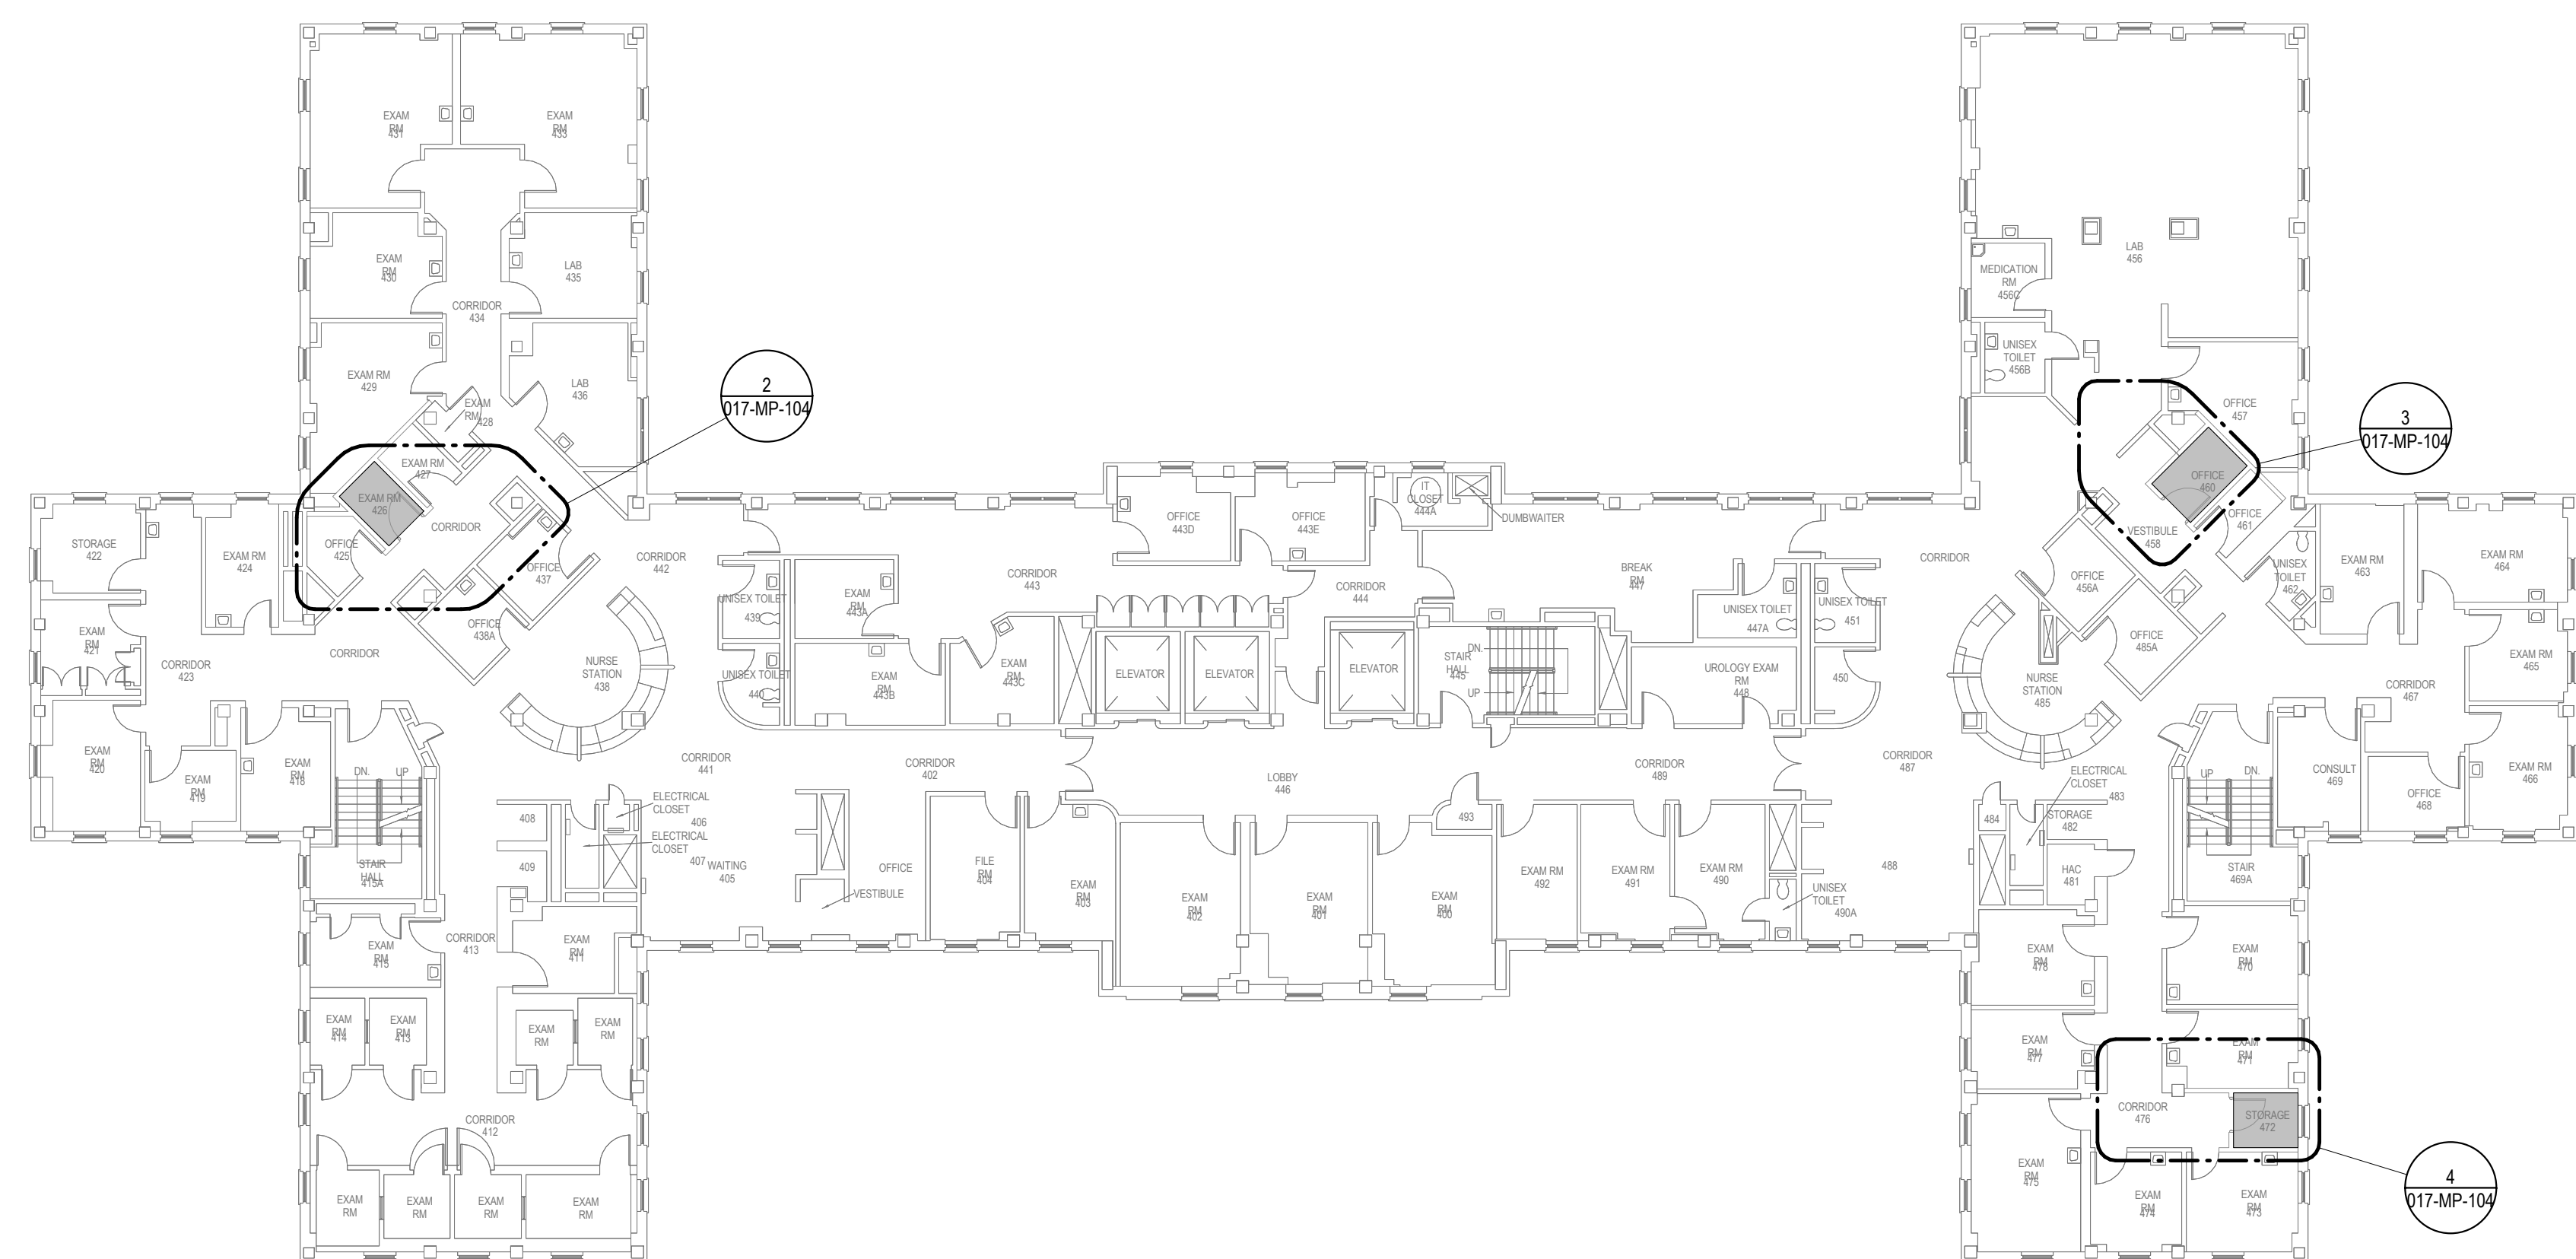



BID DEDUCT 1 - Bldg 17-04 FOURTH FLOOR PIPING PLAN

[illegible]



- $$1/4^{\circ} = 1^{\circ}-0^{\circ}$$

Autodesk Docs://VLEB-016 Sterile Storage Improvements/VLEB-016-MEP_24.rvt

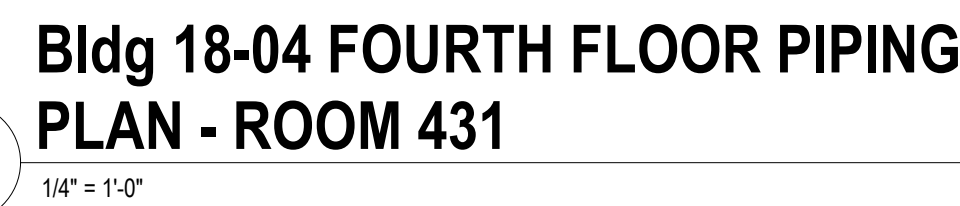

FLA
1/4" = 1'-0"



1/16" = 1'-0"

1	2	3	4	5	6	7	8	9	10
---	---	---	---	---	---	---	---	---	----

A

B

C

D

E


F

2/23/2024 11:32:39 AM

Autosave: Docs\VLB-018 Sterile Storage Improvements\VLB-018-MEP_24.rvt


- HYDRONIC GENERAL NOTES**
- REFER TO FACILITY'S INFECTION CONTROL AND RISK ASSESSMENT (ICRA) AND SPECIFICATION SECTION 01 35 26 (SAFETY REQUIREMENTS) FOR ADDITIONAL INFORMATION.
 - ALL WORK MUST BE SCHEDULED AND COORDINATED JOINTLY WITH THE MUST. A DETAILED JOB TIMELINE MUST BE ESTABLISHED AND SUBMITTED FOR REVIEW AND APPROVAL.
 - REFER TO ARCHITECTURAL FOR ADDITIONAL REQUIREMENTS.
 - MAINTAIN 6-IN MINIMUM CLEARANCE FROM RATED WALLS AND HVAC EQUIPMENT.
 - ALL BRANCH PIPING IS 3/4-IN UNLESS OTHERWISE NOTED EXCLUDING REFRIGERANT PIPING. REFRIGERANT PIPING SIZING MUST BE COMPLETED BY CONTRACTOR BASED ON MANUFACTURER'S RECOMMENDATIONS.
 - PROVIDE EXPANSION LOOPS, JOINTS, Z BENDS AND PIPING OFFSETS TO ACCOMMODATE THERMAL AND OTHER PIPING MOVEMENT.
 - CONTRACTOR RESPONSIBLE TO REMOVE EXISTING CEILING, REUSE AND REINSTALL TO GREATEST EXTENT POSSIBLE FOR LAY IN CEILINGS. GYP CEILINGS TO BE CUT AND PATCHED TO MATCH EXISTING. ALL SYSTEMS IN EXISTING CEILING TO REMAIN IN WORKING ORDER. ALL SPRINKLERS AND FIRE ALARMS IN AREA OF WORK TO REMAIN ACTIVE AT ALL TIMES.

- KEYNOTES**
- 1/2" CW PIPING CONNECT TO EXISTING PIPING IN WALL.
 - 3/4" HUMIDIFIER DRAIN CONNECT TO EXISTING CONDENSATE DRAIN PIPING.
 - EXISTING PERIMETER HEATING CONVECTORS (WHERE APPLICABLE) - FIELD-VERIFY WHETHER SYSTEM IS STEAM OR HOT WATER, REPLACE EXISTING CONVECTOR VALVE WITH NEW CONTROL VALVE, WIRED TO AND CONTROLLED BY SAME THERMOSTAT AS THE COOLING-ONLY FCU.

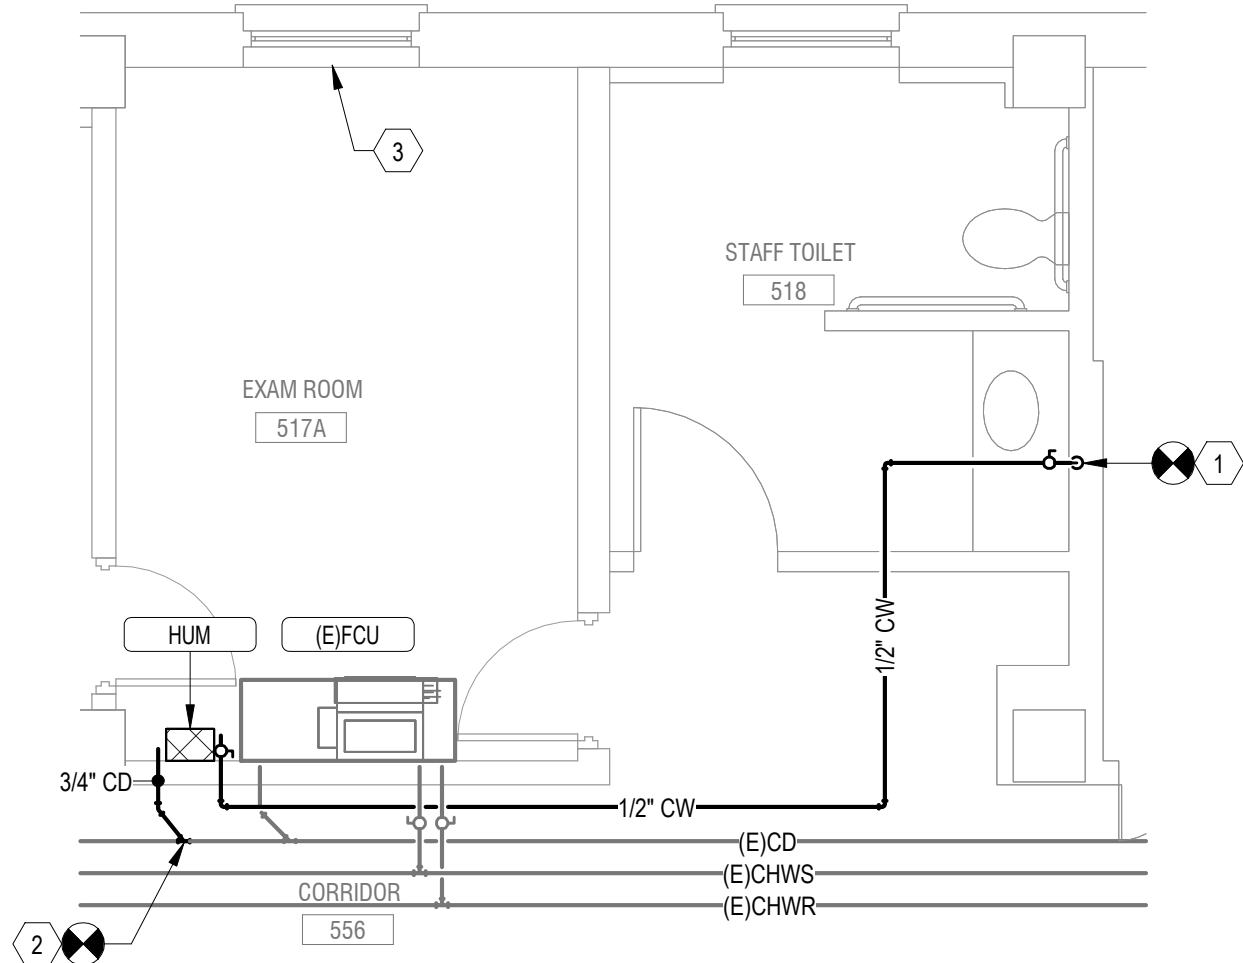


Bldg 18-05 FIFTH FLOOR PIPING PLAN - ROOM 517A

1/4" = 1'-0"

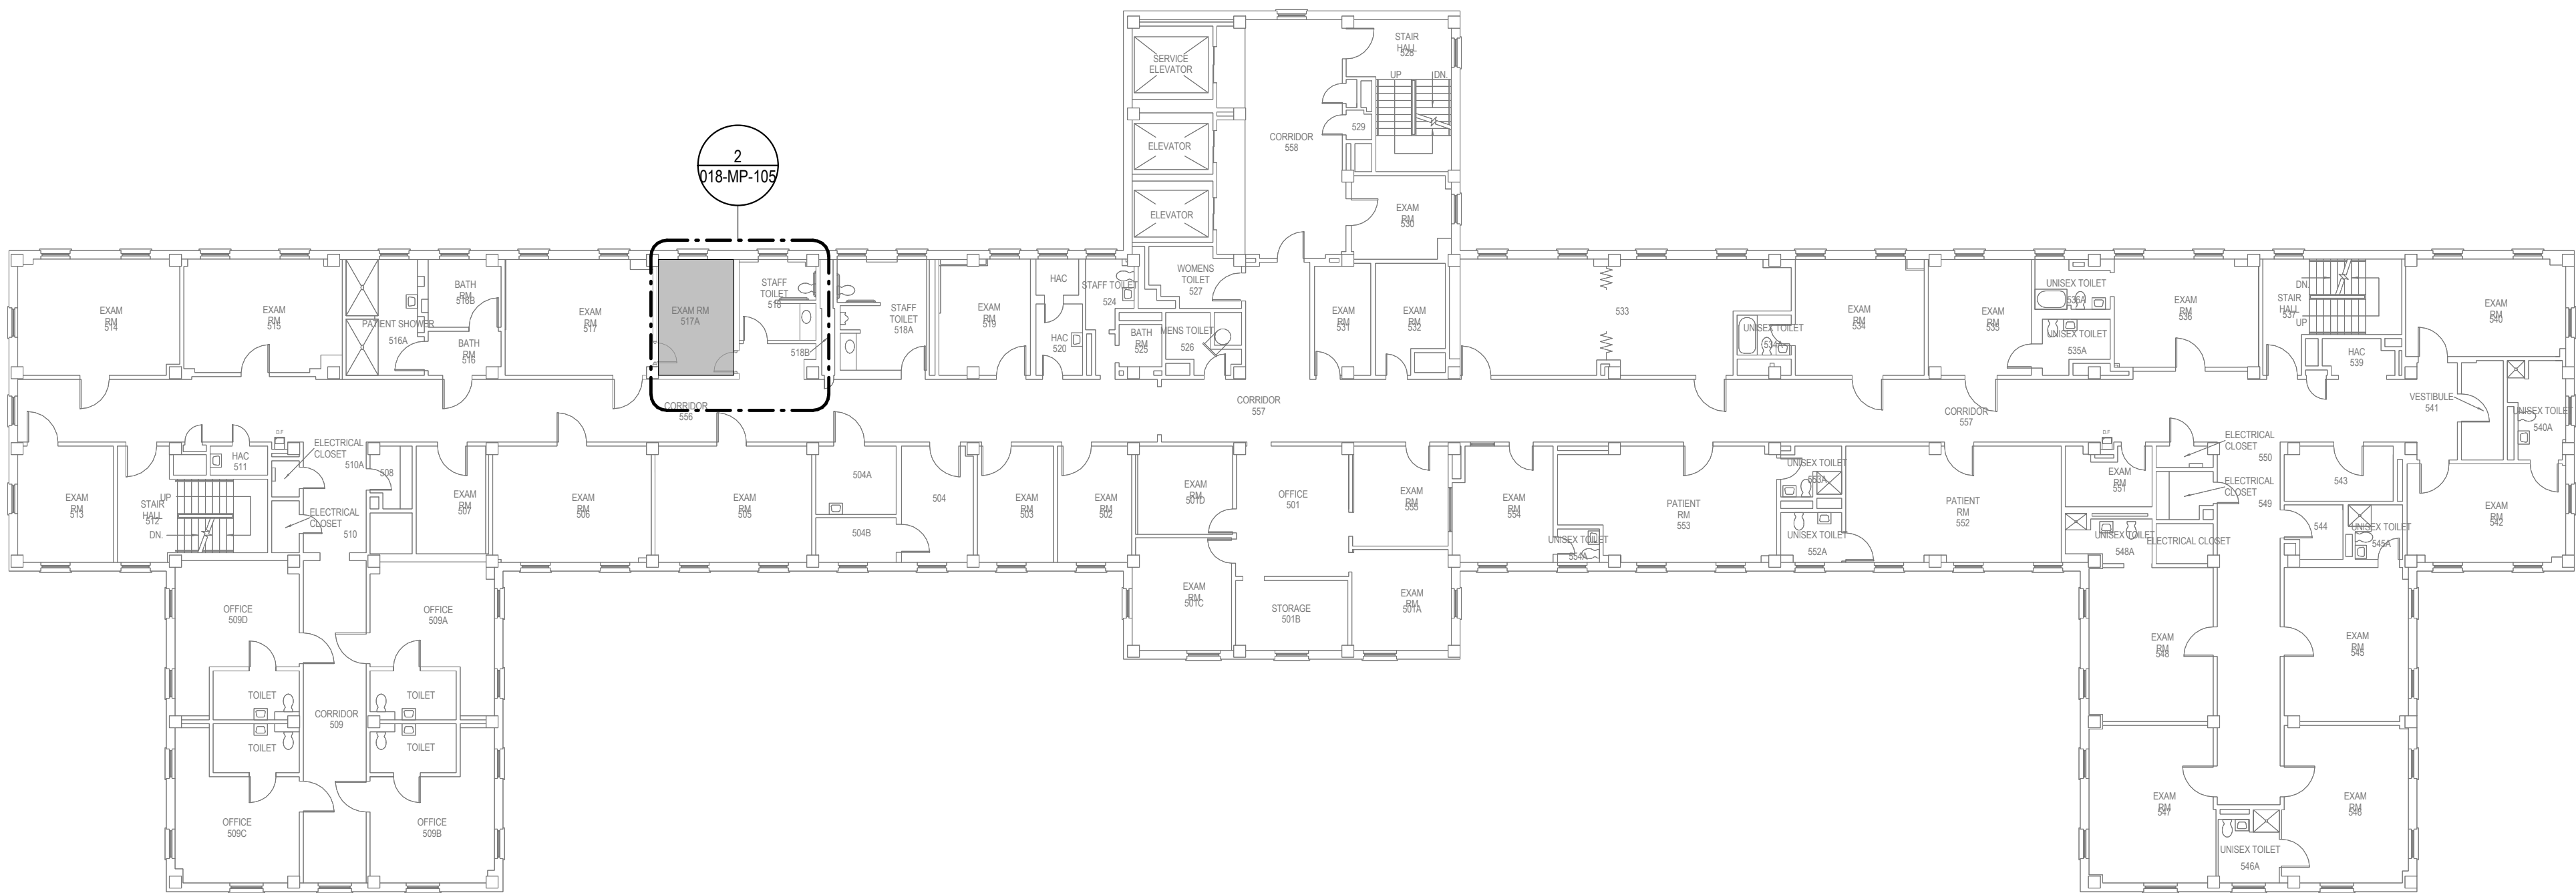

Bldg 18-05 FIFTH FLOOR PIPING PLAN

1/16" = 1'-0"



																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					</
--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	----



F

2 3/4" CONDENSATE DRAIN CONNECT TO EXISTING CONDENSATE DRAIN PIPING.

[illegible]

A

B

C


D

E


F

2/23/2024 11:33:04 AM

Autosave Docs\\VLEB-016 Sterile Storage Improvements\\VLEB-016-MEP_24.rvt

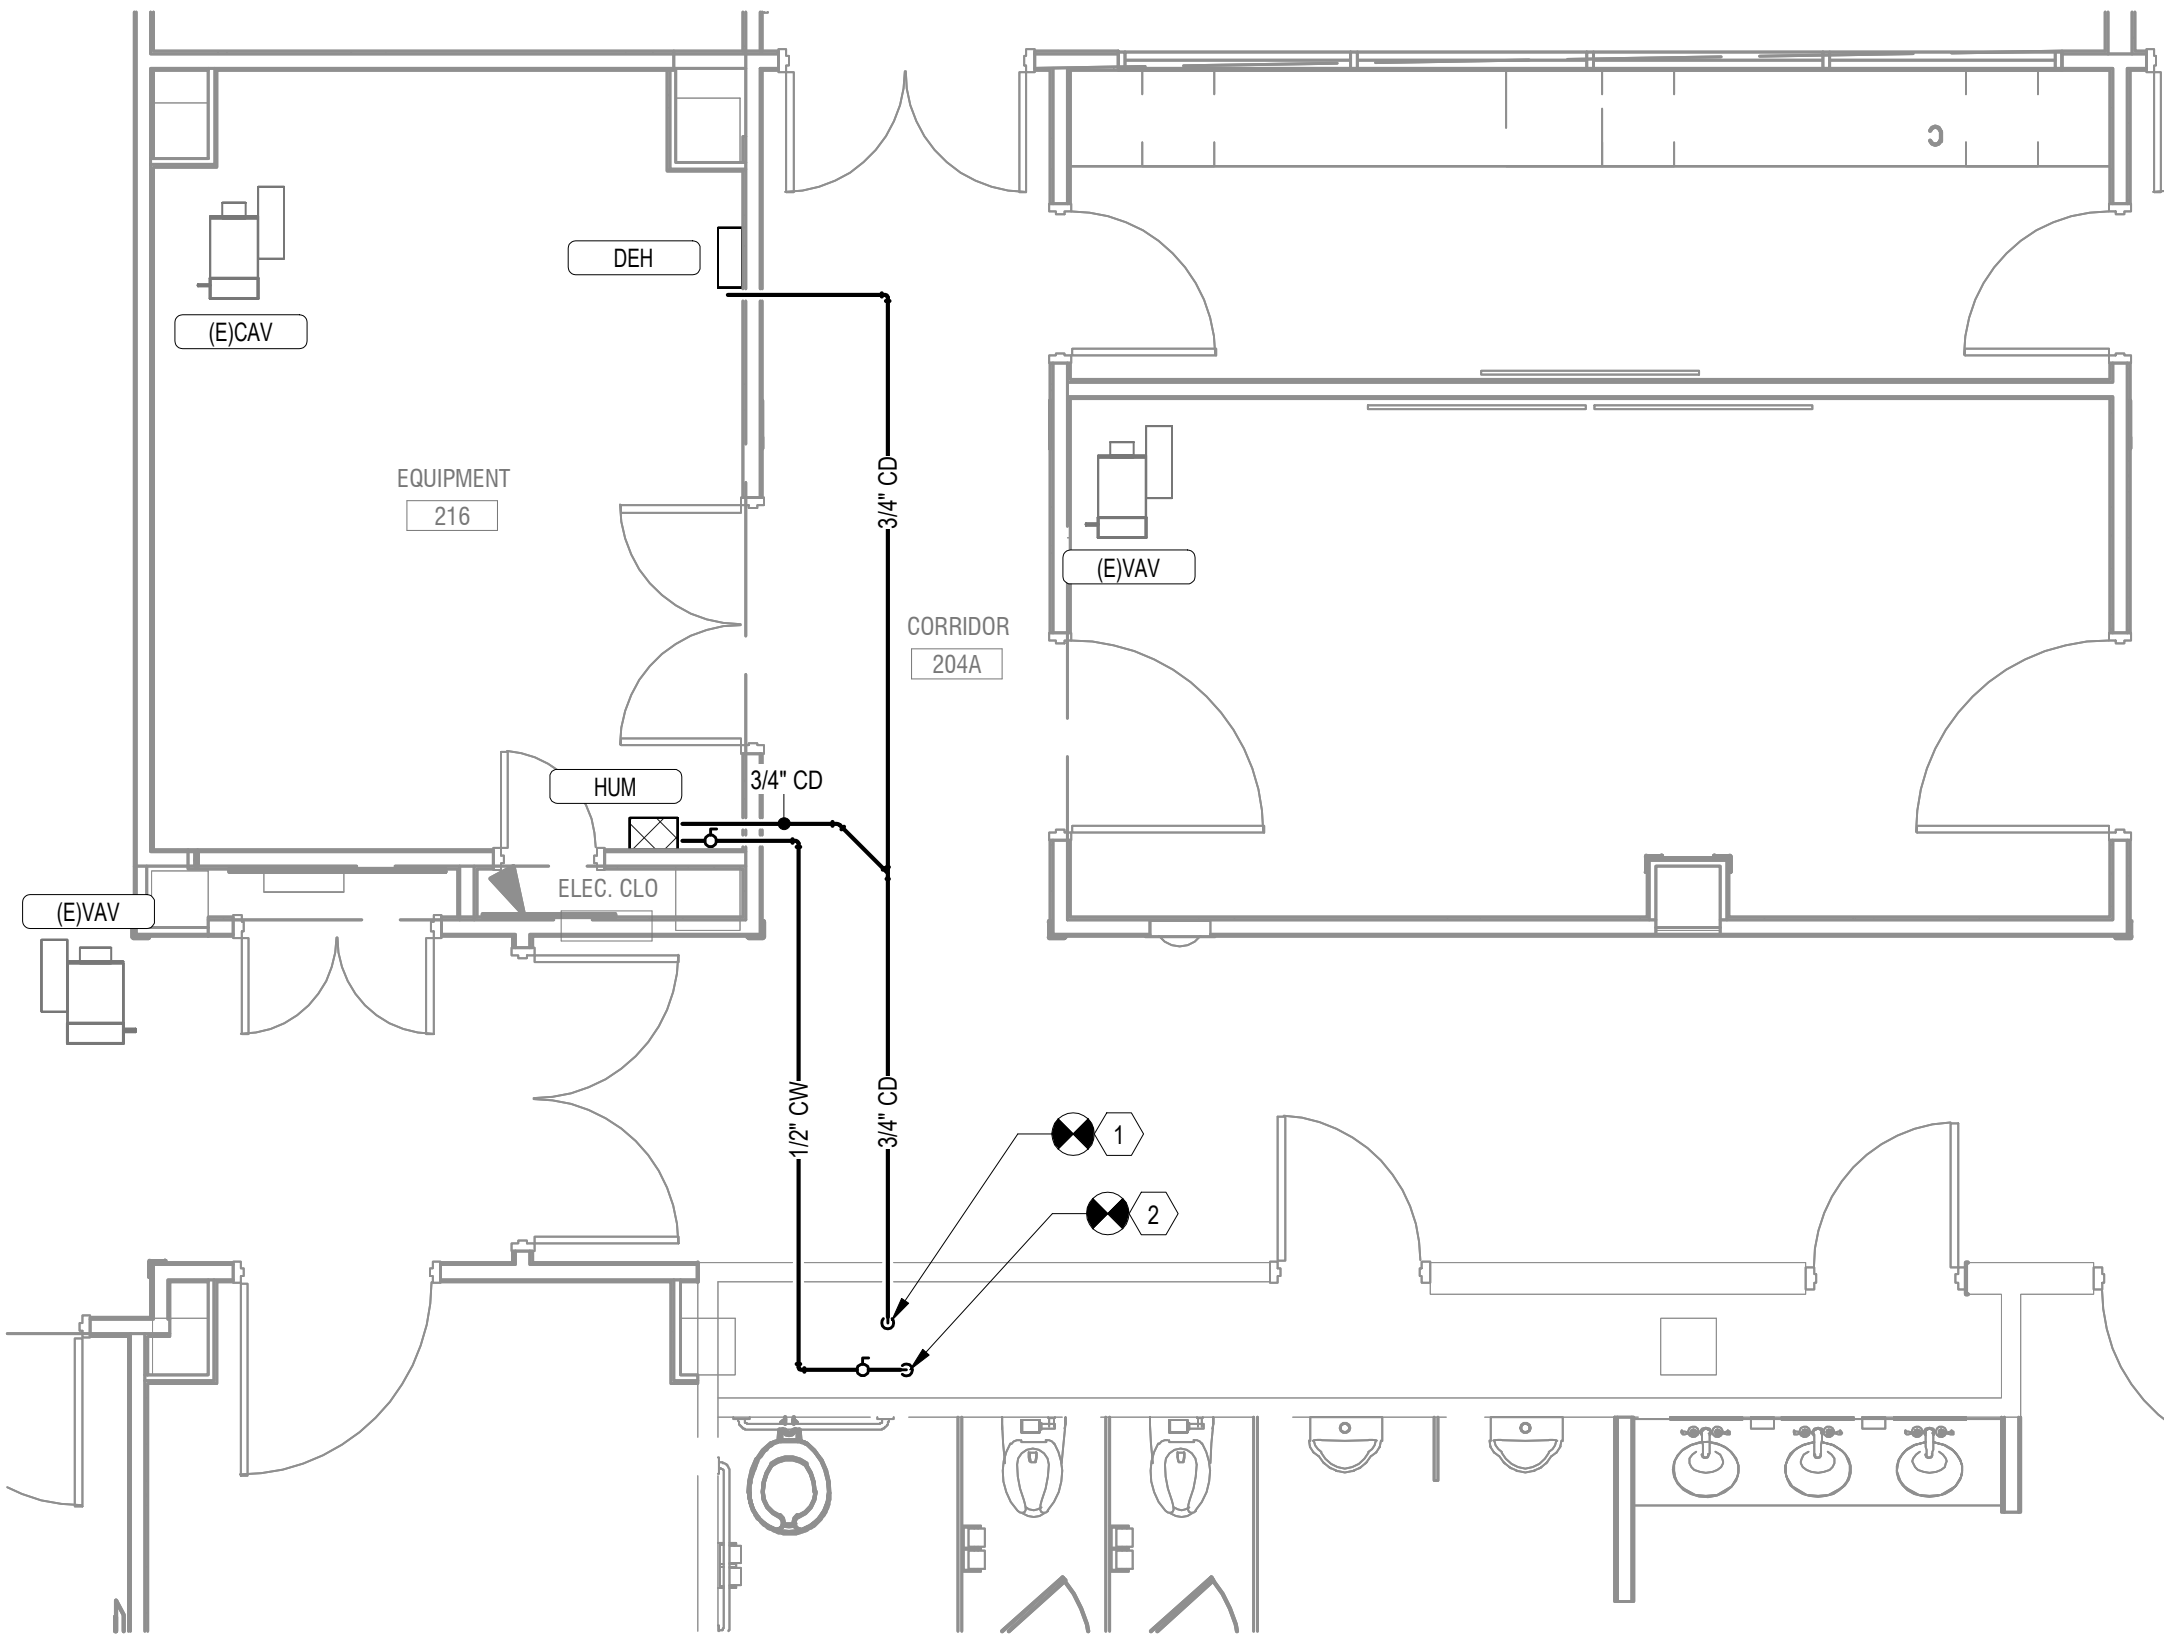

2 Bldg 22-02-SECOND FLOOR PIPING PLAN - ROOM 216
1/4\"/>

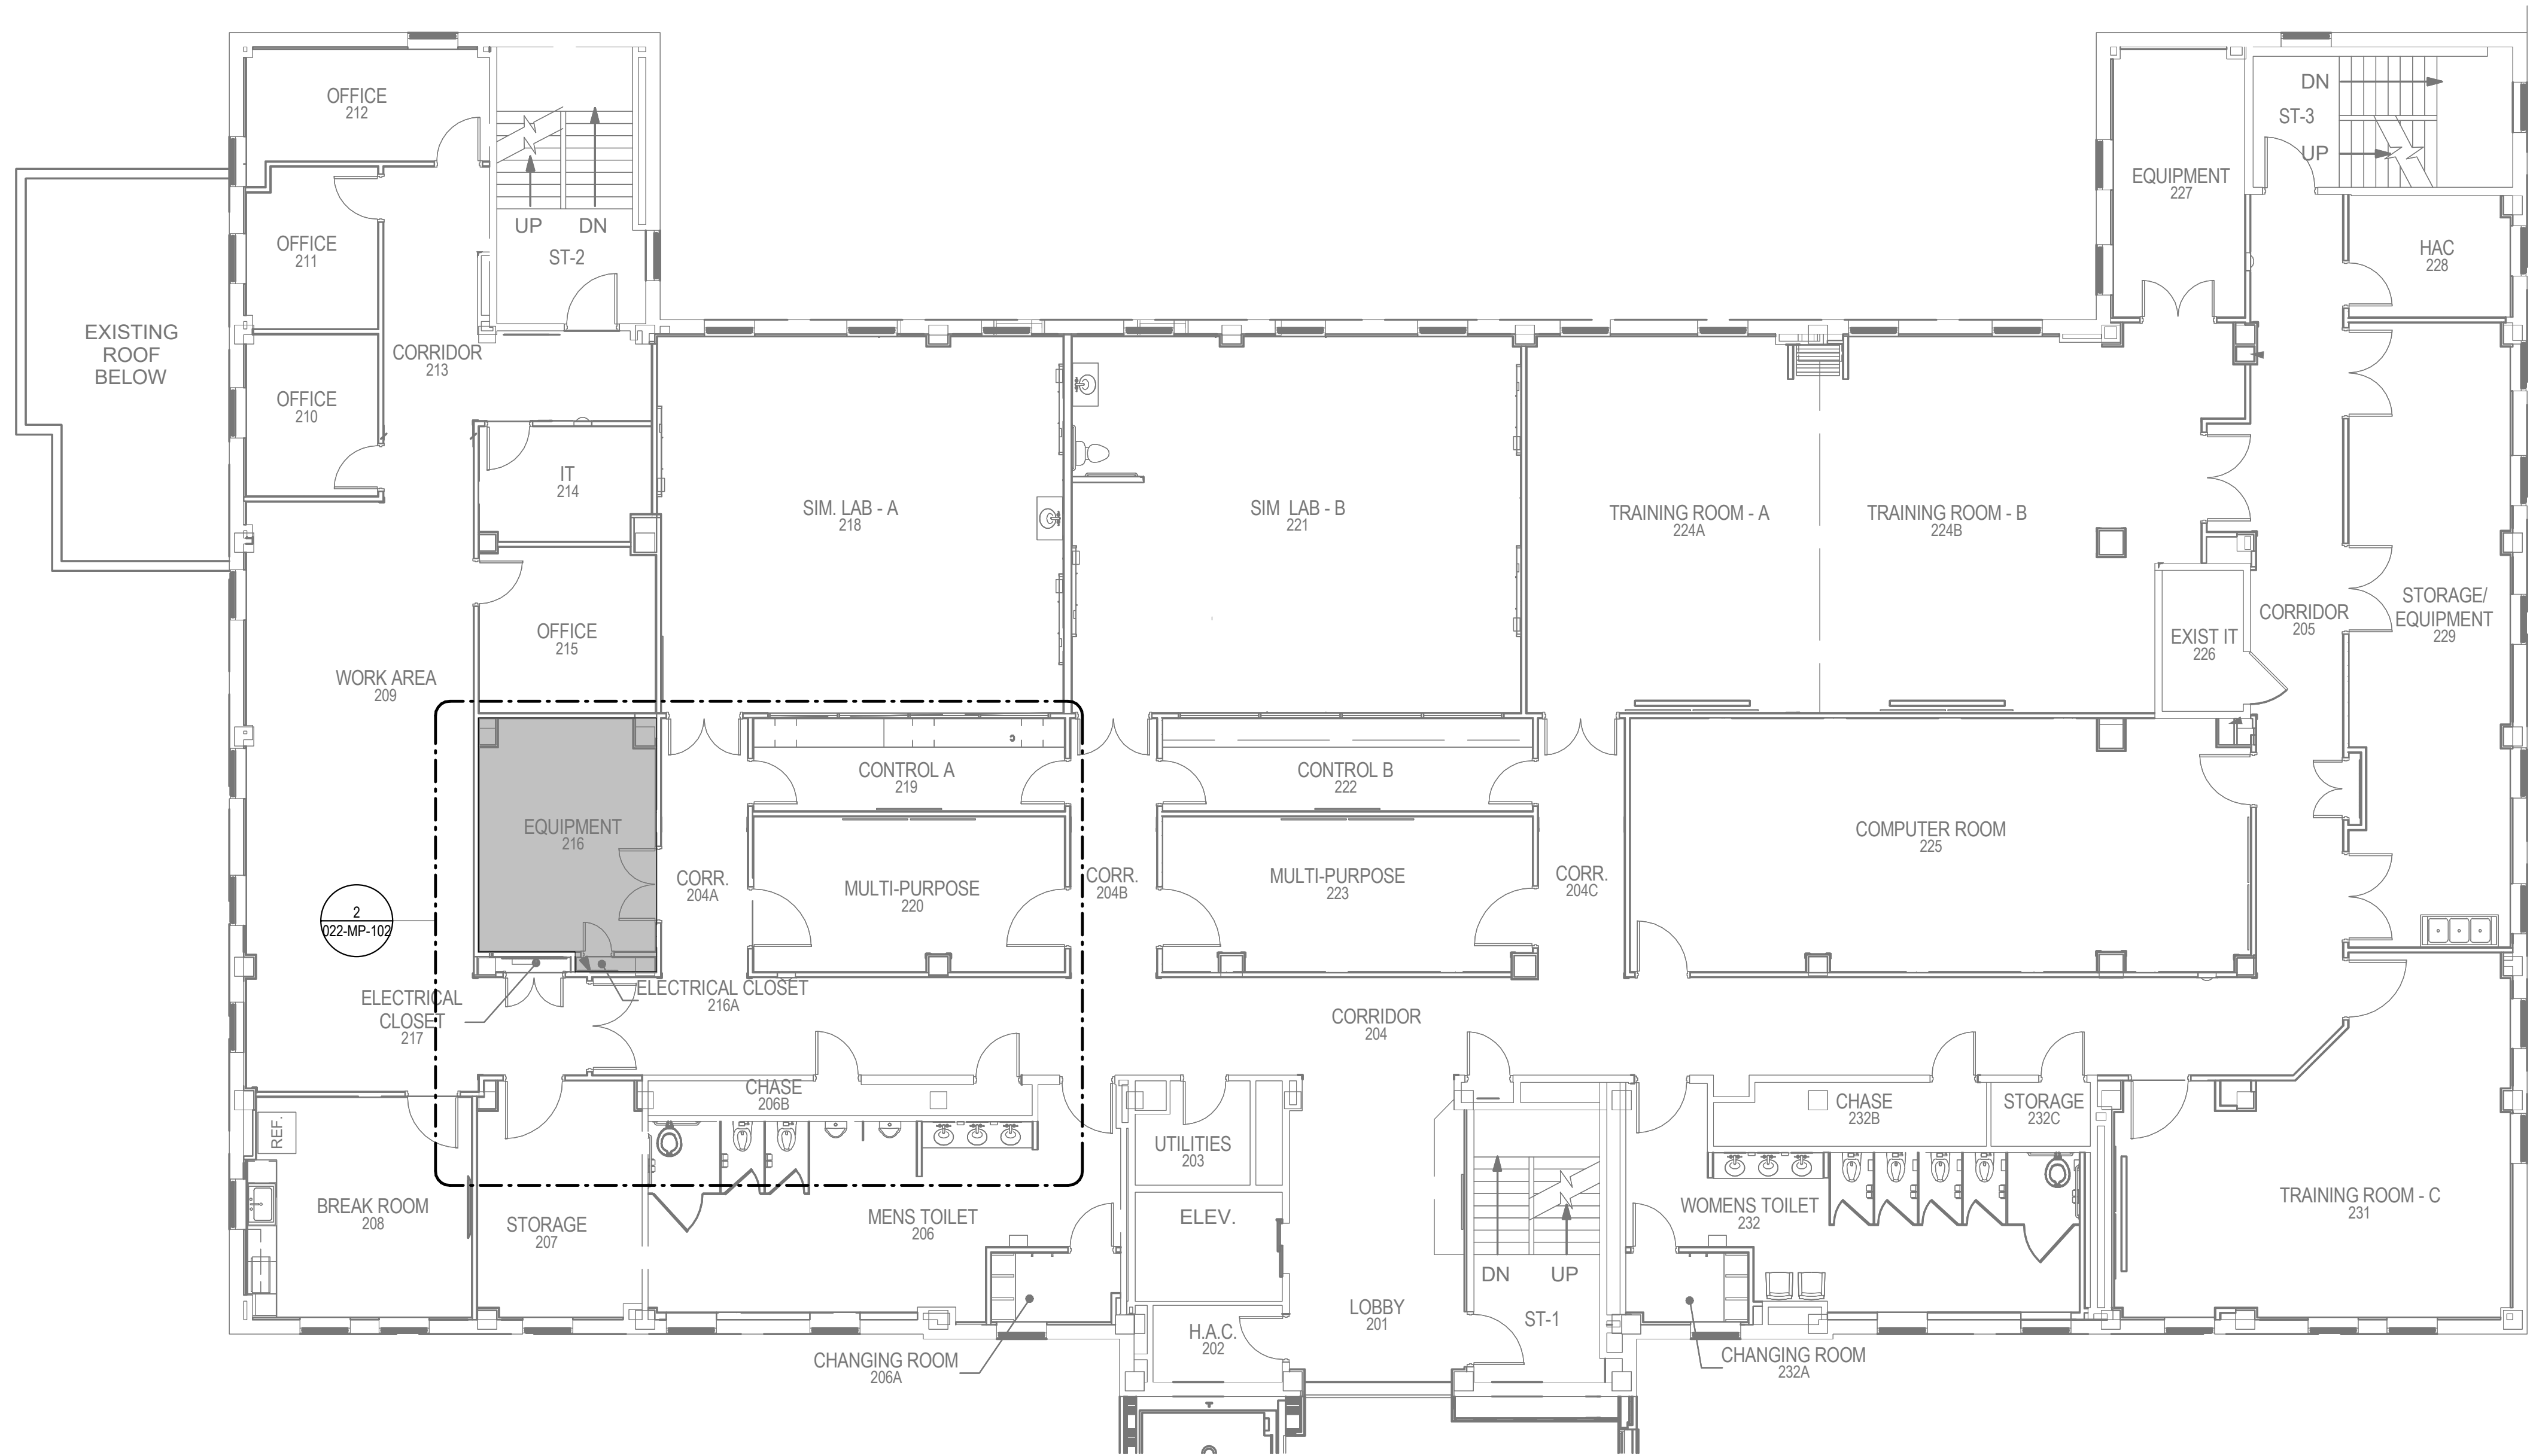

A

B

C


D

E

F


2/23/2024 11:33:06 AM

Autodesk Docs\\VLEB-016 Sterile Storage Improvements\\VLEB-016-MEP_24.rvt

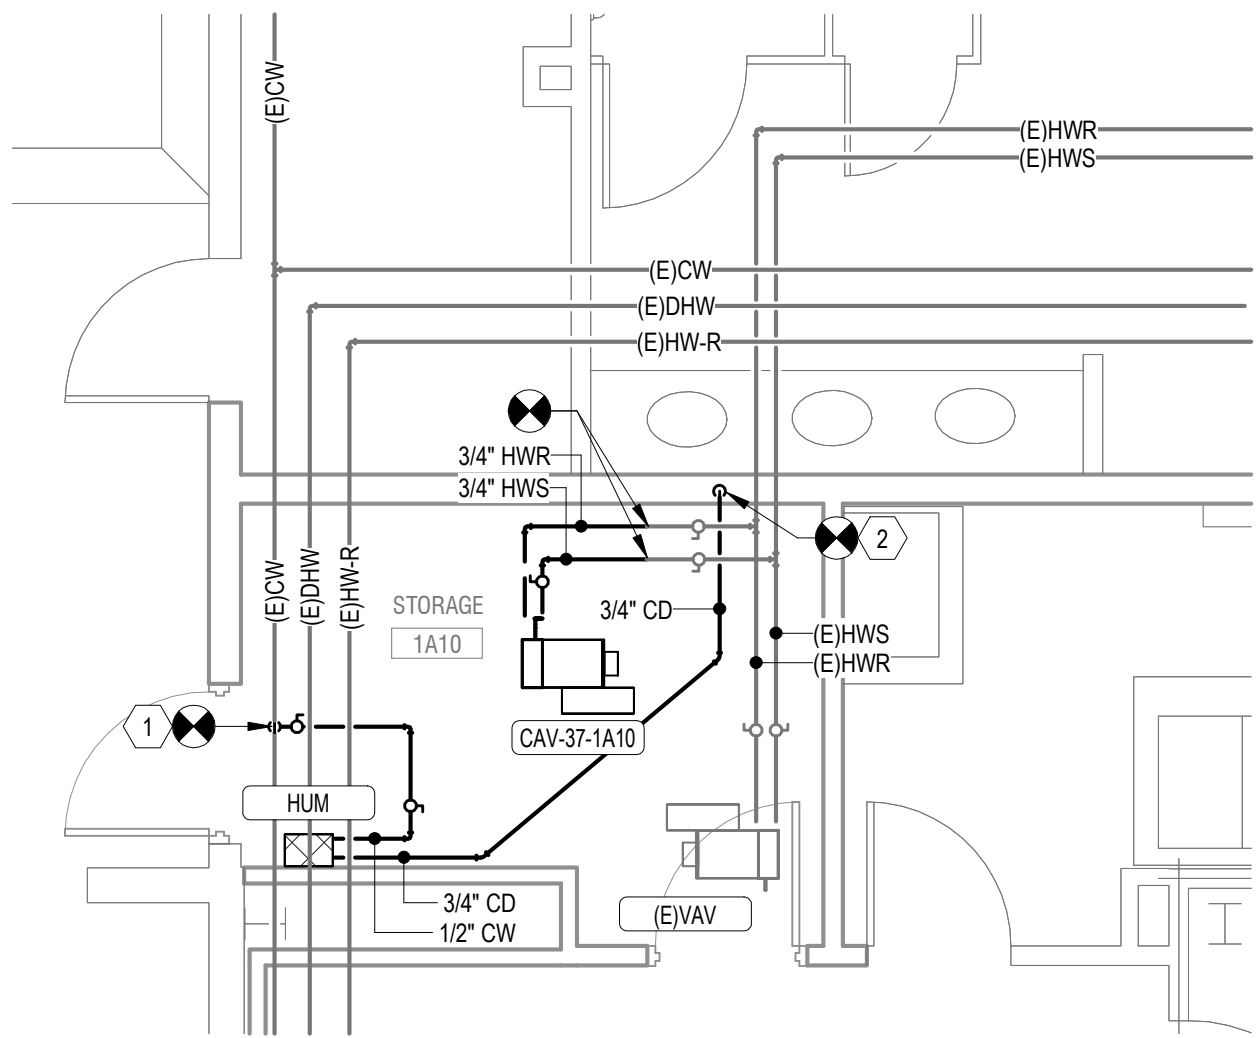

Bldg 37-01-FIRST FLOOR PIPING PLAN - ROOM 1A10

2
1/4" = 1'-0"

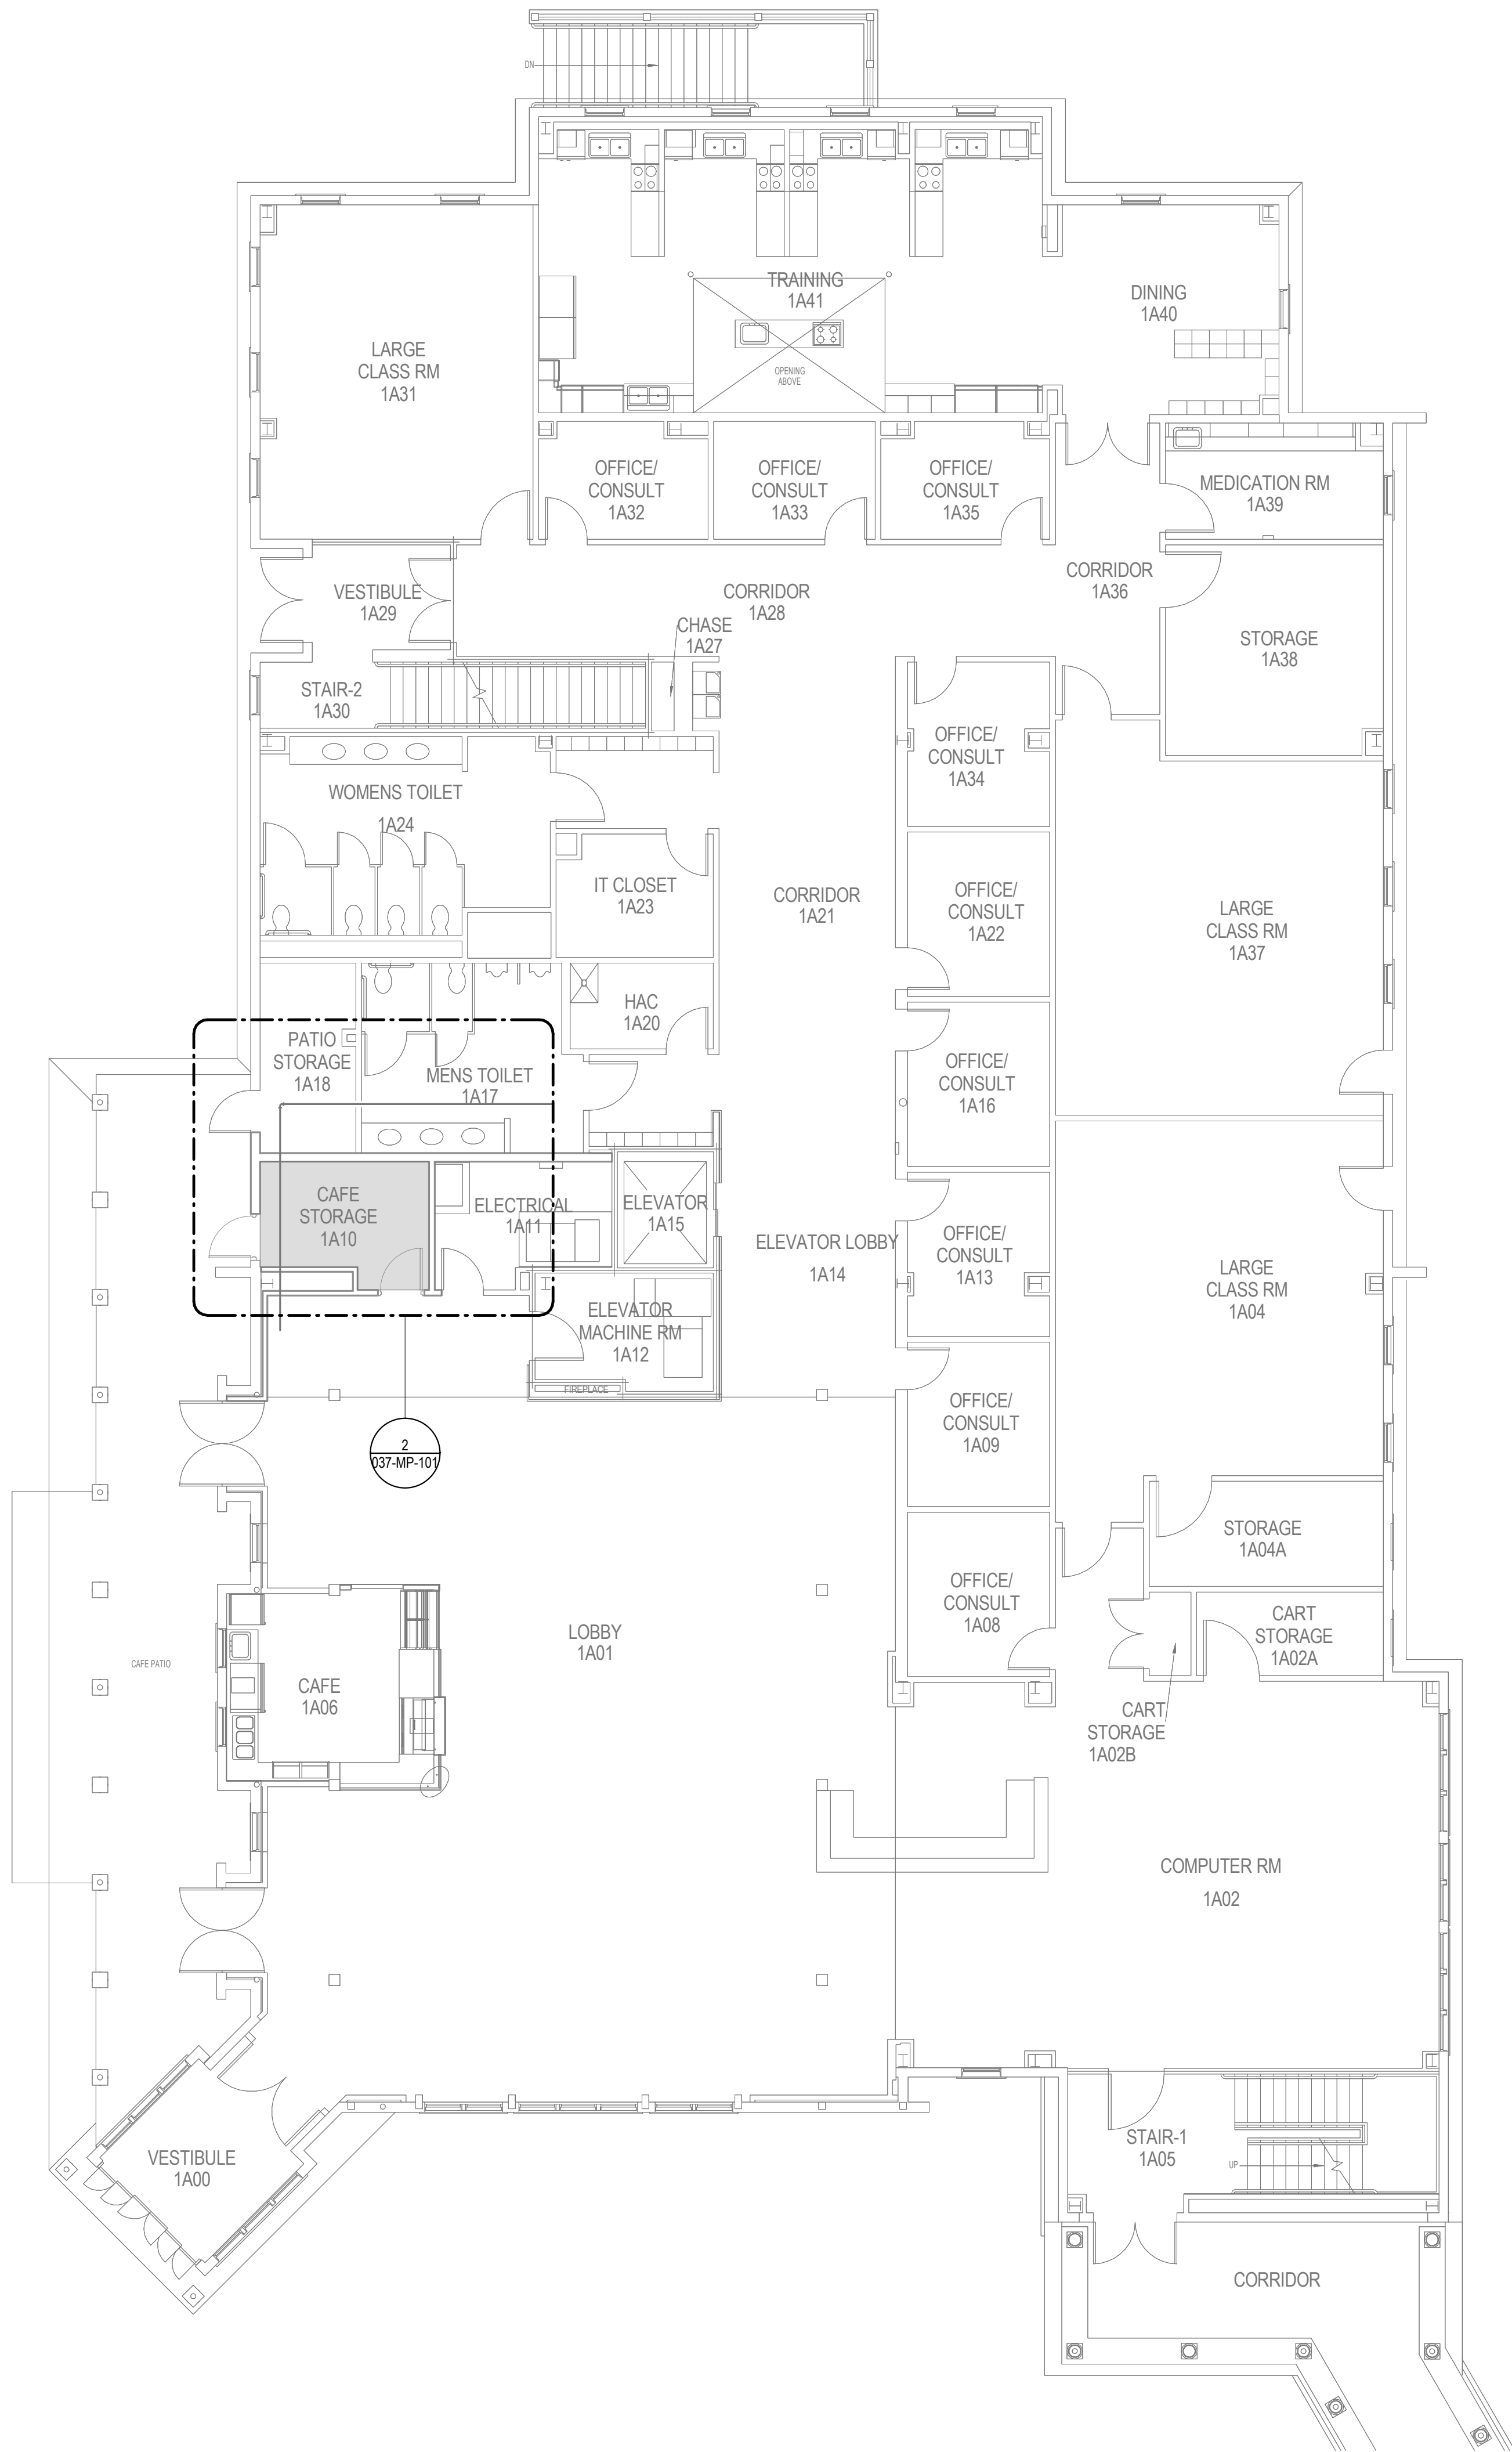

Bldg 37-01-FIRST FLOOR PIPING PLAN


1
1/8" = 1'-0"

HYDRONIC GENERAL NOTES

- 1 REFER TO FACILITY'S INFECTION CONTROL AND RISK ASSESSMENT (ICRA) AND SPECIFICATION SECTION 01 35 26 (SAFETY REQUIREMENTS) FOR ADDITIONAL INFORMATION.
- 2 ALL WORK MUST BE SCHEDULED AND COORDINATED JOINTLY WITH THE MUST. A DETAILED JOB TIMELINE MUST BE ESTABLISHED AND SUBMITTED FOR REVIEW AND APPROVAL.
- 3 REFER TO ARCHITECTURAL FOR ADDITIONAL REQUIREMENTS.
- 4 MAINTAIN 6-IN MINIMUM CLEARANCE FROM RATED WALLS AND HVAC EQUIPMENT.
- 5 ALL BRANCH PIPING IS 3/4-IN UNLESS OTHERWISE NOTED EXCLUDING REFRIGERANT PIPING. REFRIGERANT PIPING SIZING MUST BE COMPLETED BY CONTRACTOR BASED ON MANUFACTURER'S RECOMMENDATIONS.
- 6 PROVIDE EXPANSION LOOPS, JOINTS, 2 BENDS AND PIPING OFFSETS TO ACCOMMODATE THERMAL AND OTHER PIPING MOVEMENT.
- 7 CONTRACTOR RESPONSIBLE TO REMOVE EXISTING CEILING, REUSE AND REINSTALL TO GREATEST EXTENT POSSIBLE FOR LAY IN CEILINGS. GYP CEILINGS TO BE CUT AND PATCHED TO MATCH EXISTING. ALL SYSTEMS IN EXISTING CEILING TO REMAIN IN WORKING ORDER. ALL SPRINKLERS AND FIRE ALARMS IN AREA OF WORK TO REMAIN ACTIVE AT ALL TIMES.

KEYNOTES

- 1 1/2" CW PIPING CONNECT TO EXISTING PIPING.
- 2 3/4" HUMIDIFIER DRAIN DOWN IN WALL AND TERMINATE TO OSD UNDER LAVATORY WITH AIR GAP.



		Consultant	Architect/Engineer of Record	Stamp	OFFICE OF CONSTRUCTION AND FACILITIES MANAGEMENT VA U.S. Department of Veterans Affairs	Drawing Title BUILDING 37 - FIRST FLOOR PIPING PLAN	Phase BID DOCUMENTS	Project Title STERILE STORAGE IMPROVEMENTS	Project Number VLEB-016 Building Number 37
#	Revisions								
						Approved:	Sprinkler Status FULLY SPRINKLERED	Location 1700 S LINCOLN AVE, LEBANON, PA 17042	Drawing Number 037-MP-101
								Issue Date 11.17.25	Checked TS
								Drawn AC	

A

B

C

D

E

F

2/23/2024 11:33:10 AM

Autosave: Docs\VLB-018 Sterile Storage Improvements\VLB-018-MEP_24.rvt

A


B

C


D

E


F

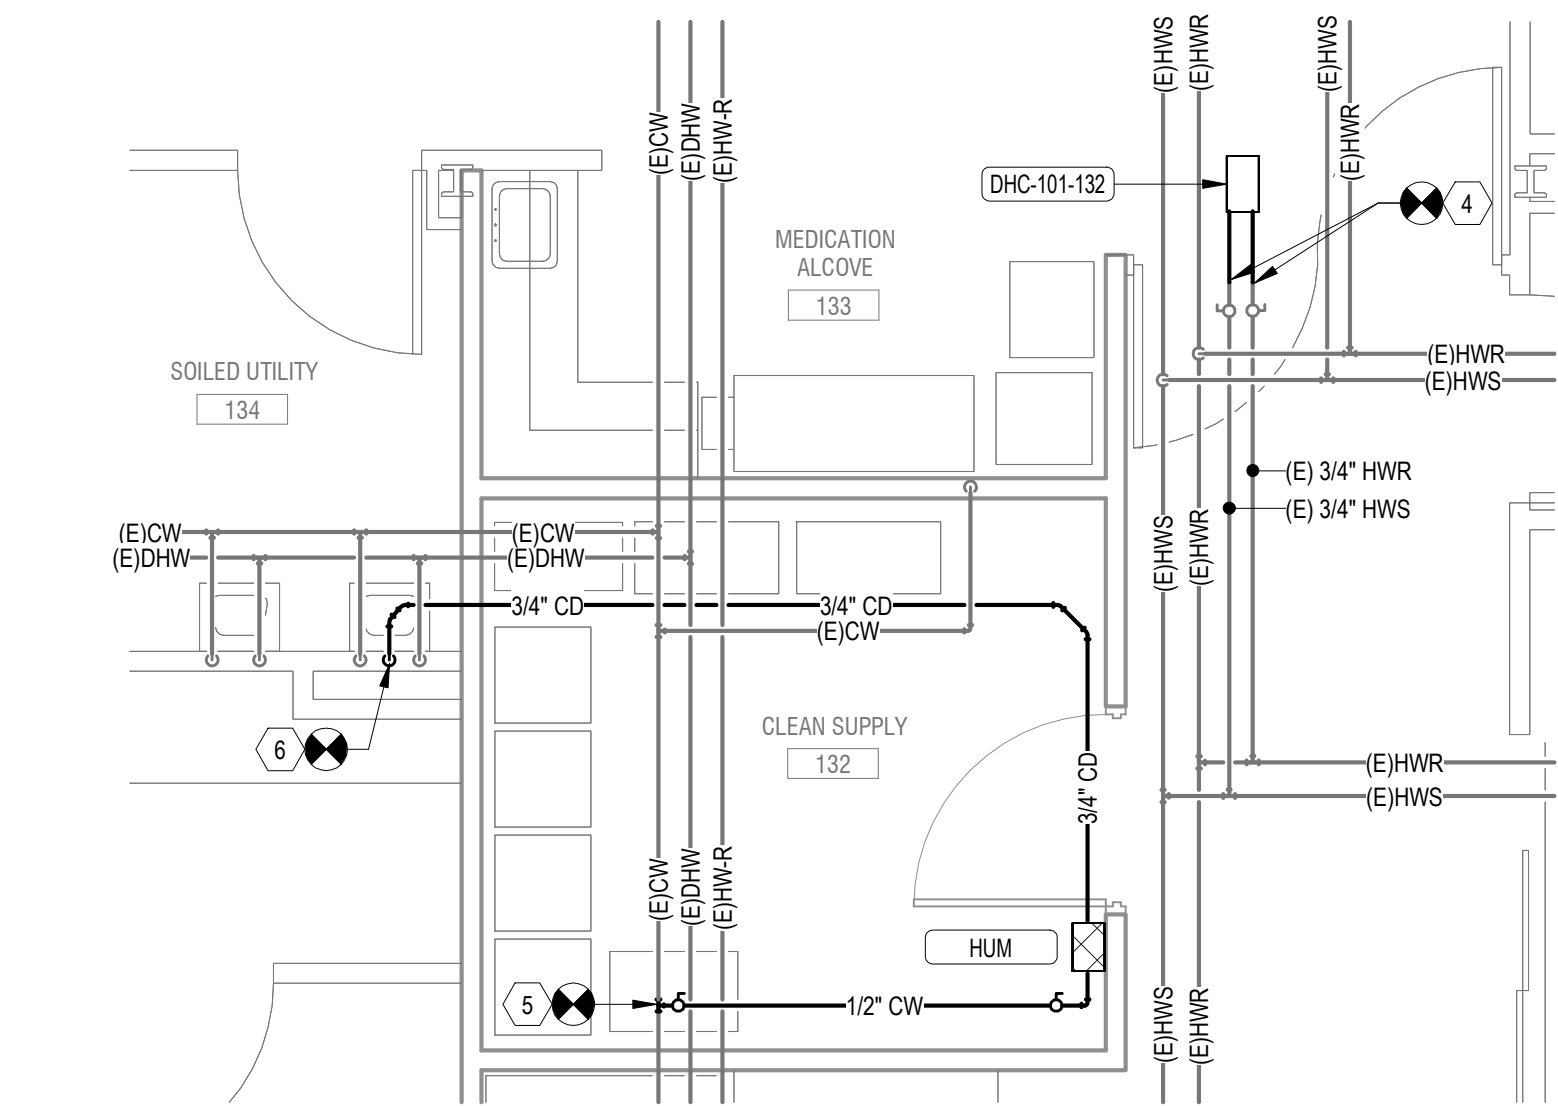


3 Bldg 101-01-FIRST FLOOR PIPING PLAN - ROOM 132
1/4" = 1'-0"

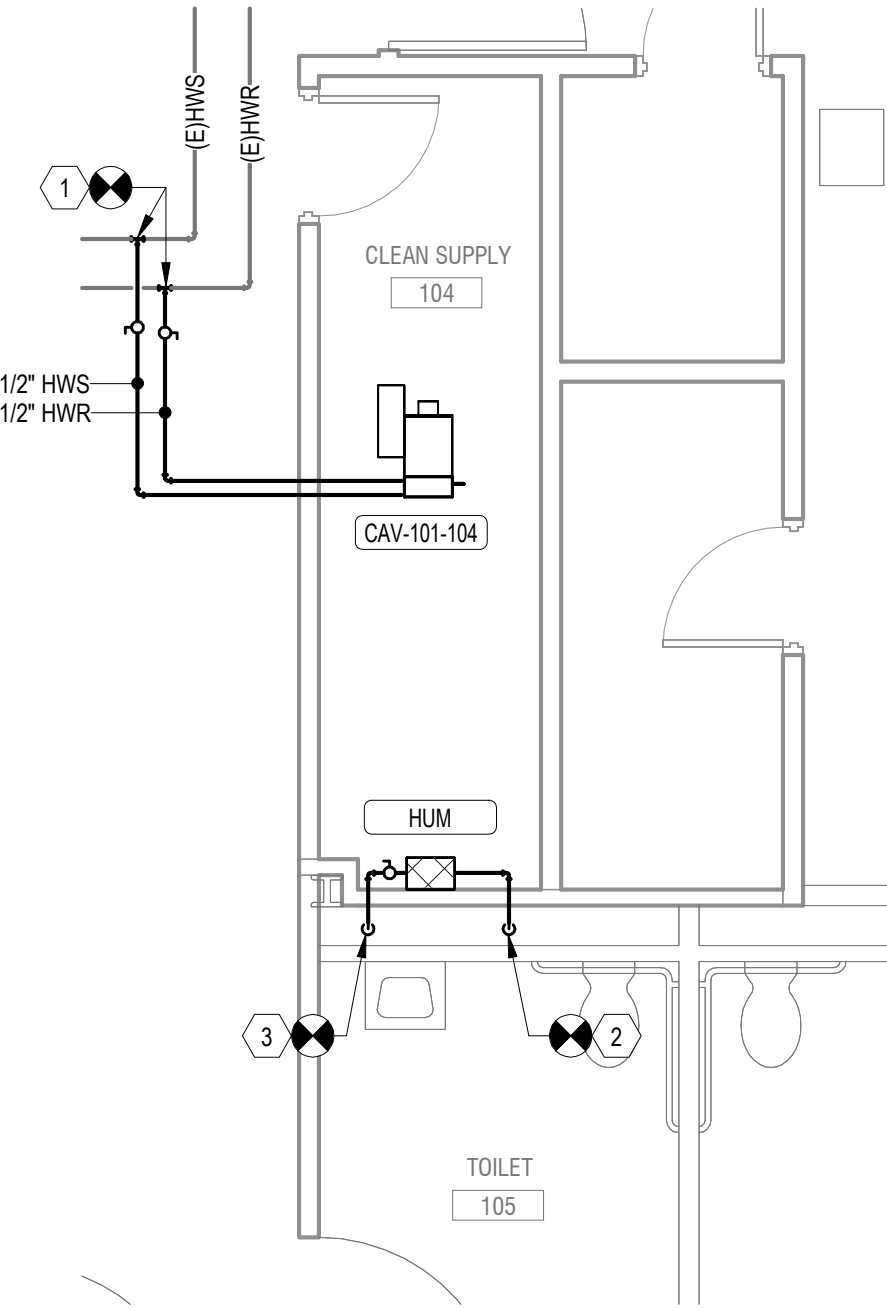

2 Bldg 101-01-FIRST FLOOR PIPING PLAN - ROOM 104
1/4" = 1'-0"

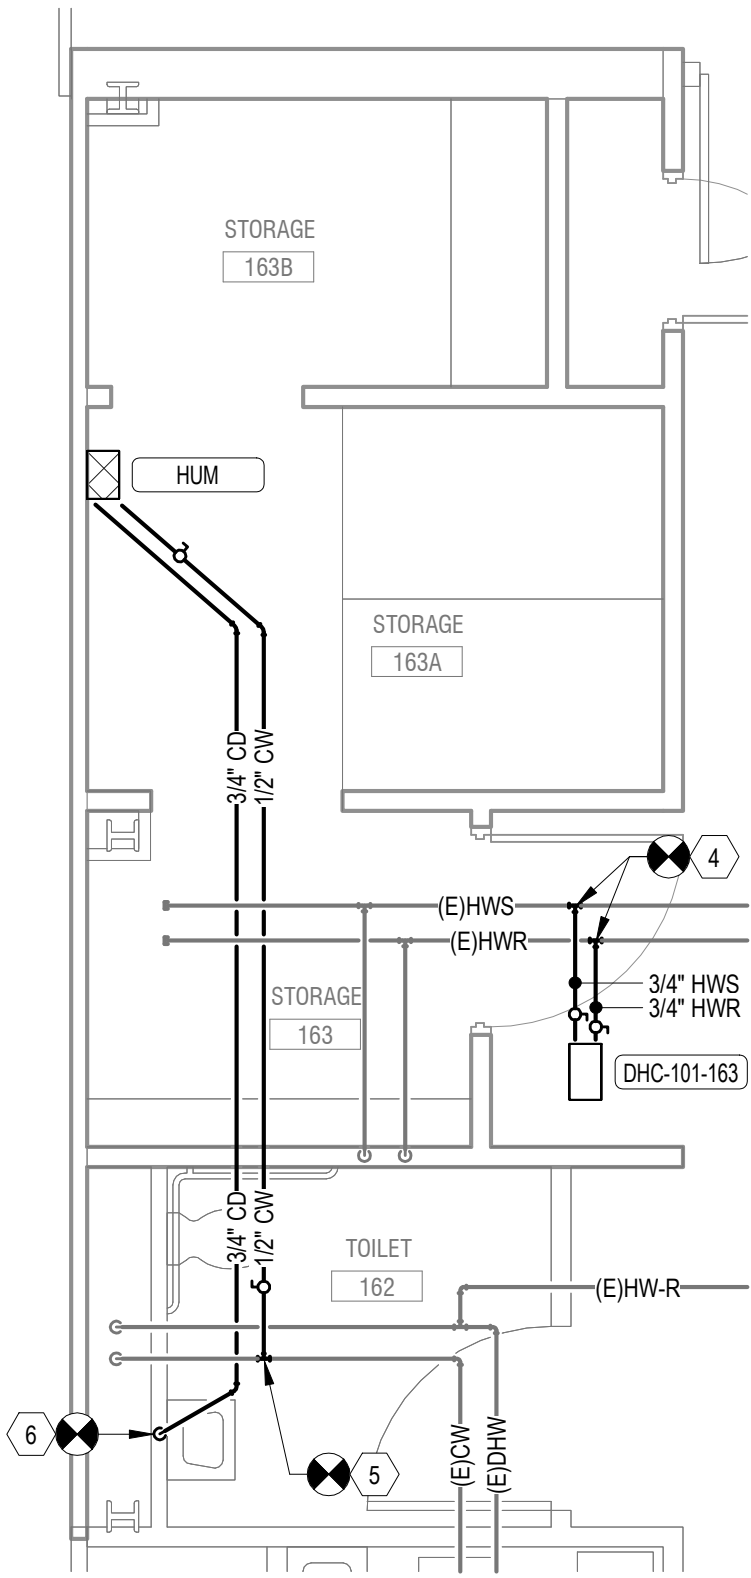

5 Bldg 101-01-FIRST FLOOR PIPING PLAN - ROOM 163, 163A, 163B
1/4" = 1'-0"

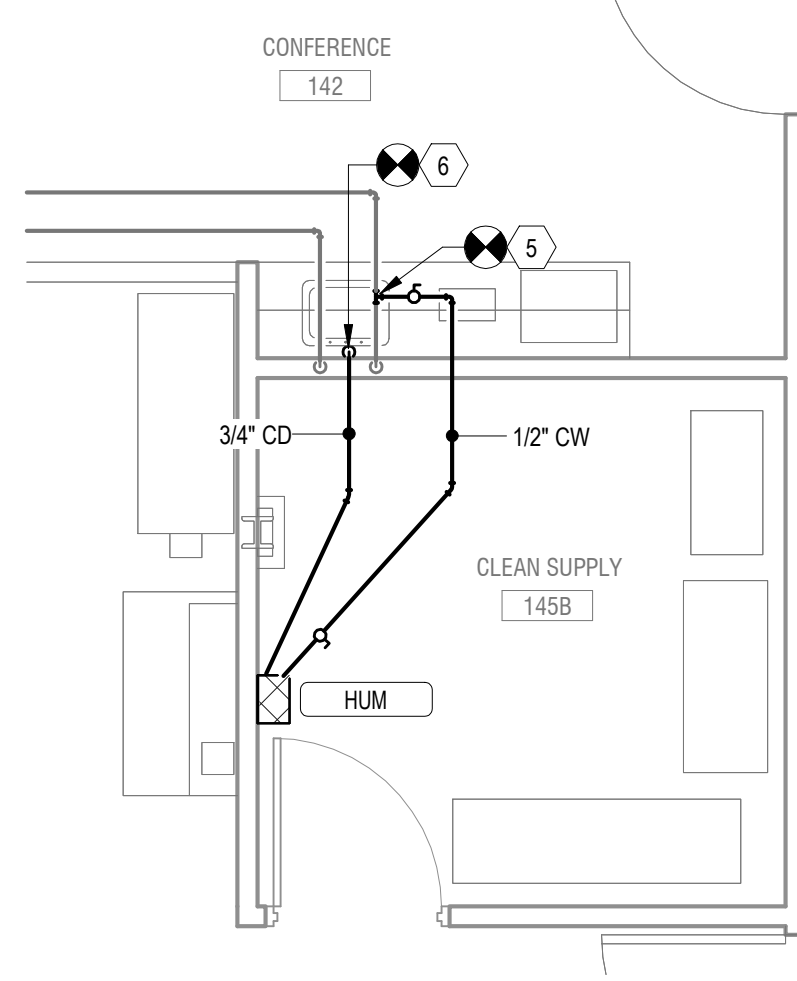


4 Bldg 101-01-FIRST FLOOR PIPING PLAN - ROOM 145B
1/4" = 1'-0"

HYDRONIC GENERAL NOTES


- 1 REFER TO FACILITY'S INFECTION CONTROL AND RISK ASSESSMENT (ICRA) AND SPECIFICATION SECTION 01 35 26 (SAFETY REQUIREMENTS) FOR ADDITIONAL INFORMATION.
- 2 ALL WORK MUST BE SCHEDULED AND COORDINATED JOINTLY WITH THE MUST. A DETAILED JOB TIMELINE MUST BE ESTABLISHED AND SUBMITTED FOR REVIEW AND APPROVAL.
- 3 REFER TO ARCHITECTURAL FOR ADDITIONAL REQUIREMENTS.
- 4 MAINTAIN 6-IN MINIMUM CLEARANCE FROM RATED WALLS AND HVAC EQUIPMENT.
- 5 ALL BRANCH PIPING IS 3/4-IN UNLESS OTHERWISE NOTED EXCLUDING REFRIGERANT PIPING. REFRIGERANT PIPING SIZING MUST BE COMPLETED BY CONTRACTOR BASED ON MANUFACTURER'S RECOMMENDATIONS.
- 6 PROVIDE EXPANSION LOOPS, JOINTS, 2 BENDS AND PIPING OFFSETS TO ACCOMMODATE THERMAL AND OTHER PIPING MOVEMENT.
- 7 CONTRACTOR RESPONSIBLE TO REMOVE EXISTING CEILING, REUSE AND REINSTALL TO GREATEST EXTENT POSSIBLE FOR LAY IN CEILINGS. GYP CEILINGS TO BE CUT AND PATCHED TO MATCH EXISTING. ALL SYSTEMS IN EXISTING CEILING TO REMAIN IN WORKING ORDER. ALL SPRINKLERS AND FIRE ALARMS IN AREA OF WORK TO REMAIN ACTIVE AT ALL TIMES.

KEYNOTES

- 1 1/2" HWSR PIPING CONNECT TO EXISTING PIPING.
- 2 1/2" CW PIPING CONNECT TO EXISTING PIPING IN WALL.
- 3 3/4" HUMIDIFIER DRAIN DOWN IN WALL AND TERMINATE TO OSD UNDER LAVATORY WITH AIR GAP.
- 4 3/4" HWSR PIPING CONNECT TO EXISTING PIPING.
- 5 1/2" CW PIPING CONNECT TO EXISTING PIPING.
- 6 3/4" HUMIDIFIER DRAIN DOWN IN WALL AND TERMINATE TO OSD UNDER LAVATORY WITH AIR GAP.

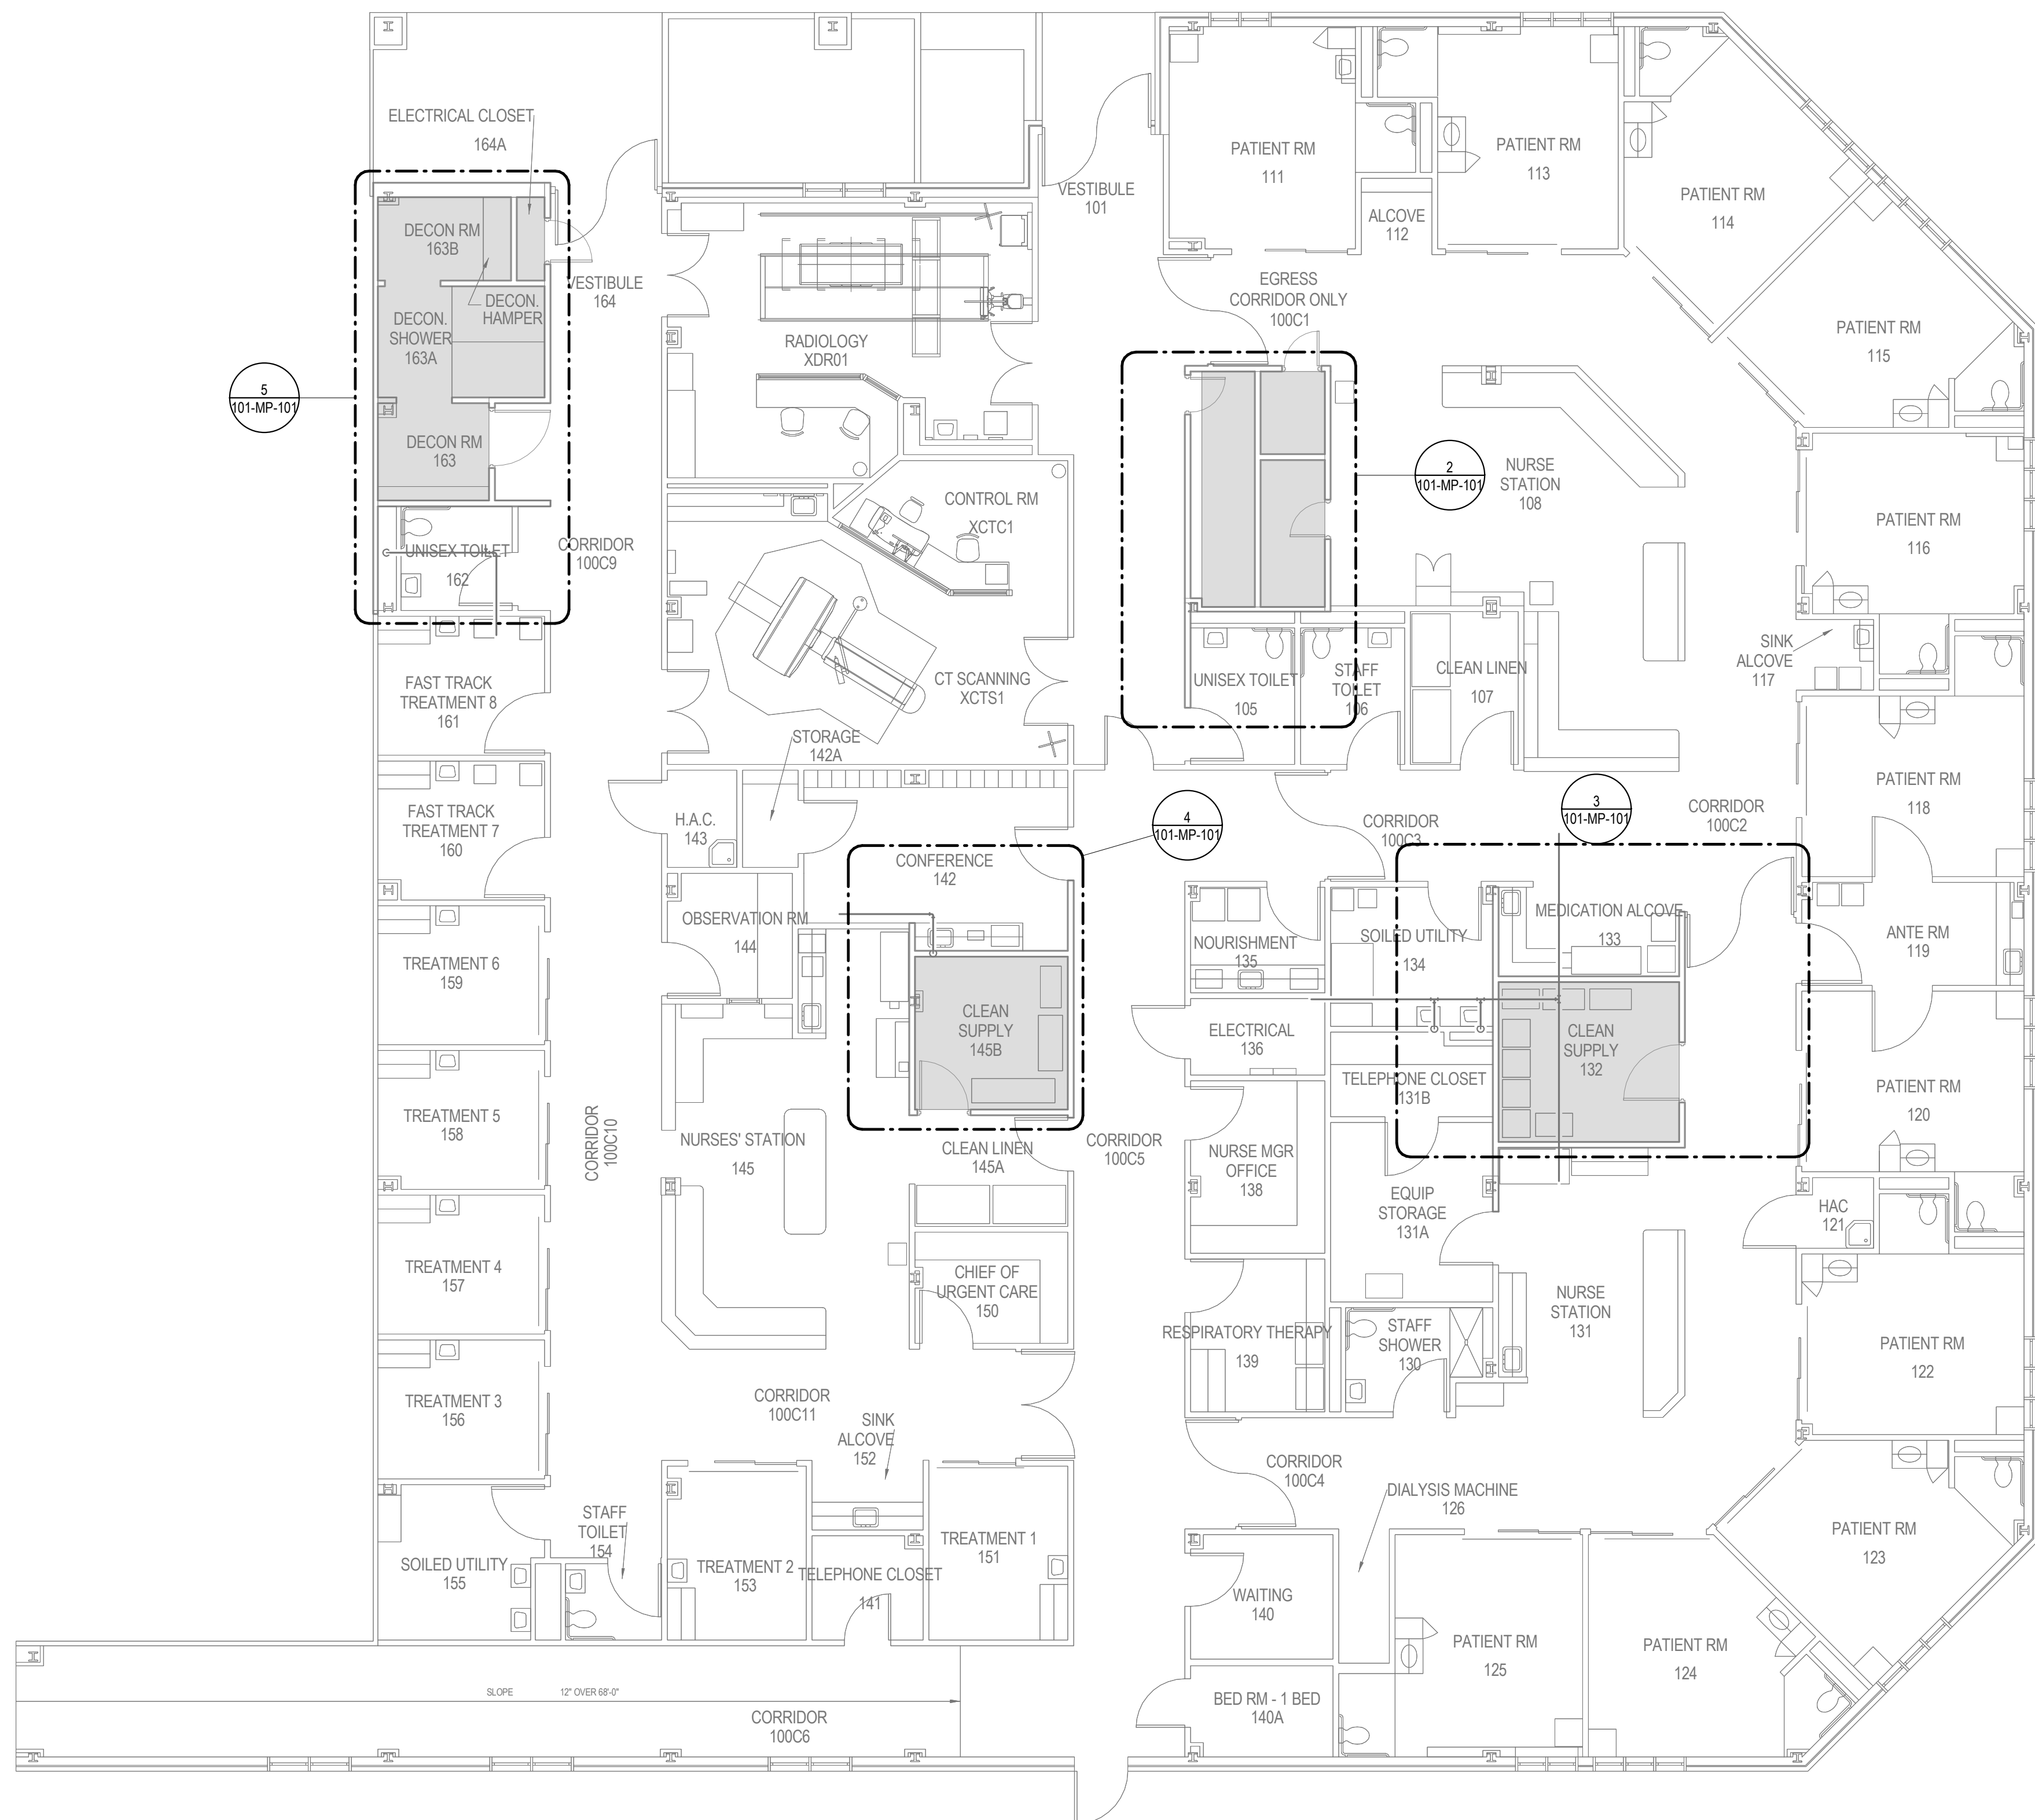

1 Bldg 101-01-FIRST FLOOR PIPING PLAN
1/8" = 1'-0"



																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																			</
--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	----

A

B

C

D

E

F

2/23/2024 11:33:12 AM


Autodesk Docs\\VLEB-016 Sterile Storage Improvements\\VLEB-016-MEP_24.rvt

HYDRONIC GENERAL NOTES


- 1 REFER TO FACILITY'S INFECTION CONTROL AND RISK ASSESSMENT (ICRA) AND SPECIFICATION SECTION 01 35 26 (SAFETY REQUIREMENTS) FOR ADDITIONAL INFORMATION.
- 2 ALL WORK MUST BE SCHEDULED AND COORDINATED JOINTLY WITH THE MUST. A DETAILED JOB TIMELINE MUST BE ESTABLISHED AND SUBMITTED FOR REVIEW AND APPROVAL.
- 3 REFER TO ARCHITECTURAL FOR ADDITIONAL REQUIREMENTS.
- 4 MAINTAIN 6-IN MINIMUM CLEARANCE FROM RATED WALLS AND HVAC EQUIPMENT.
- 5 ALL BRANCH PIPING IS 3/4-IN UNLESS OTHERWISE NOTED EXCLUDING REFRIGERANT PIPING. REFRIGERANT PIPING SIZING MUST BE COMPLETED BY CONTRACTOR BASED ON MANUFACTURER'S RECOMMENDATIONS.
- 6 PROVIDE EXPANSION LOOPS, JOINTS, Z BENDS AND PIPING OFFSETS TO ACCOMMODATE THERMAL AND OTHER PIPING MOVEMENT.
- 7 CONTRACTOR RESPONSIBLE TO REMOVE EXISTING CEILING, REUSE AND REINSTALL TO GREATEST EXTENT POSSIBLE FOR LAY IN CEILINGS. OYP CEILINGS TO BE CUT AND PATCHED TO MATCH EXISTING. ALL SYSTEMS IN EXISTING CEILING TO REMAIN IN WORKING ORDER. ALL SPRINKLERS AND FIRE ALARMS IN AREA OF WORK TO REMAIN ACTIVE AT ALL TIMES.

KEYNOTES

- 1 1/2" HWS/R PIPING CONNECT TO EXISTING PIPING.
- 2 1/2" CW PIPING CONNECT TO EXISTING PIPING.
- 3 3/4" HUMIDIFIER DRAIN DOWN IN WALL AND TERMINATE TO OSD UNDER LAVATORY WITH AIR GAP.

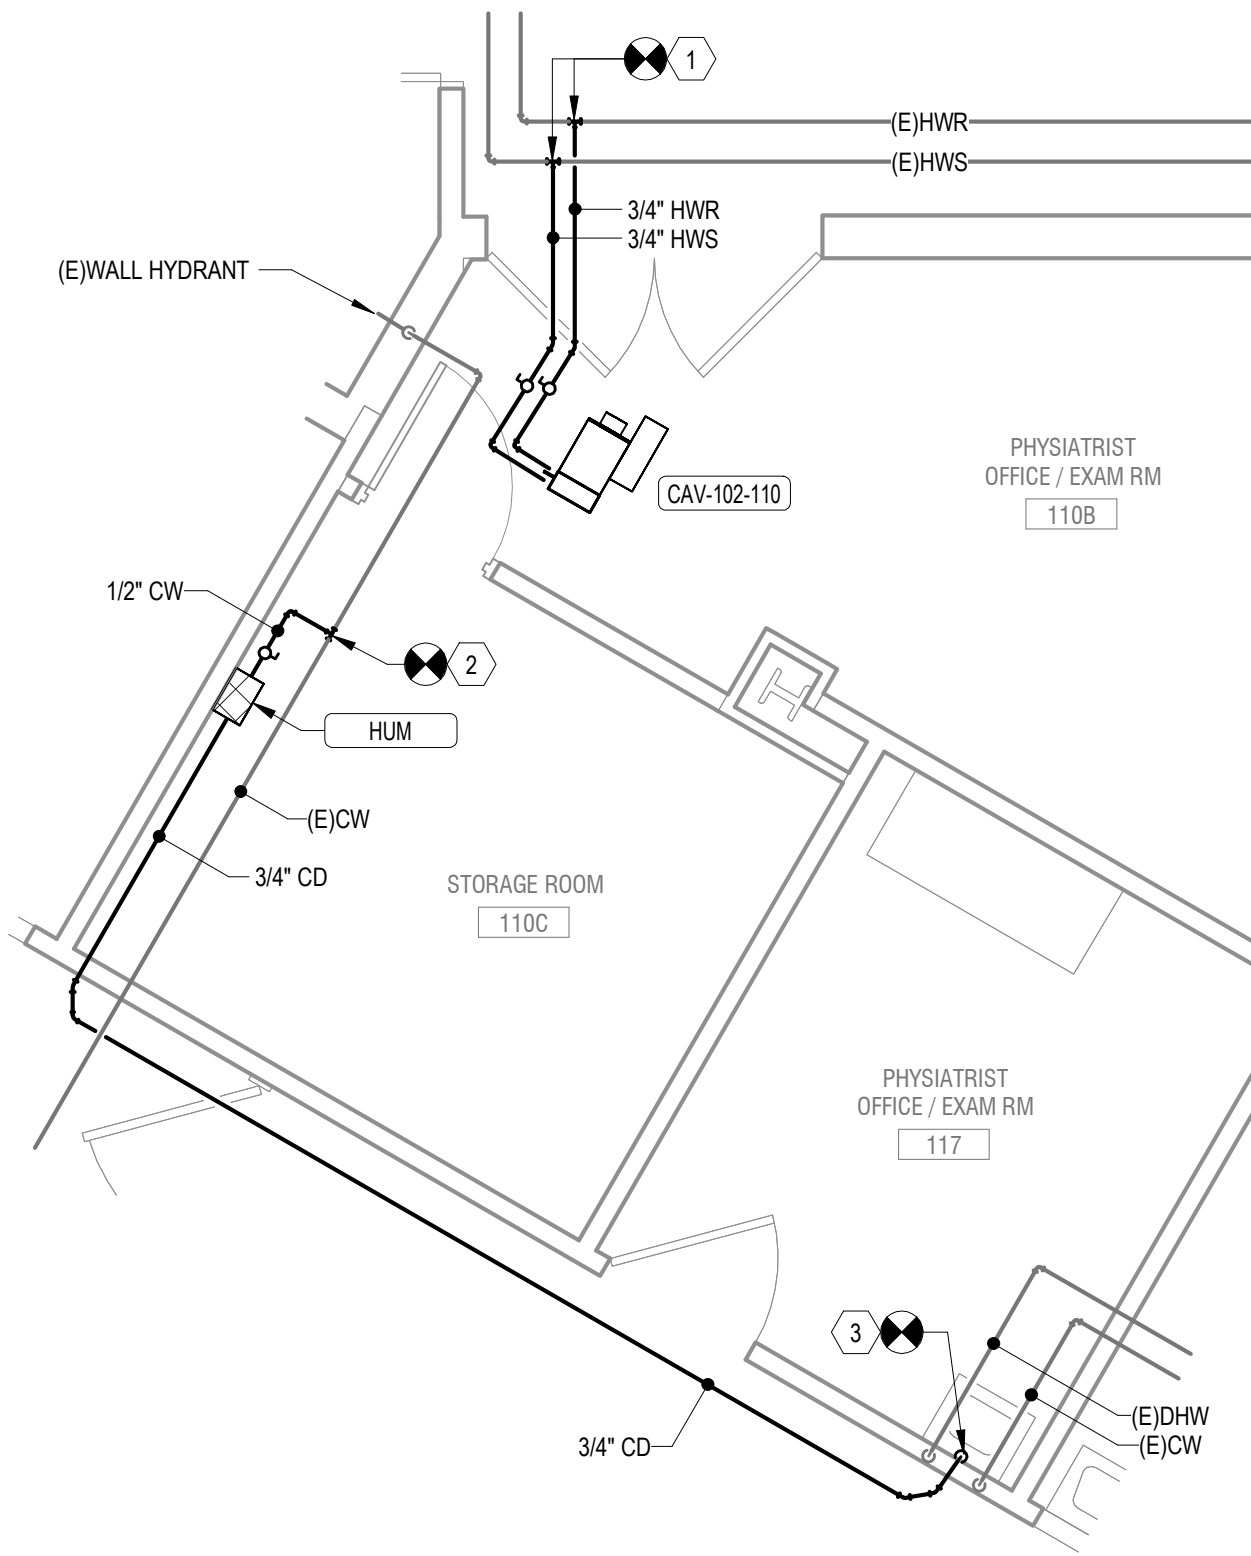

2 Bldg 102-01-FIRST FLOOR PIPING PLAN - ROOM 110
1/4" = 1'-0"

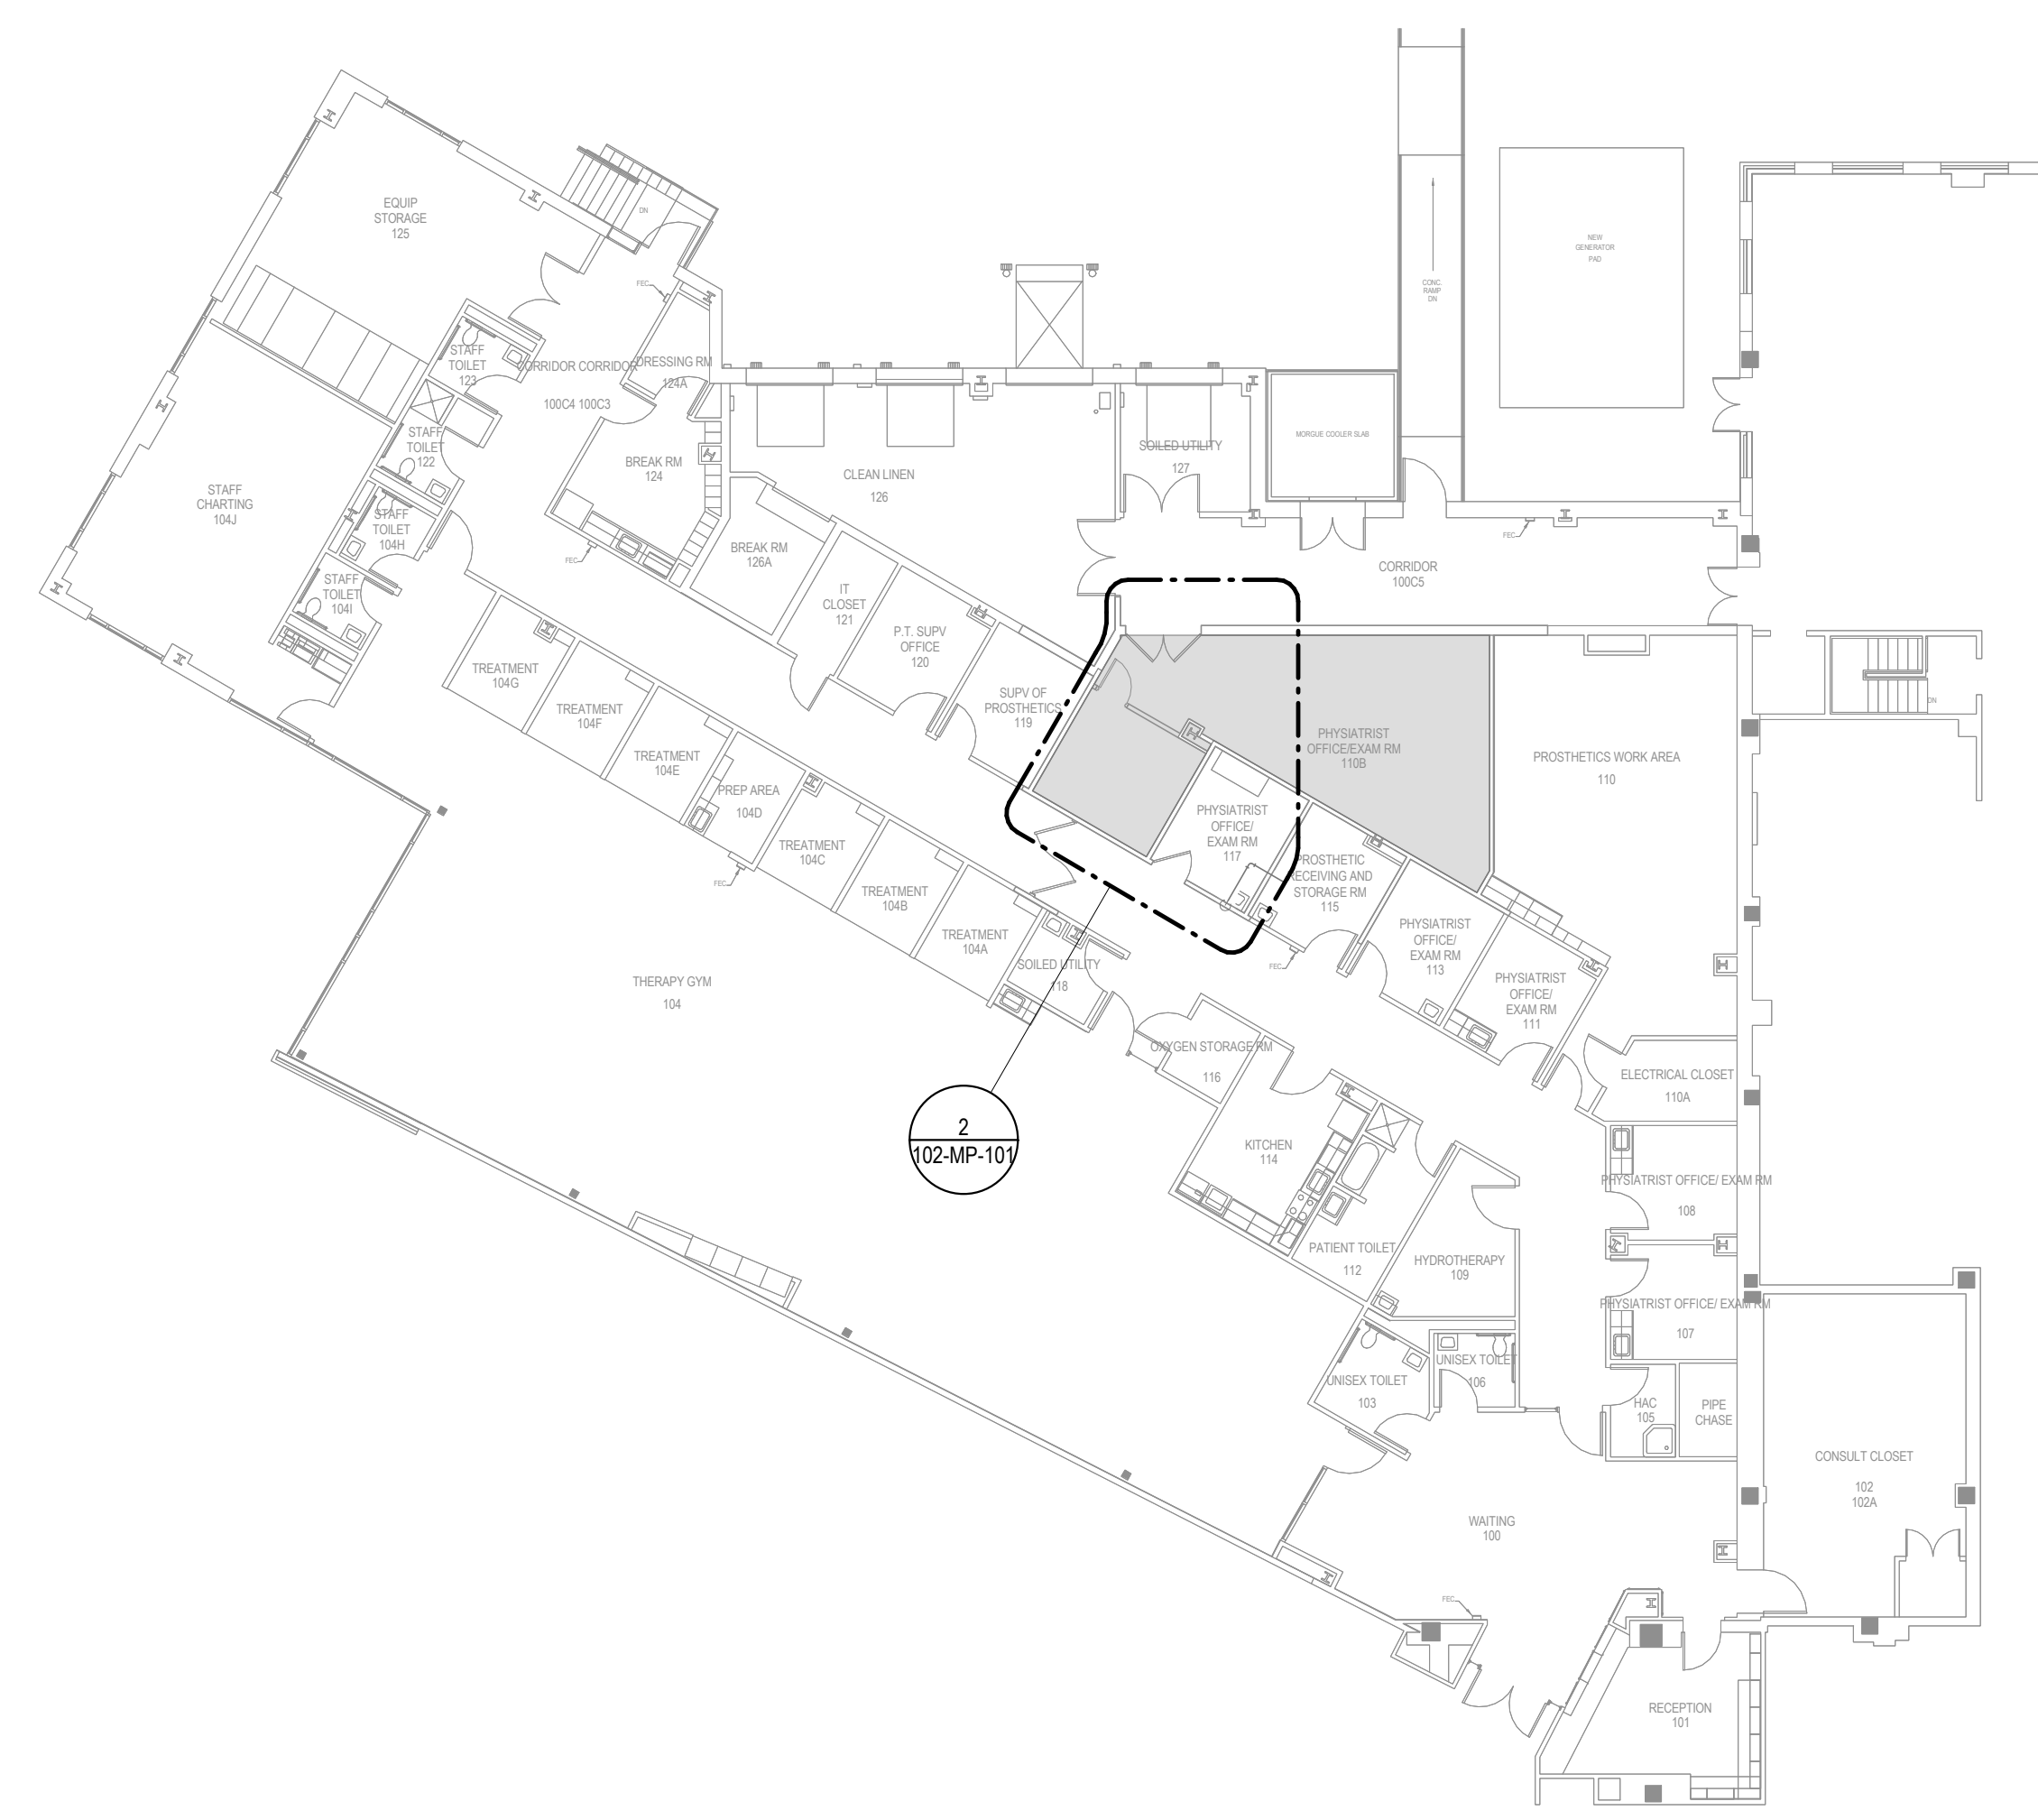

1 Bldg 102-01-FIRST FLOOR PIPING PLAN
1/16" = 1'-0"

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

A

B

C

D

E

F

2/23/2024 11:33:24 AM

Autodesk Docs\\VLEB-016 Sterile Storage Improvements\\VLEB-016-MEP_24.rvt

A

B

C

D


E

F


HYDRONIC GENERAL NOTES

- 1 REFER TO FACILITY'S INFECTION CONTROL AND RISK ASSESSMENT (ICRA) AND SPECIFICATION SECTION 01 35 26 (SAFETY REQUIREMENTS) FOR ADDITIONAL INFORMATION.
- 2 ALL WORK MUST BE SCHEDULED AND COORDINATED JOINTLY WITH THE MUST. A DETAILED JOB TIMELINE MUST BE ESTABLISHED AND SUBMITTED FOR REVIEW AND APPROVAL.
- 3 REFER TO ARCHITECTURAL FOR ADDITIONAL REQUIREMENTS.
- 4 MAINTAIN 6-IN MINIMUM CLEARANCE FROM RATED WALLS AND HVAC EQUIPMENT.
- 5 ALL BRANCH PIPING IS 3/4-IN UNLESS OTHERWISE NOTED EXCLUDING REFRIGERANT PIPING. REFRIGERANT PIPING SIZING MUST BE COMPLETED BY CONTRACTOR BASED ON MANUFACTURER'S RECOMMENDATIONS.
- 6 PROVIDE EXPANSION LOOPS, JOINTS, Z BENDS AND PIPING OFFSETS TO ACCOMMODATE THERMAL AND OTHER PIPING MOVEMENT.
- 7 CONTRACTOR RESPONSIBLE TO REMOVE EXISTING CEILING, REUSE AND REINSTALL TO GREATEST EXTENT POSSIBLE FOR LAY IN CEILINGS. GYP CEILINGS TO BE CUT AND PATCHED TO MATCH EXISTING. ALL SYSTEMS IN EXISTING CEILING TO REMAIN IN WORKING ORDER. ALL SPRINKLERS AND FIRE ALARMS IN AREA OF WORK TO REMAIN ACTIVE AT ALL TIMES.


KEYNOTES

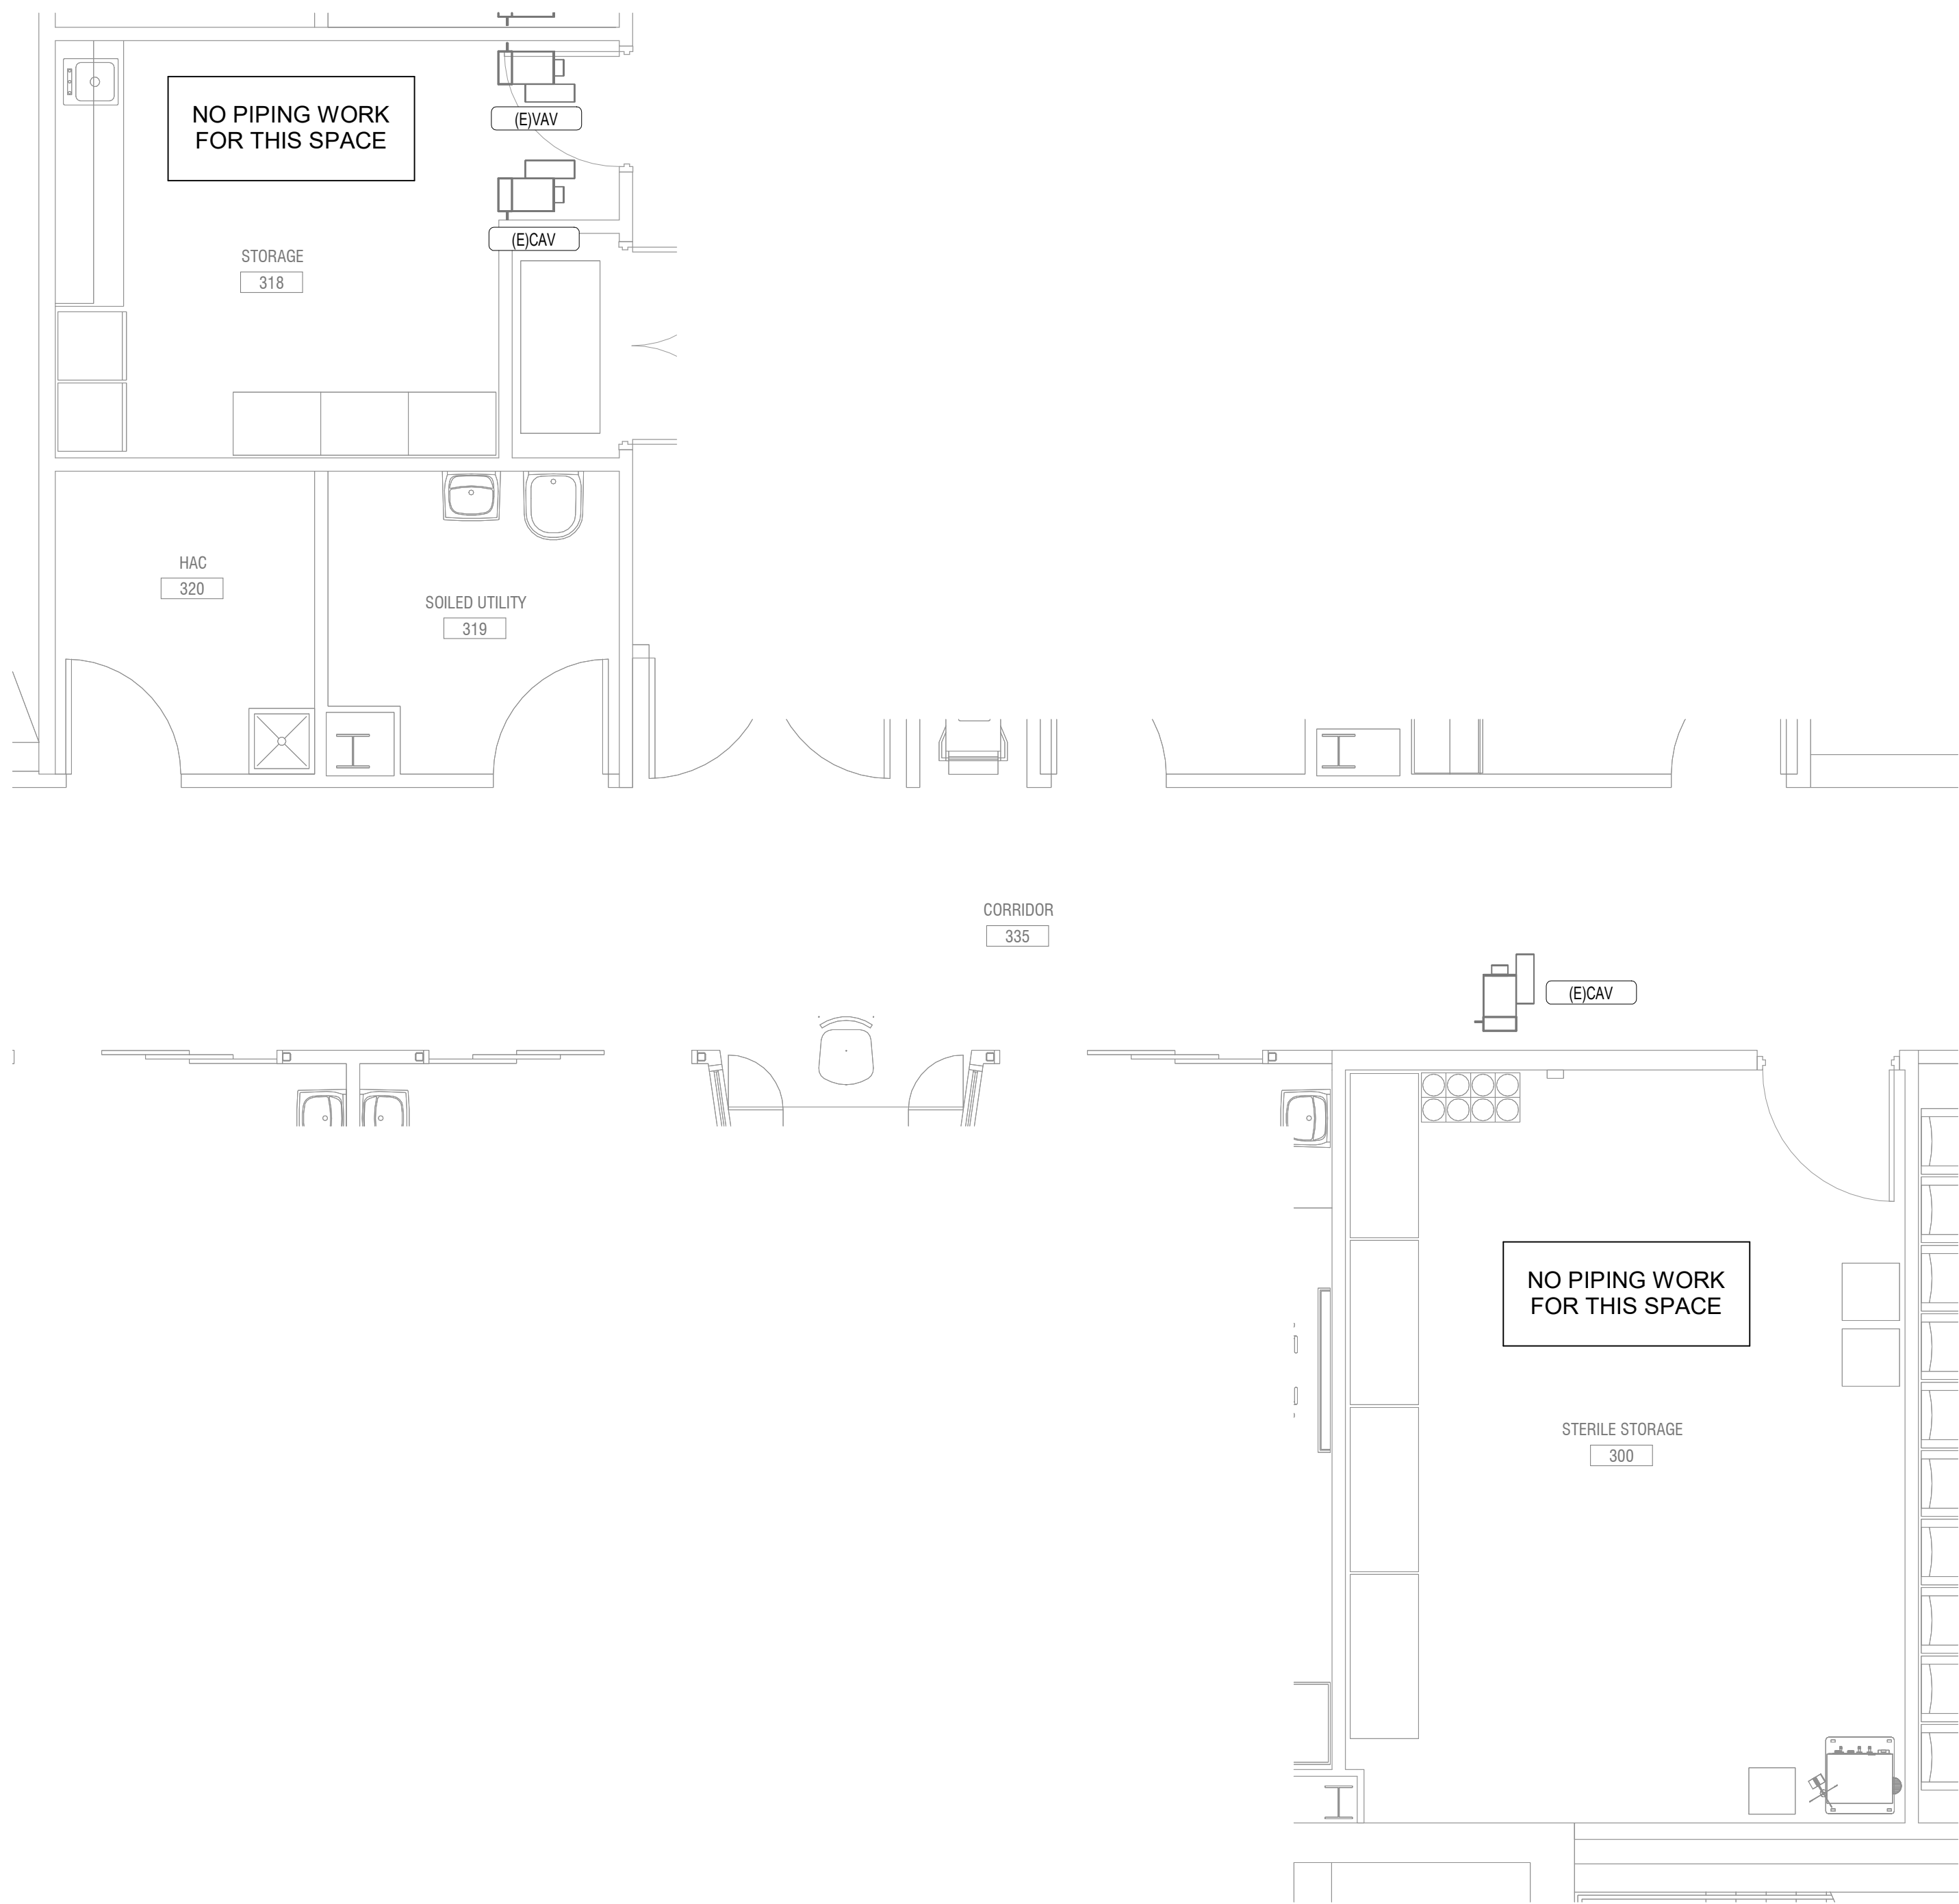

2 Bldg 104-03 THIRD FLOOR PIPING PLAN - ROOM 300 & 318
1/4" = 1'-0"


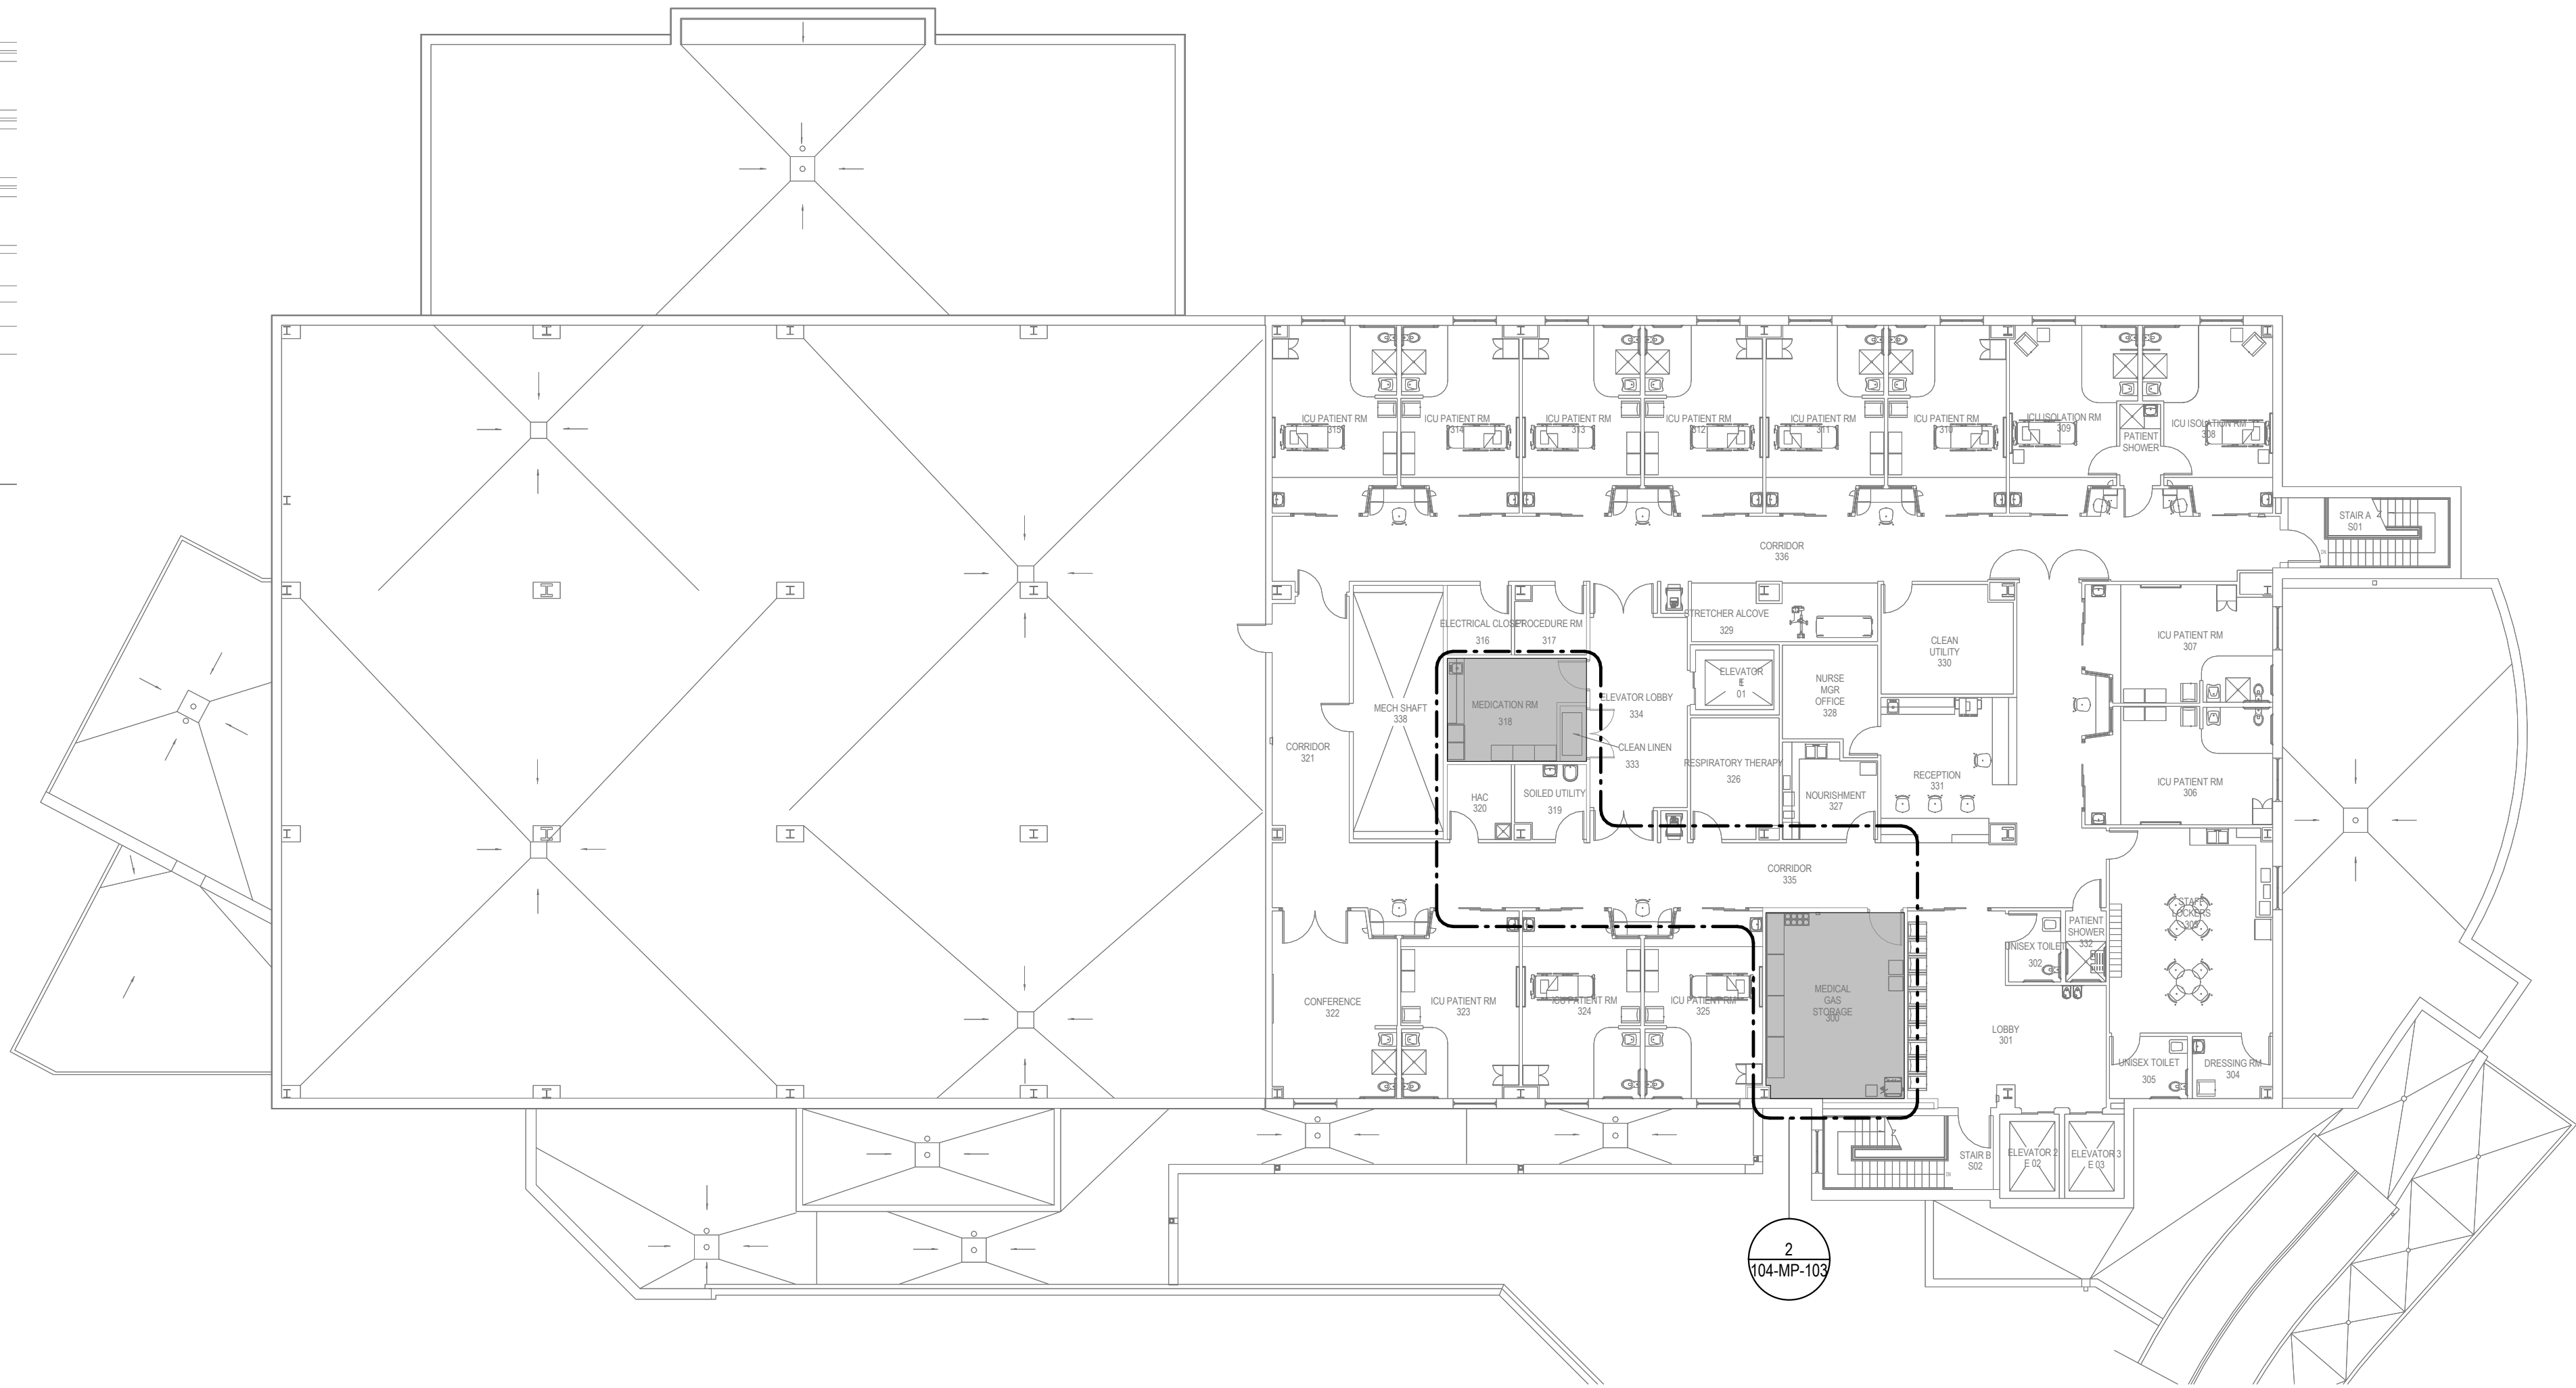


1 Bldg 104-03 THIRD FLOOR PIPING PLAN
1/16" = 1'-0"



--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

* FOR SINGLE DUCT SUPPORT, FOR "GANGED" OR STACKED DUCT SUBMIT DETAIL OF HANGER SUPPORT FOR APPROVAL. MINIMUM 1 HANGER PER 5'-0" SECTION.

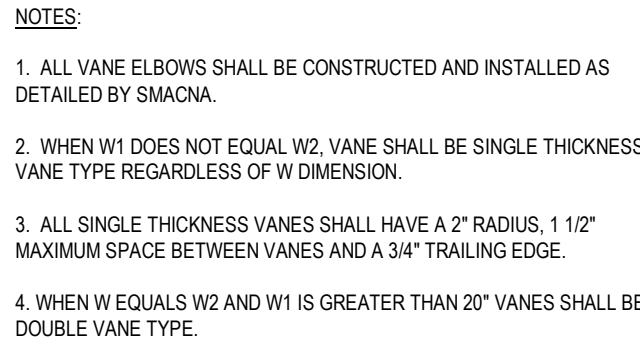
$$12^\circ = 1'-0''$$

$$12^\circ = 1'-0''$$
$$12'' = 1'-0''$$

$$12^\circ = 1'-0''$$
$$12'' = 1'-0''$$

$$12^\circ = 1'-0$$


2. ALL STANDARD RADIUS ELBOWS CAN BE SUBSTITUTED WITH SHORT RADIUS ELBOWS. ALL SHORT RADIUS ELBOWS SHALL HAVE VANES. VANES SHALL BE CONSTRUCTED, SUPPORTED AND FASTENED AS RECOMMENDED BY SMACNA.
3. FOR $R < 1-1/2 W$, VANES SHALL BE USED.

$$12^\circ = 1'-0''$$


12" = 1'-0"

$$12^\circ = 1'-0''$$
 $12^\circ = 1'-0"$ $12^{\circ} = 1'-0''$ 

NOT TO SCALE



1. DELETE INSULATION STAND-OFF ON DUCTWORK WITHOUT EXTERIOR INSULATION.
2. DETAIL SHOWS SINGLE BLADE DAMPER. DAMPER INSTALLATION SHALL BE SIMILAR FOR MULTI-BLADE DAMPERS & ROUND DAMPERS.
3. PROVIDE REMOTE OPERATORS FOR ALL MANUAL DAMPERS LOCATED ABOVE GYPSUM BOARD CEILINGS.

 $12^{\circ} = 1'-0''$

A

B

C


D

E


F

2/23/2024 11:33:26 AM


Autosave Docs\\VLEB-016 Sterile Storage Improvements\\VLEB-016-MEP_24.rvt

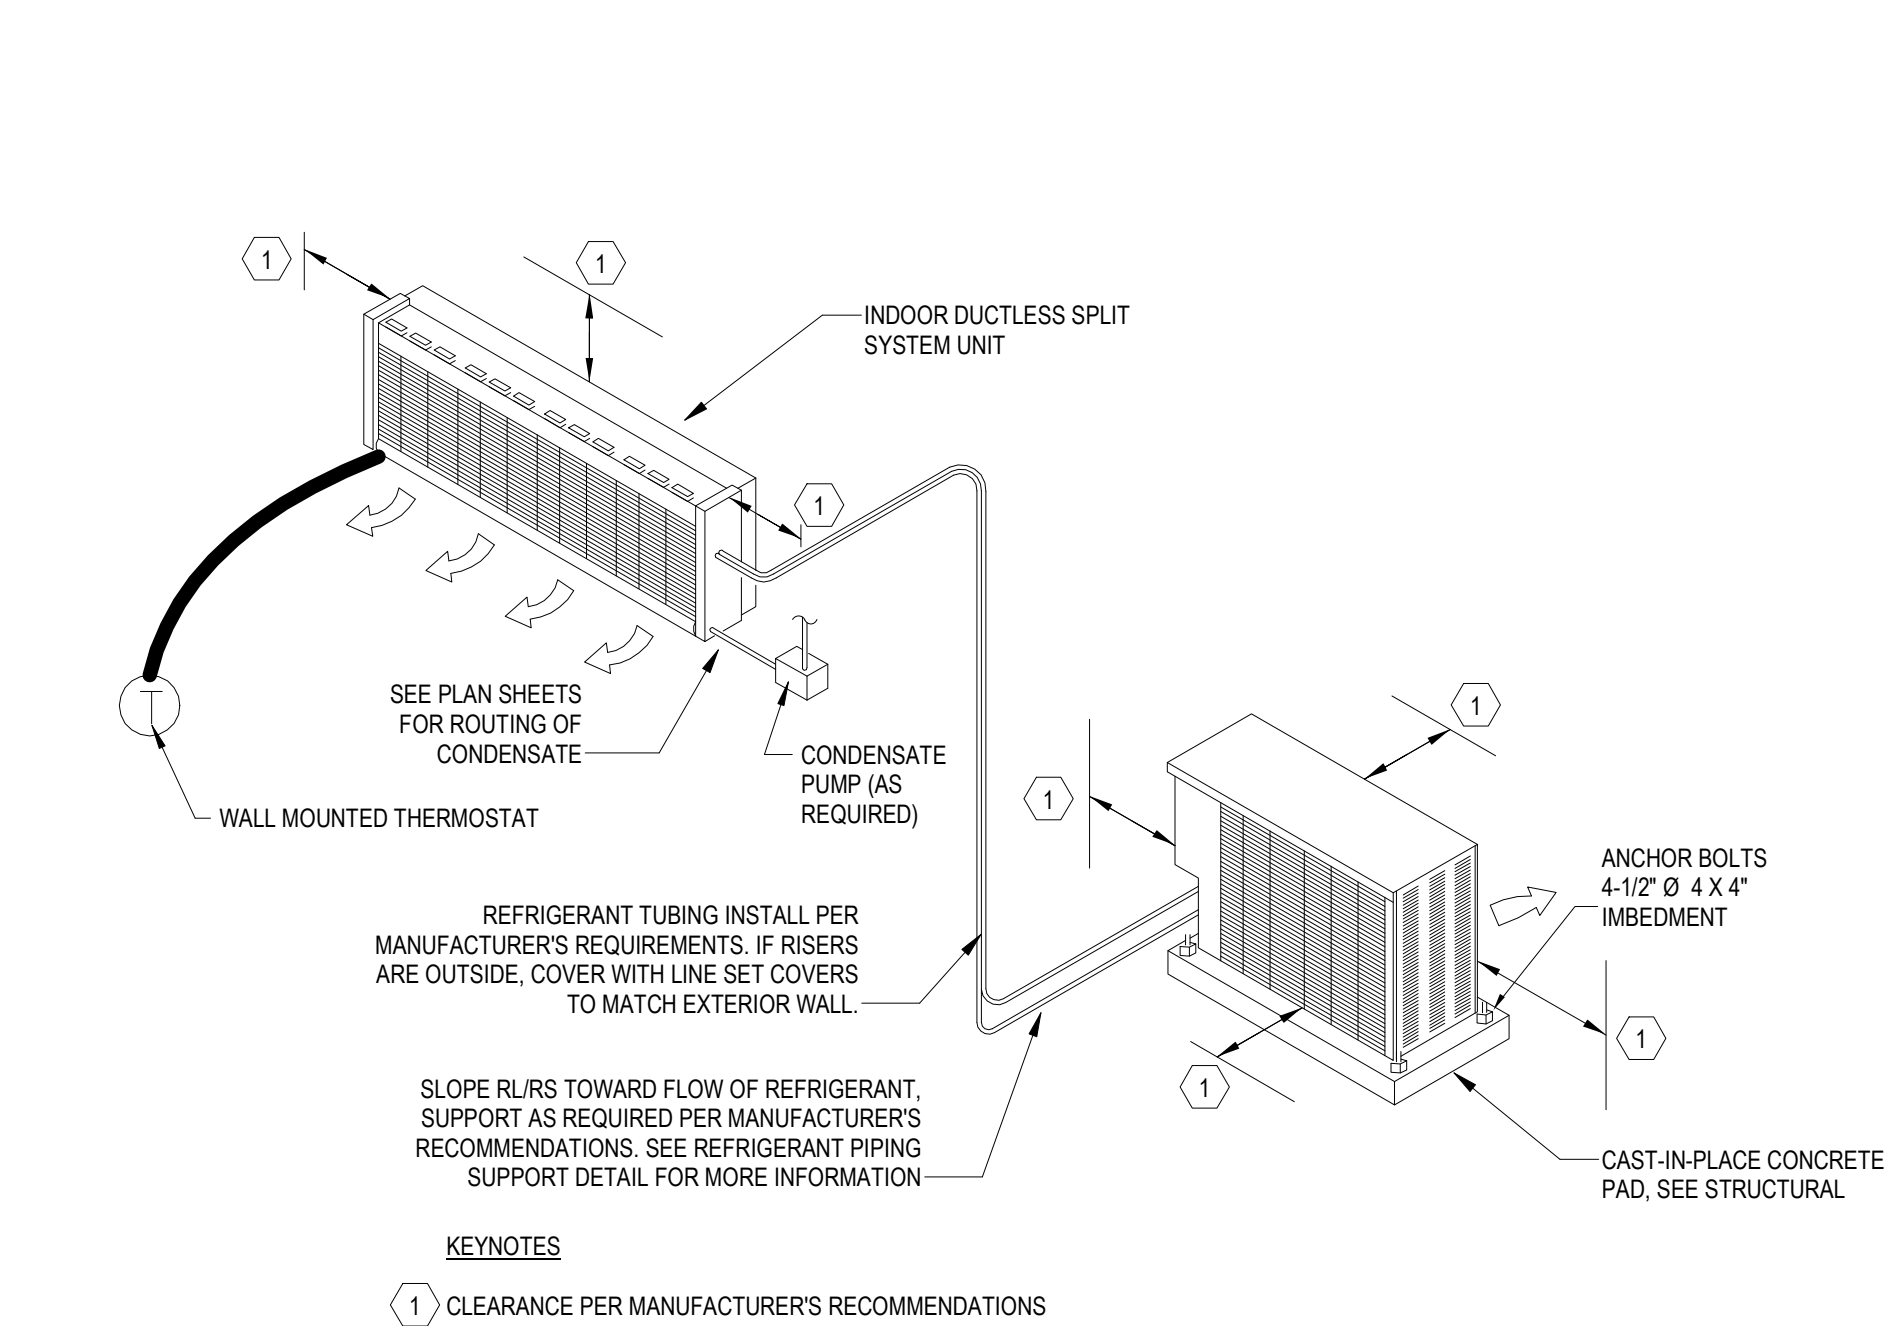


1 GROUND MOUNTED DUCTLESS SPLIT SYSTEM

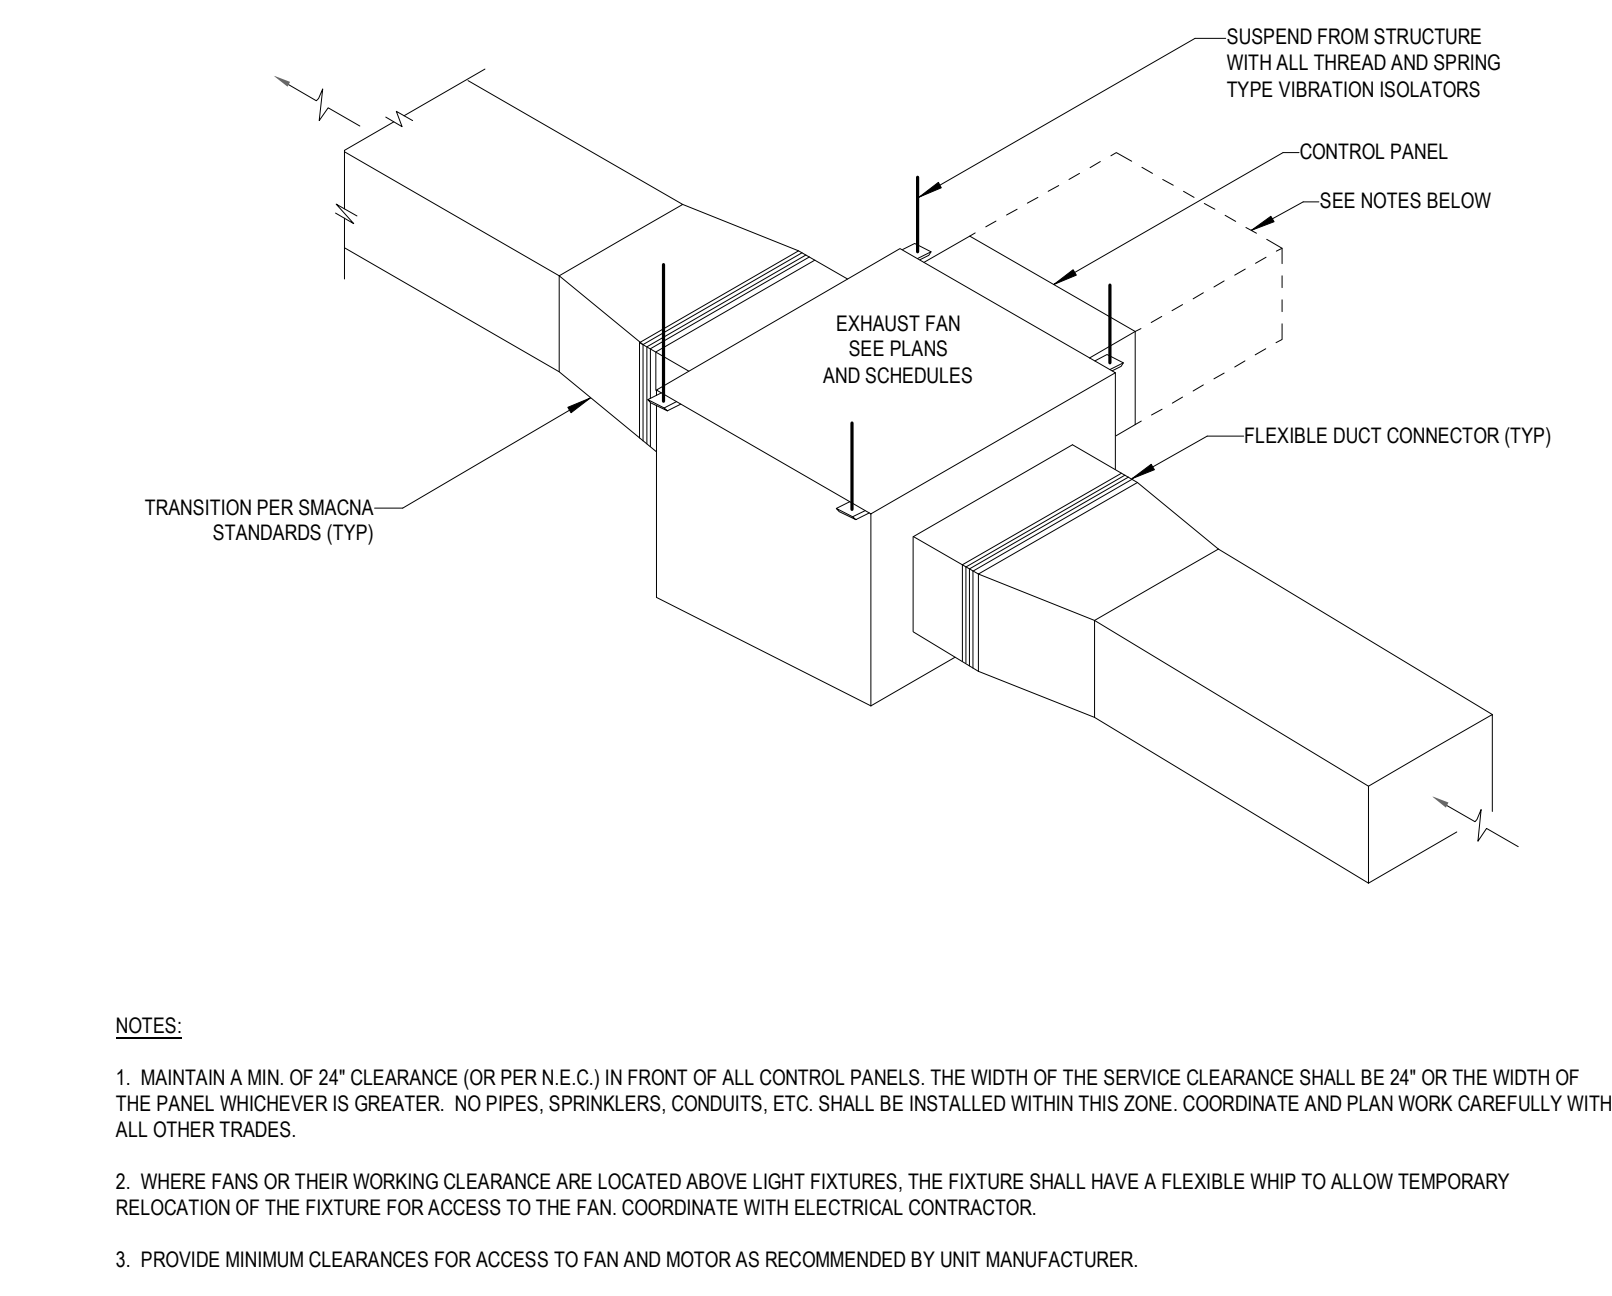


2 IN-LINE FAN HANGING DETAIL

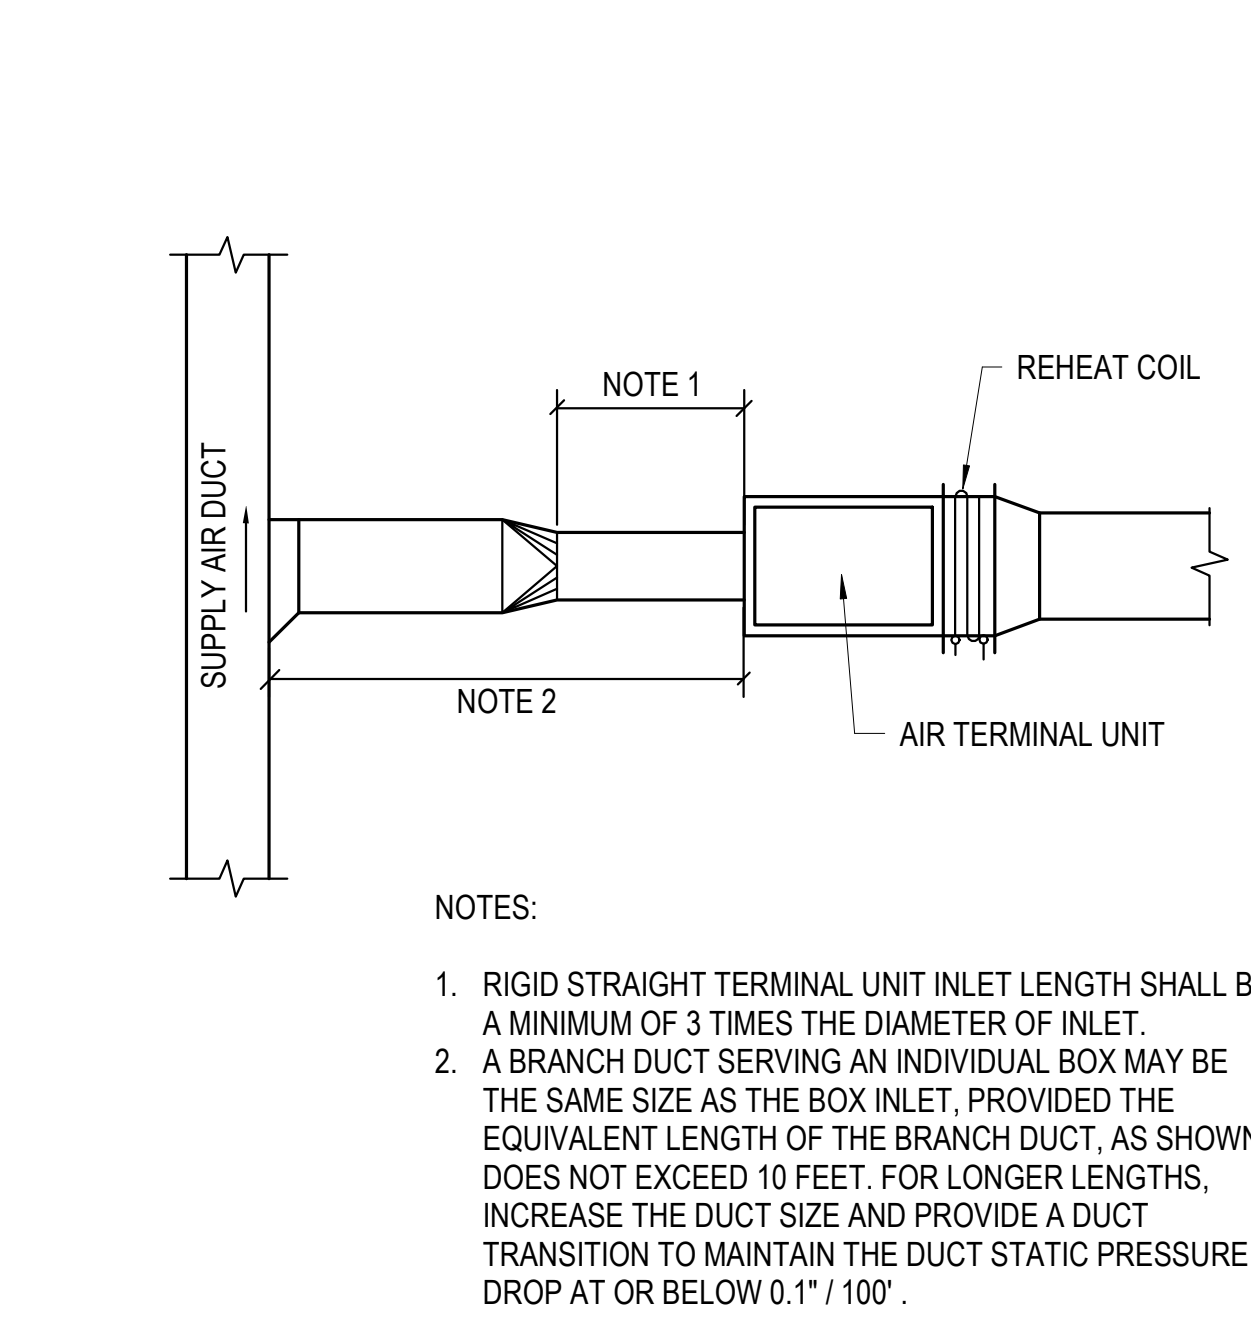


3 VAV/CAV AIR TERMINAL UNITS

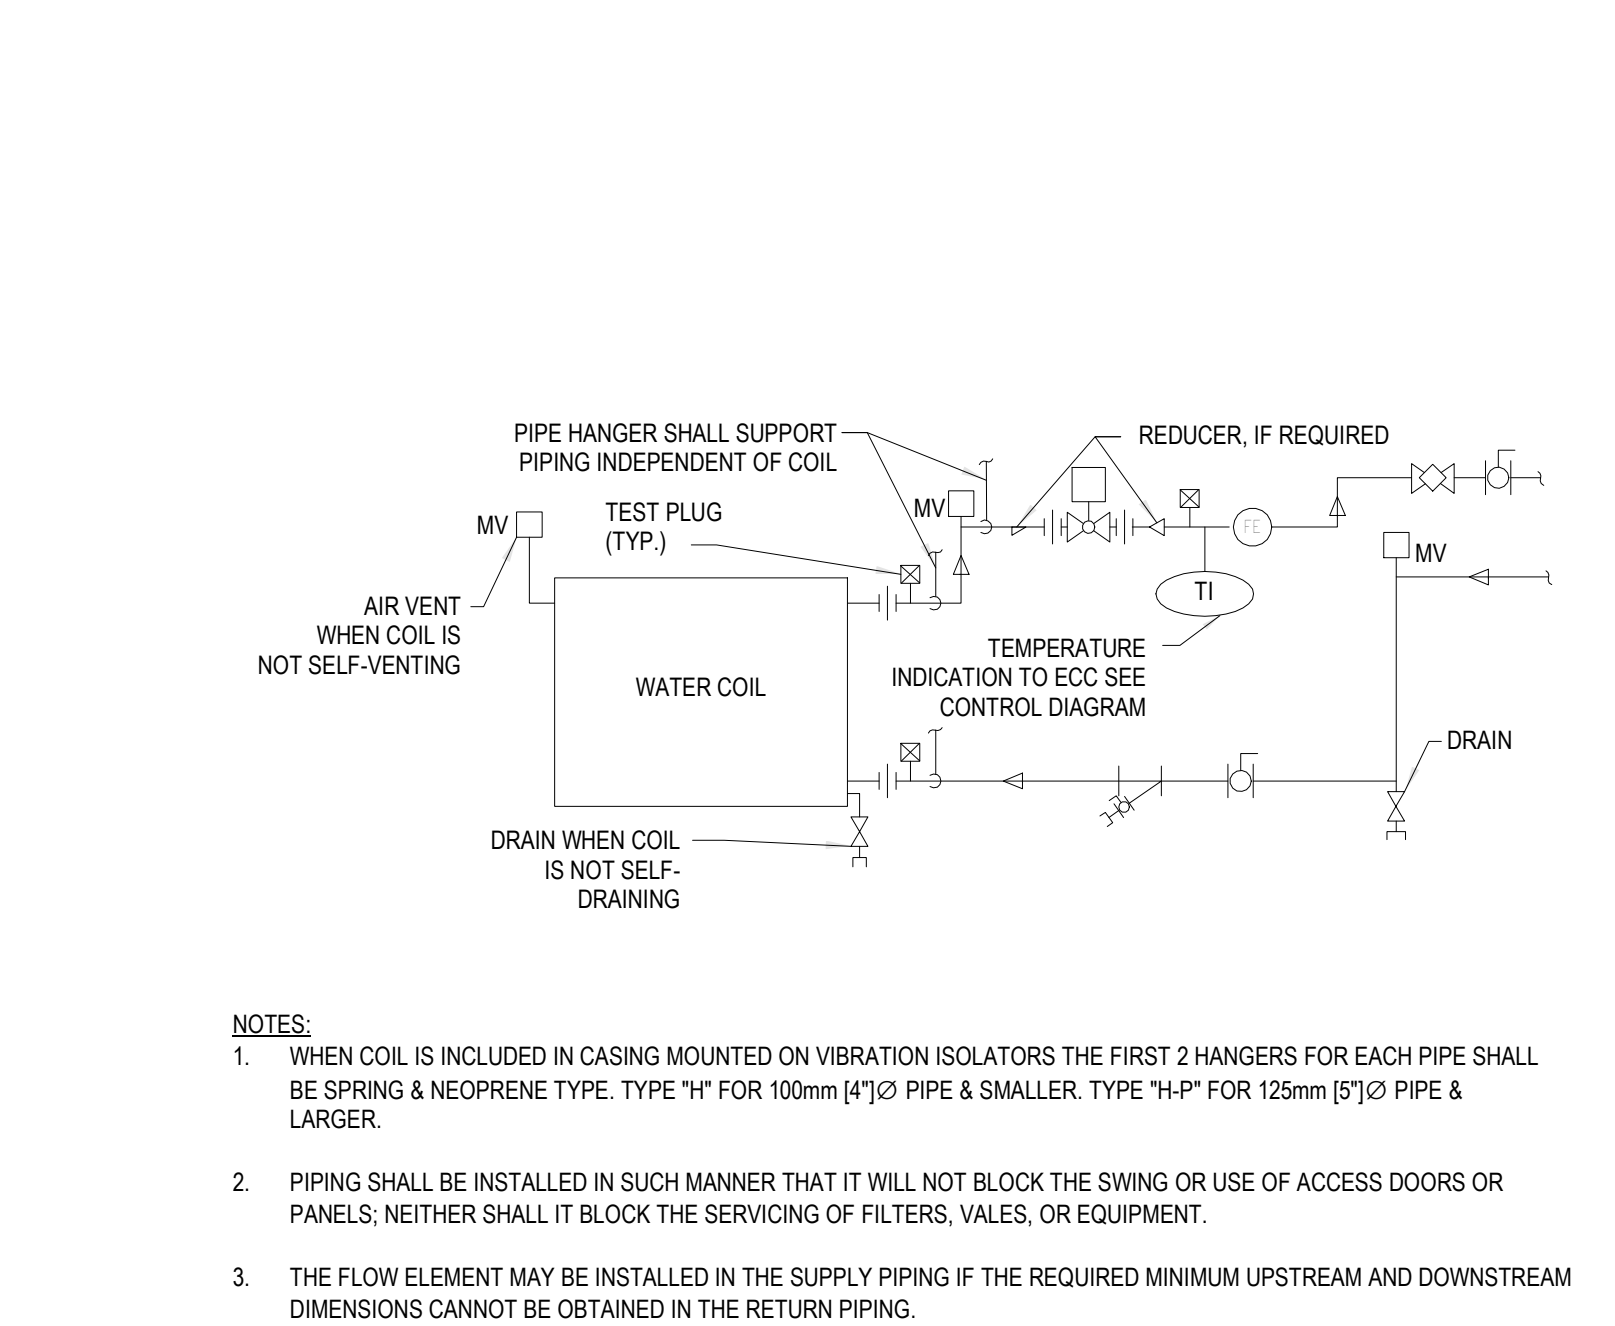


4 CHILLED WATER COIL - PIPING CONNECTIONS

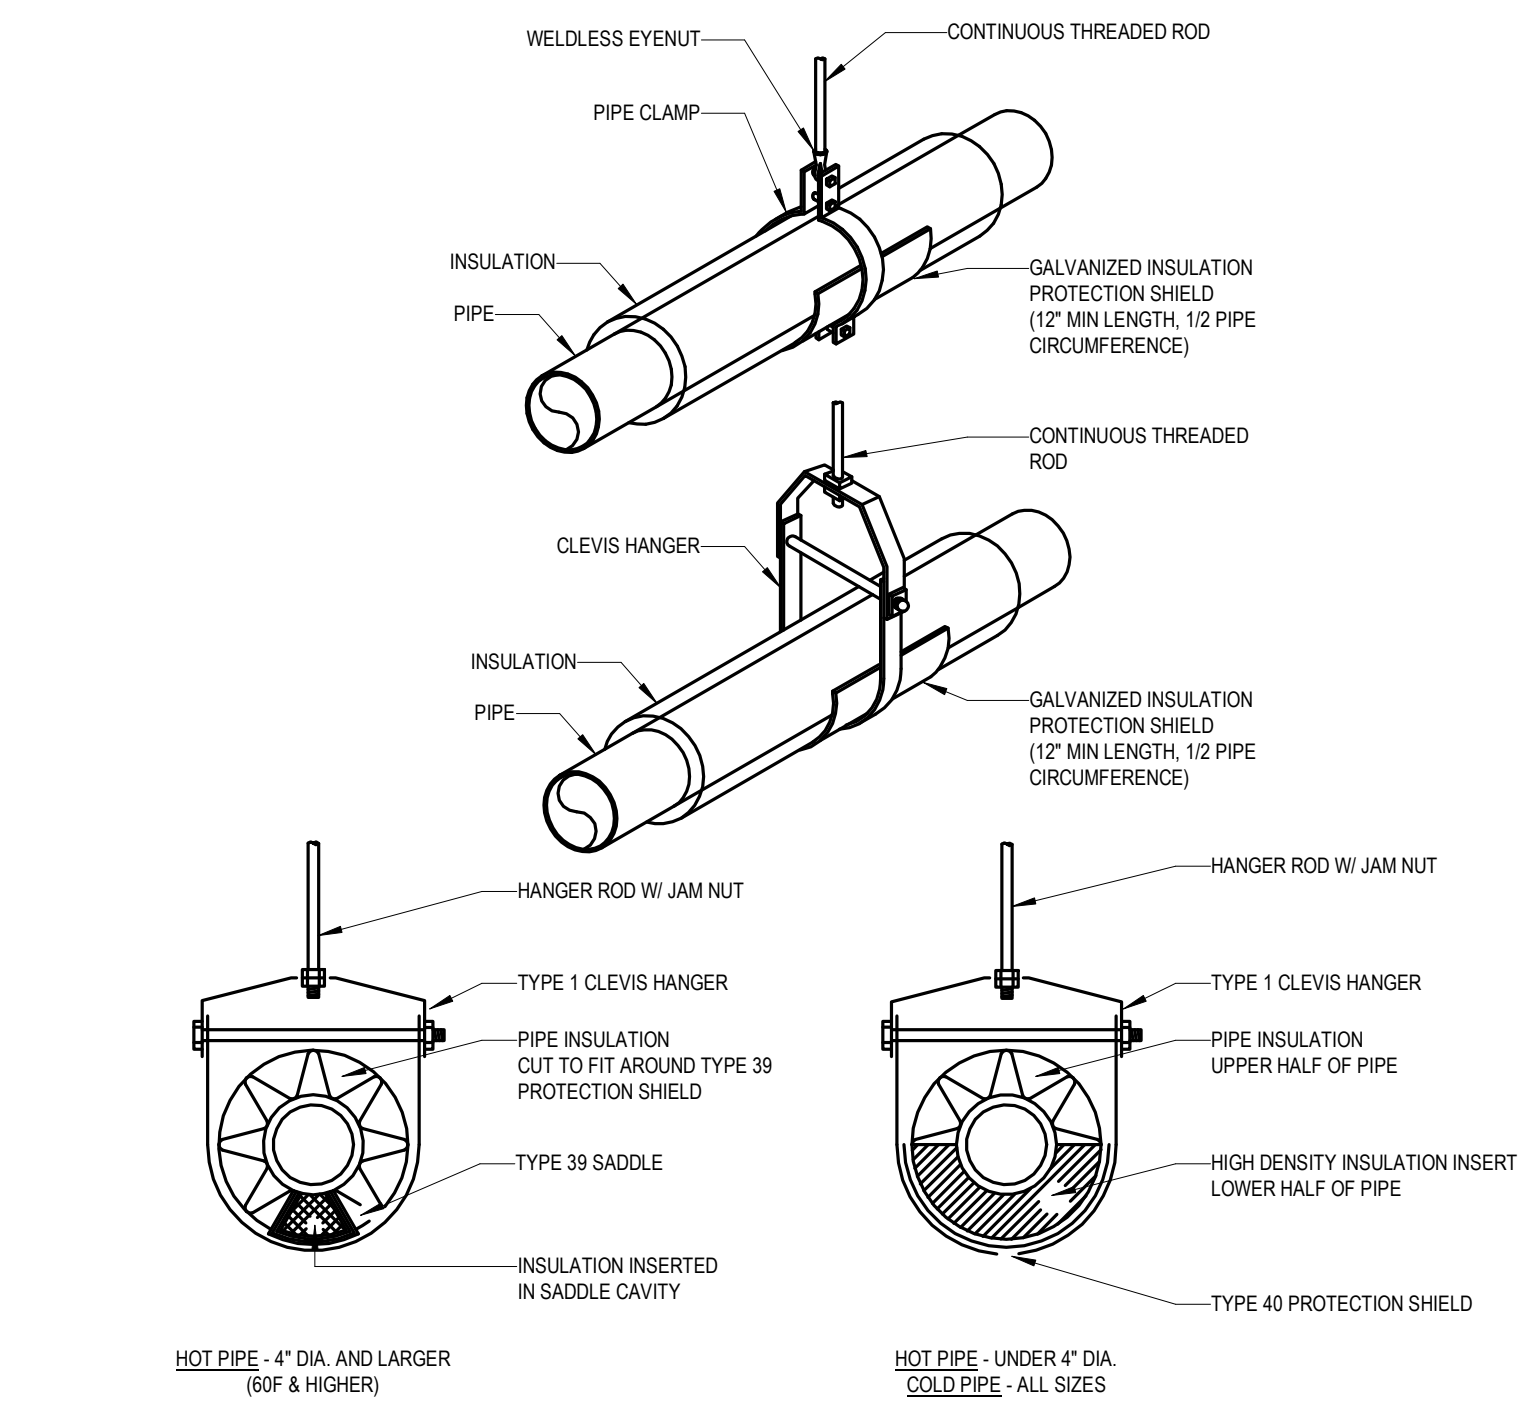


5 PIPE CLEVIS HANGER

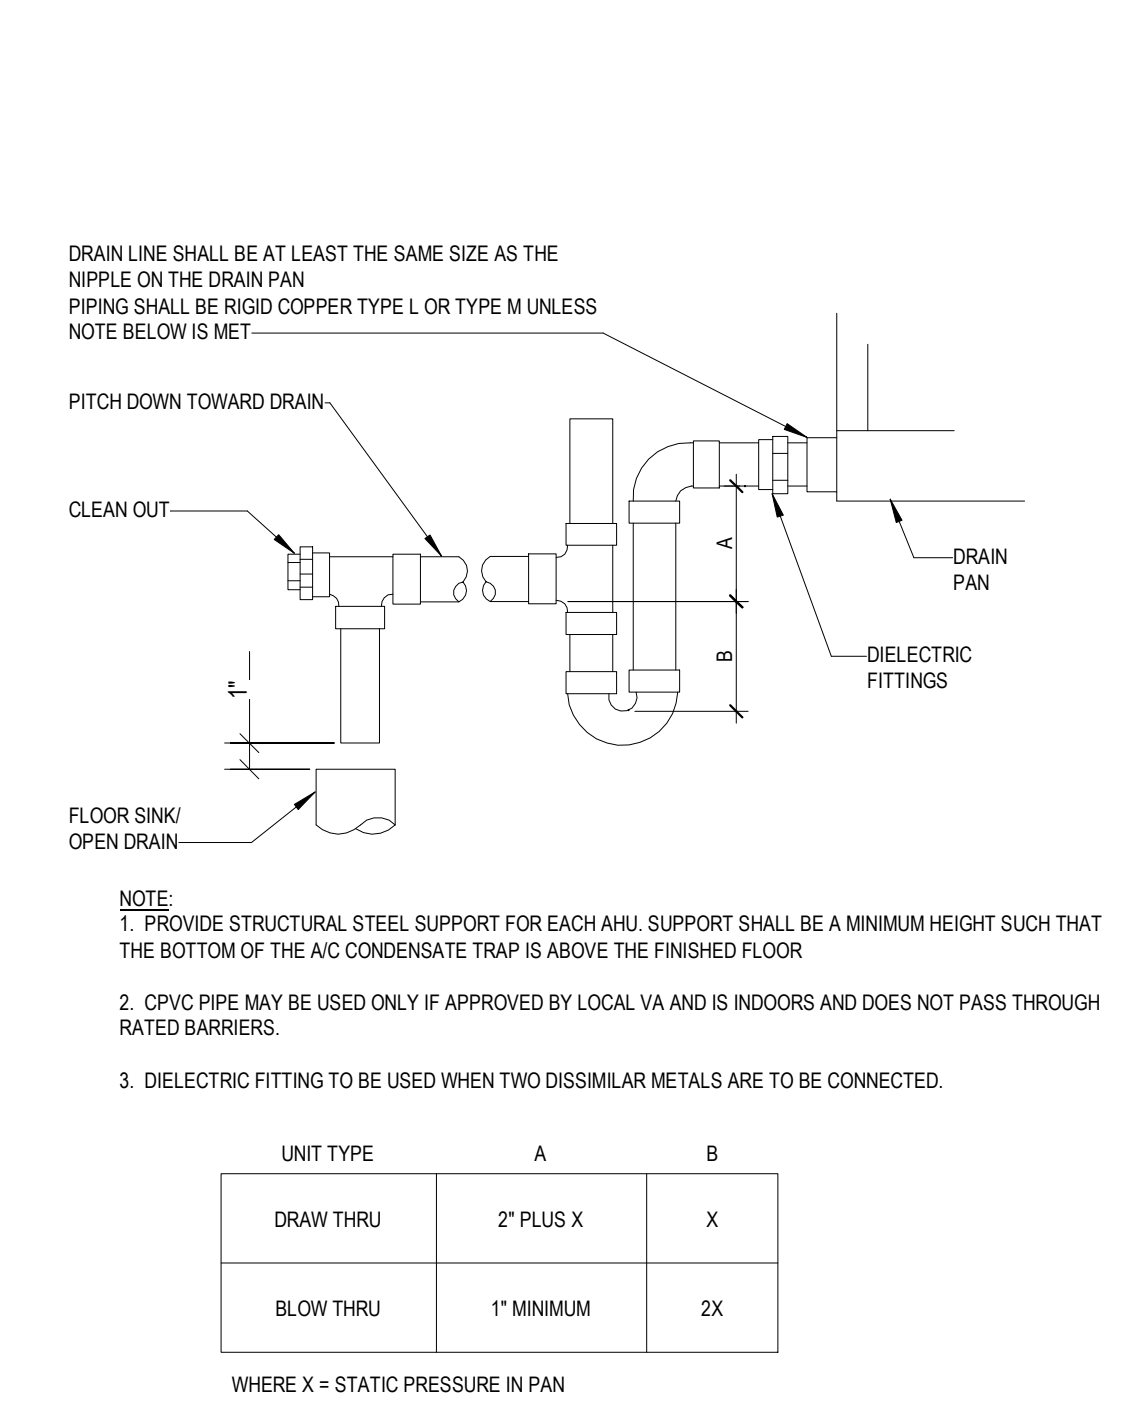


6 CONDENSATE DRAIN TRAP DETAIL

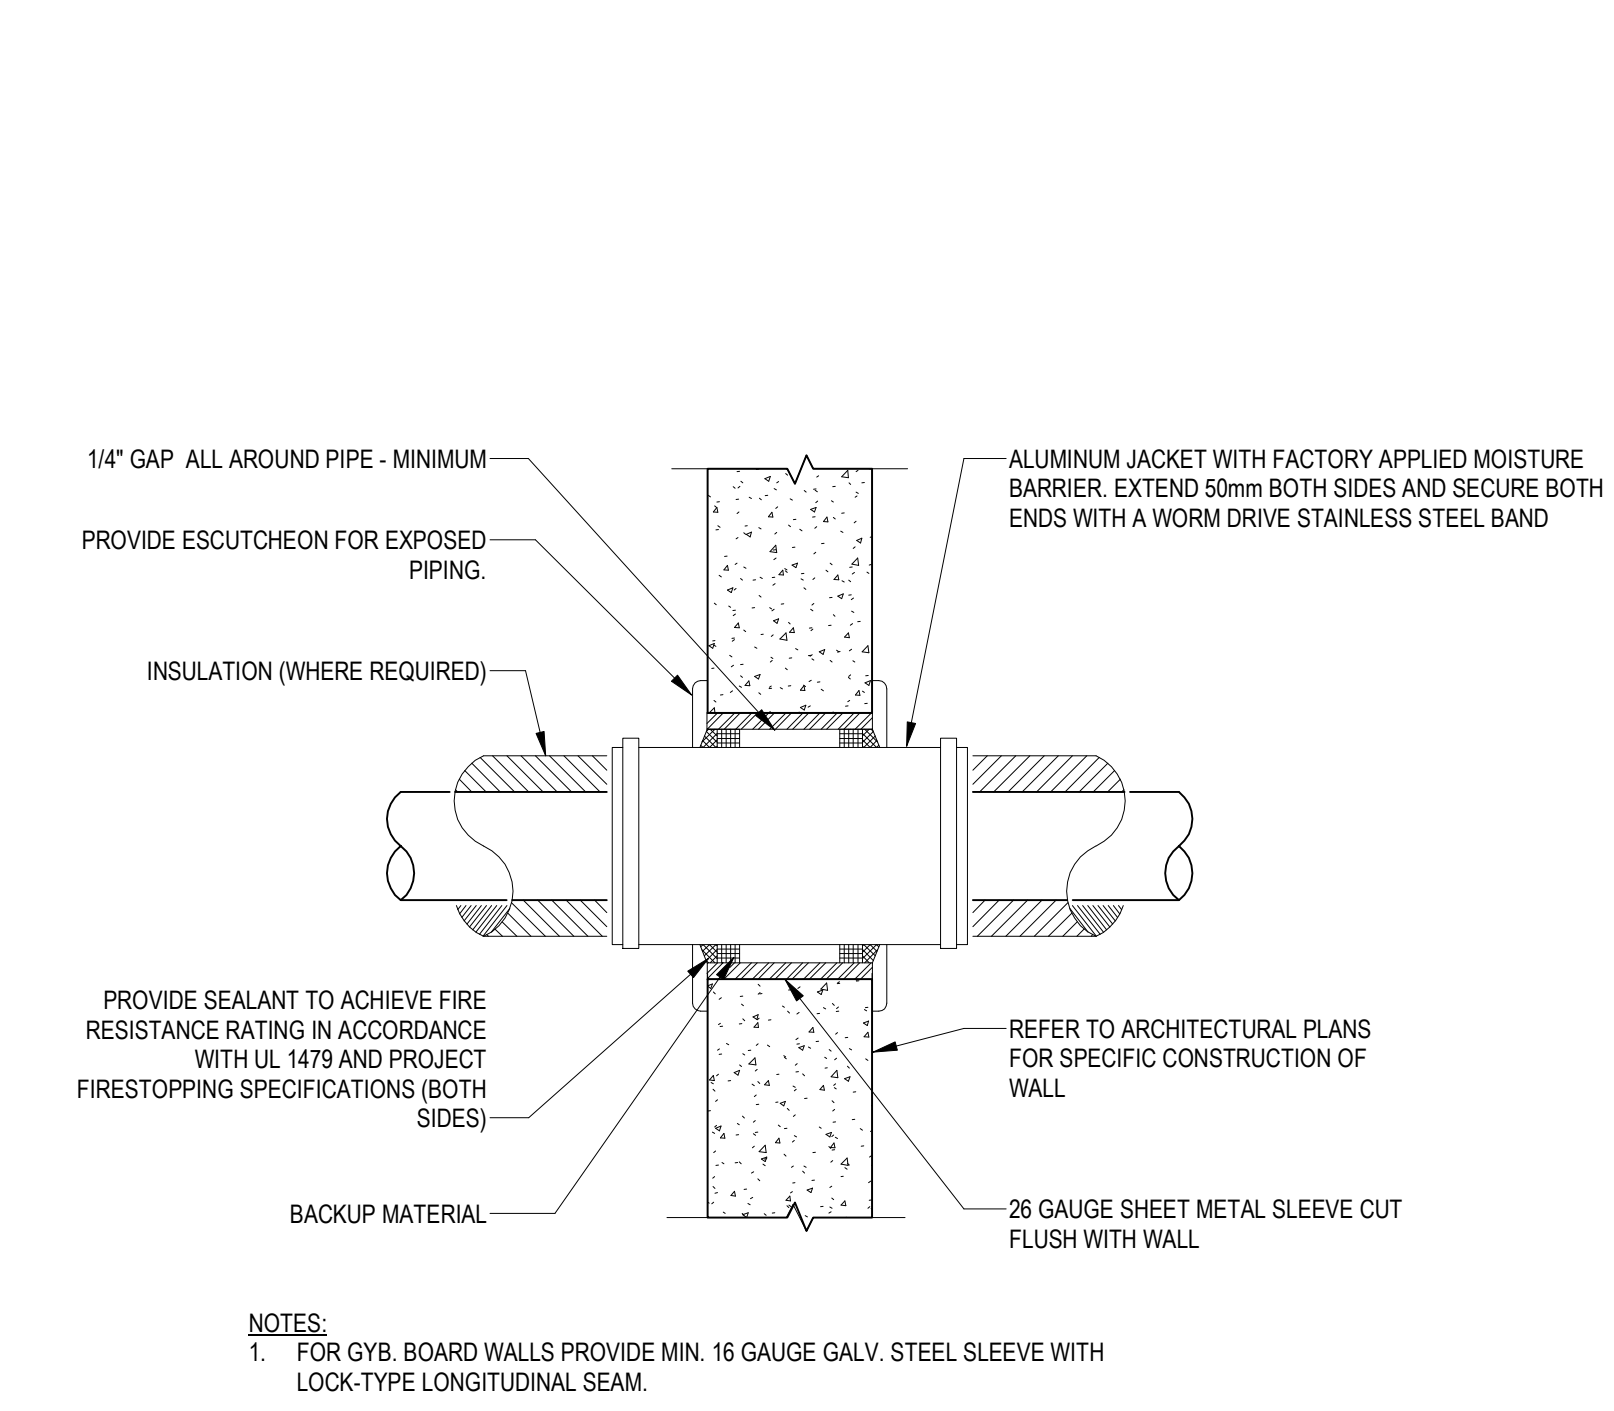


7 EXTERIOR PIPE WALL PENETRATION DETAIL

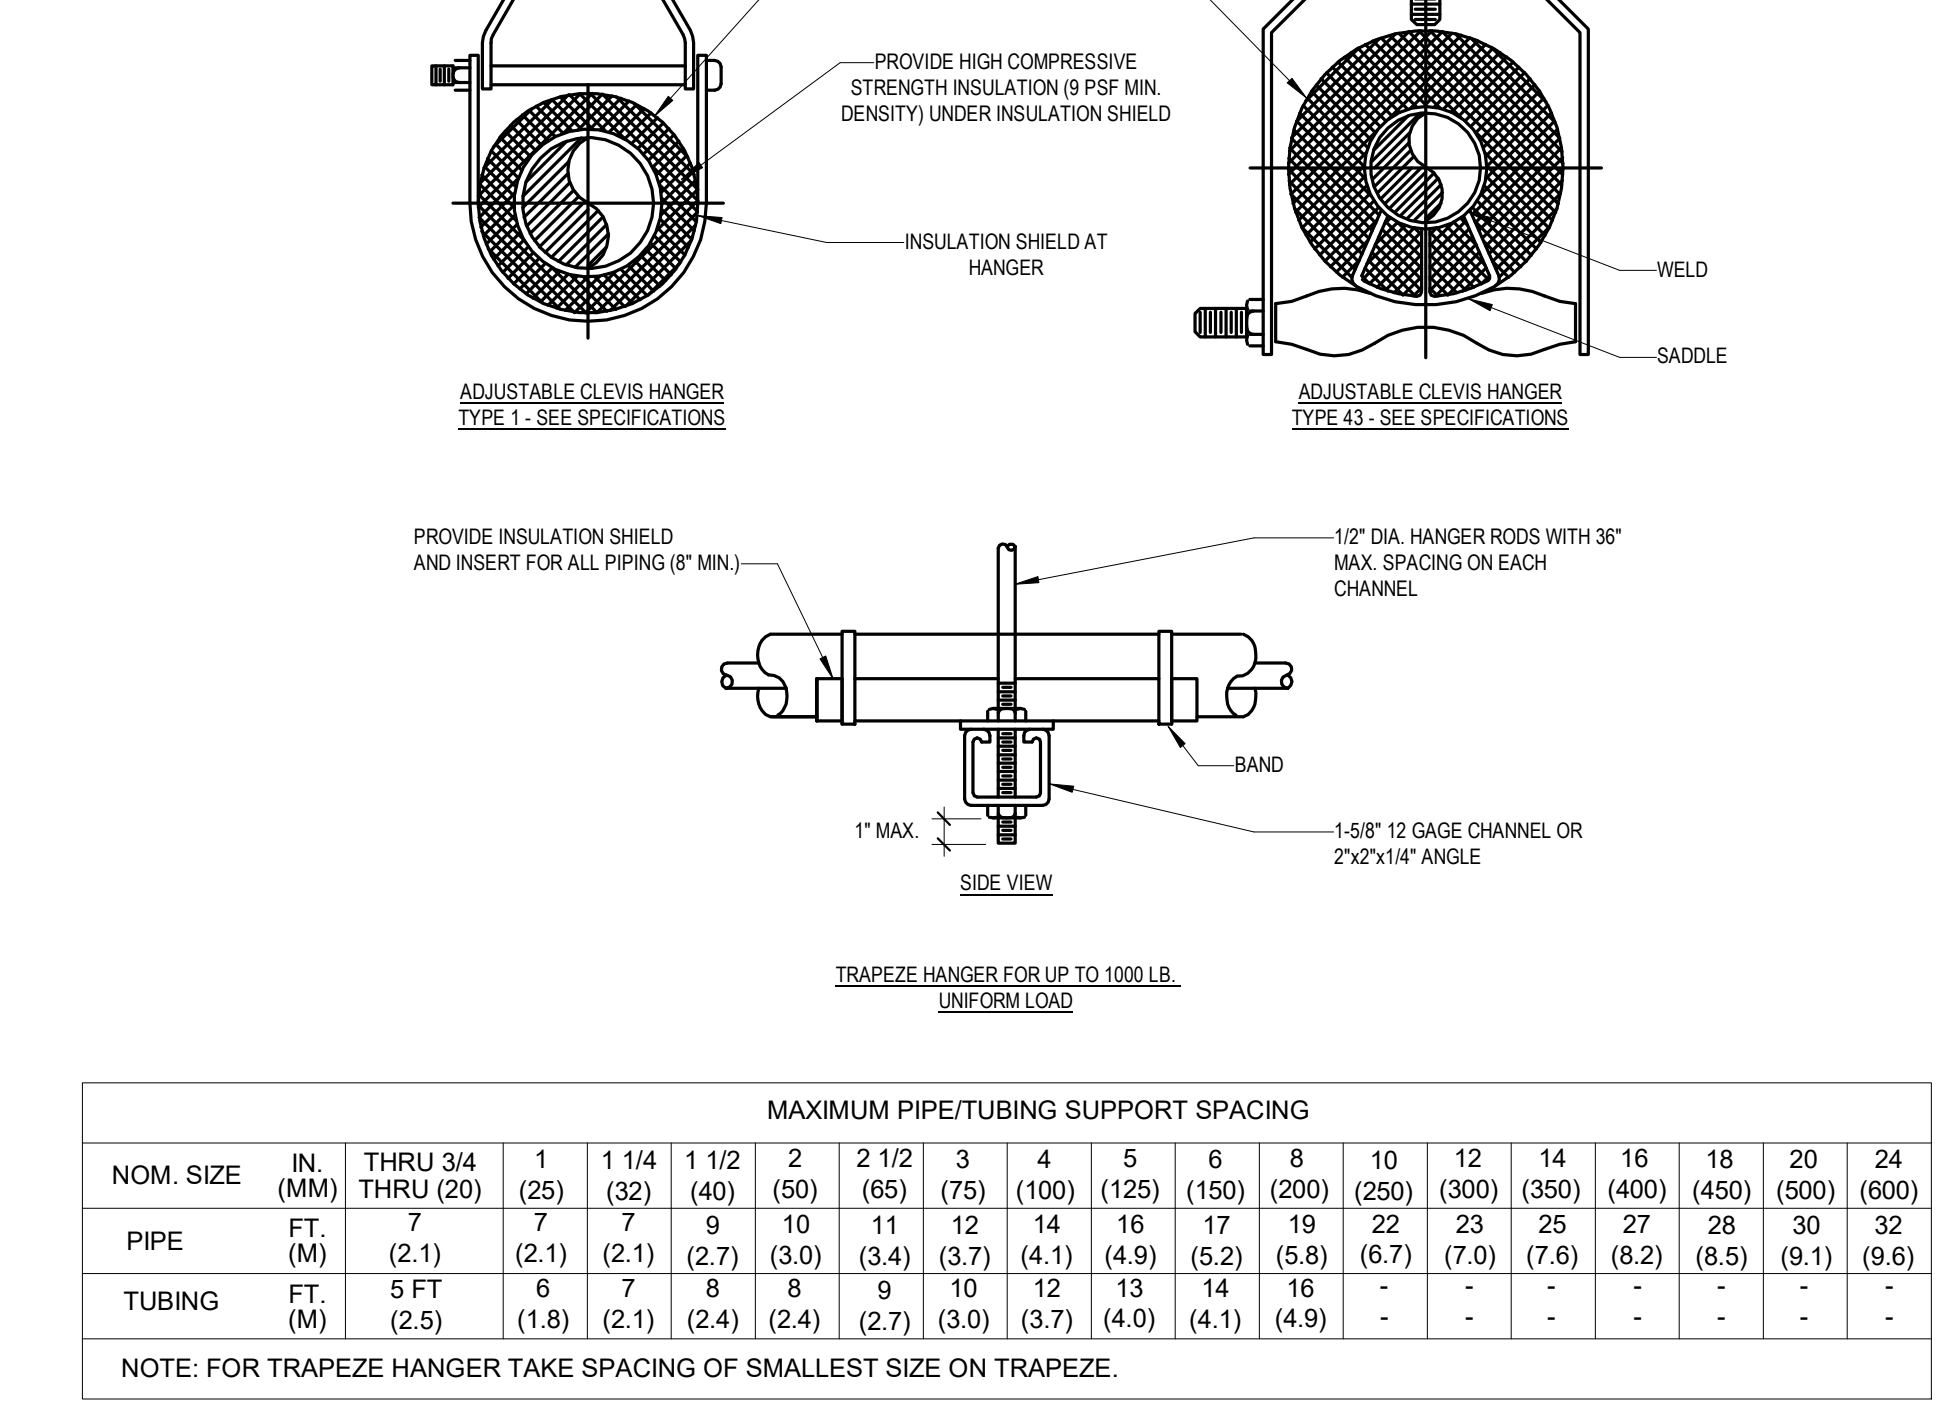


8 PIPE HANGERS

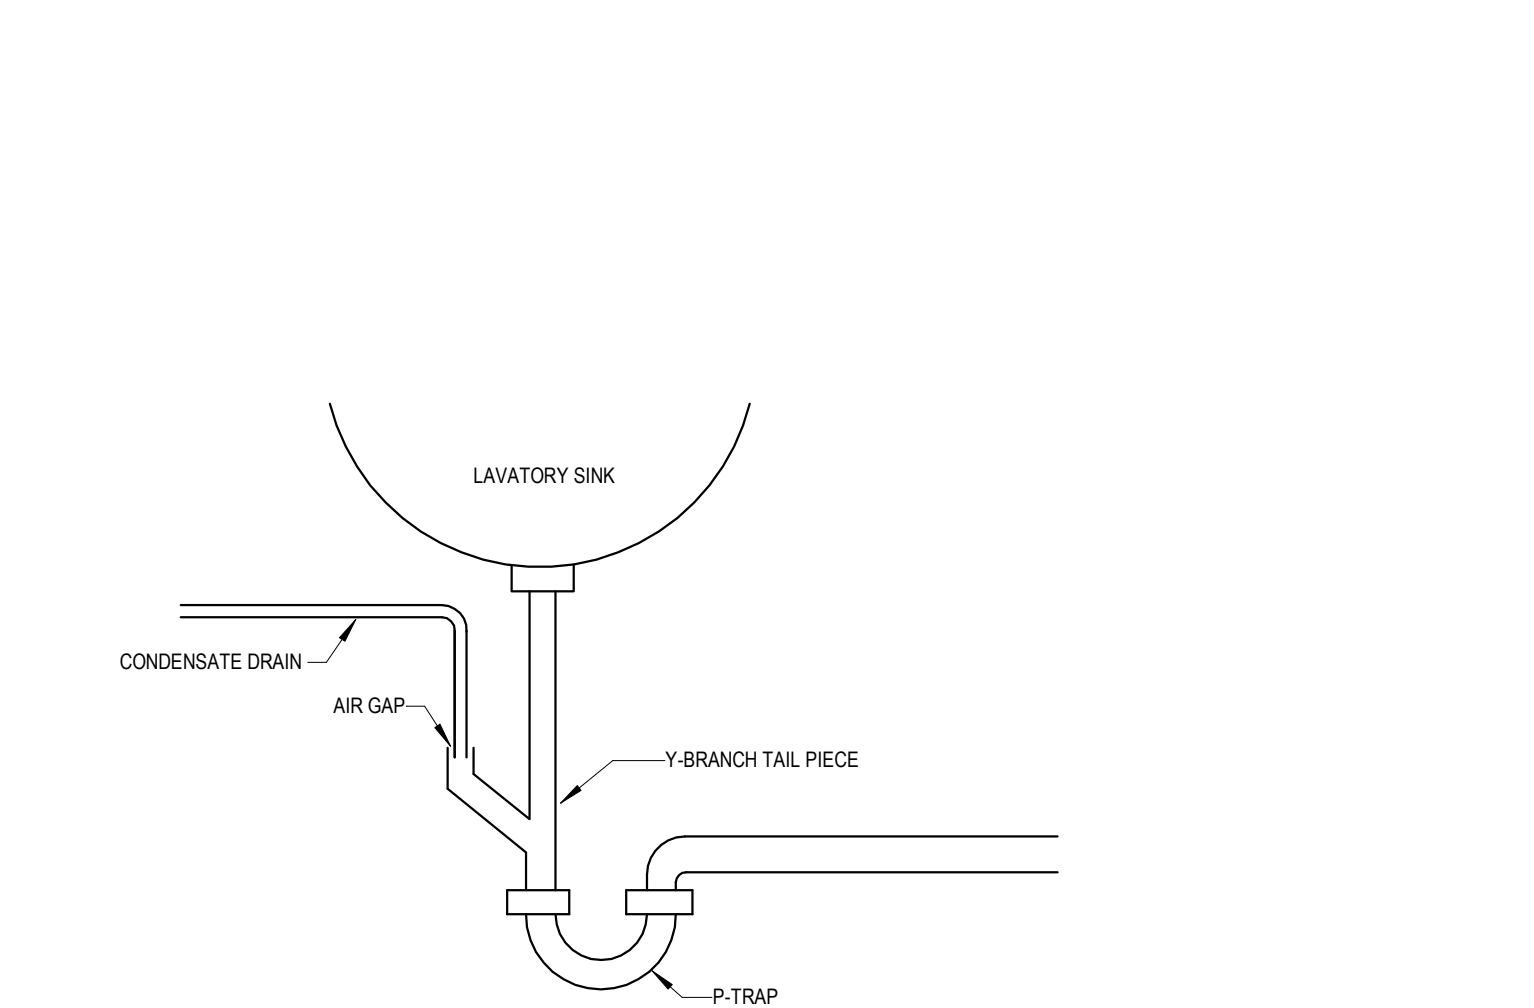


9 CONDENSATE DRAIN TO LAVATORY SINK

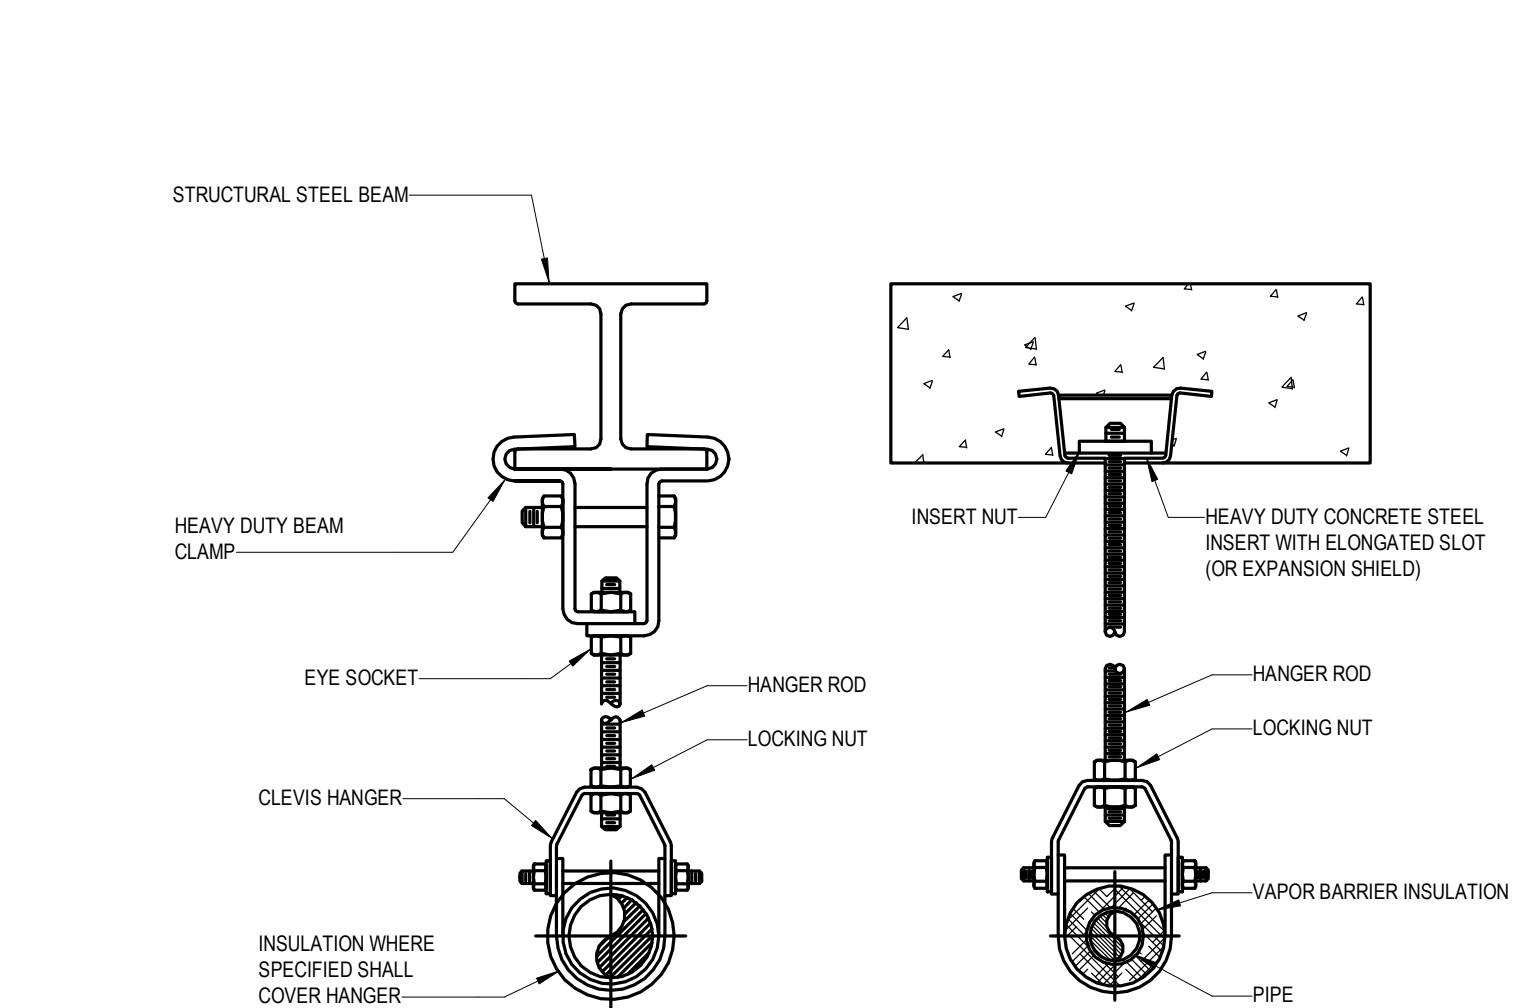


10 PIPE HANGER SUPPORTS

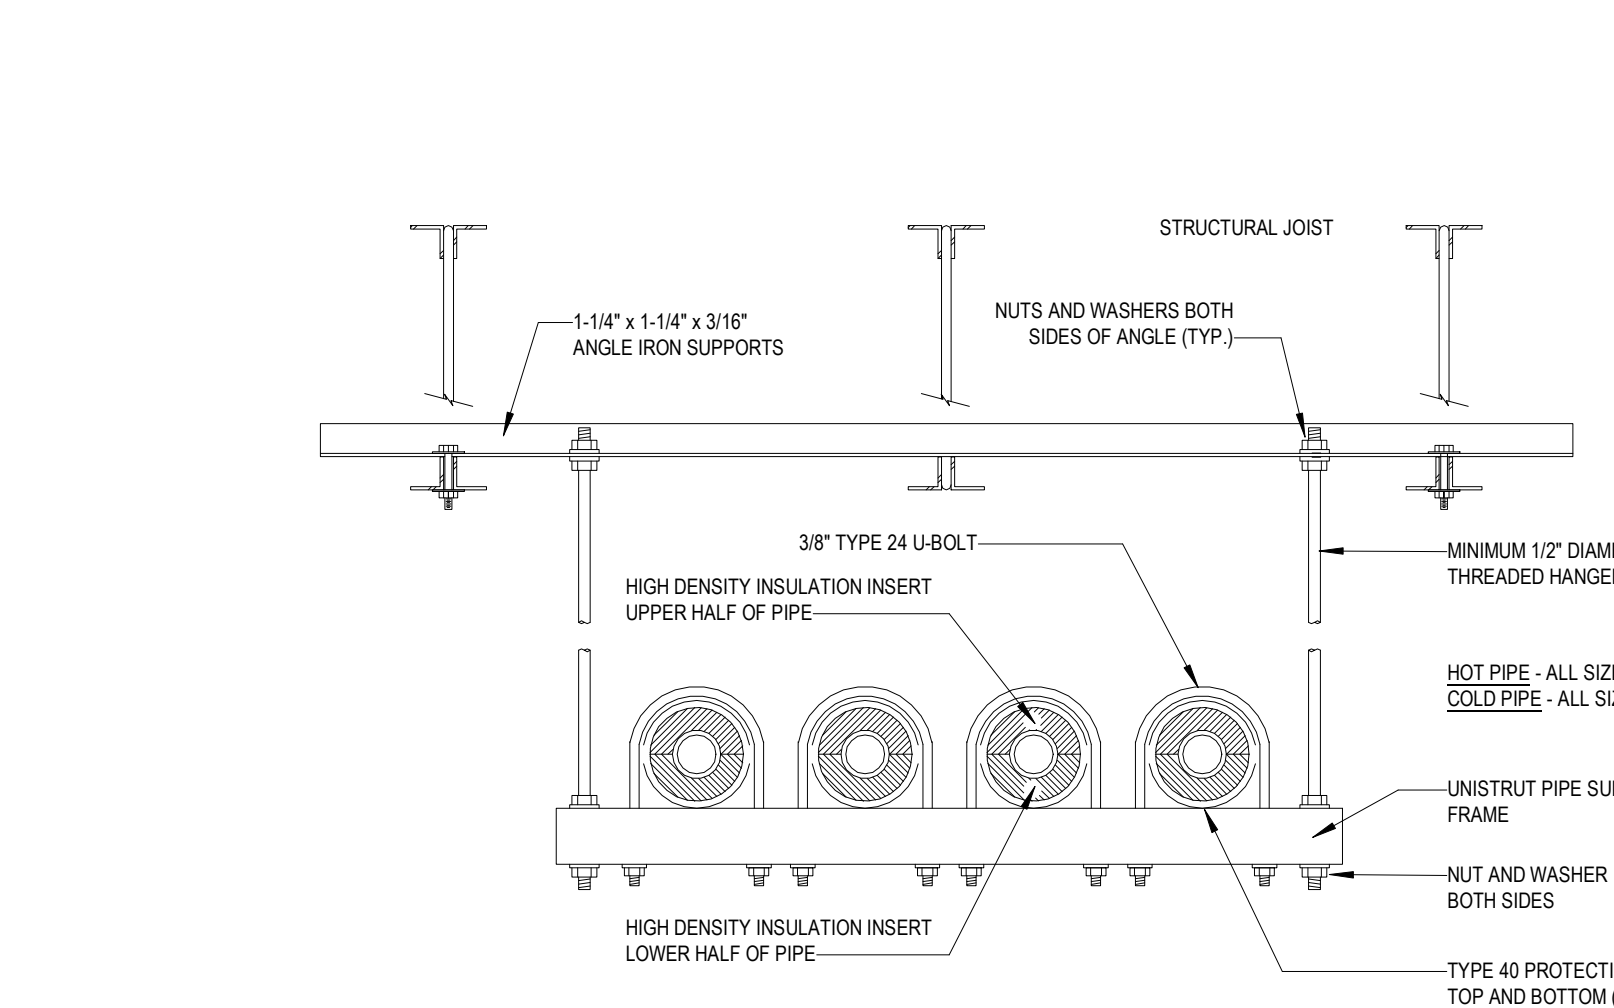

11 HORIZONTAL PIPE SUPPORT

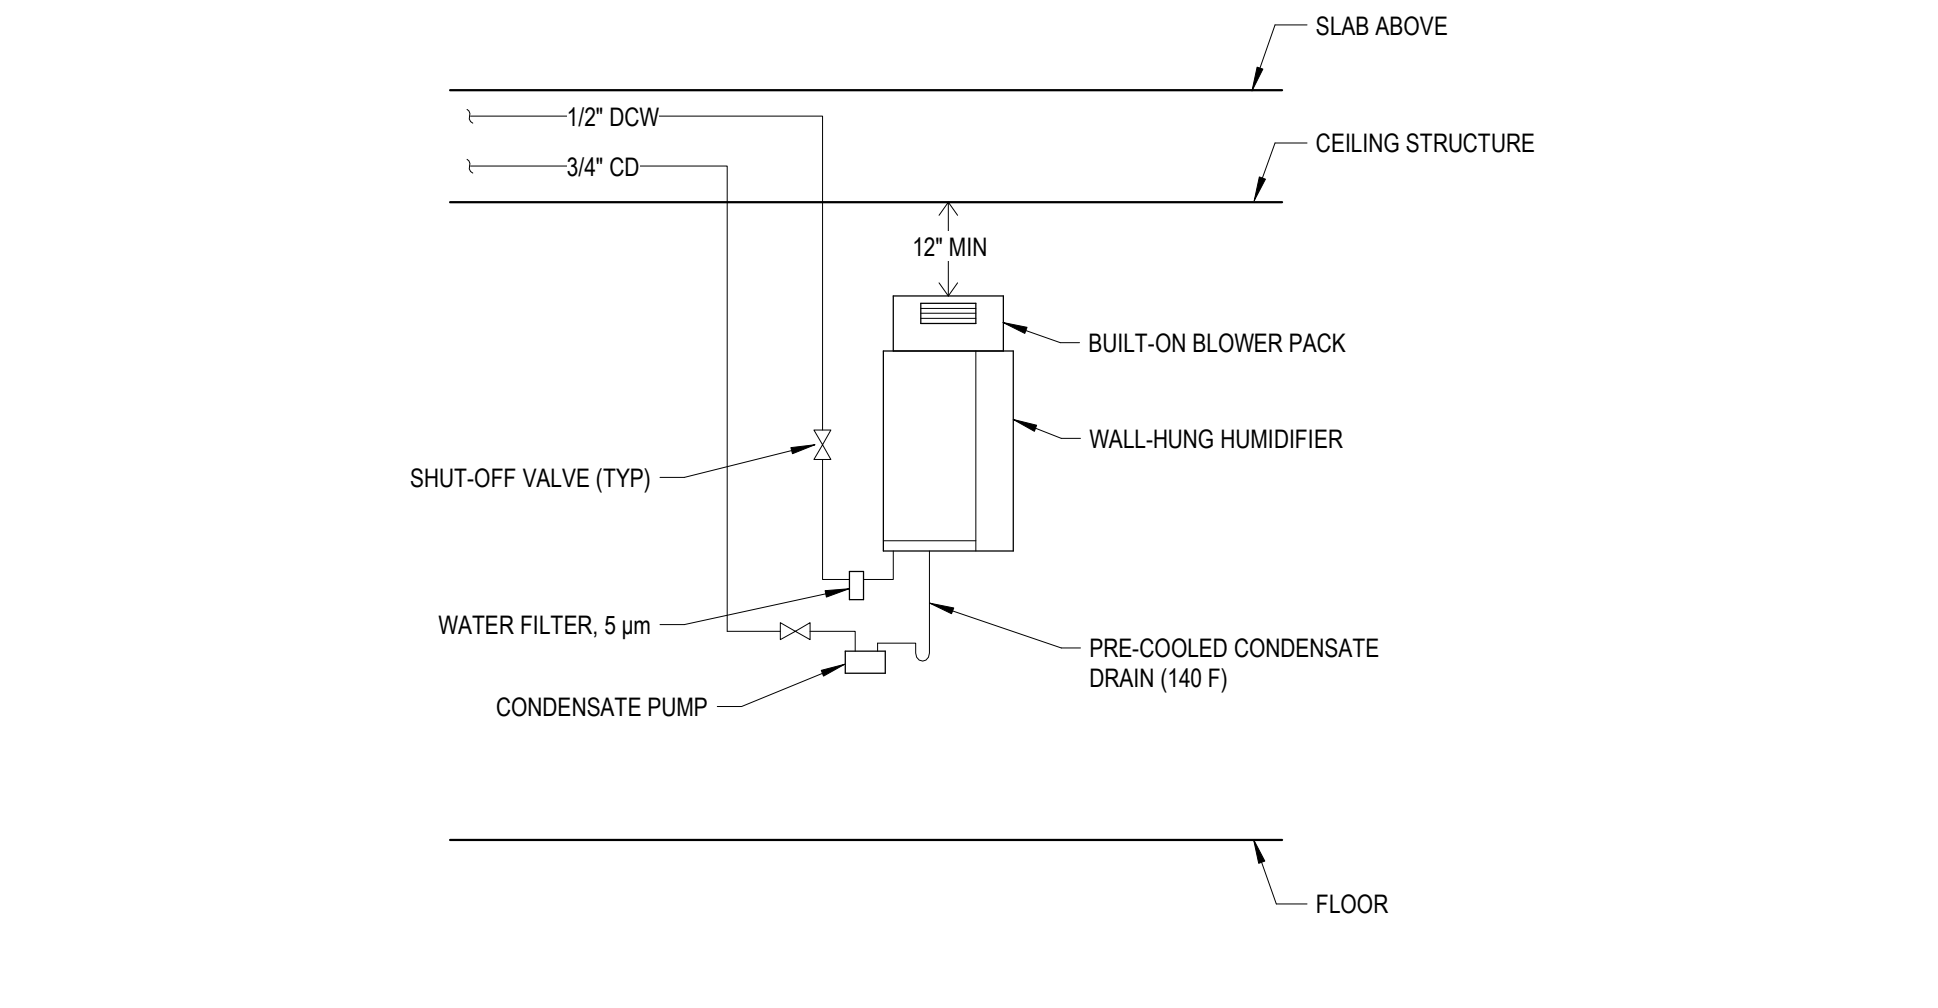

12 ELECTRODE STEAM HUMIDIFIER DETAIL



		Consultant	Architect/Engineer of Record		Stamp	Office of Construction and Facilities Management U.S. Department of Veterans Affairs	Drawing Title HVAC DETAILS 2	Phase BID DOCUMENTS	Project Title STERILE STORAGE IMPROVEMENTS	Project Number VLEB-016
			AE Works, LTD. 418 Beaver Street Sewickley, PA 15143 Phone: 412-287-7333 www.ae-works.com		Andrej Cerni Lic. No. 0402058785 11-17-25		Approved:	Sprinkler Status FULLY SPRINKLERED	Location 1700 S LINCOLN AVE, LEBANON, PA 17042	Building Number
								Issue Date 11.17.25	Checked TS	Drawn AC
										Drawing Number M502
#	Revisions	Date								

A

B

C

D

E

F

A


B

C

D

E


F

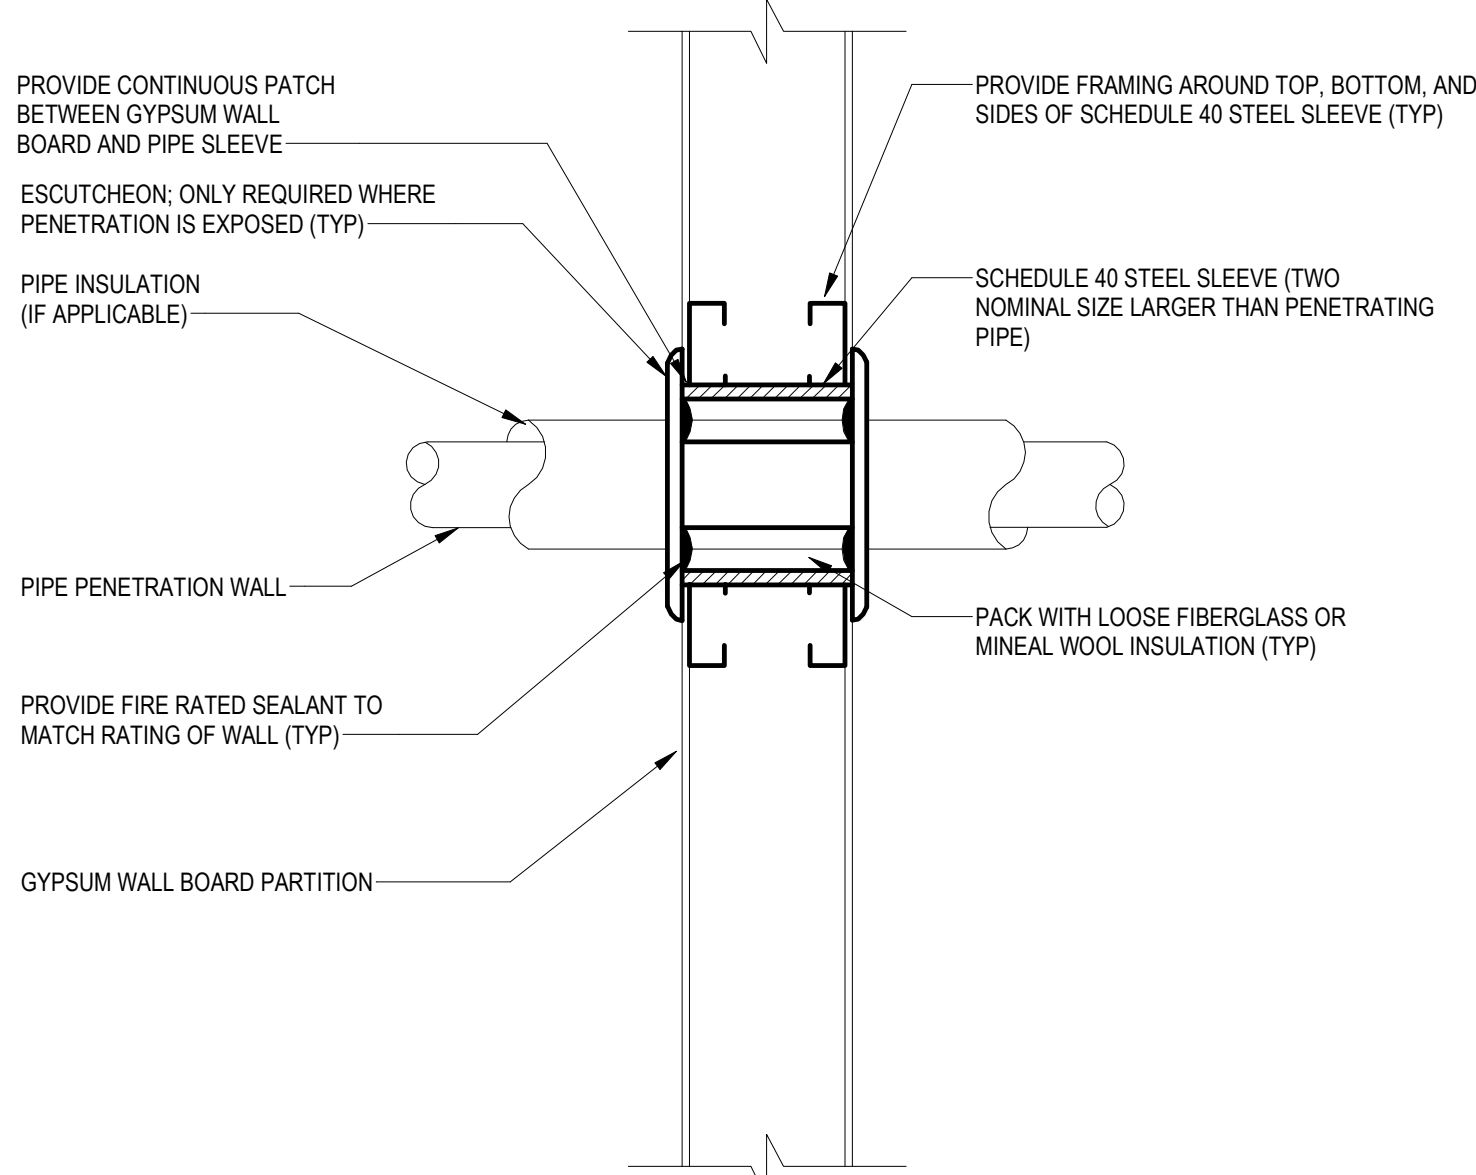

NOTES:
1. INSTALLATION DOES NOT CHANGE FOR INSULATED PIPE PENETRATING INTERIOR GWB PARTITION.
2. FOR PENETRATIONS THROUGH FIRE RATED CONSTRUCTION, PROVIDE APPROVED PIPE PENETRATION ASSEMBLY TO MAINTAIN THE RATING OF THE WALL ASSEMBLY.

1 PIPE THROUGH INTERIOR FRAMED PARTITION


NOT TO SCALE

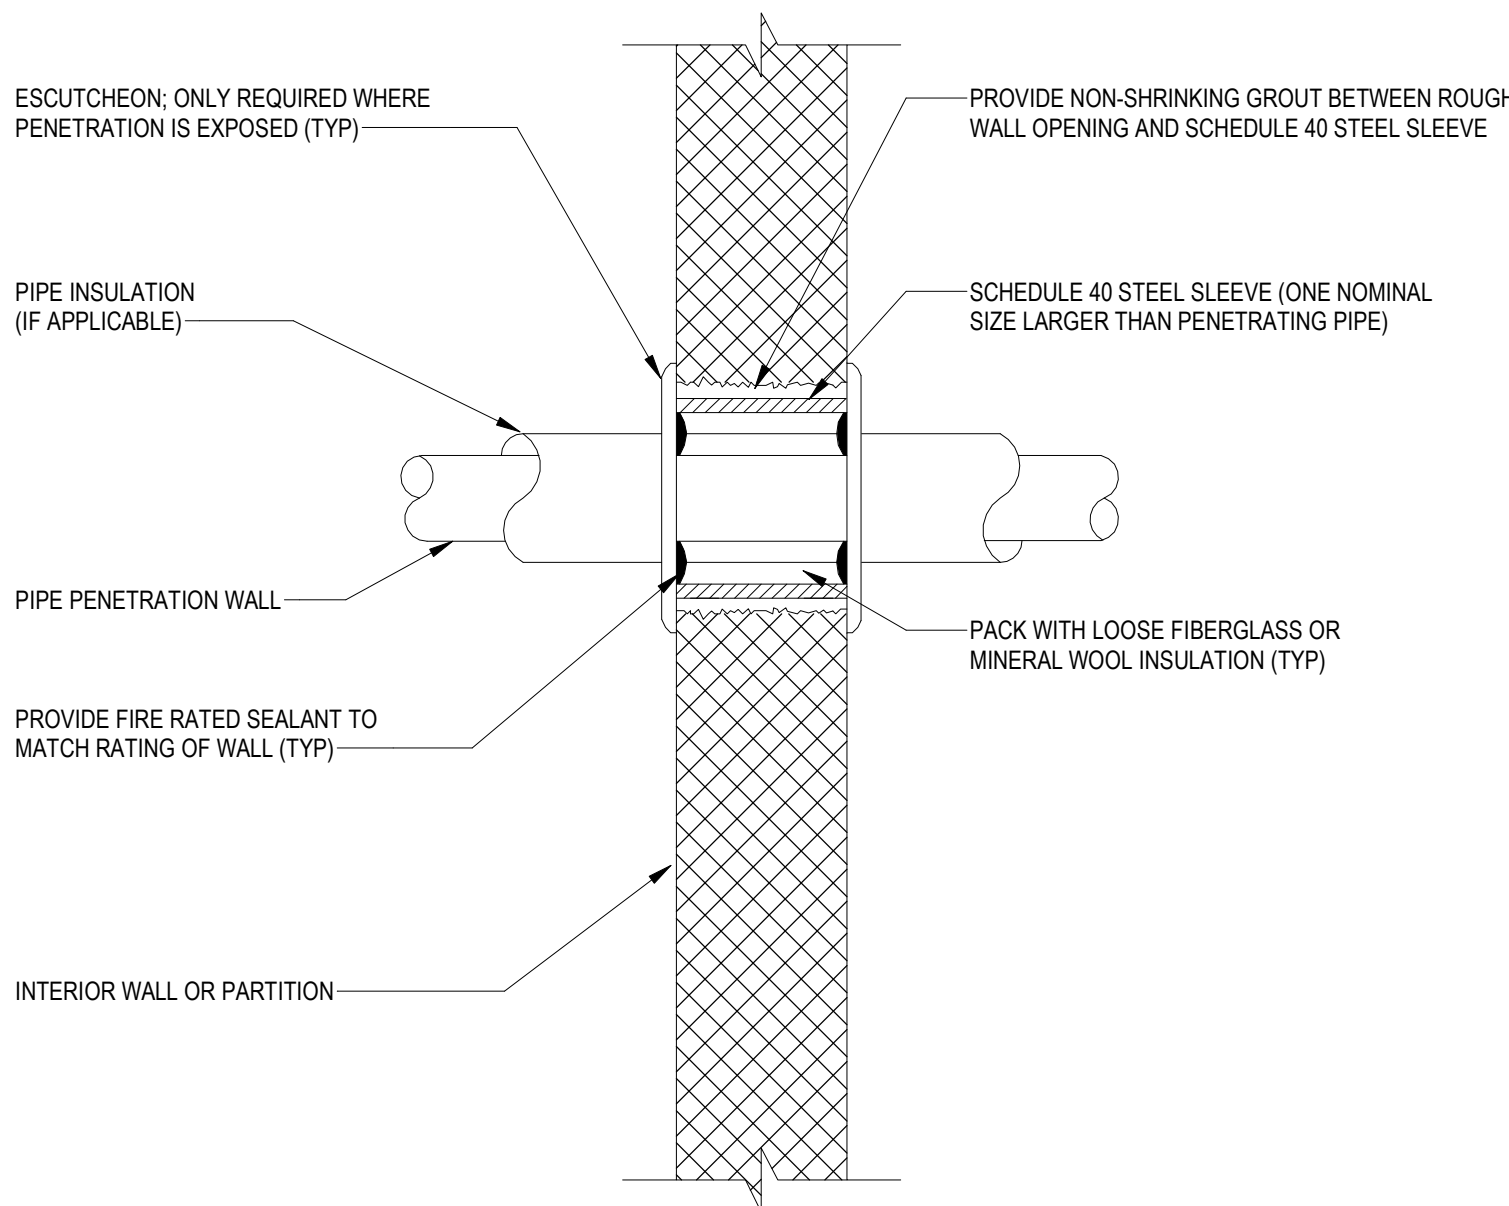

NOTES:
1. FOR PENETRATIONS THROUGH FIRE RATED CONSTRUCTION, PROVIDE APPROVED PIPE PENETRATION ASSEMBLY TO MAINTAIN THE RATING OF THE WALL ASSEMBLY.

2 PIPE THROUGH INTERIOR WALL/PARTITION


NOT TO SCALE

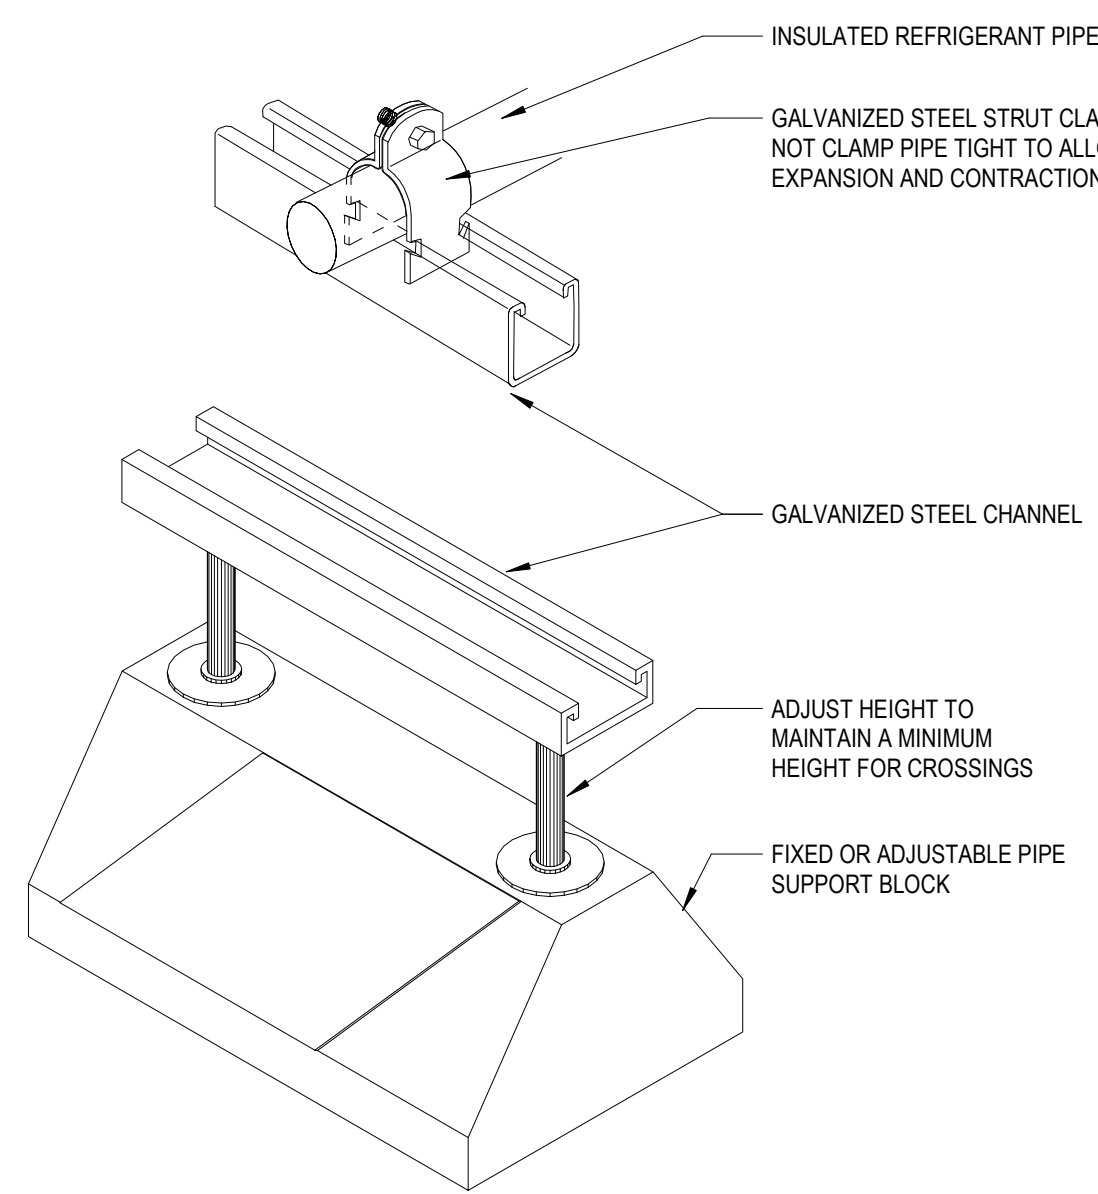

NOTES:
1. SUPPORTS TO BE SPACED 4' ON CENTER.
2. PLACE WALKPAD MATERIAL SHEETS BENEATH SUPPORTS (MIN. 1" LARGER THAN SUPPORT ALL AROUND).

3 REFRIGERANT PIPING ROOF SUPPORT


NOT TO SCALE

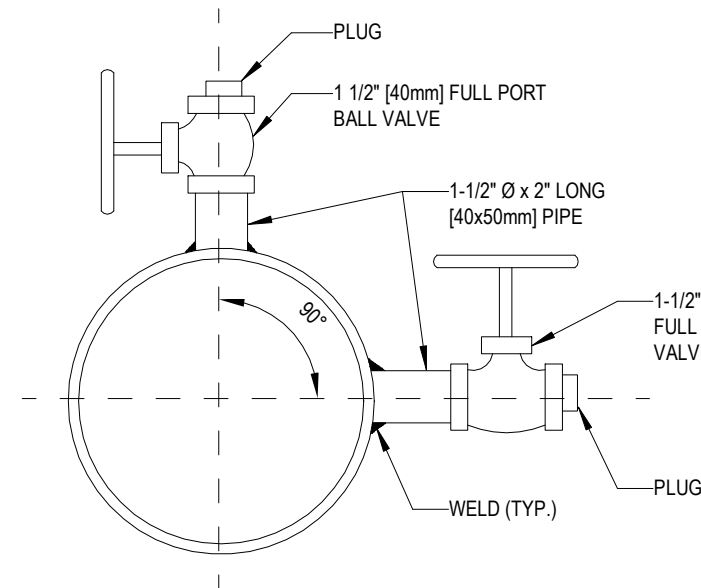

NOTES:
1. PROVIDE IN CHILLED WATER MAIN AND IN CONDENSER WATER MAIN.
2. LOCATE PILOT TUBE TAPS 20 PIPE DIAMETERS DOWNSTREAM AND 10 PIPE DIAMETERS UPSTREAM FROM THE NEAREST PIPE FITTING.
EITHER TOP OR SIDE LOCATION. BOTH ARE NOT REQUIRED AT SAME LOCATION.

5 PITOT TEST CONNECTIONS


12" = 1'-0"

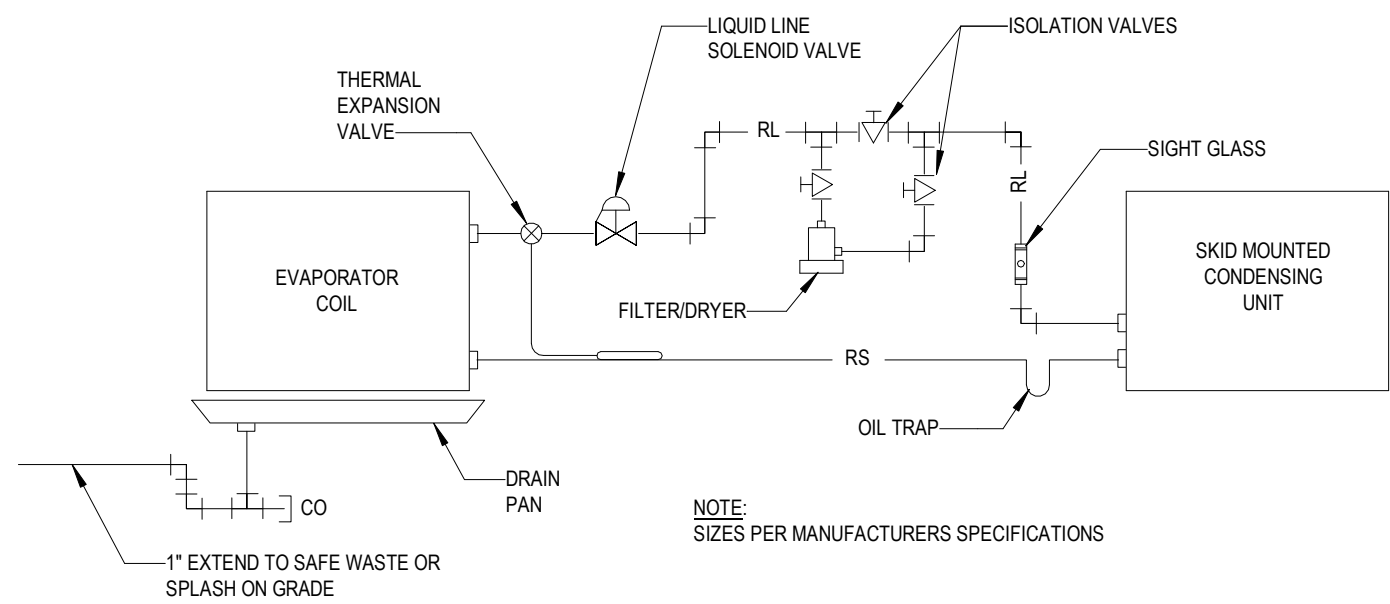

NOTE:
SIZES PER MANUFACTURER'S SPECIFICATIONS


6 TYPICAL REFRIGERANT PIPING DETAIL

12" = 1'-0"

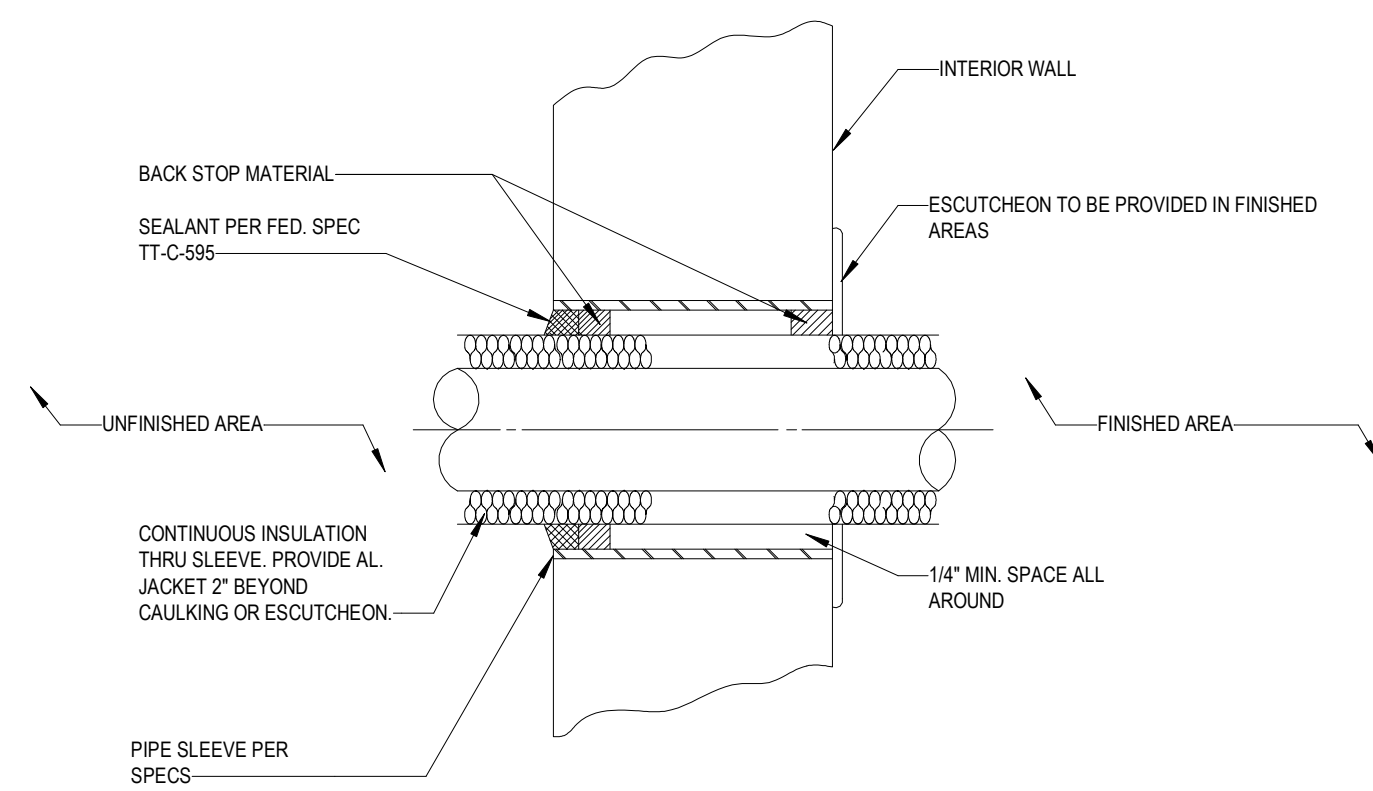


7 TYPICAL WALL PIPE SLEEVE DETAIL

12" = 1'-0"

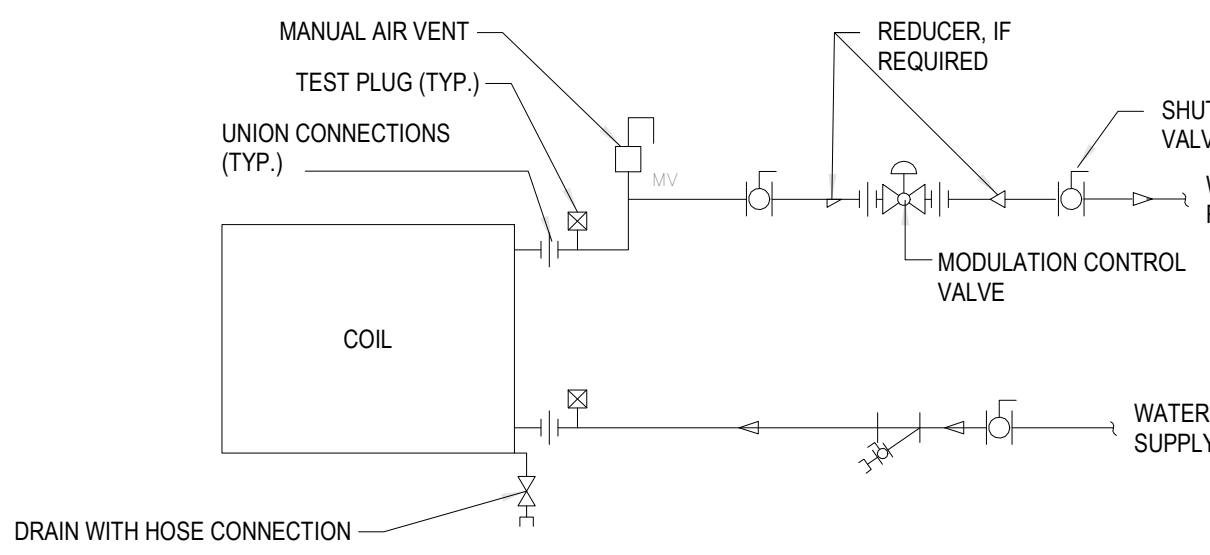

8 FAN COIL AND TERMINAL UNIT REHEAT COIL - PIPING CONNECTIONS


NOT TO SCALE

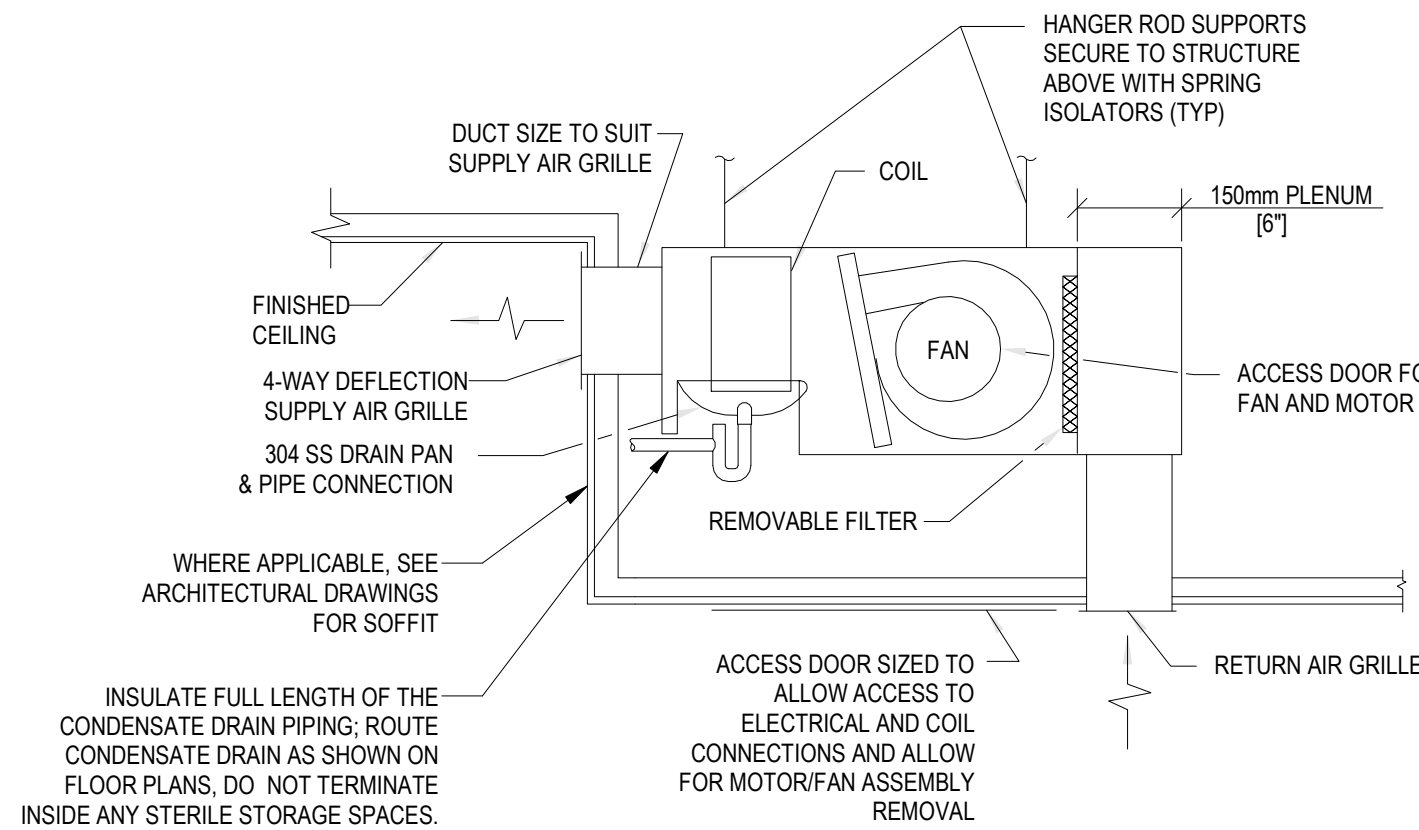

NOTES:
1. 6\"/>

9 FAN COIL UNIT - HORIZONTAL CONCEALED


1/2" = 1'-0"

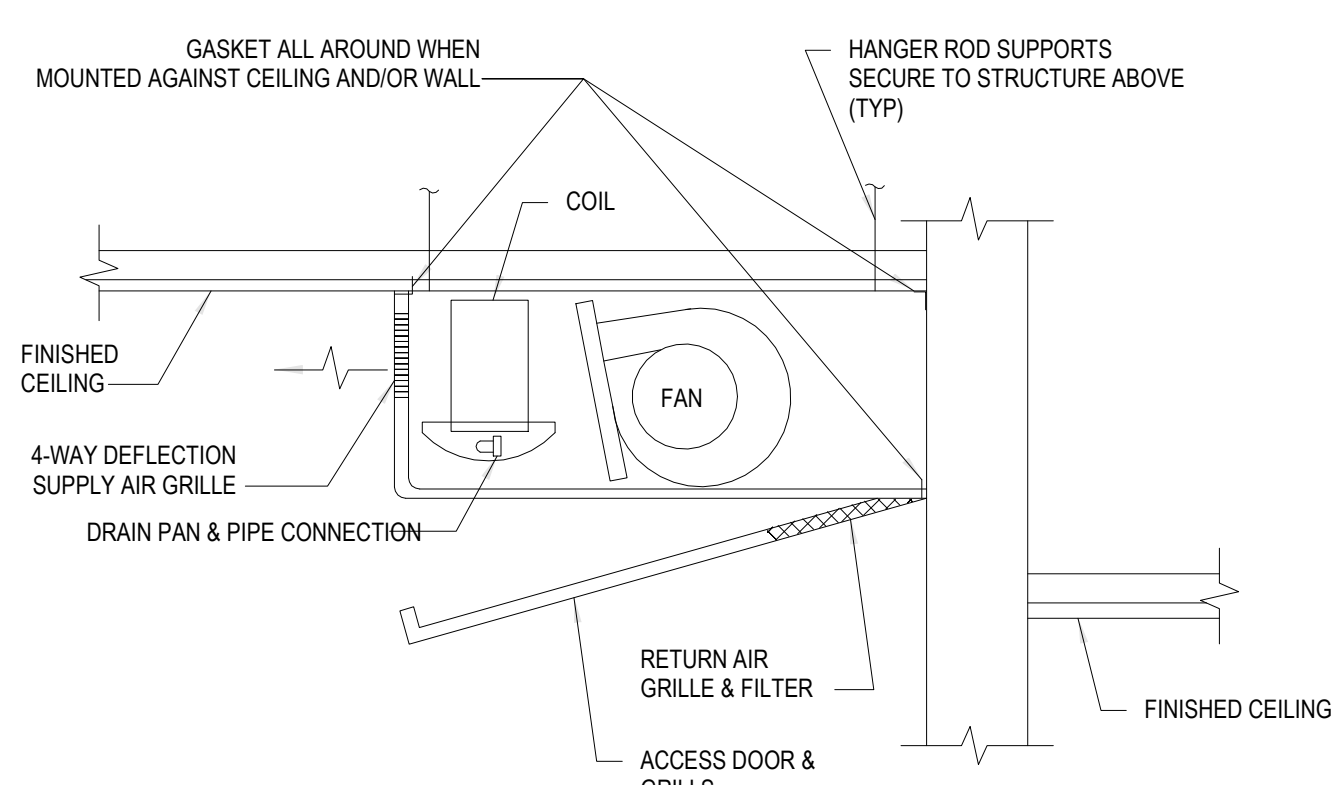

NOTE:
UNLESS OTHERWISE NOTED, ALL UNITS SHALL BE MOUNTED AGAINST FINISHED CEILING.

10 FAN COIL UNIT - HORIZONTAL EXPOSED

1/2" = 1'-0"



2/23/2024 11:33:27 AM
Autodesk Docs\\VLEB-016 Sterile Storage Improvements\\VLEB-016-MEP_24.rvt

#	Revisions	Date

Consultant

Architect/Engineer of Record

Stamp

OFFICE OF CONSTRUCTION AND FACILITIES MANAGEMENT

Drawing Title HVAC DETAILS 3

Phase BID DOCUMENTS

Project Title STERILE STORAGE IMPROVEMENTS

Project Number VLEB-016

EXISTING VAV SCHEDULE

TAG	SPACES SERVED	INLET SIZE	PRIMARY AIRFLOW			INLET SP (in wg)	OUTLET SP (in wg)	MIN INLET SP (in wg)	HOT WATER HEATING COIL										RADIATED NC	DISCHARGE NC	MANUFACTURER	MODEL	NOTES
			UNOCCUPIED MIN CFM	OCCUPIED MIN CFM	OCCUPIED MAX CFM				AIRFLOW CFM	COIL ROWS	FINS PER INCH	FLUID GPM	TOTAL HEAT MBH	EAT F	LAT F	EWT F	LWT F	FLUID PD (ft wg)					
CAV-1-216	B-001-216	4	100	100	100	1.00	0.25	0.03	100	1	10	0.3	4.0	55	85	180	153	0.08	14	27	TITUS	DESV	ALL
CAV-1-257	B-001-257	5	150	150	150	1.00	0.25	0.03	150	1	10	0.3	4.7	55	85	180	149	0.08	14	25	TITUS	DESV	ALL
CAV-37-555	B-001-555G	4	100	100	100	1.00	0.25	0.03	100	1	10	0.3	4.0	55	85	180	153	0.08	14	27	TITUS	DESV	ALL
CAV-37-1A10	B-037-1A10	7	300	300	300	1.00	0.25	0.07	300	1	10	0.8	9.4	55	85	180	156	0.38	17	23	TITUS	DESV	ALL
CAV-101-104	B-101-104	4	100	100	100	1.00	0.25	0.03	100	1	10	0.3	4.0	55	85	180	153	0.08	14	27	TITUS	DESV	ALL
CAV-102-110	B-102-110	5	150	150	150	1.00	0.25	0.03	150	1	10	0.3	4.7	55	85	180	149	0.08	14	25	TITUS	DESV	ALL
CAV-104-1121	B-104-1121	5	150	150	150	1.00	0.25	0.03	150	1	10	0.3	4.7	55	85	180	149	0.08	14	25	TITUS	DESV	ALL
CAV-104-1209	B-104-1209	5	125	125	125	1.00	0.25	0.03	125	1	10	0.3	4.4	55	85	180	151	0.08	10	23	TITUS	DESV	ALL
CAV-104-1211	B-104-1211	5	125	125	125	1.00	0.25	0.03	125	1	10	0.3	4.4	55	85	180	151	0.08	10	23	TITUS	DESV	ALL
CAV-104-1405	B-104-1405	5	125	125	125	1.00	0.25	0.03	125	1	10	0.3	4.4	55	85	180	151	0.08	10	23	TITUS	DESV	ALL

NOTES:

1. EXISTING TERMINAL BOXES SHOWN FOR REFERENCE ONLY WITH NEW DESIGN AIR FLOWS.
2. BOX SET TO CONSTANT AIR FLOW.
2. ADJUST HOT WATER FLOW RATE TO MEET DISCHARGE AIR TEMPERATURE.

WALL-MOUNTED ELECTRODE STEAM HUMIDIFIER

EXISTING VAV SCHEDULE								
TAG	SPACES SERVED	PRIMARY AIRFLOW			HOT WATER HEATING COIL			NOTES
		UNOCCUPIED MIN CFM	OCCUPIED MIN CFM	OCCUPIED MAX CFM	EAT F	LAT F	EWT F	
(E)CAV	B-001-036	150	150	150	55	85	180	ALL
(E)CAV	B-001-293	400	400	400	55	85	180	ALL
(E)CAV	B-017-138B	400	400	400	55	85	180	ALL
(E)CAV	B-022-216	250	250	250	55	85	180	ALL
(E)CAV	B-104-1406	125	125	125	55	85	180	ALL
(E)CAV	B-104-1508	300	300	300	55	85	180	ALL
(E)CAV	B-104-1513	200	200	200	55	85	180	ALL
(E)CAV	B-104-200	450	450	450	55	85	180	ALL
(E)CAV	B-104-218	250	250	250	55	85	180	ALL

NOTES:

1. EXISTING TERMINAL BOXES SHOWN FOR REFERENCE ONLY WITH NEW DESIGN AIR FLOWS.
2. BOX SET TO CONSTANT AIR FLOW.
2. ADJUST HOT WATER FLOW RATE TO MEET DISCHARGE AIR TEMPERATURE.

WALL-MOUNTED ELECTRODE STEAM HUMIDIFIER												
TAG	STEAM CAPACITY (LB/HR)	FILL RATE (GPM)	DRAIN RATE (GPM)	OPERATING WEIGHT (LB)	ELECTRICAL				STANDARD STEAM CYLINDER	MANUFACTURER	MODEL	NOTES
					VOLT	AMPS	MFA	KW				
HUM	5	0.2	1.6	55	120	15.6	20	1.9	202	CONDAIR	EL005-030	ALL

NOTES:

1. BASIS OF DESIGN CONDAIR EL SERIES, OR APPROVED EQUAL.
2. BUILT-ON BLOWER PACK.
3. HARD-WIRED WALL-MOUNTED HUMIDITY SENSOR.
4. PROVIDE WITH OPTIONAL BLT-CERTIFIED PROTOCOLS FOR BACNET CONNECTIVITY. AND REMOTE FAULT INDICATION BOARD.
5. PROVIDE WITH OPTIONAL ELECTRIC CONDENSATE PUMP.
6. PROVIDE WITH IN-LINE WATER FILTER.
7. PROVIDE WITH CONDENSATE COOLER (140 DEG F).

SPACE DE-HUMIDIFIER

SPACE DE-HUMIDIFIER												
TAG	WATER REMOVAL @ 65F AND 60%RH (PINTS/GALLONS)	EFFICIENCY @ 65F AND 60%RH (PINTS/kWh)	DIMENSIONS H x W x D	REFRIGERANT	ELECTRICAL				WEIGHT (LBS)	MANUFACTURER	MODEL	NOTES
					VOLT	AMPS	WATTS	FUSE (A)				
DEH	17 / 2.1	2.7	30" x 14.2" x 5.8"	R454B	110	2.8	324	15.0	39	SANTA-FE	ULTRA MD33	ALL

NOTES:

1. BASIS OF DESIGN SANTA-FE ULTRA MD33, OR APPROVED EQUAL.
2. PLUG TYPE B POWER CORD.
3. PROVIDE WITH OPTIONAL CONDENSATE PUMP.
4. PROVIDE WITH REMOTE WIRED DIGITAL THERMOMETER/HYGROMETER.
5. PROVIDE SURFACE-MOUNT KIT WHERE WALL-RECESSED MOUNTING IS NOT POSSIBLE OR FEASIBLE.
6. PROVIDE WITH WASHABLE FILTER.

Drawing Title
HVAC SCHEDULES

Approved:

VA U.S. Department
of Veterans Affairs

Approved:

Phase

BID DOCUMENTS

Sprinkler Status

FULLY SPRINKLERED

Project Title
STERILE STORAGE IMPROVEMENTS

Location
700 S LINCOLN AVE, LEBANON, PA 17042

Project Number
EB-016

Building Number

Drawing Number

M-701

A

B

C

D

E

F

A

B

C

D

E

F

VENTILATION INDEX																													
SPACE	VA DESIGN MANUAL REQUIREMENTS																DESIGN										NOTES		
	SPACE DESIGNATION	AREA (SQ FT)	CEILING HEIGHT (FT)	ROOM AIR RETURN or EXHAUST(S)	REQ'D AIR BALANCE	MAX NOISE (NC)	INDOOR TEMPERATURE		DESIGN RELATIVE HUMIDITY (%)	ACCEPTABLE RELATIVE HUMIDITY RANGE		SUPPLY AIR				OUTDOOR AIR		SERVED BY	SYSTEM TYPE	ACTUAL OCCUPIED SUPPLY AIRFLOW (CFM)	ACTUAL OCCUPIED ACH	ACTUAL OCCUPIED OA AIRFLOW (NORMAL MODE) (CFM)	ACTUAL UNOCCUPIED SUPPLY AIRFLOW (CFM)	ACTUAL UNOCCUPIED ACH	ACTUAL OCCUPIED RETURN/EXHAUST AIRFLOW (CFM)	ACTUAL UNOCCUPIED RETURN/EXHAUST AIRFLOW (CFM)		AIR BALANCE (CFM)	AIR BALANCE
							COOLING (F)	HEATING (F)		MAX (%)	MIN (%)	OCCUPIED MIN ACH	OCCUPIED MIN CFM	UNOCCUPIED MIN ACH	UNOCCUPIED MIN CFM	MIN OA ACH	MIN OA CFM												
B1-016	STERILE STORAGE	173	8	RET	(+)	40	66	72	50	60	30	4	92	4	92	4	92	(E)FCU	FCU	250	10.8	50	250	10.8	200	200	50	(+)	1,3,5
B1-036	STERILE STORAGE	122	8	RET	(+)	40	66	72	50	60	30	4	65	4	65	4	65	(E)CAV	VAV	150	9.2	38	150	9.2	100	100	50	(+)	1,2,5
B1-051	STERILE STORAGE	1553	8	RET	(+)	40	66	72	50	60	30	4	828	4	828	4	828	(E)FCU (E)SSHP	FCU	1,310	6.3	510	1,310	6.3	800	800	510	(+)	1,3,5
B1-111	STERILE STORAGE	148	8	RET	(+)	40	66	72	50	60	30	4	79	4	79	4	79	(E)FCU	FCU	250	12.7	50	250	12.7	200	200	50	(+)	1,3,5
B1-116A	STERILE STORAGE	115	8	RET	(+)	40	66	72	50	60	30	4	61	4	61	4	61	(E)FCU	FCU	250	16.3	50	250	16.3	200	200	50	(+)	1,3,5
B1-216	STERILE STORAGE	93	8	RET	(+)	40	66	72	50	60	30	4	50	4	50	4	50	CAV-1-216	VAV	100	8.1	25	100	8.1	50	50	50	(+)	1,2,5
B1-257	STERILE STORAGE	134	8	RET	(+)	40	66	72	50	60	30	4	71	4	71	4	71	CAV-1-257	VAV	150	8.4	38	150	8.4	100	100	50	(+)	1,2,5
B1-293	STERILE STORAGE	98	8	RET	(+)	40	66	72	50	60	30	4	52	4	52	4	52	(E)CAV	VAV	200	15.3	50	200	15.3	150	150	50	(+)	1,2,5
B1-307	STERILE STORAGE	180	8	RET	(+)	40	66	72	50	60	30	4	96	4	96	4	96	FCU-BB	FCU	250	10.4	80	250	10.4	200	200	50	(+)	1,5
B1-346	STERILE STORAGE	210	8	RET	(+)	40	66	72	50	60	30	4	112	4	112	4	112	(E)FCU	FCU	250	8.9	50	250	8.9	200	200	50	(+)	1,3,5
B1-346A	STERILE STORAGE	380	8	RET	(+)	40	66	72	50	60	30	4	203	4	203	4	203	FCU-D	FCU	650	12.8	50	650	12.8	600	600	50	(+)	1,5
B1-370	STERILE STORAGE	38	8	N/A	(+)	40	66	72	50	60	30	4	20	4	20	4	20	(E)DHC	DHC	50	9.9	13	50	9.9	0	0	50	(+)	1,2,5
B1-406	STERILE STORAGE	85	8	RET	(+)	40	66	72	50	60	30	4	45	4	45	4	45	(E)FCU	FCU	250	22.1	50	250	22.1	200	200	50	(+)	1,3,5
B1-472	STERILE STORAGE	136	8	RET	(+)	40	66	72	50	60	30	4	73	4	73	4	73	FCU-CC	FCU	300	16.5	50	300	16.5	250	250	50	(+)	1,5
B1-572	STERILE STORAGE	125	8	RET	(+)	40	66	72	50	60	30	4	67	4	67	4	67	FCU-CC	FCU	300	18.0	50	300	18.0	250	250	50	(+)	1,5
B4-105	STERILE STORAGE	80	8	RET	(+)	40	66	72	50	60	30	4	43	4	43	4	43	AH-4-105	SSHP	350	32.8	50	350	32.8	300	300	50	(+)	1,5
B17-123M	STERILE STORAGE	40	8	N/A	(+)	40	66	72	50	60	30	4	21	4	21	4	21	(E)FCU	FCU	75	14.1	19	75	14.1	0	0	75	(+)	1,3,5
B17-138B	STERILE STORAGE	199	9	RET	(+)	40	66	72	50	60	30	4	119	4	119	4	119	AHU	AHU	400	13.4	100	400	13.4	350	350	50	(+)	1,2,5
B17-209	STERILE STORAGE	110	8	RET	(+)	40	66	72	50	60	30	4	59	4	59	4	59	(E)FCU	FCU	250	17.0	50	250	17.0	200	200	50	(+)	1,3,5
B17-264	STERILE STORAGE	50	8	EXH(G)	(+)	40	66	72	50	60	30	4	27	4	27	4	27	(E)FCU	FCU	100	15.0	25	100	15.0	50	50	50	(+)	1,3,5
B17-320	STERILE STORAGE	95	8	RET	(+)	40	66	72	50	60	30	4	51	4	51	4	51	FCU-A	FCU	250	19.7	50	250	19.7	200	200	50	(+)	1,5
B17-369	STERILE STORAGE	70	8	RET	(+)	40	66	72	50	60	30	4	37	4	37	4	37	FCU-A	FCU	250	26.8	50	250	26.8	200	200	50	(+)	1,5
B17-426	STERILE STORAGE	50	8	RET	(+)	40	66	72	50	60	30	4	27	4	27	4	27	FCU-A	FCU	250	37.5	50	250	37.5	200	200	50	(+)	1,5
B17-460	STERILE STORAGE	60	8	RET	(+)	40	66	72	50	60	30	4	32	4	32	4	32	FCU-A	FCU	250	31.3	50	250	31.3	200	200	50	(+)	1,5
B17-472	STERILE STORAGE	50	8	RET	(+)	40	66	72	50	60	30	4	27	4	27	4	27	FCU-CC	FCU	150	22.5	38	150	22.5	100	100	50	(+)	1,5
B17-521	STERILE STORAGE	115	8	RET	(+)	40	66	72	50	60	30	4	61	4	61	4	61	FCU-B	FCU	250	16.3	50	250	16.3	200	200	50	(+)	1,5
B17-536	STERILE STORAGE	135	8	RET	(+)	40	66	72	50	60	30	4	72	4	72	4	72	FCU-B	FCU	250	13.9	50	250	13.9	200	200	50	(+)	1,5
B17-555G	STERILE STORAGE	55	8	RET	(+)	40	66	72	50	60	30	4	29	4	29	4	29	CAV-17-555	VAV	100	13.6	25	100	13.6	50	50	50	(+)	1,2,5
B17-578	STERILE STORAGE	145	8	RET	(+)	40	66	72	50	60	30	4	77	4	77	4	77	(E)FCU	FCU	250	12.9	50	250	12.9	200	200	50	(+)	1,3,5
B18-431	STERILE STORAGE	100	8	RET	(+)	40	66	72	50	60	30	4	53	4	53	4	53	(E)FCU	FCU	250	18.8	50	250	18.8	200	200	50	(+)	1,3,5
B18-517A	STERILE STORAGE	140	8	RET	(+)	40	66	72	50	60	30	4	75	4	75	4	75	(E)FCU	FCU	250	13.4	50	250	13.4	200	200	50	(+)	1,3,5
B22-109	STERILE STORAGE	4720	10	RET	(+)	40	66	72	50	60	30	4	3,147	4	3,147	4	3,147	(E)FCU	FCU	-	-	-	-	-	-	-	-	(+)	1,6
B22-216	STERILE STORAGE	200	8	RET	(+)	40	66	72	50	60	30	4	107	4	107	4	107	(E)CAV	VAV	250	9.4	63	250	9.4	200	200	50	(+)	1,2,5
B37-1A10	STERILE STORAGE	100	8	RET	(+)	40	66	72	50	60	30	4	53	4	53	4	53	CAV-37-1A10	VAV	300	22.5	75	300	22.5	200	200	100	(+)	1,2,5
B101-104	STERILE STORAGE	66	8	RET	(+)	40	66	72	50	60	30	4	35	4	35	4	35	CAV-101-104	VAV	100	11.4	25	100	11.4	50	50	50	(+)	1,2,5
B101-132	STERILE STORAGE	150	8	RET	(+)	40	66	72	50	60	30	4	80	4	80	4	80	(E)DHC	DHC	200	10.0	50	200	10.0	150	150	50	(+)	1,2,5
B101-145B	STERILE STORAGE	125	8	RET	(+)	40	66	72	50	60	30	4	67	4	67	4	67	(E)DHC	DHC	150	9.0	38	150	9.0	100	100	50	(+)	1,2,5
B101-163, 163A, 163B	STERILE STORAGE	220	8	RET	(+)	40	66	72	50	60	30	4	117	4	117	4	117	DHC-101-163	DHC	400	13.6	100	400	13.6	350	350	50	(+)	1,2,5
B102-110	STERILE STORAGE	134	8	RET	(+)	40	66	72	50	60	30	4	71	4	71	4	71	CAV-102-110	VAV	150	8.4	38	150	8.4	100	100	50	(+)	1,2,5
B104-1121	STERILE STORAGE	111	8	RET	(+)	40	66	72	50	60	30	4	59	4	59	4	59	CAV-104-1121	VAV	150	10.1	38	150	10.1	100	100	50	(+)	1,2,5
B104-1209	STERILE STORAGE	100	8	RET	(+)	40	66	72	50	60	30	4	53	4	53	4	53	CAV-104-1209	VAV	125	9.4	31	125	9.4	75	75	50	(+)	1,2,5
B104-1211	STERILE STORAGE	104	8	RET	(+)	40	66	72	50	60	30	4	55	4	55	4	55	CAV-104-1211	VAV	125	9.0	31	125	9.0	75	75	50	(+)	1,2,5
B104-1405	STERILE STORAGE	99	8	RET	(+)	40	66	72	50	60	30	4	53	4	53	4	53	CAV-104-1405	VAV	125	9.5								

CONTROL SYMBOLS


SENSING COMPONENTS CONTROL COMPONENTS CONTROL ELECTRICAL COMPONENTS

FILTER TYPE DIAGRAMS


FILTER TYPE DIAGRAMS

	FILTER
	BAG FILTER
	ROLL FILTER

VA FORM 08-6231									
1	2	3	4	5	6	7	8	9	10

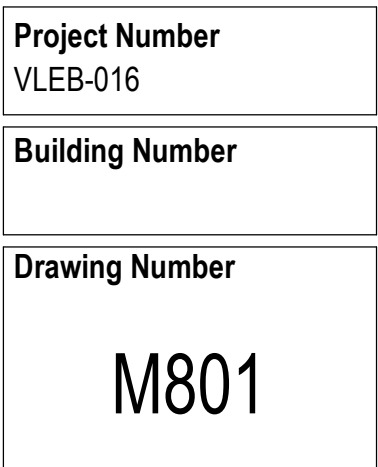

ELECTRICAL SYMBOLS LEGEND

BRANCH CIRCUITS TO DEVICES OR EQUIPMENT		HOME RUN TO INDICATED PANEL AND CIRCUIT NUMBER(S)		DASHED GRAY LINES AROUND EQUIPMENT INDICATE NEC REQUIRED CLEARANCES	
 - SHORT TICKS INDICATE HOT - LONG TICK INDICATES NEUTRAL - NO TICK MARKS INDICATES ONE HOT AND ONE NEUTRAL INCLUDE A GROUND CONDUCTOR IN ALL CONDUITS AND RACEWAYS PER NEC REQUIREMENTS. GROUND CONDUCTORS ARE NOT INDICATED WITH TICK MARKS.	 - SHORT TICKS INDICATE HOT - LONG TICK INDICATES NEUTRAL - NO TICK MARKS INDICATES ONE HOT AND ONE NEUTRAL INCLUDE A GROUND CONDUCTOR IN ALL CONDUITS AND RACEWAYS PER NEC REQUIREMENTS. GROUND CONDUCTORS ARE NOT INDICATED WITH TICK MARKS.				
REFER TO PANEL SCHEDULES FOR WIRE AND CONDUIT SIZES AND QUANTITIES.	REFER TO PANEL SCHEDULES FOR WIRE AND CONDUIT SIZES AND QUANTITIES.			KEYED NOTE REFER TO KEYNOTE SCHEDULE ON DRAWING	
 SOLID HATCHING OVER LIGHTING FIXTURES INDICATES FIXTURE SHALL BE POWERED VIA LIFE SAFETY CIRCUIT AND RELAYED VIA UL924 LISTED DEVICE FOR FULL BRIGHTNESS DURING FIRE ALARM OR NORMAL POWER LOSS.	 DASHED SYMBOLS INDICATE ELEMENT TO BE DEMOLISHED			EXIT SIGN, WALL MOUNTED CHEVRONS AS INDICATED ON DRAWINGS	
 REFER TO LIGHTING FIXTURE SCHEDULE FOR ASSOCIATED SYMBOL FOR EACH FIXTURE TYPE.	 GRAY SYMBOLS INDICATE ELEMENT EXISTING TO REMAIN			EXIT SIGN, FLAG MOUNTED FACES AND CHEVRONS AS INDICATED ON DRAWINGS	
 PANELBOARD REFER TO PANEL SCHEDULES FOR ADDITIONAL INFORMATION	 PULL BOX DIMENSIONS AS INDICATED ON DRAWINGS			SINGLE POLE SWITCH	
 SAFETY DISCONNECT SWITCH (NON-FUSED) NUMBER OF POLES AND FRAME SIZE AS INDICATED	 SAFETY DISCONNECT SWITCH (FUSED) NUMBER OF POLES, FRAME SIZE, AND FUSE SIZE AS INDICATED			TWO POLE, SINGLE POLE SWITCH	
 1-PHASE MOTOR EQUIPMENT TAG AS INDICATED	 3-PHASE MOTOR EQUIPMENT TAG AS INDICATED			3-WAY SWITCH	
 DUPLEX WALL RECEPTACLE NEMA 5-20R UNLESS NOTED OTHERWISE	 QUADRAPLEX WALL RECEPTACLE NEMA 5-20R UNLESS NOTED OTHERWISE			4-WAY SWITCH	
 DUPLEX WALL RECEPTACLE, ALL OUTLETS SWITCHED VIA LOCAL OCCUPANCY SENSING NEMA 5-20R UNLESS NOTED OTHERWISE	 QUADRAPLEX WALL RECEPTACLE, ALL OUTLETS SWITCHED VIA LOCAL OCCUPANCY SENSING NEMA 5-20R UNLESS NOTED OTHERWISE			KEYED SWITCH	
 DUPLEX WALL RECEPTACLE WITH ISOLATED GROUND NEMA 5-20R UNLESS NOTED OTHERWISE	 QUADRAPLEX WALL RECEPTACLE WITH ISOLATED GROUND NEMA 5-20R UNLESS NOTED OTHERWISE			TIMER SWITCH	
 DUPLEX WALL RECEPTACLE ON EMERGENCY CIRCUIT NEMA 5-20R UNLESS NOTED OTHERWISE	 QUADRAPLEX WALL RECEPTACLE ON EMERGENCY CIRCUIT NEMA 5-20R UNLESS NOTED OTHERWISE			DIMMER SWITCH	
 DUPLEX FLOOR RECEPTACLE NEMA 5-20R UNLESS NOTED OTHERWISE	 QUADRAPLEX FLOOR RECEPTACLE NEMA 5-20R UNLESS NOTED OTHERWISE			MOMENTARY CONTACT SWITCH	
 DUPLEX FLOOR RECEPTACLE, ALL OUTLETS SWITCHED VIA LOCAL OCCUPANCY SENSING NEMA 5-20R UNLESS NOTED OTHERWISE	 QUADRAPLEX FLOOR RECEPTACLE, ALL OUTLETS SWITCHED VIA LOCAL OCCUPANCY SENSING NEMA 5-20R UNLESS NOTED OTHERWISE			OCCUPANCY SENSING SWITCH (AUTOMATIC-ON, AUTOMATIC-OFF)	
 DUPLEX FLOOR RECEPTACLE WITH ISOLATED GROUND NEMA 5-20R UNLESS NOTED OTHERWISE	 QUADRAPLEX FLOOR RECEPTACLE WITH ISOLATED GROUND NEMA 5-20R UNLESS NOTED OTHERWISE			VACANCY SENSING SWITCH (MANUAL-ON, AUTOMATIC-OFF)	
 NON-TYPICAL NEMA WALL RECEPTACLE CONFIGURATION AS NOTED ON DRAWINGS	 SIMPLEX WALL RECEPTACLE NEMA 5-20R UNLESS NOTED OTHERWISE			OCCUPANCY SENSING SWITCH WITH DIMMING CONTROL (AUTOMATIC-ON, AUTOMATIC-OFF)	
 NON-TYPICAL NEMA FLOOR RECEPTACLE CONFIGURATION AS NOTED ON DRAWINGS	 SIMPLEX FLOOR RECEPTACLE NEMA 5-20R UNLESS NOTED OTHERWISE			VACANCY SENSING SWITCH WITH DIMMING CONTROL (MANUAL-ON, AUTOMATIC-OFF)	
 RECEPTACLE ON CORD REEL (DUPLEX SHOWN)	 RECEPTACLE ON DROP CORD (DUPLEX SHOWN)			VACANCY SENSING SWITCH WITH DIMMING CONTROL AND DAYLIGHTING (MANUAL-ON, AUTOMATIC-OFF)	
 WALL DATA OUTLET TYPE AND CONFIGURATION AS NOTED ON DRAWINGS	 WIRELESS ACCESS POINT			OCCUPANCY SENSOR (AUTOMATIC-ON, AUTOMATIC-OFF)	
 POWER MULTI-OUTLET ASSEMBLY SYMBOLS INDICATE RECEPTACLE LOCATIONS IN ASSEMBLY	 DATA MULTI-OUTLET ASSEMBLY SYMBOLS INDICATE RECEPTACLE LOCATIONS IN ASSEMBLY			VACANCY SENSOR (MANUAL-ON, AUTOMATIC-OFF)	
				LIGHT LEVEL SENSOR	
 FIRE ALARM MANUAL PULL STATION	 FIRE ALARM HORN STROBE - WALL, CEILING	 FIRE ALARM SPEAKER STROBE - WALL, CEILING			
 FIRE ALARM SPEAKER HORN - WALL, CEILING	 FIRE ALARM DETECTOR SMOKE - CEILING	 FIRE ALARM DETECTOR SMOKE DUCT			
 FIRE ALARM DETECTOR HEAT	 FIRE ALARM SPEAKER	 FIRE ALARM DETECTOR HEAT			
 FIRE ALARM SPEAKER	 FIRE ALARM TAMPER SWITCH	 FIRE ALARM FLOW SWITCH			
 KIRK KEY INTERLOCK					

ELECTRICAL ABBREVIATIONS LIST

IP	1 POLE (2P, 3P, 4P, ETC.)	DISC	DISCONNECT	JBOX	JUNCTION BOX	PWR	POWER
A	AMPERE	DIST	DISTRIBUTION	KLVOLT	KILOVOLT	QTY	QUANTITY
AC	ABOVE COUNTER, AIR CONDITIONER	DN	DOWN	KV	KILOVOLT-AMPERE	RCPT	RECEPTACLE
ACLG	ABOVE CEILING	DOWHS	DIVISION OF OCCUPATIONAL HEALTH AND SAFETY	KVAR	KILOVOLT-AMPERE REACTIVE	REQD	REQUIRED
AD	AUTOMATIC DOOR OPENER	DPR	DRIP	KWH	KILOWATT	RM	ROOM
AF	AIR FRAME	DPMR	DIVISION OF PHYSICAL SECURITY	KWH	KILOWATT-HOUR	RSC	REGID STEEL CONDUIT
A.F.F.	ABOVE FINISHED FLOOR	DSM	DIVISION OF PHYSICAL SECURITY	LOC	LOCATION, LOCATION	RTU	ROOF TOP UNIT
A.F.G.	ABOVE FINISHED GRADE	MAN	MANAGEMENT	LT	LIGHT	SC	SURFACE CONDUIT
AFI	AIR FAULT CIRCUIT INTERRUPTER	DRS	DIVISION OF RADIATION SAFETY	LTC	LIGHTING	SEC	SECONDARY
AHU	AIR HANDLING UNIT	DS	SAFETY DISCONNECT SWITCH	LTNG	LIGHTNING	SHT	SHEET
AL	ALUMINUM	DT	DOUBLE THROW	LTV	LOW VOLTAGE	SIM	SIMILAR
ALT	ALTERNATE	DTR	DIVISION OF TECHNICAL RESOURCES	LTM	MAXIMUM	SIN	SOLID NEUTRAL
AMP	AMPERE	DWG	DRAWING, DRAWINGS)	MAG-S	MAGNETIC STARTER	SPEC	SPECIFICATION
AMPL	AMPLIFIER	(E)	EXISTING TO REMAIN	MC	MOMENTARY CONTACT	SPKR	SPEAKER
ANM	ANNUNCIATOR	EC	ELECTRICAL CONTRACTOR	MCB	MECHANICAL CONTRACTOR	SPR	SPRINKLER
APPROX	APPROXIMATELY	ELEC	ELECTRIC, ELECTRICAL	MCB	MAIN CIRCUIT BREAKER	SR	SURFACE RACEWAY
AQ-STAT	AQUASTAT	ELEV	ELEVATOR	MCC	MOTOR CONTROL CENTER	SS	STAINLESS STEEL
ARCH	ARCHITECT, ARCHITECTURAL	EMER	EMERGENCY	MCCG	MAIN DISTRIBUTION CENTER	SS	SELECTOR SWITCH
AS	AS FURNISHED	EMS	ENERGY MANAGEMENT SYSTEM	MDP	MAIN DISTRIBUTION PANEL	ST	STOP/START PUSHBUTTONS
AT	AIR TRIP	EMT	ELECTRIC METALLIC TUBING	MFR	MANUFACTURER	STD	STATION
ATS	AUTOMATIC TRANSFER SWITCH	EP	ELECTRIC PNEUMATIC	MFS	MAIN FUSED DISCONNECT SWITCH	STD	STANDARD
AUTO	AUTOMATIC	EQUIP	EQUIPMENT	MANH	MANHOLE	STO	SURFACE MOUNTED
AUX	AUXILIARY	EWC	ELECTRIC WATER COOLER	MC	MICROPHONE	SW	SWITCH
AUV	AUDIO VISUAL	EXIST	EXISTING	MIN	MINIMUM	SWB	SWITCHBOARD
AWG	AMERICAN WIRE GAUGE	EXHAUST	EXHAUST	MIS	MISCELLANEOUS	SYM	SYMMETRICAL
BATT	BATTERY	EXP	EXPLOSION PROOF	MLO	MAIN LUGS ONLY	SYL	SYSTEM
BD	BOARD	FA	FIRE ALARM	MMS	MANUAL, MOTOR STARTER	TEL	TELEPHONE
BDS	BUILDING	FABP	FIRE ALARM BOOSTER POWER SUPPLY PANEL	MOT	MULTIOUTLET TERMINAL	TER	TERMINAL
BMS	BUILDING MANAGEMENT SYSTEM	FACP	FACILITIES NETWORK SYSTEM	MSP	MOTOR STARTER PANELBOARD	TL	TWIST LOCK
C	CENTRAL, CENTER LINE	FACNET	FACILITIES NETWORK SYSTEM	MSBD	MAIN SWITCHBOARD	TR	TAMPER RESISTANT
CAB	CABINET	FACP	FIRE-ALARM CONTROL PANEL	MT	MOUNT	T-STAT	THERMOSTAT
CAT	CATALOG	FCU	FAN COIL UNIT	MT-C	EMPTY CONDUIT	TTC	TELEPHONE TERMINAL CABINET
CAV	CABLE TELEVISION	FIXT	FIXTURE	MTS	MANUAL TRANSFER SWITCH	TV	TELEVISION
CB	CIRCUIT BREAKER	FLR	FLOOR	MTR	MOTOR, MOTORIZED	TVTC	TELEVISION TERMINAL CABINET
CCOEM	CENTER OFFICE OFFICE OF FACILITY	FLUR	FLOOR	N	NORMALLY CLOSED	TYCL	TYPICAL
CC	CLOSED CIRCUIT TELEVISION	FT	FEET	NEC	NATIONAL ELECTRICAL CODE	UG	UNDER COUNTER
CT	CIRCUIT	FU	FUSE	NEMA	NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION	UE	UNDERGROUND ELECTRICAL
CT	CIRCUIT FOR INFORMATION TECHNOLOGY	GA	GAUGE	NFSS	NON-FUSED SAFETY SWITCH	UG	UNDERGROUND ELECTRICAL BRANCH
CKT	CIRCUIT	GAL	GALLON	NIC	NOT IN CONTRACT	UH	UNIT HEATER
CLG	CEILING	GALV	GALVANIZED	NH	NATIONAL INSTITUTE OF HEALTH	U	UNLESS OTHERWISE
COMB	COMBINATION	GC	GENERAL CONTRACTOR	NL	NIGHT LIGHT	UT	UNDERGROUND TELEPHONE
CONN	CONNECTION	GEN	GENERATOR	N	NORMALLY OPEN	UTIL	UTILITY
CON	CONSTRUCTION	GFI	GROUND FAULT CIRCUIT INTERRUPTER	NTO	NORMAL POWER FACTOR	UV	ULTRAVIOLET
CONT	CONTINUATION OR CONTINUOUS	GFP	GROUND FAULT PROTECTOR	N	NOT TO SCALE	V	VOLTS
CONTR	CONTRACTOR	GND	GROUND	OH	OVERHEAD	VA	VOLT-AMPERE(S)
CONV	CONVERSION	GNS	GALVANIZED RIGID STEEL (CONDUIT)	OFCE	OFFICE OF HOSPITAL PHYSICAL ENVIRONMENT	VERT	VERTICAL
COP	CIRCULATING PUMP	GYP	GYPSON BOARD	OVER	OVERLOADS	VFD	VARIABLE FREQUENCY DRIVE
CR	CATHODE-RAY TUBE	HOA	HAND-OFF-AUTOMATIC	P	PUBLIC	VFL	VOLUME
CTR	CURRENT TRANSFORMER	HORIZ	HORIZONTAL	PA	PUBLIC ADDRESS	VOL	VOLUME
CT	CENTER	HRS	HOURS	PB	PULL BOX, PUSH BUTTON	WATS	WATTS(S)
CU	COPPER	HPF	HIGH POWER FACTOR	PE	PNEUMATIC ELECTRIC	W	WITH
DCP	DOMESTIC WATER CIRCULATING PUMP	HT	HEIGHT	PED	PEDESTAL	WAO	WORK AREA OUTLET
DDCM	DIVISION OF DESIGN AND CONSTRUCTION	HVAC	HEATING, VENTILATING, AND AIR CONDITIONING	PF	POWER FACTOR	WG	WIRE GAUGE
DEPT	DEPARTMENT	HTR	HEATER	PH	PHASE	WH	WATER HEATER
DEPT	DEPARTMENT	HV	HIGH VOLTAGE	PV	PUMP INDICATING VALVE	WO	WITHOUT
DET	DETENTION	HVAC	HEATING, VENTILATING, AND AIR CONDITIONING	PANEL	PANEL	WP	WEATHERPROOF
DFOM	PROTECTION	HWP	HYDROK WAVE PUMP	PO	PROJECT OFFICER	XFR	TRANSFER
DF	DIVISION OF FACILITIES OPERATIONS AND MAINTENANCE	IC	ISOLATED GROUND	PAR	PARALLEL	AT	AT
DFM	DIVISION OF THE FIRE MARSHAL	IMC	INTERMEDIATE METAL CONDUIT	PR	PRIMARY	@	FEET
DFF	DIVISION OF FACILITIES PLANNING	IN	INCHES	PROJ	PROJECTION	-	INCHES
DPS	DIVISION OF FACILITIES STEWARDSHIP	INCAND	INCANDESCENT	INCT	POWER ROOF VENTILATOR	#	NUMBER
DI	DIVISION OF FACILITIES STEWARDSHIP	INFR	INFRARED	PT	POTENTIAL TRANSFORMER	Ø	Ø
DIAMETER		INCD	INCHES	PVC	POLYVINYL CHLORIDE (CONDUIT)		


ELECTRICAL GENERAL NOTES

- THE FOLLOWING GENERAL NOTES ARE LISTED BELOW THAT SHALL APPLY TO ALL ELECTRICAL REQUIREMENTS AS INDICATED ON ALL E SERIES CONTRACT DRAWINGS.
1. THE CONTRACTOR IS RESPONSIBLE FOR THE ENTIRE DOCUMENT SET. I. E. IF WORK IS SHOWN ON OTHER DRAWINGS AS "BY CONTRACTOR," THE CONTRACTOR IS RESPONSIBLE FOR THAT WORK.
2. DRAWINGS FOR THE WORK ARE DIAGRAMMATIC AND INTENDED TO CONVEY THE EXTENT, GENERAL ARRANGEMENT AND LOCATIONS OF THE WORK. BECAUSE OF THE SCALE OF THE DRAWINGS, CERTAIN BASIC ITEMS SUCH AS ACCESS PANELS, CONDUITS, CABINET SIZES, PENETRATION SLEEVES, PULL BOXES, BACKBOXES AND JUNCTION BOXES MAY NOT BE SHOWN. INCLUDE ALL ITEMS WHERE REQUIRED BY CODE, MANUFACTURER AND RELATED SPECIFICATION SECTIONS FOR THE PROPER INSTALLATION OF ALL EQUIPMENT.
3. DUE TO SCALE OF THE DRAWINGS, ALL ELECTRICAL DEVICE SYMBOLS ARE SHOWN ON DRAWINGS AS CLOSE AS POSSIBLE TO THEIR INTENDED LOCATION. CONTRACTOR SHALL COORDINATE IN THE FIELD THE PROPER INSTALLATION OF ALL EQUIPMENT, DEVICES, CONDUITS AND CONDUITS. REFER TO RELATED SPECIFICATION SECTIONS FOR ADDITIONAL REQUIREMENTS.
4. COORDINATE WITH TRADES AND SYSTEM INTEGRATORS ANY CONDITIONS RELATED TO THE INSTALLATION OF ALL SYSTEMS. THE CONTRACTOR SHALL COORDINATE WITH THE APPROPRIATE TRADE ALL INSTALLATION REQUIREMENTS IMPACTING THE PLACEMENT OF ALL SYSTEM COMPONENTS TO THE SATISFACTION OF ALL CONCERNED TRADES.
5. COORDINATE EXACT LOCATIONS OF ALL DATA AND TELEPHONE WIRING, ELECTRIC RECEPTACLES WITH THE ARCHITECTURAL PLANS, FIREURTURE PLANS AND ALL AFFECTED TRADES PRIOR TO INSTALLATION.
6. ALL CONDUITS SHALL BE SIZED AND INSTALLED IN ACCORDANCE WITH NFPA 70 AND OTHER PROJECT SPECIFICATIONS. ALL CONDUITS SHALL BE A MINIMUM OF 3/4" UNLESS OTHERWISE NOTED.
7. PROVIDE ALL NECESSARY CLEARANCES IN ACCORDANCE WITH NEC REQUIREMENTS. ARRANGE EQUIPMENT TO FACILITATE UNRESTRICTED ACCESS FOR MAINTENANCE AND SERVICE AROUND ALL EQUIPMENT, COMPONENTS AND/OR CABLE TERMINATIONS.
8. WHERE EQUIPMENT AND/OR JUNCTION BOXES ARE INSTALLED ABOVE FINISHED CEILING, THE CONTRACTOR SHALL PROVIDE ACCESS HATCHES LISTED FOR THE INTENDED APPLICATION. ACCESS HATCHES SHALL BE LOCATED SO THAT SERVICE ACCESS TO THE EQUIPMENT AND/OR JUNCTION BOXES IS UNIMPEDED.
9. THE CONTRACTOR SHALL PROVIDE ALL INFORMATION AND COORDINATION WITH THE ASTM AND NFPA REQUIREMENTS. REFER TO RELATED SPECIFICATION SECTIONS FOR ADDITIONAL INFORMATION. INSTALLATION OF FIRE STOPS SHALL BE PERFORMED BY APPLICATOR/INSTALLER QUALIFIED AND TRAINED BY THE MANUFACTURER. INSTALLATION SHALL BE PERFORMED IN STRICT ACCORDANCE WITH MANUFACTURER'S DATA/INSTALLATION PROCEDURES.
10. ALL EQUIPMENT ENCLOSURES LOCATED OUTSIDE OR IN ALL AREAS WITH HIGH MOISTURE OR A RELATIVE HUMIDITY OF 75% OR GREATER SHALL BE NEMA 4X SEALED EQUIPMENT ENCLOSURES SPECIFIED FOR THAT APPLICATION.
11. ALL INTERIOR AND/OR EXTERIOR COMPONENTS, DEVICES OR SYSTEMS EQUIPMENT EXPOSED TO THE GENERAL POPULATION SHALL BE INSTALLED IN SECURED EQUIPMENT ENCLOSURES WITH TAMPER SWITCHES AND INSTALLED IN SUCH A MANNER THAT RESISTS TAMPERING AND/OR REMOVAL WITHOUT THE USE OF SPECIALIZED TOOLS.
12. FOR EQUIPMENT INSTALLATIONS REQUIRING COORDINATION WITH OTHER TRADES, THE CONTRACTOR SHALL PROVIDE ALL TEMPLATES, BACKBOXES AND EQUIPMENT ENCLOSURES OR MORE INFORMATION TO THE OTHER TRADES. THE CONTRACTOR SHALL PROVIDE ALL INFORMATION REGARDING MOUNTING ON WALLS, CONCRETE PADS OR OTHER MATERIALS. COORDINATE DELIVERY OF TEMPLATES AND EQUIPMENT WITH ALL AFFECTED CONTRACTORS.
13. ALL ELECTRICAL WORK SHALL BE DONE IN COMPLIANCE WITH THE NATIONAL ELECTRICAL CODE (LATEST VERSION BEING ENFORCED) AND ALL OTHER APPLICABLE CODES AND REGULATIONS FOR THAT APPLICATION.
14. THESE DRAWINGS DO NOT INCLUDE NECESSARY COMPONENTS OR INSTRUCTIONS FOR CONSTRUCTION SAFETY. THE ENGINEER ASSUMES NO RESPONSIBILITY FOR ANY WORKMANS OR TRANSPORT SAFETY, OR FOR THE ADEQUACY OF EQUIPMENT, BUILDING COMPONENTS, WORK AIDS, OR ANY NECESSITY TO WORK ON ENERGIZED ELECTRICAL COMPONENTS. FURTHER, NO SUPERINTENDENCE IS INCLUDED OR IMPLIED.
15. ALL SYSTEMS EQUIPMENT SHALL BE INSTALLED IN ACCORDANCE WITH THE MANUFACTURER'S RECOMMENDATIONS.
16. ALL ELECTRICAL MATERIALS, DEVICES, APPLIANCES, AND EQUIPMENT SHALL BE TESTED AND LISTED BY A NATIONALLY RECOGNIZED TESTING LABORATORY.
17. THE CONTRACTOR SHALL COORDINATE CONDUIT ROUTING (PLAN AND ELEVATION) WITH THE LIGHTING (NEW AND EXISTING), CEILING ELEVATION, STRUCTURE, DUCTWORK, PIPING, ETC., REQUIRED FOR THE COMPLETION OF THE PROJECT. PRIOR TO INSTALLATION.
18. THE CONTRACTOR SHALL SECURE AND PROTECT ALL EXISTING WORK. PROVIDE TEMPORARY FIRE RESISTANT TEMPORARY PLYWOOD PARTITIONS (WITH LOCKING DOORS, ETC., CLOSE ALL EXISTING OPENINGS AS REQUIRED). COORDINATE THIS WORK WITH THE OWNER'S REPRESENTATIVE PRIOR TO STARTING. IF TEMPORARY PARTITIONS IMPED THE FLOW OF EGRESS TO REQUIRED EGRESS DOORS AND STAIRS, THE CONTRACTOR SHALL PROVIDE EXIT SIGNS, AND SIGNAGE INDICATING SUCH WORK.
19. THE CONTRACTOR SHALL CAULK ALL JOINTS BETWEEN METAL FRAMES AND EXISTING CONDITIONS. THIS APPLIES TO BOTH INTERIOR AND EXTERIOR INSTALLATIONS.
20. ALL DIMENSIONS SHOWN ON THE DRAWINGS ARE FOR THE CONVENIENCE OF THE CONTRACTOR ONLY. VERIFY ALL DIMENSIONS IN THE FIELD PRIOR TO PERFORMING ANY WORK.
21. THE CONTRACTOR SHALL INSTALL ALL CONDUITS CONCEALED UNLESS NOTED OTHERWISE. EXPOSED CONDUIT SHALL ONLY BE INSTALLED IN CHASES, EXPOSED CEILING AREAS, JANITOR CLOSETS, AND MECHANICAL/ELECTRICAL ROOMS.
22. ALL ELECTRICAL CONDUIT SHALL BE INSTALLED IN ACCORDANCE WITH THE REQUIREMENTS OF THE NATIONAL ELECTRICAL CODE. PROVIDE ALL GROUNDING AND BONDING COMPONENTS NOT EXPLICITLY SHOWN ON THE DOCUMENTS.
23. THE CONTRACTOR SHALL PROVIDE UPDATED TYPED PANELBOARD DIRECTORIES, INDICATING THE LOADS SERVED BY THE RESPECTIVE PANELS. AMEND AS REQUIRED FOR AS-BUILT CONDITIONS. PROVIDE ELECTRONIC VERSIONS OF THE PANELBOARD SCHEDULES FOR FUTURE USE BY THE OWNER.
24. THE CONTRACTOR SHALL SECURE THE WORK AREA AND BE RESPONSIBLE FOR THE APPLICATION OF TYPICAL COMPANIES SERVING THE PROJECT. ALL WORK PERFORMED SHALL BE IN ACCORDANCE WITH THE REQUIREMENTS OF THE INDIVIDUAL UTILITY COMPANIES.
25. THE CONTRACTOR SHALL COORDINATE ALL WORK WITH THE OWNER PRIOR TO STARTING ALL PHASES OF THE PROJECT. THE CONTRACTOR SHALL COORDINATE WITH THE OWNER WHAT WORK, IF ANY, HAS TO BE COMPLETED DURING SECOND OR THIRD SHIFT.
26. THE CONTRACTOR SHALL PROVIDE ALL TEMPORARY FIRE PROTECTION CONNECTIONS TO KEEP AREAS UP AND OPERATIONAL DURING THE CONSTRUCTION. THE CONTRACTOR SHALL COORDINATE THESE REQUIREMENTS WITH THE OWNER.
27. THE VERBAGE ON THE DRAWINGS INDICATING TYPES OF MATERIALS TO BE ENCOUNTERED IS INTENDED TO AID THE ELECTRICAL CONTRACTOR IN UNDERSTANDING THE VARIOUS CONDITIONS LIKELY TO BE ENCOUNTERED. THE CONTRACTOR SHALL BE RESPONSIBLE FOR DETERMINING QUANTITIES OF MATERIALS REQUIRED TO COMPLETE THE WORK.
28. THE LOCATIONS OF EXISTING UTILITIES, STRUCTURE, AND OTHER CONDITIONS SHOWN ON THE PLANS ARE APPROXIMATE. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO VERIFY AND REPORT ANY DISCREPANCIES TO THE ENGINEER PRIOR TO BEGINNING ANY WORK.
29. ALL FURNISH AND EXTERIOR WALLS, WINDOWS AND SLEEVES. ALL CONDUITS SHALL HAVE SLEEVES INSTALLED. ALL SLEEVES INSTALLED ON EXTERIOR WALLS SHALL HAVE LINK SEALS INSTALLED.
30. THE CONTRACTOR SHALL MAINTAIN THE BOLDING IN WEATHERIGHT AND WATERPROOF CONDITION THROUGHOUT THE DURATION OF THE WORK. DO NOT LEAVE HOLES THROUGH WALLS AND/OR ROOFS OPEN TO THE ELEMENTS WHEN NO WORK IS OCCURRING IN THOSE AREAS.
31. THE CONTRACTOR SHALL SECURE AND PROTECT ALL EXISTING WORK. PROVIDE TEMPORARY FIRE RESISTANT TEMPORARY PLYWOOD PARTITIONS (WITH LOCKING DOORS, ETC., CLOSE ALL EXISTING OPENINGS AS REQUIRED). COORDINATE THIS WORK WITH THE OWNER'S REPRESENTATIVE PRIOR TO STARTING. IF TEMPORARY PARTITIONS IMPED THE FLOW OF EGRESS TO REQUIRED EGRESS DOORS AND STAIRS, THE CONTRACTOR SHALL PROVIDE EXIT SIGNS, AND SIGNAGE INDICATING SUCH WORK.
32. THE CONTRACTOR SHALL CAULK ALL JOINTS BETWEEN METAL FRAMES AND EXISTING CONDITIONS. THIS APPLIES TO BOTH INTERIOR AND EXTERIOR INSTALLATIONS.
33. ALL DIMENSIONS SHOWN ON THE DRAWINGS ARE FOR THE CONVENIENCE OF THE CONTRACTOR ONLY. VERIFY ALL DIMENSIONS IN THE FIELD PRIOR TO PERFORMING ANY WORK.
34. THE CONTRACTOR SHALL COORDINATE ALL WORK WITH THE OWNER PRIOR TO STARTING ALL PHASES OF THE PROJECT. THE CONTRACTOR SHALL COORDINATE WITH THE OWNER WHAT WORK, IF ANY, HAS TO BE COMPLETED DURING SECOND OR THIRD SHIFT.
35. THE CONTRACTOR SHALL PROVIDE ALL TEMPORARY FIRE PROTECTION CONNECTIONS TO KEEP AREAS UP AND OPERATIONAL DURING THE CONSTRUCTION. THE CONTRACTOR SHALL COORDINATE THESE REQUIREMENTS WITH THE OWNER.
36. THE VERBAGE ON THE DRAWINGS INDICATING TYPES OF MATERIALS TO BE ENCOUNTERED IS INTENDED TO AID THE ELECTRICAL CONTRACTOR IN UNDERSTANDING THE VARIOUS CONDITIONS LIKELY TO BE ENCOUNTERED. THE CONTRACTOR SHALL BE RESPONSIBLE FOR DETERMINING QUANTITIES OF MATERIALS REQUIRED TO COMPLETE THE WORK.
37. THE LOCATIONS OF EXISTING UTILITIES, STRUCTURE, AND OTHER CONDITIONS SHOWN ON THE PLANS ARE APPROXIMATE. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO VERIFY AND REPORT ANY DISCREPANCIES TO THE ENGINEER PRIOR TO BEGINNING ANY WORK.
38. ALL FURNISH AND EXTERIOR WALLS, WINDOWS AND SLEEVES. ALL CONDUITS SHALL HAVE SLEEVES INSTALLED. ALL SLEEVES INSTALLED ON EXTERIOR WALLS SHALL HAVE LINK SEALS INSTALLED.
39. THE CONTRACTOR SHALL MAINTAIN THE BOLDING IN WEATHERIGHT AND WATERPROOF CONDITION THROUGHOUT THE DURATION OF THE WORK. DO NOT LEAVE HOLES THROUGH WALLS AND/OR ROOFS OPEN TO THE ELEMENTS WHEN NO WORK IS OCCURRING IN THOSE AREAS.
40. THE CONTRACTOR SHALL SECURE AND PROTECT ALL EXISTING WORK. PROVIDE TEMPORARY FIRE RESISTANT TEMPORARY PLYWOOD PARTITIONS (WITH LOCKING DOORS, ETC., CLOSE ALL EXISTING OPENINGS AS REQUIRED). COORDINATE THIS WORK WITH THE OWNER'S REPRESENTATIVE PRIOR TO STARTING. IF TEMPORARY PARTITIONS IMPED THE FLOW OF EGRESS TO REQUIRED EGRESS DOORS AND STAIRS, THE CONTRACTOR SHALL PROVIDE EXIT SIGNS, AND SIGNAGE INDICATING SUCH WORK.
41. THE CONTRACTOR SHALL CAULK ALL JOINTS BETWEEN METAL FRAMES AND EXISTING CONDITIONS. THIS APPLIES TO BOTH INTERIOR AND EXTERIOR INSTALLATIONS.
42. ALL DIMENSIONS SHOWN ON THE DRAWINGS ARE FOR THE CONVENIENCE OF THE CONTRACTOR ONLY. VERIFY ALL DIMENSIONS IN THE FIELD PRIOR TO PERFORMING ANY WORK.
43. THE CONTRACTOR SHALL COORDINATE ALL WORK WITH THE OWNER PRIOR TO STARTING ALL PHASES OF THE PROJECT. THE CONTRACTOR SHALL COORDINATE WITH THE OWNER WHAT WORK, IF ANY, HAS TO BE COMPLETED DURING SECOND OR THIRD SHIFT.
44. THE CONTRACTOR SHALL PROVIDE ALL TEMPORARY FIRE PROTECTION CONNECTIONS TO KEEP AREAS UP AND OPERATIONAL DURING THE CONSTRUCTION. THE CONTRACTOR SHALL COORDINATE THESE REQUIREMENTS WITH THE OWNER.
45. THE VERBAGE ON THE DRAWINGS INDICATING TYPES OF MATERIALS TO BE ENCOUNTERED IS INTENDED TO AID THE ELECTRICAL CONTRACTOR IN UNDERSTANDING THE VARIOUS CONDITIONS LIKELY TO BE ENCOUNTERED. THE CONTRACTOR SHALL BE RESPONSIBLE FOR DETERMINING QUANTITIES OF MATERIALS REQUIRED TO COMPLETE THE WORK.
46. THE LOCATIONS OF EXISTING UTILITIES, STRUCTURE, AND OTHER CONDITIONS SHOWN ON THE PLANS ARE APPROXIMATE. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO VERIFY AND REPORT ANY DISCREPANCIES TO THE ENGINEER PRIOR TO BEGINNING ANY WORK.
47. ALL FURNISH AND EXTERIOR WALLS, WINDOWS AND SLEEVES. ALL CONDUITS SHALL HAVE SLEEVES INSTALLED. ALL SLEEVES INSTALLED ON EXTERIOR WALLS SHALL HAVE LINK SEALS INSTALLED.
48. THE CONTRACTOR SHALL MAINTAIN THE BOLDING IN WEATHERIGHT AND WATERPROOF CONDITION THROUGHOUT THE DURATION OF THE WORK. DO NOT LEAVE HOLES THROUGH WALLS AND/OR ROOFS OPEN TO THE ELEMENTS WHEN NO WORK IS OCCURRING IN THOSE AREAS.
49. THE CONTRACTOR SHALL SECURE AND PROTECT ALL EXISTING WORK. PROVIDE TEMPORARY FIRE RESISTANT TEMPORARY PLYWOOD PARTITIONS (WITH LOCKING DOORS, ETC., CLOSE ALL EXISTING OPENINGS AS REQUIRED). COORDINATE THIS WORK WITH THE OWNER'S REPRESENTATIVE PRIOR TO STARTING. IF TEMPORARY PARTITIONS IMPED THE FLOW OF EGRESS TO REQUIRED EGRESS DOORS AND STAIRS, THE CONTRACTOR SHALL PROVIDE EXIT SIGNS, AND SIGNAGE INDICATING SUCH WORK.
50. THE CONTRACTOR SHALL CAULK ALL JOINTS BETWEEN METAL FRAMES AND EXISTING CONDITIONS. THIS APPLIES TO BOTH INTERIOR AND EXTERIOR INSTALLATIONS.
51. ALL DIMENSIONS SHOWN ON THE DRAWINGS ARE FOR THE CONVENIENCE OF THE CONTRACTOR ONLY. VERIFY ALL DIMENSIONS IN THE FIELD PRIOR TO PERFORMING ANY WORK.
52. THE CONTRACTOR SHALL COORDINATE ALL WORK WITH THE OWNER PRIOR TO STARTING ALL PHASES OF THE PROJECT. THE CONTRACTOR SHALL COORDINATE WITH THE OWNER WHAT WORK, IF ANY, HAS TO BE COMPLETED DURING SECOND OR THIRD SHIFT.
53. THE CONTRACTOR SHALL PROVIDE ALL TEMPORARY FIRE PROTECTION CONNECTIONS TO KEEP AREAS UP AND OPERATIONAL DURING THE CONSTRUCTION. THE CONTRACTOR SHALL COORDINATE THESE REQUIREMENTS WITH THE OWNER.
54. THE VERBAGE ON THE DRAWINGS INDICATING TYPES OF MATERIALS TO BE ENCOUNTERED IS INTENDED TO AID THE ELECTRICAL CONTRACTOR IN UNDERSTANDING THE VARIOUS CONDITIONS LIKELY TO BE ENCOUNTERED. THE CONTRACTOR SHALL BE RESPONSIBLE FOR DETERMINING QUANTITIES OF MATERIALS REQUIRED TO COMPLETE THE WORK.
55. THE LOCATIONS OF EXISTING UTILITIES, STRUCTURE, AND OTHER CONDITIONS SHOWN ON THE PLANS ARE APPROXIMATE. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO VERIFY AND REPORT ANY DISCREPANCIES TO THE ENGINEER PRIOR TO BEGINNING ANY WORK.
56. ALL FURNISH AND EXTERIOR WALLS, WINDOWS AND SLEEVES. ALL CONDUITS SHALL HAVE SLEEVES INSTALLED. ALL SLEEVES INSTALLED ON EXTERIOR WALLS SHALL HAVE LINK SEALS INSTALLED.
57. THE CONTRACTOR SHALL MAINTAIN THE BOLDING IN WEATHERIGHT AND WATERPROOF CONDITION THROUGHOUT THE DURATION OF THE WORK. DO NOT LEAVE HOLES THROUGH WALLS AND/OR ROOFS OPEN TO THE ELEMENTS WHEN NO WORK IS OCCURRING IN THOSE AREAS.
58. THE CONTRACTOR SHALL SECURE AND PROTECT ALL EXISTING WORK. PROVIDE TEMPORARY FIRE RESISTANT TEMPORARY PLYWOOD PARTITIONS (WITH LOCKING DOORS, ETC., CLOSE ALL EXISTING OPENINGS AS REQUIRED). COORDINATE THIS WORK WITH THE OWNER'S REPRESENTATIVE PRIOR TO STARTING. IF TEMPORARY PARTITIONS IMPED THE FLOW OF EGRESS TO REQUIRED EGRESS DOORS AND STAIRS, THE CONTRACTOR SHALL PROVIDE EXIT SIGNS, AND SIGNAGE INDICATING SUCH WORK.
59. THE CONTRACTOR SHALL CAULK ALL JOINTS BETWEEN METAL FRAMES AND EXISTING CONDITIONS. THIS APPLIES TO BOTH INTERIOR AND EXTERIOR INSTALLATIONS.
60. ALL DIMENSIONS SHOWN ON THE DRAWINGS ARE FOR THE CONVENIENCE OF THE CONTRACTOR ONLY. VERIFY ALL DIMENSIONS IN THE FIELD PRIOR TO PERFORMING ANY WORK.
61. THE CONTRACTOR SHALL COORDINATE ALL WORK WITH THE OWNER PRIOR TO STARTING ALL PHASES OF THE PROJECT

[illegible]


Electrical Demolition General Notes

- 1 UNLESS NOTED OTHERWISE, REMOVE ALL ELECTRICAL DEVICES FROM WITHIN THE AREA OF DEMOLITION WORK IDENTIFIED. REMOVE ALL ASSOCIATED CONDUIT AND WIRE BACK TO THE UPSTREAM DISTRIBUTION DEVICE. THE INTENT IS FOR ALL DEVICES TO BE REMOVED TO ALLOW THE RENOVATION AND INSTALLATION OF ALL NEW DEVICES AS SHOWN ON THE NEW WORK DOCUMENTS. EXISTING DEVICES SHOWN ARE DIAGRAMMATIC AND BASED ON FIELD SURVEYS AND/OR RECORD DRAWINGS PROVIDED BY THE OWNER AND DO NOT REPRESENT THE FULL SCOPE OF DEMOLITION WORK. THE ACTUAL CONDITIONS MAY VARY. ALL EXISTING CONDITIONS MUST BE VERIFIED PRIOR TO BID. THE PLANS ARE INTENDED TO SHOW THE LOCATIONS OF EXISTING DEVICES AND IN NO WAY RELIEVE THE CONTRACTOR FROM PROVIDING ANY AND ALL COORDINATION NECESSARY TO COMPLETE THE NEW WORK. FIELD CONDITIONS SHALL GOVERN. FIELD VERIFY ALL EXISTING CONDITIONS AND DIMENSIONS PRIOR TO COMMENCEMENT OF WORK AND OBTAIN CLARIFICATIONS FROM ARCHITECT/ENGINEER IF NECESSARY.
- 2 CONTRACTOR SHALL PROVIDE A MINIMUM TWO WEEKS WRITTEN NOTICE PRIOR TO ANY SHUT DOWN. NOTICE IS TO INCLUDE BUT IS NOT LIMITED TO THE LOCATION, PANELS AND DURATION OF SHUT DOWN. SHUT DOWN IS TO BE COORDINATED WITH INSTALLATION OF NEW EQUIPMENT TO KEEP SHUT DOWN TO A MINIMAL DURATION.
- 3 OWNER SHALL HAVE RIGHT OF FIRST REFUSAL TO ANY EQUIPMENT, DEVICES, LUMINAIRES, ETC. DEMOLISHED FROM RENOVATION AREA PRIOR TO DISPOSAL.
- 4 MAINTAIN CONTINUITY OF SERVICE TO AREAS OUTSIDE THE PROJECT BOUNDARY. PATCH AND REPAIR ALL CIRCUITS CUT OFF DURING DEMOLITION BY WIRING METHODS COMPATIBLE WITH THE EXISTING INSTALLATION.
- 5 THE ELECTRICAL CONTRACTOR SHALL REVIEW THE DRAWINGS OF ALL OTHER TRADES IN THIS CONTRACT. THE REMOVAL OF ELECTRICAL SERVICE TO ALL EQUIPMENT IDENTIFIED ON OTHER TRADE DRAWINGS IS THE RESPONSIBILITY OF THE ELECTRICAL CONTRACTOR.
- 6 EXERCISE EXTREME CAUTION WHEN REMOVING/RELOCATING WIRING AND EQUIPMENT. IT IS THE CONTRACTOR'S RESPONSIBILITY TO ENSURE THAT OTHER WIRING DEVICES, EQUIPMENT AND LIGHT FIXTURES THAT MAY BE CONNECTED TO THE SAME CIRCUIT REMAIN OPERATIONAL AND ACTIVE.
- 7 CONTRACTOR SHALL EXAMINE CONDITIONS AND TEST FUNCTIONALITIES OF ALL EXISTING ELECTRICAL EQUIPMENT IDENTIFIED TO BE REUSED AND/OR RELOCATED. PROVIDE REPORT TO ENGINEER AND OWNER PRIOR TO DEMOLITION.

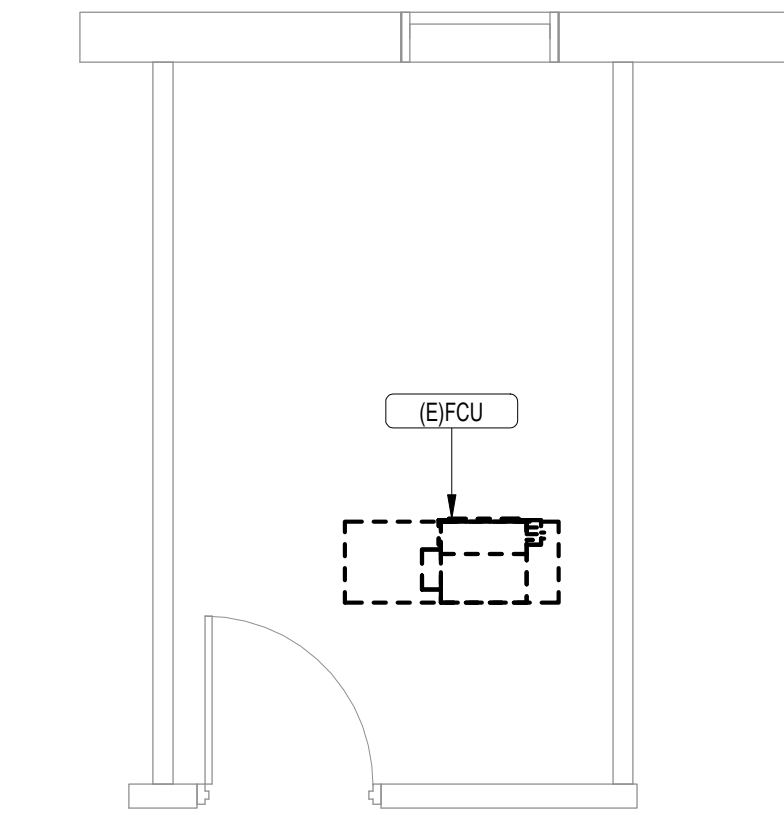

BLDG 01-04 FOURTH FLOOR ELECTRICAL DEMOLITION PLAN - ROOM 472

2 1/4" = 1'-0"

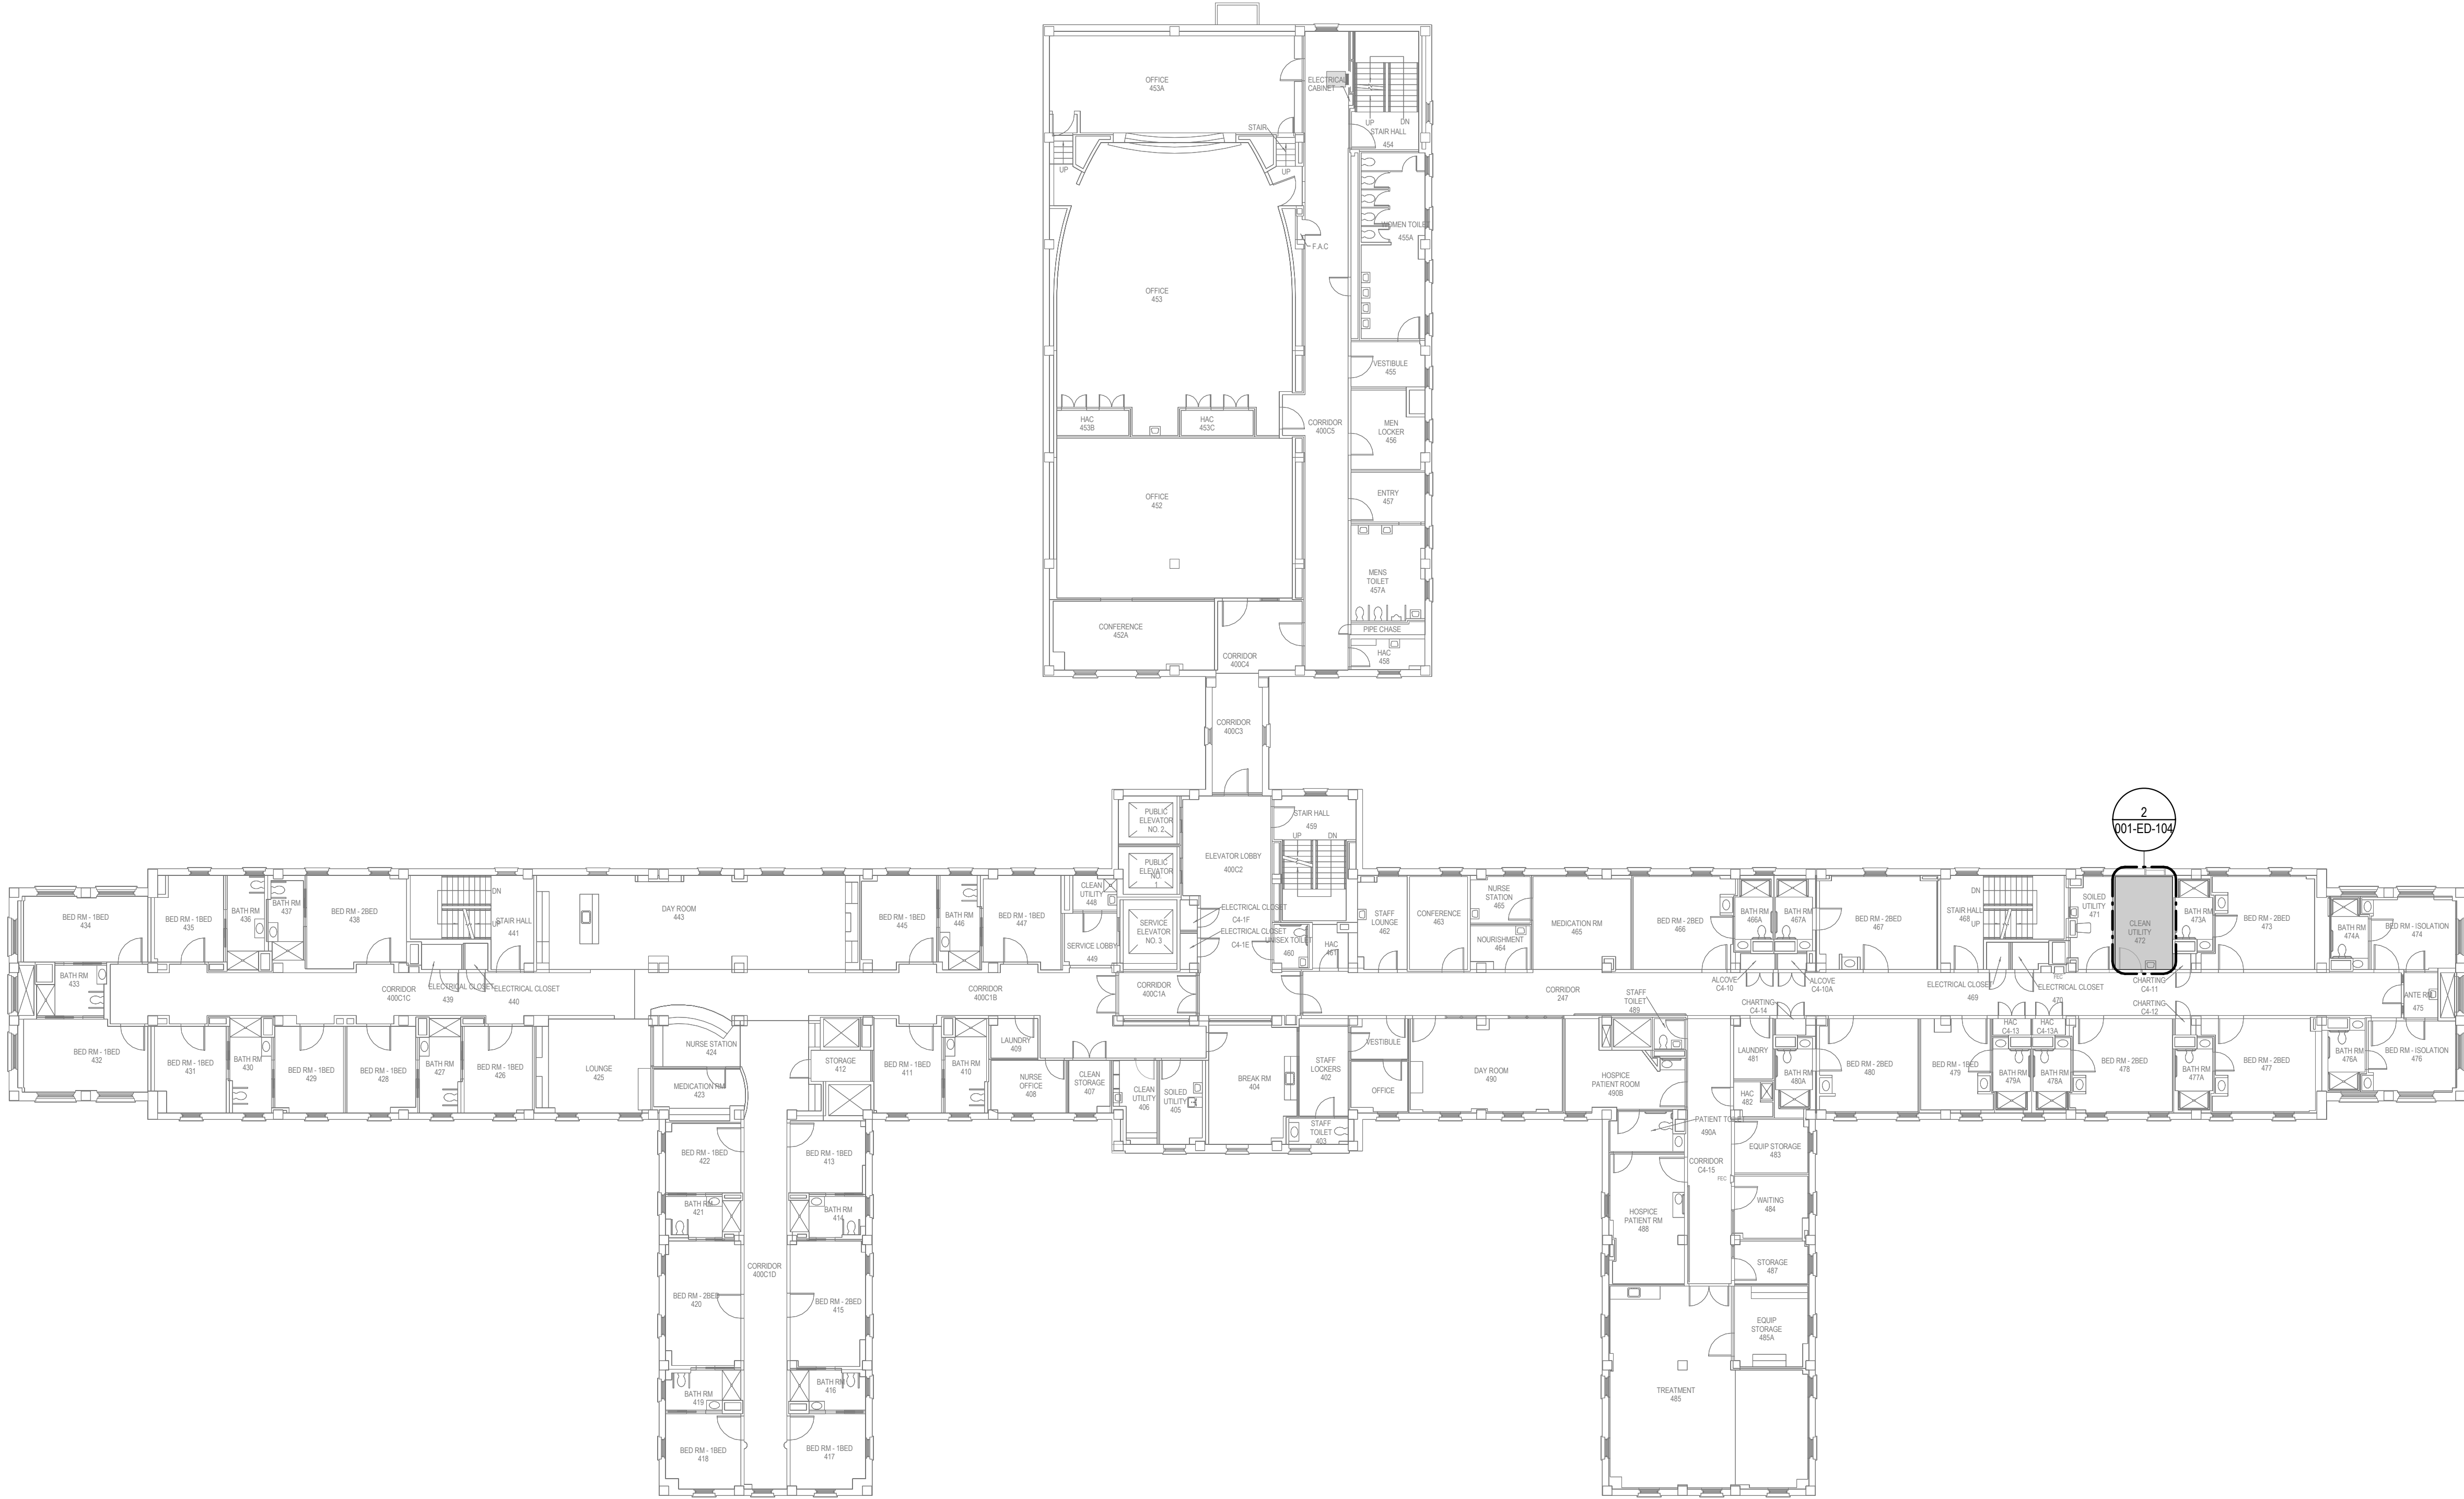

BLDG 01-04 FOURTH FLOOR ELECTRICAL DEMOLITION PLAN

1 1/16" = 1'-0"

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

UNLESS NOTED OTHERWISE, REMOVE ALL ELECTRICAL DEVICES FROM WITHIN THE AREA OF DEMOLITION WORK IDENTIFIED. REMOVE ALL ASSOCIATED CABLES AND WIRING BACK TO THE NEAREST DISTRIBUTION DEVICE. THE ELECTRICAL DEVICES TO BE REMOVED SHALL BE IDENTIFIED BY THE CONTRACTOR ON THE NEW DEMO SCHEDULES AS SHOWN ON THE NEW WORK DOCUMENTS. EXISTING DEVICES SHOWN ARE DIAGRAMMATIC AND BASED ON THE CONTRACTOR'S PRIOR RESEARCH. THE CONTRACTOR SHALL VERIFY THE EXISTENCE OF ALL ELECTRICAL DEVICES PRIOR TO DEMOLITION WORK. THE ACTUAL CONDITIONS MAY VARY. ALL EXISTING CONDITIONS MUST BE VERIFIED PRIOR TO BID. THE PLANS ARE INTENDED TO SHOW THE LOCATIONS OF EXISTING DEVICES AND IN NO WAY RELIEVE THE CONTRACTOR FROM THE OBLIGATION TO CONDUCT NECESSARY FIELD VERIFICATION. THE CONTRACTOR SHALL FIELD VERIFY ALL EXISTING CONDITIONS AND DIMENSIONS PRIOR TO COMMENCEMENT OF WORK AND OBTAIN CLARIFICATIONS FROM ARCHITECT/ENGINEER IF NECESSARY.

CONTRACTOR SHALL PROVIDE A MINIMUM TWO WEEKS WRITTEN NOTICE PRIOR TO ANY SHUT DOWN. NOTICE SHALL BE GIVEN TO THE OWNER AND ARCHITECT/ENGINEER. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE SHUT DOWN BE COORDINATED WITH INSTALLATION OF NEW EQUIPMENT TO KEEP SHUT DOWN TO A MINIMAL DURATION.


OWNER SHALL HAVE RIGHT OF FIRST REFUSAL TO ANY EQUIPMENT, DEVICES, LUMINAIRES, ETC. DEMOLISHED OR REMOVED FROM THE PROJECT.

MAINTAIN CONTINUITY OF SERVICE TO AREAS OUTSIDE THE PROJECT BOUNDARY. PATCH AND REPAIR ALL CIRCUITS OUT OF DURING DEMOLITION BY WIRING METHODS COMPATIBLE WITH THE EXISTING INSTALLATION.

THE ELECTRICAL CONTRACTOR SHALL REVIEW THE DRAWINGS OF ALL OTHER TRADES IN THIS CONTRACT. THE ELECTRICAL CONTRACTOR SHALL BE RESPONSIBLE FOR IDENTIFYING ON OTHER TRADE DRAWINGS IS THE RESPONSIBILITY OF THE ELECTRICAL CONTRACTOR.

EXERCISE EXTREME CAUTION WHEN REMOVING/RELOCATING WIRING AND EQUIPMENT. IT IS THE CONTRACTOR'S RESPONSIBILITY TO GUARANTEE THAT ALL WIRING AND LIGHT FIXTURES ARE PROPERLY IDENTIFIED AND CONNECTED TO THE SAME CIRCUIT REMAIN OPERATIONAL AND ACTIVE.

CONTRACTOR SHALL EXAMINE CONDITIONS AND TEST FUNCTIONALITIES OF ALL EXISTING ELECTRICAL EQUIPMENT PRIOR TO BEING REUSED OR RELOCATED. PROVIDE REPORT TO ENGINEER AND OWNER PRIOR TO DEMOLITION.

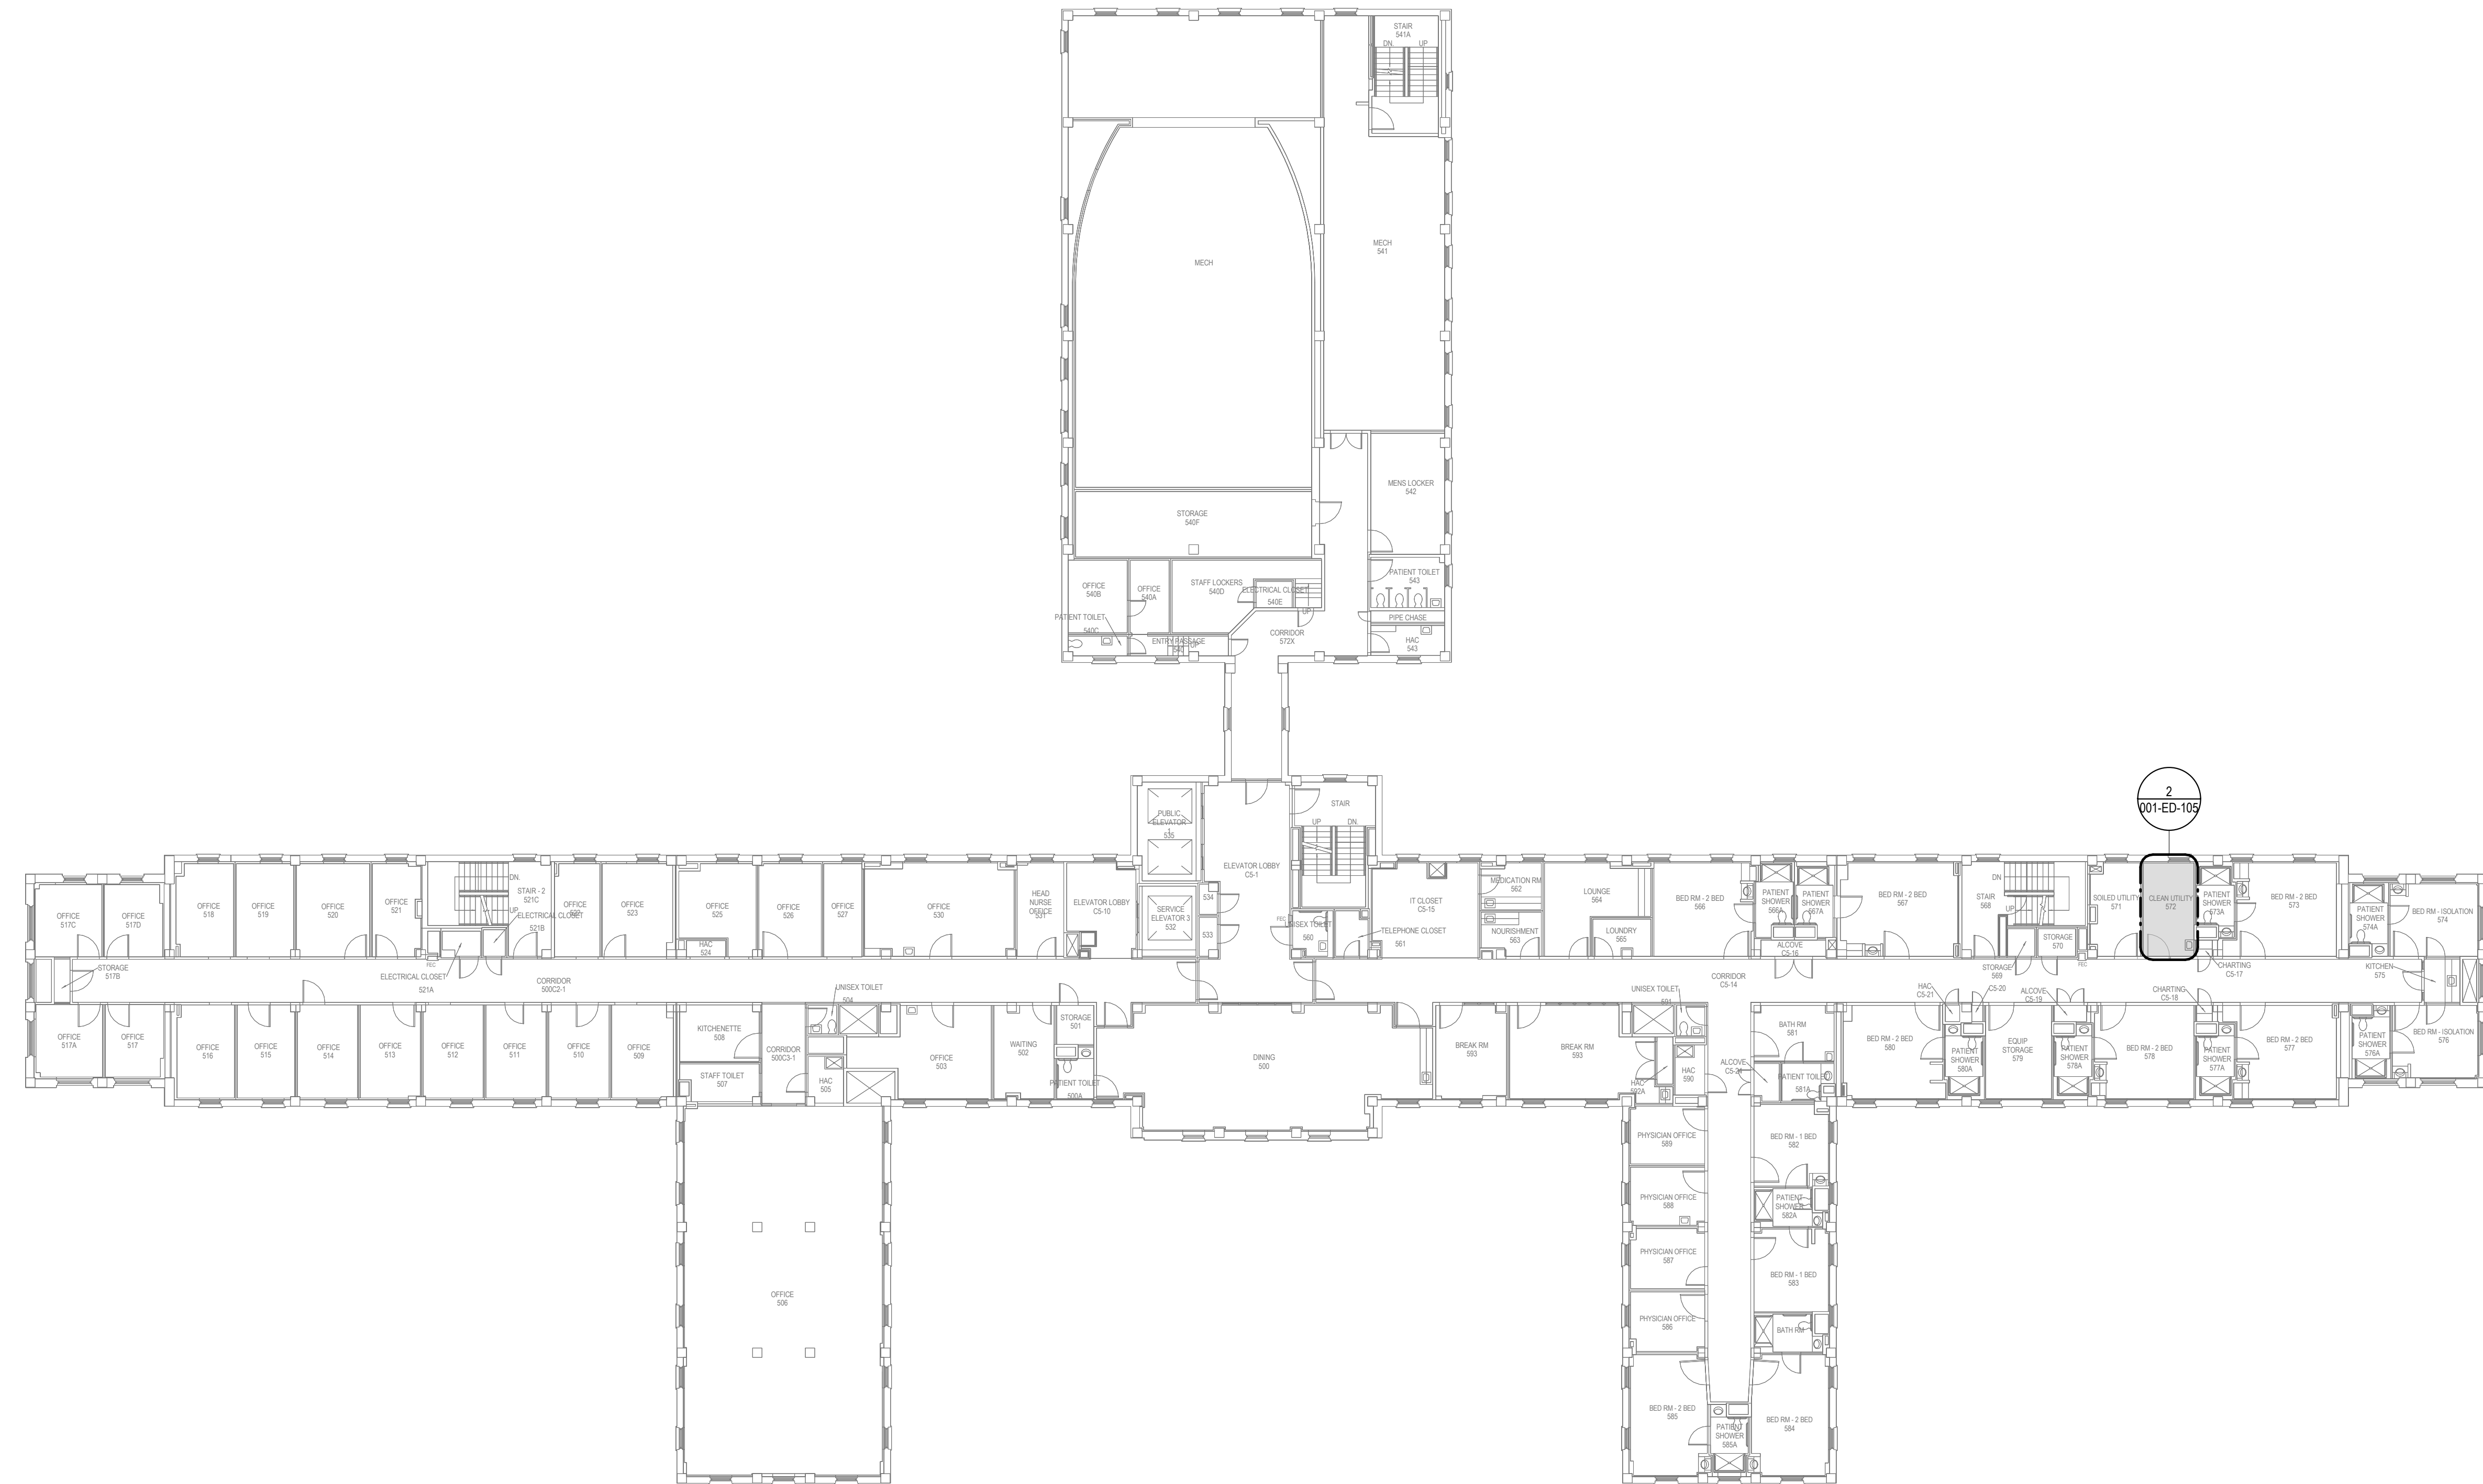

Autodesk Docs://VLEB-016 Sterile Storage Improvements/VLEB-016-MEP_24.rvt

A

B

C

D

E

F

3/5/2026 3:56:40 PM

Autodesk Docs\\VLEB-016 Sterile Storage Improvements\\VLEB-016-MEP_24.rvt

A

B

C

D

E


F

ELECTRICAL DEMOLITION GENERAL NOTES

- 1 UNLESS NOTED OTHERWISE, REMOVE ALL ELECTRICAL DEVICES FROM WITHIN THE AREA OF DEMOLITION WORK. IDENTIFIED. REMOVE ALL ASSOCIATED CONDUIT AND WIRE BACK TO THE UPSTREAM DISTRIBUTION DEVICE. THE INTENT IS FOR ALL DEVICES TO BE REMOVED TO ALLOW THE RENOVATION AND INSTALLATION OF ALL NEW DEVICES AS SHOWN ON THE NEW WORK DOCUMENTS. EXISTING DEVICES SHOWN ARE DIAGRAMMATIC AND BASED ON FIELD SURVEYS AND/OR RECORD DRAWINGS PROVIDED BY THE OWNER AND DO NOT REPRESENT THE FULL SCOPE OF DEMOLITION WORK. THE ACTUAL CONDITIONS MAY VARY. ALL EXISTING CONDITIONS MUST BE VERIFIED PRIOR TO BID. THE PLANS ARE INTENDED TO SHOW THE LOCATIONS OF EXISTING DEVICES AND IN NO WAY RELIEVE THE CONTRACTOR FROM PROVIDING ANY AND ALL COORDINATION NECESSARY TO COMPLETE THE NEW WORK. FIELD CONDITIONS SHALL GOVERN. FIELD VERIFY ALL EXISTING CONDITIONS AND DIMENSIONS PRIOR TO COMMENCEMENT OF WORK AND OBTAIN CLARIFICATIONS FROM ARCHITECT/ENGINEER IF NECESSARY.
- 2 CONTRACTOR SHALL PROVIDE A MINIMUM TWO WEEKS WRITTEN NOTICE PRIOR TO ANY SHUT DOWN. NOTICE IS TO INCLUDE BUT IS NOT LIMITED TO THE LOCATION, PANELS AND DURATION OF SHUT DOWN. SHUT DOWN IS TO BE COORDINATED WITH INSTALLATION OF NEW EQUIPMENT TO KEEP SHUT DOWN TO A MINIMAL DURATION.
- 3 OWNER SHALL HAVE RIGHT OF FIRST REFUSAL TO ANY EQUIPMENT, DEVICES, LUMINAIRES, ETC. DEMOLISHED FROM RENOVATION AREA PRIOR TO DISPOSAL.
- 4 MAINTAIN CONTINUITY OF SERVICE TO AREAS OUTSIDE THE PROJECT BOUNDARY. PATCH AND REPAIR ALL CIRCUITS CUT OFF DURING DEMOLITION BY WIRING METHODS COMPATIBLE WITH THE EXISTING INSTALLATION.
- 5 THE ELECTRICAL CONTRACTOR SHALL REVIEW THE DRAWINGS OF ALL OTHER TRADES IN THIS CONTRACT. THE REMOVAL OF ELECTRICAL SERVICE TO ALL EQUIPMENT IDENTIFIED ON OTHER TRADE DRAWINGS IS THE RESPONSIBILITY OF THE ELECTRICAL CONTRACTOR.
- 6 EXERCISE EXTREME CAUTION WHEN REMOVING/ RELOCATING WIRING AND EQUIPMENT. IT IS THE CONTRACTORS RESPONSIBILITY TO ENSURE THAT OTHER WIRING DEVICES, EQUIPMENT AND LIGHT FIXTURES THAT MAY BE CONNECTED TO THE SAME CIRCUIT REMAIN OPERATIONAL AND ACTIVE.
- 7 CONTRACTOR SHALL EXAMINE CONDITIONS AND TEST FUNCTIONALITIES OF ALL EXISTING ELECTRICAL EQUIPMENT IDENTIFIED TO BE REUSED AND/OR RELOCATED. PROVIDE REPORT TO ENGINEER AND OWNER PRIOR TO DEMOLITION.


POWER PLAN KEYNOTES

- 1 EXISTING INDOOR AND OUTDOOR EQUIPMENT SERVING THIS SPACE IS TO BE REMOVED. REMOVE ASSOCIATED ELECTRICAL CONNECTION BACK TO SOURCE AND LABEL SPARE.

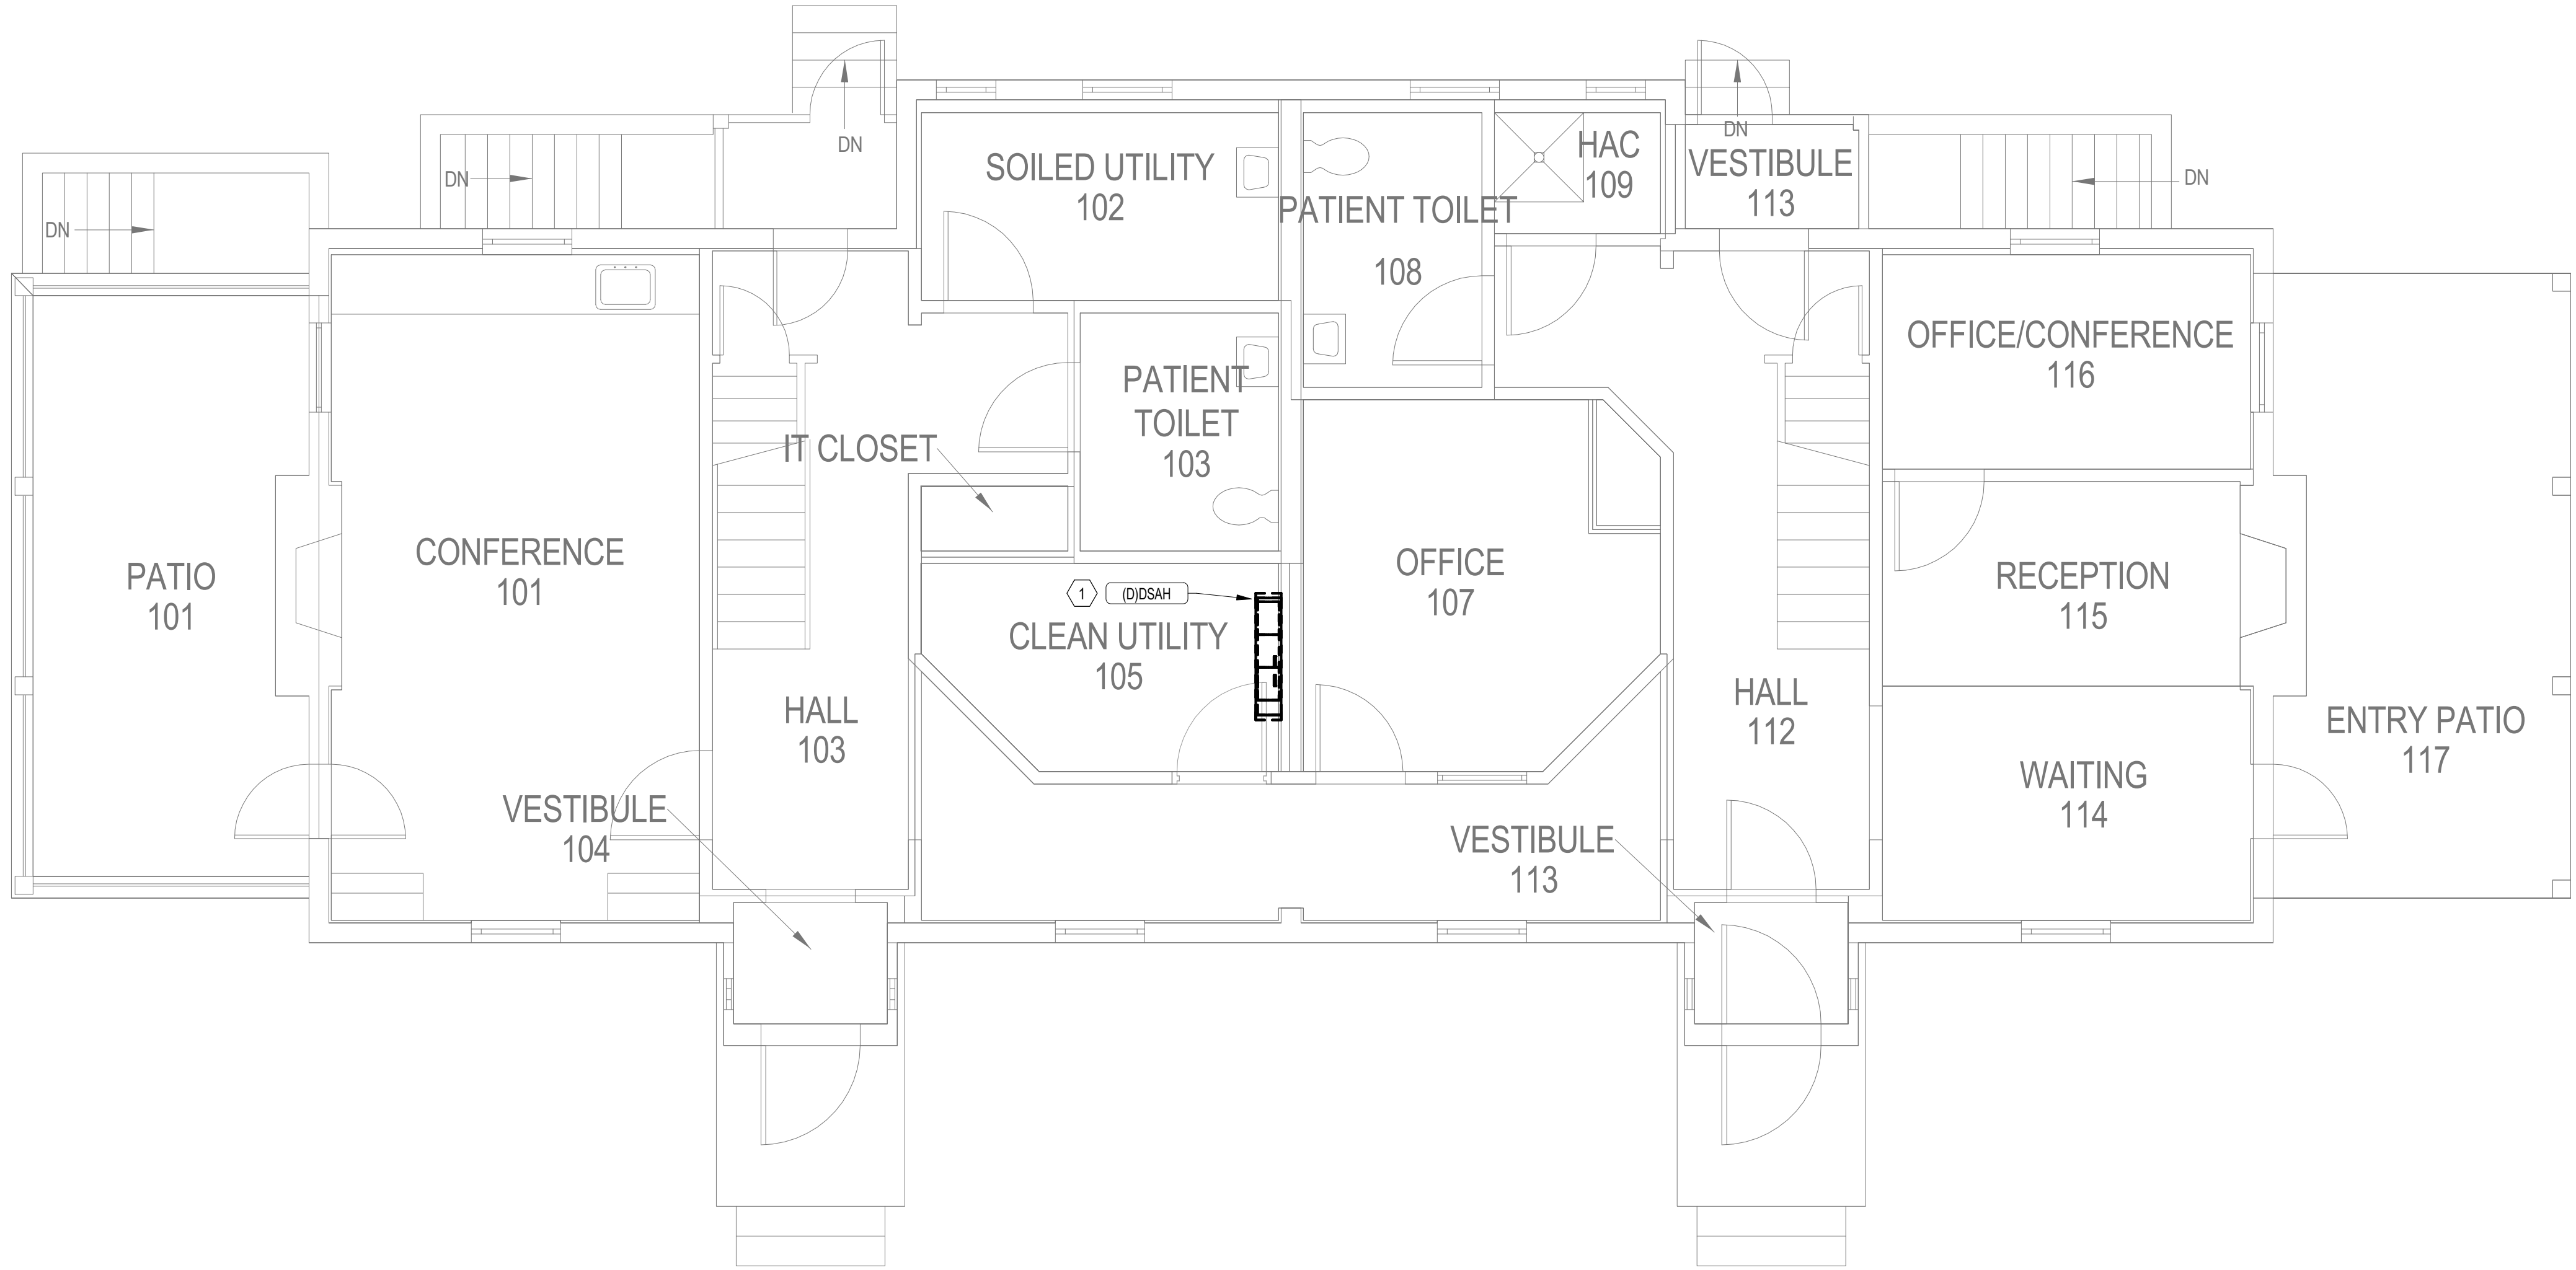

1



BLDG 4-01 FIRST FLOOR ELECTRICAL DEMOLITION PLAN
1/4" = 1'-0"



																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					</
--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	----

ELECTRICAL DEMOLITION GENERAL NOTES

- 1 UNLESS NOTED OTHERWISE, REMOVE ALL ELECTRICAL DEVICES FROM WITHIN THE AREA OF DEMOLITION WORK IDENTIFIED. REMOVE ALL ASSOCIATED CONDUIT AND WIRE BACK TO THE UPSTREAM DISTRIBUTION DEVICE. THE INTENT IS FOR ALL DEVICES TO BE REMOVED TO ALLOW THE RENOVATION AND INSTALLATION OF ALL NEW DEVICES AS SHOWN ON THE NEW WORK DOCUMENTS. EXISTING DEVICES SHOWN ARE DIAGRAMATIC AND BASED ON FIELD SURVEYS AND/OR RECORD DRAWINGS PROVIDED BY THE OWNER AND DO NOT REPRESENT THE FULL SCOPE OF DEMOLITION WORK. THE ACTUAL CONDITIONS MAY VARY. ALL EXISTING CONDITIONS MUST BE VERIFIED PRIOR TO BID. THE PLANS ARE INTENDED TO SHOW THE LOCATIONS OF EXISTING DEVICES AND IN NO WAY RELIEVE THE CONTRACTOR FROM PROVIDING ANY AND ALL COORDINATION NECESSARY TO COMPLETE THE NEW WORK. FIELD CONDITIONS SHALL GOVERN. FIELD VERIFY ALL EXISTING CONDITIONS AND DIMENSIONS PRIOR TO COMMENCEMENT OF WORK AND OBTAIN CLARIFICATIONS FROM ARCHITECT/ENGINEER IF NECESSARY.
- 2 CONTRACTOR SHALL PROVIDE A MINIMUM TWO WEEKS WRITTEN NOTICE PRIOR TO ANY SHUT DOWN. NOTICE IS TO INCLUDE BUT IS NOT LIMITED TO THE LOCATION, PANELS AND DURATION OF SHUT DOWN. SHUT DOWN IS TO BE COORDINATED WITH INSTALLATION OF NEW EQUIPMENT TO KEEP SHUT DOWN TO A MINIMAL DURATION.
- 3 OWNER SHALL HAVE RIGHT OF FIRST REFUSAL TO ANY EQUIPMENT, DEVICES, LUMINAIRES, ETC. DEMOLISHED FROM RENOVATION AREA PRIOR TO DISPOSAL.
- 4 MAINTAIN CONTINUITY OF SERVICE TO AREAS OUTSIDE THE PROJECT BOUNDARY. PATCH AND REPAIR ALL CIRCUITS CUT OFF DURING DEMOLITION BY WIRING METHODS COMPATIBLE WITH THE EXISTING INSTALLATION.
- 5 THE ELECTRICAL CONTRACTOR SHALL REVIEW THE DRAWINGS OF ALL OTHER TRADES IN THIS CONTRACT. THE REMOVAL OF ELECTRICAL SERVICE TO ALL EQUIPMENT IDENTIFIED ON OTHER TRADE DRAWINGS IS THE RESPONSIBILITY OF THE ELECTRICAL CONTRACTOR.
- 6 EXERCISE EXTREME CAUTION WHEN REMOVING/RELOCATING WIRING AND EQUIPMENT. IT IS THE CONTRACTOR'S RESPONSIBILITY TO ENSURE THAT OTHER WIRING DEVICES, EQUIPMENT AND LIGHT FIXTURES THAT MAY BE CONNECTED TO THE SAME CIRCUIT REMAIN OPERATIONAL AND ACTIVE.
- 7 CONTRACTOR SHALL EXAMINE CONDITIONS AND TEST FUNCTIONALITIES OF ALL EXISTING ELECTRICAL EQUIPMENT IDENTIFIED TO BE REUSED AND/OR RELOCATED. PROVIDE REPORT TO ENGINEER AND OWNER PRIOR TO DEMOLITION.

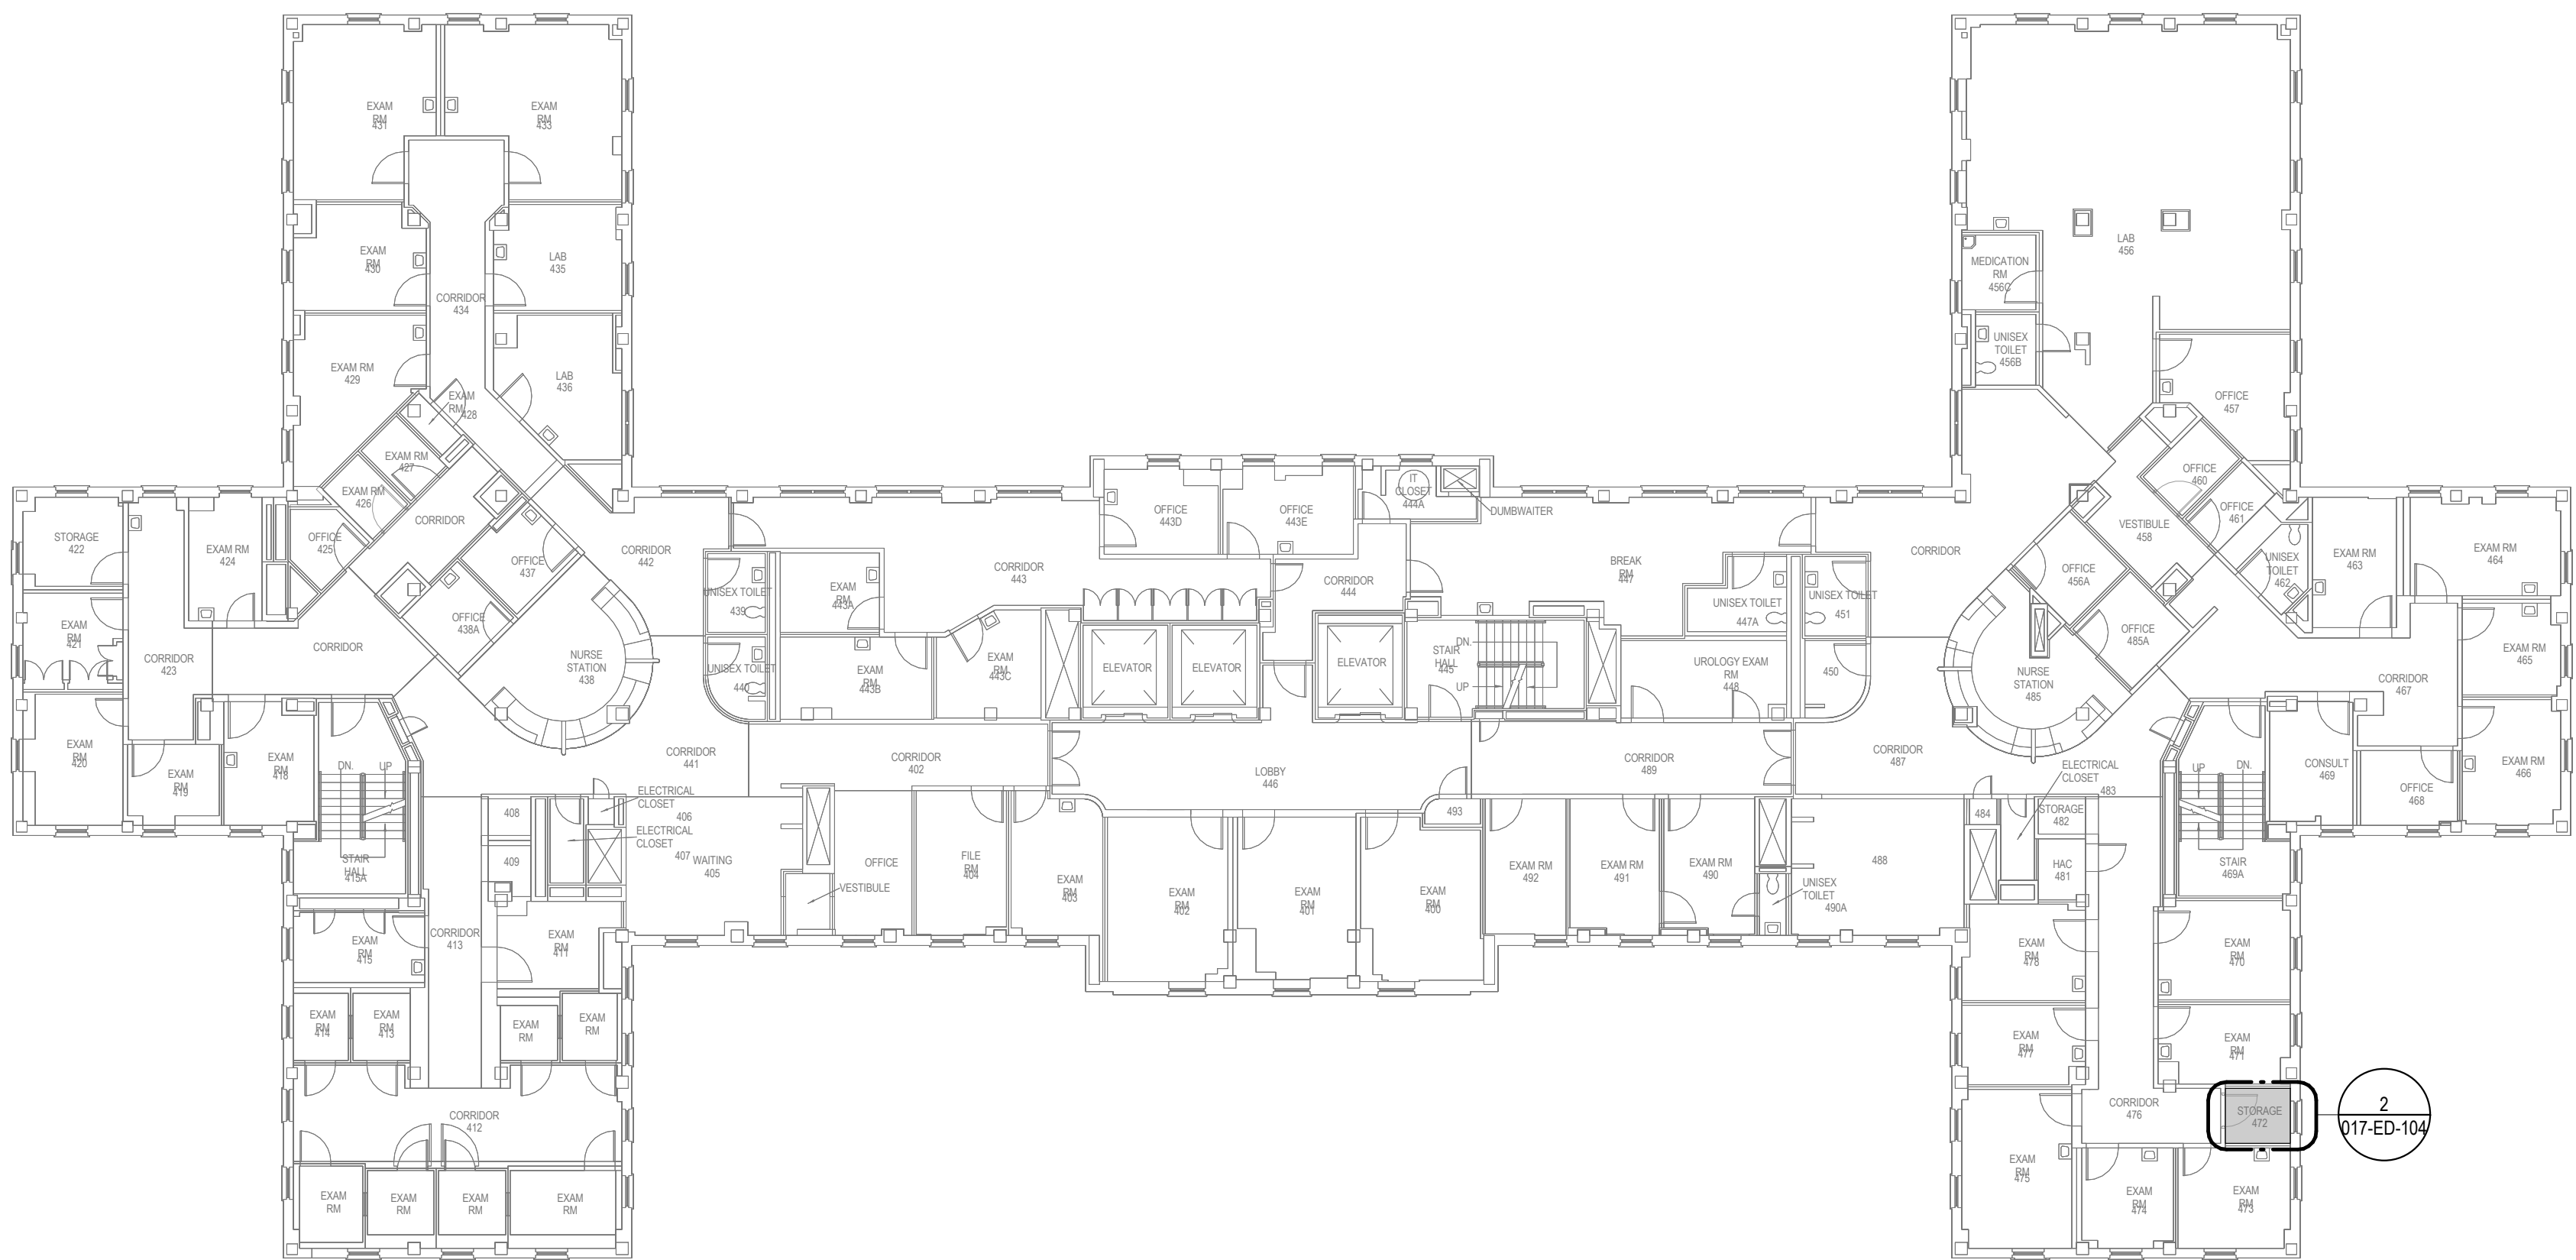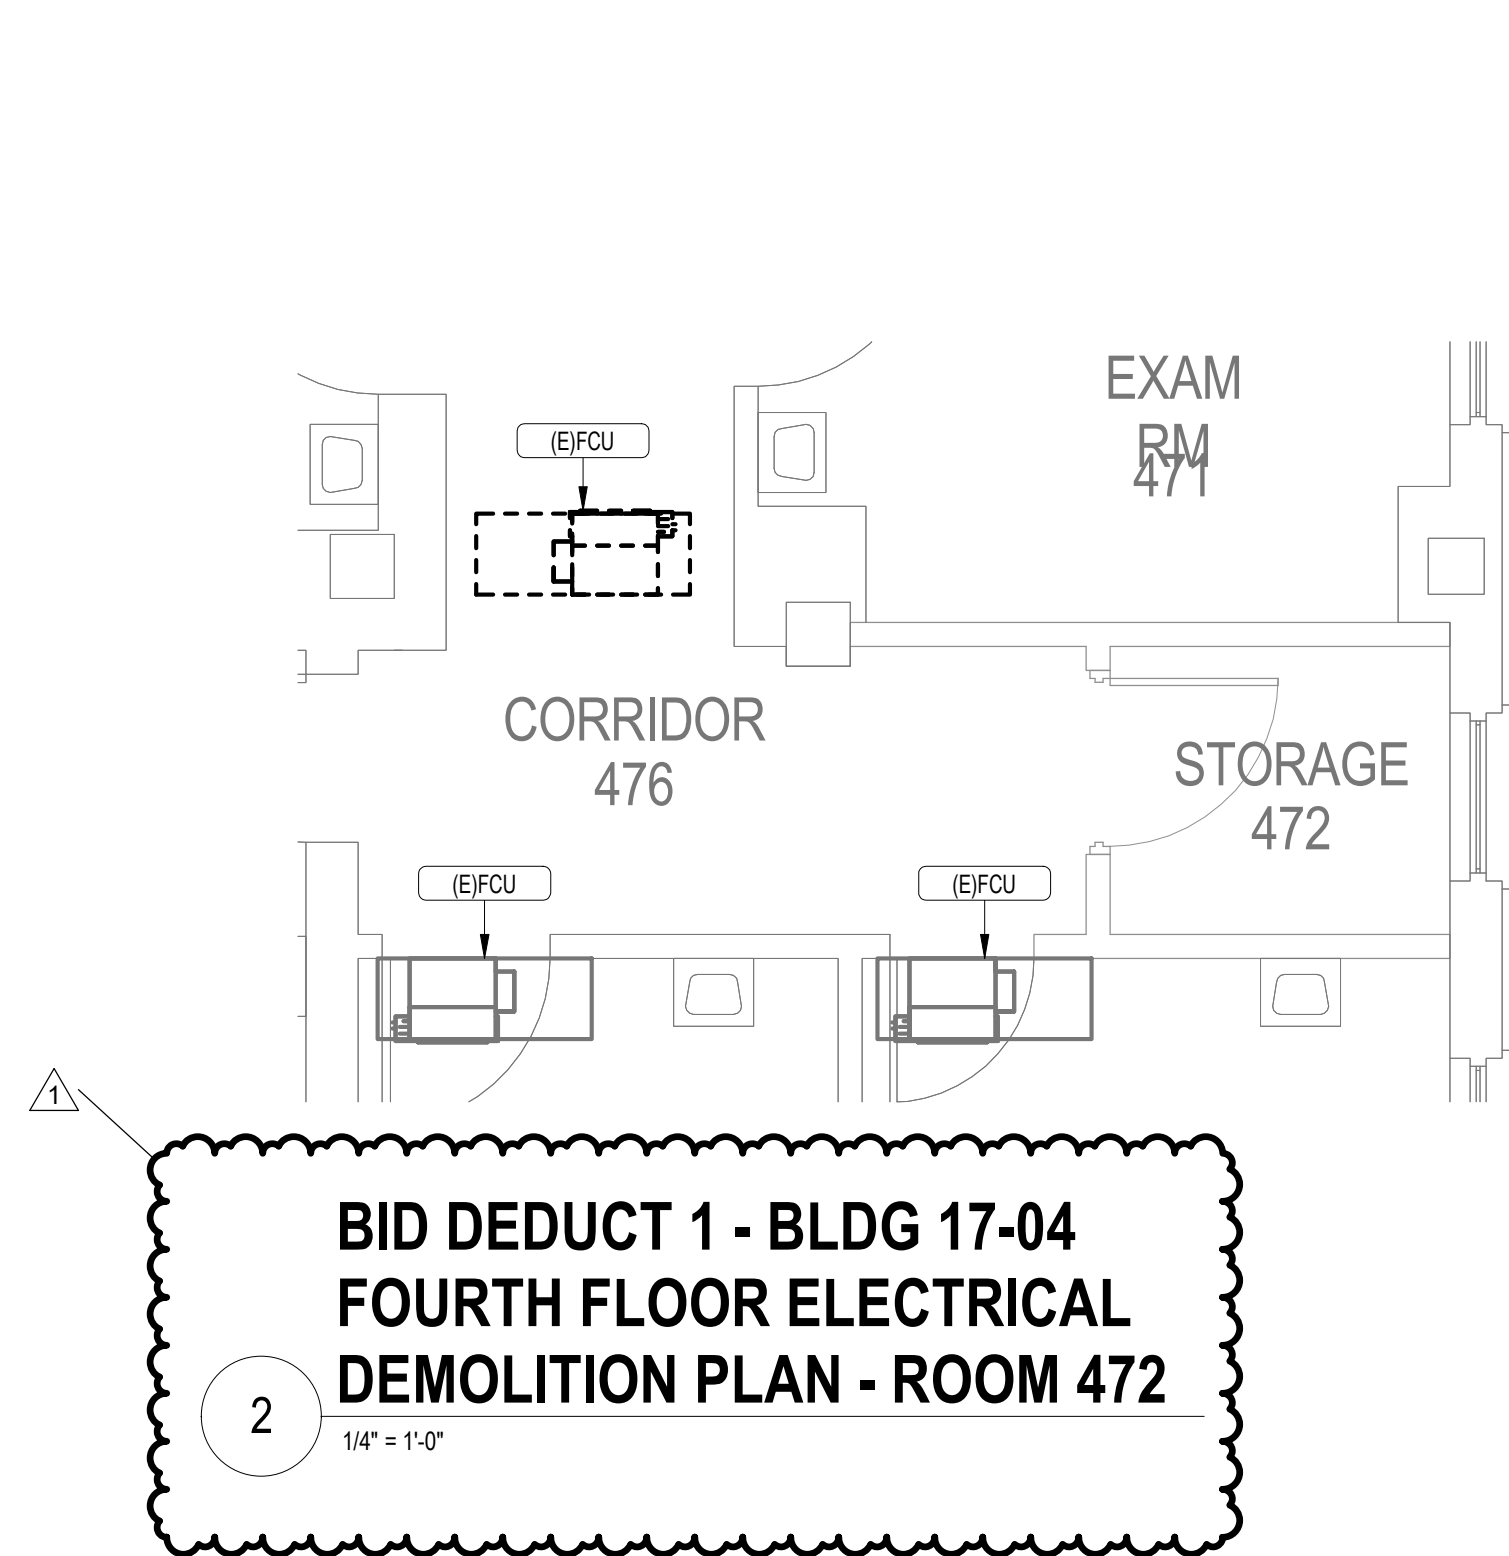


BID DEDUCT 1 - BLDG 17-04 FOURTH FLOOR ELECTRICAL
DEMOLITION PLAN

1 1/16" = 1'-0"

		Consultant	Architect/Engineer of Record		Stamp	Drawing Title		Phase	Project Title		Project Number	
						BUILDING 17 - FOURTH FLOOR ELECTRICAL DEMOLITION PLAN		BID DOCUMENTS	STERILE STORAGE IMPROVEMENTS		VLEB-016	
						Approved:		Sprinkler Status	Location		Building Number	
								FULLY SPRINKLERED	1700 S LINCOLN AVE, LEBANON, PA 17042		17	
									Issue Date		Checked	Drawing Number
									11.17.25		OF	017-ED-104
									Drawn			
									TD			


ELECTRICAL DEMOLITION GENERAL NOTES

- UNLESS NOTED OTHERWISE, REMOVE ALL ELECTRICAL DEVICES FROM WITHIN THE AREA OF DEMOLITION WORK IDENTIFIED. REMOVE ALL ASSOCIATED CONDUIT AND WIRE BACK TO THE UPSTREAM DISTRIBUTION DEVICE. THE INTENT IS FOR ALL DEVICES TO BE REMOVED TO ALLOW THE RENOVATION AND INSTALLATION OF ALL NEW DEVICES AS SHOWN ON THE NEW WORK DOCUMENTS. EXISTING DEVICES SHOWN ARE DIAGRAMMATIC AND BASED ON FIELD SURVEYS AND/OR RECORD DRAWINGS PROVIDED BY THE OWNER AND DO NOT REPRESENT THE FULL SCOPE OF DEMOLITION WORK. THE ACTUAL CONDITIONS MAY VARY. ALL EXISTING CONDITIONS MUST BE VERIFIED PRIOR TO BID. THE PLANS ARE INTENDED TO SHOW THE LOCATIONS OF EXISTING DEVICES AND IN NO WAY RELIEVE THE CONTRACTOR FROM PROVIDING ANY AND ALL COORDINATION NECESSARY TO COMPLETE THE NEW WORK. FIELD CONDITIONS SHALL GOVERN. FIELD VERIFY ALL EXISTING CONDITIONS AND DIMENSIONS PRIOR TO COMMENCEMENT OF WORK AND OBTAIN CLARIFICATIONS FROM ARCHITECT/ENGINEER IF NECESSARY.
- CONTRACTOR SHALL PROVIDE A MINIMUM TWO WEEKS WRITTEN NOTICE PRIOR TO ANY SHUT DOWN. NOTICE IS TO INCLUDE BUT IS NOT LIMITED TO THE LOCATION, PANELS AND DURATION OF SHUT DOWN. SHUT DOWN IS TO BE COORDINATED WITH INSTALLATION OF NEW EQUIPMENT TO KEEP SHUT DOWN TO A MINIMAL DURATION.
- OWNER SHALL HAVE RIGHT OF FIRST REFUSAL TO ANY EQUIPMENT, DEVICES, LUMINAIRES, ETC. DEMOLISHED FROM RENOVATION AREA PRIOR TO DISPOSAL.
- MAINTAIN CONTINUITY OF SERVICE TO AREAS OUTSIDE THE PROJECT BOUNDARY. PATCH AND REPAIR ALL CIRCUITS CUT OFF DURING DEMOLITION BY WIRING METHODS COMPATIBLE WITH THE EXISTING INSTALLATION.
- THE ELECTRICAL CONTRACTOR SHALL REVIEW THE DRAWINGS OF ALL OTHER TRADES IN THIS CONTRACT. THE REMOVAL OF ELECTRICAL SERVICE TO ALL EQUIPMENT IDENTIFIED ON OTHER TRADE DRAWINGS IS THE RESPONSIBILITY OF THE ELECTRICAL CONTRACTOR.
- EXERCISE EXTREME CAUTION WHEN REMOVING/RELOCATING WIRING AND EQUIPMENT. IT IS THE CONTRACTOR'S RESPONSIBILITY TO ENSURE THAT OTHER WIRING DEVICES, EQUIPMENT AND LIGHT FIXTURES THAT MAY BE CONNECTED TO THE SAME CIRCUIT REMAIN OPERATIONAL AND ACTIVE.
- CONTRACTOR SHALL EXAMINE CONDITIONS AND TEST FUNCTIONALITIES OF ALL EXISTING ELECTRICAL EQUIPMENT IDENTIFIED TO BE REUSED AND/OR RELOCATED. PROVIDE REPORT TO ENGINEER AND OWNER PRIOR TO DEMOLITION.

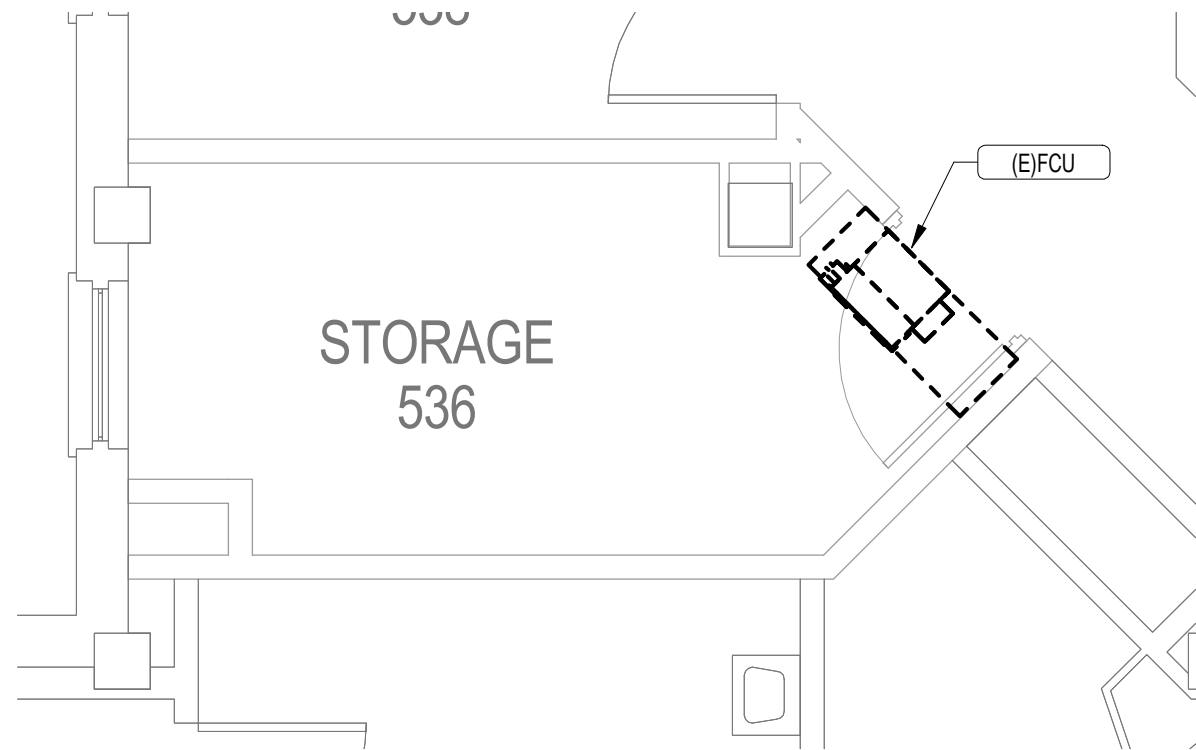


BID DEDUCT 1 - BLDG 17-05 FIFTH FLOOR ELECTRICAL PLAN - ROOM 536

3 1/4" = 1'-0"

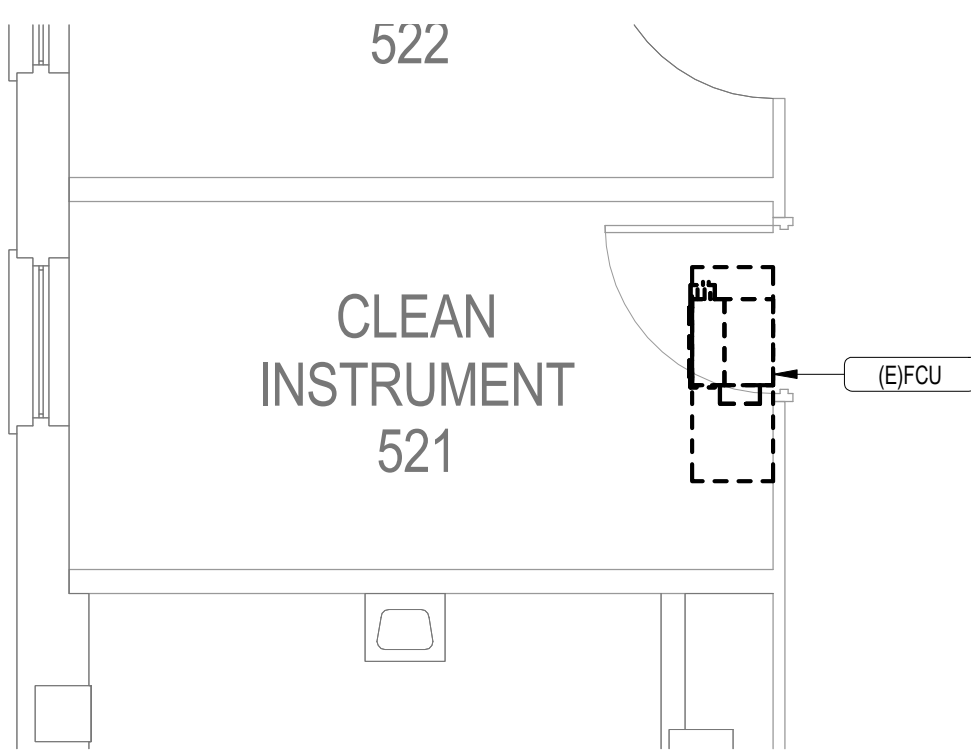

BID DEDUCT 1 - BLDG 17-05 FIFTH FLOOR ELECTRICAL PLAN - ROOM 521

2 1/4" = 1'-0"


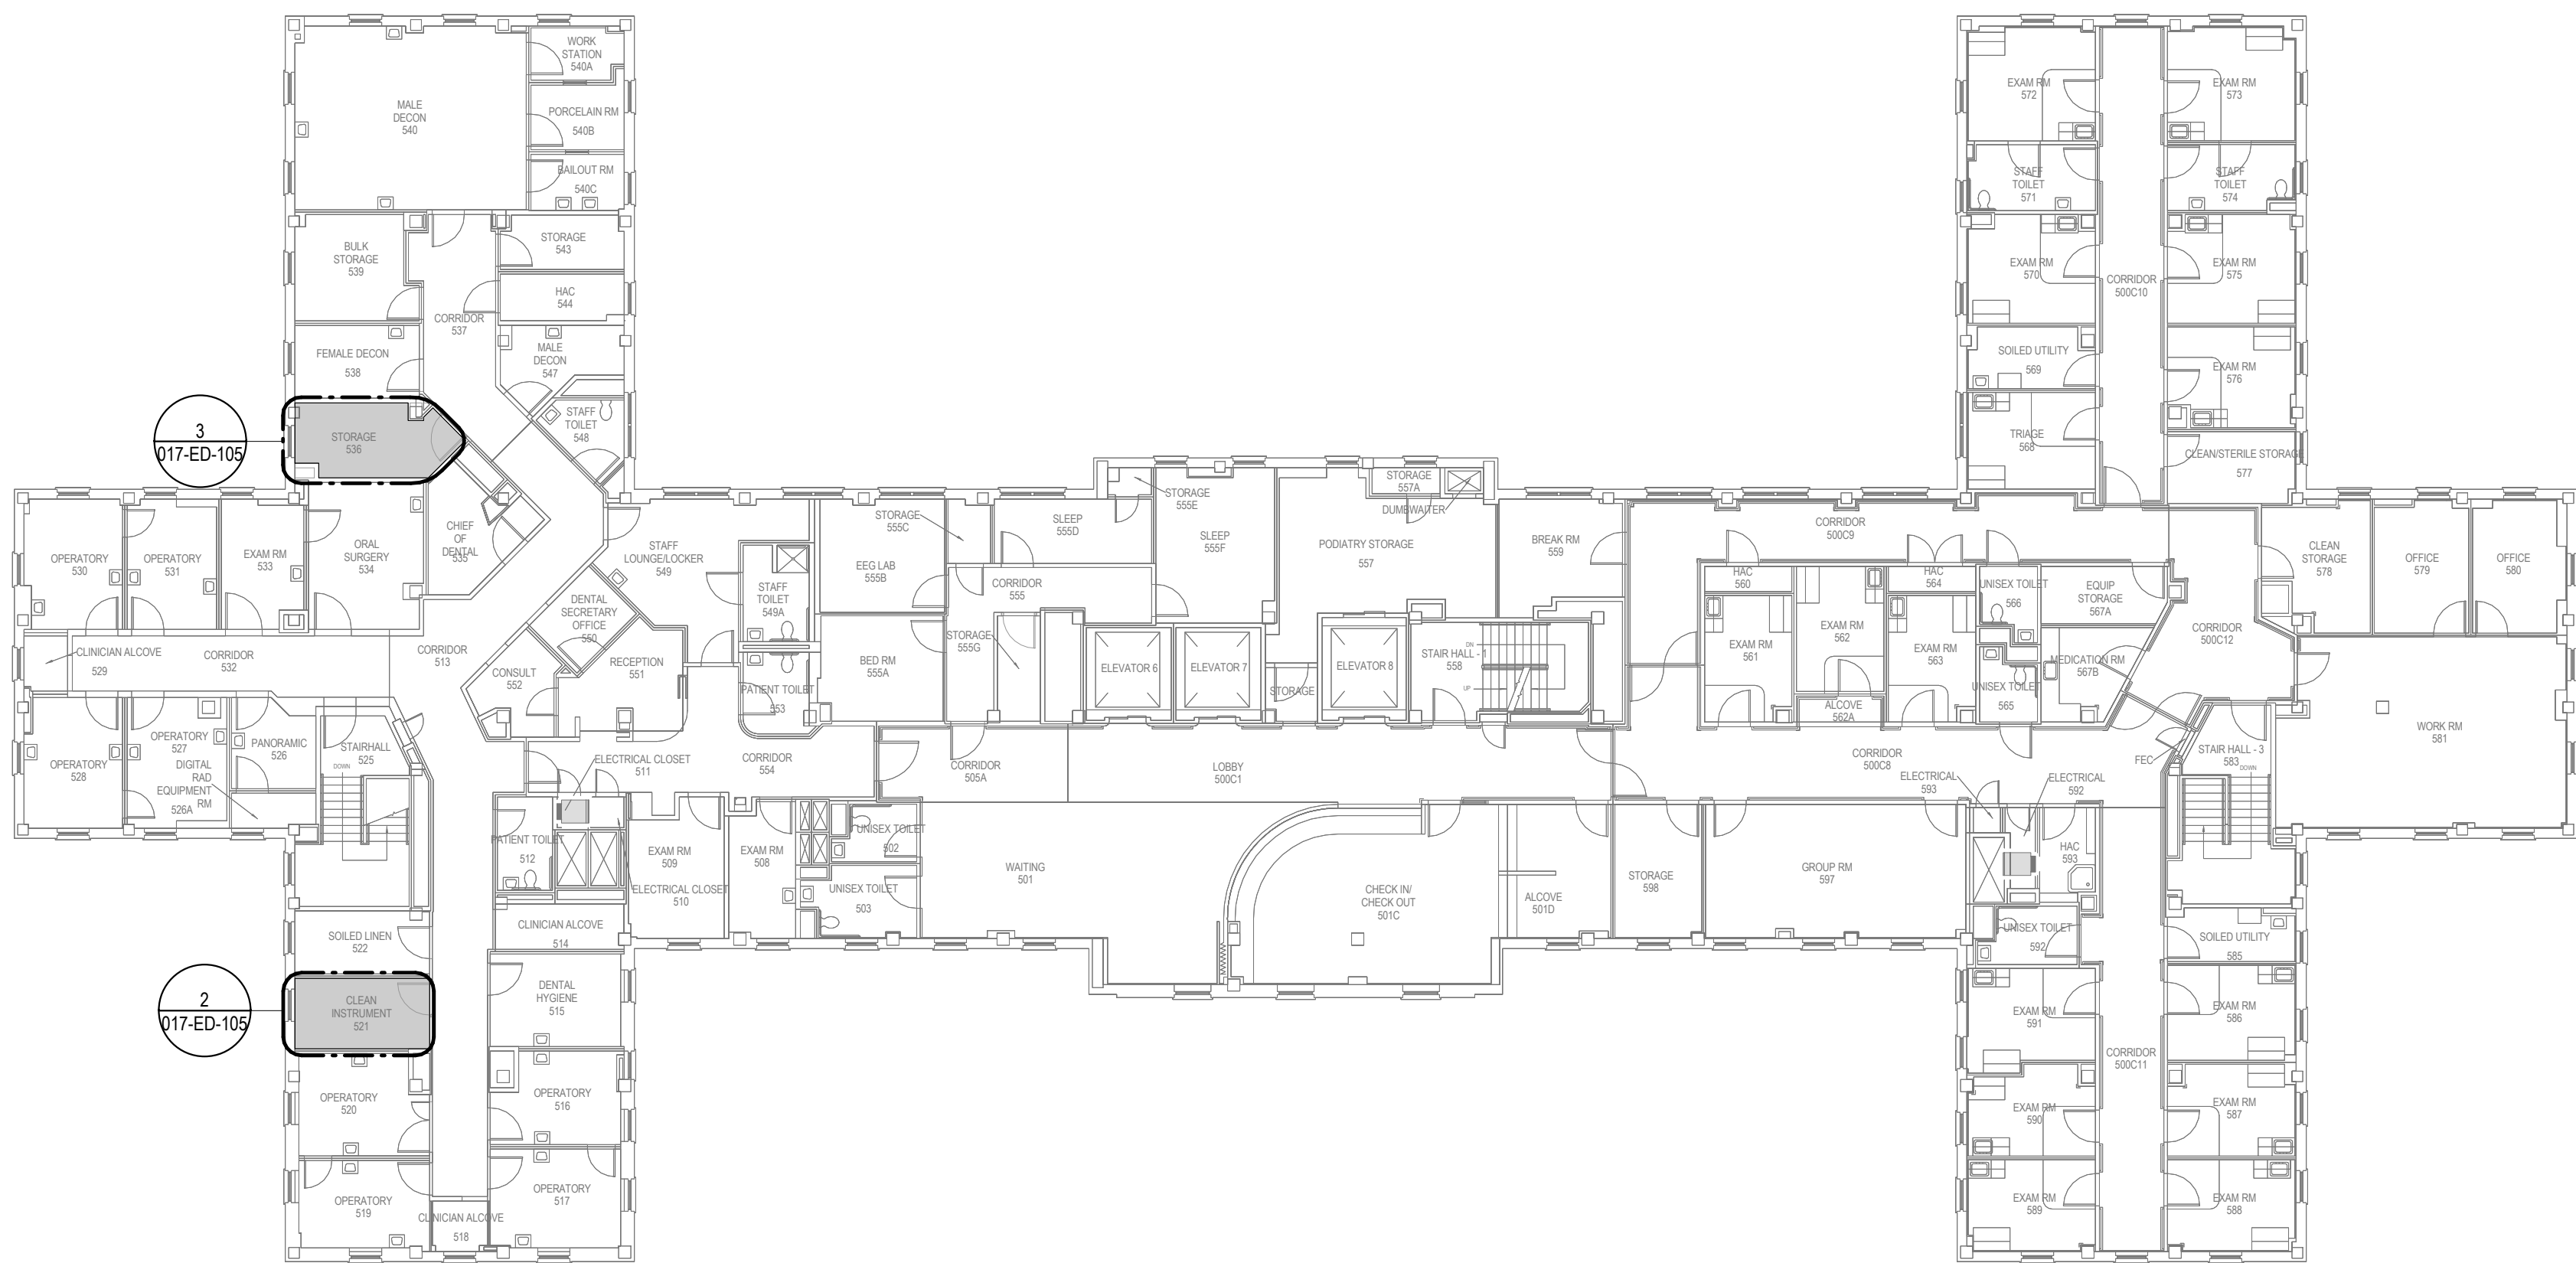


BID DEDUCT 1 - BLDG 17-05 FIFTH FLOOR PLAN - ELECTRICAL


1 1/16" = 1'-0"

		Consultant	Architect/Engineer of Record		Stamp	OFFICE OF CONSTRUCTION AND FACILITIES MANAGEMENT VA U.S. Department of Veterans Affairs	Drawing Title BUILDING 17 - FIFTH FLOOR ELECTRICAL DEMOLITION PLAN	Phase BID DOCUMENTS	Project Title STERILE STORAGE IMPROVEMENTS		Project Number VLEB-016
							Approved:	Sprinkler Status FULLY SPRINKLERED	Location 1700 S LINCOLN AVE, LEBANON, PA 17042		Building Number 17
1 BID DEDUCT #1		03/02/2026							Issue Date 11.17.25		Drawing Number 017-ED-105
# Revisions		Date							Checked OF	Drawn TD	

1. FINAL LOCATION OF ALL EQUIPMENT SHALL BE DETERMINED IN THE FIELD AND SHALL BE INSTALLED IN ACCORDANCE WITH THE OWNER'S REPRESENTATIVE. THE ELECTRICAL CONTRACTOR SHALL NOT BE RESPONSIBLE FOR THE CONTRACTOR'S DESIGN OF THE ROOF AND FLOORS AS REQUIRED TO PERMIT PASSAGE OF CONDUITS. THE ELECTRICAL CONTRACTOR SHALL PROVIDE A MARKED-UP PLAN OF THE ROOF AND FLOORS FOR REVIEW AND APPROVAL OF THE STRUCTURAL ENGINEER BEFORE ROUGH-IN BEGINS.
2. RECEPTACLES FOR ALL EQUIPMENT SHALL BE COMPLETE WITH PLUGS FOR THIS EQUIPMENT. THE ELECTRICAL CONTRACTOR SHALL VERIFY NEARLY THE CONFIGURATIONS OF PLUGS AND RECEPTACLES FOR EQUIPMENT IN THE SPACE.
3. DURING THE BIDDING PROCESS, THE ELECTRICAL CONTRACTOR SHALL REVIEW DRAWINGS AND SPECIFICATIONS AT ALL OTHER TRADES' ARCHITECTURAL, SITE/LANDSCAPING, HVAC, PLUMBING AND MECHANICAL DRAWINGS. ALL ELECTRICAL EQUIPMENT SHALL BE IDENTIFIED AND LOCATED AS NOTICED ON THE ELECTRICAL DRAWINGS SHALL BE CONSIDERED A PART OF THE ELECTRICAL CONTRACT. THE ELECTRICAL CONTRACTOR SHALL BE INSTALLED AS PER NEC REQUIREMENTS AT NO ADDITIONAL COST TO THE OWNER.
4. THE ELECTRICAL CONTRACTOR SHALL MAKE EVERY EFFORT TO MAKE ALL FEEDER RUNS CONTINUOUS (NO CABLE BENDS). FEEDING CABLES MAY BE RUN IN ANY OF THE FOLLOWING WAYS: USE 2 G. TYPE "X" CABLE; CABLE IN UNBROKEN EDS; OR CABLE IN TWO INCH APPROXIMATED MANHOLES.
5. THE MECHANICAL CONTRACTOR SHALL PROVIDE DISCONNECT SWITCHES, VFD'S OR COMBINATION STARTERS FOR ALL OF THEIR UNITS. THE ELECTRICAL CONTRACTOR SHALL RECEIVE THESE ITEMS FROM THE MECHANICAL CONTRACTOR AND INSTALL THEM IN THE ELECTRICAL RACKS.
6. THE ELECTRICAL CONTRACTOR SHALL COORDINATE CONDUIT PENETRATIONS FOR ROOFTOP EQUIPMENT WITH MECHANICAL AND ROOFING CONTRACTORS. IF PROVISIONS ARE NOT IN PLACE FOR CONDUIT PENETRATIONS, THE ELECTRICAL CONTRACTOR SHALL COORDINATE WITH MECHANICAL CONTRACTORS AND CONTRACTING THE ROOF CONTRACTOR FOR SEALING THE ROOF PENETRATIONS.
7. REFER TO MECHANICAL DRAWINGS FOR EXACT LOCATION OF ALL MECHANICAL EQUIPMENT.
8. PROVIDE CONDUIT AND WIRING AS REQUIRED TO MEET CIRCUITS SHOWN TO CONFORM TO ALL CODES AND REQUIREMENTS.
9. PROVIDE EQUIPMENT GROUND CONDUCTOR IN ALL RACEWAYS. REFER TO PANELBOARD SCHEDULES FOR EQUIPMENT GROUND CONNECTION SCHEDULE FOR ELECTRICAL REQUIREMENTS AND CIRCUITRY.
10. ROUTE CONDUIT HIGH AGAINST STRUCTURE AND OFFSET UP BETWEEN JOISTS WHERE NECESSARY TO AVOID DUCT WORK AND HVAC SYSTEM.
11. VERIFY AND COORDINATE ALL REQUIREMENTS OF ALL EQUIPMENT WITH MANUFACTURER'S RECOMMENDATIONS PRIOR TO INSTALLATION OF EQUIPMENT.

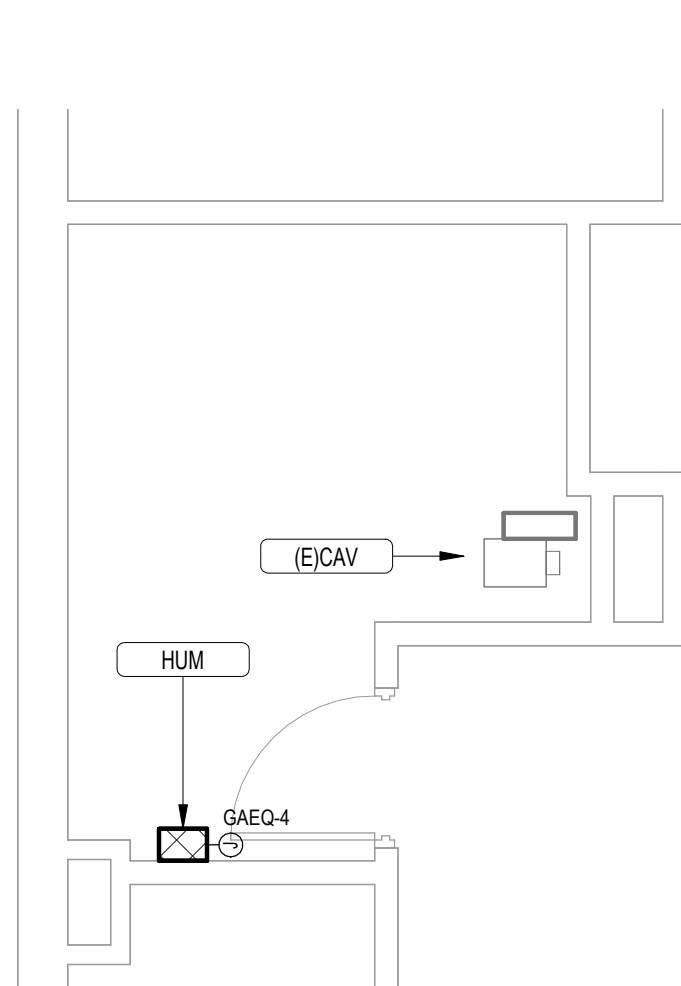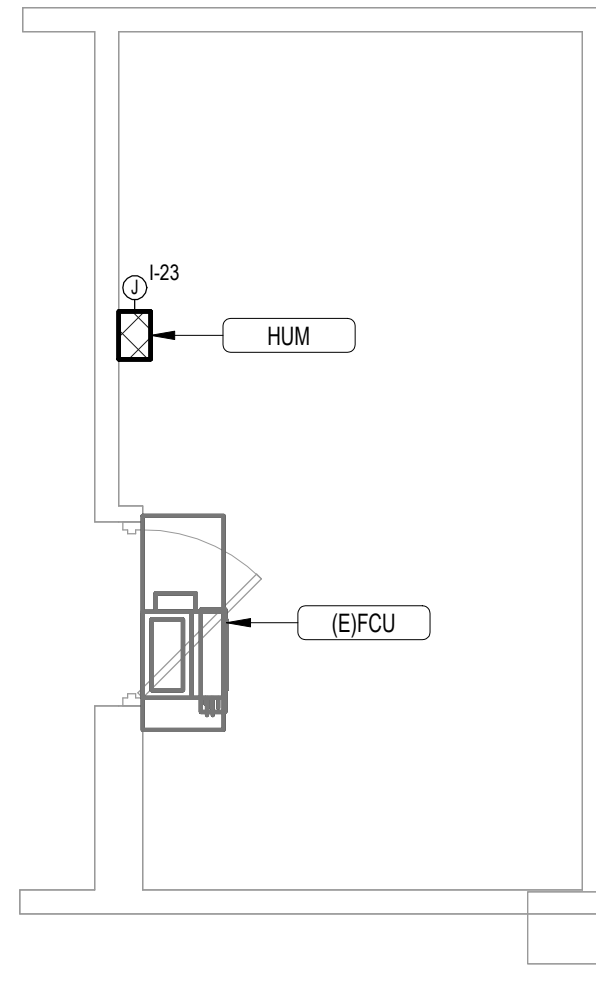

$$1/4^\circ = 1' \cdot 0''$$


$1/4" = 1'-0"$

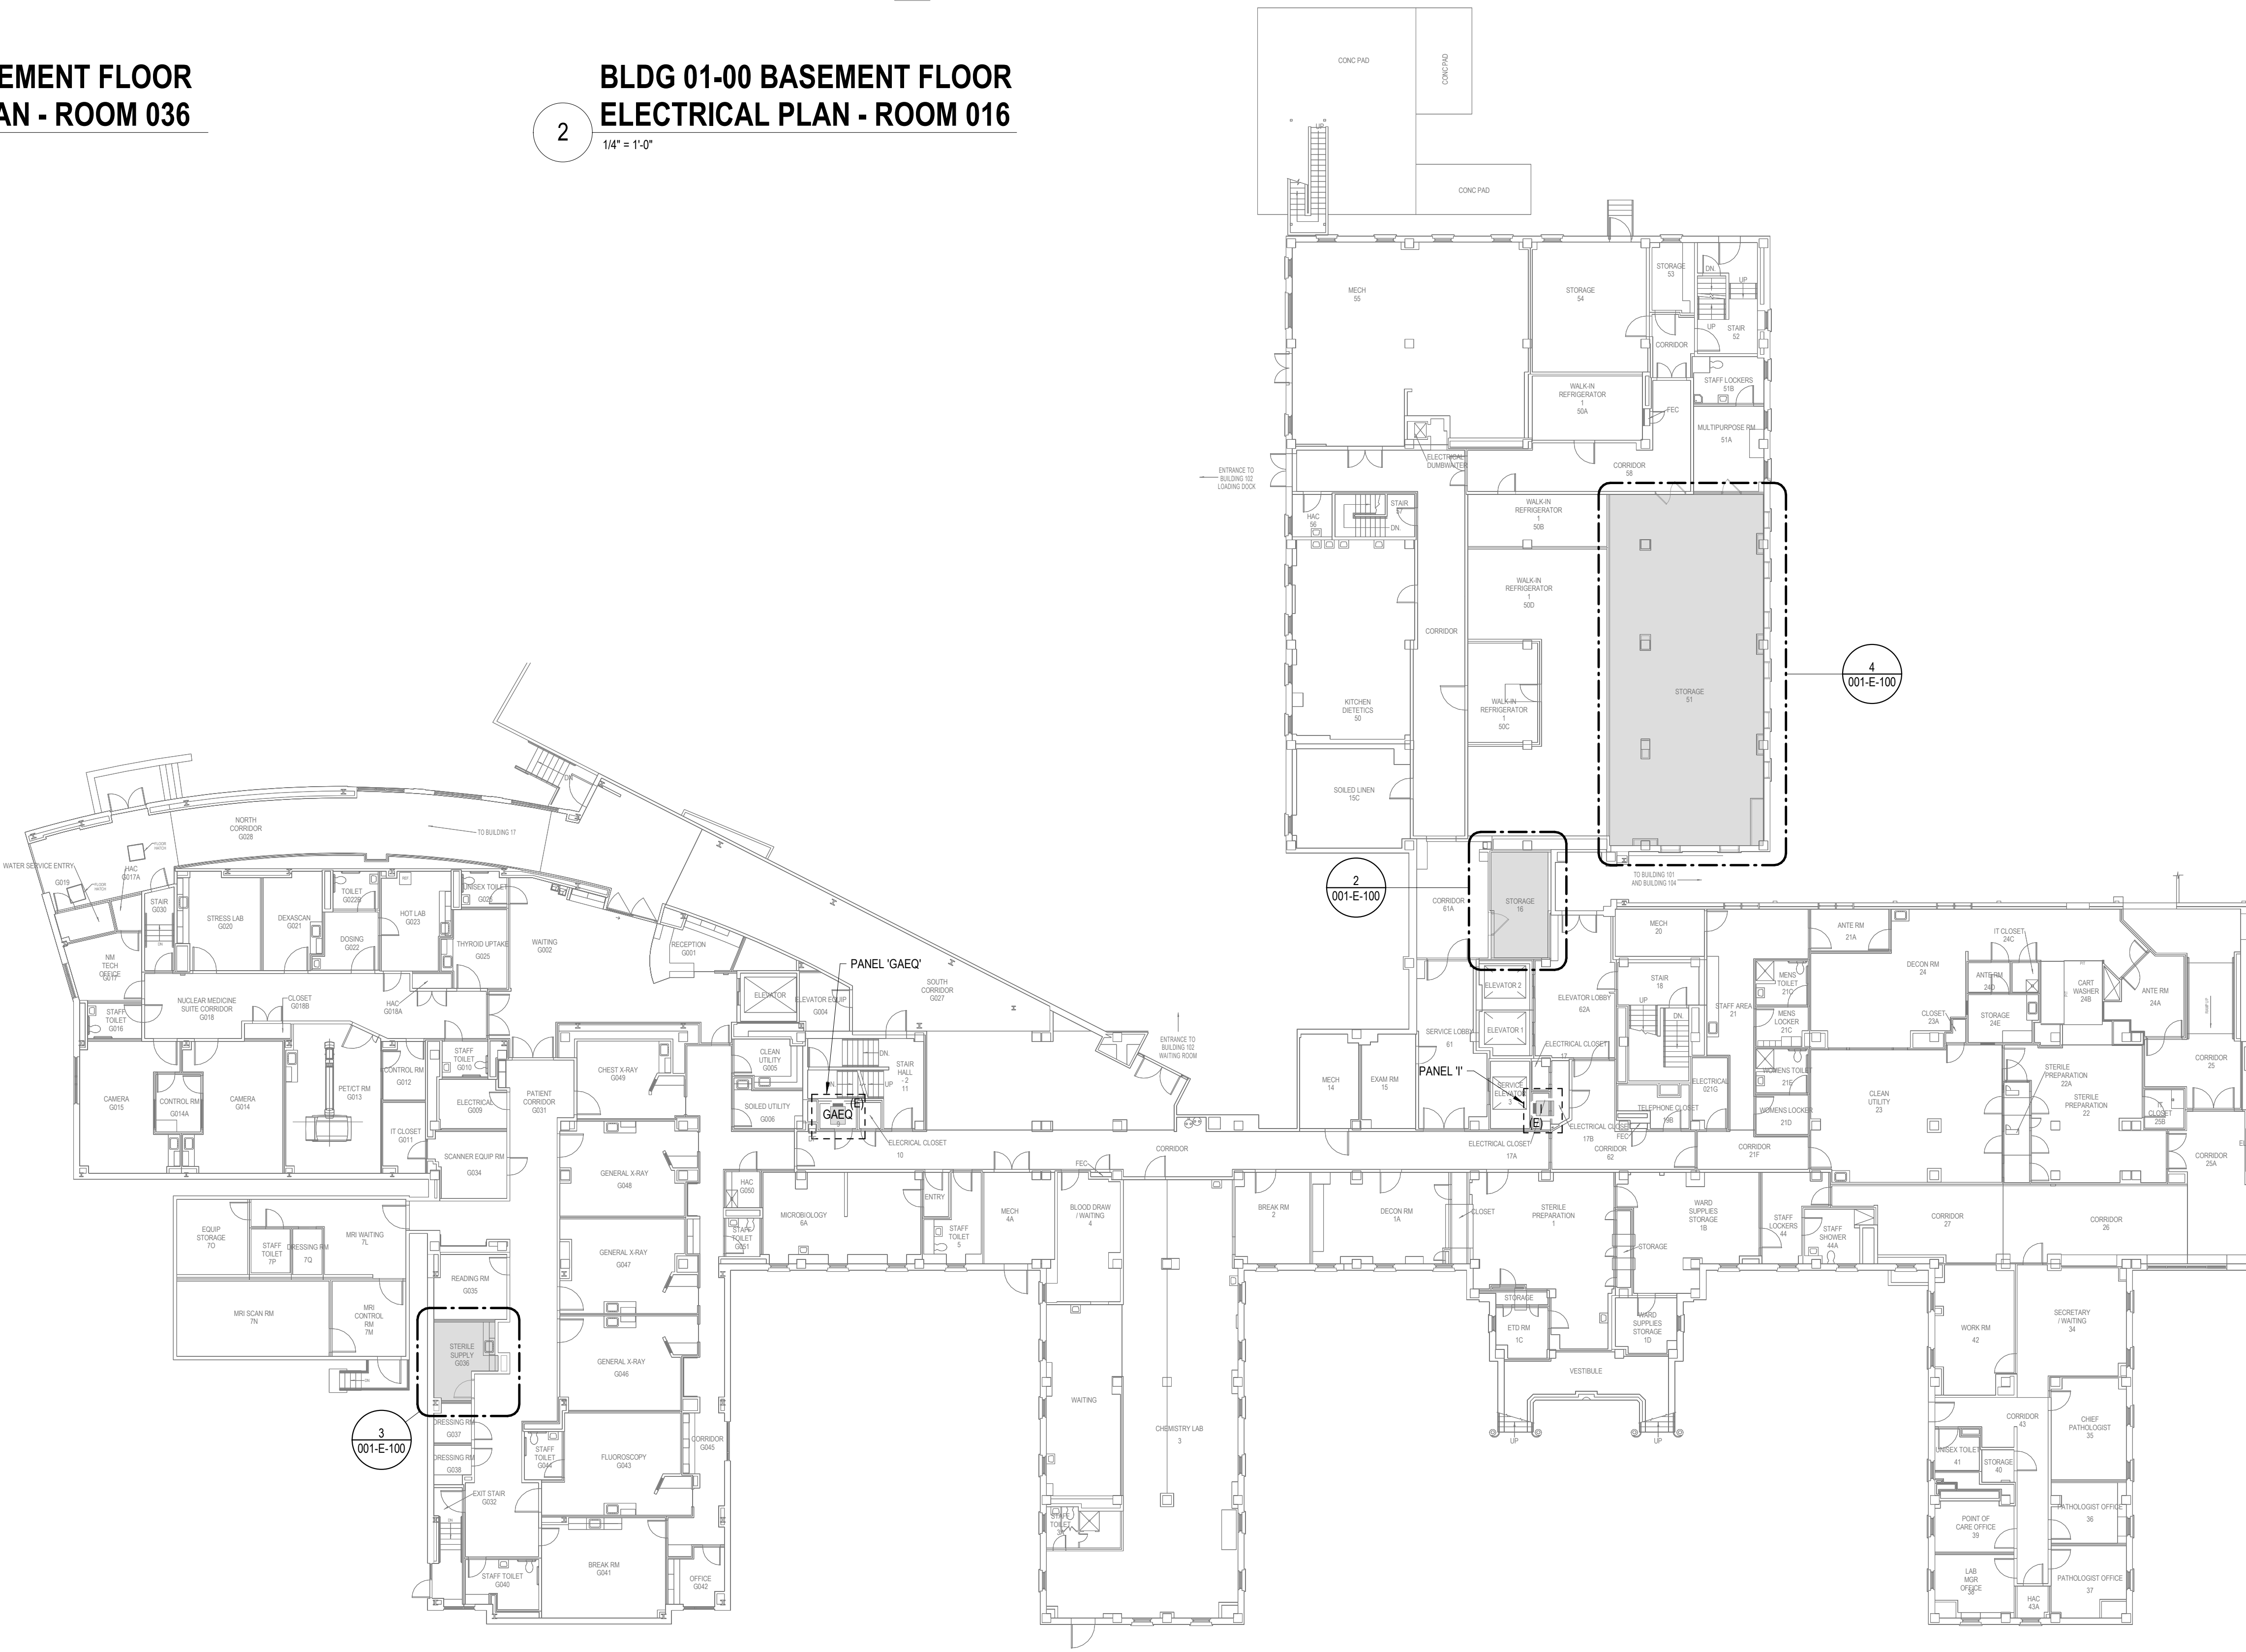


$1/4" = 1'-0"$


$$1/16'' = 1'-0''$$

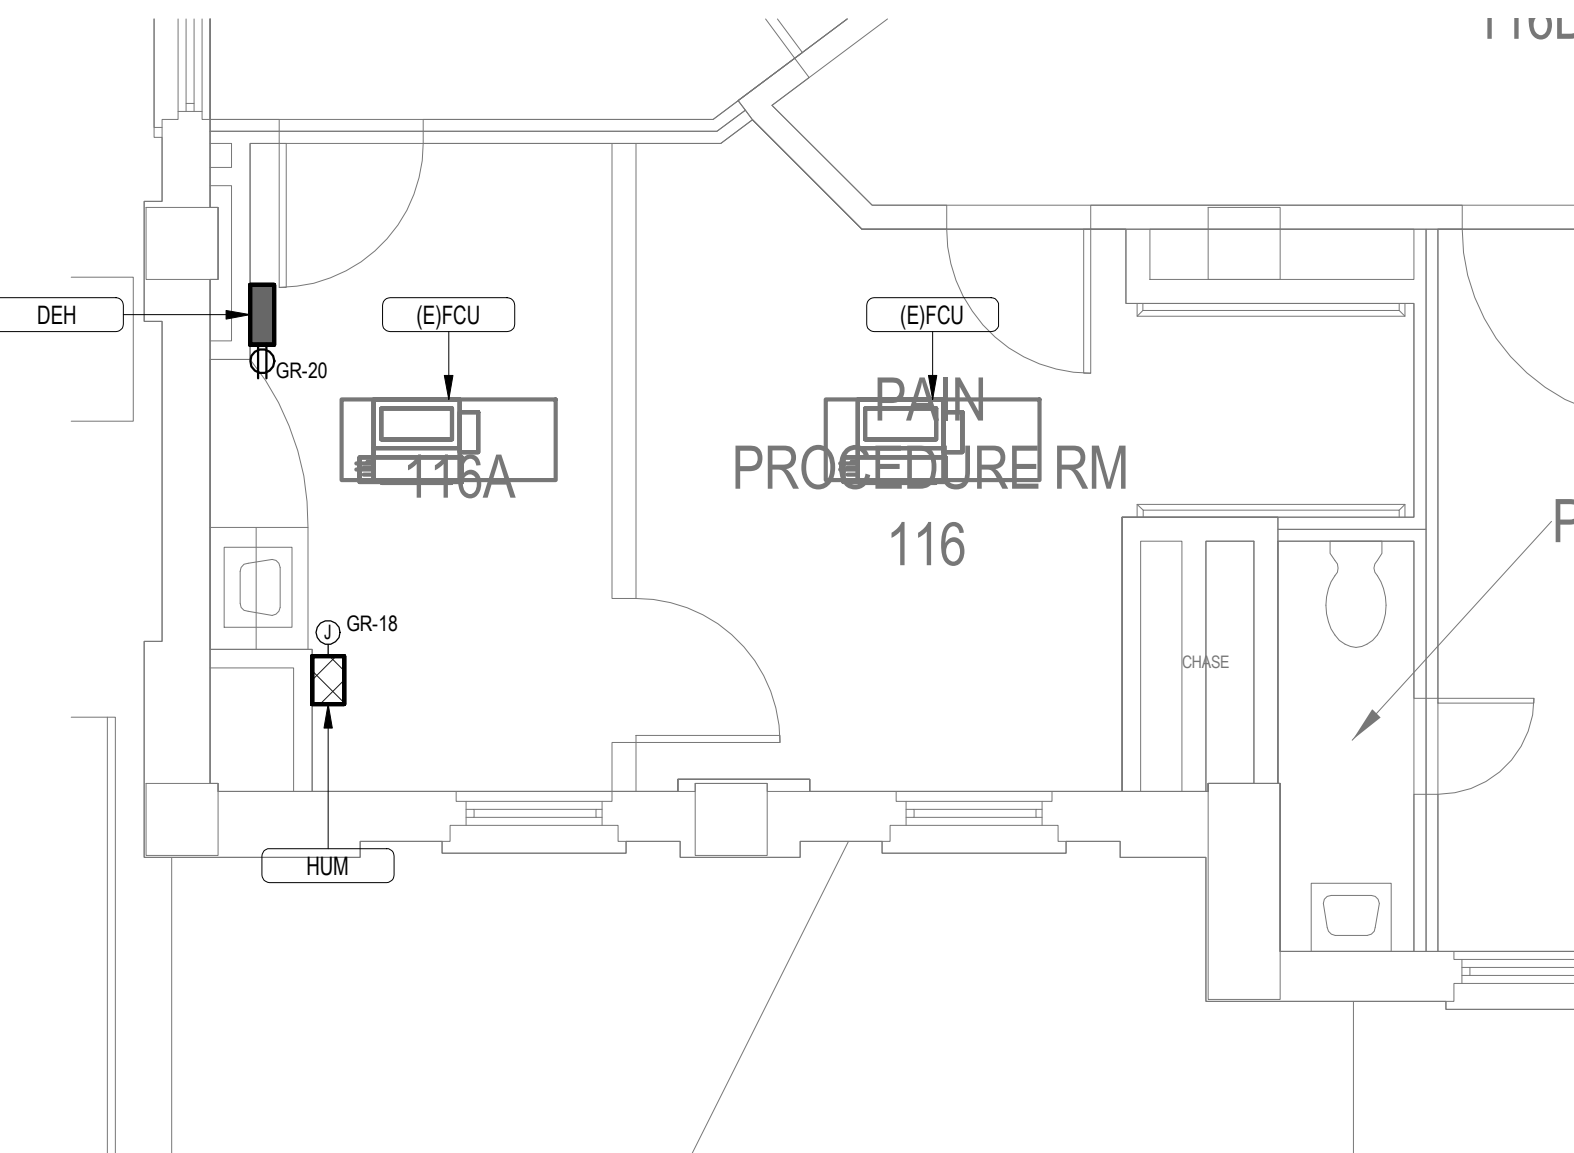

3 BLDG 01-01 FIRST FLOOR ELECTRICAL PLAN - ROOM 116A
1/4" = 1'-0"

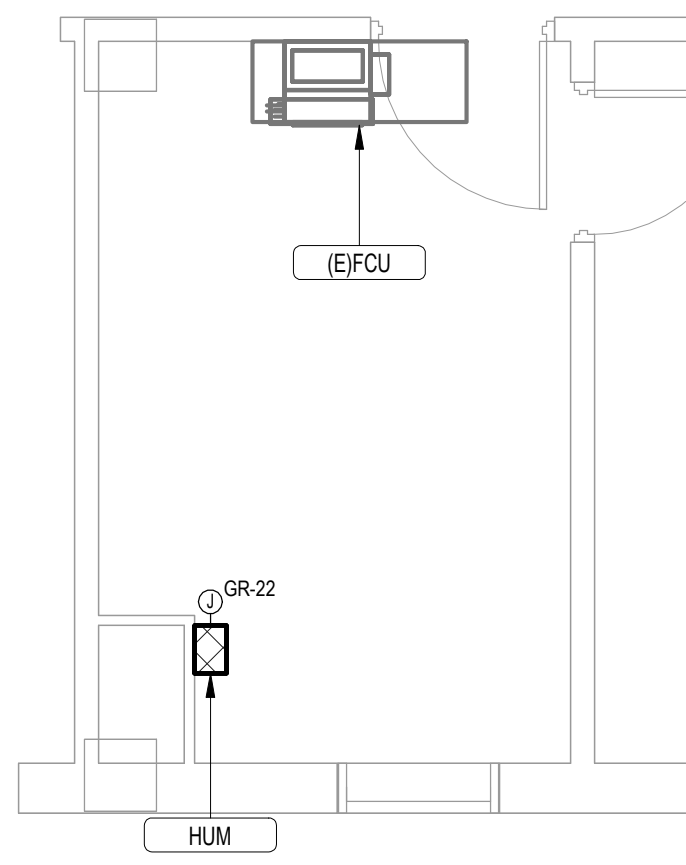

2 BLDG 01-01 FIRST FLOOR ELECTRICAL PLAN - ROOM 111
1/4" = 1'-0"

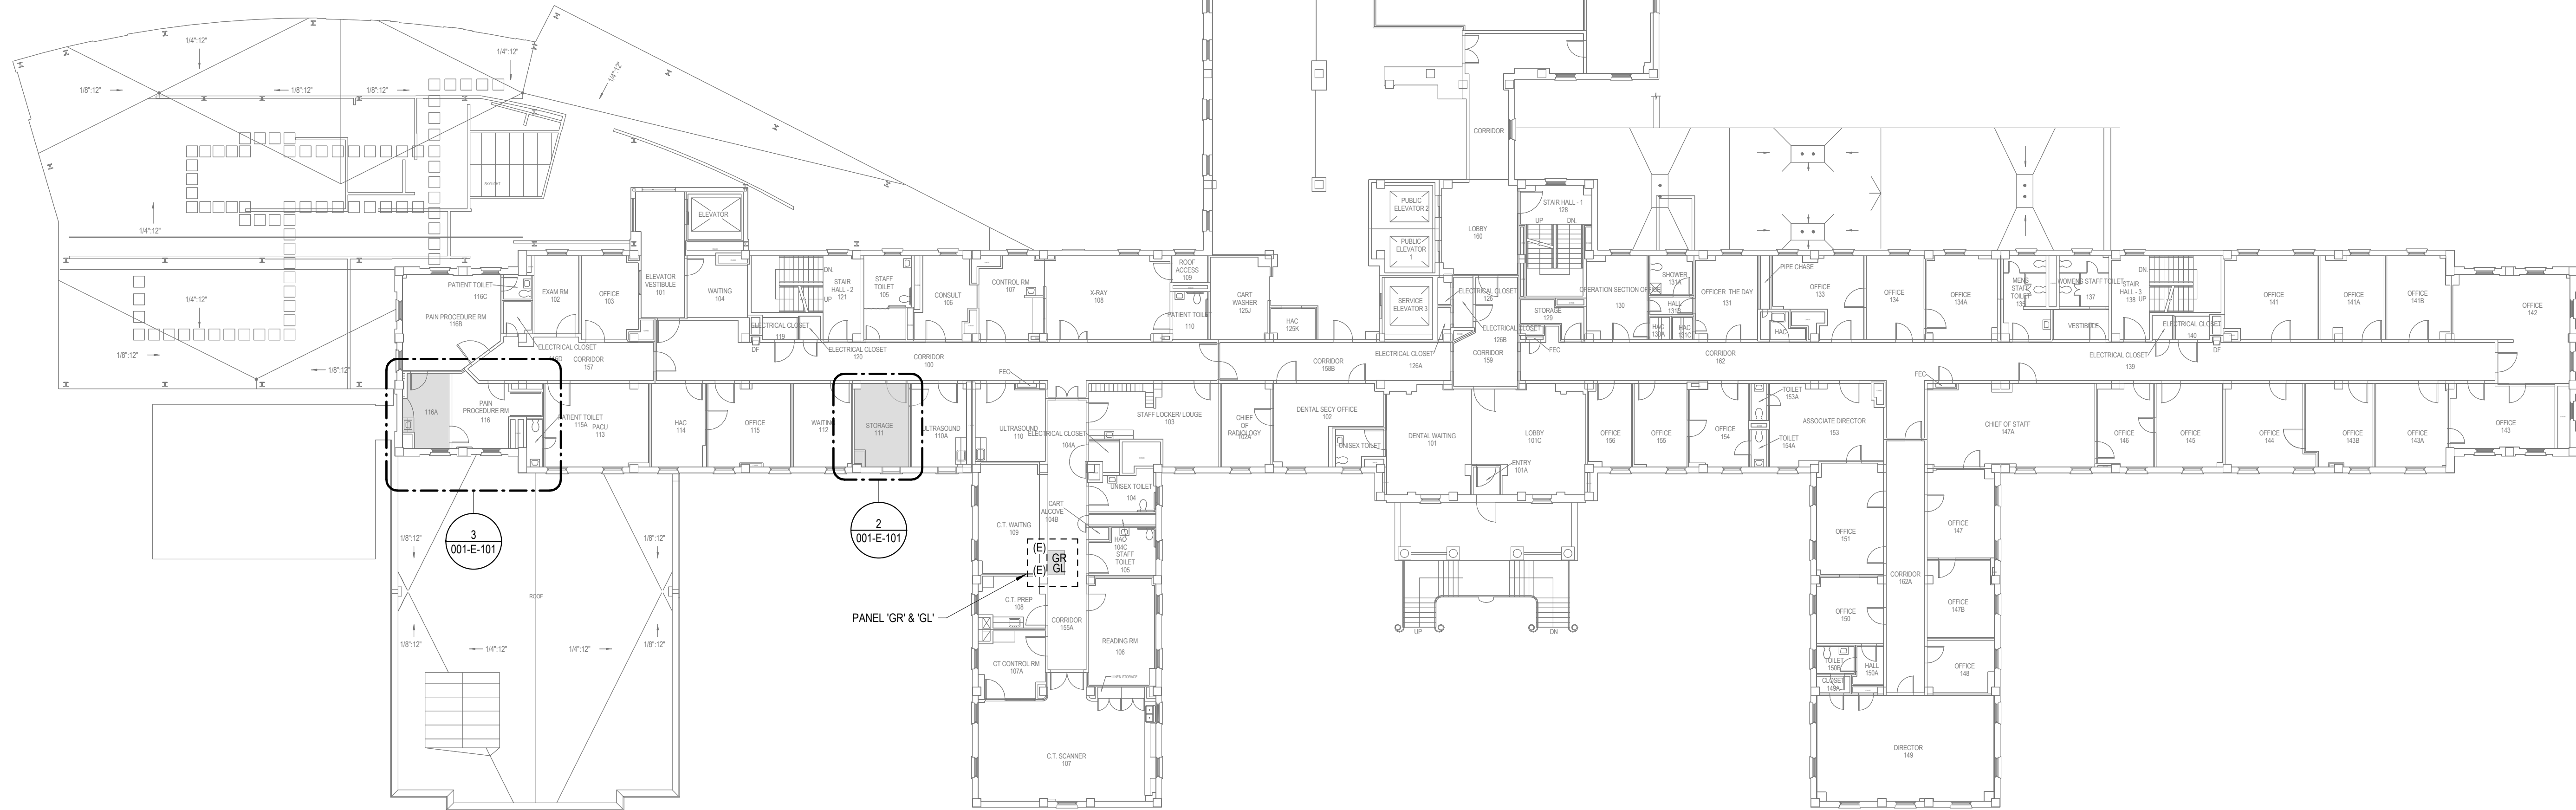

1 BLDG 00-01 FIRST FLOOR ELECTRICAL PLAN
1/16" = 1'-0"

POWER PLAN GENERAL NOTES

- 1 FINAL LOCATION OF ALL EQUIPMENT SHALL BE DETERMINED IN THE FIELD AND SHALL BE INSTALLED AS DIRECTED BY THE ARCHITECT OR OWNER'S REPRESENTATIVE. WHERE STRUCTURAL OPENINGS ARE NOT AVAILABLE, THE CONTRACTOR SHALL CORE DRILL WALLS AND FLOORS AS REQUIRED TO PERMIT PASSAGE OF CONDUITS. THE ELECTRICAL CONTRACTOR SHALL PROVIDE A MARKED-UP PLAN WITH LOCATION PENETRATIONS FOR REVIEW AND APPROVAL OF THE STRUCTURAL ENGINEER BEFORE ROUGH-IN BEGINS.
- 2 RECEPTACLES FOR ALL EQUIPMENT SHALL BE COMPLETE WITH PLUGS FOR THIS EQUIPMENT. THE ELECTRICAL CONTRACTOR SHALL VERIFY NEMA CONFIGURATIONS OF PLUGS AND RECEPTACLES FOR EQUIPMENT IN THE SPACE.
- 3 DURING THE BIDDING PROCESS, THE ELECTRICAL CONTRACTOR SHALL REVIEW DRAWINGS AND SPECIFICATIONS OF ALL OTHER TRADES (ARCHITECTURAL, SITE/LANDSCAPING, HVAC, PLUMBING AND SPECIALTY TRADES). ALL ITEMS REQUIRING POWER INDICATED ON THESE DRAWINGS BUT NOT INDICATED ON THE ELECTRICAL DRAWINGS SHALL BE CONSIDERED A PART OF THE ELECTRICAL CONTRACTOR'S WORK. THIS WORK SHALL BE INSTALLED AS PER NEC REQUIREMENTS AT NO ADDITIONAL COST TO THE OWNER.
- 4 THE CONTRACTOR SHALL MAKE EVERY EFFORT TO MAKE ALL FEEDER RUNS CONTINUOUS (NO CABLE BREAKS). IF SPLICING CABLES IN BOXES BECOMES NECESSARY, USE O.Z.G. TYPE "XVY" CABLE TAPS, OR APPROVED EQUAL, AND TAPE EACH TAP IN APPROVED MANNER.
- 5 THE MECHANICAL CONTRACTOR SHALL PROVIDE DISCONNECT SWITCHES, VFD'S, OR COMBINATION STARTERS FOR ALL OF THEIR UNITS. THE ELECTRICAL CONTRACTOR SHALL RECEIVE THESE ITEMS FROM THE MECHANICAL CONTRACTOR FOR INSTALLATION BY THE ELECTRICAL CONTRACTOR.
- 6 THE ELECTRICAL CONTRACTOR SHALL COORDINATE CONDUIT PENETRATIONS FOR ROOFTOP EQUIPMENT WITH MECHANICAL AND ROOFING CONTRACTORS. IF PROVISIONS ARE NOT IN PLACE FOR THESE PENETRATIONS THE ELECTRICAL CONTRACTOR SHALL BE RESPONSIBLE FOR MAKING OWN PENETRATIONS AND CONTRACTING THE ROOF CONTRACTOR FOR SEALING THE ROOF PENETRATIONS.
- 7 REFER TO MECHANICAL DRAWINGS FOR EXACT LOCATION OF ALL MECHANICAL EQUIPMENT.
- 8 PROVIDE CONDUIT AND WIRING AS REQUIRED TO MEET CIRCUITING SHOWN TO CONFORM TO NEC REQUIREMENTS.
- 9 PROVIDE EQUIPMENT GROUND CONDUCTOR IN ALL RACEWAYS. REFER TO PANELBOARD SCHEDULES.
- 10 REFER TO EQUIPMENT CONNECTION SCHEDULE FOR ELECTRICAL REQUIREMENTS AND CIRCUIT DESIGNATIONS.
- 11 ROUTE CONDUIT HIGH AGAINST STRUCTURE AND OFFSET UP BETWEEN JOISTS WHERE NECESSARY TO AVOID DUCT WORK AND HVAC SYSTEM.
- 12 VERIFY AND COORDINATE EXACT ELECTRICAL REQUIREMENTS OF ALL EQUIPMENT WITH MANUFACTURER'S RECOMMENDATIONS PRIOR TO INSTALLATION OF EQUIPMENT.

#	Revisions	Date

Consultant

Architect/Engineer of Record

AE Works, LTD. 418 Beaver Street Sewickley, PA 15143 Phone: 412-287-7333 www.ae-works.com

Stamp


OFFICE OF CONSTRUCTION AND FACILITIES MANAGEMENT
VA U.S. Department of Veterans Affairs

Drawing Title BUILDING 1 - FIRST FLOOR ELECTRICAL PLAN
Approved:


Phase BID DOCUMENTS
Sprinkler Status FULLY SPRINKLERED

Project Title STERILE STORAGE IMPROVEMENTS
Location 1700 S LINCOLN AVE, LEBANON, PA 17042
Issue Date 11.17.25
Checked DF
Drawn TD


Project Number VLEB-016
Building Number 1
Drawing Number 001-E-101

2 BLDG 01-02 SECOND FLOOR ELECTRICAL PLAN - ROOM 216
1/4" = 1'-0"


3 BLDG 01-02 SECOND FLOOR ELECTRICAL PLAN - ROOM 257
1/4" = 1'-0"

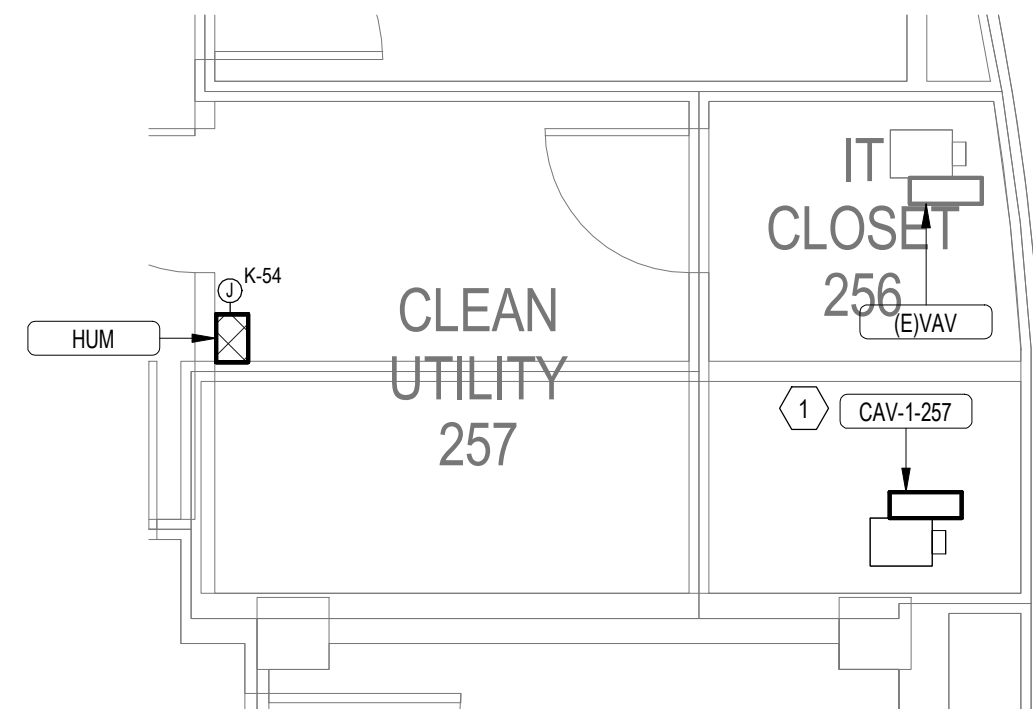

4 BLDG 01-02 SECOND FLOOR ELECTRICAL PLAN - ROOM 292
1/4" = 1'-0"

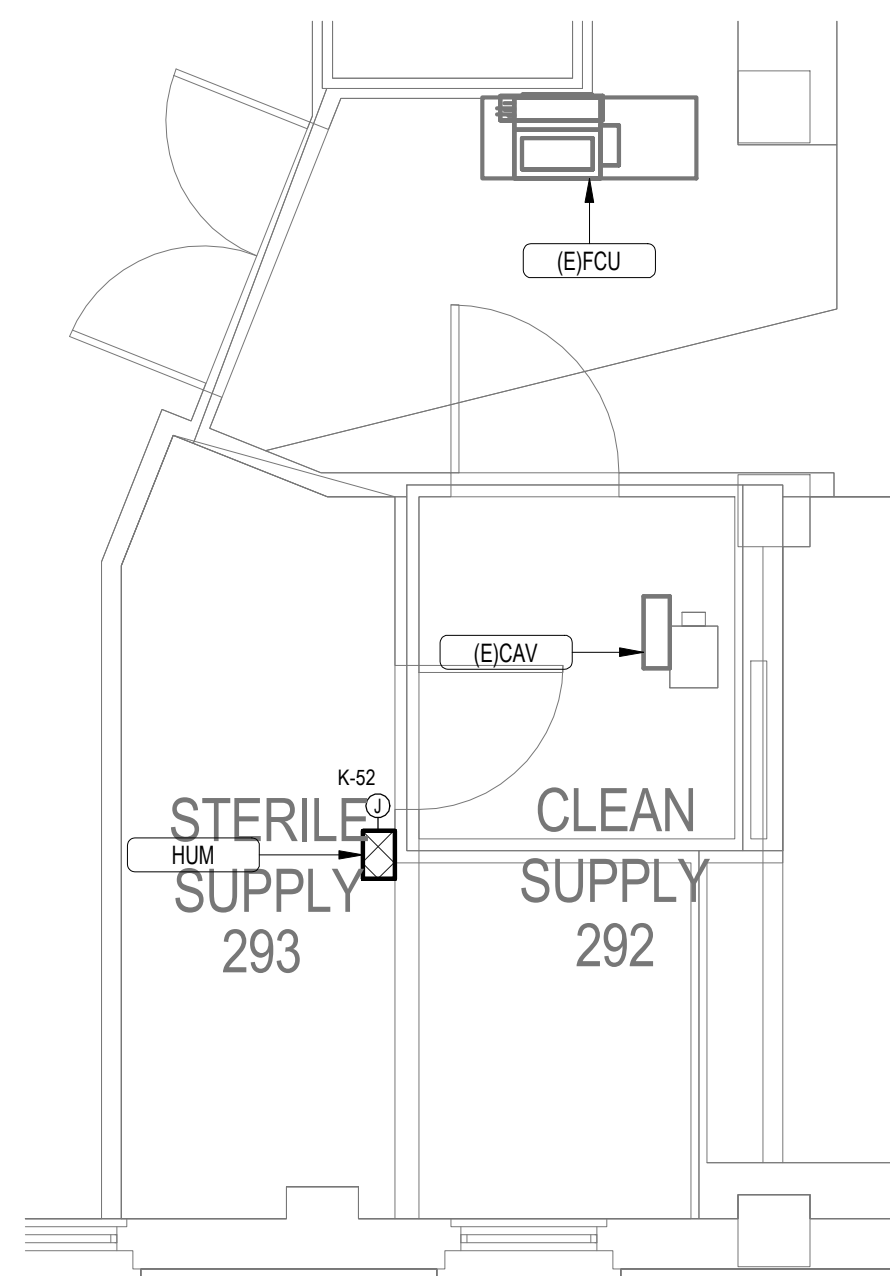

1 BLDG 01-02 SECOND FLOOR ELECTRICAL PLAN
1/16" = 1'-0"

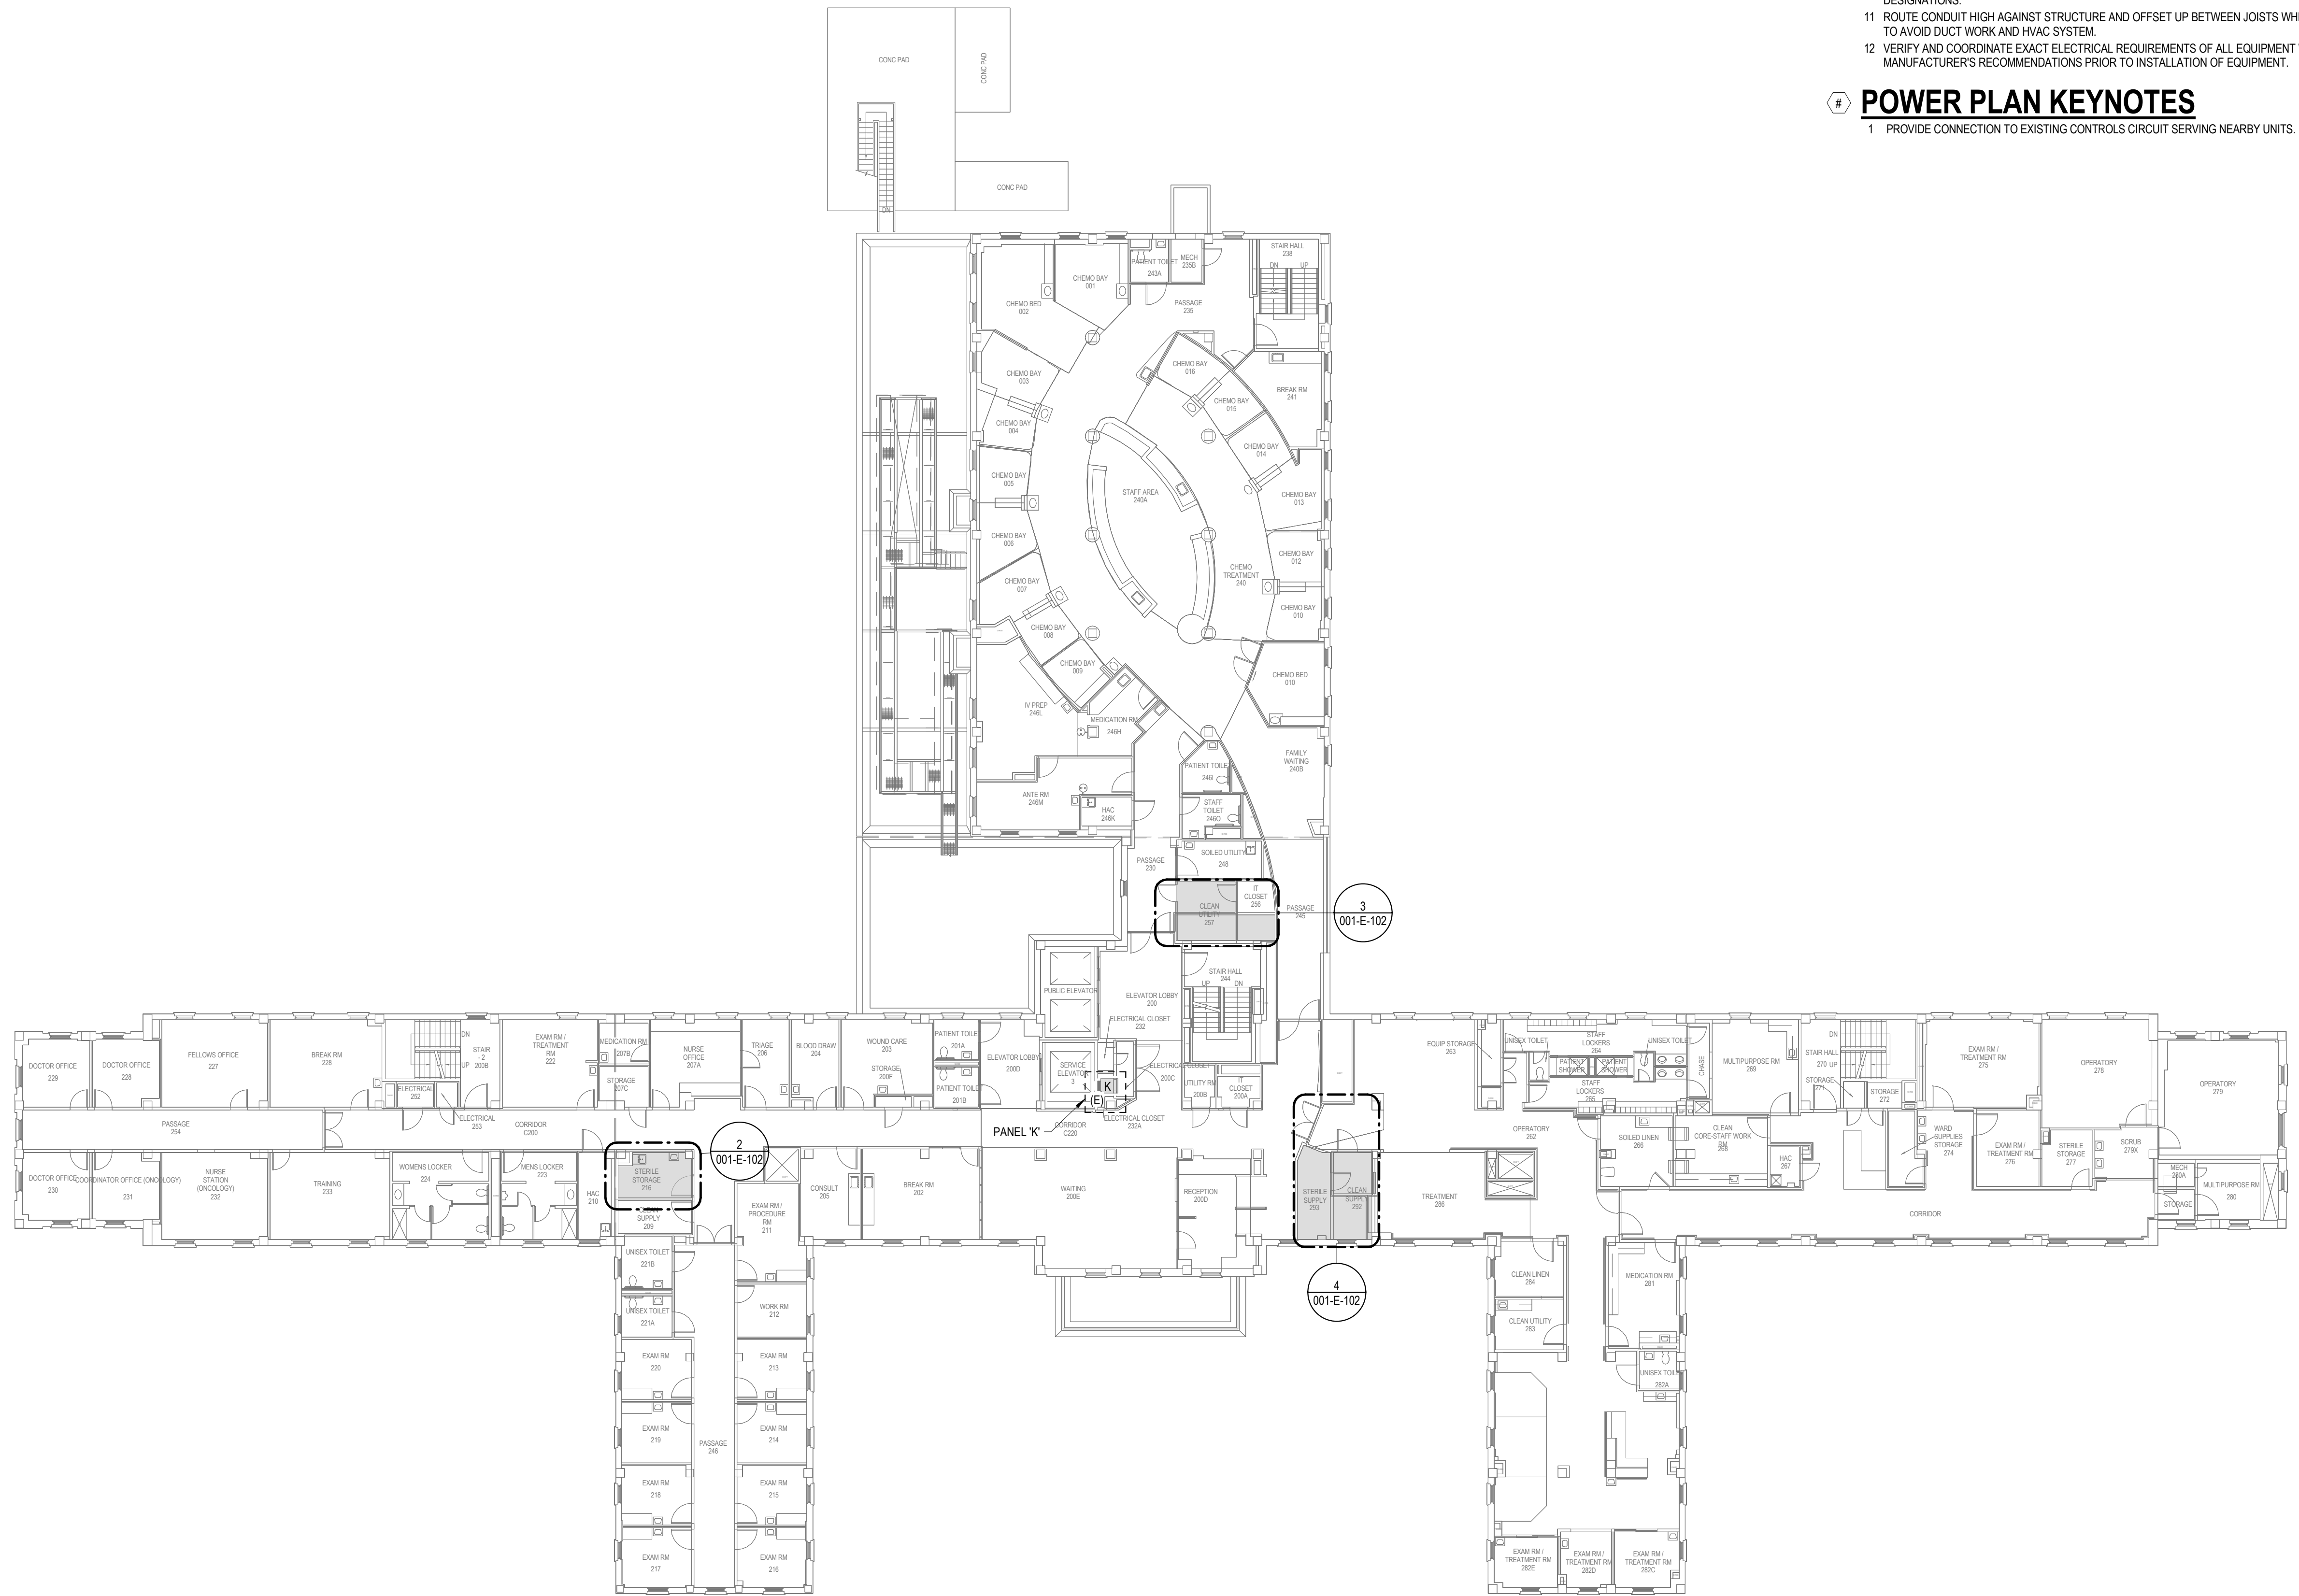

POWER PLAN GENERAL NOTES

1. FINAL LOCATION OF ALL EQUIPMENT SHALL BE DETERMINED IN THE FIELD AND SHALL BE INSTALLED AS DIRECTED BY THE ARCHITECT OR OWNER'S REPRESENTATIVE, WHERE STRUCTURAL OPENINGS ARE AVAILABLE. THE CONTRACTOR SHALL CORE DRILL WALLS AND FLOORS AS REQUIRED TO PERMIT PENETRATIONS OF CONDUIT. THE ELECTRICAL CONTRACTOR SHALL PROVIDE A MARKED-UP PLAN WITH LOCATION PENETRATIONS FOR REVIEW AND APPROVAL OF THE STRUCTURAL ENGINEER BEFORE ROUGH-IN BEGINS.
2. REQUIREMENTS FOR ALL EQUIPMENT SHALL BE COMPLETE WITH PLUGS FOR THIS EQUIPMENT. THE ELECTRICAL CONTRACTOR SHALL VERIFY NEA CONFIGURATIONS OF PLUGS AND RECEPTACLES FOR EQUIPMENT IN THE SPACE.
3. DURING THE BIDDING PROCESS, THE ARCHITECT/OWNER SHALL REVIEW DRAWINGS AND SPECIFICATIONS OF ALL OTHER TRADES (ELECTRICAL, STEEL, MECHANICAL, PLUMBING AND SPECIALTY TRADES); ALL ITEMS REQUIRING POWER INDICATED ON THESE DRAWINGS BUT NOT INDICATED ON THE ELECTRICAL DRAWINGS SHALL BE CONSIDERED A PART OF THE ELECTRICAL CONTRACTOR'S WORK. THIS WORK SHALL BE INSTALLED AS PER NEC REQUIREMENTS AT NO ADDITIONAL COST TO THE OWNER.
4. THE CONTRACTOR SHALL MAKE EVERY EFFORT TO MAKE ALL FEEDER RUNS CONTINUOUS (NO CABLE BREAKS); IF SPLICING CABLES IN BOXES BECOMES NECESSARY, USE O.C. TYPE "XW" CABLE TAPS, OR APPROVED EQUIVALENT.
5. THE MECHANICAL CONTRACTOR SHALL PROVIDE DISCONNECT SWITCHES, VFDs, OR COMBINATION STARTERS FOR ALL OF THEIR UNITS. THE ELECTRICAL CONTRACTOR SHALL RECEIVE THESE ITEMS FROM THE MECHANICAL CONTRACTOR FOR INSTALLATION AND WIRING.
6. THE ELECTRICAL CONTRACTOR SHALL COORDINATE CONDUIT PENETRATIONS FOR ROOFTOP EQUIPMENT WITH MECHANICAL AND ROOFING CONTRACTORS. IF PROVISIONS ARE NOT IN PLACE FOR THESE PENETRATIONS THE ELECTRICAL CONTRACTOR SHALL BE RESPONSIBLE FOR MAKING WORK COORDINATE WITH MECHANICAL AND ROOFING CONTRACTORS FOR PENETRATIONS.
7. REFER TO MECHANICAL DRAWINGS FOR EXACT LOCATION OF ALL MECHANICAL EQUIPMENT.
8. PROVIDE CONDUIT AND WIRING AS REQUIRED TO MEET CIRCUITING SCHEME TO CONFORM TO NEC REQUIREMENTS.
9. PROVIDE EQUIPMENT GROUND CONDUCTOR IN ALL RACEWAYS. REFER TO PANELBOARD SCHEDULES TO DETERMINE EQUIPMENT GROUNDING REQUIREMENTS.
10. REFER TO EQUIPMENT CONNECTION SCHEDULE FOR ELECTRICAL REQUIREMENTS AND CIRCUIT DESIGNATIONS.
11. ROUTE CONDUIT HIGH AGAINST STRUCTURE AND OFFSET UP BETWEEN JOISTS WHERE NECESSARY TO AVOID CONTACT WORK AND/OR STRUCTURE.
12. VERIFY AND COORDINATE EXACT ELECTRICAL REQUIREMENTS OF ALL EQUIPMENT WITH MANUFACTURER'S RECOMMENDATIONS PRIOR TO INSTALLATION OF EQUIPMENT.

POWER PLAN KEYNOTES

- 1 PROVIDE CONNECTION TO EXISTING CONTROLS CIRCUIT SERVING NEARBY UNITS.



[illegible]

- VA FORM 08 - 6231

1. FINAL LOCATION OF ALL EQUIPMENT SHALL BE DETERMINED IN THE FIELD AND SHALL BE INSTALLED IN ACCORDANCE WITH THE APPROVED MECHANICAL DRAWINGS. THE CONTRACTOR SHALL BE RESPONSIBLE FOR PROVIDING THE SPACE AND ACCESS TO THE EQUIPMENT. THE CONTRACTOR SHALL CORE DRILL WALLS AND FLOORS AS REQUIRED TO PERMIT PASSAGE OF CONDUITS. THE ELECTRICAL CONTRACTOR SHALL PROVIDE A MARKED-UP PLAN OF THE PENETRATIONS FOR REVIEW AND APPROVAL OF THE STRUCTURAL ENGINEER PRIOR TO BEGINNING RE-GRINDS.
2. RECEPTACLES FOR ALL EQUIPMENT SHALL BE COMPLETE WITH PLUGS FOR THIS EQUIPMENT. THE ELECTRICAL CONTRACTOR SHALL VERIFY NEMA CONFIGURATIONS OF PLUGS AND RECEPTACLES FOR EQUIPMENT IN THE SPACE.
3. DURING THE BIDDING PROCESS, THE ELECTRICAL CONTRACTOR SHALL REVIEW DRAWINGS AND SPECIFICATIONS OF ALL OTHER TRADES (ARCHITECTURAL, STEELDECKING, HVAC, PLUMBING AND MECHANICAL) AND PROVIDE ALL COMMENTS TO THE PROJECT ENGINEER. ANY COMMENTS INDICATED ON THE ELECTRICAL DRAWINGS SHALL BE CONSIDERED A PART OF THE ELECTRICAL CONTRACTOR'S WORK. EQUIPMENT SHALL BE INSTALLED AS PER NEMA REQUIREMENTS AT AN ADDITIONAL COST TO THE OWNER.
4. THE CONTRACTOR SHALL MAKE EVERY EFFORT TO MAKE ALL FEEDER RUNS CONTINUOUS (NO CABLE BREAKS). IF SPlicing CABLES IN BOXES RESULTS IN THE USE OF U.G. TYPE "XV" CABLE TAPES, THE CONTRACTOR SHALL SUBMIT THE U.G. CABLES FOR APPROVED MANUFACTURER.
5. THE MECHANICAL CONTRACTOR SHALL PROVIDE DISCONNECT SWITCHES, VFD'S, OR COMBINATION STARTERS FOR ALL OF THEIR UNITS. THE ELECTRICAL CONTRACTOR SHALL RECEIVE THESE ITEMS FROM THE MECHANICAL CONTRACTOR AND INSTALL THEM IN THE ELECTRICAL ROOM.
6. THE ELECTRICAL CONTRACTOR SHALL COORDINATE CONDUIT PENETRATIONS FOR ROOFTOP EQUIPMENT WITH MECHANICAL AND ROOFING CONTRACTORS. IF PROVISIONS ARE NOT IN PLACE FOR PENETRATIONS THROUGH THE ROOF, THE ELECTRICAL CONTRACTOR SHALL PROVIDE FOR ROOF PENETRATIONS AND CONTRACTING THE ROOF CONTRACTOR FOR SEALING THE ROOF PENETRATIONS.
7. REFER TO MECHANICAL DRAWINGS FOR EXACT LOCATION OF ALL MECHANICAL EQUIPMENT.
8. PROVIDE CONDUIT AND WIRING AS REQUIRED TO MEET CRUCIAL SHOOTING TO CONFORM TO NEC REQUIREMENTS.
9. PROVIDE EQUIPMENT GROUND CONDUCTOR IN ALL RACEWAYS. REFER TO PANELBOARD SCHEDULES FOR CONDUCTOR SIZES.
10. REFER TO EQUIPMENT CONNECTION SCHEDULE FOR ELECTRICAL REQUIREMENTS AND CIRCUIT BREAKERS.
11. ROUTE CONDUIT HIGH AGAINST STRUCTURE AND OFFSET UP BETWEEN JOISTS WHERE NECESSARY TO AVOID DUCT WORK AND HVAC SYSTEM.
12. VERIFY AND COORDINATE ALL ELECTRICAL REQUIREMENTS OF ALL EQUIPMENT.
13. PROVIDE ALL REQUIRED CONDUIT AND WIRING TO MEET ALL REQUIREMENTS OF ALL EQUIPMENT. MANUFACTURER'S RECOMMENDATIONS PRIOR TO INSTALLATION OF EQUIPMENT.

1 PROVIDE RECEPTACLE FOR CONDENSATE PUMP

1 PROVIDE RECEPTACLE FOR CONDENSATE PUMP
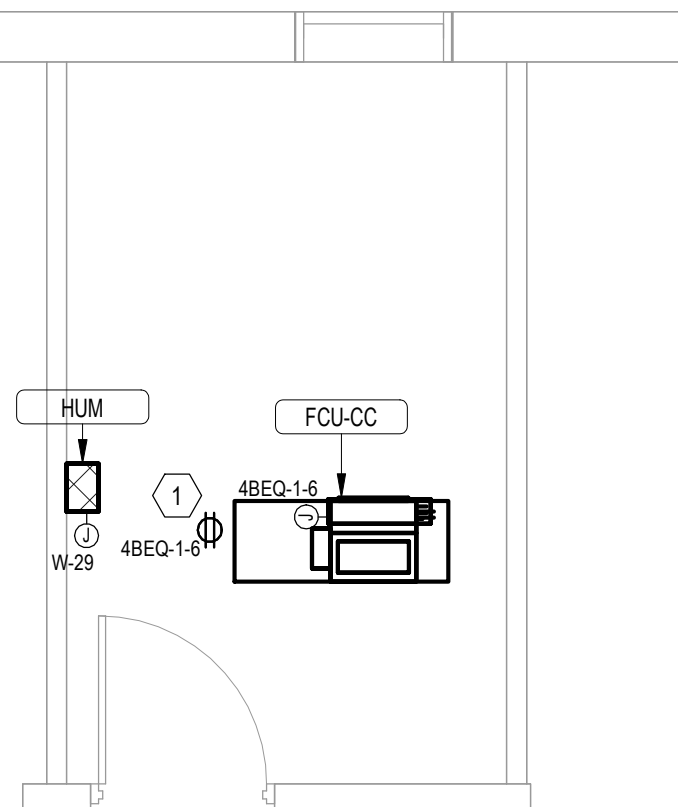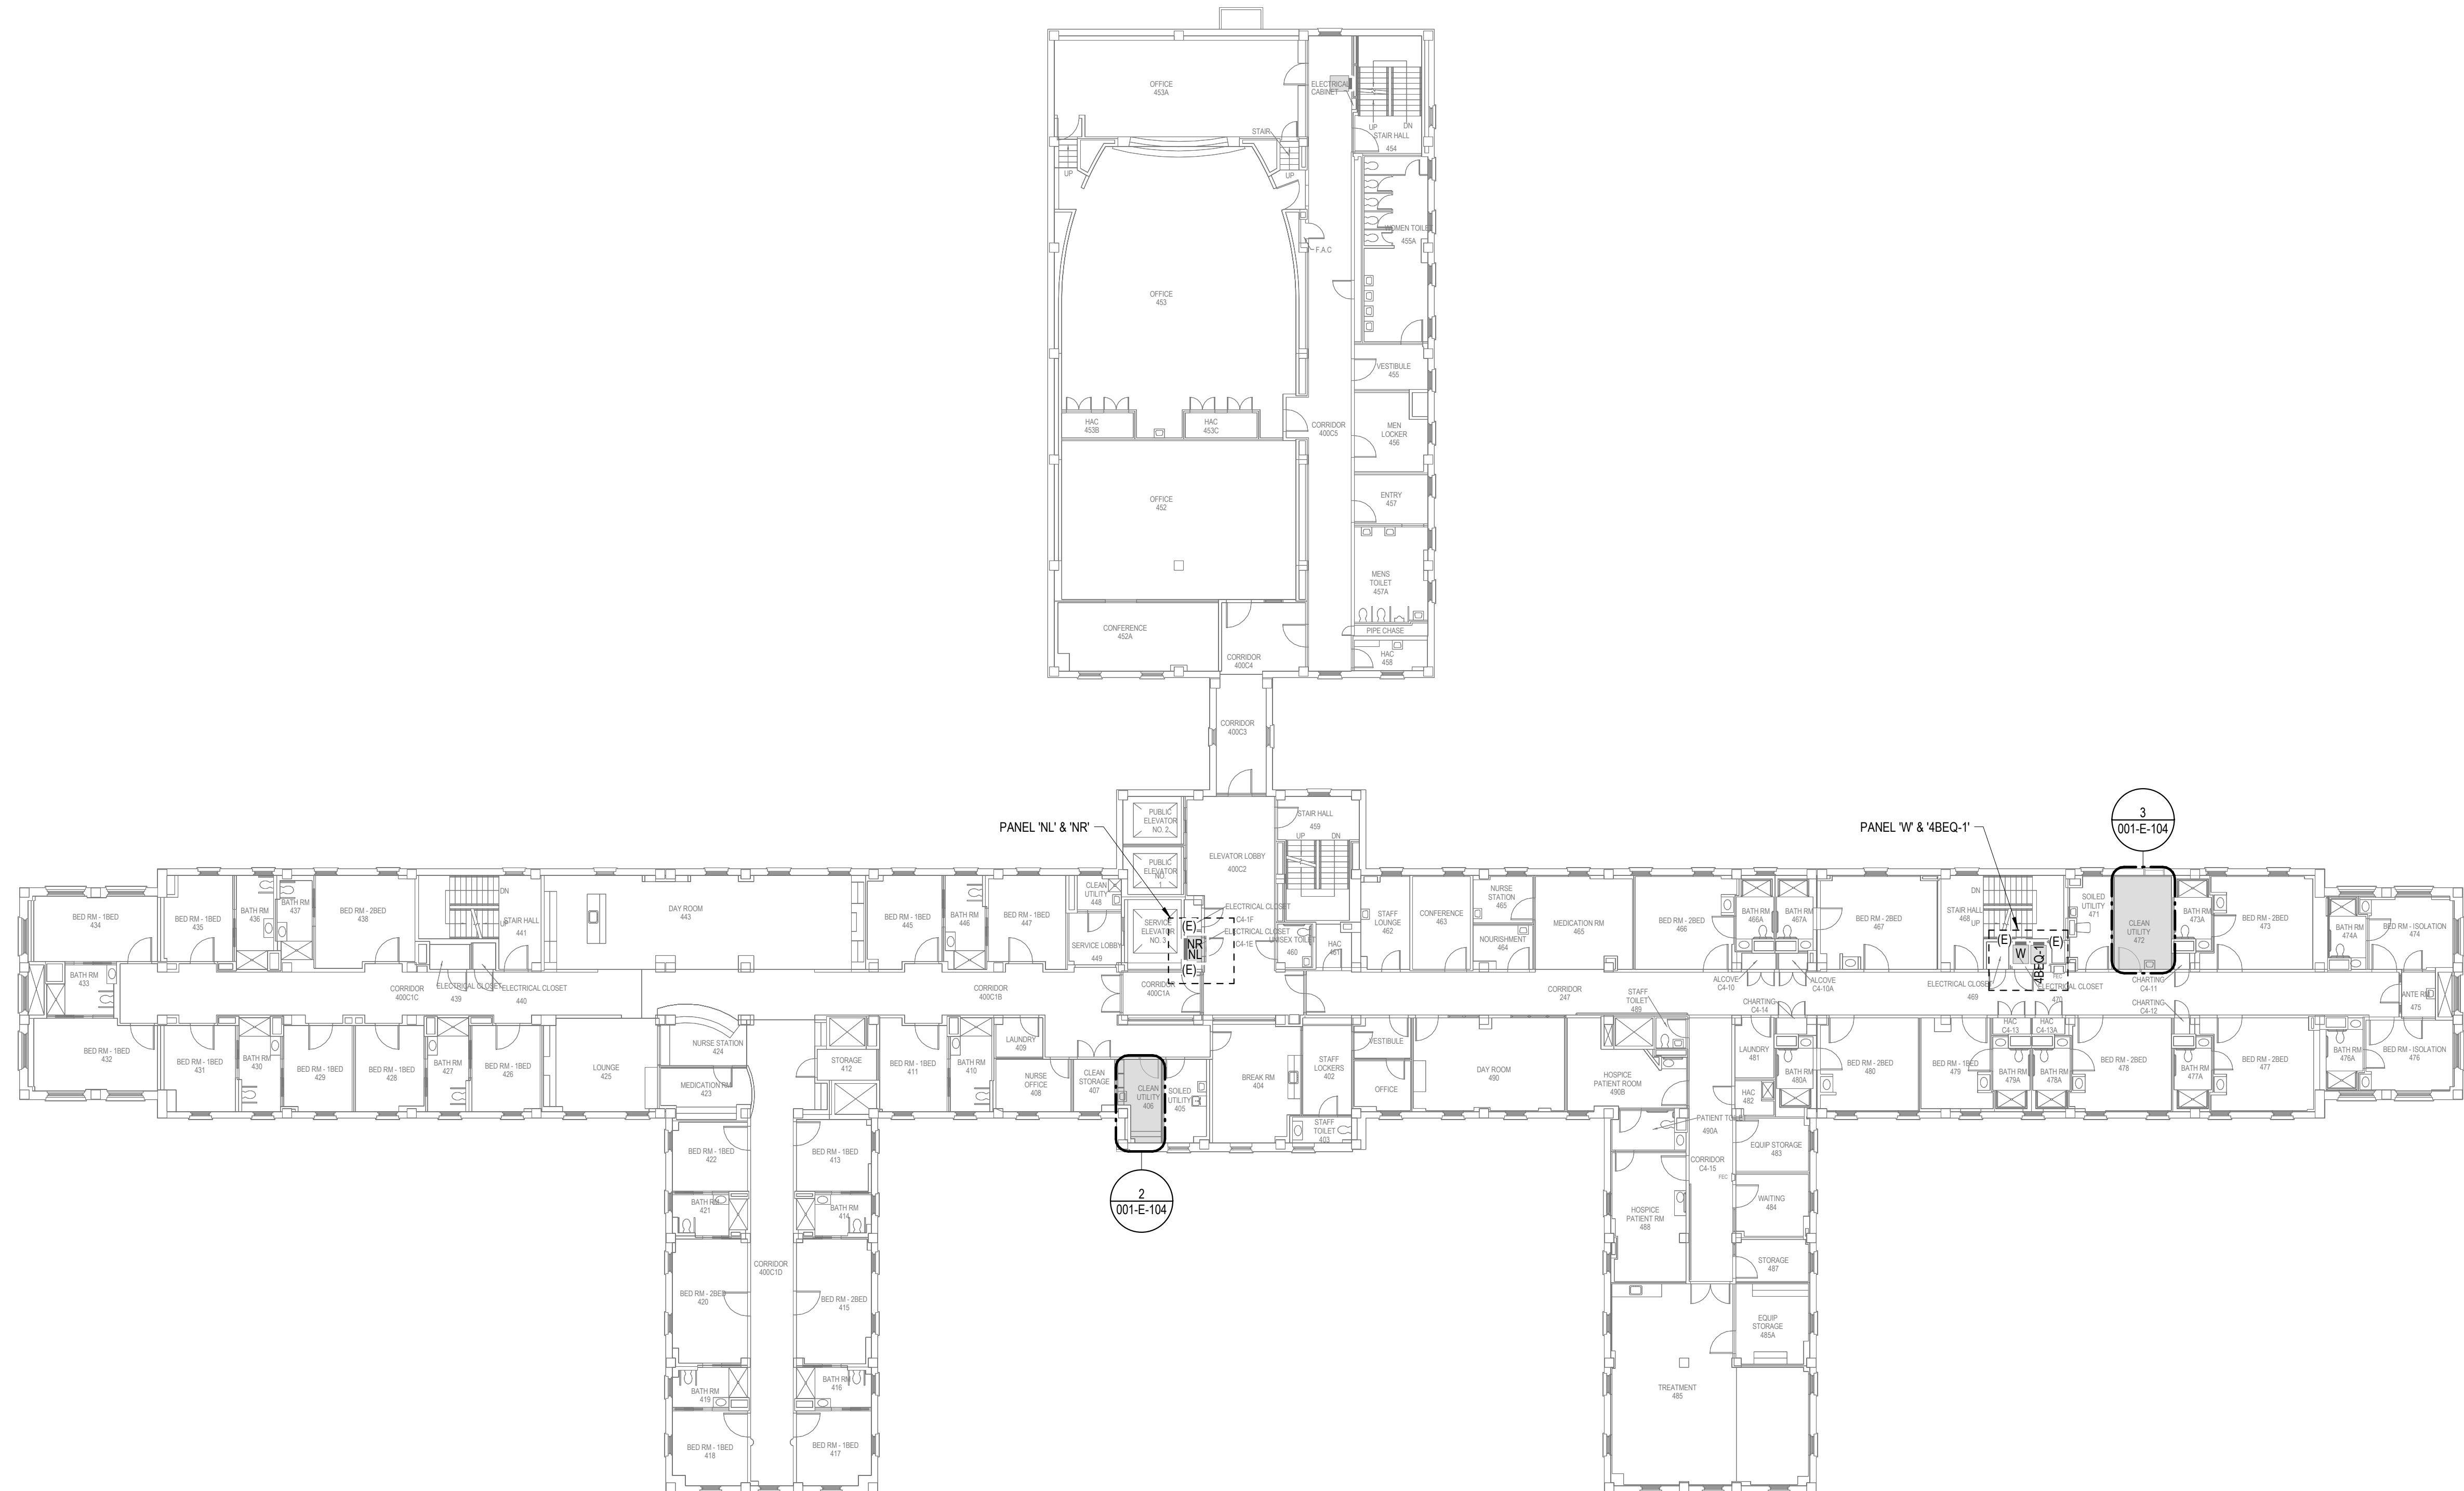
$$\frac{1}{4}'' = 1'-0''$$

$$1/4" = 1'-0"$$

$$1/16'' = 1'-0''$$

VA FORM 08 - 6231									
1	2	3	4	5	6	7	8	9	10

A

B

C


D

E


F

3/5/2026 3:57:03 PM

Autodesk Docs\\VLEB-016 Sterile Storage Improvements\\VLEB-016-MEP_24.rvt

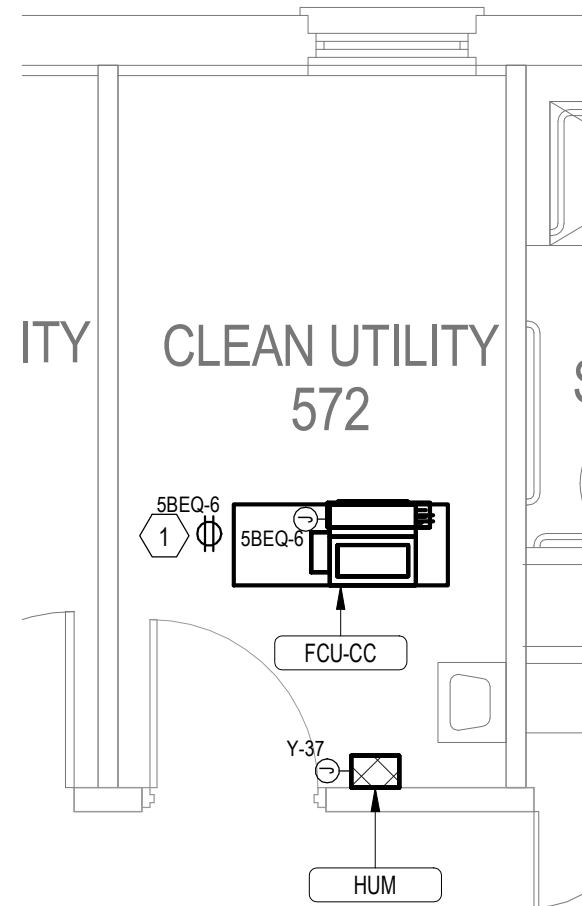

2 BLDG 01-05 FIFTH FLOOR ELECTRICAL PLAN - ROOM 572
1/4" = 1'-0"

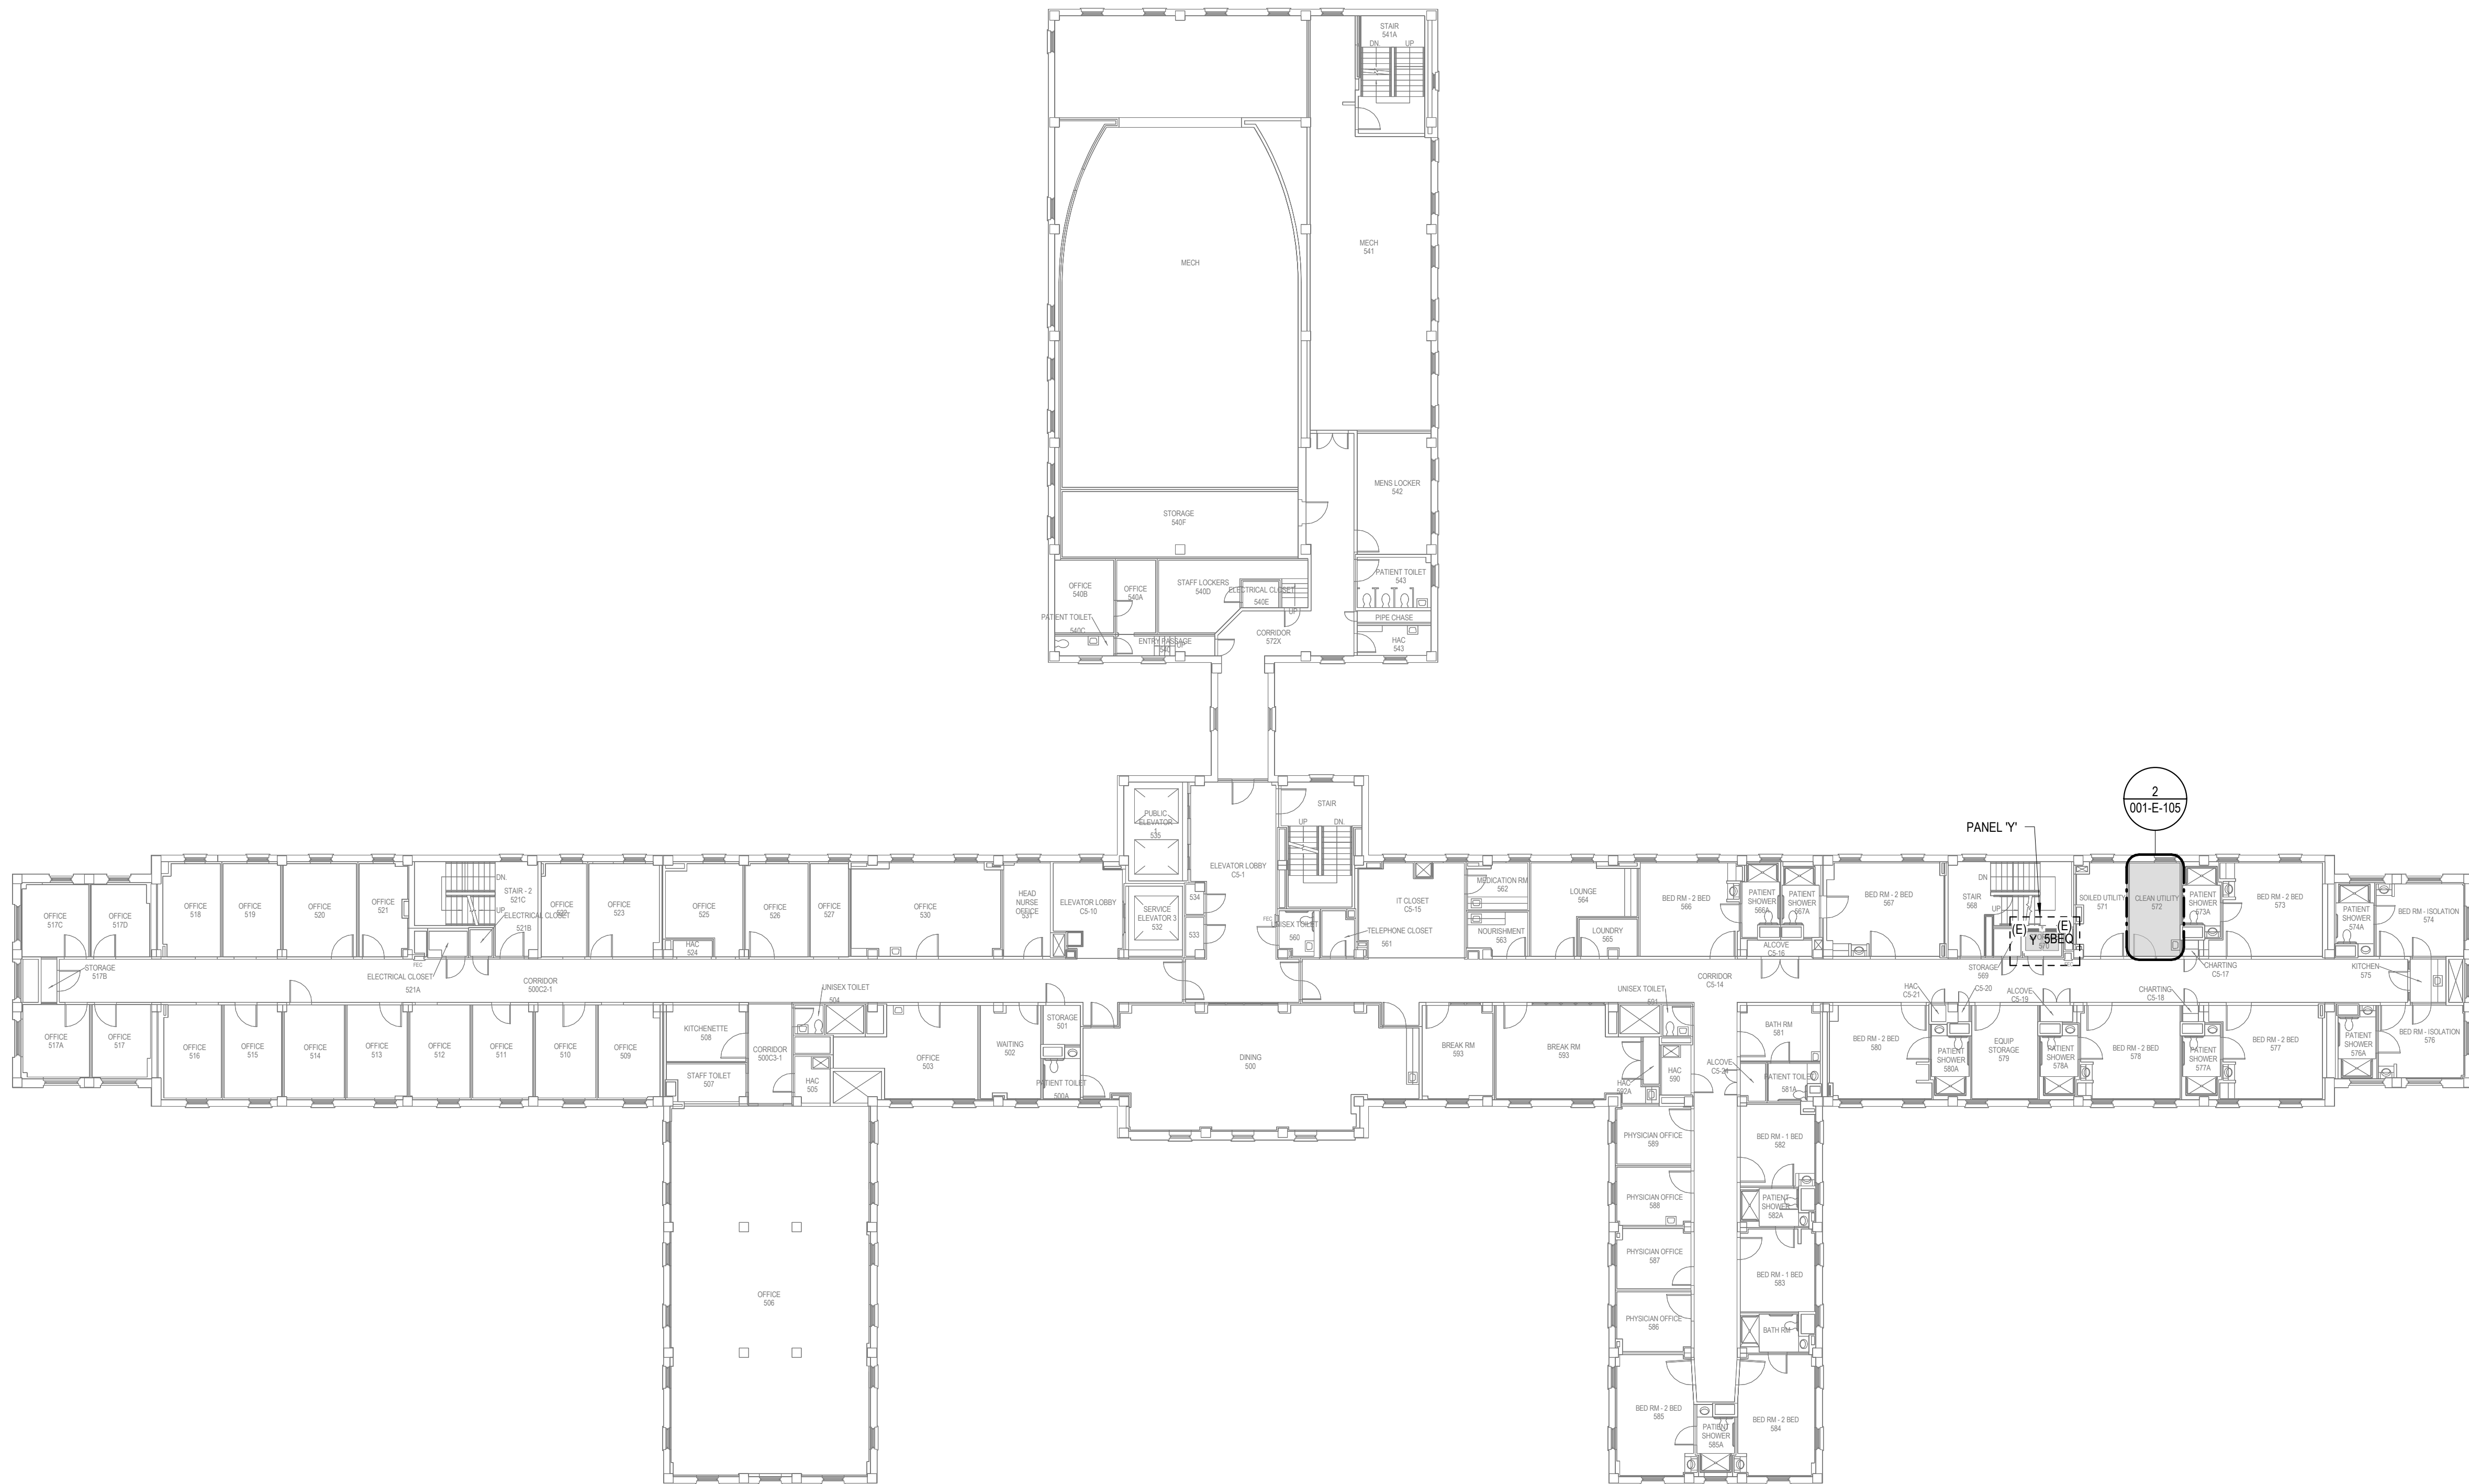


1 BLDG 01-05 FIFTH FLOOR ELECTRICAL PLAN
1/16" = 1'-0"

POWER PLAN GENERAL NOTES

- 1 FINAL LOCATION OF ALL EQUIPMENT SHALL BE DETERMINED IN THE FIELD AND SHALL BE INSTALLED AS DIRECTED BY THE ARCHITECT OR OWNER'S REPRESENTATIVE. WHERE STRUCTURAL OPENINGS ARE NOT AVAILABLE, THE CONTRACTOR SHALL CORE DRILL WALLS AND FLOORS AS REQUIRED TO PERMIT PASSAGE OF CONDUITS. THE ELECTRICAL CONTRACTOR SHALL PROVIDE A MARKED-UP PLAN WITH LOCATION PENETRATIONS FOR REVIEW AND APPROVAL OF THE STRUCTURAL ENGINEER BEFORE ROUGH-IN BEGINS.
- 2 RECEPTACLES FOR ALL EQUIPMENT SHALL BE COMPLETE WITH PLUGS FOR THIS EQUIPMENT. THE ELECTRICAL CONTRACTOR SHALL VERIFY NEMA CONFIGURATIONS OF PLUGS AND RECEPTACLES FOR EQUIPMENT IN THE SPACE.
- 3 DURING THE BIDDING PROCESS, THE ELECTRICAL CONTRACTOR SHALL REVIEW DRAWINGS AND SPECIFICATIONS OF ALL OTHER TRADES (ARCHITECTURAL, SITE/LANDSCAPING, HVAC, PLUMBING AND SPECIALTY TRADES). ALL ITEMS REQUIRING POWER INDICATED ON THESE DRAWINGS BUT NOT INDICATED ON THE ELECTRICAL DRAWINGS SHALL BE CONSIDERED A PART OF THE ELECTRICAL CONTRACTOR'S WORK. THIS WORK SHALL BE INSTALLED AS PER NEC REQUIREMENTS AT NO ADDITIONAL COST TO THE OWNER.
- 4 THE CONTRACTOR SHALL MAKE EVERY EFFORT TO MAKE ALL FEEDER RUNS CONTINUOUS (NO CABLE BREAKS). IF SPLICING CABLES IN BOXES BECOMES NECESSARY, USE O.Z.G. TYPE "XVY" CABLE TAPS, OR APPROVED EQUAL, AND TAPE EACH TAP IN APPROVED MANNER.
- 5 THE MECHANICAL CONTRACTOR SHALL PROVIDE DISCONNECT SWITCHES, VFD'S, OR COMBINATION STARTERS FOR ALL OF THEIR UNITS. THE ELECTRICAL CONTRACTOR SHALL RECEIVE THESE ITEMS FROM THE MECHANICAL CONTRACTOR FOR INSTALLATION BY THE ELECTRICAL CONTRACTOR.
- 6 THE ELECTRICAL CONTRACTOR SHALL COORDINATE CONDUIT PENETRATIONS FOR ROOFTOP EQUIPMENT WITH MECHANICAL AND ROOFING CONTRACTORS. IF PROVISIONS ARE NOT IN PLACE FOR THESE PENETRATIONS THE ELECTRICAL CONTRACTOR SHALL BE RESPONSIBLE FOR MAKING OWN PENETRATIONS AND CONTRACTING THE ROOF CONTRACTOR FOR SEALING THE ROOF PENETRATIONS. REFER TO MECHANICAL DRAWINGS FOR EXACT LOCATION OF ALL MECHANICAL EQUIPMENT.
- 7 PROVIDE CONDUIT AND WIRING AS REQUIRED TO MEET CIRCUITING SHOWN TO CONFORM TO NEC REQUIREMENTS.
- 8 PROVIDE EQUIPMENT GROUND CONDUCTOR IN ALL RACEWAYS. REFER TO PANELBOARD SCHEDULES.
- 9 REFER TO EQUIPMENT CONNECTION SCHEDULE FOR ELECTRICAL REQUIREMENTS AND CIRCUIT DESIGNATIONS.
- 10 ROUTE CONDUIT HIGH AGAINST STRUCTURE AND OFFSET UP BETWEEN JOISTS WHERE NECESSARY TO AVOID DUCT WORK AND HVAC SYSTEM.
- 11 VERIFY AND COORDINATE EXACT ELECTRICAL REQUIREMENTS OF ALL EQUIPMENT WITH MANUFACTURER'S RECOMMENDATIONS PRIOR TO INSTALLATION OF EQUIPMENT.

POWER PLAN KEYNOTES

- 1 PROVIDE RECEPTACLE FOR CONDENSATE PUMP.



																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										</
--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	----

A

B

C

D

E

F

A

B

C

D

E


F

POWER PLAN GENERAL NOTES


- 1 FINAL LOCATION OF ALL EQUIPMENT SHALL BE DETERMINED IN THE FIELD AND SHALL BE INSTALLED AS DIRECTED BY THE ARCHITECT OR OWNER'S REPRESENTATIVE. WHERE STRUCTURAL OPENINGS ARE NOT AVAILABLE, THE CONTRACTOR SHALL CORE DRILL WALLS AND FLOORS AS REQUIRED TO PERMIT PASSAGE OF CONDUITS. THE ELECTRICAL CONTRACTOR SHALL PROVIDE A MARKED-UP PLAN WITH LOCATION PENETRATIONS FOR REVIEW AND APPROVAL OF THE STRUCTURAL ENGINEER BEFORE ROUGH-IN BEGINS.
- 2 RECEPTACLES FOR ALL EQUIPMENT SHALL BE COMPLETE WITH PLUGS FOR THIS EQUIPMENT. THE ELECTRICAL CONTRACTOR SHALL VERIFY NEMA CONFIGURATIONS OF PLUGS AND RECEPTACLES FOR EQUIPMENT IN THE SPACE.
- 3 DURING THE BIDDING PROCESS, THE ELECTRICAL CONTRACTOR SHALL REVIEW DRAWINGS AND SPECIFICATIONS OF ALL OTHER TRADES (ARCHITECTURAL, SITE/LANDSCAPING, HVAC, PLUMBING AND SPECIALTY TRADES). ALL ITEMS REQUIRING POWER INDICATED ON THESE DRAWINGS BUT NOT INDICATED ON THE ELECTRICAL DRAWINGS SHALL BE CONSIDERED A PART OF THE ELECTRICAL CONTRACTOR'S WORK. THIS WORK SHALL BE INSTALLED AS PER NEC REQUIREMENTS AT NO ADDITIONAL COST TO THE OWNER.
- 4 THE CONTRACTOR SHALL MAKE EVERY EFFORT TO MAKE ALL FEEDER RUNS CONTINUOUS (NO CABLE BREAKS). IF SPLICING CABLES IN BOXES BECOMES NECESSARY, USE O.Z.G. TYPE "XWY" CABLE TAPS, OR APPROVED EQUAL, AND TAPE EACH TAP IN APPROVED MANNER.
- 5 THE MECHANICAL CONTRACTOR SHALL PROVIDE DISCONNECT SWITCHES, VFD'S, OR COMBINATION STARTERS FOR ALL OF THEIR UNITS. THE ELECTRICAL CONTRACTOR SHALL RECEIVE THESE ITEMS FROM THE MECHANICAL CONTRACTOR FOR INSTALLATION BY THE ELECTRICAL CONTRACTOR.
- 6 THE ELECTRICAL CONTRACTOR SHALL COORDINATE CONDUIT PENETRATIONS FOR ROOFTOP EQUIPMENT WITH MECHANICAL AND ROOFING CONTRACTORS. IF PROVISIONS ARE NOT IN PLACE FOR THESE PENETRATIONS THE ELECTRICAL CONTRACTOR SHALL BE RESPONSIBLE FOR MAKING OWN PENETRATIONS AND CONTRACTING THE ROOF CONTRACTOR FOR SEALING THE ROOF PENETRATIONS.
- 7 REFER TO MECHANICAL DRAWINGS FOR EXACT LOCATION OF ALL MECHANICAL EQUIPMENT.
- 8 PROVIDE CONDUIT AND WIRING AS REQUIRED TO MEET CIRCUITING SHOWN TO CONFORM TO NEC REQUIREMENTS.
- 9 PROVIDE EQUIPMENT GROUND CONDUCTOR IN ALL RACEWAYS. REFER TO PANELBOARD SCHEDULES.
- 10 REFER TO EQUIPMENT CONNECTION SCHEDULE FOR ELECTRICAL REQUIREMENTS AND CIRCUIT DESIGNATIONS.
- 11 ROUTE CONDUIT HIGH AGAINST STRUCTURE AND OFFSET UP BETWEEN JOISTS WHERE NECESSARY TO AVOID DUCT WORK AND HVAC SYSTEM.
- 12 VERIFY AND COORDINATE EXACT ELECTRICAL REQUIREMENTS OF ALL EQUIPMENT WITH MANUFACTURER'S RECOMMENDATIONS PRIOR TO INSTALLATION OF EQUIPMENT.

POWER PLAN KEYNOTES

- 1 PROVIDE CONNECTION TO NEW MECHANICAL EQUIPMENT VIA EXISTING CIRCUITRY ABANDONED DURING DEMOLITION IN EXISTING PANEL 'P4'. PANEL 'P4' IS LOCATED IN BASEMENT. LOCATION NOT SHOWN.

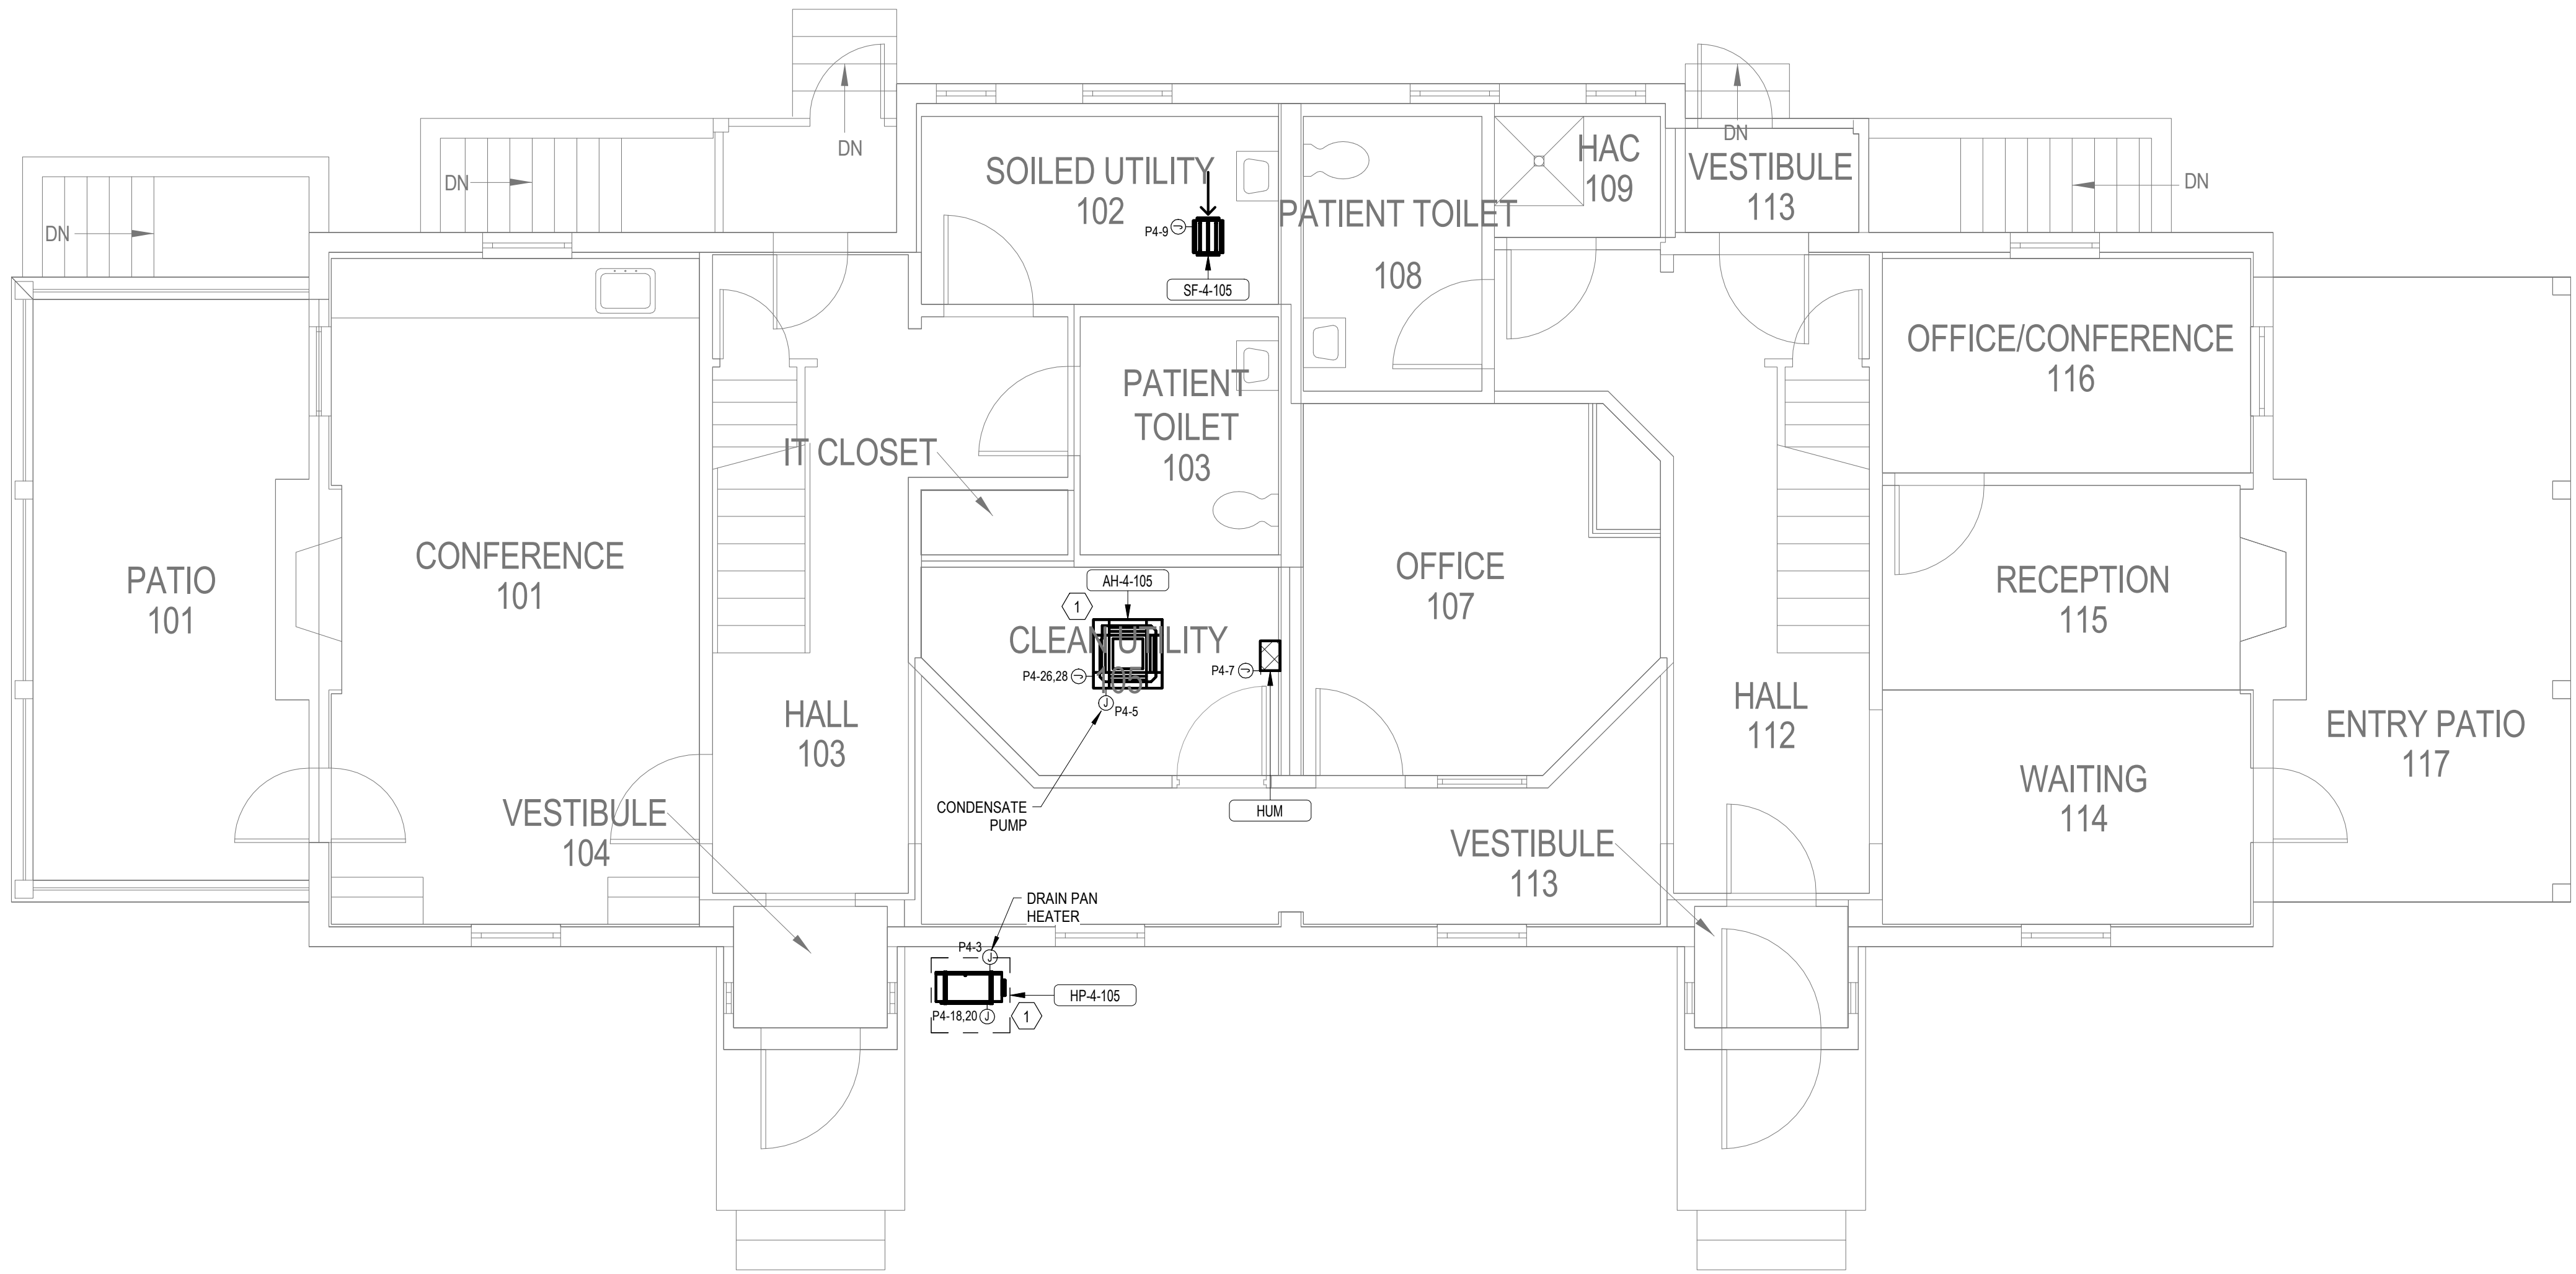

1 BLDG 4-01 FIRST FLOOR ELECTRICAL PLAN
1/4" = 1'-0"



--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

1. FINAL LOCATION OF ALL EQUIPMENT SHALL BE DETERMINED IN THE FIELD AND SHALL BE INSTALLED AS DIRECTED BY THE ARCHITECT OR OWNER'S REPRESENTATIVE, WHERE STRUCTURAL OPENINGS ARE AVAILABLE. THE ELECTRICAL CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS TO PERMIT PASSAGE OF CONDUITS. THE ELECTRICAL CONTRACTOR SHALL PROVIDE A MARK-UP PLAN OF THE LOCATION PENETRATIONS FOR REVIEW AND APPROVAL OF THE STRUCTURAL ENGINEER PRIOR TO BEGINNING WORK.
2. RECEPTACLES FOR ALL EQUIPMENT SHALL BE COMPLETE WITH PLUGS FOR THIS EQUIPMENT. THE ELECTRICAL CONTRACTOR SHALL VERIFY NEMA CONFIGURATIONS OF PLUGS AND RECEPTACLES FOR ALL EQUIPMENT IN THE SPACE.
3. DURING THE BIDDING PROCESS, THE ELECTRICAL CONTRACTOR SHALL REVIEW DRAWINGS AND SPECIFICATIONS OF ALL OTHER TRADES (ARCHITECTURAL, STEELERASCAPING, HVAC, PLUMBING AND MECHANICAL) AND PROVIDE ALL NECESSARY FIELD NOTATIONS TO THE ARCHITECT. ANY FIELD NOTATION INDICATED ON THE ELECTRICAL DRAWINGS SHALL BE CONSIDERED A PART OF THE ELECTRICAL CONTRACTOR'S WORK. THIS WORK SHALL BE INSTALLED AS PER NEC REQUIREMENTS AT THE CONTRACTOR'S COST TO THE PROJECT.
4. THE CONTRACTOR SHALL MAKE EVERY EFFORT TO MAKE ALL FEEDER RUNS CONTINUOUS (NO CABLE BREAKS); IF SPUNING GABLES IN BOXES BECOMES NECESSARY, USE O.Z.G. TYPE "X" WIRE TAPS. ALL FEEDER RUNS SHALL BE EQUAL, AND ALL FEEDER RUNS SHALL BE IDENTICAL.
5. THE MECHANICAL CONTRACTOR SHALL PROVIDE DISCONNECT SWITCHES, VFDs, OR COMBINATION STARTERS FOR ALL OF THEIR UNITS. THE ELECTRICAL CONTRACTOR SHALL RECEIVE THESE ITEMS FROM THE MECHANICAL CONTRACTOR PRIOR TO BEGINNING WORK.
6. THE ELECTRICAL CONTRACTOR SHALL COORDINATE CONDUIT PENETRATIONS FOR ROOFTOP EQUIPMENT WITH MECHANICAL AND ROOFING CONTRACTORS. IF PROVISIONS ARE NOT IN PLACE FOR PENETRATIONS INTO THE ROOF, THE ELECTRICAL CONTRACTOR SHALL BE RESPONSIBLE FOR PROVIDING PENETRATIONS AND CONTRACTING THE ROOF CONTRACTOR FOR SEALING THE ROOF PENETRATIONS.
7. REFER TO MECHANICAL DRAWINGS FOR EXACT LOCATION OF ALL MECHANICAL EQUIPMENT.
8. PROVIDE CONDUIT AND WIRING AS REQUIRED TO MEET CIRCUITING SHOWN TO CONFORM TO NEC.
9. PROVIDE EQUIPMENT GROUND CONDUCTOR IN ALL RACEWAYS. REFER TO PANELBOARD SCHEDULES FOR EQUIPMENT CONNECTION SCHEDULE FOR ELECTRICAL REQUIREMENTS AND CIRCUIT NOTATIONS.
10. ROUTE CONDUIT HIGH ABOVE STRUCTURE AND OFFSET UP BETWEEN JOISTS WHERE NECESSARY TO AVOID DUCT WORK AND HVAC SYSTEM.
11. VERIFY AND COORDINATE EXACT ELECTRICAL REQUIREMENTS OF ALL EQUIPMENT WITH THE ARCHITECTURES PRIOR TO BEGINNING WORK. PRIOR TO INSTALLATION OF ALL EQUIPMENT.

1 NO ELECTRICAL WORK REQUIRED. ALL CONNECTIONS ARE EXISTING TO REMAIN.

2 BLDG 17-01 FIRST FLOOR ELECTRICAL PLAN - ROOM 123M
1/4" = 1'-0"

1 BLDG 17-01 FIRST FLOOR ELECTRICAL PLAN
1/16" = 1'-0"

[illegible]

A

B

C

D

E

F

3/5/2026 3:57:09 PM

Autodesk Docs\\VLEB-016 Sterile Storage Improvements\\VLEB-016-MEP_24.rvt

POWER PLAN GENERAL NOTES

- 1 FINAL LOCATION OF ALL EQUIPMENT SHALL BE DETERMINED IN THE FIELD AND SHALL BE INSTALLED AS DIRECTED BY THE ARCHITECT OR OWNER'S REPRESENTATIVE. WHERE STRUCTURAL OPENINGS ARE NOT AVAILABLE, THE CONTRACTOR SHALL CORE DRILL WALLS AND FLOORS AS REQUIRED TO PERMIT PASSAGE OF CONDUITS. THE ELECTRICAL CONTRACTOR SHALL PROVIDE A MARKED-UP PLAN WITH LOCATION PENETRATIONS FOR REVIEW AND APPROVAL OF THE STRUCTURAL ENGINEER BEFORE ROUGH-IN BEGINS.
- 2 RECEPTACLES FOR ALL EQUIPMENT SHALL BE COMPLETE WITH PLUGS FOR THIS EQUIPMENT. THE ELECTRICAL CONTRACTOR SHALL VERIFY NEMA CONFIGURATIONS OF PLUGS AND RECEPTACLES FOR EQUIPMENT IN THE SPACE.
- 3 DURING THE BIDDING PROCESS, THE ELECTRICAL CONTRACTOR SHALL REVIEW DRAWINGS AND SPECIFICATIONS OF ALL OTHER TRADES (ARCHITECTURAL, SITE/LANDSCAPING, HVAC, PLUMBING AND SPECIALTY TRADES). ALL ITEMS REQUIRING POWER INDICATED ON THESE DRAWINGS BUT NOT INDICATED ON THE ELECTRICAL DRAWINGS SHALL BE CONSIDERED A PART OF THE ELECTRICAL CONTRACTOR'S WORK. THIS WORK SHALL BE INSTALLED AS PER NEC REQUIREMENTS AT NO ADDITIONAL COST TO THE OWNER.
- 4 THE CONTRACTOR SHALL MAKE EVERY EFFORT TO MAKE ALL FEEDER RUNS CONTINUOUS (NO CABLE BREAKS). IF SPLICING CABLES IN BOXES BECOMES NECESSARY, USE O.Z.G. TYPE "XIV" CABLE TAPS, OR APPROVED EQUAL, AND TAPE EACH TAP IN APPROVED MANNER.
- 5 THE MECHANICAL CONTRACTOR SHALL PROVIDE DISCONNECT SWITCHES, VFD'S, OR COMBINATION STARTERS FOR ALL OF THEIR UNITS. THE ELECTRICAL CONTRACTOR SHALL RECEIVE THESE ITEMS FROM THE MECHANICAL CONTRACTOR FOR INSTALLATION BY THE ELECTRICAL CONTRACTOR.
- 6 THE ELECTRICAL CONTRACTOR SHALL COORDINATE CONDUIT PENETRATIONS FOR ROOFTOP EQUIPMENT WITH MECHANICAL AND ROOFING CONTRACTORS. IF PROVISIONS ARE NOT IN PLACE FOR THESE PENETRATIONS THE ELECTRICAL CONTRACTOR SHALL BE RESPONSIBLE FOR MAKING OWN PENETRATIONS AND CONTRACTING THE ROOF CONTRACTOR FOR SEALING THE ROOF PENETRATIONS. REFER TO MECHANICAL DRAWINGS FOR EXACT LOCATION OF ALL MECHANICAL EQUIPMENT.
- 7 PROVIDE CONDUIT AND WIRING AS REQUIRED TO MEET CIRCUITING SHOWN TO CONFORM TO NEC REQUIREMENTS.
- 8 PROVIDE EQUIPMENT GROUND CONDUCTOR IN ALL RACEWAYS. REFER TO PANELBOARD SCHEDULES.
- 9 REFER TO EQUIPMENT CONNECTION SCHEDULE FOR ELECTRICAL REQUIREMENTS AND CIRCUIT DESIGNATIONS.
- 10 ROUTE CONDUIT HIGH AGAINST STRUCTURE AND OFFSET UP BETWEEN JOISTS WHERE NECESSARY TO AVOID DUCT WORK AND HVAC SYSTEM.
- 11 VERIFY AND COORDINATE EXACT ELECTRICAL REQUIREMENTS OF ALL EQUIPMENT WITH MANUFACTURER'S RECOMMENDATIONS PRIOR TO INSTALLATION OF EQUIPMENT.

A


B

C


D

E


F

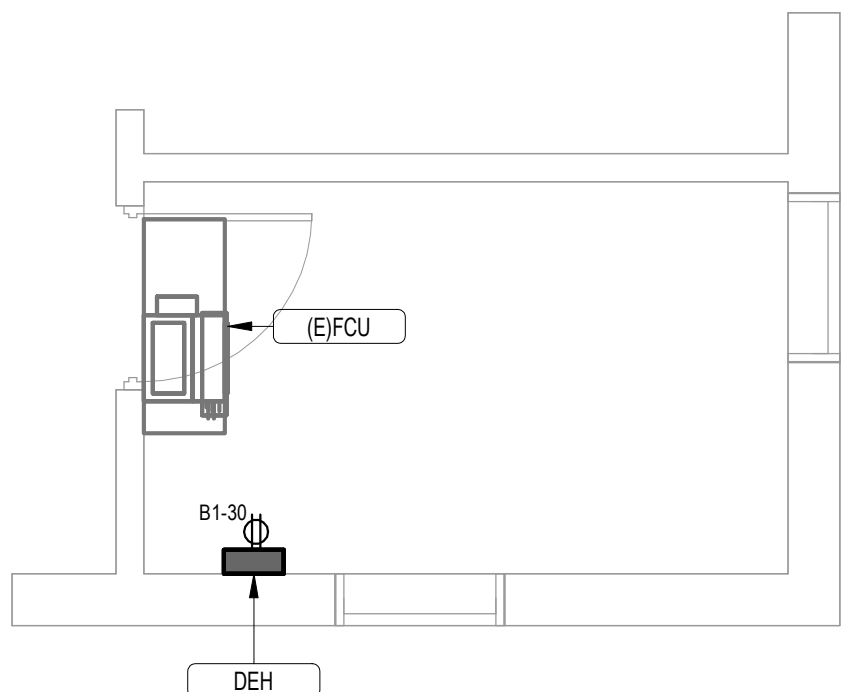

2 BID DEDUCT 1 - BLDG 17-02 SECOND FLOOR ELECTRICAL PLAN - ROOM 208
1/4" = 1'-0"

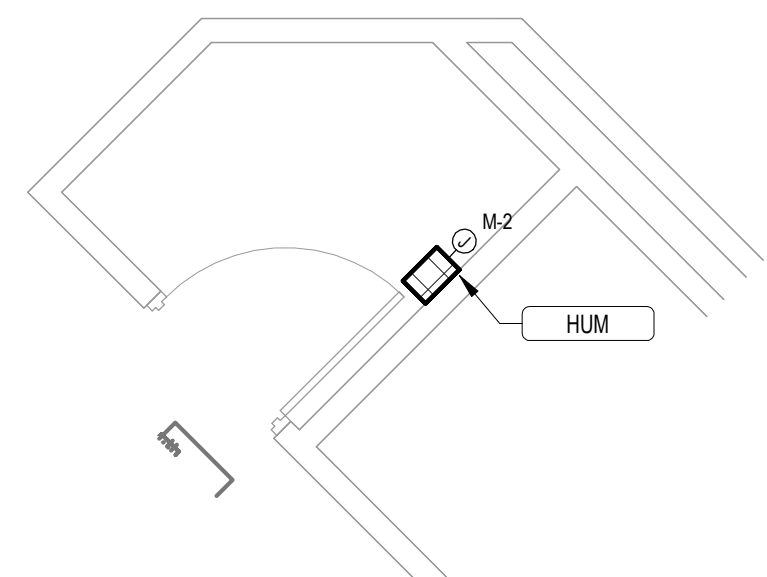

3 BID DEDUCT 1 - BLDG 17-02 SECOND FLOOR ELECTRICAL PLAN - ROOM 264
1/4" = 1'-0"

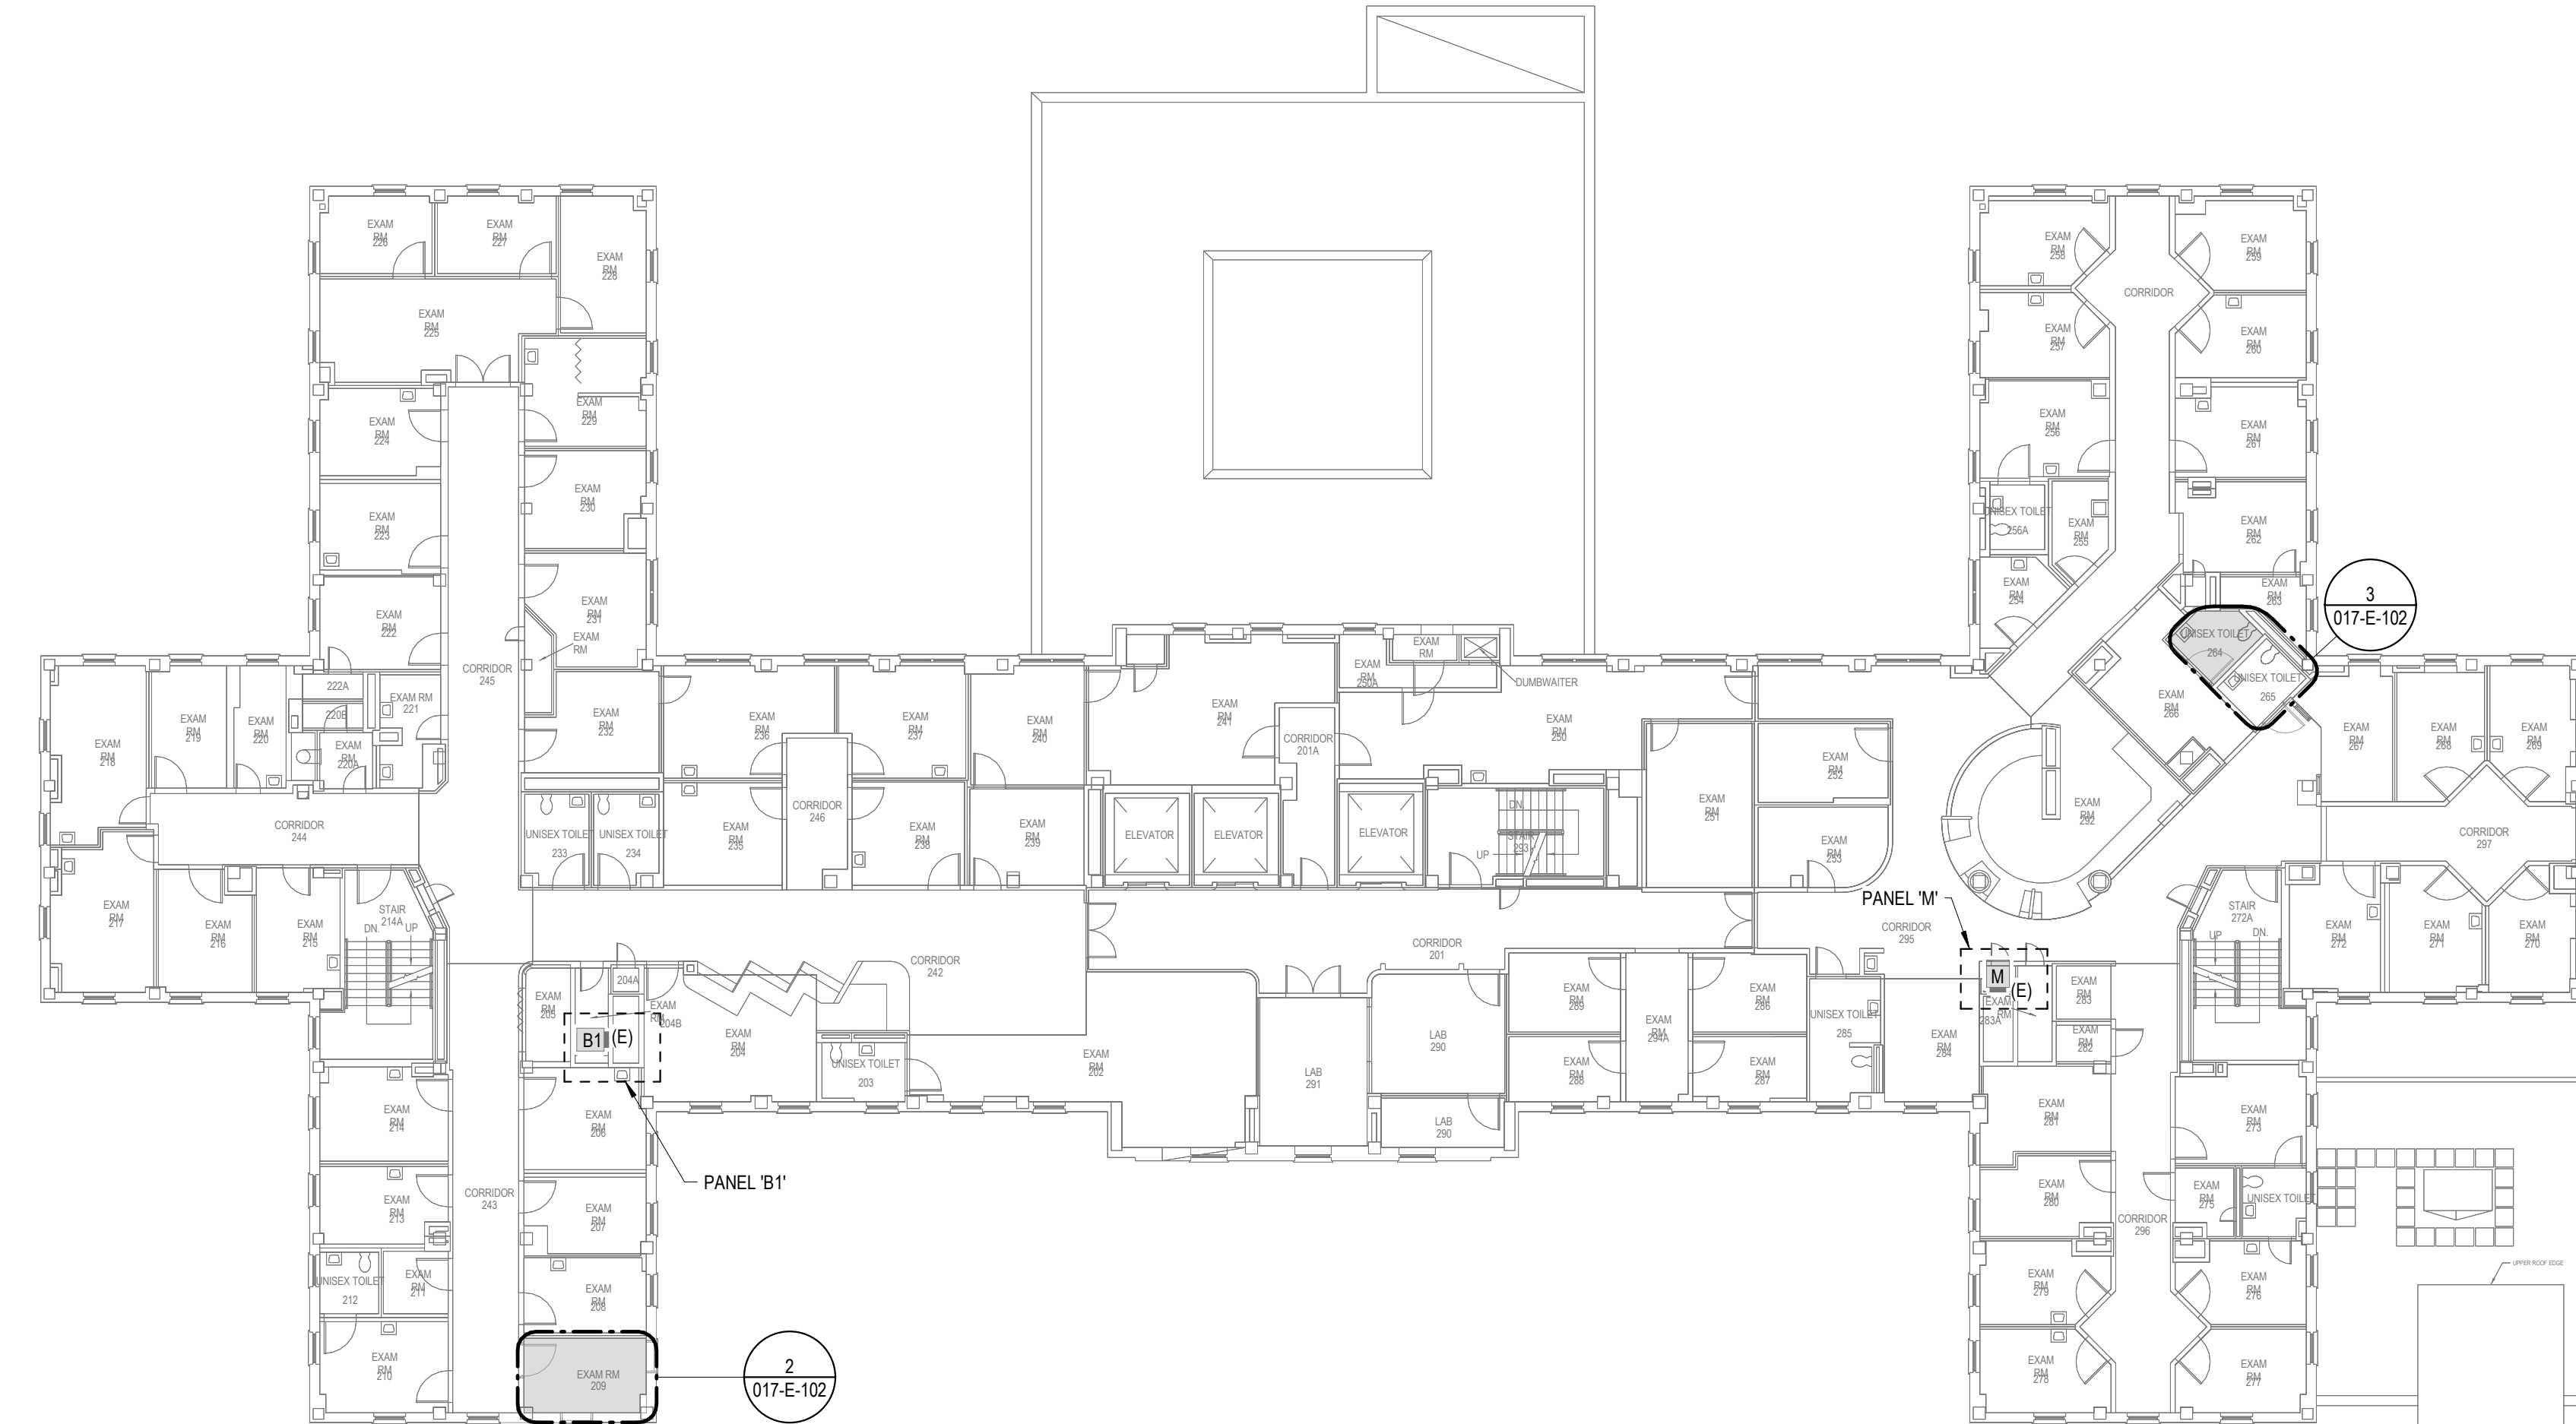


1 BID DEDUCT 1 - BLDG 17-02 SECOND FLOOR ELECTRICAL PLAN
1/16" = 1'-0"


			Consultant	Architect/Engineer of Record	Stamp	Drawing Title BUILDING 17 - SECOND FLOOR ELECTRICAL PLAN	Phase BID DOCUMENTS	Project Title STERILE STORAGE IMPROVEMENTS	Project Number VLEB-016
									Building Number 17
									Drawing Number
									017-E-102
1	BID DEDUCT #1	03/02/2026							
#	Revisions	Date							

POWER PLAN GENERAL NOTES


- 1 FINAL LOCATION OF ALL EQUIPMENT SHALL BE DETERMINED IN THE FIELD AND SHALL BE INSTALLED AS DIRECTED BY THE ARCHITECT OR OWNER'S REPRESENTATIVE. WHERE STRUCTURAL OPENINGS ARE NOT AVAILABLE, THE CONTRACTOR SHALL CORE DRILL WALLS AND FLOORS AS REQUIRED TO PERMIT PASSAGE OF CONDUITS. THE ELECTRICAL CONTRACTOR SHALL PROVIDE A MARKED-UP PLAN WITH LOCATION PENETRATIONS FOR REVIEW AND APPROVAL OF THE STRUCTURAL ENGINEER BEFORE ROUGH-IN BEGINS.
- 2 RECEPTACLES FOR ALL EQUIPMENT SHALL BE COMPLETE WITH PLUGS FOR THIS EQUIPMENT. THE ELECTRICAL CONTRACTOR SHALL VERIFY NEMA CONFIGURATIONS OF PLUGS AND RECEPTACLES FOR EQUIPMENT IN THE SPACE.
- 3 DURING THE BIDDING PROCESS, THE ELECTRICAL CONTRACTOR SHALL REVIEW DRAWINGS AND SPECIFICATIONS OF ALL OTHER TRADES (ARCHITECTURAL, SITELANDSCAPING, HVAC, PLUMBING AND SPECIALTY TRADES). ALL ITEMS REQUIRING POWER INDICATED ON THESE DRAWINGS BUT NOT INDICATED ON THE ELECTRICAL DRAWINGS SHALL BE CONSIDERED A PART OF THE ELECTRICAL CONTRACTOR'S WORK. THIS WORK SHALL BE INSTALLED AS PER NEC REQUIREMENTS AT NO ADDITIONAL COST TO THE OWNER.
- 4 THE CONTRACTOR SHALL MAKE EVERY EFFORT TO MAKE ALL FEEDER RUNS CONTINUOUS (NO CABLE BREAKS). IF SPLICING CABLES IN BOXES BECOMES NECESSARY, USE O.Z.G. TYPE "XWY" CABLE TAPS, OR APPROVED EQUAL, AND TAPE EACH TAP IN APPROVED MANNER.
- 5 THE MECHANICAL CONTRACTOR SHALL PROVIDE DISCONNECT SWITCHES, VFD'S, OR COMBINATION STARTERS FOR ALL OF THEIR UNITS. THE ELECTRICAL CONTRACTOR SHALL RECEIVE THESE ITEMS FROM THE MECHANICAL CONTRACTOR FOR INSTALLATION BY THE ELECTRICAL CONTRACTOR.
- 6 THE ELECTRICAL CONTRACTOR SHALL COORDINATE CONDUIT PENETRATIONS FOR ROOFTOP EQUIPMENT WITH MECHANICAL AND ROOFING CONTRACTORS. IF PROVISIONS ARE NOT IN PLACE FOR THESE PENETRATIONS THE ELECTRICAL CONTRACTOR SHALL BE RESPONSIBLE FOR MAKING OWN PENETRATIONS AND CONTRACTING THE ROOF CONTRACTOR FOR SEALING THE ROOF PENETRATIONS.
- 7 REFER TO MECHANICAL DRAWINGS FOR EXACT LOCATION OF ALL MECHANICAL EQUIPMENT.
- 8 PROVIDE CONDUIT AND WIRING AS REQUIRED TO MEET CIRCUITING SHOWN TO CONFORM TO NEC REQUIREMENTS.
- 9 PROVIDE EQUIPMENT GROUND CONDUCTOR IN ALL RACEWAYS. REFER TO PANELBOARD SCHEDULES.
- 10 REFER TO EQUIPMENT CONNECTION SCHEDULE FOR ELECTRICAL REQUIREMENTS AND CIRCUIT DESIGNATIONS.
- 11 ROUTE CONDUIT HIGH AGAINST STRUCTURE AND OFFSET UP BETWEEN JOISTS WHERE NECESSARY TO AVOID DUCT WORK AND HVAC SYSTEM.
- 12 VERIFY AND COORDINATE EXACT ELECTRICAL REQUIREMENTS OF ALL EQUIPMENT WITH MANUFACTURER'S RECOMMENDATIONS PRIOR TO INSTALLATION OF EQUIPMENT.

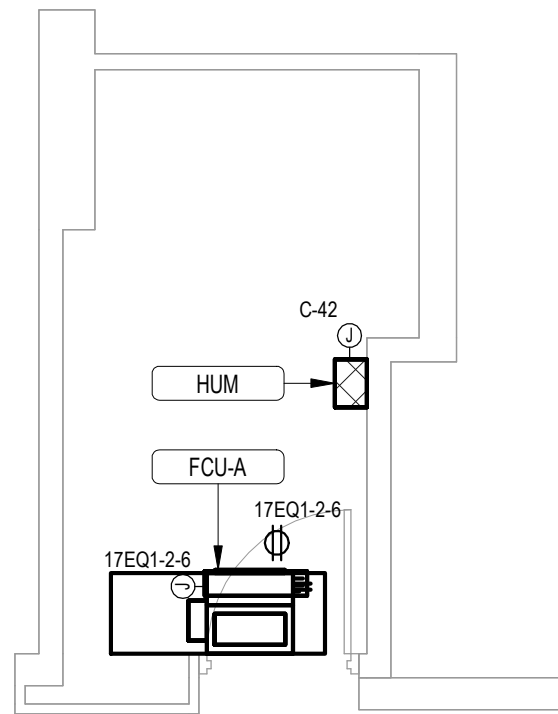


2 BID DEDUCT 1 - BLDG 17-03THIRD FLOOR ELECTRICAL PLAN - ROOM 320
1/4" = 1'-0"

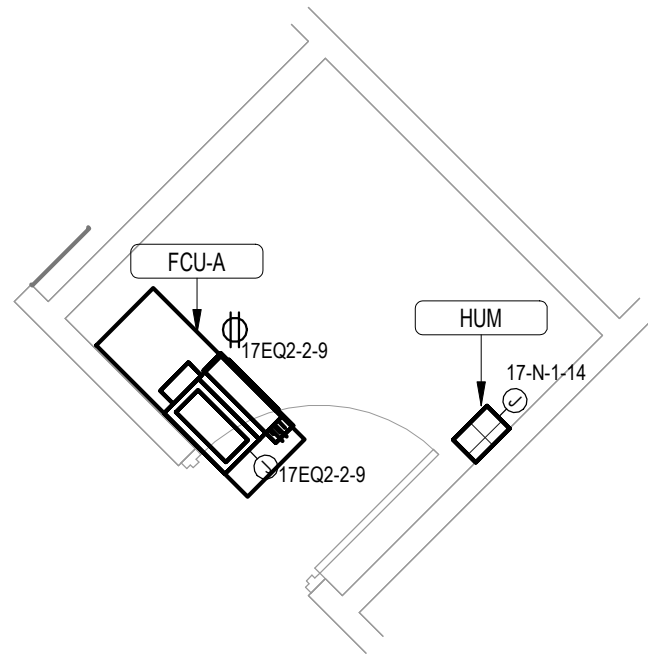

3 BID DEDUCT 1 - BLDG 17-03 THIRD FLOOR ELECTRICAL PLAN - ROOM 369
1/4" = 1'-0"

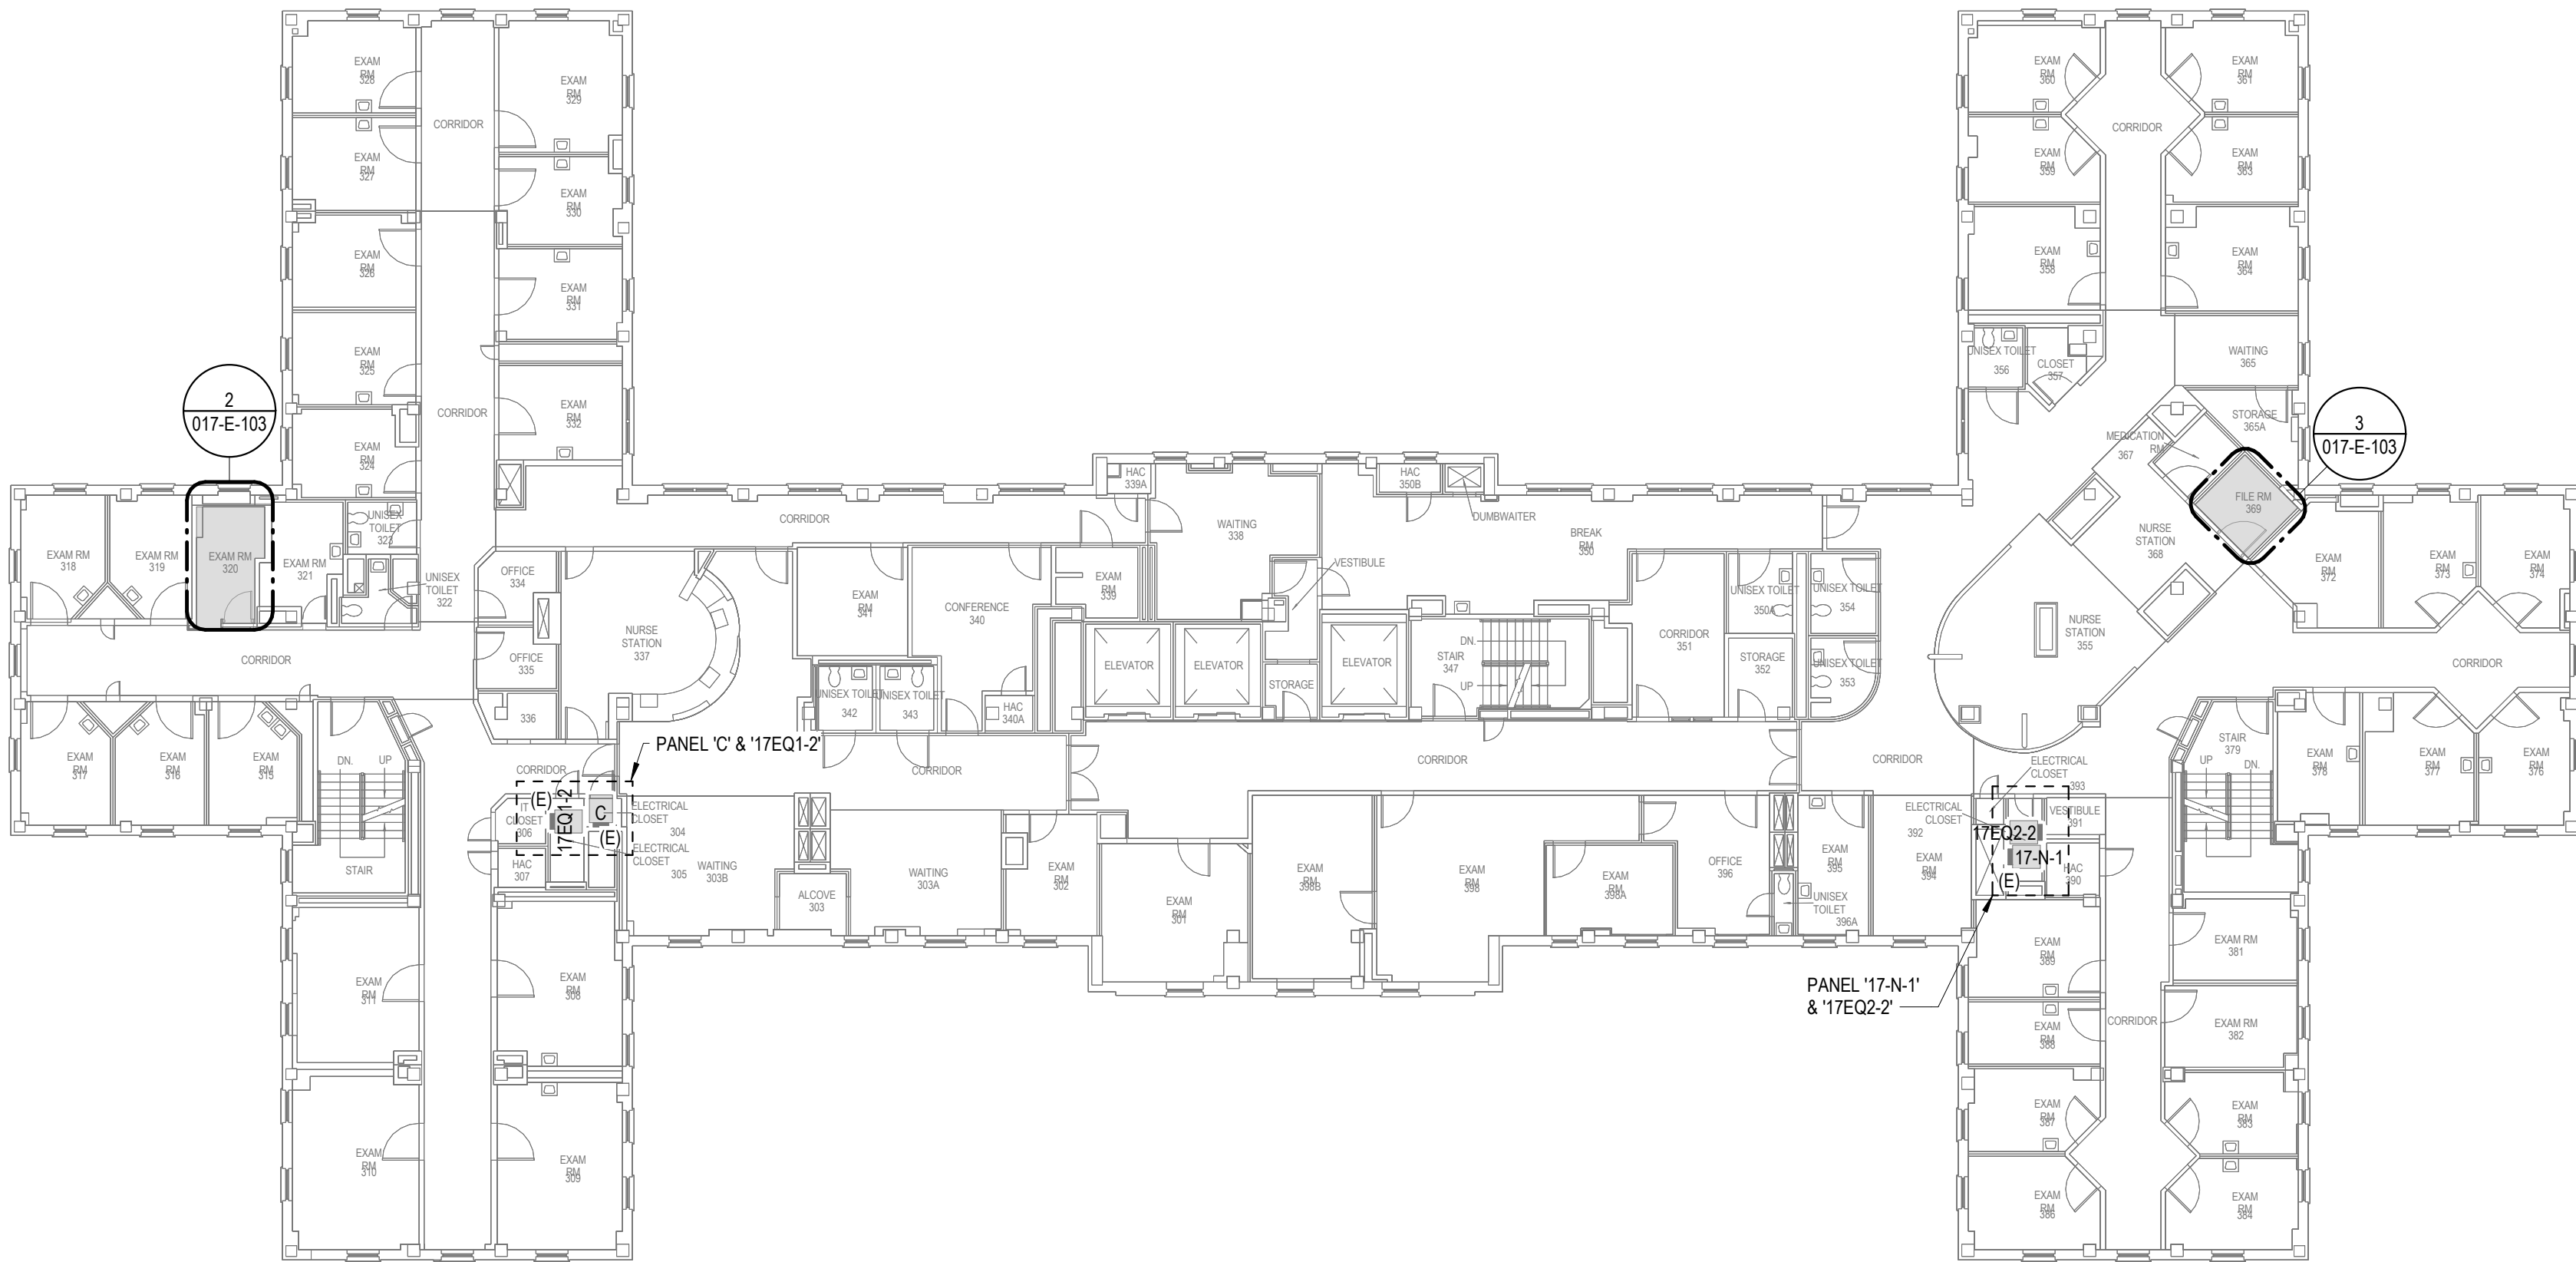

1 BID DEDUCT 1 - BLDG 17-03 THIRD FLOOR ELECTRICAL PLAN
1/16" = 1'-0"



		Consultant	Architect/Engineer of Record		Stamp	Drawing Title BUILDING 17 - THIRD FLOOR ELECTRICAL PLAN		Phase BID DOCUMENTS		Project Title STERILE STORAGE IMPROVEMENTS		Project Number VLEB-016	
			AE Works, LTD. 418 Beaver Street Sewickley, PA 15143 Phone: 412-287-7333 www.ae-works.com			OFFICE OF CONSTRUCTION AND FACILITIES MANAGEMENT		Sprinkler Status FULLY SPRINKLERED		Location 1700 S LINCOLN AVE, LEBANON, PA 17042		Building Number 17	
			AE WORKS			VA U.S. Department of Veterans Affairs		Issue Date 11.17.25		Checked OF		Drawn TD	
1 BID DEDUCT #1		03/02/2026				Approved:						Drawing Number 017-E-103	
# Revisions		Date											



2) $1/4'' = 1'-0''$




3 $\frac{1}{4}'' = 1'-0''$



4 $\frac{1}{4}'' = 1'-0''$




1/16" = 1'-0"



1. FINAL LOCATION OF ALL EQUIPMENT SHALL BE DETERMINED IN THE FIELD AND SHALL BE INSTALLED AS DECREED BY THE ARCHITECT OR OWNER'S REPRESENTATIVE. WHERE STRUCTURAL OPENINGS ARE REQUIRED, THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS TO PERMIT PASSAGE OF CONDUITS. THE ELECTRICAL CONTRACTOR SHALL PROVIDE A MARKED-UP PLAN WITH LOCATION PENETRATIONS FOR REVIEW AND APPROVAL OF THE STRUCTURAL ENGINEER BEFORE WORK BEGINS.
2. RECEPTACLES FOR ALL EQUIPMENT SHALL BE COMPLETE WITH PLUGS FOR THIS EQUIPMENT. THE ELECTRICAL CONTRACTOR SHALL VERIFY NAME CONFIGURATIONS OF PLUGS AND RECEPTACLES FOR EQUIPMENT TO FIT THE SPACE.
3. DURING THE BIDDING PROCESS, THE ELECTRICAL CONTRACTOR SHALL REVIEW DRAWINGS AND SPECIFICATIONS OF ALL OTHER TRADES (ARCHITECTURAL, SITE/LANDSCAPING, HVAC, PLUMBING AND MECHANICAL). ALL ELECTRICAL AND MECHANICAL PENETRATIONS SHALL BE IDENTIFIED AND INDICATED ON THE ELECTRICAL DRAWINGS SHALL BE CONSIDERED A PART OF THE ELECTRICAL CONTRACTORS WORK. THIS WORK SHALL BE INSTALLED AS PER NEC REQUIREMENTS AT THE CONTRACTOR'S COST TO THE OWNER.
4. THE CONTRACTOR SHALL MAKE EVERY EFFORT TO MAKE ALL FEEDER RUNS CONTINUOUS (NO CABLE BREAKS). IF SPLICING CABLES IN BOXES BECOMES NECESSARY, USE O.Z.G. TYPE "XV" CABLE TAPS, AND USE EQUAL AND LIKE CABLES.
5. THE MECHANICAL CONTRACTOR SHALL PROVIDE DISCONNECT SWITCHES, VFD'S, OR COMBINATION STARTERS FOR ALL OR THEIR UNITS. THE ELECTRICAL CONTRACTOR SHALL RECEIVE THESE ITEMS FROM THE MECHANICAL CONTRACTOR AND INSTALL THEM AS SHOWN ON THE DRAWINGS.
6. THE ELECTRICAL CONTRACTOR SHALL COORDINATE CONDUIT PENETRATIONS FOR ROOFTOP EQUIPMENT WITH MECHANICAL AND ROOFING CONTRACTORS. IF PENETRATIONS ARE NOT IN PLACE FOR MECHANICAL PENETRATIONS, THE ELECTRICAL CONTRACTOR SHALL PROVIDE THE PENETRATIONS, PENETRATIONS AND CONTRACTORS THE ROOF CONTRACTOR FOR SEALING THE ROOF PENETRATIONS.
7. PROVIDE TO MECHANICAL DRAWINGS FOR EXACT LOCATION OF ALL MECHANICAL EQUIPMENT.
8. PROVIDE CONDUIT AND WIRING AS REQUIRED TO MEET CIRCUITING SHOWN TO CONFORM TO NEC AND ALL CITY DEPARTMENTS.
9. PROVIDE EQUIPMENT GROUND CONDUCTOR IN ALL RACEWAYS. REFER TO PANELBOARD SCHEDULES FOR EQUIPMENT CONNECTION SCHEDULE FOR ELECTRICAL REQUIREMENTS AND CIRCUIT BREAKING.
10. ROUTE CONDUIT HIGH AGAINST STRUCTURE AND OFFSET UP BETWEEN JOISTS WHERE NECESSARY TO AVOID DUCT WORK AND HVAC SYSTEM.
11. VERIFY AND COORDINATE EXACT ELECTRICAL REQUIREMENTS OF ALL EQUIPMENT. HANG ALL EQUIPMENT BEFORE INSTALLATION OF EQUIPMENT.


1 PROVIDE RECEPTACLE FOR CONDENSATE PUMP

[illegible]

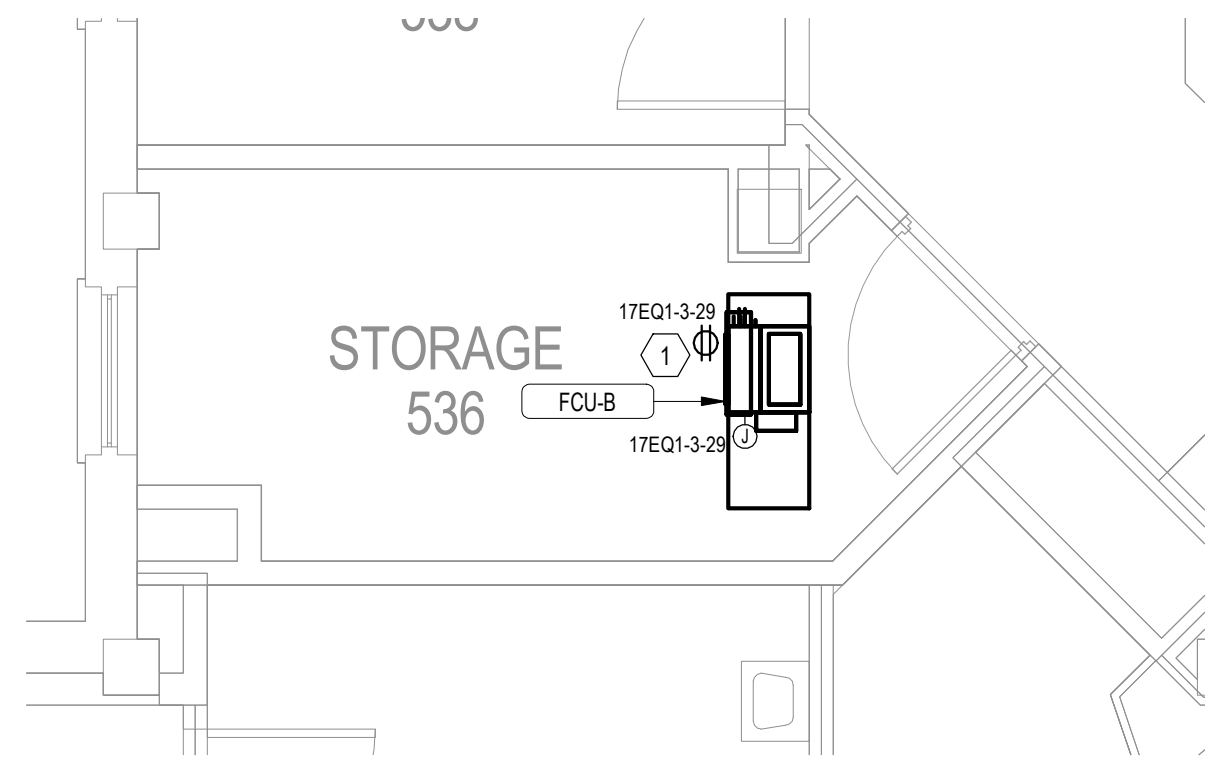

**BID DEDUCT 1 - BLDG 17-05 FIFTH
FLOOR ELECTRICAL PLAN - ROOM**


536
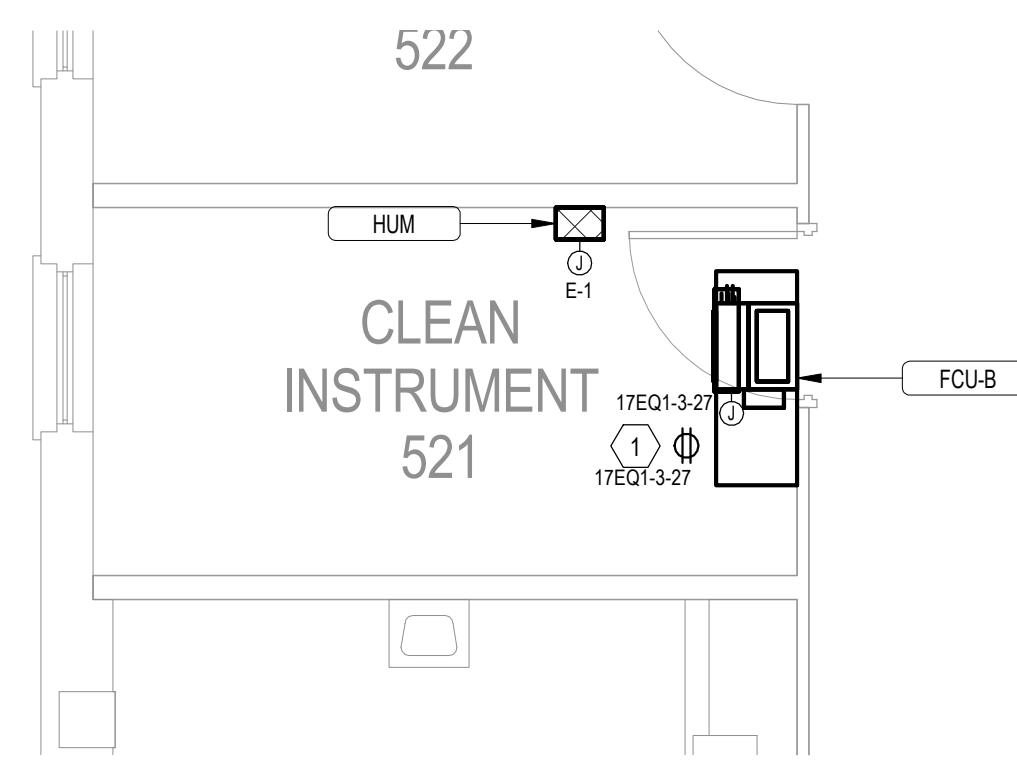
$$1/4'' = 1'-4$$


**BID DEDUCT 1 - BLDG 17-05 FIFTH
FLOOR ELECTRICAL PLAN - ROOM**

2


2)

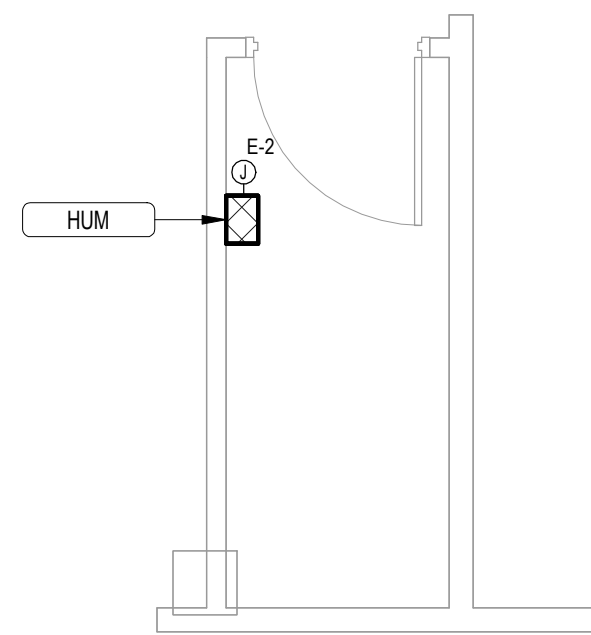

**BID DEDUCT 1 - BLDG 17-05 FIFTH
FLOOR ELECTRICAL PLAN - ROOM**


4

555G

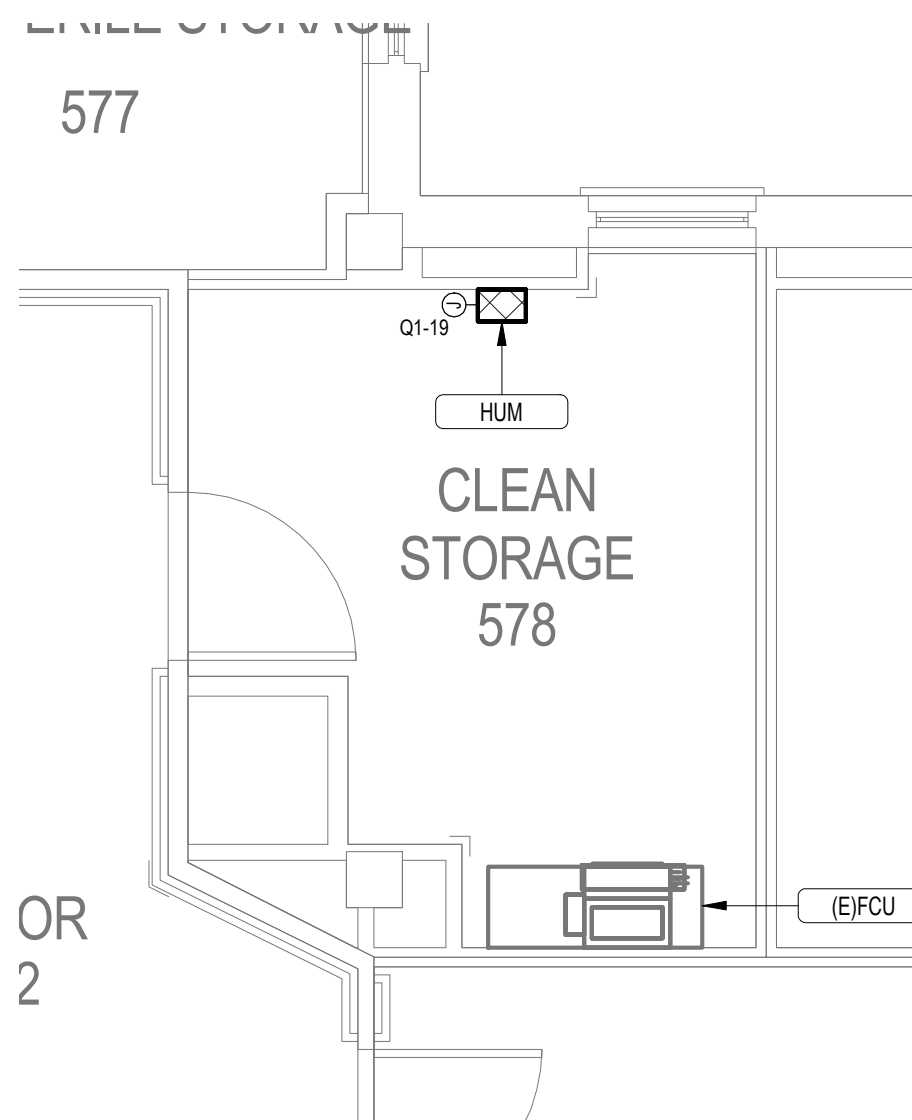

BID DEDUCT 1 - BLDG 17-05 FIFTH FLOOR ELECTRICAL PLAN - ROOM

578

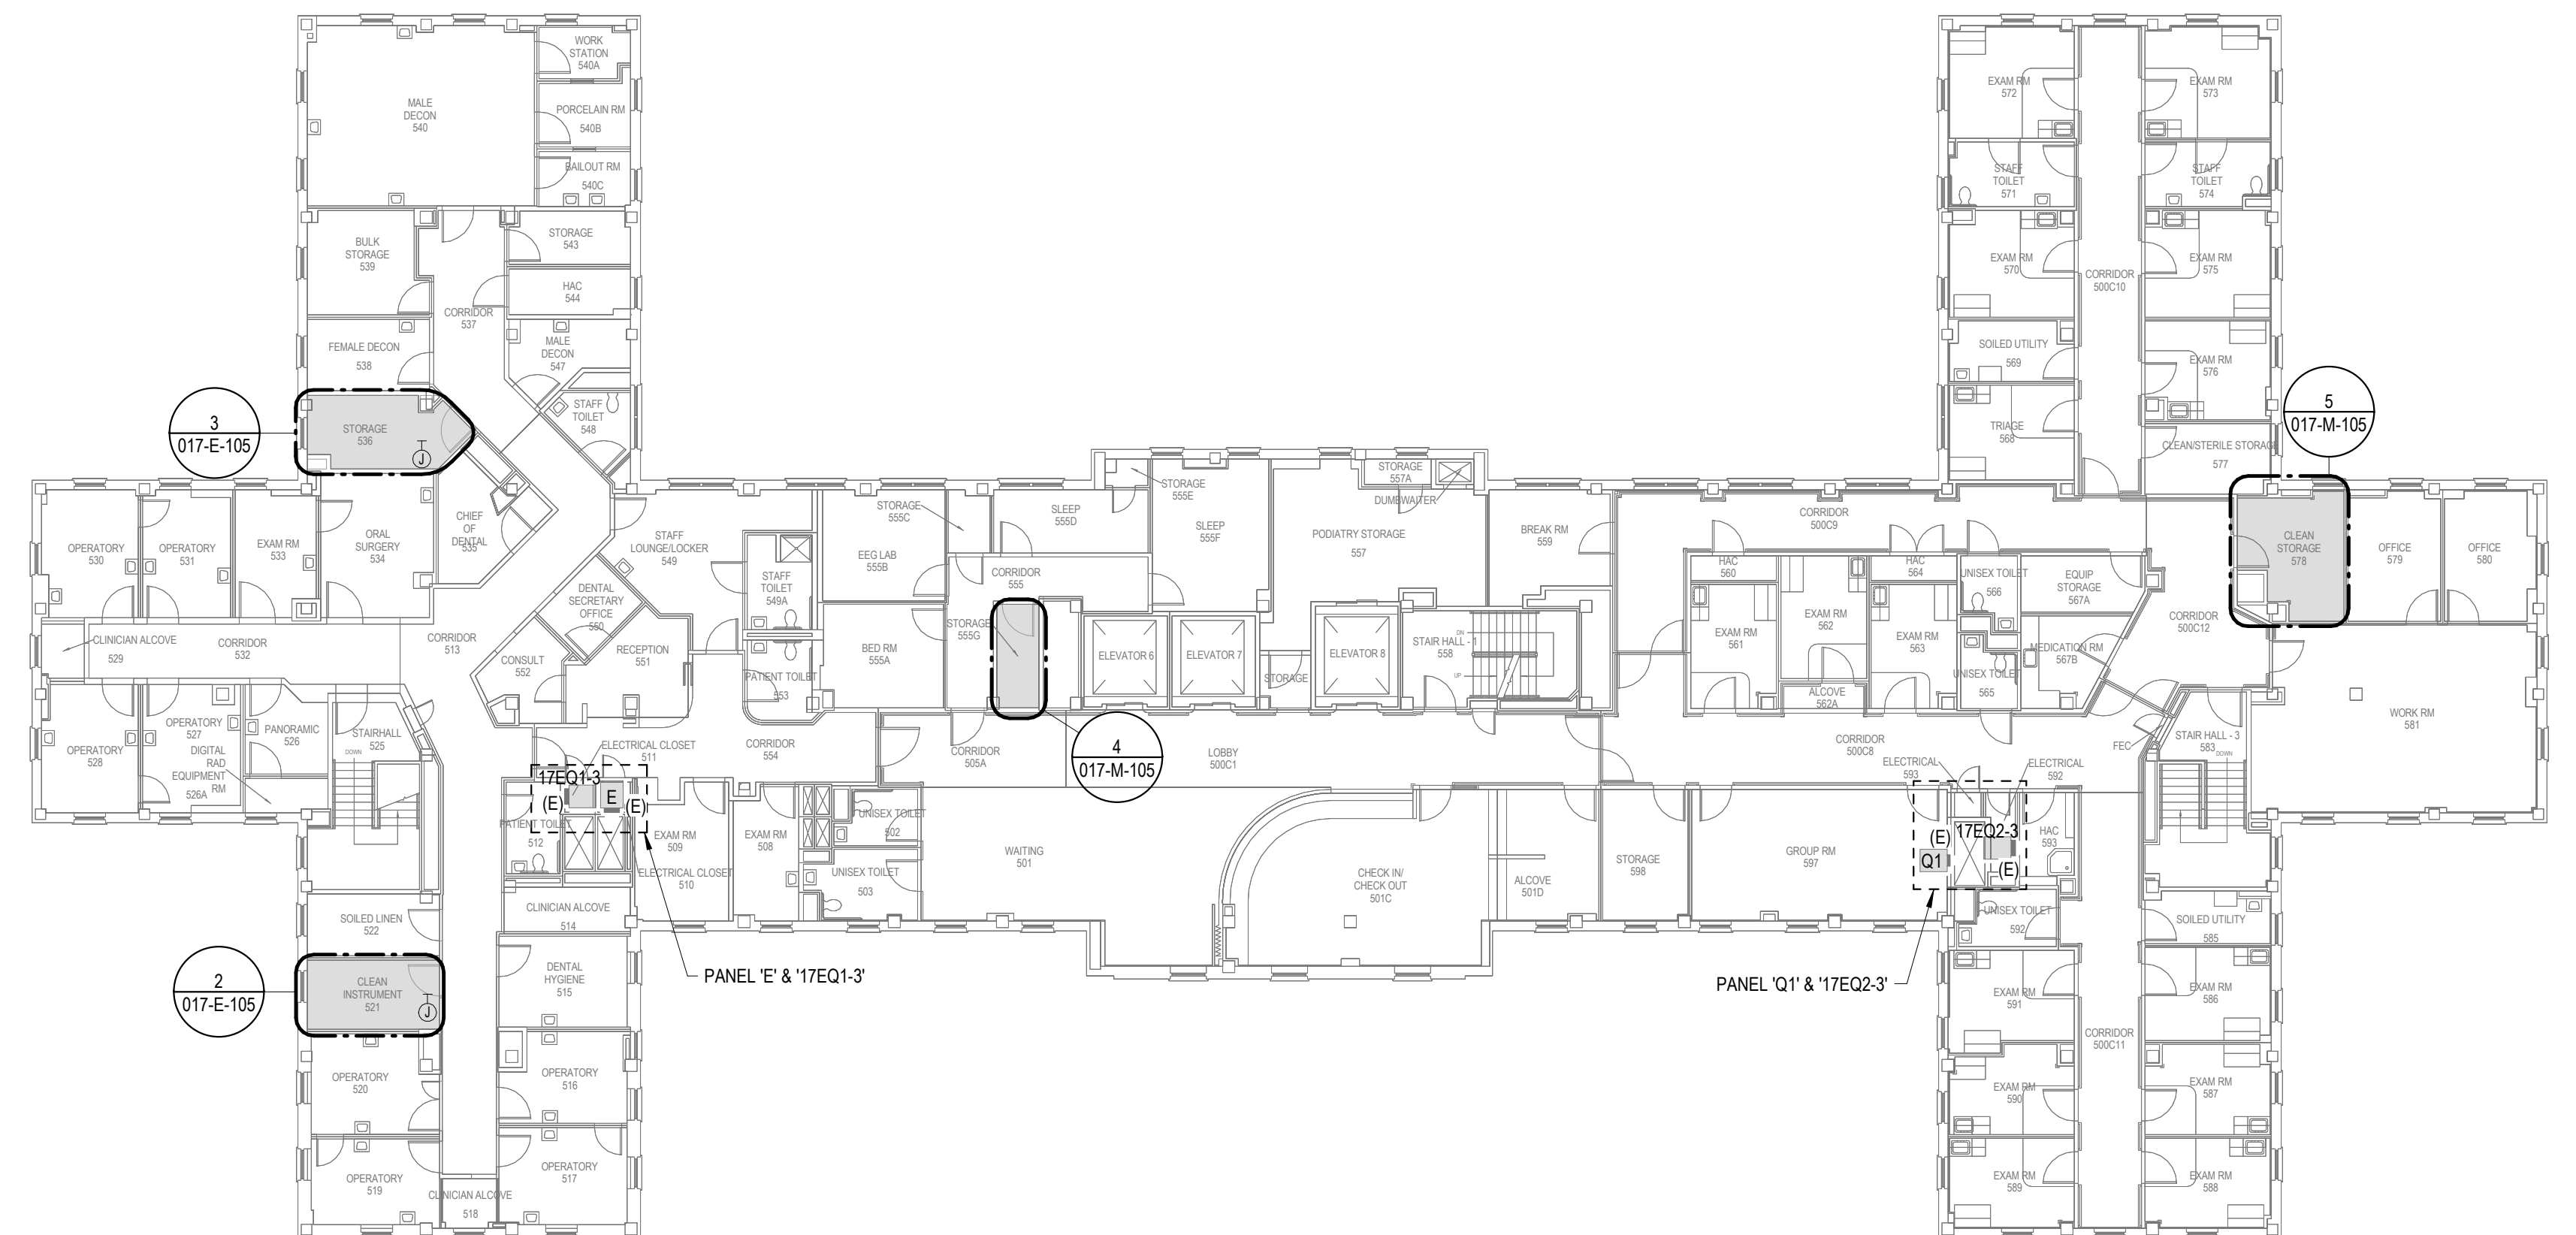 $1/4^{\circ} = 1'$ 

BID DEDUCT 1 - BLDG 17-05 FIFTH FLOOR ELECTRICAL PLAN

$$1/16'' = 1'-0''$$
[illegible]

A

B

C

D

E

F

3/5/2026 3:57:13 PM

Autosave: Docs\VLB-018 Sterile Storage Improvements\VLB-018-MEP_24.rvt

POWER PLAN GENERAL NOTES

- 1 FINAL LOCATION OF ALL EQUIPMENT SHALL BE DETERMINED IN THE FIELD AND SHALL BE INSTALLED AS DIRECTED BY THE ARCHITECT OR OWNER'S REPRESENTATIVE. WHERE STRUCTURAL OPENINGS ARE NOT AVAILABLE, THE CONTRACTOR SHALL CORE DRILL WALLS AND FLOORS AS REQUIRED TO PERMIT PASSAGE OF CONDUITS. THE ELECTRICAL CONTRACTOR SHALL PROVIDE A MARKED-UP PLAN WITH LOCATION PENETRATIONS FOR REVIEW AND APPROVAL OF THE STRUCTURAL ENGINEER BEFORE ROUGH-IN BEGINS.
- 2 RECEPTACLES FOR ALL EQUIPMENT SHALL BE COMPLETE WITH PLUGS FOR THIS EQUIPMENT. THE ELECTRICAL CONTRACTOR SHALL VERIFY NEMA CONFIGURATIONS OF PLUGS AND RECEPTACLES FOR EQUIPMENT IN THE SPACE.
- 3 DURING THE BIDDING PROCESS, THE ELECTRICAL CONTRACTOR SHALL REVIEW DRAWINGS AND SPECIFICATIONS OF ALL OTHER TRADES (ARCHITECTURAL, SITE/LANDSCAPING, HVAC, PLUMBING AND SPECIALTY TRADES). ALL ITEMS REQUIRING POWER INDICATED ON THESE DRAWINGS BUT NOT INDICATED ON THE ELECTRICAL DRAWINGS SHALL BE CONSIDERED A PART OF THE ELECTRICAL CONTRACTOR'S WORK. THIS WORK SHALL BE INSTALLED AS PER NEC REQUIREMENTS AT NO ADDITIONAL COST TO THE OWNER.
- 4 THE CONTRACTOR SHALL MAKE EVERY EFFORT TO MAKE ALL FEEDER RUNS CONTINUOUS (NO CABLE BREAKS). IF SPLICING CABLES IN BOXES BECOMES NECESSARY, USE O.Z.G. TYPE "XVY" CABLE TAPS, OR APPROVED EQUAL, AND TAPE EACH TAP IN APPROVED MANNER.
- 5 THE MECHANICAL CONTRACTOR SHALL PROVIDE DISCONNECT SWITCHES, VFD'S, OR COMBINATION STARTERS FOR ALL OF THEIR UNITS. THE ELECTRICAL CONTRACTOR SHALL RECEIVE THESE ITEMS FROM THE MECHANICAL CONTRACTOR FOR INSTALLATION BY THE ELECTRICAL CONTRACTOR.
- 6 THE ELECTRICAL CONTRACTOR SHALL COORDINATE CONDUIT PENETRATIONS FOR ROOFTOP EQUIPMENT WITH MECHANICAL AND ROOFING CONTRACTORS. IF PROVISIONS ARE NOT IN PLACE FOR THESE PENETRATIONS THE ELECTRICAL CONTRACTOR SHALL BE RESPONSIBLE FOR MAKING OWN PENETRATIONS AND CONTRACTING THE ROOF CONTRACTOR FOR SEALING THE ROOF PENETRATIONS.
- 7 REFER TO MECHANICAL DRAWINGS FOR EXACT LOCATION OF ALL MECHANICAL EQUIPMENT.
- 8 PROVIDE CONDUIT AND WIRING AS REQUIRED TO MEET CIRCUITING SHOWN TO CONFORM TO NEC REQUIREMENTS.
- 9 PROVIDE EQUIPMENT GROUND CONDUCTOR IN ALL RACEWAYS. REFER TO PANELBOARD SCHEDULES.
- 10 REFER TO EQUIPMENT CONNECTION SCHEDULE FOR ELECTRICAL REQUIREMENTS AND CIRCUIT DESIGNATIONS.
- 11 ROUTE CONDUIT HIGH AGAINST STRUCTURE AND OFFSET UP BETWEEN JOISTS WHERE NECESSARY TO AVOID DUCT WORK AND HVAC SYSTEM.
- 12 VERIFY AND COORDINATE EXACT ELECTRICAL REQUIREMENTS OF ALL EQUIPMENT WITH MANUFACTURER'S RECOMMENDATIONS PRIOR TO INSTALLATION OF EQUIPMENT.

A


B

C

D

E

F

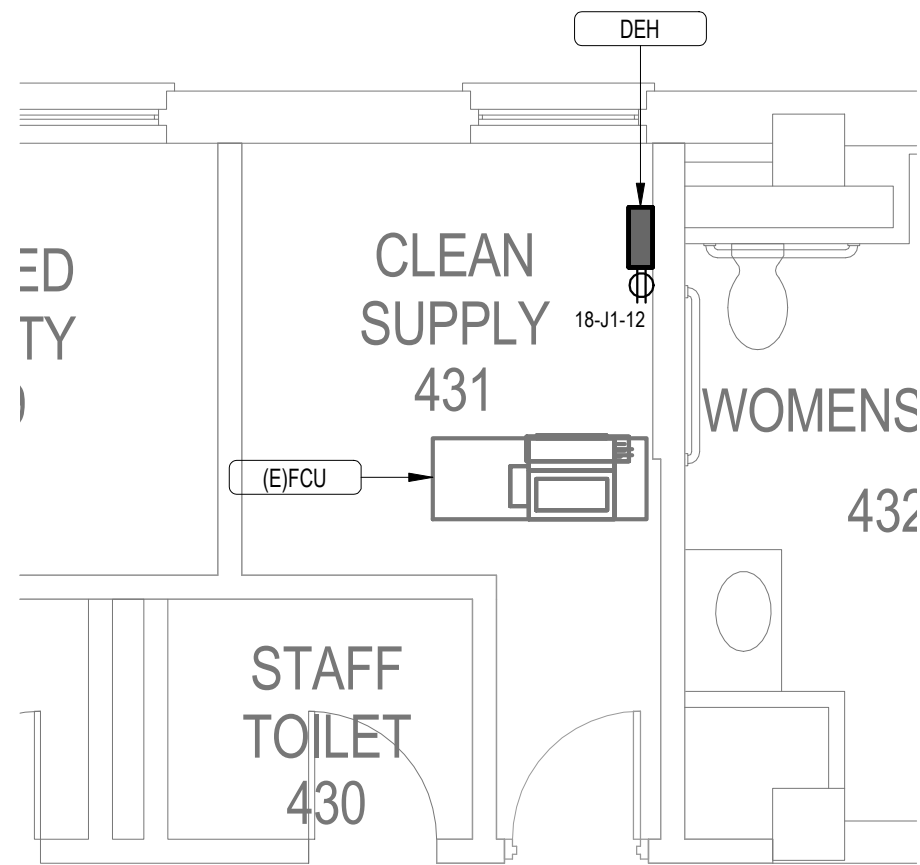

BLDG 18-04 FOURTH FLOOR ELECTRICAL PLAN - ROOM 431

2


1/4" = 1'-0"



BLDG 18-04 FOURTH FLOOR ELECTRICAL PLAN

1


1/16" = 1'-0"



--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

POWER PLAN GENERAL NOTES

- 1 FINAL LOCATION OF ALL EQUIPMENT SHALL BE DETERMINED IN THE FIELD AND SHALL BE INSTALLED AS DIRECTED BY THE ARCHITECT OR OWNER'S REPRESENTATIVE. WHERE STRUCTURAL OPENINGS ARE NOT AVAILABLE, THE CONTRACTOR SHALL CORE DRILL WALLS AND FLOORS AS REQUIRED TO PERMIT PASSAGE OF CONDUITS. THE ELECTRICAL CONTRACTOR SHALL PROVIDE A MARKED-UP PLAN WITH LOCATION PENETRATIONS FOR REVIEW AND APPROVAL OF THE STRUCTURAL ENGINEER BEFORE TROUGH BEGINS.
- 2 RECEPTACLES FOR ALL EQUIPMENT SHALL BE COMPLETE WITH PLUGS FOR THIS EQUIPMENT. THE ELECTRICAL CONTRACTOR SHALL VERIFY NEMA CONFIGURATIONS OF PLUGS AND RECEPTACLES FOR EQUIPMENT IN THE SPACE.
- 3 DURING THE BIDDING PROCESS, THE ELECTRICAL CONTRACTOR SHALL REVIEW DRAWINGS AND SPECIFICATIONS OF ALL OTHER TRADES (ARCHITECTURAL, SITELANDSCAPING, HVAC, PLUMBING AND SPECIALTY TRADES). ALL ITEMS REQUIRING POWER INDICATED ON THESE DRAWINGS BUT NOT INDICATED ON THE ELECTRICAL DRAWINGS SHALL BE CONSIDERED A PART OF THE ELECTRICAL CONTRACTOR'S WORK. THIS WORK SHALL BE INSTALLED AS PER NEC REQUIREMENTS AT NO ADDITIONAL COST TO THE OWNER.
- 4 THE CONTRACTOR SHALL MAKE EVERY EFFORT TO MAKE ALL FEEDER RUNS CONTINUOUS (NO CABLE BREAKS). IF SPLICING CABLES IN BOXES BECOMES NECESSARY, USE O.Z.G. TYPE "XVY" CABLE TAPS, OR APPROVED EQUAL, AND TAPE EACH TAP IN APPROVED MANNER.
- 5 THE MECHANICAL CONTRACTOR SHALL PROVIDE DISCONNECT SWITCHES, VFD'S, OR COMBINATION STARTERS FOR ALL OF THEIR UNITS. THE ELECTRICAL CONTRACTOR SHALL RECEIVE THESE ITEMS FROM THE MECHANICAL CONTRACTOR FOR INSTALLATION BY THE ELECTRICAL CONTRACTOR.
- 6 THE ELECTRICAL CONTRACTOR SHALL COORDINATE CONDUIT PENETRATIONS FOR ROOFTOP EQUIPMENT WITH MECHANICAL AND ROOFING CONTRACTORS. IF PROVISIONS ARE NOT IN PLACE FOR THESE PENETRATIONS THE ELECTRICAL CONTRACTOR SHALL BE RESPONSIBLE FOR MAKING OWN PENETRATIONS AND CONTRACTING THE ROOF CONTRACTOR FOR SEALING THE ROOF PENETRATIONS. REFER TO MECHANICAL DRAWINGS FOR EXACT LOCATION OF ALL MECHANICAL EQUIPMENT.
- 7 PROVIDE CONDUIT AND WIRING AS REQUIRED TO MEET CIRCUITING SHOWN TO CONFORM TO NEC REQUIREMENTS.
- 8 PROVIDE EQUIPMENT GROUND CONDUCTOR IN ALL RACEWAYS. REFER TO PANELBOARD SCHEDULES.
- 9 REFER TO EQUIPMENT CONNECTION SCHEDULE FOR ELECTRICAL REQUIREMENTS AND CIRCUIT DESIGNATIONS.
- 10 ROUTE CONDUIT HIGH AGAINST STRUCTURE AND OFFSET UP BETWEEN JOISTS WHERE NECESSARY TO AVOID DUCT WORK AND HVAC SYSTEM.
- 11 VERIFY AND COORDINATE EXACT ELECTRICAL REQUIREMENTS OF ALL EQUIPMENT WITH MANUFACTURER'S RECOMMENDATIONS PRIOR TO INSTALLATION OF EQUIPMENT.

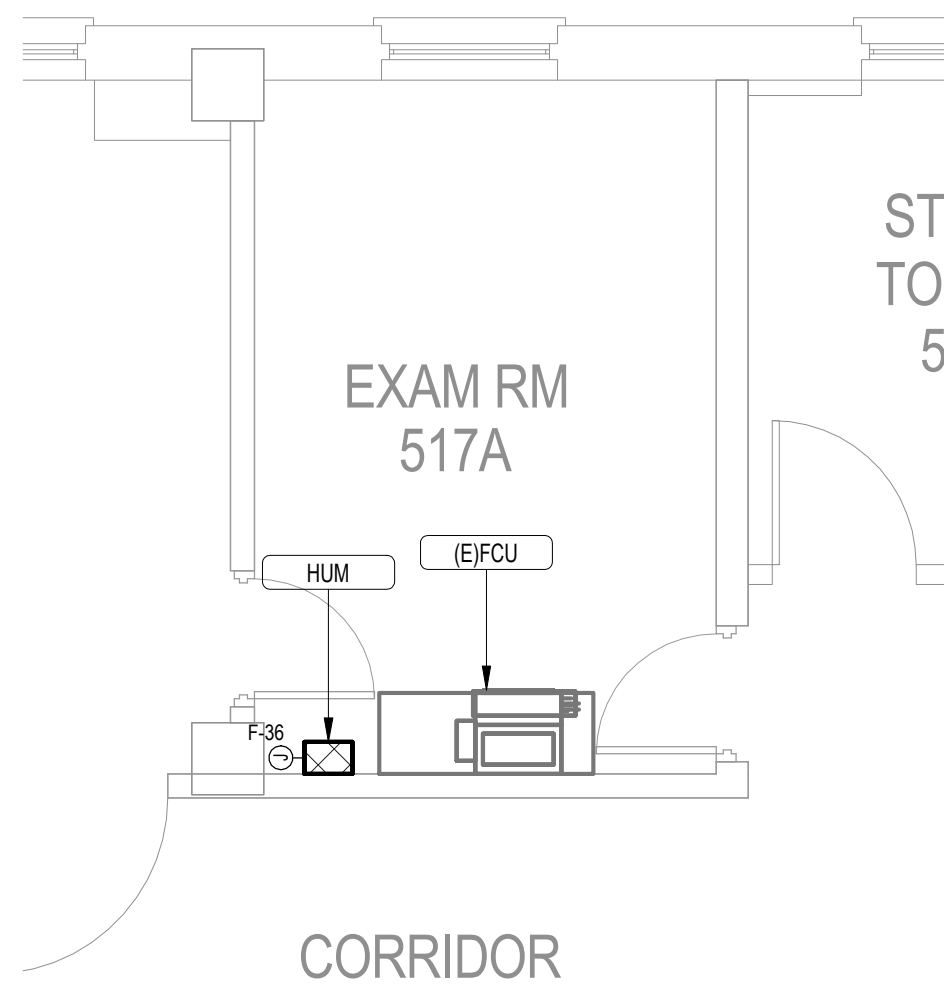

BLDG 18-05 FIFTH FLOOR
ELECTRICAL PLAN - ROOM 517A


2
1/4" = 1'-0"



BLDG 18-05 FIFTH FLOOR ELECTRICAL PLAN


1
1/16" = 1'-0"

		Consultant	Architect/Engineer of Record		Stamp	Office of Construction and Facilities Management	Drawing Title	Phase	Project Title		Project Number	
							BUILDING 18 - FIFTH FLOOR ELECTRICAL PLAN	BID DOCUMENTS	STERILE STORAGE IMPROVEMENTS		VLEB-016	
							Approved:	Sprinkler Status	Location		Building Number	
								FULLY SPRINKLERED	1700 S LINCOLN AVE, LEBANON, PA 17042		18	
									Issue Date	Checked	Drawn	Drawing Number
									11.17.25	DF	TD	018-E-105
#	Revisions	Date										

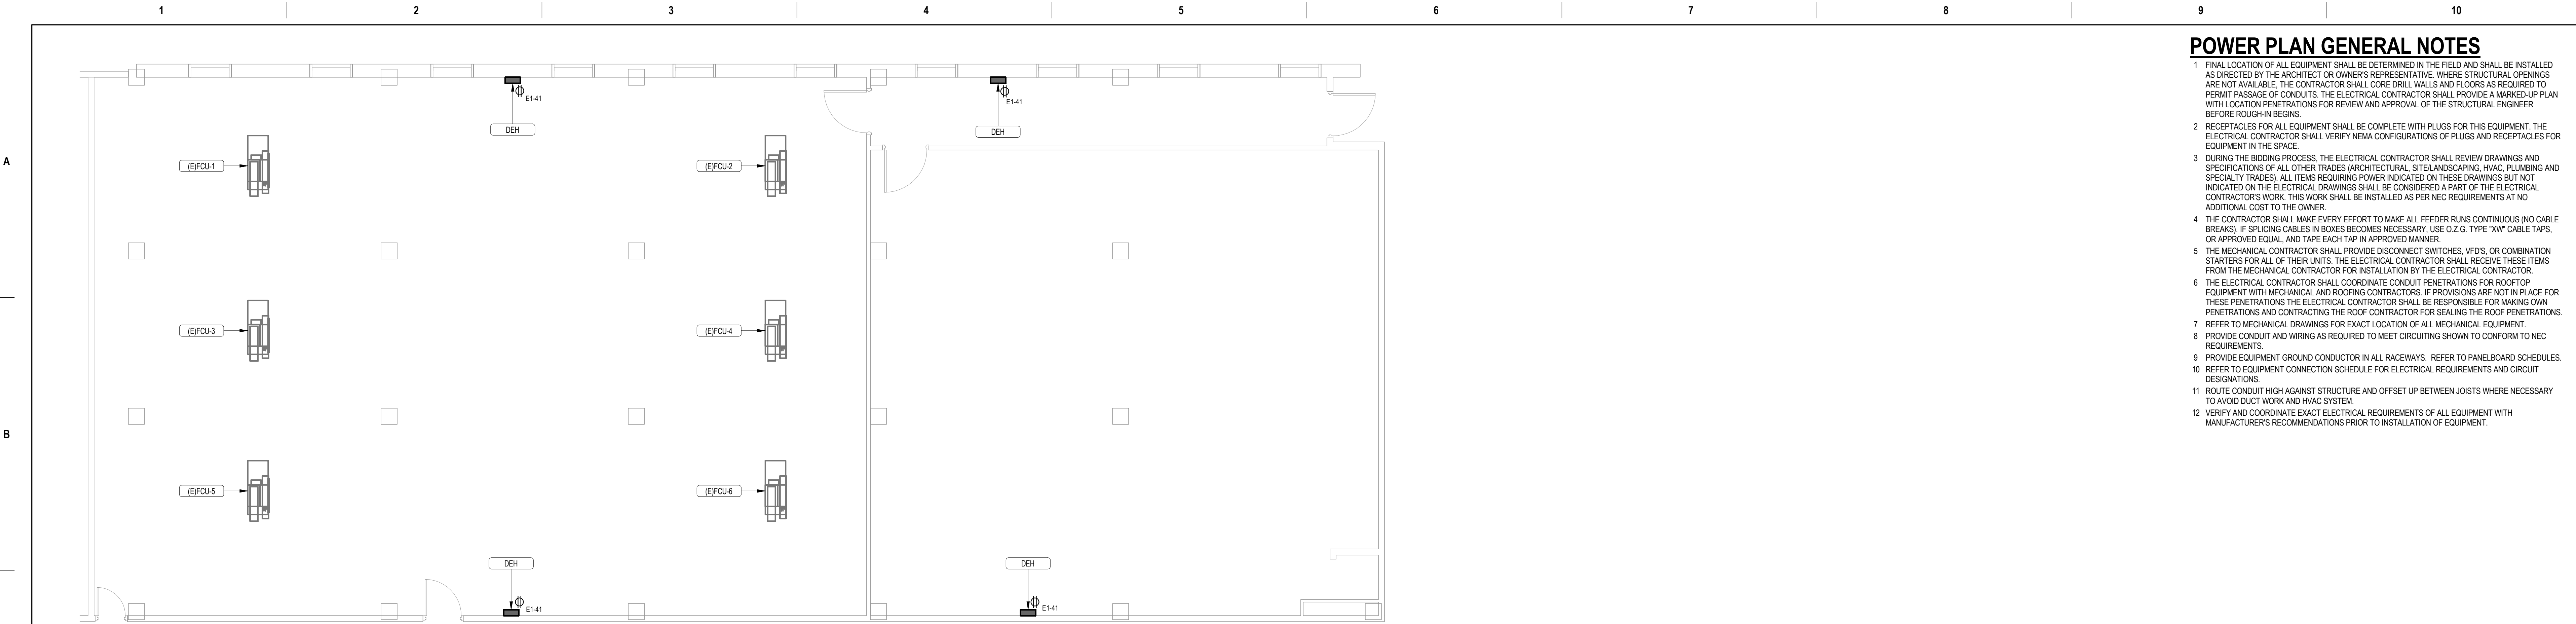

- POWER PLAN GENERAL NOTES**
- 1 FINAL LOCATION OF ALL EQUIPMENT SHALL BE DETERMINED IN THE FIELD AND SHALL BE INSTALLED AS DIRECTED BY THE ARCHITECT OR OWNER'S REPRESENTATIVE. WHERE STRUCTURAL OPENINGS ARE NOT AVAILABLE, THE CONTRACTOR SHALL CORE DRILL WALLS AND FLOORS AS REQUIRED TO PERMIT PASSAGE OF CONDUITS. THE ELECTRICAL CONTRACTOR SHALL PROVIDE A MARKED-UP PLAN WITH LOCATION PENETRATIONS FOR REVIEW AND APPROVAL OF THE STRUCTURAL ENGINEER BEFORE ROUGH-IN BEGINS.
 - 2 RECEPTACLES FOR ALL EQUIPMENT SHALL BE COMPLETE WITH PLUGS FOR THIS EQUIPMENT. THE ELECTRICAL CONTRACTOR SHALL VERIFY NEMA CONFIGURATIONS OF PLUGS AND RECEPTACLES FOR EQUIPMENT IN THE SPACE.
 - 3 DURING THE BIDDING PROCESS, THE ELECTRICAL CONTRACTOR SHALL REVIEW DRAWINGS AND SPECIFICATIONS OF ALL OTHER TRADES (ARCHITECTURAL, SITELANDSCAPING, HVAC, PLUMBING AND SPECIALTY TRADES). ALL ITEMS REQUIRING POWER INDICATED ON THESE DRAWINGS BUT NOT INDICATED ON THE ELECTRICAL DRAWINGS SHALL BE CONSIDERED A PART OF THE ELECTRICAL CONTRACTOR'S WORK. THIS WORK SHALL BE INSTALLED AS PER NEC REQUIREMENTS AT NO ADDITIONAL COST TO THE OWNER.
 - 4 THE CONTRACTOR SHALL MAKE EVERY EFFORT TO MAKE ALL FEEDER RUNS CONTINUOUS (NO CABLE BREAKS). IF SPLICING CABLES IN BOXES BECOMES NECESSARY, USE O.Z.G. TYPE "XIV" CABLE TAPS, OR APPROVED EQUAL, AND TAPE EACH TAP IN APPROVED MANNER.
 - 5 THE MECHANICAL CONTRACTOR SHALL PROVIDE DISCONNECT SWITCHES, VFD'S, OR COMBINATION STARTERS FOR ALL OF THEIR UNITS. THE ELECTRICAL CONTRACTOR SHALL RECEIVE THESE ITEMS FROM THE MECHANICAL CONTRACTOR FOR INSTALLATION BY THE ELECTRICAL CONTRACTOR.
 - 6 THE ELECTRICAL CONTRACTOR SHALL COORDINATE CONDUIT PENETRATIONS FOR ROOFTOP EQUIPMENT WITH MECHANICAL AND ROOFING CONTRACTORS. IF PROVISIONS ARE NOT IN PLACE FOR THESE PENETRATIONS THE ELECTRICAL CONTRACTOR SHALL BE RESPONSIBLE FOR MAKING OWN PENETRATIONS AND CONTRACTING THE ROOF CONTRACTOR FOR SEALING THE ROOF PENETRATIONS.
 - 7 REFER TO MECHANICAL DRAWINGS FOR EXACT LOCATION OF ALL MECHANICAL EQUIPMENT.
 - 8 PROVIDE CONDUIT AND WIRING AS REQUIRED TO MEET CIRCUITING SHOWN TO CONFORM TO NEC REQUIREMENTS.
 - 9 PROVIDE EQUIPMENT GROUND CONDUCTOR IN ALL RACEWAYS. REFER TO PANELBOARD SCHEDULES.
 - 10 REFER TO EQUIPMENT CONNECTION SCHEDULE FOR ELECTRICAL REQUIREMENTS AND CIRCUIT DESIGNATIONS.
 - 11 ROUTE CONDUIT HIGH AGAINST STRUCTURE AND OFFSET UP BETWEEN JOISTS WHERE NECESSARY TO AVOID DUCT WORK AND HVAC SYSTEM.
 - 12 VERIFY AND COORDINATE EXACT ELECTRICAL REQUIREMENTS OF ALL EQUIPMENT WITH MANUFACTURER'S RECOMMENDATIONS PRIOR TO INSTALLATION OF EQUIPMENT.

2 BLDG 22-01 FIRST FLOOR ELECTRICAL PLAN - ROOM 109 ENLARGED PLAN
3/16" = 1'-0"

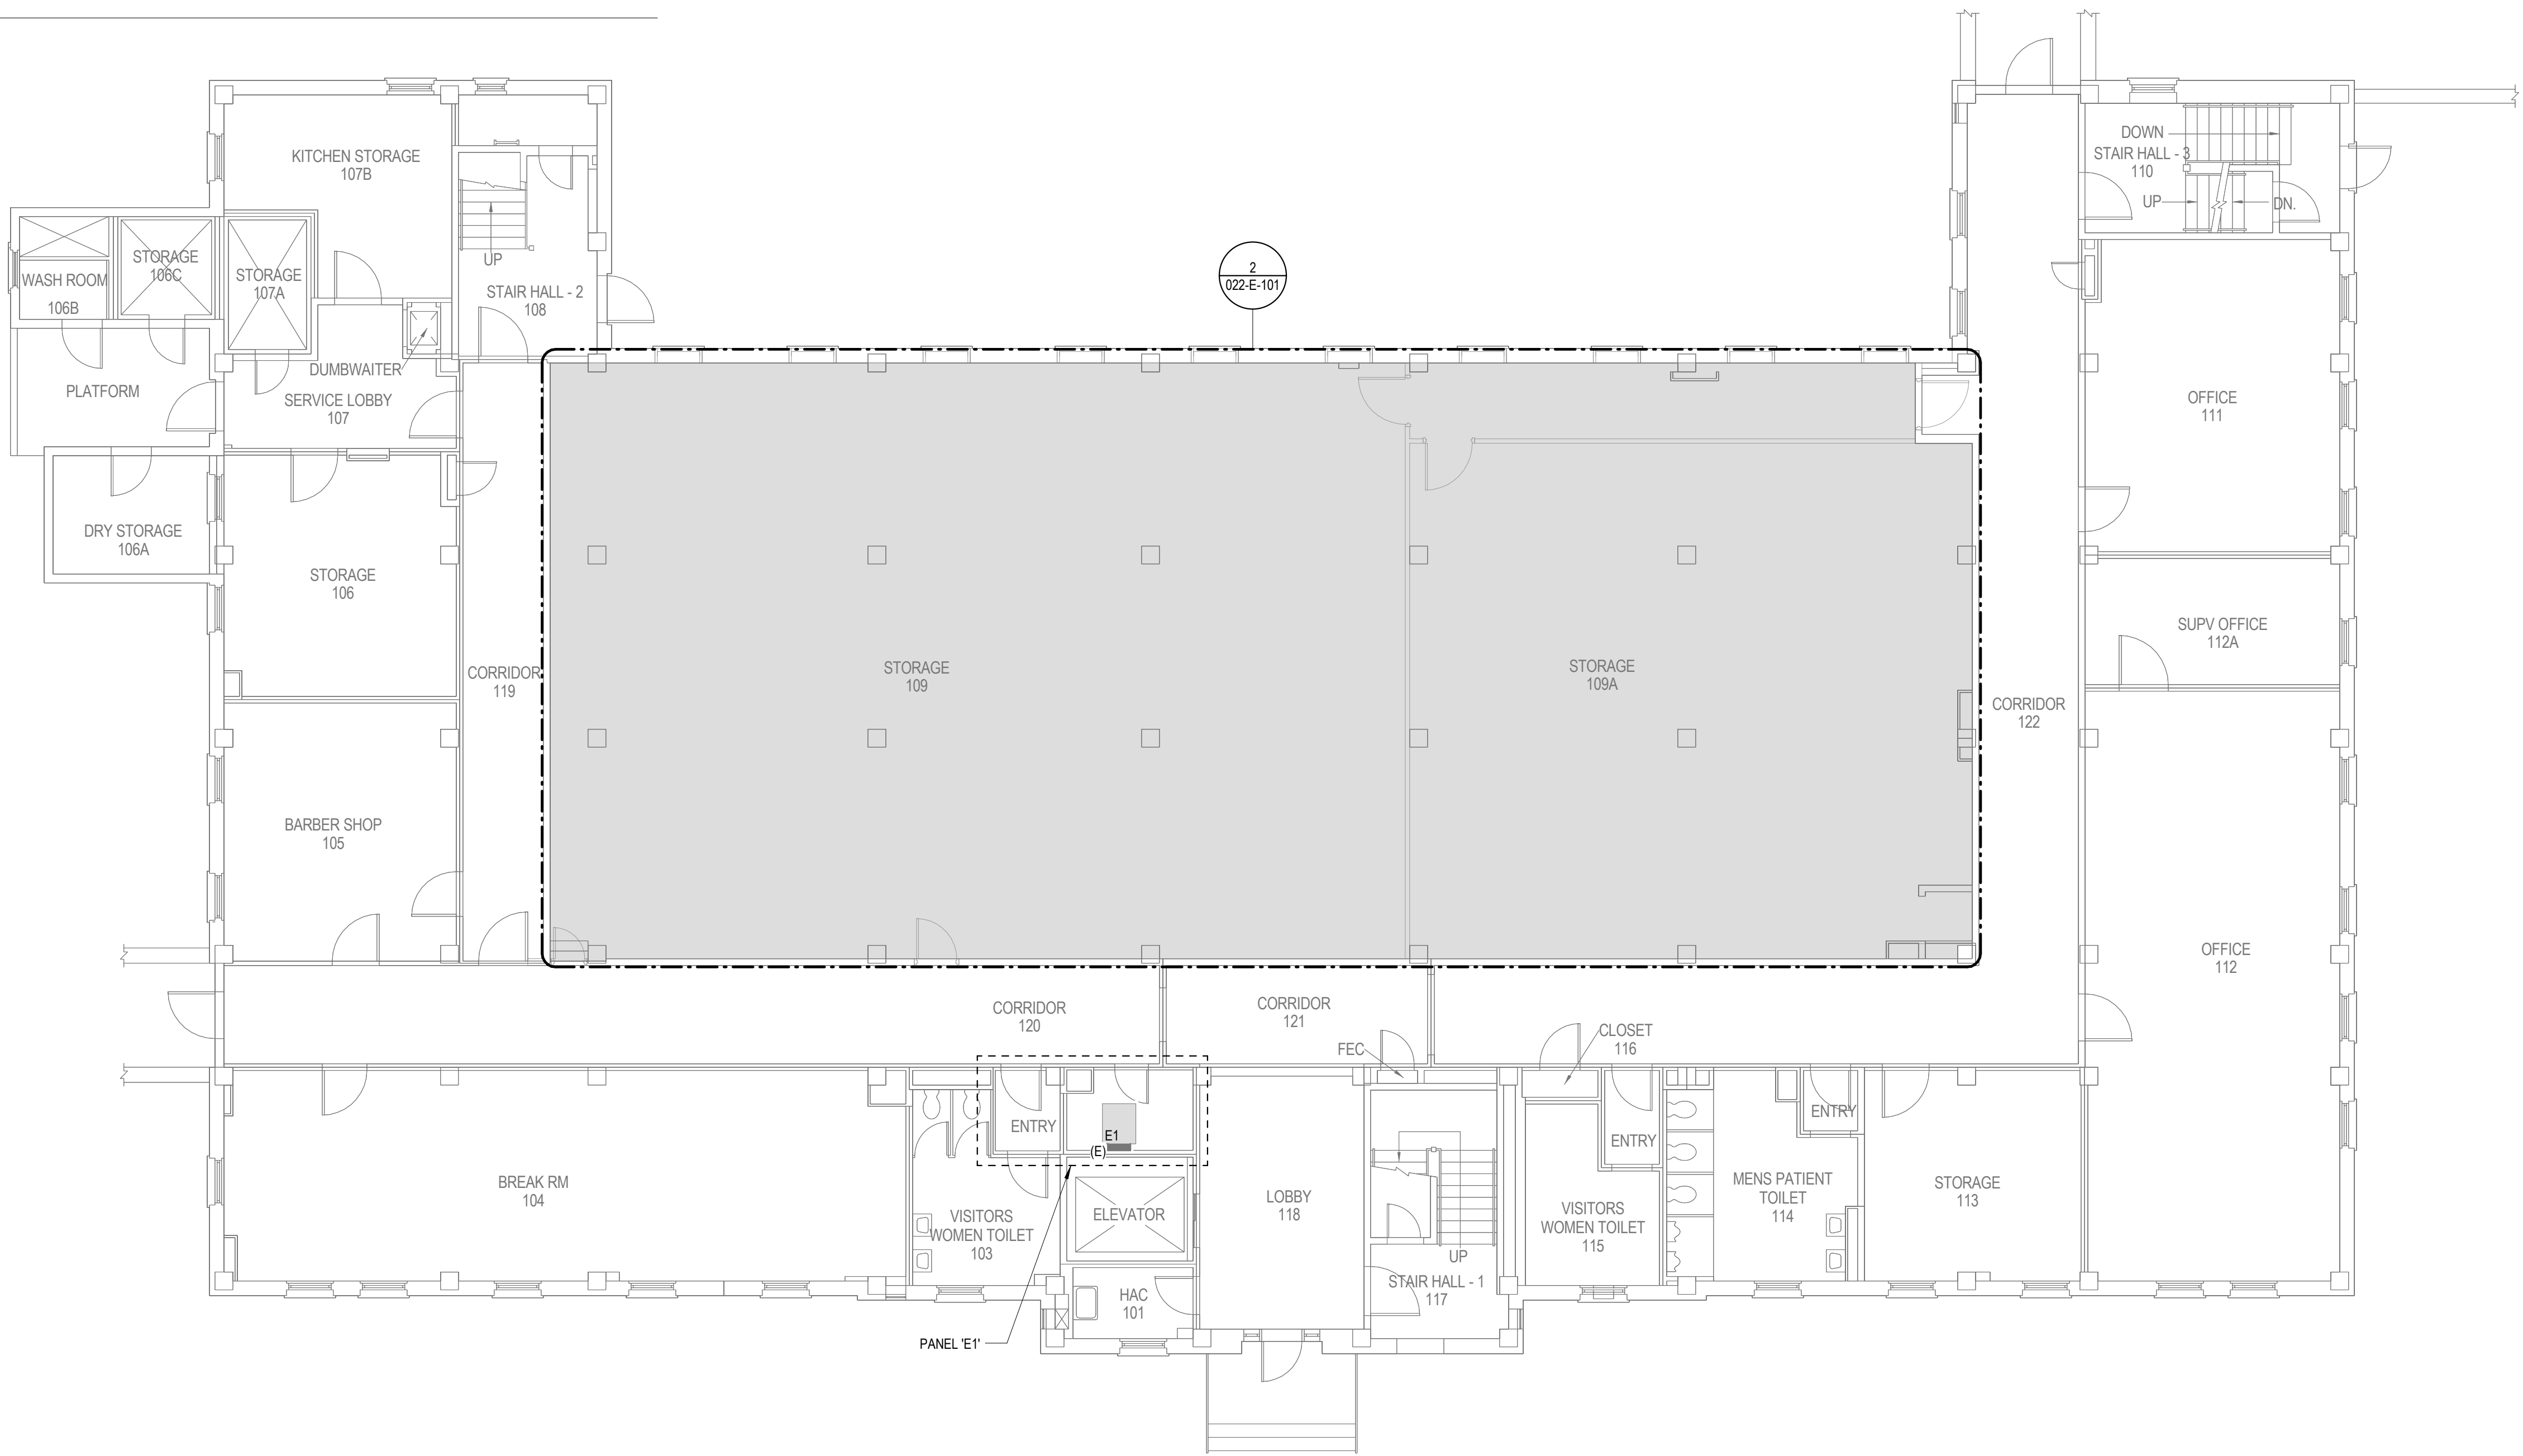

1 BLDG 22-01 FIRST FLOOR ELECTRICAL PLAN
1/8" = 1'-0"

Autodesk Docs//VLEB-016 Sterile Storage																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
---	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

1. THE LOCATION OF ALL EQUIPMENT SHALL BE DETERMINED IN THE FIELD AND SHALL BE INSTALLED IN ACCORDANCE WITH THE AREA CONSTRUCTION DETAILS.
2. THE ELECTRICAL CONTRACTOR SHALL PROVIDE ALL MATERIALS AND SUPPLIES FOR THE ELECTRICAL FINAL WORK. THE CONTRACTOR SHALL CORE DRILL WALLS AND FLOORS AS REQUIRED TO PERMIT PASSAGE OF CONDUITS. THE ELECTRICAL CONTRACTOR SHALL PROVIDE A MARKED-UP PLAN OF THE ROOF PENETRATIONS FOR REVIEW AND APPROVAL OF THE STRUCTURAL ENGINEER BEFORE BEGINNING REPAIRS.
3. RECEPTACLES FOR ALL EQUIPMENT SHALL BE COMPLETE WITH PLUGS FOR THIS EQUIPMENT. THE ELECTRICAL CONTRACTOR SHALL VERIFY NEMA CONFIGURATIONS OF PLUGS AND RECEPTACLES FOR EQUIPMENT IN THE SPACE.
4. DURING THE BIDDING PROCESS, THE ELECTRICAL CONTRACTOR SHALL REVIEW DRAWINGS AND SPECIFICATIONS OF ALL OTHER TRADES (ARCHITECTURAL, STEELDECKING, HVAC, PLUMBING AND MECHANICAL) AND PROVIDE ALL COMMENTS TO THE ARCHITECT FOR REVIEW AND APPROVAL. AS INDICATED ON THE ELECTRICAL DRAWINGS SHALL BE CONSIDERED A PART OF THE ELECTRICAL CONTRACTOR'S WORK. EQUIPMENT SHALL BE INSTALLED AS PER NEMA REQUIREMENTS AT AN ADDITIONAL COST TO THE OWNER.
5. THE CONTRACTOR SHALL MAKE EVERY EFFORT TO MAKE ALL FEEDER RUNS CONTINUOUS (NO CABLE BREAKS). IF SPlicing CABLES IN BOXES RESULTS IN THE USE OF U.G. TYPE "XIV" CABLE TAPES, THE ELECTRICAL CONTRACTOR SHALL OBTAIN APPROVED MATERIAL.
6. THE MECHANICAL CONTRACTOR SHALL PROVIDE DISCONNECT SWITCHES, VFD'S, OR COMBINATION STARTERS FOR ALL OF THEIR UNITS. THE ELECTRICAL CONTRACTOR SHALL RECEIVE THESE ITEMS FROM THE MECHANICAL CONTRACTOR FOR INSTALLATION AND WIRING.
7. THE ELECTRICAL CONTRACTOR SHALL COORDINATE CONDUIT PENETRATIONS FOR ROOFTOP EQUIPMENT WITH MECHANICAL AND ROOFING CONTRACTORS. IF PROVISIONS ARE NOT IN PLACE FOR PENETRATIONS TO BE MADE BY THE MECHANICAL CONTRACTOR, THE ELECTRICAL CONTRACTOR SHALL PENETRATIONS AND CONTRACTING THE ROOF CONTRACTOR FOR SEALING THE ROOF PENETRATIONS.
8. REFER TO MECHANICAL DRAWINGS FOR EXACT LOCATION OF ALL MECHANICAL EQUIPMENT.
9. ALL CONDUIT AND WIRING AS REQUIRED TO MEET CRUITING SHOWN TO CONFORM TO NEMA REQUIREMENTS.
10. PROVIDE EQUIPMENT GROUND CONDUCTOR IN ALL RACEWAYS. REFER TO PANELBOARD SCHEDULES FOR CONDUIT SIZES.
11. REFER TO EQUIPMENT CONNECTION SCHEDULE FOR ELECTRICAL REQUIREMENTS AND CIRCUIT BREAKING.
12. ROUTE CONDUIT HIGH AGAINST STRUCTURE AND OFFSET UP BETWEEN JOISTS WHERE NECESSARY TO AVOID DUCT WORK AND HVAC SYSTEM.
13. VERIFY AND COORDINATE ALL ELECTRICAL REQUIREMENTS OF ALL EQUIPMENT.
14. THE ELECTRICAL CONTRACTOR SHALL FOLLOW THE MANUFACTURER'S RECOMMENDATIONS PRIOR TO INSTALLATION OF EQUIPMENT.



A

B

C

D

E

F

3/5/2026 3:57:19 PM

Autodesk Docs\\VLEB-016 Sterile Storage Improvements\\VLEB-016-MEP_24.rvt

POWER PLAN GENERAL NOTES

- 1 FINAL LOCATION OF ALL EQUIPMENT SHALL BE DETERMINED IN THE FIELD AND SHALL BE INSTALLED AS DIRECTED BY THE ARCHITECT OR OWNER'S REPRESENTATIVE. WHERE STRUCTURAL OPENINGS ARE NOT AVAILABLE, THE CONTRACTOR SHALL CORE DRILL WALLS AND FLOORS AS REQUIRED TO PERMIT PASSAGE OF CONDUITS. THE ELECTRICAL CONTRACTOR SHALL PROVIDE A MARKED-UP PLAN WITH LOCATION PENETRATIONS FOR REVIEW AND APPROVAL OF THE STRUCTURAL ENGINEER BEFORE ROUGH-IN BEGINS.
- 2 RECEPTACLES FOR ALL EQUIPMENT SHALL BE COMPLETE WITH PLUGS FOR THIS EQUIPMENT. THE ELECTRICAL CONTRACTOR SHALL VERIFY NEMA CONFIGURATIONS OF PLUGS AND RECEPTACLES FOR EQUIPMENT IN THE SPACE.
- 3 DURING THE BIDDING PROCESS, THE ELECTRICAL CONTRACTOR SHALL REVIEW DRAWINGS AND SPECIFICATIONS OF ALL OTHER TRADES (ARCHITECTURAL, SITE/LANDSCAPING, HVAC, PLUMBING AND SPECIALTY TRADES). ALL ITEMS REQUIRING POWER INDICATED ON THESE DRAWINGS BUT NOT INDICATED ON THE ELECTRICAL DRAWINGS SHALL BE CONSIDERED A PART OF THE ELECTRICAL CONTRACTOR'S WORK. THIS WORK SHALL BE INSTALLED AS PER NEC REQUIREMENTS AT NO ADDITIONAL COST TO THE OWNER.
- 4 THE CONTRACTOR SHALL MAKE EVERY EFFORT TO MAKE ALL FEEDER RUNS CONTINUOUS (NO CABLE BREAKS). IF SPLICING CABLES IN BOXES BECOMES NECESSARY, USE O.Z.G. TYPE "XW" CABLE TAPS, OR APPROVED EQUAL, AND TAPE EACH TAP IN APPROVED MANNER.
- 5 THE MECHANICAL CONTRACTOR SHALL PROVIDE DISCONNECT SWITCHES, VFD'S, OR COMBINATION STARTERS FOR ALL OF THEIR UNITS. THE ELECTRICAL CONTRACTOR SHALL RECEIVE THESE ITEMS FROM THE MECHANICAL CONTRACTOR FOR INSTALLATION BY THE ELECTRICAL CONTRACTOR.
- 6 THE ELECTRICAL CONTRACTOR SHALL COORDINATE CONDUIT PENETRATIONS FOR ROOFTOP EQUIPMENT WITH MECHANICAL AND ROOFING CONTRACTORS. IF PROVISIONS ARE NOT IN PLACE FOR THESE PENETRATIONS THE ELECTRICAL CONTRACTOR SHALL BE RESPONSIBLE FOR MAKING OWN PENETRATIONS AND CONTRACTING THE ROOF CONTRACTOR FOR SEALING THE ROOF PENETRATIONS. REFER TO MECHANICAL DRAWINGS FOR EXACT LOCATION OF ALL MECHANICAL EQUIPMENT.
- 7 PROVIDE CONDUIT AND WIRING AS REQUIRED TO MEET CIRCUITING SHOWN TO CONFORM TO NEC REQUIREMENTS.
- 8 PROVIDE EQUIPMENT GROUND CONDUCTOR IN ALL RACEWAYS. REFER TO PANELBOARD SCHEDULES.
- 9 REFER TO EQUIPMENT CONNECTION SCHEDULE FOR ELECTRICAL REQUIREMENTS AND CIRCUIT DESIGNATIONS.
- 10 ROUTE CONDUIT HIGH AGAINST STRUCTURE AND OFFSET UP BETWEEN JOISTS WHERE NECESSARY TO AVOID DUCT WORK AND HVAC SYSTEM.
- 11 VERIFY AND COORDINATE EXACT ELECTRICAL REQUIREMENTS OF ALL EQUIPMENT WITH MANUFACTURER'S RECOMMENDATIONS PRIOR TO INSTALLATION OF EQUIPMENT.

A


B

C

D


E

F

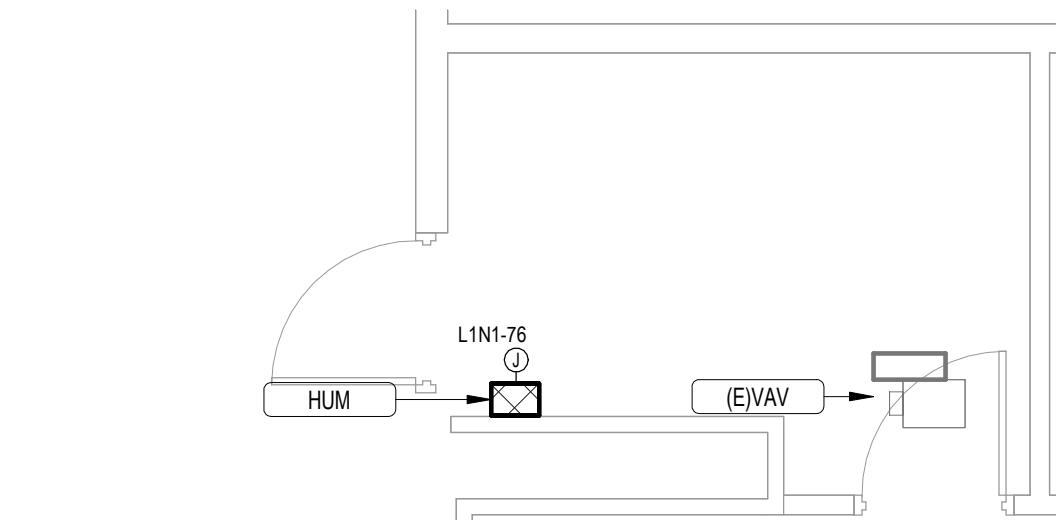

BLDG 37-01 FIRST FLOOR
ELECTRICAL PLAN - ROOM 1A10

2
1/4" = 1'-0"

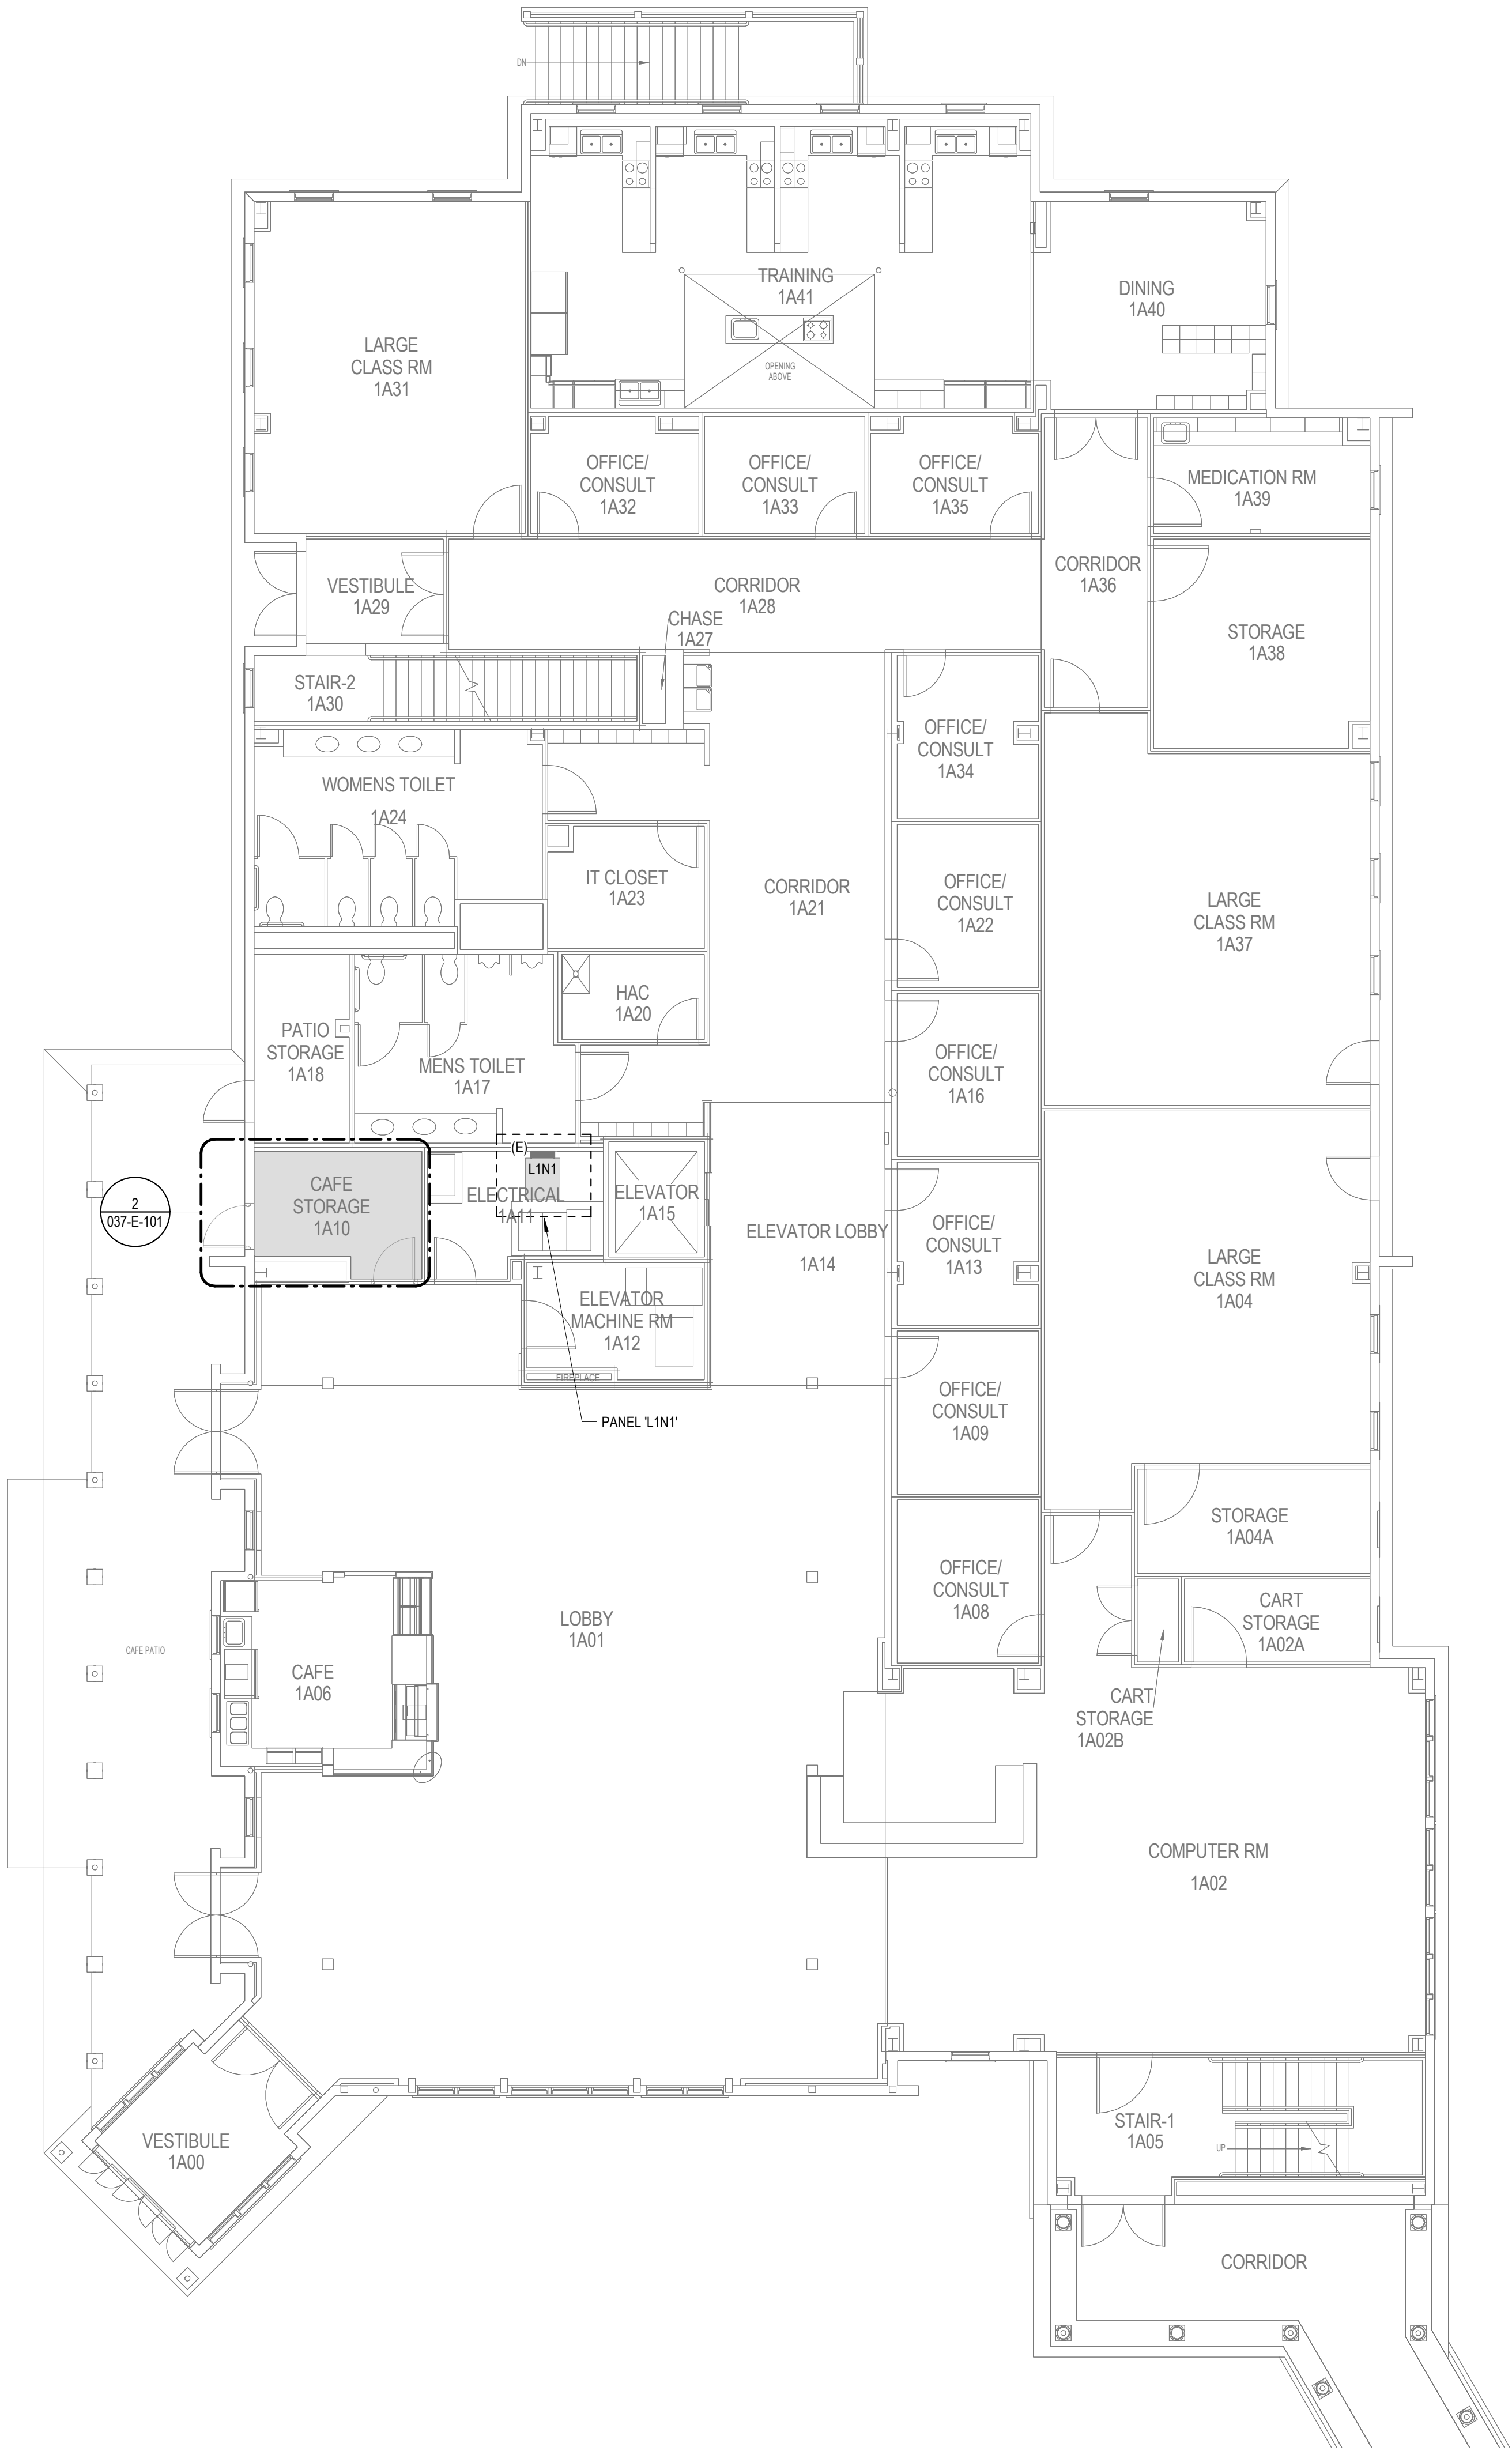

1
1/8" = 1'-0"

BLDG 37-01 FIRST FLOOR ELECTRICAL PLAN


																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					</
--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	----

POWER PLAN GENERAL NOTES

- 1 FINAL LOCATION OF ALL EQUIPMENT SHALL BE DETERMINED IN THE FIELD AND SHALL BE INSTALLED AS DIRECTED BY THE ARCHITECT OR OWNER'S REPRESENTATIVE. WHERE STRUCTURAL OPENINGS ARE NOT AVAILABLE, THE CONTRACTOR SHALL CORE DRILL WALLS AND FLOORS AS REQUIRED TO PERMIT PASSAGE OF CONDUITS. THE ELECTRICAL CONTRACTOR SHALL PROVIDE A MARKED-UP PLAN WITH LOCATION PENETRATIONS FOR REVIEW AND APPROVAL OF THE STRUCTURAL ENGINEER BEFORE ROUGH-IN BEGINS.
- 2 RECEPTACLES FOR ALL EQUIPMENT SHALL BE COMPLETE WITH PLUGS FOR THIS EQUIPMENT. THE ELECTRICAL CONTRACTOR SHALL VERIFY NEMA CONFIGURATIONS OF PLUGS AND RECEPTACLES FOR EQUIPMENT IN THE SPACE.
- 3 DURING THE BIDDING PROCESS, THE ELECTRICAL CONTRACTOR SHALL REVIEW DRAWINGS AND SPECIFICATIONS OF ALL OTHER TRADES (ARCHITECTURAL, SITE/LANDSCAPING, HVAC, PLUMBING AND SPECIALTY TRADES). ALL ITEMS REQUIRING POWER INDICATED ON THESE DRAWINGS BUT NOT INDICATED ON THE ELECTRICAL DRAWINGS SHALL BE CONSIDERED A PART OF THE ELECTRICAL CONTRACTOR'S WORK. THIS WORK SHALL BE INSTALLED AS PER NEC REQUIREMENTS AT NO ADDITIONAL COST TO THE OWNER.
- 4 THE CONTRACTOR SHALL MAKE EVERY EFFORT TO MAKE ALL FEEDER RUNS CONTINUOUS (NO CABLE BREAKS). IF SPLICING CABLES IN BOXES BECOMES NECESSARY, USE O.Z.G. TYPE "XIV" CABLE TAPS, OR APPROVED EQUAL, AND TAPE EACH TAP IN APPROVED MANNER.
- 5 THE MECHANICAL CONTRACTOR SHALL PROVIDE DISCONNECT SWITCHES, VFD'S, OR COMBINATION STARTERS FOR ALL OF THEIR UNITS. THE ELECTRICAL CONTRACTOR SHALL RECEIVE THESE ITEMS FROM THE MECHANICAL CONTRACTOR FOR INSTALLATION BY THE ELECTRICAL CONTRACTOR.
- 6 THE ELECTRICAL CONTRACTOR SHALL COORDINATE CONDUIT PENETRATIONS FOR ROOFTOP EQUIPMENT WITH MECHANICAL AND ROOFING CONTRACTORS. IF PROVISIONS ARE NOT IN PLACE FOR THESE PENETRATIONS THE ELECTRICAL CONTRACTOR SHALL BE RESPONSIBLE FOR MAKING OWN PENETRATIONS AND CONTRACTING THE ROOF CONTRACTOR FOR SEALING THE ROOF PENETRATIONS.
- 7 REFER TO MECHANICAL DRAWINGS FOR EXACT LOCATION OF ALL MECHANICAL EQUIPMENT.
- 8 PROVIDE CONDUIT AND WIRING AS REQUIRED TO MEET CIRCUITING SHOWN TO CONFORM TO NEC REQUIREMENTS.
- 9 PROVIDE EQUIPMENT GROUND CONDUCTOR IN ALL RACEWAYS. REFER TO PANELBOARD SCHEDULES.
- 10 REFER TO EQUIPMENT CONNECTION SCHEDULE FOR ELECTRICAL REQUIREMENTS AND CIRCUIT DESIGNATIONS.
- 11 ROUTE CONDUIT HIGH AGAINST STRUCTURE AND OFFSET UP BETWEEN JOISTS WHERE NECESSARY TO AVOID DUCT WORK AND HVAC SYSTEM.
- 12 VERIFY AND COORDINATE EXACT ELECTRICAL REQUIREMENTS OF ALL EQUIPMENT WITH MANUFACTURER'S RECOMMENDATIONS PRIOR TO INSTALLATION OF EQUIPMENT.


BLDG 101-01 FIRST FLOOR
ELECTRICAL PLAN - ROOM 132

1/4" = 1'-0"

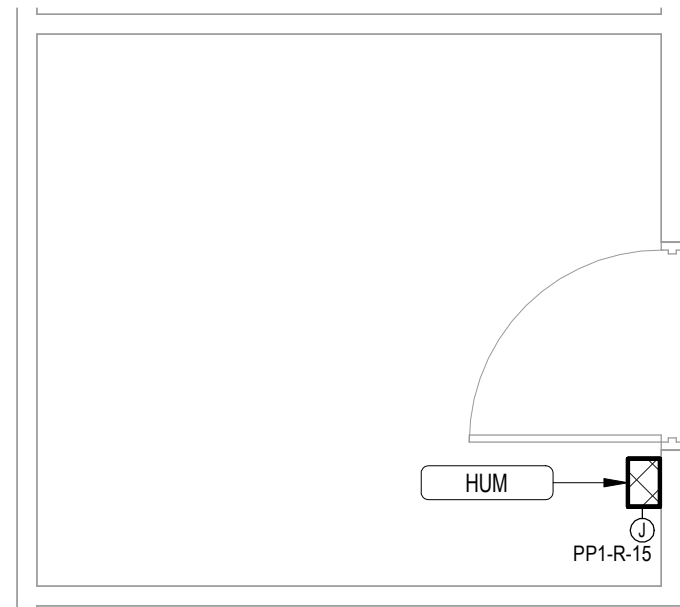


BLDG 101-01 FIRST FLOOR
ELECTRICAL PLAN - ROOM 104

1/4" = 1'-0"

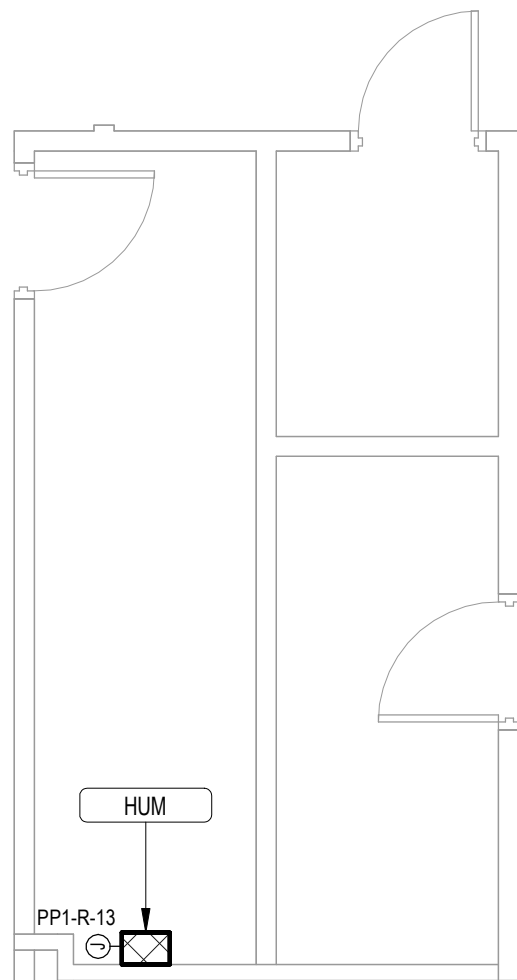



BLDG 101-01 FIRST FLOOR
ELECTRICAL PLAN - ROOM 145B

1/4" = 1'-0"

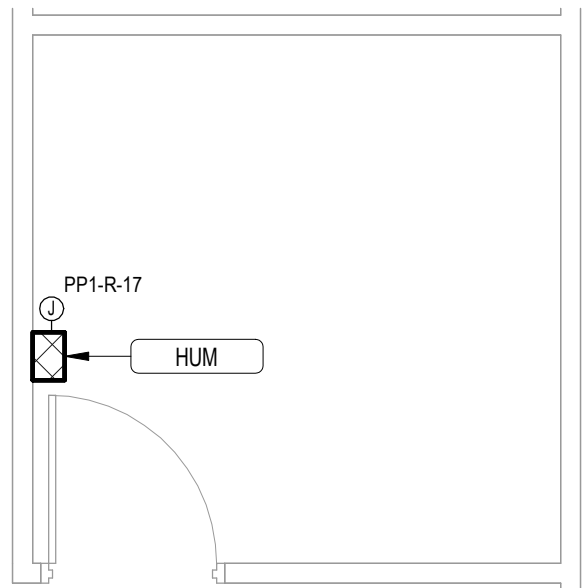

BLDG 101-01 FIRST FLOOR
ELECTRICAL PLAN - ROOM 163,
163A, 163B

1/4" = 1'-0"

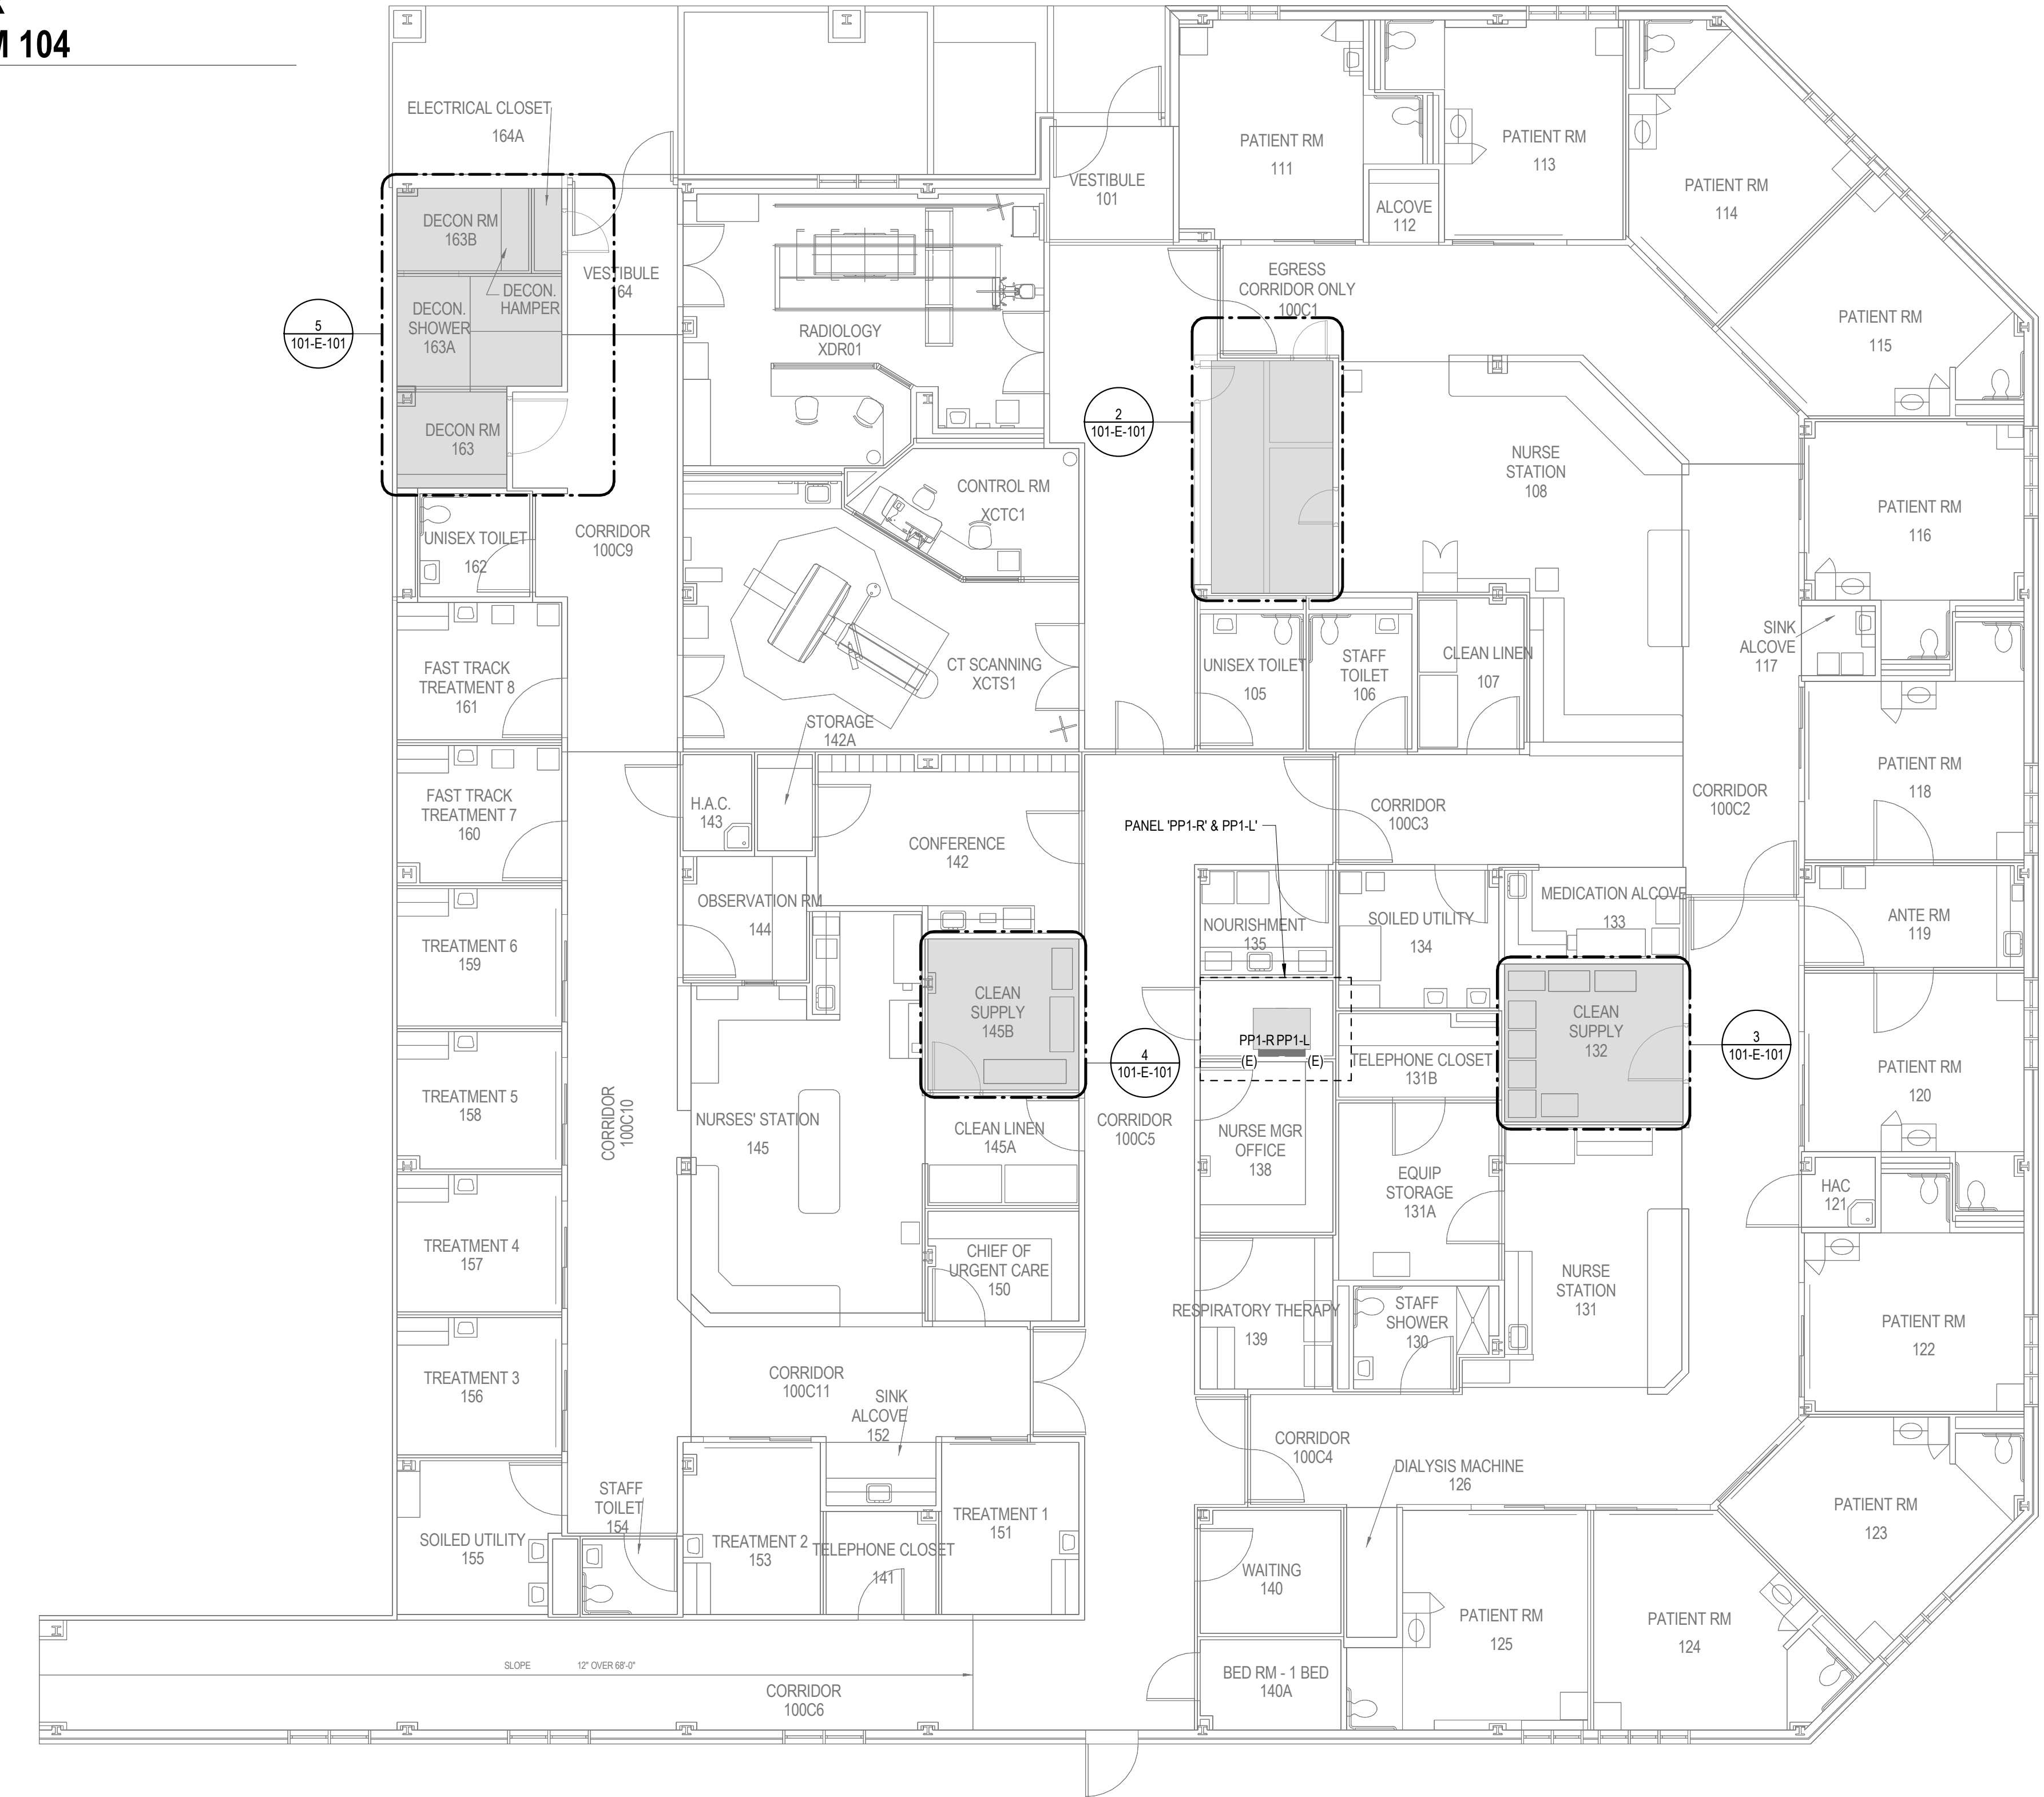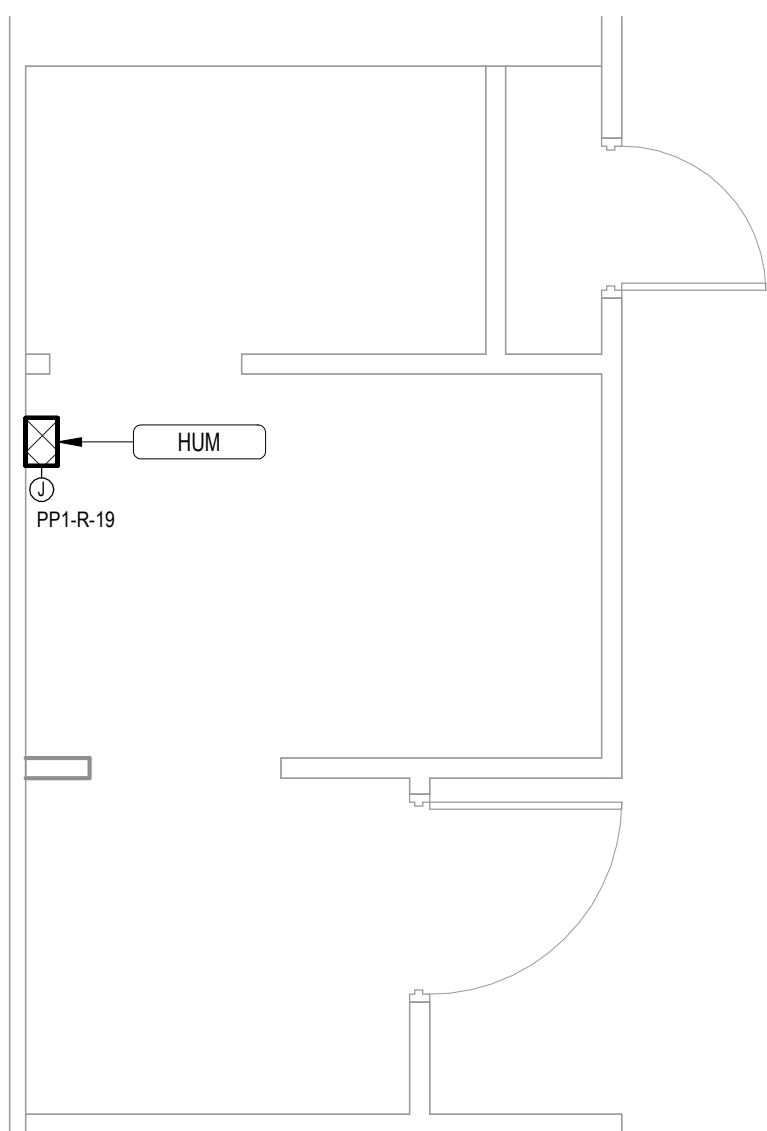

BLDG 101-01 FIRST FLOOR ELECTRICAL PLAN

1/8" = 1'-0"

		Consultant	Architect/Engineer of Record	Stamp	OFFICE OF CONSTRUCTION AND FACILITIES MANAGEMENT VA U.S. Department of Veterans Affairs	Drawing Title BUILDING 101 - FIRST FLOOR ELECTRICAL PLAN Approved:	Phase BID DOCUMENTS Sprinkler Status FULLY SPRINKLERED	Project Title STERILE STORAGE IMPROVEMENTS Location 1700 S LINCOLN AVE, LEBANON, PA 17042 Issue Date 11.17.25	Project Number VLEB-016 Building Number 101 Drawing Number 101-E-101
#	Revisions							Checked DF	Drawn TD

A

B

C

D

E

F

3/5/2026 3:57:24 PM


Autosave: Docs\VLB-016 Sterile Storage Improvements\VLB-016-MEP_24.rvt

POWER PLAN GENERAL NOTES

- 1 FINAL LOCATION OF ALL EQUIPMENT SHALL BE DETERMINED IN THE FIELD AND SHALL BE INSTALLED AS DIRECTED BY THE ARCHITECT OR OWNER'S REPRESENTATIVE. WHERE STRUCTURAL OPENINGS ARE NOT AVAILABLE, THE CONTRACTOR SHALL CORE DRILL WALLS AND FLOORS AS REQUIRED TO PERMIT PASSAGE OF CONDUITS. THE ELECTRICAL CONTRACTOR SHALL PROVIDE A MARKED-UP PLAN WITH LOCATION PENETRATIONS FOR REVIEW AND APPROVAL OF THE STRUCTURAL ENGINEER BEFORE ROUGH-IN BEGINS.
- 2 RECEPTACLES FOR ALL EQUIPMENT SHALL BE COMPLETE WITH PLUGS FOR THIS EQUIPMENT. THE ELECTRICAL CONTRACTOR SHALL VERIFY NEMA CONFIGURATIONS OF PLUGS AND RECEPTACLES FOR EQUIPMENT IN THE SPACE.
- 3 DURING THE BIDDING PROCESS, THE ELECTRICAL CONTRACTOR SHALL REVIEW DRAWINGS AND SPECIFICATIONS OF ALL OTHER TRADES (ARCHITECTURAL, SITE/LANDSCAPING, HVAC, PLUMBING AND SPECIALTY TRADES). ALL ITEMS REQUIRING POWER INDICATED ON THESE DRAWINGS BUT NOT INDICATED ON THE ELECTRICAL DRAWINGS SHALL BE CONSIDERED A PART OF THE ELECTRICAL CONTRACTOR'S WORK. THIS WORK SHALL BE INSTALLED AS PER NEC REQUIREMENTS AT NO ADDITIONAL COST TO THE OWNER.
- 4 THE CONTRACTOR SHALL MAKE EVERY EFFORT TO MAKE ALL FEEDER RUNS CONTINUOUS (NO CABLE BREAKS). IF SPLICING CABLES IN BOXES BECOMES NECESSARY, USE O.Z.G. TYPE "XIV" CABLE TAPS, OR APPROVED EQUAL, AND TAPE EACH TAP IN APPROVED MANNER.
- 5 THE MECHANICAL CONTRACTOR SHALL PROVIDE DISCONNECT SWITCHES, VFD'S, OR COMBINATION STARTERS FOR ALL OF THEIR UNITS. THE ELECTRICAL CONTRACTOR SHALL RECEIVE THESE ITEMS FROM THE MECHANICAL CONTRACTOR FOR INSTALLATION BY THE ELECTRICAL CONTRACTOR.
- 6 THE ELECTRICAL CONTRACTOR SHALL COORDINATE CONDUIT PENETRATIONS FOR ROOFTOP EQUIPMENT WITH MECHANICAL AND ROOFING CONTRACTORS. IF PROVISIONS ARE NOT IN PLACE FOR THESE PENETRATIONS THE ELECTRICAL CONTRACTOR SHALL BE RESPONSIBLE FOR MAKING OWN PENETRATIONS AND CONTRACTING THE ROOF CONTRACTOR FOR SEALING THE ROOF PENETRATIONS. REFER TO MECHANICAL DRAWINGS FOR EXACT LOCATION OF ALL MECHANICAL EQUIPMENT.
- 7 PROVIDE CONDUIT AND WIRING AS REQUIRED TO MEET CIRCUITING SHOWN TO CONFORM TO NEC REQUIREMENTS.
- 8 PROVIDE EQUIPMENT GROUND CONDUCTOR IN ALL RACEWAYS. REFER TO PANELBOARD SCHEDULES.
- 9 REFER TO EQUIPMENT CONNECTION SCHEDULE FOR ELECTRICAL REQUIREMENTS AND CIRCUIT DESIGNATIONS.
- 10 ROUTE CONDUIT HIGH AGAINST STRUCTURE AND OFFSET UP BETWEEN JOISTS WHERE NECESSARY TO AVOID DUCT WORK AND HVAC SYSTEM.
- 11 VERIFY AND COORDINATE EXACT ELECTRICAL REQUIREMENTS OF ALL EQUIPMENT WITH MANUFACTURER'S RECOMMENDATIONS PRIOR TO INSTALLATION OF EQUIPMENT.

POWER PLAN KEYNOTES


- 1 PROVIDE CONNECTION TO NEW EQUIPMENT FROM SPARE 15A CIRCUIT IN EXISTING ELECTRICAL PANEL.

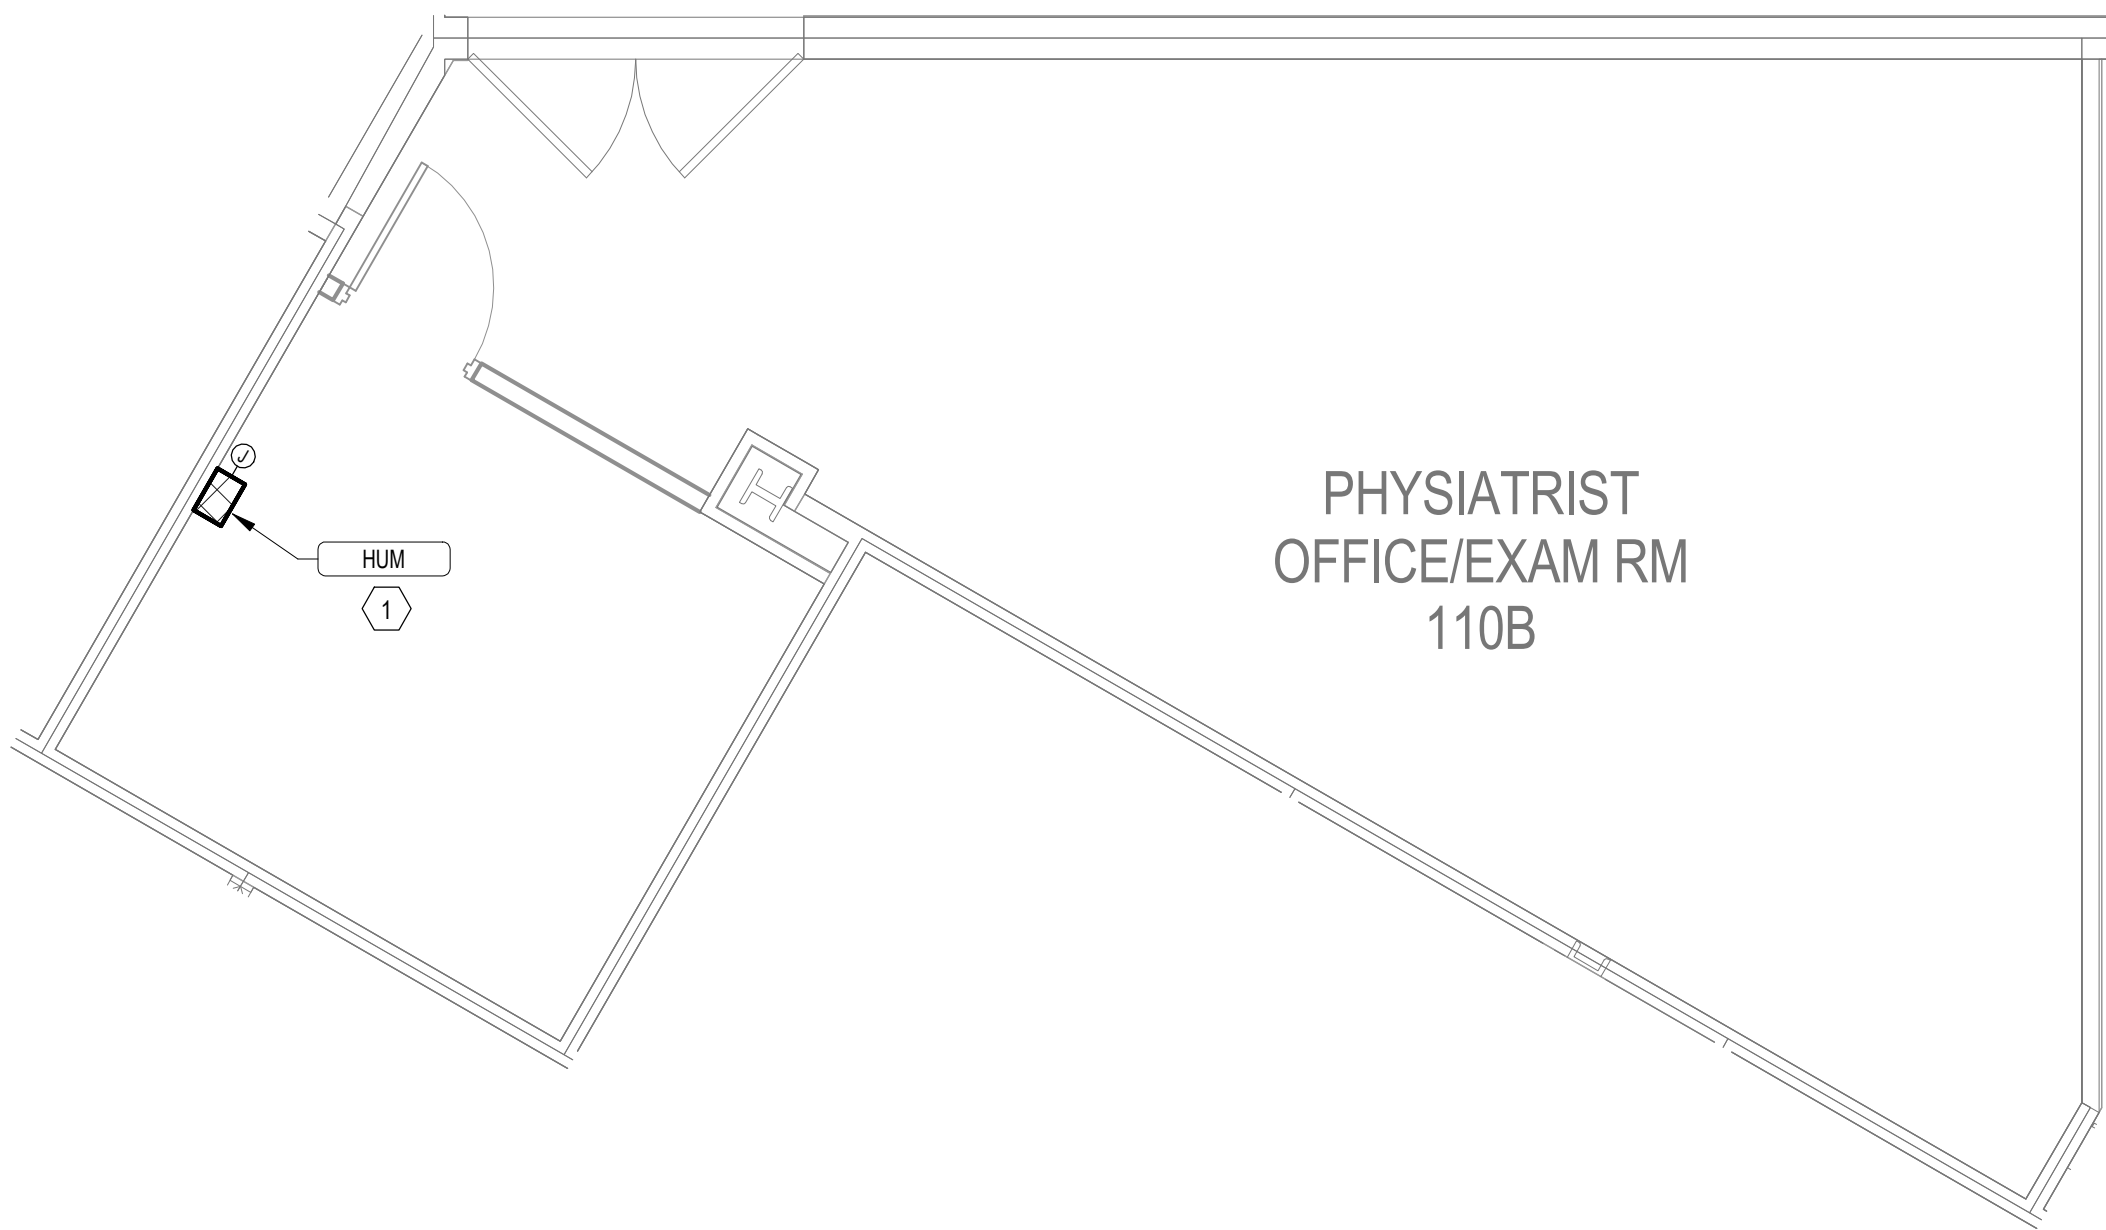

2

BLDG 102-01 FIRST FLOOR ELECTRICAL PLAN - ROOM 110


1/4" = 1'-0"

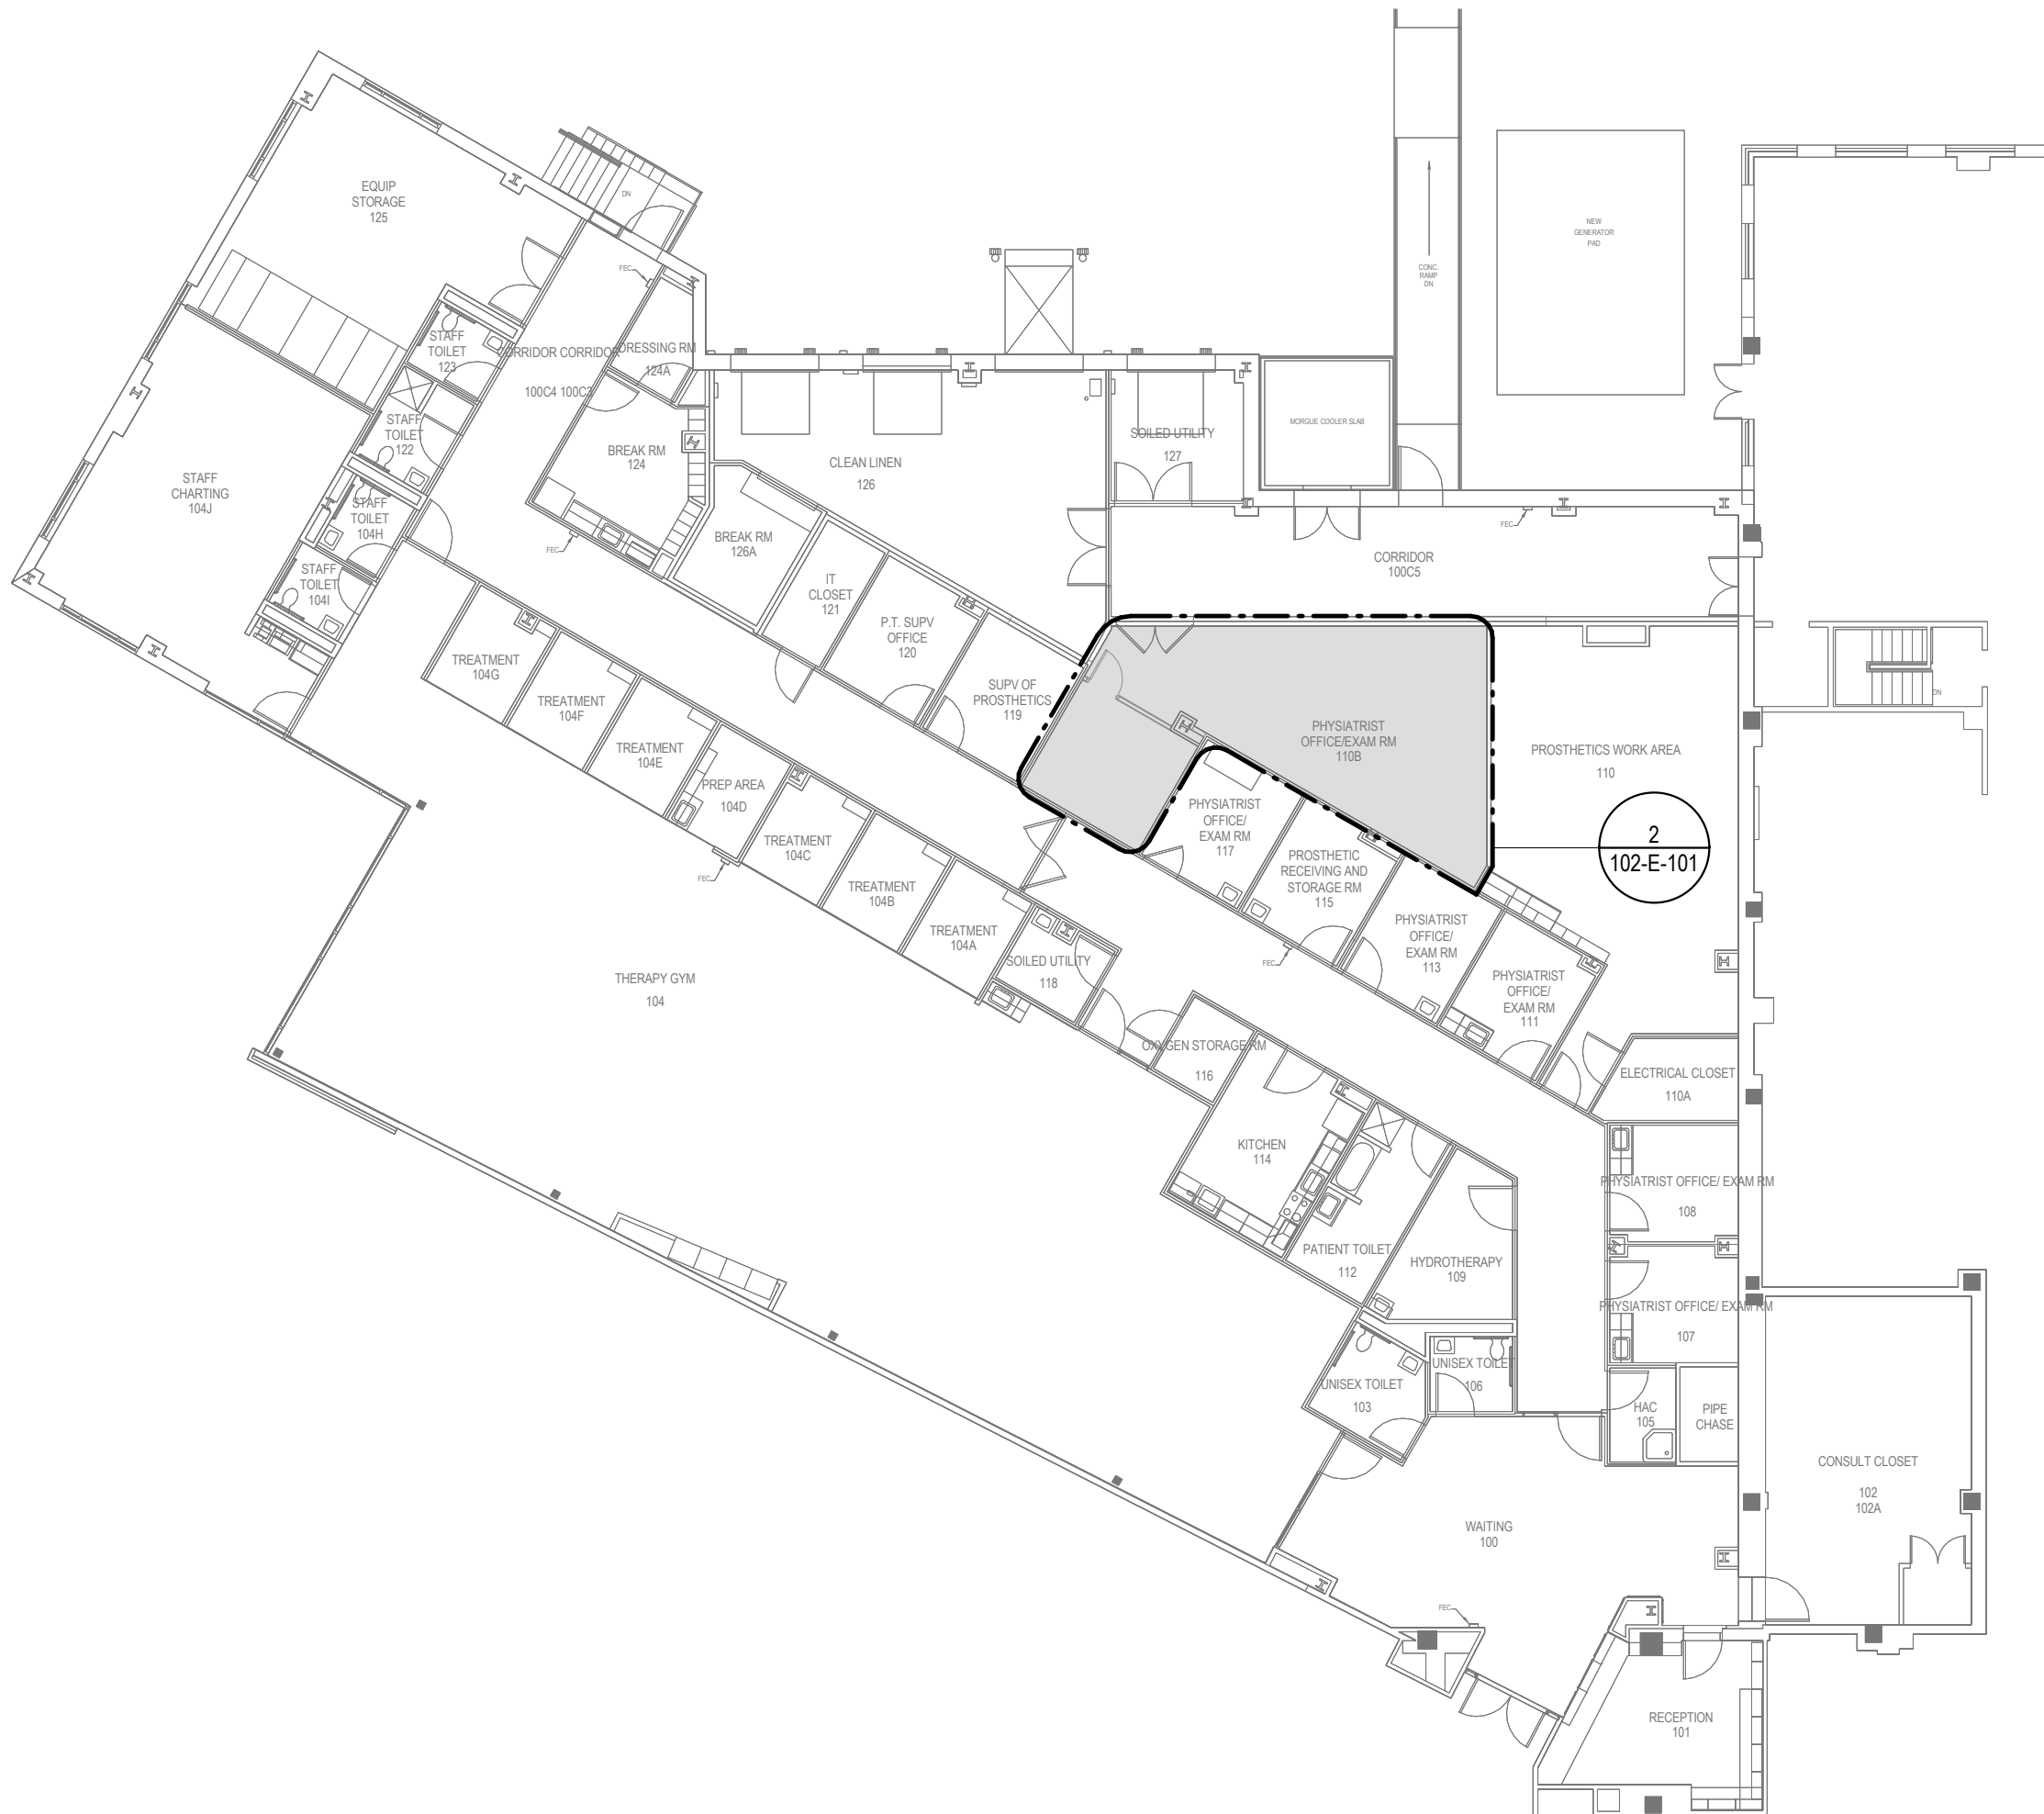

1

BLDG 102-01 FIRST FLOOR ELECTRICAL PLAN

1/16" = 1'-0"



--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

A

B

C

D

E

F

A

B

C

D

E


F

POWER PLAN GENERAL NOTES

- 1 FINAL LOCATION OF ALL EQUIPMENT SHALL BE DETERMINED IN THE FIELD AND SHALL BE INSTALLED AS DIRECTED BY THE ARCHITECT OR OWNER'S REPRESENTATIVE. WHERE STRUCTURAL OPENINGS ARE NOT AVAILABLE, THE CONTRACTOR SHALL CORE DRILL WALLS AND FLOORS AS REQUIRED TO PERMIT PASSAGE OF CONDUITS. THE ELECTRICAL CONTRACTOR SHALL PROVIDE A MARKED-UP PLAN WITH LOCATION PENETRATIONS FOR REVIEW AND APPROVAL OF THE STRUCTURAL ENGINEER BEFORE ROUGH-IN BEGINS.
- 2 RECEPTACLES FOR ALL EQUIPMENT SHALL BE COMPLETE WITH PLUGS FOR THIS EQUIPMENT. THE ELECTRICAL CONTRACTOR SHALL VERIFY NEMA CONFIGURATIONS OF PLUGS AND RECEPTACLES FOR EQUIPMENT IN THE SPACE.
- 3 DURING THE BIDDING PROCESS, THE ELECTRICAL CONTRACTOR SHALL REVIEW DRAWINGS AND SPECIFICATIONS OF ALL OTHER TRADES (ARCHITECTURAL, SITE/LANDSCAPING, HVAC, PLUMBING AND SPECIALTY TRADES). ALL ITEMS REQUIRING POWER INDICATED ON THESE DRAWINGS BUT NOT INDICATED ON THE ELECTRICAL DRAWINGS SHALL BE CONSIDERED A PART OF THE ELECTRICAL CONTRACTOR'S WORK. THIS WORK SHALL BE INSTALLED AS PER NEC REQUIREMENTS AT NO ADDITIONAL COST TO THE OWNER.
- 4 THE CONTRACTOR SHALL MAKE EVERY EFFORT TO MAKE ALL FEEDER RUNS CONTINUOUS (NO CABLE BREAKS). IF SPLICING CABLES IN BOXES BECOMES NECESSARY, USE O.Z.G. TYPE "XIV" CABLE TAPS, OR APPROVED EQUAL, AND TAPE EACH TAP IN APPROVED MANNER.
- 5 THE MECHANICAL CONTRACTOR SHALL PROVIDE DISCONNECT SWITCHES, VFD'S, OR COMBINATION STARTERS FOR ALL OF THEIR UNITS. THE ELECTRICAL CONTRACTOR SHALL RECEIVE THESE ITEMS FROM THE MECHANICAL CONTRACTOR FOR INSTALLATION BY THE ELECTRICAL CONTRACTOR.
- 6 THE ELECTRICAL CONTRACTOR SHALL COORDINATE CONDUIT PENETRATIONS FOR ROOFTOP EQUIPMENT WITH MECHANICAL AND ROOFING CONTRACTORS. IF PROVISIONS ARE NOT IN PLACE FOR THESE PENETRATIONS THE ELECTRICAL CONTRACTOR SHALL BE RESPONSIBLE FOR MAKING OWN PENETRATIONS AND CONTRACTING THE ROOF CONTRACTOR FOR SEALING THE ROOF PENETRATIONS. REFER TO MECHANICAL DRAWINGS FOR EXACT LOCATION OF ALL MECHANICAL EQUIPMENT.
- 7 PROVIDE CONDUIT AND WIRING AS REQUIRED TO MEET CIRCUITING SHOWN TO CONFORM TO NEC REQUIREMENTS.
- 8 PROVIDE EQUIPMENT GROUND CONDUCTOR IN ALL RACEWAYS. REFER TO PANELBOARD SCHEDULES.
- 9 REFER TO EQUIPMENT CONNECTION SCHEDULE FOR ELECTRICAL REQUIREMENTS AND CIRCUIT DESIGNATIONS.
- 10 ROUTE CONDUIT HIGH AGAINST STRUCTURE AND OFFSET UP BETWEEN JOISTS WHERE NECESSARY TO AVOID DUCT WORK AND HVAC SYSTEM.
- 11 VERIFY AND COORDINATE EXACT ELECTRICAL REQUIREMENTS OF ALL EQUIPMENT WITH MANUFACTURER'S RECOMMENDATIONS PRIOR TO INSTALLATION OF EQUIPMENT.

POWER PLAN KEYNOTES


- 1 NO ELECTRICAL WORK REQUIRED. ALL CONNECTIONS ARE EXISTING TO REMAIN.

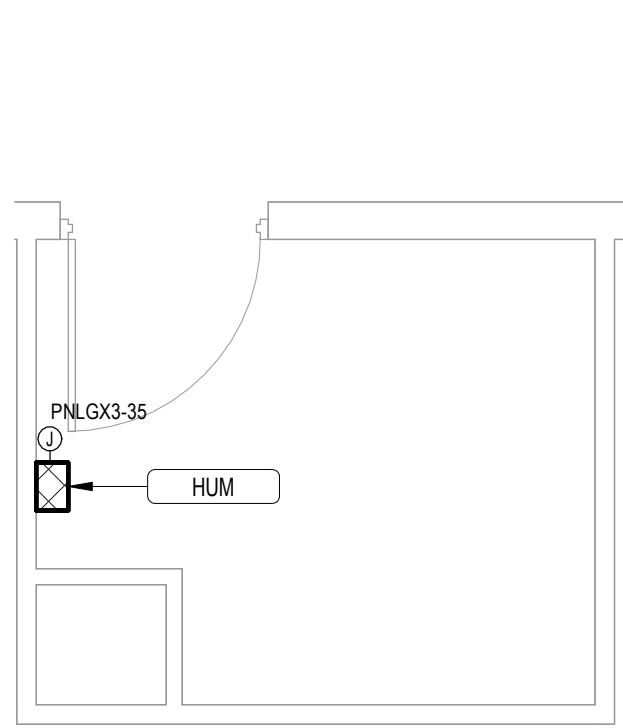

BLDG 104-01 FIRST FLOOR
ELECTRICAL PLAN - ROOM 1211

4


1/4" = 1'-0"

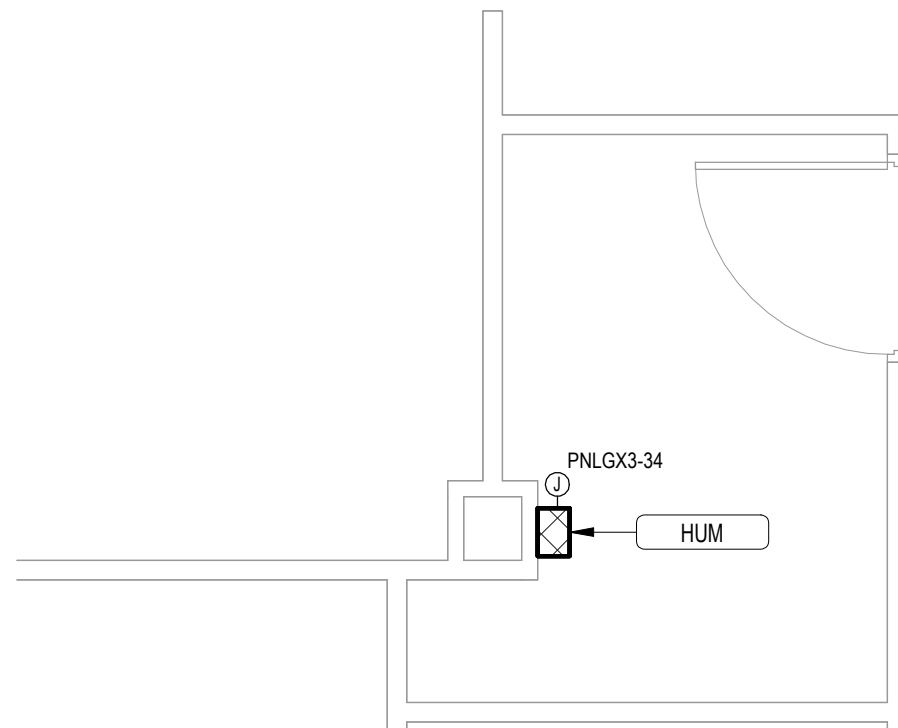

BLDG 104-01 FIRST FLOOR
ELECTRICAL PLAN - ROOM 1209

3


1/4" = 1'-0"

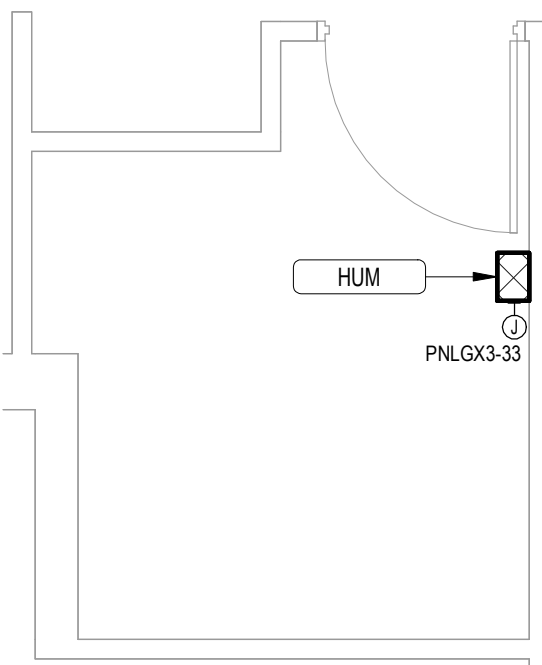

BLDG 104-01 FIRST FLOOR
ELECTRICAL PLAN - ROOM 1121

2


1/4" = 1'-0"

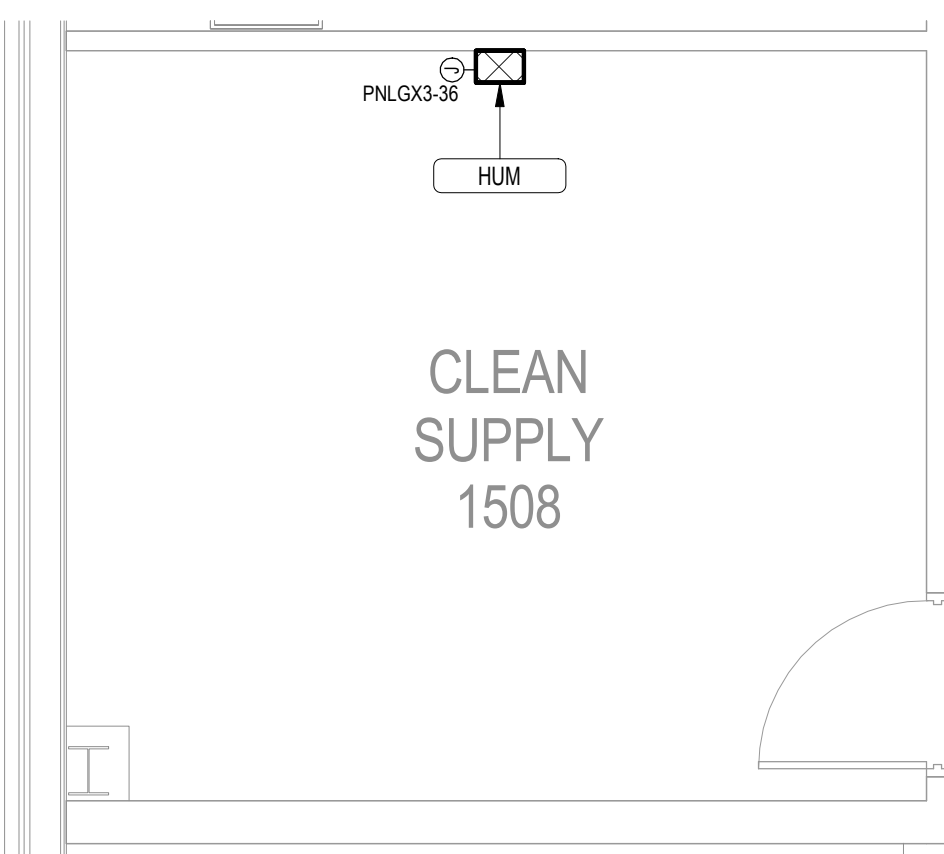

BLDG 104-01 FIRST FLOOR
ELECTRICAL PLAN - ROOM 1508

6


1/4" = 1'-0"

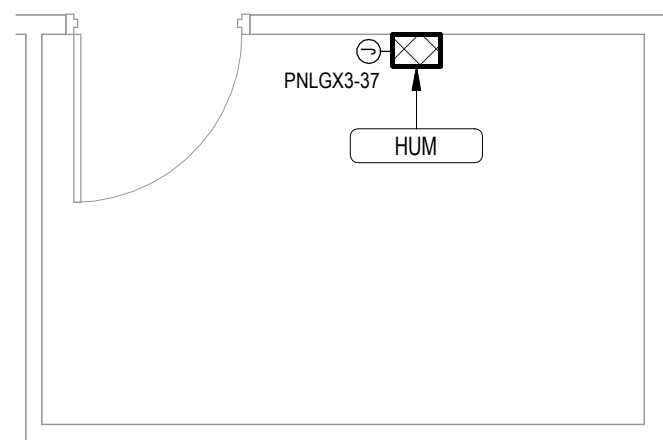

BLDG 104-01 FIRST FLOOR
ELECTRICAL PLAN - ROOM 1406

5


1/4" = 1'-0"

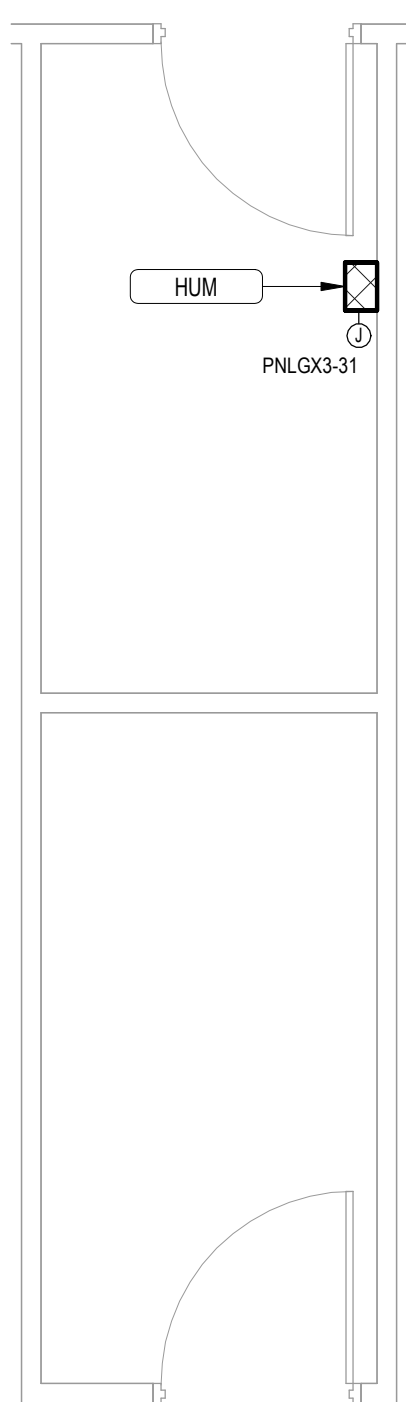

BLDG 104-01 FIRST FLOOR
ELECTRICAL PLAN - ROOM 1405

8


1/4" = 1'-0"

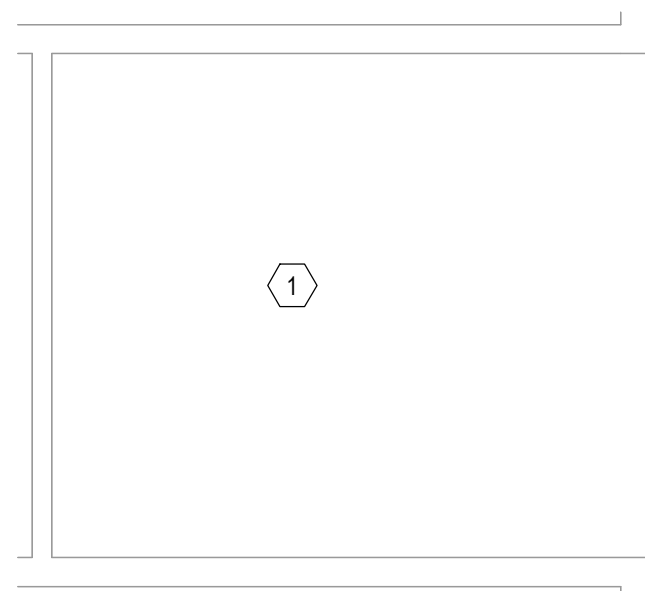

BLDG 104-01 FIRST FLOOR
ELECTRICAL PLAN - ROOM 1513

7

1/4" = 1'-0"

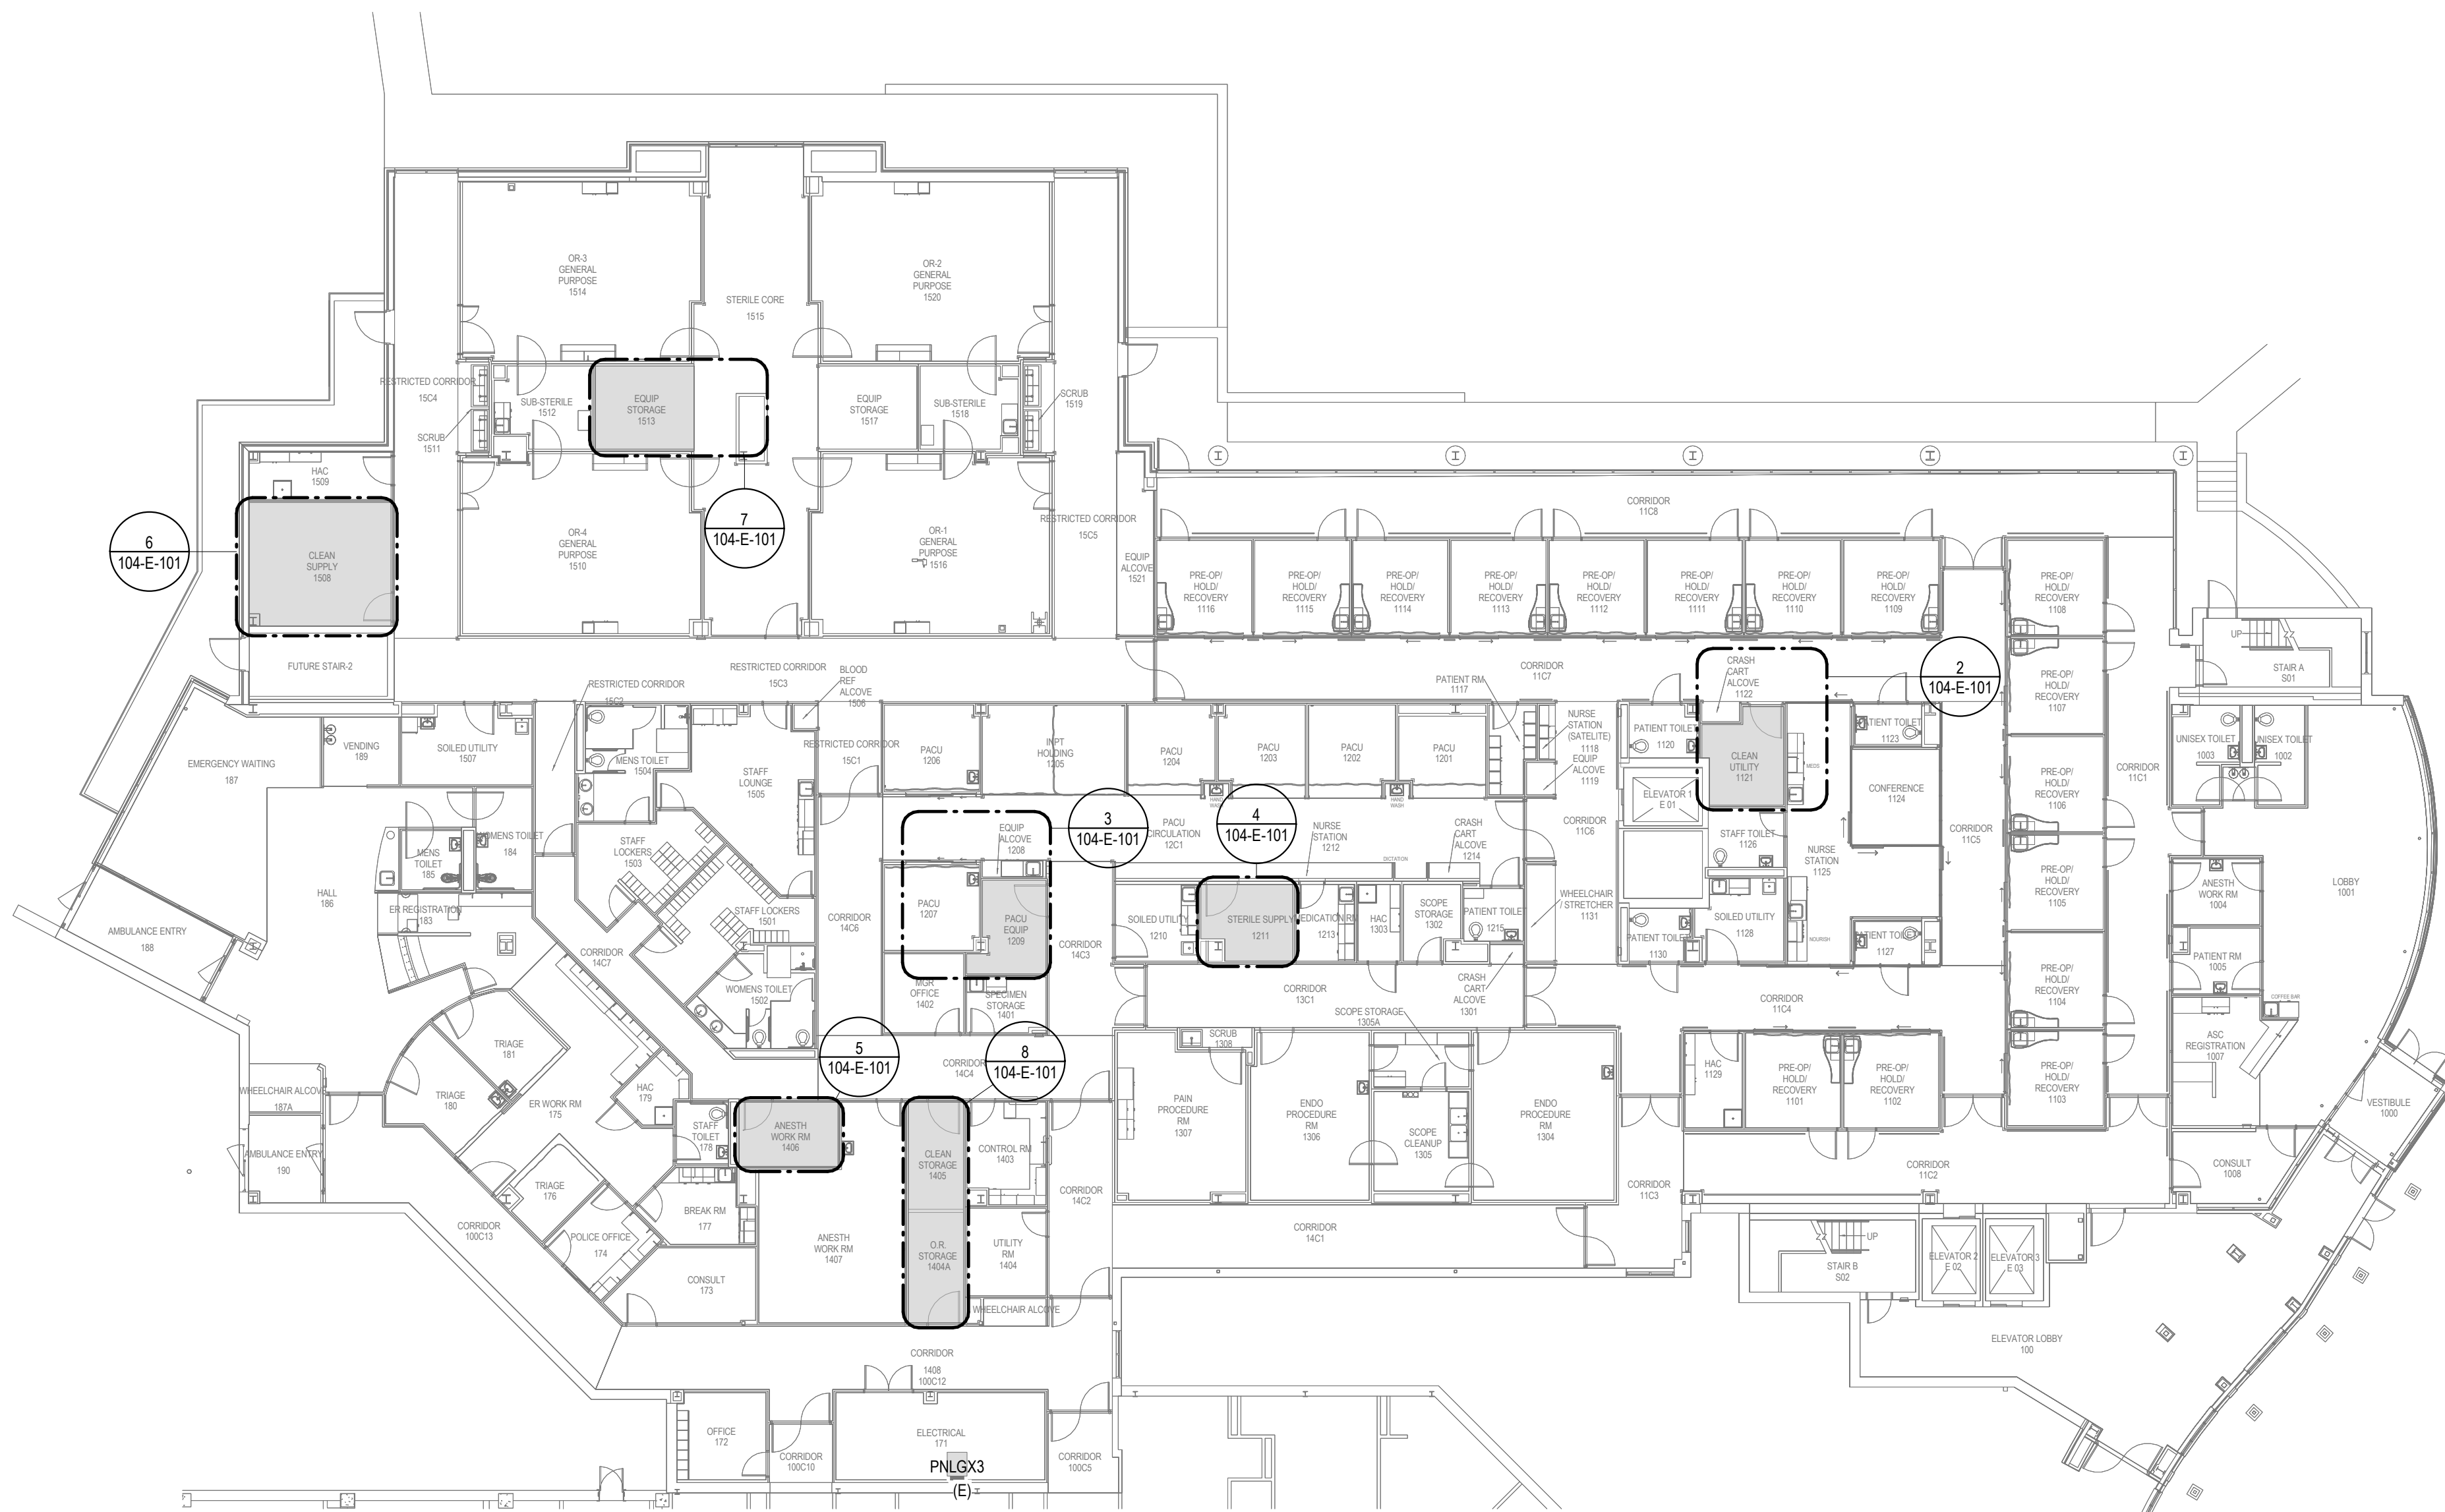

BLDG 104-01 FIRST FLOOR PLAN - ELECTRICAL

1

1/16" = 1'-0"

3/25/2026 3:57:32 PM

Autodesk Docs\\VLEB-016 Sterile Storage Improvements\\VLEB-016-MEP_24.rvt

																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					</
--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	----

1. FINAL LOCATION OF ALL EQUIPMENT SHALL BE DETERMINED IN THE FIELD AND SHALL BE INSTALLED AS DIRECTED BY THE ARCHITECT OR OWNER'S REPRESENTATIVE, WHERE STRUCTURAL OPENINGS ARE AVAILABLE. THE ELECTRICAL CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND APPROVALS FOR THE ELECTRICAL WORK. THE ELECTRICAL CONTRACTOR SHALL PROVIDE A MARKED-UP PLAN WITH LOCATION PENETRATIONS FOR REVIEW AND APPROVAL OF THE STRUCTURAL ENGINEER AND ARCHITECT BEFORE BEGINNING WORK.
2. RECEPTABLES FOR ALL EQUIPMENT SHALL BE COMPLETE WITH PLUGS FOR THIS EQUIPMENT. THE ELECTRICAL CONTRACTOR SHALL VERIFY NEMA CONFIGURATIONS OF PLUGS AND RECEPTABLES FOR ALL OF THE SPACES.
3. DURING THE BIDDING PROCESS, THE ELECTRICAL CONTRACTOR SHALL REVIEW DRAWINGS AND SPECIFICATIONS OF ALL OTHER TRADES (ARCHITECTURAL, STEELSPACING, HVAC, PLUMBING AND MECHANICAL). ALL ELECTRICAL PENETRATIONS SHALL BE IDENTIFIED AND NOTED IN THE DRAWINGS. ANYTHING INDICATED ON THE ELECTRICAL DRAWINGS SHALL BE CONSIDERED A PART OF THE ELECTRICAL CONTRACTOR'S WORK. THIS WORK SHALL BE INSTALLED AS PER NEC REQUIREMENTS AT NO ADDITIONAL COST TO THE OWNER.
4. THE CONTRACTOR SHALL MAKE EVERY EFFORT TO MAKE ALL FEEDER RUNS CONTINUOUS (NO CABLE BREAKS); IF SPLICING CABLES IN BOVES BECOMES NECESSARY, USE O.Z.G. TYPE "X" CABLE TAPS, AND USE THE SAME EQUAL, ALUMINUM OR COPPER CONNECTORS.
5. THE MECHANICAL CONTRACTOR SHALL PROVIDE DISCONNECT SWITCHES, VFDs, OR COMBINATION STARTERS FOR ALL OF THEIR UNITS. THE ELECTRICAL CONTRACTOR SHALL RECEIVE THESE ITEMS FROM THE MECHANICAL CONTRACTOR AND INSTALL THEM IN THE ELECTRICAL RACKS.
6. THE ELECTRICAL CONTRACTOR SHALL COORDINATE CONDUIT PENETRATIONS FOR ROOFTOP EQUIPMENT WITH MECHANICAL AND ROOFING CONTRACTORS. IF PROVISIONS ARE NOT IN PLACE FOR PENETRATIONS, THE ELECTRICAL CONTRACTOR SHALL PROVIDE THE NECESSARY PENETRATIONS AND CONTRACTING THE ROOF CONTRACTOR FOR SEALING THE ROOF PENETRATIONS.
7. REFER TO MECHANICAL DRAWINGS FOR EXACT LOCATION OF ALL MECHANICAL EQUIPMENT.
8. PROVIDE CONDUIT AND WIRING AS REQUIRED TO MEET CIRCUITING SHOWN TO CONFORM TO NEC AND ALL LOCAL ELECTRICAL CODES.
9. PROVIDE EQUIPMENT GROUND CONDUCTOR IN ALL RACEWAYS. REFER TO PANELBOARD SCHEDULES FOR EQUIPMENT CONNECTION SCHEDULE FOR ELECTRICAL REQUIREMENTS AND CIRCUIT BREAKING CAPACITIES.
10. ROUTE CONDUIT HIGH AGAINST STRUCTURE AND OFFSET UP BETWEEN JOISTS WHERE NECESSARY TO AVOID DUCT WORK AND HVAC SYSTEM.
11. VERIFY AND COORDINATE EXACT ELECTRICAL REQUIREMENTS OF ALL EQUIPMENT WITH MANUFACTURERS IMMEDIATELY PRIOR TO INSTALLATION OF EQUIPMENT.

1 NO ELECTRICAL WORK REQUIRED. ALL CONNECTIONS ARE EXISTING TO REMAIN.

$$1/4^* = 1' \cdot 0^*$$
$$1/4^{\circ} = 1'-0''$$

1/16" = 1'-0"

VA FORM 08-6231

A
B
C
D
E
F

12345678910

MECHANICAL EQUIPMENT CONNECTION SCHEDULE										
ITEM NO.	DESCRIPTION	VOLTAGE	LOAD (A)	KVA	FLA	MAX OCP	BREAKER SIZE	FEEDER DESCRIPTION SETS: NO. &...	TYPE OF CONNECTION	NOTES
AH-4-105	SPLIT SYSTEM (INDOOR UNIT)	208/1	0.5	0.104	0.5	15	15	1.3#12, #12G, 3/4"C	HARD WIRED	2
HP-4-105	SPLIT SYSTEM (OUTDOOR UNIT)	208/1	16.5	3.432	16.5	20	20	H	HARD WIRED	2
FCU-A / AA	FAN COIL UNIT	120	0.6	0.066	0.6	15	15	1.2#12, #12G, 3/4"C	HARD WIRED	1
FCU-B / BB	FAN COIL UNIT	120	0.6	0.066	0.6	15	15	1.2#12, #12G, 3/4"C	HARD WIRED	1
FCU-C / CC	FAN COIL UNIT	120	0.7	0.079	0.7	15	15	1.2#12, #12G, 3/4"C	HARD WIRED	1
FCU-D / DD	FAN COIL UNIT	120	1.5	0.147	1.5	15	15	1.2#12, #12G, 3/4"C	HARD WIRED	1
HUM-	HUMIDIFIER	120	15.6	1.872	15.6	20	20	1.2#12, #12G, 3/4"C	HARD WIRED	2
DEH-	DEHUMIDIFIER	120	0.305	0.336	2.8	15	15	1.2#12, #12G, 3/4"C	RECEPTACLE	
ERV	ENERGY RECOVERY VENTILATOR	208/3	19	6.840	19	20	20	1.3#12, #12G, 3/4"C	HARD WIRED	2
NOTES: 1. PROVIDE CONDENSATE PUMP WITH NEW FCU'S. CONDENSATE PUMP TO BE POWERED ON SAME CIRCUIT AS FCU AND CONNECTED VIA RECEPTACLE. 2. MAKE CONNECTION VIA INTEGRAL DISCONNECT SWITCH.										

EXISTING PANEL I									
RATINGS: 208Y/120 BUS RATING: 100 AMPS A.I.C. RATING: 10,000 AMPS SYMMETRICAL					MAINS TYPE: MLO				
LOCATION: BLDG 1 - ELEC CLOSET 17 FED FROM: MOUNTING: SURFACE									
CKT NO	CIRCUIT DESCRIPTION	BREAKER P TRIP	LOAD (KVA)			BREAKER TRIP P	CIRCUIT DESCRIPTION	CKT NO	
1	LITES RM #1 ALSO DOOR BUZZER PAD	1 20.0 A	0.90	0.90		20.0 A	1 CLOSET #19 RM 20	2	
3	30A RECP CLOSET CORR 4	1 20.0 A		2.16	0.00	20.0 A	1 GAS STERILIZER (OFF)	4	
5	LTS. RM LOBBY & DOCK	1 20.0 A			0.90 0.90	20.0 A	1 LITES RM 14, 15, 15A	6	
7	LIGHT IN OLD ELEC CLOSET	1 20.0 A	0.10	0.90		20.0 A	1 LITES RM 24, 25 & REC	8	
9	38 & 39 HYDRO UNIT	1 20.0 A		1.92	1.10	20.0 A	1 LITES RM 24, 24 RM 39 REC & LITES	10	
11	ELTR	1 20.0 A			1.92 1.00	20.0 A	1 LITES RM 4A, 5A, 5 6A	12	
13	LITES, RM #2 LAV 3A EXHAUST FAN FOR ??	1 20.0 A	1.00	0.90		20.0 A	1 10A RECP CLOSET #19	14	
15	CLOSET LIGHT (LEFT)	1 20.0 A		0.10	0.90	20.0 A	1 ULTRASONIC CLEANER	16	
17	LITES RM 3, 5	1 20.0 A			0.90 0.90	20.0 A	1 ULTRASONIC CLEANER	18	
19	LITES, RM 21-23 LAV, 1ST FL RM 33 A/C (OFF)	1 20.0 A	0.00	0.00		20.0 A	3 SPARE	20	
21	10A RECP CLOSET #19	1 20.0 A		0.90	0.00	20.0 A	1 ELTR	22	
23	HUM RM 016	1 20.0 A			1.87 0.00	20.0 A	1 ELTR	24	
25	30A RECP IN CORR (OFF)	1 20.0 A	2.16	1.92		20.0 A	1 ELTR	26	
27	110 WASHER, TURBOMATIC RM 1 NORTH	1 20.0 A		1.92	1.30	20.0 A	2 LAZER SUP RM	28	
29	LITES - PAD	1 20.0 A			0.90 1.30	20.0 A	1 OXYGEN RM 40	30	
31	LITES - PAD	1 20.0 A	0.90	1.10		20.0 A	2 220 AC PAD	32	
33	ELTR	1 20.0 A		1.92	1.30	20.0 A	1 HUM RM 051	34	
35	BLK CLG CT RM 34 STEAM STERILIZER	1 20.0 A			1.00 1.30	20.0 A	1 HUM RM 051	36	
37	30A RECP IN CORR RM 39 WALL HEATVENT...	1 20.0 A	1.92	0.90		20.0 A	1 HUM RM 051	38	
39	PAD AIR COND 220 MODUTROL BLOWER (OFF)	2 20.0 A		1.30	1.87	20.0 A	1 HUM RM 051	40	
41				1.30	1.87	20.0 A	1 HUM RM 051	42	
NOTES: 13.2 16.5 15.8 110.0 141.0 134.8 45.5 :CONNECTED LOAD/PHASE (KVA) 126.2 :TOTAL CONNECTED LOAD (KVA) 100.00% :TOTAL DEMAND FACTOR 45.5 :TOTAL DEMAND LOAD (KVA) 126.2 :TOTAL DEMAND LOAD (A)									

EXISTING PANEL GAEQ									
RATINGS: 208Y/120 BUS RATING: 100 AMPS A.I.C. RATING: ETR					MAINS TYPE: MLO				
LOCATION: BLDG 1 - ELEC CLOSET 9 FED FROM: DP-EQ-1A MOUNTING: SURFACE									
CKT NO	CIRCUIT DESCRIPTION	BREAKER P TRIP	LOAD (KVA)			BREAKER TRIP P	CIRCUIT DESCRIPTION	CKT NO	
1	SPACE	1 -- --	0.90			20.0 A	1 RM 15 LIGHTS	2	
3	SPACE	1 -- --		1.87		20.0 A	1 HUM RM 036	4	
5	RM #1 STERILE RM LIGHTS	1 20.0 A			0.90 0.90	20.0 A	1 REC RM 1, STERILE RM	6	
7	SPARE (OFF)	1 20.0 A	0.00	0.90		20.0 A	1 RECP RM 6C	8	
9	SPACE	1 20.0 A		5.40	0.72	20.0 A	1 RM 6A	10	
11	PANEL GAEQ-1	2 100.0 A			5.40 0.90	20.0 A	1 SILVER RECOVERY RM OUTLETS	12	
13	RECP RM 6A	1 20.0 A	1.40	1.08		20.0 A	1 OUTLES RM 6D (MED CART)	14	
15	SPARE	1 20.0 A		0.00	0.90	20.0 A	1 REFER NORTH IN CHEMISTRY PRE WALL RM...	16	
17	SPARE (OFF)	2 20.0 A			0.00 0.60	20.0 A	1 RECP RM 6A	18	
19	SPACE	1 20.0 A	0.00	1.44		20.0 A	1 PARAMAX RM 15 RECP?	20	
21	SPARE (OFF)	1 20.0 A		0.00	0.00	20.0 A	1 SPARE (OFF)	22	
23	SPARE (OFF)	1 20.0 A			0.00 0.00	20.0 A	1 SPARE (OFF)	24	
NOTES: 5.7 6.7 8.7 :CONNECTED LOAD/PHASE (KVA) 47.7 76.7 76.3 :CONNECTED LOAD/PHASE (A) 23.1 :TOTAL CONNECTED LOAD (KVA) 64.2 :TOTAL CONNECTED LOAD (A) 100.00% :TOTAL DEMAND FACTOR 23.1 :TOTAL DEMAND LOAD (KVA) 64.2 :TOTAL DEMAND LOAD (A)									

EXISTING PANEL E1									
RATINGS: 208Y/120 BUS RATING: 100 AMPS A.I.C. RATING: ETR					MAINS TYPE: MLO				
LOCATION: BLDG 22 - FAC 102 FED FROM: MOUNTING: SURFACE									
CKT NO	CIRCUIT DESCRIPTION	BREAKER P TRIP	LOAD (KVA)			BREAKER TRIP P	CIRCUIT DESCRIPTION	CKT NO	
1	FAN COILS CORRIDOR 122	1 20.0 A	1.62	1.12		20.0 A	1 FAN COILS STORAGE 109	2	
3	FAN COILS STORAGE 109	1 20.0 A		1.12	0.97	20.0 A	1 FAN COILS CORRIDOR 120	4	
5	FAN COILS CORRIDOR 120	1 20.0 A			1.30 0.50	20.0 A	1 REC MAIN ENTRANCE	6	
7	SPARE	1 20.0 A	0.00	0.00		20.0 A	1 SPARE	8	
9	SPARE	1 20.0 A		0.00	0.00	20.0 A	1 SPARE	10	
11	SPARE	1 20.0 A			0.00 0.00	20.0 A	1 SPARE	12	
13	SPARE	1 20.0 A	0.00	0.00		20.0 A	1 SPARE	14	
15	SPARE	1 20.0 A		0.00	0.00	20.0 A	1 SPARE	16	
17	SPARE	1 20.0 A			0.00 0.00	20.0 A	1 SPARE	18	
19	SPARE	1 20.0 A	0.00	0.00		20.0 A	1 SPARE	20	
21	SPARE	1 20.0 A		0.00	0.00	20.0 A	1 SPARE	22	
23	SPARE	1 20.0 A			0.00 0.00	20.0 A	1 SPARE	24	
25	SPARE	1 20.0 A	0.00	0.00		20.0 A	1 SPARE	26	
27	SPARE	1 20.0 A		0.00	0.00	20.0 A	1 SPARE	28	
29	SPARE	1 20.0 A			0.00 0.00	20.0 A	1 SPARE	30	
31	SPARE	1 20.0 A	0.00	0.00		20.0 A	1 SPARE	32	
33	SPARE	1 20.0 A		0.00	0.00	20.0 A	1 SPARE	34	
35	SPARE	1 20.0 A			0.00 0.00	20.0 A	1 SPARE	36	
37	SPARE	1 20.0 A	0.00	0.00		20.0 A	1 SPARE	38	
39	SPARE	1 20.0 A			1.34 0.00	20.0 A	1 SPARE	40	
41	(4) DEH RM 109	1 15.0 A				20.0 A	1 SPARE	42	
NOTES: 2.7 2.1 3.1 :CONNECTED LOAD/PHASE (KVA) 23.6 17.4 26.3 :CONNECTED LOAD/PHASE (A) 7.9 :TOTAL CONNECTED LOAD (KVA) 21.8 :TOTAL CONNECTED LOAD (A) 100.00% :TOTAL DEMAND FACTOR 7.9 :TOTAL DEMAND LOAD (KVA) 21.8 :TOTAL DEMAND LOAD (A)									

EXISTING PANEL GR									
RATINGS: 208Y/120 BUS RATING: 200 AMPS A.I.C. RATING: ETR					MAINS TYPE: MLO				
LOCATION: BLDG 1 - CORRIDOR 155A FED FROM: GL MOUNTING: RECESSED									
CKT NO	CIRCUIT DESCRIPTION	BREAKER P TRIP	LOAD (KVA)			BREAKER TRIP P	CIRCUIT DESCRIPTION	CKT NO	
1	ULTRASOUND LIGHTS	1 20.0 A	0.86	0.90		20.0 A	1 REC 115	2	
3	CT WAIT-PREP-CONTROL LIGHTS	1 20.0 A		0.51	0.90	20.0 A	1 REC 116A	4	
5	CT SCANNER ROOM LIGHTS	1 20.0 A			1.38 0.90	20.0 A	1 REC 115	6	
7	CORRIDOR LIGHTS	1 20.0 A	0.38	0.90		20.0 A	1 REC 116	8	
9	STAFF LOCKER LIGHTS	1 20.0 A		0.45	0.90	20.0 A	1 REC 116B	10	
11	TOILETS - RADIO REAR READ LIGHTS	1 20.0 A			0.46 0.90	20.0 A	1 REC 118	12	
13	ULTRASOUND REC	1 20.0 A	1.08	0.90		20.0 A	1 REC 117	14	
15	ULTRASOUND REC	1 20.0 A			1.08 0.90	20.0 A	1 PAIN CLINIC FCUS	16	
17	STAFF LOCKER REC	1 20.0 A		1.08	1.87	20.0 A	1 HUM RM 116A	18	
19	CT PREP REC	1 20.0 A	0.72	0.34		15.0 A	1 DEH RM 116A	20	
21	CT CONTROL REC	1 20.0 A		1.08	1.87	20.0 A	1 HUM RM 111	22	
23	RADIO READ REC	1 20.0 A			1.08 --	--	1 SPACE	24	
25	RADIO READ REC	1 20.0 A	1.08	--		--	1 SPACE	26	
27	SINK/TOILET REC	1 20.0 A		0.36	--	--	1 SPACE	28	
29	CT SCANNER ROOM REC	1 20.0 A			1.08 --	--	1 SPACE	30	
31	CT WAITING REC	1 20.0 A	1.26	--		--	1 SPACE	32	
33	EXISTING CIRCUIT	1 20.0 A		0.00	--	--	1 SPACE	34	
35	CT SCANNER ROOM DOOR WARNING LIGHTS	1 20.0 A		0.15	--	--	1 SPACE	36	
37	MICROWAVE IN LOUNGE	1 20.0 A	0.18	--		--	1 SPACE	38	
39	SPARE	1 20.0 A		0.00	--	--	1 SPACE	40	
41	SPARE	1 20.0 A		0.00	--	--	1 SPACE	42	
NOTES: 8.6 7.9 8.8 :CONNECTED LOAD/PHASE (KVA) 72.2 65.9 73.8 :CONNECTED LOAD/PHASE (A) 25.2 :TOTAL CONNECTED LOAD (KVA) 70.0 :TOTAL CONNECTED LOAD (A) 100.00% :TOTAL DEMAND FACTOR 25.2 :TOTAL DEMAND LOAD (KVA) 70.0 :TOTAL DEMAND LOAD (A)									

EXISTING PANEL ML									
RATINGS: 208Y/120 BUS RATING: 100 AMPS A.I.C. RATING: ETR					MAINS TYPE: MLO			LOCATION: BLDG 1 - ELEC CLOSET 335 FED FROM: LSB MOUNTING: SURFACE	
CKT NO	CIRCUIT DESCRIPTION	BREAKER	LOAD (KVA)			BREAKER	CIRCUIT DESCRIPTION	CKT NO	
		P TRIP	A	B	C	TRIP P			
1	E CLOSET LIGHTS	1 20.0 A	0.50	0.72		20.0 A	1 REC ABOVE CELL ENT 1-38	2	
3	SPARE	1 20.0 A			1.00 0.00	20.0 A	1 EXISTING	4	
5	REC RM 300 & 301	1 20.0 A			0.72 0.72	20.0 A	1 REC RM 311	6	
7	REC RM 312	1 20.0 A	0.36	0.72		20.0 A	1 REC RM 331	8	
9	NORTH HALL LIGHTS	1 20.0 A		1.00	1.87	20.0 A	1 HUM RM 307	10	
11	EXISTING LOAD	1 20.0 A			1.50 0.72	20.0 A	1 REC RM 331	12	
13	SPARE	1 20.0 A	0.00	0.72		20.0 A	1 REC RM 331	14	
15	REC RM 332	1 20.0 A		0.72	0.34	15.0 A	1 DEH RM 346	16	
17	SPARE	1 20.0 A			0.00 0.00	20.0 A	1 SPARE	18	
19	HUM RM 346	1 20.0 A	1.87	0.72		20.0 A	1 REC RM 313	20	
21	REC RM 300, 304, 305, 306	1 20.0 A		1.08	0.72	20.0 A	1 REC RM 313	22	
23	REC RM 300, 301, 303	1 20.0 A			1.08 1.36	20.0 A	1 MICROWAVE RM 304	24	
25	WHIRLPOOL RM 307	1 20.0 A	1.50	1.20		20.0 A	1 REFRIGERATOR RM 307	26	
27	REC RM 304, 205, 306 AND FLOOR REC	1 20.0 A		1.44	1.72	20.0 A	1 WASHING MACHINE RM 302	28	
29	HUM RM 346	1 20.0 A			1.87 0.00	20.0 A	1 SPARE	30	
31	SPARE	1 20.0 A	0.00	1.00		20.0 A	1 LIGHTS RM 300 THRU 308 & 310	32	
33	LIGHTS S & W HALL NURSING STA. C3-13,14,15	1 20.0 A		1.00	0.00	20.0 A	1 SPARE	34	
35	LIGHTS N HALL C3-6, 7,8 & 9	1 20.0 A			1.00 0.00	20.0 A	1 SPARE	36	
37	SPARE	1 20.0 A	0.00	2.08		30.0 A	2 DRYER REC RM 302	38	
39	SPACE	1 --	--	2.08		--	--	40	
41	SPACE	1 TRIP	--	--	--	--	--	42	
NOTES:			23.8	24.9	16.9	1 SPACE			
			204.5	214.1	157.9	1 CONNECTED LOAD/SPACE (KVA)			
						1 CONNECTED LOAD/SPACE (A)			
						67.7 - TOTAL CONNECTED LOAD (A)			
						187.9 - TOTAL CONNECTED LOAD (A)			
						100.0% - TOTAL DEMAND FACTOR			
						67.7 - TOTAL DEMAND LOAD (KVA)			
						187.9 - TOTAL DEMAND LOAD (A)			

