


FILE NAME: Y:\CONUS\Multiples\2026_783264_P1360_MAMF_B_Design\DWG\Sheet\08_ARCH\PI360_783264_4507-4510.dwg
LAYOUT NAME: A-507 CEILING DETAILS PLOTTED: Wednesday, January 21, 2026 - 8:31am USER: paulaklefel



GENERAL SHEET NOTES

- 1. REFER TO SHEET A-001 FOR ARCHITECTURAL LEGEND AND ABBREVIATIONS
- 2. REFER TO SHEET A-502 FOR KEYNOTES THIS SHEET
- 3. REFER TO 100 SERIES SHEETS FOR PARTITION AND CEILING TYPE LOCATIONS AND FIRE RESISTANT BOUNDARIES.
- 4. AT PIPE AND DUCT PENETRATIONS AT NON-RATED WALLS PROVIDE 15MM MIN THICKNESS ACOUSTICAL/SMOKE SEALANT AROUND FULL PERIMETER OF PENETRATION, BOTH SIDES.

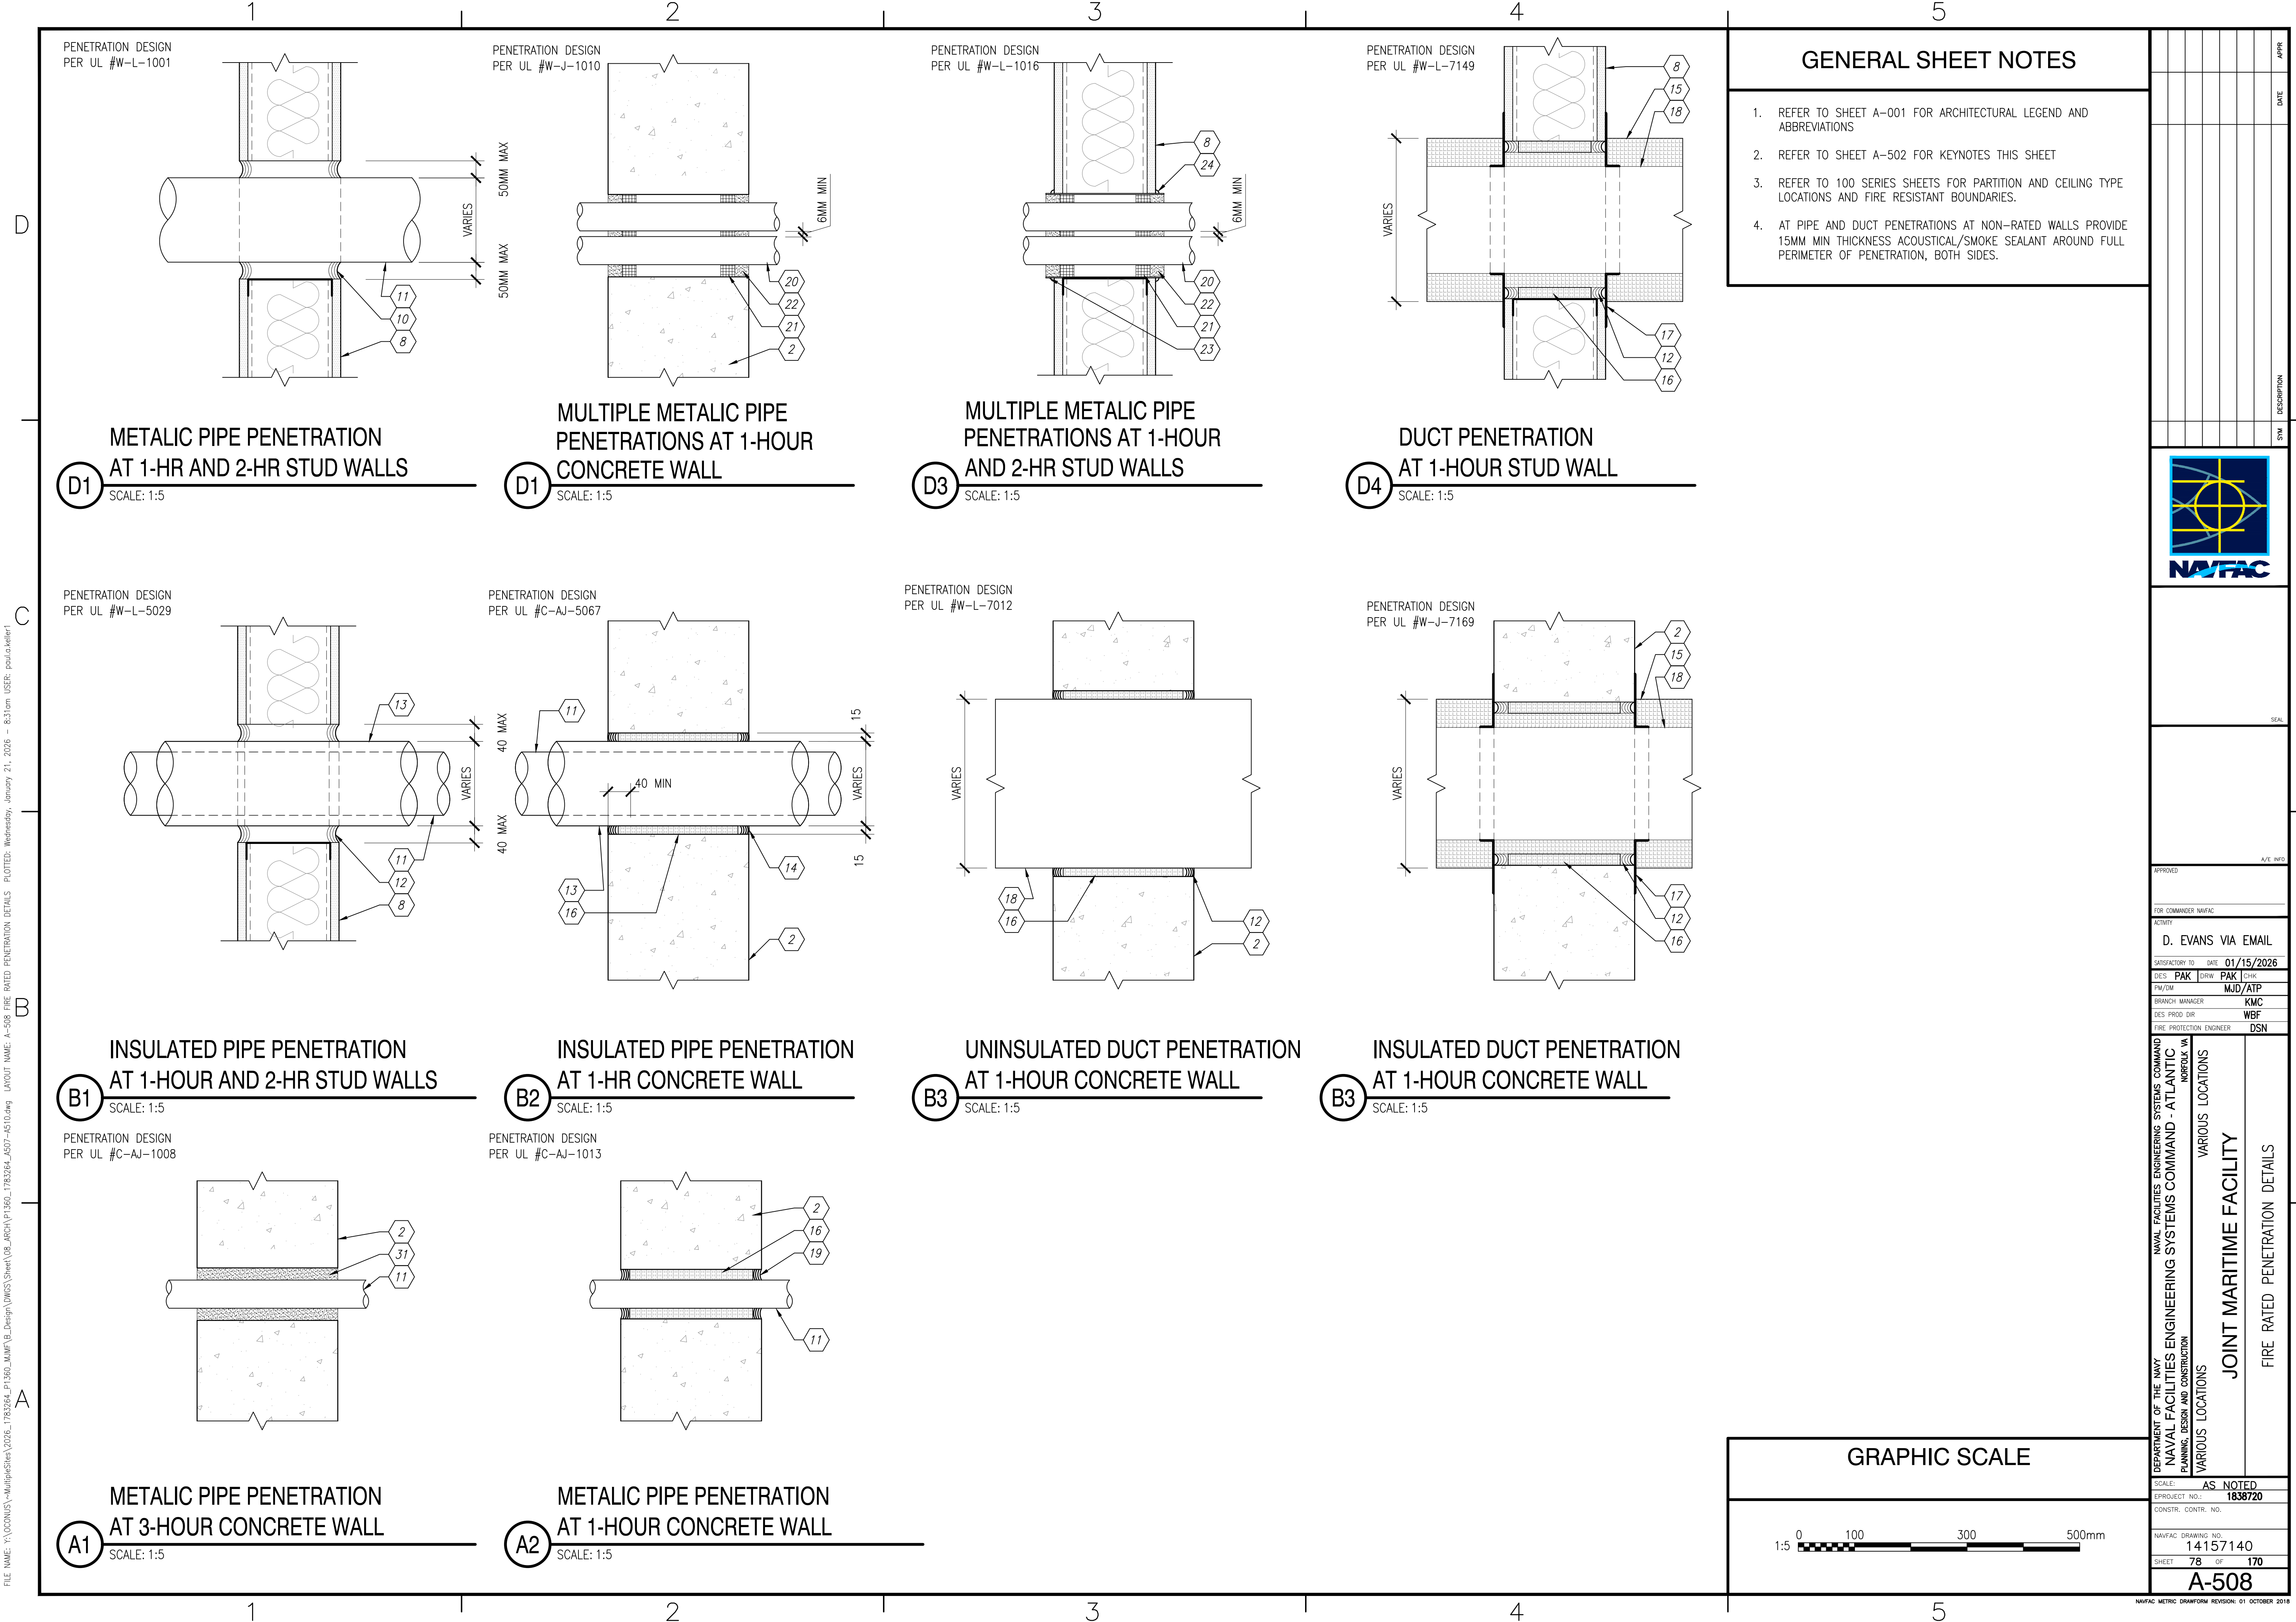

APPROVED
FOR COMMANDER NAVFAC
ACTIVITY
D. EVANS VIA EMAIL
SATISFACTORY TO DATE 01/15/2026
DES PAK DRW PAK
PM/DM MJD/ATP
BRANCH MANAGER KMC
DES PROD DIR WBF
FIRE PROTECTION ENGINEER DSN

DEPARTMENT OF THE NAVY
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - ATLANTIC
PLANNING, DESIGN AND CONSTRUCTION
VARIOUS LOCATIONS
VARIOUS LOCATIONS
JOINT MARITIME FACILITY
FIRE RATED PENETRATION DETAILS


SCALE: AS NOTED
APPROVED NO.: 1838720
CONSTR. CONTR. NO.
NAVFAC DRAWING NO. 14157140
SHEET 78 OF 170
A-508

GRAPHIC SCALE




FILE NAME: Y:\CONUS\MultipleSites\2024_1783264_P1360_JAMFAB_Design\DWG\Sheet\08_ARCH\PT1360_1783264_0507-A510.dwg LAYOUT NAME: A-508 FIRE RATED PENETRATION DETAILS PLOTTED: Wednesday, January 21, 2026 - 8:31am USER: paul.keller1


FILE NAME: Y:\CONUS\MultipleSheets\2026_1783264_P1360_IAMFB_Design\DWG\Sheet\08_ARCH\PT1360_1783264_0507-A510.dwg LAYOUT NAME: A-509 FIRE RATED PARTITION DETAILS PLOTTED: Wednesday, January 21, 2026 - 8:31am USER: paulakeller1

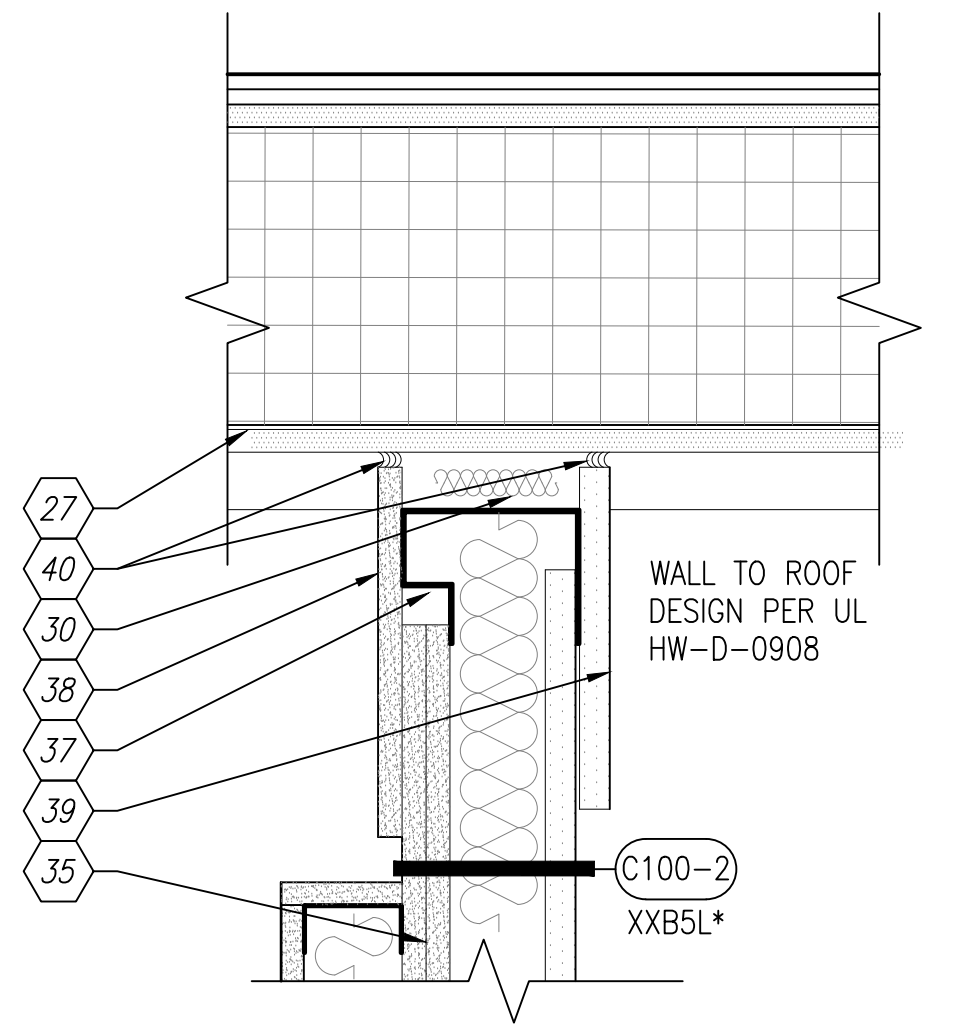


B1 3-HR CONCRETE CAP TO TO 1-HR SHAFTWALL
SCALE: 1:5 A-307

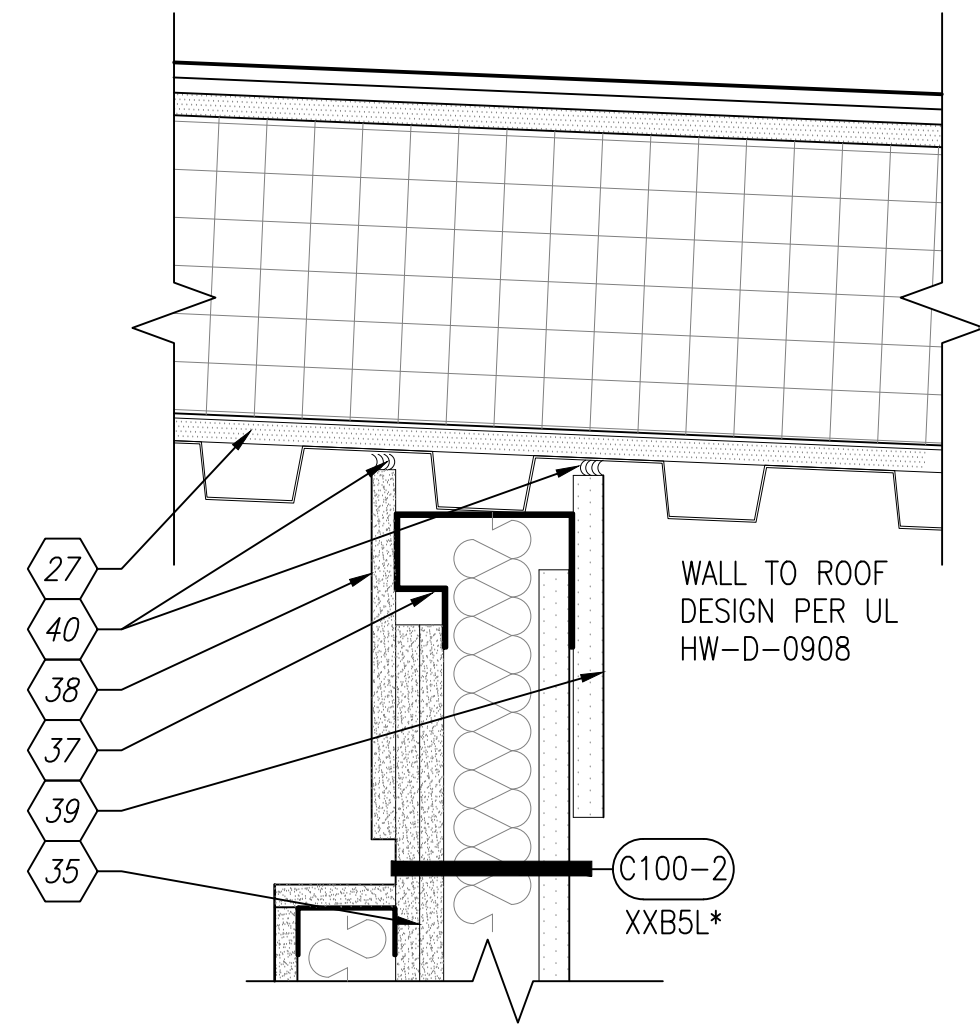


B2 3-HR CONCRETE CAP TO TO 1-HR SHAFTWALL
SCALE: 1:5 A-506

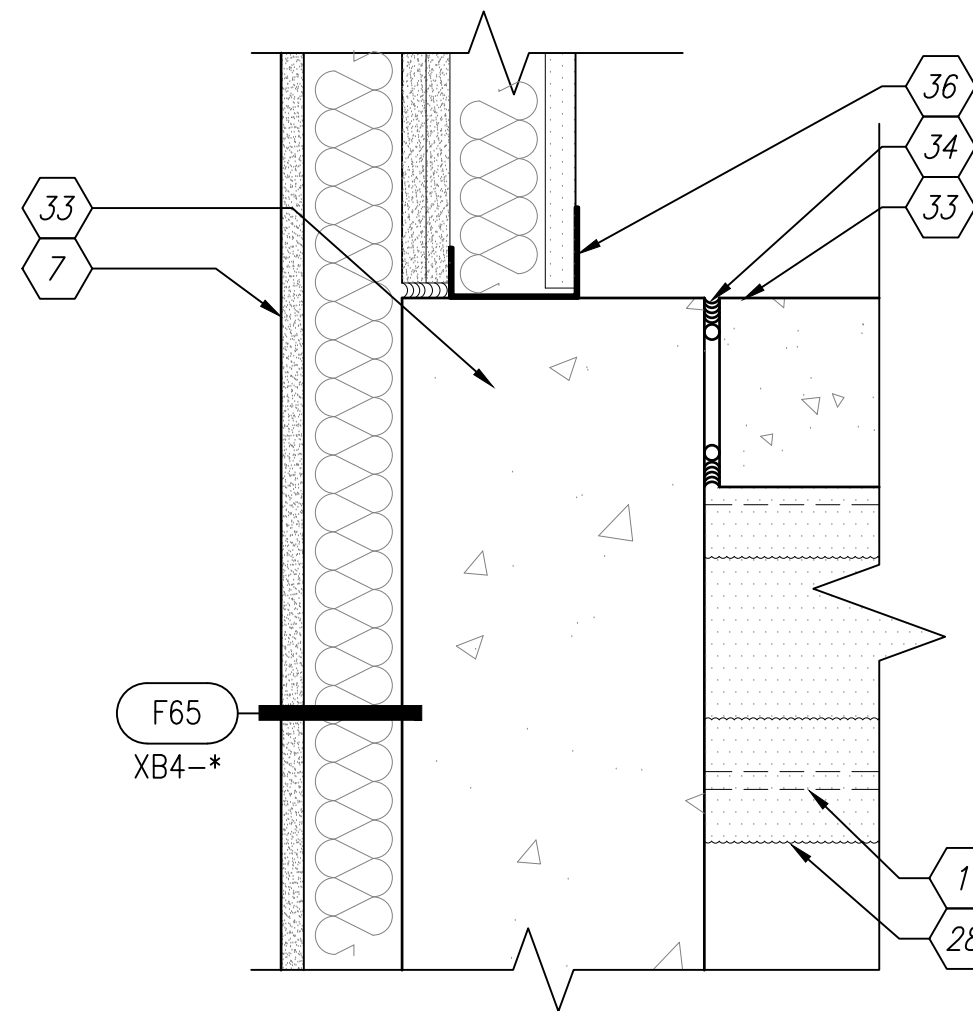


B3 3-HR CONCRETE CAP DETAIL
SCALE: 1:5 A-307

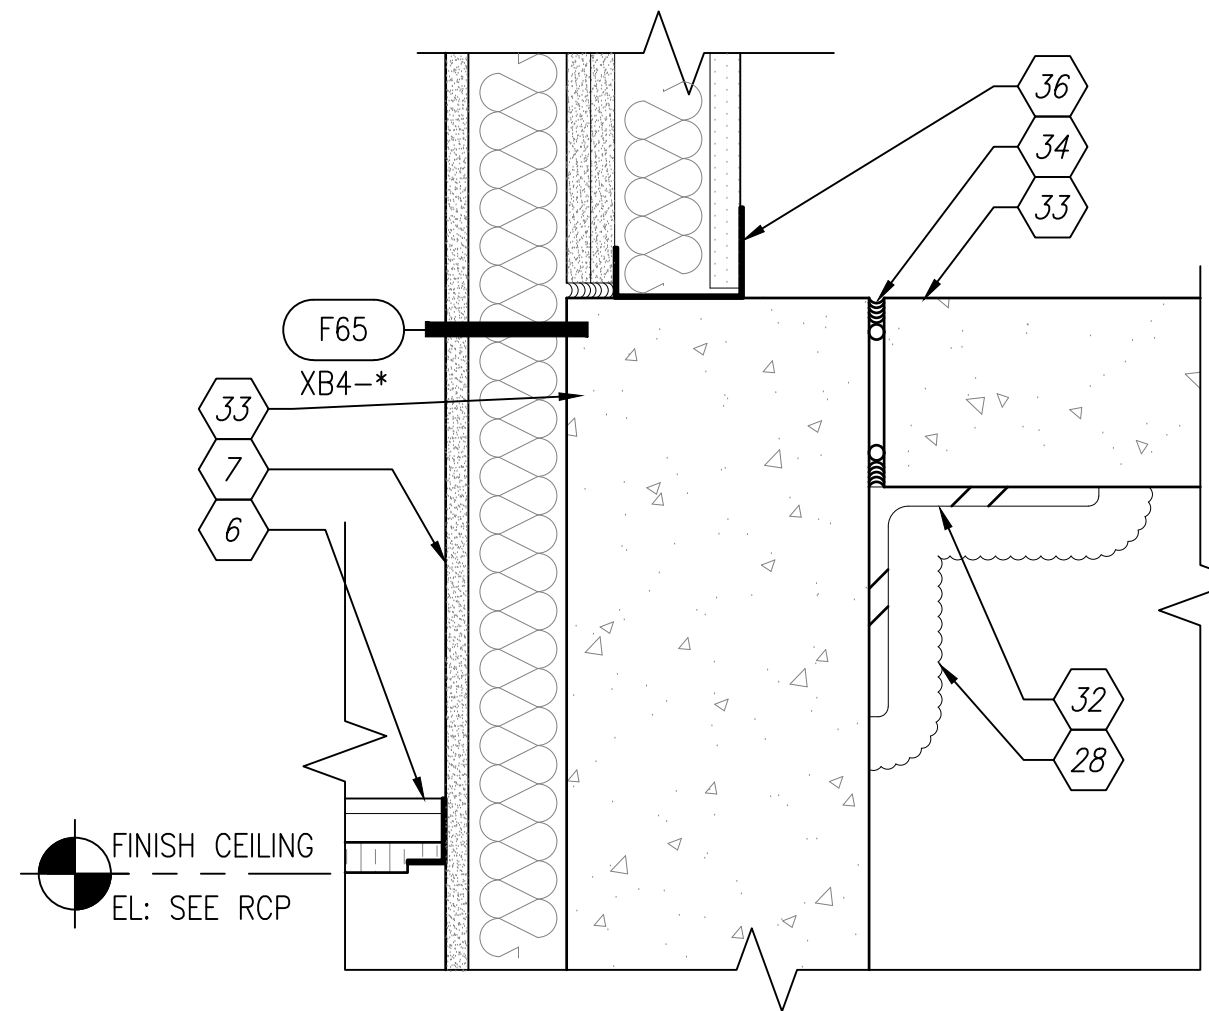


B4 FIRE RATED JOINT IN FIRE RATED PRECAST WALLS AND CEILINGS
SCALE: 1:5 A-307

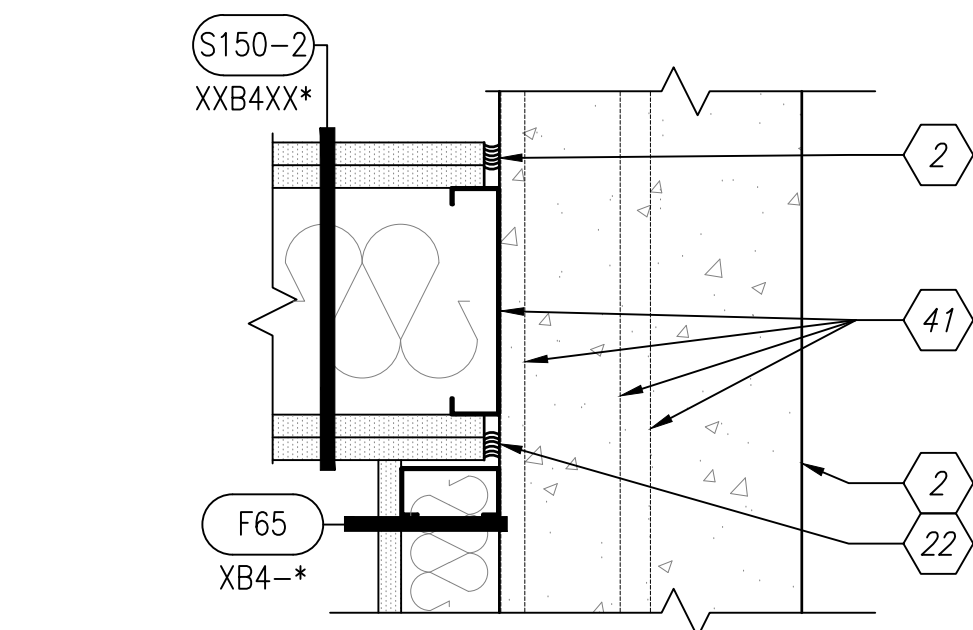


A1 3-HOUR WALL TO 2-HR WALL INTERSECTION
SCALE: 1:5 A-105

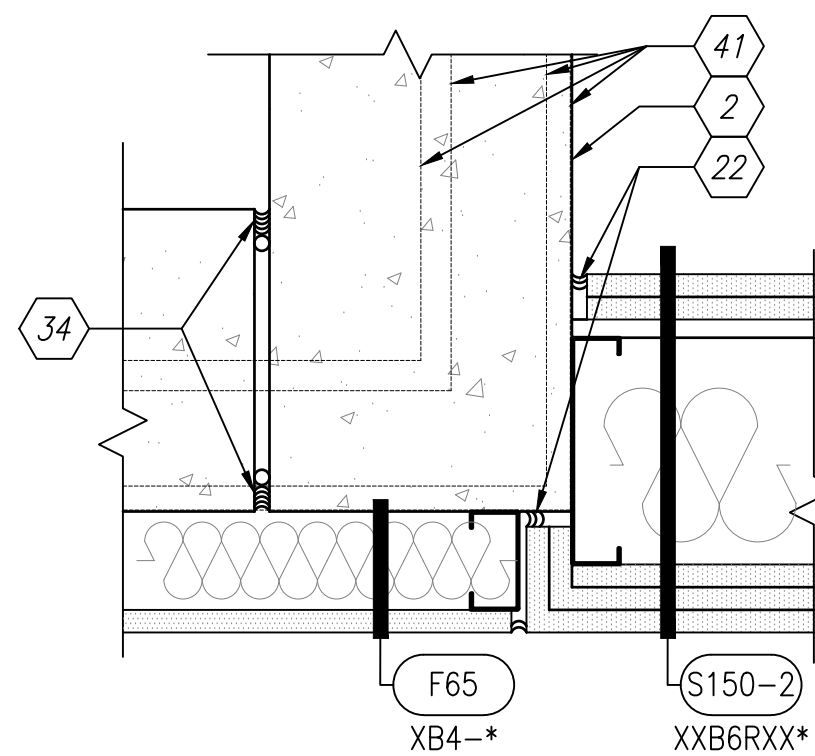


A2 3-HOUR WALL TO 1-HR WALL INTERSECTION
SCALE: 1:5 A-105

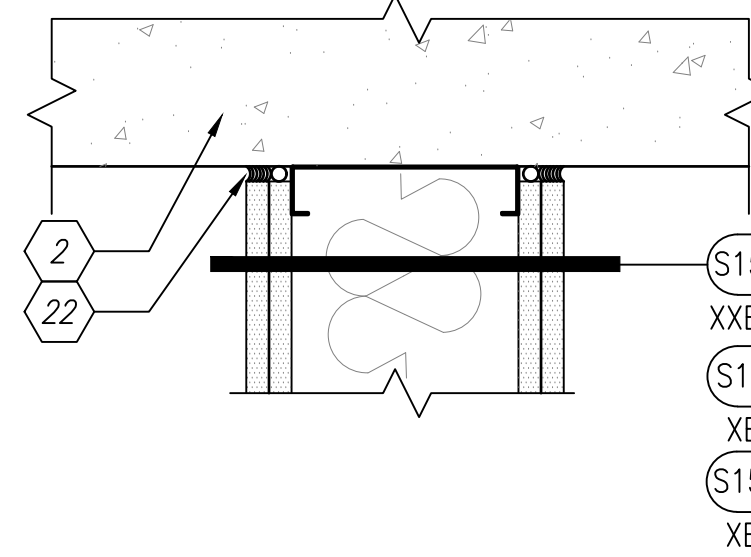


A3 RATED WALL TO EXTERIOR WALL INTERSECTION
SCALE: 1:5 A-105

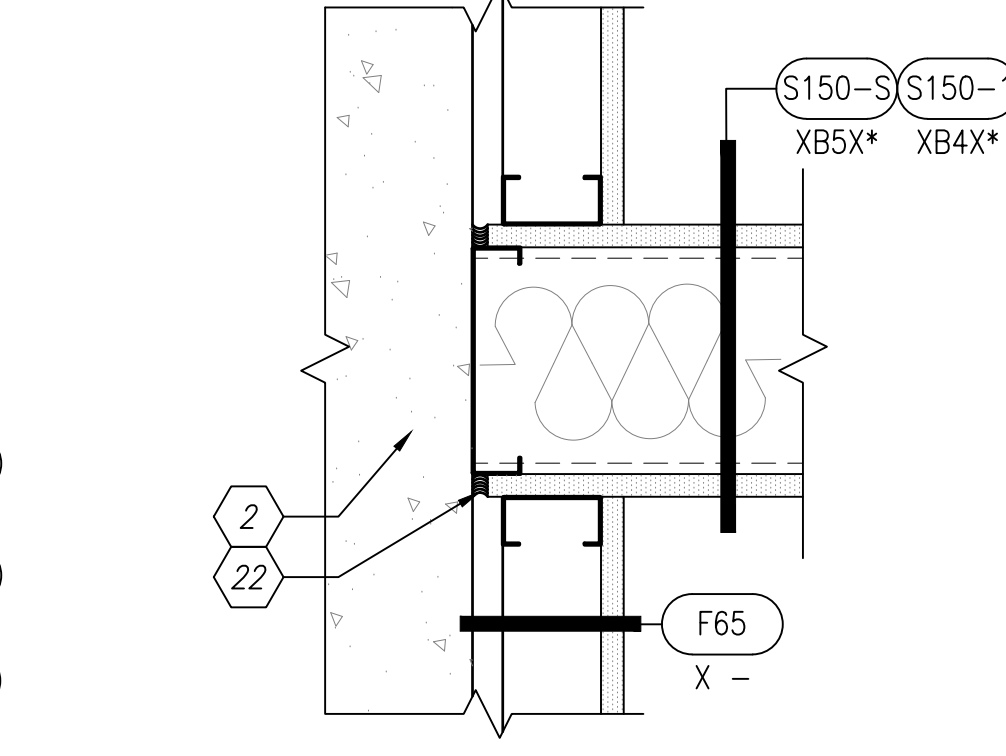


A4 1HR/SMOKE PARTITION TO EXTERIOR WALL INTERSECTION
SCALE: 1:5 A-405

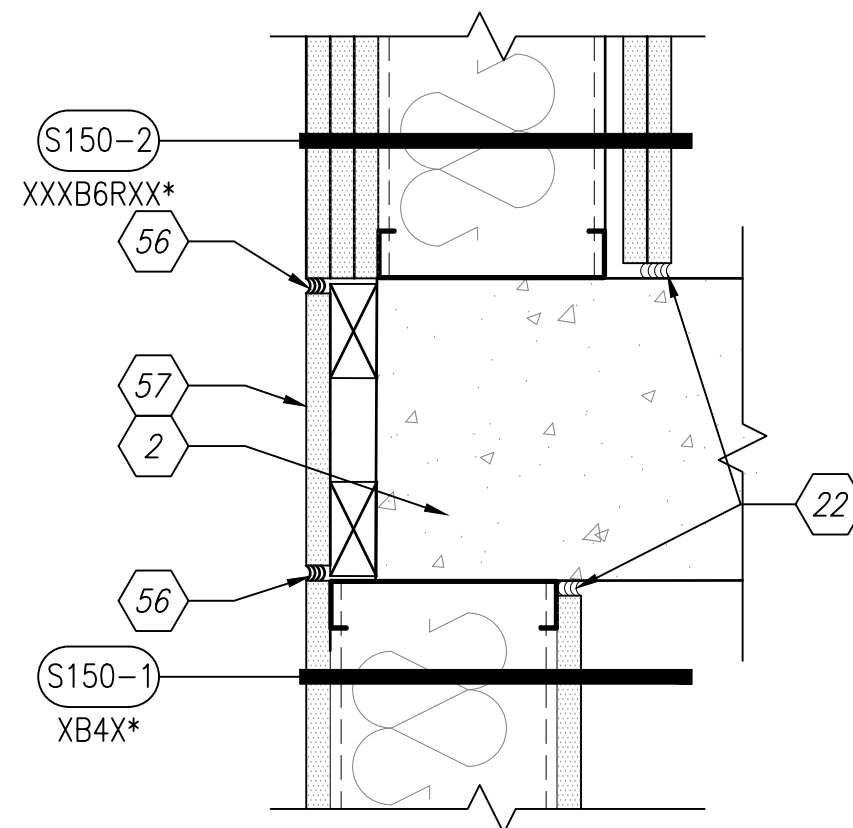


C4 FIRE RATED WALL INTERSECTION JOINT
SCALE: 1:5

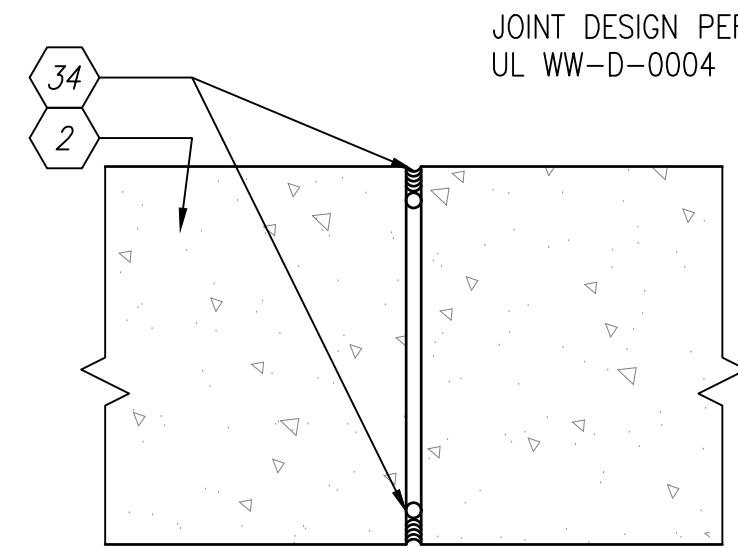


C5 2HR TO NON RATEDWALL INTERSECTION
SCALE: 1:5 A-105

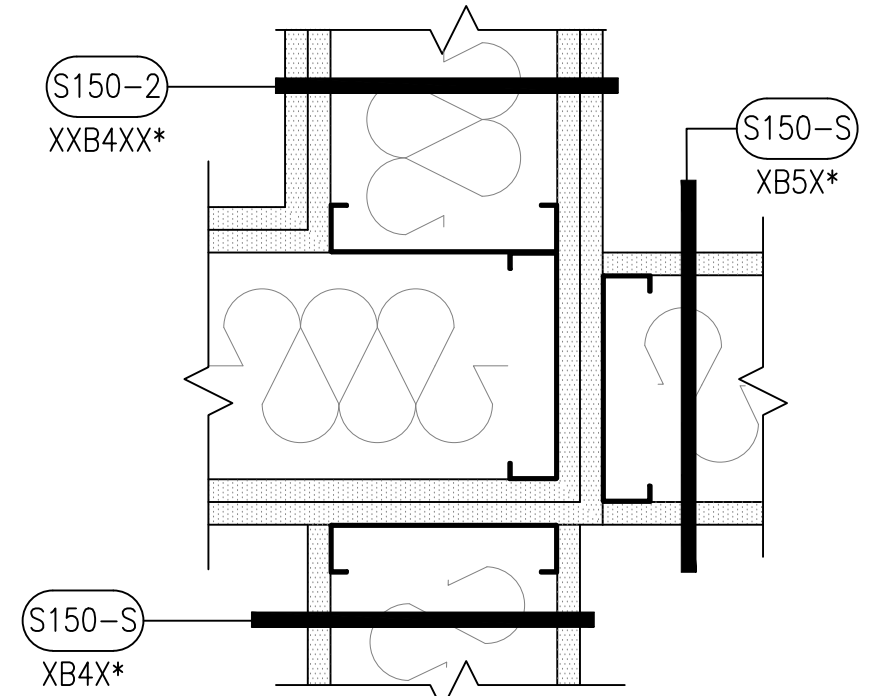

B5 1-HR SHAFTWALL TO EXTERIOR WALL
SCALE: 1:5 A-405

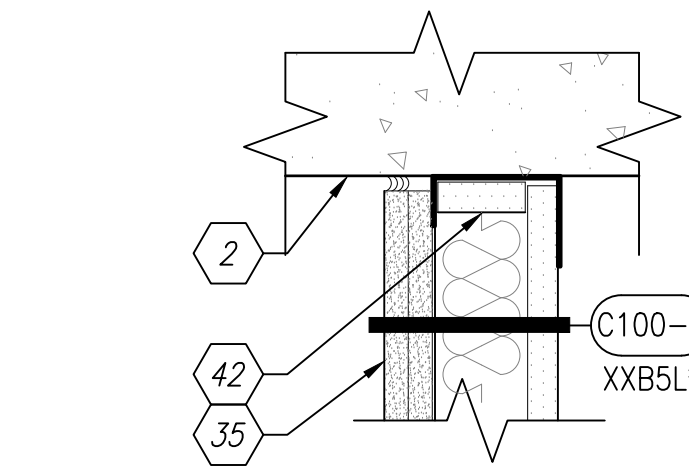


A5 2HR TO NON RATEDWALL INTERSECTION
SCALE: 1:5 A-105

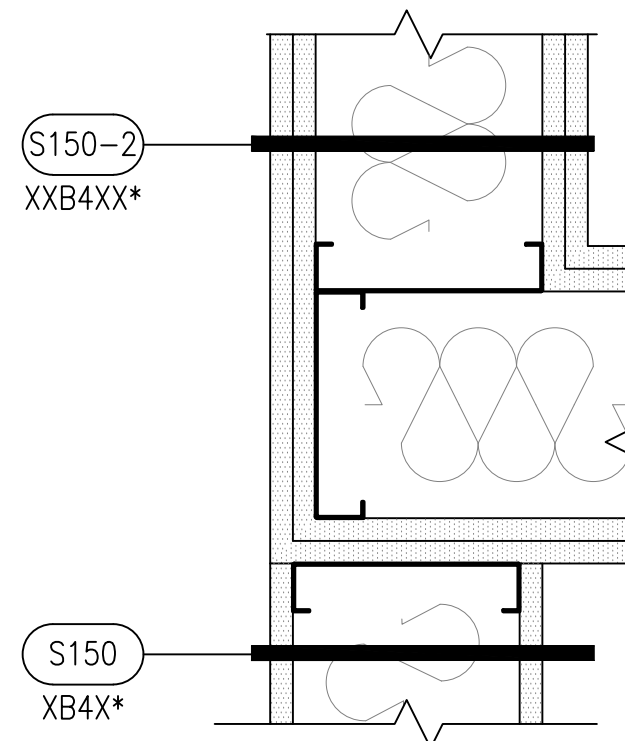

A5 2HR TO NON RATEDWALL INTERSECTION
SCALE: 1:5 A-105

GENERAL SHEET NOTES


1. REFER TO SHEET A-001 FOR ARCHITECTURAL LEGEND AND ABBREVIATIONS
2. REFER TO SHEET A-502 FOR KEYNOTES THIS SHEET
3. REFER TO 100 SERIES SHEETS FOR PARTITION AND CEILING TYPE LOCATIONS AND FIRE RESISTANT BOUNDARIES.
4. REFER TO A-605 FOR PARTITION TYPES.



APPROVED
FOR COMMANDER NAVFAC
ACTIVITY
D. EVANS VIA EMAIL
SATISFACTORY TO DATE 01/15/2026
DES PAK DRW PAK
PW/DM MJD/ATP
BRANCH MANAGER KMC
DES PROD DIR WBF
FIRE PROTECTION ENGINEER DSN

DEPARTMENT OF THE NAVY
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - ATLANTIC
PLANNING, DESIGN AND CONSTRUCTION
VARIOUS LOCATIONS
VARIOUS LOCATIONS
JOINT MARITIME FACILITY
FIRE RATED PARTITION DETAILS


SCALE: AS NOTED
APPROVED NO. 1838720
CONSTR. CONTR. NO.
NAVFAC DRAWING NO. 14157141
SHEET 79 OF 170
A-509

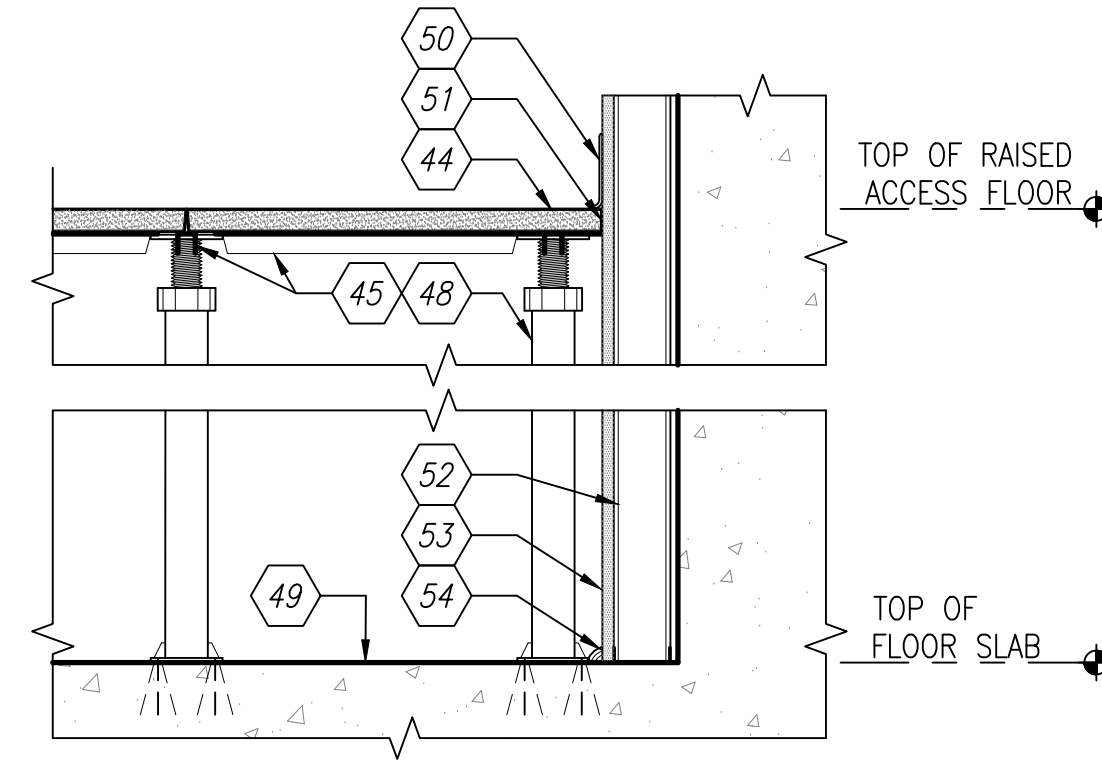

D2 ACCESS FLOOR AT CONCRETE WALL
SCALE: 1:10 A-306



1. REFER TO SHEET A-001 FOR ARCHITECTURAL LEGEND AND ABBREVIATIONS
2. REFER TO SHEET A-502 FOR KEYNOTES THIS SHEET
3. REFER TO 100 SERIES SHEETS FOR PARTITION AND CEILING TYPE LOCATIONS AND FIRE RESISTANT BOUNDARIES.
4. REFER TO A-605 FOR PARTITION TYPES.

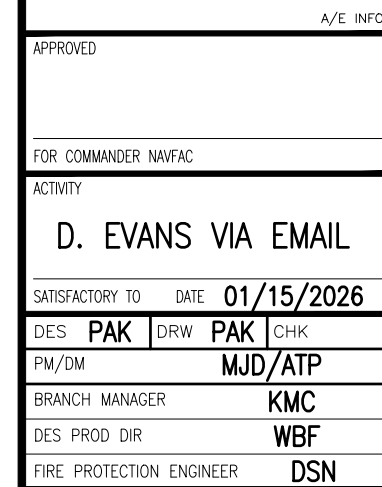[illegible]

DEPARTMENT OF THE NAVY NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - ATLANTIC PLANNING, DESIGN AND CONSTRUCTION	NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - ATLANTIC PLANNING, DESIGN AND CONSTRUCTION	NORFOLK VA
VARIOUS LOCATIONS		
VARIOUS LOCATIONS		
JOINT MARITIME FACILITY		
RAISED ACCESS FLOOR DETAILS		


SCALE:	AS NOTED	
EPROJECT NO.:	1838720	
CONSTR. CONTR. NO.		
NAVFAC DRAWING NO.	14157142	
SHEET	80	OF 170
A-510		




A

FILE NAME: Y:\OCONUS\MultipleSheet\2026_1783264_P1360_IAMF\B_Design\DWGS\Sheet\08_ARCH\PT1360_1783264_4606.dwg LAYOUT NAME: A-606 DOOR AND WINDOW SCHEDULES AND TYPES PLOTTED: Wednesday, January 21, 2026 - 8:31am USER: paul.akeel1

DOOR SCHEDULE																	
DOOR							FRAME						FIRE RATING (MIN.)	HARDWARE		NOTES	MARK
MARK	SIZE			MATL	DOOR TYPE	GLZ	MATL	FRAME TYPE	GLZ	DETAILS							
	W	HT	THK							HEAD	JAMB	THRESHOLD					
100A	965	2150	45	HM	D1	--	ALUM	F1	--	D1/A-607	A1/A-607	C1/A-607	--	1.0	--	2, 3, 6	100A
100B	965	2150	45	HM	D1	--	HM	F1	--	A3/A-607	A3/A-607		120	6.0	100		100B
100C	965	2150	45	HM	D1	--	HM	F1	--	A4/A-607	A4/A-607		120	8.0	100	1, 3	100C
102	965	2150	45	HM	D1	--	HM	F1	--	D1/A-607	A1/A-607	C1/A-607	--	1.1	--	6	102
103	965	2150	45	HM	D1	--	HM	F1	--	A3/A-607	A3/A-607		--	4.0	--	4	103
104	965	2150	45	HM	D1	--	HM	F1	--	A3/A-607	A3/A-607		--	4.0	--	4	104
105	965	2150	45	HM	D1	--	HM	F1	--	A3/A-607	A3/A-607		--	5.0	--	4	105
106	915	2150	45	HM	D1	--	HM	F1	--	A3/A-607	A3/A-607		S	3.0	--	4	106
107	965	2150	45	HM	D1	--	HM	F1	--	A3/A-607	A3/A-607		S	4.1	--	5	107
108	965	2150	45	HM	D1	--	HM	F1	--	A3/A-607	A3/A-607		S	4.1	--	5	108
109A	2400	2450	45	HM	D2	--	HM	F2	--	D2/A-607	A2/A-607	C1/A-607	--	2.1	109	1, 2, 3, 6	109A
109B	915	2150	45	HM	D1	--	HM	F1	--	A3/A-607	A3/A-607		S	6.1	101		109B
109C	2400	2450	45	HM	D2	--	HM	F2	--	D4/A-607	D4/A-607	B4/A-607	60	7.0	--	3	109C
110	915	2450	45	HM	D1	--	HM	F1	--	A3/A-607	A3/A-607		S	3.4	--		110
111A	965	2150	45	HM	D1	--	HM	F1	--	D3/A-607	D3/A-607		--	8.3	111	1, 3	111A
111B	965	2150	45	HM	D1	--	HM	F1	--	D1/A-607	A1/A-607	C1/A-607	--	1.0	--	2, 3, 6	111B
111C	965	2150	45	HM	D1	--	HM	F1	--	D3/A-607	D3/A-607		120	3.6	--		111C
112A	2400	2450	45	HM	D2	--	HM	F2	--	D2/A-607	A2/A-607	C1/A-607	--	2.0	112	2, 3, 6	112A
112B	1200	2150	45	HM	D1	--	HM	F1	--	A3/A-607	A3/A-607		S	3.5	--		112B
113A	2400	2450	45	HM	D2	--	HM	F2	--	D2/A-607	A2/A-607	C1/A-607	120	2.0	113	2, 3, 6	113A
113B	965	2150	45	HM	D1	--	HM	F1	--	A4/A-607	A4/A-607		60	3.1	111		113B
114A	2400	2450	45	HM	D2	--	HM	F2	--	D2/A-607	A2/A-607	C1/A-607	180	2.0	114	2, 3, 6	114A
114B	2400	2450	45	HM	D2	--	HM	F2	--	D2/A-607	A2/A-607	C1/A-607	180	2.0	114	2, 3, 6	114B
115A	915	2150	45	HM	D1	--	HM	F1	--	B5/A-607	B5/A-607		180	3.1	115		115A
115B	1200	2150	45	HM	D1	--	HM	F1	--	A5/A-607	A5/A-607		120	3.3	111	1	115B
116A	1200	2150	45	HM	D1	--	HM	F1	--	D3/A-607	D3/A-607	B3/A-607	60	8.1	101	1, 3	116A
116B	965	2150	45	HM	D1	--	HM	F1	--	D3/A-607	D3/A-607	B3/A-607	60	8.2	--	1, 3	116B
117	1200	2450	45	HM	D1	--	HM	F1	--	A3/A-607	A3/A-607		60	3.2	117		117
118A	1200	2450	45	HM	D1	--	HM	F1	--	A3/A-607	A3/A-607		60	3.2	118		118A
118B	2400	2450	45	HM	D2	--	HM	F1	--	D2/A-607	A2/A-607	C1/A-607	--	2.0	118	2, 3, 6	118B
119	1200	2450	45	HM	D1	--	HM	F1	--	A3/A-607	A3/A-607		60	3.2	119		119

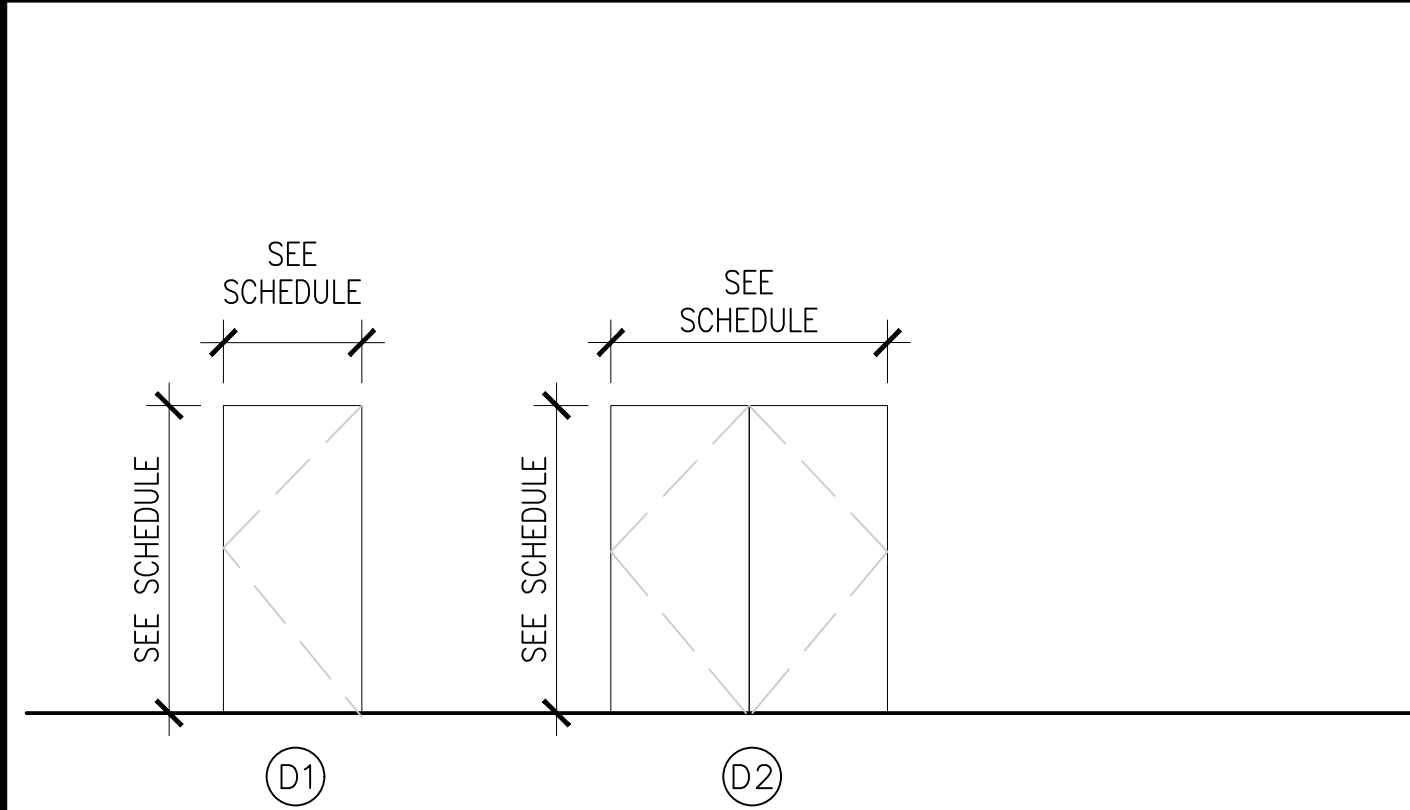


B1 DOOR TYPES
SCALE: 1:50
A-606

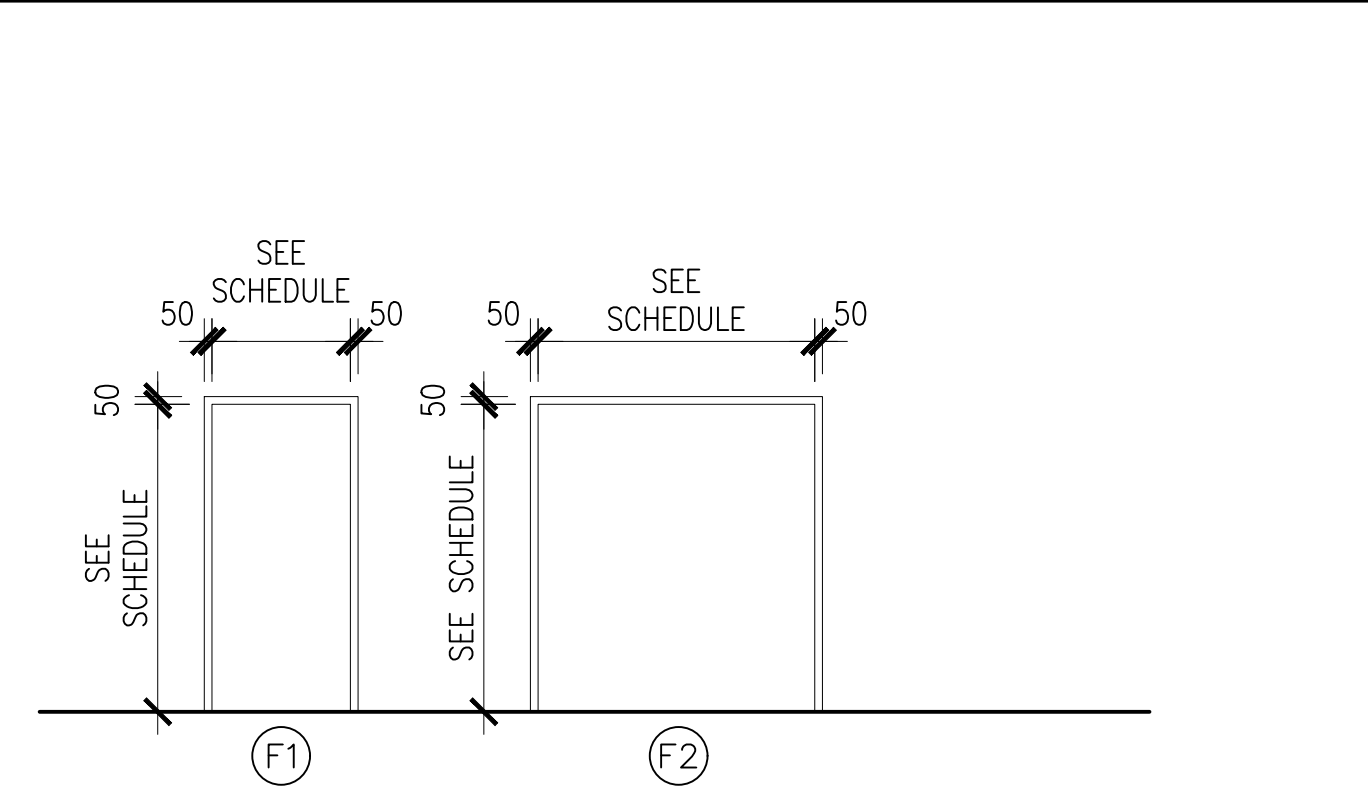

B2 DOOR TYPES
SCALE: 1:50
A-606

LOUVER SCHEDULE		
MARK ON DWGS	DESCRIPTION	BOTTOM OF LOUVER ROUGH OPENING
L-1	HORIZONTAL BLADES	300 MM AFF
L-2	HORIZONTAL BLADES	300 MM AFF
L-3	HORIZONTAL BLADES	3060 MM AFF
L-4	HORIZONTAL BLADES	3200 MM AFF
L-5	HORIZONTAL BLADES	2180 MM AFF
L-6	HORIZONTAL BLADES	2380 MM AFF
L-6	HORIZONTAL BLADES	3340 MM AFF

GLAZING SCHEDULE	
MARK ON DWGS	DESCRIPTION
GL1	LAMINATED AND INSULATED GLAZING

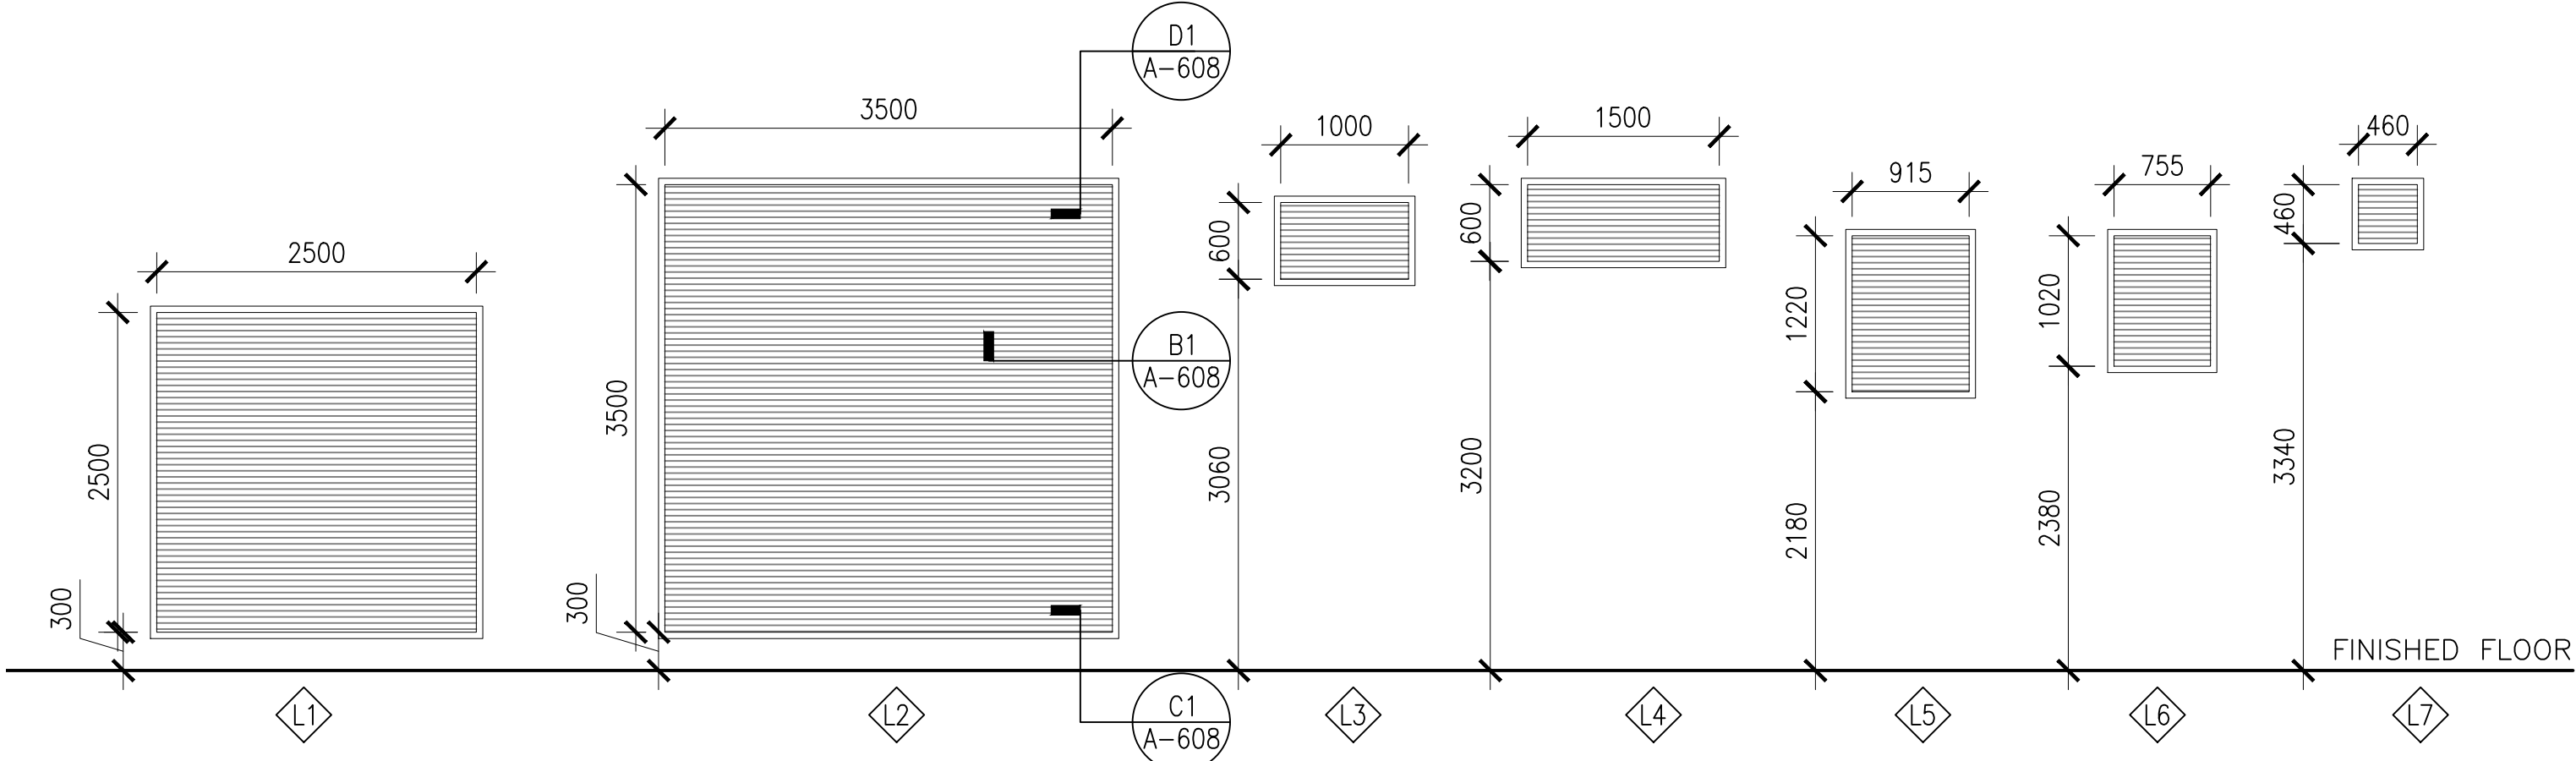

A2 LOUVER TYPES
SCALE: 1:50
A-606

GENERAL DOOR NOTES	
1	PROVIDE INSULATION WITHIN EXTERIOR DOOR ASSEMBLIES.
2	REFER TO FINISH SCHEDULE FOR DOOR AND FRAME FINISHES.
3	REFER TO UFGS 08 71 00 DOOR HARDWARE FOR DOOR HARDWARE SET SCHEDULE.
4	PROVIDE DOOR HARDWARE TO MEET REQUIRED DOOR RATING
5	STC 45 DOOR/FRAME ASSEMBLIES IN STUD WALLS REQUIRE STRUCTURAL STEEL REINFORCEMENT HIDDEN ENTIRELY WITHIN WALL. REFER TO DOOR DETAILS AND STRUCTURAL DRAWINGS.
DOOR SCHEDULE NOTES	
1	PROVIDE STC 45 ACOUSTICAL DOOR ASSEMBLY – REFER TO 08 34 73 SOUND CONTROL DOOR ASSEMBLIES FOR ADDITIONAL INFORMATION.
2	DOOR FRAME DEPTH: MIN 200MM
3	PREP DOOR AND DOOR FRAME FOR ACCESS CONTROL SYSTEM – SEE ELECTRONIC SECURITY SYSTEM DRAWINGS.
4	REFER TO INTERIOR DRAWINGS FOR FLOOR TRANSITION DETAIL AT SILL
5	PROVIDE STC 35 ACOUSTICAL DOOR ASSEMBLY – REFER TO 08 34 73 SOUND CONTROL DOOR ASSEMBLIES FOR ADDITIONAL INFORMATION.
6	PROVIDE HURRICANE-RESISTANT DOOR ASSEMBLY.
SCHEDULE ABBREVIATIONS	
HM	HOLLOW METAL (PRIMED)
STL	STEEL
WD	WOOD

GRAPHIC SCALE	
1:50	0 1000 3000 5000mm

APPR

DATE

DESCRIPTION

SYN

SEAL

A/E INFO

APPROVED

FOR COMMANDER NAVFAC

ACTIVITY

D. EVANS VIA EMAIL

SATISFACTORY TO DATE 01/15/2026

DES PAK DRW PAK LCHK JHR

PM/DM MJD/ATP

BRANCH MANAGER KMC

DES PROD DIR WBF

FIRE PROTECTION ENGINEER DSN

DEPARTMENT OF THE NAVY
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND
PLANNING, DESIGN AND CONSTRUCTION
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - ATLANTIC
NORFOLK, VA
VARIOUS LOCATIONS
VARIOUS LOCATIONS
JOINT MARITIME FACILITY
DOOR AND WINDOW SCHEDULES AND TYPES

SCALE: AS NOTED

APPROVED NO. 1838720

CONSTR. CONTR. NO.


NAVFAC DRAWING NO. 14157145

SHEET 83 OF 170


A-606

NAVFAC METRIC DRAWFORM REVISION: 01 OCTOBER 2018


FILE NAME: Y:\OCONUS\MultipleSites\2026_1783264_P1360_IAMFB_B_Design\DWG\Sheet\08_ARCH\VP1360_1783264_0607.dwg LAYOUT NAME: A-607 DOOR DETAILS PLOTTED: Wednesday, January 21, 2026 - 8:31am USER: paul.keller1

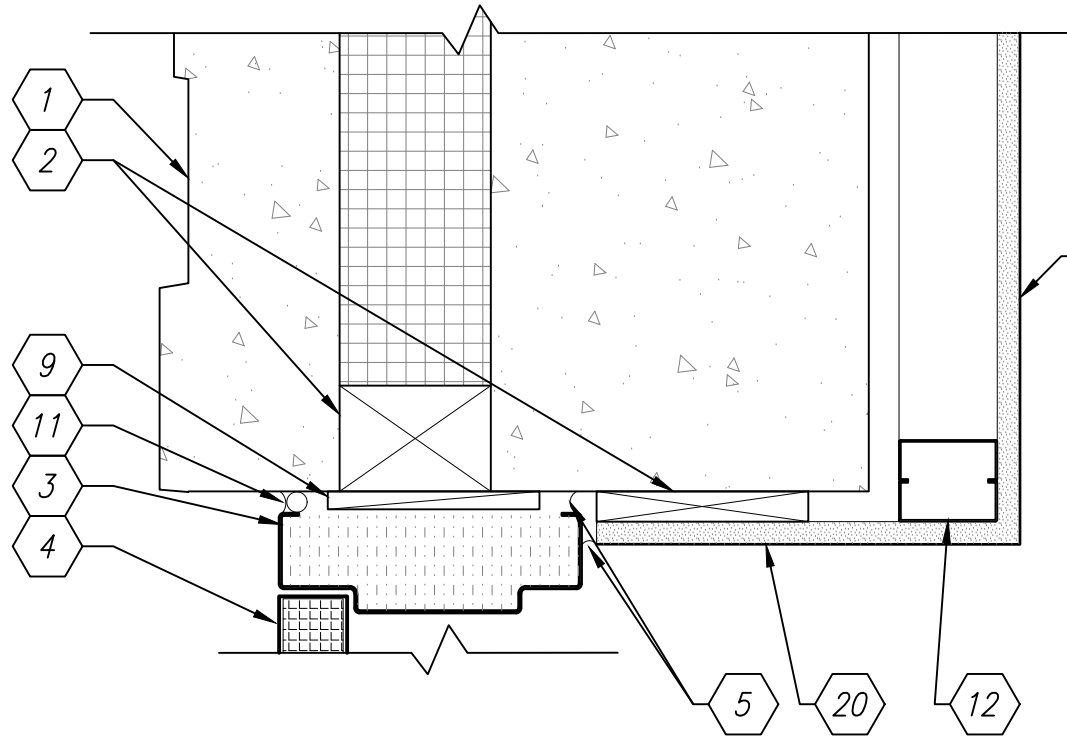


D1 EXTERIOR DOOR DETAIL - HEAD
SCALE: 1:5

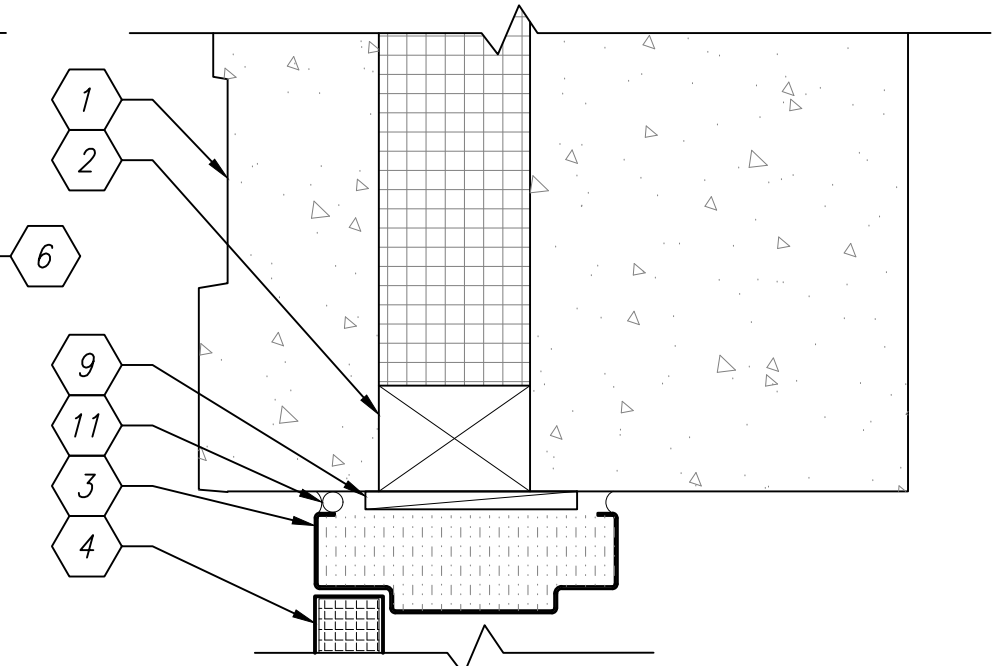


D2 EXTERIOR DOOR DETAIL - HEAD
SCALE: 1:5

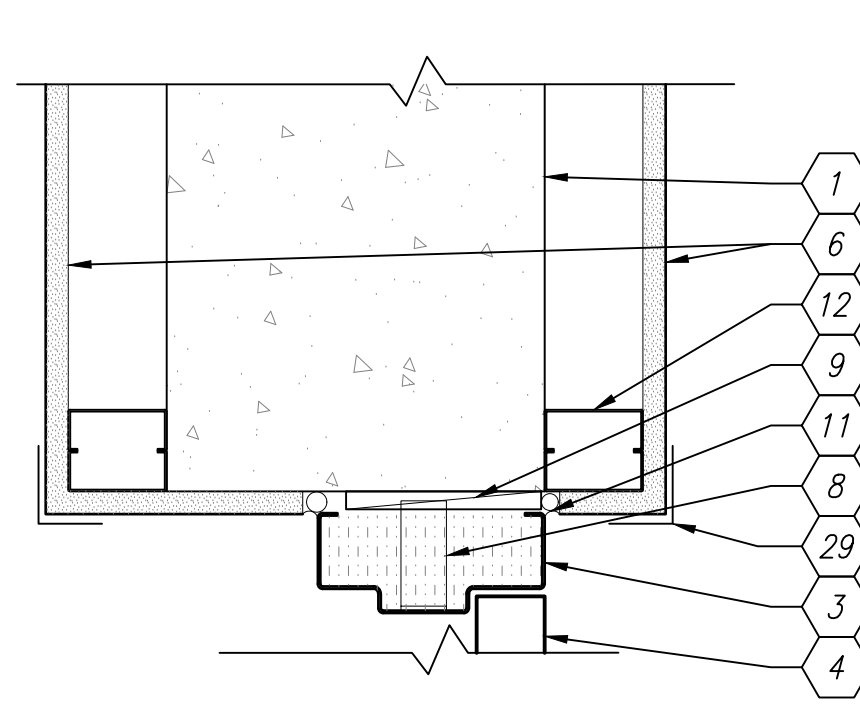


D3 INTERIOR DOOR DETAIL - HEAD/JAMB
SCALE: 1:5

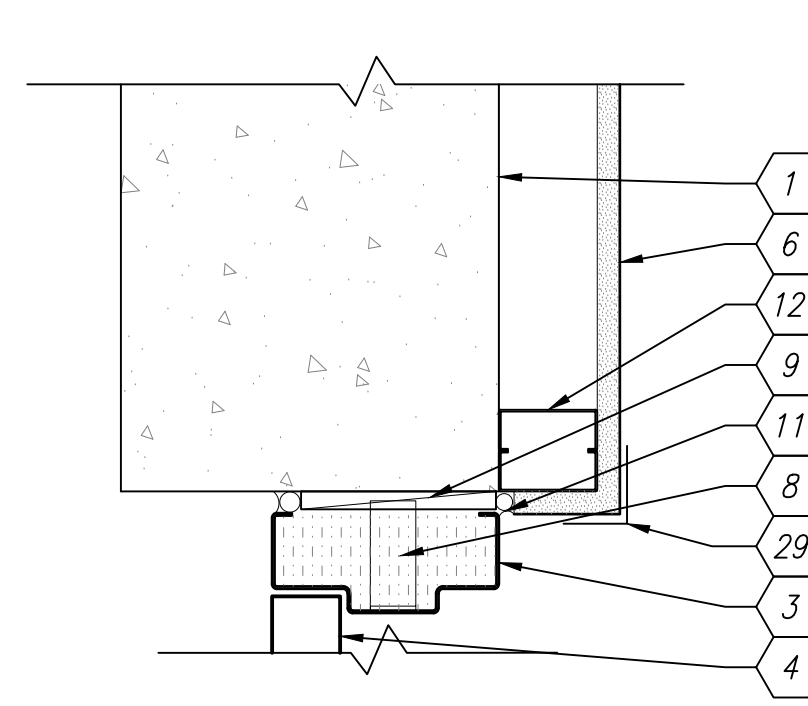


D4 INTERIOR DOOR DETAIL - HEAD/JAMB
SCALE: 1:5

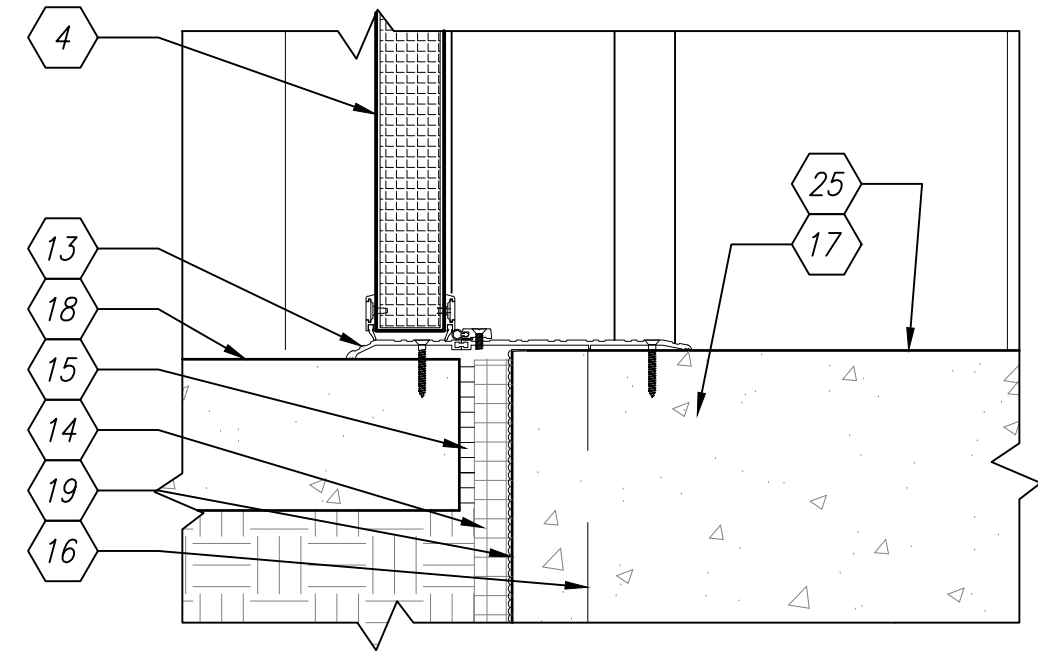


C1 EXTERIOR DOOR DETAIL - SILL
SCALE: 1:5

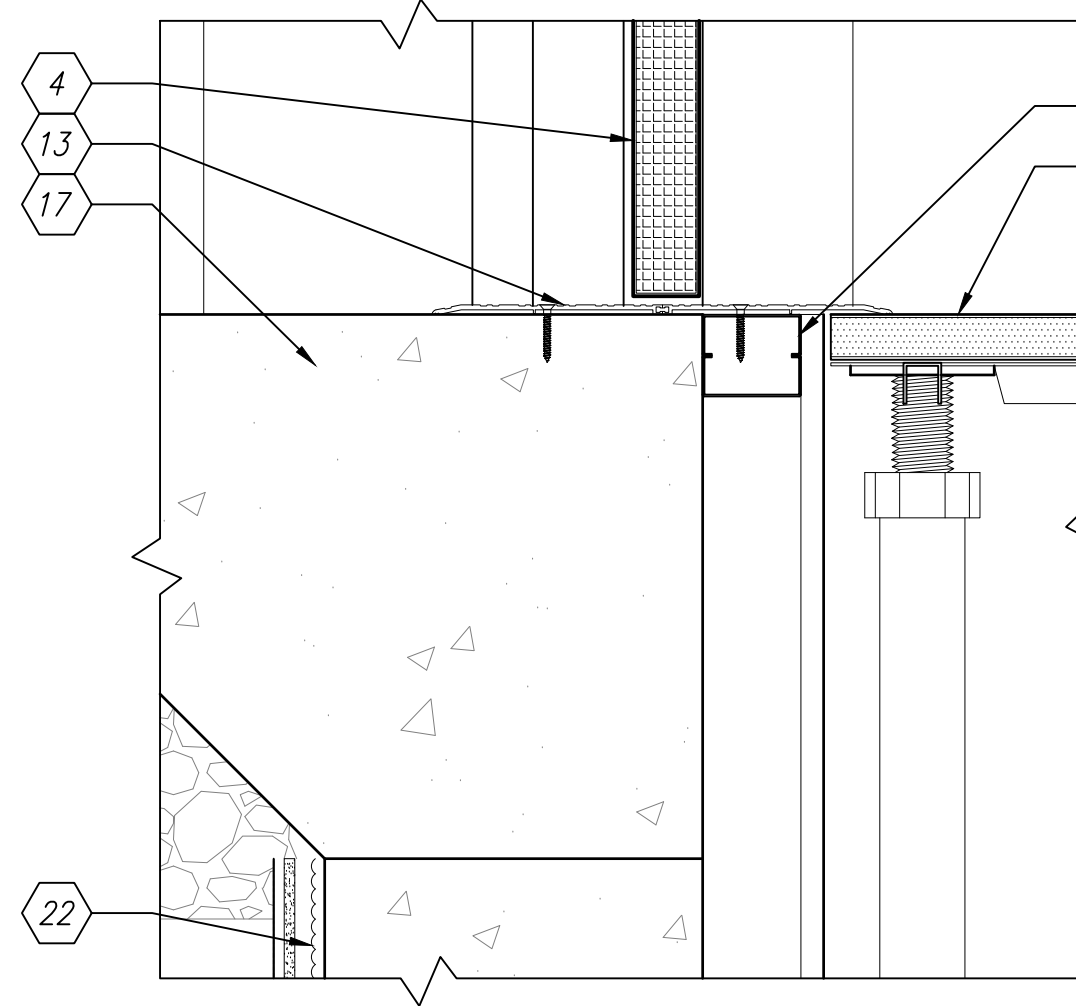


B3 INTERIOR DOOR DETAIL - SILL
SCALE: 1:5

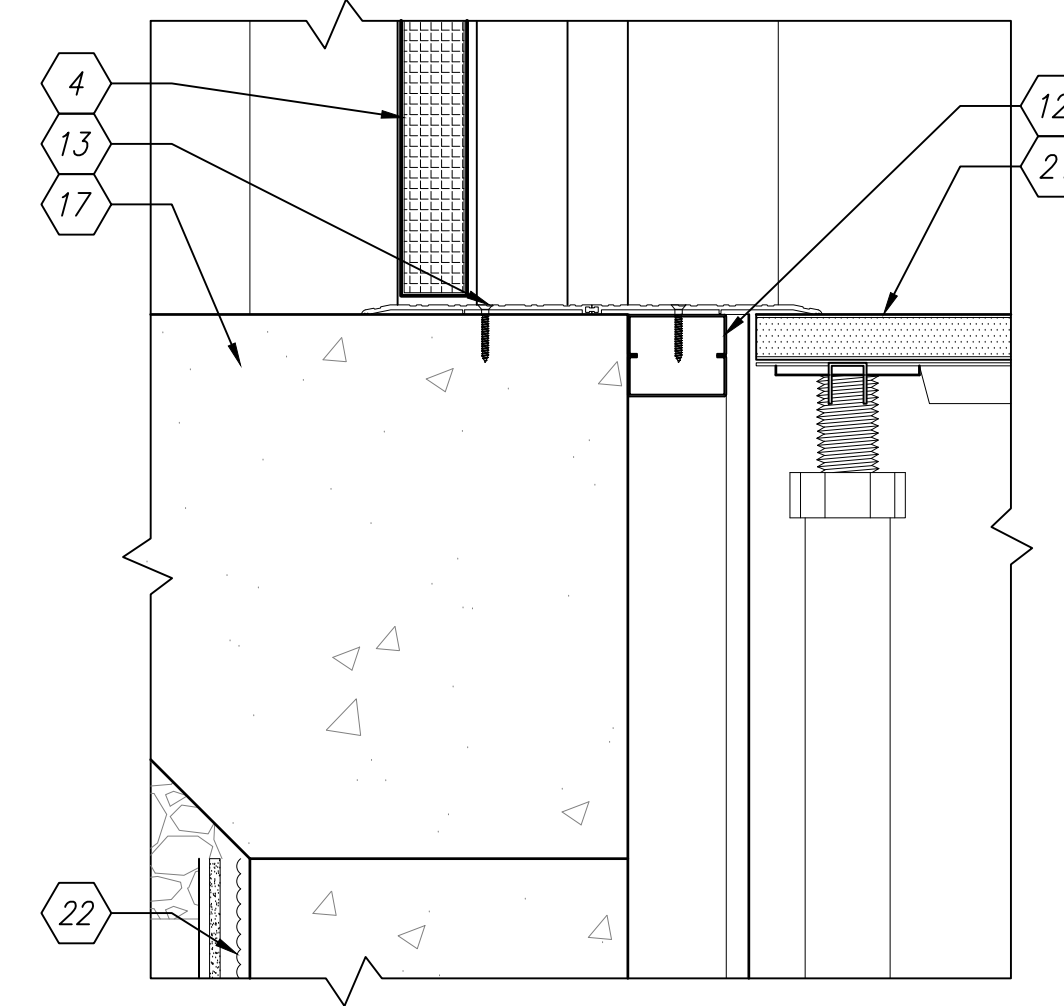


B4 INTERIOR DOOR DETAIL - SILL
SCALE: 1:5

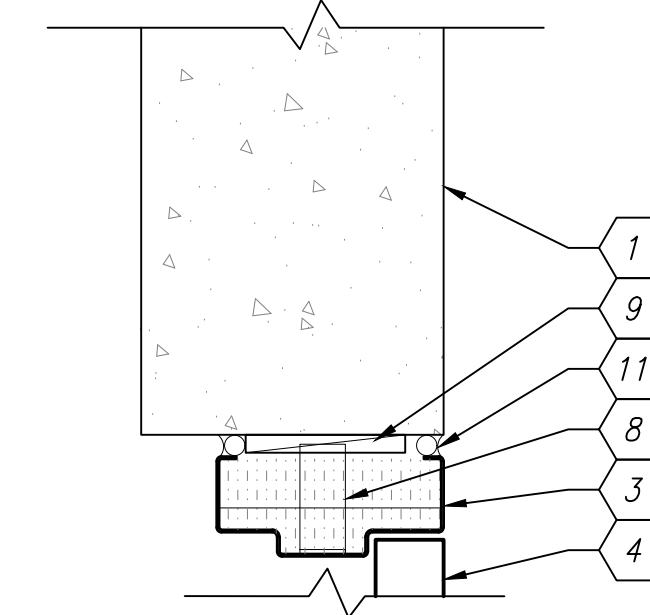


B5 180 MIN INTERIOR DOOR
DETAIL - HEAD/JAMB
SCALE: 1:5

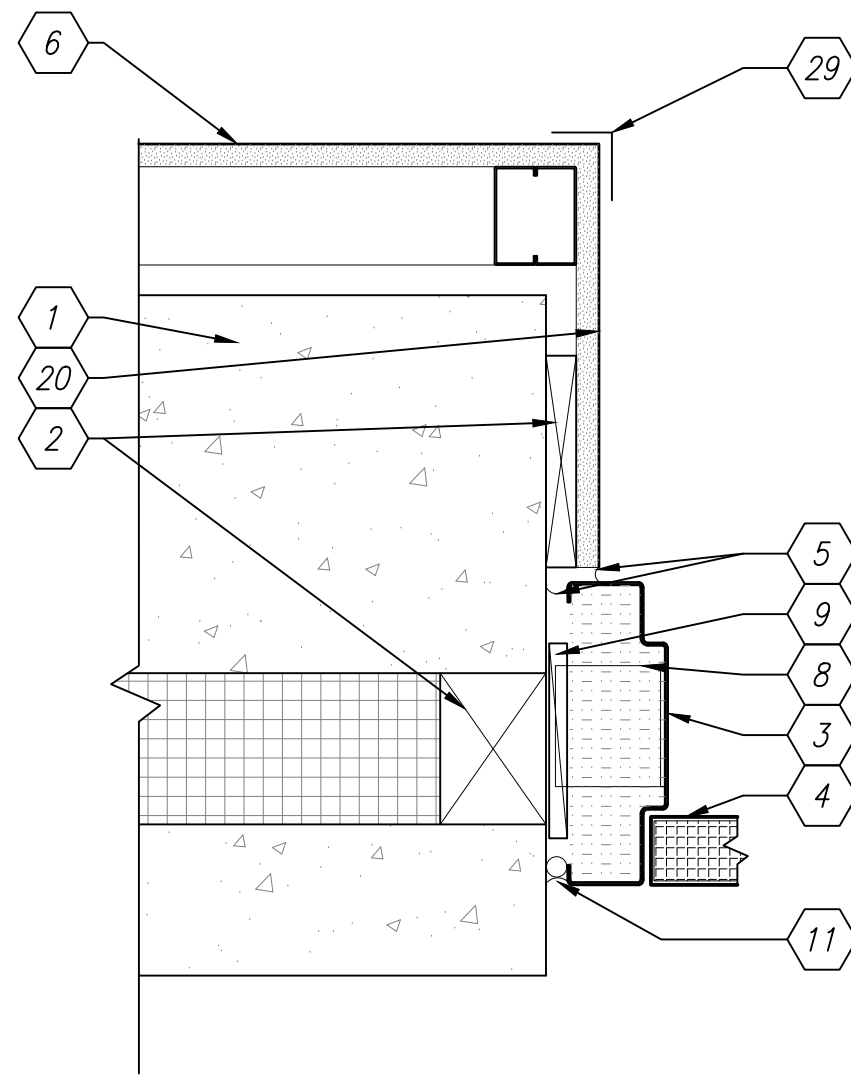


A1 EXTERIOR DOOR DETAIL - JAMB
SCALE: 1:5

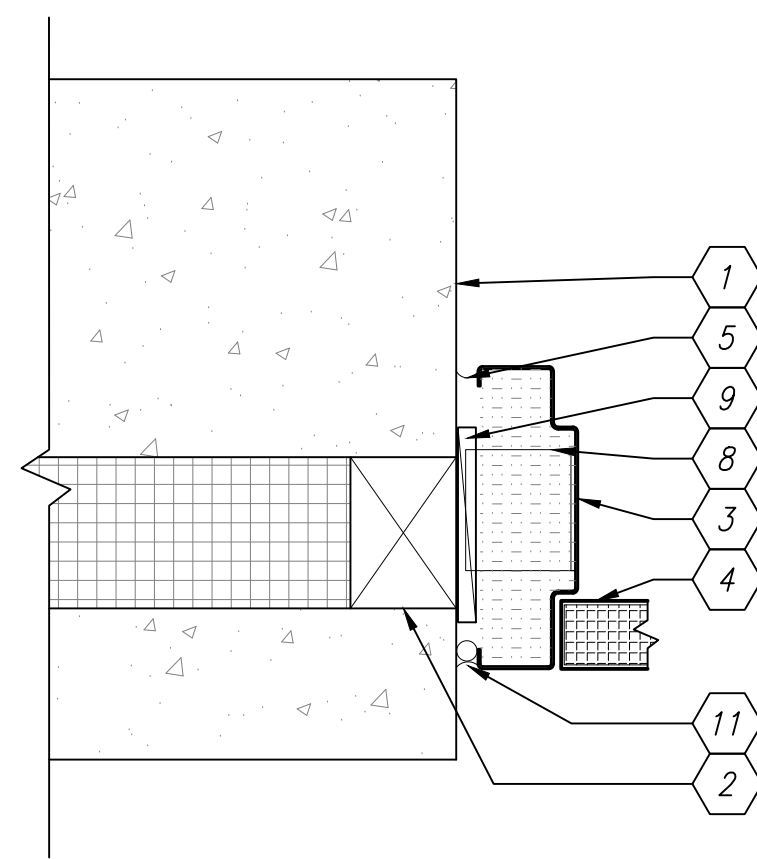


A2 EXTERIOR DOOR DETAIL - JAMB
SCALE: 1:5

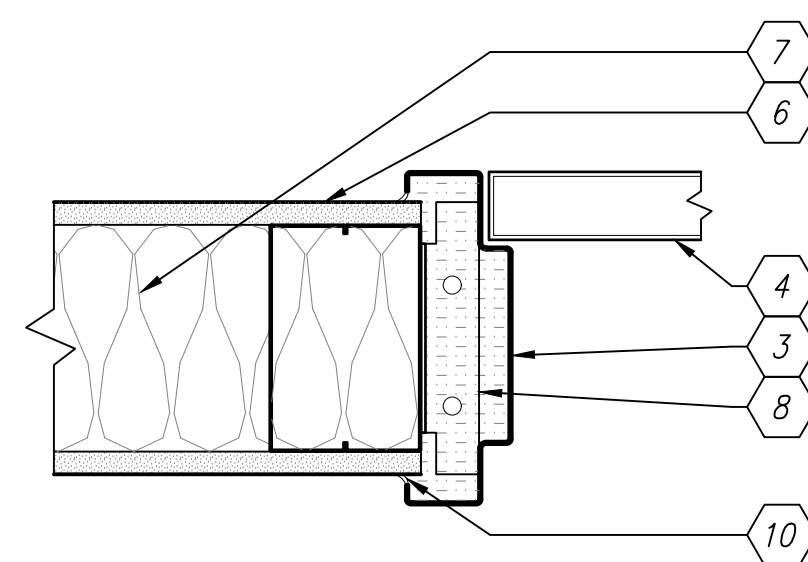


A3 INTERIOR DOOR DETAIL - HEAD/JAMB
SCALE: 1:5

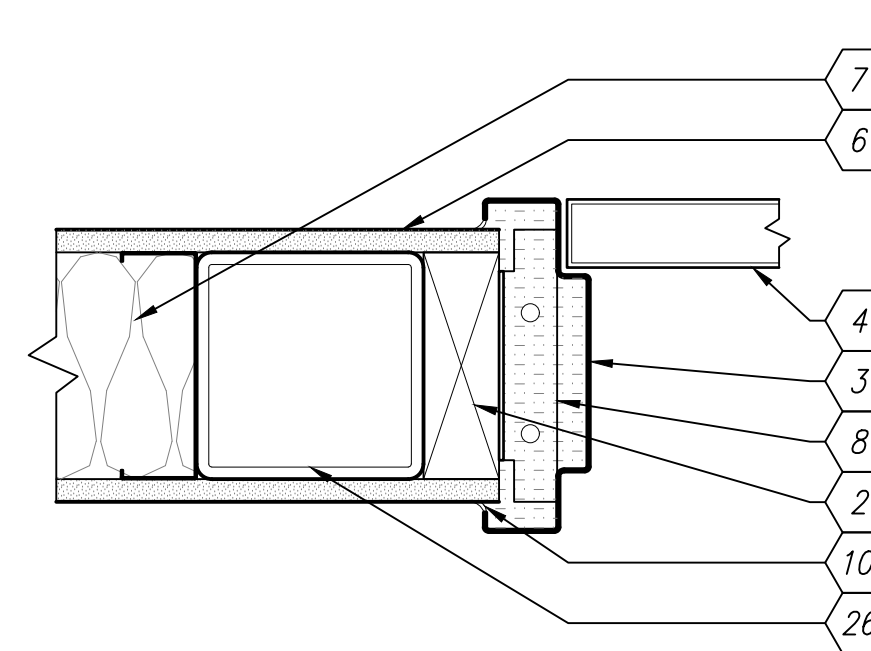

A4 STC DOOR DETAIL - HEAD/JAMB
SCALE: 1:5

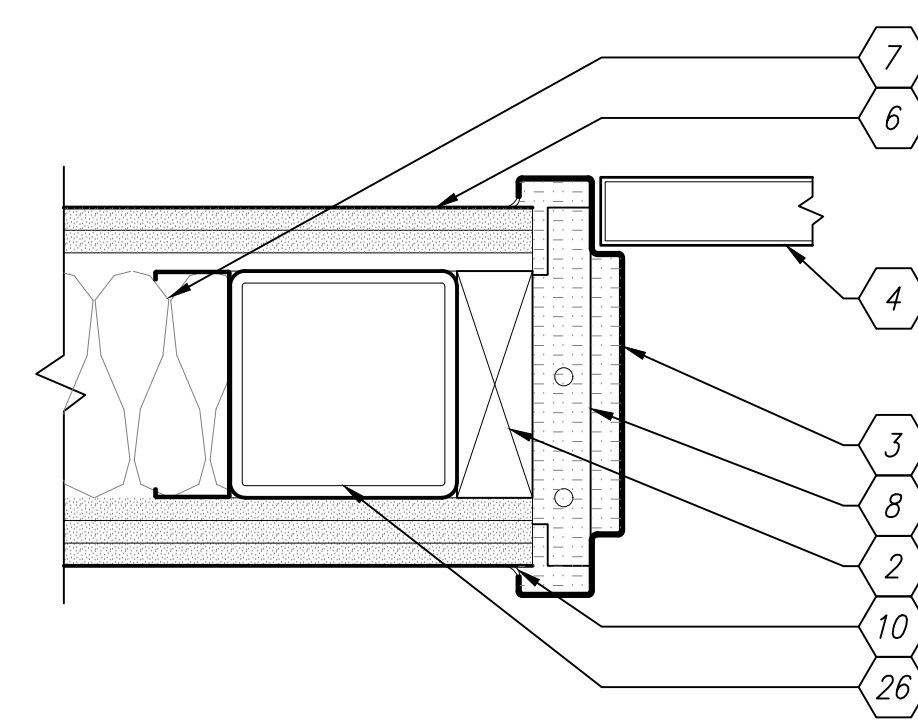


A5 STC DOOR DETAIL - HEAD/JAMB
SCALE: 1:5

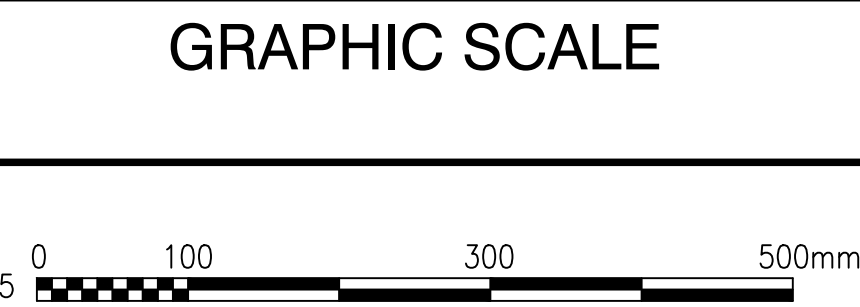

GENERAL SHEET NOTES

1. REFER TO SHEET A-601 FOR DOOR DETAIL KEYNOTES.
2. REFER TO SHEET A-606 FOR DOOR TYPES.



APPROVED

FOR COMMANDER NAVFAC

ACTIVITY

D. EVANS VIA EMAIL

SATISFACTORY TO DATE 01/15/2026

DES PAK DRW PAK

PM/DM MJD/ATP

BRANCH MANAGER KMC

DES PROD DIR WBF

FIRE PROTECTION ENGINEER DSN

DEPARTMENT OF THE NAVY
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND
PLANNING, DESIGN AND CONSTRUCTION
VARIOUS LOCATIONS

VARIOUS LOCATIONS

JOINT MARITIME FACILITY
DOOR DETAILS

SCALE: AS NOTED

APPROVED NO. 1838720

CONSTR. CONTR. NO.

NAVFAC DRAWING NO. 14157146

SHEET 84 OF 170

A-607

FILE NAME: Y:\OCONUS\MultipleSites\2026_1783264_P136C_JAMFAB_Design\DWG\Sheet\09_INT\F101.dwg LAYOUT NAME: IF101 INTERIOR FURNITURE PLAN PLOTTED: Tuesday, January 20, 2026 - 9:44am USER: elizabeth.clements

D

C

B


A

INTERIOR FURNITURE PLAN

A1
SCALE: 1:100



IF101

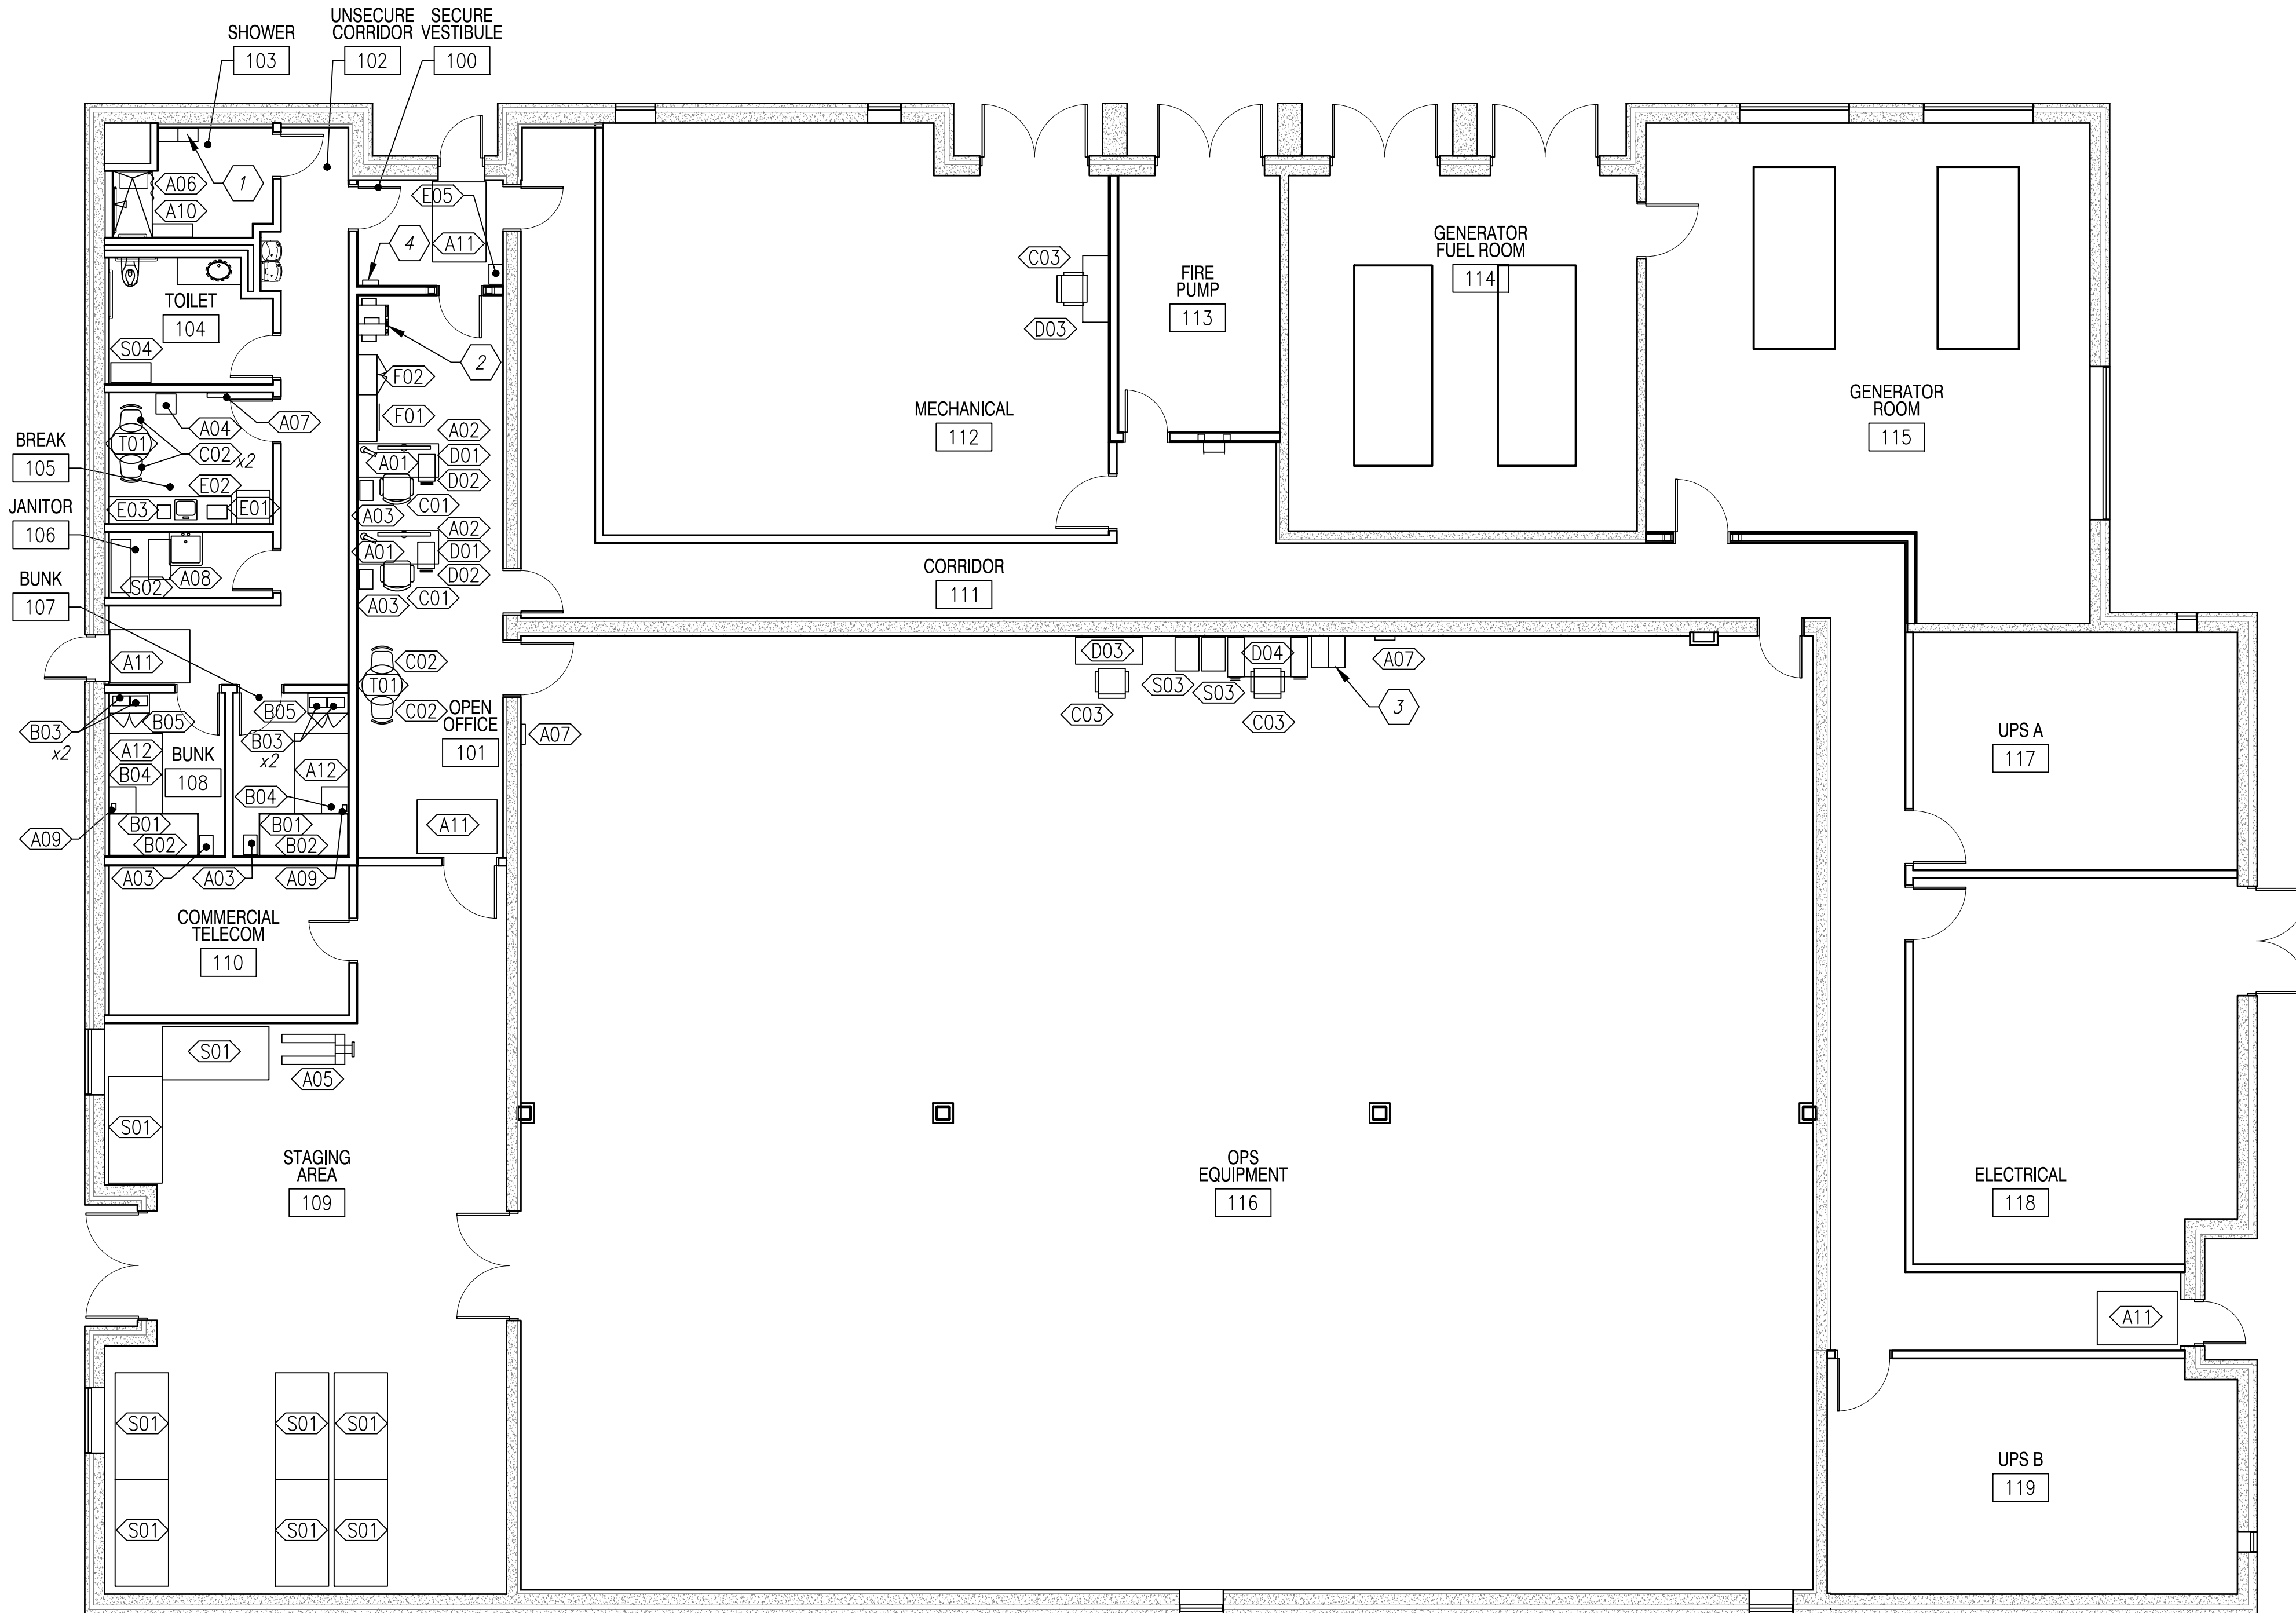

GENERAL SHEET NOTES

- FF&E IS INDICATED FOR COORDINATION PURPOSES ONLY. PROCUREMENT OF THE FF&E IS NOT PART OF THE BASE BID CONSTRUCTION CONTRACT, BUT WILL BE FUNDED AND PROVIDED SEPARATELY.
- REFER TO ELECTRICAL AND TELECOM DRAWINGS FOR COORDINATION OF FURNITURE LAYOUTS WITH POWER, DATA AND COMMUNICATIONS LOCATIONS.
- CONTRACTOR TO COORDINATE LOCATIONS OF WALL MOUNTED FIRE LIFE SAFETY DEVICES WITH WALL MOUNTED FF&E.

SHEET KEYNOTES

- LOCKERS, CFCL.
- MULTI-FUNCTION COPIER/PRINTER, GFCL.
- GSA-CLASS 6 SAFES, GFCL.
- SHELF T9, CFCL. SEE A401 FOR DETAILS.



APPROVED
FOR COMMANDER NAVFAC
ACTIVITY
D. EVANS VIA EMAIL
SATISFACTORY TO DATE 01/15/2026
DES ELC DRW ELC CHK MJD/ATP DEP
PM/DM MJD/ATP
BRANCH MANAGER KEVIN COYNE, RA
DES PROD DIR WBF
FIRE PROTECTION ENGINEER DSN

DEPARTMENT OF THE NAVY
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - ATLANTIC
PLANNING, DESIGN AND CONSTRUCTION
VARIOUS LOCATIONS
VARIOUS LOCATIONS
JOINT MARITIME FACILITY
INTERIOR FURNITURE PLAN

SCALE: AS NOTED
APPROVE/ECT NO.: 1838720
CONSTR. CONTR. NO.
NAVFAC DRAWING NO. 14157148
SHEET 86 OF 170
IF101

NAVFAC METRIC DRAWING REVISION: 01 OCTOBER 2018

GRAPHIC SCALE

1:100 0 1000 5000 10000mm

D


C

B

A

FILE NAME: Y:\OCONUS\MultipleSites\2026_1783264_P136C_JAMFAB_Design\DWG\SHEET\09_INT\PI150_1783264_IF601.dwg LAYOUT NAME: IF601 FURNITURE SCHEDULE AND DETAILS PLOTTED: Tuesday, January 20, 2026 - 9:44am USER: elizabeth.clemens

FF&E SCHEDULE				
CODE	ITEM DESCRIPTION	ITEM TYPE	NOTES	QTY
A01	TASK LIGHT	ACCESSORY	--	2
A02	MONITOR ARM	ACCESSORY	SUPPORT TWO 27" MONITORS	2
A03	TRASH PERSONAL	ACCESSORY	--	4
A04	TRASH KITCHEN	ACCESSORY	INCLUDE LID	1
A05	PALLET JACK	ACCESSORY	--	1
A06	SHOWER CURTAIN	ACCESSORY	--	1
A07	WALL CLOCK	ACCESSORY	ELECTRIC, MOUNT 90" AFF	3
A08	MOP BUCKET	ACCESSORY	--	1
A09	ALARM CLOCK	ACCESSORY	--	2
A10	SHOWER BENCH	ACCESSORY	--	1
A11	ENTRANCE MAT	ACCESSORY	48"WIDE X 72"LONG	4
A12	RUG	ACCESSORY	48"WIDE X 72"LONG WITH ADA EDGE	2
B01	SINGLE BED FRAME	BUNK	--	2
B02	MATTRESS	BUNK	--	2
B03	BED-IN-A-BAG	BUNK	--	4
B04	SIDE TABLE	BUNK	--	2
B05	WARDROBE	BUNK	--	2
C01	TASK CHAIR	CHAIR	DESK-TO-COUNTER SEAT HEIGHT	2
C02	DINING CHAIR	CHAIR	--	4
C03	INDUSTRIAL STOOL	CHAIR	COUNTER HEIGHT	3
D01	SIT-TO-STAND DESK	DESK	--	2
D02	MOBILE PEDESTAL	DESK	--	2
D03	WORK TABLE	DESK	COUNTER HEIGHT	2
D04	WORKBENCH	DESK	COUNTER HEIGHT	1
E01	REFRIGERATOR	EQUIPMENT	--	1
E02	MICROWAVE	EQUIPMENT	--	1
E03	COFFEE MAKER	EQUIPMENT	--	1
E04A	FIRE EXTINGUISHER	EQUIPMENT	SEE SHEET G-102 FOR INSTALLATION LOCATIONS	10
E04B	FIRE EXTINGUISHER	EQUIPMENT	SEE SHEET G-102 FOR INSTALLATION LOCATIONS	2
E05	AED	EQUIPMENT	--	1
F01	LATERAL 5-HIGH	FILE	--	1
F02	STORAGE CABINET 5-HIGH	FILE	--	1
S01	INDUSTRIAL SHELVING 48X96	STORAGE	--	8
S02	WIRE SHELVING 18X48	STORAGE	5-HIGH	1
S03	TOOL CABINET MOBILE	STORAGE	--	2
S04	WIRE SHELVING 18X24	STORAGE	5-HIGH	1
T01	DINING TABLE	TABLE	--	2

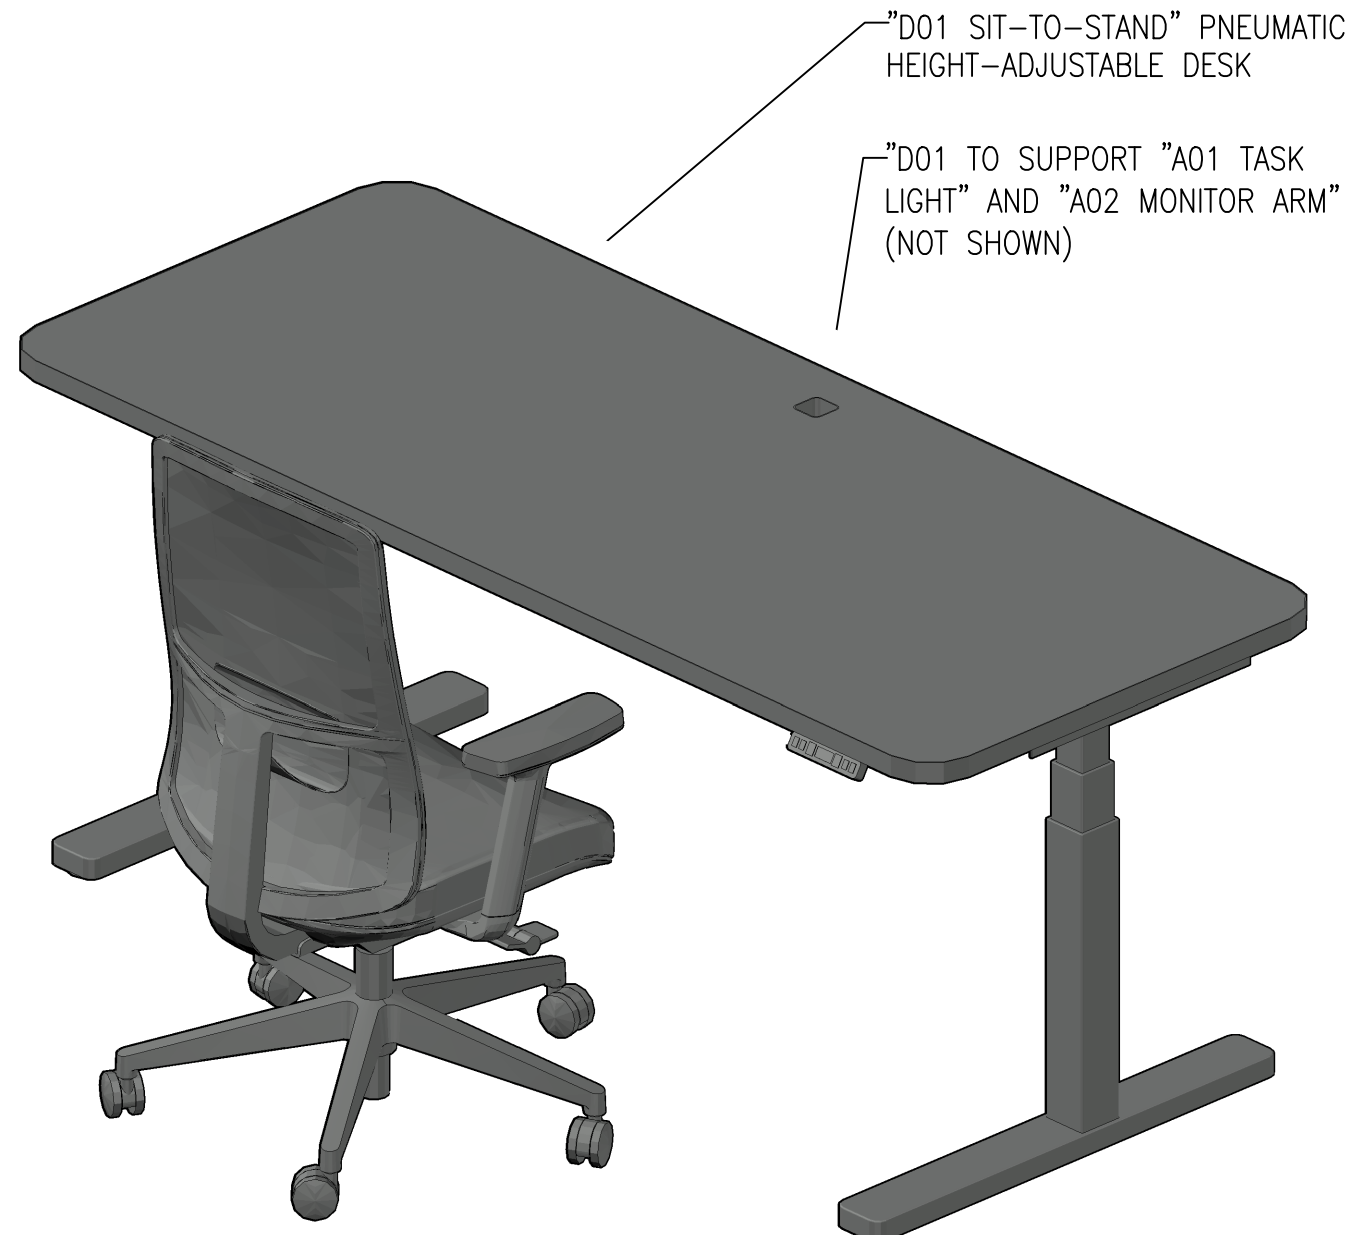

WORKSTATION ISOMETRIC

A1

SCALE: NTS

IF101

GENERAL SHEET NOTES

- FF&E IS INDICATED FOR COORDINATION PURPOSES ONLY. PROCUREMENT OF THE FF&E IS NOT PART OF THE BASE BID CONSTRUCTION CONTRACT, BUT WILL BE FUNDED AND PROVIDED SEPARATELY.
- REFER TO ELECTRICAL AND TELECOM DRAWINGS FOR COORDINATION OF FURNITURE LAYOUTS WITH POWER, DATA AND COMMUNICATIONS LOCATIONS.
- REFER TO FF&E FINAL SUBMITTAL FOR SPECIFICATION INFORMATION.
- FF&E COUNTS PROVIDED IN THE FF&E SCHEDULE ARE FOR INFORMATION ONLY. CONTRACTOR TO VERIFY QUANTITIES AND TYPES PRIOR TO FABRICATION.
- WORKSURFACE GROMMET LOCATIONS SHOWN FOR COORDINATION PURPOSES ONLY. REFER TO FF&E FINAL SUBMITTAL FOR EXACT LOCATIONS.



APPROVED	
FOR COMMANDER NAVFAC	
ACTIVITY	
D. EVANS VIA EMAIL	
SATISFACTORY TO	DATE 01/15/2026
DES ELC	DRW ELC
PM/DM	MJD/ATP
BRANCH MANAGER	KEVIN COYNE, RA
DES PROD DIR	WBF
FIRE PROTECTION ENGINEER	DSN

DEPARTMENT OF THE NAVY	NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND	NAVFAC
PLANNING, DESIGN AND CONSTRUCTION	NAVFAC	
VARIOUS LOCATIONS	VARIOUS LOCATIONS	
JOINT MARITIME FACILITY		
FURNITURE SCHEDULE AND DETAILS		
SCALE: AS NOTED		
APPROVED NO. 1838720		
CONSTR. CONTR. NO.		
NAVFAC DRAWING NO. 14157149		
SHEET 87 OF 170		
IF601		

A1 SCALE: 1:100



1


- C



A	
---	--

A

SCALE:	AS NOTED
PROJECT NO.:	1838720






11/20/2016 02:11:50 PM 04 00000000 00

INTERIOR SIGNAGE SCHEDULE						
ROOM NO.	SIGN TYPE	SIGN COPY	TACTILE BRAILLE	SYMBOL GRAPHIC	NOTES	COUNT
101	A1	SECURE AREA	YES	--	--	1
102	A1	UNSECURE AREA	YES	--	--	1
102	B	NO RE-ENTRY	YES	--	--	1
103	F	SHOWER	YES	SHOWER HEAD	--	1
104	C	UNISEX	YES	UNISEX RESTROOM	--	1
105	A1	BREAK ROOM	YES	--	--	1
106	A1	JANITOR CLOSET	YES	--	--	1
107	A1	BUNK 01	YES	--	--	1
108	A1	BUNK 02	YES	--	--	1
109	A1	RECEIVING	YES	--	--	2
109	A2	RECEIVING	YES	--	--	1
110	A1	TELECOM ROOM	YES	--	--	1
111	B	NO RE-ENTRY	YES	--	--	2
111	B	NO ENTRY	YES	--	--	1
111	A1	CORRIDOR	YES	--	--	1

GENERAL SHEET NOTES

1. REFER TO SHEET IG101 FOR SIGNAGE LOCATIONS.
2. CONFIRM ALL SIGNAGE LOCATIONS, SIGN COPY AND QUANTITIES WITH USER PRIOR TO FABRICATION.
3. SIGN MUST BE INSTALLED ON WALL ON LATCH SIDE OF DOOR OR DIRECTLY ON DOOR. SEE DETAIL A4/IG601.
4. PROVIDE SIGN TYPE "E" AT ALL FIRE EXTINGUISHERS. MOUNT SIGNS AT 5'-6" (1675MM) AFF TO CENTER OF SIGN. REFER TO SHEET G-102 FIRE EXTINGUISHER LOCATIONS.
5. EXTERIOR SIGNS (AS INDICATED) MUST BE EXTERIOR PHOTOPOLYMER ALUMINUM. FINISH TO MATCH INTERIOR SIGNS.


SHEET KEYNOTES	
1.	25MM RAISED TEXT WITH BRAILLE
2.	52MM RAISED INTERNATIONAL PICTOGRAM SYMBOL, CENTERED
3.	SQUARE END REMOVABLE CAP
4.	19MM RAISED TACTILE TEXT
5.	38MM RAISED TACTILE TEXT
6.	10MM TEXT WITH SLIDING INSERT

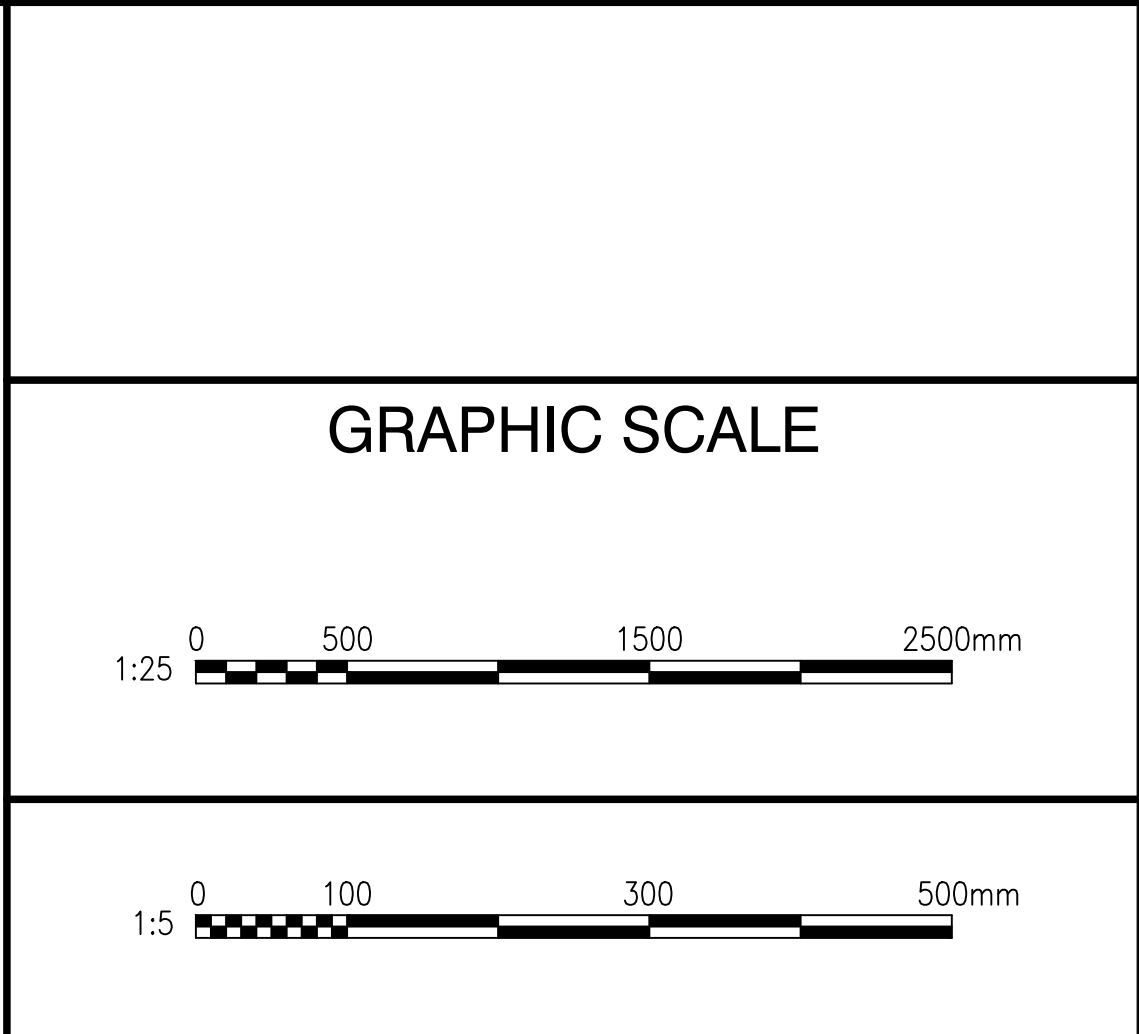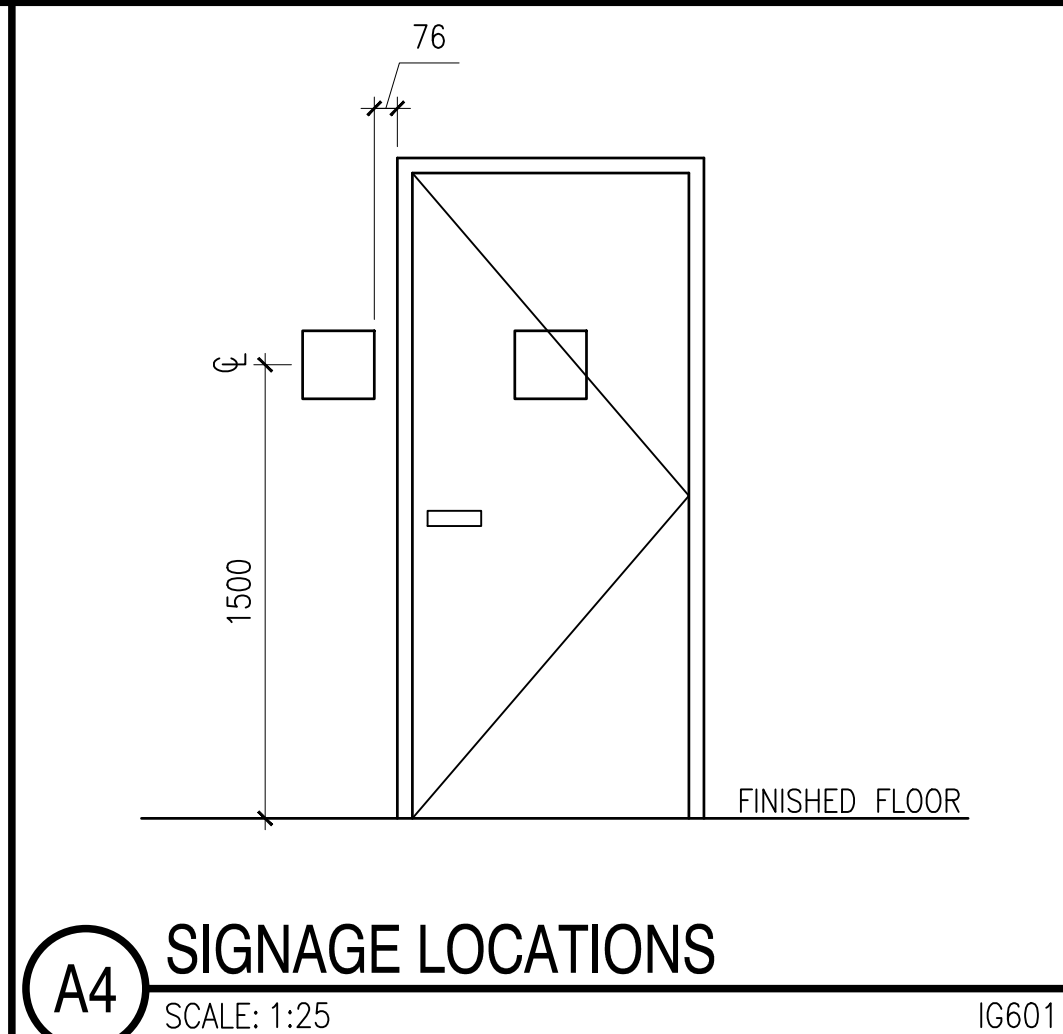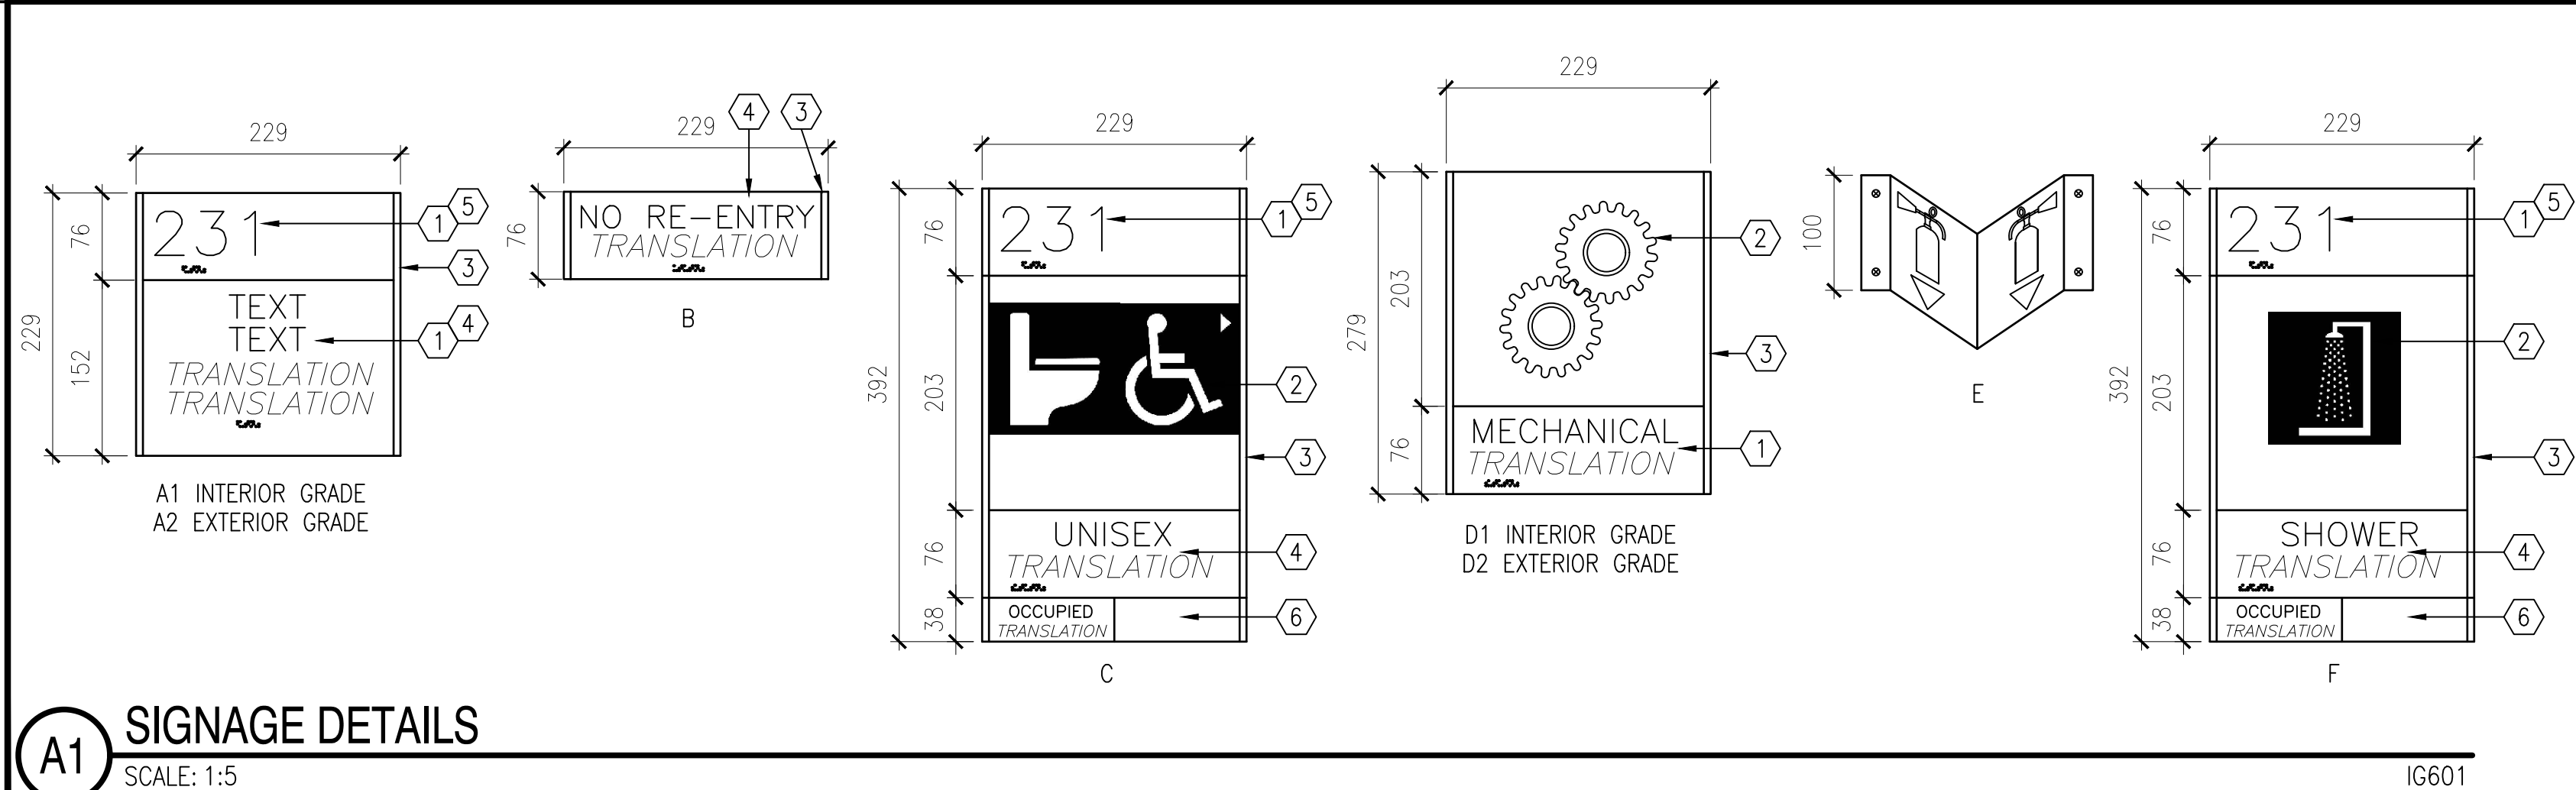[illegible]


FILE NAME: Y:\CONUS\MultipleSheets\2026_1783264_P1362_IAMFAB_Design\DWGS\Sheet\09_INTY1362_1783264_IN601.dwg LAYOUT NAME: IN601 INTERIOR FINISH LEGEND AND SCHEDULE PLOTTED: Tuesday, January 20, 2026 - 9:45am USER: elizabeth.clemens

FINISH LEGEND					
CODE	MATERIAL	BASIS OF DESIGN PRODUCT	COLOR	SIZE	NOTES
FLOORS					
ESD1	ESD FLOOR TILE	FORBO COLOREX EC	EC 250201 EVEREST	24" x 24"	INSTALL WITH RAF1
PT1	PORCELAIN TILE	CROSSVILLE COLOR BLOX 2.0	CBX03 SLINKY	12" x 24"	
PT4	PORCELAIN TILE (MOSAIC)	CROSSVILLE COLOR BLOX 2.0	CBX03 SLINKY	3" x 3"	
RAF1	RAISED ACCESS FLOOR SYSTEM	TATE 2"D BOLTED STRINGER UNDERSTRUCTURE, CONCORE 3000 FLOOR PANELS	---	24" x 24"	2'-0" FINISHED FLOOR HEIGHT, INSTALL WITH ESD1
SC1	SEALED CONCRETE	ASHFORD FORMULA	CLEAR	--	
SC2	SEALED CONCRETE, ANTISTATIC	ELECTRASEAL ANTI STATIC CONCRETE SEALER	CLEAR	--	
WALL BASE					
PTB1	PORCELAIN TILE BASE	CROSSVILLE COLOR BLOX 2.0	CBX03 SLINKY	12" x 6" HIGH	COVE BASE
RB1	RUBBER BASE	ROPPE	123 CHARCOAL	6" HIGH	STANDARD TOE BASE
WALLS					
PT2	PORCELAIN TILE (FIELD WALL TILE)	CROSSVILLE COLOR BLOX 2.0	CBX03 SLINKY	12" x 24"	INSTALL ALUMINUM FINISH EDGE AT ALL INTERIOR AND EXTERIOR CORNERS
PT3	PORCELAIN TILE (ACCENT WALL TILE)	CROSSVILLE COLOR BLOX 2.0	CBX31 COTTON SHEETS	6" x 6"	INSTALL ALUMINUM FINISH EDGE AT ALL INTERIOR AND EXTERIOR CORNERS
PNT1	WALL PAINT	SHERWIN WILLIAMS	SW7063 NEBULOUS WHITE	---	
SS1	SOLID SURFACE SHOWER WALL PANELS	SWANSTONE	WHITE	FULL HEIGHT	INSTALL PER MANUFACTURER'S INSTRUCTIONS
CEILINGS					
ACT1	ACOUSTIC CEILING TILE	ARMSTRONG, CALLA HIGH NRC, TEGULAR	WHITE	24" x 24"	INSTALL WITH ACG1
ACT2	CLEAN-ROOM ACOUSTIC CEILING TILE	ARMSTRONG, CALLA FOR DYNAMAX, SQUARE LAY-IN	WHITE	24" x 24'	INSTALL WITH ACG2
ACT3	PERFORATED AIR DEVICE TILE	PRICE, PERFORATED AIR DEVICE MODEL 10	WHITE	24" x 24"	INSTALL AS REQUIRED, SEE MECHANICAL DRAWINGS FOR LOCATIONS
ACG1	ACOUSTIC CEILING GRID	ARMSTRONG, TEGULAR 15/16" GRID	WHITE	15/16"	INCLUDE SEISMIC SUPPORTS
ACG2	STRUCTURAL CEILING GRID	ARMSTRONG DYNAMAX	WHITE	24"x24"x2"	INCLUDE SEISMIC SUPPORTS
PNT2	DRYWALL CEILING PAINT	SHERWIN WILLIAMS	SW7007 CEILING BRIGHT WHITE	--	
PNT3	DRY-FALL PAINT	SHERWIN WILLIAMS	SW7007 CEILING BRIGHT WHITE	--	
MISCELLANEOUS					
CG1	CORNER GUARD	CS GROUP, CO-8	TYPE 304 STAINLESS STEEL #4 FINISH	3-1/2" LEGS	INSTALL ON ALL OUTSIDE CORNERS, BOTTOM OF CORNER GUARD TO ALIGN WITH TOP OF WALL BASE, FULL HEIGHT OF WALL
GRT1	GROUT	MAPEI	112 MEDIUM GREY	3/16" JOINT	INSTALL WITH PT1, PT2, PT3, AND PTB1
LKR1	PHENOLIC LOCKERS	BRADLEY CORP. PHENOLIC LOCKER	SLATE GREY D91		FULL HEIGHT
PLAM1	PLASTIC-LAMINATE CASEWORK	WILSONART	7919K-78 AMBER CHERRY		
PNT4	DOOR & TRIM PAINT	SHERWIN WILLIAMS	SW7067 CITYSCAPE		
SS2	SOLID SURFACE COUNTERTOPS & WINDOWSILL	CORIAN	MATTERHORN		
SS3	SOLID SURFACE SHOWER PAN	SWANSTONE	WHITE		
SG1	SIGNAGE	2/90 SIGN SYSTEMS, SLIDE MODULAR	211 ASH/233 PEARL GREY		INCLUDE SATIN NATURAL ALUMINUM TRIM


FINISH SCHEDULE										
MARK	NAME	FLOOR		BASE		WALL		CEILING		NOTES
		FINISH	COLOR	FINISH	COLOR	FINISH	COLOR	FINISH	COLOR	
100	SECURE VESTIBULE	SC	2	RB	1	PNT	1	ACG/ACT	1/1	--
101	OPEN OFFICE	SC	2	RB	1	PNT	1	ACG/ACT	1/1	--
102	UNSECURE CORRIDOR	SC	1	RB	1	PNT	1	ACG/ACT	1/1	--
103	SHOWER	PT	4	PTB	1	PT	2/3	GWB/PNT	2	1
104	TOILET	PT	1	PTB	1	PT	2/3	GWB/PNT	2	--
105	BREAK	PT	1	PTB	1	PNT	1	ACG/ACT	1/1	--
106	JANITOR	SC	1	RB	1	PNT	1	GWB/PNT	2	--
107	BUNK	SC	1	RB	1	PNT	1	ACG/ACT	1/1	--
108	BUNK	SC	1	RB	1	PNT	1	ACG/ACT	1/1	--
109	STAGING AREA	SC	2	RB	1	PNT	1	EXP/PNT	3	--
110	COMMERCIAL TELECOM	SC	2	RB	1	PNT	1	EXP/PNT	3	--
111	CORRIDOR	SC	2	RB	1	PNT	1	ACG/ACT	1/1	--
112	MECHANICAL	SC	1	RB	1	PNT	1	EXP/PNT	3	--
113	FIRE PUMP	SC	1	RB	1	PNT	1	EXP/PNT	3	--
114	GENERATOR FUEL ROOM	SC	1	RB	1	EXP	--	EXP/PNT	3	--
115	GENERATOR ROOM	SC	1	RB	1	PNT	1	EXP/PNT	3	--
116	OPS EQUIPMENT	SC/RAF/ESD	1/1/1	RB	1	PNT	1	GWB/PNT/ACG/ACT/ACT	-/2/2/2/3	--
117	UPS A	SC	2	RB	1	PNT	1	EXP/PNT	3	--
118	ELECTRICAL	SC	2	RB	1	PNT	1	EXP/PNT	3	--
119	UPS B	SC	2	RB	1	PNT	1	EXP/PNT	3	--

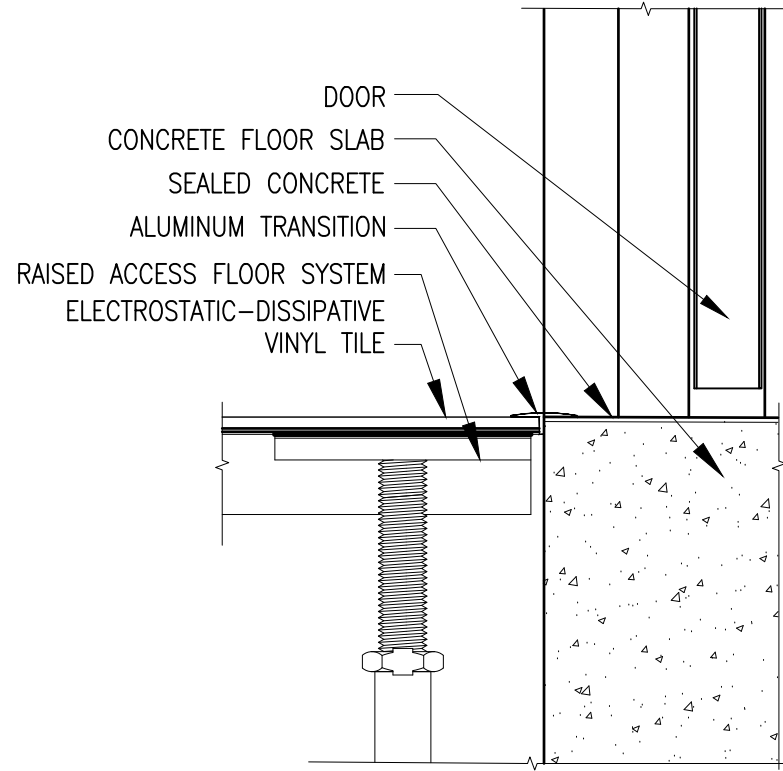

D4 RAF TRANSITION
SCALE: 1:5 IN601

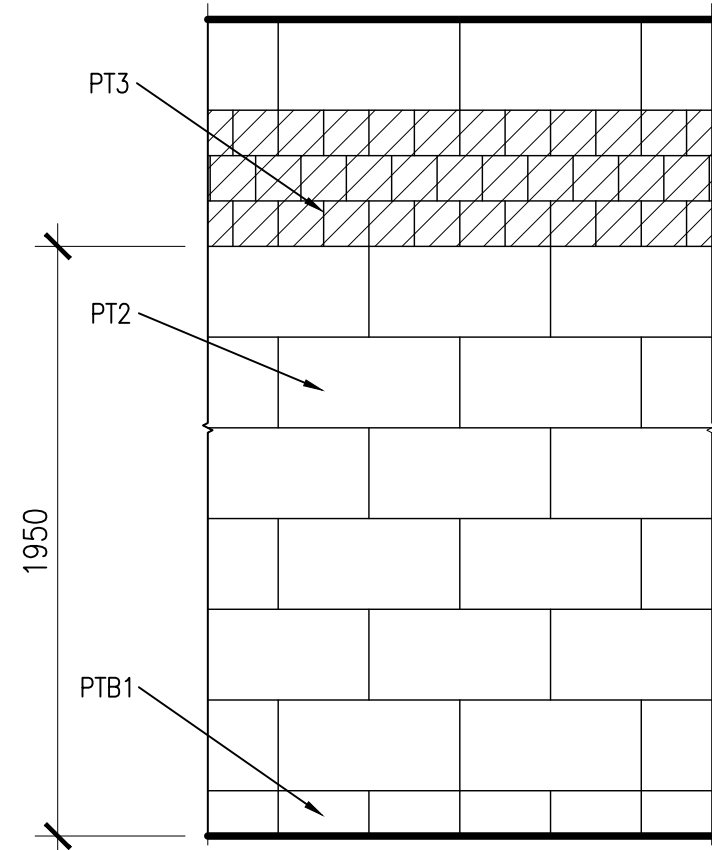

C4 ACCENT WALL TILE ELEVATION
SCALE: 1:25 IN601

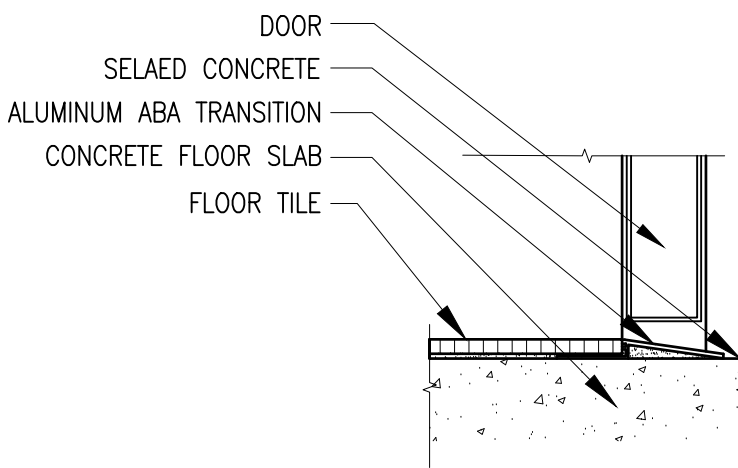

B4 PT TO SC TRANSITION
SCALE: 1:5 IN601

GENERAL SHEET NOTES

- THE USE OF MANUFACTURER'S NAMES AND PRODUCT NUMBERS IS NOT INTENDED TO BE PROPRIETARY. OTHER MANUFACTURER'S PRODUCTS WILL BE CONSIDERED, PROVIDED THEY CLOSELY APPROXIMATE COLOR, FINISH, TEXTURE, PATTERN AND QUALITY.
- CONTRACTOR MUST CHECK AND COORDINATE LEAD TIMES AND REQUIREMENTS FOR ALL FINISHES ON FINISH LEGEND PRIOR TO ORDERING.
- PROVIDE SOLID SURFACE MATERIAL SS2 AT INTERIOR WINDOWSILLS.
- PROVIDE STAINLESS STEEL METAL TRANSITION STRIPS BETWEEN DISSIMILAR FLOOR FINISHES. TRANSITION STRIPS TO BE CENTERED UNDER DOORS AS APPLICABLE.
- PROVIDE ALUMINUM FINISH EDGE AT ALL INSIDE AND OUTSIDE CORNERS AT WALL TILE.
- PROVIDE STAINLESS STEEL CORNER GUARDS AT ALL OUTSIDE CORNERS. MOUNT BOTTOM OF CORNER GUARD AT TOP OF WALL BASE.
- ALIGN ALL FLOOR AND WALL TILE GROUT JOINTS TO THE GREATEST EXTENT POSSIBLE.
- PROVIDE PAINT FINISHES AS FOLLOWS: FLAT FINISH ON CEILINGS, EGGSHELL FINISH ON WALLS, AND SEMI-GLOSS FINISH ON DOORS AND DOOR TRIM.
- REFER TO A-106 FOR CEILING HEIGHTS.
- ALL EXPOSED SURFACES MUST BE PAINTED, INCLUDING, BUT NOT LIMITED TO, STRUCTURAL STEEL, COLUMNS, TRUSSES, JOINTS, GIRTS, AND METAL DECK.
- EXTEND FLOOR FINISH UNDER CASEWORK.
- ALIGN LENGTH OF FLOOR TILE TO RUN PARALLEL WITH LENGTH OF ROOM.



FINISH SCHEDULE NOTES

- SHOWER PAN TO BE SS3 AND SHOWER WALLS TO BE SS1.

GRAPHIC SCALE



APPR	DATE	DESCRIPTION	SYN	SEAL	A/E INFO	APPROVED	FOR COMMANDER NAVFAC	ACTIVITY	D. EVANS VIA EMAIL	SATISFACTORY TO DATE 01/15/2026	DES ELC DRW ELC CHK DEP	PM/DM MJD/ATP	BRANCH MANAGER KEVIN COYNE, RA	DES PROD DIR WBF	FIRE PROTECTION ENGINEER DSN	NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND NORFOLK, VA	VARIOUS LOCATIONS	JOINT MARITIME FACILITY	INTERIOR FINISH LEGEND AND SCHEDULE	DEPARTMENT OF THE NAVY NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - ATLANTIC PLANNING, DESIGN AND CONSTRUCTION	VARIOUS LOCATIONS	SCALE: AS NOTED	APPROVED NO. 1838720	CONSTR. CONTR. NO.	NAVFAC DRAWING NO. 14157152	SHEET 90 OF 170	IN601	NAVFAC METRIC DRAWFORM REVISION: 01 OCTOBER 2018
------	------	-------------	-----	------	----------	----------	----------------------	----------	--------------------	---------------------------------	-------------------------	---------------	--------------------------------	------------------	------------------------------	--	-------------------	-------------------------	-------------------------------------	--	-------------------	-----------------	----------------------	--------------------	-----------------------------	-----------------	-------	--

D

- C

AIR-

APP

- NOI

A

FILE NAME:

FILE NAME: Y:\OCONUS\~MultipleSites\2026_1783264_B Design\DWGS\Sheet\10_FP\P1360_P1360_MJMFB.dwg
PLOTTED: Friday, January 16, 2026 - 1:32pm USER: rodney.bentley

- B

D

C

B

A



A



A



A

- A



A


A

A

A

A




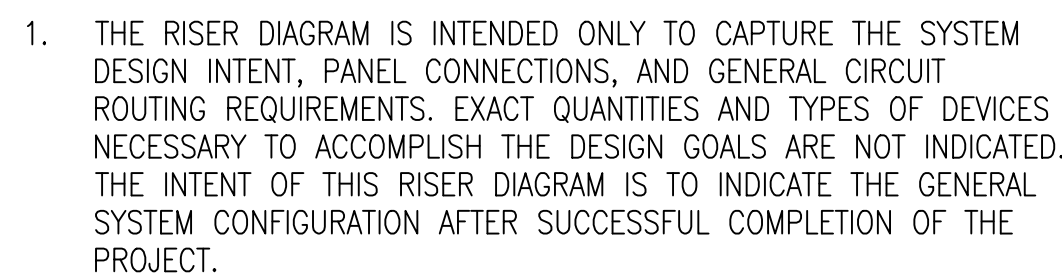

SCALE: NONE

AI SCALE: NONE

FILE NAME: Y:\OCONUS\MultipleSites\2026_1783264_P1362_JMFB\B_Design\DWG\S\Sheet\10_FPV\1362_1783264_FP101.dwg LAYOUT NAME: FX-101 PLOTTED: Friday, January 16, 2026 - 1:39pm USER: rodnej.bentley

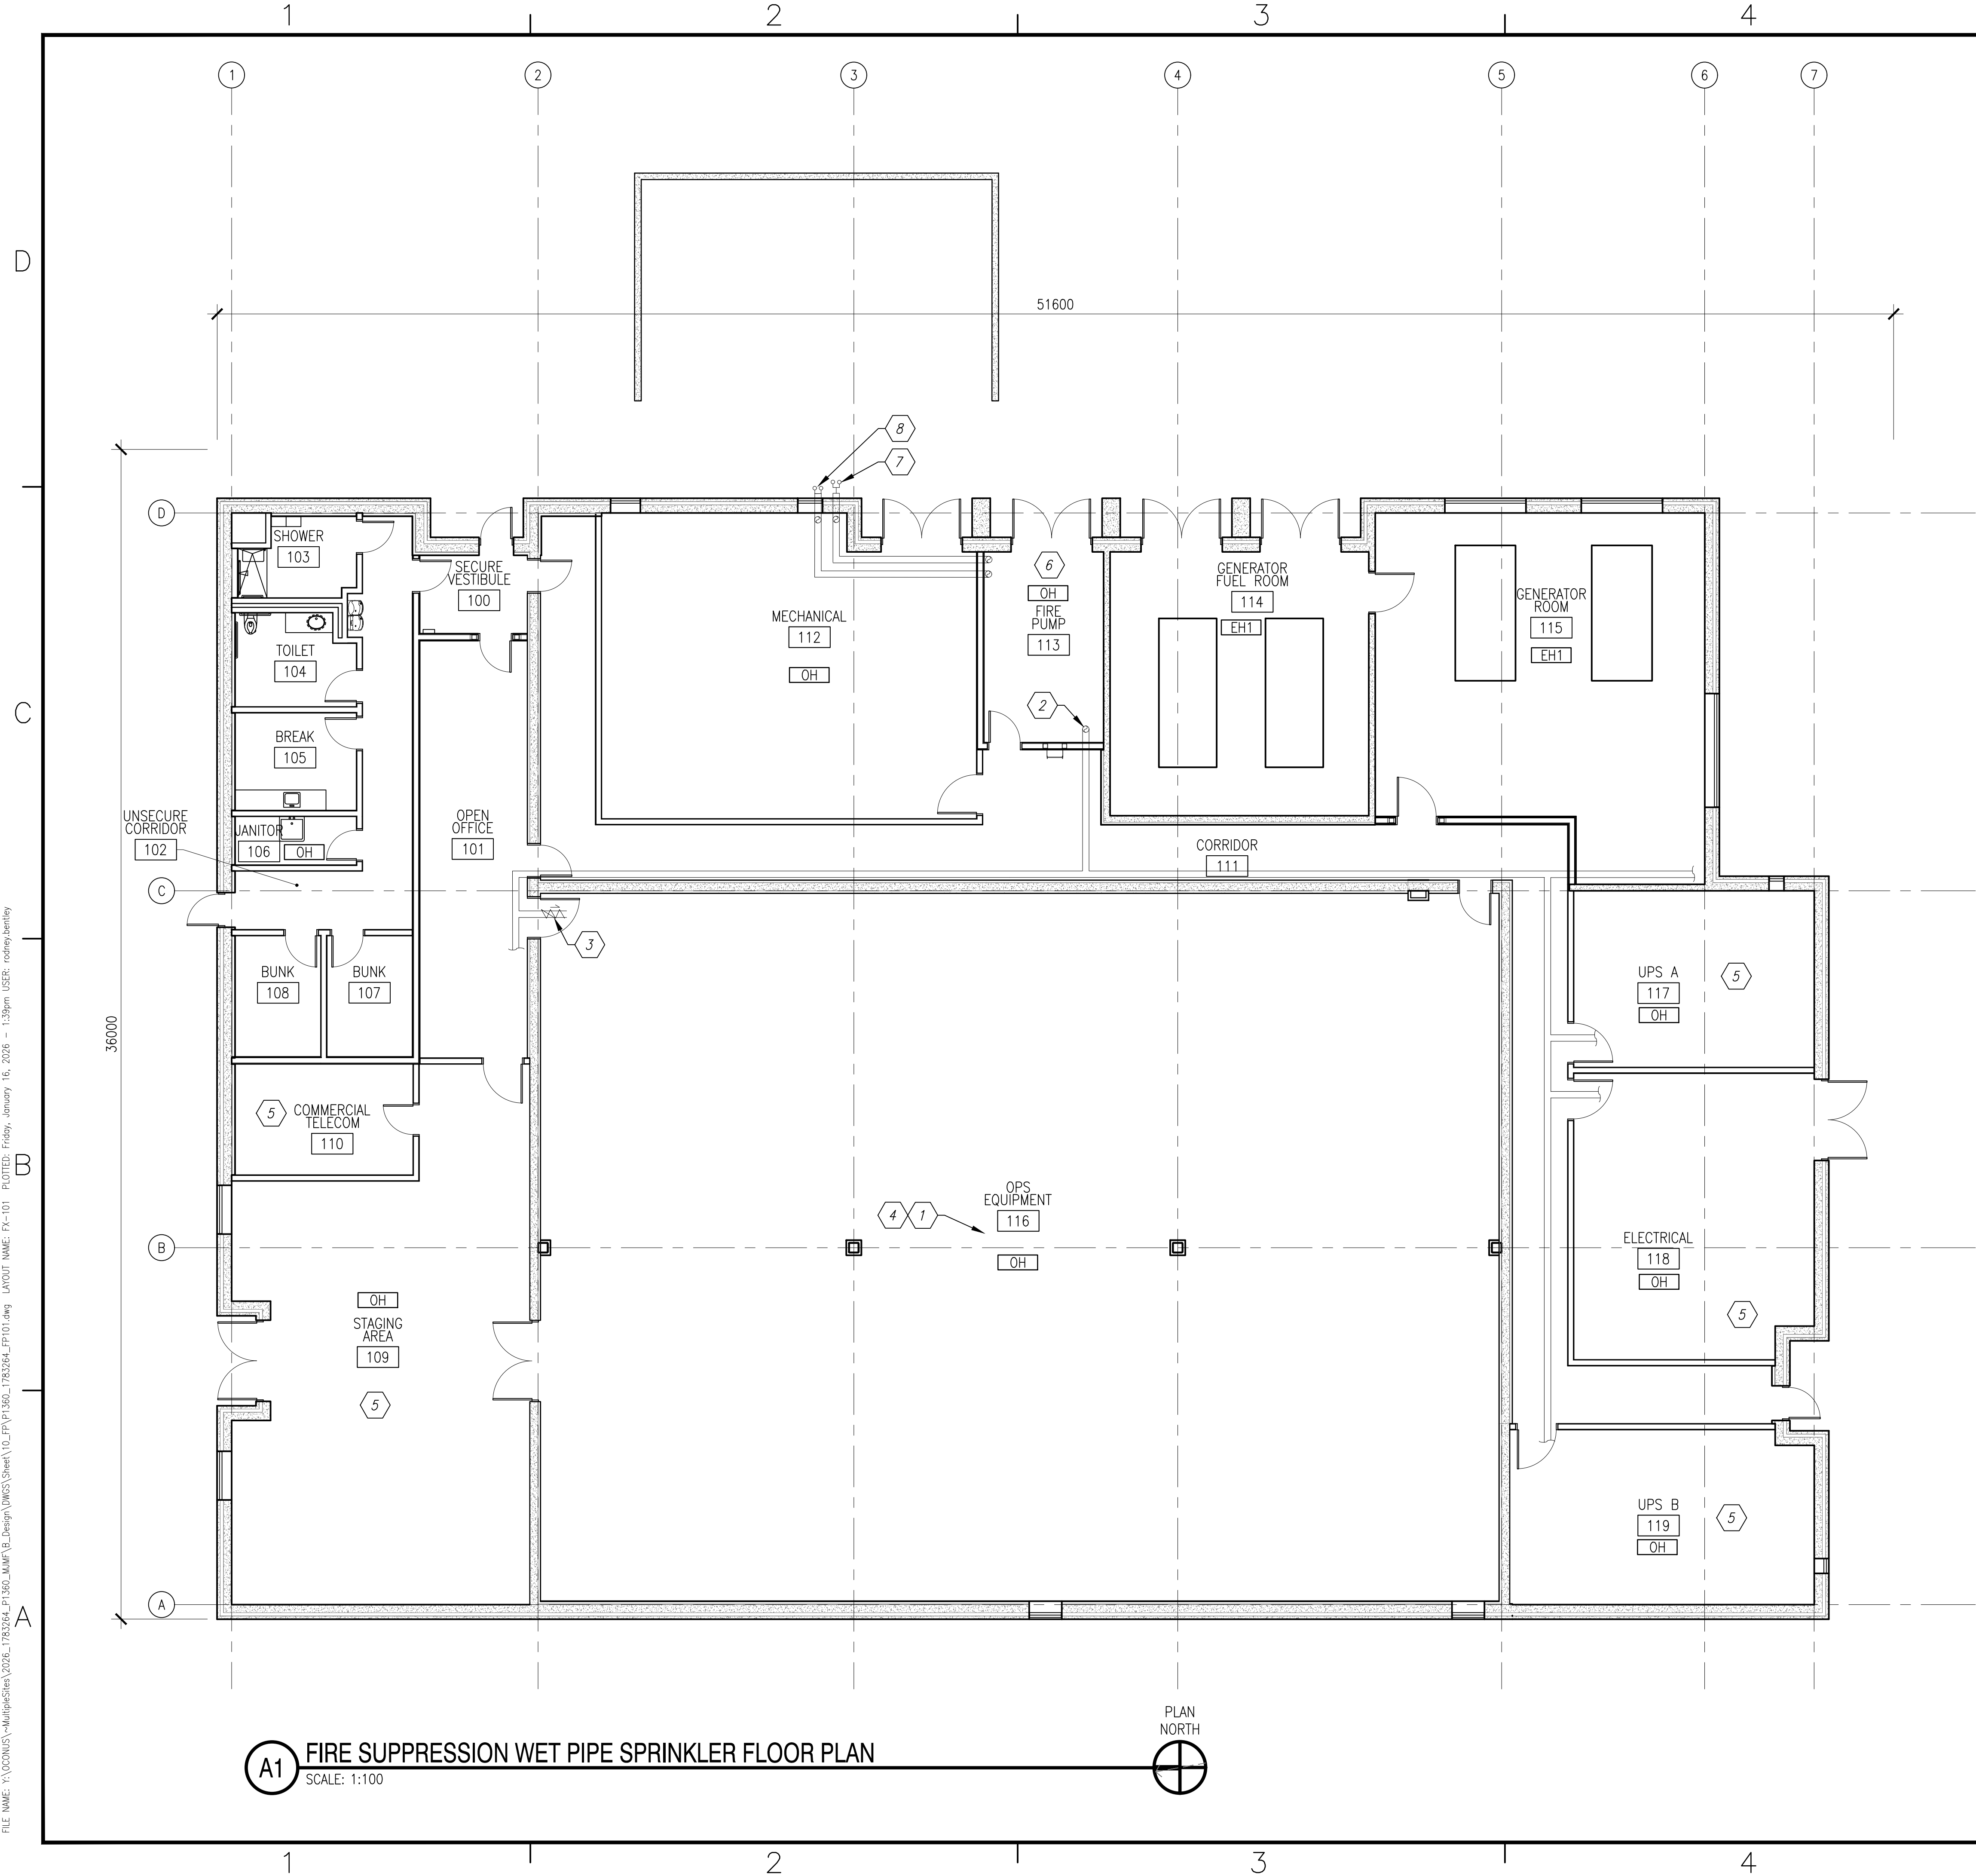

A1 FIRE SUPPRESSION WET PIPE SPRINKLER FLOOR PLAN
SCALE: 1:100

GENERAL SHEET NOTES

1. PROVIDE SPRINKLERS THROUGHOUT. AREAS ARE LIGHT HAZARD UNLESS OTHERWISE NOTED.

SHEET KEYNOTES

1. PROVIDE CLEAN AGENT SYSTEM IN OPS EQUIPMENT. SEE SHEET FK101.
2. SPRINKLER RISER SEE DETAIL B2 ON SHEET FP001.
3. PROVIDE WET SPRINKLER CONTROL VALVE WITH WATER FLOW SWITCH, CHECK VALVE AND BUTTERFLY VALVE WITH TAMPER SWITCH.
4. PROVIDE CONCEALED PENDENT SPRINKLERS IN ALL ELECTRONIC EQUIPMENT AREAS WHERE SUSPENDED CEILING SYSTEM IS INSTALLED. SPRINKLERS MUST NOT BE LOCATED DIRECTLY OVER ELECTRICAL EQUIPMENT, SERVER RACKS OR MAJOR ELECTRICAL COMPONENTS.
5. PROVIDE UPRIGHT SPRINKLERS WITH LISTED SPRINKLER GUARDS IN ALL ELECTRONIC EQUIPMENT AREAS WITHOUT FINISHED CEILINGS. SPRINKLERS MUST NOT BE LOCATED DIRECTLY OVER ELECTRICAL EQUIPMENT, SERVER RACKS OR MAJOR ELECTRICAL COMPONENTS.
6. PROVIDE FIRE PUMP, JOCKEY PUMP, FLOW METER, TEST HEADER, FDC, BACKFLOW PREVENTER, BYPASS, FIRE PUMP CONTROLLER, JOCKEY PUMP CONTROLLER AND ALL ASSOCIATED VALVES, PIPING AND FITTINGS. SEE SHEET FX401 FOR PUMP ROOM SECTION DETAILS.
7. WALL MOUNTED 2 INLET FIRE DEPARTMENT CONNECTION.
8. WALL MOUNTED 3 OUTLET FIRE PUMP TEST HEADER

GRAPHIC SCALE



APPR	DATE	DESCRIPTION	SYN	SEAL	A/E INFO	APPROVED	FOR COMMANDER NAVFAC	ACTIVITY	D. EVANS VIA EMAIL	SATISFACTORY TO DATE	01/15/2026	DES	RDB	DRW	RDB	CHK	XXX	PM/DM	MJD/ATP	BRANCH MANAGER	DSN	DES PROD DIR	WBF	FIRE PROTECTION ENGINEER	DSN	DEPARTMENT OF THE NAVY	NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND	NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - ATLANTIC	PLANNING, DESIGN AND CONSTRUCTION	VARIOUS LOCATIONS	VARIOUS LOCATIONS	VARIOUS LOCATIONS	JOINT MARITIME FACILITY	FIRE SUPPRESSION FLOOR PLAN	SCALE:	AS NOTED	APPROVED NO.:	1838720	CONSTR. CONTR. NO.:	NAVFAC DRAWING NO.:	14157158	SHEET	96	OF	170	FX101	NAVFAC METRIC DRAWFORM REVISION: 01 OCTOBER 2018
------	------	-------------	-----	------	----------	----------	----------------------	----------	--------------------	----------------------	------------	-----	-----	-----	-----	-----	-----	-------	---------	----------------	-----	--------------	-----	--------------------------	-----	------------------------	--	---	-----------------------------------	-------------------	-------------------	-------------------	-------------------------	-----------------------------	--------	----------	---------------	---------	---------------------	---------------------	----------	-------	----	----	-----	-------	--

FILE NAME: Y:\OCONUS\MultipleSites\2024_1783264_P1362_JAMF\B_Design\DWG\SHEET\10_FPV\1362_1783264_FX401.dwg LAYOUT NAME: FX401 PLOTTED: Friday, January 16, 2026 - 1:41pm USER: norey.bentley

1

2

3

4

5

D

C

B

A

1


2

3

4

5

A1 FIRE PUMP PLAN VIEW
SCALE: 1:20

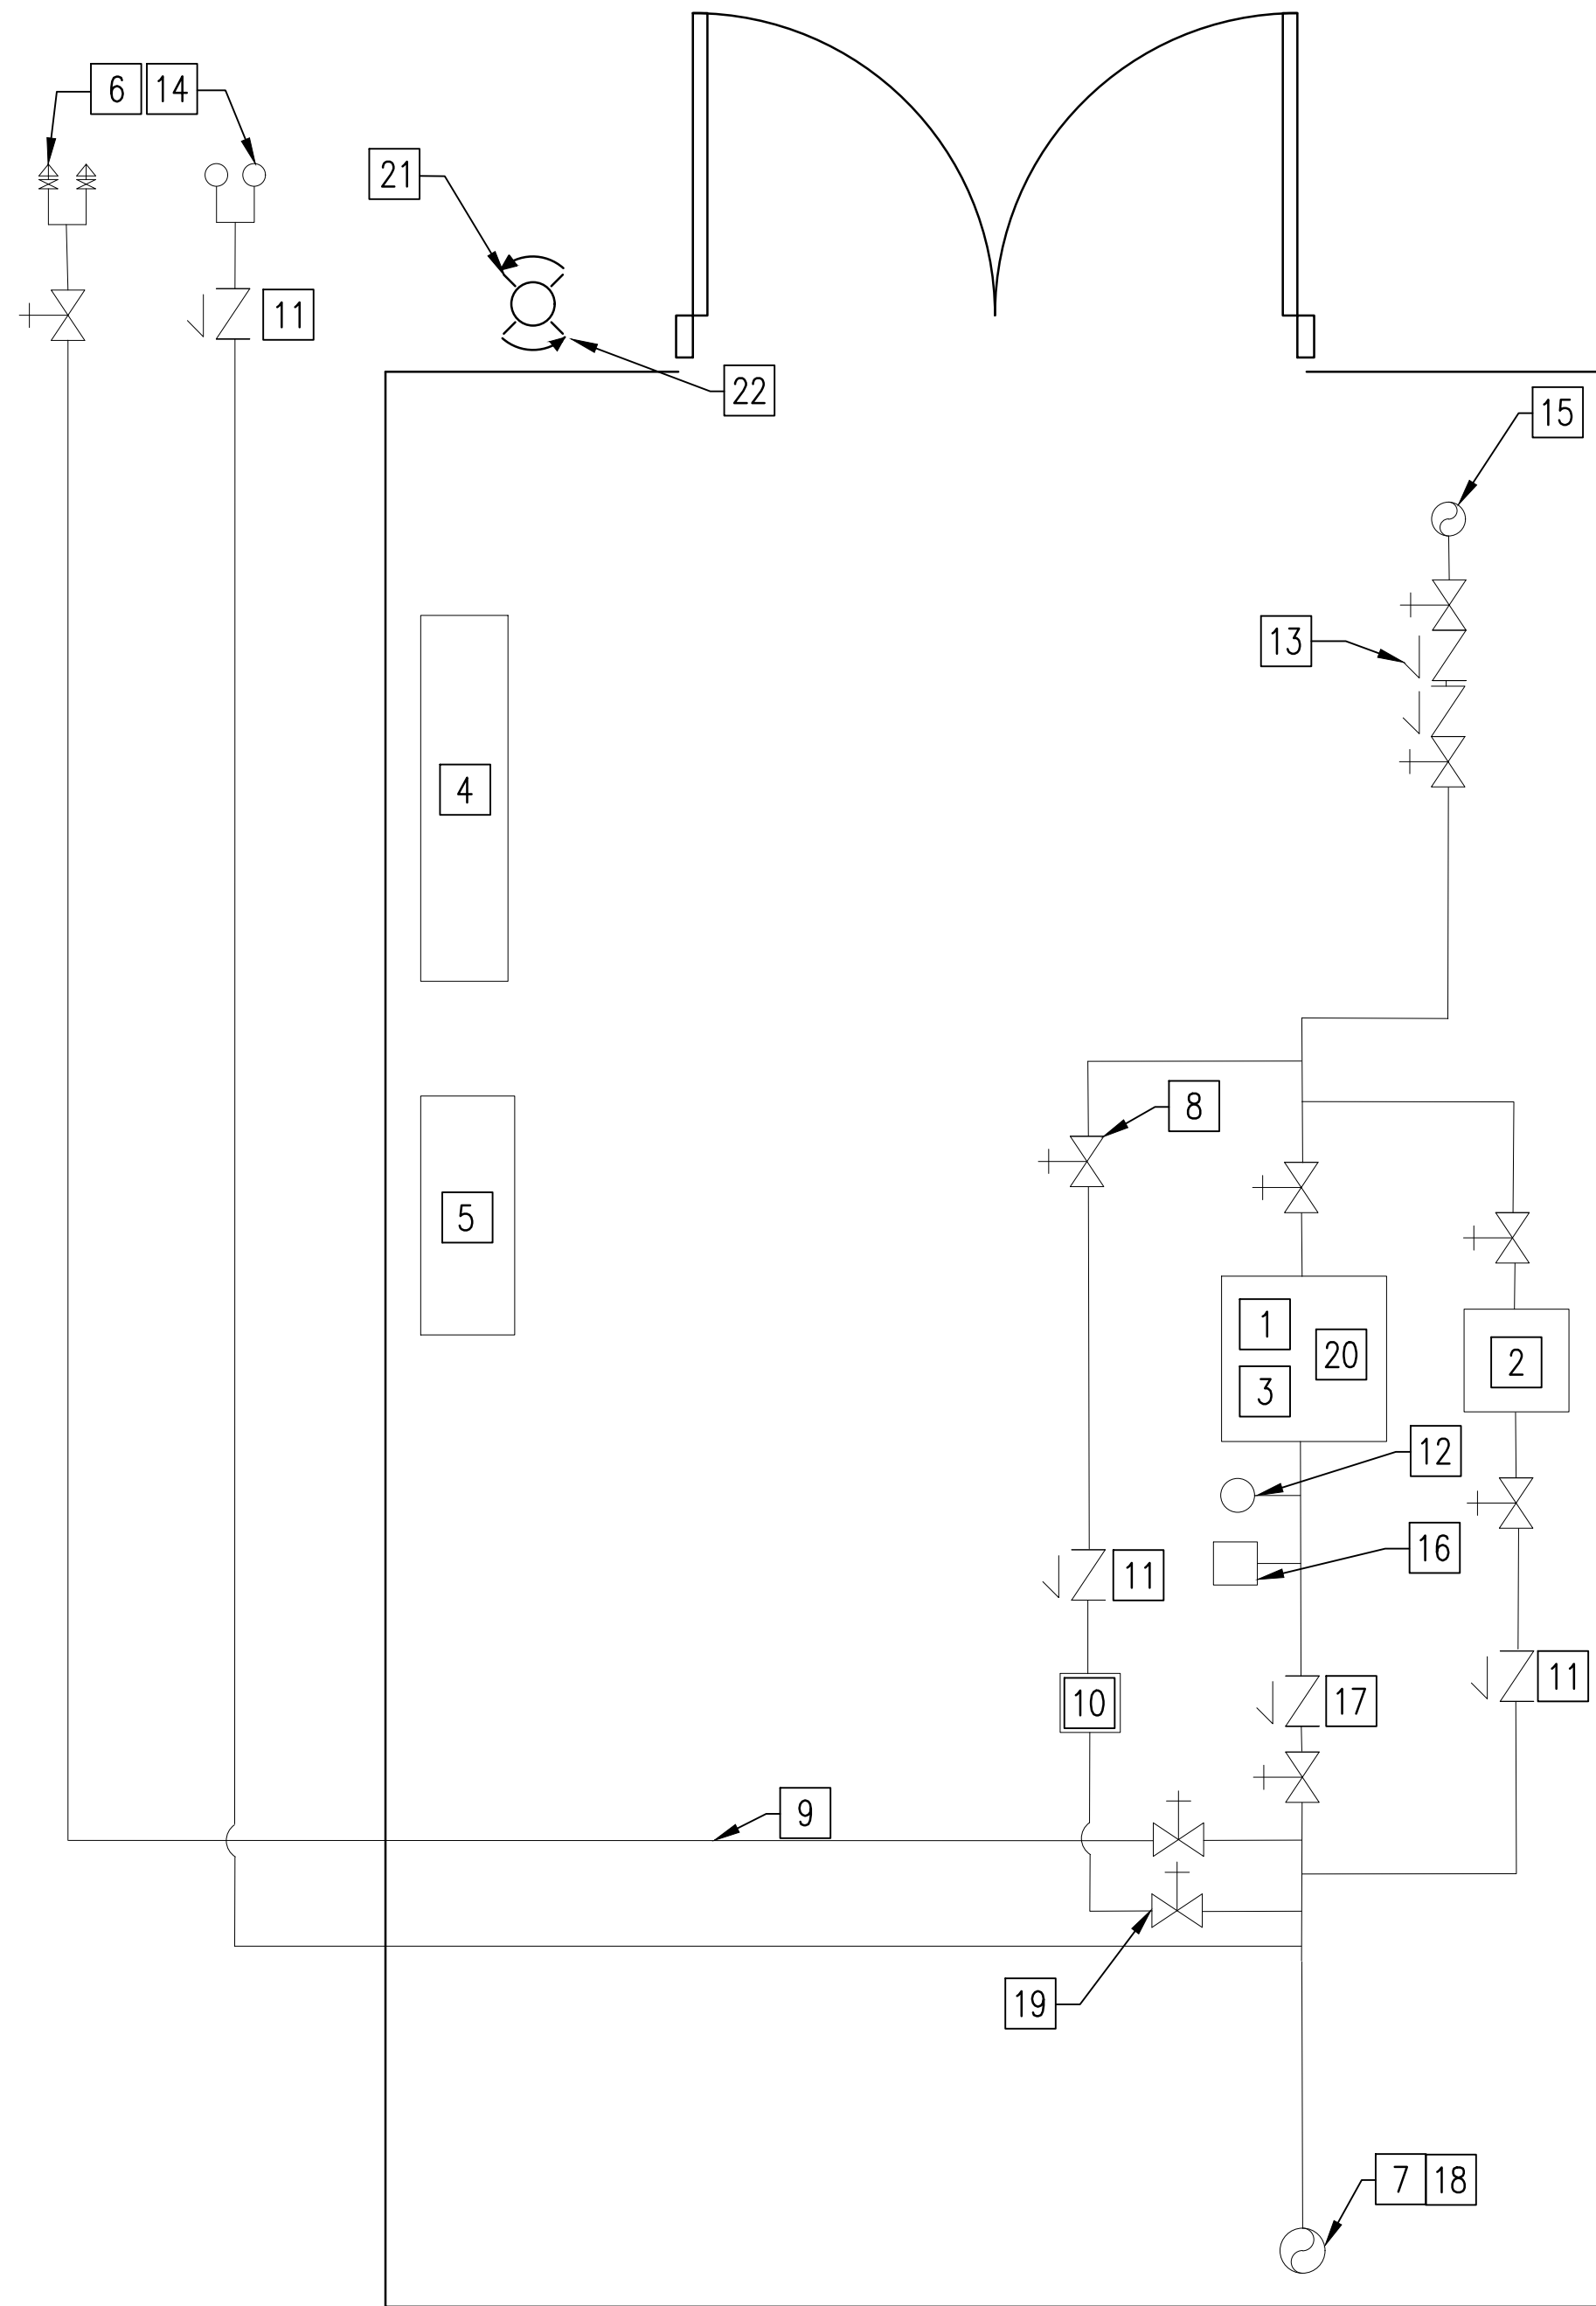

PLAN
NORTH



- 1 1893 L/MIN @ 4.76 BAR FIRE PUMP
- 2 60.56 L/MIN @ 5.86 BAR JOCKEY PUMP
- 3 ELECTRIC MOTOR
- 4 FIRE PUMP CONTROLLER
- 5 JOCKEY PUMP CONTROLLER
- 6 FIRE PUMP TEST HEADER WITH THREE 65 MM HOSE VALVE CONNECTIONS
- 7 BUILDING SPRINKLER SYSTEM
- 8 METER CONTROL VALVE
- 9 150 MM TO FIRE PUMP TEST HEADER
- 10 125 MM FLOW METER
- 11 CHECK VALVE
- 12 PRESSURE GAUGE
- 13 BACKFLOW PREVENTER
- 14 FIRE DEPARTMENT CONNECTION
- 15 INCOMING FIRE WATER SERVICE
- 16 AUTOMATIC AIR RELEASE VALVE
- 17 DISCHARGE CHECK VALVE
- 18 FLOOR CONTROL VALVE (CONTROL VALVE, CHECK VALVE, FLOW SWITCH, TEST AND DRAIN)
- 19 METER THROTTLE VALVE
- 20 CONCRETE PAD
- 21 ROTATING BEACON TO INDICATE FIRE PUMP RUNNING
- 22 BEACON SIGNAGE. SEE I602B FOR SIGN DETAILS.

GENERAL SHEET NOTES

1. EXACT LOCATION AND ROUTING OF PIPING TO BE DETERMINED BY THE CONTRACTOR. PROVIDE MINIMUM 915 MM CLEARANCE ON ONE SIDE OF THE FIRE PUMP ASSEMBLY AND IN FRONT OF THE CONTROLLER. PROVIDE MINIMUM 915 MM ACCESS IN FRONT OF, AND 150 MM BEHIND, ALL CONTROL VALVES AND CHECK VALVES.



APPROVED

FOR COMMANDER NAVFAC

ACTIVITY

D. EVANS VIA EMAIL

SATISFACTORY TO DATE 01/15/2026

DES LRP DRW LRP CHK MAM

PM/DM MJD/ATP

BRANCH MANAGER DSN

DES PROD DIR WBF

FIRE PROTECTION ENGINEER DSN

DEPARTMENT OF THE NAVY NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND

NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - ATLANTIC

PLANNING, DESIGN AND CONSTRUCTION NORFOLK, VA

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

GRAPHIC SCALE



SCALE: AS NOTED

APPROVED NO. 1838720


CONSTR. CONTR. NO.

NAVFAC DRAWING NO. 14157159

SHEET 97 OF 170


FX401

NAVFAC METRIC DRAWFORM REVISION: 01 OCTOBER 2018

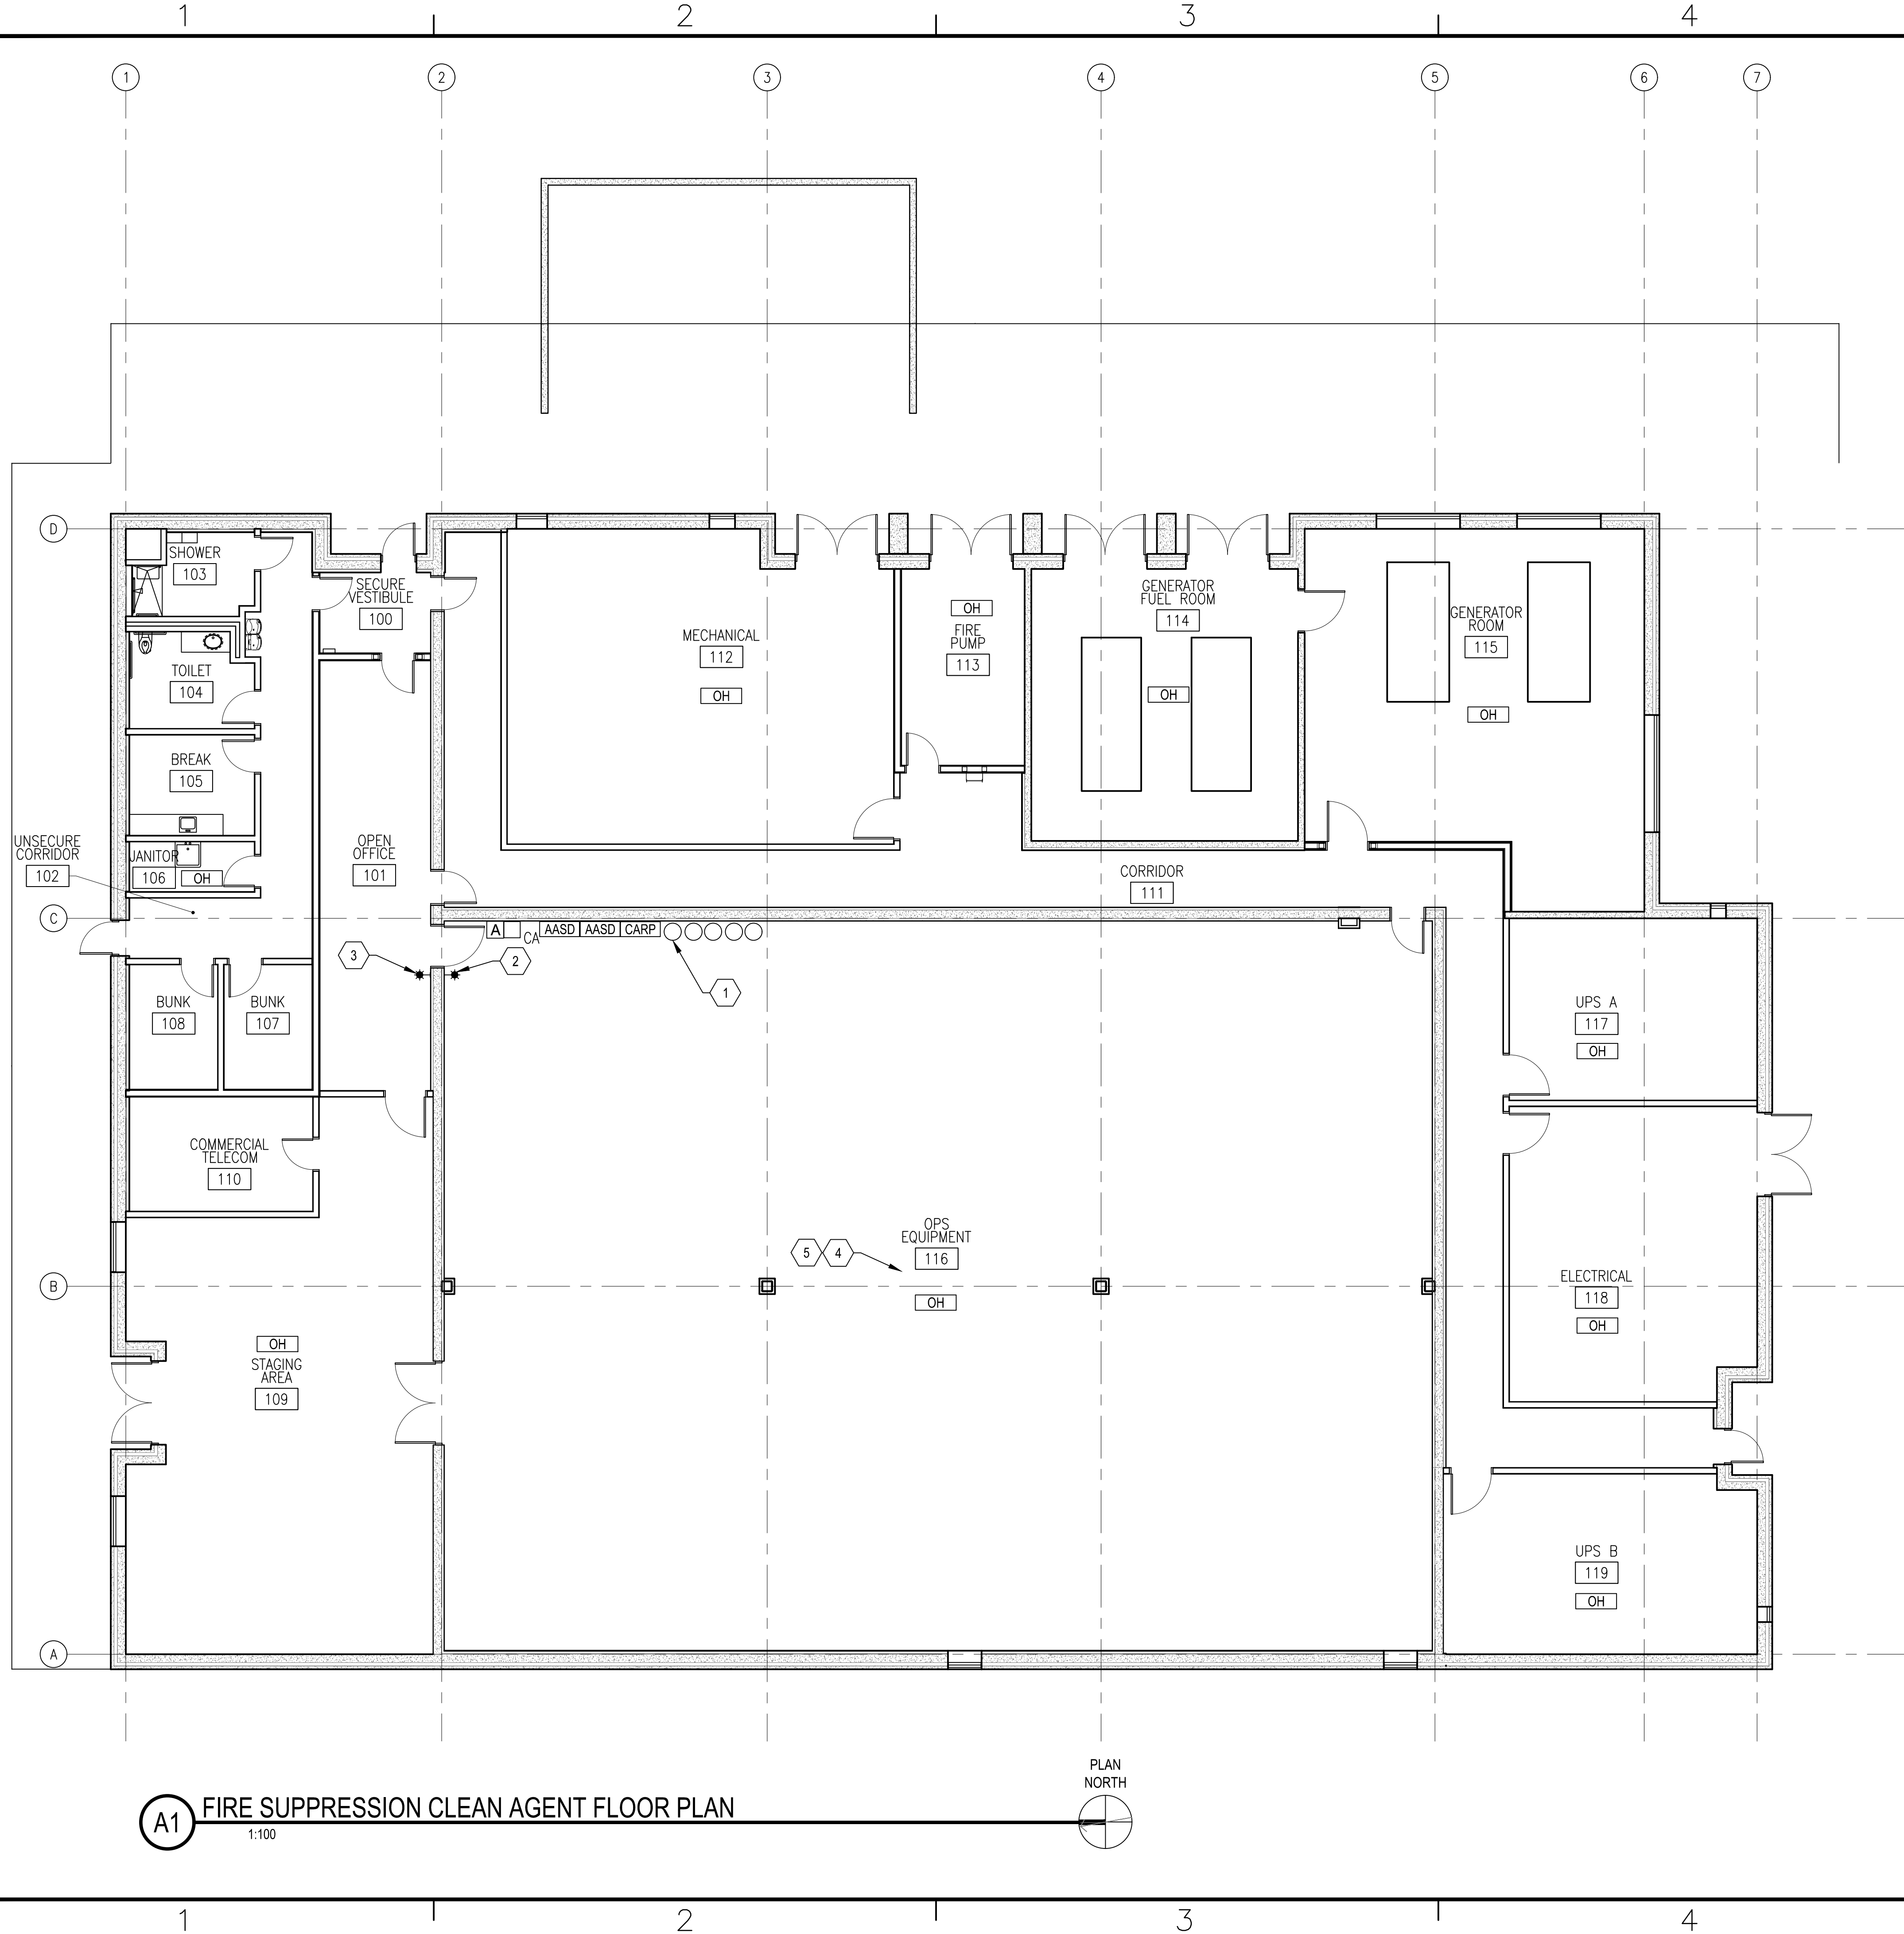

SHEET KEYNOTES

1. PROVIDE PRIMARY CLEAN AGENT CYLINDERS IN THIS LOCATION.
2. PER-DISCHARGE ALARM (RED) STROBE. THIS STROBE SHALL BE LABELED "CLEAN AGENT DISCHARGE. CLEAN AGENT WILL DISCHARGE. EVACUATE THIS ROOM IMMEDIATELY."
3. POST-DISCHARGE ALARM (BLUE) STROBE. THIS STROBE SHALL BE LABELED "CLEAN AGENT POST-DISCHARGE. CLEAN AGENT DISCHARGING WHEN FLASHING - DO NOT ENTER."
4. PROVIDE AIR-ASPIRATING VERY EARLY WARNING SMOKE DETECTION SYSTEM AND CLEAN AGENT SUPPRESSION SYSTEM IN THE PROTECTED AREA.
5. CLEAN AGENT MUST BE PROVIDED BELOW FLOOR AND ABOVE CEILING.

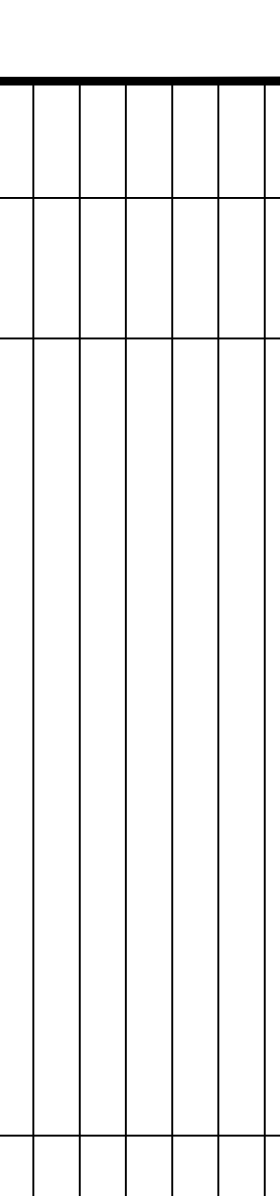

FK101

A1 FIRE SUPPRESSION CLEAN AGENT FLOOR PLAN



METRIC DRAWFORM REVISION: 01 OCTOBER 2018

FILE NAME: Y:\OCONUS\MultipleStations\2024_1783264_P1360_JMMP\B_Design\DWG\Sheet\11_PLB\VT1360_1783264_P-001.dwg LAYOUT NAME: P-001 PLOTTED: Tuesday, January 20, 2026 - 10:01am USER: joseph.n.rhodes


PLUMBING ABBREVIATIONS LEGEND

SCALE: NTS

A ABA ABS ABV ACH AD ADJ AFF AFB AHU ALT AMB ANSI	ARCHITECTURAL BARRIERS ACT ABSOLUTE ABOVE AIR CHANGES PER HOUR ACCESS DOOR ADJUSTABLE ABOVE FINISHED FLOOR ABOVE FINISHED GRADE AIR HANDLING UNIT ALTITUDE AMBIENT AMERICAN NATIONAL STANDARDS INSTITUTE ACCESS PANEL AIR PRESSURE DROP APPROXIMATE ABOVE RAISED FLOOR ALL SERVICE JACKET AUTOMATIC TEMPERATURE CONTROL ATMOSPHERE ACID WASTE STACK ACID VENT STACK	G GA GAL GALV GBD GPD GPH GPM GPU GUH GW GCO	GAUGE GALLON GALVANIZED GARBAGE DRAIN GALLONS PER HOUR GALLONS PER HOUR GALLONS PER MINUTE GALLONS PER UNIT GAS UNIT HEATER GREASE WASTE GROUND CLEANOUT	Q QTY R RA RAD RD REF REL A RH RHC RI RL RO RPM RS S SA SAN SCHEDULE SD SH SKD SEER SENS SF SF SF SP SPEC SOV SRD SS ST STL	QUANTITY RETURN AIR REFRIGERATED AIR DRYER ROOF DRAIN REFERENCE RELIEF AIR RELATIVE HUMIDITY REHEAT COIL ROOF INTAKE REFRIGERANT LIQUID/RAIN LEADER ROOF OPENING REVOLUTIONS PER MINUTE REFRIGERANT SUCTION SUPPLY AIR SANITARY SCHEDULE SMOKE DETECTOR SHOWER SMOKE DAMPER SEASONAL ENERGY EFFICIENCY RATIO SENSIBLE SQUARE FEET SQUARE FEET SUPPLY FAN STATIC PRESSURE (INCHES OF WATER) SPECIFICATION SHUT-OFF VALVE SECONDARY ROOF DRAIN STAINLESS STEEL/SOIL STACK STORM DRAIN STEEL
B B BB BDD B/F BHP BMS BOD BOF BOL BOP BOS BTUH	BOILER BASEBOARD HEATERS BACKDRAFT DAMPER BELOW FLOOR BRAKE HORSEPOWER BUILDING MANAGEMENT SYSTEM BOTTOM OF DUCT BOTTOM OF FAN BOTTOM OF LOUVER BOTTOM OF PIPE BOTTOM OF STEEL BRITISH THERMAL UNIT PER HOUR	H HBA HQA HP HPU HR HW HWP HWS HWR HX	HOSE BIB HAND-OFF-AUTOMATIC SWITCH HORSEPOWER HEAT PUMP UNIT HOUR HOT WATER, DOMESTIC HOT WATER PUMP HOT WATER SUPPLY HOT WATER RETURN HEAT EXCHANGER	U UON U/F U/G	UNLESS OTHERWISE NOTED UNDERFLOOR UNDERGROUND
C C CA CD CFH CFM CH CHP CHS CHR CL CLG CM CMU CO COL CONN CONT CP CU FT CRU CT CUH CV CW CWP CWR CWS	CELSIUS COMPRESSED AIR CONDENSATE DRAIN LINE CUBIC FEET PER HOUR CUBIC FEET PER MINUTE CHILLER CHILLED WATER PUMP CHILLED WATER SUPPLY CHILLED WATER RETURN CENTER LINE CEILING CENTIMETERS CONCRETE MASONRY UNIT CLEANOUT COLUMN CONNECT CONTINUED CONTROL PANEL CUBIC FEET COMPUTER ROOM UNIT COOLING TOWER CABINET UNIT HEATER CONSTANT VOLUME COLD WATER, DOMESTIC CONDENSER WATER PUMP CONDENSER WATER RETURN CONDENSER WATER SUPPLY	K KG KPA KW	KILOGRAMS KILO PASCAL KILOWATTS	M MAU MAX MBH MCA MCC MD MECH MEZZ MIN MISC M MM MOCP MTD MUW	MAKE-UP AIR UNIT MAXIMUM BTU PER HOUR (THOUSAND) MINIMUM CIRCUIT AMPS MOTOR CONTROL CENTER MOTORIZED DAMPER MECHANICAL MEZZANINE MINIMUM MISCELLANEOUS METERS MILLIMETERS MAXIMUM OVER-CURRENT PROTECTION MOUNTED MAKE-UP WATER
D DAC DB db DCU DDC DEG DIA DN DWG DX	DUCTLESS SPLIT INDOOR UNIT DRY BULB DECIBEL DUCTLESS SPLIT OUTDOOR UNIT DIRECT DIGITAL CONTROL DEGREES DIAMETER DOWN DRAWING DIRECT EXPANSION	N NC N.C. NEG NIC NO N.O. NOM NTS	NOISE CRITERIA NORMALLY CLOSED NEGATIVE NOT IN CONTRACT NUMBER NORMALLY OPEN NOMINAL NOT TO SCALE	W W WB WCO WG WH WHA WO WPD WS WSPH W/TP W/W W/O	WASTE WET BULB WALL CLEANOUT WATER GAUGE WALL HYDRANT WATER HAMPER ARRESTOR WALL OPENING WATER PRESSURE DROP WASTE STACK WATER SOURCE HEAT PUMP WITH TRAP PRIMER WATTS WITH WITH OUT
E E EA EAT ECU EDH EER EF EL ELEC EQ ERV ESP ET EUH EWC EWH EWS EWT EXH EXP	EXISTING MATERIAL OR EQUIPMENT EACH / EXHAUST AIR ENTERING AIR TEMPERATURE EVAPORATIVE COOLING UNIT ELECTRIC DUCT HEATER ENERGY EFFICIENCY RATIO EXHAUST FAN ELEVATION ELECTRICAL / ELECTRIC EQUIVALENT ENERGY RECOVERY VENTILATOR EXTERNAL STATIC PRESSURE EXPANSION TANK ELECTRIC UNIT HEATER ELECTRIC WATER COOLER ELECTRIC WALL HEATER EMERGENCY EYEWASH/SHOWER ENTERING WATER TEMPERATURE EXHAUST AIR EXPANSION	O OA OAI OAT OAU OBD OC OD OW OZ	OUTSIDE AIR OUTSIDE AIR INTAKE OUTSIDE AIR TEMPERATURE OUTSIDE AIR UNIT OPPOSED BLADE DAMPER ON CENTER OUTSIDE DIAMETER OILY WASTE OUNCE	Z ZD ZN	Z-DUCT ZONE
F F FA FC FCO FCU FD FL FLA FLD FOB FPB FPM FPS FS FSD FSK FT FTG	FAHRENHEIT FIRE ALARM FLEXIBLE CONNECTIOIN FLOOR CLEANOUT FAN COIL UNIT FIRE DAMPER/FLOOR DRAIN FLOOR FULL LOAD AMPERES FLOOR DRAIN FLAT ON BOTTOM FAN POWERED VARIABLE AIR VOLUME BOX FEET PER MINUTE FEET PER SECOND FLOOR SINK FIRE/SMOKE DAMPER FOIL SCRM KRAFT FEET OR FOOT FOOTING	P P PA PD PH POC POS PRI PRESS PSI PSIG PTAC PVC	PUMP PASCAL PRESSURE DROP (FEET OF WATER) PLUMBING DRAINAGE INSTITUTE PHASE POINT OF CONNECTION POSITIVE PRIMARY PRESSURE POUNDS PER SQUARE INCH PSI GAGE PACKAGED TERMINAL AIR CONDITIONER POLYVINYL CHLORIDE		


SYMBOLS LEGEND

SCALE: NTS

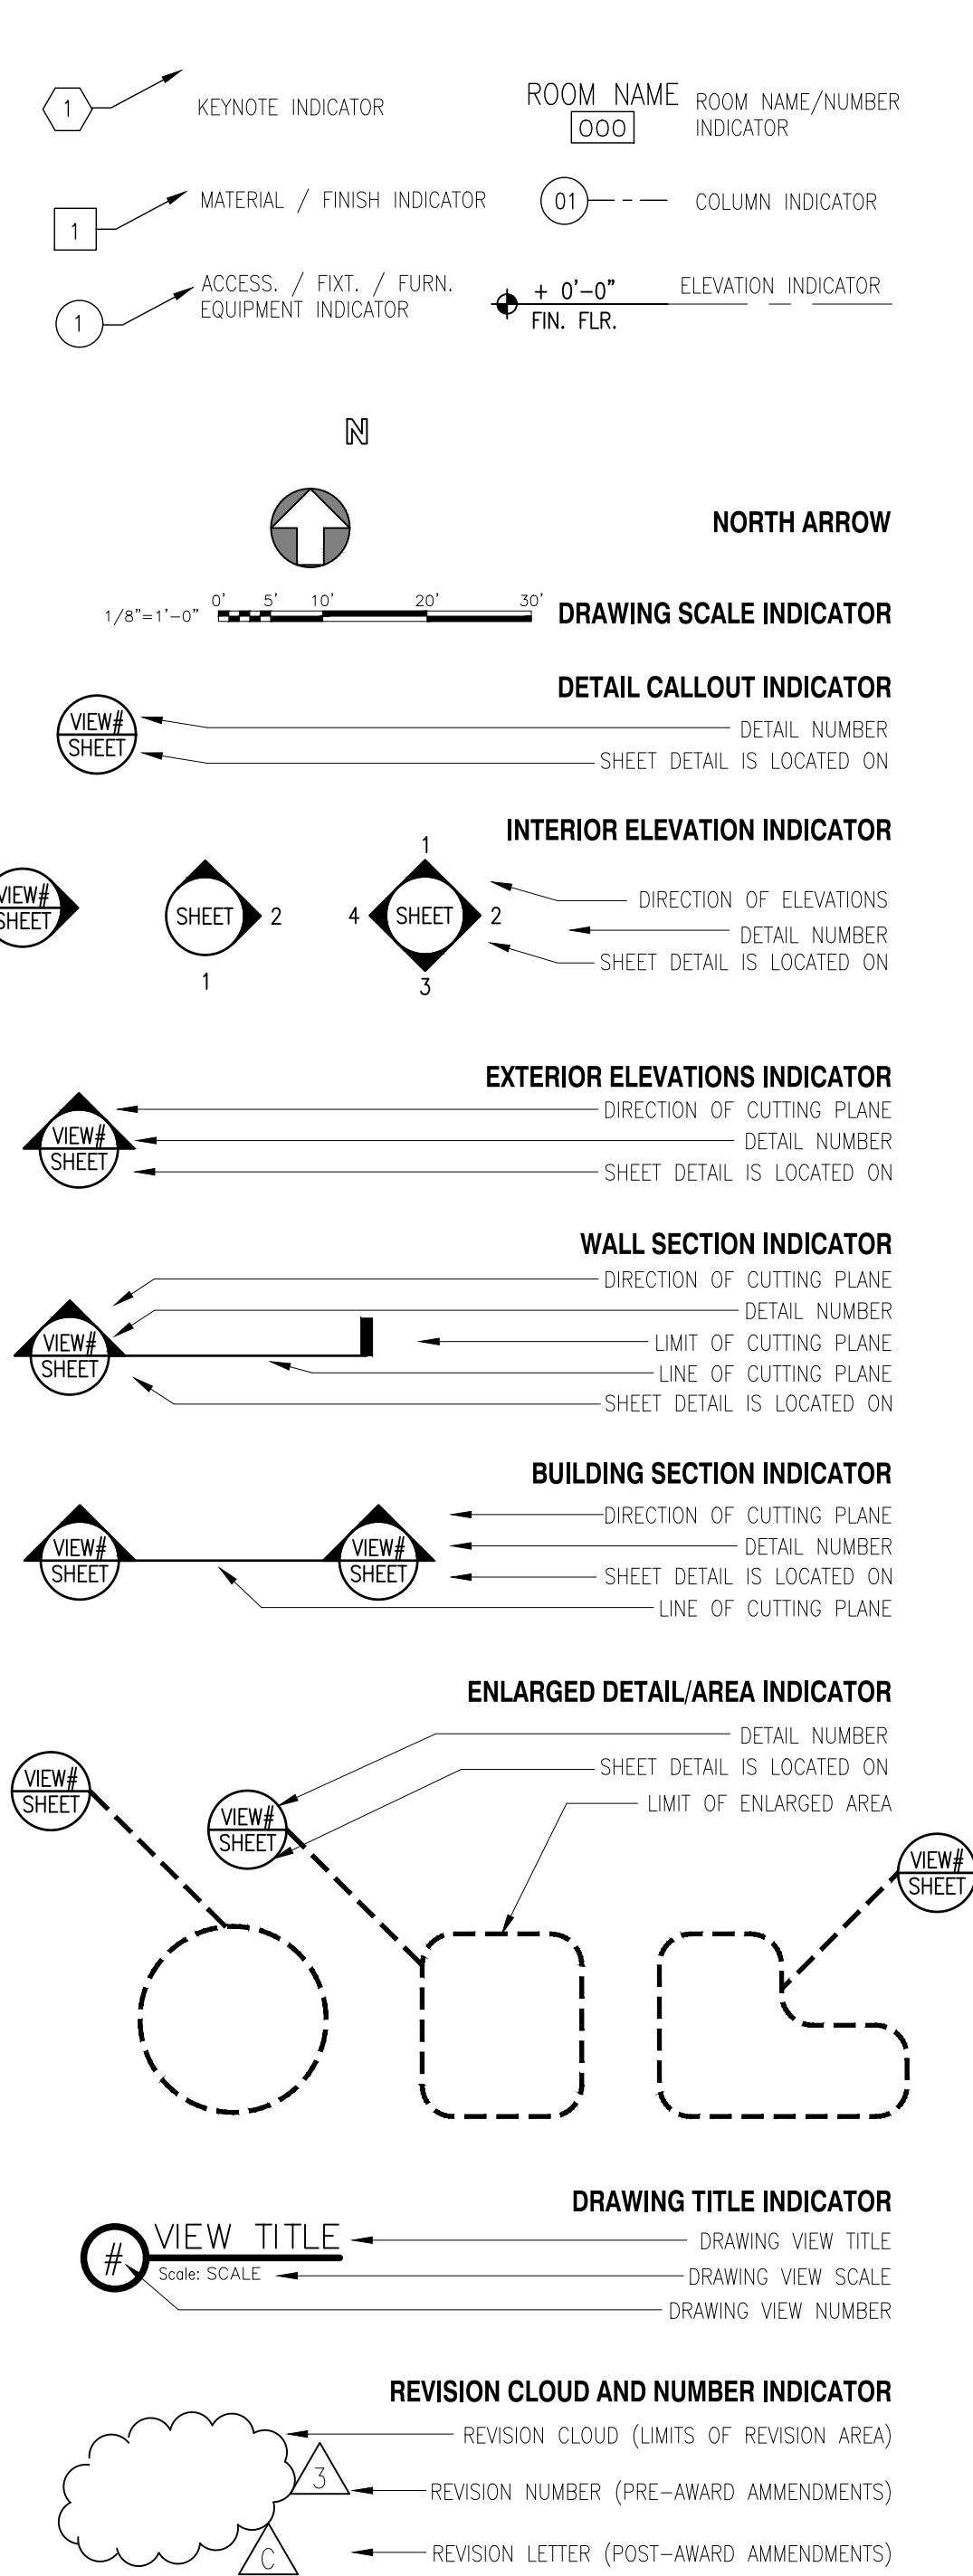


PLUMBING LINETYPE LEGEND

SCALE: NTS

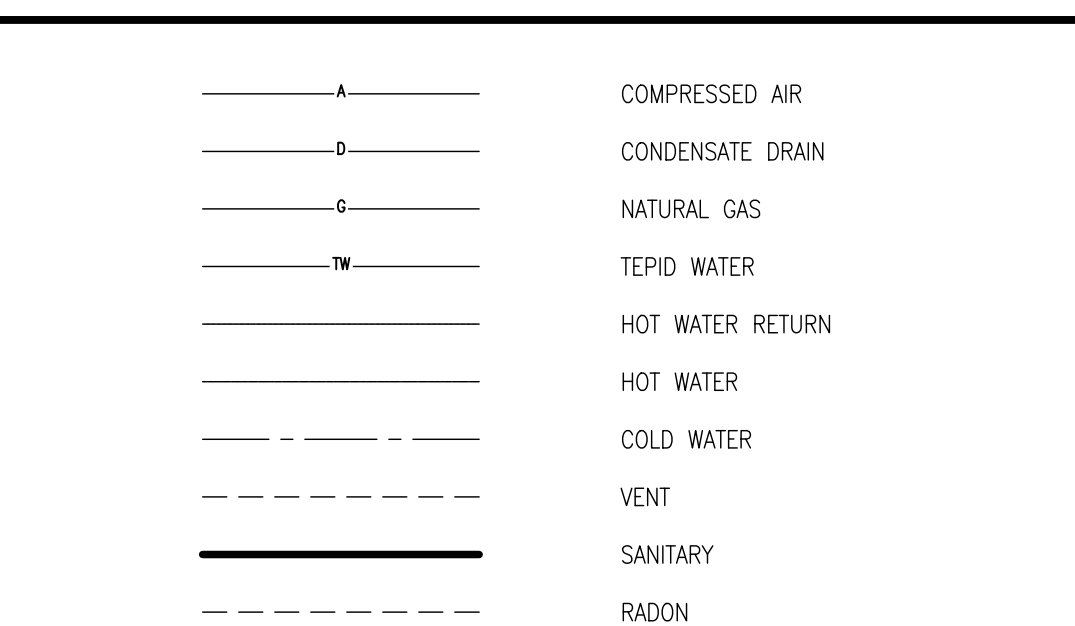

PLUMBING SYMBOLS LEGEND

SCALE: NTS

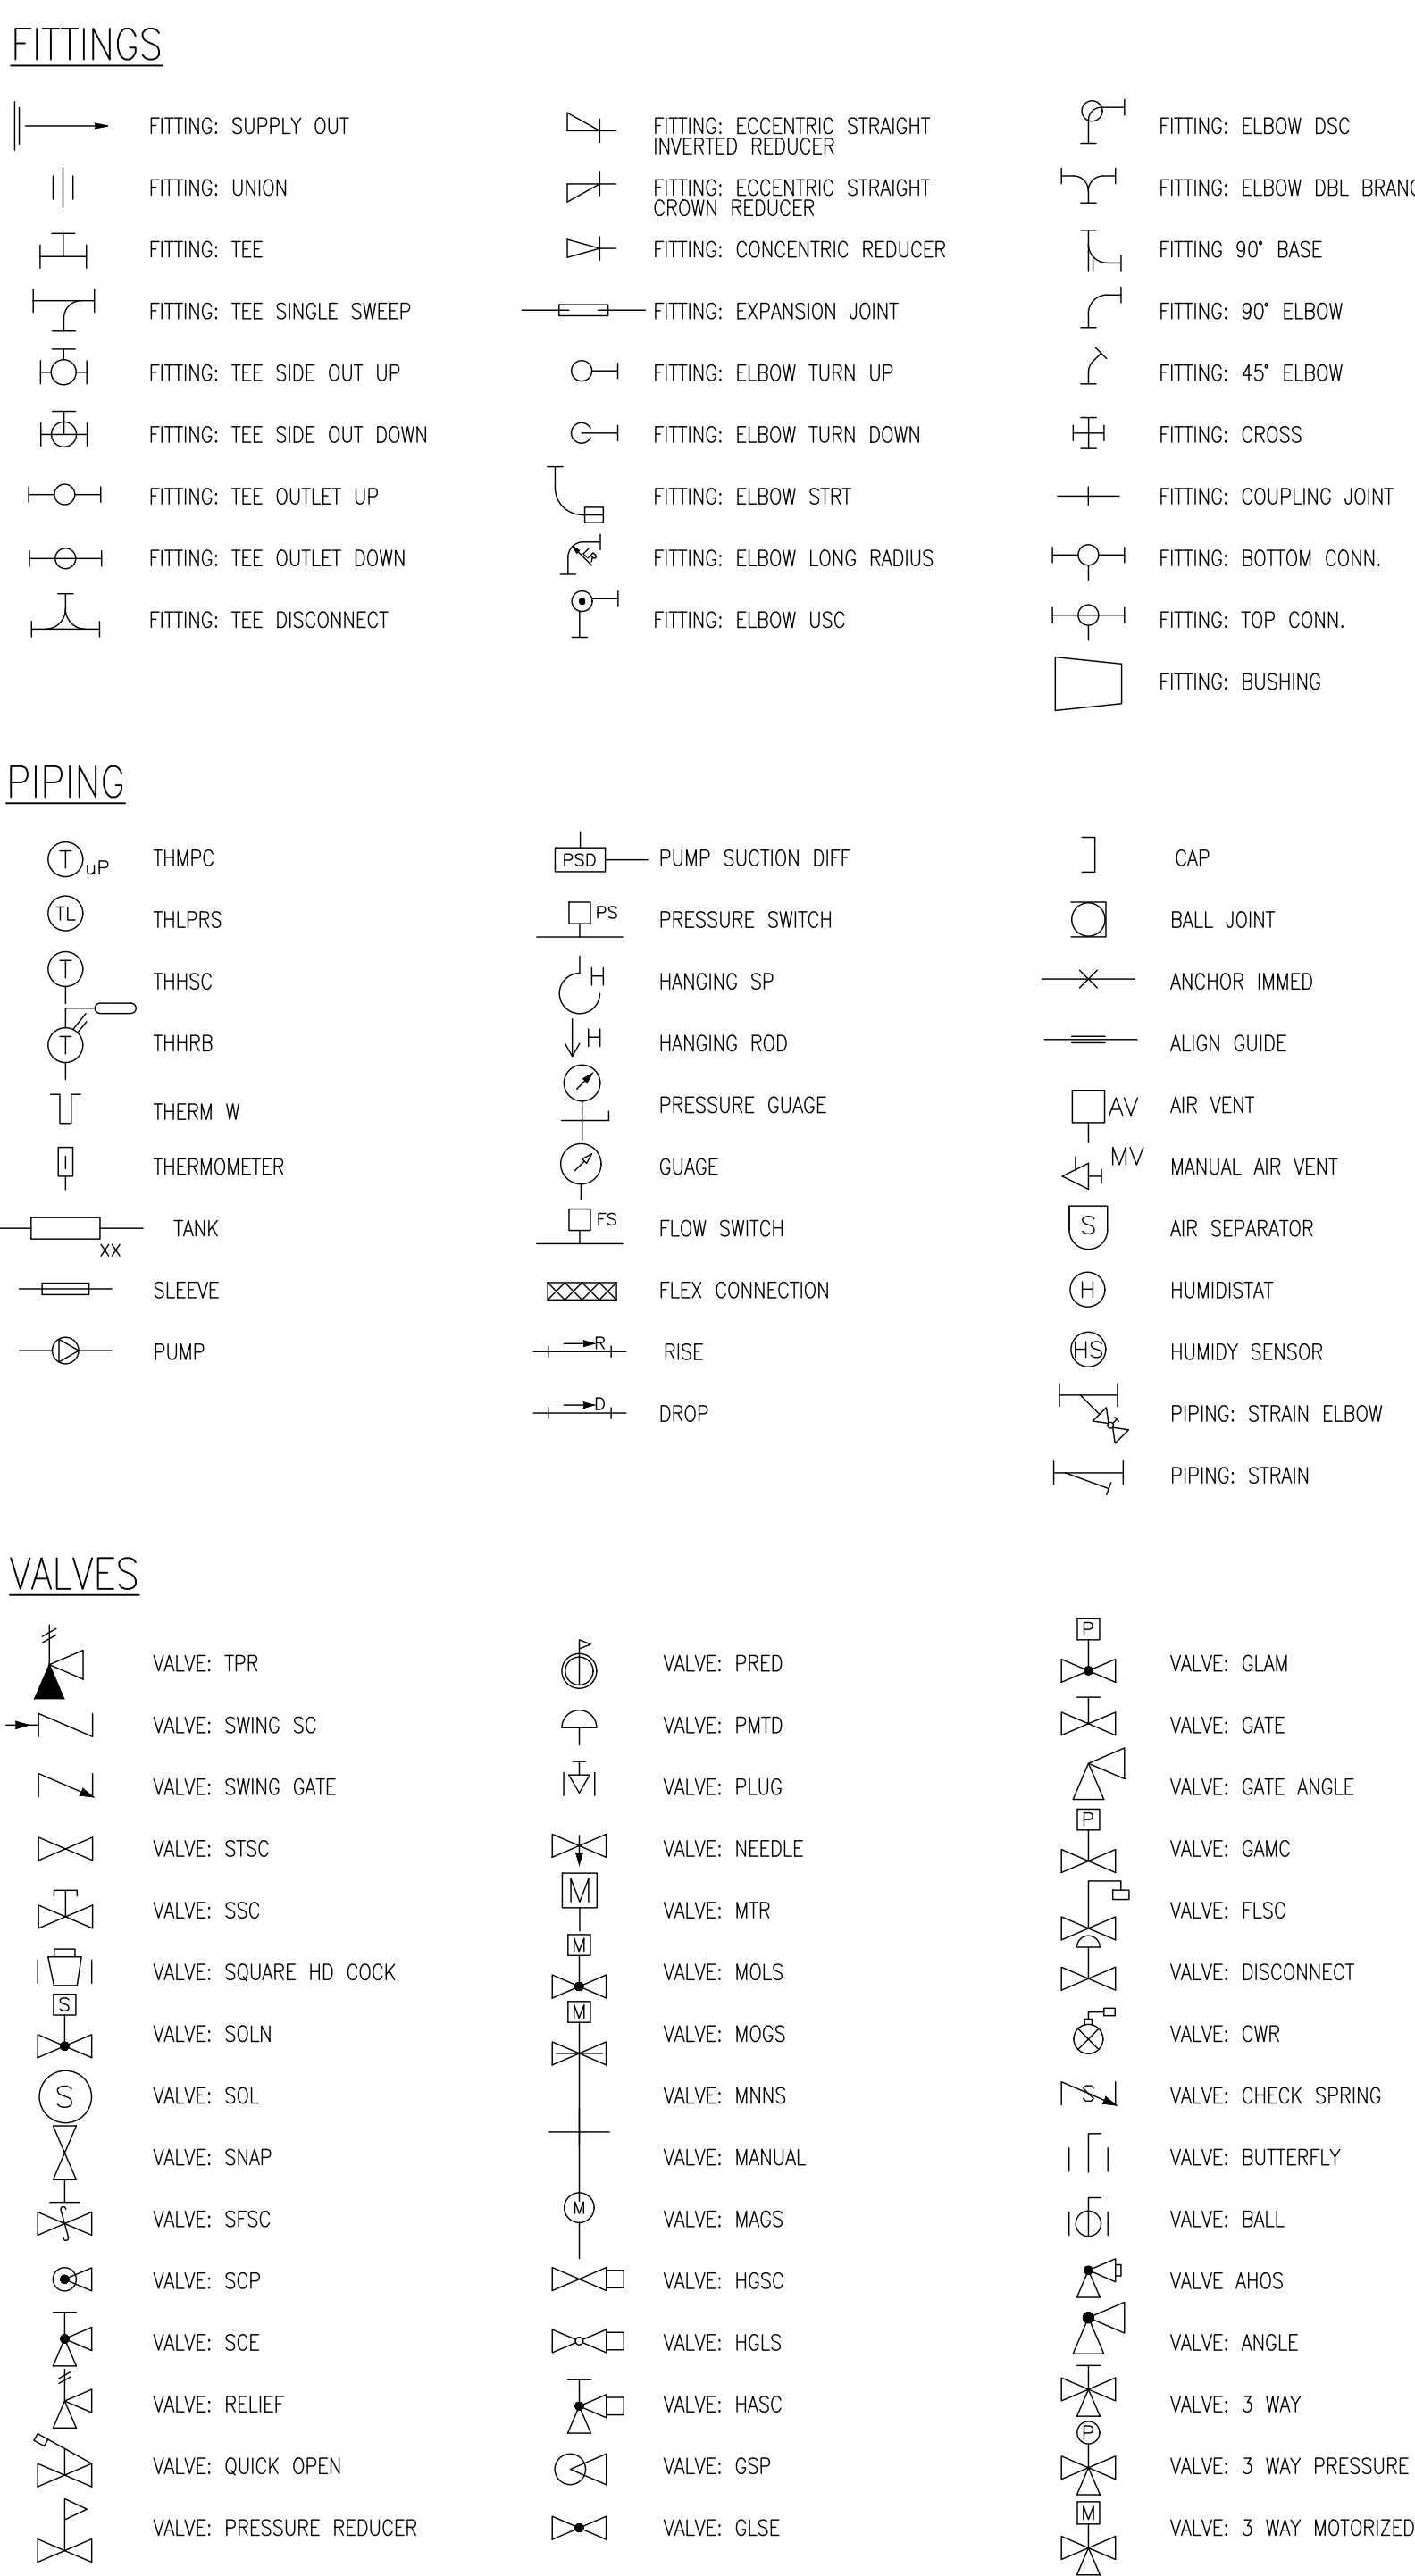

PLUMBING GENERAL NOTES


SCALE: NTS

- THESE GENERAL PLUMBING NOTES APPLY TO PLUMBING DRAWINGS IN THE SET. SHEET SPECIFIC NOTES ARE INDICATED ON EACH SHEET UNDER GENERAL SHEET NOTES.
- PROVIDE ALL EQUIPMENT PER MANUFACTURER'S INSTRUCTIONS.
- PROVIDE ALL MATERIALS AND EQUIPMENT AND PERFORM ALL LABOR REQUIRED TO PROVIDE COMPLETE AND OPERABLE PLUMBING SYSTEMS AS INDICATED ON THE DRAWINGS, SPECIFIED AND AS REQUIRED BY CODE.
- PROVIDE PLUMBING FIXTURES AND EQUIPMENT WITH ACCESSIBLE STOPS.
- FIELD VERIFY DIMENSIONS PRIOR TO PROCUREMENT AND INSTALLATION OF EQUIPMENT AND MATERIAL.
- PROVIDE CLEANOUTS FULL SIZE OF PIPE.
- COORDINATE PIPING WORK WITH OTHER TRADES, PROVIDE OFFSETS IN PIPING AROUND OBSTRUCTIONS AT NO ADDITIONAL COST TO THE GOVERNMENT.
- EXTEND PLUMBING VENTS WITHIN A 3M RADIUS OF EXHAUST VENTS TO A HEIGHT OF 1M ABOVE EXHAUST VENT CROWN.
- EXTEND PLUMBING VENTS WITHIN A 3M RADIUS OF ANY VENTILATION UNIT TO A HEIGHT OF 1M ABOVE THE VENTILATION INTAKE.
- MOUNT HOSE BIBBS 750MM ABOVE FINISH FLOOR UON.
- MOUNT WALL HYDRANTS 600MM ABOVE FINISHED GRADE UON.
- ESTABLISH SLOPES AND INVERT ELEVATIONS OF INTERIOR PIPING BEFORE PIPING IS INSTALLED, SO THAT SLOPES WILL BE MAINTAINED. INSTALL PIPING TO AVOID CONFLICT WITH OTHER TRADES.
- COORDINATE WITH ARCHITECTURAL DRAWINGS PRIOR TO ROUGHING-IN PLUMBING FIXTURES.
- MAKE CODE-COMPLIANT HOT AND COLD WATER, HOT WATER RECIRCULATING, WASTE, VENT, AND GAS, ETC PIPING CONNECTIONS TO ALL FIXTURES AND EQUIPMENT EVEN THOUGH ALL BRANCHES, FITTINGS AND CONNECTIONS ARE NOT SHOWN.
- PROVIDE DEEP SEAL TRAPS FOR ALL FLOOR DRAINS.
- PROVIDE EQUIPMENT, PLUMBING FIXTURES, TRIM HARDWARE AND/OR DEVICES USUALLY UTILIZED IN THE CLASS OF WORK, THROUGH NOT SPECIFICALLY MENTIONED OR SHOWN ON THE DRAWINGS, BUT WHICH MAY BE NECESSARY FOR THE SATISFACTORY COMPLETION OF THE WORK (AS DETERMINED BY THE CONTRACTING OFFICER).
- PROVIDE MATERIALS AND EQUIPMENT WITH STAMPS OR SEALS OF ARI, ASME, UL, ASTM, CE OR ETL.
- PERFORM TESTS FOR ACCEPTANCE AND APPROVAL BY CODE AND THE REQUIREMENTS OF APPLICABLE REGULATORY AGENCIES. PERFORM REQUIRED TESTS IN THE PRESENCE OF THE GOVERNMENT UNLESS OTHERWISE WAIVED IN WRITING.
- COORDINATE WORK TO AVOID AND RESOLVE CONFLICTS PRIOR TO PERFORMING WORK.
- RUN PIPING CONCEALED ABOVE CEILING OR IN WALLS OR CHASES UNLESS OTHERWISE NOTED. RUN PIPING ABOVE CEILING TIGHT TO THE UNDERSIDE OF THE STRUCTURE, EXCEPT INSTALL COMPONENTS REQUIRING MAINTENANCE: NO HIGHER THE 3.6M AFF.
- LAYOUT OF PIPING IS DIAGRAMMATIC. RUN EXPOSED PIPING TIGHT TO THE STRUCTURE, UNLESS OTHERWISE NOTED. ALLOW FOR RISES, DROPS, AND OFFSETS AS REQUIRED.
- SLOPE SANITARY SEWER PIPING DOWNWARD AT A MINIMUM 20MM/M.
- PROVIDE ACCESS PANELS IN WALLS AND HARD CEILINGS TO ACCESS PLUMBING VALVES AND EQUIPMENT REQUIRING FOR WATER HAMMER ARRESTORS.
- PROVIDE SEISMIC PROTECTION FOR PIPING AND EQUIPMENT IN ACCORDANCE WITH THE SEISMIC DESIGN CRITERIA INDICATED ON STRUCTURAL DRAWING SHEET 5-001.
- AFTER THE PIPING IS INSULATED, PROVIDE FACTORY-FABRICATED PIPE LABELS ON THE FOLLOWING PIPING, AT 3M ON CENTER ON THE PIPING MAINS AND 1.5M ON CENTER ON THE BRANCH RUNOUTS FROM MAINS:

HW	DOMESTIC HOT WATER
CW	DOMESTIC COLD WATER
HWR	DOMESTIC HOT WATER RETURN
CA	COMPRESSED AIR
OD	OIL DISTRIBUTION

APPR	DATE	DESCRIPTION	SEAL	A/E INFO
FOR COMMANDER NAVFAC				
ACTIVITY				
D. EVANS VIA EMAIL				
SATISFACTORY TO DATE 01/15/2026				
DES JNR	DRW JNR	CHK BJR		
PM/DM	MUD/ATP			
BRANCH MANAGER STEPHEN ERICSON				
DES PROD DIR	WBF			
FIRE PROTECTION ENGINEER DSN				
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND				
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - ATLANTIC				
NORFOLK VA				
VARIOUS LOCATIONS				
JOINT MARITIME FACILITY				
GENERAL NOTES, SYMBOLS, AND LEGEND				
SCALE: AS NOTED				
APPROVED NO. 1838720				
CONSTR. CONTR. NO.				
NAVFAC DRAWING NO. 14157162				
SHEET 100 OF 170				
P-001				

FILE NAME: Y:\CONUS\MultipleSites\2026_1783264_P1360_JAMFAB_Design\DWG\Sheet\11_PLEB\VT1360_1783264_P-101.dwg LAYOUT NAME: P-101 PLOTTED: Tuesday, January 20, 2026 - 10:02am USER: joseph.n.rhodes

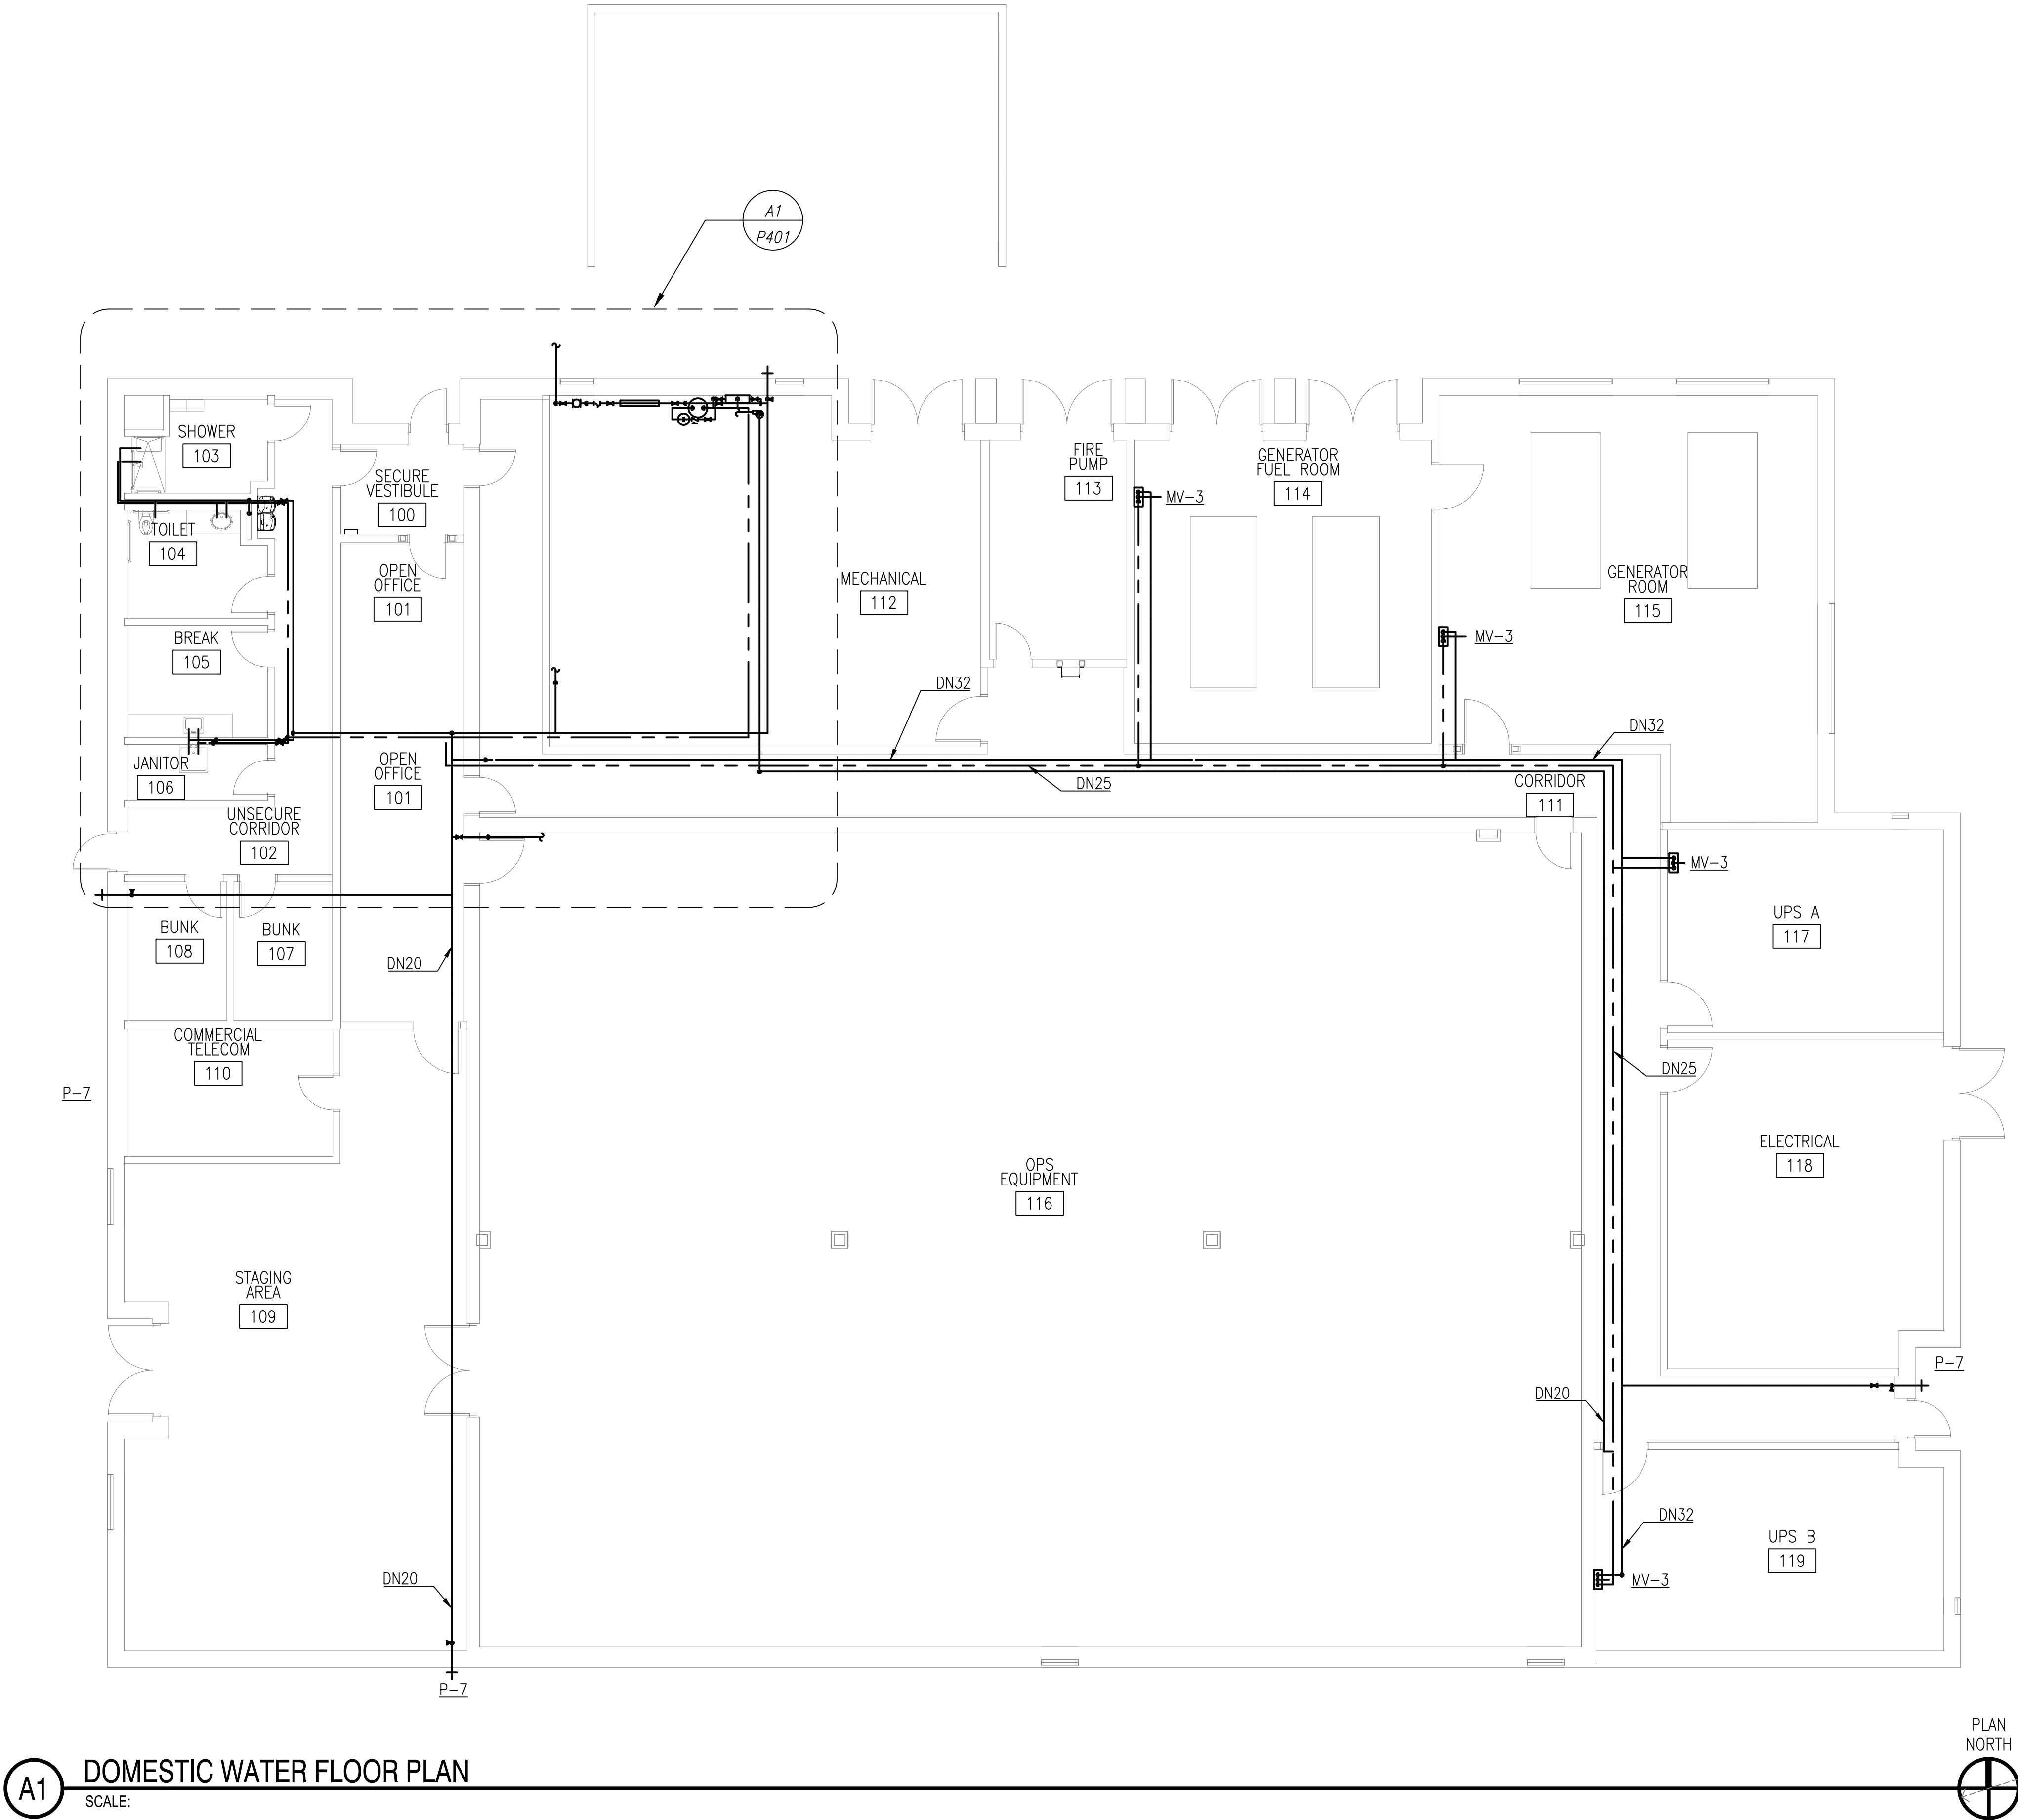


GENERAL SHEET NOTES

- REFER TO CIVIL SHEETS FOR PIPING CONTINUATION.
- REFER TO PIPING DIAGRAMS ON P-701 FOR PIPE SIZES

SHEET KEYNOTES

- PIPING DOWN TO BELOW RAISED FLOOR TO SERVE CRAH HUMIDIFIERS.
- PIPE SUPPORT REQUIRED BELOW RAISED FLOOR.
- COORDINATE WITH MECHANICAL ON PIPING CONTINUATION.



APPROVED:
FOR COMMANDER NAVFAC
ACTIVITY
D. EVANS VIA EMAIL
SATISFACTORY TO: DATE: 01/15/2026
DES: JNR DRW: JNR CHK: BJR
PM/DM: MJD/ATP
BRANCH MANAGER: STEPHEN ERICSON
DES PROD DIR: WBF
FIRE PROTECTION ENGINEER: DSN


DEPARTMENT OF THE NAVY
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - ATLANTIC
PLANNING, DESIGN AND CONSTRUCTION
VARIOUS LOCATIONS
VARIOUS LOCATIONS
JOINT MARITIME FACILITY
DOMESTIC WATER - FLOOR PLAN

GRAPHIC SCALE



SCALE: AS NOTED
APPROVED NO.: 1838720
CONSTR. CONTR. NO.
NAVFAC DRAWING NO.: 14157163
SHEET 101 OF 170
P-101

FILE NAME: Y:\CONUS\MultipleStations\2026_1783264_P1360_JAMFAB_Design\DWG\Sheet\11_P1360_V1360_1783264_P-102.dwg LAYOUT NAME: P-102 PLOTTED: Tuesday, January 20, 2026 - 10:02am USER: joseph.n.rhodes

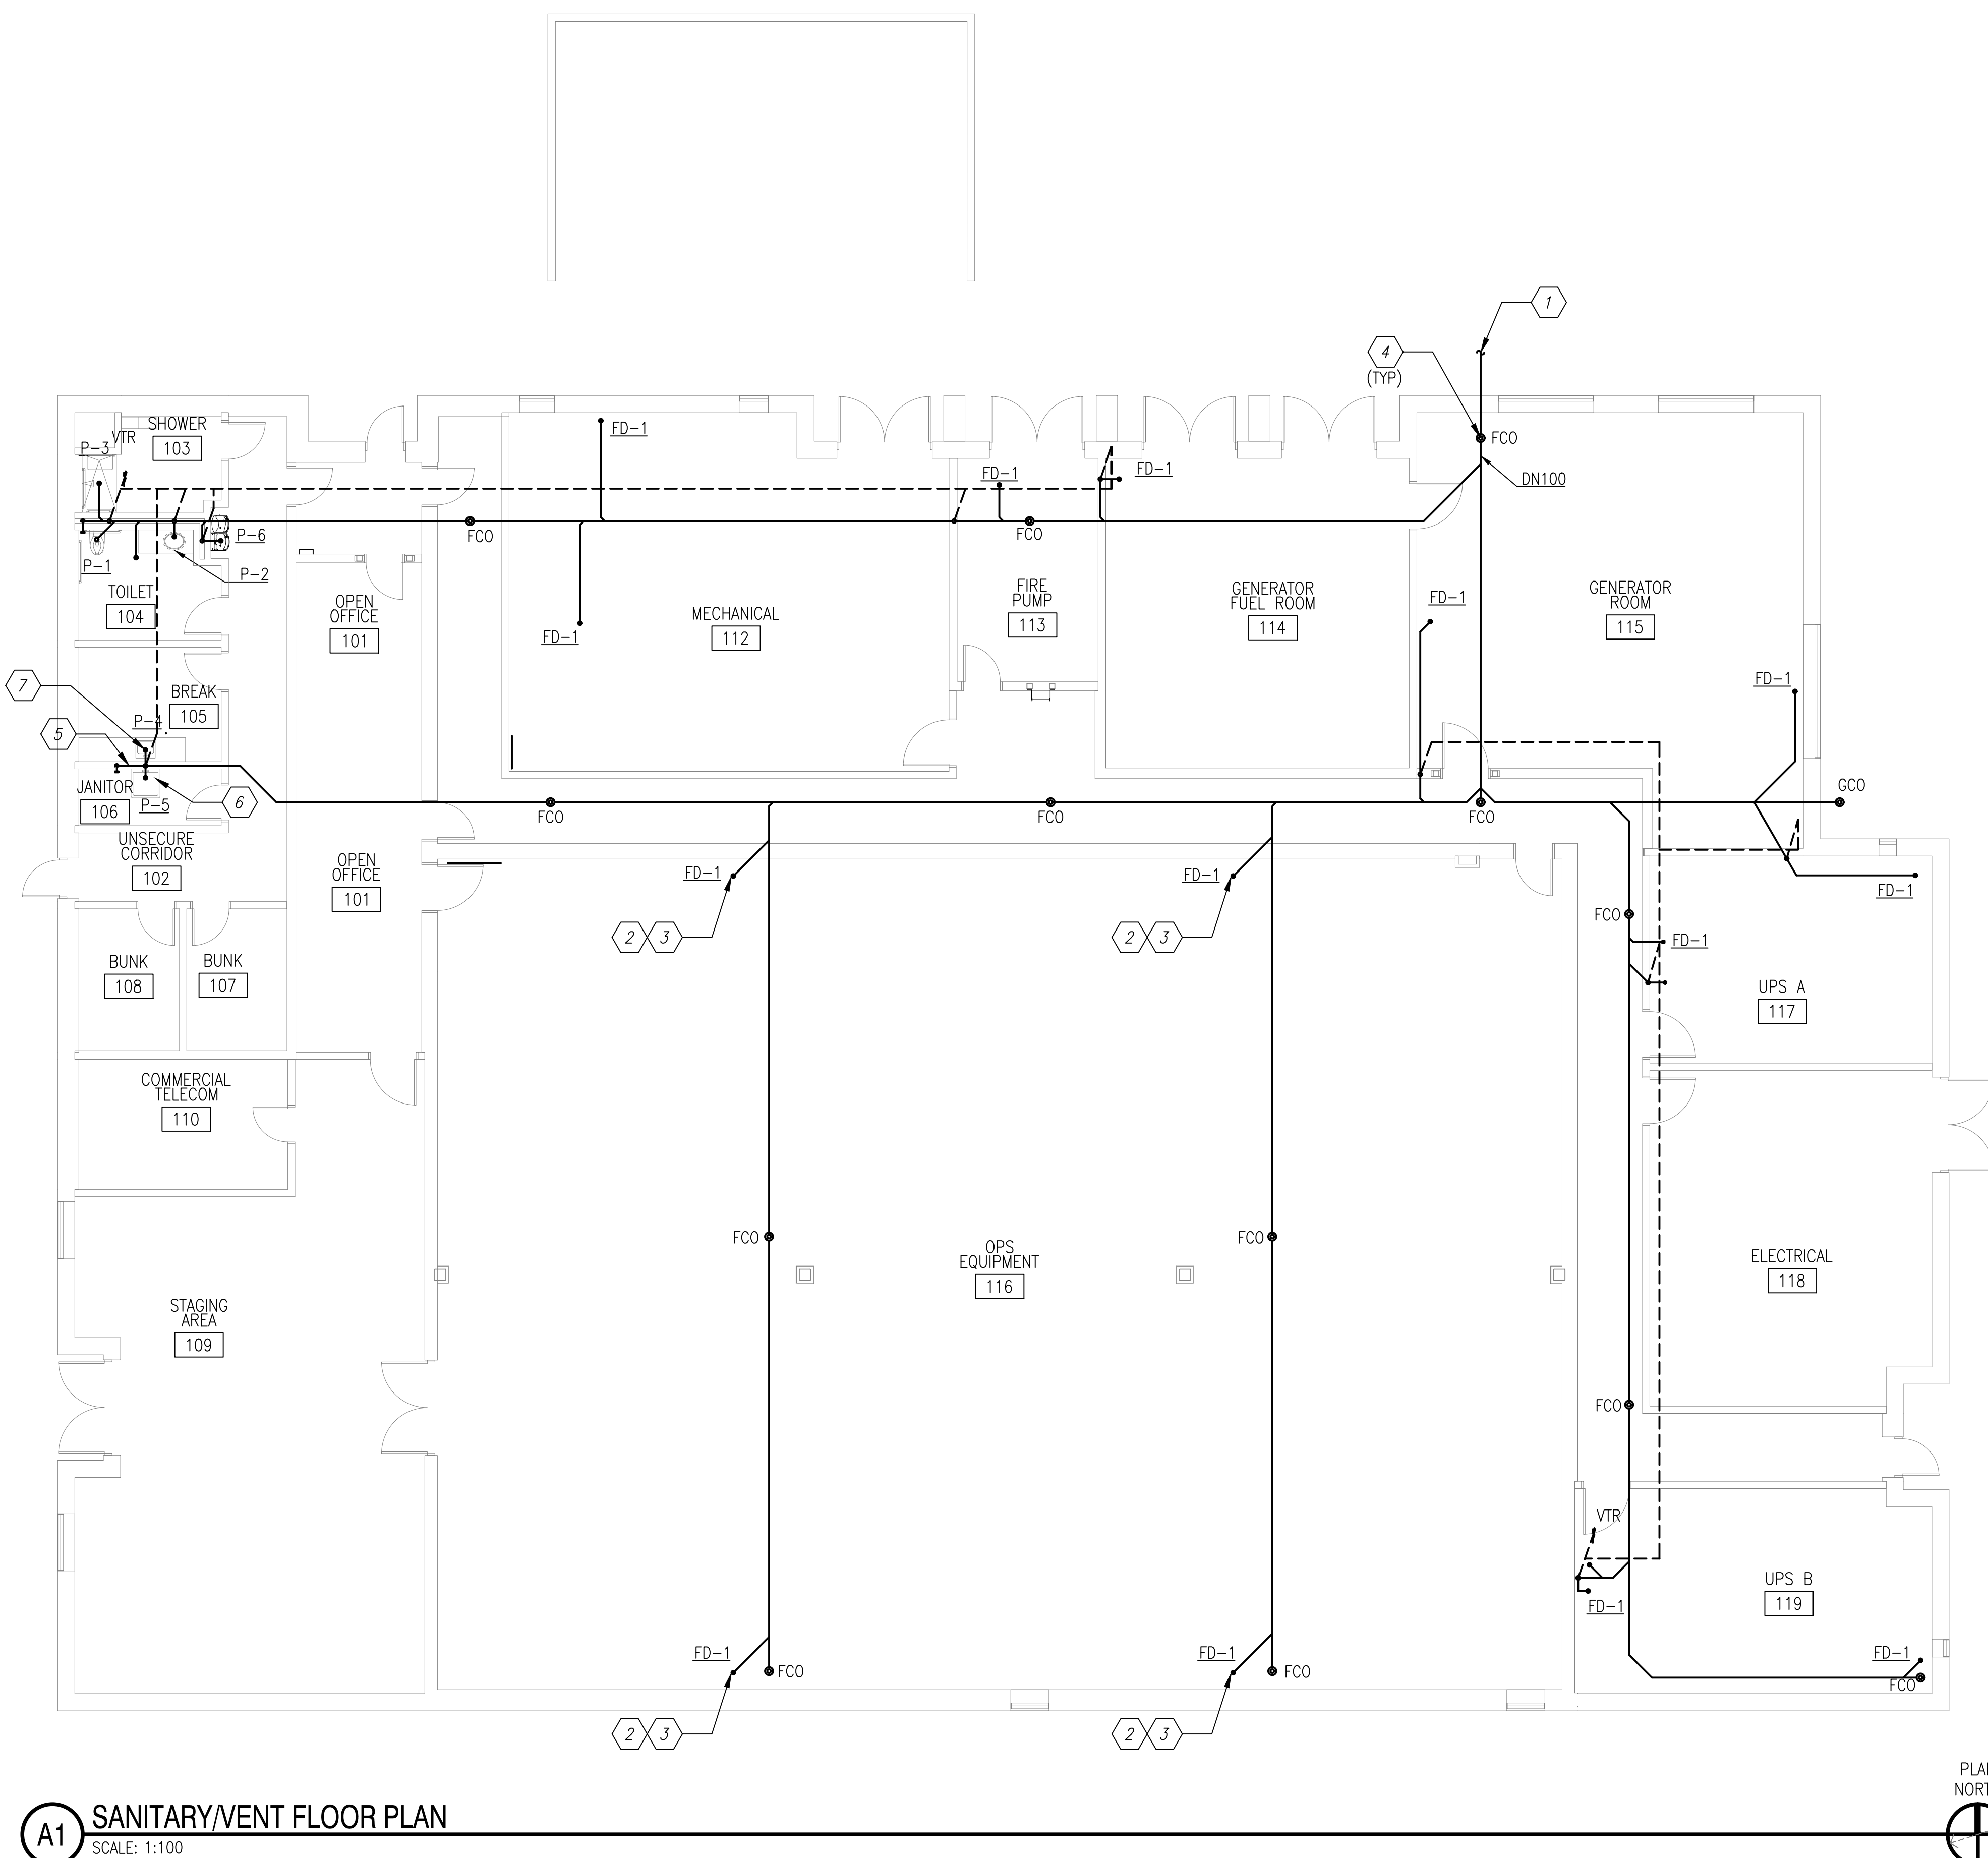

A1 SANITARY/VENT FLOOR PLAN
SCALE: 1:100

SHEET KEYNOTES

1. REFER TO PIPING DIAGRAMS ON P-702 FOR PIPE SIZES
2. SANITARY MAINS BELOW GRADE AND VENT PIPING ABOVE GRADE UNLESS OTHERWISE INDICATED
3. ALL SANITARY PIPING IS DN80 UNLESS OTHERWISE STATED. REFER TO NOTE ONE.
4. ALL VENT PIPING IS DN50 UNLESS OTHERWISE STATED. REFER TO NOTE ONE.

SHEET KEYNOTES

1. DN100 SANITARY SEWER PIPING. INVERT AT 1010MM BELOW FINISHED FLOOR. REFER TO CIVIL DRAWINGS FOR PIPING CONTINUATION.
2. COORDINATE FLOOR DRAIN WITH CRAH UNITS.
3. REFER TO P-501 B3 FOR FLOOR DRAIN DETAIL.
4. REFER TO P-501 A4 FOR FLOOR CLEANOUT DETAIL.
5. REFER TO P-501 B4 FOR WALL CLEANOUT DETAIL.
6. REFER TO P-501 C3 FOR MOP SINK DETAIL.
7. INSTALL GD-1



APPROVED
FOR COMMANDER NAVFAC
ACTIVITY
D. EVANS VIA EMAIL
SATISFACTORY TO DATE 01/15/2026
DES JNR DRW JNR CHG BJR
PW/DM MJD/ATP
BRANCH MANAGER STEPHEN ERICSON
DES PROD DIR WBF
FIRE PROTECTION ENGINEER DSN

DEPARTMENT OF THE NAVY
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - ATLANTIC
PLANNING, DESIGN AND CONSTRUCTION
VARIOUS LOCATIONS
VARIOUS LOCATIONS
JOINT MARITIME FACILITY
SANITARY/VENT - FLOOR PLAN

GRAPHIC SCALE




SCALE: AS NOTED
APPROVED NO.: 1838720
CONSTR. CONTR. NO.
NAVFAC DRAWING NO. 14157164
SHEET 102 OF 170
P-102

FILE NAME: Y:\OCONUS\MultipleSites\2026_1783264_P1360_JAMFAB_Design\DWG\Sheet\11_P1360_1783264_P-103.dwg LAYOUT NAME: P-103 PLOTTED: Tuesday, January 20, 2026 - 10:02am USER: joseph.n.rhodes

A1 MITIGATION SYSTEM

SCALE:

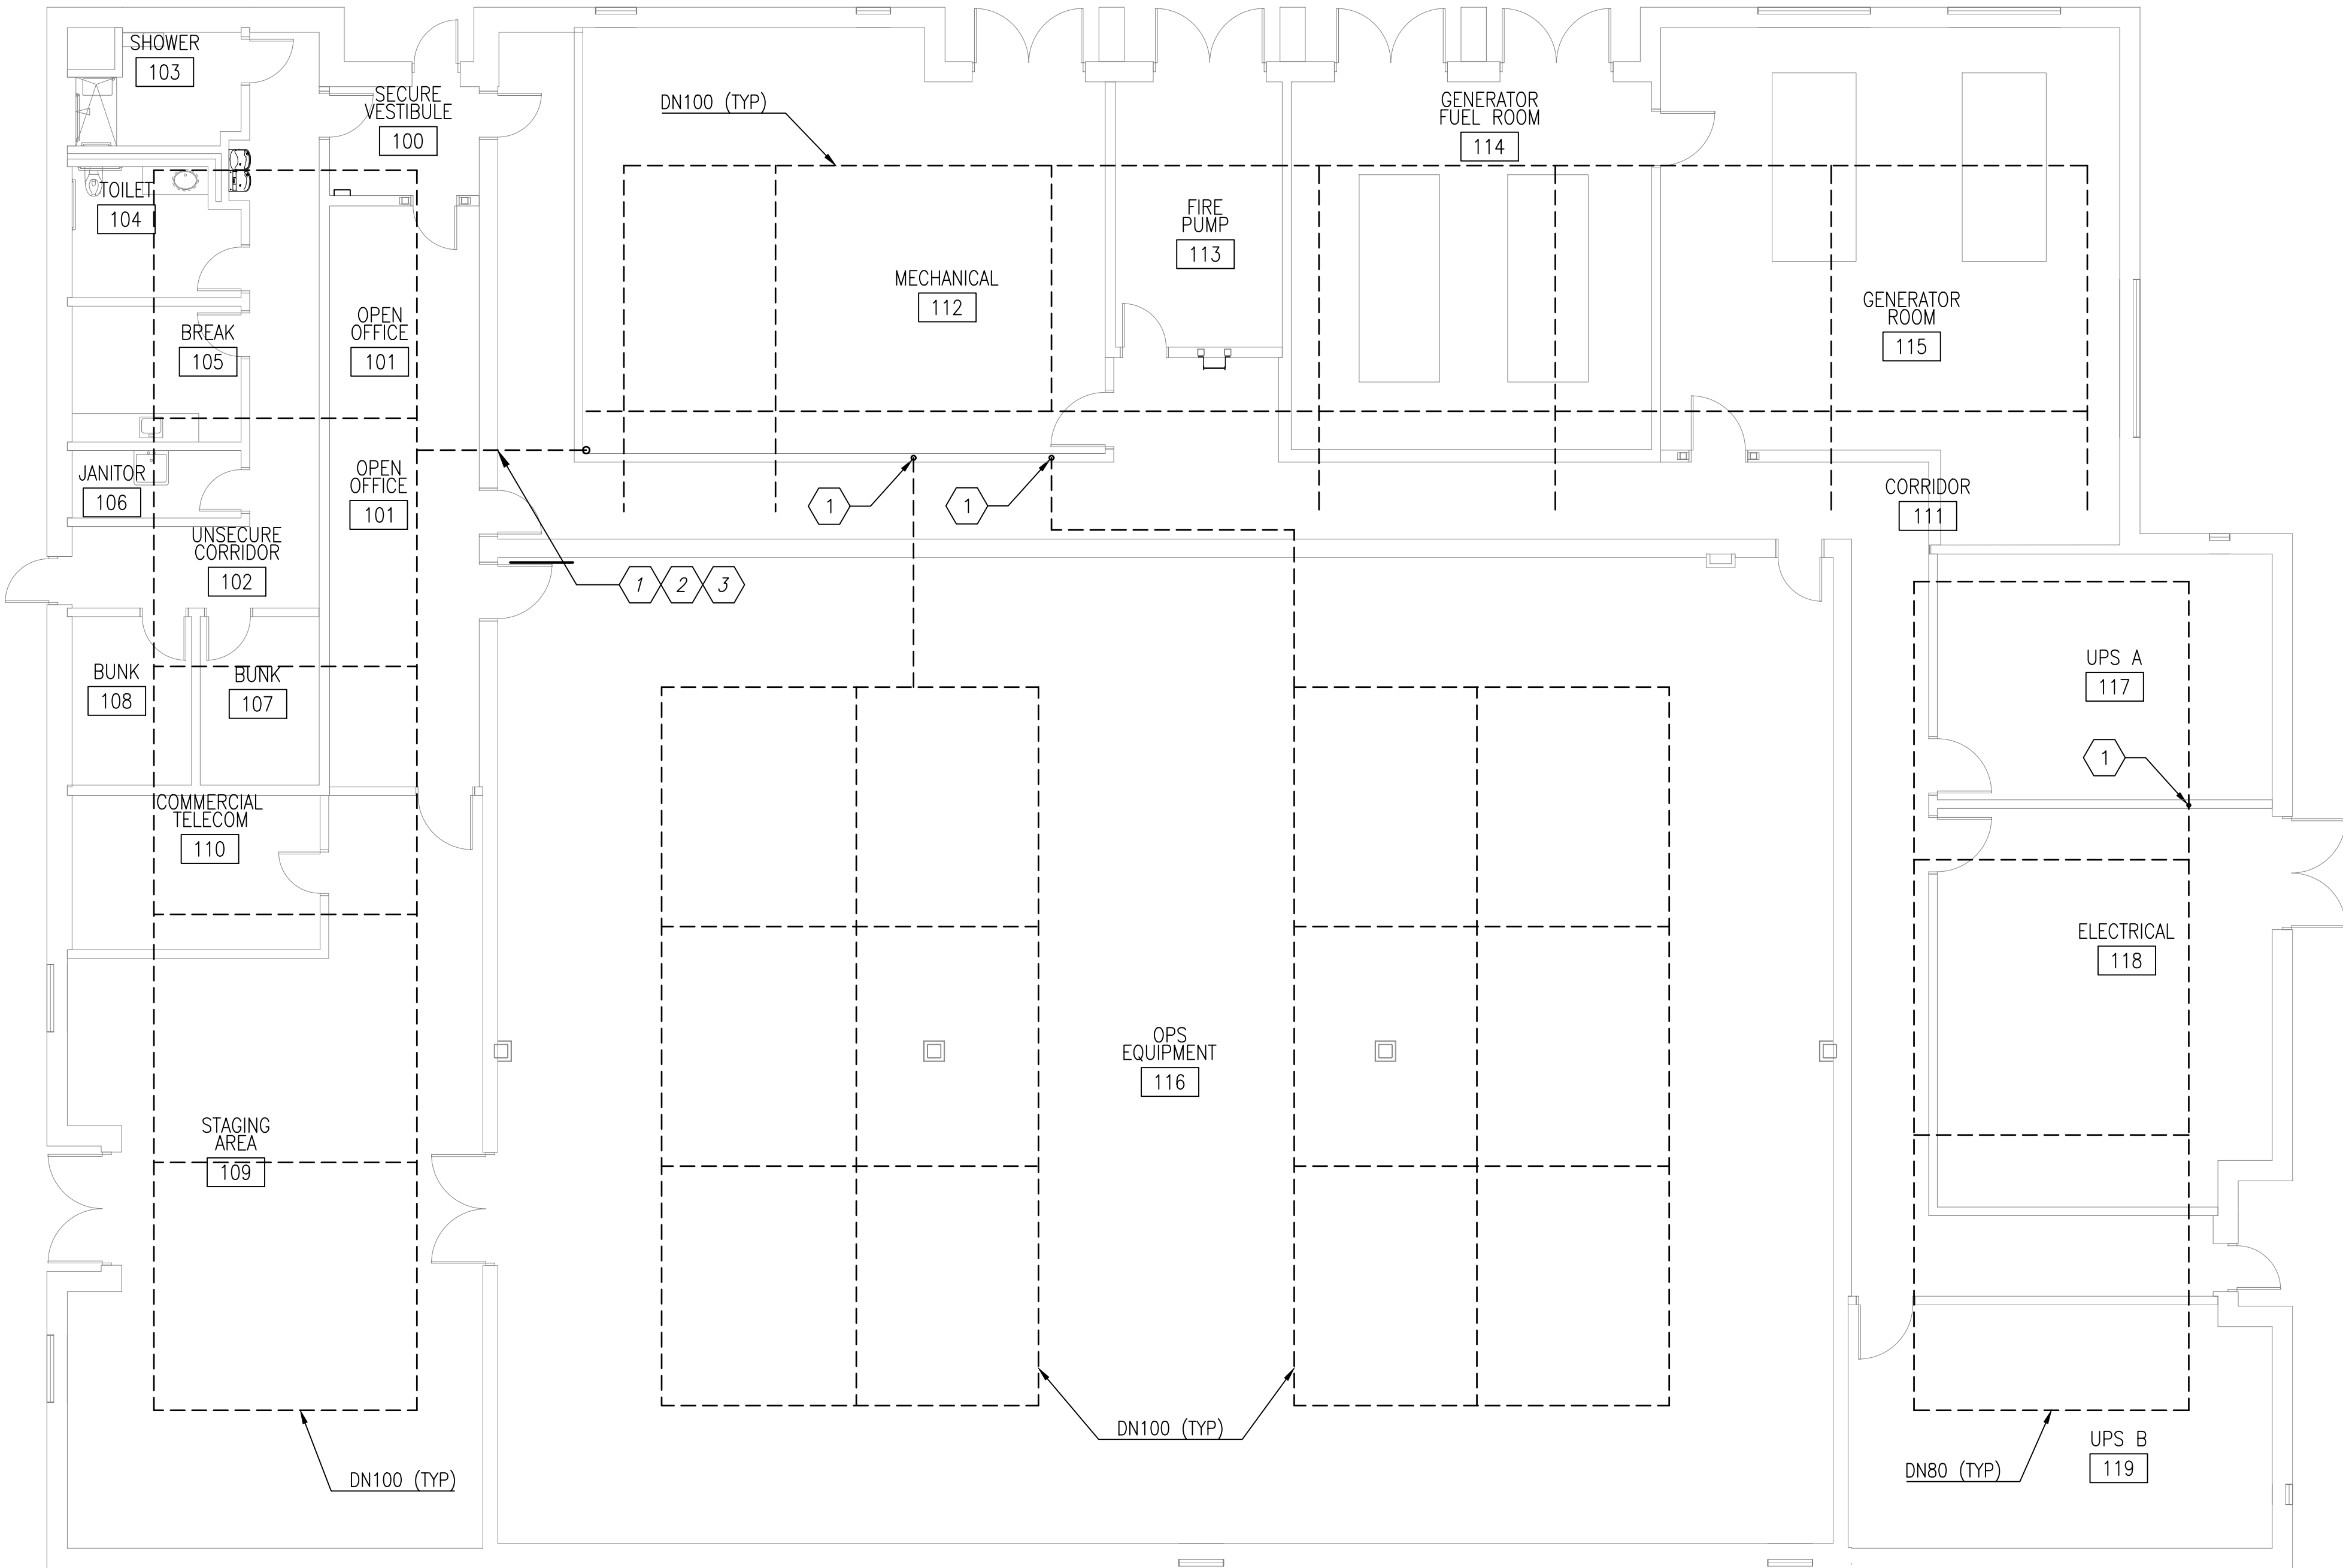


GENERAL SHEET NOTES

1. REFER TO PIPING DIAGRAMS ON P-703 FOR PIPE SIZES

SHEET KEYNOTES

1. COORDINATE WITH MECHANICAL ON EXHAUST FAN CONNECTIONS.
2. BRACE PIPE TO WALL
3. 6" SCHEDULE 40 PVC VERTICAL PIPE



APPROVED

FOR COMMANDER NAVFAC

ACTIVITY

D. EVANS VIA EMAIL

SATISFACTORY TO DATE 01/15/2026

DES JNR DRW JNR LCH BJR

PM/DM MUD/ATP

BRANCH MANAGER STEPHEN ERICSON

DES PROD DIR WBF

FIRE PROTECTION ENGINEER DSN

DEPARTMENT OF THE NAVY
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - ATLANTIC
PLANNING, DESIGN AND CONSTRUCTION
VARIOUS LOCATIONS
VARIOUS LOCATIONS
VARIOUS LOCATIONS

JOINT MARITIME FACILITY

RADON - FLOOR PLAN

GRAPHIC SCALE



SCALE: AS NOTED

APPROVED NO. 1838720

CONSTR. CONTR. NO.

NAVFAC DRAWING NO.

14157165

SHEET 103 OF 170

P-103

NAVFAC METRIC DRAWING REVISION: 01 OCTOBER 2018



SCALE: 1:100



- SHEET KEYNOTES

- 

MANDER NAVFAC

Discussion

EVANS VIA EMAIL

DATE 01/15/2026

BJF	ORW	BJF	CHK	RER
MID/ATR				

MANAGER STEPHEN ERICSON

PROTECTION ENGINEER	DSN
---------------------	-----

5

ORFO
TION

DCA

15

Y

UNIT
VA

ANI

$\frac{A}{P}$

OF

 $\frac{M}{FL}$

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100	101	102	103	104	105	106	107	108	109	110	111	112	113	114	115	116	117	118	119	120	121	122	123	124	125	126	127	128	129	130	131	132	133	134	135	136	137	138	139	140	141	142	143	144	145	146	147	148	149	150	151	152	153	154	155	156	157	158	159	160	161	162	163	164	165	166	167	168	169	170	171	172	173	174	175	176	177	178	179	180	181	182	183	184	185	186	187	188	189	190	191	192	193	194	195	196	197	198	199	200	201	202	203	204	205	206	207	208	209	210	211	212	213	214	215	216	217	218	219	220	221	222	223	224	225	226	227	228	229	230	231	232	233	234	235	236	237	238	239	240	241	242	243	244	245	246	247	248	249	250	251	252	253	254	255	256	257	258	259	260	261	262	263	264	265	266	267	268	269	270	271	272	273	274	275	276	277	278	279	280	281	282	283	284	285	286	287	288	289	290	291	292	293	294	295	296	297	298	299	300	301	302	303	304	305	306	307	308	309	310	311	312	313	314	315	316	317	318	319	320	321	322	323	324	325	326	327	328	329	330	331	332	333	334	335	336	337	338	339	340	341	342	343	344	345	346	347	348	349	350	351	352	353	354	355	356	357	358	359	360	361	362	363	364	365	366	367	368	369	370	371	372	373	374	375	376	377	378	379	380	381	382	383	384	385	386	387	388	389	390	391	392	393	394	395	396	397	398	399	400	401	402	403	404	405	406	407	408	409	410	411	412	413	414	415	416	417	418	419	420	421	422	423	424	425	426	427	428	429	430	431	432	433	434	435	436	437	438	439	440	441	442	443	444	445	446	447	448	449	450	451	452	453	454	455	456	457	458	459	460	461	462	463	464	465	466
---	---	---	---	---	---	---	---	---	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----

AF
NE

17	M
----	---

ITUE

10

CONST
NS
JO

AND ATI

07
SIGN

G. D. S.

LANN
TARI

AS NOTED


ECT NO.: 1838/20

14157166

104 OF 170
B 101

F-104

FILE NAME: Y:\CONUS\MultipleSites\2026_1783264_P1360_JMMP\B_Design\DWG\Sheet\11_P1360_JMMP_P-401.dwg PLOTTED: Tuesday, January 20, 2026 - 10:02am USER: joseph.n.rhodes

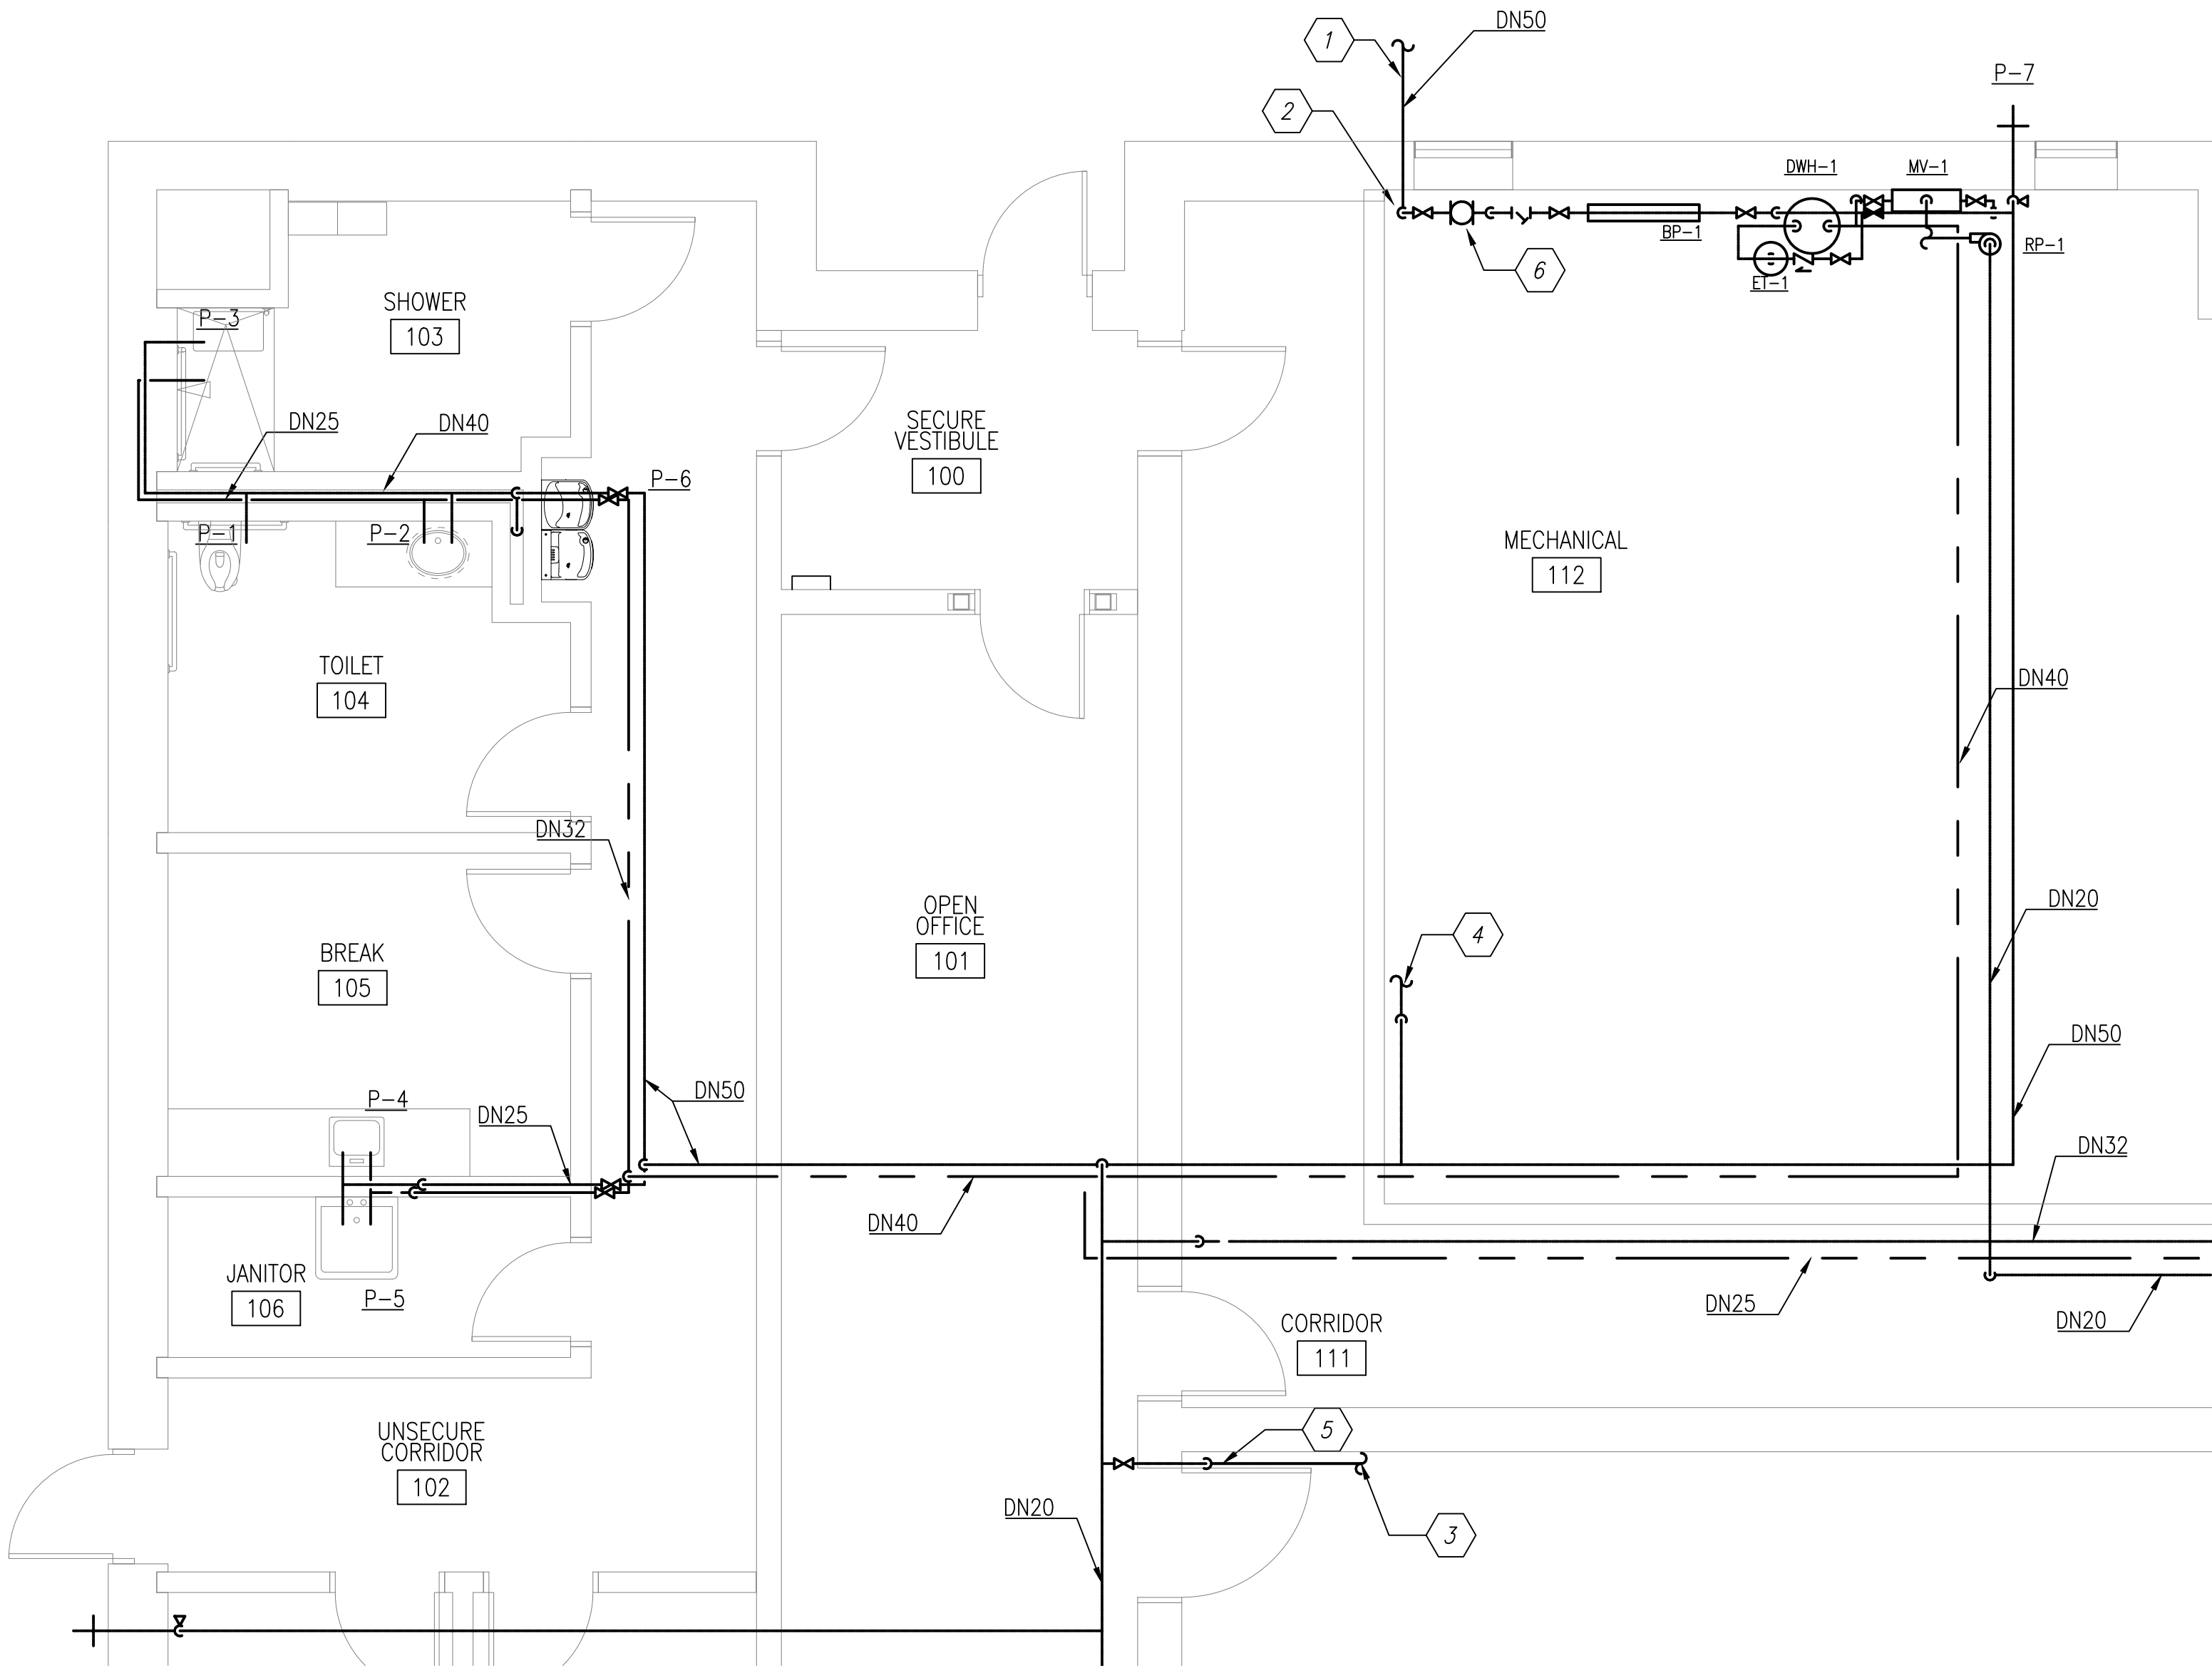

A1 DOMESTIC WATER - ENLARGED FLOOR PLAN
SCALE: 1:50



GENERAL SHEET NOTES

1. REFER TO CIVIL SHEET FOR PIPING CONTINUATION.
2. PIPING DOWN TO BELOW RAISED FLOOR TO SERVE CRAC HUMIDIFIERS.
3. SECURE WATER HEATER TO WALLS WITH SEISMIC RESTRAINING STRAPS



SHEET KEYNOTES

1. REFER TO CIVIL SHEET FOR PIPING CONTINUATION.
2. WATER PIPING UP FROM BELOW GRADE
3. PIPING DOWN TO BELOW RAISED FLOOR TO SERVE CRAC HUMIDIFIERS.
4. COORDINATE WITH MECHANICAL FOR PIPING CONTINUATION.
5. PIPE SUPPORT TO BE SUPPORTED BELOW RAISED FLOOR.
6. WATER METER



APPROVED

FOR COMMANDER NAVFAC

ACTIVITY

D. EVANS VIA EMAIL

SATISFACTORY TO DATE 01/15/2026

DES JNR DRW JNR CHG BJR

PM/DM MJD/ATP

BRANCH MANAGER STEPHEN ERICSON

DES PROD DIR WBF

FIRE PROTECTION ENGINEER DSN

NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND

NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - ATLANTIC

PLANNING, DESIGN AND CONSTRUCTION

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

GRAPHIC SCALE

1:50 0 1000 3000 5000mm

SCALE: AS NOTED

APPROVED NO. 1838720

CONSTR. CONTR. NO.

NAVFAC DRAWING NO.

14157167

SHEET 105 OF 170

P-401


FILE NAME: Y:\OCONUS\MultipleStations\2026_1783264_P1360_JAMFB\B_Design\DWGS\Sheet\11_PLB\VP1360_1783264_P-501.dwg LAYOUT NAME: P-501 PLOTTED: Tuesday, January 20, 2026 - 10:02am USER: joseph.n.rhodes

D

C


B

A

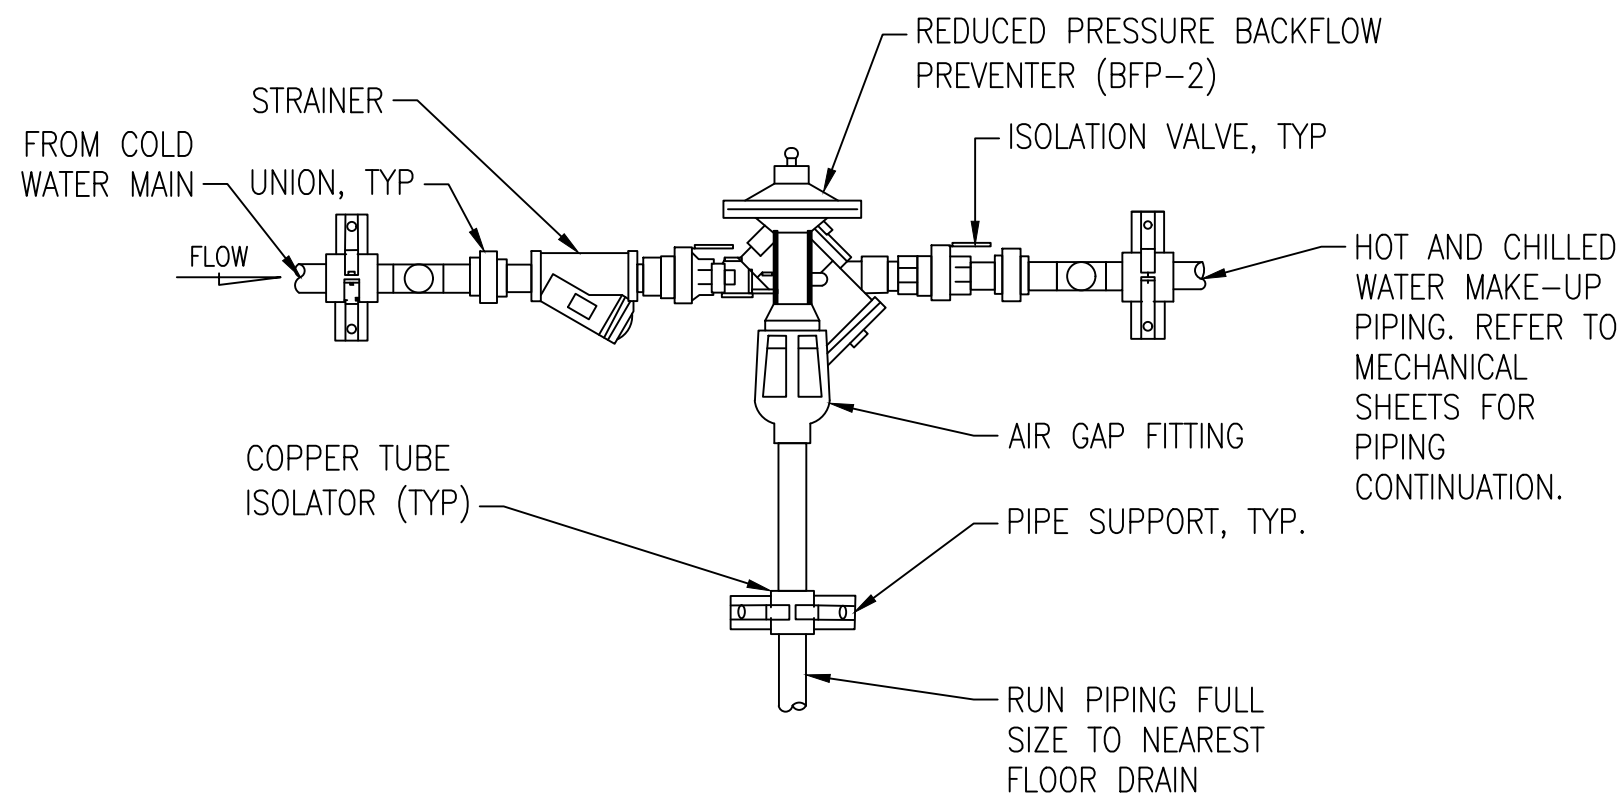


NOTES:
1. INSTALL BACKFLOW PREVENTER AT HEIGHT RECOMMENDED BY MANUFACTURER FOR EASE OF MAINTENANCE.

C1 REDUCED PRESSURE BACKFLOW PREVENTER, WALL-MOUNT
SCALE: NOT TO SCALE

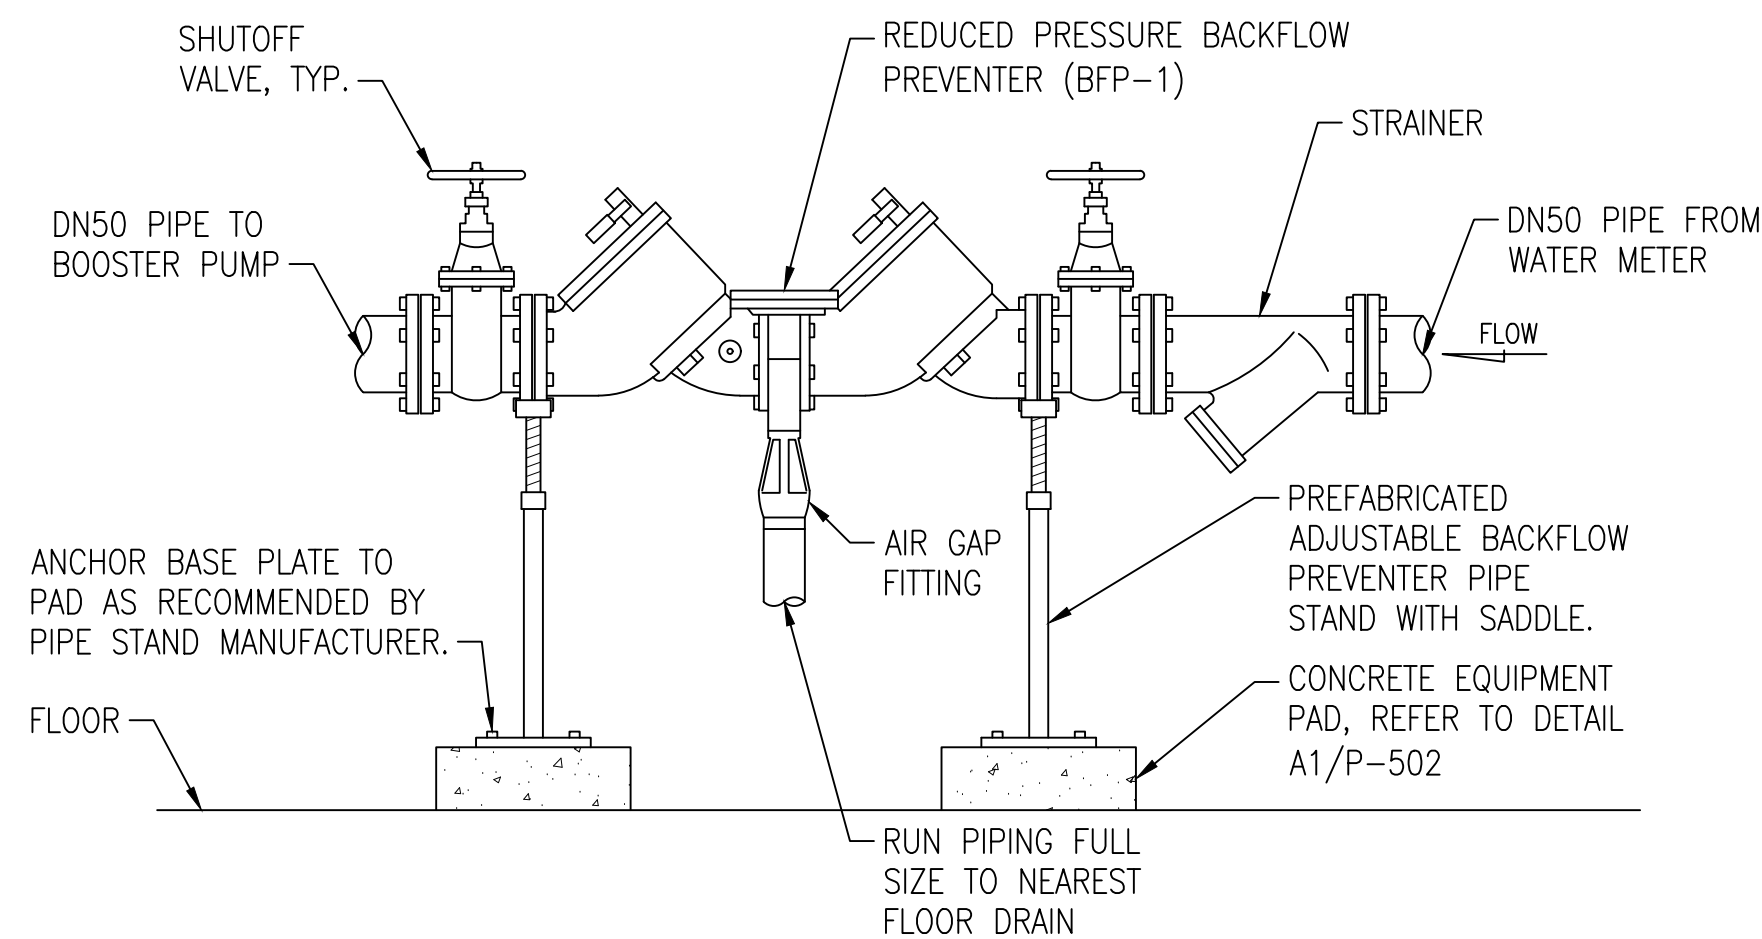


NOTES:
1. INSTALL BACKFLOW PREVENTER AT HEIGHT RECOMMENDED BY MANUFACTURER FOR EASE OF MAINTENANCE.


B1 REDUCED PRESSURE BACKFLOW PREVENTER, FLOOR-MOUNT
SCALE: NOT TO SCALE

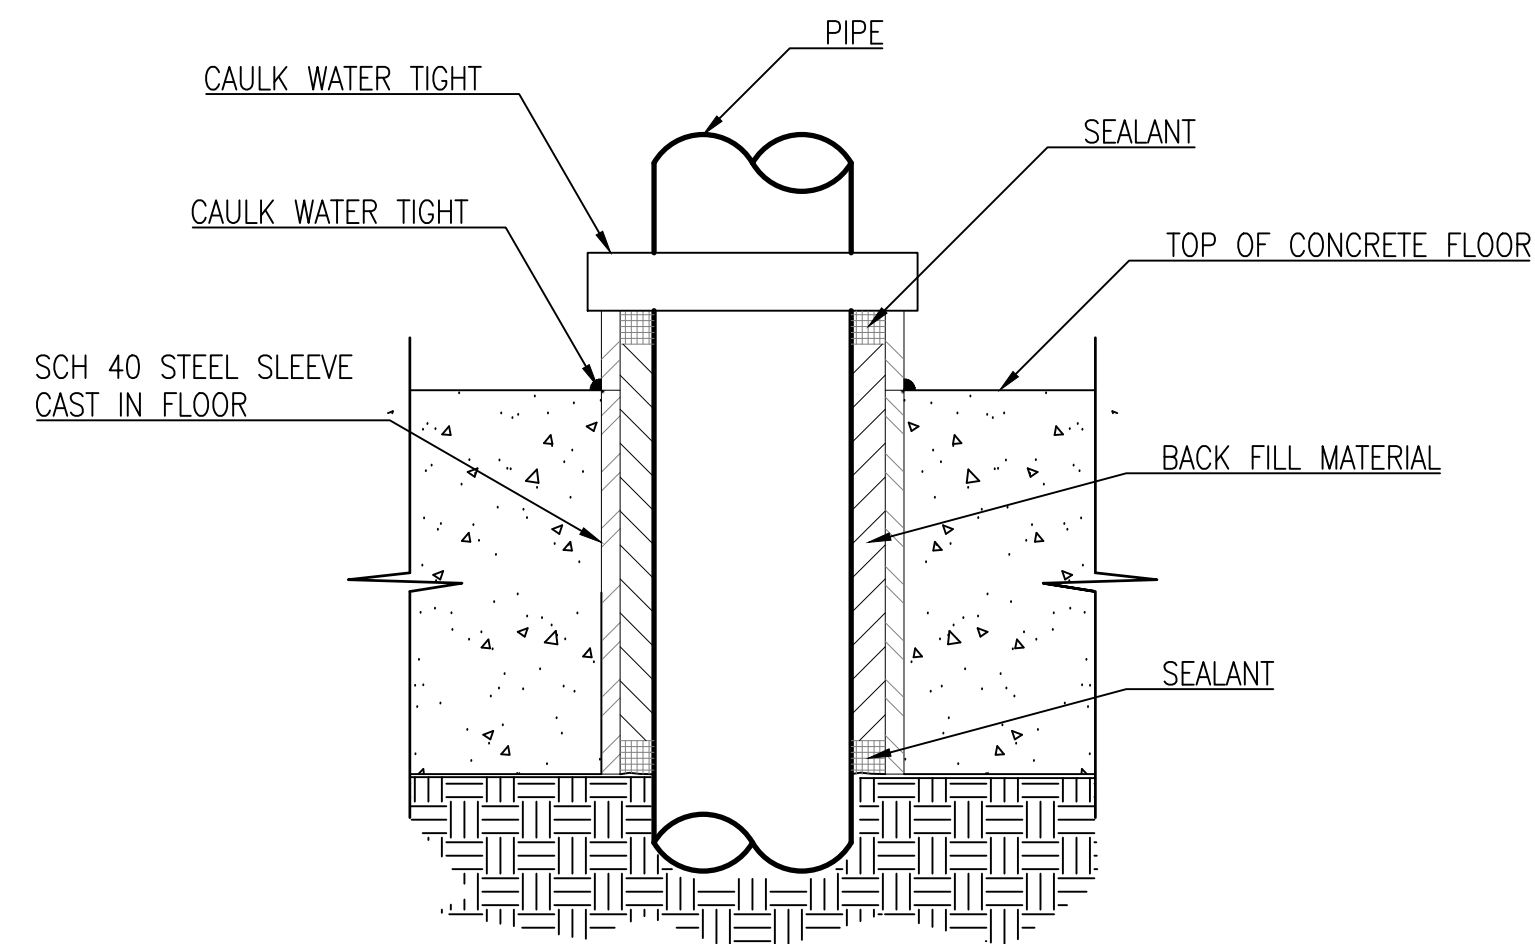


A1 FLOOR SLAB PIPE PENETRATION DETAIL
SCALE: NOT TO SCALE

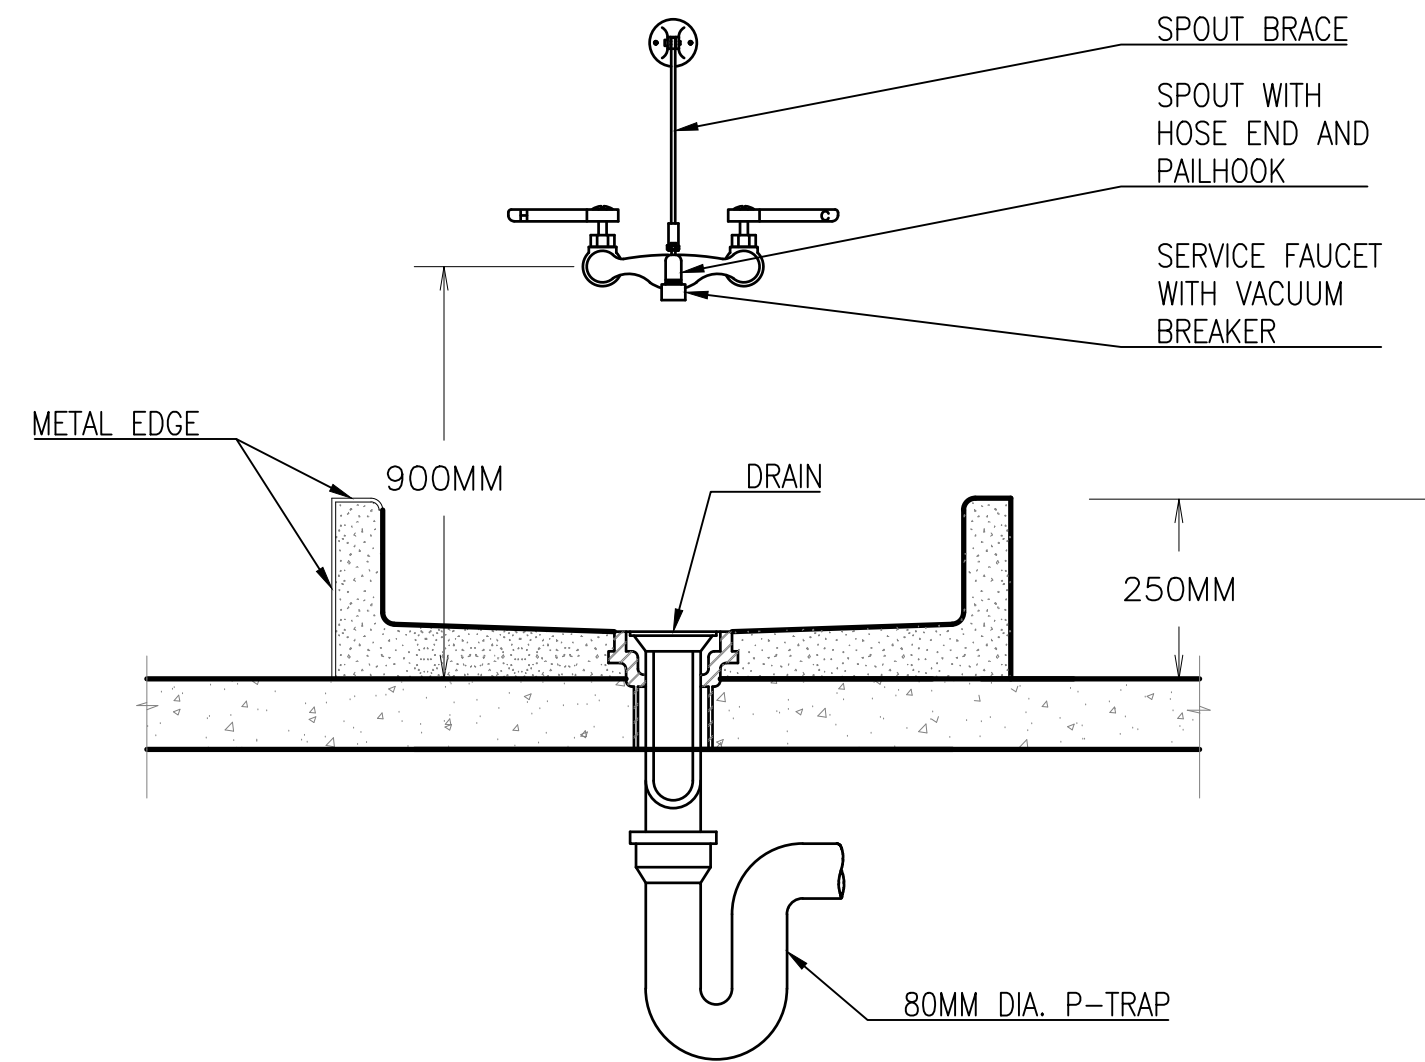


C3 MOP SINK DETAIL
SCALE: NOT TO SCALE

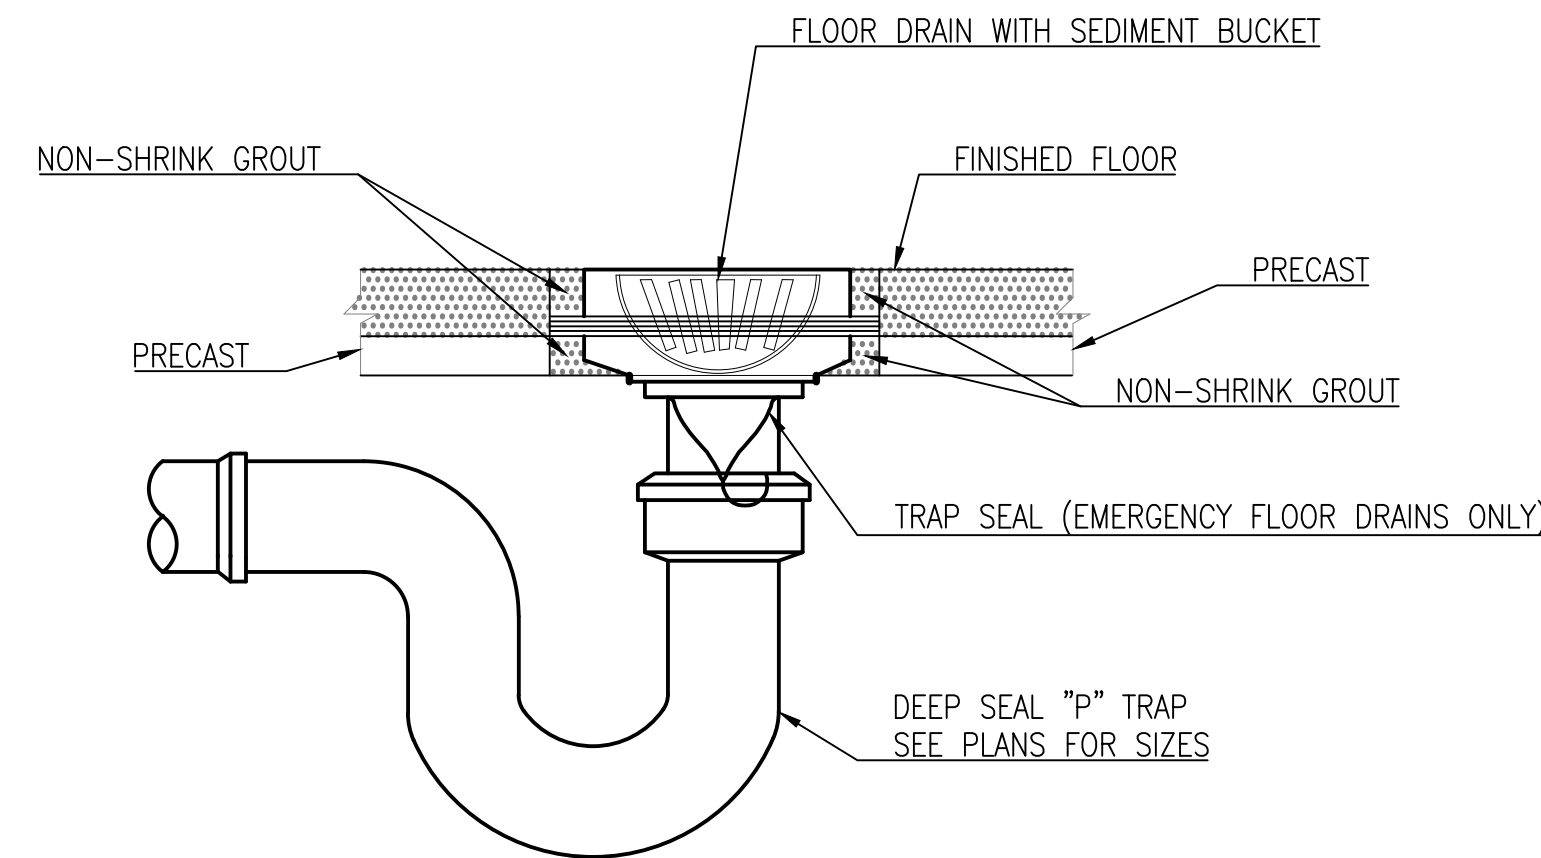

B3 FLOOR DRAIN DETAIL
SCALE: NOT TO SCALE

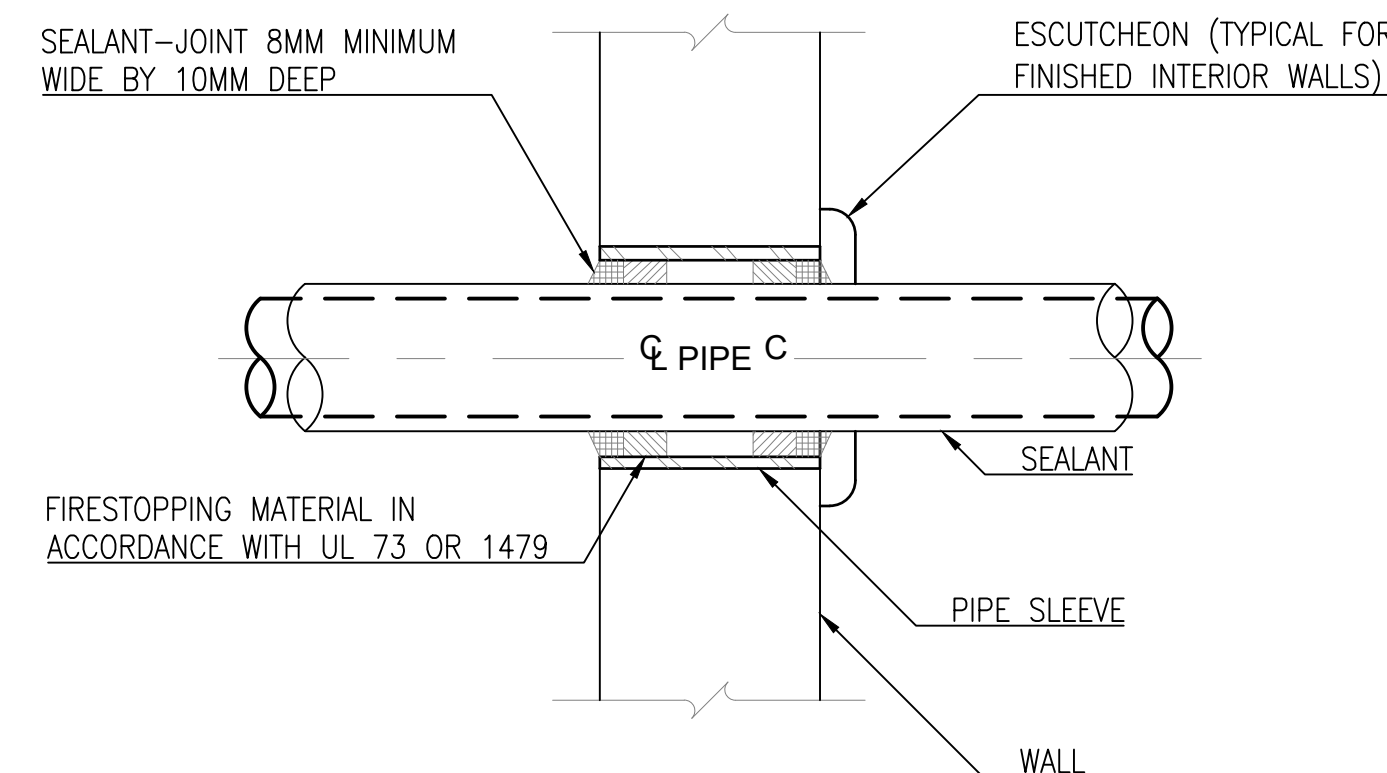


A3 PIPE INTERIOR WALL PENETRATION DETAIL
SCALE: NOT TO SCALE

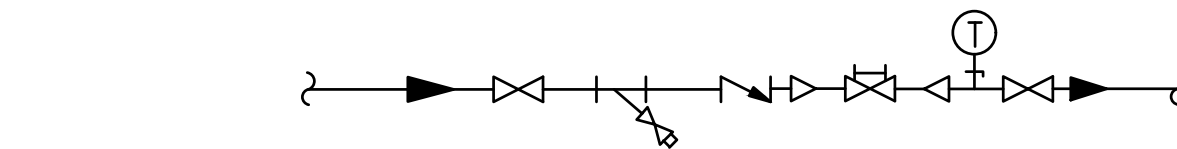


NOTES:
1. PROVIDE MINIMUM NUMBER OF STRAIGHT PIPE LENGTHS UPSTREAM AND DOWNSTREAM OF MANUAL BALANCING VALVE AS RECOMMENDED BY THE MANUFACTURER.
2. SIZE MANUAL BALANCING VALVE BASED ON THE MANUFACTURER'S RECOMMENDED MINIMUM PRESSURE DROP REQUIRED FOR AN ACCURATE FLOW READING.
3. REFER TO PIPING DIAGRAMS PIPE SIZES.


C4 HOT WATER CIRCUIT SETTER
SCALE: NOT TO SCALE

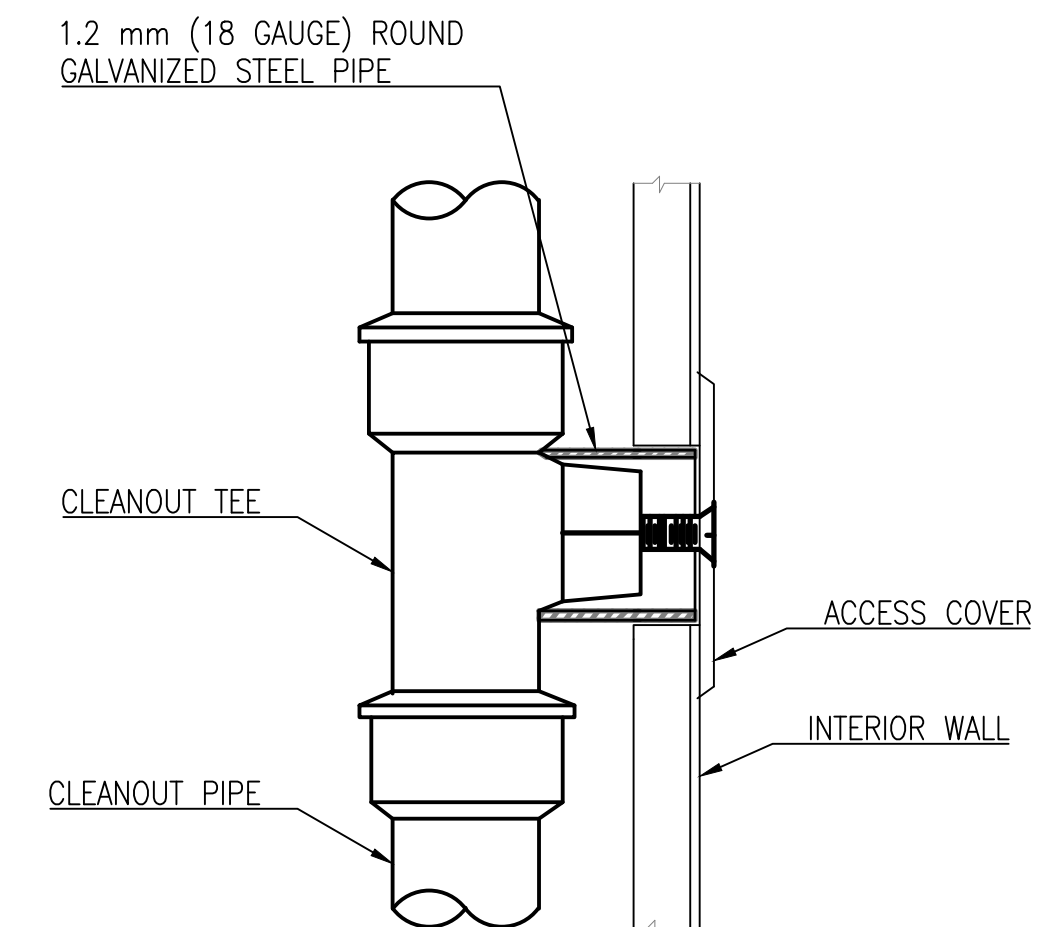

B4 WALL CLEANOUT DETAIL
SCALE: NOT TO SCALE

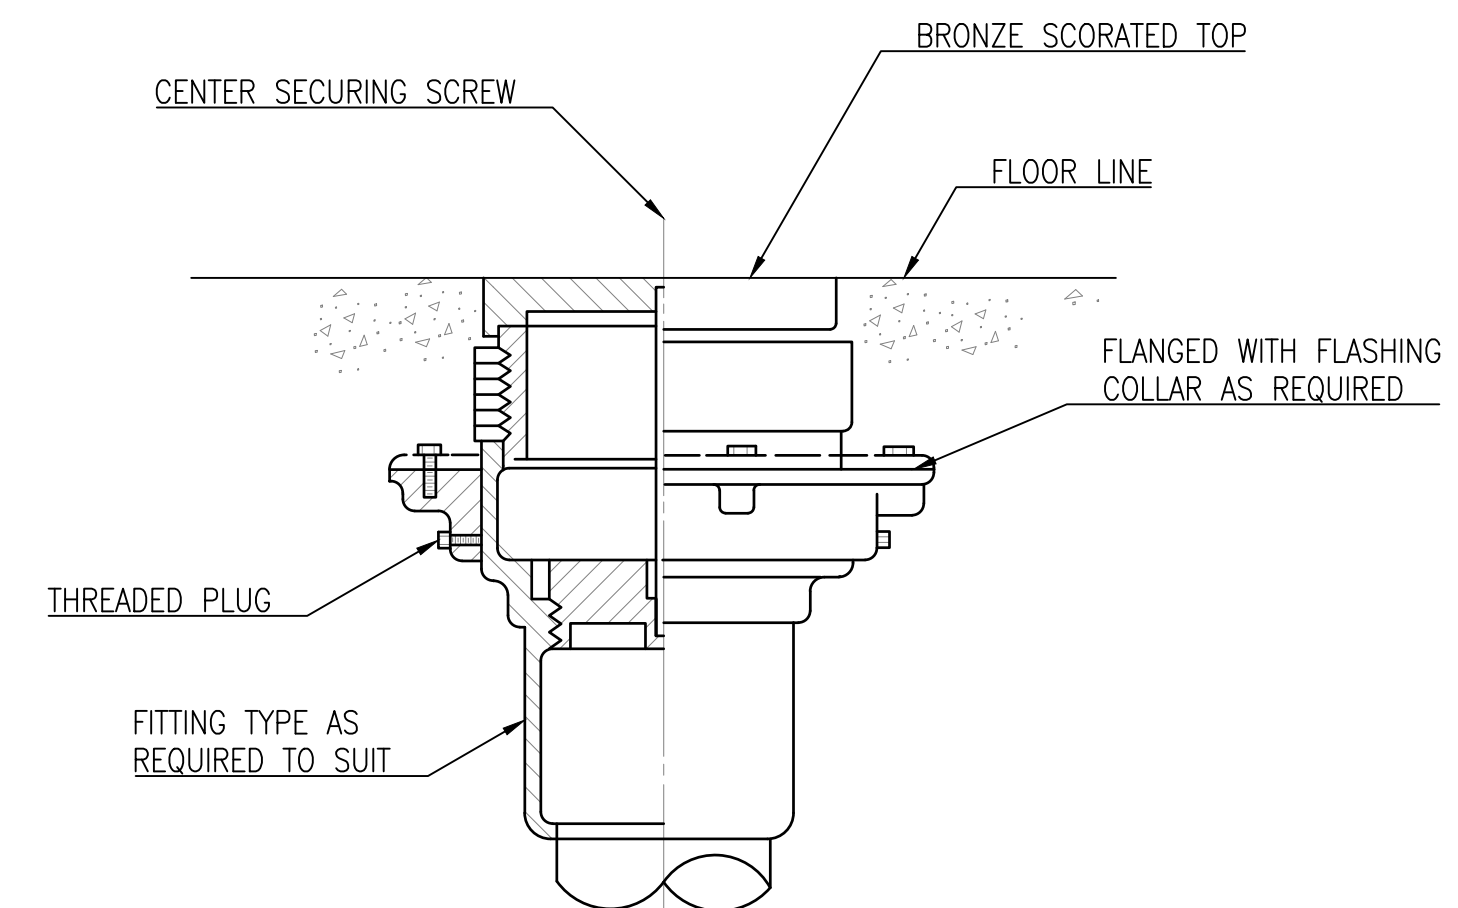

A4 FLOOR CLEANOUT DETAIL
SCALE: NOT TO SCALE



A/E INFO

APPROVED

FOR COMMANDER NAVFAC

ACTIVITY

D. EVANS VIA EMAIL

SATISFACTORY TO DATE 01/15/2026

DES JNR DRW JNR CHG BJR

PM/DM MUD/ATP

BRANCH MANAGER STEPHEN ERICSON

DES PROD DIR WBF

FIRE PROTECTION ENGINEER DSN

NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND

NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - ATLANTIC

PLANNING, DESIGN AND CONSTRUCTION

VARIOUS LOCATIONS

VARIOUS LOCATIONS

JOINT MARITIME FACILITY

PLUMBING DETAILS

SCALE: AS NOTED

APPROVED NO. 1838720


CONSTR. CONTR. NO.

NAVFAC DRAWING NO. 14157168

SHEET 106 OF 170

P-501

NAVFAC METRIC DRAWING REVISION: 01 OCTOBER 2018

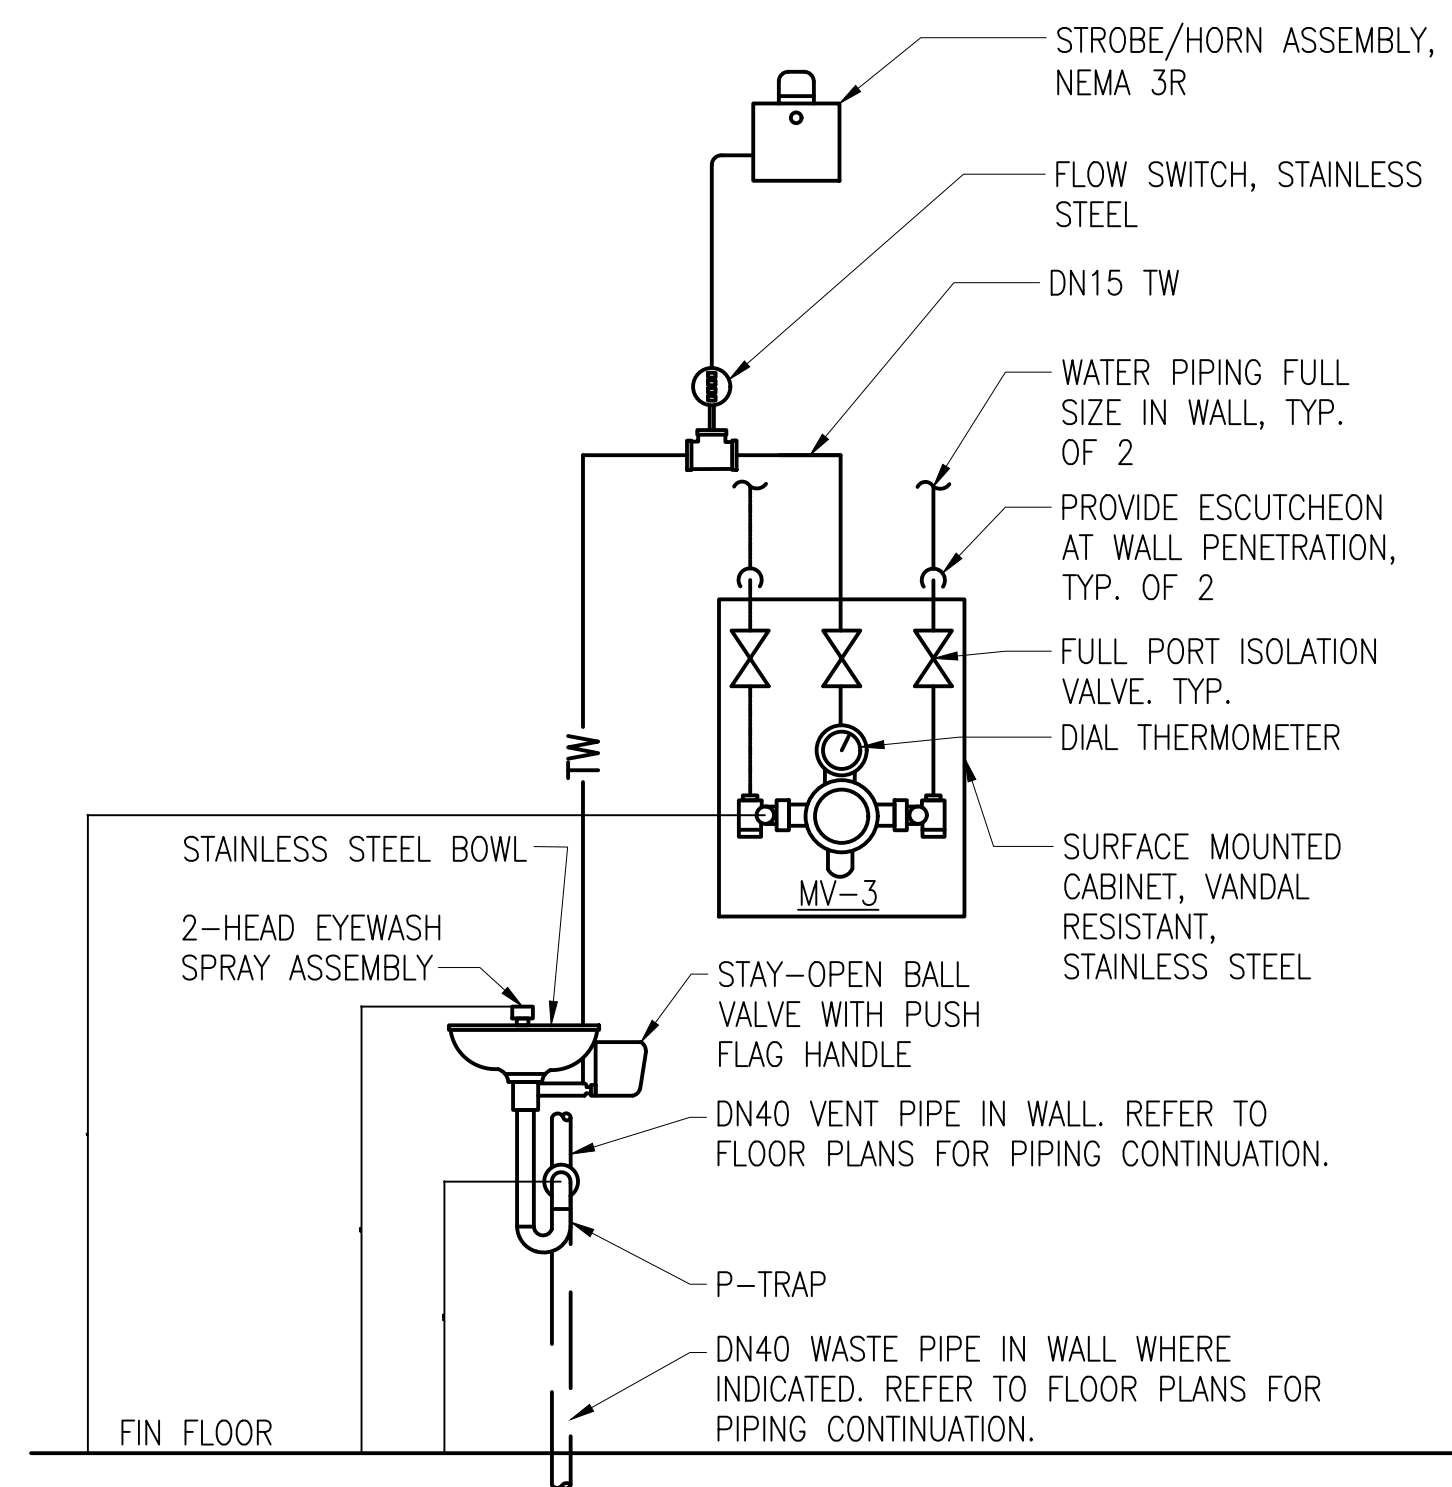


- NOTES:

1. STAINLESS STEEL EYE/FACE WASH DUST COVER NOT SHOWN FOR CLARITY.
2. MOUNT HORN/STROBE ASSEMBLY TO WALL A MINIMUM OF 2 METERS AFF AND AS CLOSE TO THE CENTERLINE OF THE EYE/FACE WASH AS POSSIBLE.
3. MOUNT FLOW SWITCH SUCH THAT THE CLOSEST UPSTREAM AND DOWNSTREAM FITTINGS ARE A MINIMUM OF 150 mm FROM IT. COORDINATE WITH LOCATION OF MIXING VALVE.
4. REFER TO ELECTRICAL SHEETS FOR HORN/STROBE POWER.
5. BARRIER FREE CONFIGURATION


C1 EMERGENCY EYEWASH
SCALE: NOT TO SCALE

SCALE: NOT TO SCALE

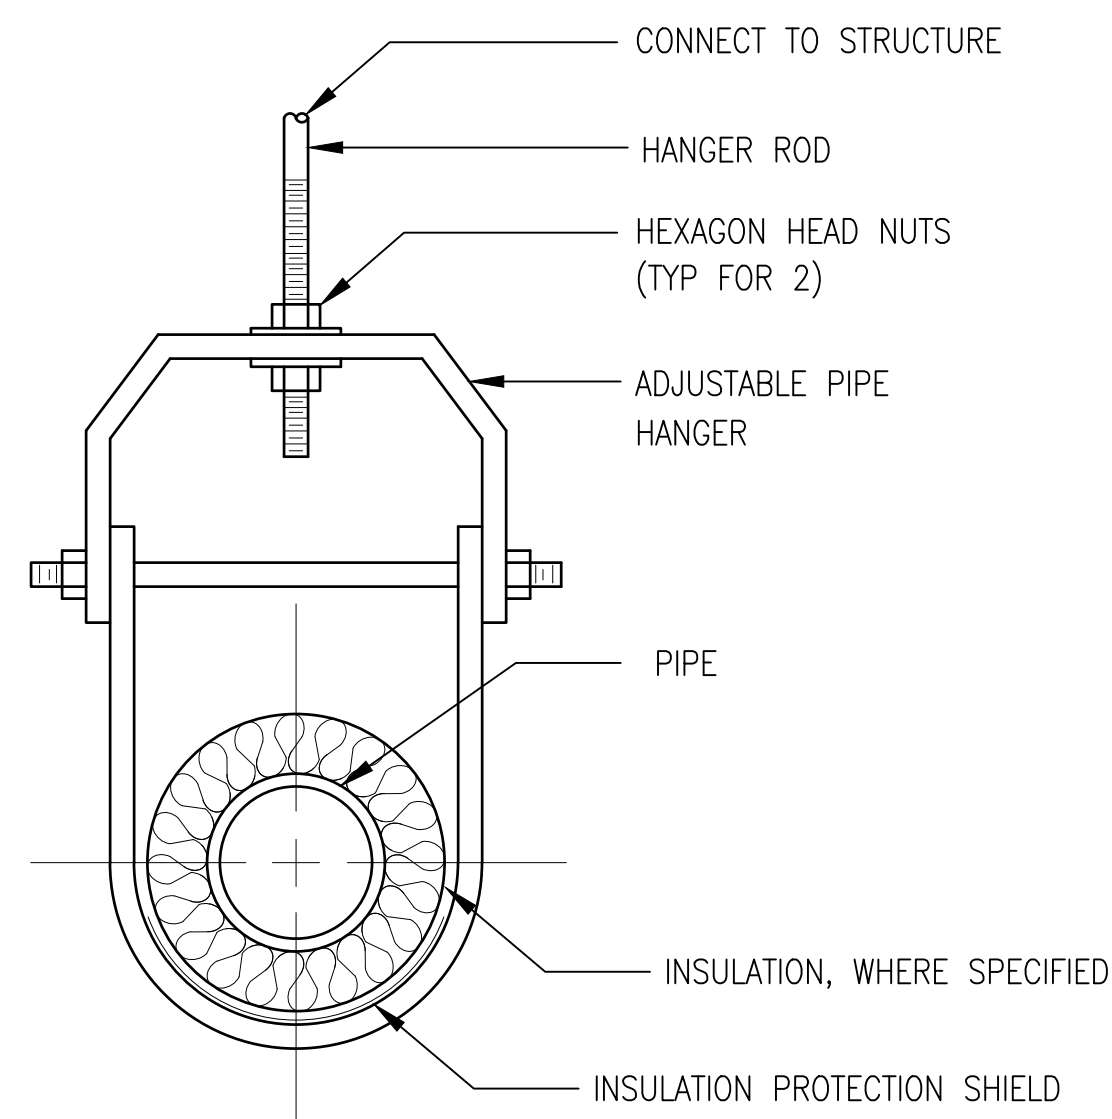

C2 PIPE SUPPORT
SCALE: NOT TO SCALE


SCALE: NOT TO SCALE

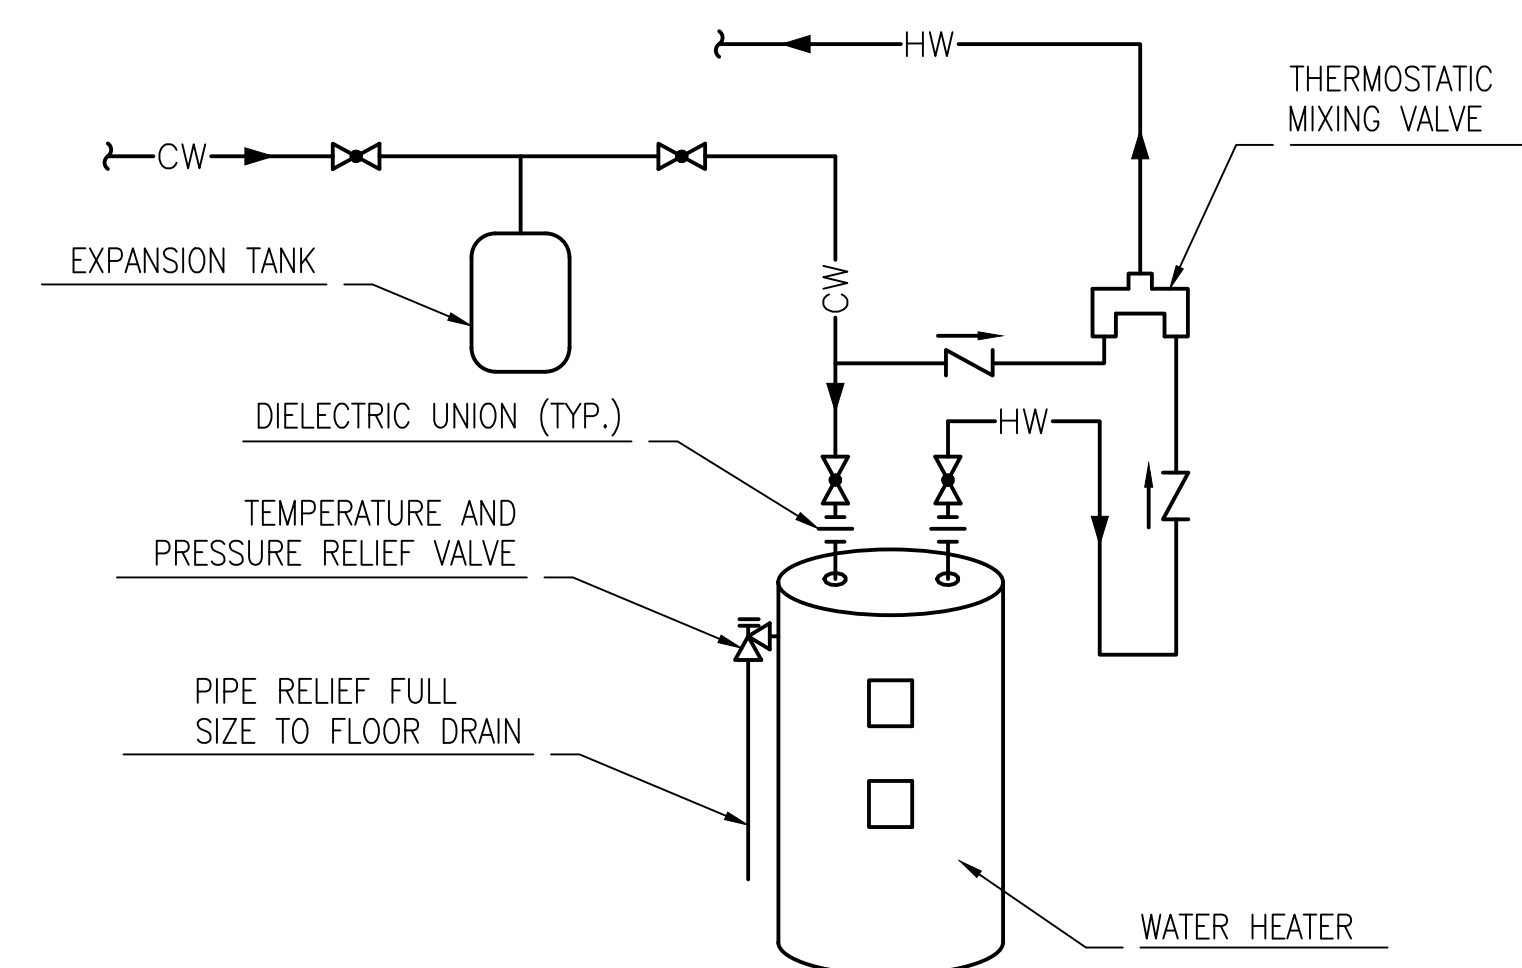

NOTE: SEE FLOOR PLAN FOR SIZES (TYP.)


C1 **DETAIL - ELECTRIC WATER HEATER (DHW-1)**
SCALE: NOT TO SCALE

SCALE: NOT TO SCALE

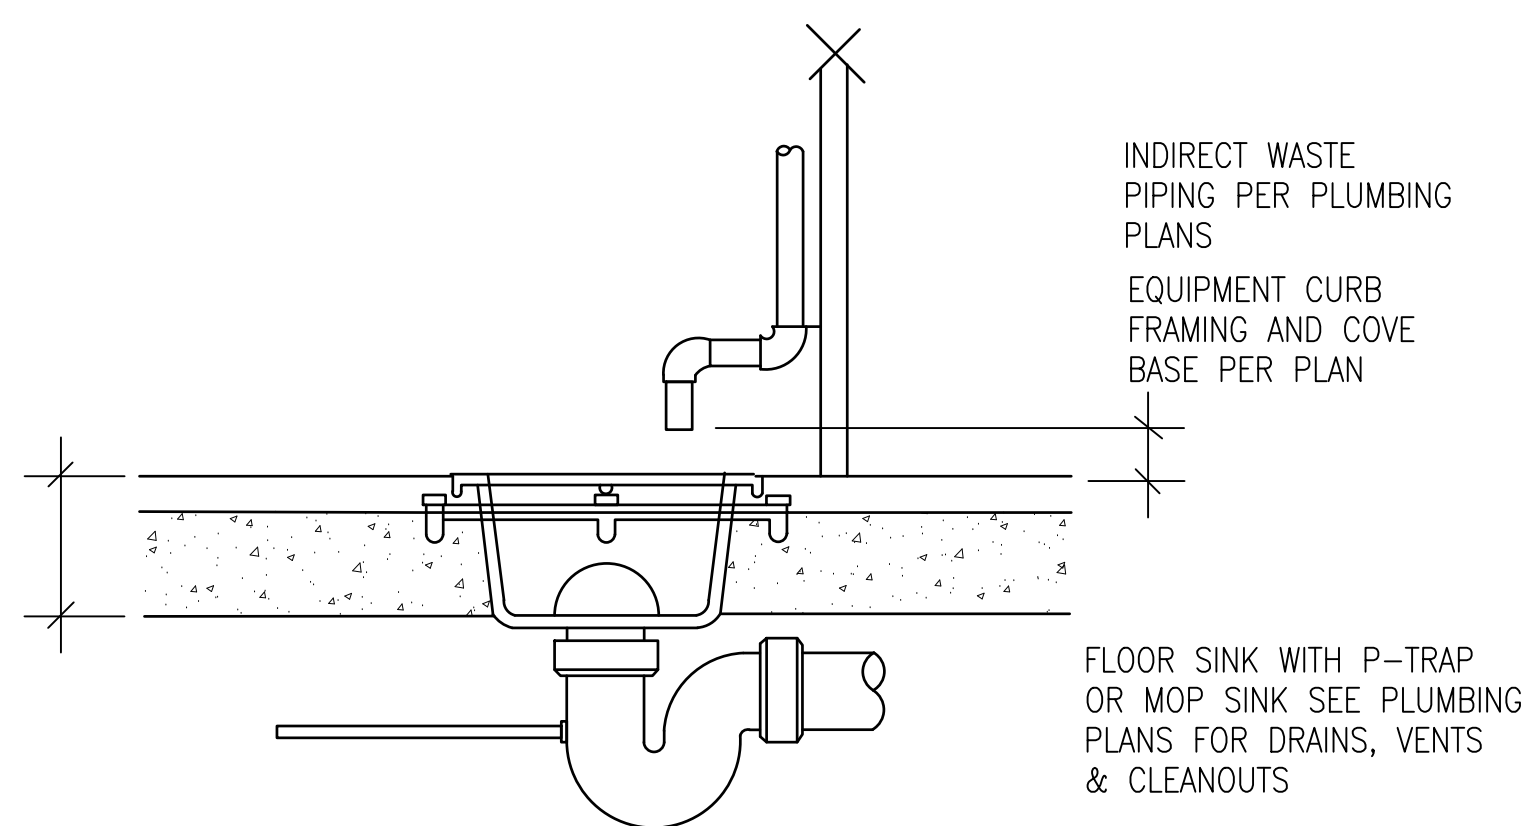


B1 FLOOR SINK
SCALE: NOT TO SCALE

SCALE: NOT TO SCALE

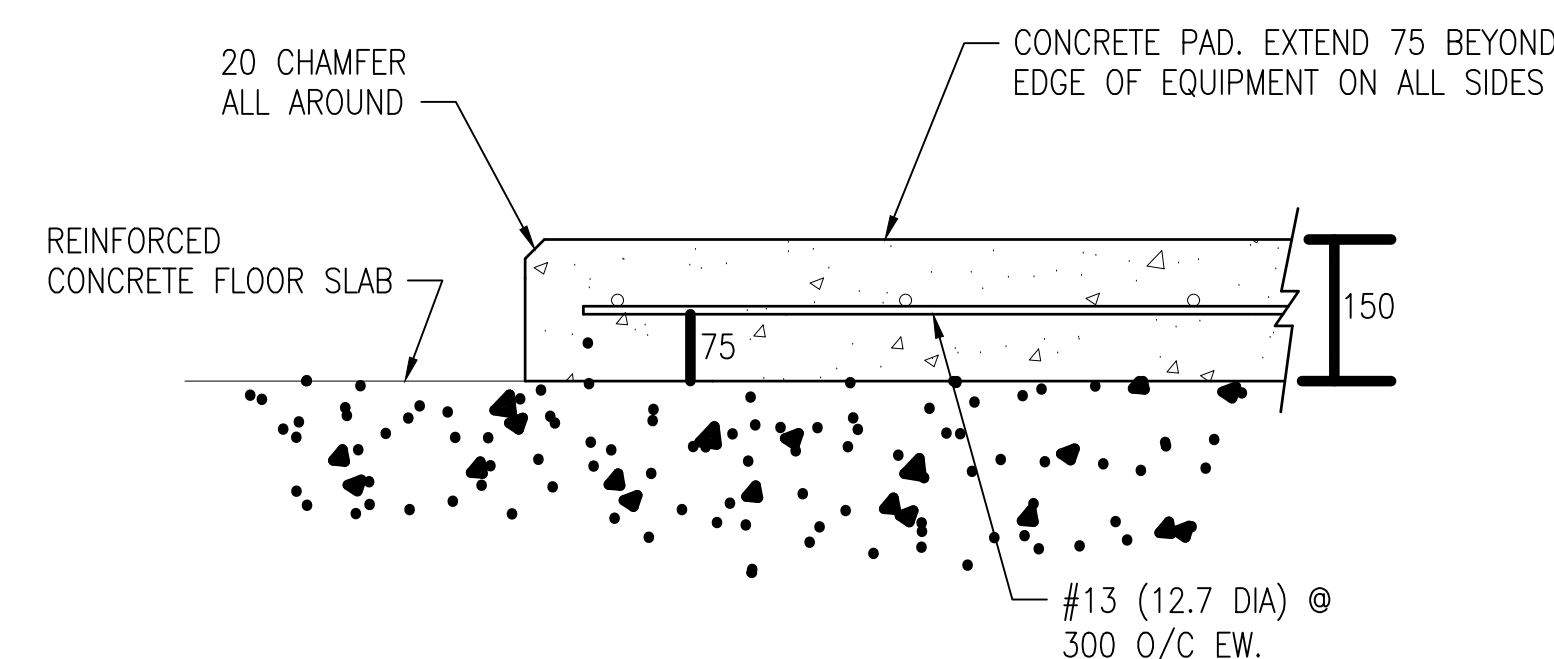

A1 CONCRETE EQUIPMENT PAD
SCALE: NOT TO SCALE

SCALE: NOT TO SCALE

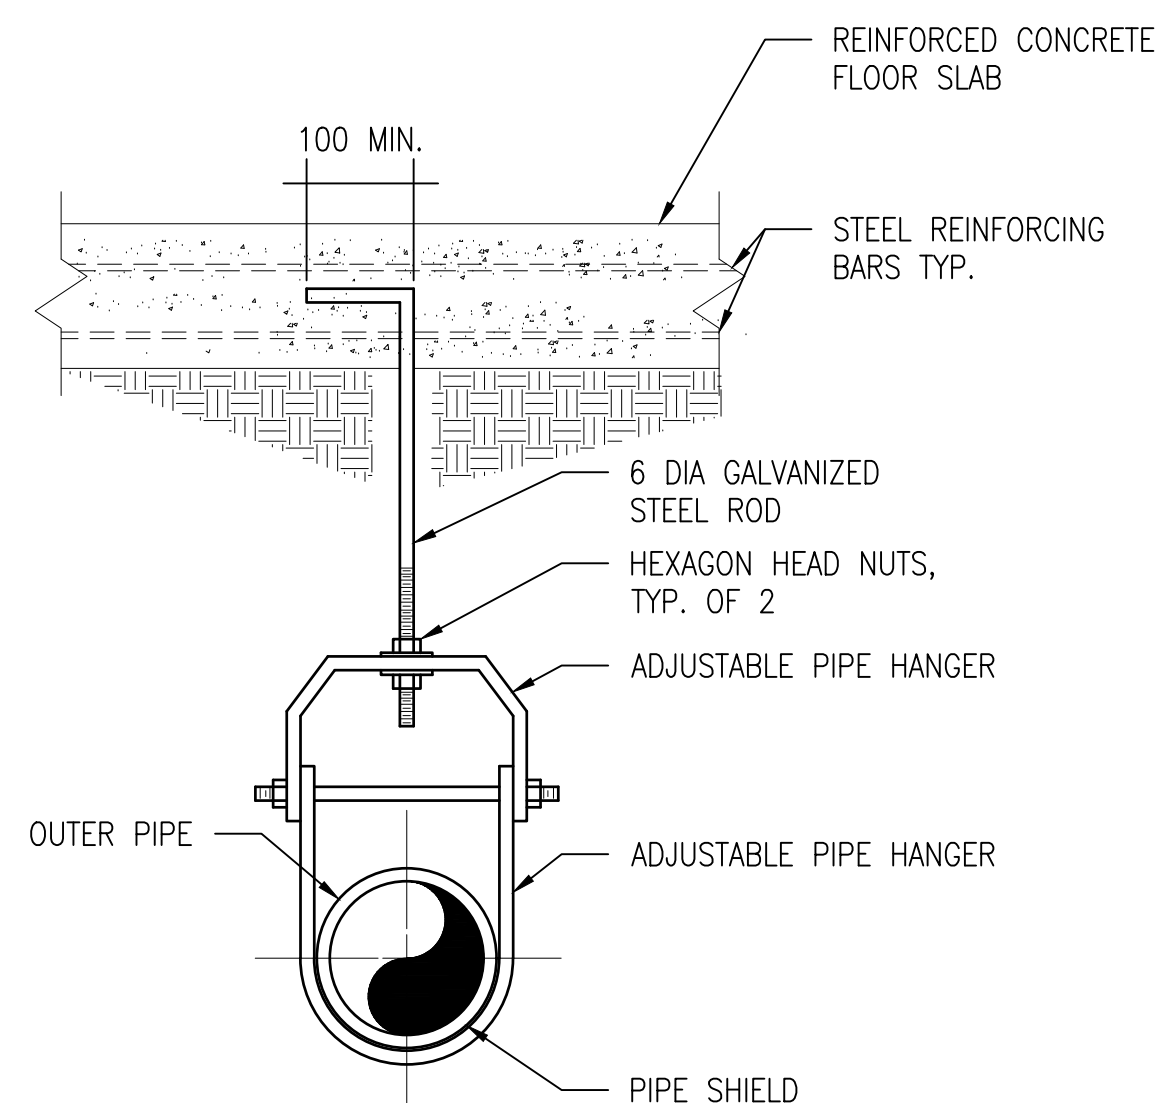

NOTE: ALL STEEL IN PIPE SUPPORT ASSEMBLY SHALL BE HOT-DIPPED GALVANIZED STEEL. PROTECT PIPE SUPPORTS, HANGERS, AND RODS WITH BITUMEN COATING (CR LAURENCE #BC5GL)

A2 BELOW SLAB PIPE SUPPORT
SCALE: NOT TO SCALE

SCALE: NOT TO SCALE

CBAA

BACKFLOW PREVENTER SCHEDULE					
MARK	LOCATION	TYPE	SIZE (MM)	PRESSURE DROP (KPA)	REMARKS
BP-1	112	REDUCED PRESSURE ZONE	65	85 @ 330 LPM	1, 2
<u>NOTES:</u>		1. PROVIDE FIXED AIR GAP. DISCHARGE TO NEAREST FLOOR DRAIN. 2. INSTALL IN ACCORDANCE WITH MANUFACTURER'S REQUIREMENTS.			

BACKFLOW PREVENTER SCHEDULE					
MARK	LOCATION	TYPE	SIZE (MM)	PRESSURE DROP (KPA)	REMARKS
BP-1	112	REDUCED PRESSURE ZONE	65	85 @ 330 LPM	1, 2
<u>NOTES:</u>	1. PROVIDE FIXED AIR GAP. DISCHARGE TO NEAREST FLOOR DRAIN. 2. INSTALL IN ACCORDANCE WITH MANUFACTURER'S REQUIREMENTS.				

A

AUTOMATIC FUEL OIL POLISHING UNIT SCHEDULE								
MARK	CAPACITY (L/min)	SUCTION (kPa)	PRESSURE (kPa)	MOTOR				NOTES
				POWER (W)	VOLTAGE	PHASE	FREQUENCY (HZ)	
AFPU-1	30.3	46.5	120	375	120	1	60	1,2
1. PROVIDE WITH INTEGRAL PRESSURE RELIEF VALVE DISCHARGING TO PUMP SUCTION. 2. SUCTION AND HEAD ARE EXTERNAL TO UNIT.								

MARK	USABLE CAPACITY (L)	NOMINAL DIMENSIONS				NOTES
		DIAMETER (MM)	LENGTH (MM)	WIDTH (MM)	HEIGHT (MM)	
BT-1	9463.5	1625.6	4572	1625.6	1625.6	1


FLUID DETECTION SYSTEM SCHEDULE							
MARK	DETECTION CABLE		MONITORING/ALARM PANEL				NOTES
	SHEATH	CONDUCTORS	POWER (W)	VOLTAGE	PHASE	FREQUENCY (HZ)	
FDS-1	MONOFILAMENT BRAID	RAYON INSULATED	60	120	1	60	1

1. THE SYSTEM SHALL UTILIZE LINEAR WATER LEAK DETECTION CABLE.
2. THE SYSTEM SHALL UTILIZE LIMITED POWER, LOW VOLTAGE A.C. FOR THE DETECTION CIRCUITS TO PROTECT THE LEAK DETECTION CABLE FROM DAMAGE BY ELECTROLYSIS.
3. THE SYSTEM SHALL SUPERVISE THE WIRING AND THE FLUID SENSING CONDUCTORS EMBEDDED IN THE LEAK DETECTION CABLE. ANY BREAK IN THE WIRING SHALL CAUSE A SYSTEM TROUBLE INDICATION AT THE LEAK DETECTION CONTROL PANEL.
4. THE SYSTEM SHALL ALSO INCLUDE BOTH ALARM AND TROUBLE INDICATIONS FOR EACH INPUT ZONE AS WELL AS A COMMON AUDIBLE ALARM AND AUXILIARY FORM-C CONTACTS FOR CONNECTION TO EXTERNAL MONITORING SYSTEMS.
5. SYSTEM INPUTS SHALL HAVE ADJUSTABLE SENSITIVITY TO ALLOW FOR PROPER OPERATION OVER A BROAD RANGE OF AMBIENT FIELD CONDITIONS.
6. THE CONTROL PANEL SHALL OPERATE FROM 115 V.A.C. AND SHALL INCLUDE AUTOMATIC BATTERY BACKUP USING A 12V GEL – CELL BATTERY. THE PANEL ASSEMBLY IS HOUSED IN A STEEL ENCLOSURE WITH HINGED DOOR AND CAM LOCK TO PREVENT UNAUTHORIZED ACCESS.


FUEL STORAGE TANK CONTROL PANEL SCHEDULE						
MARK	DESCRIPTION	ELECTRICAL				NOTES
		POWER (W)	VOLTAGE	PHASE	FREQUENCY (HZ)	
TCP-1	LEAD-LAG FUEL STORAGE TANK CONTROL	20	120	1	60	1,2
1. INSTALL IN ACCORDANCE WITH MANUFACTURER'S REQUIREMENTS. 2. PROVIDE WITH ALL REQUIRED ACCESSORIES AND APPURTENANCES TO SUPPORT DUAL TANKS IN A LEAD-LAG OPERATIONAL SEQUENCE.						

MARK	DESCRIPTION	ELECTRICAL				NOTES
		POWER (W)	VOLTAGE	PHASE	FREQUENCY (HZ)	
TCP-1	LEAD-LAG FUEL STORAGE TANK CONTROL	20	120	1	60	1,2


1. INSTALL IN ACCORDANCE WITH MANUFACTURER'S REQUIREMENTS.
2. PROVIDE WITH ALL REQUIRED ACCESSORIES AND APPURTENANCES TO SUPPORT DUAL TANKS IN A LEAD-LAG OPERATIONAL SEQUENCE.

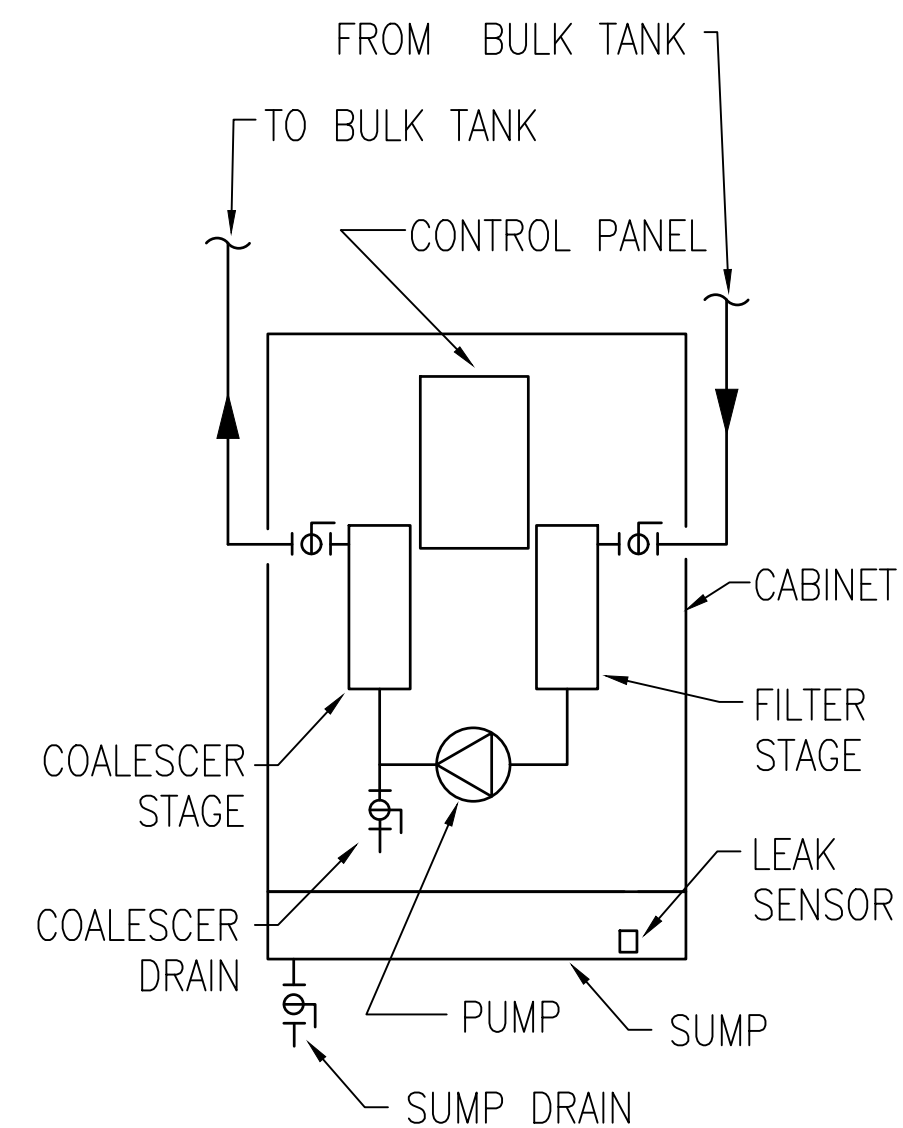

C3 AUTOMATIC FUEL POLISHING UNIT DETAIL
N.T.S.

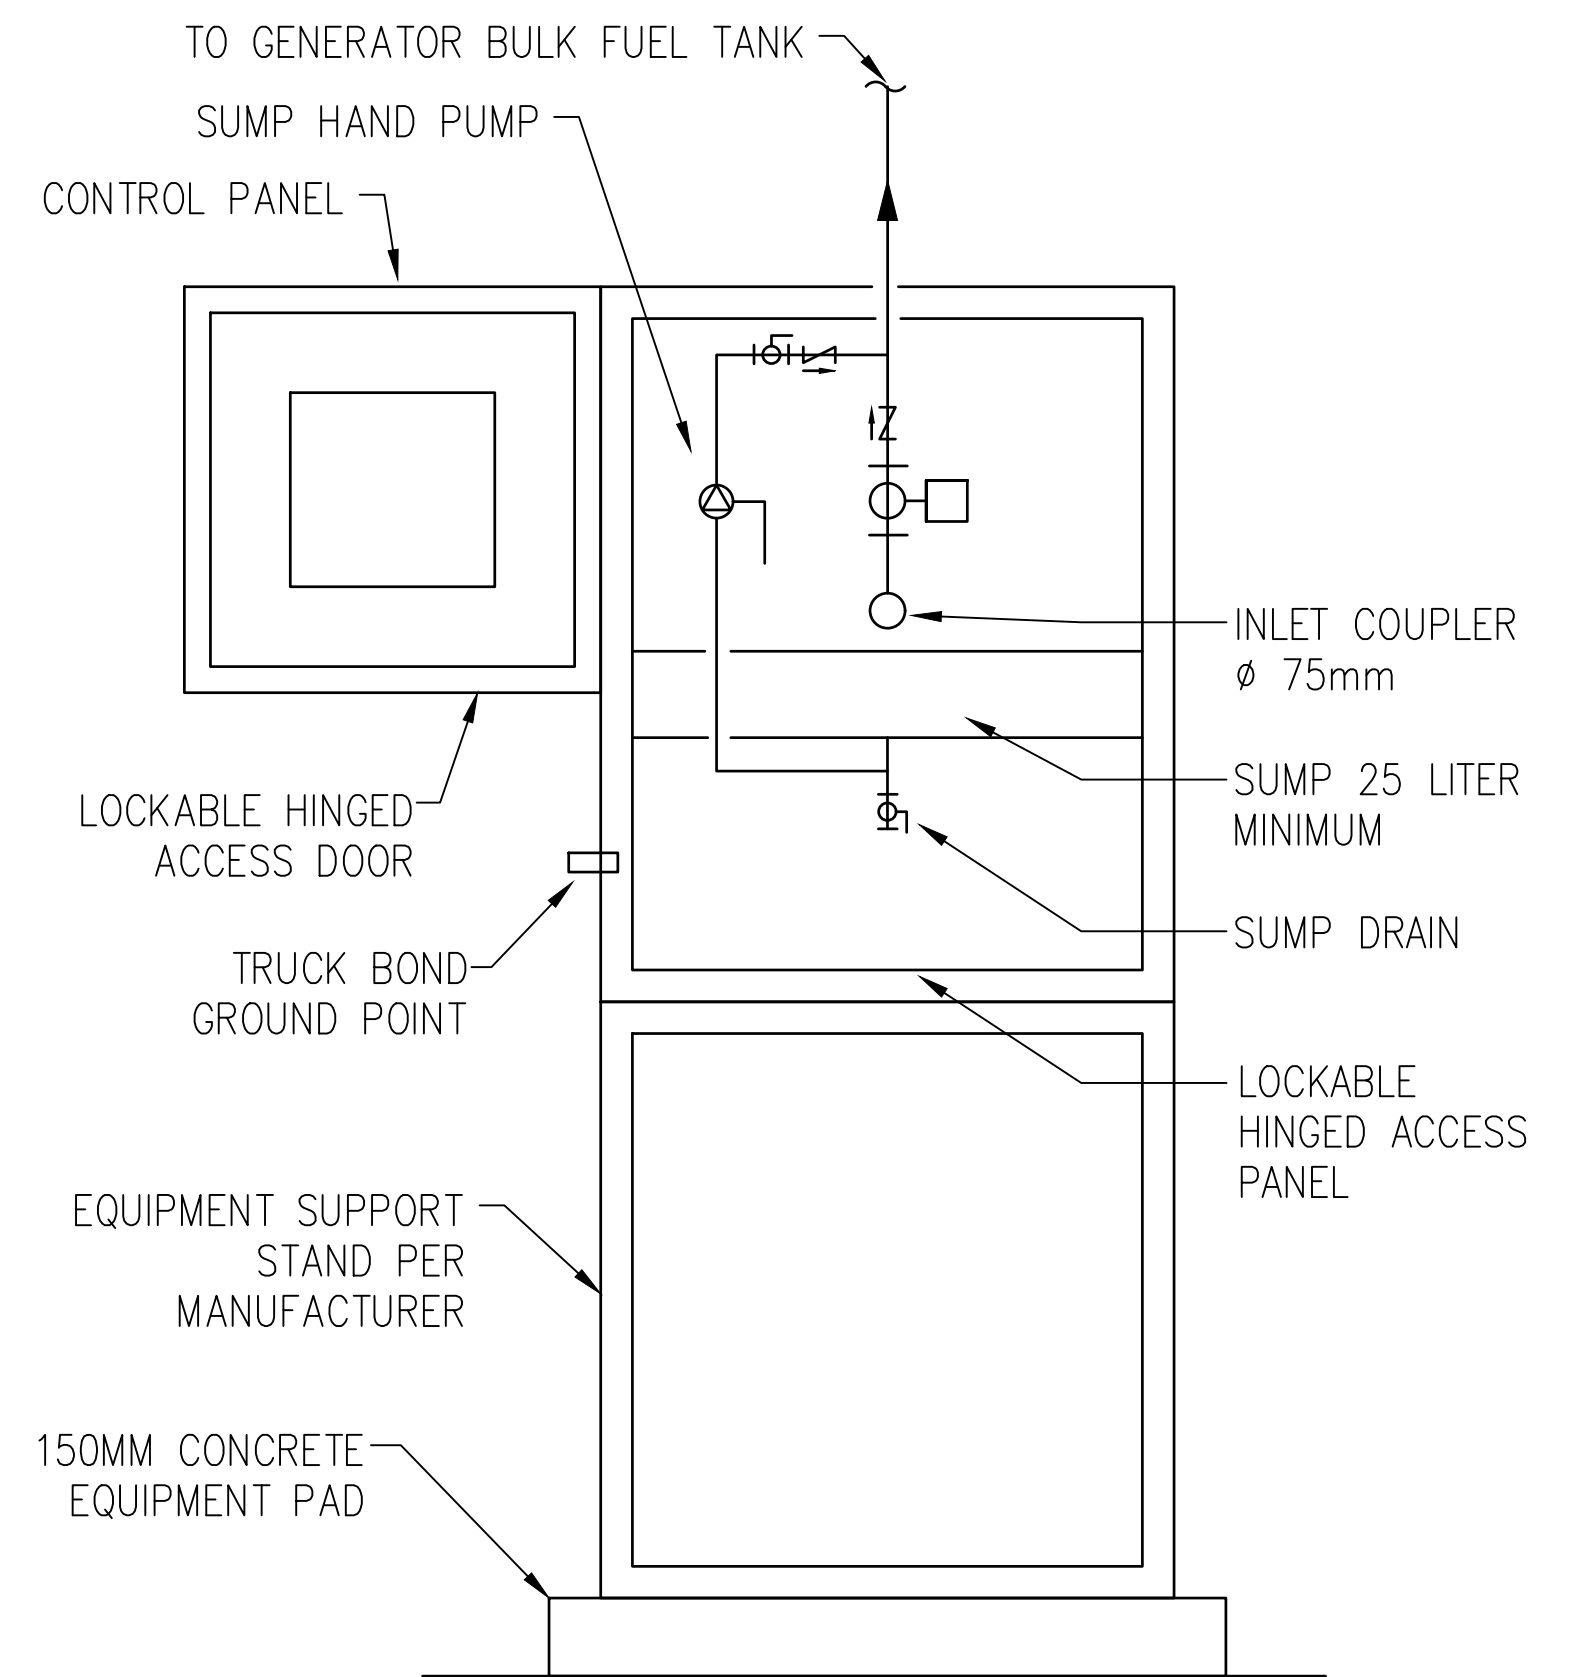


C4 AUTOMATIC FILL PORT DETAIL
N.T.S.

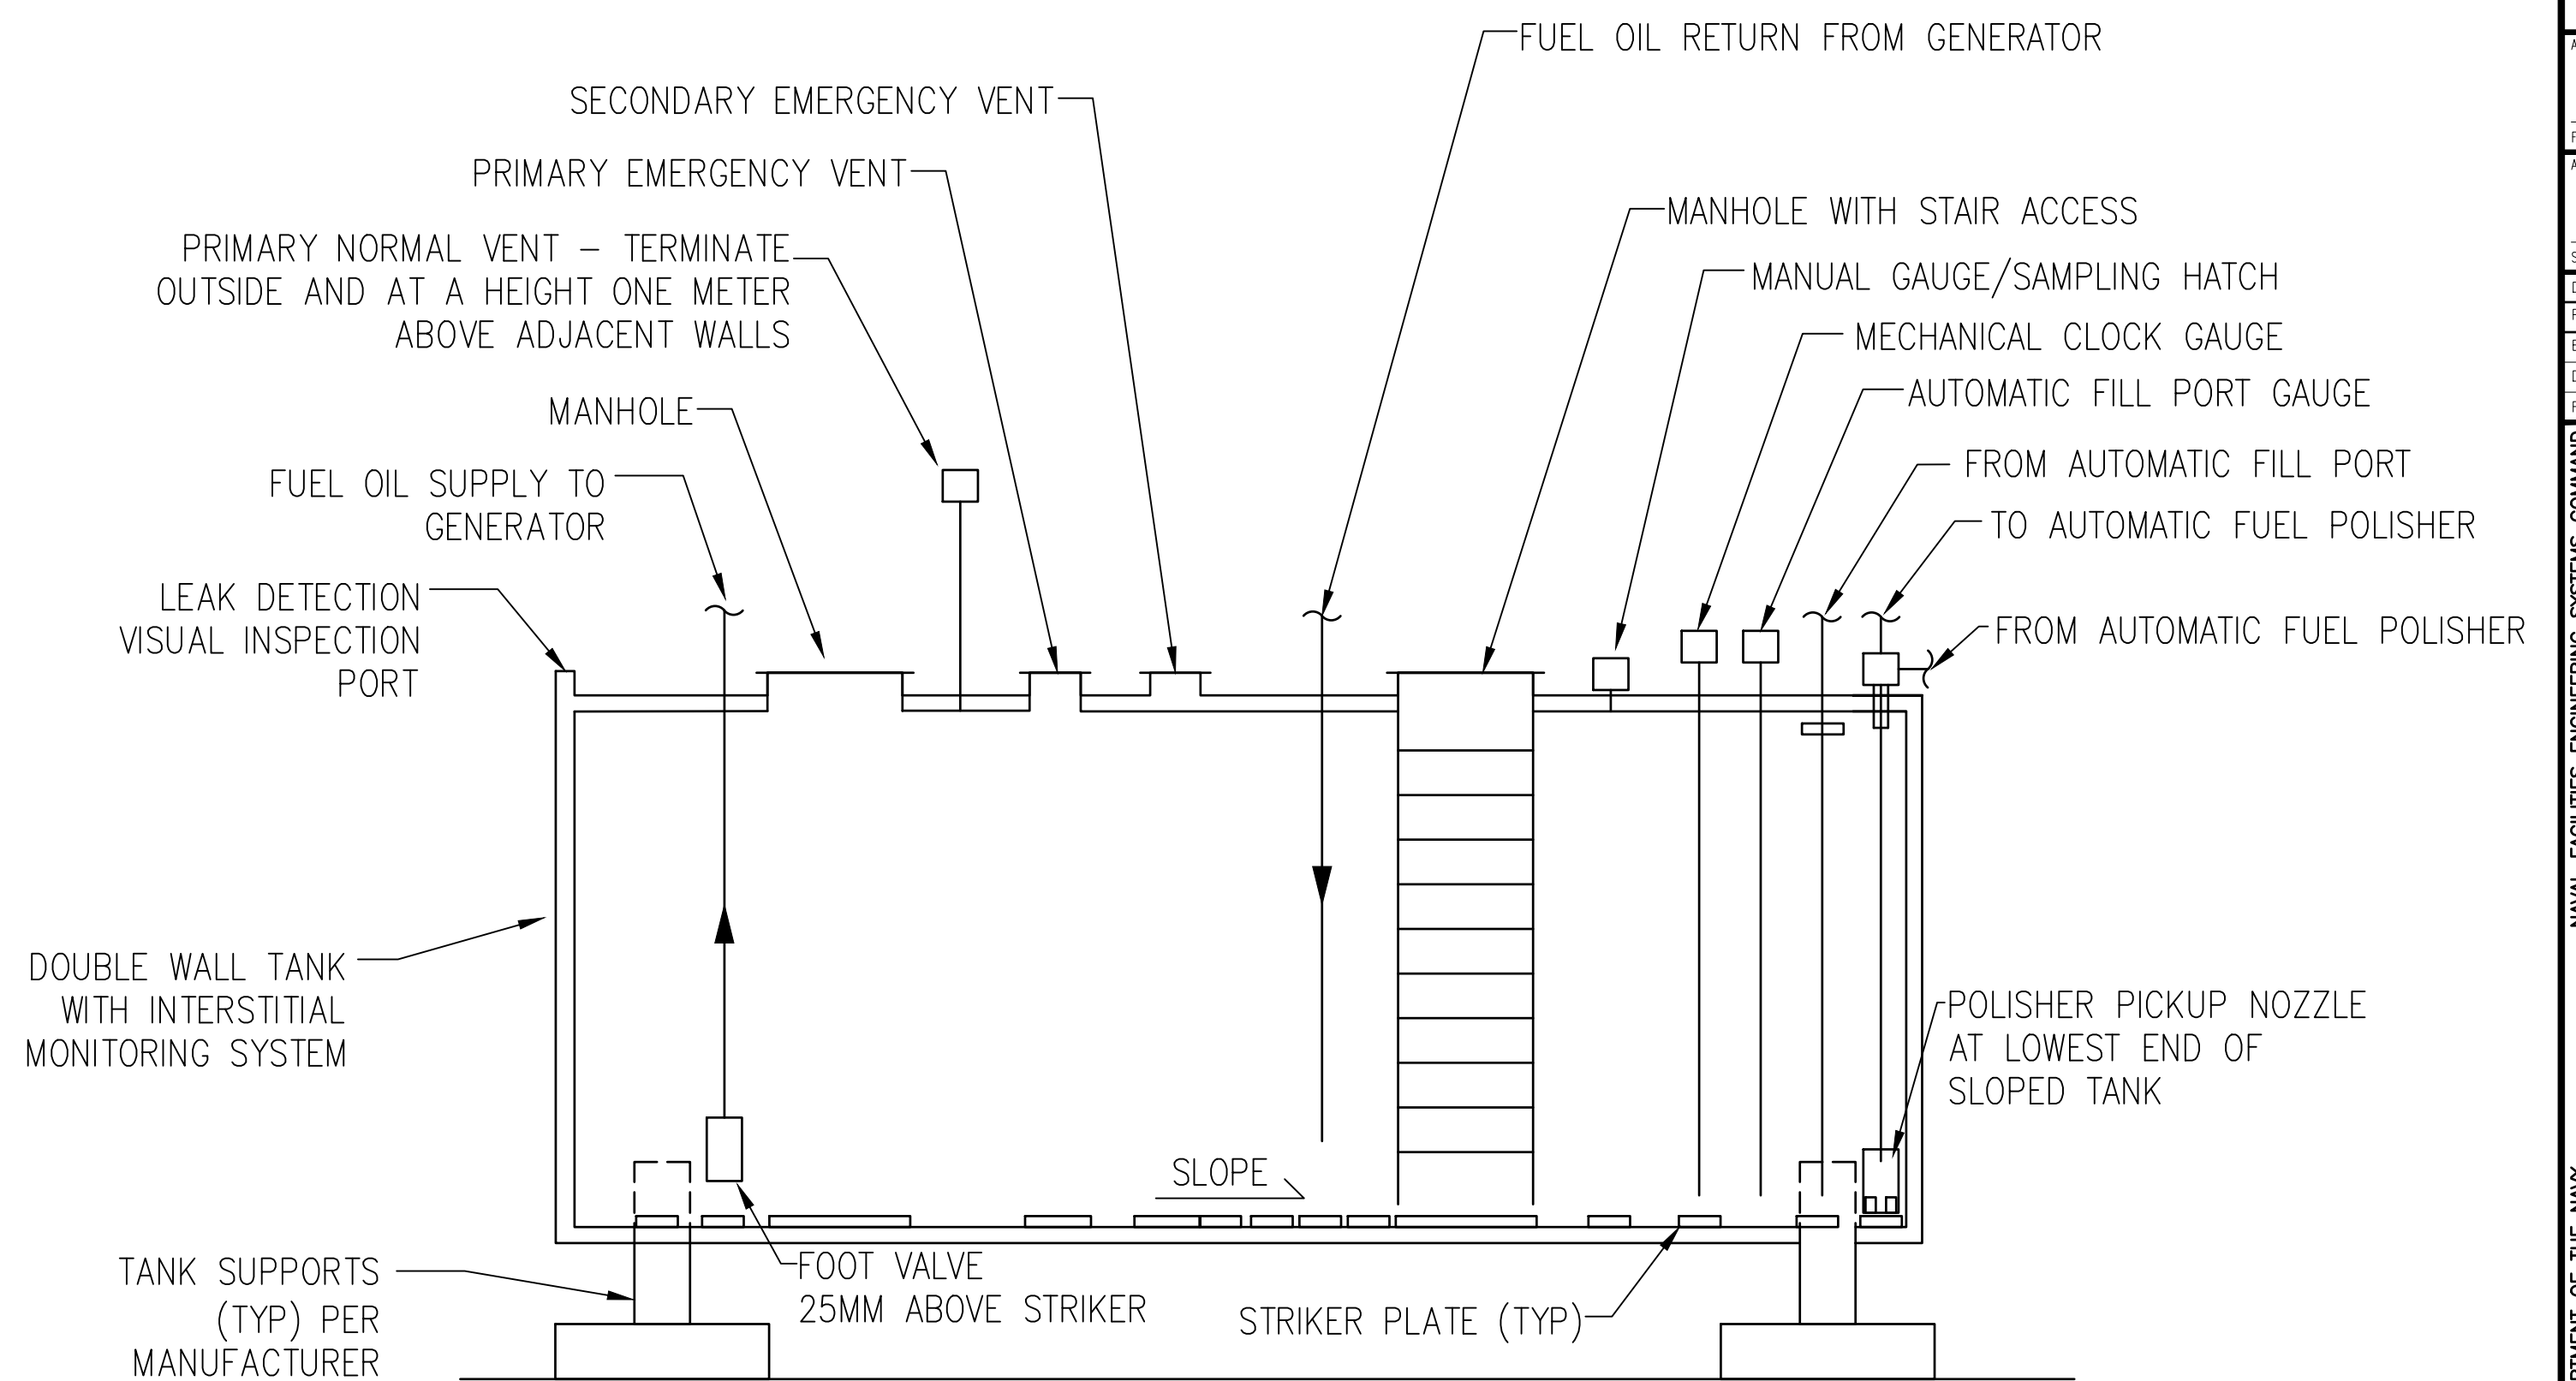

A3 GENERATOR FUEL BULK TANK DETAIL
N.T.S.

FILE NAME: Y:\OCONUS\MultipleStations\2026_1783264_P1362_JMFB_B_Design\DWG\Sheet\11_P1362_V1362_1783264_P-701.dwg PLOTTED: Tuesday, January 20, 2026 - 10:02am USER: joseph.n.rhodes

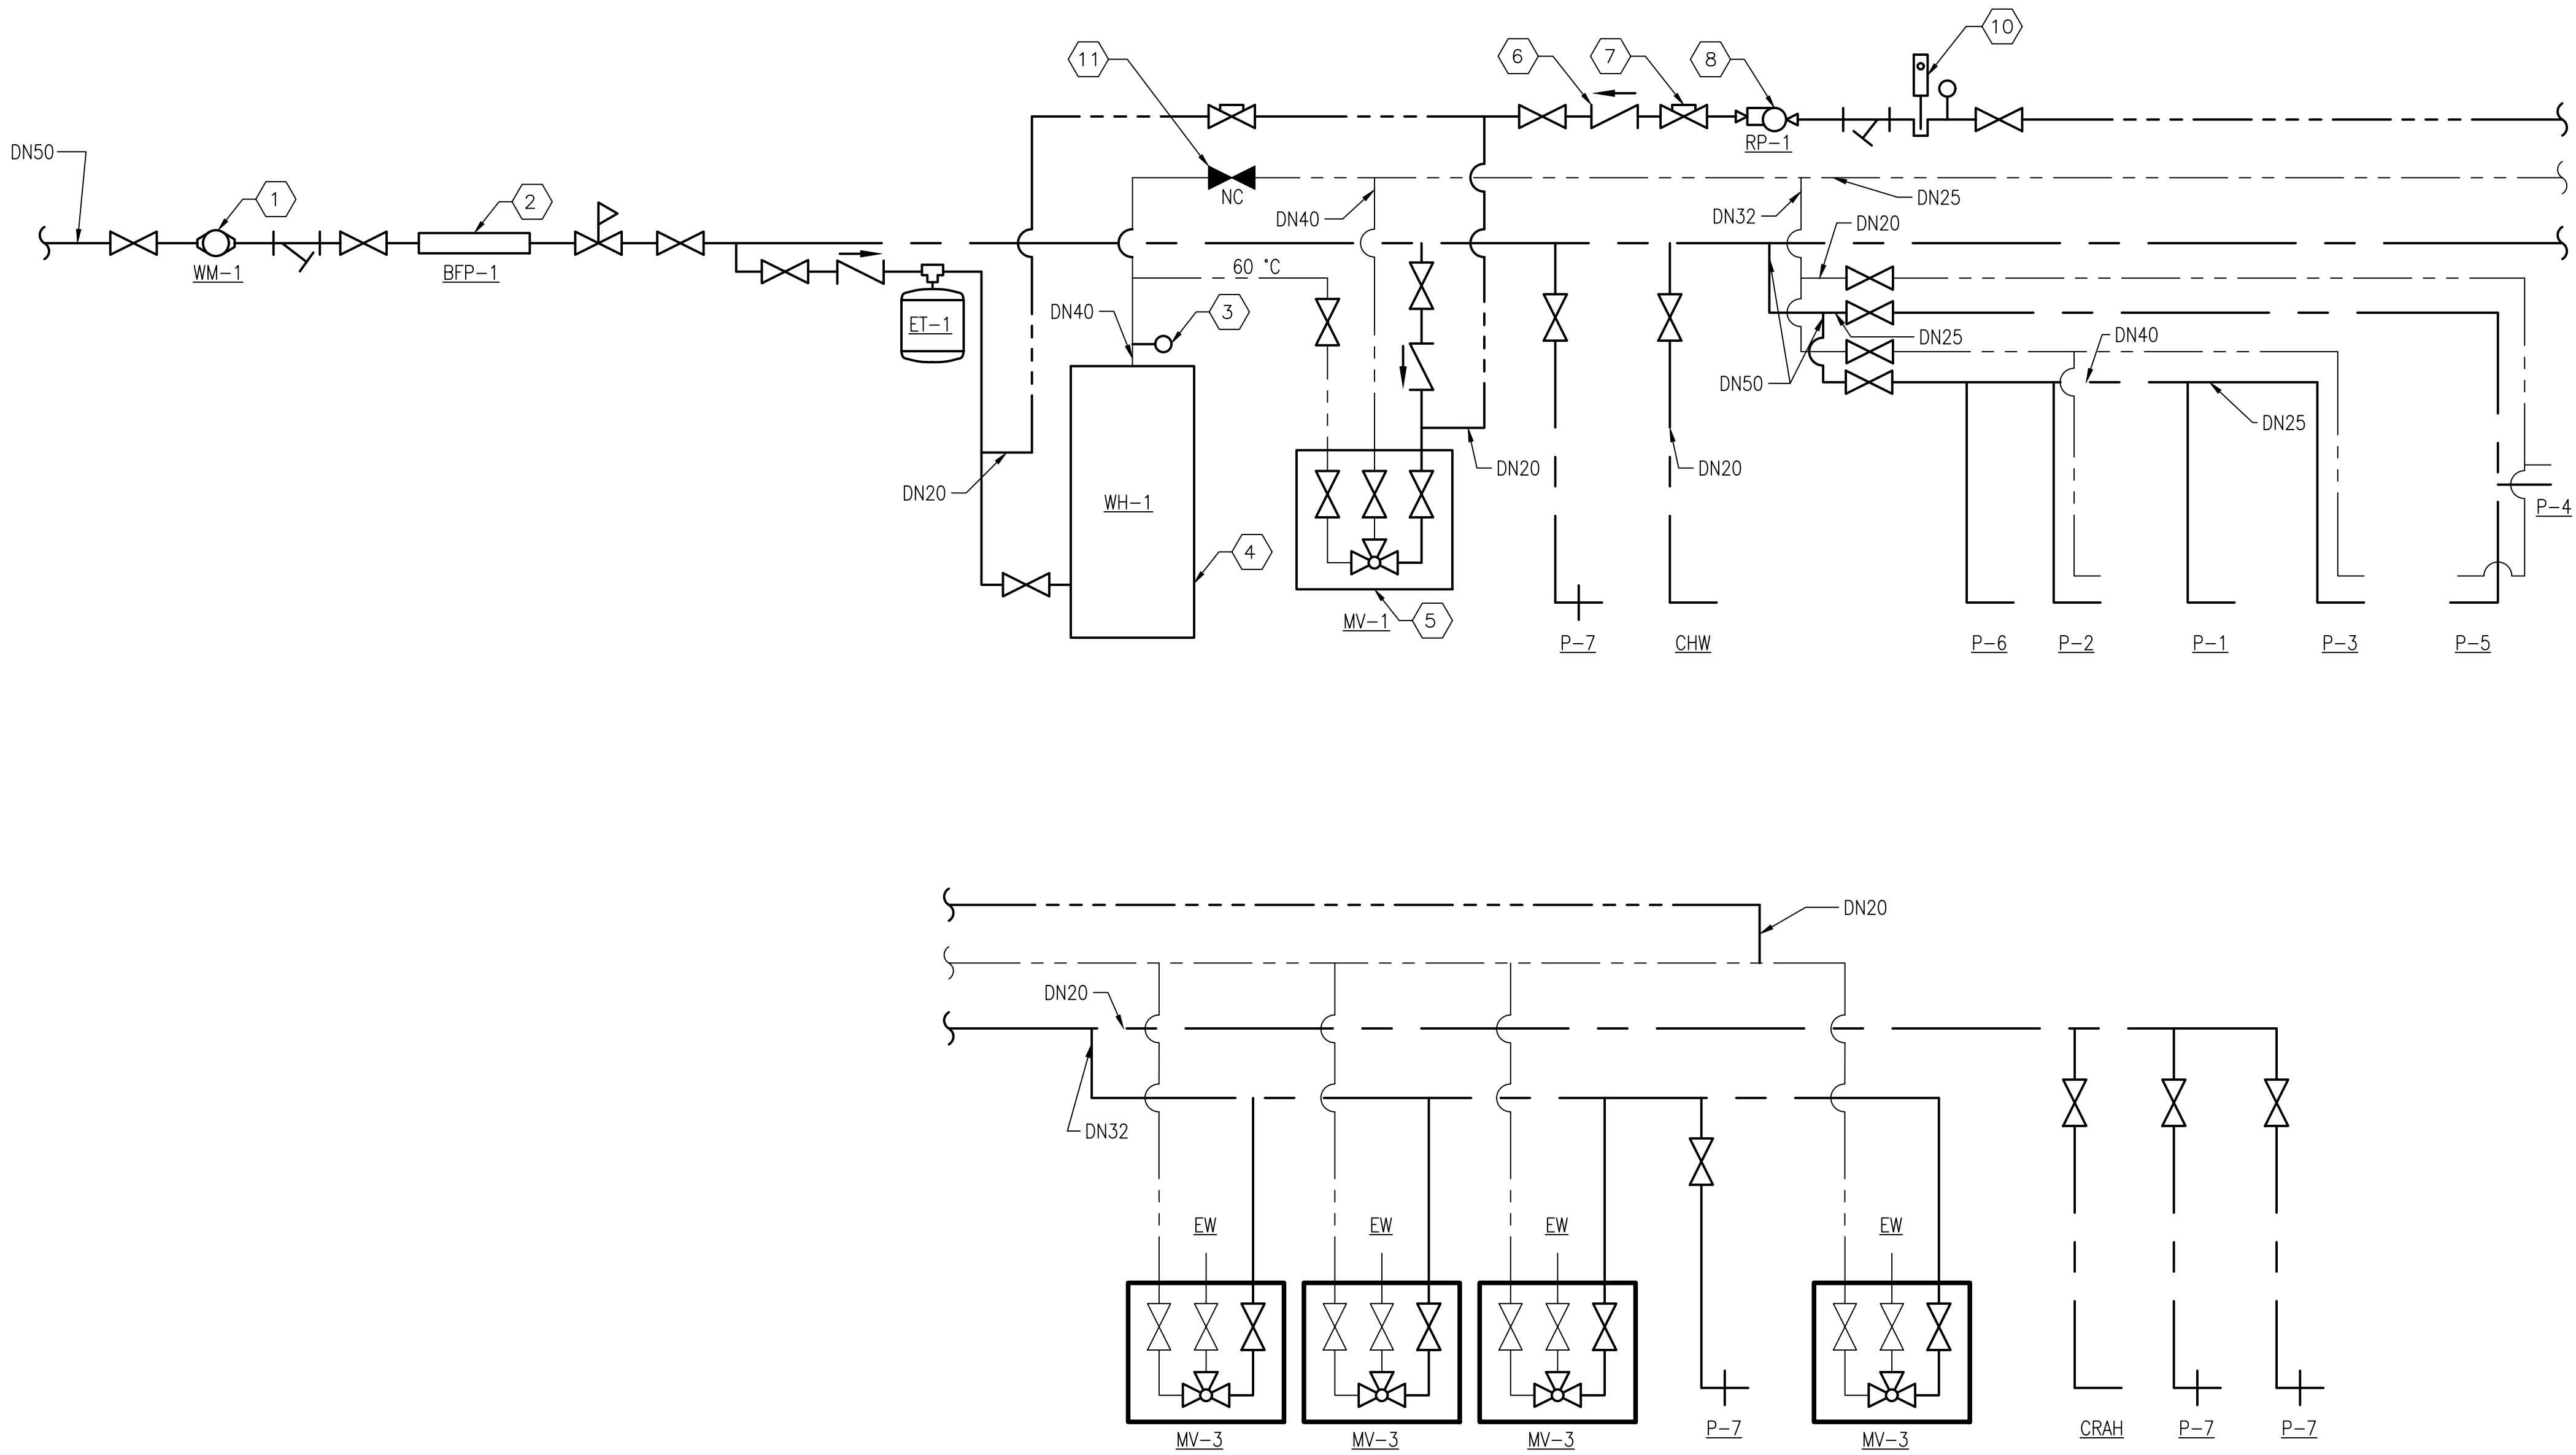

NOTES:

1. LAVATORY MIXING VALVES (MV-2) NOT SHOWN IN THIS DIAGRAM. REFER TO MIXING VALVE SCHEDULE.
2. PROVIDE MINIMUM NUMBER OF STRAIGHT PIPE LENGTHS UPSTREAM AND DOWNSTREAM OF MANUAL BALANCING VALVE AS RECOMMENDED BY THE MANUFACTURER.
3. SIZE MANUAL BALANCING VALVE BASED ON THE MANUFACTURER'S RECOMMENDED MINIMUM PRESSURE DROP REQUIRED FOR AN ACCURATE FLOW READING.
4. PIPE TO INDIVIDUAL FIXTURES SHALL BE FULL SIZE UNLESS OTHERWISE NOTED. REFER TO PLUMBING SCHEDULE.

PIPING DIAGRAM - DOMESTIC WATER

SCALE: NONE

SHEET KEYNOTES

1. WATER METER. RUN PULSE OUTPUT TO AMI ELECTRIC METER. REFER TO ELECTRICAL SHEETS FOR EXACT LOCATION OF AMI ELECTRIC METER.
2. REDUCED PRESSURE BACKFLOW PREVENTER. REFER TO DETAIL C3/P501B.
3. COMBINATION TEMPERATURE/PRESSURE GAUGE, TYP.
4. DOMESTIC WATER HEATER
5. MASTER MIXING VALVE
6. CHECK VALVE, TYP.
7. MANUAL BALANCING VALVE, TYP.
8. HOT WATER RECIRCULATION PUMP (RP-1)
9. WATER HAMMER ARRESTOR (PDI SIZE A)
10. AQUASTAT
11. LOCKABLE VALVE



A/E INFO

APPROVED

FOR COMMANDER NAVFAC

ACTIVITY

D. EVANS VIA EMAIL

SATISFACTORY TO DATE 01/15/2026

DES JNR DRW JNR CHG BJR

PM/DM MUD/ATP

BRANCH MANAGER STEPHEN ERICSON

DES PROD DIR WBF

FIRE PROTECTION ENGINEER DSN

NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND

NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - ATLANTIC

PLANNING, DESIGN AND CONSTRUCTION

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS


VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

FILE NAME: Y:\OCONUS\MultipleStations\2024_1783264_P1362_JMMPA_B_Design\DWG\Sheet\11_P1362_V1362.dwg LAYOUT NAME: P-704 PLOTTED: Tuesday, January 20, 2026 - 10:02am USER: joseph.n.rhodes

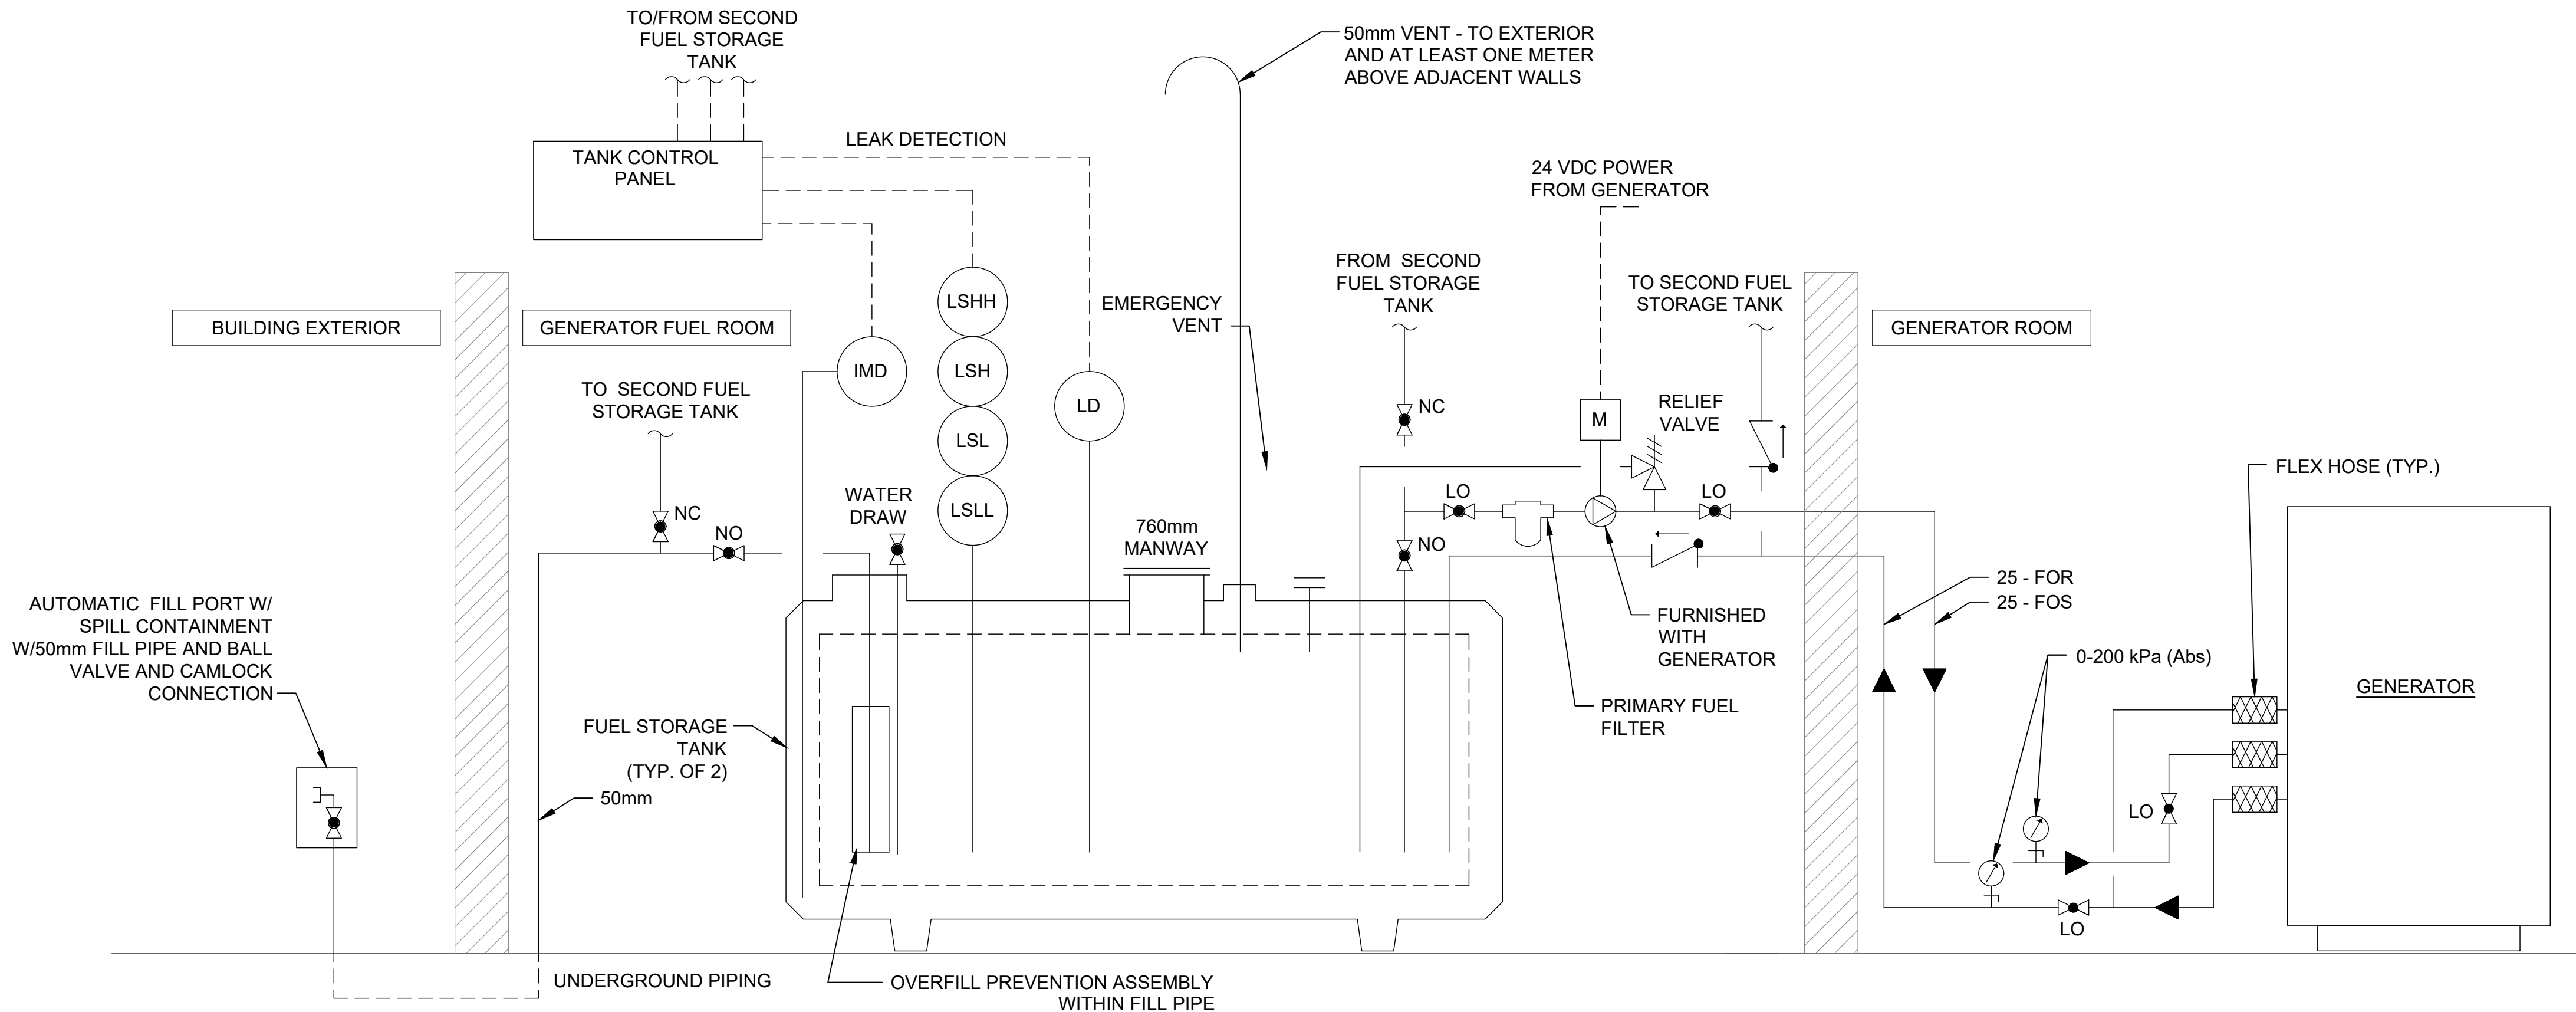

C1 FUEL PIPING SCHEMATIC FLOW DIAGRAM
SCALE: NOT TO SCALE

FUEL PIPING SYSTEM POINTS LIST

POINT NAME	POINT I/O	HARDWARE				SOFTWARE					NOTES	
		ANALOG INPUT	ANALOG OUTPUT	DIGITAL INPUT	DIGITAL OUTPUT	ANALOG VALUE	DIGITAL VALUE	SCHEDULE	TREND	ALARM		GRAPHIC
HIGH LEVEL (LSHH/LSH)	LEVEL					X				X	X	1
OVERFILL	OVERFILL						X			X	X	1
LEAK DETECTION (LD)	LEVEL						X			X	X	1
INTERSTITIAL MONITORING SYSTEM (IMS)	LEVEL						X			X	X	1
LOW INVENTORY (LSLL/LSL)	LEVEL					X				X	X	1
FUEL LEVEL	LEVEL					X			X	X	X	1

NOTES:
1. POINTS LIST IS TYPICAL FOR BOTH FUEL STORAGE TANKS.

FUEL PIPING SYSTEM CONTROLS

AUTOMATIC FILL PORT (AFP-1):

- DISPLAY CURRENT USABLE FUEL LEVEL FOR EACH FUEL STORAGE TANK IN PERCENT AND LITERS.
- WHEN FUEL STORAGE TANK LEVEL REACHES FULL LEVEL, THE PUMP DE-ENERGIZES FROM AUTOMATIC MODE AND CLOSSES THE INLET VALVE. FUEL FILL CAN CONTINUE THROUGH PORT IN MANUAL FILL MODE.
- WHEN THE FUEL LEVEL REACHES CRITICAL HIGH LEVEL, THE PUMP DE-ENERGIZES AND CLOSSES THE AUTOMATIC FILL VALVE TO PREVENT OVERFILL.

AUTOMATIC FUEL POLISHING UNIT (AFPU-1):

- ALTERNATE DAILY: ENERGIZE EACH AUTOMATIC POLISHING UNIT PUMP FOR 4 (ADJ.) HOURS AND DE-ENERGIZE FOR 20 (ADJ.) HOURS.

FLUID DETECTION SYSTEM (FDS-1):

- ON DETECTION OF SIGNAL FROM THE FLUID DETECTION CABLE.

FUEL STORAGE TANK CONTROL PANEL (TCP-1):

- LEAD TANK: RESPECTIVE FUEL STORAGE TANK AND ASSOCIATED VALVES ARE COMMANDED OPEN.
- LAG TANK: RESPECTIVE FUEL STORAGE TANK AND ASSOCIATED VALVES ARE COMMANDED CLOSED.
- AUTOMATIC CHANGEOVER: LEAD AND LAG TANK SWITCH WHEN LEAD TANK REACHES LOW LOW LEVEL.
- MANUAL CHANGEOVER: LEAD AND LAG TANK SWITCH WHEN PROMPTED BY MANUAL INPUT.
- FUEL CANNOT BE PUMPED FROM TANK BELOW THE LOW LOW LEVEL THRESHOLD UNLESS UNDER MANUAL CONTROL.
- UNUSED FUEL RETURNS TO THE (ACTIVE) LEAD TANK
- VISUAL AND AUDIO ALARMS:
 - FUEL STORAGE TANK CRITICAL LOW LEVEL
 - FUEL STORAGE TANK CRITICAL HIGH LEVEL
 - LEAK DETECTION
 - INTERSTITIAL MONITORING SYSTEM
 - FUEL STORAGE TANK LOW LOW LEVEL
 - NO PUMP FLOW WHILE COMMANDED ON

FUEL STORAGE TANK THRESHOLDS:

- LOW LEVEL: BELOW 30% USABLE LEVEL
- FULL LEVEL: ABOVE 95% USABLE LEVEL
- CRITICAL HIGH LEVEL: ABOVE 99% USABLE LEVEL
- LOW LOW LEVEL: BELOW 15% USABLE LEVEL

GENERAL NOTES

1. REFER TO SPECIFICATIONS FOR REQUIREMENTS FOR ELECTRICAL GROUNDING OF TANK. INSTRUMENTS ARE TO BE GROUNDED SEPARATELY FROM TANKS.
2. PROVIDE TANK WITH CHANNEL SUPPORTS WITH ANCHOR HOLES. REFER TO SPECIFICATIONS FOR STRUCTURAL AND SEISMIC REQUIREMENTS.

SHEET KEYNOTES

1.



A/E INFO

APPROVED

FOR COMMANDER NAVFAC

ACTIVITY

D. EVANS VIA EMAIL

SATISFACTORY TO DATE 01/15/2026

DES B.J.F. DRW OLS C.H.K. RER

PM/DM MJD/ATP

BRANCH MANAGER B.J.F.

DES PROD DIR WBF

FIRE PROTECTION ENGINEER DSN

NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND

NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - ATLANTIC

PLANNING, DESIGN AND CONSTRUCTION

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS

VARIOUS LOCATIONS