



UD CHILLER CAPACITY UPGRADE

DEPARTMENT OF VETERANS AFFAIRS PROJECT NO. 646-20-109

PITTSBURGH VA MEDICAL CENTER
UNIVERSITY DRIVE CAMPUS
BUILDING 8
PITTSBURGH, PA

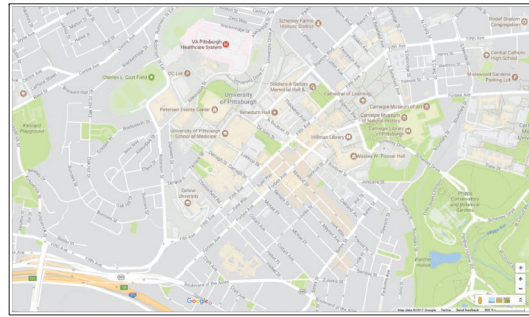

LOCATION MAP
SCALE: NTS

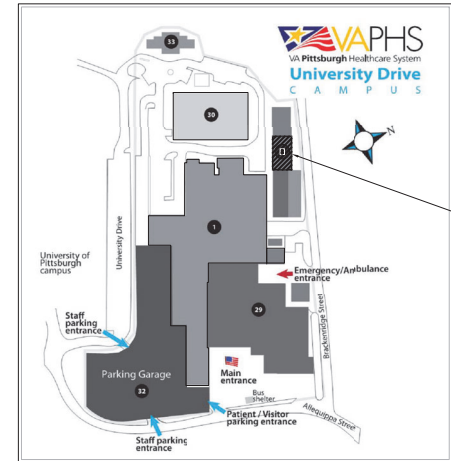

CAMPUS PLAN
SCALE: NTS

DRAWING INDEX

DRAWING No.	DRAWING TITLE	DRAWING No.	DRAWING TITLE	DRAWING No.	DRAWING TITLE	DRAWING No.	DRAWING TITLE
GENERAL		ARCHITECTURAL		MECHANICAL		ELECTRICAL	
G1001	COVER SHEET	A0101	NOTES, SYMBOLS AND ABBREVIATIONS	M-001	ABBREVIATIONS, NOTES, & SYMBOLS	E-001	ABBREVIATIONS AND SYMBOLS
G1010	CODE COMPLIANCE AND LIFE SAFETY PLANS	AD101	DEMOLITION PLAN - FIRST LEVEL	M5101	SITE PLAN	E-002	NOTES
G1011	PHASING PLANS - LEVELS 1, 2, 3 & SITE	AD102	DEMOLITION PLAN - SECOND LEVEL	M2102	TEMPORARY WORK PLAN SECOND LEVEL	E-003	FIRE ALARM NOTES
G1012	PHASING NOTES	AD103	DEMOLITION PLAN - ROOF LEVEL	MD111	DEMOLITION PLAN - FIRST LEVEL	ED101	SITE PLAN
STRUCTURAL		AE101	FLOOR AND FINISH PLAN - FIRST LEVEL	MD121	DEMOLITION PLAN - SECOND LEVEL	ED111	DEMOLITION PLAN - FIRST LEVEL
S-001	ABBREVIATIONS & NOTES	AE102	FLOOR AND FINISH PLAN - SECOND LEVEL	MD131	DEMOLITION PLAN - ROOF	ED121	DEMOLITION PLAN - SECOND LEVEL
S-002	NOTES	AE103	FLOOR PLAN - ROOF LEVEL	MD111	EQUIPMENT PLAN FIRST LEVEL	ED131	DEMOLITION PLAN - ROOF
SD111	DEMOLITION PLAN - FIRST LEVEL	AE200	EXTERIOR ELEVATIONS	MD121	EQUIPMENT PLAN SECOND LEVEL	EL111	LIGHTING PLAN - FIRST LEVEL
SD121	DEMOLITION PLAN - SECOND LEVEL	AE300	BUILDING SECTIONS	MD131	EQUIPMENT PLAN ROOF	EL121	LIGHTING PLAN - SECOND LEVEL
SD131	DEMOLITION PLAN - ROOF LEVEL	AE310	PLAN DETAILS	M-111	PLAN - FIRST LEVEL	EP111	POWER PLAN - FIRST LEVEL
SD201	DEMOLITION SECTIONS & DETAILS	AE311	SECTION DETAILS	M-121	PLAN - SECOND LEVEL	EP121	POWER PLAN - SECOND LEVEL
SF101	FOUNDATION PLAN	PLUMBING		M-131	PLAN - ROOF	EP131	CONDUIT PLAN - SECOND LEVEL
SF111	FRAMING PLAN - FIRST LEVEL	P-001	ABBREVIATIONS, NOTES, & SYMBOLS	M-301	SECTIONS	EV101	PLAN - ROOF
SF121	FRAMING PLAN - SECOND LEVEL	P-111	PLAN - FIRST LEVEL	M-302	SECTIONS	EV111	SYSTEMS PLAN - FIRST LEVEL
SF131	FRAMING PLAN - ROOF LEVEL	P-121	PLAN - SECOND LEVEL	M-303	SECTIONS	EV121	SYSTEMS PLAN - SECOND LEVEL
SF401	FRAMING PLAN - ROOF DRAINAGE	P-201	DETAILS	M-304	SECTIONS	E-601	DETAILS
SF411	FRAMING PLAN TOP OF COOLING TOWER PLATFORM	P-301	DETAILS	M-305	SECTIONS	E-602	SINGLE LINE DIAGRAM - EXISTING DEMOLITION
S-201	BRACE FRAME ELEVATIONS	M-601		M-601	CHILLED WATER FLOW DIAGRAM	E-603	SINGLE LINE DIAGRAM - NEW
S-301	CONCRETE SECTIONS & DETAILS	M-602	CONDENSER WATER FLOW DIAGRAM	M-602	CONDENSER WATER FLOW DIAGRAM	E-604	SINGLE LINE DIAGRAM - NEW
S-401	STEEL SECTIONS & DETAILS	M-603	TEMPORARY CHILLED WATER FLOW DIAGRAM	M-603	TEMPORARY CHILLED WATER FLOW DIAGRAM	E-605	FIRE ALARM RISER DIAGRAM AND MATRIX
S-501	SECTIONS & DETAILS	M-604	EXHAUST FLOW CONTROLS DIAGRAM	M-604	EXHAUST FLOW CONTROLS DIAGRAM	E-701	SCHEDULES
S-511	SITE SECTIONS & DETAILS	M-701	SCHEDULES	M-701	SCHEDULES		
		M-702	SCHEDULES	M-702	SCHEDULES		
		M-801	CONTROLS ABBREVIATIONS, NOTES & SYMBOLS	M-801	CONTROLS ABBREVIATIONS, NOTES & SYMBOLS		
		M-802	CONTROLS SEQUENCE OF OPERATION	M-802	CONTROLS SEQUENCE OF OPERATION		
		M-803	CONTROLS POINT'S LIST - 1	M-803	CONTROLS POINT'S LIST - 1		
		M-804	CONTROLS POINT'S LIST - 2	M-804	CONTROLS POINT'S LIST - 2		

PRINTS OF THIS DRAWING SHALL NOT BE USED FOR ANY PURPOSE WHATSOEVER WITHOUT THE SEAL AND SIGNATURE OF THE PROFESSIONAL ENGINEER.

CONSULTANT

LaBella
Powered by partnership.
300 State Street
Suite 201
Rochester, NY 14614
P: (585) 454-4111
www.labella.com

ENGINEER OF RECORD

Miller-Remick LLC
Mechanical, Electrical, Plumbing,
& Structural Engineering
1010 KINGS HIGHWAY SOUTH
CHERRY HILL, NEW JERSEY 08034
PHONE: (856) 429-4000
FAX: (856) 429-5000
MR PROJECT NO. 0507-0014

MILLER-REMICK LLC
PROFESSIONAL ENGINEER



Office of
Construction and
Facilities
Management

VA U.S. Department of
Veterans Affairs

Drawing Title
COVER SHEET

Approved: Project Director

Phase
CONSTRUCTION BID
DOCUMENTS

NON-SPRINKLERED

Project Title
UD CHILLER CAPACITY UPGRADE

Location
UNIVERSITY DRIVE CAMPUS
PITTSBURGH, PENNSYLVANIA

Issue Date
2022-05-11

Checked
BGH

Drawn
SP

Project Number
646-20-109

Building Number
8

Drawing Number
GI001

4 GENERAL PHASING PLAN - SITE
SCALE: 1/8" = 1'-0"

A SECTION
SCALE: 1/8" = 1'-0"

1 GENERAL PHASING PLAN - FIRST LEVEL
SCALE: 1/8" = 1'-0"

2 GENERAL PHASING PLAN - SECOND LEVEL
SCALE: 1/8" = 1'-0"

3 GENERAL PHASING PLAN - ROOF LEVEL
SCALE: 1/8" = 1'-0"

PRINTS OF THIS DRAWING SHALL NOT BE USED FOR ANY PURPOSE
WHATSOEVER WITHOUT THE SEAL AND SIGNATURE OF THE
PROFESSIONAL ENGINEER.

CONSULTANT



300 State Street | Engineering
Suite 201 | Architecture
Rochester, NY 14614 | Environmental
P: (585) 454-6110 | Planning
www.2stb.com

ENGINEER OF RECORD



1010 KINGS HIGHWAY SOUTH
CHERRY HILL, NEW JERSEY 08034
PHONE: (856)429-4000
FAX: (856)429-5002
MR PROJECT NO: 0507-0014

MILLER-REMICK LLC
PROFESSIONAL ENGINEER



Office of
Construction
and Facilities
Management

VA | U.S. Department
of Veterans Affairs

Drawing Title GENERAL PHASING PLANS LEVELS 1, 2, 3 & SITE

Approved: Project Director

Phase	CONSTRUCTION & DOCUMENTS
-------	--------------------------

NON SPRINKLERED

Project Title	UD CHILLER CAPACITY UPGRADE
---------------	-----------------------------

Project Number
646-20-109

Building Number
8

Location	UNIVERSITY DRIVE CAMPUS PITTSBURGH, PENNSYLVANIA
----------	---

	Drawing Number
--	----------------

Issue Date

☐ Checked

Drawn

GC101

- PHASE 1:
- 1.1 PROVIDE NEW MEDIUM VOLTAGE (MV) SWITCHGEAR (SWGR) WITH MV STEP-DOWN TRANSFORMER (VTRF) AND DISCONNECT SWITCH AT THE REAR OF THE CHILLER PLANT. PROVIDE NEW 480V/277V DISTRIBUTION PANEL (PANEL) STEP-DOWN VTRF AND 200V/120V FNL PROVIDE WIRING AND CONDUIT BETWEEN EACH EQUIPMENT, INCLUDING FUTURE PHASE TERMINATIONS OF WIRING AND CONDUIT TO THE EXISTING MV SWGR AT THE REAR.
 - 1.2 PROVIDE THE NEW MV SWGR (FUZZED SWITCH, VTRF, AND 480V/277V CIRCUIT BREAKER SECTION) AT THE FIRST LEVEL. PROVIDE A NEW NON-FUSED SWITCH AT THE CHILLER PLANT FLOOR. PROVIDE A NEW BUSBUILT FROM THE CIRCUIT BREAKER SECTION TO A NEW NON-FUSED SWITCH AT THE CHILLER PLANT FLOOR. PROVIDE WIRING AND CONDUIT FROM THE EXISTING SWITCHGEAR TO THE INTERIOR SWITCHGEAR. REFER TO ELECTRICAL FLOOR PLAN FOR EXACT EQUIPMENT LAYOUT.
 - 1.3 PROVIDE A TEMPORARY 480V/277V SWITCHBOARD ON THE FINISHED GRADE WITH 4 CABLED RECEPTACLES. PROVIDE WIRING FROM THE NON-FUSED SWITCH TO THE TEMPORARY SWITCHBOARD. PROVIDE (4) FOUR TEMPORARY CABLES WITH WALL PLUGS ON BOTH ENDS. PROVIDE TEMPORARY CABLE TRAY FROM THE NON-FUSED SWITCH AT THE CHILLER PLANT FLOOR TO THE TEMPORARY SWITCHBOARD. ROUTE THE CABLE TRAY ALONG THE PERIMETER OF THE EXTERIOR WALL OF BUILDING 8.
 - 1.4 PROVIDE CONDUIT ROUGH-IN FROM THE EXISTING PULLBOX ON THE SIDE OF THE HALL TO THE NEW MV SWGR AT THE REAR OF THE CHILLER PLANT. PROVIDE WIRING THROUGH THE EXISTING SPACE CONDUIT AND NEW CONDUIT FROM THE NEW MV SWGR TO THE EXISTING SWGR IN BUILDING 31.
 - 1.5 PROVIDE NEW MV FUSED SWITCH, TRANSFORMER, AND NON-FUSED 480V/277V DISCONNECT SWITCH FOR CHILLER #4 IN THE FIRST LEVEL. PROVIDE WIRING AND CONDUIT FROM SWGR TO THE FUSED SWITCH. PROVIDE CONDUIT WIRING BETWEEN EACH NEW EQUIPMENT.
 - 1.6 COORDINATE A CAMPUS WIDE POWER SHUTDOWN WITH THE VA PRIOR TO FINAL TERMINATIONS OF THE WIRING INTO THE SPARE CIRCULO OF THE EXISTING MV SWGR IN BUILDING 31.
 - 1.7 WHEN RECEIVING AN APPROVAL FROM THE VA FOR A CAMPUS WIDE POWER SHUTDOWN, DE-ENERGIZE THE EXISTING MV SWGR.
 - 1.8 PROVIDE FINAL TERMINATIONS FROM THE NEW MV SWGR TO THE EXISTING MV SWGR.
 - 1.9 RE-ENERGIZE THE EXISTING MV SWGR.
 - 1.10 TEST AND COMMISSION THE EXISTING MV SWGR, NEW MV SWGRS, VTRFS, AND PNLs.

- PHASE 2:
- 2.1 VA TO REMOVE ALL STORED MATERIALS IN BA104 AND BA105 PRIOR TO BEGINNING OF DEMOLITION. DEMOLISH MECHANICAL SYSTEMS IN ROOMS BA104 AND BA105, INCLUDING EXHAUST FANS, BOILER BREACHING HEAD RECOVERY, GAS PIPING AND FLOWMETERS. ALSO DEMOLISH OFFICE BA104.
 - 2.2 DISCONNECT AND REMOVE POWER CONNECTIONS TO DEMOLISHED MECHANICAL EQUIPMENT IN ROOMS AND ON THE ROOF.
 - 2.3 DISCONNECT AND REMOVE EXISTING LIGHTING FIXTURES, WIRING DEVICES, AND FIRE ALARM INITIATING DEVICES IN ROOMS BA104 AND BA105.
 - 2.4 DISCONNECT AND WIRING DEVICES AND LIGHTING FIXTURES IN THE DEMOLISHED OFFICE ON THE BASEMENT FLOOR.
 - 2.5 DISCONNECT AND REMOVE EXISTING VTRF. DISCONNECT AND RELOCATE EXISTING VTRF AND PANELBOARDS TO NEW LOCATION.
 - 2.6 RELOCATE NEW EQUIPMENT HOIST ON ROOF.
 - 2.7 REMOVE HEAT RECOVERY DUCT ON BOILER PLANT ROOF (NOTE DOES NOT HAVE CORRESPONDING TAG ON GC101).
 - 2.8 REMOVE SMALL STACK AND GUY WIRES FROM CHILLER PLANT ROOF. (NOTE DOES NOT HAVE CORRESPONDING TAG ON GC101).
 - 2.9 REMOVE EXISTING SECTION OF LOWER CHILLER PLANT ROOF, ABOVE ROOM BA104 (NOTE DOES NOT HAVE CORRESPONDING TAG ON GC101).
 - 2.10 SELECTIVELY DEMOLISH STACK CONCRETE WALLS AND ROOF (NOTE DOES NOT HAVE CORRESPONDING TAG ON GC101).
 - 2.11 LOWER THE NEW MV VTRF FOR CHILLERS 1 AND 2 INTO ROOM BA104 (B104) AND TRANSPORT IT TO ROOM BA105 (B105).
 - 2.12 LOWER THE NEW MV FUSED SWITCHES FOR CHILLERS 1 AND 2 INTO ROOM BA104 (B104) AND TRANSPORT IT TO ROOM BA105 (B105).
 - 2.13 REMOVE WEST WALL ON CHILLER PLANT LEVEL 2.
 - 2.14 INSTALL NEW FLOOR ABOVE ROOM BA104 TO MATCH ELEVATION OF EXISTING CHILLER PLANT FLOOR.
 - 2.15 INSTALL NEW FLOOR DRAINS.
 - 2.16 INSTALL NEW CHILLER PLANT ROOF TO MATCH EXISTING ELEVATIONS.
 - 2.17 INSTALL NEW CMU SHEAR WALL.
 - 2.18 INSTALL NEW EQUIPMENT DRAINS.
 - 2.19 FRAME AND INSTALL NEW DRAINAGE AND GRATED CATAWALK FOR NEW COOLING TOWER.
 - 2.20 SET UP CRANE IN LOADING AREA BEHIND BUILDING 8.
 - 2.21 PROVIDE POWER CONNECTIONS TO NEW COOLING TOWER #4 VIA VTRF, INCLUDING NEW LIGHTING FIXTURES) AND RECEPTACLES) ON THE ROOF.
 - 2.22 INSTALL NEW COOLING TOWER MAKEUP WATER SUPPLY SUB METER AND PIPING.
 - 2.23 INSTALL NEW FACADE WALLS FOR EXTENDED AREA ON WEST SIDE OF CHILLER PLANT.
 - 2.24 CREATE OPENING AND INSTALL NEW ROLL-UP DOOR FOR CHILLER #4 B-SC1-A.

- PHASE 3:
- 3.1 PROVIDE WIRING FROM THE TEMPORARY SWITCHBOARD TO THE TEMPORARY CHILLER ROOMS. DE-ENERGIZE THE TEMPORARY CHILLERS. DE-ENERGIZE A AND B FEEDS SERVING THE CHILLER PLANT AT THE EXISTING MEDIUM VOLTAGE SWITCHGEAR IN BUILDING 31.
 - 3.2 DISCONNECT AND REMOVE EXISTING WIRING SERVING THE A AND B FEEDS SERVING THE CHILLER PLANT FROM THE EXISTING MV SWGR IN BUILDING 31 TO EXISTING SELECTOR SWITCH 54. EXISTING CONDUITS) SHALL REMAIN.
 - 3.3 DISCONNECT AND REMOVE EXISTING WIRING FROM THE SELECTOR SWITCH TO THE EXISTING MV SWGR (MAIN SECTIONS). DISCONNECT AND REMOVE EXISTING WIRING FROM THE GENERATOR TO THE EXISTING MV SWGR (MAIN SECTIONS). EXISTING CONDUITS) SHALL REMAIN.
 - 3.4 DISCONNECT AND REMOVE EXISTING WIRING FROM THE EXISTING MV SWGR (MAIN SECTIONS) TO THE EXISTING MV SWGR (DISTRIBUTION SECTIONS). EXISTING CONDUITS) SHALL REMAIN.
 - 3.5 TERMINATE THE WIRING AND CONDUIT ROUGH-IN TO THE FUSED SWITCH FROM PHASE 1.
 - 3.6 DISCONNECT AND REMOVE WIRING AND CONDUIT TO CHILLERS #1 AND #2 BACK TO A NEW PULLBOX. REMOVE EXISTING MV FUSED SWITCHES AND VTRF SERVING CHILLERS #1 AND #2.
 - 3.7 DISCONNECT AND REMOVE WIRING AND CONDUIT TO CHILLER #3 BACK TO EXISTING PULLBOX.
 - 3.8 DISCONNECT AND REMOVE THE VTRFS AND DISCONNECT SWITCHES SERVING COOLING TOWERS #1, #2, AND #3. REMOVE EXISTING WIRING AND CONDUIT.
 - 3.9 REINSTALL THE RELOCATED TRANSFORMER AND PANELBOARDS FROM DEMOLITION IN ROOM B104.
 - 3.10 PROVIDE WIRING AND CONDUIT BETWEEN THE MV VTRF AND FUSED SWITCHES SERVING CHILLER 1 AND 2 IN ROOM B105.
 - 3.11 PROVIDE NEW LIGHTING FIXTURES AND WIRING DEVICES IN ROOMS B104 AND B105.
 - 3.12 PROVIDE NEW FIRE ALARM INITIATING AND NOTIFICATION DEVICES IN ROOMS B104 AND B105.
 - 3.13 MOVE CRANE TO BRACKENRIDGE STREET. REFER TO M501 FOR APPROPRIATE LOCATION.
 - 3.14 POUR NEW EQUIPMENT PADS AND INSTALL FLOOR DRAINS IN WEST END OF CHILLER PLANT (NOTE DOES NOT HAVE CORRESPONDING TAG ON GC101).
 - 3.15 INSTALL NEW PUMP B-SC1-B.
 - 3.16 INSTALL NEW CHILLER #4 B-SC1-A.
 - 3.17 SET UP TEMPORARY CHILLERS AND CONNECT TO MAIN HOSPITAL CHS & CHM. REFER TO M-HS).
 - 3.18 PERFORM TESTING, ADJUSTING, BALANCING, AND COMMISSIONING ON THE TEMPORARY CHILLERS.
 - 3.19 REMOVE EXISTING EAST WALL OF CHILLER PLANT.
 - 3.20 CONSTRUCT NEW CMU SHEAR WALL AND FOUNDATIONS.

- PHASE 4:
- 4.1 COORDINATE THE DEMOLITION AND NEW WORK ASSOCIATED WITH THE PHASE SCOPE OF WORK UNDER THIS PHASE. RELOCATE EXISTING VTRF AND ASSOCIATED EQUIPMENT AS NOTED ON THE FLOOR PLANS.
 - 4.2 RELOCATED CHEMICAL FEED SYSTEM.
 - 4.3 INSTALL NEW EMERGENCY SHOWER.
 - 4.4 RELOCATE/INSTALL EXISTING CHILLER CONDENSER PUMPS (ECP-CHP-1, 2, & 3) AND ASSOCIATED PIPING IN NEW LOCATION.
 - 4.5 RELOCATE/INSTALL EXISTING CHILLER PRIMARY PUMPS (ECP-PPH-1, 2, & 3) AND ASSOCIATED PIPING IN NEW LOCATION.
 - 4.6 RELOCATE MV LOAD INTERRUPTER AND CHILLER #3 VTRF, AND FEEDERS AND CONDUIT.
 - 4.7 BRACKENRIDGE EAST WALL DIVING MAIN CHILLER PLANT FROM CURRENT CHILLER #3 SPACE (NOTE DOES NOT HAVE CORRESPONDING TAG ON GC101).
 - 4.8 INSTALL NEW "Y" BRACING (NOTE DOES NOT HAVE CORRESPONDING TAG ON GC101).
 - 4.9 INSTALL NEW AIR SEPARATOR B-AS-1 AND NEW EXPANSION TANK B-ET-1.
 - 4.10 "POTENTIAL TO START UP AND PUT INTO OPERATION CHILLER #4".
 - 4.11 REMOVE MV FUSED SWITCH AND VTRF FOR CHILLER #1 & #2.
 - 4.12 REMOVE EXISTING CHILLER #3.
 - 4.13 REMOVE SKID WITH SECONDARY PUMPS 1, 2, & 3 AND ASSOCIATED PIPING, AND VTRFS.
 - 4.14 RELOCATE EXISTING CHILLER (ECP-CH-3) IN NEW LOCATION, AND RELOCATE EXISTING MV FUSED SWITCH AND VTRF.
 - 4.15 REMOVE ALL REMAINING PIPING NOT TO BE REUSED.
 - 4.16 CONNECT ALL CHILLER, PUMP, COOLING TOWER, POWER, AND CONTROLS.
 - 4.17 MODIFY EXISTING FIRE ALARM SYSTEM.
 - 4.18 PERFORM TESTING, ADJUSTING, BALANCING, AND COMMISSIONING ON ALL EFFECTED EQUIPMENT.
 - 4.19 REMOVE TEMPORARY CHILLERS.
 - 4.20 INSTALL NEW EXHAUST FAN B-ET-3. DEMO EXISTING REFRIGERANT EXHAUST FAN REF-2 ON ROOF. PATCH ROOF OPENING AND REMOVE OLD DUCT.
 - 4.21 PROVIDE NEW VTRFS FOR COOLING TOWERS #1, #2, AND #3 ON THE ROOF. PROVIDE POWER CONNECTIONS TO THE COOLING TOWERS.
 - 4.22 PROVIDE POWER CONNECTION TO HEAT TRACE CIRCUITS SERVING COOLING TOWER #4.
 - 4.23 EXTEND EXISTING LIGHTNING PROTECTION SYSTEM TO SERVE COOLING TOWER #4. UPDATE/REVISE THE EXISTING LIGHTNING PROTECTION SYSTEM ON THE ROOF.
 - 4.24 EXTEND FEEDERS AND CONDUIT FROM THE EXISTING PULLBOX TO NEW FUSED SWITCHES (LOCATED IN THE BASEMENT) SERVING CHILLER #1 AND #2.
 - 4.25 PROVIDE NEW WIRING THROUGH EXISTING CONDUITS) BETWEEN THE GENERATOR TO THE EXISTING MV SWGR AT THE REAR. PROVIDE NEW WIRING THROUGH EXISTING CONDUITS) BETWEEN THE TWO EXISTING MV SWGR AT THE REAR. PROVIDE NEW WIRING THROUGH THE EXISTING CONDUIT FROM THE SELECTOR SWITCH TO THE EXISTING MV SWGR IN BUILDING 31.
 - 4.26 DE-ENERGIZE THE FUSED SWITCH AT THE NEW MV SWGR SERVING THE EXISTING MV SWGR.
 - 4.27 PERFORM FINAL TERMINATIONS OF THE WIRING AND CONDUIT INTO THE EXISTING MV SWGR FROM PHASE 1.
 - 4.28 COORDINATE A CAMPUS WIDE POWER SHUTDOWN WITH THE VA PRIOR TO FINAL TERMINATIONS OF THE WIRING INTO THE CIRCULO (SERVING THE CHILLER PLANT) OF THE EXISTING MV SWGR IN BUILDING 31.
 - 4.29 WHEN RECEIVING AN APPROVAL FROM THE VA FOR A CAMPUS WIDE POWER SHUTDOWN, DE-ENERGIZE THE EXISTING MV SWGR.
 - 4.30 PROVIDE FINAL TERMINATIONS FROM THE EXISTING SELECTOR SWITCH TO THE EXISTING MV SWGR.
 - 4.31 RE-ENERGIZE THE EXISTING MV SWGR.
 - 4.32 TEST AND COMMISSION THE EXISTING MV SWGRS, SELECTOR SWITCH, AND GENERATOR.
 - 4.33 WHEN THE CHILLER PLANT IS FULLY OPERATIONAL, DE-ENERGIZE THE TEMPORARY CHILLERS. REMOVE TEMPORARY SWITCHBOARD, WIRING, CABLE TRAY, CMU CONCRETE SHEET, PROVIDE A LOCK-OUT TAG ON THE NON-FUSED SWITCH AT THE CHILLER PLANT FLOOR.
 - 4.34 WHEN THE CHILLER PLANT IS FULLY OPERATIONAL, PROVIDE A LOCK-OUT TAG ON THE CIRCUIT BREAKER SECTION. PROVIDE A LOCK-OUT TAG FOR THE CIRCUIT BREAKER SECTION.

GENERAL SHEET NOTES:

1. REFER KEYNOTES TO DRAWING GC101 PHASING PLAN. COORDINATE WITH ALL TRADES PRIOR TO FINISHING THE CONSTRUCTION PHASE.
2. REFER TO ELECTRICAL CONTRACT DOCUMENTS FOR MORE INFORMATION ASSOCIATED WITH THE ELECTRICAL SCOPE OF WORK IDENTIFIED IN EACH PHASE.
3. COORDINATE WITH THE VA AND MECHANICAL CONTRACTORS, TWO WEEKS AHEAD OF ALL POWER OUTAGES AND RE-ENERGIZING ASSOCIATED WITH THE SCOPE OF WORK. ALL POWER SHUTDOWNS SHALL MINIMIZE THE DURATION OF THE POWER OUTAGE AS PRACTICAL.
4. EXISTING CHILLER PLANT SHUTDOWN SHALL NOT BE PERFORMED UNLESS AMBIENT TEMPERATURES ARE BELOW 50 DEGREES FAHREHNEIT.
5. PHASING NOTES ARE MEANT TO REPRESENT A SEQUENTIAL LIST OF ACTIVITIES. THESE NOTES ONLY DISCUSS THE BASIC SCOPE ISSUES. THEY ARE NOT MEANT TO BE A COMPLETE LISTING OF ALL PROJECT ACTIVITIES AND SCOPE.
6. CONTRACTOR SHALL PROVIDE KICK CLASS 1 BARRIERS AT STAIRWELLS INDICATED ON PHASING PLANS FOR ALL PHASES.

PRINTS OF THIS DRAWING SHALL NOT BE USED FOR ANY PURPOSE WHATSOEVER WITHOUT THE SEAL AND SIGNATURE OF THE PROFESSIONAL ENGINEER.

CONSULTANT



ENGINEER OF RECORD



MILLER-REMIK LLC
PROFESSIONAL ENGINEER



Office of
Construction
and Facilities
Management



Drawing Title GENERAL PHASING NOTES	Phase CONSTRUCTION BID DOCUMENTS	Project Title UD CHILLER CAPACITY UPGRADE	Project Number 646-20-109
Approved: Project Director		Location UNIVERSITY DRIVE CAMPUS PITTSBURGH, PENNSYLVANIA	Drawing Number GC102
	NON-SPRINKLERED	Issue Date 2022-05-11	Checked PKD Drawn SP