



USCGC BRISTOL BAY (WTGB 102)

USCG 120 BARGE (12002)

SPECIFICATION FOR DOCKSIDE REPAIRS

FY2026

Developed By: Kalee J Campbell

(Rev-2, 19 February 2026)

TABLE OF CONTENTS

Revisions Record.....	iv
Consolidated List of References.....	v
Consolidated List of Government-furnished Property	ix
Consolidated List of Critical Inspection Items	x
Principal Characteristics - Tug, IceBreaking.....	xi
Principal Characteristics - Barge	xii
General Requirements	1
WORK ITEM 1: Fire Prevention Requirements «TYPE»	14
WORK ITEM 2: Tank (Water Mist), Clean And Inspect	18
WORK ITEM 3: Tanks, Hydraulic Oil Stowage and Service, Clean and Inspect	21
WORK ITEM 4: Tanks, Potable Water, Clean and Inspect	24
WORK ITEM 5: Tanks, Lube Oil, Clean and Inspect	28
WORK ITEM 6: Tanks, Ballast, Clean and Inspect.....	32
WORK ITEM 7: Voids, Accessible, Clean and Inspect.....	35
WORK ITEM 8: Tanks, Dirty Oil and Waste, Clean and Inspect	38
WORK ITEM 9: Main Diesel Engine, MDE, Exhaust Piping, Commercial Clean.....	41
WORK ITEM 10: Ship Service Diesel Generator (SSDG) Exhaust Piping, Commercial Clean.....	44
WORK ITEM 11: Boiler Exhaust Stack Uptakes, Commercial Clean	47
WORK ITEM 12: Bubbler Diesel Engine Exhaust Piping, Commercial Clean	50
WORK ITEM 13: Circuit Breakers (60 Hz), Inspect and Test	53
WORK ITEM 14: Vent Ducts, Engine And Motor Room, All, Commercial Cleaning	57
WORK ITEM 15: Vent Ducts, Galley and Pantry Room, All, Commercial Cleaning	60
WORK ITEM 16: Vent Ducts, All Other, Commercial Cleaning.....	63
WORK ITEM 17: Compressed Air Receivers and System Valves, All, Clean, Inspect, Hydro and Lift...66	
WORK ITEM 18: Vertical Capstan, Inspect and Service	72
WORK ITEM 19: Hull Fittings (Mooring and Towing), Inspect and Test - Barge	76
WORK ITEM 20: Single Point Davit, Inspect and Service	78
WORK ITEM 21: Hydraulic Release Pelican Hook, Inspect and Service - Tender	83
WORK ITEM 22: Grey Water Holding Tanks, Clean and Inspect.....	85
WORK ITEM 23: Sewage Holding Tanks, Clean and Inspect	89
WORK ITEM 24: Grey Water Piping, Clean and Flush.....	93
WORK ITEM 25: Sewage Piping, Clean and Flush	97
WORK ITEM 26: Tanks, MP Fuel Service, Clean and Inspect - Barge	101
WORK ITEM 27: Tanks, Potable Water, Clean and Inspect - Barge	105
WORK ITEM 28: Tanks, Ballast, Clean and Inspect - Barge.....	109
WORK ITEM 29: Voids, Accessible, Clean and Inspect - Barge.....	113
WORK ITEM 30: Boiler Exhaust Stack Uptakes, Commercial Clean - Barge	116
WORK ITEM 31: Vent Ducts, Galley and Pantry Room, All, Commercial Cleaning - Barge	119
WORK ITEM 32: Vent Ducts, All Other, Commercial Cleaning - Barge.....	122
WORK ITEM 33: Hull Fittings, Weight Handling Rigging Hardware, Inspect and Test - Barge.....	126
WORK ITEM 34: Mechanical Chain Stoppers, Inspect and Service.....	129
WORK ITEM 35: Anchor Winch, Inspect and Service - Barge	132
WORK ITEM 36: Traction Winches, Inspect and Service - Barge	136
WORK ITEM 37: Gypsy Winches (Appleton Model AMD-865), Overhaul - Barge	141
WORK ITEM 38: Grey Water Holding Tanks, Clean and Inspect - Barge	147
WORK ITEM 39: Sewage Holding Tanks, Clean and Inspect - Barge	151
WORK ITEM 40: Deck Covering, Electrical Matting, Renew.....	154
WORK ITEM 41: Fireman Valves, Overhaul or Renew	156

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026

WORK ITEM 42: Hull Fittings (Mooring and Towing), Inspect and Test - Barge	161
--	-----

REVISIONS RECORD

This page is used to record specification revisions, which may have occurred subsequent to a Revision 0 (Rev-0) package. Information listed is intended to provide contractors and field unit personnel a means to ensure all the current specification revision pages are present when reviewing or utilizing this specification package.

DATE	REV#	WORK ITEM#	CHANGES MADE

NOTE : All work item and paragraph numbers listed above for a given revision correspond to same numbers in the previous revision. This revised specification is self-contained with all of the above listed changes incorporated.

CONSOLIDATED LIST OF REFERENCES

The below-listed documents form a part of this specification to the extent specified herein. Approval/publication dates or revision dates/numbers are also identified, to ensure that same document versions are used at the time of specification writing and during contract execution.

All Coast guard drawings, technical publications, and standard specifications will be provided to contractors by the Coast Guard at an appropriate time, or upon request, free of charge. Other Government documents may be accessed – free of charge – from links located on the SFLC website. Commercial sites provide access to their respective documents.

COAST GUARD DRAWINGS

Coast Guard Drawing 101 WTGB 259-001, Rev L, Diesel Exhausts & Steam Generator Exhausts System A & D

Coast Guard Drawing 101 WTGB 514-002, Rev X, Ventilation & A/C Arrangements & Details

Coast Guard Drawing 101 WTGB 528-001, Rev L, Sanitary & Deck Drain System Diagram

Coast Guard Drawing 101 WTGB 528-003, Rev C, Grey Water Mods & Tank Transitions

Coast Guard Drawing 101 WTGB 589-001, Rev B, Barge Quick Release Modification

Coast Guard Drawing 101-WTGB-320-6, Rev L, Power System One Line Diagram

Coast Guard Drawing 120 Barge 120-001, Rev B, Longitudinal and Transverse Bulkheads

Coast Guard Drawing 120 BARGE 167-001, Rev C, Access & Closures

Coast Guard Drawing 120 BARGE 185-003, Rev A, Traction Winch Foundation

Coast Guard Drawing 120 Barge 581-001, Rev B, Mooring and Towing Arrangement

Coast Guard Drawing 120 Barge 611-001, Rev C, Hull Fittings

Coast Guard Drawing 120 BARGE-130-001. Rev D, Main & Focs'le Decks

Coast Guard Drawing 120 BARGE-601-001. Rev C, General Arrangement & Profile

Coast Guard Drawing 120-BARGE 111-1, Rev C, Bottom Framing & Plating

Coast Guard Drawing 120-BARGE 120-1, Rev B, Longitudinal & Transverse Bulkheads

Coast Guard Drawing 120-BARGE 601-1, Rev C, General Arrangement and Profile

Coast Guard Drawing 120-BARGE-512-1, Rev B, HVAC Diag & Install Dets

Coast Guard Drawing 120-CGB 533-1, Rev D, Potable Water System

Coast Guard Drawing 120-CGB 581-001, Rev C, Anchor Handling Arrangement

Coast Guard Drawing 120-CGB 593-1, Rev C, Sewage & Plumbing Drains

Coast Guard Drawing 120-CGB 601-1, Rev C, General Arrangement and Profile

Coast Guard Drawing 120-CGB 801-4, Rev A, Tank Capacity Curves

Coast Guard Drawing 120-CGB 801-5, Rev A, Tank Sounding Tables

Coast Guard Drawing 140 WTGB 259-001, Rev -, Diesel Exhaust Systems, Arrangements & Details

Coast Guard Drawing 140 WTGB 259-002, Rev B, Exhaust Modifications to Suit Bubbler Installation

Coast Guard Drawing 140 WTGB 551-001, Rev -, Compressed Air System Diagram

Coast Guard Drawing 140-WTGB 123-2, Rev B, Structural Mods Incidental to Water Mist Tank 4-24-1-

W

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026

Coast Guard Drawing 140-WTGB 528-002, Rev -, Sanitary & Deck Drains Diag
Coast Guard Drawing 140-WTGB 528-003, Rev -, Sanitary & Deck Drains A&D
Coast Guard Drawing 140-WTGB 528-004, Rev -, Grey Water Mods & Tank Transition
Coast Guard Drawing 140-WTGB 555-2, Rev C, Water Mist System Installation A&D
Coast Guard Drawing 140-WTGB 555-4, Rev C, Water Mist System Diagram
Coast Guard Drawing 140-WTGB 801-3, Rev -, Booklet of General Plans
Coast Guard Drawing 140-WTGB-167-001, Rev A, Closures & Window List
Coast Guard Drawing 140-WTGB-167-007, Rev -, Flush WT Escape Scuttle
Coast Guard Drawing 140-WTGB-320-1, Rev L, Power System One-Line Wiring Diagram
Coast Guard Drawing 140-WTGB-801-003, Rev B, Booklet of General Plans
Coast Guard Drawing FL 1204-3, Rev A, Welded Padeyes & Links
Coast Guard Drawing FL 3801-67, Rev B, Sheets 1 through 10 of 50 (General Notes – Ductwork) and Sheet 39 (Handholes for W.T. and N.W.T. Ducts)
Contact SES to provide and update record file.

COAST GUARD PUBLICATIONS

Coast Guard Commandant Instruction (COMDTINST) M10360.3, Jun 2006, Coatings and Colors Manual
Coast Guard Technical Publication (TP) 10000, May 2015, Manufacturer's Instruction Book - SWBS Group(s) 583, Single Point Davit, – Model PLA-2000
Coast Guard Technical Publication (TP) 3386, SWBS 582, Section A, June 2013, Mooring and Towing Systems
Coast Guard Technical Publication (TP) 3386, SWBS 582, Section O, Feb 1991, Appleton Marine Installation, Operation, and Maintenance Manual for Gypsy Winch Model AMD-865
Coast Guard Technical Publication (TP) 3456, 2001, Ship Information Book, Section B
Coast Guard Technical Publication (TP) 3478, Dec 2020, Manufacturer's Instruction Book-SWBS Group(s) 324
Coast Guard Technical Publication (TP) 3483, SWBS Groups 580-583, Feb 2012, Vertical Capstan
Coast Guard Technical Publication (TP) 5415, SWBS 581-A, Mar 2013, Anchor Winch - Model 525-HAW
Fire Prevention and Response
Surface Forces Logistics Center Standard Specification 0000 (SFLC Std Spec 0000), 2022, General Requirements
Surface Forces Logistics Center Standard Specification 0000 (SFLC Std Spec 0000), 2022, General Requirements
Surface Forces Logistics Center Standard Specification 0000 (SFLC Std Spec 0000), 2022, General Requirements
Surface Forces Logistics Center Standard Specification (SFLC Std Spec) 0000, 2022, General Requirements
Surface Forces Logistics Center Standard Specification 0000 (SFLC Std Spec 0000), 2022, General Requirements
Surface Forces Logistics Center Standard Specification 0740 (SFLC Std Spec 0740), 2022, Welding and Allied Processes
Surface Forces Logistics Center Standard Specification 0740 (SFLC Std Spec 0740), 2022, Welding and Allied Processes

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026

Surface Forces Logistics Center Standard Specification (SFLC Std Spec) 0740, 2022, Welding and Allied Processes

Surface Forces Logistics Center Standard Specification 0740 (SFLC Std Spec 0740), 2022, Welding and Allied Processes

Surface Forces Logistics Center Standard Specification 3020 (SFLC Std Spec 3020), 2022, Overhaul AC Electrical Motors

Surface Forces Logistics Center Standard Specification 5000 (SFLC Std Spec 5000), 2022, Auxiliary Machine Systems

Surface Forces Logistics Center Standard Specification 5000 (SFLC Std Spec 5000), 2022, Auxiliary Machine Systems

Surface Forces Logistics Center Standard Specification 5100 (SFLC Std Spec 5100), 2022, Clean Shipboard Ventilation Systems

Surface Forces Logistics Center Standard Specification 5550 (SFLC Std Spec 5550), 2022, Fire Prevention and Response

Surface Forces Logistics Center Standard Specification 5550 (SFLC Std Spec 5550), 2022,

Surface Forces Logistics Center Standard Specification 6310 (SFLC Std Spec 6310), 2022, Requirements for Preservation of Ship Structures

Surface Forces Logistics Center Standard Specification 6310 (SFLC Std Spec 6310), 2022, Requirements for Preservation of Ship Structures

Surface Forces Logistics Center Standard Specification 6310 (SFLC Std Spec 6310), 2022, Requirements for Preservation of Ship Structures

Surface Forces Logistics Center Standard Specification 6310 (SFLC Std Spec 6310), 2022, Requirements for Preservation of Ship Structures

Surface Forces Logistics Center Standard Specification 6310 (SFLC Std Spec 6310), 2022, Requirements for Preservation of Ship Structures

Surface Forces Logistics Center Standard Specification 6341 (SFLC Std Spec 6341), 2022, Install Interior Deck Covering Systems

OTHER REFERENCES

American National Standards Institute/American Water Works Association (ANSI/AWWA) C652, 2011, Disinfection of Water-Storage Facilities

American National Standards Institute/NSF International (ANSI/NSF) 61, 2015, Drinking Water System Components - Health Effects

American Society for Testing and Materials (ASTM) International F1508, 2021, Standard Specification for Angle Style, Pressure Relief Valves for Steam, Gas, and Liquid Services

American Society of Mechanical Engineers (ASME) B16.34, 2004, Valves-Flanged, Threaded, and Welding End

American Society of Mechanical Engineers (ASME) B16.34, 2025, Valves-Flanged, Threaded, and Welding End

ASTM International (ASTM) D1330, 2004, Standard Specification for Rubber Sheet Gaskets

ASTM International (ASTM) D1330, 2010, Standard Specification for Rubber Sheet Gaskets

ASTM International (ASTM) D1330, 2015, Standard Specification for Rubber Sheet Gaskets

ASTM International (ASTM) F992, 2006, Standard Specification for Valve Label Plates

Code of Federal Regulations (CFR) Title 29, Part 1915, 2014, Occupational Safety and Health Standards for Shipyard Employment

Code of Federal Regulations (CFR) Title 29, Part 1915, Jul 2008, Occupational Safety and Health Standards for Shipyard Employment

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026

Code of Federal Regulations (CFR) Title 29, Part 1915, Jul 2013, Occupational Safety and Health Standards for Shipyard Employment

Code of Federal Regulations (CFR) Title 29, Part 1915, Occupational Safety and Health Standards for Shipyard Employment

Commercial Item Description (CID) A-A-59316, 2003, Abrasive Materials for Blasting

Federal Specification (Fed Spec) DDD-C-95, Mar 1972, Carpets and Rugs, Wool, Nylon, Acrylic, Modacrylic

Manufacturers Standardization Society of the Valve and Fittings Industry (MSS) SP-61, 2003 Edition, Pressure Testing Of Steel Valves

Manufacturers Standardization Society of the Valve and Fittings Industry (MSS) SP-61, 2019 Edition, Pressure Testing Of Valves

Manufacturers Standardization Society of the Valve and Fittings Industry (MSS) SP-67, 2002 Edition, Butterfly Valves

Manufacturers Standardization Society of the Valve and Fittings Industry (MSS) SP-67, 2022 Edition, Butterfly Valves

Manufacturers Standardization Society of the Valve and Fittings Industry (MSS) SP-72, 1999 Edition, Ball Valves with Flanged or Butt-Welding Ends for General Service

Manufacturers Standardization Society of the Valve and Fittings Industry (MSS) SP-72, 2010 Edition, Ball Valves with Flanged or Butt-Welding Ends for General Service

Manufacturers' Standardization Society of the Valve and Fittings Industry (MSS) SP-80, 2008 Edition, Bronze Gate, Globe, Angle and Check Valves

Manufacturers' Standardization Society of the Valve and Fittings Industry (MSS) SP-80, 2019 Edition, Bronze Gate, Globe, Angle and Check Valves

MIL-C-81309F, May 2005, Corrosion Preventive Compounds, Water Displacing, Ultra-Thin Film

MIL-DTL-1222, Dec 2000, Studs, Bolts, Screws and Nuts for Applications Where a High Degree of Reliability Is Required

MIL-PRF-16173, Sep 2006, Corrosion Prevention Compound, Solvent Cutback, Cold-Application

National Electrical Manufacturers Association (NEMA) Stds, Pub. No. AB4, 2017, Guidelines for Inspection and Preventive Maintenance of Molded Case Circuit Breakers Used in Commercial and Industrial Applications

NAVSEA 803-6397268, Rev B, Doors Watertight, Quick Acting Arrangement

NAVSEA Technical Publication T9074-AD-GIB-010/1688, (TP 1688), July 2012, Requirements for Fabrication, Welding, and Inspection of Submarine Structure

Society of Automotive Engineers (SAE) Aerospace Material Specification (AMS) C6183, 2013, Cork and Rubber Composition Sheet; For Aromatic Fuel and Oil Resistant Gaskets

Society of Automotive Engineers (SAE) Aerospace Material Specification (AMS) C6183, 2019, Cork and Rubber Composition Sheet; for Aromatic Fuel and Oil Resistant Gaskets

Society of Automotive Engineers (SAE) Aerospace Material Specification (AMS) C6183, 2019, Cork and Rubber Composition Sheet; For Aromatic Fuel and Oil Resistant Gaskets

The Society for Protective Coatings (SSPC) Surface Preparation Specification No.11 (SSPC-SP 11), 2012, Power Tool Cleaning to Bare Metal

The Society for Protective Coatings (SSPC)/NACE International (NACE) 2006, Joint Surface Preparation Standard SSPC-SP 10/NACE No.2, Near-White Blast Cleaning

Underwriters Laboratories Inc. (UL) 489, May 2016, Molded Case Circuit Breaker

CONSOLIDATED LIST OF GOVERNMENT-FURNISHED PROPERTY

The following is a list of property, which the Government will furnish. This list supersedes any other material obligations indicated or implied by referenced drawings.

WORK ITEM	MTI	ITEM DESCRIPTION	NSN/PN	QTY	ESTIMATED COST (\$/UNIT)
20	N	Parts Kit, Boat Davit 5- Year Inspection/Overhaul	NSN: 2030-01-F18-5589 PN: 18379	1 ea	22,369.00
21	N	**Release Hook	Model No. CSRH-50 6E888 (Cage 50194)	2 ea.	8,000.00
35	N	Rope, Wire	NSN: 4010-01-690-6075 PN: CGWR1500637BCSS	1 ea.	3,423.52

*Government-loaned property, which shall be returned to the vessel upon completion of the availability.

**New or refurbished equipment that the Government may provide for installation in place of existing equipment.

***Government-furnished property, which is to be supplied by either the vessel or the C4IT ServiceCenter

CONSOLIDATED LIST OF CRITICAL INSPECTION ITEMS

The following is a list of work items, which contain Critical Inspection reports, which the Contractor must complete within the first 25% of the availability contract period (see SFLC Std Spec 0000, paragraph 3.2.6.5 (Inspection report particulars)):

Work Item	Title
17	Compressed Air Receivers and System Valves, All, Clean, Inspect, Hydro and Lift
18	Vertical Capstan, Inspect and Service
20	Single Point Davit, Inspect and Service
21	Hydraulic Release Pelican Hook, Inspect and Service - Tender
34	Mechanical Chain Stoppers, Inspect and Service
35	Anchor Winch, Inspect and Service - Barge
36	Traction Winches, Inspect and Service - Barge
37	Gypsy Winches (Appleton Model AMD-865), Overhaul - Barge
40	Deck Covering, Electrical Matting, Renew

PRINCIPAL CHARACTERISTICS - TUG, ICEBREAKING

140' WTGB (TUG, ICEBREAKING)	
PHYSICAL	
Length overall	140' 0"
Length between perpendiculars	130' 0"
Breadth, extreme	37' 7-1/4"
Depth, molded	18' 2-3/8"
Frame spacing	1' 6"
Full load (Winter) draft (at)	12' 1-1/2"
Full load (winter) displacement	687 Long tons (LT)
Full load (winter) center of gravity	
Above base (kg)	13' 1"
Full load trimming moment (forward)	75.6 Ft-LT
Min. operating condition draft (at)	11' 6-3/8"
Min. operating condition displacement	640 Long tons
Min. operating condition center of gravity	
Above base (kg)	13' 4-1/4"
Min. operating condition trimming moment	
Forward	76.8 Ft-LT
Height of vessel above DWL	Approx. 62' 0"
MACHINERY	
Main Propulsion	
Engine Type	Diesel-electric
Number of units:	2
Total shaft horsepower:	2500
Propeller	
Number of propellers	1
Number of blades	4
Diameter of propeller	8' 6"
Pitch	Fixed

NOTE

Stability values above are for representative tug. Draft and longitudinal lever values provided above are for tugs in fresh water. Longitudinal lever values are provided to adjust tug's design drag of 1.0 feet by the stern.

PRINCIPAL CHARACTERISTICS - BARGE

120' CGB, BARGE	
PHYSICAL	
Length overall	125' 0"
Breadth, extreme	52' 0"
Frame spacing	1' 0"
Full load draft	5' 7"
Full load displacement	690 Long tons
DIESEL GENERATORS	
Number of units	2
Rated power	75 kw, 450 V, 3 Ph
DIESEL HYDRAULIC POWER UNIT	
Number of units	2
Rated power	75 kw, 450 V, 3 Ph
BOW THRUSTER	
Number of units	1
PROPELLERS	
Type	Vertical Mount in Recessed Tunnel
Number	1
Number of blades	3
Diameter	12"

General Requirements

1. SCOPE

1.1 Intent. This standard specification invokes general requirements for conducting vessel repairs performed by commercial contractors at a Coast Guard facility for Coast Guard vessels.

1.2 Term interchangeability. The terms 'Contractor', 'CG Yard', 'NAVSTA EVERETT', 'shipyard', 'Base', and 'Coast Guard Industrial' are used interchangeably in this specification. Where the primary service provider is Coast Guard personnel, references to contractor and other noted descriptors within this specification or within drawings, publications, SFLC Standard Specifications or other commercial and military references are deemed the same as prime service provider.

2. REFERENCES

COAST GUARD DRAWINGS

None

COAST GUARD PUBLICATIONS

Coast Guard Commandant Instruction (COMDTINST) M10360.3 (series), Coatings and Color Manual
Surface Forces Logistics Center Standard Specification 0000 (SFLC Std Spec 0000), 2022, General Requirements

Surface Forces Logistics Center Standard Specification 0740 (SFLC Std Spec 0740), 2022, Welding and Allied Processes

Surface Forces Logistics Center Standard Specification 5550 (SFLC Std Spec 5550), 2022, Fire Prevention and Response

Surface Forces Logistics Center Standard Specification 6310 (SFLC Std Spec 6310), 2022, Requirements for Preservation of Ship Structures

OTHER REFERENCES

Code of Federal Regulations (CFR) Title 29, Part 1915, Occupational Safety and Health Standards for Shipyard Employment

NAVSEA Technical Publication T9074-AD-GIB-010/1688, (TP 1688), July 2012, Requirements for Fabrication, Welding, and Inspection of Submarine Structure

3. REQUIREMENTS

3.1 General. The Contractor must conform to all requirements specified in SFLC Std Spec 0000 and in this item, as applicable, during the performance of this availability. The requirements in this WI applies to all work under the scope of this contract, whether explicitly stated in all following work items or not, and to all other work subsequently authorized by changes, modifications, or extensions to the contract.

3.1.1 The Contractor must conform to all requirements specified in SFLC Std Spec 5550 and in the Fire Protection and Response work item, as applicable, during the performance of this availability.

3.1.1.1 Fire Safety Plan submission. The Contractor must submit a copy of the CFR 1915, Subpart P, Fire Safety Plan with the Contractor's bid when work will be conducted in a Contractor-owned facility. Include any MOA(s) with local firefighting facilities.

3.1.1.2 Fire Plan submission. The Contractor must submit a copy of the developed availability specific fire plan as requested in the Fire Protection and Response work item, with the Contractor's bid.

3.1.1.2 Fire Plan submission. The Contractor must submit a copy of the developed availability specific fire plan, as requested in the Fire Protection and Response work item, seven (7) days before the Arrival Conference.

NOTE

NAVSEA drawings listed will be available FOR INSPECTION ONLY from the Coast Guard Port Engineer post-award. SFLC will not redistribute NAVSEA documents. Contractors can apply to NAVSEA headquarters directly for copies.

3.2 Contractor-provided fire watch personnel. The Contractor must provide fire watch personnel and equipment.

3.2 Contractor-provided fire extinguishers. The Contractor must provide portable fire extinguishers.

3.2 Fire watch requirements. The Contractor must refer to 3.3.1.3 (Fire watch requirements) of SFLC Std Spec 0000, in accomplishing the following task:

- Provide portable fire extinguishers for Coast Guard fire watch personnel. Coast Guard fire watch is in lieu of contractor personnel during the hours of 0800-1600, Monday through Friday, and limited to two Coast Guard fire watch personnel.
- Provide fire watch personnel and fire extinguishers for the duration of the availability period, during and beyond noted Coast Guard fire watch support.

3.3 Preservation requirements. The Contractor must accomplish all preservation tasks, including touch-ups, in accordance with SFLC Std Spec 6310.

3.3.1 Brand name approval. Ensure that all contractor-furnished coatings are in accordance with SFLC Std Spec 6310, Appendix C (Authorized Coatings for Use on Cutters and Boats).

3.3.2 Coating colors and system color schemes. The Contractor must obtain a written KO authorization to deviate from any coatings required in SFLC Std Spec 6310 Appendix C before work.

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026

3.3.3 In-process quality control measures. The Contractor must abide by all the safety, preservation, and quality control requirements specified in SFLC Std Spec 0000, paragraph 3.2.4.2 (In-process QC measures for “critical-coated surfaces”).

3.3.3.1 Quality control requirements. The Contractor must abide by the following when performing preservation related inspections. The following measurements must be randomly spaced throughout for the purposes of providing a representation of the entire prepared or coated surface.

3.3.3.1.1 Surface profile measurements. One surface profile measurement must be taken for every 200 square feet for the first 1000 square feet; for each additional 500 square feet or less, one profile measurement must be taken. Profile measurements must be taken in accordance with SFLC Std Spec 6310, paragraph 3.1.8.3 (Surface profile measurements). A “measurement” for surface profile is defined as follows:

- ASTM D4417, Method B: One profile measurement is the average (mean) of 10 individual readings.
- ASTM D4417, Method C: One profile measurement is the average (mean) of 2 individual readings.

3.3.3.1.2 Soluble salt conductivity measurements. 5 conductivity measurements must be taken every 1000 square feet. For submerged (immersed) applications conductivity measurements must not exceed 30 microsiemens/cm. For non-submerged (non-immersed) applications conductivity measurements must not exceed 70 microsiemens/cm. If a conductivity check fails, clean the surface in accordance with SFLC Std Spec 6310, paragraph 3.1.8.5 (Soluble salt removal).

3.3.3.1.3 Coating thickness measurements. Three area measurements must be taken for the first 1000 square feet; for each additional 1000 square feet, perform an additional area measurement. A “measurement” for coating thickness is defined as follows:

- SSPC-PA 2 defines an area measurement as 5 separate spot measurements randomly spaced throughout a 100 square foot area.
- SSPC-PA 2 defines a spot measurement as 3 gage readings and each new gage reading the probe must be moved to a new location within a 1.5-inch diameter circle defining the spot.

3.4 Welding and brazing requirements. The Contractor must perform all welding and allied processes, and NDE in accordance with SFLC Std Spec 0740.

3.4.1 HY-130 material substitution. The Contractor must be aware that HY-130 steel plating is no longer commercially available. For the purpose of performing flight deck repairs on US Coast Guard WMEC-270 “B-Class” cutters, Strenx 900 steel plating has been approved as a replacement for HY-130. Due to the similarity in material properties and weldability of HY-130 and Strenx 900, all welding procedures and welder qualifications for welding Strenx 900 must be the same as those outlined in NAVSEA TP 1688 as applicable for welding HY-130.

3.4.2 Standard spec modification. For any welding involving HY-130 on the flight deck of WMEC-270 “B-Class” cutters, perform all welding and allied processes, and non-destructive evaluation (NDE) in accordance with NAVSEA TP 1688. The Contractor must be aware that the welding requirements specified in this document take precedence over paragraph 3.3.6 of SFLC Standard Spec 0000 for the purpose of welding involving HY-130.

3.4.3 Approval to weld HY-130. To obtain Coast Guard approval to weld on HY-130 steel for WMEC-270 “B-Class” cutters, the Contractor must provide written Performance Qualification Records (PQR’s) for each process to be used. The PQR’s must be approved by one of the regulatory agencies affirming that the WPS meets the welding requirements of NAVSEA TP 1688. In addition, the Contractor must ensure that all subcontractors, prior to performing welding operations, have qualified procedures by meeting all the requirements set forth in this document.

NOTE

NAVSEA approval is NOT required for welding procedures submitted but the procedures must be reviewed and shown to satisfy the requirements set forth in NAVSEA TP 1688, by a welding regulatory agency. The requirements for welding Strenx 900 are considered the same as those for welding HY-130.

3.5 Environmental protection requirements. The Contractor must adhere to the following environmental protection requirements in accordance with the SFLC Stand Spec 0000:

3.5.1 USCG facilities. The Contractor must provide and maintain environmental protection as defined in SFLC Std Spec 0000 Appendix B, Requirements for Environmental Protection at USCG Facilities, during the performance of this availability. Contractor must plan for and provide environmental protective measures to control pollution that develops during normal practice, as well as plan for and provide environmental protective measures required to correct conditions that develop during the project. Contractor must comply with applicable Federal, state, and local laws, codes, ordinances, and regulations in their entirety. Any reference to a specific portion of a Federal, state, or local law, code, ordinance, or regulation in this or any other item must not be construed to mean that relief is provided from any other sections of the law, code, ordinance, or regulation.

3.5.1.1 USCG Generator status. The activity Generator Status for the Coast Guard Facility is _____.

3.5.1.2 Plans and permits. The CG Facility has unit specific permits including the following:

- Spill Prevention Control and Countermeasures (SPCC) Plan: Unit has a SPCC Plan which requires certain unit-specific procedures be followed for the storage, inspection, and transfer of petroleum products in containers 55 gallons or greater.
- National Pollutant Discharge Elimination System (NPDES) Storm Water (SW) Permit: Unit has an NPDES SW permit which requires unit-specific procedures be followed for the storage and inspection of equipment and materials which may contribute contaminants to storm water discharges.
- Air Emission Permit: Unit has an Air Emission Permit which requires unit-specific procedures be followed for the emissions of VOCs and hazardous air pollutants.

3.5.2 Test and procedures. The Contractor is required to promptly conduct tests and procedures for the purpose of assessing whether operations are in compliance with applicable Environmental Laws. Analytical work must be done by qualified laboratories; and where required by law, the laboratories must be certified.

3.5.3 Regulatory notifications. The Contractor is responsible for all regulatory notification requirements in accordance with Federal, State and local regulations. In cases where the Coast Guard must also provide public notification, such as storm water permitting, the Contractor must coordinate with the Contracting Officer or COR, and if work is being performed at a USCG Facility, the local Facility Engineer or Engineering Officer. The Contractor must submit copies of all regulatory notifications to the Contracting Officer and the local Facility Engineer or Engineering Officer prior to commencement of work activities. Regulatory notifications must be provided for including but not limited to demolition, renovation, National Pollutant Discharge Elimination System (NPDES) defined site work, and remediation of controlled substances such as asbestos, hazardous waste, and lead paint.

3.5.4 Environmental manager. The Contractor must appoint in writing an Environmental Manager for the project, who is responsible for coordinating Contractor compliance with Federal, State, local, and station environmental requirements. The Environmental Manager must ensure compliance with Hazardous Waste Program requirements, including hazardous waste handling, storage, manifesting, and disposal; implement the Contractors' Environmental Management Plan; ensure that all environmental permits are obtained, maintained, and closed out;

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026

ensure compliance with Storm Water Program Management requirements; ensure compliance with Hazardous Materials including storage, handling, and reporting requirements; as well as coordinate any remediation of regulated substances such as lead, asbestos, and polychlorinated biphenyl (PCB). This may be a collateral position; however the individual must be trained to accomplish the following duties; ensure waste segregation and storage compatibility requirements are met; inspect and manage Satellite Accumulation areas; ensure only authorized personnel add wastes to containers; ensure all Contractor personnel are trained in 40 CFR requirements and individual position requirements; coordinate removal of waste containers; and maintain the Environmental Records binder and required documentation, including environmental permits compliance and close-out.

3.5.5 HW disposal. Contractor must comply with SFLC Std Spec 0000 Appendix B, Requirements For Environmental Protection At USCG Facilities for HW disposal, and ensure that waste removals are conducted during normal business hours (0800-1600) on Monday through Friday (excluding holidays).

3.5.6 Additional Requirements. The Contractor must be aware of the following:

3.5.6.1 No Contractor or Subcontractor must have the authority to sign a Hazardous Waste Manifest using the Coast Guard facility's EPA Generator ID Number or remove contract generated hazardous waste from the Coast Guard facility without COR or KO-approval.

3.5.6.2 Local environmental regulations at the Government facilities may be more stringent. As with all environmental regulations, the Contractor must prepare for and comply with local and state regulations.

3.5.6.3 Coast Guard facilities do not maintain Facilities Response Plans (FRPs) per 33 CFR 154. Contractor must furnish the FRP when required for over-the-water liquids transfers to and from vessels, and is required for oil/fuel transfers to/from vessels for 250 barrels (10,500 gallons) or more.

3.6 Local Policy. The Contractor must refer to site (e.g., Base) Regulations and Instructions for details regarding local policies (e.g., crane services, parking, or facility usage).

3.7 SFLC Standard Specification approved changes. Approved updates to the 2022 SFLC Standard Specifications will appear here.

3.7.1 SFLC Standard Specification 5550: Replace paragraph 3.11.3 to state, "Material supporting imminent work shall be brought on the cutter and stored where the work is being performed. Material that appreciably contributes to fire load shall be removed at the end of each work shift when personnel are not present. Trash, debris, and packaging materials shall be promptly removed from the vessel at the end of each work shift and not allowed to accumulate." Advance the paragraph numbering of the Fire Prevention and Safety Inspection form to 3.11.4.

4. NOTES

4.1 QA inspection forms. QA inspection forms (QA-1 thru QA-5), required in SFLC Std Spec 6310 to be completed and submitted during preservation of "critical-coated surfaces", are provided at the end of this document.

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026
QA-1 - QUALITY ASSURANCE INSPECTION FORM
(PRESERVATION CHECKLIST)

VESSEL NAME	HULL #	WORK ITEM #	WORK ITEM TITLE
LOCATION OF WORK (INCL. FRAME #'S)		AREA (SQFT)	

CHECKPOINT 1 – COATING SYSTEM COMPLIANCE				
Ensure all coatings are in compliance with SFLC Std Spec 6310, Appendix C.				
CHECKPOINT 2 - PAINT STORAGE				
Ensure all coatings are kept at a temperature of 65 to 85°F at all times, unless otherwise specified by the coating mfg.				
CHECKPOINT 3 - AMBIENT CONDITIONS				
Ensure surface and surrounding temperatures are each between 50 and 90°F for water-containing coatings, and 35 and 95°F for other coatings, unless otherwise specified by the coating manufacturer(s).				
Ensure maximum relative humidity (RH) is as follows, from surface preparations through final curing of topcoat: 50% for tanks, voids, and vent plenum; and 85% for all other areas, unless otherwise specified by manufacturer(s).				
Ensure surface temperature is at least 5°F above the dew point, unless otherwise specified by the coating mfg.				
CHECKPOINT 4 - PRE-SURFACE PREPARATION				
Remove surface contaminants (soluble salts, loose rust, mud, and marine growth) with low pressure fresh water wash down (maximum 5,000 psi). If oil and grease are present, perform solvent cleaning, as per SSPC SP-1.				
Verify equipment setup, blast media, and surface preparation methods match designated test coupon.				
CHECKPOINT 5 - SURFACE PREPARATION				
Verify environmental conditions (see CHECKPOINT 3).				
Ensure cleanliness of prepared surface is as per specification (i.e.: SSPC SP-11, SP-10, SP WJ-2...).				
Verify surface anchor profile using ASTM D4417-Methods B or C against SFLC Std Spec 6310. Conduct profile readings at a minimum of 5 locations for the first 1000-sqft area, and 2 locations for each succeeding 1000-sqft area.				
Measure soluble salt conductivity in accordance with SSPC-Guide 15. Conduct 5 measurements per each 1000-sqft area (max. threshold: 70 microsiemens/cm for non-submerged surfaces, 30 microsiemens/cm for submerged surfaces).				
CHECKPOINT 6 - PRIMER COAT APPLICATION				
Verify environmental conditions (see CHECKPOINT 3).				
Verify proper mixing and stand-in (induction) times.				
Ensure no paint is applied when the temperature is expected to drop to freezing before the paint has dried.				
Ensure surfaces are completely dry, unless otherwise allowed by the coating manufacturer(s).				
Verify wet film thickness (WFT) at random, to prevent under or over application. Verify final DFT.				
Brush out all runs, sags, drips, and puddles.				
Perform visual inspection for holidays and other defects.				
CHECKPOINT 7 – STRIPE COAT APPLICATION				
Verify environmental conditions (see CHECKPOINT 3).				
Ensure overcoating window is as per manufacturer's instructions.				
After primer coat (mist coat after inorganic zinc), brush-apply un-thinned coat of same primer paint over edges, weld seams, cut-outs, and areas of complex geometries @ 3-4 mils wet film thickness (WFT).				
CHECKPOINT 8 – TOP COAT APPLICATION				
Verify environmental conditions (see CHECKPOINT 3).				
Ensure overcoating window is as per manufacturer's instructions.				
Verify proper mixing and stand-in (induction) times, as applicable.				
Verify wet film thickness at random, to prevent under or over application.				
Brush out all runs, sags, drips, and puddles.				
CHECKPOINT 9 – FINAL INSPECTION				
Verify final system dry film thickness. Conduct 5 sets of 3 readings for each of the first 3 100-sqft areas, followed by 5 sets of 3 readings for each succeeding 1000-sqft area.				
Ensure that system cure is in accordance with manufacturer's recommendation for intended service.				
Ensure potable water tank exhaust ventilation is maintained continuously from and during coating application through final system cure, to exhaust all solvent to the atmosphere and to prevent solvent entrapment.				
For immersion coatings (including tank U/W body), record date and time of the following events: Final coat application: / ; Return to service or removal from environment controls: /				
CHECKPOINT 10 – RECORD KEEPING				
Complete, sign, and submit all provided QA Inspection Forms.				
NAME OF QP-1/AMPP INSPECTOR		SIGNATURE	CERT. #	DATE / TIME
NAME OF CG REPRESENTATIVE		SIGNATURE	UNIT	DATE/TIME

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026
 QA-2 - QUALITY ASSURANCE INSPECTION FORM
 (ENVIRONMENTAL READINGS)

VESSEL NAME	HULL #	WORK ITEM #	WORK ITEM TITLE

Use one sheet for each activity. Record conditions every four hours from before surface preparation to application of final coating system coat.							
DATE & TIME	ACTIVITY (SURFACE PREPARATION, PRIMER COAT, BARRIER COAT, TOP COAT, ETC...)	LOCATION (FRAME & DECK, RELATION TO EQUIPMENT, ETC.)	TEMPERATURE				% REL. HUMIDITY
			DEW PT.	SURFACE	AMBIENT	ΔT DP - SURFACE	
NAME OF QP-1/AMPP INSPECTOR		SIGNATURE				CERT. #	DATE / TIME
NAME OF CG REPRESENTATIVE		SIGNATURE				UNIT	DATE/TIME

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026
QA-3a - QUALITY ASSURANCE INSPECTION FORM
(SURFACE PROFILE LOG FOR PROFILE MEASUREMENTS IAW ASTM D4417-METHOD-C)

VESSEL NAME	HULL #	WORK ITEM #	WORK ITEM TITLE
LOCATION OF WORK (FRAME REFERENCES)			AREA (SQFT)

SURFACE PREPARATION METHOD		PROFILE ACHIEVED (MILS)		
		MIN	MAX	MEAN
SSPC-SP-10/AMPP No. 2	☐			
SSPC-SP WJ-2/AMPP WJ-2	☐			
SSPC-SP-3	☐			
SSPC-SP-11	☐			
SSPC-SP-11 (inaccessible area)	☐			
Brush-blasting (non-metallic substrate)	☐			
ABRASIVE MANUFACTURER:		ABRASIVE SIEVE SIZE:		

PLACE SURFACE PROFILE REPLICA TAPES IN THE SPACES PROVIDED BELOW, TO SERVE AS PERMANENT QA RECORD. MAINTAIN A SEPARATE LOG FOR EACH LOCATION. WHEN AN AREA IS DIVIDED INTO SEPARATE SECTIONS, MAINTAIN A SEPARATE LOG FOR EACH SECTION.					
Place Surface Profile Replica Tape Here		Place Surface Profile Replica Tape Here		Place Surface Profile Replica Tape Here	
Reading (mils):		Reading (mils):		Reading (mils):	
Place Surface Profile Replica Tape Here		Place Surface Profile Replica Tape Here		Place Surface Profile Replica Tape Here	
Reading (mils):		Reading (mils):		Reading (mils):	
Place Surface Profile Replica Tape Here		Place Surface Profile Replica Tape Here		Place Surface Profile Replica Tape Here	
Reading (mils):		Reading (mils):		Reading (mils):	
Place Surface Profile Replica Tape Here		Place Surface Profile Replica Tape Here		Place Surface Profile Replica Tape Here	
Reading (mils):		Reading (mils):		Reading (mils):	
Place Surface Profile Replica Tape Here		Place Surface Profile Replica Tape Here		Place Surface Profile Replica Tape Here	
Reading (mils):		Reading (mils):		Reading (mils):	
MEAN MIL READING (IAW ASTM D4417-METHOD C) FOR ABOVE 15 READINGS:					

NAME OF QP-1/AMPP INSPECTOR	SIGNATURE	CERT. #	DATE / TIME
NAME OF CG REPRESENTATIVE	SIGNATURE	UNIT	DATE/TIME

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026
QA-3b - QUALITY ASSURANCE INSPECTION FORM
(SURFACE PROFILE LOG FOR PROFILE MEASUREMENTS IAW ASTM D4417-METHOD-B)

VESSEL NAME	HULL #	WORK ITEM #	WORK ITEM TITLE
LOCATION OF WORK (INCL. FRAME #'S)			AREA (SQFT)

SURFACE PREPARATION METHOD		PROFILE ACHIEVED (MILS)		
		MIN	MAX	MEAN
SSPC-SP-10/AMPP No. 2	☐			
SSPC-SP WJ-2/AMPP WJ-2	☐			
SSPC-SP-3	☐			
SSPC-SP-11	☐			
SSPC-SP-11 (inaccessible area)	☐			
Brush-blasting (non-metallic substrate)	☐			
ABRASIVE MANUFACTURER:		ABRASIVE SIEVE SIZE:		

RECORD MEASUREMENTS TAKEN IN THE SPACES PROVIDED BELOW, TO SERVE AS PERMANENT QA RECORD. MAINTAIN SEPARATE LOG FOR EACH LOCATION. WHEN AN AREA IS DIVIDED INTO SEPARATE SECTIONS, MAINTAIN A SEPARATE LOG FOR EACH SECTION.					
Reading (mils):					
Reading (mils):					
Reading (mils):					
Reading (mils):					
Reading (mils):					
Reading (mils):					
Reading (mils):					
Reading (mils):					
Reading (mils):					
Reading (mils):					
Mean Mils Reading (IAW ASTM D4417-Method B for above 10 readings (by column):					
Mean Reading (mils)					

NAME OF QP-1/AMPP INSPECTOR	SIGNATURE	CERT. #	DATE / TIME
NAME OF CG REPRESENTATIVE	SIGNATURE	UNIT	DATE/TIME

VESEL NAME	HULL #	WORK ITEM #	WORK ITEM TITLE
LOCATION OF WORK (INCL. FRAME #'S)			AREA (SQFT)

(Rev-2)

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026
QA-5 - QUALITY ASSURANCE DATA FORM
(COATING THICKNESS)

(Use one sheet for each sequence)

VESSEL NAME	HULL #	WORK ITEM #	WORK ITEM TITLE

COATING MFG	PRODUCT NAME	BATCH #	INDUCTION TIME	COATING SYSTEM SEQUENCE (PRIMER/TOUCHUP/3RD COAT, ETC.)

DRY FILM THICKNESS (DFT) MEASUREMENTS IAW SSPC-PA 2.						
SPOT	1	2	3	4	5	AVERAGE VALUE
*BASE METAL READING (BMR)						
*Required, If Magnetic Pull-Off (Type I/Banana) Gauge Is Used.						

LOCATION (FRAME REFERENCE):								
SPOT	1	2	3	4	5	OVERALL AVG. DFT	ADJUSTMENTS	
1							AVG. BMR	DEVIATION
2								
3							BEFORE ADJUSTMENTS	AFTER ADJUSTMENTS
AVG.								

LOCATION (FRAME REFERENCE):								
SPOT	1	2	3	4	5	OVERALL AVG. DFT	ADJUSTMENTS	
1							AVG. BMR	DEVIATION
2								
3							BEFORE ADJUSTMENTS	AFTER ADJUSTMENTS
AVG.								

LOCATION (FRAME REFERENCE):								
SPOT	1	2	3	4	5	OVERALL AVG. DFT	ADJUSTMENTS	
1							AVG. BMR	DEVIATION
2								
3							BEFORE ADJUSTMENTS	AFTER ADJUSTMENTS
AVG.								

APPLICATION METHOD (AIRLESS, CONVENTIONAL SPRAY, ROLLED)	AVERAGE DFT

NAME OF QP-1/AMPP INSPECTOR	SIGNATURE	CERT. #	DATE / TIME
NAME OF CG REPRESENTATIVE	SIGNATURE	UNIT	DATE/TIME

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026

4.2 Tank and Void Assessment form.

SFLC-ESD-25		TANK AND VOID ASSESSMENT FORM	
PRINT	RESET		

GENERAL DATA Note: Use SFLC-ESD-29 for Compartments other than Tanks & Voids.			
Inspector's Name:		Organization:	Contact Info:
Cutter Name:		Cutter Class:	Hull:
Tank:	Service:	Tank Area:	Gallons:
Solid Balast:	Access Compt:	Date:	Assessment Reason:
ACCESS DATA			
Manhole and cover condition:		Tank Penetration Condition:	
VENT OVERFLOW DATA			
Present: ☐ Yes ☐ No		Check Valve Installed: ☐ Yes ☐ No	Check Valve Operates Properly: ☐ Yes ☐ No
LADDER DATA			
NR of Ladder(s) Present: ☐ Yes ☐ No		Ladder Damaged: ☐ Yes ☐ No	Ladder Material:
TANK LEVEL INDICATOR (TLI) DATA			
TLI Present in Tank: ☐ Yes ☐ No		TLI Damaged: ☐ Yes ☐ No	TLI Type:
SOUNDING TUBE DATA			
Sounding Tube Present in Tank: ☐ Yes ☐ No		Sounding Tube Damaged: ☐ Yes ☐ No	
Striker Plate Damaged (>50%): ☐ Yes ☐ No			
CATHODIC PROTECTION DATA			
Cathodic Protection in Tank: ☐ Yes ☐ No		Total Zincs:	Number of Zincs > 50% Depleted:
1-6 Cleanliness & Housekeeping			
Clean to light layer or residue		1-2 (G)	Comments:
Loose accumulation scale		3-4 (Y)	
Impending residue and sediments		5-6 (R)	
% 1-6 Coating Systems			
All Painted Surfaces		1-2 (G)	Comments:
		3-4 (Y)	
		5-6 (R)	
% 1-6 Structural			
Corrosion		1-2 (G)	Comments:
		3-4 (Y)	
		5-6 (R)	
Pitting & Grooving		1-2 (G)	Comments:
		3-4 (Y)	
		5-6 (R)	

SFLC-ESD-25	TANK AND VOID ASSESSMENT SHEET
PRINT	

Structural Integrity Data			
Estimated Total Linear Feet of Structure Requiring Repair:		Estimated Total Square Feet of Plating Requiring Repair:	
Cracks/ Fractures Present:	☐ Yes ☐ No	Buckling/Deflections/ Distortions Present:	☐ Yes ☐ No
Holes Present:	☐ Yes ☐ No	Material Wastage Present:	☐ Yes ☐ No
All Welds Intact:	☐ Yes ☐ No	Structural Evaluation Recommended:	☐ Yes ☐ No
PHOTOGRAPHS			
Pictures Taken (enter quantity):			
Note: To add pictures to this form, Work Station must have Adobe Acrobat (not Reader) installed. Add all photos and photo comments to a word document and save file. Open this form and click "Combine Files". Add the document with photos you've just saved and save as a new combined .pdf files.			
Additional Comments:			

WORK ITEM 1: Fire Prevention Requirements «TYPE»

1. SCOPE

1.1 Intent. This work item describes the requirements for the Contractor to minimize shipboard fire risk and to clarify the Contractors' role in fire prevention and response.

NOTE

This work item is not separately priced. Factor fire prevention and response costs into bid of affected work items.

1.2 Government-furnished property.

None.

2. REFERENCES

COAST GUARD DRAWINGS

None

COAST GUARD PUBLICATIONS

Surface Forces Logistics Center Standard Specification 0000 (SFLC Std Spec 0000), 2022, General Requirements

Surface Forces Logistics Center Standard Specification 5550 (SFLC Std Spec 5550), 2022, Fire Prevention and Response

OTHER REFERENCES

None

3. REQUIREMENTS

3.1 Fire Plan. The Contractor must develop and implement a written fire plan in accordance SFLC Std Spec 5550. The Contractors Fire Plan must address Fire Protection and Response specifics as required in this Work Item.

3.1.1 The availability's specific Fire Plan must always address the following:

- material condition and fire protection boundary obstruction mitigations
- inoperable fittings log

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026

- fire alarms
- firefighting equipment disposition

3.1.2 The Fire Plan must also address the following:

- fire protection system status
- communication links
- temporary services
- power disconnects
- fire prevention and safety inspections

3.2 Fire Prevention Responsible Party. The Contractor must appoint a Fire Prevention Responsible Party (FPRP) who acts as the Contractor's Responsible Person for fire prevention concerns during the entire availability.

3.3 Fire Prevention and Response Conference. The Contractor must participate in the Fire Prevention and Response Conference as required in Std Spec 5550, paragraph 3.12. The participants must address the contents of SFLC Std Spec 5550, paragraph 3.12.1, as applicable.

3.4 Fire Responsibility Familiarization Tour and Initial Inspection. The Contractor must participate in the Fire Responsibility Familiarization Tour and Initial Inspection as required in Std Spec 5550, paragraphs 3.12.2 through 3.12.4.

3.5 Material Condition and Fire Protection Boundary Obstruction Mitigation Requirements. The Contractor must conform to all material condition and fire protection boundary obstruction mitigation requirements detailed in SFLC Std Spec 5550, paragraph 3.2.

3.6 Inoperable Fittings Log Requirements. The Contractor must conform to all inoperable fittings log requirements detailed in SFLC Std Spec 5550, paragraph 3.3.

3.6.1 The Contractor must maintain an Inoperable Fittings log. The logs must contain the same information as a Damage Control Closure Log found in Appendix A of SFLC Std Spec 5550. The log must remain at the access point of the vessel available for inspection or use by authorized personnel, i.e., casualty response. Deliver all logs to the CG when requested and at the end of the availability.

3.7 Fire Prevention Service Particulars. The Contractor must conform to the below listed fire prevention service requirements, in accordance with SFLC Std Spec 5550.

TABLE 1 – FIRE PREVENTION SERVICE SELECTION

*SUB-PARAGRAPH	TITLE	Y/N	Guidance/suggested use (see <i>Fire Prevention WI Companion Doc</i> for more commentary).
3.4	Fire prevention system status	N	
3.4.1	Temporary firefighting system proposal	N	
3.4.2	Emergent firefighting system inoperability approval and notification	N	
3.4.3	“Disabled equipment” signage for disabled initial responder equipment	N	
3.4.4	Firefighting system inoperability allowance for removed hazards	N	

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026

*SUB-PARAGRAPH	TITLE	Y/N	Guidance/suggested use (see Fire Prevention WI Companion Doc for more commentary).
3.4.5	Maintain sprinkling zone operability	N	
3.4.6 including all subparagraphs	Hazard mitigation for maintenance of fixed extinguishing systems	N	
3.4.7	Procedure implementation for enabling/disabling fire suppression systems	N	
3.4.8	Portable water pumping requirement for vessels w/o installed capability	N	
3.4.9	Limitations on operation of major machinery while firefighting systems are offline	N	
3.4.10	Liquid fuel pumping requirement for operational permanent or temporary firefighting systems	N	
3.4.11	Mechanical AFFF equipment must be available to initial responders in compartments with risk of flammable/combustible liquid spillage	N	
3.4.12 including all subparagraphs	Portable fire extinguisher requirements	N	
3.4.13	Hose and reel protection	N	
3.4.14 including all subparagraphs	Drydock firefighting requirements	N	
3.4.15	Fire protection system status in Fire Plan	N	
3.5	Fire response related communication links in Fire Plan	N	
3.6	Fire response related temporary services in Fire Plan	N	
3.6.1	Minimize downtime of fixed extinguishing systems	N	
3.6.2 through 3.6.10	Firemain and related equipment requirements	N	
3.6.11	Permanent lighting requirements	Y	
3.6.12 including all subparagraphs	Temporary lighting requirements	Y	
3.6.13	Electrical power, firefighting water, and lighting source location and testing identified in Fire Plan	N	
3.7 including all subparagraphs	Fire alarm requirements	Y	
3.8	Shore power manual disconnect locations identified in Fire Plan	Y	
3.9	Other power manual disconnect locations identified in the Fire Plan	N	
3.10 including subparagraph	Vessel firefighting equipment placement and disposition info in Fire Plan	Y	
3.11	Fire prevention and safety inspections in Fire Plan	Y	
3.11.1	Initial and daily inspection requirements	Y	
3.11.2	Additional details in fire inspection reports	Y	

*Each sub-paragraph number relates directly to the identical sub-paragraph number in SFLC Std Spec 5550.

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026

3.5 Extended fire prevention services. If the performance period of the contract is extended by the KO, the contractor must continue to provide all fire prevention services as specified herein for the extension period.

4. NOTES

This section is not applicable to this work item.

WORK ITEM 2: Tank (Water Mist), Clean And Inspect

1. SCOPE

1.1 Intent. This work item describes the requirements for the Contractor to clean and inspect the following tank(s):

TABLE 1 - TANKS

TYPE OF TANK	LOCATION	CAPACITY - 100% (GALLONS)	LOW SUCTION (GALLONS)
Water Mist	4-24-1-W	1,261	100

1.2 Government-furnished property.

None.

2. REFERENCES

COAST GUARD DRAWINGS

Coast Guard Drawing 140-WTGB 123-2, Rev B, Structural Mods Incidental to Water Mist Tank 4-24-1-W

Coast Guard Drawing 140-WTGB 555-2, Rev C, Water Mist System Installation A&D

Coast Guard Drawing 140-WTGB 555-4, Rev C, Water Mist System Diagram

Coast Guard Drawing 140-WTGB 801-3, Rev -, Booklet of General Plans

COAST GUARD PUBLICATIONS

Surface Forces Logistics Center Standard Specification 0000 (SFLC Std Spec 0000), 2022, General Requirements

OTHER REFERENCES

ASTM International (ASTM) D1330, 2004, Standard Specification for Rubber Sheet Gaskets

3. REQUIREMENTS

3.1 General.

3.1.1 CIR.

None.

3.1.2 Tech Rep.

Not applicable.

3.1.3 Protective measures. The Contractor shall furnish and install all protective coverings to seal off and protect all non-affected vessel's components, equipment, and spaces near the work area against contamination during the performance of work. Upon completion of work, the Contractor shall remove all installed protective measures, inspect for the presence of contamination, and return all contaminated equipment, components, and spaces to original condition of cleanliness.

3.1.4 Interferences. The Contractor shall handle all interferences in accordance with SFLC Std Spec 0000, paragraph 3.3.5 (Interferences). Known interferences include, but are not limited to the below-listed:

- Fluid contents.
- Piping.
- Deck grating.

NOTE

Coast Guard personnel will operate all shipboard machinery and equipment.

3.1.5 Operational test - initial. Prior to commencement of work, the Contractor shall witness Coast Guard Personnel perform an initial operational test of the TLI's for tanks listed in paragraph 1.1 (Intent), to demonstrate existing operational condition. Submit a CFR.

3.1.6 Plug log. The Contractor shall keep a written record of all plugs put in any tanks vents. A separate list shall be kept for each tank being entered.

3.1.6.1 Ensure that all plugs are removed from each tank upon completion of work in the tank.

3.1.6.2 The plug log shall be available to the Coast Guard inspector when the inspector is performing his close-out inspection on each tank.

3.2 Content removal. The Contractor shall remove access cover(s); remove and dispose of all fluids and/or residues in accordance with all applicable Federal, state, and local regulations. Plug all inlet and outlet piping in the tank to prevent contaminants from entering the tank. Use plugs with an attached lanyard, ring or other system that will ensure plugs are not lost in the pipe openings. Maintain a plug accountability log outside the tank(s) to prevent any of the installed temporary plugs from being lost inside the tank or forgotten inside at tank closure.

3.3 Cleaning. The Contractor shall clean the designated structure's (see paragraph 1.1 (Intent)) interior surfaces free of all foreign materials, such as sediment, sludge and fungal growth. Remove all persistent residues, taking care not to damage the tank coating system. Remove cleaning media and residues continuously from the compartment during the washing process. Remove any residual wash media and wipe up residual moisture with clean lint-free cloths. Collect, contain, and dispose of all wash media, residues, and cleaning materials in accordance with all Federal, state, and local regulations.

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026

3.4 Inspection. The Contractor shall visually inspect all interior surfaces, including, but not limited to bulkheads, floor and overhead plating, structural members, manhole cover surfaces, fasteners and gasket seating surfaces. Submit a CFR including the following, as applicable:

- Structural condition.
- Inaccessible areas, if any.
- Condition of coating, including measurements taken, percentage, location, and type of coating failure.
- Tank level indicator (TLI) and/or float switch condition.
- Sounding tube and striker plate condition.
- Suction and discharge piping condition.
- Fastener material (stainless steel) and condition.

3.5 Closing. The Contractor shall ensure that the compartment(s) remain open for at least 24 hours after completion of any KO-authorized tank repairs and preservation. Notify the COR at least 24 hours prior to closing the compartment(s). After satisfactory inspection by the Coast Guard Inspector, and completion of all authorized repairs, close the manhole cover(s) with new gasket material conforming to ASTM D1330 and new cotton grommets on each stud (as applicable).

NOTE

Coast Guard personnel will operate all shipboard machinery and equipment.

3.6 Operational test – post repairs. After completion of work, the Contractor shall thoroughly test, in the presence of the Coast Guard Inspector and demonstrate the designated tank TLI's to be in satisfactory operating condition. Submit a CFR.

4. NOTES

This section is not applicable to this work item.

WORK ITEM 3: Tanks, Hydraulic Oil Stowage and Service, Clean and Inspect

1. SCOPE

1.1 Intent. This work item describes the requirements for the Contractor to clean and inspect the following tank(s):

TABLE 1 - TANKS

TYPE OF TANK	LOCATION	CAPACITY - 95% (GALLONS)	LOW SUCTION (GALLONS)
Hydraulic Oil			

1.2 Government-furnished property.

None.

2. REFERENCES

COAST GUARD DRAWINGS

None

COAST GUARD PUBLICATIONS

Surface Forces Logistics Center Standard Specification 0000 (SFLC Std Spec 0000), 2022,
General Requirements

Surface Forces Logistics Center Standard Specification 5000 (SFLC Std Spec 5000), 2022,
Auxiliary Machine Systems

OTHER REFERENCES

Society of Automotive Engineers (SAE) Aerospace Material Specification (AMS) C6183, 2019,
Cork and Rubber Composition Sheet; For Aromatic Fuel and Oil Resistant Gaskets

3. REQUIREMENTS

3.1 General. The Contractor must accomplish the following for all designated tanks in paragraph 1.1 (Intent).

3.1.1 CIR.

None.

3.1.2 Tech Rep.

Not applicable.

3.1.3 Protective measures. The Contractor must furnish and install all protective measures in accordance with SFLC Std Spec 0000, paragraph 3.3.3 (Vessel component, space, and equipment protection).

3.1.4 Interferences. The Contractor must handle all interferences in accordance with SFLC Std Spec 0000, paragraph 3.3.5 (Interferences).

NOTE

Coast Guard personnel will operate all shipboard machinery and equipment.

3.2 Operational test, initial. Prior to commencement of work, the Contractor must witness Coast Guard personnel perform an initial operational test of the equipment listed below to demonstrate existing operational condition. Submit a CFR.

- TLI

3.3 Tank contents. The Contractor must remove and dispose of up to a total of 100 gallons of hydraulic oil.

NOTE

Vessel may come in with less tank fluid contents than specified above.

3.4 Plug log. The Contractor must keep a written record of all plugs put in any tanks vents. A separate list must be kept for each tank being entered.

3.4.1 Ensure that all plugs are removed from each tank upon completion of work in the tank.

3.4.2 Ensure the plug log is available to the Coast Guard inspector when the inspector is performing his close-out inspection on each tank.

3.5 Cleaning requirements. The Contractor must remove tank cover(s) and clean tank interior surfaces free of all foreign materials, such as sediment or sludge, taking care not to damage the coating system (if applicable). Remove cleaning media and residues continuously during the washing process. Remove any residual wash media; and wipe up residual moisture with clean lint-free cloths.

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026

3.6 Tank content and waste disposal. The Contractor must dispose of residual tank contents and all cleaning fluids in compliance with all applicable Federal, state, and local laws, ordinances and regulations. Document a complete chain of custody record of the removed tank contents and generated wastes, from the vessel to the point of final destination or delivery. Submit document to the COR upon completion of work.

3.7 Inspection. The Contractor must visually inspect all tank interior surfaces, including, but not limited to bulkheads, floor and overhead plating, structural members, manhole cover surfaces, fasteners and gasket seating surfaces. Complete the “Tank and Void Assessment Form” (found in the Work Item titled “General Requirements”) and submit via CFR. Electronic PDF version of this form will be furnished by the COR upon request. Include the following, as applicable:

- Tank structural condition.
- Inaccessible areas.
- Condition of tank coating, including measurements taken, percentage, location, and type of coating failure.
- Tank level indicator (TLI) and/or float switch condition, as applicable.
- Sounding tube and striker plate condition.
- Suction and discharge piping condition.
- Fastener material and condition (correct fastener material is stainless steel).

3.8 Tank closing. The Contractor must ensure that the tank(s) remain open for approximately 24 hours after completion of all authorized repair and preservation procedures. Notify the COR at least 24 hours prior to closing the tank(s) and ensure tank closure is accomplished in the presence of the Coast Guard Inspector. After satisfactory inspection by the Coast Guard Inspector and completion of all authorized repairs, close tank manhole cover(s) with new gasket material conforming to AMS-C-6183, and renew any damaged or missing fasteners. For purpose of bid, assume 10% of existing fasteners will require renewal.

NOTE

Coast Guard personnel will operate all shipboard machinery and equipment.

3.9 Operational test, post repairs. After completion of work and in the presence of the Coast Guard Inspector, the Contractor must thoroughly test and demonstrate the equipment listed below to be in satisfactory operating condition. Submit a CFR.

- TLI

4. NOTES

4.1 The Coast Guard Inspector will visually inspect the tank interior immediately prior to closing.

WORK ITEM 4: Tanks, Potable Water, Clean and Inspect**1. SCOPE**

1.1 Intent. This work item describes the requirements for the Contractor to clean and inspect the following tank(s):

TABLE 1 - TANKS

TYPE OF TANK	LOCATION	CAPACITY - 95% (GALLONS)	LOW SUCTION (GALLONS)
Potable Water	4-19-3-W, Tender	3,367	100
Potable Water	4-19-4-W, Tender	3,367	100

1.2 Government-furnished property.

None.

2. REFERENCES**COAST GUARD DRAWINGS**

None.

COAST GUARD PUBLICATIONS

Surface Forces Logistics Center Standard Specification 0000 (SFLC Std Spec 0000), 2022,
General Requirements

OTHER REFERENCES

American National Standards Institute/NSF International (ANSI/NSF) 61, 2015, Drinking Water
System Components - Health Effects

3. REQUIREMENTS

3.1 General.

3.1.1 CIR.

None.

3.1.2 Tech Rep.

Not applicable.

3.1.3 Protective measures. The Contractor must furnish and install all protective measures in accordance with SFLC Std Spec 0000, paragraph 3.3.3 (Vessel component, space, and equipment protection).

3.1.4 Interferences. The Contractor must handle all interferences in accordance with SFLC Std Spec 0000, (Interferences). Known interferences include, but are not limited to the following:

- Fluid contents
- Piping
- RO system components
- Deck grating.

NOTE

Coast Guard personnel will operate all shipboard machinery and equipment.

3.2 Operational test, initial. Prior to commencement of work, the Contractor must witness Coast Guard personnel perform an initial operational test of the equipment listed below to demonstrate existing operational condition. Submit a CFR.

- TLI

3.3 Plug log. The Contractor must keep a written record of all plugs put in any tanks vents. A separate list must be kept for each tank being entered.

3.3.1 Ensure that all plugs are removed from each tank upon completion of work in the tank.

3.3.2 Ensure the plug log is available to the Coast Guard inspector when the inspector is performing his close-out inspection on each tank.

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026

3.4 Tank content removal. The Contractor must remove and dispose of all fluids and/or residues in accordance with all applicable Federal, state, and local regulations. The Contractor must notify the Dockmaster prior to filling or draining the potable water tank(s), when this item is being executed in a drydock availability. The Contractor must ensure the following:

3.5 Tank cleaning. The Contractor must remove tank cover(s); clean tank interior surfaces free of all foreign materials, such as sediment, sludge and bacterial growth. Remove all persistent residues, taking care not to damage any tank coating system. Remove cleaning media and residues continuously from the tank during the washing process. Remove any residual wash media and wipe up residual moisture with clean lint-free cloths. Collect, contain, and dispose of all wash media, residues, and cleaning materials in accordance with all Federal, state, and local regulations.

3.6 Inspection. The Contractor must visually inspect all tank interior surfaces, including, but not limited to bulkheads, floor and overhead plating, structural members, manhole cover surfaces, fasteners and gasket seating surfaces. Complete the “Tank and Void Assessment Form” (found in the Work Item titled “General Requirements”) and submit via CFR. Electronic PDF version of this form will be furnished by the COR upon request. Include the following, as applicable:

- Tank structural condition.
- Inaccessible areas, if any.
- Condition of tank coating, including measurements taken, percentage, location, and type of coating failure.
- Tank level indicator (TLI) and/or float switch condition (if applicable).
- Sounding tube and striker plate condition.
- Suction and discharge piping condition.
- Fastener material and condition.

3.7 Tank closing. The Contractor must notify the COR at least 24 hours prior to closing the tank(s) and ensure tank closure is accomplished in the presence of the Coast Guard Inspector. After satisfactory inspection by the Coast Guard Inspector, and completion of all authorized repairs, close tank manhole cover(s) with new gasket material conforming to ANSI/NSF 61. Renew all stud cotton grommets (as applicable) upon reinstallation of manhole cover(s).

3.7.1 The Contractor must renew 100% of nuts and washers.

3.8 Tank disinfecting. After all other work involving the potable water system and tank closing have been completed, the Contractor must disinfect and treat the affected potable water tank(s) and associated disturbed piping and components, as necessary, to meet or exceed the requirements of AWWA C652. After tank disinfecting, remove and dispose of all treated water in accordance with all Federal, state and local regulations. Ensure that no one enters the tanks once disinfection is completed. Submit CFR providing confirmation that disinfection of tank(s) and associated potable water system disturbed piping and components has been completed and certifying that all sampling and testing is negative for coliform organisms.

NOTE

Coast Guard personnel will operate all shipboard machinery and equipment.

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026

3.9 Operational test, post repairs. After completion of work and in the presence of the Coast Guard Inspector, the Contractor must thoroughly test and demonstrate the equipment listed below to be in satisfactory operating condition. Submit a CFR.

- TLI

4. NOTES

This section is not applicable to this work item.

WORK ITEM 5: Tanks, Lube Oil, Clean and Inspect

1. SCOPE

1.1 Intent. This work item describes the requirements for the Contractor to clean and inspect the following tank(s):

TABLE 1 – TANKS

TYPE OF TANK	LOCATION	CAPACITY - 95% (GALLONS)	LOW SUCTION (GALLONS)
Lube Oil	Eng Rm 2-41-1	280	0
Lube Oil	Eng Rm 2-41-2	280	0

1.2 Government-furnished property.

None.

2. REFERENCES

COAST GUARD DRAWINGS

None

COAST GUARD PUBLICATIONS

Surface Forces Logistics Center Standard Specification 0000 (SFLC Std Spec 0000), 2022,
General Requirements

OTHER REFERENCES

Society of Automotive Engineers (SAE) Aerospace Material Specification (AMS) C6183, 2013,
Cork and Rubber Composition Sheet; For Aromatic Fuel and Oil Resistant Gaskets

3. REQUIREMENTS

3.1 General.

3.1.1 CIR.

None.

3.1.2 Tech Rep.

Not applicable.

3.1.3 Protective measures. The Contractor must furnish and install all protective measures in accordance with SFLC Std Spec 0000, paragraph 3.3.3 (Vessel component, space, and equipment protection).

3.1.4 Interferences. The Contractor must handle all interferences in accordance with SFLC Std Spec 0000, paragraph 3.3.5 (Interferences). Known interferences include, but are not limited to the below-listed:

- Tank cover
- Piping
- Tank contents.

3.1.4.1 The Contractor must remove up to a total of 600 gallons of lube oil. Document a complete chain of custody record of the removed tank contents from the vessel to the point of final destination or delivery. Submit document to the COR upon completion of work.

3.1.4.2 The Contractor must dispose of removed fluids in accordance with all applicable Federal, state, and local regulations (see 4.2 (Tank content restoration)).

3.1.4.2 The Contractor must stow all fluids in suitable stowage facility, immediately after removal, and re-stow all tank contents, upon completion of work. Contractor must ensure lube oil quality is maintained throughout all stages of the process.

NOTE

Vessel may come in with less tank fluid contents than specified above.

NOTE

Coast Guard personnel will operate all shipboard machinery and equipment.

3.2 Operational test, initial. Prior to commencement of work, the Contractor must witness Coast Guard Personnel perform an initial operational test of the TLI's for tanks listed in paragraph 1.1 (Intent), to demonstrate existing operational condition. Submit a CFR.

3.3 Plug Log. The Contractor must keep a written record of all plugs put in any tanks vents. A separate list must be kept for each tank being entered.

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026

3.3.1 Ensure that all plugs are removed from each tank upon completion of work in the tank.

3.3.2 Ensure the plug log is available to the Coast Guard inspector when the inspector is performing his close-out inspection on each tank.

NOTE

Initial and post repair operational tests apply only to tanks that possess TLIs.

3.4 Cleaning requirements. The Contractor must remove tank cover(s) and clean tank interior surfaces free of all foreign materials, such as sediment or sludge, taking care not to damage the coating system (if applicable). Remove cleaning media and residues continuously during the washing process. Remove any residual wash media; and wipe up residual moisture with clean lint-free cloths.

3.5 Tank content and waste disposal. The Contractor must dispose of residual tank contents and all cleaning fluids in compliance with all applicable Federal, state, and local laws, ordinances and regulations. Document a complete chain of custody record of the removed tank contents and generated wastes, from the vessel to the point of final destination or delivery. Submit document to the COR upon completion of work.

3.6 Inspection. The Contractor must visually inspect all tank interior surfaces, including, but not limited to bulkheads, floor and overhead plating, structural members, manhole cover surfaces, fasteners and gasket seating surfaces. Complete the “Tank and Void Assessment Form” (found in the Work Item titled “General Requirements”) and submit via CFR. Electronic PDF version of this form will be furnished by the COR upon request. Include the following, as applicable:

- Tank structural condition.
- Inaccessible areas.
- Condition of tank coating (if applicable), including measurements taken, percentage, location, and type of coating failure.
- Tank level indicator (TLI) and/or float switch condition (as applicable).
- Sounding tube and striker plate condition.
- Suction and discharge piping condition.
- Fastener material (stainless steel) and condition.

3.7 Tank closing. The Contractor must ensure that the tank(s) remain open for at least 24 hours after completion of all KO-authorized repair and preservation procedures. Notify the COR at least 24 hours prior to closing the tank(s) and ensure tank closure is accomplished in the presence of the Coast Guard Inspector. After satisfactory inspection by the Coast Guard Inspector and completion of all authorized repairs, close tank manhole cover(s) with new gasket material conforming to AMS-C-6183.

NOTE

Coast Guard personnel will operate all shipboard machinery and equipment.

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026

3.8 Operational test, post repairs. After completion of work, the Contractor must thoroughly test, in the presence of the Coast Guard Inspector and demonstrate all designated tank TLIs to be in satisfactory operating condition. Submit a CFR.

4. NOTES

4.1 Tank content removal. The Ship's force will pump down the tanks to the maximum extent possible with the installed pumping system.

4.3 Tank inspection. The Coast Guard Inspector will visually inspect the tank interior immediately prior to closing.

4.3 Tank content restoration. The Ship's force will procure new fluids and refill all tanks at the appropriate time.

WORK ITEM 6: Tanks, Ballast, Clean and Inspect**1. SCOPE**

1.1 Intent. This work item describes the requirements for the Contractor to clean and inspect the following tank(s):

TABLE 1 - TANKS

TYPE OF STRUCTURE	LOCATION	CAPACITY - 95% (GALLONS)	LOW SUCTION (GALLONS)
Ballast	4-19-1-W	1,319	100
Ballast	4-19-2-W	1,319	100
Ballast	2-76-3-W	1292	100
Ballast	2-76-4-W	1292	100

1.2 Government-furnished property.

None.

2. REFERENCES**COAST GUARD DRAWINGS**

None.

COAST GUARD PUBLICATIONS

Surface Forces Logistics Center Standard Specification 0000 (SFLC Std Spec 0000), 2022,
General Requirements

Surface Forces Logistics Center Standard Specification 0740 (SFLC Std Spec 0740), 2022,
Welding and Allied Processes

OTHER REFERENCES

ASTM International (ASTM) D1330, 2015, Standard Specification for Rubber Sheet Gaskets

3. REQUIREMENTS

3.1 General.

3.1.1 CIR.

None.

3.1.2 Tech Rep.

Not applicable.

3.1.3 Protective measures. The Contractor must furnish and install all protective measures in accordance with SFLC Std Spec 0000, paragraph 3.3.3 (Vessel component, space, and equipment protection).

3.1.4 Interferences. The Contractor must handle all interferences in accordance with SFLC Std Spec 0000, paragraph 3.3.5 (Interferences).

NOTE

Coast Guard personnel will operate all shipboard machinery and equipment.

3.2 Operational test, initial. Prior to commencement of work, the Contractor must witness Coast Guard personnel perform an initial operational test of the equipment listed below to demonstrate existing operational condition. Submit a CFR.

- TLI's for tanks listed in paragraph 1.1

3.3 Plug log. The Contractor must keep a written record of all plugs put in any tanks vents. A separate list must be kept for each tank being entered.

3.3.1 Ensure that all plugs are removed from each tank upon completion of work in the tank.

3.3.2 The plug log must be available to the Coast Guard inspector when the inspector is performing his close-out inspection on each tank.

3.3 Content removal. The Contractor must remove access cover(s); remove and dispose of all fluids and/or residues in accordance with all applicable Federal, state, and local regulations. Plug all inlet and outlet piping in the tank to prevent contaminants from entering the tank. Use plugs with an attached lanyard, ring or other system that will ensure plugs are not lost in the pipe openings. Maintain a plug accountability log outside the tank(s) to prevent any of the installed temporary plugs from being lost inside the tank or forgotten inside at tank closure.

3.4 Cleaning. The Contractor must clean the designated structure's (see paragraph 1.1 (Intent)) interior surfaces free of all foreign materials, such as sediment, sludge and fungal growth. Remove all persistent residues, taking care not to damage the tank coating system. Remove cleaning media and residues continuously from the compartment during the washing process. Remove any residual wash media and wipe up residual moisture with clean lint-free cloths. Collect, contain, and dispose of all wash media, residues, and cleaning materials in accordance with all Federal, state, and local regulations.

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026

3.5 Inspection. The Contractor must visually inspect all interior surfaces, including, but not limited to bulkheads, floor and overhead plating, structural members, manhole cover surfaces, fasteners and gasket seating surfaces. Complete the “Tank and Void Assessment Form” (found in the Work Item titled “General Requirements”) and submit via CFR. Electronic PDF version of this form will be furnished by the COR upon request. Include the following, as applicable:

- Structural condition.
- Inaccessible areas, if any.
- Condition of coating, including measurements taken, percentage, location, and type of coating failure.
- Tank level indicator (TLI) and/or float switch condition.
- Sounding tube and striker plate condition.
- Suction and discharge piping condition.
- Fastener material (stainless steel) and condition.
- Anodes (as applicable).

3.6 Closing. The Contractor must ensure that the compartment(s) remain open for at least 24 hours after completion of any KO-authorized tank repairs and preservation. Notify the COR at least 24 hours prior to closing the compartment(s) and ensure tank closure is accomplished in the presence of the Coast Guard Inspector. After satisfactory inspection by the Coast Guard Inspector, and completion of all authorized repairs, close the manhole cover(s) with new gasket material conforming to ASTM D1330 and new cotton grommets on each stud (as applicable).

3.6.1 The Contractor must renew 100% of nylon insert/nylock nuts and washers.

NOTE

Coast Guard personnel will operate all shipboard machinery and equipment.

3.7 Operational test, post repairs. After completion of work and in the presence of the Coast Guard Inspector, the Contractor must thoroughly test and demonstrate the equipment listed below to be in satisfactory operating condition. Submit a CFR.

- TLIs

3.8 Ultrasonic thickness (UT) measurement. The Contractor must take a total of 50 UT measurements of tank plating, in locations designated by the Coast Guard Inspector, in accordance with SFLC Std Spec 0740, Appendix C. Use Coast Guard Drawing _____ as guidance. Submit a CFR.

4. NOTES

This section is not applicable to this work item.

WORK ITEM 7: Voids, Accessible, Clean and Inspect**1. SCOPE**

1.1 Intent. This work item describes the requirements for the Contractor to clean and inspect the following void(s):

TABLE 1 - VOIDS

TYPE OF STRUCTURE	LOCATION	CAPACITY - 95% (GALLONS)	LOW SUCTION (GALLONS)
Void	4-76-0-V	N/A	
Void	4-36-0-Q	N/A	
Void	4-5-0-V	N/A	

1.2 Government-furnished property.

None.

2. REFERENCES**COAST GUARD DRAWINGS**

None.

COAST GUARD PUBLICATIONS

Surface Forces Logistics Center Standard Specification 0000 (SFLC Std Spec 0000), 2022,
General Requirements

OTHER REFERENCES

ASTM International (ASTM) D1330, 2015, Standard Specification for Rubber Sheet Gaskets

3. REQUIREMENTS

3.1 General.

3.1.1 CIR.

None.

3.1.2 Tech Rep.

Not applicable.

3.1.3 Protective measures. The Contractor must furnish and install all protective measures in accordance with SFLC Std Spec 0000, paragraph 3.3.3 (Vessel component, space, and equipment protection).

3.1.4 Interferences. The Contractor must handle all interferences in accordance with SFLC Std Spec 0000, paragraph 3.3.5 (Interferences).

NOTE

Coast Guard personnel will operate all shipboard machinery and equipment.

3.2 Operational test, initial. Prior to commencement of work, the Contractor must witness Coast Guard personnel perform an initial operational test of the TLI's for tanks listed in paragraph 1.1 (Intent), to demonstrate existing operational condition. Submit a CFR.

3.3 Cleaning and inspection requirements. to accomplish the following tasks:

3.3.1 Content removal. The Contractor must remove and dispose of all fluids and/or residues in accordance with all applicable Federal, state, and local regulations.

3.3.2 Cleaning. The Contractor must remove access cover(s). Clean the designated structure's interior surfaces free of all foreign materials, such as sediment, sludge and fungal growth. Remove all persistent residues, taking care not to damage the tank coating system. Remove cleaning media and residues continuously from the compartment during the washing process. Remove any residual wash media and wipe up residual moisture with clean lint-free cloths. Collect, contain, and dispose of all wash media, residues, and cleaning materials in accordance with all Federal, state, and local regulations.

3.3.3 Inspection. The Contractor must visually inspect all interior surfaces, including, but not limited to bulkheads, floor and overhead plating, structural members, manhole cover surfaces, fasteners and gasket seating surfaces. Complete the "Tank and Void Assessment Form" (found in the Work Item titled "General Requirements") and submit via CFR. Electronic PDF version of this form will be furnished by the COR upon request. Include the following, as applicable:

- Structural condition.
- Inaccessible areas, if any.
- Condition of coating, including measurements taken, percentage, location, and type of coating failure.
- Tank level indicator (TLI) and/or float switch condition.
- Sounding tube and striker plate condition.

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026

- Suction and discharge piping condition.
- Fastener material and condition.

3.4 Closing. The Contractor must ensure that the compartment(s) remain open for approximately 24 hours after completion of the tasks specified above. Notify the COR at least 24 hours prior to closing the compartment(s) and ensure tank closure is accomplished in the presence of the Coast Guard Inspector. After satisfactory inspection by the Coast Guard Inspector, and completion of all authorized repairs, close the manhole cover(s) with new gasket material conforming to ASTM D1330 and cotton grommets on the studs (as applicable). The Contractor must renew up to 10% of missing or damaged nuts and washers.

NOTE

Coast Guard personnel will operate all shipboard machinery and equipment.

3.5 Operational test, post repairs. After completion of work and in the presence of the Coast Guard inspector, the Contractor must thoroughly test and demonstrate the TLI's for tanks listed in paragraph 1.1 (Intent), to be in satisfactory operating condition. Submit a CFR.

4. NOTES

This section is not applicable to this work item.

WORK ITEM 8: Tanks, Dirty Oil and Waste, Clean and Inspect**1. SCOPE**

1.1 Intent. This work item describes the requirements for the Contractor to clean and inspect the following tank(s):

TABLE 1 – TANKS

TYPE OF TANK	LOCATION	CAPACITY - 95% (GALLONS)	LOW SUCTION (GALLONS)
Dirty Lube Oil	4-32-0-F	450	100
Oily Water	4-48-0-F	795	100

1.2 Government-furnished property.

None.

2. REFERENCES**COAST GUARD DRAWINGS**

None

COAST GUARD PUBLICATIONS

Surface Forces Logistics Center Standard Specification 0000 (SFLC Std Spec 0000), 2022,
General Requirements

OTHER REFERENCES

Society of Automotive Engineers (SAE) Aerospace Material Specification (AMS) C6183, 2019,
Cork and Rubber Composition Sheet; For Aromatic Fuel and Oil Resistant Gaskets

3. REQUIREMENTS

3.1 General.

3.1.1 CIR.

None.

3.1.2 Tech Rep.

Not applicable.

3.1.3 Protective measures. The Contractor must furnish and install all protective measures in accordance with SFLC Std Spec 0000, paragraph 3.3.3 (Vessel component, space, and equipment protection).

3.1.4 Interferences. The Contractor must handle all interferences in accordance with SFLC Std Spec 0000, paragraph 3.3.5 (Interferences).

3.2 The Contractor must remove up to a total of 1000 gallons of waste oil and oily water, to facilitate gas-freeing. Dispose of removed fluids in accordance with all applicable Federal, state, and local regulations.

NOTE

Coast Guard personnel will operate all shipboard machinery and equipment.

3.3 Operational test, initial. Prior to commencement of work, the Contractor must witness Coast Guard Personnel perform an initial operational test of the equipment listed below to demonstrate existing operational condition. Submit a CFR.

- TLI's for tank(s) listed in paragraph 1.1 (Intent)

3.4 Plug log. The Contractor must keep a written record of all plugs put in any tanks vents. A separate list must be kept for each tank being entered.

3.4.1 Ensure that all plugs are removed from each tank upon completion of work in the tank.

3.4.2 Ensure the plug log is available to the Coast Guard inspector when the inspector is performing his close-out inspection on each tank.

NOTE

Vessel may come in with less tank fluid contents than specified above.

3.5 Cleaning requirements. The Contractor must remove tank cover(s) and clean tank interior surfaces free of all foreign materials, such as sediment or sludge, taking care not to damage the coating system (if applicable). Remove cleaning media and residues continuously during the washing process. Remove any residual wash media; and wipe up residual moisture with clean lint-free cloths.

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026

3.6 Tank content and waste disposal. The Contractor must dispose of tank contents and all cleaning fluids in compliance with all applicable Federal, state, and local laws, ordinances and regulations. Document a complete chain of custody record of the removed tank contents and generated wastes, from the vessel to the point of final destination or delivery. Submit document to the COR upon completion of work.

3.7 Inspection. The Contractor must visually inspect all tank interior surfaces, including, but not limited to bulkheads, floor and overhead plating, structural members, manhole cover surfaces, fasteners and gasket seating surfaces. Complete the “Tank and Void Assessment Form” (found in the Work Item titled “General Requirements”) and submit via CFR. Electronic PDF version of this form will be furnished by the COR upon request. Include the following, as applicable:

- Tank structural condition.
- Inaccessible areas.
- Condition of tank coating, including measurements taken, percentage, location, and type of coating failure.
- Tank level indicator (TLI) and/or float switch condition.
- Sounding tube and striker plate condition.
- Suction and discharge piping condition.
- Fastener material and condition (correct fastener material is stainless steel).

3.8 Tank closing. The Contractor must ensure that the tank(s) remain open for at least 24 hours after completion of all authorized repair and preservation procedures. Notify the COR at least 24 hours prior to closing the tank(s) and ensure tank closure is accomplished in the presence of the Coast Guard Inspector. After satisfactory inspection by the Coast Guard Inspector and completion of all authorized repairs, close tank manhole cover(s) with new gasket material conforming to AMS-C-6183.

NOTE

Coast Guard personnel will operate all shipboard machinery and equipment.

3.9 Operational test, post repairs. After completion of work and in the presence of the Coast Guard Inspector, the Contractor must thoroughly test and demonstrate the equipment listed below to be in satisfactory operating condition. Submit a CFR.

- TLI's for tank listed in paragraph 1.1 (Intent)

4. NOTES

4.1 The Coast Guard Inspector will visually inspect the tank interior immediately prior to closing.

WORK ITEM 9: Main Diesel Engine, MDE, Exhaust Piping, Commercial Clean

1. SCOPE

1.1 Intent. This work item describes the requirements for the Contractor to clean the Main Diesel Engine (MDE) exhaust piping system, including the associated stack uptakes.

1.2 Government-furnished property.

None.

2. REFERENCES

COAST GUARD DRAWINGS

Coast Guard Drawing 101 WTGB 259-001, Rev L, Diesel Exhausts & Steam Generator Exhausts
System A & D

COAST GUARD PUBLICATIONS

Surface Forces Logistics Center Standard Specification 0000 (SFLC Std Spec 0000), 2022,
General Requirements

Surface Forces Logistics Center Standard Specification 6310 (SFLC Std Spec 6310), 2022,
Requirements for Preservation of Ship Structures

OTHER REFERENCES

Code of Federal Regulations (CFR) Title 29, Part 1915, 2014, Occupational Safety and Health
Standards for Shipyard Employment

3. REQUIREMENTS

3.1 General.

3.1.1 CIR.

None.

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026

3.1.2 Tech Rep.

Not applicable.

3.1.3 Protective measures. The Contractor must furnish and install all protective measures in accordance with SFLC Std Spec 0000, paragraph 3.3.3 (Vessel component, space, and equipment protection).

3.1.4 Interferences. The Contractor must handle all interferences in accordance with SFLC Std Spec 0000, paragraph 3. (Interferences). Known interferences include, but are not limited to the following:

- Access covers
- Exhaust stack
- MDE
- Piping
- Pipe insulation
- Vent ducting
- Wiring
- Exhaust pipe expansion joints
- Exhaust insulation blankets
-

3.2 Staging or scaffolding, netting. The Contractor must erect suitable staging or scaffolding in accordance with 29 CFR 1915, Subpart E (Scaffolds, Ladders and Other Working Surfaces) to facilitate work, as required.

3.2.1 Rig suitable safety netting, to protect workers during possible falls, and to protect the Engine Room and machinery from falling tools.

3.3 Work plan. The Contractor must develop and submit, to the COR, a plan for collecting and disposing of waste extracted during cleaning process. Ensure that the proposed plan must detail how and where exhaust piping will be disconnected, how entire length of exhaust piping will be divided/sectioned for cleaning, and precautions to protect the MDE. The Contractor must perform this work upon receiving Coast Guard approval of the plan.

NOTE

Coast Guard personnel will operate all shipboard machinery and equipment.

3.4 Operational test, initial. Prior to commencement of work, the Contractor must witness Coast Guard personnel perform an initial operational test of all items or shipboard devices to be disturbed, used, repaired, or altered, to demonstrate existing operational condition. Submit a CFR.

3.5 Cleaning. The Contractor must clean the interior surfaces of the exhaust piping and stack uptakes to the MDE, shown on Coast Guard Drawings 101 WTGB 259-001, to a condition free from soot, tar, and any other foreign matter as follows:

3.5.1 Disconnect the exhaust piping as necessary to facilitate cleaning.

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026

3.5.2 Thoroughly sweep, mechanically clean, and vacuum the interior of each exhaust pipe system, including the mufflers, from the exhaust outlet to the topmost location outside the vessel. Clean all adjacent stack uptake surfaces. Ensure that all tar deposits, soot deposits, and all other surface contaminants are removed.

3.5.3 Remove all debris from the pipe surfaces, stack deck, and Engine Room areas by vacuuming. Dispose of all cleaning materials and generated debris in accordance with all applicable Federal, state, and local regulations.

3.5.4 Reassemble exhaust piping; renew all disturbed flange connection gaskets with suitable high temperature, non-asbestos-containing gasket materials; and renew all disturbed fasteners.



3.6 Inspection and report. The Contractor must perform a visual inspection of the following components; submit a CFR:

- Exhaust stack access hatches, including all associated studs and nuts.
- All cleaned exhaust stack surfaces.
- All exhaust expansion joints, including associated bolts.

3.6.1 Following cleaning of the interior of each exhaust pipe system, the Contractor must demonstrate completeness of the cleaning process to the Coast Guard Inspector, showing that the entire length of exhaust piping cleaned according to the work plan.

3.7 Touch-up preservation. The Contractor must prepare and coat all new and disturbed surfaces to match existing adjacent surfaces in accordance with SFLC Std Spec 6310, (Touch-ups and minor coating repairs.)

NOTE

Coast Guard personnel will operate all shipboard machinery and equipment.

3.8 Operational test, post repairs. After completion of work, the Contractor must thoroughly test, in the presence of the Coast Guard Inspector and demonstrate all items or shipboard devices that have been disturbed, used, repaired, altered, or installed to be in satisfactory operating condition. Submit a CFR

4. NOTES

This section is not applicable to this work item.

WORK ITEM 10: Ship Service Diesel Generator (SSDG) Exhaust Piping, Commercial Clean

1. SCOPE

1.1 Intent. This work item describes the requirements for the Contractor to clean the Ship Service Diesel Generator (SSDG) exhaust piping.

1.2 Government-furnished equipment.

None.

2. REFERENCES

COAST GUARD DRAWINGS

Coast Guard Drawing 101 WTGB 259-001, Rev L, Diesel Exhausts & Steam Generator Exhausts System A & D

COAST GUARD PUBLICATIONS

Surface Forces Logistics Center Standard Specification 0000 (SFLC Std Spec 0000), 2022, General Requirements

Surface Forces Logistics Center Standard Specification 6310 (SFLC Std Spec 6310), 2022, Requirements for Preservation of Ship Structures

OTHER REFERENCES

Code of Federal Regulations (CFR) Title 29, Part 1915, Jul 2008, Occupational Safety and Health Standards for Shipyard Employment

3. REQUIREMENTS

3.1 General.

3.1.1 CIR.

None.

3.1.2 Tech Rep.

Not applicable.

3.1.3 Protective measures. The Contractor shall furnish and install suitable covering to seal off and protect all non-affected surfaces/equipment and spaces in the vicinity of the work area against contamination during the performance of work. Upon completion of work, remove protective material and inspect for the presence of contamination. Clean all equipment and spaces, contaminated due to improper protection, to original condition of cleanliness.

3.1.4 Interferences. The Contractor shall be aware that interferences in way of work include, but are not limited to the below-listed. Handle all interferences in accordance with SFLC Std Spec 0000, paragraph 3.3.5 (Interferences):

- Access covers.
- Exhaust stack.
- SSDG.
- Vent ducting.
- Wiring.
- Exhaust pipe expansion joints.
- Exhaust insulation blankets.
-

3.1.5 Safety precaution. The Contractor shall rig suitable safety netting, to protect workers during possible falls, and to protect the Engine Room and machinery from falling tools.

3.1.6 Access openings.

Not applicable.

3.2 Work plan. The Contractor shall develop and submit to the COTR, a plan for collecting and disposing of waste extracted during cleaning process. Ensure that the proposed plan shall detail how and where exhaust piping will be disconnected, how entire length of exhaust piping will be divided/sectioned for cleaning, and precautions to protect the SSDG. The Contractor shall perform this work upon receiving Coast Guard approval of the plan.

3.3 Operational test - initial. Prior to commencement of work, the Contractor shall witness an operational pre-test (by Coast Guard personnel) of the exhaust stack system, to demonstrate existing operational condition. Submit a CFR.

3.4 Cleaning. The Contractor shall clean the interior surfaces of the exhaust piping to the SSDG, shown on Coast Guard Drawing(s) 101 WTGB 259-001, to a condition free from soot, tar, and any other foreign matter as follows:

3.4.1 Disconnect the exhaust piping as necessary to facilitate cleaning.

3.4.2 Thoroughly sweep, mechanically clean, and vacuum the interior of each exhaust pipe system, including the mufflers, from the exhaust outlet to the topmost location outside the vessel. Ensure that all tar deposits, soot deposits, and all other surface contaminants are completely removed.

3.4.3 Upon completion of cleaning, do the following:

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026

3.4.3.1 Remove all debris from the pipe surfaces, stack deck, and Engine Room areas by vacuuming. Dispose of all cleaning materials and generated debris in accordance with all applicable Federal, state, and local regulations.

3.4.3.2 Reassemble exhaust piping; renew all disturbed flange connection gaskets with suitable high temperature, non-asbestos-containing gasket materials; and renew all disturbed fasteners.

3.5 Inspection and report. The Contractor shall perform a visual inspection of the following components; submit a CFR:

- Exhaust stack access hatches, including all associated studs and nuts.
- All cleaned exhaust stack surfaces.
- All exhaust expansion joints, including associated bolts.

3.6 Touch-up preservation. The Contractor shall prepare and touch-up coat all disturbed surfaces to match existing adjacent surfaces in accordance with SFLC Std Spec 6310, Appendix B (Cutter and Boat Interior Painting Systems).

3.7 Operational test – post repairs. After completion of work, the Contractor shall witness an operational test (by Coast Guard personnel) of the exhaust stack system to prove satisfactory operating condition. Submit a CFR.

4. NOTES

This section is not applicable to this work item.

WORK ITEM 11: Boiler Exhaust Stack Uptakes, Commercial Clean

1. SCOPE

1.1 Intent. This work item describes the requirements for the Contractor to clean the Boiler exhaust stack uptakes.

1.2 Government-furnished property.

None.

2. REFERENCES

COAST GUARD DRAWINGS

Coast Guard Drawing 101 WTGB 259-001, Rev L, Diesel Exhausts & Steam Generator Exhausts System A & D

COAST GUARD PUBLICATIONS

Surface Forces Logistics Center Standard Specification 0000 (SFLC Std Spec 0000), 2022, General Requirements

Surface Forces Logistics Center Standard Specification 6310 (SFLC Std Spec 6310), 2022, Requirements for Preservation of Ship Structures

OTHER REFERENCES

None

3. REQUIREMENTS

3.1 General.

3.1.1 CIR.

None.

3.1.2 Tech Rep.

Not applicable.

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026

3.1.3 Protective measures. The Contractor must furnish and install all protective measures in accordance with SFLC Std Spec 0000, paragraph 3.3.3 (Vessel component, space, and equipment protection).

3.1.4 Interferences. The Contractor must handle all interferences in accordance with SFLC Std Spec 0000, paragraph 3.3.5 (Interferences). Known interferences include, but are not limited to following:

- Access covers.
- Exhaust stack.
- Boiler.
- Exhaust pipe expansion joints.
- Exhaust insulation blankets.
-

3.2 Safety precaution. The Contractor must rig suitable safety netting, to protect workers during possible falls, and to protect the Engine Room and machinery from falling tools.

NOTE

Coast Guard personnel will operate all shipboard machinery and equipment.

3.3 Operational test, initial. Prior to commencement of work, the Contractor must witness Coast Guard personnel perform an initial operational test of all items or shipboard devices to be disturbed, used, repaired, or altered, to demonstrate existing operational condition. Submit a CFR.

3.4 Cleaning. The Contractor must clean the interior surfaces of the exhaust piping to the Boiler, shown on Coast Guard Drawing(s) 101 WTGB 259-001, to a condition free from soot, tar, and any other foreign matter as follows:

3.4.1 Disconnect the exhaust piping as necessary to facilitate cleaning.

3.4.2 Thoroughly sweep, mechanically clean, and vacuum the interior of each exhaust pipe system, including the mufflers, from the exhaust outlet to the topmost location outside the vessel. Ensure that all tar deposits, soot deposits, and all other surface contaminants are completely removed.

3.4.3 Upon completion of cleaning, do the following:

3.4.3.1 Remove all debris from the pipe surfaces, stack deck, and Engine Room areas by vacuuming. Dispose of all cleaning materials and generated debris in accordance with all applicable Federal, state, and local regulations.

3.4.3.2 Reassemble exhaust piping; renew all disturbed flange connection gaskets with suitable high temperature, non-asbestos-containing gasket materials; and renew all disturbed fasteners.

3.5 Inspection and report. The Contractor must perform a visual inspection of the following components; submit a CFR:

- Exhaust stack access hatches, including all associated studs and nuts.
- All cleaned exhaust stack surfaces.
- All exhaust expansion joints, including associated bolts.

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026

3.5.1 Following cleaning of the interior of each uptake, the Contractor must demonstrate completeness of the cleaning process to the Coast Guard Inspector, showing that the entire length of uptake has been satisfactorily cleaned according to the work plan.

3.6 Touch-up preservation. The Contractor must prepare and coat all new and disturbed surfaces to match existing adjacent surfaces in accordance with SFLC Std Spec 6310, paragraph 3.1.13 (Touch-ups and minor coating repairs.)

NOTE

Coast Guard personnel will operate all shipboard machinery and equipment.

3.7 Operational test, post repairs. After completion of work, the Contractor must thoroughly test, in the presence of the Coast Guard Inspector and demonstrate all items or shipboard devices that have been disturbed, used, repaired, altered, or installed to be in satisfactory operating condition. Submit a CFR.

4. NOTES

This section is not applicable to this work item.

WORK ITEM 12: Bubbler Diesel Engine Exhaust Piping, Commercial Clean

1. SCOPE

1.1 Intent. This work item describes the requirements for the Contractor to clean the bubbler diesel engine exhaust piping system, including the associated stack uptakes.

1.2 Government-furnished property.

None.

2. REFERENCES

COAST GUARD DRAWINGS

Coast Guard Drawing 140 WTGB 259-001, Rev -, Diesel Exhaust Systems, Arrangements & Details

Coast Guard Drawing 140 WTGB 259-002, Rev B, Exhaust Modifications to Suit Bubbler Installation

COAST GUARD PUBLICATIONS

Surface Forces Logistics Center Standard Specification 0000 (SFLC Std Spec 0000), 2022, General Requirements

Surface Forces Logistics Center Standard Specification 6310 (SFLC Std Spec 6310), 2022, Requirements for Preservation of Ship Structures

OTHER REFERENCES

Code of Federal Regulations (CFR) Title 29, Part 1915, Jul 2013, Occupational Safety and Health Standards for Shipyard Employment

3. REQUIREMENTS

3.1 General.

3.1.1 CIR.

None.

3.1.2 Tech Rep.

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026

Not applicable.

3.1.3 Protective measures. The Contractor must furnish and install all protective measures in accordance with SFLC Std Spec 0000, paragraph 3.3.3 (Vessel component, space, and equipment protection).

3.1.4 Interferences. The Contractor must handle all interferences in accordance with SFLC Std Spec 0000, paragraph 3.3.5 (Interferences). Known interferences include, but are not limited to the below-listed:

- Access covers.
- Exhaust stack.
- Bubbler diesel engine.
- Exhaust pipe expansion joints.
- Exhaust insulation blankets.

3.1.5 Scaffolding. The Contractor must, in accordance with 29 CFR 1915, Subpart E, erect suitable staging or scaffolding, as required, to facilitate work.

3.1.6 Safety precaution. The Contractor must rig suitable safety netting, to protect workers during possible falls, and to protect the Engine Room and machinery from falling tools.

3.1.7 Work plan. The Contractor must develop and submit, to the COR, a plan for collecting and disposing of waste extracted during cleaning process. Ensure that the proposed plan must detail how and where exhaust piping will be disconnected, how entire length of exhaust piping will be divided/sectioned for cleaning, and precautions to protect the bubbler engine. The Contractor must perform this work upon receiving Coast Guard approval of the plan.

NOTE

Coast Guard personnel will operate all shipboard machinery and equipment.

3.2 Operational test - initial. Prior to commencement of work, the Contractor must witness Coast Guard Personnel perform an initial operational test of the exhaust stack system, to demonstrate existing operational condition. Submit a CFR.

3.3 Cleaning. The Contractor must clean the interior surfaces of the exhaust piping to the bubbler diesel engine, shown on CG Drawings 140 WTGB 259-001 and 140 WTGB 259-002, to a condition free from soot, tar, and any other foreign matter as follows:

3.3.1 Disconnect the exhaust piping as necessary to facilitate cleaning.

3.3.2 Thoroughly sweep, mechanically clean, and vacuum the interior of each exhaust pipe system, including the mufflers, from the exhaust outlet to the topmost location outside the vessel. Ensure that all tar deposits, soot deposits, and all other surface contaminants are completely removed.

3.3.3 Remove all debris from the pipe surfaces, stack deck, and Engine Room areas by vacuuming. Dispose of all cleaning materials and generated debris in accordance with all applicable Federal, state, and local regulations.

3.3.4 Reassemble exhaust piping; renew all disturbed flange connection gaskets with suitable high temperature, non-asbestos-containing gasket materials; and renew all disturbed fasteners.

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026

3.4 Inspection and report. The Contractor must perform a visual inspection of the following components; submit a CFR:

- Exhaust stack access hatches, including all associated studs and nuts.
- All cleaned exhaust stack surfaces.
- All exhaust expansion joints, including associated bolts.

3.5 Touch-up preservation, general. The Contractor must prepare and coat all new and disturbed exterior and interior surfaces, as applicable, to match existing adjacent surfaces in accordance with SFLC Std Spec 6310, paragraph 3.1.13 (Touch-ups and minor coating repairs.)

NOTE

Coast Guard personnel will operate all shipboard machinery and equipment.

3.6 Operational test – post repairs. After completion of work, the Contractor must thoroughly test, in the presence of the Coast Guard Inspector and demonstrate the exhaust stack system to be in satisfactory operating condition. Submit a CFR.

4. NOTES

This section is not applicable to this work item.

WORK ITEM 13: Circuit Breakers (60 Hz), Inspect and Test

1. SCOPE

1.1 Intent. This work item describes the requirements for the Contractor to inspect and test circuit breakers (60 Hz) located on the Main Switchboard.

1.2 Government-furnished property.

None.

2. REFERENCES

COAST GUARD DRAWINGS

Coast Guard Drawing 101-WTGB-320-6, Rev L, Power System One Line Diagram

Coast Guard Drawing 140-WTGB-320-1, Rev L, Power System One-Line Wiring Diagram

COAST GUARD PUBLICATIONS

Coast Guard Technical Publication (TP) 3478, Dec 2020, Manufacturer's Instruction Book-SWBS Group(s) 324

Surface Forces Logistics Center Standard Specification 0000 (SFLC Std Spec 0000), 2022, General Requirements

OTHER REFERENCES

National Electrical Manufacturers Association (NEMA) Std. No. AB4, 2017, Guidelines for Inspection and Preventive Maintenance of Molded Case Circuit Breakers Used in Commercial and Industrial Applications

Underwriters Laboratories Inc. (UL) 489, May 2016, Molded Case Circuit Breaker

3. REQUIREMENTS

3.1 General.

3.1.1 CIR.

None.

3.1.2 Tech Rep.

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026

Not applicable.

3.1.3 Protective measures. The Contractor must furnish and install all protective measures in accordance with SFLC Std Spec 0000, paragraph 3.3.3 (Vessel component, space, and equipment protection).

3.1.4 Interferences. The Contractor must handle all interferences in accordance with SFLC Std Spec 0000, paragraph 3.3.5 (Interferences).

3.2 Inspection requirement. The Contractor must inspect all circuit breakers wire connectors, screws and plating and submit a CFR.

3.2.1 The Contractor must provide skilled technicians, portable instrument standards and all necessary equipment to inspect and test circuit breakers designated in the work item. The Contractor may remove the Circuit Breakers from the vessel to a shoreside test facility. If this is done the Contractor must exercise extreme care in transporting and reinstalling the circuit breakers to original operating condition on Switchboard.

3.2.2 Prior to any wiring disconnection and removal of circuit breakers, the Contractor must record all wiring information, trip setting adjustments, and equipment locations necessary for use in later reinstallation. Retain all mounting and connecting hardware for later reuse. Submit a CFR.

3.2.3 Disconnect and remove the circuit breakers listed in the Table 1. Coordinate the disconnection and removal of the circuit breakers with the COR to minimize disruption of power. Temporarily cover or insulate switchboard or panel board openings created by the removal of circuit breakers to prevent personnel contact with energized conductors.

3.2.4 The Contractor must notify the COR 48 Hours prior to start work on this item.

3.2.5 Surface burn marks and hairline cracks are acceptable but must not deteriorate the mold surface or impair physical strength. Cracks are not permitted in wall section between phase and a ground plane when there is a conducting part in contact with the wall section. Cracks must not exceed 0.75 inch in length, and in no case should be greater than 50 percent of the length of the surface in which the crack appears. Submit a CFR

3.3 Circuit breaker testing. The contractor must test circuit breakers listed in the Table 1 in accordance with the National Electrical Manufacturers Association (NEMA) AB 4 or UL 489 Molded Case Circuit Breakers. The test must include, at a minimum:

- Mechanical Operation
- Insulation Resistance
- Individual Pole Resistance
- Inverse-Time Over current Tripping
- Instantaneous Over current Tripping
- Rated Hold-In Current (Note: Perform this test only on the circuit breakers which are tripping under normal load condition. The COR will identify the circuit breakers).

3.4 Circuit breaker data sheet. The contractor must provide data sheet of each circuit breaker testing with the following information:

- Circuit Breaker Model and Serial Number

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026

- Circuit Breaker Service
- Circuit Breaker Visual Condition
- Test Voltage/Test Amperes
- Type of Test/Test Method/Test Date/Name of Test Laboratory
- Result of Testing

3.5 Contractor's option for circuits breaker renewal. The Contractor may elect to renew circuit breakers in lieu of testing (due to high cost of labor for testing or non available nearby testing facilities) at no additional cost to the government. Ensure that all circuit breakers must be UL 489 Certified.

TABLE 1 – CIRCUIT BREAKER LIST

QUANTITY	GENERAL ELECTRIC	DESCRIPTION	SERVICE
1	AKR-7B-30	3 POLE 800 AMP FRAME, 400 AMP TRIP RATING.	SSDG NO.1
1	AKR-5B-30	3 POLE 800 AMP FRAME, 400 AMP TRIP RATING.	SSDG NO.2
1	AKR-5B-30	3 POLE, 800 AMP FRAME, 180 AT	SHORE POWER
1	AKR-5B-30	3 POLE, 800 AMP FRAME, 400 AMP TRIP RATING	FIRE MAIN BUSS
1	TFC 36225	3 POLE, 225 AMP FRAME, 225 AMP INST	PROP EQUIPMENT POWER PANEL
2	TFC 36100	3 POLE, 225 AMP FRAME, 450 AMP INST	STEERING PUMP NO.1 & NO.2
2	TFK 236125	3 POLE, 225 AMP, 125 AT	FIRE PUMP NO.1 & NO.2
2	TFK 236125	3 POLE, 225 AMP, 125 AT	ENGINE ROOM POWER PANEL, AUX M/C POWER PANEL,
2	TFK 236125	3 POLE, 225 AMP, 125 AT	
1	TFK 134C5050	3 POLE, 225 AMP, 100 AT	GALLEY EQMNT POWER PANEL

3.6 Circuit breaker reinstallation. After all testing is complete; reinstall circuit breakers using previously recorded wiring information to its original operating condition and Coast Guard TP 3478.

NOTE

Coast Guard personnel will operate all shipboard machinery and equipment.

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026

3.7 Operational test - general. After completion of work, the Contractor must thoroughly test, in the presence of the Coast Guard Inspector and demonstrate all items or shipboard devices that have been disturbed, used, repaired, altered, or installed to be in satisfactory operating condition. Submit a CFR.

3.7.1 Operate each Circuit Breaker “ON” and “OFF” several times to exercise the circuit breaker and ensure that mechanical linkages are free.

3.7.2 Direction of Rotation Test – Perform a direction of rotation test on each new and disturbed three-phase motor circuit.

4. NOTES

This section is not applicable to this work item.

WORK ITEM 14: Vent Ducts, Engine And Motor Room, All, Commercial Cleaning

1. SCOPE

1.1 Intent. This work item describes the requirements for the Contractor to clean and inspect the designated shipboard ventilation systems.

1.2 Government-furnished property.

None.

2. REFERENCES

COAST GUARD DRAWINGS

Coast Guard Drawing 101 WTGB 514-002, Rev X, Ventilation & A/C Arrangements & Details
Coast Guard Drawing FL 3801-67, Rev B, Sheets 1 through 10 of 50 (General Notes – Ductwork)
and Sheet 39 (Handholes for W.T. and N.W.T. Ducts)

COAST GUARD PUBLICATIONS

Surface Forces Logistics Center Standard Specification 0000 (SFLC Std Spec 0000), 2022,
General Requirements
Surface Forces Logistics Center Standard Specification 5100 (SFLC Std Spec 5100), 2022, Clean
Shipboard Ventilation Systems
Coast Guard Technical Publication (TP) 3456, 2001, Ship Information Book, Section B

OTHER REFERENCES

None

3. REQUIREMENTS

3.1 General.

3.1.1 CIR.

None.

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026

3.1.2 Tech Rep.

Not applicable.

3.1.3 Protective measures. The Contractor must furnish and install all protective measures in accordance with SFLC Std Spec 0000, paragraph 3.3.3 (Vessel component, space, and equipment protection).

3.1.3.1 Install filter medium at the terminal ends of all supply vent ducting to prevent any residual foreign mater from blowing into the engine room spaces.

3.1.4 Interferences. The Contractor must handle all interferences in accordance with SFLC Std Spec 0000, paragraph 3.3.5 (Interferences). Known interferences include, but are not limited to the following:

- Ducting screens.
- Electric pre-heaters.
- Overhead sheathing/panels.
- Ventilation covers..

NOTE

Coast Guard personnel will operate all shipboard machinery and equipment.

3.2 Operational test, initial. Prior to commencement of work, the Contractor must witness Coast Guard personnel perform an initial operational test of the ventilation systems included in this work item, to demonstrate existing operational condition. Submit a CFR.

3.3 Cleaning requirements. The Contractor must clean and inspect the following ventilation systems, shown on Coast Guard Drawing 101 WTGB 514-002, FL 3801-67 and TP 3456, in accordance with SFLC Std Spec 5100. Submit a CFR.

TABLE 1 – ENGINE ROOM

SYSTEM LOCATION	TYPE
Engine Room (01-49-1)	Supply
Motor Room (1-49-1)	Supply

3.3.1 The Contractor must clean the exhaust ventilation ducting up to and including the discharge of the engine room exhaust fans. The Contractor is not expected to clean the exhaust stack plenum area.

NOTE

Past experience has shown that the engine room exhaust ventilation systems have accumulated oils and greases and systems are coated with a very sticky and very thick sludge. Take this into consideration in the bid.

3.3.2 Disassemble the exhaust system as required to clean all sections of the exhaust system.

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026

3.3.2.1 After cleaning, reassemble vent ducting using new gaskets and fasteners.

3.3.3 Prior to reassembling the vent systems, visually inspect the systems in the presence of the Coast Guard Inspector. Verify that the vent systems are clean and oil and build up free. The Contractor must use video probe equipment to allow viewing the internal surfaces of all vent ducting.

3.4 Notification. The Contractor must give written notification to the COR 48 hours before starting ventilation cleaning work.

NOTE

Coast Guard personnel will operate all shipboard machinery and equipment.

3.5 Operational test, post repairs. After completion of work, the Contractor must thoroughly test, in the presence of the Coast Guard Inspector and demonstrate the ventilation systems disturbed to be in satisfactory operating condition. Submit a CFR.

4. NOTES

This section is not applicable to this work item.

WORK ITEM 15: Vent Ducts, Galley and Pantry Room, All, Commercial Cleaning

1. SCOPE

1.1 Intent. This work item describes the requirements for the Contractor to clean and inspect the designated shipboard ventilation systems.

1.2 Government-furnished property.

None.

2. REFERENCES

COAST GUARD DRAWINGS

Coast Guard Drawing 101 WTGB 514-002, Rev X, Ventilation & A/C Arrangements & Details
Coast Guard Drawing FL 3801-67, Rev B, Sheets 1 through 10 of 50 (General Notes – Ductwork)
and Sheet 39 (Handholes for W.T. and N.W.T. Ducts)

COAST GUARD PUBLICATIONS

Surface Forces Logistics Center Standard Specification 0000 (SFLC Std Spec 0000), 2022,
General Requirements
Surface Forces Logistics Center Standard Specification 5100 (SFLC Std Spec 5100), 2022, Clean
Shipboard Ventilation Systems
Coast Guard Technical Publication (TP) 3456, 2001, Ship Information Book, Section B

OTHER REFERENCES

None

3. REQUIREMENTS

3.1 General.

3.1.1 CIR.

None.

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026

3.1.2 Tech Rep.

Not applicable.

3.1.3 Protective measures. The Contractor must furnish and install all protective measures in accordance with SFLC Std Spec 0000, paragraph 3.3.3 (Vessel component, space, and equipment protection).

3.1.4 Interferences. The Contractor must handle all interferences in accordance with SFLC Std Spec 0000, paragraph 3.3.5 (Interferences). Known interferences include, but are not limited to the following:

- Ducting screens.
- Electric pre-heaters.
- Overhead sheathing/panels.
- Ventilation covers..

NOTE

Coast Guard personnel will operate all shipboard machinery and equipment.

3.2 Operational test, initial. Prior to commencement of work, the Contractor must witness Coast Guard Personnel perform an initial operational test of the ventilation systems included in this work item, to demonstrate existing operational condition. Submit a CFR.

NOTE

It is recommended that the Contractor conduct a ship check to verify dimensions in the table below.

3.3 Cleaning requirements. The Contractor must clean and inspect the following ventilation systems, shown on Coast Guard Drawing 101 WTGB 514-002, FL 3801-67 and TP 3456, in accordance with SFLC Std Spec 5100. Submit a CFR.

TABLE – 1 SYSTEM LOCATION

SYSTEM LOCATION	TYPE
Galley	Exhaust

3.4 Additional requirements. In addition to the above, the Contractor must accomplish the following:

3.4.1 Notification. Give written notification to the COR, 48 hours before starting ventilation cleaning work.

3.4.2 Additional protective covering. In addition to providing protective covering as specified in SFLC Std Spec 5100, subsection 3.1.3 (Protective measures), provide additional protective covering for all food preparation and serving surfaces in the immediate work area, as applicable, to prevent contamination.

3.4.3 Avoidance of meal preparation and service. Ensure that cleaning of galley ventilation systems is scheduled between 1900 and 0530 so that it WILL NOT interfere with meal preparation and service.

NOTE

Coast Guard personnel will operate all shipboard machinery and equipment.

3.5 Operational test, post repairs. After completion of work, the Contractor must thoroughly test, in the presence of the Coast Guard Inspector and demonstrate the ventilation systems included in this work item to be in satisfactory operating condition. Submit a CFR.

4. NOTES

This section is not applicable to this work item.

WORK ITEM 16: Vent Ducts, All Other, Commercial Cleaning


1. SCOPE

1.1 Intent. This work item describes the requirements for the Contractor to clean and inspect the designated shipboard ventilation systems.

1.2 Government-furnished property.

None.

2. REFERENCES



COAST GUARD DRAWINGS

Coast Guard Drawing 101 WTGB 514-002, Rev X, Ventilation & A/C Arrangements & Details

Coast Guard Drawing FL 3801-67, Rev B, Sheets 1 through 10 of 50 (General Notes – Ductwork)
and Sheet 39 (Handholes for W.T. and N.W.T. Ducts)

COAST GUARD PUBLICATIONS

Surface Forces Logistics Center Standard Specification 0000 (SFLC Std Spec 0000), 2022,
General Requirements

Surface Forces Logistics Center Standard Specification 5100 (SFLC Std Spec 5100), 2022, Clean
Shipboard Ventilation Systems

Coast Guard Technical Publication (TP) 3456, 2001, Ship Information Book, Section B

OTHER REFERENCES

None

3. REQUIREMENTS

3.1 General.

3.1.1 CIR.

None.

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026

3.1.2 Tech Rep.

Not applicable.

3.1.3 Protective measures. The Contractor must furnish and install all protective measures in accordance with SFLC Std Spec 0000, paragraph 3.3.3 (Vessel component, space, and equipment protection).

3.1.4 Interferences. The Contractor must handle all interferences in accordance with SFLC Std Spec 0000, paragraph 3.3.5 (Interferences). Known interferences include, but are not limited to:

- Ducting screens.
- Electric pre-heaters.
- Overhead sheathing/panels.
- Ventilation covers.

NOTE

Coast Guard personnel will operate all shipboard machinery and equipment.

3.2 Operational test, initial. Prior to commencement of work, the Contractor must witness Coast Guard Personnel perform an initial operational test of the ventilation systems included in this work item, to demonstrate existing operational condition. Submit a CFR.

3.3 Cleaning requirements. The Contractor must clean and inspect the following ventilation systems, shown on Coast Guard Drawing 101 WTGB 514-002, FL 3801-67 and TP 3456, in accordance with SFLC Std Spec 5100. Submit a CFR.

TABLE 1 – SYSTEM LOCATIONS

SYSTEM LOCATION	TYPE
ALL BERTHING, OFFICE AND WORK SPACES (A-TEAM: PLEASE LIST ALL SPACES: I.E. DC RM, ET/EM RM)	???
CPO STATEROOM 1-33-1	
CREW BERTHING 1-19-1	
CREW BERTHING 1-19-2	
WARDROOM 1-33-2	
ENGINEERING CONTROL CENTER 1-58-0	
CREW MESS 1-42-2	
CO STATEROOM 01-34-1	
OFFICER STATEROOM 01-34-2	
BRIDGE 1-01-22	
HEAD 1-29-2	
BOSN HOLE 2-8-0	

3.4 Notification. The Contractor must give written notification to the COR, 48 hours before starting ventilation cleaning work.

NOTE

Coast Guard personnel will operate all shipboard machinery and equipment.

3.5 Operational test, post repairs. After completion of work, the Contractor must thoroughly test, in the presence of the Coast Guard Inspector and demonstrate the ventilation systems included in this work item to be in satisfactory operating condition. Submit a CFR.

4. NOTES

This section is not applicable to this work item.

WORK ITEM 17: Compressed Air Receivers and System Valves, All, Clean, Inspect, Hydro and Lift

1. SCOPE

1.1 Intent. The work item describes the requirements for the Contractor to clean, inspect, lift test and hydrostatically test the below designated air receivers and system valves:

TABLE 1: AIR RECEIVERS

SERVICE	DESIGNATION	LOCATION	QTY	OPERATING PRESSURE (psi)
Starting Air		4-61-0-E-142	3	200
Ships Service		4-61-0-E	1	150
Ships Whistle		2-19-0-E	1	150

TABLE 2: SYSTEM VALVES

TYPE	SIZE	DESIGNATION	QTY	SET PRESSURE (psi)
Relief	¾ in	Starting Air, DSA Compressors	2	250
Relief	1 in	Start Air, Receiver	3	265
Relief	½ in	Service Air to Start Air Cross Connect	1	135
Relief		Start Air Tree Engine Room	1	80
Relief		Service Air Tree Engine Room	1	50
Relief		Service Air Leslie	1	40
Relief	½ in	Service Air Receiver	1	135
Relief	½ in	Service Air Compressor	1	135
Relief		Service Air Above Boiler	1	30

1.2 Government-furnished property.

None.

2. REFERENCES

COAST GUARD DRAWINGS

Coast Guard Drawing 140 WTGB 551-001, Rev -, Compressed Air System Diagram

COAST GUARD PUBLICATIONS

Surface Forces Logistics Center Standard Specification 0000 (SFLC Std Spec 0000), 2022, General Requirements

Surface Forces Logistics Center Standard Specification 0740 (SFLC Std Spec 0740), 2022, Welding and Allied Processes

Surface Forces Logistics Center Standard Specification 6310 (SFLC Std Spec 6310), 2022, Requirements for Preservation of Ship Structures

OTHER REFERENCES

American Society of Mechanical Engineers (ASME) B16.34, 2025, Valves-Flanged, Threaded, and Welding End

American Society for Testing and Materials (ASTM) International F1508, 2021, Standard Specification for Angle Style, Pressure Relief Valves for Steam, Gas, and Liquid Services

Manufacturers Standardization Society of the Valve and Fittings Industry (MSS) SP-61, 2019 Edition, Pressure Testing Of Valves

Manufacturers Standardization Society of the Valve and Fittings Industry (MSS) SP-67, 2022 Edition, Butterfly Valves

Manufacturers Standardization Society of the Valve and Fittings Industry (MSS) SP-72, 2010 Edition, Ball Valves with Flanged or Butt-Welding Ends for General Service

Manufacturers' Standardization Society of the Valve and Fittings Industry (MSS) SP-80, 2019 Edition, Bronze Gate, Globe, Angle and Check Valves

3. REQUIREMENTS

3.1 General.

3.1.1 CIR. The Contractor must submit a CIR for the inspections listed in the following paragraph(s):

None.

3.1.2 Tech Rep.

Not applicable.

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026

3.1.3 Protective measures. The Contractor must furnish and install all protective measures in accordance with SFLC Std Spec 0000, paragraph 3.3.3 (Vessel component, space, and equipment protection).

3.1.4 Interferences. The Contractor must handle all interferences in accordance with SFLC Std Spec 0000, paragraph 3.3.5 (Interferences). Known interferences include, but are not limited to the following:

- Piping system.

NOTE

Coast Guard personnel will operate all shipboard machinery and equipment.

3.1.5 Operational test - initial. Prior to commencement of work, the Contractor must witness Coast Guard personnel perform an initial operational test of the compressed air system, to demonstrate existing operational condition. Submit a CFR.

3.2 Air receiver cleaning and inspection. The Contractor must clean and inspect each designated air receiver in paragraph 1.1 (Intent) as follows.

3.2.1 Blowdown the air receivers and collect the blowdown (condensate) into a separate container for inspection.

3.2.2 Visually inspect the blowdown (condensate) under a bright white light for oil or particulate contamination. Clean and visually inspect the internal and external surfaces of the air receiver for signs of corrosion, pitting, and other damage. Submit a CFR.

3.3 Hydrostatic test. The Contractor must perform a hydrostatic test of the designated air receiver(s) in accordance with SFLC Std Spec 0740, Appendix C and manufacturer's recommended procedures. In the event a test pressure is not listed on the applicable drawing, test to 1-1/2 times the nominal operating pressure and hold for five minutes. Refer to Coast Guard Drawing 140 WTGB 551-001 for guidance. Submit a CFR.

3.3.1 To hydrostatic test, isolate the air receiver by disconnecting all piping, relief valves, and pressure switches. Install pipe plugs/caps, to prevent backflow into compressors and other system components.

3.3.2 Hydrostatically test the air receiver(s) using clean fresh water. Ensure zero leakage from or permanent deformation of pressure-containing parts by repairing all leaks, deformations, and discrepancies.

3.3.3 Instruments and equipment that might be damaged by clean fresh water must be excluded from hydrostatic pressure test.

3.3.4 After testing, drain and thoroughly dry the air receivers with warm air. Dispose of testing fluids in accordance with all applicable Federal, state, and local regulations. Reconnect all disconnected piping and restore system. Renew any disturbed gaskets.

WARNING

Do not drain any fluids, including fresh water, into any space, bilge, or exterior location.

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026

3.3 NDE. The Contractor must perform NDE of the designated air receiver(s) in accordance with SFLC Std Spec 0740, Appendix C, and the following. Submit CFR.

3.3.1 Magnetic particle (MT) inspection. For carbon steel receivers, perform magnetic particle (MT) inspection on external weld connections in two directions with an AC yoke. Extent of inspection must be minimum 90% of total weld length. For non-ferrous receivers, perform dye penetrant (PT) inspection instead of MT.

3.3.2 Ultrasonic (UT) inspection. Perform ultrasonic thickness measurements at the intersections of a 6-inch by 6-inch grid over the entire surface of the air receiver, including the heads. Any area of visible corrosion on the receiver must be measured near the center of the area. Localized areas of wall thinning must be continuously scanned to their extremities to ensure that the deepest area of thinning has been measured. Submit sketch and data sheet detailing all UT thickness locations and measurements.

3.4 Contractor's option for valve renewal. The Contractor may, at no additional cost to the Government, opt to renew valves designated for inspection and testing if preferable for the Contractor. If the Contractor elects to renew valves, the Contractor must ensure the following:

- New valves are commercial-standard type valves, conforming to the applicable standard listed in Table 1(Valve Standards).
- New valves must be equivalent (including identical material) to the valve being renewed.

TABLE 1 - VALVE STANDARDS

VALVE TYPE	INDUSTRY STANDARD
Steel Valves	MSS SP-61
Butterfly Valve	MSS SP-67
Ball Valves, Flanged or Butt-Welded Ends	MSS SP-72
Bronze Gate, Globe, Angle and Check Valves	MSS SP-80
Angle Style. Pressure Relief Valves	ASTM F1508
All others	ASME B16.34

3.4.1 Visually inspect the piping and mounting arrangements; and submit a CFR detailing any required modifications to accommodate the new valve(s).

3.4.2 Provide original documentation to the COR certifying each valve has been satisfactorily shop-tested. Documentation must include the set pressure, date of inspection / test, and testing facility.

3.5 Valve inspection and testing. The Contractor must inspect and test each designated air system valve as follows. Refer to Coast Guard Drawing 140 WTGB 551-001 for guidance.

3.5.1 Relief valves. Disassemble as required, and visually inspect all parts for defects and deterioration. Submit a CFR.

3.5.1.1 Perform a lifting test on each relief valve in accordance with manufacturer's recommendations and ASME PTC 25. Ensure that each valve seats cleanly after pressure relief (without simmering), and with no allowable leakage.

3.5.1.2 Adjust the relief pressure on the designated relief valve as necessary to obtain the specified lifting pressure. After adjustment, perform a final check to confirm each relief valve's lifting pressure in the

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026

presence of the Coast Guard Inspector. After successful confirmation, install the relief valves. Renew all O-rings and gaskets. Submit a CFR.

3.5.2 Pressure reducing valves. Disassemble as required, and visually inspect all parts for defects and deterioration. Submit a CFR.

3.5.2.1 Adjust the setting on the designated reducing valve as necessary to obtain the specified pressure setting.

3.5.2.2 After adjustment, perform a final check to confirm each reducing valve's ability to maintain set pressure in the presence of the Coast Guard Inspector. After successful confirmation, install the pressure reducing valves. Renew all O-rings and gaskets. Submit a CFR.

3.6 Valve reinstallation/installation. Upon completion of all authorized work, the Contractor must accomplish the following:

- Remove and dispose of all blank flanges and associated gaskets.
- Reinstall/install all overhauled and new valves with new gaskets.
- Renew all missing or damaged valve label plates.
- Renew all bolting hardware.

3.7 Touch-up preservation, general. The Contractor must prepare and coat all new and disturbed surfaces to match existing adjacent surfaces in accordance with SFLC Std Spec 6310, paragraph 3.1.13 (Touch-ups and minor coating repairs.)

3.8 Data plates- valve. The Contractor must affix an anodized aluminum test data plate with lock wire to each valve. The data plate must be engraved with ¼-inch high letters, stating the following:

- Valve number / designation
- Set pressure (if applicable)
- Date of inspection / test.

3.9 Documentation. The Contractor must provide documentation to the Coast Guard Inspector certifying each valve tested. Documentation must include the valve number / designation, set pressure, date of inspection / test, and testing facility.

NOTE

Coast Guard personnel will operate all shipboard machinery and equipment.

3.10 Operational test – post repairs. After completion of work, the Contractor must thoroughly test, in the presence of the Coast Guard Inspector and demonstrate the compressed air system to be in satisfactory operating condition. Submit a CFR.

3.11 Surface preservation. The Contractor must prepare and coat the receiver exterior surfaces, using the system specified for “Machinery, Operating Temperatures Under 200 °F” in SFLC Std Spec 6310, Appendix B (Cutter and Boat Interior Painting Systems). Select finish/top coat color to match previous paint scheme.

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026

3.12 Data plates- air receiver. The Contractor must affix an anodized aluminum test data plate with epoxy resin cement to each air receiver. The data plate must be engraved with 1/4-inch high letters, stating the following:

- Receiver name / number.
- Hydrostatic test pressure.
- Date of inspection / test.
- Testing facility.

3.12 Data plates- air receiver. The Contractor must affix an anodized aluminum test data plate with epoxy resin cement to each air receiver. The data plate must be engraved with 1/4-inch high letters, stating the following:

- Receiver name / number.
- Hydrostatic test pressure. Transpose test pressure, date of last hydro and testing facility name from existing label plate (if available).
- Type of NDE performed.
- Date of NDE.
- NDE facility.

3.13 Documentation. The Contractor must provide documentation to the Coast Guard Inspector certifying each air receiver tested. Documentation must include the receiver name / number, method of testing, hydrostatic test pressure (if applicable), date of inspection / test, and testing facility.

4. NOTES

4.1 Air receiver definition. An air receiver is a pressure vessel for the storage of air at 600 psig and below.

WORK ITEM 18: Vertical Capstan, Inspect and Service

1. SCOPE

1.1 Intent. This work item describes the requirements for the Contractor to inspect and service the Vertical Capstan.

1.2 Government-furnished property.

None.

2. REFERENCES

COAST GUARD DRAWINGS

None.

COAST GUARD PUBLICATIONS

Coast Guard Technical Publication (TP) 3483, SWBS Groups 580-583, Feb 2012, Vertical Capstan

Surface Forces Logistics Center Standard Specification 0000 (SFLC Std Spec 0000), 2022, General Requirements

Surface Forces Logistics Center Standard Specification 3020 (SFLC Std Spec 3020), 2022, Overhaul AC Electrical Motors

Surface Forces Logistics Center Standard Specification 5000 (SFLC Std Spec 5000), 2022, Auxiliary Machine Systems

OTHER REFERENCES

None.

3. REQUIREMENTS

3.1 General.

3.1.1 CIR. The Contractor must submit a CIR for the inspections listed in the following Table I tasks:

- Task #1.
- Task #3.
- Task #5.

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026

3.1.2 Tech Rep.

Not applicable.

3.1.3 Protective measures. The Contractor must furnish and install all protective measures in accordance with SFLC Std Spec 0000, paragraph 3.3.3 (Vessel component, space, and equipment protection).

3.1.4 Interferences. The Contractor must handle all interferences in accordance with SFLC Std Spec 0000, paragraph 3.3.5 (Interferences).

3.2 Inspection and repair particulars. The Contractor must perform the work described herein in accordance with SFLC Std Spec 5000 and TP-3483, SWBS 580-583.

				ADDITION REQUIREMENTS	
#	TASK TYPE	QTY	COMPONENT OR ASSEMBLY	APPENDIX AND PARA. FROM SFLC STD SPEC 5000	OTHER
1	Operate and Inspect	1	Capstan Assembly	3.2.1 (Operate and inspect)	Submit a CIR
2	Service and Inspect	1	Capstan Head Shaft Assembly	3.2.2 (Service and inspect)	Remove capstan head and clean, inspect: shaft, bearing, coupling. Inspect keys and keyways for damage, cracks, and excessive wear. Renew seals and gaskets. Submit a CFR.
3	Disassemble and Inspect	1	Electric brake	D2.3(Brakes and clutches)	Submit a CFR.
4	Overhaul and Preserve	1	Electric Motor	3.2.4 (Preservation)	Perform requirements in paragraphs 3.1 thru 3.4.3 of SFLC Std Spec 3020. Submit a CFR, for all inspections required in SFLC Std Spec 3020.
5	Disassemble and Inspect	1	Gear Reducer	D2.4 (Open gearing and gear reducers)	Check runout of shaft (0.002" TIR max allowable). Inspect keys and keyways for damage, cracks, excessive wear. Inspect thrust and tapered roller bearings for excessive wear, deterioration. Inspect gear teeth for damage, cracks, excessive wear. Renew seals and gaskets. Submit a CFR.

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026

				ADDITION REQUIREMENTS	
#	TASK TYPE	QTY	COMPONENT OR ASSEMBLY	APPENDIX AND PARA. FROM SFLC STD SPEC 5000	OTHER
6	NDE	1	Capstan Assembly And Foundation	3.235 (NDE)	Weld joints to NDE: All joints attaching capstan foundations to deck.
7	Preserve	1	Capstan Assembly And Foundation	3.2.4 (Preservation)	Preservation to include: windlass assembly housing and foundation and the motor casing, and gear reducer, and all other previously painted associated components surfaces. Select the following top coat colors: + Spar (10371) for equipment surfaces. + Black (17038) for foundation surfaces.
8	Groom and lubricate	1	Capstan Assembly	3.2.6 (Groom and lubrication)	
9	Operational Test	1	Capstan Assembly	B2.6 (Capstans)	Submit a CFR.

3.3 Special requirements for various components. If a Change Request has been authorized for additional work on any of the components listed in Table I below, the Contractor must refer to the corresponding Appendix or paragraph of SFLC Std Spec 5000, as applicable.

TABLE 1 – SPECIAL REQUIREMENTS

COMPONENT	APPENDIX & PARAGRAPH IN SFLC STD SPEC 5000
Fluids	C2.1
Hose assemblies	C2.2
Piping and tubing	C2.3
Valves and manifolds	C2.4
Gages	C2.5
Gas charged accumulators	C2.6
Heat exchangers and fluid coolers	C2.7
Systems	C2.8
Fastener assemblies	D2.1
Wire rope assemblies	D2.2
Brakes and clutches	D2.3
Open gearing and gear reducers	D2.4

4. NOTES

This section is not applicable for this work item.

WORK ITEM 19: Hull Fittings (Mooring and Towing), Inspect and Test - Barge

1. SCOPE

1.1 Intent. This work item describes the requirements for the Contractor to inspect the below designated hull fittings:

1.1.1 General Mooring and Tow Hull Fittings

QTY	DESCRIPTION	LOCATION	APPLICABLE REFERENCE
QTY	DESCRIPTION	LOCATION	APPLICABLE REFERENCE
13	Bitt	FRM's 82 P/S, 76 P/S, 70 P/S, 28 P/S, 19 P/S, 3 Centerline	140-WTGB-582-001
4	Cleat	FRM's 56 P/S, 40 P/S	140-WTGB-582-001
17	Chock	FRM's AFT Centerline, 88 P/S, 78 P/S, 50 P/S, 35P/S, 23 P/S, 19 P/S, 10 P/S, 1 P/S, FWD Centerline	140-WTGB-582-001
1	Tow Bit	FRM 76 Centerline	140-WTGB-582-001

1.2 Government-furnished property.

None.

2. REFERENCES

COAST GUARD DRAWINGS

None

COAST GUARD PUBLICATIONS

Surface Forces Logistics Center Standard Specification 0000 (SFLC Std Spec 0000), 2022,
General Requirements

Surface Forces Logistics Center Standard Specification 0740 (SFLC Std Spec 0740), 2022,
Welding and Allied Processes

Surface Forces Logistics Center Standard Specification 6310 (SFLC Std Spec 6310), 2022,
Requirements for Preservation of Ship Structures

OTHER REFERENCES

None

3. REQUIREMENTS

3.1 General.

3.1.1 CIR.

None.

3.1.2 Tech Rep.

Not applicable.

3.1.3 Protective measures. The Contractor must furnish and install all protective measures in accordance with SFLC Std Spec 0000, paragraph 3.3.3 (Vessel component, space, and equipment protection).

3.1.4 Interferences. The Contractor must handle all interferences in accordance with SFLC Std Spec 0000, paragraph 3.3.5 (Interferences).

3.2 Inspection and test particulars. The Contractor must accomplish the following for designated fitting designated in paragraph 1.1, and submit a CFR.

3.2.1 Visual. Visually inspect all cleaned surfaces for excessive damage, wear, corrosion, distortion, elongation of holes, gouges, pits, and cracks.

3.2.2 NDE. Perform nondestructive examination (NDE) of all designated fittings, including all components and associated welds (including but not limited to deck mounting and base/foundation welds) or other mounting hardware, in accordance with SFLC Std Spec 0740, Appendix C.

3.3 Touch-up preservation. The Contractor must prepare and coat all new and disturbed exterior and interior surfaces, as applicable, to match existing adjacent surfaces in accordance with SFLC Std Spec 6310, paragraph 3.1.13 (Touch-ups and minor coating repairs).

4. NOTES

This section is not applicable to this work item.

WORK ITEM 20: Single Point Davit, Inspect and Service

1. SCOPE

1.1 Intent. This work item describes the requirements for the Contractor to inspect and service the Single Point Davit (SPD) – Vest Model PLA-2000 identified in Table 1.

TABLE 1 – LOCATIONS

SIDE	LEVEL	FRAME
Starboard	01	55

1.2 Government-furnished property.

MTI	ITEM DESCRIPTION	NSN/PN	QTY	ESTIMATED COST (\$/UNIT)
N	Parts Kit, Boat Davit 5-Year Inspection/Overhaul	NSN: 2030-01-F18-5589 PN: 18379	1 ea	22,369.00

*Government-loaned property, which must be returned to the vessel upon completion of the availability.

**New or refurbished equipment that the Government may provide for installation in place of existing equipment.

***Government-furnished property, which is to be supplied by either the vessel or the C4IT Service Center.

2. REFERENCES

COAST GUARD DRAWINGS

None.

COAST GUARD PUBLICATIONS

Coast Guard Technical Publication (TP) 10000, May 2015, Manufacturer's Instruction Book - SWBS Group(s) 583, Single Point Davit, – Model PLA-2000

Surface Forces Logistics Center Standard Specification 0000 (SFLC Std Spec 0000), 2022, General Requirements

Surface Forces Logistics Center Standard Specification 5000 (SFLC Std Spec 5000), 2022, Auxiliary Machine Systems

Surface Forces Logistics Center Standard Specification 6310 (SFLC Std Spec 6310), 2022, Requirements for Preservation of Ship Structures

OTHER REFERENCES

None.

3. REQUIREMENTS

3.1 General.

3.1.1 CIR. The Contractor must submit a CIR for the inspections listed in the following paragraph(s):

- Task #1.

3.1.2 Tech Rep. The Contractor must provide the services of a qualified Tech Rep who is familiar with the Vestdavit SPD model PLA-2000 to do the following, on site:

- Advise on manufacturer's proprietary information pertinent to the system.
- Assist with proper installation, calibration, and operation.
- Ensure compliance with manufacturer's procedures and standards during system disassembly, inspection, and reassembly as applicable.

3.1.3 Protective measures. The Contractor must furnish and install all protective measures in accordance with SFLC Std Spec 0000, paragraph 3.3.3 (Vessel component, space, and equipment protection).

3.1.3.1 Protective measures, hydraulic system(s). Maintain existing hydraulic system cleanliness and take all necessary precautions to prevent the introduction of contaminants into the hydraulic system. Immediately after disconnecting or removing components from the hydraulic system, seal all openings to the rest of the system using caps for externally threaded connection points, bolt-on blanks, or taped-on discs/covers made of durable plastic or sheet-metal that is no less than 1/16-inch thick.

NOTE

Be aware that plastic bags may be used only when arrangement or configuration prevents the use of the other sealing methods specified above.

3.1.4 Interferences. The Contractor must handle all interferences in accordance with SFLC Std Spec 0000, paragraph 3.3.5 (Interferences). Known interferences include, but are not limited to the following:

- Small Boat

3.2 Inspect and service task particulars. The Contractor must refer to CG TP-10000, SWBS 583 as guidance during the performance of the tasks specified in Table 1. Perform all designated tasks in accordance with SFLC Std Spec 5000, as applicable.

TABLE I – RECURRING TASKS

#	TASK TYPE	QTY	COMPONENT OR ASSEMBLY	ADDITION REQUIREMENTS	
				APPENDIX AND PARA. FROM 5000 STD	OTHER
1	Operate and Inspect	1	SPD System	3.2.1 (Operate and Inspect) Appendix A	Submit a CIR
2	Renew	1	Wire puller Wheel 15963	3.2.3	GFP
3	Renew	1	Valve Set 10977	C2.4 (Valves and manifolds)	GFP

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026

				ADDITION REQUIREMENTS	
#	TASK TYPE	QTY	COMPONENT OR ASSEMBLY	APPENDIX AND PARA. FROM 5000 STD	OTHER
4	Renew	1	Valve Set 10980 Line Puller Type WS-1	C2.4 (Valves and manifolds)	GFP
5	Renew	1	Valve Set 15492 11 Refill Valves only	C2.4 (Valves and manifolds)	GFP
6	Renew	1	Pressure Gauge 10254	C2.5 (Gages)	GFP
7	Renew	1	Pressure Gauge 10255	C2.5 (Gages)	GFP
8	Renew	2	Pressure Gauge 10720	C2.5 (Gages)	GFP
9	Renew	1	HPU Filter Return 12887	C2.1.2 (Filtering)	GFP
10	Renew	1	HPU Filter Pressure 12888	C2.1.2 (Filtering)	GFP
11	Renew	1	Breather Filter 11961	C2.1.2 (Filtering)	GFP
12	Renew	4	Hydraulic Hose 12848	C2.2 (Hose assemblies)	GFP
13	Renew	3	Hydraulic Hose 12617	C2.2 (Hose assemblies)	GFP
14	Renew	1	Hydraulic Hose 12845	C2.2 (Hose assemblies)	GFP
15	Renew	1	Hydraulic Hose 17956	C2.2 (Hose assemblies)	GFP
16	Renew	2	Hydraulic Hose 17954	C2.2 (Hose assemblies)	GFP
17	Renew	4	Hydraulic Hose 14445	C2.2 (Hose assemblies)	GFP
18	Renew	2	Hydraulic Hose 17007	C2.2 (Hose assemblies)	GFP
19	Renew	2	Hydraulic Hose 17006	C2.2 (Hose assemblies)	GFP
20	Renew	1	Hydraulic Hose 17951	C2.2 (Hose assemblies)	GFP
21	Renew	1	Hydraulic Hose 17952	C2.2 (Hose assemblies)	GFP
22	Renew	1	Hydraulic Hose 17953	C2.2 (Hose assemblies)	GFP
23	Renew	1	Hydraulic Hose 13539	C2.2 (Hose assemblies)	GFP
24	Renew	1	Hydraulic Hose 17955	C2.2 (Hose assemblies)	GFP
25	Renew	1	Hydraulic Hose 14490	C2.2 (Hose assemblies)	GFP
26	Renew	1	Wire Rope Assembly 15807	D2.2 (Wire rope assemblies)	GFP

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026

				ADDITION REQUIREMENTS	
#	TASK TYPE	QTY	COMPONENT OR ASSEMBLY	APPENDIX AND PARA. FROM 5000 STD	OTHER
27	Renew	1	Grease for Wire Rope 13921	D2.2 (Wire Rope assemblies)	GFP
28	Renew	1	Grease Tape 10174	C2.2.1.2.2 (Weatherization).	GFP
29	Renew	1	Breather Filler Plug 10539	C2.1.2 (Filtering)	GFP
30	Renew	1	Breather Filler Plug 10540	C2.1.2 (Filtering)	GFP
31	Renew	All	System Hydraulic Fluid	C2.1 (Fluids)	
32	Preserve	1	SPD System	3.2.4 (Preservation)	Preservation to include all previously-coated surfaces
33	Groom and Lubricate	1	SPD System	3.2.6 (Groom and Lubricate)	Perform all maintenance specified in TP-10000, Section B
34	Final Operational and Weight Test	1	SPD System	B2.7 (Davits)	After completion of all other work, perform the operational and weight testing for this system. Main Hoist test weights are as follows: • Static: 6,615 (+300, -0) lbs • Dynamic: 4,850 (+200, -0) lbs • Rated: 4,410 (+0, -200) lbs Submit a CFR.
35	Fabricate and Install	1	Label plate	B2.9 (Label Plates)	
36	Weatherize	All	Hose fittings	C2.2.1.2.2 (Weatherization).	

3.3 Special requirements for various components. If a Change Request has been authorized for additional work on any of the components listed in Table II below, the Contractor must refer to the corresponding Appendix or paragraph of SFLC Std Spec 5000, as applicable.

TABLE II – SPECIAL REQUIREMENTS

COMPONENT	APPENDIX & PARAGRAPH IN SFLC STD SPEC 5000
Fluids	C2.1
Hose assemblies	C2.2
Piping and tubing	C2.3
Valves and manifolds	C2.4
Gages	C2.5
Gas charged accumulators	C2.6
Heat exchangers and fluid coolers	C2.7
Systems	C2.8
Fastener assemblies	D2.1
Wire rope assemblies	D2.2

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026

Brakes and clutches	D2.3
Open gearing and gear reducers	D2.4

3.4 Touch-up preservation. The Contractor must prepare and coat all new and disturbed surfaces to match existing adjacent surfaces in accordance with SFLC Std Spec 6310, paragraph 3.1.13 (Touch-ups and minor coating repairs).

4. NOTES

This section is not applicable to this work item.

WORK ITEM 21: Hydraulic Release Pelican Hook, Inspect and Service - Tender

1. SCOPE

1.1 Intent. This work item describes the requirements for the Contractor to inspect and service the hydraulic release pelican hook, locate on the Main deck, frame 45, port and starboard.

1.2 Government-furnished property.

MTI	ITEM DESCRIPTION	NSN/PN	QTY	ESTIMATED COST (\$/UNIT)
N	**Release Hook	Model No. CSRH-50 6E888 (Cage 50194)	2 ea.	8,000.00

**New or refurbished equipment that the Government may provide for installation in place of existing equipment.

2. REFERENCES

COAST GUARD DRAWINGS

Coast Guard Drawing 101 WTGB 589-001, Rev B, Barge Quick Release Modification

COAST GUARD PUBLICATIONS

Surface Forces Logistics Center Standard Specification 0000 (SFLC Std Spec 0000), 2022, General Requirements

Surface Forces Logistics Center Standard Specification 5000 (SFLC Std Spec 5000), 2022, Auxiliary Machine Systems

Surface Forces Logistics Center Standard Specification 6310 (SFLC Std Spec 6310), 2022, Requirements for Preservation of Ship Structures

OTHER REFERENCES

None

3. REQUIREMENTS

3.1 General.

3.1.1 CIR. The Contractor must submit a CIR for the inspections listed in Table 1, as follows:

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026

- Task #1
- Task #2

3.1.2 Tech Rep.

Not applicable.

3.1.3 Protective measures. The Contractor must furnish and install all protective measures in accordance with SFLC Std Spec 0000, paragraph 3.3.3 (Vessel component, space, and equipment protection).

3.1.3.1 Protective measures - hydraulic system. Maintain existing hydraulic system cleanliness; take all necessary precautions to prevent the introduction of contaminants into the hydraulic system. Whenever disconnecting or removing components from the hydraulic system, completely seal all openings to the rest of the system, immediately, using either caps (for externally threaded connection points), bolt-on blanks, or taped-on discs/covers (durable plastic or sheet-metal no less than 1/16-inch thick).

NOTE

Plastic bags may be used only when arrangement or configuration prevents the use of the other sealing methods specified above.

3.2 Inspection and repair particulars. The Contractor must accomplish the following tasks, using Coast Guard Drawing 101 WTGB 589-001 as guidance:

TABLE 1 – RECURRING TASKS

				ADDITIONAL REQUIREMENTS	
#	TASK TYPE (SFLC STD SPEC 5000 PARA. REF.)	QTY	COMPONENT OR ASSEMBLY	APPENDIX AND PARA. FROM SFLC STD SPEC 5000	OTHER
1	Operate and Inspect	2	Hydraulic Release Hook	3.2.1 (Operate and Inspect) Appendix A	Submit a CIR.
2	Disassemble and inspect	2	Hydraulic Release Hook	3.2.3 (Disassemble and inspect)	Submit a CIR.
3	NDE and Preserve	2	Hydraulic Release Hook, including Foundation Mounting Studs	3.2.5 (NDE)	Submit a CFR.
4	Preserve	2	Release Hook, including foundation surfaces	3.2.4 (Preservation)	None
5	Renew	2	Hydraulic Release Hook		Renew only after a Change Request has been authorized. GFP.

4. NOTES

This section is not applicable to this work item.

WORK ITEM 22: Grey Water Holding Tanks, Clean and Inspect**1. SCOPE**

1.1 Intent. This work item describes the requirements for the Contractor to clean and inspect the following tank(s):

TABLE 1 – TANKS

TYPE OF TANK	LOCATION	CAPACITY - 95% (Gallons)	LOW SUCTION (Gallons)
Grey Water Holding	4-32-1-W	1686	100
Grey Water Holding	4-32-2-W	1686	100

1.2 Government-furnished property.

None.

1. REFERENCES**COAST GUARD DRAWINGS**

Coast Guard Drawing 140-WTGB 528-002, Rev -, Sanitary & Deck Drains Diag
Coast Guard Drawing 140-WTGB 528-003, Rev -, Sanitary & Deck Drains A&D
Coast Guard Drawing 140-WTGB 528-004, Rev -, Grey Water Mods & Tank Transition

COAST GUARD PUBLICATIONS

Surface Forces Logistics Center Standard Specification 0000 (SFLC Std Spec 0000), 2022,
General Requirements

OTHER REFERENCES

ASTM International (ASTM) D1330, 2015, Standard Specification for Rubber Sheet Gaskets

3. REQUIREMENTS

3.1 General.

3.1.1 CIR.

None.

3.1.2 Tech Rep.

Not applicable.

3.1.3 Protective measures. The Contractor must furnish and install all protective measures in accordance with SFLC Std Spec 0000, (Vessel component, space, and equipment protection).

3.1.3.1 Plug all inlet and outlet piping in the tank(s) to prevent contaminants from entering. Use plugs with an attached lanyard, ring or other system that will ensure plugs are not lost in the pipe openings.

3.1.4 Interferences. The Contractor must handle all interferences in accordance with SFLC Std Spec 0000, (Interferences). Known interferences include, but are not limited to the following:

- Piping.
- Pump(s).
-

3.2 Plug log. The Contractor must keep a written record of all plugs put in any tank vents. A separate list must be kept for each tank being entered.

3.2.1 Ensure that all plugs are removed from each tank upon completion of work in the tank.

3.2.2 The plug log must be available to the Coast Guard Inspector when the inspector is performing his close-out inspection on each tank.

NOTE

Coast Guard personnel will operate all shipboard machinery and equipment.

3.3 Operational test, initial. Prior to commencement of work, the Contractor must witness Coast Guard personnel perform an initial operational test of all items or shipboard devices to be disturbed, used, repaired, or altered, to demonstrate existing operational condition. Submit a CFR.

3.4 Service disruption. When grey water is disrupted due to Contractor repairs, the Contractor must refer to SFLC Standard Spec 0000 par 3.2.11 to provide required temporary facilities.

3.5 Cleaning. The Contractor must accomplish the following for the tank(s) listed. The Contractor must refer to all references in Section 2 for guidance.

3.5.1 Content removal. Remove and dispose of all contents, fluids, and/or residues in accordance with all applicable Federal, state, and local regulations

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026

3.5.2 Cleaning requirements. Remove manhole cover(s). Clean all tank structure's interior surfaces free of all foreign materials, sediment, and sludge. Remove all persistent residues, taking care not to damage the tank coating system. Remove cleaning media and residues continuously from the tank during the washing process. Remove any residual wash media and wipe up residual moisture with clean lint-free cloths. Collect, contain, and dispose of all wash media, residues, and cleaning materials in accordance with all Federal, state, and local regulations. Clean all tank vent lines. Remove and clean the eductors and level switches inside of the tank(s). Reinstall the eductors and level switches upon completion of tank cleaning. Use new gaskets and o-rings to install/reinstall all removed/disturbed components.

3.6 Inspection. The Contractor must visually inspect all interior surfaces, including, but not limited to bulkheads, floor and overhead plating, structural members, manhole cover surfaces, fasteners and gasket seating surfaces. Submit the "Tank and Void Assessment Form" via CFR (see paragraph 4.2 of the Work Item titled "General Requirements"). Electronic PDF version of this form will be furnished by the COR upon request. Include the following, as applicable:

- Tank structural condition.
- Inaccessible areas.
- Condition of tank coating, including measurements taken, percentage, location, and type of coating failure (not applicable for stainless steel tanks).
- Tank level indicator (TLI), vacuum and/or float switch condition.
- Suction and discharge piping and vent line condition.
- Fastener material (stainless steel) and condition.
- Zinc anode condition (remaining percentage).

3.7 Control panel assembly. The Contractor must open and vacuum clean the control panel assembly. Inspect the control panel assembly for any indications of overheating or loose wiring or connections. Submit a CFR

3.8 Closing. The Contractor must notify the COR at least 24 hours prior to closing the tank(s) and ensure tank closure is accomplished in the presence of the Coast Guard Inspector. After satisfactory inspection by the Coast Guard Inspector, and completion of all authorized repairs, close the manhole cover(s) with new gasket material conforming to ASTM D1330.

3.8.1 Renew 100% of nylon insert/nylock nuts and washers.

NOTE

Coast Guard personnel will operate all shipboard machinery and equipment.

3.9 Operational test, post repairs. After completion of work, the Contractor must thoroughly test, in the presence of the Coast Guard Inspector and demonstrate all items or shipboard devices that have been disturbed, used, repaired, altered, or installed to be in satisfactory operating condition. Submit a CFR.

3.9.1 The Contractor must adjust the set point on each of the vacuum pressure switches (as applicable) to the set points noted previously.

3.9.2 The Contractor must verify operation of the low and high level switches/alarms and that the pumps cycle from lead to lag status during operation. Demonstrate proper operation of tank TLIs to prove satisfactory operating condition.

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026

3.9.3 Upon completion of testing and, in the presence of the Coast Guard Inspector, the Contractor must pump tank(s) to the limit of the ship's installed pumps.

4. NOTES

This section is not applicable to this work item.

WORK ITEM 23: Sewage Holding Tanks, Clean and Inspect**1. SCOPE**

1.1 Intent. This work item describes the requirements for the Contractor to clean and inspect the following tank(s):

TABLE 1 – TANKS

TYPE OF TANK	LOCATION	CAPACITY - 95% (Gallons)	LOW SUCTION (Gallons)
Sewage Vacuum Collection Tank	2-19-0-E	900	100

1.2 Government-furnished property.

None.

2. REFERENCES**COAST GUARD DRAWINGS**

Coast Guard Drawing 140-WTGB 528-002, Rev -, Sanitary & Deck Drains Diag
 Coast Guard Drawing 140-WTGB 528-003, Rev -, Sanitary & Deck Drains A&D
 Coast Guard Drawing 140-WTGB 528-004, Rev -, Grey Water Mods & Tank Transition

COAST GUARD PUBLICATIONS

Surface Forces Logistics Center Standard Specification 0000 (SFLC Std Spec 0000), 2022,
 General Requirements

OTHER REFERENCES

ASTM International (ASTM) D1330, 2015, Standard Specification for Rubber Sheet Gaskets

3. REQUIREMENTS

3.1 General.

3.1.1 CIR.

None.

3.1.2 Tech Rep.

Not applicable.

3.1.3 Protective measures. The Contractor must furnish and install all protective measures in accordance with SFLC Std Spec 0000, (Vessel component, space, and equipment protection).

3.1.3.1 Plug all inlet and outlet piping in the tank(s) to prevent contaminants from entering. Use plugs with an attached lanyard, ring or other system that will ensure plugs are not lost in the pipe openings.

3.1.4 Interferences. The Contractor must handle all interferences in accordance with SFLC Std Spec 0000, (Interferences). Known interferences include, but are not limited to the following:

- Piping.
- Pump(s).
-

3.2 Plug log. The Contractor must keep a written record of all plugs put in any tank vents. A separate list must be kept for each tank being entered.

3.2.1 Ensure that all plugs are removed from each tank upon completion of work in the tank.

3.2.2 The plug log must be available to the Coast Guard Inspector when the inspector is performing his close-out inspection on each tank.

NOTE

Coast Guard personnel will operate all shipboard machinery and equipment.

3.3 Operational test - initial. Prior to commencement of work, the Contractor must witness Coast Guard personnel perform an initial operational test of all items or shipboard devices to be disturbed, used, repaired, or altered, to demonstrate existing operational condition. Submit a CFR.

3.4 Service disruption. When sewage collection service is disrupted due to contractor repairs, the Contractor must refer to SFLC Standard Spec 0000 par 3.2.11 to provide required temporary facilities.

3.5 Cleaning and inspection requirements. The Contractor must accomplish the following for the tank(s) listed in paragraph 1.1 (Intent), referring to all references in Section 2 for guidance:

3.5.1 Content removal. Remove and dispose of all contents, fluids, and/or residues in accordance with all applicable Federal, state, and local regulations

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026

3.5.2 Cleaning requirements. Remove manhole cover(s). Clean all tank structure's interior surfaces free of all foreign materials, sediment, and sludge. Remove all persistent residues, taking care not to damage the tank coating system. Remove cleaning media and residues continuously from the tank during the washing process. Remove any residual wash media and wipe up residual moisture with clean lint-free cloths. Collect, contain, and dispose of all wash media, residues, and cleaning materials in accordance with all Federal, state, and local regulations. Clean all tank vent lines. Remove and clean the eductors and level switches inside of the tank(s). Reinstall the eductors and level switches upon completion of tank cleaning. Use new gaskets and o-rings to install/reinstall all removed/disturbed components.

3.5.3 Inspection. Visually inspect all interior surfaces, including, but not limited to bulkheads, floor and overhead plating, structural members, manhole cover surfaces, fasteners and gasket seating surfaces. Submit the "Tank and Void Assessment Form" via CFR (see paragraph 4.2 of the Work Item titled "General Requirements"). Electronic PDF version of this form will be furnished by the COR upon request. Include the following, as applicable:

- Tank structural condition.
- Inaccessible areas.
- Condition of tank coating, including measurements, percentage, location, and type of coating failure (not applicable for stainless steel tanks).
- Tank level indicator (TLI), vacuum and/or float switch condition.
- Suction and discharge piping and vent line condition.
- Fastener material (stainless steel) and condition.
- Zinc anode condition (remaining percentage).

3.5.4 Control panel assembly. Open and vacuum clean the control panel assembly. Inspect the control panel assembly for any indications of overheating or loose wiring or connections. Submit a CFR

3.6 Closing. The Contractor must notify the COR at least 24 hours prior to closing the tank(s) and ensure tank closure is accomplished in the presence of the Coast Guard Inspector. After satisfactory inspection by the Coast Guard Inspector, and completion of all authorized repairs, close the manhole cover(s) with new gasket material conforming to ASTM D1330.

3.6.1 The Contractor must renew 100% of nylon insert/nylock nuts and washers.

NOTE

Coast Guard personnel will operate all shipboard machinery and equipment.

3.7 Operational test, post repairs. After completion of work, the Contractor must accomplish the following in the presence of the Coast Guard Inspector, and submit a CFR:

3.7.1 Adjust the set point on each of the vacuum pressure switches (as applicable) to the set points noted previously.

3.7.2 Verify operation of the low and high level switches/alarms and that the pumps cycle from lead to lag status during operation. Demonstrate proper operation of tank TLIs to prove satisfactory operating condition.

3.7.3 Upon completion of testing and, in the presence of the Coast Guard Inspector, pump tank(s) to the limit of the ship's installed pumps.

4. NOTES

This section is not applicable to this work item.

WORK ITEM 24: Grey Water Piping, Clean and Flush

1. SCOPE

1.1 Intent. This work item describes the requirements for the Contractor to clean the grey water piping system.

1.2 Government-furnished property.

None.

2. REFERENCES

COAST GUARD DRAWINGS

Coast Guard Drawing 101 WTGB 528-001, Rev L, Sanitary & Deck Drain System Diagram

Coast Guard Drawing 101 WTGB 528-003, Rev C, Grey Water Mods & Tank Transitions

COAST GUARD PUBLICATIONS

Surface Forces Logistics Center Standard Specification 0000 (SFLC Std Spec 0000), 2022,
General Requirements

OTHER REFERENCES

3. REQUIREMENTS

3.1 General.

3.1.1 CIR.

None.

3.1.2 Tech Rep.

Not applicable.

3.1.3 Protective measures. The Contractor must furnish and install all protective measures in accordance with SFLC Std Spec 0000, paragraph 3.3.3 (Vessel component, space, and equipment protection).

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026

3.1.4 Interferences. The Contractor must handle all interferences in accordance with SFLC Std Spec 0000, (Interferences). Known interferences include, but are not limited to the following:

- Grey water pumps
-

3.2 Contamination prevention. The Contractor must take all precautions to prevent contamination of personnel and spaces in accordance with all applicable Federal, state, and local regulations.

3.3 Personnel qualification. The Contractor must ensure that personnel accomplishing this work are qualified and experienced in operating the pressurized water system and handling the chemicals. For each operator/cleaning technician, submit documentation of applicable experience and training obtained within the last twelve months along with the Cleaning Plan (see paragraph 3.5.6.2).

NOTE

Coast Guard personnel will operate all shipboard machinery and equipment.

3.4 Operational test, initial. Prior to commencement of work, the Contractor must witness Coast Guard personnel perform an initial operational test of all items or shipboard devices to be disturbed, used, repaired, or altered, to demonstrate existing operational condition. Submit a CFR.

3.5 Piping hydro jet cleaning. The Contractor must perform the following work:

3.5.1 The Contractor must clean and flush approximately 150 linear feet of grey water system piping, shown on Coast Guard Drawings 101 WTGB 528-001 and 101 WTGB 528-003.

3.5.2 Prior to commencing work, coordinate with the Coast Guard Inspector. Determine required down times for affected piping system. Determine the feasibility/need for the piping system to be split to minimize system down time.

3.5.3 With the aid of ship's force, split the plumbing drain system fore and aft by closing isolation valves in the drainage system. Work on only one section of the plumbing drain system at a time to allow use of toilet and shower facilities in the other section of the system by the ship's duty section.

3.5.4 Using the referenced Coast Guard drawings as guidance, hydro blast the internal surfaces of all of the plumbing drain piping. Hydro blast pressure must be at least 2500 psig at the discharge nozzle in all piping to ensure removal of all salts and scale from piping internal surfaces.

NOTE

Ship's force will provide an assistant to the Contractor to show the Contractor the location of clean-out connections within the plumbing drain system.

3.5.4.1 Open each of the clean out connections as required to clean and hydro blast all of the internal piping within the system. Catch any fluid that drains from the clean out connections when it is opened and clean up any spills using bleach to disinfect the spill after cleaning.

3.5.4.2 It may be necessary for the Contractor to install additional clean-out connections to access all portions of the plumbing drain system. If additional clean-out connections are needed, a separate

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026

specification item in this specification package must be authorized to install additional clean-out connections.

3.5.4.3 Empty and clean all connected grease traps, and dispose of waste in accordance with all Federal laws and regulations.

3.5.4.4 Hydro blast cleaning water may be collected in the ship's sewage system and disposed of via the ship's sewage shore tie connections.

3.5.5 Clean until all of the following conditions are met:

- All visible calcium carbonate deposits, solid deposits, grease and build-up are removed from pipe walls.
- Discharge water from the piping being cleaned is free of all visible scale and deposits.

3.5.5.1 Inspect the piping interior using a borescope in the presence of the COR, to verify that all solid deposits visible to the unmagnified eye have been removed. Continue the cleaning process until all visible solid deposits are removed from the pipe walls.

3.5.6 In the event that hydro blasting alone does not clean piping to required conditions, Contractor must use chemical cleaning methods.

3.5.6.1 Ensure that chemical cleaners do not damage the environment, heat exchanger or the vessel.

3.5.6.2 Submit the written plan for chemical cleaning to the COR for approval 96 hours before work is to commence. The procedure must include products to be used, safety precautions, disposal requirements, sequence of events, etc. Submit a MSDS to the COR for all chemicals proposed for use. Changes to the chemical cleaning plan as written, need to be approved by the COR (and Facilities).

3.5.6.3 Chemical cleaning waste water disposal. Dispose of all cleaning fluids and debris in accordance with all applicable Federal, state, and local regulations. Remove all unused chemicals from USCG property immediately upon completion of work item. Do not drain any fluids (including fresh water) into any space, bilge, or exterior location.

- Sequence of each location that ensures all piping sections will be cleaned and all foreign debris removed.
- Flush twice the volume of the system cleaned with water to include 3 repeated pH tests between 6 and 8. The flushing water shall be collected and disposed by the Contractor.

3.6 Pumps and valves. The Contractor must replace system tank valve(s) with temporary spool piece(s). Visually inspect system pumps and valve(s); and submit a CFR. Upon completion of work, reinstall the removed tank valve(s) with new gaskets.

3.7 Gasket renewal. The Contractor must reinstall all removed valves and fittings with new gasket material conforming to applicable referenced drawings.

NOTE

Coast Guard personnel will operate all shipboard machinery and equipment.

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026

3.8 Operational test, post repairs. After completion of work, the Contractor must thoroughly test, in the presence of the Coast Guard Inspector and demonstrate all items or shipboard devices that have been disturbed, used, repaired, altered, or installed to be in satisfactory operating condition. Submit a CFR.

3.8.1 Leak test. After all system components are reinstalled, the Contractor must test all disturbed piping for leaks, as follows, and submit a CFR:

- Plug all system openings (except the highest) and fill system with water to the point of overflow. Ensure that the water level does not go down (without adding any water) for sufficient time to inspect the entire system (no less than 15 minutes).
- Closely monitor the system for leaks. Repair all leaks detected.
- Repeat test and inspection until no leaks are detected.

4. NOTES

This section is not applicable to this work item.

WORK ITEM 25: Sewage Piping, Clean and Flush

1. SCOPE

1.1 Intent. This work item describes the requirements for the Contractor to clean the sewage piping system.

1.2 Government-furnished property.

None.

2. REFERENCES

COAST GUARD DRAWINGS

Coast Guard Drawing 101 WTGB 528-001, Rev L, Sanitary & Deck Drain System Diagram

Coast Guard Drawing 101 WTGB 528-003, Rev C, Grey Water Mods & Tank Transitions

COAST GUARD PUBLICATIONS

Surface Forces Logistics Center Standard Specification 0000 (SFLC Std Spec 0000), 2022,
General Requirements

OTHER REFERENCES

ASTM International (ASTM) D1330, 2010, Standard Specification for Rubber Sheet Gaskets

3. REQUIREMENTS

3.1 General.

3.1.1 CIR.

None.

3.1.2 Tech Rep.

Not applicable.

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026

3.1.3 Protective measures. The Contractor must furnish and install all protective measures in accordance with SFLC Std Spec 0000, paragraph 3.3.3 (Vessel component, space, and equipment protection).

3.1.4 Interferences. The Contractor must handle all interferences in accordance with SFLC Std Spec 0000, (Interferences). Known interferences include, but are not limited to the following:

- Sewage pumps
- Toilets

3.2 Contamination prevention. The Contractor must take all precautions to prevent contamination of personnel and spaces in accordance with all applicable Federal, state, and local regulations.

3.3 Personnel qualification. The Contractor must ensure that personnel accomplishing this work are qualified and experienced in operating the pressurized water system and handling the chemicals. For each operator/cleaning technician, submit documentation of applicable experience and training obtained within the last twelve months along with the Cleaning Plan.

NOTE

Coast Guard personnel will operate all shipboard machinery and equipment.

3.4 Operational test - initial. Prior to commencement of work, the Contractor must witness Coast Guard personnel perform an initial operational test of all items or shipboard devices to be disturbed, used, repaired, or altered, to demonstrate existing operational condition. Submit a CFR.

3.5 Cleaning plan. Submit the written plan for chemical cleaning to the COR before work is to commence. The procedure must include products to be used, safety precautions, disposal requirements, sequence of events, etc. Submit a MSDS to the COR for all chemicals proposed for use. Changes to the chemical cleaning plan as written, need to be approved by the COR (and Facilities).

CAUTION

Although the Coast Guard prefers pressurized water as the cleaning fluid, the Contractor may propose chemical cleaning as an alternative, providing that the proposed chemical cleaning agent is environmentally safe, suitable for use in marine sewage piping application, and pre-approved by the COR.

The chemicals used in the cleaning (including cleaning chemicals, neutralizing compounds, and defoaming chemicals) must not cause any significant detrimental effects to the sewage piping system or any other system components. Due to the fact that system piping has historically been difficult to clean by pressure washing only, chemical cleaning is usually required to successfully complete the cleaning process.

3.5.1 Procedure requirements. The Contractor must ensure that the procedure includes the following:

- Methods of cleaning.
- All safety precautions required during cleaning operations.
- List of qualified personnel who will operate machinery or handle chemicals (see paragraph 3.3 (Personnel qualification) herein).
- Locations in the sewage piping where cleaning will take place, and any additional fittings necessary.

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026

- Sequence of each location that ensures all piping sections will be cleaned and all foreign debris removed.

3.5.2 Plan submittal. The Contractor must submit the written plan to the COR for approval at least 96 hours prior to commencing cleaning operations. Changes to the chemical cleaning plan as written, need to be approved by the COR (and local Facilities).

3.6 Clean and flush. The Contractor must clean and flush approximately 350 linear feet of sewage system piping (Contractor must be aware sections of sewage piping in the Engine Room are PVC), shown on Coast Guard Drawings 101 WTGB 528-001 and 101 WTGB 528-003.

3.6.1 Pumps and valves. Replace system tank valve(s) with temporary spool piece(s) before cleaning. Visually inspect system pumps and valve(s); and submit a CFR. Upon completion of work, reinstall the removed tank valve(s) with new gaskets.

3.6.2 Cleaning. Continue cleaning until all of the following conditions are met:

- All visible calcium carbonate deposits, solid deposits and build-up are removed from pipe walls.
- Discharge water from the piping being cleaned is free of all visible scale and deposits.

3.6.3 Inspect the piping interior using a borescope in the presence of the COR, to verify that all solid deposits visible to the unmagnified eye have been removed. Continue the cleaning process until all visible solid deposits are removed from the pipe walls.

3.6.4 Flush twice the volume of the system cleaned with water to include 3 repeated pH tests between 6 and 8. The flushing water shall be collected and disposed by the Contractor.

3.7 Waste disposal. The Contractor must dispose of all cleaning fluids and debris in accordance with all applicable Federal, state, and local regulations. Remove all unused chemicals from USCG property immediately upon completion of work item. Do not drain any fluids (including fresh water) into any space, bilge, or exterior location.

3.8 Gasket renewal. The Contractor must reinstall all removed valves and fittings with new gasket material conforming to ASTM D1330.

NOTE

Coast Guard personnel will operate all shipboard machinery and equipment.

3.9 Operational test – post repairs. After completion of work, the Contractor must thoroughly test, in the presence of the Coast Guard Inspector and demonstrate all items or shipboard devices that have been disturbed, used, repaired, altered, or installed to be in satisfactory operating condition. Submit a CFR.

3.9.1 Leak test. After all system components are reinstalled, the Contractor must test all disturbed piping for leaks, as follows, and submit a CFR:

- Plug all system openings (except the highest) and fill system with water to the point of overflow. Ensure that the water level does not go down (without adding any water) for sufficient time to inspect the entire system (no less than 15 minutes).

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026

- Closely monitor the system for leaks. Repair all leaks detected.
- Repeat test and inspection until no leaks are detected.

4. NOTES

This section is not applicable to this work item.

WORK ITEM 26: Tanks, MP Fuel Service, Clean and Inspect - Barge**1. SCOPE**

1.1 Intent. This work item describes the requirements for the Contractor to clean and inspect the following tank(s):

TABLE 1 - FUEL SERVICE TANKS

TYPE OF TANK	LOCATION	CAPACITY - 95% (GALLONS)	LOW SUCTION (GALLONS)
Diesel cargo fuel	2-15-1-FF (Fr 15-40)	15,950	386
Diesel cargo fuel	2-40-1-FF (Fr 40-60)	13,770	427
Diesel service	2-30-2-F (Fr 30-40)	6,889	213

1.2 Government-furnished property.

None.

2. REFERENCES**COAST GUARD DRAWINGS**

Coast Guard Drawing 120 Barge 120-001, Rev B, Longitudinal and Transverse Bulkheads

COAST GUARD PUBLICATIONS

Surface Forces Logistics Center Standard Specification 0000 (SFLC Std Spec 0000), 2022,
General Requirements

Surface Forces Logistics Center Standard Specification 0740 (SFLC Std Spec 0740), 2022,
Welding and Allied Processes

OTHER REFERENCES

Society of Automotive Engineers (SAE) Aerospace Material Specification (AMS) C6183, 2019,
Cork and Rubber Composition Sheet; for Aromatic Fuel and Oil Resistant Gaskets

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026

MIL-DTL-1222, Dec 2000, Studs, Bolts, Screws and Nuts for Applications Where a High Degree of Reliability Is Required

3. REQUIREMENTS

3.1 General.

3.1.1 CIR.

None.

3.1.2 Tech Rep.

Not applicable.

3.1.3 Protective measures. The Contractor must furnish and install all protective measures in accordance with SFLC Std Spec 0000, paragraph 3.3.3 (Vessel component, space, and equipment protection).

3.1.4 Interferences. The Contractor must handle all interferences in accordance with SFLC Std Spec 0000, paragraph 3.3.5 (Interferences). Known interferences include, but are not limited to the below-listed:

- Fuel
- Piping
- Tank access cover

3.1.4.1 The Contractor must remove all remaining tank contents (approximately 2% of original CAPACITY - 95%), after the existing tank contents have been emptied by the vessel's crew until loss of suction (using the vessel's existing transfer systems). Document a complete chain of custody record of the removed tank contents from the vessel to the point of final destination or delivery. Submit document to the COR upon completion of work.

3.1.4.2 Dispose of removed fluids in accordance with all applicable Federal, state, and local regulations (see 4.2 (Tank content restoration)).

3.1.4.2 Stow all fluids in suitable stowage facility, immediately after removal, and re-stow all tank contents, upon completion of work. Contractor must ensure fuel quality is maintained throughout all stages of the process.

NOTE

Vessel may come in with less tank fluid contents than specified above.

NOTE

Coast Guard personnel will operate all shipboard machinery and equipment.

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026

3.2 Operational test, initial. Prior to commencement of work, the Contractor must witness Coast Guard Personnel perform an initial operational test of the equipment listed below to demonstrate existing operational condition. Submit a CFR.

- Designated tank TLIs

3.3 Plug log. The Contractor must keep a written record of all plugs put in any tanks vents. A separate list must be kept for each tank being entered.

3.3.1 Ensure that all plugs are removed from each tank upon completion of work in the tank.

3.3.2 Ensure the plug log is available to the Coast Guard inspector when the inspector is performing his close-out inspection on each tank.

NOTE

Initial and post repair operational tests apply only to tanks that possess TLIs.

3.4 Cleaning requirements. The Contractor must remove tank cover(s) and clean tank interior surfaces free of all foreign materials, such as residual fuel or water, sediment, sludge, rust, or biological growth, taking care not to damage the coating system (if applicable). Remove cleaning media and residues continuously during the washing process. Remove any residual wash media; and wipe up residual moisture with clean lint-free cloths. The Contractor must refer to Coast Guard Drawing 120 Barge 120-001 for guidance.

3.5 Tank content and waste disposal. The Contractor must dispose of residual tank contents and any cleaning fluids in compliance with all applicable Federal, state, and local laws, ordinances and regulations. Document a complete chain of custody record of the removed tank contents and generated wastes, from the vessel to the point of final destination or delivery. Submit document to the COR upon completion of work.

3.6 Inspection. The Contractor must accomplish the following tasks:

3.6.1 Visually inspect all tank interior surfaces, including, but not limited to bulkheads, floor and overhead plating, structural members, manhole cover surfaces, fasteners and gasket seating surfaces. Submit a CFR including the following, as applicable:

- Tank structural condition.
- Inaccessible areas.
- Condition of tank coating, including measurements taken, percentage, location, and type of coating failure (if tank interior surfaces are coated).
- Tank level indicator (TLI) and/or float switch condition, as applicable.
- Sounding/vent tube and striker plate condition.
- Suction and discharge piping condition.
- Fastener material and condition (correct fastener material is stainless steel).

3.7 Tank closing. The Contractor must accomplish the following after completion of all KO-authorized repairs and/or preservation procedures:

3.7.1 For unpainted fuel tank(s) that are not ballasted, apply a heavy coat of lube oil to the entire tank interior(s).

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026

3.7.2 Ensure that the tank(s) remain open for at least 24 hours. Notify the COR at least 24 hours prior to closing the tank(s). After satisfactory inspection by the Coast Guard Inspector and completion of all authorized repairs, close tank manhole cover(s) with new gasket material conforming to AMS-C-6183. Chase threads on studs to ensure even installation of the access covers. Renew any damaged or missing fasteners. Use MIL-DTL-1222 as guidance. Existing undamaged fasteners may be reused. For purpose of bid, assume 10% of existing fasteners will require renewal. Renew all Nylock hex nuts.

NOTES

For cutters with unpainted fuel tanks, the 24 hour tank opening period begins after completing the lube oil coating.

Coast Guard personnel will operate all shipboard machinery and equipment.

3.8 Operational test, post repairs. After completion of work and in the presence of the Coast Guard Inspector, the Contractor must thoroughly test and demonstrate the equipment listed below to be in satisfactory operating condition. Submit a CFR.

- Designated tank TLIs
- Vent check valves

3.9 Ultrasonic thickness (UT) measurement. The Contractor must take a total of 50 UT measurements of tank plating, in locations designated by the Coast Guard Inspector, in accordance with SFLC Std Spec 0740, Appendix C. Use Coast Guard Drawing {_____} as guidance. Submit a CFR.

4. NOTES

4.1 Tank content removal. The Ship's force will pump down the tanks to the maximum extent possible with the installed pumping system.

4.2 Tank content restoration. The Ship's force will procure new fluids and refill all tanks at the appropriate time.

WORK ITEM 27: Tanks, Potable Water, Clean and Inspect - Barge**1. SCOPE**

1.1 Intent. This work item describes the requirements for the Contractor to clean and inspect the following tank(s):

TABLE 1 - TANKS

TYPE OF TANK	LOCATION	CAPACITY - 95% (GALLONS)	LOW SUCTION (GALLONS)
Potable Water (Tug Use)	2-45-2-W	5,529	152
Potable Water (Tug Use)	2-60-2-W	7,372	203
Potable Water (Barge Use)	2-90-3-W	2,764.5	76

1.2 Government-furnished property.

None.

2. REFERENCES**COAST GUARD DRAWINGS**

Coast Guard Drawing 120-CGB 533-1, Rev D, Potable Water System
 Coast Guard Drawing 120-CGB 801-4, Rev A, Tank Capacity Curves
 Coast Guard Drawing 120-CGB 801-5, Rev A, Tank Sounding Tables

COAST GUARD PUBLICATIONS

Surface Forces Logistics Center Standard Specification 0000 (SFLC Std Spec 0000), 2022,
 General Requirements

OTHER REFERENCES

American National Standards Institute/NSF International (ANSI/NSF) 61, 2015, Drinking Water System Components - Health Effects

American National Standards Institute/American Water Works Association (ANSI/AWWA) C652, 2011, Disinfection of Water-Storage Facilities

3. REQUIREMENTS

3.1 General.

3.1.1 CIR.

None.

3.1.2 Tech Rep.

Not applicable.

3.1.3 Protective measures. The Contractor must furnish and install all protective measures in accordance with SFLC Std Spec 0000, paragraph 3.3.3 (Vessel component, space, and equipment protection).

3.1.4 Interferences. The Contractor must handle all interferences in accordance with SFLC Std Spec 0000, paragraph 3.3.5 (Interferences). Known interferences include, but are not limited to the following:

- Fluid contents
- Piping
- RO system components
- Deck grating.

NOTE

Coast Guard personnel will operate all shipboard machinery and equipment.

3.2 Operational test, initial. Prior to commencement of work, the Contractor must witness Coast Guard personnel perform an initial operational test of the equipment listed below to demonstrate existing operational condition. Submit a CFR.

- TLI

3.3 Plug log. The Contractor must keep a written record of all plugs put in any tanks vents. A separate list must be kept for each tank being entered.

3.3.1 Ensure that all plugs are removed from each tank upon completion of work in the tank.

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026

3.3.2 Ensure the plug log is available to the Coast Guard inspector when the inspector is performing his close-out inspection on each tank.

3.4 Tank content removal. The Contractor must remove and dispose of all fluids and/or residues in accordance with all applicable Federal, state, and local regulations. The Contractor must notify the Dockmaster prior to filling or draining the potable water tank(s), when this item is being executed in a drydock availability. The Contractor must refer to Coast Guard Drawings 120 CGB 533-1; 120 CGB 801-4; 120 CGB 801-5 for guidance.

3.5 Tank cleaning. The Contractor must remove tank cover(s); clean tank interior surfaces free of all foreign materials, such as sediment, sludge and bacterial growth. Remove all persistent residues, taking care not to damage any tank coating system. Remove cleaning media and residues continuously from the tank during the washing process. Remove any residual wash media and wipe up residual moisture with clean lint-free cloths. Collect, contain, and dispose of all wash media, residues, and cleaning materials in accordance with all Federal, state, and local regulations.

3.6 Inspection. The Contractor must visually inspect all tank interior surfaces, including, but not limited to bulkheads, floor and overhead plating, structural members, manhole cover surfaces, fasteners and gasket seating surfaces. Submit a CFR including the following, as applicable:

- Tank structural condition.
- Inaccessible areas, if any.
- Condition of tank coating, including measurements taken, percentage, location, and type of coating failure.
- Tank level indicator (TLI) and/or float switch condition (if applicable).
- Sounding tube and striker plate condition.
- Suction and discharge piping condition.
- Fastener material and condition.

3.7 Tank closing. The Contractor must notify the COR at least 24 hours prior to closing the tank(s). After satisfactory inspection by the Coast Guard Inspector, and completion of all authorized repairs, close tank manhole cover(s) with new gasket material conforming to ANSI/NSF 61. Renew all stud cotton grommets (as applicable) upon reinstallation of manhole cover(s).

3.7.1 The Contractor must renew 100% of nuts and washers.

3.8 Tank disinfecting. After all other work involving the potable water system and tank closing have been completed, the Contractor must disinfect and treat the affected potable water tank(s) and associated disturbed piping and components, as necessary, to meet or exceed the requirements of AWWA C652. After tank disinfecting; remove and dispose of all treated water in accordance with all Federal, state and local regulations. Ensure that no one enters the tanks once disinfection is completed.

NOTE

Coast Guard personnel will operate all shipboard machinery and equipment.

3.9 Operational test, post repairs. After completion of work and in the presence of the Coast Guard Inspector, the Contractor must thoroughly test and demonstrate the equipment listed below to be in satisfactory operating condition. Submit a CFR.

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026

- TLI

4. NOTES

This section is not applicable to this work item.

WORK ITEM 28: Tanks, Ballast, Clean and Inspect - Barge**1. SCOPE**

1.1 Intent. This work item describes the requirements for the Contractor to clean and inspect the following tank(s):

TABLE 1 - TANKS

TYPE OF STRUCTURE	LOCATION	CAPACITY - 95% (GALLONS)	LOW SUCTION (GALLONS)
Ballast Tank	2-100-1-W	12854	-
Ballast Tank	2-100-2-W	12854	-
Ballast Tank	2-100-3-W	4825	-
Ballast Tank	2-100-4-W	4825	-

1.2 Government-furnished property.

None.

2. REFERENCES**COAST GUARD DRAWINGS**

Coast Guard Drawing 120-BARGE 601-1, Rev C, General Arrangement and Profile

Coast Guard Drawing 120-BARGE 111-1, Rev C, Bottom Framing & Plating

Coast Guard Drawing 120-BARGE 120-1, Rev B, Longitudinal & Transverse Bulkheads

COAST GUARD PUBLICATIONS

Surface Forces Logistics Center Standard Specification 0000 (SFLC Std Spec 0000), 2022,
General Requirements

Surface Forces Logistics Center Standard Specification 0740 (SFLC Std Spec 0740), 2022,
Welding and Allied Processes

OTHER REFERENCES

ASTM International (ASTM) D1330, 2004, Standard Specification for Rubber Sheet Gaskets

3. REQUIREMENTS

3.1 General.

3.1.1 CIR.

None.

3.1.2 Tech Rep.

Not applicable.

3.1.3 Protective measures. The Contractor must furnish and install all protective measures in accordance with SFLC Std Spec 0000, paragraph 3.3.3 (Vessel component, space, and equipment protection).

3.1.4 Interferences. The Contractor must handle all interferences in accordance with SFLC Std Spec 0000, paragraph 3.3.5 (Interferences).

Ballast tanks.

Manhole cover, gasket and fasteners.

NOTE

Coast Guard personnel will operate all shipboard machinery and equipment.

3.2 Operational test, initial. Prior to commencement of work, the Contractor must witness Coast Guard personnel perform an initial operational test of the equipment listed below to demonstrate existing operational condition. Submit a CFR.

- TLI's for tanks listed in paragraph 1.1

3.3 Plug log. The Contractor must keep a written record of all plugs put in any tanks vents. A separate list must be kept for each tank being entered.

3.3.1 Ensure that all plugs are removed from each tank upon completion of work in the tank.

3.3.2 The plug log must be available to the Coast Guard inspector when the inspector is performing his close-out inspection on each tank.

3.3 Content removal. The Contractor must remove access cover(s); remove and dispose of all fluids and/or residues in accordance with all applicable Federal, state, and local regulations. Plug all inlet and outlet piping in the tank to prevent contaminants from entering the tank. Use plugs with an attached lanyard, ring or other system that will ensure plugs are not lost in the pipe openings. Maintain a plug accountability log outside the tank(s) to prevent any of the installed temporary plugs from being lost inside the tank or forgotten inside at tank closure.

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026

3.4 Cleaning. The Contractor must clean the designated structure's (see paragraph 1.1 (Intent)) interior surfaces free of all foreign materials, such as sediment, sludge and fungal growth. Remove all persistent residues, taking care not to damage the tank coating system. Remove cleaning media and residues continuously from the compartment during the washing process. Remove any residual wash media and wipe up residual moisture with clean lint-free cloths. Collect, contain, and dispose of all wash media, residues, and cleaning materials in accordance with all Federal, state, and local regulations. The Contractor must refer to Coast Guard Drawings 120-BARGE 111-1 and 120-BARGE 120-1 (as applicable) for guidance.

3.5 Inspection. The Contractor must visually inspect all interior surfaces, including, but not limited to bulkheads, floor and overhead plating, structural members, manhole cover surfaces, fasteners and gasket seating surfaces. Submit a CFR including the following, as applicable:

- Structural condition.
- Inaccessible areas, if any.
- Condition of coating, including measurements taken, percentage, location, and type of coating failure.
- Tank level indicator (TLI) and/or float switch condition.
- Sounding tube and striker plate condition.
- Suction and discharge piping condition.
- Fastener material (stainless steel) and condition.
- Anodes (as applicable).

3.6 Closing. The Contractor must ensure that the compartment(s) remain open for at least 24 hours after completion of any KO-authorized tank repairs and preservation. Notify the COR at least 24 hours prior to closing the compartment(s). After satisfactory inspection by the Coast Guard Inspector, and completion of all authorized repairs, close the manhole cover(s) with new gasket material conforming to ASTM D1330 and new cotton grommets on each stud (as applicable).

3.6.1 The Contractor must renew 100% of nylon insert/nylock nuts and washers.

NOTE

Coast Guard personnel will operate all shipboard machinery and equipment.

3.7 Operational test, post repairs. After completion of work and in the presence of the Coast Guard Inspector, the Contractor must thoroughly test and demonstrate the equipment listed below to be in satisfactory operating condition. Submit a CFR.

- TLIs

3.8 Ultrasonic thickness (UT) measurement. The Contractor must take a total of 50 UT measurements of tank plating, in locations designated by the Coast Guard Inspector, in accordance with SFLC Std Spec 0740, Appendix C. Use Coast Guard Drawing _____ as guidance. Submit a CFR.

4. NOTES

This section is not applicable to this work item.

WORK ITEM 29: Voids, Accessible, Clean and Inspect - Barge**1. SCOPE**

1.1 Intent. This work item describes the requirements for the Contractor to clean and inspect the following void(s):

TABLE 1 – VOIDS

TYPE OF STRUCTURE	LOCATION	CAPACITY - 95% (GALLONS)
Void	2-0-1-V	N/A
Void	2-0-2-V	N/A
Void	2-6-1-V	N/A
Void	2-6-2-V	N/A
Void	2-40-2-V	N/A
Void	2-45-4-V	N/A
Void	2-60-4-V	N/A
Void	2-90-5-V	N/A
Void	2-108-1-V	N/A
Void	2-108-2-V	N/A

1.2 Government-furnished property.

None.

2. REFERENCES

COAST GUARD DRAWINGS

Coast Guard Drawing 120-BARGE 601-1, Rev C, General Arrangement and Profile

Coast Guard Drawing 120-BARGE 111-1, Rev C, Bottom Framing & Plating

Coast Guard Drawing 120-BARGE 120-1, Rev B, Longitudinal & Transverse Bulkheads

COAST GUARD PUBLICATIONS

Surface Forces Logistics Center Standard Specification 0000 (SFLC Std Spec 0000), 2022,
General Requirements

OTHER REFERENCES

ASTM International (ASTM) D1330, 2015, Standard Specification for Rubber Sheet Gaskets

3. REQUIREMENTS

3.1 General.

3.1.1 CIR.

None.

3.1.2 Tech Rep.

Not applicable.

3.1.3 Protective measures. The Contractor must furnish and install all protective measures in accordance with SFLC Std Spec 0000, paragraph 3.3.3 (Vessel component, space, and equipment protection).

3.1.4 Interferences. The Contractor must handle all interferences in accordance with SFLC Std Spec 0000, paragraph 3.3.5 (Interferences).

NOTE

Coast Guard personnel will operate all shipboard machinery and equipment.

3.2 Operational test, initial. Prior to commencement of work, the Contractor must witness Coast Guard personnel perform an initial operational test of the TLI's for tanks listed in paragraph 1.1 (Intent), to demonstrate existing operational condition. Submit a CFR.

3.3 Cleaning and inspection requirements. The Contractor must refer to Coast Guard Drawings 120-BARGE 111-1 and 120-BARGE 120-1 (as applicable) for guidance. to accomplish the following tasks:

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026

3.3.1 Content removal. The Contractor must remove and dispose of all fluids and/or residues in accordance with all applicable Federal, state, and local regulations.

3.3.2 Cleaning. The Contractor must remove access cover(s). Clean the designated structure's interior surfaces free of all foreign materials, such as sediment, sludge and fungal growth. Remove all persistent residues, taking care not to damage the tank coating system. Remove cleaning media and residues continuously from the compartment during the washing process. Remove any residual wash media and wipe up residual moisture with clean lint-free cloths. Collect, contain, and dispose of all wash media, residues, and cleaning materials in accordance with all Federal, state, and local regulations.

3.3.3 Inspection. The Contractor must visually inspect all interior surfaces, including, but not limited to bulkheads, floor and overhead plating, structural members, manhole cover surfaces, fasteners and gasket seating surfaces. Submit a CFR including the following, as applicable:

- Structural condition.
- Inaccessible areas, if any.
- Condition of coating, including measurements taken, percentage, location, and type of coating failure.
- Tank level indicator (TLI) and/or float switch condition.
- Sounding tube and striker plate condition.
- Suction and discharge piping condition.
- Fastener material and condition.

3.4 Closing. The Contractor must ensure that the compartment(s) remain open for approximately 24 hours after completion of the tasks specified above. Notify the COR at least 24 hours prior to closing the compartment(s). After satisfactory inspection by the Coast Guard Inspector, and completion of all authorized repairs, close the manhole cover(s) with new gasket material conforming to ASTM D1330 and cotton grommets on the studs (as applicable). The Contractor must renew up to 10% of missing or damaged nuts and washers.

NOTE

Coast Guard personnel will operate all shipboard machinery and equipment.

3.5 Operational test, post repairs. After completion of work and in the presence of the Coast Guard inspector, the Contractor must thoroughly test and demonstrate the TLI's for tanks listed in paragraph 1.1 (Intent), to be in satisfactory operating condition. Submit a CFR.

4. NOTES

This section is not applicable to this work item.

WORK ITEM 30: Boiler Exhaust Stack Uptakes, Commercial Clean - Barge

1. SCOPE

1.1 Intent. This work item describes the requirements for the Contractor to clean the Boiler exhaust stack uptakes.

1.2 Government-furnished property.

None.

2. REFERENCES

COAST GUARD DRAWINGS

Contact SES to provide and update record file.

COAST GUARD PUBLICATIONS

Surface Forces Logistics Center Standard Specification 0000 (SFLC Std Spec 0000), 2022,
General Requirements

Surface Forces Logistics Center Standard Specification 6310 (SFLC Std Spec 6310), 2022,
Requirements for Preservation of Ship Structures

OTHER REFERENCES

None

3. REQUIREMENTS

3.1 General.

3.1.1 CIR.

None.

3.1.2 Tech Rep.

Not applicable.

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026

3.1.3 Protective measures. The Contractor must furnish and install all protective measures in accordance with SFLC Std Spec 0000, paragraph 3.3.3 (Vessel component, space, and equipment protection).

3.1.4 Interferences. The Contractor must handle all interferences in accordance with SFLC Std Spec 0000, paragraph 3.3.5 (Interferences). Known interferences include, but are not limited to following:

- Access covers.
- Exhaust stack.
- Boiler.
- Exhaust pipe expansion joints.
- Exhaust insulation blankets.
-

3.2 Safety precaution. The Contractor must rig suitable safety netting, to protect workers during possible falls, and to protect the Engine Room and machinery from falling tools.

NOTE

Coast Guard personnel will operate all shipboard machinery and equipment.

3.3 Operational test, initial. Prior to commencement of work, the Contractor must witness Coast Guard personnel perform an initial operational test of all items or shipboard devices to be disturbed, used, repaired, or altered, to demonstrate existing operational condition. Submit a CFR.

3.4 Cleaning. The Contractor must clean the interior surfaces of the exhaust piping to the Boiler, shown on Coast Guard Drawing(s) , to a condition free from soot, tar, and any other foreign matter as follows:

3.4.1 Disconnect the exhaust piping as necessary to facilitate cleaning.

3.4.2 Thoroughly sweep, mechanically clean, and vacuum the interior of each exhaust pipe system, including the mufflers, from the exhaust outlet to the topmost location outside the vessel. Ensure that all tar deposits, soot deposits, and all other surface contaminants are completely removed.

3.4.3 Upon completion of cleaning, do the following:

3.4.3.1 Remove all debris from the pipe surfaces, stack deck, and Engine Room areas by vacuuming. Dispose of all cleaning materials and generated debris in accordance with all applicable Federal, state, and local regulations.

3.4.3.2 Reassemble exhaust piping; renew all disturbed flange connection gaskets with suitable high temperature, non-asbestos-containing gasket materials; and renew all disturbed fasteners.

3.5 Inspection and report. The Contractor must perform a visual inspection of the following components; submit a CFR:

- Exhaust stack access hatches, including all associated studs and nuts.
- All cleaned exhaust stack surfaces.
- All exhaust expansion joints, including associated bolts.

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026

3.5.1 Following cleaning of the interior of each uptake, the Contractor must demonstrate completeness of the cleaning process to the Coast Guard Inspector, showing that the entire length of uptake has been satisfactorily cleaned according to the work plan.

3.6 Touch-up preservation. The Contractor must prepare and coat all new and disturbed surfaces to match existing adjacent surfaces in accordance with SFLC Std Spec 6310, paragraph 3.1.13 (Touch-ups and minor coating repairs.)

NOTE

Coast Guard personnel will operate all shipboard machinery and equipment.

3.7 Operational test, post repairs. After completion of work, the Contractor must thoroughly test, in the presence of the Coast Guard Inspector and demonstrate all items or shipboard devices that have been disturbed, used, repaired, altered, or installed to be in satisfactory operating condition. Submit a CFR.

4. NOTES

This section is not applicable to this work item.

WORK ITEM 31: Vent Ducts, Galley and Pantry Room, All, Commercial Cleaning - Barge

1. SCOPE

1.1 Intent. This work item describes the requirements for the Contractor to clean and inspect the designated shipboard ventilation systems.

1.2 Government-furnished property.

None.

2. REFERENCES

COAST GUARD DRAWINGS

Coast Guard Drawing 120-BARGE-512-1, Rev B, HVAC Diag & Install Dets

COAST GUARD PUBLICATIONS

Surface Forces Logistics Center Standard Specification 0000 (SFLC Std Spec 0000), 2022,
General Requirements

Surface Forces Logistics Center Standard Specification 5100 (SFLC Std Spec 5100), 2022, Clean
Shipboard Ventilation Systems

OTHER REFERENCES

None

3. REQUIREMENTS

3.1 General.

3.1.1 CIR.

None.

3.1.2 Tech Rep.

Not applicable.

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026

3.1.3 Protective measures. The Contractor must furnish and install all protective measures in accordance with SFLC Std Spec 0000, paragraph 3.3.3 (Vessel component, space, and equipment protection).

3.1.4 Interferences. The Contractor must handle all interferences in accordance with SFLC Std Spec 0000, paragraph 3.3.5 (Interferences). Known interferences include, but are not limited to the following:

- Machinery.
- Piping.
- Electrical wiring.
- Overhead sheathing.
- Insulation..

NOTE

Coast Guard personnel will operate all shipboard machinery and equipment.

3.2 Operational test, initial. Prior to commencement of work, the Contractor must witness Coast Guard Personnel perform an initial operational test of the ventilation systems included in this work item, to demonstrate existing operational condition. Submit a CFR.

NOTE

It is recommended that the Contractor conduct a ship check to verify dimensions in the table below.

3.3 Cleaning requirements. The Contractor must clean and inspect the following ventilation systems, shown on Coast Guard Drawing 120-BARGE-512-1, in accordance with SFLC Std Spec 5100. Submit a CFR.

TABLE – 1 SYSTEM LOCATION

SYSTEM LOCATION	TYPE
Gaylord Hood	Exhaust
Galley	Supply
Galley	Exhaust

3.4 Additional requirements. In addition to the above, the Contractor must accomplish the following:

3.4.1 Notification. Give written notification to the COR, 48 hours before starting ventilation cleaning work.

3.4.2 Additional protective covering. In addition to providing protective covering as specified in SFLC Std Spec 5100, subsection 3.1.3 (Protective measures), provide additional protective covering for all food preparation and serving surfaces in the immediate work area, as applicable, to prevent contamination.

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026

3.4.3 Avoidance of meal preparation and service. Ensure that cleaning of galley ventilation systems is scheduled between 1900 and 0530 so that it WILL NOT interfere with meal preparation and service.

NOTE

Coast Guard personnel will operate all shipboard machinery and equipment.

3.5 Operational test, post repairs. After completion of work, the Contractor must thoroughly test, in the presence of the Coast Guard Inspector and demonstrate the ventilation systems included in this work item to be in satisfactory operating condition. Submit a CFR.

4. NOTES

This section is not applicable to this work item.

WORK ITEM 32: Vent Ducts, All Other, Commercial Cleaning - Barge

1. SCOPE

1.1 Intent. This work item describes the requirements for the Contractor to clean and inspect the designated shipboard ventilation systems.

1.2 Government-furnished property.

None.

2. REFERENCES

COAST GUARD DRAWINGS

Coast Guard Drawing 120-BARGE-512-1, Rev B, HVAC Diag & Install Dets

COAST GUARD PUBLICATIONS

Surface Forces Logistics Center Standard Specification 0000 (SFLC Std Spec 0000), 2022,
General Requirements

Surface Forces Logistics Center Standard Specification 5100 (SFLC Std Spec 5100), 2022, Clean
Shipboard Ventilation Systems

OTHER REFERENCES

None

3. REQUIREMENTS

3.1 General.

3.1.1 CIR.

None.

3.1.2 Tech Rep.

Not applicable.

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026

3.1.3 Protective measures. The Contractor must furnish and install all protective measures in accordance with SFLC Std Spec 0000, paragraph 3.3.3 (Vessel component, space, and equipment protection).

3.1.4 Interferences. The Contractor must handle all interferences in accordance with SFLC Std Spec 0000, paragraph 3.3.5 (Interferences). Known interferences include, but are not limited to:

- Machinery.
- Piping.
- Electrical wiring.
- Overhead sheathing.
- Insulation.

NOTE

Coast Guard personnel will operate all shipboard machinery and equipment.

3.2 Operational test, initial. Prior to commencement of work, the Contractor must witness Coast Guard Personnel perform an initial operational test of the ventilation systems included in this work item, to demonstrate existing operational condition. Submit a CFR.

3.3 Cleaning requirements. The Contractor must clean and inspect the following ventilation systems, shown on Coast Guard Drawing 120-BARGE-512-1, in accordance with SFLC Std Spec 5100. Submit a CFR.

TABLE 1 – SYSTEM LOCATIONS

LOCATION	TYP E	COMPARTME NT VENTILATED	CLASSIFICATI ON
2-48-1	EXH AUS T	2-40-0-AA	44-12-DG2
2-55-1	EXH AUS T	2-40-0-AA	44-12-DG2
LOCATION	TYP E	COMPARTME NT VENTILATED	CLASSIFICATI ON
2-48-1	EXH AUS T	2-40-0-AA	44-12-DG2
2-55-1	EXH AUS T	2-40-0-AA	44-12-DG2
	A/C	2-80-4-Q	
	A/C	2-80-2-L	

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026

	A/C	2-80-0-L	
	A/C	2-80-1-Q	
	A/C	2-80-5-Q	
	A/C	2-90-0-L	
	A/C	2-90-2-L	
	A/C	2-90-1-L	
2-19-1	EXH AUS T	1-0-2-Q	
1-3-2	EXH AUS T	DECK STORES	
1-0-1	EXH AUS T	DC SHOP	
1-0-4	EXH AUS T	VESTIBULE	
1-0-2	EXH AUS T	PAINT LOCKER	
2-40-0	EXH AUS T	CARGO HOLD	
2-70-2	EXH AUS T	SHIPS OFFICE	
2-80-0	EXH AUS T	HEAD	
2-90-2	EXH AUS T	BERTHING	
2-90-1	EXH AUS T	BERTHING	
2-90-0	EXH AUS T	BERTHING	

3.4 Notification. The Contractor must give written notification to the COR, 48 hours before starting ventilation cleaning work.

NOTE

Coast Guard personnel will operate all shipboard machinery and equipment.

3.5 Operational test, post repairs. After completion of work, the Contractor must thoroughly test, in the presence of the Coast Guard Inspector and demonstrate the ventilation systems included in this work item to be in satisfactory operating condition. Submit a CFR.

4. NOTES

This section is not applicable to this work item.

WORK ITEM 33: Hull Fittings, Weight Handling Rigging Hardware, Inspect and Test - Barge

1. SCOPE

1.1 Intent. This work item describes the requirements for the Contractor to inspect and test designated hull fittings, listed in Table 1.

TABLE 1 - DESIGNATED ATON HULL FITTINGS

QTY	DESCRIPTION	LOCATION
12	Pad Eye, 1 1/4" Complete table with details of pad eyes, tie-downs, and similar ATON weight handling fittings installed on an ATON barge deck. See CG Dwg 120-BARGE 611-01, TABLE 17-E	Buoy Deck, Frames 25, 35, 50, 60,70 and 80
30	Pad Eye, 2" Complete table with details of pad eyes, tie-downs, and similar ATON weight handling fittings installed on an ATON barge deck. See CG Dwg 120-BARGE 611-01, TABLE 17-E.	Buoy Deck, Frames 25, 35, 50, 60,70, 80 and 88

1.2 Government-furnished property.

None.

2. REFERENCES

COAST GUARD DRAWINGS

Coast Guard Drawing FL 1204-3, Rev A, Welded Padeyes & Links

COAST GUARD PUBLICATIONS

Surface Forces Logistics Center Standard Specification 0000 (SFLC Std Spec 0000), 2022,
General Requirements

Surface Forces Logistics Center Standard Specification 0740 (SFLC Std Spec 0740), 2022,
Welding and Allied Processes

Surface Forces Logistics Center Standard Specification 6310 (SFLC Std Spec 6310), 2022,
Requirements for Preservation of Ship Structures

OTHER REFERENCES

None

3. REQUIREMENTS

3.1 General.

3.1.1 CIR.

None.

3.1.2 Tech Rep.

Not applicable.

3.1.3 Protective measures - general. The Contractor shall furnish and install all protective coverings to seal off and protect all non-affected vessel's components, equipment, and spaces in the vicinity of the work area against contamination during the performance of work. Upon completion of work, the Contractor shall remove all installed protective measures, inspect for the presence of contamination, and return all contaminated equipment, components, and spaces to original condition of cleanliness.

3.1.4 Interferences. The Contractor shall handle all interferences in accordance with SFLC Std Spec 0000, paragraph 3.3.5 (Interferences).

3.2 Inspection and test particulars. The Contractor shall accomplish the following inspections for all designated fittings, and submit a CFR.

3.2.1 Visual. Perform a visual inspection of fitting structures and associated foundations, for evidence of fractures, excessive wear, deformation, and corrosion.

3.2.2 NDE. Structurally inspect all fittings, including foundation welds, by NDE methods in accordance with SFLC Std Spec 0740, Appendix C. If a NDE method that requires coating removal is selected, perform subsequent touch-up preservation in accordance with SFLC Std Spec 6310, paragraph 3.1.13 (Touch-ups and minor coating repairs).

NOTE

Common NDE methods not requiring coating removal include, but are not limited to:

a. Radiographic Testing (RT).

b. Ultrasonic Testing (UT).

c. Eddy Current Testing (ET).

2.3 Measurements. Measure and record each pad-eye diameter ("A" dimension), shown on Coast Guard Drawing FL 1204-3 as guidance.

3.2.4 Pull-test. In lieu of NDE, the Contractor may pull-test all pad eyes in accordance with SFLC Std Spec 5000, paragraph 3.2.7 (Pull-Test), using the working load provided in Coast Guard Drawing FL 1204-3 for each designated pad eye size. Visually inspect all welds for signs of damage, after completion of pull-test.

4. NOTES

This section is not applicable to this work item.

WORK ITEM 34: Mechanical Chain Stoppers, Inspect and Service

1. SCOPE

1.1 Intent. This work item describes the requirements for the Contractor to inspect and service the port and starboard mechanical chain stoppers.

1.2 Government-furnished property.

None.

2. REFERENCES

COAST GUARD DRAWINGS

Coast Guard Drawing 120 Barge 611-001, Rev C, Hull Fittings

COAST GUARD PUBLICATIONS

Surface Forces Logistics Center Standard Specification 0000 (SFLC Std Spec 0000), 2022,
General Requirements

Surface Forces Logistics Center Standard Specification 5000 (SFLC Std Spec 5000), 2022,
Auxiliary Machine Systems

OTHER REFERENCES

None

3. REQUIREMENTS

3.1 General.

3.1.1 CIR. The Contractor shall submit a CIR for the inspections listed in Table 1, as follows:

- Task #1.
- Task #2.

3.1.2 Tech Rep.

Not applicable.

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026

3.1.3 Protective measures. The Contractor shall furnish and install all protective coverings to seal off and protect all non-affected vessel's components, equipment, and spaces near the work area against contamination during the performance of work. Upon completion of work, the Contractor shall remove all installed protective measures, inspect for the presence of contamination, and return all contaminated equipment, components, and spaces to original condition of cleanliness.

3.1.4 Interferences. The Contractor shall handle all interferences in accordance with SFLC Std Spec 0000, paragraph 3.3.5 (Interferences).

3.2 Repair particulars. The Contractor shall use Coast Guard Drawing 120 Barge 611-001 for reference, and perform all tasks in Table 1.

TABLE 1 – REPAIR TASKS

				ADDITIONAL REQUIREMENTS	
#	TASK TYPE (SFLC STD SPEC 5000 PARA. REF.)	QTY	COMPONENT OR ASSEMBLY	APPENDIX AND PARA. FROM SFLC STD SPEC 5000	OTHER
1	Operate and Inspect	4	Mechanical Chain Stopper Assembly	3.2.1 (Operate and Inspect)	Submit a CIR.
2	Disassemble and Inspect	4	Mechanical Chain Stopper Assembly	3.2.3 (Disassemble and Inspect)	Submit a CIR. Reassemble chain stoppers with contractor furnished materials. Refer to paragraph 3.2.1 for materials.
3	NDE	4	Mechanical Chain Stopper Assembly	3.2.5 (NDE)	NDE task is limited to chain stopper welds.
4	Preserve	4	Mechanical Chain Stopper Assembly and foundation	3.2.4 (Preservation)	Select the following top coating colors: Black (17038) for the chain stopper surfaces. Gray (16099) for the foundation surfaces.
5	Groom and Lubricate	4	Mechanical Chain Stopper Assembly	3.2.6 (Groom and Lubricate)	
6	Weight Test	4	Mechanical Chain Stopper Assemblies	B2.1(Mechanical Chain Stoppers)	Operational test load: 15,000 lbs. Submit a CFR.
7	Fabricate and Install	4	Label plate	B2.9 (Label plates)	

3.2.1 Contractor furnished parts. The Contractor shall provide new bolts, washers, spring assembly, end hinge pins, middle hinge pins, lock hinge pin, grease fittings, and bronze bushings. Upon installation of each bronze bushing, the Contractor shall drill a hole to line up with grease fitting in accordance with «DWG1».

4. NOTES

This section is not applicable to this work item.

WORK ITEM 35: Anchor Winch, Inspect and Service - Barge**1. SCOPE**

1.1 Intent. This work item describes the requirements for the Contractor to inspect and service the anchor winch (and associated cathead) located onboard the 120 Barge.

1.2 Government-furnished property.

MTI	ITEM DESCRIPTION	NSN/PN	QTY	ESTIMATED COST (\$/UNIT)
N	Rope, Wire	NSN: 4010-01-690-6075 PN: CGWR1500637BCSS	1 ea.	3,423.52

2. REFERENCES**COAST GUARD DRAWINGS**

Coast Guard Drawing 120-CGB 581-001, Rev C, Anchor Handling Arrangement

COAST GUARD PUBLICATIONS

Coast Guard Technical Publication (TP) 5415, SWBS 581-A, Mar 2013, Anchor Winch - Model 525-HAW

Surface Forces Logistics Center Standard Specification 0000 (SFLC Std Spec 0000), 2022, General Requirements

Surface Forces Logistics Center Standard Specification 5000 (SFLC Std Spec 5000), 2022, Auxiliary Machine Systems

OTHER REFERENCES

None

3. REQUIREMENTS

3.1 General.

3.1.1 CIR. The Contractor must submit a CIR for the inspections listed in the following paragraph(s):

- 3.2 (Inspection and repair requirements) - TABLE 1 (Task # 1, 2, 3, 7, and 10)

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026

3.1.2 Tech Rep.

None.

3.1.3 Protective measures. The Contractor must furnish and install all protective measures in accordance with SFLC Std Spec 0000, paragraph 3.3.3 (Vessel component, space, and equipment protection).

3.1.4 Interferences. The Contractor must handle all interferences in accordance with SFLC Std Spec 0000, paragraph 3.3.5 (Interferences). Known interferences include, but are not limited to the following:

- Anchor and anchor chain.

3.2 Inspection and repair requirements. The Contractor must accomplish the following:

TABLE 1 – INSPECTION AND REPAIR TASKS

				ADDITIONAL REQUIREMENTS	
#	TASK TYPE	QTY	COMPONENT OR ASSEMBLY	APPENDIX AND PARA. FROM SFLC STD SPEC 5000	OTHER
1	Operate and Inspect	1	Anchor Winch & Cathead	3.2.1 (Operate and inspect) Appendix A	Submit a CIR.
2	Disassemble and Inspect	1	Hydraulic Disc Brake Assembly	D2.3 (Brakes and clutches)	Submit a CIR.
3	Disassemble and Inspect	1	Planetary Gear Box Assembly	D2.4 (Open gearing and gear reducers)	Submit a CIR.
4	Renew	5.5 Pints	Main Planetary Gear Box Oil	D2.4 (Open gearing and gear reducers)	EP 90 Gear Lube Oil. Submit a CFR.
5	Disassemble and Inspect	1	Band Brake Assembly	3.2.3 (Disassemble and inspect)	Submit a CFR.
6	Disassemble and Inspect	1	Band Brake Handwheel, Bevel Gear Box, and Linkage Assemblies up the Band Brake Assembly	3.2.3 (Disassemble and inspect) D2.4 (Open gearing and gear reducers)	Submit a CFR.
7	Disassemble and Inspect	1	Directional Control Valve assembly	C2.4 (Valves and manifolds)	Submit (CIR).
8	Service and Inspect	1	Hand Pump assembly	3.2.2 (Service and inspect)	Submit a CFR.
9	Service and Inspect	1	Hydraulic Motor	3.2.2 (Service and inspect)	Submit a CFR.
10	Disassemble and Inspect	1	Holding Valve assembly	C2.4 (Valves and manifolds)	Submit a CIR.
11	Service and Inspect	1	Cathead and associated clutch	3.2.2 (Service and inspect)	1. Inspect clutch lugs for mashing or rounding. 2. Inspect assembly and hardware. 3. Inspect shaft and pillow block. Submit a CFR.

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026

				ADDITIONAL REQUIREMENTS	
#	TASK TYPE	QTY	COMPONENT OR ASSEMBLY	APPENDIX AND PARA. FROM SFLC STD SPEC 5000	OTHER
12	NDE	1	Anchor Winch & Cathead assembly foundation	3.2.5 (NDE)	Weld joints to NDE: All joints attaching winch foundations to deck. Submit CFR.
13	Preserve and NDE	1	Anchor Winch & Cathead assembly and foundation	3.2.4 (Preservation)	Finish coat color: Select to match surrounding surfaces.
14	Renew	1	Wire Rope Assembly	D 2.2 (Wire Rope Assemblies)	Wire Rope particulars: 500 ft 1-in" diameter , 6x36, RRL, IWRC, EIPS Close Spelter Socket one end. This is a GFP item. PN: CGWR1500637BCSS
15	Groom and Lubricate	1	Anchor Winch & Cathead	3.2.6 (Groom and lubricate)	
16	Final Operational and/or weight test	1	Anchor Winch & Cathead	B2.5 (Anchor windlass)	Rated Load: 6,000 pounds @100 fpm Submit CFR.
17	Fabricate and Install	1	Label plate	B2.9 (label plates)	

3.3 Special requirements for various components. If a Change Request has been authorized for additional work on any of the components listed in Table 2 below, the Contractor must refer to the corresponding Appendix or paragraph of SFLC Std Spec 5000, as applicable.

TABLE 2 – SPECIAL REQUIREMENTS

COMPONENT	APPENDIX & PARAGRAPH IN SFLC STD SPEC 5000
Fluids	C2.1
Hose assemblies	C2.2
Piping and tubing	C2.3
Valves and manifolds	C2.4
Gages	C2.5
Gas charged accumulators	C2.6
Heat exchangers and fluid coolers	C2.7
Systems	C2.8
Fastener assemblies	D2.1
Wire rope assemblies	D2.2
Brakes and clutches	D2.3
Open gearing and gear reducers	D2.4

4. NOTES

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026

4.1 Anchor windlass particulars. Anchor Winless information is as follows:

- Manufacturer: McElroy Machine
- Model: 525 HAW
- Serial number: _____

WORK ITEM 36: Traction Winches, Inspect and Service - Barge

1. SCOPE

1.1 Intent. This work item describes the requirements for the Contractor to inspect and service port and starboard Appleton Traction/Facing Winches (Model AMD-855), located on the barge.

1.2 Government-furnished property.

None.

2. REFERENCES

COAST GUARD DRAWINGS

Coast Guard Drawing 120 BARGE 167-001, Rev C, Access & Closures

Coast Guard Drawing 120 BARGE 185-003, Rev A, Traction Winch Foundation

COAST GUARD PUBLICATIONS

Coast Guard Technical Publication (TP) 3386, SWBS 582, Section A, June 2013, Mooring and Towing Systems

Surface Forces Logistics Center Standard Specification 0000 (SFLC Std Spec 0000), 2022, General Requirements

Surface Forces Logistics Center Standard Specification 5000 (SFLC Std Spec 5000), 2022, Auxiliary Machine Systems

Surface Forces Logistics Center Standard Specification 6310 (SFLC Std Spec 6310), 2022, Requirements for Preservation of Ship Structures

OTHER REFERENCES

None

3. REQUIREMENTS

3.1 General.

3.1.1 CIR. The Contractor must submit a CIR for the inspections listed in the following tasks, in Table 1:

- Task #1
- Task #2
- Task #3

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026

- Task #4

3.1.2 Tech Rep.

Not applicable.

3.1.3 Protective measures - general. The Contractor must furnish and install all protective coverings to seal off and protect all non-affected vessel's components, equipment, and spaces in the vicinity of the work area against contamination during the performance of work. Upon completion of work, the Contractor must remove all installed protective measures, inspect for the presence of contamination, and return all contaminated equipment, components, and spaces to original condition of cleanliness.

3.1.3.1 Protective measures - hydraulic system(s). The Contractor must maintain existing hydraulic system cleanliness; take all necessary precautions to prevent the introduction of contaminants into the hydraulic system. Whenever disconnecting or removing components from the hydraulic system, completely seal all openings to the rest of the system, immediately, using either caps (for externally threaded connection points), bolt-on blanks, or taped-on discs/covers (durable plastic or sheet-metal no less than 1/16-inch thick).

NOTE

Plastic bags may be used only when arrangement or configuration prevents the use of the other sealing methods specified above.

3.1.4 Interferences. The Contractor must handle all interferences in accordance with SFLC Std Spec 0000, paragraph 3.3.5 (Interferences).

3.1.4.1 Access to facing winch machinery requires entering two voids below (2-108-1-V and 2-108-2-V). Upon securing access to voids following completion of work, renew all disturbed gaskets and fasteners.

3.2 Tasks to be accomplished. The Contractor must perform the tasks designated in Table 1 below, in accordance with SFLC Std Spec 5000 and CG TP-3386, SWBS 582, Section A as guidance

TABLE 1 – RECURRING TASKS

#	TASK TYPE (SFLC STD SPEC 5000 PARA. REF.)	QTY	COMPONENT OR ASSEMBLY	APPENDIX AND PARA. FROM SFLC STD SPEC 5000	OTHER
1	Operate and Inspect	2	Facing Winch	3.2.1 (Operate and Inspect) Appendix A (General Inspection Requirements)	Submit a CIR.

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026

#	TASK TYPE (SFLC STD SPEC 5000 PARA. REF.)	QTY	COMPONENT OR ASSEMBLY	APPENDIX AND PARA. FROM SFLC STD SPEC 5000	OTHER
2	Disassemble Inspect, and Preserve	2	Hydraulic Motor	3.2.3 (Disassemble and inspect) 3.2.4 (Preserve)	Refer to TP-3386, SWBS 582, Section A. Reassemble and reinstall the hydraulic motor with new O-rings, seals and bearings. Submit a CIR.
3	Disassemble Inspect, and Preserve	All	Secondary And Primary Gear Reducers	D2.1 (Fastener assemblies) D2.4 (Open gearing and gear reducers) 3.2.3 (Disassemble and inspect) 3.2.4 (Preservation)	- Reassemble and reinstall the gear reducers with new bearings, O-rings, seals and gaskets. - Lubricate the gear reducers in accordance with the manufacturer's instructions. Submit a CIR.
4	Disassemble Inspect, and Preserve	2	Hydraulic Brake	D2.3 (Brakes and clutches) 3.2.3 (Disassemble and inspect) 3.2.4 (Preservation)	After any authorized repairs, reassemble and reinstall the hydraulic brake with a new O-ring kit, stack kit, bearing kit and gasket kit. Hydraulic brake (YMD-5891) is shown in TP-3386, SWBS 582, Section A. Submit a CIR.
5	Renew	All	Hydraulic Fluids and Gear Oil	Fluids (C2.1) D2.4 (Open gearing and gear reducers)	Refer to TP-3386, SWBS 582, Section A.
6	NDE	2	Facing Winch Machinery Foundation	3.2.5 (NDE)	Areas to NDE: all weld joints connecting winch foundations to the deck. Submit a CFR.
7	Preserve	2	Facing Winch and Machinery Foundation	3.2.4 (Preservation)	Finish coat color: Select to match surrounding surfaces.
8	Groom and Lubricate	2	Facing Winch Assembly	3.2.6 (Groom and lubricate)	

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026

#	TASK TYPE (SFLC STD SPEC 5000 PARA. REF.)	QTY	COMPONENT OR ASSEMBLY	APPENDIX AND PARA. FROM SFLC STD SPEC 5000	OTHER
9	Op Test	2	Facing Winch		Verify that each facing winch rotates in both directions with no unusual noise, dragging, or binding. Verify that each facing winch will develop enough tension in its wire rope to pull the barge to the ship. Verify that each facing winch will lock the barge snugly against the ship. Submit a CFR.

3.3 Additional maintenance requirements. The Contractor must perform the tasks below, if marked with an “X”.

TABLE 2 – ADDITIONAL TASKS

ADDITIONAL TASK		TASK TYPE	QTY	COMPONENT OR ASSEMBLY	APPENDIX AND PARA. FROM SFLC STD SPEC 5000	OTHER
—	1	Renew	All	Hose Assemblies	C2.2 (Hose assemblies)	Refer to TP-3386, SWBS 582, Section A..
—	2	Renew	2	Hydraulic Motor		P/N: YMD-12926 Note that new motor bolt holes may not align exactly with those from the obsolete motor. If required, cut and clean-up the four corners on the new motors to make the mounting holes into mounting slots, allowing installation of the new motors. Submit a CFR.

4. NOTES

This section is not applicable to this work item.

WORK ITEM 37: Gypsy Winches (Appleton Model AMD-865), Overhaul - Barge

1. SCOPE

1.1 Intent. This work item describes the requirements for the Contractor to overhaul the designated four Gypsy Winches, Appleton Model AMD-865.

1.2 Government-furnished property.

None.

2. REFERENCES

COAST GUARD DRAWINGS

Coast Guard Drawing 120 Barge 581-001, Rev B, Mooring and Towing Arrangement

COAST GUARD PUBLICATIONS

Coast Guard Technical Publication (TP) 3386, SWBS 582, Section O, Feb 1991, Appleton Marine Installation, Operation, and Maintenance Manual for Gypsy Winch Model AMD-865

Surface Forces Logistics Center Standard Specification 0000 (SFLC Std Spec 0000), 2022, General Requirements

Surface Forces Logistics Center Standard Specification 5000 (SFLC Std Spec 5000), 2022, Auxiliary Machine Systems

Surface Forces Logistics Center Standard Specification 6310 (SFLC Std Spec 6310), 2022, Requirements for Preservation of Ship Structures

OTHER REFERENCES

MIL-PRF-16173, Sep 2006, Corrosion Prevention Compound, Solvent Cutback, Cold-Application

MIL-C-81309F, May 2005, Corrosion Preventive Compounds, Water Displacing, Ultra-Thin Film

3. REQUIREMENTS

3.1 General.

3.1.1 CIR. The Contractor shall submit a CIR for the inspections listed in Table 1, as follows:

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026

- Tasks #1, 2, 4, 5, 6, and 7.

3.1.2 Tech Rep.

Not applicable.

3.1.3 Protective measures - general. The Contractor shall furnish and install all protective coverings to seal off and protect all non-affected vessel's components, equipment, and spaces in the vicinity of the work area against contamination during the performance of work. Upon completion of work, the Contractor shall remove all installed protective measures, inspect for the presence of contamination, and return all contaminated equipment, components, and spaces to original condition of cleanliness.

3.1.3.1 Hydraulic system. The Contractor shall maintain existing hydraulic system cleanliness; take all necessary precautions to prevent the introduction of contaminants into the hydraulic system. Whenever disconnecting or removing components from the hydraulic system, completely seal all openings to the rest of the system, immediately, using either caps (for externally threaded connection points), bolt-on blanks, or taped-on discs/covers (durable plastic or sheet-metal no less than 1/16-inch thick).

3.1.4 Interferences. The Contractor shall handle all interferences in accordance with SFLC Std Spec 0000, paragraph 3.3.5 (Interferences).

NOTE

Plastic bags may be used only when arrangement or configuration prevents the use of the other sealing methods specified above.

3.2 Overhaul particulars. The Contractor shall accomplish the following tasks, using Coast Guard Drawing 120 Barge 581-001 and CG TP 3386, SWBS 582-O as guidance:

NOTE

Be aware that the forward gypsy winches have wire rope installed on the drum while the aft gypsy winches have bare drums and are used with fiber rope.

TABLE 1 – OVERHAUL TASKS

				ADDITIONAL REQUIREMENTS	
#	TASK TYPE (SFLC STD SPEC 5000 PARA. REF.)	QTY	COMPONENT OR ASSEMBLY	APPENDIX AND PARA. FROM SFLC STD SPEC 5000	OTHER
1	Operate and Inspect	4	Gypsy Winch	3.2.1 (Operate and inspect)	Submit a CIR.
2	Disassemble and Inspect	4	Gypsy Winch	3.2.3 (Disassemble and inspect)	Clean all internal parts to remove all dirt and rust. Visually inspect all gears and remove all burrs, knife edges and nicks from the gears with an emery cloth.

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026

				ADDITIONAL REQUIREMENTS	
#	TASK TYPE (SFLC STD SPEC 5000 PARA. REF.)	QTY	COMPONENT OR ASSEMBLY	APPENDIX AND PARA. FROM SFLC STD SPEC 5000	OTHER
					Submit a CIR. Renew all bearings, seals and gaskets.
3	Renew	4	Hydraulic Motor	N/A	Renew the hydraulic motor – Refer to CG TP 3386, SWBS 582-O (Part Number: YMD-2281).
4	Disassemble and Inspect	4	Gear Box	3.2.3 (Disassemble and inspect)	Clean and inspect all components of the gear box. Reassemble and reinstall the gear box with new bearings, O-rings, seals and gaskets. Lubricate the gear box in accordance with the manufacturer's instructions. Submit a CIR.
5	Disassemble and inspect	4	Control Stand Components	3.2.3 (Disassemble and inspect)	Submit a CIR.
6	Disassemble and Inspect	4	Hydraulic brake	D2.3(Brakes and clutches)	Clean and inspect all components of the hydraulic brake. Submit a CIR. Reassemble and reinstall the hydraulic brake with a new O-rings, discs, bearings, and gaskets.
7	Disassemble and Inspect	4	Directional control valves	C2.4(Valves and manifolds)	Inspect the spool bores and spools for deep scratches, gouges or excessive wear. If any of these conditions exist, replace the section. Minor surface damage on the spool may be polished away with very fine crocus cloth. Examine the machined surfaces of the valve housings for nicks or burrs that could cause leakage between the sections. Lightly stone these surfaces to remove any rough spots. Wash all parts thoroughly and blow dry with warm dry air. Submit a CIR.

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026

				ADDITIONAL REQUIREMENTS	
#	TASK TYPE (SFLC STD SPEC 5000 PARA. REF.)	QTY	COMPONENT OR ASSEMBLY	APPENDIX AND PARA. FROM SFLC STD SPEC 5000	OTHER
					Reassemble with new seals, O-rings, springs and washers.
8	Preserve	4	Gypsy Winch and associated foundation	3.2.4 (Preservation)	1. Coat all working surfaces with Solvent Cutback Corrosion Preventative Compound conforming to MIL-C-16173, Grade 3, or Thin Film Corrosion Preventative Compound conforming to MIL-C-81309, Type II, Class I. 2. Select following top color coats: - Spar (10371) for winch surfaces. - Black (17038), for foundations.
9	Renew	00	Hydraulic hoses	C2.2(Hose assemblies)	Refer to CG TP 3386, SWBS 582-O.
10	Renew	All	Hydraulic oil	C2.1 (Fluids)	Dispose of old fluids in accordance with all applicable Federal, state, and local regulations.
11	Groom and Lubricate	4	Gypsy Winch	3.2.6 (Groom and lubricate)	Refer to CG TP 3386, SWBS 582-O.
12	Final Weight Test	4	Gypsy Winch	B2.3.1 (Functional / No-load test) B2.3.5 (Winch Brake / Modified static load test) B2.3.7 (Rated load test)	Refer to paragraph 3.3 below for test particulars. Required test weights: - Winch Brake / Modified Static Load Test Weight: 15,000 (+750/-0) - Rated Load Test Weight: 12,000 (+0/-600) Pounds. Submit a CFR.
13	Fabricate and Install	4	Label plate	B2.9 (Label plates)	

NOTE

Coast Guard personnel will operate all shipboard machinery and equipment.

3.3 Final weight test. After completion of work and in the presence of the Coast Guard Inspector, the Contractor must thoroughly test and demonstrate the gypsy winches to be in satisfactory condition through the successful performance of the below-listed final weight tests. Final weight test must be in

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026

accordance with the requirements of SFLC Std Spec 5000, paragraph B2.3 (Winches). Submit a CFR summarizing all test results.

3.3.1 Required equipment. The following tests require a load to be lifted by the winch. See the following regarding equipment required for performance of tests:

3.3.1.1 Appropriate rope for performing tests on the two bare drum gypsy winches are not on hand with the cutter. The Contractor must provide appropriately sized and rated ropes and secure them to the drums for the below tests, as necessary.

3.3.1.2 A combination of appropriately-rated snatch blocks, slings, and crane are necessary for performance of the tests. Refer to the images in Section 4 for suggested test arrangement. The cutter can provide snatch blocks for the wire rope, slings, and crane. The Contractor must provide appropriately sized and rated snatch blocks for use with bare drum winches and contractor-provided rope.

3.3.2 Functional / No-load test. Conduct a functional / no-load test in accordance with SFLC Std Spec 5000, paragraph B2.3.1. The system must be operated through full operating ranges in all directions. During the test, operation of limit switches and emergency features (as applicable) must be checked. Rated speeds of each function must be verified. Winch must be accelerated and decelerated smoothly, and slow speed must be used near the end of each range of motion.

3.3.3 Winch Brake / Modified Static Load Test. Conduct a winch brake / modified static load test in accordance with SFLC Std Spec 5000, paragraph B2.3.5, using a test weight of 15,000 lbs (+750/-0). Hold the load for a minimum of 10 minutes and inspect for slippage or creep.

3.3.4 Rated Load Test. Conduct a rated load test in accordance with SFLC Std Spec 5000, paragraph B2.3.7, using a test weight of 12,000 lbs (0/-600).

4. NOTES

4.1 Test arrangement images.

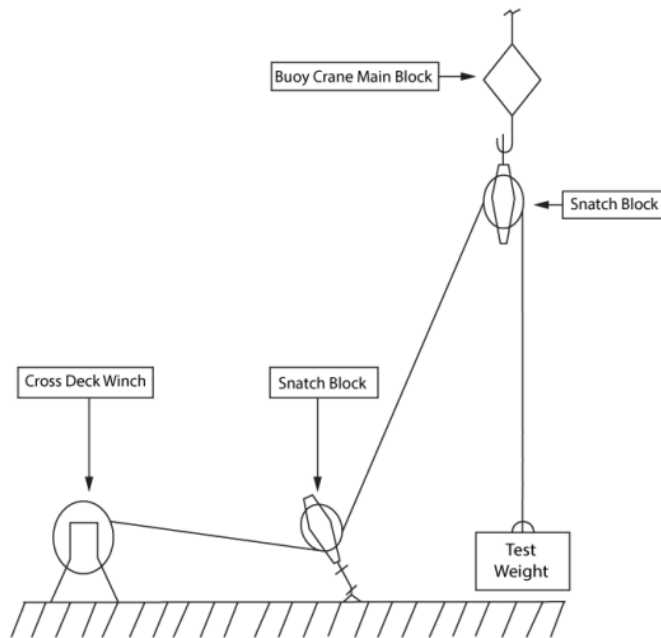


FIGURE 1 – SUGGESTED TEST ARRANGEMENT



FIGURE 2 – CONNECTION FROM SNATCH BLOCK TO DECK TIE DOWNS USING SLING

This section is not applicable to this work item.

WORK ITEM 38: Grey Water Holding Tanks, Clean and Inspect - Barge

1. SCOPE

1.1 Intent. This work item describes the requirements for the Contractor to clean and inspect the following tank(s):

TABLE 1 – TANKS

TYPE OF STRUCTURE	LOCATION	CAPACITY - 95% (GALLONS)
TANK-EXTERNAL STEEL	2-80-0	65

1.2 Government-furnished property.

None.

1. REFERENCES

COAST GUARD DRAWINGS

Coast Guard Drawing 120-CGB 593-1, Rev C, Sewage & Plumbing Drains
Coast Guard Drawing 120-CGB 601-1, Rev C, General Arrangement and Profile
Coast Guard Drawing 120-CGB 801-4, Rev A, Tank Capacity Curves
Coast Guard Drawing 120-CGB 801-5, Rev A, Tank Sounding Tables

COAST GUARD PUBLICATIONS

Surface Forces Logistics Center Standard Specification 0000 (SFLC Std Spec 0000), 2022,
General Requirements

OTHER REFERENCES

ASTM International (ASTM) D1330, 2015, Standard Specification for Rubber Sheet Gaskets

3. REQUIREMENTS

3.1 General.

3.1.1 CIR.

None.

3.1.2 Tech Rep.

Not applicable.

3.1.3 Protective measures. The Contractor must furnish and install all protective measures in accordance with SFLC Std Spec 0000, paragraph 3.3.3 (Vessel component, space, and equipment protection).

3.1.3.1 Plug all inlet and outlet piping in the tank(s) to prevent contaminants from entering. Use plugs with an attached lanyard, ring or other system that will ensure plugs are not lost in the pipe openings.

3.1.4 Interferences. The Contractor must handle all interferences in accordance with SFLC Std Spec 0000, paragraph 3.3.5 (Interferences). Known interferences include, but are not limited to the following:

- Piping.
- Pump(s).
-

3.2 Plug log. The Contractor must keep a written record of all plugs put in any tank vents. A separate list must be kept for each tank being entered.

3.2.1 Ensure that all plugs are removed from each tank upon completion of work in the tank.

3.2.2 The plug log must be available to the Coast Guard Inspector when the inspector is performing his close-out inspection on each tank.

NOTE

Coast Guard personnel will operate all shipboard machinery and equipment.

3.3 Operational test, initial. Prior to commencement of work, the Contractor must witness Coast Guard personnel perform an initial operational test of all items or shipboard devices to be disturbed, used, repaired, or altered, to demonstrate existing operational condition. Submit a CFR.

3.4 Service disruption. When grey water is disrupted due to Contractor repairs, the Contractor must refer to SFLC Standard Spec 0000 par 3.2.11 to provide required temporary facilities.

3.5 Cleaning. The Contractor must accomplish the following for the tank(s) listed. The Contractor must refer to for guidance.

3.5.1 Content removal. Remove and dispose of all contents, fluids, and/or residues in accordance with all applicable Federal, state, and local regulations

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026

3.5.2 Cleaning requirements. Remove manhole cover(s). Clean all tank structure's interior surfaces free of all foreign materials, sediment, and sludge. Remove all persistent residues, taking care not to damage the tank coating system. Remove cleaning media and residues continuously from the tank during the washing process. Remove any residual wash media and wipe up residual moisture with clean lint-free cloths. Collect, contain, and dispose of all wash media, residues, and cleaning materials in accordance with all Federal, state, and local regulations. Clean all tank vent lines. Remove and clean the eductors and level switches inside of the tank(s). Reinstall the eductors and level switches upon completion of tank cleaning. Use new gaskets and o-rings to install/reinstall all removed/disturbed components.

3.6 Inspection. The Contractor must visually inspect all interior surfaces, including, but not limited to bulkheads, floor and overhead plating, structural members, manhole cover surfaces, fasteners and gasket seating surfaces. Submit the Tank and Void Inspection Form, and a CFR including the following, as applicable:

- Tank structural condition.
- Inaccessible areas.
- Condition of tank coating, including measurements taken, percentage, location, and type of coating failure (not applicable for stainless steel tanks).
- Tank level indicator (TLI), vacuum and/or float switch condition.
- Suction and discharge piping and vent line condition.
- Fastener material (stainless steel) and condition.
- Zinc anode condition (remaining percentage).

3.7 Control panel assembly. The Contractor must open and vacuum clean the control panel assembly. Inspect the control panel assembly for any indications of overheating or loose wiring or connections. Submit a CFR

3.8 Closing. The Contractor must notify the COR at least 24 hours prior to closing the tank(s). After satisfactory inspection by the Coast Guard Inspector, and completion of all authorized repairs, close the manhole cover(s) with new gasket material conforming to ASTM D1330.

3.8.1 Renew 100% of nylon insert/nylock nuts and washers.

NOTE

Coast Guard personnel will operate all shipboard machinery and equipment.

3.9 Operational test, post repairs. After completion of work, the Contractor must thoroughly test, in the presence of the Coast Guard Inspector and demonstrate all items or shipboard devices that have been disturbed, used, repaired, altered, or installed to be in satisfactory operating condition. Submit a CFR.

3.9.1 The Contractor must adjust the set point on each of the vacuum pressure switches (as applicable) to the set points noted previously.

3.9.2 The Contractor must verify operation of the low and high level switches/alarms and that the pumps cycle from lead to lag status during operation. Demonstrate proper operation of tank TLIs to prove satisfactory operating condition.

3.9.3 Upon completion of testing and, in the presence of the Coast Guard Inspector, the Contractor must pump tank(s) to the limit of the ship's installed pumps.

4. NOTES

This section is not applicable to this work item.

WORK ITEM 39: Sewage Holding Tanks, Clean and Inspect - Barge**1. SCOPE**

1.1 Intent. This work item describes the requirements for the Contractor to clean and inspect the following tank(s):

TABLE 1 – TANKS

TYPE OF STRUCTURE	LOCATION	CAPACITY - 95% (GALLONS)
TANK	2-90-4	5,837
TANK	2-60-1	11,675
VAC- EXTERNAL	2-80-4	162

1.2 Government-furnished property.

«GFE»

2. REFERENCES**COAST GUARD DRAWINGS**

«CGDRAWINGS»

COAST GUARD PUBLICATIONS

Surface Forces Logistics Center Standard Specification 0000 (SFLC Std Spec 0000), 2022,
General Requirements

OTHER REFERENCES

ASTM International (ASTM) D1330, 2015, Standard Specification for Rubber Sheet Gaskets

3. REQUIREMENTS

3.1 General.

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026

3.1.1 CIR.

None.

3.1.2 Tech Rep.

Not applicable.

3.1.3 Protective measures. The Contractor must furnish and install all protective measures in accordance with SFLC Std Spec 0000, paragraph 3.3.3 (Vessel component, space, and equipment protection).

3.1.3.1 Plug all inlet and outlet piping in the tank(s) to prevent contaminants from entering. Use plugs with an attached lanyard, ring or other system that will ensure plugs are not lost in the pipe openings.

3.1.4 Interferences. The Contractor must handle all interferences in accordance with SFLC Std Spec 0000, paragraph 3.3.5 (Interferences). Known interferences include, but are not limited to the following:

- Piping.
- Pump(s).

3.2 Plug log. The Contractor must keep a written record of all plugs put in any tank vents. A separate list must be kept for each tank being entered.

3.2.1 Ensure that all plugs are removed from each tank upon completion of work in the tank.

3.2.2 The plug log must be available to the Coast Guard Inspector when the inspector is performing his close-out inspection on each tank.

NOTE

Coast Guard personnel will operate all shipboard machinery and equipment.

3.4 Operational test - initial. Prior to commencement of work, the Contractor must witness Coast Guard personnel perform an initial operational test of all items or shipboard devices to be disturbed, used, repaired, or altered, to demonstrate existing operational condition. Submit a CFR.

3.4 Service disruption. When sewage collection service is disrupted due to contractor repairs, the Contractor must refer to SFLC Standard Spec 0000 par 3.2.11 to provide required temporary facilities.

3.5 Cleaning and inspection requirements. The Contractor must accomplish the following for the tank(s) listed in paragraph 1.1 (Intent), referring to «DWG1» for guidance:

3.5.1 Content removal. Remove and dispose of all contents, fluids, and/or residues in accordance with all applicable Federal, state, and local regulations

3.5.2 Cleaning requirements. Remove manhole cover(s). Clean all tank structure's interior surfaces free of all foreign materials, sediment, and sludge. Remove all persistent residues, taking care not to damage the tank coating system. Remove cleaning media and residues continuously from the tank during the washing process. Remove any residual wash media and wipe up residual moisture with clean lint-free cloths. Collect, contain, and dispose of all wash media, residues, and cleaning materials in accordance with all

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026

Federal, state, and local regulations. Clean all tank vent lines. Remove and clean the eductors and level switches inside of the tank(s). Reinstall the eductors and level switches upon completion of tank cleaning. Use new gaskets and o-rings to install/reinstall all removed/disturbed components.

3.5.3 Inspection. Visually inspect all interior surfaces, including, but not limited to bulkheads, floor and overhead plating, structural members, manhole cover surfaces, fasteners and gasket seating surfaces. Submit a CFR including the following, as applicable:

- Tank structural condition.
- Inaccessible areas.
- Condition of tank coating, including measurements, percentage, location, and type of coating failure (not applicable for stainless steel tanks).
- Tank level indicator (TLI), vacuum and/or float switch condition.
- Suction and discharge piping and vent line condition.
- Fastener material (stainless steel) and condition.
- Zinc anode condition (remaining percentage).

3.5.4 Control panel assembly. Open and vacuum clean the control panel assembly. Inspect the control panel assembly for any indications of overheating or loose wiring or connections. Submit a CFR

3.6 Closing. The Contractor must notify the COR at least 24 hours prior to closing the tank(s). After satisfactory inspection by the Coast Guard Inspector, and completion of all authorized repairs, close the manhole cover(s) with new gasket material conforming to ASTM D1330.

3.6.1 The Contractor must renew 100% of nylon insert/nylock nuts and washers.

NOTE

Coast Guard personnel will operate all shipboard machinery and equipment.

3.7 Operational test, post repairs. After completion of work, the Contractor must accomplish the following in the presence of the Coast Guard Inspector, and submit a CFR:

3.7.1 Adjust the set point on each of the vacuum pressure switches (as applicable) to the set points noted previously.

3.7.2 Verify operation of the low and high level switches/alarms and that the pumps cycle from lead to lag status during operation. Demonstrate proper operation of tank TLIs to prove satisfactory operating condition.

3.7.3 Upon completion of testing and, in the presence of the Coast Guard Inspector, pump tank(s) to the limit of the ship's installed pumps.

4. NOTES

WORK ITEM 40: Deck Covering, Electrical Matting, Renew

1. SCOPE

1.1 Intent. This work item describes the requirements for the Contractor to renew electrical deck covering system(s).

1.2 Government-furnished property.

None.

2. REFERENCES

COAST GUARD DRAWINGS

Coast Guard Drawing 140-WTGB 801-003, Rev -, Booklet of General Plans

Coast Guard Drawing 140-WTGB 131-001, Rev -, Main Deck Pl & Fr

COAST GUARD PUBLICATIONS

Surface Forces Logistics Center Standard Specification 0000 (SFLC Std Spec 0000), 2022, General Requirements

Surface Forces Logistics Center Standard Specification 6341 (SFLC Std Spec 6341), 2022, Install New Deck Covering Systems

OTHER REFERENCES

None

3. REQUIREMENTS

3.1 General.

3.1.1 CIR. The Contractor must submit a CIR for the inspections listed in the following paragraph(s):

- None

3.1.2 Technical Representative.

Not applicable.

3.1.3 Protective measures. The Contractor must furnish and install all protective coverings to seal off

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026

and protect all non-affected vessel's components, equipment, and spaces near the work area against contamination during the performance of work. Upon completion of work, the Contractor must remove all installed protective measures, inspect for the presence of contamination, and return all contaminated equipment, components, and spaces to original condition of cleanliness.

3.1.4 Interferences. The Contractor must handle all interferences in accordance with SFLC Std Spec 0000, (Interferences). Known interferences include, but are not limited to the following:

- Propulsion Control Console.
- Scuttle.

3.2 Deck covering installation particulars. The Contractor must perform all tasks specified in SFLC Std Spec 6341, Appendix D (Electrical Grade Sheet (Dielectric)), and herein, to install a new covering system in the location(s) specified in Table I below.

TABLE I - DECKING SYSTEM PARTICULARS

LOCATION	AREA (*SQFT)	DECK MTL (A/S**)	COVE BASE	UNDERLAYMENT REQUIREMENT
ENGINEERING CONTROL CENTER (1-58-0-C)	130	S	Yes: X No :__	New: X Retain Existing: __ Insulating: __

*Approximated.

**Note: A = Aluminum; S = Steel.

3.3 Visual inspection. The Contractor must perform a visual inspection of all exposed deck surfaces, prior to priming deck surfaces. Submit a CFR.

3.4 Deck covering color. The Contractor must submit a deck covering color chart to Coast Guard Inspector, for the purpose of color selection.

4. NOTES

This section is not applicable to this work item.

WORK ITEM 41: Fireman Valves, Overhaul or Renew**1. SCOPE**

1.1 Intent. This work item describes the requirements for the Contractor to overhaul or renew the listed firemain valves as designated in Table 1.

TABLE 1 - FIREMAIN VALVES

SIZE/ TYPE/ VALVE #	DESCRIPTION	MATERIAL	CONNECTION/ RATED PRESSURE CLASS #	INDUSTRY STANDARD	*O/ R
6"/ Butterfly/ 1-31-3	Fire main Supply to Pilot House Fire Monitors	Ni-Al-Brz	Flanged/ 150	MSS SP-67	O
6"/ Butterfly/ 02-25-1	COV for Fire monitor	Ni-Al-Brz	Flanged/ 150	MSS SP-67	O
6"/ Butterfly/ 02-25-2	COV for Fire monitor	Ni-Al-Brz	Flanged/ 150	MSS SP-67	O

* "O" = Overhaul "R"=Renew

NOTE

Firemain Cuttout Valve (FMCOV) shown in Figure is identified on CG Dwg as a 6 inch IPS 150# Wafer type Butterfly Valve. OEM is KEYSTONE with part number 139-941. Attached label plate on the shipboard valve contains markings "LD512-BSJ-E".

1.2 Government-furnished property.

None

2. REFERENCES

COAST GUARD DRAWINGS

Coast Guard Drawing 140 WTGB 521-002, Rev -, Firemain System Arrangements & Details

Coast Guard Drawing 140 WTGB 521-003, Rev A, Firemain System Diagram

COAST GUARD PUBLICATIONS

Surface Forces Logistics Center Standard Specification 0000 (SFLC Std Spec 0000), 2022, General Requirements

Surface Forces Logistics Center Standard Specification 0740 (SFLC Std Spec 0740), 2022, Welding and Allied Processes

Surface Forces Logistics Center Standard Specification 6310 (SFLC Std Spec 6310), 2022, Requirements for Preservation of Ship Structures

OTHER REFERENCES

American Society of Mechanical Engineers (ASME) B16.34, 2017, Valves-Flanged, Threaded, and Welding End

ASTM International (ASTM) F992, 2017, Standard Specification for Valve Label Plates

Manufacturers Standardization Society of the Valve and Fittings Industry (MSS) SP-61, 2013 Edition, Pressure Testing Of Steel Valves

Manufacturers Standardization Society of the Valve and Fittings Industry (MSS) SP-67, 2017 Edition, Butterfly Valves

Manufacturers Standardization Society of the Valve and Fittings Industry (MSS) SP-72, 2018 Edition, Ball Valves with Flanged or Butt-Welding Ends for General Service

Manufacturers' Standardization Society of the Valve and Fittings Industry (MSS) SP-80, 2013 Edition, Bronze Gate, Globe, Angle and Check Valves

3. REQUIREMENTS

3.1 General.

3.1.1 CIR.

None.

3.1.2 Tech Rep.

Not applicable.

3.1.3 Protective measures. The Contractor must furnish and install all protective measures in accordance with SFLC Std Spec 0000, paragraph 3.3.3 (Vessel component, space, and equipment protection).

3.1.4 Interferences. The Contractor must handle all interferences in accordance with SFLC Std Spec 0000, paragraph 3.3.5 (Interferences). Known interferences include, but are not limited to the following:

Deck plates

Piping

Insulation

Pumps

Hoses

3.2 Temporary firemain connections. The Contractor must provide temporary connections for the firemain to ensure the firemain system remains operational during the performance of the tasks specified herein.

3.3 Removal. The Contractor must remove each valve identified in Table 1 and immediately install blank flanges and gaskets over openings and secure each flange 180 degrees apart with at least two bolts.

3.4 Renewal. The Contractor must renew all valves identified in Table 1 by an "R" in the "O/ R" column. At no additional cost to the Government, the Contractor may opt to renew valves identified in Table 1 for overhaul by an "O" in the "O/ R" column as follows.

3.4.1 Equivalency. Ensure all renewed valves, including Mil-Std valves, are commercial-standard type valves conforming to the applicable standard listed in Table 1. The Contractor must ensure each new valve is of identical material and equivalent to the valve it is replacing.

3.4.2 Inspection. Visually inspect the piping and mounting arrangements and submit a CFR detailing any required modifications to accommodate the new valve(s).

3.5 Overhaul. The Contractor must accomplish the following as required for each valve identified for overhaul, not including valves the Contractor has opted to renew, to meet the specified valve testing standard:

3.5.1 Disassembly. Disassemble the valve to the extent necessary to perform the required work.

NOTE

Complete disassembly of some valves may not be necessary for overhaul.

3.5.2 Cleaning. Clean all internal surfaces.

3.5.3 Inspection. Visually inspect for defects in body and structural material, surface finish, and the condition of seats, disks, parting faces, plugs, and sealing surfaces.

3.5.4 Machining. As applicable, machine, grind, lap, and spot-in seat-to-disk to obtain an acceptable leakage rate at or below the valve's industry testing standards identified in Table 1.

3.5.5 Assembly. Assemble the valve using new hardware and software not limited to the following:

Packing

O-rings

Gaskets

Seal rings

Non-metallic seats

Pins

Washers

Inserts, etc

3.5.6 Testing. Test each overhauled valve in accordance with the applicable standards listed in Table 1. Submit a CFR.

3.6 Installation. Upon completion of all authorized work, the Contractor must install all overhauled and renewed valves with renewed gaskets as follows:

3.6.1 Disposal. Remove and dispose of all blank flanges and associated gaskets.

3.6.2 Secure. Secure each valve installation with renewed bolting hardware.

3.6.3 Labeling. Renew all missing and damaged valve label plates, and install new valve label plates on new valves, in accordance with ASTM F992.

3.7 Touch-up preservation. The Contractor must prepare and coat all new and disturbed surfaces to match existing adjacent surfaces in accordance with SFLC Std Spec 6310, paragraph 3.1.13 (Touch-ups and minor coating repairs.)

3.8 Leak test. After completing all authorized mechanical (i.e. threaded, bolted, etc.) joint repairs, the Contractor must test the disturbed firemain piping system's operation using the system fluid at normal operating pressure. Ensure zero visible leakage from or deformation of mechanical parts by repairing all leaks and discrepancies. Submit a CFR.

3.9 Hydrostatic test. After all authorized repairs, the Contractor must hydrostatically test all new and disturbed piping and components of the disturbed firemain piping system in accordance with SFLC Std Spec 0740, Appendix C, "Hydrostatic Test". Ensure zero leakage from or permanent deformation of pressure-containing parts by repairing all leaks, deformations, and discrepancies. Submit a CFR.

4. NOTES

This section is not applicable to this work item.

WORK ITEM 42: Hull Fittings (Mooring and Towing), Inspect and Test - Barge

1. SCOPE

1.1 Intent. This work item describes the requirements for the Contractor to inspect the below designated hull fittings:

1.1.1 General Mooring and Tow Hull Fittings

QTY	DESCRIPTION	LOCATION	APPLICABLE REFERENCE
QTY	DESCRIPTION	LOCATION	APPLICABLE REFERENCE
01	BOW CHOCK	FR 0	Drawing Number: 101-WTGB_582_1
	CLOSED RAILING CHOCK	PORT/STBD FR01, PORT STBD FR 08, PORT/STBD FRAME 15, PORT/STBD FRAME 23, PORT/STBD FR 78, PORT/STBD FR 87,	Drawing Number: 101-WTGB_582_1
09	BITT	CENTERLINE FR 03, PORT/STBD FR 10, PORT/STBD FR 28, PORT STBD FR 70, PORT/STBD FR 78	Drawing Number: 101-WTGB_582_1
01	TOW BITT	FRAME 76	Drawing Number: 101-WTGB_582_1
01	STERN CHOCK	CENTERLINE FR 92	Drawing Number: 101-WTGB_582_1
02	DECK CLEAT	PORT/STBD FR 56	Drawing Number: 101-WTGB_582_1
04	DECK CHOCK	PORT/STBD FR 35, PORT STBD FR 50	Drawing Number: 101-WTGB_582_1
04	SINGLE BIT/HORN	PORT/STBD FR 18, PORT/STBD FR 56	Drawing Number: 101-WTGB_582_1
02	EMERGENCY BREAKAWAY SHACKLE ASSEMBLY	PORT/STBD FR 40	Drawing Number: 101-WTGB_582_1

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026

1.1.2 Tender/Barge Interface Hull Fittings

QTY	DESCRIPTION	LOCATION	APPLICABLE REFERENCE
QTY	DESCRIPTION	LOCATION ON BARGE	APPLICABLE REFERENCE
04	BUOY PORT MECHANICAL CHAIN STOPPERS	PORT/STBD FR 70, PORT/STBD FR 90	DRAWING: 120-BARGE_802_3 MPC Number: A-A-15792 Drawing Number: FL_2605_37
09	CLOSED MOORING CHOCK	Centerline FR 0, Port/STBD FR 25, Port/STBD FR 45, Port/STBD 65, Port/STBD FR 123	DRAWING: 120-BARGE_802_3
05	12" BITT	CENTERLINE FR 03, PORT/STBD FR 26, PORT/STBD FR 50,	DRAWING: 120-BARGE_802_3
02	CLOSED CHOCK W/10" BITT	PORT/STBD FR 120	DRAWING: 120-BARGE_802_3
02	H BITT	PORT/STBD INBOARD FR 110	DRAWING: 120-BARGE_802_3
02	TRACTION WHINCH	PORT STBD OUTBOARD FR 115	DRAWING: 120-BARGE_802_3

1.2 Government-furnished property.

None.

2. REFERENCES

COAST GUARD DRAWINGS

None

COAST GUARD PUBLICATIONS

Surface Forces Logistics Center Standard Specification 0000 (SFLC Std Spec 0000), 2022,
General Requirements

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026

Surface Forces Logistics Center Standard Specification 0740 (SFLC Std Spec 0740), 2022,
Welding and Allied Processes

Surface Forces Logistics Center Standard Specification 6310 (SFLC Std Spec 6310), 2022,
Requirements for Preservation of Ship Structures

OTHER REFERENCES

None

3. REQUIREMENTS

3.1 General.

3.1.1 CIR.

None.

3.1.2 Tech Rep.

Not applicable.

3.1.3 Protective measures. The Contractor must furnish and install all protective measures in accordance with SFLC Std Spec 0000, paragraph 3.3.3 (Vessel component, space, and equipment protection).

3.1.4 Interferences. The Contractor must handle all interferences in accordance with SFLC Std Spec 0000, paragraph 3.3.5 (Interferences).

3.2 Inspection and test particulars. The Contractor must accomplish the following for designated fitting designated in paragraph 1.1, and submit a CFR.

3.2.1 Visual. Visually inspect all cleaned surfaces for excessive damage, wear, corrosion, distortion, elongation of holes, gouges, pits, and cracks.

3.2.2 NDE. Perform nondestructive examination (NDE) of all designated fittings, including all components and associated welds (including but not limited to deck mounting and base/foundation welds) or other mounting hardware, in accordance with SFLC Std Spec 0740, Appendix C.

3.3 Touch-up preservation. The Contractor must prepare and coat all new and disturbed exterior and interior surfaces, as applicable, to match existing adjacent surfaces in accordance with SFLC Std Spec 6310, paragraph 3.1.13 (Touch-ups and minor coating repairs).

4. NOTES

This section is not applicable to this work item.

USCGC BRISTOL BAY (WTGB-140) DOCKSIDE AVAILABILITY FY2026