
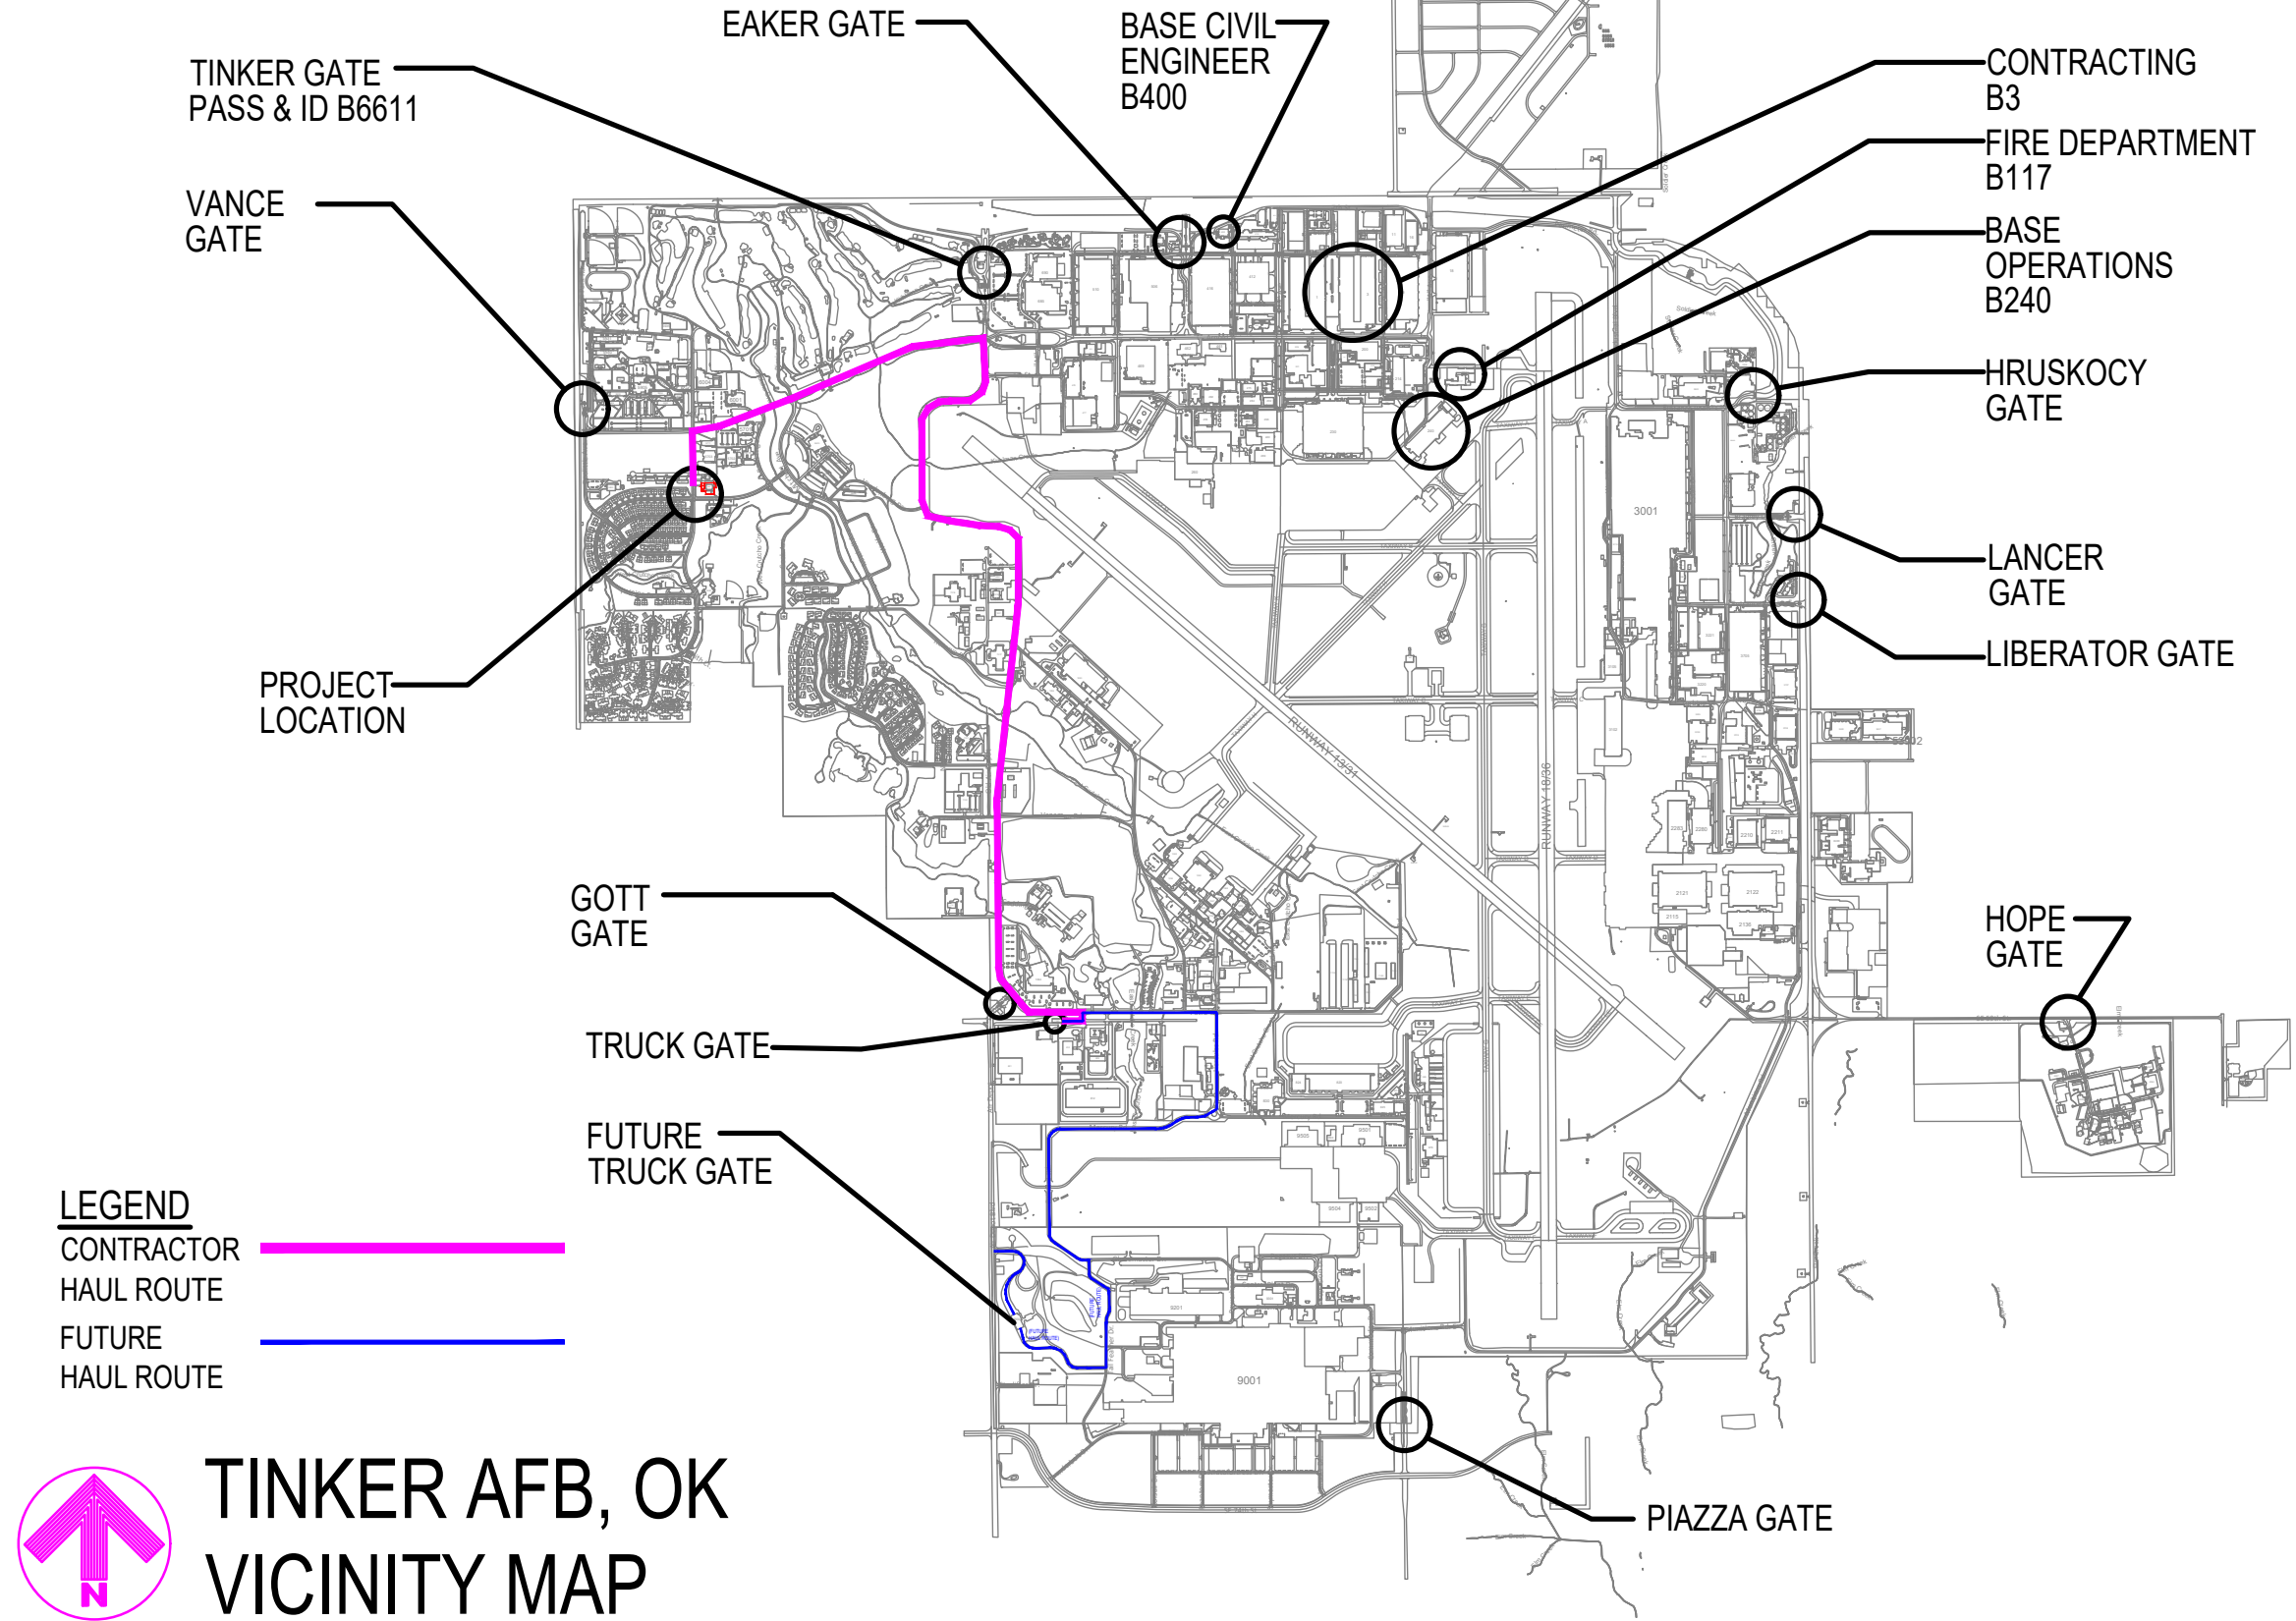


WWYK250172
REPLACE WALLS OF THE
ISZARD POOL HOUSE,
B5730

KEY PLAN:

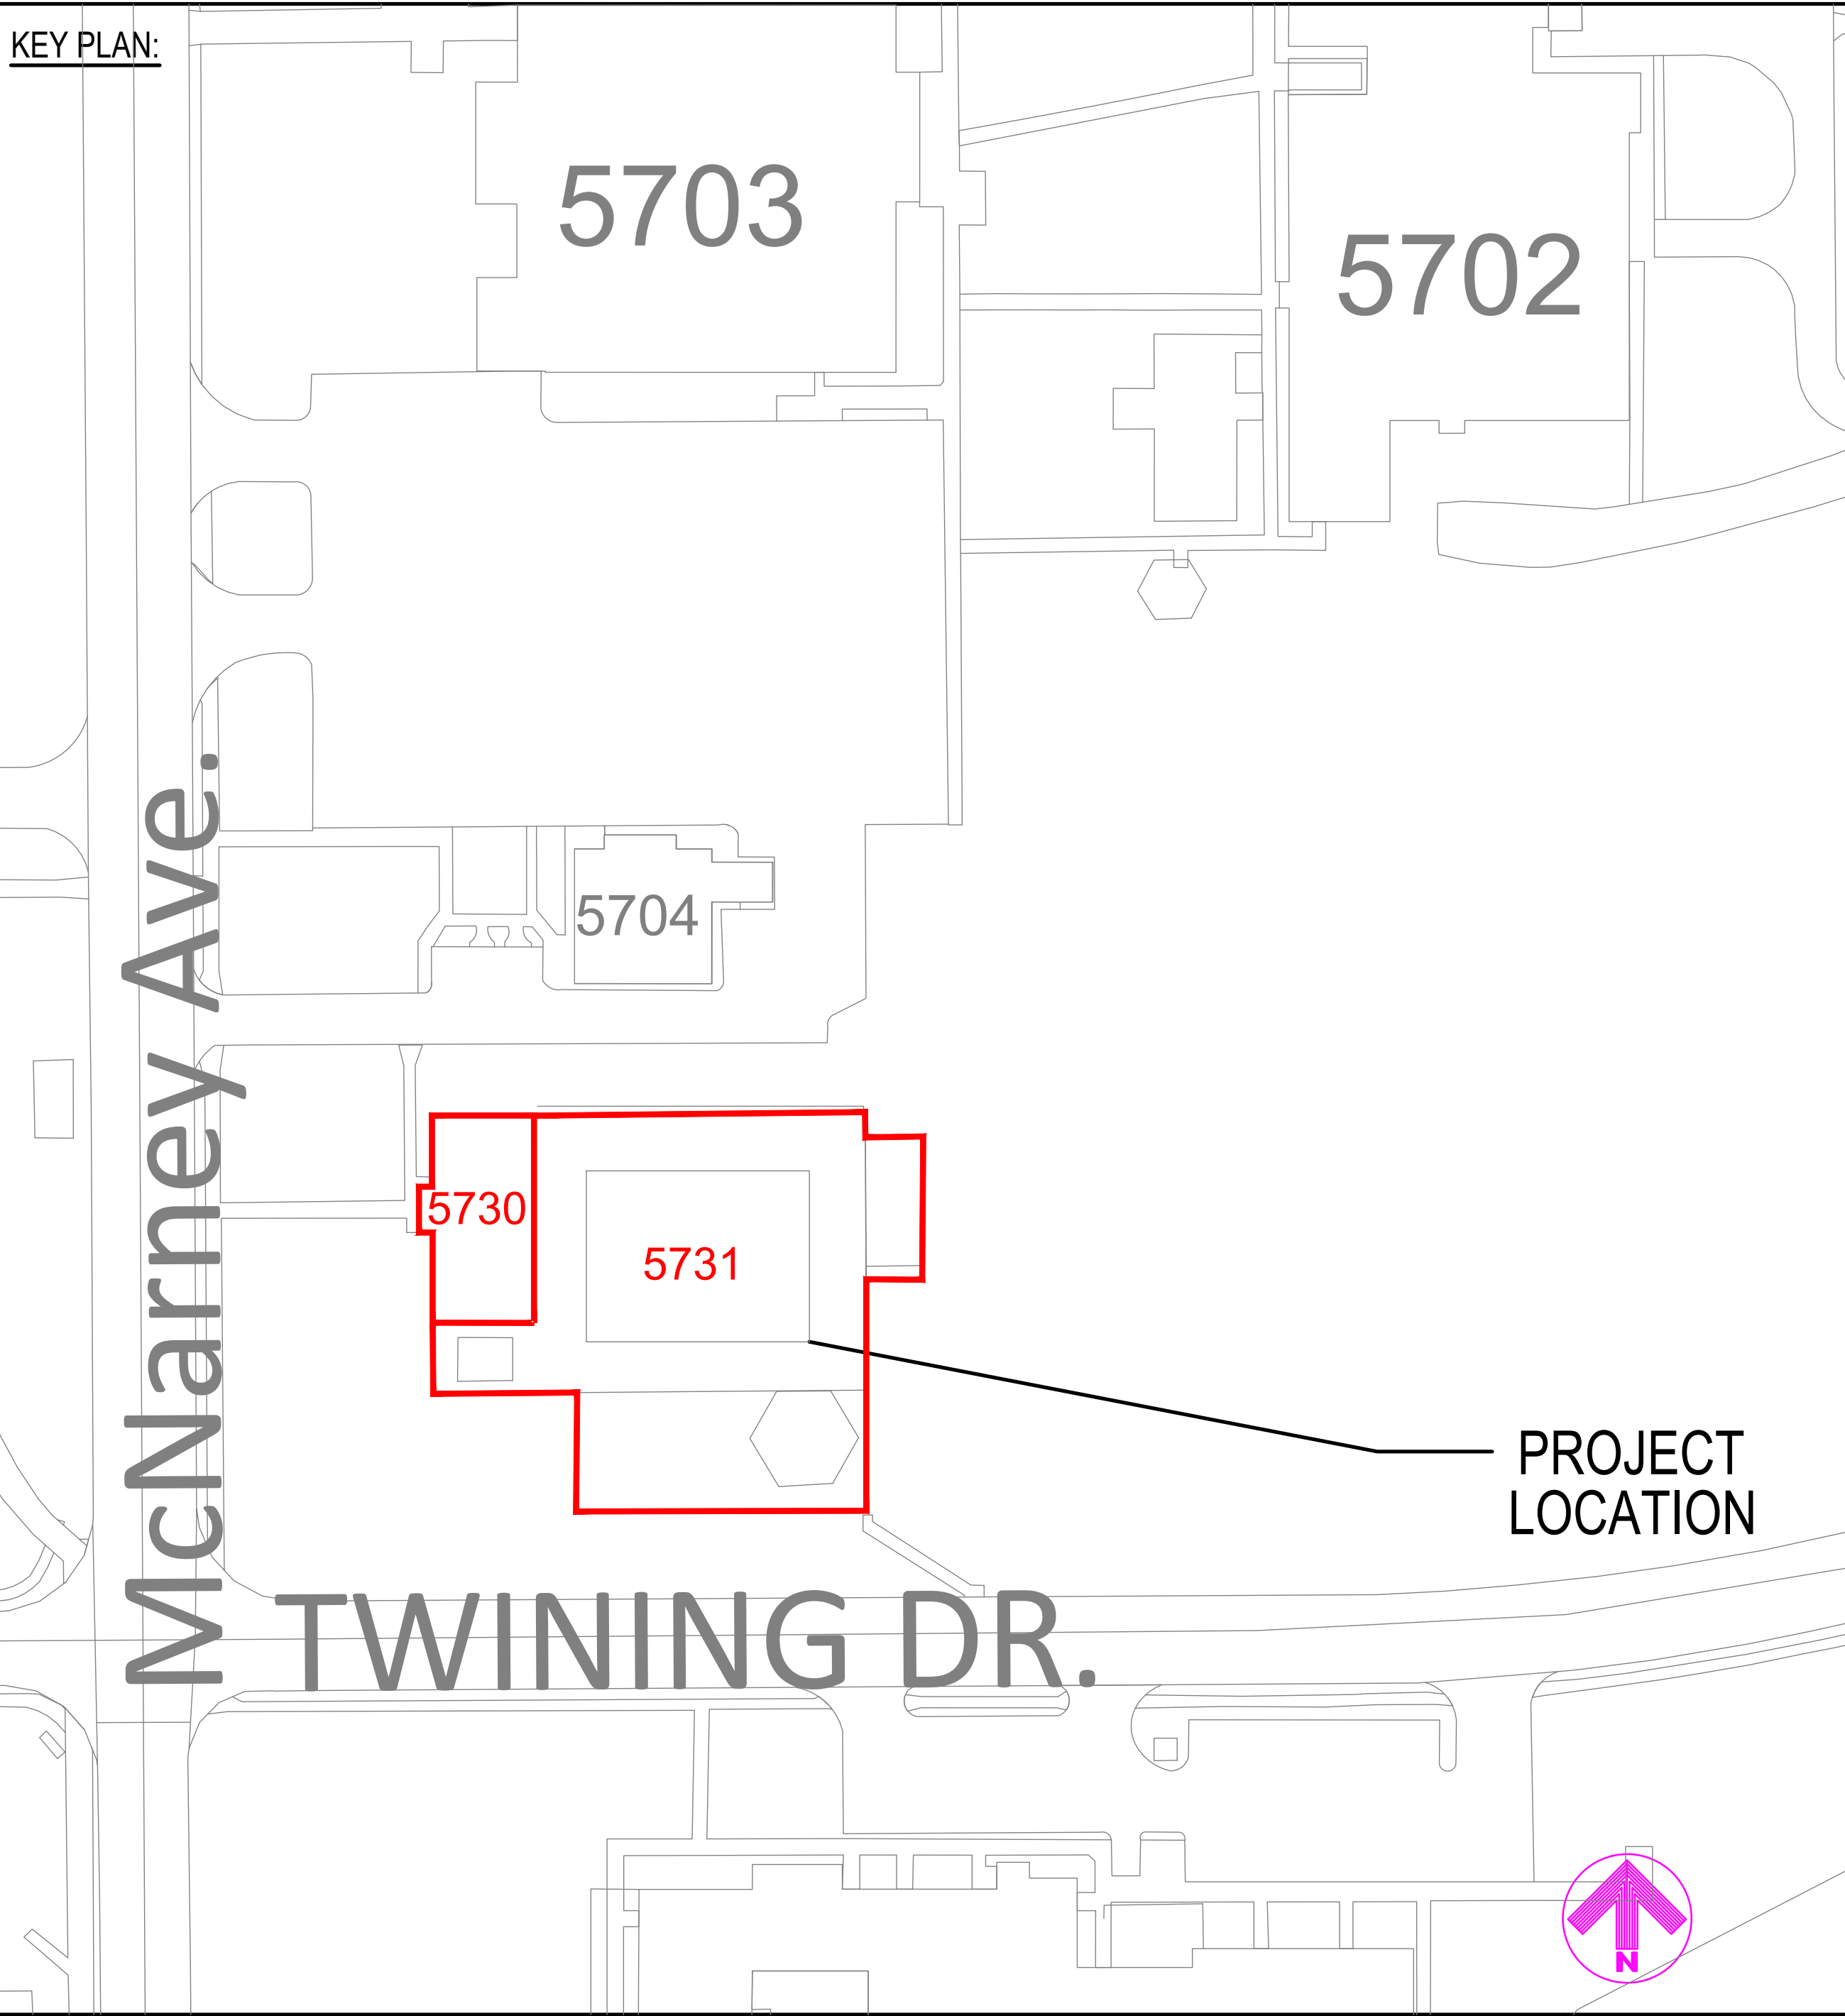

TINKER AFB, OK
VICINITY MAP

GENERAL NOTES:

- BRAND NAMES: REFERENCE TO SPECIFIC BRAND NAMES OR COMPANIES IS FOR THE PURPOSE OF ESTABLISHING MINIMUM QUALITY STANDARDS, IDENTIFICATION AND GUIDANCE AND IS NOT INTENDED TO LIMIT SELECTION OF OTHER MANUFACTURERS THAT ARE EQUAL OR EXCEED THE SPECIFIED ITEMS IN TERMS OF PHYSICAL PROPERTIES, INCLUDING, COLOR RANGE, FINISH, DURABILITY, APPEARANCE, PERFORMANCE CHARACTERISTICS, AND OTHER FACTORS. OTHER PRODUCTS, MATERIALS, COLORS AND SYSTEMS, MAY BE SUBMITTED FOR EVALUATION AND APPROVAL/DISAPPROVAL BY THE CONTRACTING OFFICER.
- THIS SET OF CONSTRUCTION DOCUMENTS SHALL BE CONSIDERED AS A WHOLE IN THAT THE GENERAL CONTRACTOR AND ALL THE SUB-CONTRACTORS ARE RESPONSIBLE FOR THE INFORMATION PRESENTED ON ALL SHEETS ON THE SET OF DRAWINGS AND ALL SECTIONS OF THE SPECIFICATIONS.
- THE CONTRACTOR IS RESPONSIBLE FOR ERECTING ALL CONSTRUCTION FENCING AND BARRICADES AS REQUIRED TO PROTECT CONSTRUCTION MATERIAL AND TO PREVENT ANY UNAUTHORIZED PERSONNEL FROM ENTERING THE CONSTRUCTION SITE.
- ANY DAMAGE TO THE EXISTING GROUNDS OR FACILITIES CAUSED BY CONSTRUCTION TRAFFIC OR ANY CONSTRUCTION OPERATION SHALL BE REPAIRED OR REPLACED BY THE CONTRACTOR TO MATCH OR EXCEED EXISTING CONDITIONS AT NO ADDITIONAL COST TO THE GOVERNMENT.
- ALL WORK NOTED & LOCATED IN THESE DOCS SHALL BE UNDERSTOOD BY THE CONTRACTOR TO REQUIRE ALL NEW LABOR & MATERIALS UNLESS SPECIFICALLY NOTED TO BE "EXISTING" OR "BY OTHERS".

PROJECT DRAWING INDEX

SEQ.	SHT.	SHEET TITLE
		GENERAL
1	G-101	GENERAL NOTES & VICINITY MAP
		DISCIPLINE
2	C-101	SITE PLAN AND UTILITIES
3	S-001	GENERAL NOTES
4	S-002	GENERAL NOTES
5	S-003	STRUCTURAL GENERAL NOTES
6	S-004	SPECIAL INSPECTIONS
7	S-101	STRUCTURAL PLAN AND DETAILS
8	S-501	STRUCTURAL DETAILS
9	AD-101	ARCHITECTURAL DEMOLITION
10	A-101	ARCHITECTURAL NEW WORK
11	A-102	ARCHITECTURAL NEW WORK
12	RD-101	ROOF DEMOLITION
13	R-101	ROOF NEW WORK
14	R-501	ROOF DETAILS
15	ED-101	ELECTRICAL DEMOLITION PLAN
16	E-101	ELECTRICAL NEW WORK PLAN

SIGNATURES

CORROSION ENGINEER: (CECE)	DATE:
CE OPERATIONS: (CECO)	DATE:
ZONE MANAGER:	DATE:
CONSTRUCTION MANAGEMENT: (CECE)	DATE:
FIRE DEPARTMENT	DATE:
SAFETY:	DATE:
INDUSTRIAL HYGIENE:	DATE:
ENVIRONMENTAL:	DATE:
ASBESTOS EVALUATION:	DATE:
COMMUNICATIONS: (COMM)	DATE:
USING AGENCY:	DATE:
REVIEWED BY:	DATE:
REVIEWED BY:	DATE:
DESIGN MANAGER: (CECE)	DATE:
CHIEF DESIGN BRANCH: (CECE)	DATE:
CHIEF ENGINEER DIR: (CECE)	DATE:
BASE CIVIL ENGINEER: (CE)	DATE:



35%
DESIGN

WWYK250172
REPLACE WALLS OF THE
ISZARD POOL HOUSE,
B5730

TINKER AIR FORCE BASE, OKLAHOMA

ISSUE DATE	DATE	DESCRIPTION
2 FEB 2025		
DESIGN GROUP: TEP3-SRM		
DESIGNED BY:		
DRAWN BY: F BAKER		
CHECKED BY: B SHANNON		
DESIGN FILE LOCATION:		

GENERAL NOTES
AND
VICINITY MAP

SHEET NUMBER
G-101

SHEET 01 OF 16

1		2		3		4		5	
STRUCTURAL GENERAL NOTES									
E	ACI RAP-1 REPAIRS				ACI RAP-1 REPAIRS CONTINUE				
	SURFACE PREPARATION:				TEST CORES:				
	CLEAN THE SURFACE AREA 1/2 IN. WIDE ON EACH SIDE OF THE CRACK WITH WIRE BRUSH. REMOVE CONTAMINANTS BY HIGH-PRESSURE WATER, "OIL-FREE" COMPRESSED AIR, OR POWER VACUUMS. WHEN USING WATER TO CLEAN OUT THE CRACK, BLOW OUT THE CRACK WITH OIL-FREE, COMPRESSED OR HEATED AIR TO ACCELERATE DRYING. WHERE CONCRETE SURFACES ADJACENT TO THE CRACK ARE DETERIORATED, "V"-GROOVE THE CRACK UNTIL SOUND CONCRETE IS REACHED. "V" GROOVES CAN ALSO BE USED WHEN HIGH INJECTION PRESSURES REQUIRE A STRONGER CAP SEAL.				CORE LOCATIONS SHOULD BE CHOSEN TO AVOID CUTTING REINFORCING STEEL, DRILLING CORES IN AREAS OF HIGH STRESS, OR CREATING CORE HOLES BELOW THE WATERLINE. THE ENGINEER SHOULD DETERMINE CORE LOCATIONS WHEN THESE TYPES OF CONDITIONS EXIST; BE SURE THE EPOXY HAS SET BEFORE EXTRACTING A CORE; TAKE CORES (NORMALLY 2 IN. DIAMETER) TO CHECK THAT THE PENETRATION OF THE EPOXY IS ADEQUATE; INSPECT THE CORE VISUALLY TO DETERMINE THE PENETRATION OF THE EPOXY INTO THE CRACK; CORES CAN BE FURTHER TESTED FOR COMPRESSIVE AND SPLIT TENSILE STRENGTH PER ASTM C 42; AND SUBSEQUENTLY, PATCH THE REMOVED-CORE AREA (AFTER PROPER SURFACE PREPARATION) WITH AN EXPANSIVE CEMENTITIOUS OR EPOXY GROUT COMPATIBLE WITH THE EXISTING SUBSTRATE CONCRETE AND THE SURROUNDING ENVIRONMENT.				
D	REPAIR PROCEDURE:				METHODS FOR NONDESTRUCTIVE EVALUATION:				
	PORT INSTALLATION:				IMPACT ECHO (IE); ULTRASONIC PULSE VELOCITY (UPV); AND SPECTRAL ANALYSIS OF SURFACE WAVES (SASW).				
	INSTALL THE ENTRY PORTS ONLY AFTER PROPER SURFACE PREPARATION. TWO TYPES OF ENTRY PORTS MAY BE USED FOR THE INJECTION PROCESS: SURFACE-MOUNTED; OR SOCKET-MOUNTED. ENTRY PORTS CAN BE ANY TUBELIKE DEVICE THAT PROVIDES FOR THE SUCCESSFUL TRANSFER OF THE EPOXY RESIN UNDER PRESSURE INTO THE CRACK. PORT SPACING IS TYPICALLY 8 IN. ON CENTER, WITH INCREASED SPACING AT WIDER CRACKS. PORT SPACING MAY ALSO BE ADJUSTED BASED ON THE THICKNESS OF THE CONCRETE ELEMENT. SURFACE-MOUNTED ENTRY PORTS ARE NORMALLY ADEQUATE FOR MOST CRACKS, BUT SOCKET-MOUNTED PORTS ARE USED WHEN CRACKS ARE BLOCKED, SUCH AS WHEN CALCIFIED CONCRETE IS ENCOUNTERED. ENTRY PORTS CAN ALSO BE CONNECTED BY A MANIFOLD SYSTEM WHEN SIMULTANEOUS INJECTION OF MULTIPLE PORT LOCATIONS IS ADVANTAGEOUS.								
C	INSTALL THE CAP SEAL:								
	THE CAP SEAL CONTAINS THE EPOXY AS IT IS INJECTED UNDER PRESSURE INTO THE CRACK. WHEN CRACKS PENETRATE COMPLETELY THROUGH A SECTION, CAP SEALS PERFORM BEST WHEN INSTALLED ON BOTH SIDES OF THE CRACKED ELEMENT, ENSURING CONTAINMENT OF THE EPOXY. CAP SEALS SHALL BE INSTALLED USING EPOXIES, POLYESTERS, PARAFFIN WAX, OR SILICONE CAULK. THE SELECTION OF THE CAP SEAL MATERIAL SHOULD CONSIDER THE FOLLOWING CRITERIA, SUBJECT TO THE TYPE OF CRACK TO BE REPAIRED: NON-SAG CONSISTENCY (FOR VERTICAL OR OVERHEAD); MOISTURE TOLERANCE; WORKING LIFE; AND RIGIDITY (MODULUS OF ELASTICITY). CONCRETE TEMPERATURE CHANGES AFTER INSTALLATION OF THE CAP SEAL BUT PRIOR TO INJECTION MAY CAUSE THE CAP SEAL TO IF THIS OCCURS, THE CAP SEAL MUST BE REPAIRED PRIOR TO RESIN INJECTION. PRIOR TO PROCEEDING WITH INSTALLATION OF THE CAP SEAL, MARK THE LOCATION OF THE WIDEST PORTION OF THE CRACK AND PAY CLOSE ATTENTION TO THE FOLLOWING: USE ONLY MATERIALS THAT HAVENT EXCEEDED THEIR SHELF LIFE; ACCURATE BATCHING OF COMPONENTS; SMALL BATCHES TO KEEP MATERIAL FRESH, AND DISSIPATE HEAT; PORT SPACING; AND CONSISTENT APPLICATION OF THE MATERIAL (1 IN. WIDE X 3/16IN. THICK) OVER THE LENGTH OF THE CRACK.								
	INJECT THE EPOXY:								
B	FOR A SUCCESSFUL EPOXY INJECTION, START WITH THE PROPER BATCHING AND MIXING OF THE EPOXY COMPONENTS IN STRICT ACCORDANCE WITH THE MANUFACTURER'S REQUIREMENTS. PRIOR TO STARTING THE ACTUAL INJECTION, BE SURE THAT THE CAP SEAL AND PORT ADAPTER ADHESIVE HAVE PROPERLY CURED SO THEY CAN SUSTAIN THE INJECTION PRESSURES. START THE INJECTION AT THE WIDEST SECTION OF A HORIZONTAL CRACK. (BE SURE TO LOCATE AND MARK THESE AREAS BEFORE INSTALLING THE CAP SEAL.) VERTICAL CRACKS ARE TYPICALLY INJECTED FROM THE BOTTOM UP. CONTINUE THE INJECTION UNTIL REFUSAL. IF AN ADJACENT PORT STARTS BLEEDING, CAP THE PORT BEING INJECTED AND CONTINUE INJECTION AT THE FURTHEST BLEEDING PORT. HAIRLINE CRACKS ARE SOMETIMES NOT WELL SUITED TO "PUMPING TO REFUSAL." IN THOSE CASES, TRY INJECTING THE EPOXY AT INCREASED PRESSURE (APPROXIMATELY 200 PSI) FOR 5 MIN. CLOSER PORT SPACING CAN ALSO BE CONSIDERED. WHEN INJECTION INTO A PORT IS COMPLETE, CAP IT IMMEDIATELY. HIGHER PRESSURE CAN BE USED FOR INJECTING VERY NARROW CRACKS OR INCREASING THE RATE OF INJECTION. USE OF HIGHER PRESSURE SHOULD BE MANAGED WITH CARE TO PREVENT A BLOWOUT OF THE CAP SEAL OR PORTS.								
	REMOVE PORTS AND CAP SEAL:								
	UPON COMPLETION OF THE INJECTION PROCESS, REMOVE THE PORTS AND CAP SEAL BY HEAT, CHIPPING, OR GRINDING. COMPLETE REMOVAL IS REQUIRED FOR A SUBSEQUENT APPLICATION OF A COSMETIC COATING. PREPARE THE CONCRETE SURFACE BY GRINDING.								
A	QUALITY ASSURANCE:								
	TO ENSURE THAT THE INJECTION HAS BEEN SUCCESSFUL, QUALITY ASSURANCE MEASURES INCLUDE TEST CORES OR NON-DESTRUCTIVE EVALUATION (NDE).								
1		2		3		4		5	



WWWK250172
REPLACE WALLS OF THE
ISZARD POOL HOUSE,
B5730
ER AIR FORCE BASE, OKLAHOMA

TINKER AIR FORCE BASE, OKLAHOMA

MANAGEMENT INFORMATION		REVISIONS	
		MARK	DATE
ISSUE DATE: 2 FEB 2026			
DESIGN GROUP: TEPA-SRM			
DESIGNED BY: L LUKE			
DRAWN BY: F BAKER			
CHECKED BY: B SHANNON			

DESIGN FILE LOCATION:
T:\Enan\Design\2020s\2025\202501720_Support\0_3 Drawings\PDF

STRUCTURAL GENERAL NOTES

SHEET NUMBER

S-003

SHEET 05 OF 16

1

2

3

4

5

STATEMENT OF QUALITY ASSURANCE / SPECIAL INSPECTIONS

1. QUALITY ASSURANCE / SPECIAL INSPECTION IS REQUIRED IN ACCORDANCE WITH THE UFC 3-301-01 AS SUMMARIZED BELOW.

2. THE SPECIAL INSPECTORS MUST BE QUALIFIED TO PERFORM THE TYPES OF INSPECTION SPECIFIED.

3. IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO INFORM THE SPECIAL INSPECTOR OR INSPECTING AGENCY AT LEAST ONE WORKING DAY PRIOR TO PERFORMING ANY WORK THAT REQUIRES SPECIAL INSPECTION. ALL WORK PERFORMED WITHOUT SPECIAL INSPECTION IS SUBJECT TO REMOVAL.

4. THE SPECIAL INSPECTOR(S) SHALL OBSERVE THE INDICATED WORK FOR COMPLIANCE WITH THE CONTRACT DOCUMENTS AND SUBMIT RECORDS OF INSPECTION TO THE ARCHITECT, ENGINEER OF RECORD AND AUTHORITY HAVING JURISDICTION.

5. SPECIAL INSPECTIONS SHALL BE PERFORMED BY A CERTIFIED OR QUALIFIED SPECIAL INSPECTOR(S), AS DETERMINED AND TO THE SATISFACTION OF THE ARCHITECT, ENGINEER OF RECORD AND AUTHORITY HAVING JURISDICTION.

6. PERIODIC SPECIAL INSPECTION IS DEFINED AS THE PART-TIME OR INTERMITTENT INSPECTION OF THE WORK BY AN APPROVED INSPECTOR WHO IS PRESENT IN THE AREA WHERE THE WORK HAS BEEN OR IS BEING PERFORMED AND AT THE COMPLETION OF WORK. CONTINUOUS SPECIAL INSPECTION IS DEFINED AS THE FULL-TIME INSPECTION OF THE WORK BY AN APPROVED INSPECTOR WHO IS CONTINUOUSLY PRESENT AND MONITORING THE WORK PERFORMED. IN ALL CASES, THE INSPECTION SHALL BE COORDINATED AND PERFORMED SO THAT WORK CAN BE CORRECTED PRIOR TO OTHER RELATED WORK PROCEEDING AND COVERING THE INSPECTED WORK.

7. ASSOCIATED TESTING SHALL BE PERFORMED AS INDICATED IN THE FOLLOWING TABLES BY AN APPROVED AND ACCREDITED AGENCY AS DETERMINED AND TO THE SATISFACTION OF THE ARCHITECT, ENGINEER OF RECORD AND AUTHORITY HAVING JURISDICTION.

8. SPECIAL INSPECTION AND ASSOCIATED TESTING REPORTS SHALL BE SUBMITTED TO THE ENGINEER OF RECORD, CONTRACTOR, AUTHORITY HAVING JURISDICTION, AND ARCHITECT WITHIN ONE WEEK OF INSPECTION OR WITHIN ONE WEEK OF TEST COMPLETION.

9. AT THE CONCLUSION OF CONSTRUCTION, A FINAL REPORT SHALL BE SUBMITTED BY THE SPECIAL INSPECTOR(S) WHICH DOCUMENTS THE REQUIRED SPECIAL INSPECTIONS AND CORRECTION OF PREVIOUSLY NOTED DISCREPANCIES. THE FINAL REPORT SHALL BE SUBMITTED TO THE ENGINEER OF RECORD, CONTRACTOR, AUTHORITY HAVING JURISDICTION AND ARCHITECT.

10. WORK REQUIRING SPECIAL INSPECTION THAT IS INSTALLED OR COVERED WITHOUT THE APPROVAL OF THE SPECIAL INSPECTOR IS SUBJECT TO REMOVAL OR EXPOSURE.

11. REFER TO THE FOLLOWING TABLES AND SPECIFICATIONS FOR SPECIFIC INSPECTION/TESTING REQUIREMENTS AND FREQUENCIES.

12. DEFINITION OF "PERIODIC" AND "CONTINUOUS" SPECIAL INSPECTIONS: CONTINUOUS INSPECTION IS THE FULL-TIME OBSERVATION OF WORK REQUIRING SPECIAL INSPECTION BY AN APPROVED SPECIAL INSPECTOR WHO IS PRESENT IN THE AREA WHERE THE WORK IS BEING PERFORMED; PERIODIC INSPECTION IS THE PART-TIME OR INTERMITTENT OBSERVATION OF WORK REQUIRING SPECIAL INSPECTION BY AN APPROVED SPECIAL INSPECTOR WHO IS PRESENT IN THE AREA WHERE THE WORK HAS BEEN OR IS BEING PERFORMED AND AT THE COMPLETION OF THE WORK. WHERE "PERIODIC" SPECIAL INSPECTION IS REQUIRED, "PART-TIME" OR "INTERMITTENT" MEANS THAT INSPECTION OF THE TASK NEEDS TO BE PERFORMED FROM TIME TO TIME DURING THE PROGRESS OF THE TASK. THE PERIOD OF TIME BETWEEN INSPECTIONS VARIES GREATLY FOR DIFFERENT TYPES OF WORK DEPENDING ON THE TYPE OF INSPECTION DONE. THE PERIOD OF TIME BETWEEN INSPECTIONS ALSO DEPENDS ON THE PACE OF THE CONSTRUCTION, THE NUMBER OF WORKERS, AND THE QUALITY OF THE WORKMANSHIP, AND OTHER FACTORS. IT IS THE RESPONSIBILITY OF THE SPECIAL INSPECTOR TO PROVIDE INSPECTIONS AT AN APPROPRIATE FREQUENCY AND AT APPROPRIATE TIMES DURING CONSTRUCTION. THE INSPECTOR MUST HAVE ADEQUATE EXPERIENCE AND EXHIBIT GOOD JUDGEMENT IN DETERMINING THE FREQUENCY AND TIMING OF INSPECTIONS

STRUCTURAL STEEL INSPECTIONS AND NON-DESTRUCTIVE TESTING OF STRUCTURAL STEEL ELEMENTS SHALL BE IN ACCORDANCE WITH THE QUALITY ASSURANCE REQUIREMENTS OF AISC 360, CHAPTER N.

FABRICATOR AND ERECTOR QUALITY CONTROL PROGRAM
REFERENCE AISC 360, CHAPTER N, SECTION N2.

THE FABRICATOR S QUALITY CONTROL INSPECTOR SHALL INSPECT THE FOLLOWING AS A MINIMUM, AS APPLICABLE:

1. SHOP WELDING, HIGH-STRENGTH BOLTING, AND DETAILS IN ACCORDANCE WITH AISC 360 SECTION N6.

2. SHOP CUT AND FINISHED SURFACES IN ACCORDANCE IN ACCORDANCE WITH AISC 360, SECTION M2.

3. SHOP HEATING FOR STRAIGHTENING, CAMBERING AND CURVING IN ACCORDANCE WITH AISC 360, SECTION M2.1.

4. TOLERANCES FOR SHOP FABRICATION IN ACCORDANCE WITH SECTION 6 OF THE CODE OF STANDARD PRACTICE.

THE ERECTOR S QUALITY CONTROL INSPECTOR SHALL INSPECT THE FOLLOWING AS A MINIMUM, AS APPLICABLE:

1. FIELD WELDING, HIGH-STRENGTH BOLTING, AND DETAILS IN ACCORDANCE WITH AISC 360, SECTION N6.

2. STEEL DECK AND HEADED STEEL STUD ANCHOR PLACEMENT AND ATTACHMENT IN ACCORDANCE WITH AISC 360, SECTION N6. FIELD CUT SURFACES IN ACCORDANCE WITH AISC 360, SECTION M2.2.

3. FIELD HEATING FOR STRAIGHTENING IN ACCORDANCE WITH AISC 360, SECTION M2.1. TOLERANCES FOR FIELD ERECTION IN ACCORDANCE WITH SECTION 7.13 OF THE CODE OF STANDARD PRACTICE.

FABRICATOR AND ERECTOR DOCUMENTS
REFERENCE AISC 360, CHAPTER N, SECTION N3.

SUBMITTALS FOR STEEL CONSTRUCTION AND AVAILABLE DOCUMENTS FOR STEEL CONSTRUCTION SHALL CONFORM TO AISC 360, SECTION N3.

INSPECTION AND NONDESTRUCTIVE TESTING PERSONNEL
REFERENCE AISC 360, CHAPTER N, SECTION N4

QUALITY CONTROL INSPECTOR (FABRICATOR OR ERECTOR) QUALIFICATIONS, QUALITY ASSURANCE INSPECTOR (SPECIAL INSPECTOR) QUALIFICATIONS & NONDESTRUCTIVE TESTING PERSONNEL (INSPECTION AGENCY PERSONNEL) QUALIFICATIONS SHALL CONFORM TO AISC 360, SECTION N4.

MINIMUM REQUIREMENTS FOR INSPECTION OF STRUCTURAL STEEL BUILDINGS
REFERENCE AISC 360, CHAPTER N, SECTION N5.

QUALITY CONTROL INSPECTIONS BY THE FABRICATOR S OR ERECTOR S QUALITY CONTROL INSPECTOR (QCI) AND QUALITY ASSURANCE INSPECTIONS OF FABRICATED ITEMS AND THE ERECTED STEEL SYSTEM BY THE SPECIAL INSPECTOR (SI), SHALL CONFORM TO AISC 360, SECTION N6 AND TABLES N5.4-1, N5.4-2, N5.4-3, N5.6-1, N5.6-2 AND N5.6-3. IN THESE TABLES INSPECTION TASKS ARE AS FOLLOWS:

O = OBSERVE THESE ITEMS ON A RANDOM BASIS. OPERATIONS NEED NOT BE DELAYED PENDING THESE INSPECTIONS.
P = PERFORM THESE TASKS FOR EACH WELDED JOINT OR MEMBER.

NONDESTRUCTIVE TESTING OF WELDED JOINTS
NONDESTRUCTIVE TESTING OF WELDED JOINTS SHALL CONFORM TO AISC 360, SECTION N5 AND SHALL BE PERFORMED BY THE SPECIAL INSPECTOR (QUALITY ASSURANCE INSPECTOR) IN ACCORDANCE WITH AWS D1.1.

TABLE N5.4-1, AISC 360-16
INSPECTION TASKS PRIOR TO WELDING

INSPECTION TASKS PRIOR TO WELDING

QC

QA

WELDING PROCEDURES SPECIFICATIONS (WPSs) AVAILABLE

P

P

MANUFACTURER CERTIFICATIONS FOR WELDING CONSUMABLES AVAILABLE

P

P

MATERIAL IDENTIFICATION (TYPE/GRADE)

O

O

WELDER IDENTIFICATION SYSTEM¹

O

O

FIT-UP OF GROOVE WELDS (INCLUDING JOINT GEOMETRY)

- JOINT PREPARATION

- DIMENSIONS (ALIGNMENT, ROOT OPENING, ROOT FACE, BEVEL)

- CLEANLINESS (CONDITION OF STEEL SURFACES)

- SHIELDING GAS TYPE/FLOW RATE

- TACKING (TACK WELD QUALITY AND LOCATION)

- BACKING TYPE AND FIT (IF APPLICABLE)

O

O

CONFIGURATION AND FINISH OF ACCESS HOLES

O

O

FIT-UP OF FILLET WELDS

- DIMENSIONS (ALIGNMENT, GAPS, AT ROOT)

- CLEANLINESS (CONDITION OF STEEL SURFACES)

- TACKING (TACK WELD QUALITY AND LOCATION)

O

O

CHECK WELDING EQUIPMENT

O

-

¹ THE FABRICATOR OR ERECTOR, AS APPLICABLE, SHALL MAINTAIN A SYSTEM BY WHICH A WELDER WHO HAS WELDED A JOINT OR MEMBER CAN BE IDENTIFIED. STAMPS, IF USED SHALL BE THE LOW-STRESS TYPE.

O = OBSERVE THESE ITEMS ON A RANDOM BASIS. OPERATIONS NEED NOT BE DELAYED PENDING THESE INSPECTIONS.
P = PERFORM THESE TASKS FOR EACH WELDED JOINT OR MEMBER.

TABLE N5.4-2, AISC 360-16
INSPECTION TASKS DURING WELDING

INSPECTION TASKS DURING WELDING

QC

QA

USE OF QUALIFIED WELDERS

O

O

- JNTROL AND HANDLING OF WELDING CONSUMABLES

- PACKAGING

- EXPOSURE CONTROL

O

O

WELDING OVER CRACKED TACK WELDS

O

O

ENVIRONMENTAL CONDITIONS

- WIND SPEED WITHIN LIMITS

- PRECIPITATION AND TEMPERATURE

O

O

WPS FOLLOWED

- SETTINGS ON WELDING EQUIPMENT

- TRAVEL SPEED

- SELECTED WELDING MATERIALS

- SHIELDING GAS TYPE/FLOW RATE

- PREHEAT APPLIED

- INTERPASS TEMPERATURE MAINTAINED (MIN/MAX)

- PROPER POSITION (F,V, H, OH)

O

O

WELDING TECHNIQUES

- INTERPASS AND FINAL CLEANING

- EACH PASS WITHIN PROFILE LIMITATIONS

- EACH PASS MEETS QUALITY REQUIREMENTS

O

O

O = OBSERVE THESE ITEMS ON A RANDOM BASIS. OPERATIONS NEED NOT BE DELAYED PENDING THESE INSPECTIONS.
P = PERFORM THESE TASKS FOR EACH WELDED JOINT OR MEMBER.

REQUIRED VERIFICATION AND INSPECTION OF SOILS

VERIFICATION AND INSPECTION

CONTINUOUS

PERIODIC

1. REVIEW CONTRACTOR'S FIELD QUALITY CONTROL PROCEDURES. VERIFY MATERIALS BELOW SHALLOW FOUNDATIONS ARE ADEQUATE TO ACHIEVE THE DESIGN BEARING CAPACITY.

-

x

2. VERIFY EXCAVATIONS ARE EXTENDED TO PROPER DEPTH AND HAVE REACHED PROPER MATERIAL.

-

x

3. PERFORM CLASSIFICATION AND TESTING OF COMPACTED FILL MATERIALS.

-

x

4. VERIFY USE OF PROPER MATERIALS, DENSITIES AND LIFT THICKNESS DURING PLACEMENT AND COMPACTION OF COMPACTED FILL.

x

-

5. PRIOR TO PLACEMENT OF COMPACTED FILL, INSPECT SUBGRADE AND VERIFY THAT SITE HAS BEEN PREPARED PROPERLY.

-

x

REQUIRED VERIFICATION AND INSPECTION OF CONCRETE CONSTRUCTION

VERIFICATION AND INSPECTION

CONT

PERIODIC

1. INSPECTION OF REINFORCING STEEL, INCLUDING PLACEMENT.

-

X

2. INSPECTION OF ANCHORS CAST IN CONCRETE

-

X

3. INSPECTION OF ANCHORS POST-INSTALLED IN HARDENED CONCRETE.

X

-

4. VERIFYING USE OF REQUIRED DESIGN MIX.

-

X

5. PRIOR TO CONCRETE PLACEMENT, FABRICATE SPECIMENS FOR STRENGTH TESTS, PERFORM SLUMP AND AIR CONTENT TESTS, AND DETERMINE THE TEMPERATURE OF THE CONCRETE.

X

-

6. INSPECTION OF CONCRETE PLACEMENT FOR PROPER APPLICATION TECHNIQUES.

X

-

7. INSPECTION FOR MAINTENANCE OF SPECIFIED CURING TEMPERATURE AND TECHNIQUES.

-

X

8. INSPECT FORMWORK FOR SHAPE, LOCATION AND DIMENSIONS OF THE CONCRETE MEMBER BEING FORMED.

-

X

TABLE N5.4-3, AISC 360-16
INSPECTION TASKS AFTER WELDING

INSPECTION TASKS AFTER WELDING

QC

QA

WELDS CLEANED

O

O

SIZE, LENGTH AND LOCATION OF WELDS

P

P

WELDS MEET VISUAL ACCEPTANCE CRITERIA

- CRACK PROHIBITION

- WELD/BASE-METAL FUSION

- CRATER CROSS SECTION

- WELD PROFILES

- WELD SIZE

- UNDERCUT

- POROSITY

P

P

ARC STRIKES

P

P

k-AREA¹

P

P

BACKING REMOVED & WELD TABS REMOVED (IF REQUIRED)

P

P

REPAIR ACTIVITIES

P

P

DOCUMENT ACCEPTANCE OR REJECTION OF WELDED JOINT OR MEMBER

P

P

WHEN WELDING OF DOUBLER PLATES, CONTINUITY PLATES OR STIFFENERS HAS BEEN PERFORMED IN THE k-AREA, VISUALLY INSPECT THE WEB k-AREA FOR CRACKS WITHIN 3 INCHES (75 mm) OF THE WELD.

O = OBSERVE THESE ITEMS ON A RANDOM BASIS. OPERATIONS NEED NOT BE DELAYED PENDING THESE INSPECTIONS
P = PERFORM THESE TASKS FOR EACH WELDED JOINT OR MEMBER.

REQUIRED VERIFICATION AND INSPECTION OF MASONRY CONSTRUCTION

MINIMUM TESTS

VERIFICATION OF SLUMP FLOW AND VISUAL STABILITY INDEX (VSI) AS DELIVERED TO THE PROJECT SITE IN ACCORDANCE WITH SPECIFICATION ARTICLE 1.5 B.1b.3 FOR SELF-CONSOLIDATING GROUT

VERIFICATION OF f_m AND f_{asc} IN ACCORDANCE WITH SPECIFICATION ARTICLE 1.4 B PRIOR TO CONSTRUCTION, EXCEPT WHERE SPECIFICALLY EXEMPT BY THIS CODE

MINIMUM SPECIAL INSPECTION

INSPECTION TASK

FREQUENCY (a)

REFERENCE OF CRITERIA

CONT

PERIODIC

TMS 402/ACI 530/ASCE 5

TMS 602/ACI 530.1/ASCE 6

1. VERIFY COMPLIANCE WITH THE APPROVED SUBMITTALS

X

ART. 1.5

2. AS MASONRY CONSTRUCTION BEGINS, VERIFY THAT THE FOLLOWING ARE IN COMPLIANCE:

a. PROPORTIONS OF SITE-PREPARED MORTAR

X

ART. 2.1, 2.6 A

b. CONSTRUCTION OF MORTAR JOINTS

X

ART. 3.3 B

c. LOCATION OF REINFORCEMENT

X

ART. 3.4, 3.6 A

3. PRIOR TO GROUTING, VERIFY THAT THE FOLLOWING ARE IN COMPLIANCE:

a. GROUT SPACE

X

ART. 3.2 D, 3.2 F

b. GRADE, TYPE, AND SIZE OF REINFORCEMENT AND ANCHOR BOLTS

X

SEC. 6.1,

ART. 2.4, 3.4

c. PLACEMENT OF REINFORCEMENT, CONNECTORS

X

SEC. 6.1, 6.2.1, 6.2.6, 6.2.7

ART. 3.2 E, 3.4, 3.6 A

d. PROPORTIONS OF SITE-PREPARED GROUT

X

ART. 2.6 B, 2.4 G.1.b

e. CONSTRUCTION OF MORTAR JOINTS

X

ART. 3.3 B

4. VERIFY DURING CONSTRUCTION:

a. SIZE LOCATION AND STRUCTURAL ELEMENTS

X

ART. 3.3 F

b. TYPE, SIZE, AND LOCATION OF ANCHORS, INCLUDING OTHER DETAILS OF ANCHORAGE OF MASONRY TO STRUCTURAL MEMBERS, FRAMES, OR OTHER CONSTRUCTION

X

SEC. 1.2.1(e), 6.1.4.3, 6.2.1

c. WELDING OF REINFORCEMENT

X

SEC. 8.1.6.7.2, 9.3.3.4 (c), 11.3.3.4 (b)

d. PREPARATION, CONSTRUCTION, AND PROTECTION OF MASONRY DURING COLD WEATHER (TEMPERATURE BELOW 40°F (4.4°C)) OR HOT WEATHER (TEMPERATURE ABOVE 90°F (32.2°C))

X

ART. 1.8 C, 1.8 D

5. OBSERVE PREPARATION OF GROUT SPECIMENS, MORTAR SPECIMENS, AND/OR PRISMS

X

ART. 1.4 B.2.a.3, 1.4 B.2.b.3, 1.4 B.2.c.3, 1.4 B.3.1.4 B.4

(a) FREQUENCY REFERS TO THE FREQUENCY OF SPECIAL INSPECTION, WHICH MAY BE CONTINUOUS DURING THE TASK LISTED OR PERIODIC DURING THE LISTED TASKS, AS DEFINED IN THE TABLE

PROJECT INFORMATION

WYK250172

REPLACE WALLS OF THE ISARD POOL HOUSE, B5730

TINKER AIR FORCE BASE, OKLAHOMA

MANAGEMENT INFORMATION

ISSUE DATE:2 FEB 2026

DESIGN GROUP:TEPA-SRM

DESIGNED BY:L. LUKE

DRAWN BY:F. BAKER

CHECKED BY:B. SHANNON

DESIGN FILE LOCATION: T:\Engr\Design\2020s\2025\20250172\0_Support\0_3_Drawings\pDf

REVISIONS

MARK

DATE

DESCRIPTION


SHEET TITLE

SPECIAL INSPECTIONS

SHEET NUMBER

S-004

SHEET 06 OF 16

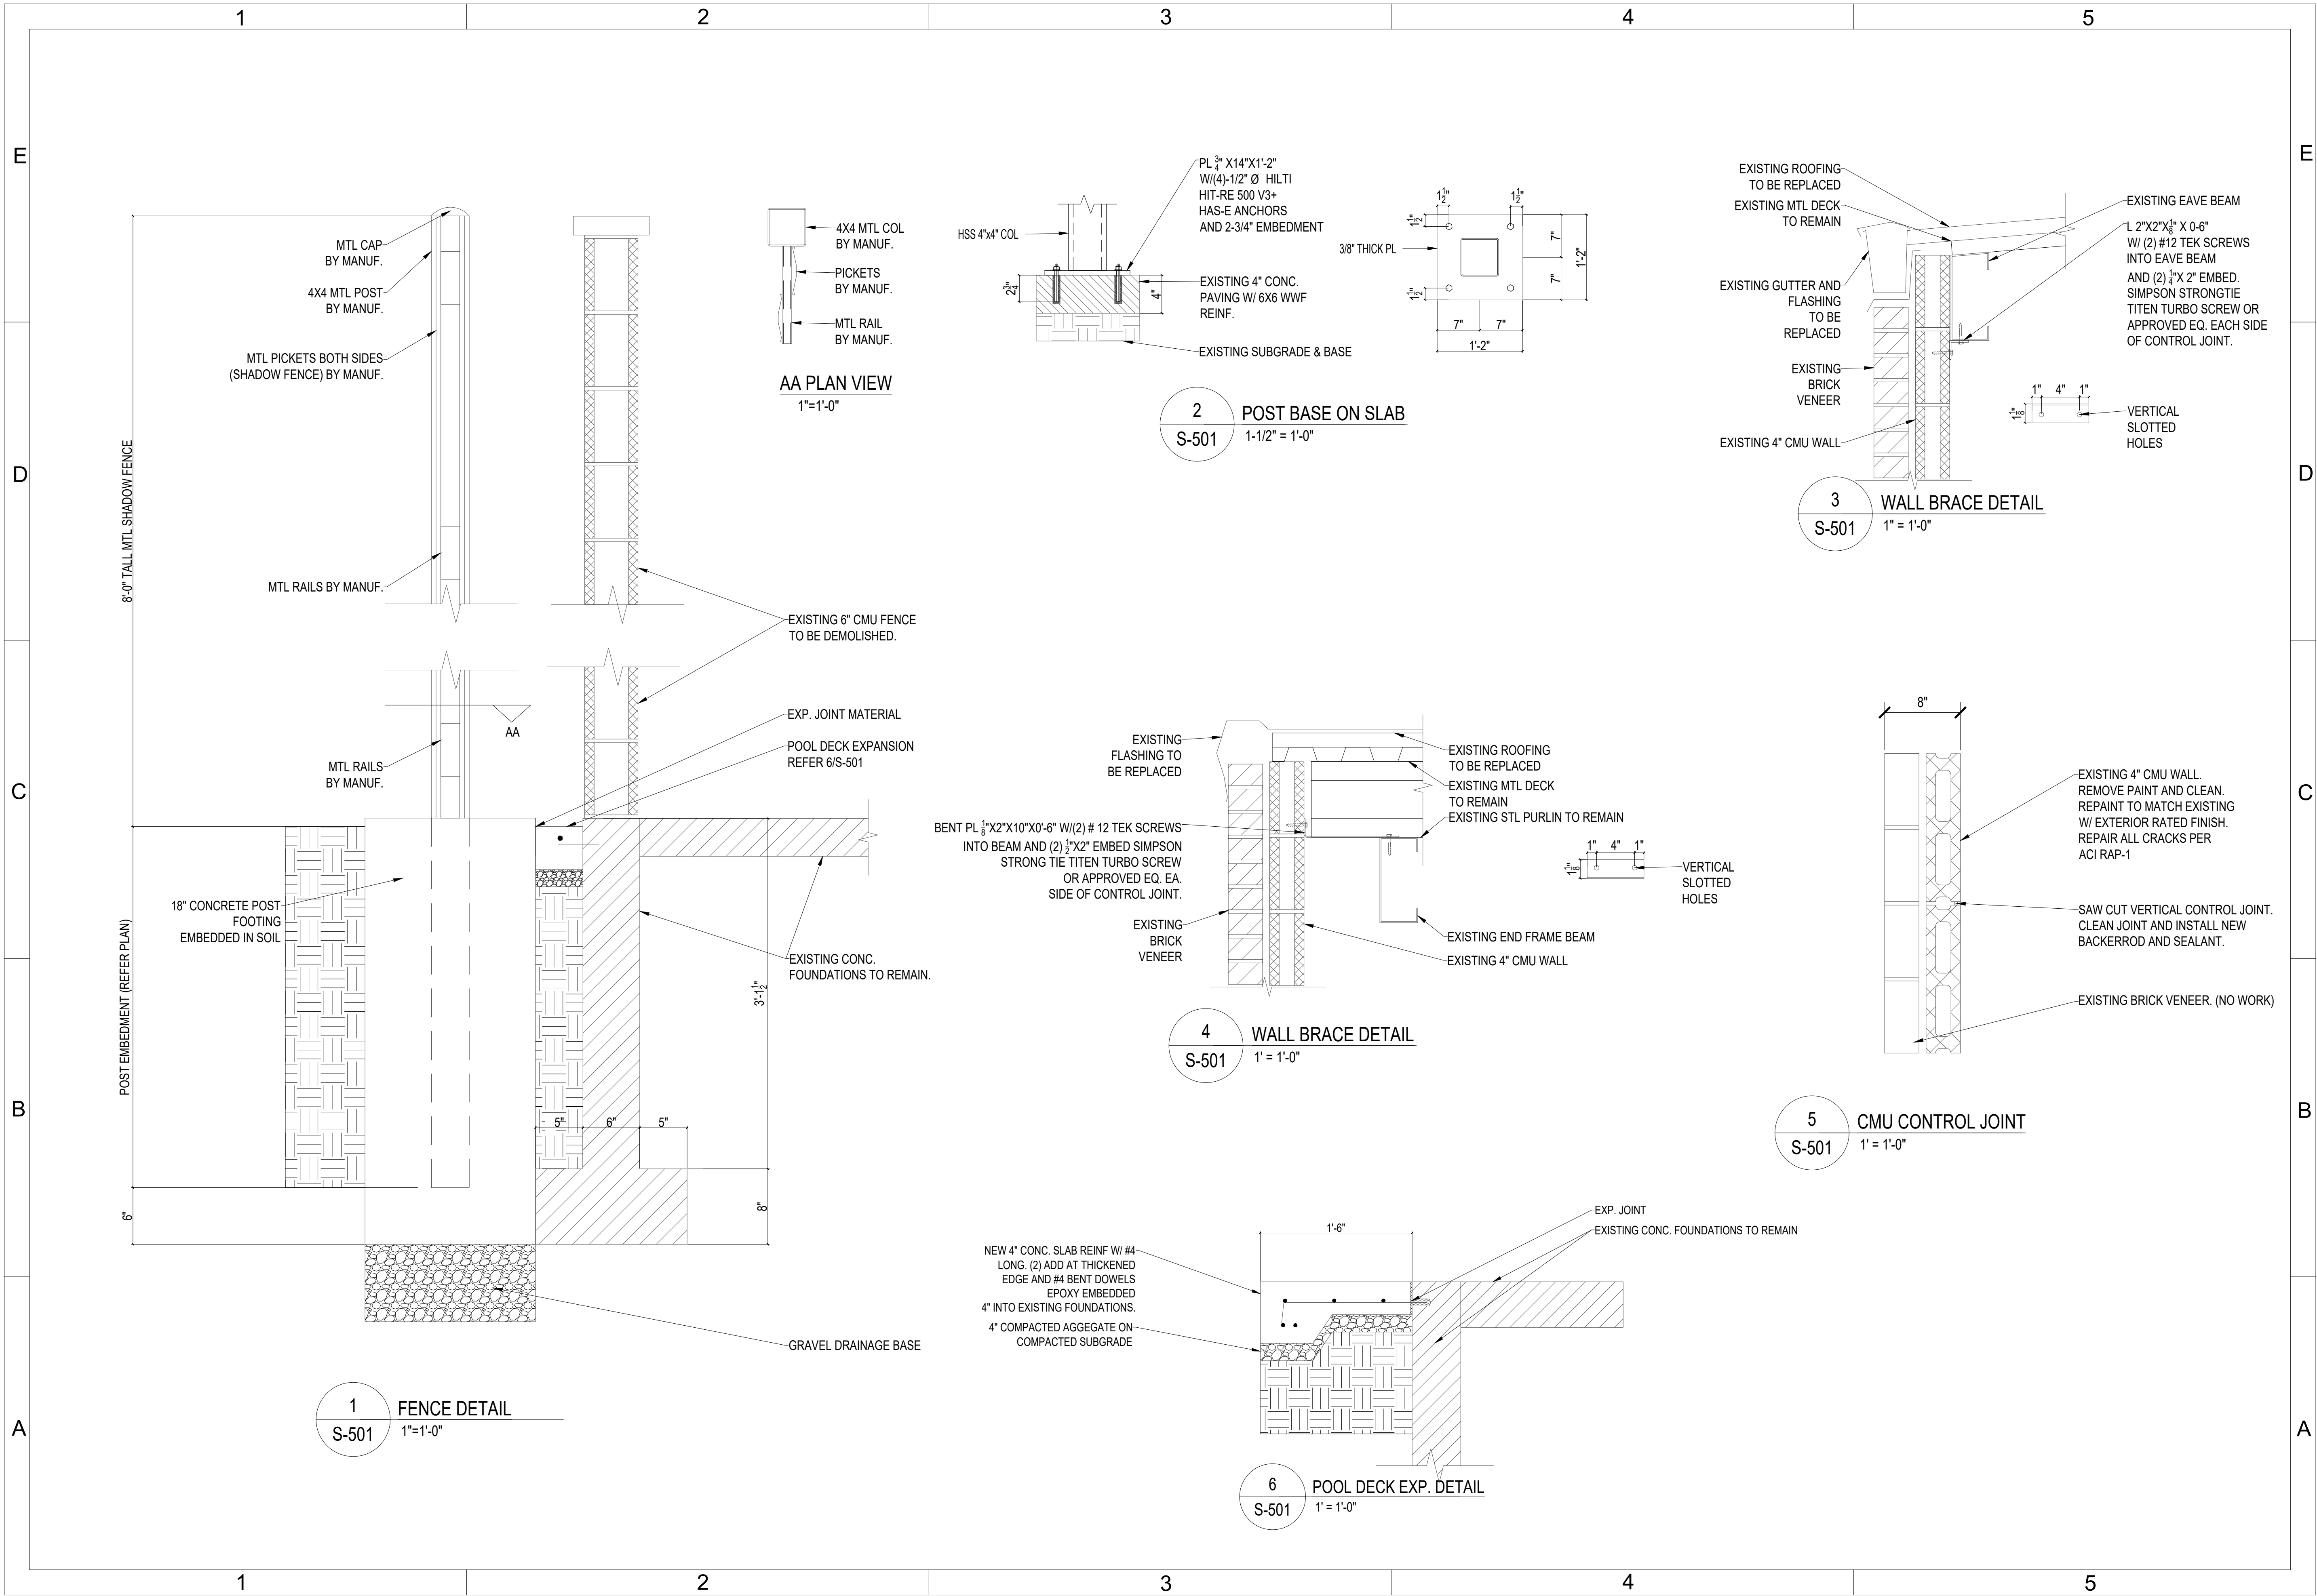


35%
DESIGN

PROJECT INFORMATION
WWYK250172
REPLACE WALLS OF THE
ISZARD POOL HOUSE,
B5730
TINKER AIR FORCE BASE, OKLAHOMA

MANAGEMENT INFORMATION		REVISIONS		DESCRIPTION	
ISSUE DATE	2 FEB 2026	MARK	DATE	DESCRIPTION	
DESIGN GROUP	TEPA-SRM				
DESIGNED BY	L LUKE				
DRAWN BY	F BAKER				
CHECKED BY	B SHANNON				
DESIGN FILE LOCATION: T:\Engn\Design\2025\20250172\0_Support\0_3_Drawings\PDF					

STRUCTURAL DETAILS

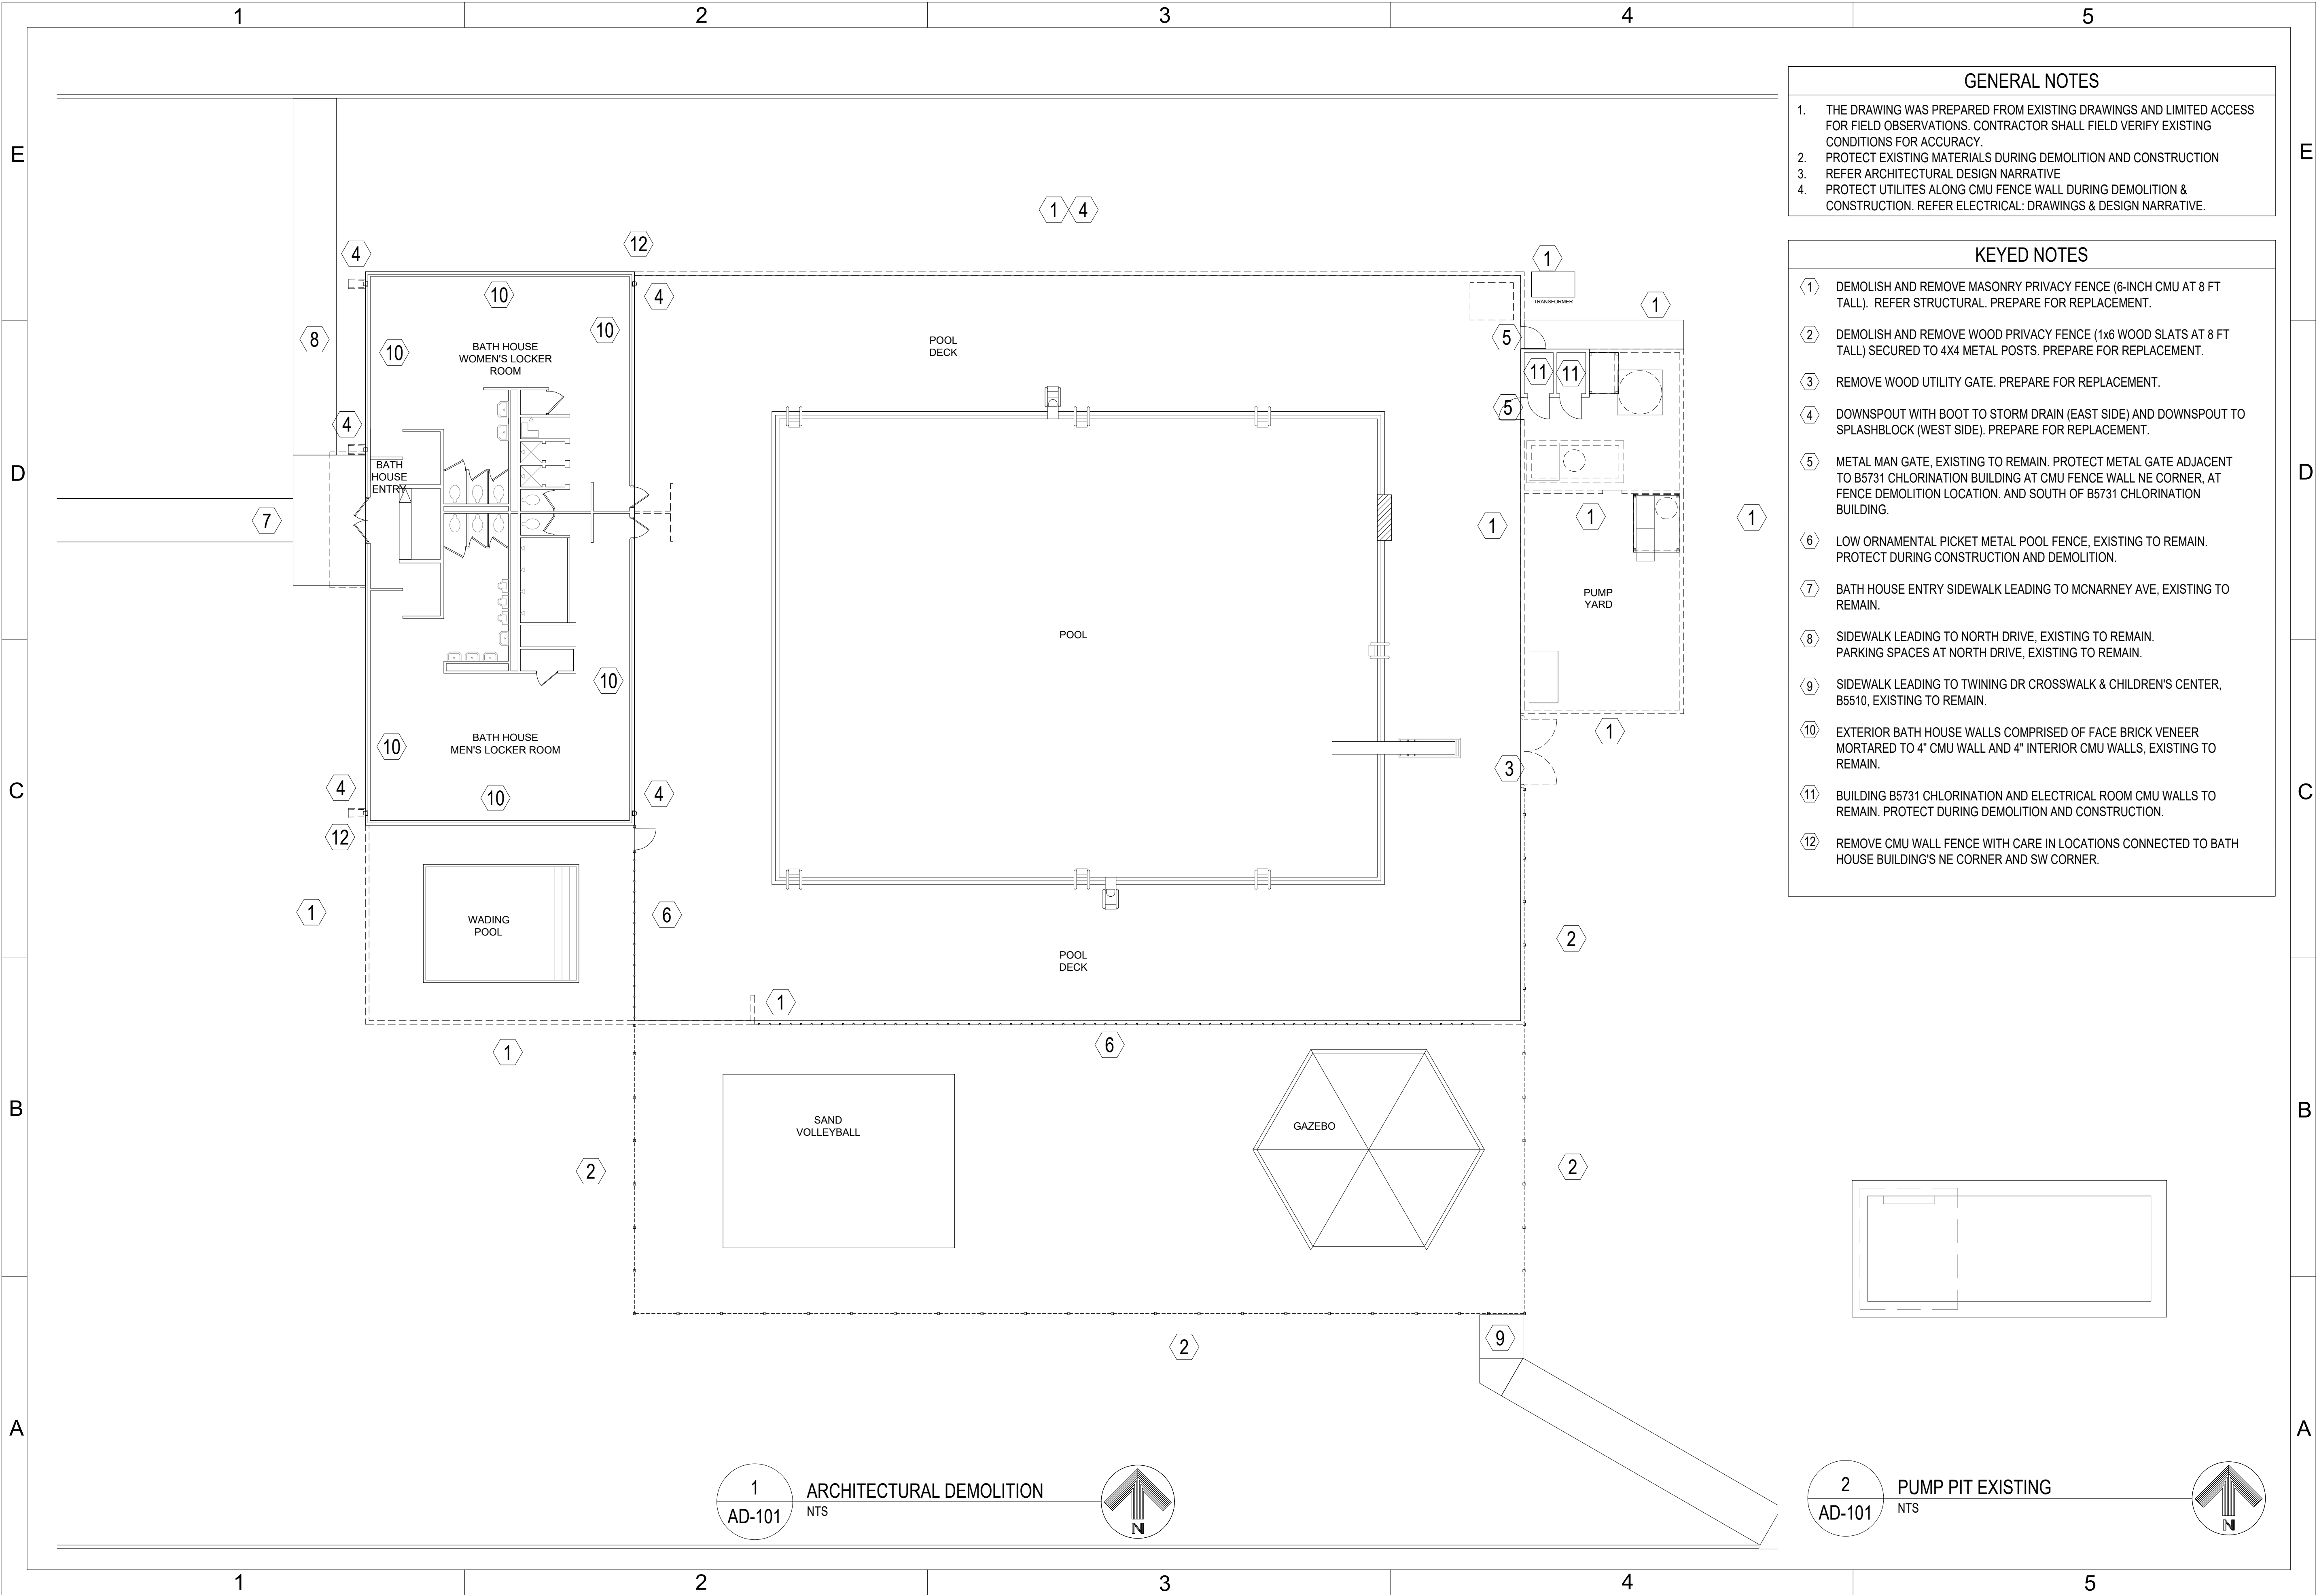

- GENERAL NOTES**
1. THE DRAWING WAS PREPARED FROM EXISTING DRAWINGS AND LIMITED ACCESS FOR FIELD OBSERVATIONS. CONTRACTOR SHALL FIELD VERIFY EXISTING CONDITIONS FOR ACCURACY.
 2. PROTECT EXISTING MATERIALS DURING DEMOLITION AND CONSTRUCTION
 3. REFER ARCHITECTURAL DESIGN NARRATIVE
 4. PROTECT UTILITES ALONG CMU FENCE WALL DURING DEMOLITION & CONSTRUCTION. REFER ELECTRICAL: DRAWINGS & DESIGN NARRATIVE.

- KEYED NOTES**
- 1 DEMOLISH AND REMOVE MASONRY PRIVACY FENCE (6-INCH CMU AT 8 FT TALL). REFER STRUCTURAL. PREPARE FOR REPLACEMENT.
 - 2 DEMOLISH AND REMOVE WOOD PRIVACY FENCE (1x6 WOOD SLATS AT 8 FT TALL) SECURED TO 4X4 METAL POSTS. PREPARE FOR REPLACEMENT.
 - 3 REMOVE WOOD UTILITY GATE. PREPARE FOR REPLACEMENT.
 - 4 DOWNSPOUT WITH BOOT TO STORM DRAIN (EAST SIDE) AND DOWNSPOUT TO SPLASHBLOCK (WEST SIDE). PREPARE FOR REPLACEMENT.
 - 5 METAL MAN GATE, EXISTING TO REMAIN. PROTECT METAL GATE ADJACENT TO B5731 CHLORINATION BUILDING AT CMU FENCE WALL NE CORNER, AT FENCE DEMOLITION LOCATION. AND SOUTH OF B5731 CHLORINATION BUILDING.
 - 6 LOW ORNAMENTAL PICKET METAL POOL FENCE, EXISTING TO REMAIN. PROTECT DURING CONSTRUCTION AND DEMOLITION.
 - 7 BATH HOUSE ENTRY SIDEWALK LEADING TO MCNARNEY AVE, EXISTING TO REMAIN.
 - 8 SIDEWALK LEADING TO NORTH DRIVE, EXISTING TO REMAIN. PARKING SPACES AT NORTH DRIVE, EXISTING TO REMAIN.
 - 9 SIDEWALK LEADING TO TWINING DR CROSSWALK & CHILDREN'S CENTER, B5510, EXISTING TO REMAIN.
 - 10 EXTERIOR BATH HOUSE WALLS COMPRISED OF FACE BRICK VENEER MORTARED TO 4" CMU WALL AND 4" INTERIOR CMU WALLS, EXISTING TO REMAIN.
 - 11 BUILDING B5731 CHLORINATION AND ELECTRICAL ROOM CMU WALLS TO REMAIN. PROTECT DURING DEMOLITION AND CONSTRUCTION.
 - 12 REMOVE CMU WALL FENCE WITH CARE IN LOCATIONS CONNECTED TO BATH HOUSE BUILDING'S NE CORNER AND SW CORNER.



AIR FORCE MATERIEL COMMAND
72 ABW CIVIL ENGINEER DIRECTORATE
TINKER AFB, OK

35%
DESIGN

PROJECT INFORMATION

WYK250172
REPLACE WALLS OF THE
ISZARD POOL HOUSE,
B5730

TINKER AIR FORCE BASE, OKLAHOMA

MANAGEMENT INFORMATION		REVISIONS	
ISSUE DATE	DESCRIPTION	MARK	DATE
2 FEB 2026	DESIGN GROUP: TEPA-SRM		
	DESIGNED BY: T DELANEY		
	DRAWN BY: F BAKER		
	CHECKED BY: B SHANNON		
DESIGN FILE LOCATION: T:\Engr\Design\2025\20250172\0_Support\0_3_Drawings\PDF			


SHEET TITLE

ARCHITECTURAL
DEMOLITION

SHEET NUMBER

AD-101

SHEET 09 OF 16

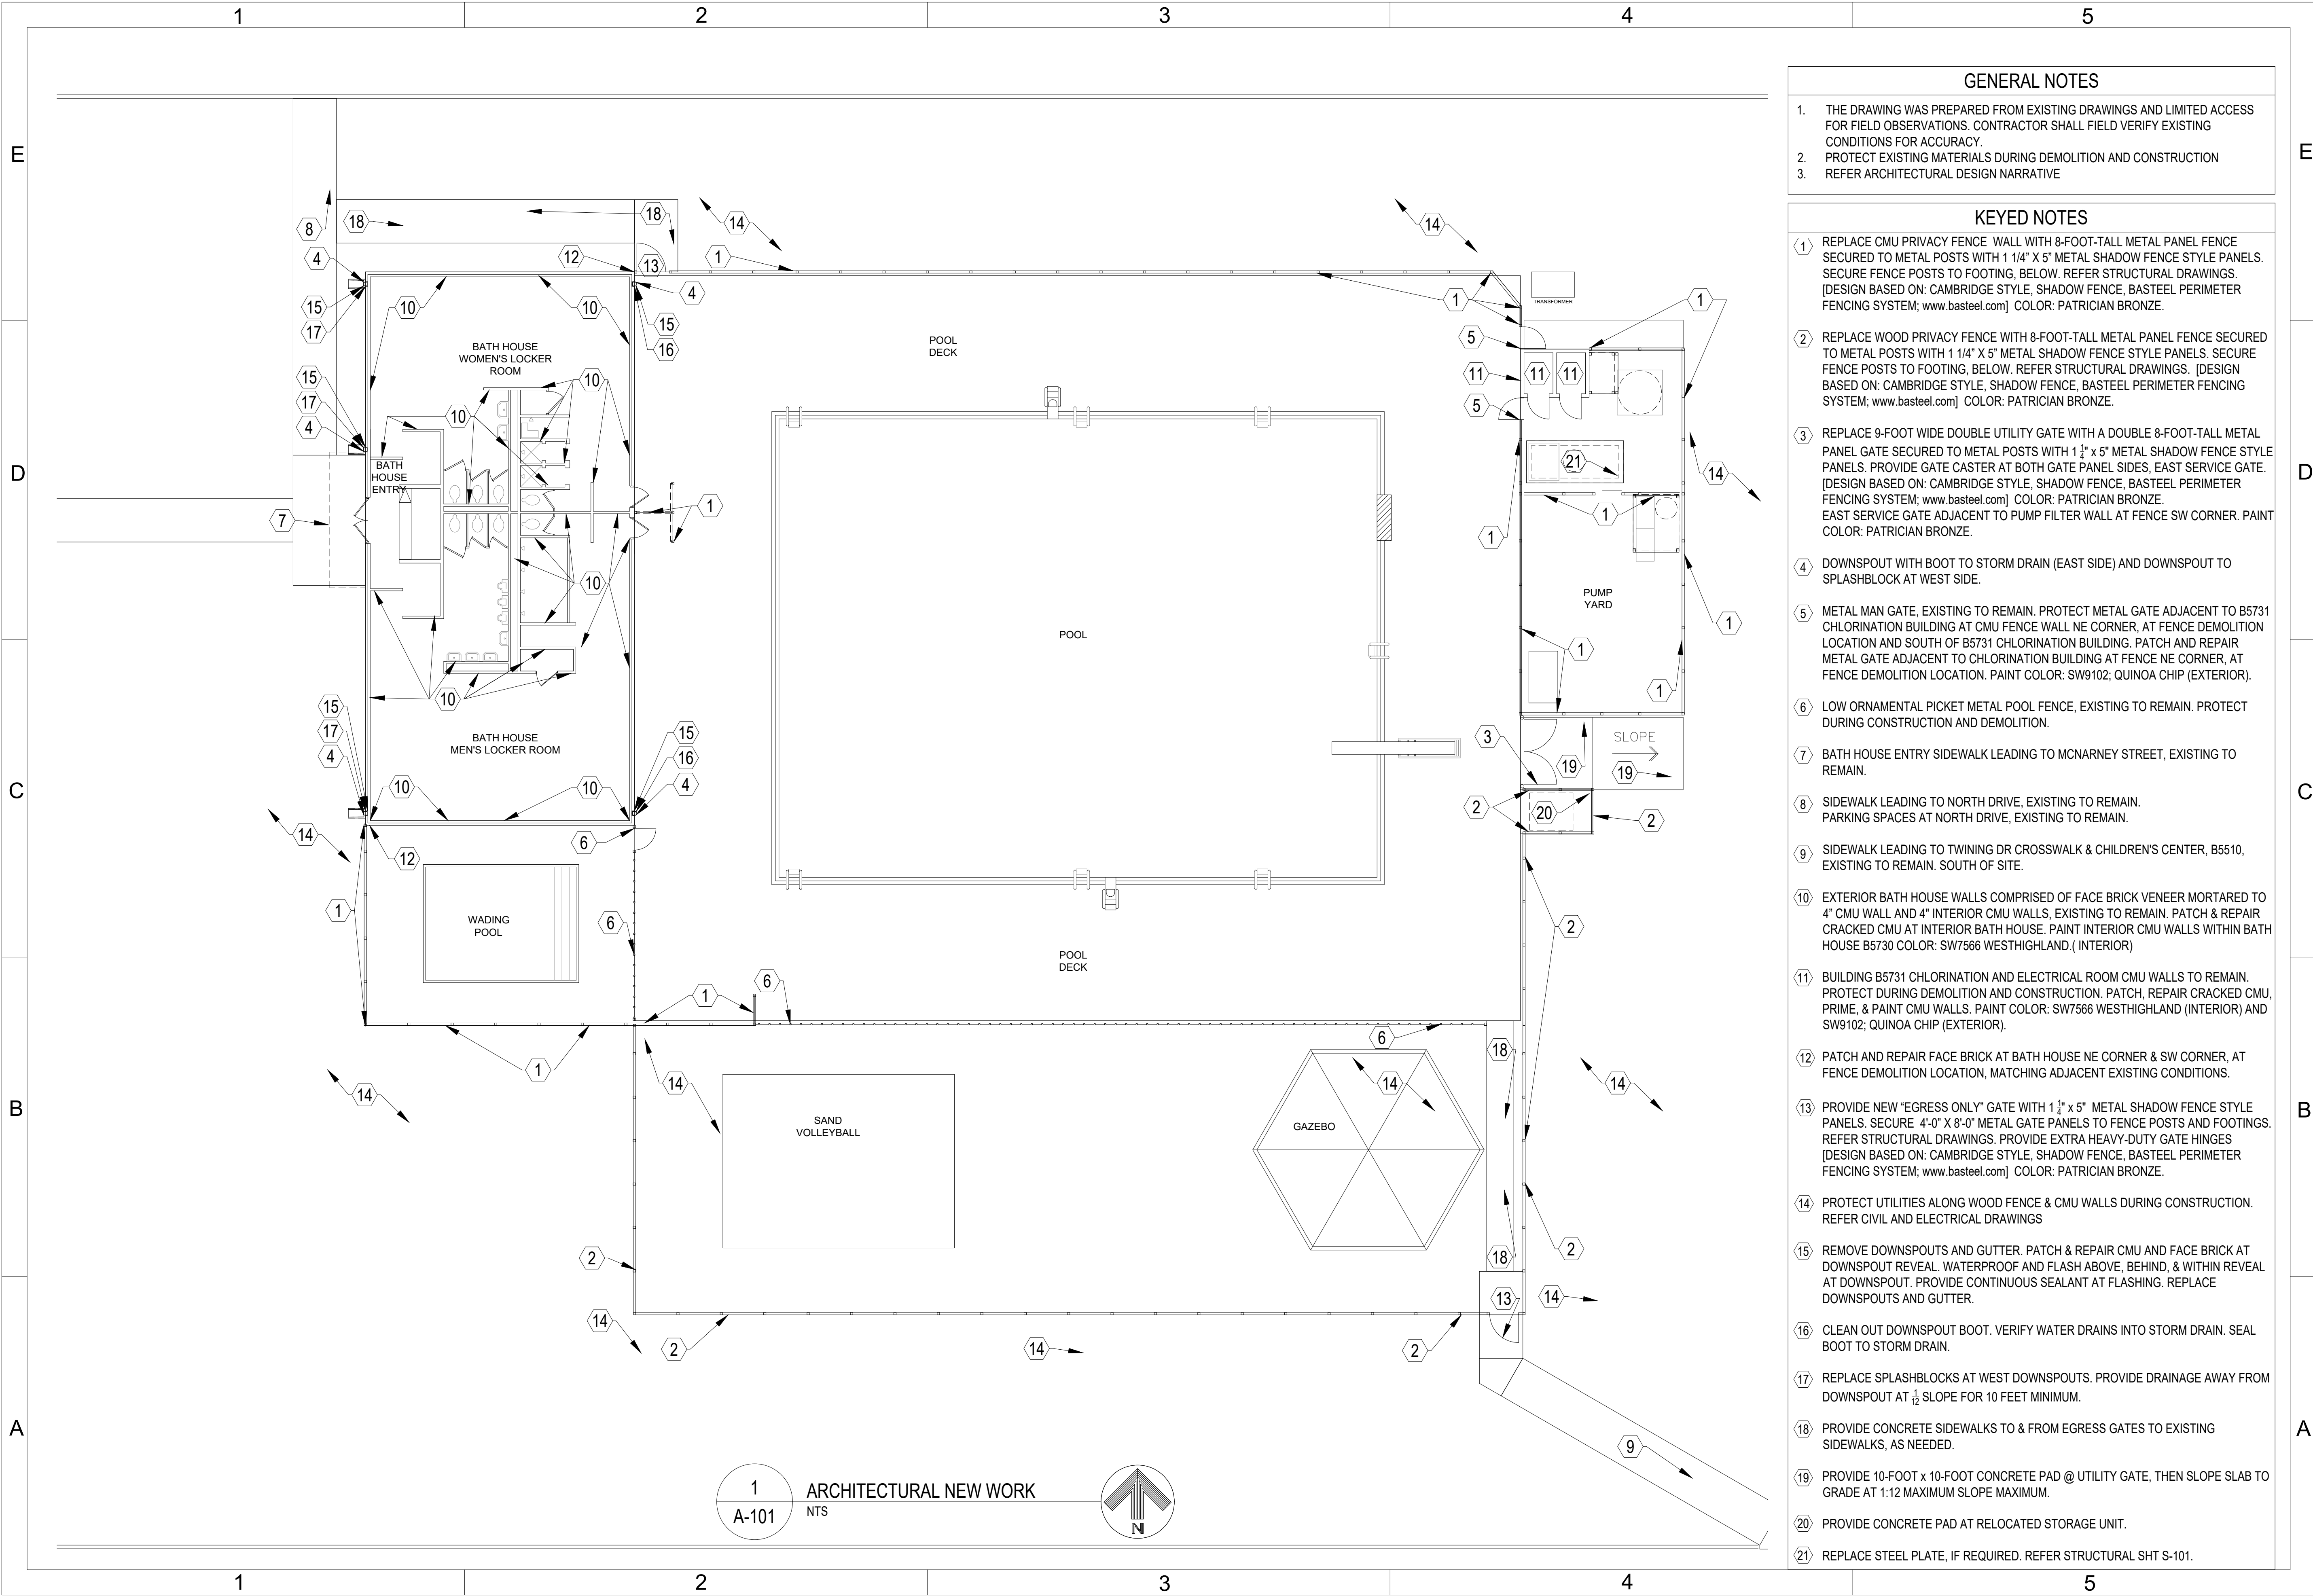

GENERAL NOTES

1. THE DRAWING WAS PREPARED FROM EXISTING DRAWINGS AND LIMITED ACCESS FOR FIELD OBSERVATIONS. CONTRACTOR SHALL FIELD VERIFY EXISTING CONDITIONS FOR ACCURACY.
2. PROTECT EXISTING MATERIALS DURING DEMOLITION AND CONSTRUCTION
3. REFER ARCHITECTURAL DESIGN NARRATIVE

KEYED NOTES

1. REPLACE CMU PRIVACY FENCE WALL WITH 8-FOOT-TALL METAL PANEL FENCE SECURED TO METAL POSTS WITH 1 1/4" X 5" METAL SHADOW FENCE STYLE PANELS. SECURE FENCE POSTS TO FOOTING, BELOW. REFER STRUCTURAL DRAWINGS. [DESIGN BASED ON: CAMBRIDGE STYLE, SHADOW FENCE, BASTEEL PERIMETER FENCING SYSTEM; www.basteel.com] COLOR: PATRICIAN BRONZE.
2. REPLACE WOOD PRIVACY FENCE WITH 8-FOOT-TALL METAL PANEL FENCE SECURED TO METAL POSTS WITH 1 1/4" X 5" METAL SHADOW FENCE STYLE PANELS. SECURE FENCE POSTS TO FOOTING, BELOW. REFER STRUCTURAL DRAWINGS. [DESIGN BASED ON: CAMBRIDGE STYLE, SHADOW FENCE, BASTEEL PERIMETER FENCING SYSTEM; www.basteel.com] COLOR: PATRICIAN BRONZE.
3. REPLACE 9-FOOT WIDE DOUBLE UTILITY GATE WITH A DOUBLE 8-FOOT-TALL METAL PANEL GATE SECURED TO METAL POSTS WITH 1 1/4" X 5" METAL SHADOW FENCE STYLE PANELS. PROVIDE GATE CASTER AT BOTH GATE PANEL SIDES, EAST SERVICE GATE. [DESIGN BASED ON: CAMBRIDGE STYLE, SHADOW FENCE, BASTEEL PERIMETER FENCING SYSTEM; www.basteel.com] COLOR: PATRICIAN BRONZE. EAST SERVICE GATE ADJACENT TO PUMP FILTER WALL AT FENCE SW CORNER. PAINT COLOR: PATRICIAN BRONZE.
4. DOWNSPOUT WITH BOOT TO STORM DRAIN (EAST SIDE) AND DOWNSPOUT TO SPLASHBLOCK AT WEST SIDE.
5. METAL MAN GATE, EXISTING TO REMAIN. PROTECT METAL GATE ADJACENT TO B5731 CHLORINATION BUILDING AT CMU FENCE WALL NE CORNER, AT FENCE DEMOLITION LOCATION AND SOUTH OF B5731 CHLORINATION BUILDING. PATCH AND REPAIR METAL GATE ADJACENT TO CHLORINATION BUILDING AT FENCE NE CORNER, AT FENCE DEMOLITION LOCATION. PAINT COLOR: SW9102; QUINOA CHIP (EXTERIOR).
6. LOW ORNAMENTAL PICKET METAL POOL FENCE, EXISTING TO REMAIN. PROTECT DURING CONSTRUCTION AND DEMOLITION.
7. BATH HOUSE ENTRY SIDEWALK LEADING TO MCNARNEY STREET, EXISTING TO REMAIN.
8. SIDEWALK LEADING TO NORTH DRIVE, EXISTING TO REMAIN. PARKING SPACES AT NORTH DRIVE, EXISTING TO REMAIN.
9. SIDEWALK LEADING TO TWINING DR CROSSWALK & CHILDREN'S CENTER, B5510, EXISTING TO REMAIN. SOUTH OF SITE.
10. EXTERIOR BATH HOUSE WALLS COMPRISED OF FACE BRICK VENEER MORTARED TO 4" CMU WALL AND 4" INTERIOR CMU WALLS, EXISTING TO REMAIN. PATCH & REPAIR CRACKED CMU AT INTERIOR BATH HOUSE. PAINT INTERIOR CMU WALLS WITHIN BATH HOUSE B5730 COLOR: SW7566 WESTHIGHLAND, (INTERIOR)
11. BUILDING B5731 CHLORINATION AND ELECTRICAL ROOM CMU WALLS TO REMAIN. PROTECT DURING DEMOLITION AND CONSTRUCTION. PATCH, REPAIR CRACKED CMU, PRIME, & PAINT CMU WALLS. PAINT COLOR: SW7566 WESTHIGHLAND (INTERIOR) AND SW9102; QUINOA CHIP (EXTERIOR).
12. PATCH AND REPAIR FACE BRICK AT BATH HOUSE NE CORNER & SW CORNER, AT FENCE DEMOLITION LOCATION, MATCHING ADJACENT EXISTING CONDITIONS.
13. PROVIDE NEW "EGRESS ONLY" GATE WITH 1 1/4" X 5" METAL SHADOW FENCE STYLE PANELS. SECURE 4'-0" X 8'-0" METAL GATE PANELS TO FENCE POSTS AND FOOTINGS. REFER STRUCTURAL DRAWINGS. PROVIDE EXTRA HEAVY-DUTY GATE HINGES [DESIGN BASED ON: CAMBRIDGE STYLE, SHADOW FENCE, BASTEEL PERIMETER FENCING SYSTEM; www.basteel.com] COLOR: PATRICIAN BRONZE.
14. PROTECT UTILITIES ALONG WOOD FENCE & CMU WALLS DURING CONSTRUCTION. REFER CIVIL AND ELECTRICAL DRAWINGS
15. REMOVE DOWNSPOUTS AND GUTTER. PATCH & REPAIR CMU AND FACE BRICK AT DOWNSPOUT REVEAL. WATERPROOF AND FLASH ABOVE, BEHIND, & WITHIN REVEAL AT DOWNSPOUT. PROVIDE CONTINUOUS SEALANT AT FLASHING. REPLACE DOWNSPOUTS AND GUTTER.
16. CLEAN OUT DOWNSPOUT BOOT. VERIFY WATER DRAINS INTO STORM DRAIN. SEAL BOOT TO STORM DRAIN.
17. REPLACE SPLASHBLOCKS AT WEST DOWNSPOUTS. PROVIDE DRAINAGE AWAY FROM DOWNSPOUT AT 1/2 SLOPE FOR 10 FEET MINIMUM.
18. PROVIDE CONCRETE SIDEWALKS TO & FROM EGRESS GATES TO EXISTING SIDEWALKS, AS NEEDED.
19. PROVIDE 10-FOOT x 10-FOOT CONCRETE PAD @ UTILITY GATE, THEN SLOPE SLAB TO GRADE AT 1:12 MAXIMUM SLOPE MAXIMUM.
20. PROVIDE CONCRETE PAD AT RELOCATED STORAGE UNIT.
21. REPLACE STEEL PLATE, IF REQUIRED. REFER STRUCTURAL SHT S-101.



AIR FORCE MATERIEL COMMAND
72 ABW CIVIL ENGINEER DIRECTORATE

TINKER AFB, OK

35%
DESIGN

PROJECT INFORMATION
WWYK250172

REPLACE WALLS OF THE
ISARD POOL HOUSE,
B5730

TINKER AIR FORCE BASE, OKLAHOMA

REVISIONS
MARK DATE DESCRIPTION

MARK	DATE	DESCRIPTION
1		
2		
3		
4		
5		
6		
7		
8		
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		
19		
20		
21		

MANAGEMENT INFORMATION
ISSUE DATE: 2 FEB 2025
DESIGN GROUP: TEPA-SRM
DESIGNED BY: T DELANEY
DRAWN BY: F BAKER
CHECKED BY: B SHANNON
DESIGN FILE LOCATION:
T:\Eng\Design\2025\20250172\0_Support\0_3_Drawings\PDF


SHEET TITLE

ARCHITECTURAL NEW
WORK

SHEET NUMBER

A-101

SHEET 10 OF 16

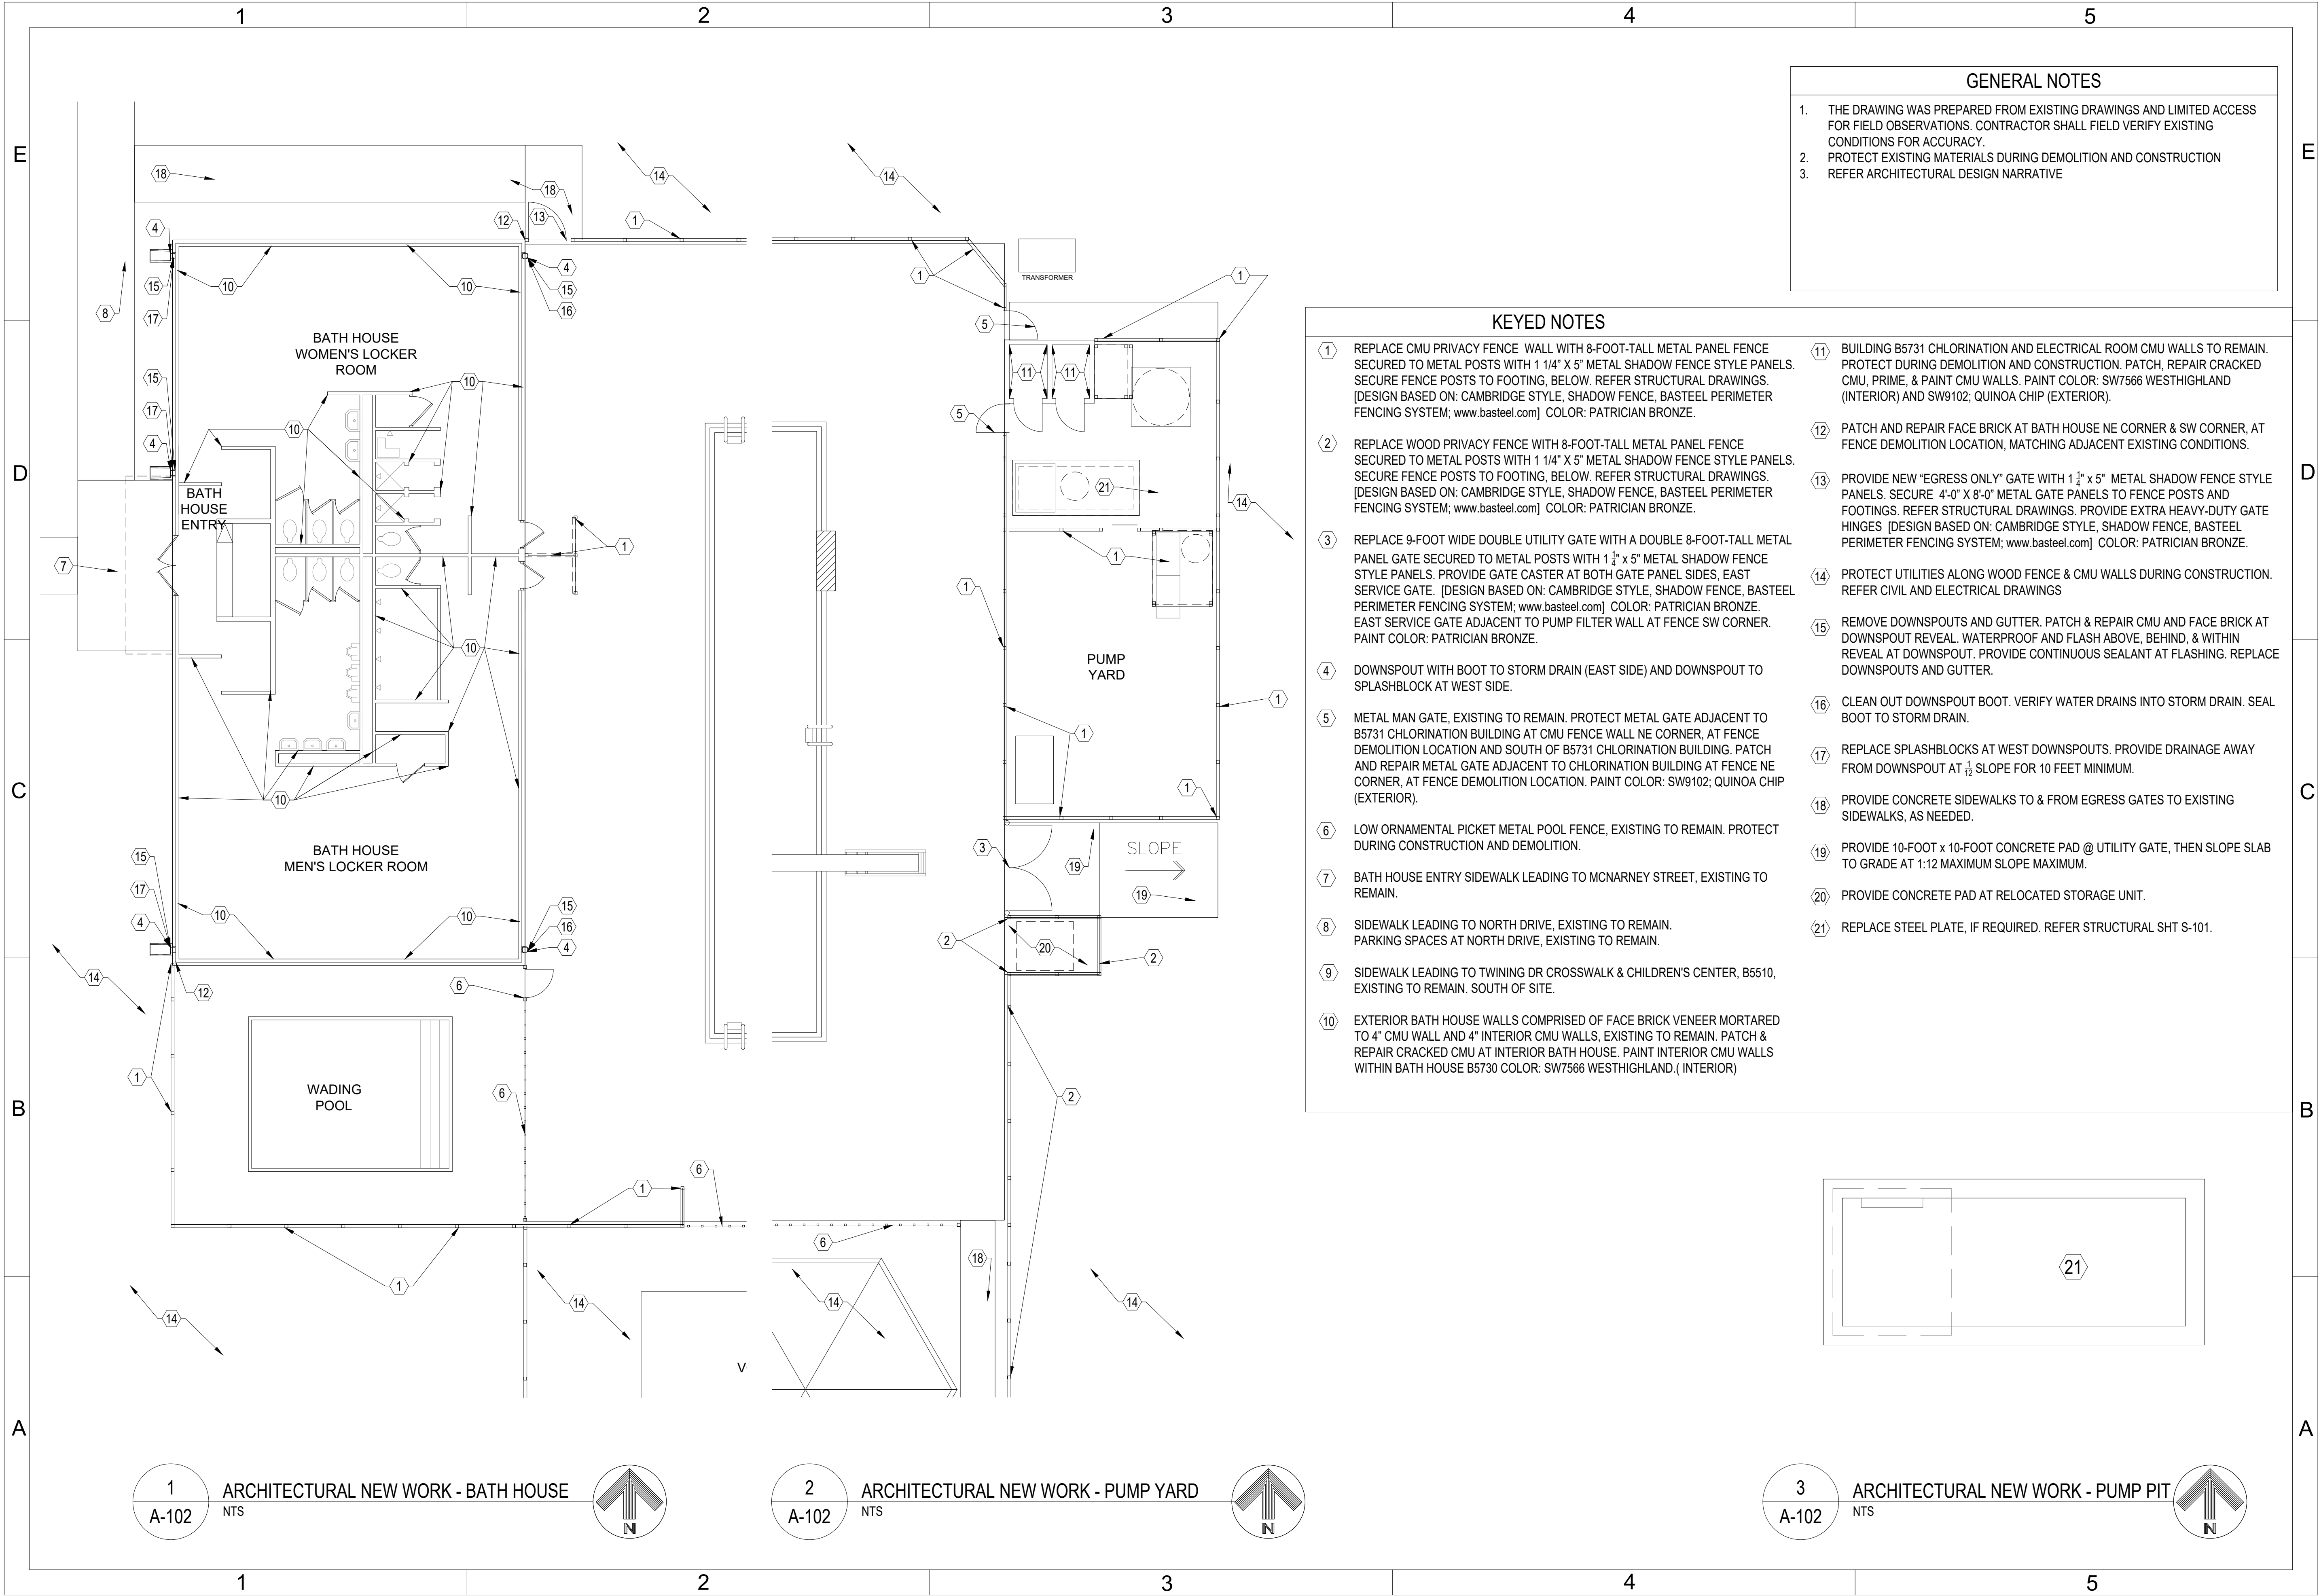

AIR FORCE MATERIEL COMMAND
72 ABW CIVIL ENGINEER DIRECTORATE
TINKER AFB, OK

35%
DESIGN

PROJECT INFORMATION
WYK250172
REPLACE WALLS OF THE
ISARD POOL HOUSE,
B5730
TINKER AIR FORCE BASE, OKLAHOMA

MANAGEMENT INFORMATION	REVISIONS	DATE	DESCRIPTION
ISSUE DATE: 2 FEB 2025			
DESIGN GROUP: TEPA-SRM			
DESIGNED BY: T DELANEY			
DRAWN BY: F BAKER			
CHECKED BY: B SHANNON			
DESIGN FILE LOCATION: T:\Engr\Design\2025\20250172\0_Support\0_3_Drawings\PDF			


ARCHITECTURAL NEW
WORK

SHEET TITLE
SHEET NUMBER
A-102
SHEET 11 OF 16



- ## KEYED NOTES
-
- | | |
|---|--|
| ① | REMOVE THE EXIST BUILT-UP ROOF SYSTEM. |
| ② | REMOVE THE GUTTERS AND DOWNSPOUTS. |
| ③ | REMOVE THE RAKE TRIM. |
| ④ | DISCONNECT POWER & REMOVE EXISTING EXHAUST FAN . |
| ⑤ | REMOVE EXISTING FLUE VENT AND CAP. |
| ⑥ | REMOVE EXISTING PLUMBING VENT PIPE AND JACK. |

SHEET TITLE	
ROOF DEMOLITION	
SHEET NUMBER	
RD-101	
SHEET	OF
12	16

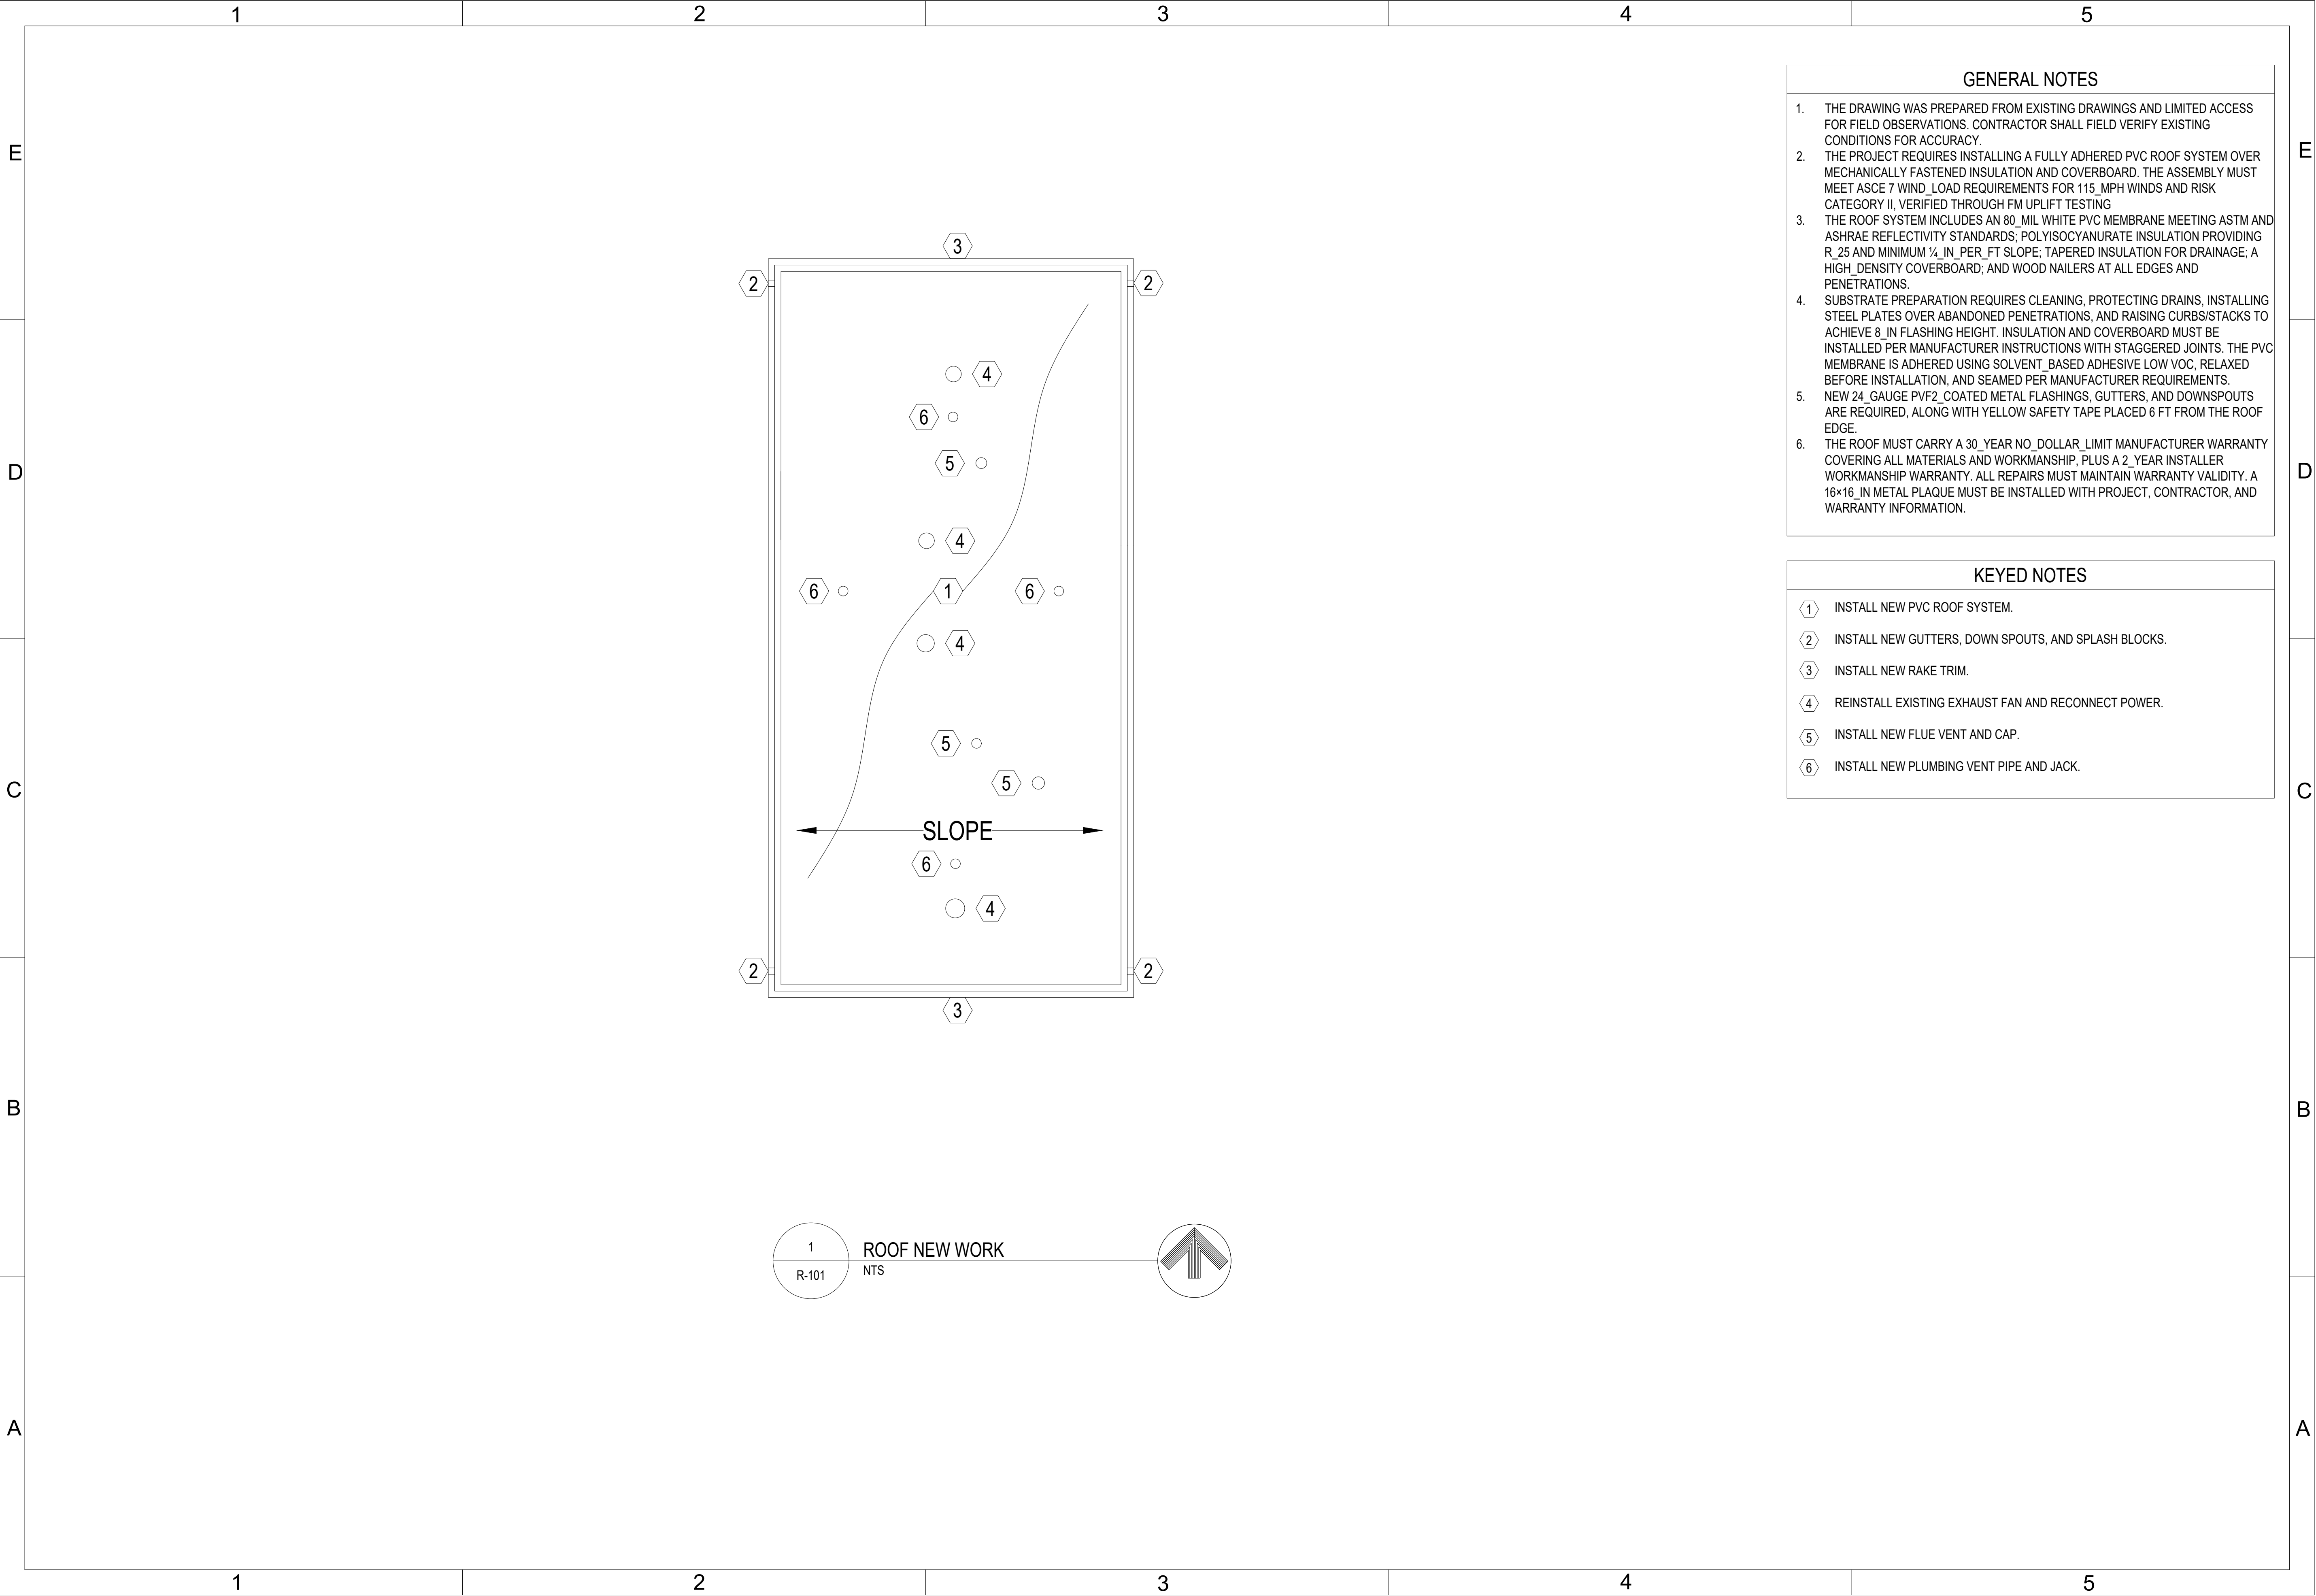

- GENERAL NOTES
1.

THE DRAWING WAS PREPARED FROM EXISTING DRAWINGS AND LIMITED ACCESS FOR FIELD OBSERVATIONS. CONTRACTOR SHALL FIELD VERIFY EXISTING CONDITIONS FOR ACCURACY.
2.

THE PROJECT REQUIRES INSTALLING A FULLY ADHERED PVC ROOF SYSTEM OVER MECHANICALLY FASTENED INSULATION AND COVERBOARD. THE ASSEMBLY MUST MEET ASCE 7 WIND_LOAD REQUIREMENTS FOR 115_MPH WINDS AND RISK CATEGORY II, VERIFIED THROUGH FM UPLIFT TESTING
3.

THE ROOF SYSTEM INCLUDES AN 80_MIL WHITE PVC MEMBRANE MEETING ASTM AND ASHRAE REFLECTIVITY STANDARDS; POLYISOCYANURATE INSULATION PROVIDING R_25 AND MINIMUM ¼_IN_PER_FT SLOPE; TAPERED INSULATION FOR DRAINAGE; A HIGH_DENSITY COVERBOARD; AND WOOD NAILERS AT ALL EDGES AND PENETRATIONS.
4.

SUBSTRATE PREPARATION REQUIRES CLEANING, PROTECTING DRAINS, INSTALLING STEEL PLATES OVER ABANDONED PENETRATIONS, AND RAISING CURBS/STACKS TO ACHIEVE 8_IN FLASHING HEIGHT. INSULATION AND COVERBOARD MUST BE INSTALLED PER MANUFACTURER INSTRUCTIONS WITH STAGGERED JOINTS. THE PVC MEMBRANE IS ADHERED USING SOLVENT_BASED ADHESIVE LOW VOC, RELAXED BEFORE INSTALLATION, AND SEAMED PER MANUFACTURER REQUIREMENTS.
5.

NEW 24_GAUGE PVF2_COATED METAL FLASHINGS, GUTTERS, AND DOWNSPOUTS ARE REQUIRED, ALONG WITH YELLOW SAFETY TAPE PLACED 6 FT FROM THE ROOF EDGE.
6.

THE ROOF MUST CARRY A 30_YEAR NO_DOLLAR_LIMIT MANUFACTURER WARRANTY COVERING ALL MATERIALS AND WORKMANSHIP, PLUS A 2_YEAR INSTALLER WORKMANSHIP WARRANTY. ALL REPAIRS MUST MAINTAIN WARRANTY VALIDITY. A 16×16_IN METAL PLAQUE MUST BE INSTALLED WITH PROJECT, CONTRACTOR, AND WARRANTY INFORMATION.

- KEYED NOTES
- ①

INSTALL NEW PVC ROOF SYSTEM.
- ②

INSTALL NEW GUTTERS, DOWN SPOUTS, AND SPLASH BLOCKS.
- ③

INSTALL NEW RAKE TRIM.
- ④

REINSTALL EXISTING EXHAUST FAN AND RECONNECT POWER.
- ⑤

INSTALL NEW FLUE VENT AND CAP.
- ⑥

INSTALL NEW PLUMBING VENT PIPE AND JACK.

AFMC

AIR FORCE MATERIEL COMMAND

72 ABW CIVIL ENGINEER DIRECTORATE

TINKER AFB, OK

35%
DESIGN

PROJECT INFORMATION

WWYK250172
REPLACE WALLS OF THE
ISZARD POOL HOUSE,
B5730

TINKER AIR FORCE BASE, OKLAHOMA

MANAGEMENT INFORMATION		REVISIONS	
ISSUE	DATE	MARK	DESCRIPTION
1	2 FEB 2026		
DESIGN GROUP: TEPA-SRM			
DESIGNED BY: A ALAWADI			
DRAWN BY: F BAKER			
CHECKED BY: B SHANNON			
DESIGN FILE LOCATION: T:\Engn\Design\2020s\2025\20250172\0_Support\0_3_Drawings\PDF			

SHEET TITLE


ROOF NEW WORK

SHEET NUMBER

R-101

SHEET 13

OF 16

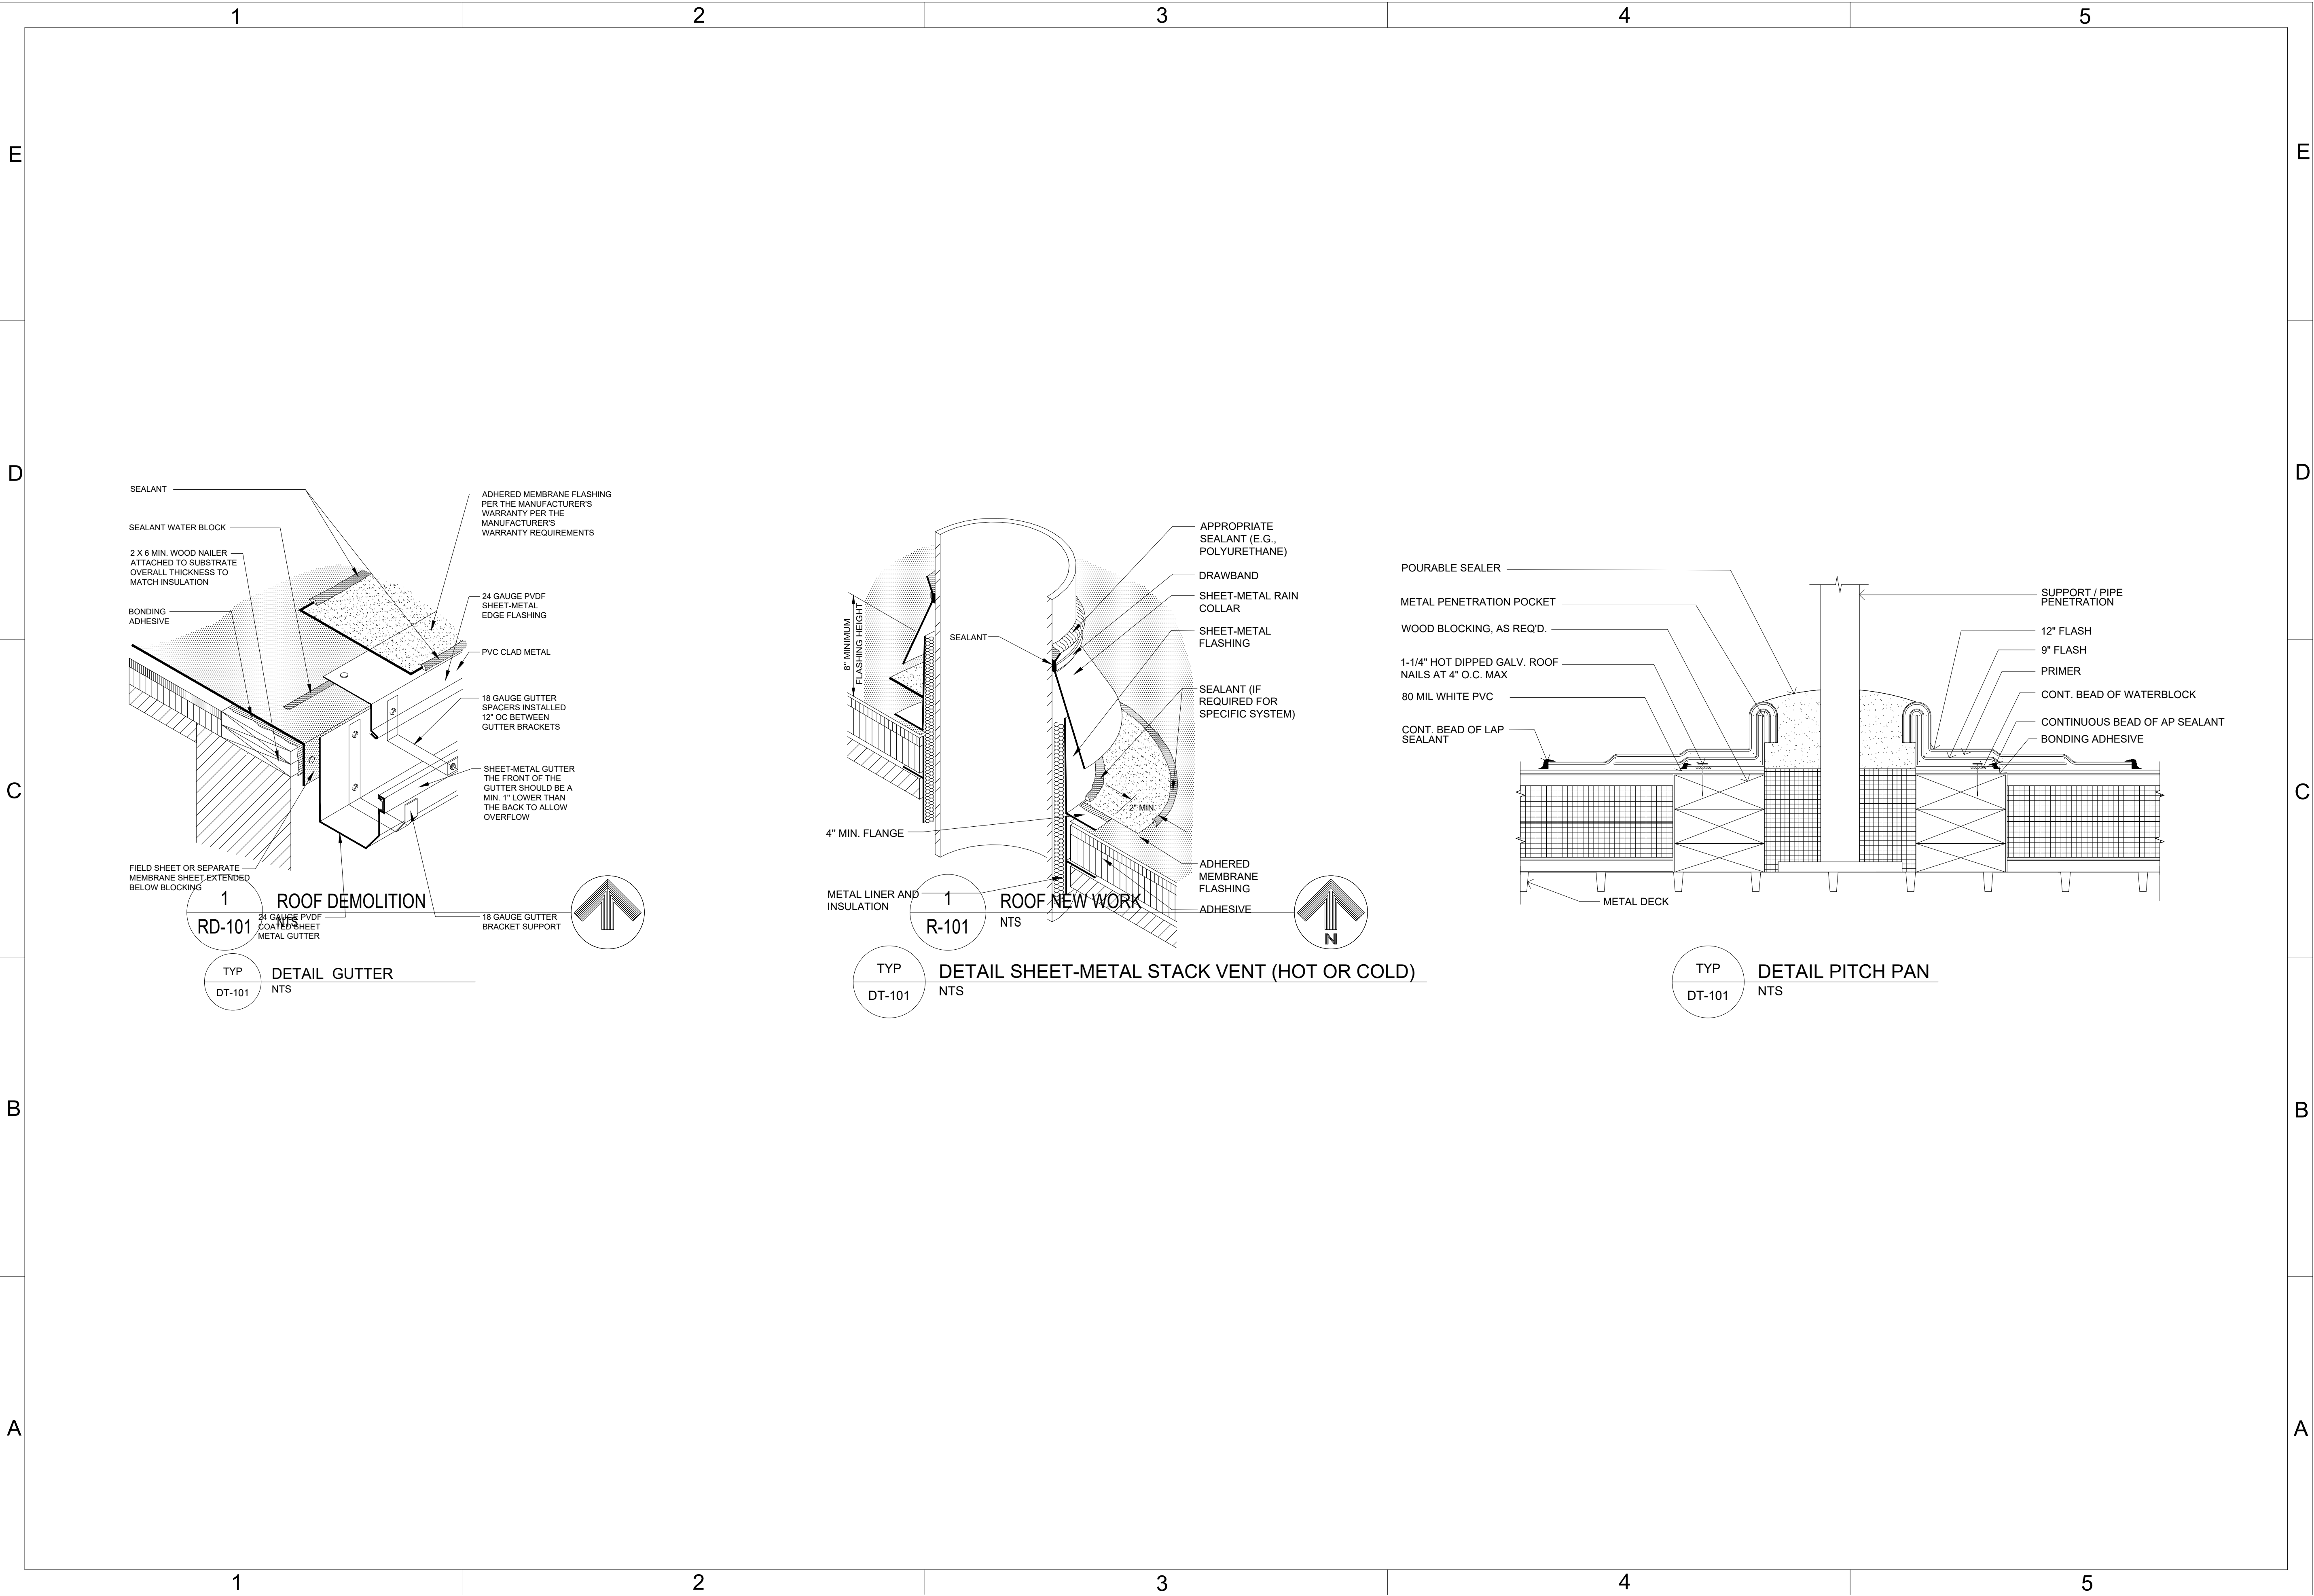



AIR FORCE MATERIEL COMMAND
72 ABW CIVIL ENGINEER DIRECTORATE
TINKER AFB, OK

35%
DESIGN

PROJECT INFORMATION

WWYK250172
REPLACE WALLS OF THE
ISZARD POOL HOUSE,
B5730

TINKER AIR FORCE BASE, OKLAHOMA

MANAGEMENT INFORMATION		REVISIONS		DESCRIPTION	
ISSUE DATE	2 FEB 2026	MARK	DATE	DATE	DESCRIPTION
DESIGN GROUP	TEPA-SRM				
DESIGNED BY	A ALAWADI				
DRAWN BY	F BAKER				
CHECKED BY	B SHANNON				
DESIGN FILE LOCATION: T:\Engn\Design\2025\20250172\0_Support\0_3_Drawings\PDF					


SHEET TITLE

ROOF PLAN DETAILS

SHEET NUMBER

R-501

SHEET 14 OF 16

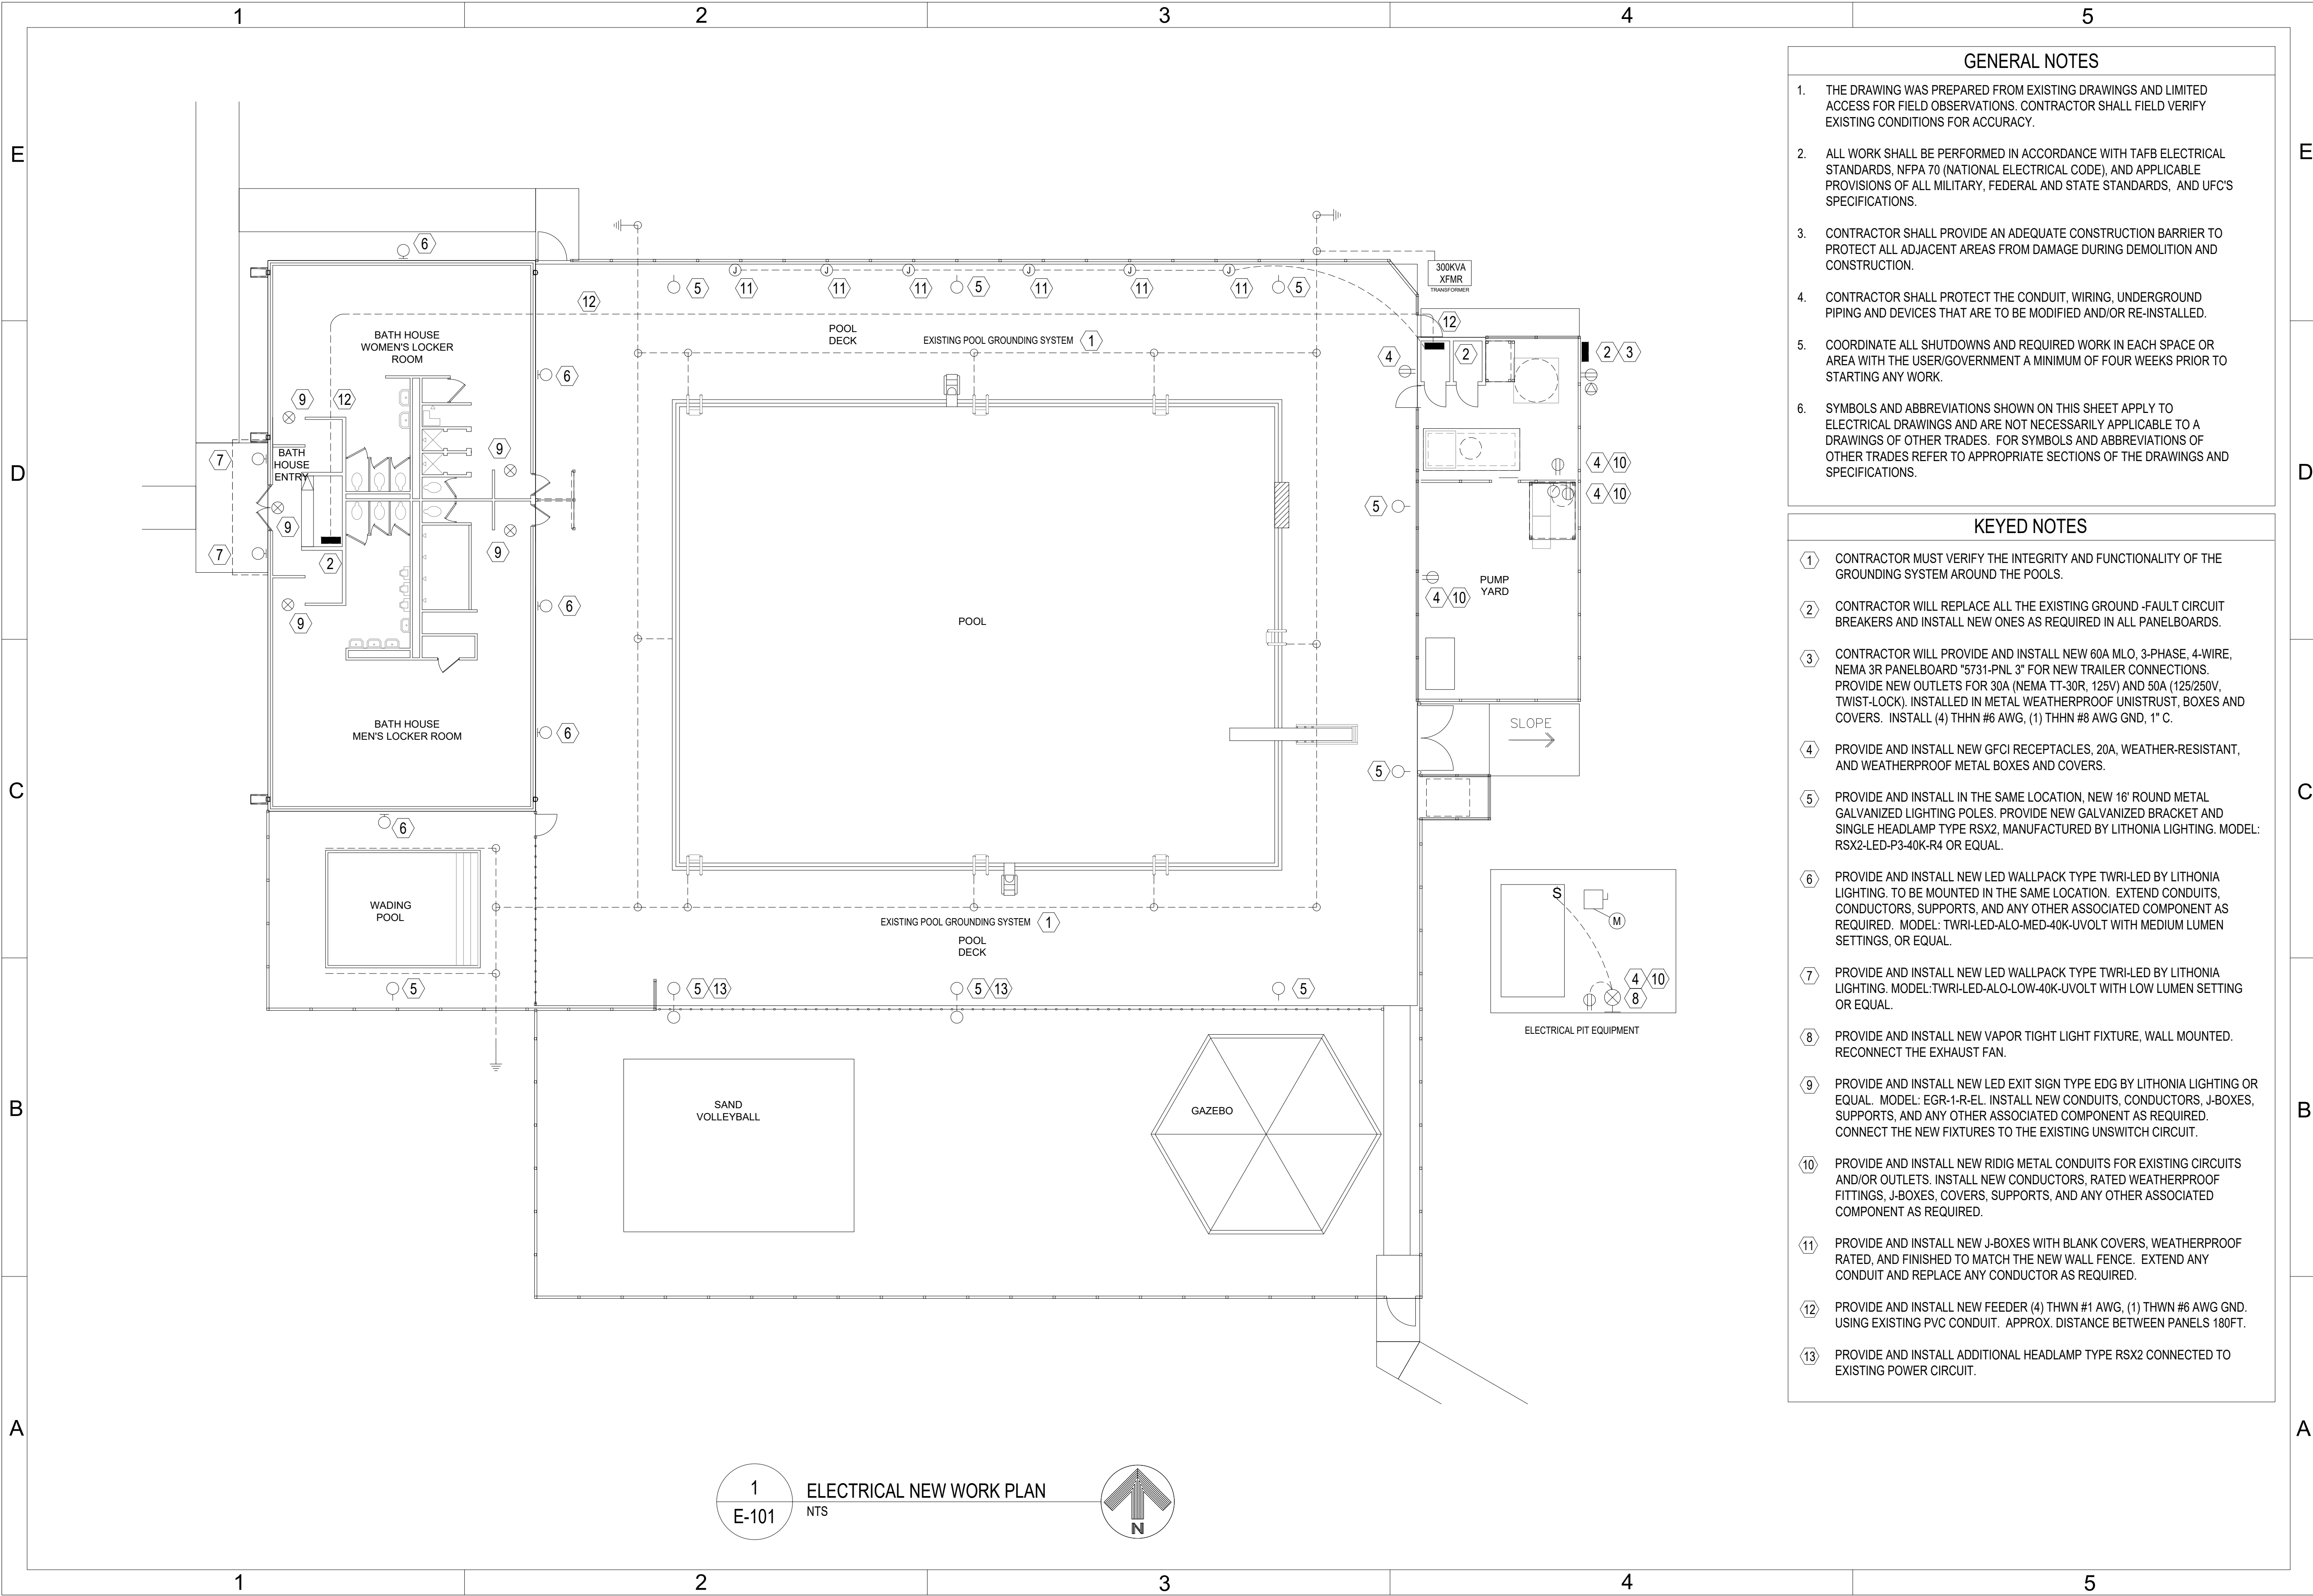

1
E-101
ELECTRICAL NEW WORK PLAN
NTS

GENERAL NOTES

1. THE DRAWING WAS PREPARED FROM EXISTING DRAWINGS AND LIMITED ACCESS FOR FIELD OBSERVATIONS. CONTRACTOR SHALL FIELD VERIFY EXISTING CONDITIONS FOR ACCURACY.
2. ALL WORK SHALL BE PERFORMED IN ACCORDANCE WITH TAFB ELECTRICAL STANDARDS, NFPA 70 (NATIONAL ELECTRICAL CODE), AND APPLICABLE PROVISIONS OF ALL MILITARY, FEDERAL AND STATE STANDARDS, AND UFC'S SPECIFICATIONS.
3. CONTRACTOR SHALL PROVIDE AN ADEQUATE CONSTRUCTION BARRIER TO PROTECT ALL ADJACENT AREAS FROM DAMAGE DURING DEMOLITION AND CONSTRUCTION.
4. CONTRACTOR SHALL PROTECT THE CONDUIT, WIRING, UNDERGROUND PIPING AND DEVICES THAT ARE TO BE MODIFIED AND/OR RE-INSTALLED.
5. COORDINATE ALL SHUTDOWNS AND REQUIRED WORK IN EACH SPACE OR AREA WITH THE USER/GOVERNMENT A MINIMUM OF FOUR WEEKS PRIOR TO STARTING ANY WORK.
6. SYMBOLS AND ABBREVIATIONS SHOWN ON THIS SHEET APPLY TO ELECTRICAL DRAWINGS AND ARE NOT NECESSARILY APPLICABLE TO A DRAWINGS OF OTHER TRADES. FOR SYMBOLS AND ABBREVIATIONS OF OTHER TRADES REFER TO APPROPRIATE SECTIONS OF THE DRAWINGS AND SPECIFICATIONS.

KEYED NOTES

1. CONTRACTOR MUST VERIFY THE INTEGRITY AND FUNCTIONALITY OF THE GROUNDING SYSTEM AROUND THE POOLS.
2. CONTRACTOR WILL REPLACE ALL THE EXISTING GROUND -FAULT CIRCUIT BREAKERS AND INSTALL NEW ONES AS REQUIRED IN ALL PANELBOARDS.
3. CONTRACTOR WILL PROVIDE AND INSTALL NEW 60A MLO, 3-PHASE, 4-WIRE, NEMA 3R PANELBOARD "5731-PNL 3" FOR NEW TRAILER CONNECTIONS. PROVIDE NEW OUTLETS FOR 30A (NEMA TT-30R, 125V) AND 50A (125/250V, TWIST-LOCK). INSTALLED IN METAL WEATHERPROOF UNISTRUST, BOXES AND COVERS. INSTALL (4) THHN #6 AWG, (1) THHN #8 AWG GND, 1" C."
4. PROVIDE AND INSTALL NEW GFCI RECEPTACLES, 20A, WEATHER-RESISTANT, AND WEATHERPROOF METAL BOXES AND COVERS.
5. PROVIDE AND INSTALL IN THE SAME LOCATION, NEW 16' ROUND METAL GALVANIZED LIGHTING POLES. PROVIDE NEW GALVANIZED BRACKET AND SINGLE HEADLAMP TYPE RSX2, MANUFACTURED BY LITHONIA LIGHTING. MODEL: RSX2-LED-P3-40K-R4 OR EQUAL.
6. PROVIDE AND INSTALL NEW LED WALLPACK TYPE TWRI-LED BY LITHONIA LIGHTING. TO BE MOUNTED IN THE SAME LOCATION. EXTEND CONDUITS, CONDUCTORS, SUPPORTS, AND ANY OTHER ASSOCIATED COMPONENT AS REQUIRED. MODEL: TWRI-LED-ALO-MED-40K-UVOLT WITH MEDIUM LUMEN SETTINGS, OR EQUAL.
7. PROVIDE AND INSTALL NEW LED WALLPACK TYPE TWRI-LED BY LITHONIA LIGHTING. MODEL: TWRI-LED-ALO-LOW-40K-UVOLT WITH LOW LUMEN SETTING OR EQUAL.
8. PROVIDE AND INSTALL NEW VAPOR TIGHT LIGHT FIXTURE, WALL MOUNTED. RECONNECT THE EXHAUST FAN.
9. PROVIDE AND INSTALL NEW LED EXIT SIGN TYPE EDG BY LITHONIA LIGHTING OR EQUAL. MODEL: EGR-1-R-EL. INSTALL NEW CONDUITS, CONDUCTORS, J-BOXES, SUPPORTS, AND ANY OTHER ASSOCIATED COMPONENT AS REQUIRED. CONNECT THE NEW FIXTURES TO THE EXISTING UNSWITCH CIRCUIT.
10. PROVIDE AND INSTALL NEW RIDIG METAL CONDUITS FOR EXISTING CIRCUITS AND/OR OUTLETS. INSTALL NEW CONDUCTORS, RATED WEATHERPROOF FITTINGS, J-BOXES, COVERS, SUPPORTS, AND ANY OTHER ASSOCIATED COMPONENT AS REQUIRED.
11. PROVIDE AND INSTALL NEW J-BOXES WITH BLANK COVERS, WEATHERPROOF RATED, AND FINISHED TO MATCH THE NEW WALL FENCE. EXTEND ANY CONDUIT AND REPLACE ANY CONDUCTOR AS REQUIRED.
12. PROVIDE AND INSTALL NEW FEEDER (4) THWN #1 AWG, (1) THWN #6 AWG GND. USING EXISTING PVC CONDUIT. APPROX. DISTANCE BETWEEN PANELS 180FT.
13. PROVIDE AND INSTALL ADDITIONAL HEADLAMP TYPE RSX2 CONNECTED TO EXISTING POWER CIRCUIT.



TINKER AFB, OK

35%
DESIGN

WWYK250172
REPLACE WALLS OF THE
ISZARD POOL HOUSE,
B5730

TINKER AIR FORCE BASE, OKLAHOMA

PROJECT INFORMATION

REVISIONS

MANAGEMENT INFORMATION

SHEET TITLE

SHEET NUMBER

SHEET 16 OF 16

ELECTRICAL NEW
WORK PLAN

E-101