

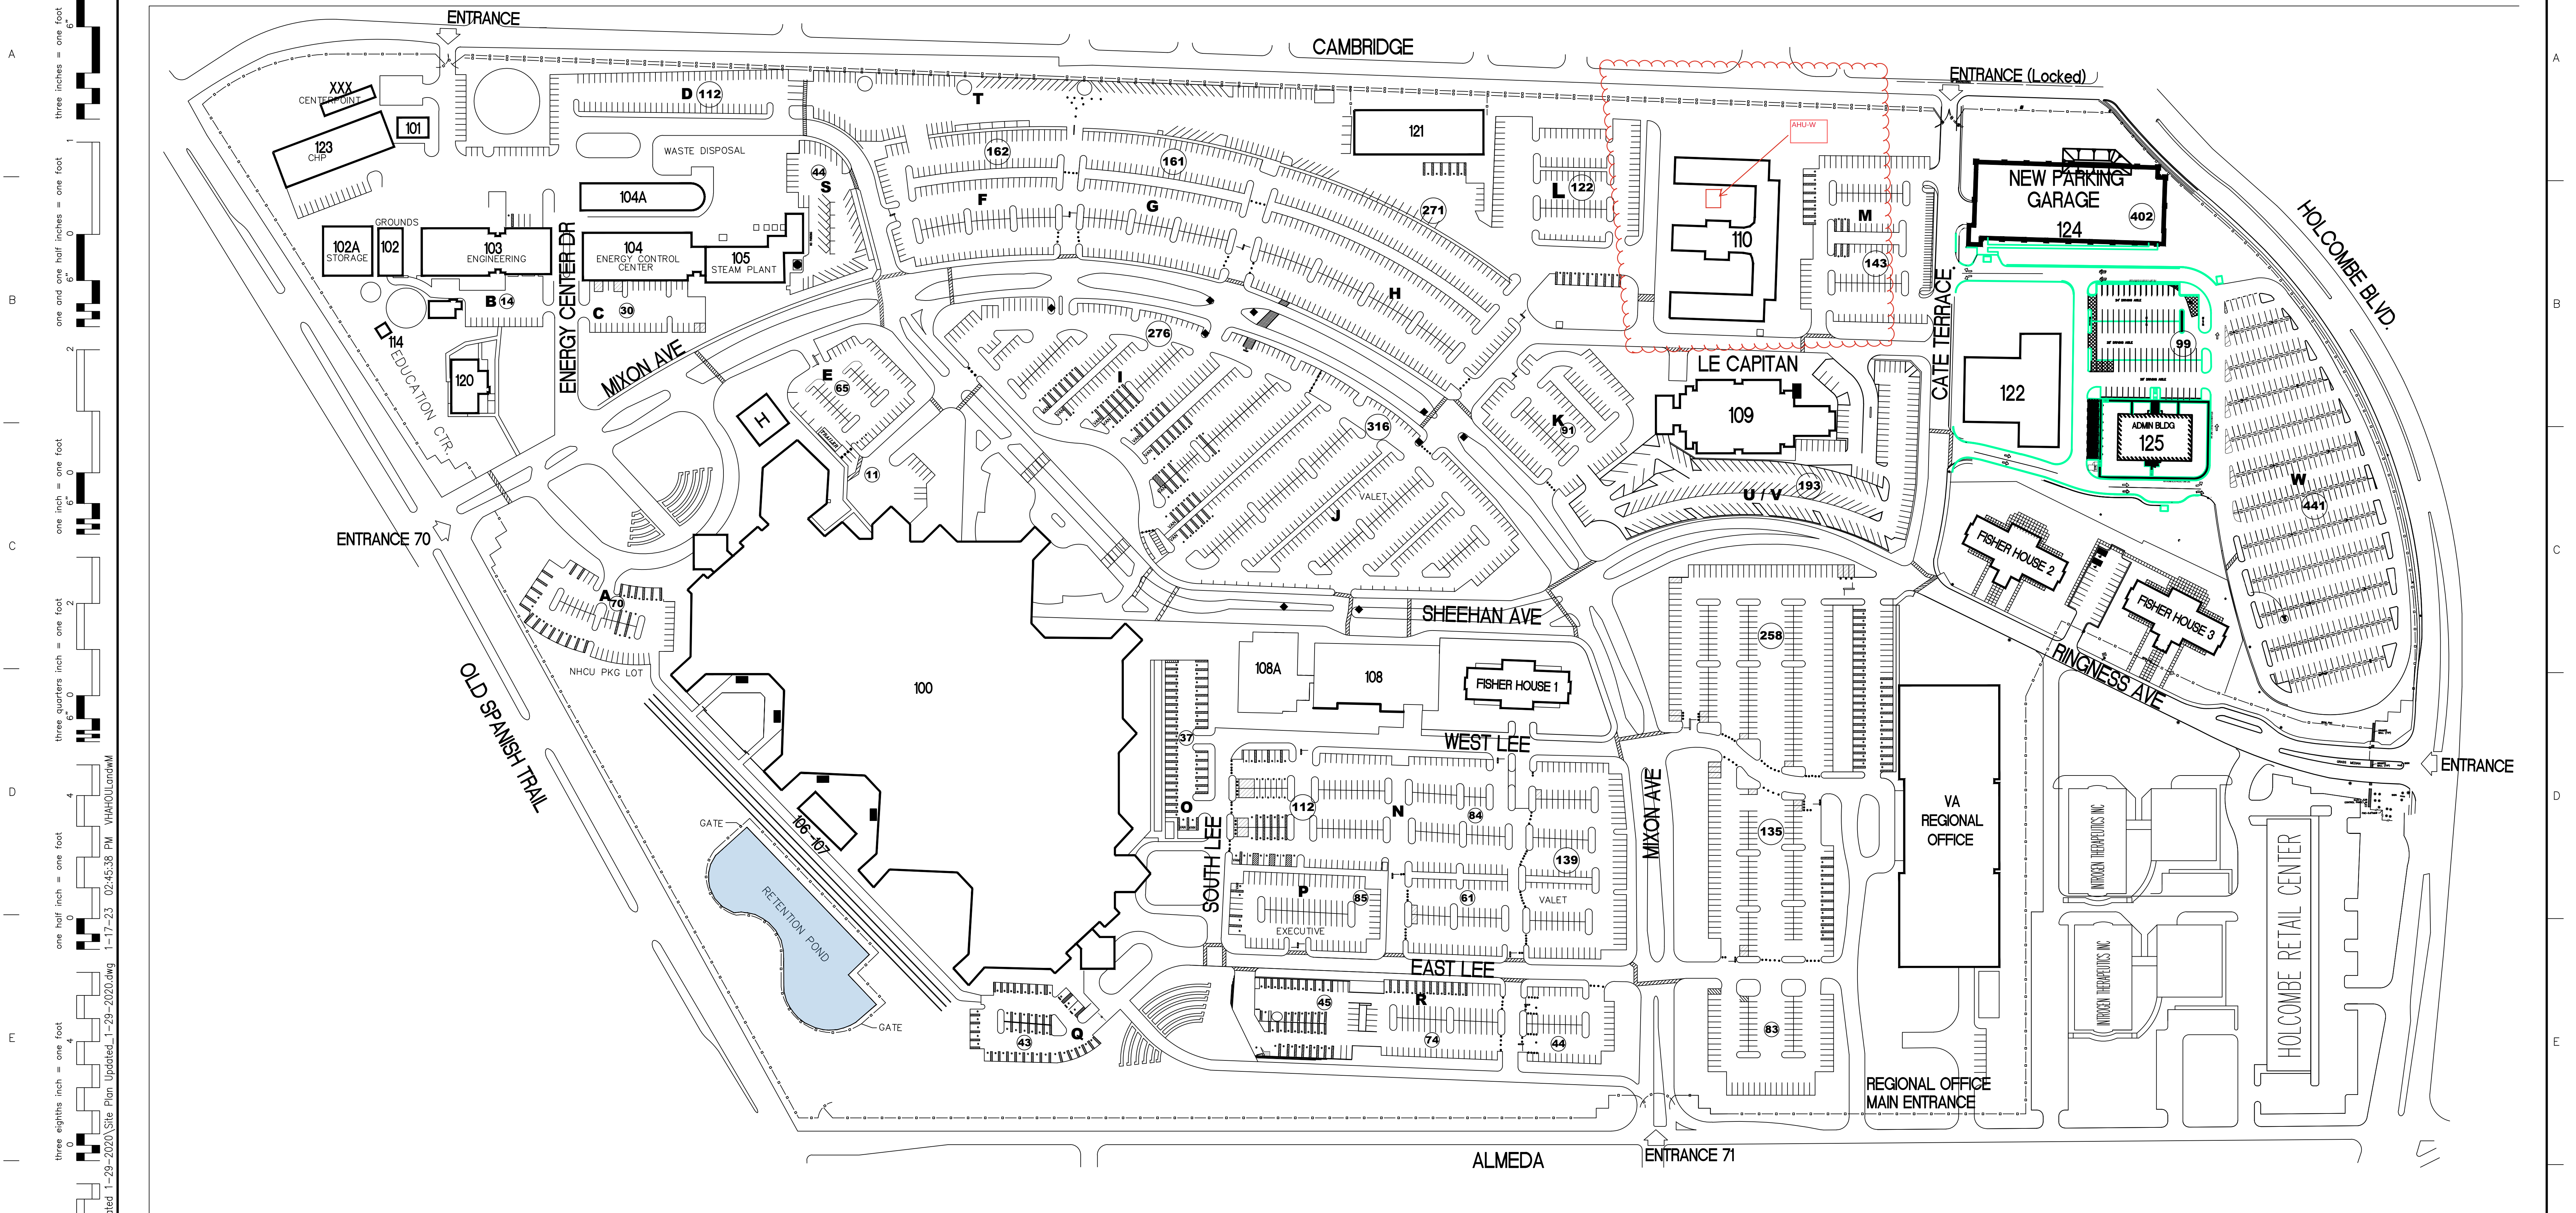




SITE PLAN

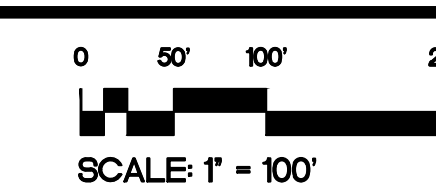

LAST UPDATED
10/15/2022

		Dept. of Veterans Affairs Michael E. DeBakey VAMC 2002 Holcombe Blvd. Houston, TX	Z:\dvaseol2.bmp	ARCHITECT/ENGINEERS:	Drawing Title MICHAEL E. DEBAKEY VAMC SITE PLAN	Project Title SITE PARKING LOT / STRIPING PLAN	Project Number Building Number Site	Office of Construction and Facilities Management  Department of Veterans Affairs
Revisions: Date					Approved Chief Engineer/Division Manager	Location VA Medical Center Houston, Tx	Drawing Number CS101	
					Date 3/21/2018	Checked GM	Drawn MWM	

REMARKS
1 EXISTING UNIT WITH CHW COOLING COIL AND STEAM PREHEAT COIL. DATA PROVIDED FOR REFERENCE ONLY AND TRANSCRIBED FROM ORIGINAL PROJECT'S SCHEDULE SHEET.
2 STEAM PREHEAT COIL TO BE REMOVED AND NEW HW PREHEAT COIL TO BE INSTALLED IN AHU. CHILLED WATER COIL TO REMAIN IN SERVICE.
3 HW PREHEAT COIL DATA SHOWN IS APPLICABLE FOR THIS PROJECT.
4 EXISTING UNIT WITH CHW COOLING COIL AND NO PREHEAT COIL. DATA PROVIDED FOR REFERENCE ONLY AND TRANSCRIBED FROM ORIGINAL PROJECT'S SCHEDULE SHEET.
5 EXISTING CHILLED WATER COIL TO REMAIN IN SERVICE.
6 NEW AIR HANDLING UNIT TO SERVE WEST WING FLOORS 1 AND 2.

REMARKS

1	EXISTING COMPLETELY FUNCTIONAL STEAM TO HOT WATER HEAT EXCHANGER SYSTEM.
2	PERFORMANCE PARAMETERS NOTED IN CURRENT LOAD COLUMN REPRESENT REQUIREMENTS FOR THIS PROJECT.
3	TO ACHIEVE A MAXIMUM PUMP CAPACITY OF 400 GPM THE PRESSURE OF THE STEAM WILL NEED TO BE INCREASED TO 10 PSIG. THIS REPRESENTS AN EFFECTIVE MAXIMUM DELIVERY FOR THE HEAT EXCHANGER.

REMARKS

1 EXISTING PUMPS WITH VARIABLE FREQUENCY DRIVES.

2 DATA PRESENTED FOR REFERENCE ONLY. TAKEN FROM ORIGINAL
PROJECT'S SCHEDULE SHEETS & FIELD VISIT.

3 BRONZE FITTINGS, MECHANICAL SEAL, CARBON STEEL SHAFT,
INERTIA BASE, PREMIUM EFFICIENCY MOTOR, DRIP LIP BASE WITH DRAIN.

REMARKS

- 1 ALL AIR DEVICES SHALL BE TESTED IN ACCORDANCE WITH ASHRAE STANDARD 70-91.
- 2 BORDER TYPE SHALL BE COMPATIBLE WITH CEILING TYPE FOR THE SPACE IN WHICH IT IS LOCATED.
- 3 NOISE CRITERIA, NC MAXIMUM 35.
- 4 FURNISH WITH INTEGRAL OPPOSED BLADE DAMPER.
- 5 INSTALL WITH BLADE DEFLECTION IN THE SAME DIRECTION AS AIRFLOW.

REMARKS ALL UNITS

1	UNITS SHALL HAVE SINGLE POINT CONNECTIONS FOR POWER AND CONTROL.
2	PROVIDE DISCONNECT SWITCH IN ACCORDANCE WITH NEC REQUIREMENTS.

❖❖ SUPPORT VALUE ENGINEERING ❖❖