


TASK GROUP INSTRUCTION
AIM REV 20.11.4.0 (OCTOBER 2020)

TGI NO.:	COMPONENT NAME:	TYPE:	PHASE:	REPEAT:	CHANGE:
	96350D BERP 02 LEVEL	AY	A	0	1
SHIP/HULL NO.:	SHIP/HULL NAME:	SYSTEM:	PROJ/WO NO:	CASREP CAT:	
DDG-113	USS JOHN FINN		BC1		
CU PHASE TITLE:					
F/O - S/A 96350D, MODIFY BOLTED EQUIPMENT REMOVAL PLATE (BERP) 02 LEVEL WEATHER					
PREPARING ACTIVITY:					
PREPARED BY:	CODE	PHONE	DATE		
KAZUMI WATANABE	231A	315-243-4518	16-JAN-2025		
APPROVED BY:	CODE	PHONE	DATE		
YUUJI NAKAMURA	231A	315-243-6041	16-JAN-2025		
CONCURRED BY:	CODE	PHONE	DATE		
CONCURRED BY:	CODE	PHONE	DATE		
CONCURRED BY:	CODE	PHONE	DATE		
CONCURRED BY:	CODE	PHONE	DATE		
REASON FOR WORK/NEED FOR CHANGE:					
Applicable standard Item was changed.					
CHANGE INSTRUCTIONS:					
CH-1: Changed applicable standard Item. (03/01/2025)					
SPECIAL REQUIREMENTS:					
This work affects a fire zone boundary. Fabrication and/or staging of a non-flammable closure is required.					

WORK CERTIFICATION SIGNATURES

COMPLETION OF WORK REVIEW:	BADGE NO.:	SHOP/CODE:	PHONE:	DATE:
ACCEPTANCE OF COMPLETED WORK				
PHYSICAL INSPECTION	PHYSICAL INSPECTION COMPLETED:	BADGE NO.:	SHOP/CODE:	PHONE:
REQUIRED: ☐ YES ☒ NO				
RECORDS REVIEW:	BADGE NO.:	SHOP/CODE:	PHONE:	DATE:



LIST OF EFFECTIVE PAGES									
SHT NO.	CHG NO.	SHT NO.	CHG NO.	SHT NO.	CHG NO.	SHT NO.	CHG NO.	SHT NO.	CHG NO.
1-7		QA17 (1)							
J1-2									
M1-4									
Sketch (1-5)									

1. SCOPE/PURPOSE

1.1 Title: S/A 96350D, Bolted Equipment Removal Plate (BERP) 02 Level Weather; modify

1.2 Location of Work:

1.2.1 02 Level Weather, Frames between 279 and 302, Port

1.2.2 02 Level Weather, Frames between 221 and 228, Starboard (Stbd)

1.2.3 01 Level Weather, Frames between 279 and 302, Port

1.2.4 Intake Engine Room No. 2 (02-284-0-Q)

1.2.5 Close In Weapon System (CIWS) Control Room No. 2 (02-299-0-C)

1.2.6 Intake Engine Room No. 2 (01-276-0-Q)

1.2.7 Intake Trunk (A) Engine Room No. 2 (1-289-2-Q)

1.2.8 CIWS Weapons and Aviation Ordnance Equipment Workshop (01-300-0-Q)

1.2.9 Fan Room (01-300-2-Q)

1.2.10 State Room (01-300-4-L)

1.2.11 Deck Gear Locker (01-276-2-A)

1.2.12 Engine Room No. 2 (4-254-0-E)

1.2.13 Intake Engine Room No. 2 (02-275-0-Q)

1.2.14 Passage (01-220-0-L)

1.3 Identification:

1.3.1 Quantity (One Lot), S/A 96350D BERP, 02 Level Weather

1.3.1.1 Quantity (One Lot), Strip Flat for Perforated Sheet on Insulation Support of BERP

BERP No.: 02-281-2, 02-296-2, and 02-296-4

Material: CRES 316L, ASTM A240, One Inch x 0.125 Inch Thickness Sheet

Butt Weld Joint Design: B1S.1 of MIL-STD-22D

Fillet Weld Joint Design: PT1S.1 of MIL-STD-22D

Fillet Weld Size: 1/8 Inch

Remarks: See 2.7 for detail

2 TGI NO.:

SHIP:

96350D BERP 02 LEVEL	AY	A	0
DDG-113	CHG/VER:		1/1

1.3.1.2 Quantity (4 EA), Label Plate for BERP

BERP No.: 02-225-1, 02-281-2, 02-296-2, and 02-296-4
 Remarks: See Sketch Enclosure-01 for material and detail

1.3.1.3 Quantity (36 EA), Label Plate for Securing Fitting on BERP

BERP No.: 02-225-1, 02-281-2, 02-296-2, and 02-296-4
 Weld Type: Tack Weld
 Remarks: See Item No. LBL01 Plate No. LP001, LP002, and LP003 of 2.4 for material and detail

1.3.2 Quantity (12 EA), Securing Fitting on BERP

Type: XIV
 Part No.: PH285M-14S
 Material: CRES 316L, ASTM A314
 Remarks: See Item No. 300 of 2.4 and 2.14 for detail

1.3.2.1 Quantity (2 EA), Securing Fitting on BERP No. 02-225-1

1.3.2.2 Quantity (2 EA), Securing Fitting on BERP No. 02-281-2

1.3.2.3 Quantity (4 EA), Securing Fitting on BERP No. 02-296-2

1.3.2.4 Quantity (4 EA), Securing Fitting on BERP No. 02-296-4

1.3.3 Quantity (36 SF), Inner Insulation, BERP 02-296-4

Thermal Felt Insulation Material: MIL-DTL-32585 Type I, Form 2, Facing A
 Acoustic Insulation Material: MIL-DTL-32585 Type II, Form 2, Facing D
 Remarks: See Sheet 7B of 2.4 for detail

1.3.4 Quantity (36 SF), Inner Insulation, BERP 02-296-2

Thermal Felt Insulation Material: MIL-DTL-32585 Type I, Form 2, Facing A
 Acoustic Insulation Material: MIL-DTL-32585 Type II, Form 2, Facing D
 Remarks: See Sheet 7C of 2.4 for detail

1.3.5 Quantity (9 SF), Inner Insulation, BERP 02-281-2

Thermal Felt Insulation Material: MIL-DTL-32585 Type I, Form 2, Facing A
 Acoustic Insulation Material: MIL-DTL-32585 Type II, Form 2, Facing D
 Remarks: See Sheet 6A of 2.4 for detail

1.3.6 Quantity (36 SF), Perforated Sheet, BERP 02-296-4

Material: CRES 316L, ASTM A240, 0.063 Inch Thickness
 Remarks: See Sheet 7B of 2.4 for detail

1.3.7 Quantity (36 SF), Perforated Sheet, BERP 02-296-2

Material: CRES 316L, ASTM A240, 0.063 Inch Thickness
 Remarks: See Sheet 7C of 2.4 for detail

1.3.8 Quantity (9 SF), Perforated Sheet, BERP 02-281-2

96350D BERP 02 LEVEL	AY	A	0
DDG-113	CHG/VER:		1/1

Material: CRES 316L, ASTM A240, 0.063 Inch Thickness

Remarks: See Sheet 6A of 2.4 for detail

1.3.9 Quantity (One AY), Spring Hanger Assembly for Anti-Icing Piping

Size: 6 Inch IPS

Hanger No.: SHS/08026

Cold Load: 195 LBS

Hot Load: 159 LBS

Piping Movement: 1.03 Inch up

Remarks: See Sheet 4 (Zone ID 7-F) of 2.15 and Sheet 13A of 2.16 for detail

1.3.10 Quantity (146 SF in Total), Interior Surface of Intake BERP

1.3.10.1 Quantity (18 SF), Interior Surface of BERP 02-281-2

Remarks: See Detail 6A-4B of 2.4 for detail

1.3.10.2 Quantity (65 SF), Interior Surface of BERP 02-296-2

Remarks: See Detail 7C-4A of 2.4 and Sheet 5 Detail 7C-4A of 2.10 for detail

1.3.10.3 Quantity (63 SF), Interior Surface of BERP 02-296-4

Remarks: See Detail 7B-5C of 2.4 for detail

1.3.11 Quantity (80 SF in Total), Interior Surface of Intake Space, where new material is installed and disturbed by hot work

1.3.11.1 Quantity (15 SF), Interior Surface of 02-284-0-Q

1.3.11.2 Quantity (45 SF), Interior Surface of 01-276-0-Q

1.3.11.3 Quantity (20 SF), Interior Surface of 1-289-2-Q

1.3.12 Quantity (15 SF), Exterior Surface of BERP 02-225-1

1.4 Security Classification: None.

1.5 Initial Condition:

1.5.1 Potential Asbestos Hazard.

1.5.2 Critical Coated Area: CCNY-DDG113-001-25 for the area listed in 1.3.10 and 1.3.11.

1.6 Contractor work start date: 4/20/26

1.7 Contractor work completion date: 6/15/26

2. REFERENCES:

REF. NO.	DOCUMENT /DRAWING NUMBER	DOCUMENT/DRAWING TITLE	REV	CHG NO.	COPY REQ'D (Y/N)	SOURCE DOC (Y/N)	PARA	SEC	PG	CHP
1	NSI FY-26	NAVSEA Standard Items	-	1	N					

96350D BERP 02 LEVEL	AY	A	0
DDG-113	CHG/VER:	1/1	

REF. NO.	DOCUMENT /DRAWING NUMBER	DOCUMENT/DRAWING TITLE	REV	CHG NO.	COPY REQ'D (Y/N)	SOURCE DOC (Y/N)	PARA	SEC	PG	CHP
2	LI FY-26	Local Standard Items	-	ORG	N					
3	MP LM19-BC116801-EXSAZC00	2A/2B GTM INTAKE FOD PROTECTION FOR BERP MOD (02-281-2), (02-296-2), (02-296-4)	-		Y				AL L	
4	DWG 167-8877495	SHIPALT DDG-51-96350 MODIFY 02 AND 03 LEVEL WEATHERDECK BERPS & ML	B		Y				AL L	
5	LAR SRFY-0174-23	DRAWING CORRECTION FOR SEVERAL DISCREPANCIES OF DWG # 167-8877495 "B"	-		Y				AL L	
6	LAR SRFY-0242-24	MOD OF DECK INSERT ASSY FOR BERP (02-296-2 & 02-296-4)	-		Y				AL L	
7	LAR FDRMC-0003-22	Acoustic Insulation and Perforated Sheathing detail missing	-		Y				AL L	
8	LAR 96350/DDG1 13/1222248	BOLT CALLOUT CORRECTION A010	-		Y				AL L	
9	LAR 96350/DDG9 9/1223432	DRAWING CORRECTION FOR DISCREPANCY IN MATERIAL INFORMATION OF BERP (02-225-1)	-		Y				AL L	
10	LAR 96350/DDG1 05/1215953	REVISE 02-296-2 BERP COVER FAB DETAIL	-		Y				AL L	
11	LAR 96350/DDG1 13/1222286	TORQUE VALUES	-		Y				AL L	
12	LAR 96350/DDG6 5/1212147	REVISE GENERAL NOTE 41 TO REMOVE THE WORD CRES	-		Y				AL L	
13	LAR 96350/DDG5 1/1216372	REVISE GN 42 - (RECOMMENDED BOLTING RING INSTALLATION METHOD)	-		Y				AL L	
14	DWG 3495 PH285M-14S	PH285M-14S SOCKET (CROSSBAR-FLUSH)	-		Y				AL L	
15	DWG 551-7062131	BLEED, STARTING, ANTI-ICING & PRAIRIE/MASKER AIR,ZONE 4610	-		Y				4	
16	DWG 505-7058667	HOT HANGERS, FAB & INSTL, 110-314, 01 LEVEL & ABOVE	C		Y				13 A	

3. APPENDICES:

3.1 ~~Appendix "J" TGI Job Summary Information Sheet~~

3.2 Appendix "M" TGI Material List

3.3 Appendix "D" Deficiency Form

4. GENERAL REQUIREMENTS:

4.1 Not Applicable.

5. PROCEDURE:

5.1 Accomplish the requirements of 2.3.

(V)(G) "GAS TURBINE MAINTENANCE PROCEDURE"

96350D BERP 02 LEVEL	AY	A	0
DDG-113	CHG/VER:		1/1

5.2 Accomplish the requirements of modification work for each S/A 96350D BERP listed in 1.3.1 in accordance with 2.4 through 2.13, using 2.14 for guidance.

5.2.1 Fabricate and install each new strip flat listed in 1.3.1.1 in accordance with 2.7.

5.2.2 Fabricate and install each new label plate listed in 1.3.1.2 in accordance with Enclosure-01.

5.2.3 Install each new label plate listed in 1.3.1.3, using 2.4 for guidance.

5.2.4 Accomplish the requirements of 009-012 of 2.1, including Table 2, Column(s) A and D, Lines One through 7.

5.2.5 Accomplish the requirements of 009-025 of 2.1 for the local air hose test of each new weld for watertight/airtight structural boundary. Allowable leakage: None.

5.2.6 Tighten new nickel copper alloy hexagon head screws of the BERP in accordance with 2.4, 2.8, 2.11, and 2.12.

5.2.6.1 Torque must be 16.8 foot-pounds (50 percent of torque value).

5.2.6.2 Allow BERP to settle for 24 to 48 hours and torque must be 33.6 foot-pounds (100 percent of torque value).

5.2.7 Accomplish the requirements of 009-025 of 2.1 for a water hose test of the BERP. Allowable leakage: None.

5.2.8 Accomplish a load test of each new securing fitting listed in 1.3.2 in accordance with 2.4.

(I)(G) "LOAD TEST"

5.2.8.1 Test load must be 2,000 LBs (plus 100 LBs and minus 0 LBs).

5.2.8.2 Hold test load for 10 minutes.

5.2.8.3 No visible damage or permanent deformation on the securing fitting.

5.2.8.4 Document the load test on QA Form 17 Enclosure-02-1.

5.3 Accomplish the requirements of 009-011 of 2.1 for installation of each new inner insulation listed in 1.3.3 through 1.3.5 in accordance with 2.7.

5.4 Fabricate and install each new perforated sheet listed in 1.3.6 through 1.3.8 in accordance with 2.7.

5.4.1 Accomplish the requirements of 009-012 of 2.1, including Table 2, Column(s) D, Lines One through 7.

5.5 Remove existing, and install each spring hanger assembly listed in 1.3.9 for supporting of structural work, using 2.15 and 2.16 for guidance.

5.6 Accomplish the requirements of 009-032 of 2.1, including Table 3, Line(s) 19 for each area listed in 1.3.10 and 1.3.11.

5.7 Accomplish the requirements of 009-032 of 2.1, including Table 2, Line(s) 24 for each area listed in 1.3.12.

5.7.1 Accomplish the requirements of 009-026 of 2.1, including Attachment G, for installation of new peel and stick nonskid deck covering. Application of peel and stick nonskid deck covering must conform to MIL-PRF-24667, Type XI, Composition PS.

5.8 Accomplish the requirements of 009-032 of 2.1 for each new and disturbed surface.

96350D BERP 02 LEVEL	AY	A	0
DDG-113	CHG/VER:	1/1	

5.9 Notes:

5.9.1 Planner: Code 231A K. Watanabe, 243-4518
 Planner: Code 231A T. Takanashi, 243-6238
 Planner: Code 233 Y. Kimura, 080-6845-2423
 Planner: Code 234 H. Ito, 243-4534
 Planner: Code 234 T. Tsunoi, 070-7787-2058
 Engineer: Code 250 K. Nogi, 243-5294

5.9.2 Work Integration Manager (WIM): Code 333 T. Yaginuma, 080-5419-0598

5.9.3 All GFM listed in 2.4 except ordered materials will be provided by SRF-JRMC as kitted material.

5.9.4 Work per this instruction involves cutting an access (or removal of a door) through a fire zone bulkhead, through the hull of the ship above the turn of the bilge, through ventilation components (ducting, plenums, etc.), or through any air-tight, fume-tight or watertight bulkheads normally used to control air flow in the event of a shipboard fire. A nonflammable closure is required in accordance with COMNAVSEASYSCOM MSG R 261400Z JUL 12. The closure, if not continuously in use, shall be staged near the access, readily visible and accessible, so that any emergency responder can install the closure to affect proper air flow onboard the ship.

5.9.5 Calibration for hot and cold load setting of each spring hanger assembly listed in 1.3.9 will be covered by TGI No. 38BC116801C01 (SRF-JRMC TGI).

5.9.6 JCN EXSA-ZC00 is related to this TGI.

5.10 Government Furnished Material (GFM):

5.10.1 SRF-JRMC will provide GFM listed in Appendix "M".

5.11 SRF-JRMC will provide the following service work: (TGI No. 38BC116801S02).

5.11.1 [C740] Crane and crane rigging service.

5.11.2 [X99E] Utility service, electrical.

5.11.3 [X99M] Utility service, including water supply, steam supply, and low pressure air supply except for onboard blasting work.

5.11.4 [C106.1] Safety inspection for SRF-JRMC employees.

5.11.5 [C106.2] Gas free inspection for SRF-JRMC employees.

5.11.6 [C133] QA inspection for (G) symbol(s) and review of coating application data.

5.11.7 [C285] Inspection for (G) symbol(s).

96350D BERP 02 LEVEL	AY	A	0
DDG-113	CHG/VER:		1/1

APPENDIX "M"

TGI MATERIAL LIST

SYSTEM:	PLANT NO.:	COMPONENT NAME:	TYPE:	PHASE:	REPEAT:	CU PH VERSION:	CASREP CAT:
		96350D BERP 02 LEVEL	AY	A	0	1	

CU PHASE TITLE:

F/O - S/A 96350D, MODIFY BOLTED EQUIPMENT REMOVAL PLATE (BERP) 02 LEVEL WEATHER

MATERIAL REFERENCES

REF NO.	DOCUMENT/DRAWING NUMBER	DOCUMENT/DRAWING TITLE	REV
---------	-------------------------	------------------------	-----

JOB ORDER:

38BC116801

KEY OP:

A01

MATERIAL LIST

ITEM NO.	PC NO.	REF NO.	M / C	DESCRIPTION	STOCK NUMBER	GENERIC MATL TYPE	LVL	QA	HAZ MAT	DOC NO.	QTY REQD/ UNIT	QTY USED/ UNIT
001			M	SHEET,METAL, ORDERED FOR KTR ORIG:C-231A, K. WATANABE 243-4518	9B 9515 002044595		NA	4	N	50085978	2/SF	
002			M	PLATE,ME, 4 FT X 10 FT PLATE ORDERED FOR KTR ORIG:C-231A, K. WATANABE 243-4518	9B 9515 001533374		NA	4	N	50105043	40/SF	
003			M	PLATE,ME, 2 FT X 8 FT PLATE ORDERED FOR KTR ORIG:C-231A, K. WATANABE 243-4518	9B 9515 002375350		NA	4	N	50105050	16/SF	
004			M	PLATE,ME, 2 FT X 2 FT PLATE ORDERED FOR KTR ORIG:C-231A, K. WATANABE 243-4518	9B 9515 014160552		NA	4	N	50105056	4/SF	
005			M	PLATE,ME, 2 FT X 12 FT PLATE ORDERED FOR KTR ORIG:C-231A, K. WATANABE 243-4518	9B 9515 001533368		NA	4	N	50105061	24/SF	
006			M	PLATE,ME, 2 FT X 4 FT PLATE ORDERED FOR KTR ORIG:C-231A, K. WATANABE 243-4518	9B 9515 002243088		NA	4	N	50105067	8/SF	

NOTES:

M-1

TGI NO.:	96350D BERP 02 LEVEL	AY	A	0
SHIP:	DDG-113	CHG/VER:	1/1	

MATERIAL LIST

ITEM NO.	PC NO.	REF NO.	M / C	DESCRIPTION	STOCK NUMBER	GENERIC MATL TYPE	LVL	QA	HAZ MAT	DOC NO.	QTY REQD/ UNIT	QTY USED/ UNIT
007			M	ANTISEIZ, ORDERED FOR KTR ORIG:C-231A, K. WATANABE 243-4518	9B 8030 002921102		NA	4	Y	50105194	17/TU	
008			M	ADHESIVE, ORDERED FOR KTR ORIG:C-231A, K. WATANABE 243-4518	9B 8040 016640296		NA	4	Y	50105076	70/TU	
009			M	BOLT,SELFLOC, 1/2"-1, BOLT, SELFLOCKING HEXAGON HEAD, SIZE: 1/2"-13UNC-2A X 1-3/4"LG, CRES 316, ASTM F593 CONDITION: CW1, GROUP:2. ORDERED FOR KTR ORIG:C-231A, K. WATANABE 243-4518	9B 5306 LL6987270		NA	4	N	50107433	110/EA	
010			M	PAD, TAPPED, ROUND, PAD, TAPPED, ROUND, SIZE: 1/2"- 13UNC-2B X 1"LG, 1"OD, MATERIAL: CRES 316L, CENTERED, CONCENTRIC INTERNAL THREAD THRU HOLE ORDERED FOR KTR ORIG:C-231A, K. WATANABE 243-4518	9B 5340 LL9600508		NA	4	N	50107448	110/EA	
011			M	CORK AND RUBBER SHEE, CORK AND RUBBER SHEET, SPEC: AMS-C-6183 (FORMERLY: MIL-C-6183), TY-I (MOLDED), CL-1 (AROMATIC FUEL), GR-C (FIRM), SIZE: 2"W X 24"L X 3/16"THK, BIW CAT: 52431-018 ORDERED FOR KTR ORIG:C-231A, K. WATANABE 243-4518	9B 5330 LL9001102		NA	4	N	50107462	10/EA	
012			M	CORK AND RUBBER SHEE, CORK AND RUBBER SHEET, SPEC: AMS-C-6183 (FORMERLY: MIL-C-6183), TY-I (MOLDED), CL-1 (AROMATIC FUEL), GR-C (FIRM), SIZE: 2"W X 78"(6'-6") L X 3/16"THK, BIW CAT: 52431-026 ORDERED FOR KTR ORIG:C-231A, K. WATANABE 243-4518	9B 5330 LL9001101		NA	4	N	50107463	14/EA	
013			M	SCREW,CAP, SCREW, CAP, HEAD: HEX, SPEC: MIL-DTL- 1222 TYPE 1, SIZE: 3/8"- 16UNC-2A X 2" LG, MATL: CRES 316 COLD WORKED ORDERED FOR KTR ORIG:C-231A, K. WATANABE 243-4518	9B 5305 LL7004675		NA	4	N	50107460	50/EA	
014			M	NUT,SELF, ORDERED FOR KTR ORIG:C-231A, K. WATANABE 243-4518	9B 5310 014804186		NA	4	N	50105083	60/EA	

M-2

TGI NO.:	96350D BERP 02 LEVEL	AY	A	0
SHIP:	DDG-113	CHG/VER:	1/1	

MATERIAL LIST

ITEM NO.	PC NO.	REF NO.	M / C	DESCRIPTION	STOCK NUMBER	GENERIC MATL TYPE	LVL	QA	HAZ MAT	DOC NO.	QTY REQD/ UNIT	QTY USED/ UNIT
015			M	WASHER,F, ORDERED FOR KTR ORIG:C-231A, K. WATANABE 243-4518	9B 5310 013897976 SX		NA	4	N	50105090	170/EA	
016			M	SCREW,HE, SCREW, HEX CAP, SPEC: MIL-DTL-1222J TYPE I, SIZE: 3/8"-16UNC-2A X 1" LG. MATL: CRES 316, COLD WORKED, ORDERED FOR KTR ORIG:C-231A, K. WATANABE 243-4518	9Z 5305 LL4883004		NA	4	N	50087745	20/EA	
017			M	SCREW,CAP,HEX HEAD,3, SCREW, CAP, HEX HEAD, SPEC: MIL-DTL-1222, TYPE-I, SIZE: 3/8-16UNC-2A X 1-1/2" LG, MATL: CRES 316, COLD WORKED, FINISH: NO COATING ORDERED FOR KTR ORIG:C-231A, K. WATANABE 243-4518	9B 5305 LL4863045		NA	4	N	50107461	20/EA	
018			M	INSULATI, ORDERED FOR KTR ORIG:C-231A, K. WATANABE 243-4518	9Q 5640 013713263		NA	4	N	50105101	16/SH	
019			M	SOUND CO, ORDERED FOR KTR ORIG:C-231A, K. WATANABE 243-4518	9Q 5640 013837815		NA	4	N	50105107	10/SH	
020			M	INSULATI, ORDERED FOR KTR ORIG:C-231A, K. WATANABE 243-4518	9Q 5640 013713262		NA	4	N	50105112	6/SH	
021			M	SOUND CO, ORDERED FOR KTR ORIG:C-231A, K. WATANABE 243-4518	9Q 5640 013715238		NA	4	N	50105118	13/SH	
022			M	CAP,SNAP, ORDERED FOR KTR ORIG:C-231A, K. WATANABE 243-4518	9B 5325 007377648		NA	4	N	50105123	410/EA	
023			M	TAPE,TEX, ORDERED FOR KTR ORIG:C-231A, K. WATANABE 243-4518	9B 8315 002671632		NA	4	N	50105128	5/RO	
024			M	TAPE,TEX, ORDERED FOR KTR ORIG:C-231A, K. WATANABE 243-4518	9B 8315 002671633		NA	4	N	50105145	8/RO	
025			M	ADHESIVE, ORDERED FOR KTR ORIG:C-231A, K. WATANABE 243-4518	9B 8040 002738708		NA	4	Y	50105186	6/GL	
200			M	ROD EYE, WELDED, SIZ, ROD EYE, WELDED, SIZE FOR 5/8"DIA ROD, GALVANIZED CARBON STEEL, RIGHT HAND THREADS, ROD THREAD LENGTH: 4-1/2"LENGTH, FULL LENGTH = 8" ORDERED FOR KTR, C234 H.I.TO, 243-4534	9B 5340 LL9100456		NA	4	N	43457454	1/EA	

M-3

TGI NO.:	96350D BERP 02 LEVEL	AY	A	0
SHIP:	DDG-113	CHG/VER:	1/1	

MATERIAL LIST

ITEM NO.	PC NO.	REF NO.	M / C	DESCRIPTION	STOCK NUMBER	GENERIC MATL TYPE	LVL	QA	HAZ MAT	DOC NO.	QTY REQD/ UNIT	QTY USED/ UNIT
201			M	NUT, HEX, JAM, RH TH, NUT, HEX, JAM, RH THD, 5/8-11UNC-2B, CRES 316, MIL-DTL-1222 ORDERED FOR KTR, C234 H.I.TO, 243-4534	9B 5310 LL9607179		NA	4	N	43457455	1/EA	
202			M	VALVE,CHECK, ORDERED FOR KTR, C234 H.I.TO, 243-4534	9B 4820 015207833		NA	4	N	43445139	1/EA	
203			M	TUBE,METALLIC, **PROVIDE ONE CONTINUEOUS LENGTH 5 FT. DO NOT PROVIDE SEPARATELY. ORDERED FOR KTR, C234 H.I.TO, 243-4534	3B 4710 002898006		NA	4	N	43445140	5/FT	
204			M	COUPLING,TUBE, ORDERED FOR KTR, C234 H.I.TO, 243-4534	9B 4730 005423290		NA	4	N	43445141	2/EA	
205			M	COUPLING, ORDERED FOR KTR, C234 H.I.TO, 243-4534	9B 4730 014645442		NA	4	N	43445142	2/EA	
450			M	SHEET, P, SHEET, PERFORATED, 4FT X 8FT X 0.063"THK, CRES 316L, ASTM-A240, 3/16"DIA, PITCH: 3/8" ON STAGGERED CENTERS ORDERD FOR KTR C234 T. TSUNOI, 070-7787-2058	9B 9515 LL9603130		NA	4	N	43427414	12/SH	
451			M	INSULATI, 24" X 36" X 2"THK, FIBER GLASS, FACED THERMAL AND SOUND ABSORBING FELT TYPE, MIL-DTL-32585 TYPE II FORM 2 FACING D (FORMER SPEC MIL-I-22023 TY-III), CLAREMONT MARINE INSULATION - TUFFSKIN 1613. DO NOT CROSS NSN 5640-01-509-0809 SMIC X3. ORDERD FOR KTR C234 T. TSUNOI, 070-7787-2058	9Q 5640 LL4808709		NA	4	N	43427411	70/SH	
452			M	INSULATI, INSULATION, THERMAL FELT, 2FT X 3FT X 2"THK, 1.5LB/QFT DENSITY, FIBROUS GLASS, MIL-DTL-32585 TYPE I FORM 2 FACING A (FORMER SPEC MIL-I-22023 TY-I CL-4), 10 SHEETS PER BOX. ORDERD FOR KTR C234 T. TSUNOI, 070-7787-2058	9Q 5640 LL9005023		NA	4	N	43427412	70/SH	
453			M	TAPE,PRESSURE SENSI, ORDERD FOR KTR C234 T. TSUNOI, 070-7787-2058	9Q HOLD 015406777		NA	4	N	43415087	7/RO	
454			M	ADHESIVE, ORDERD FOR KTR C234 T. TSUNOI, 070-7787-2058	9B 8040 002738708		NA	4	Y	43415095	7/GL	

M-4

TGI NO.:	96350D BERP 02 LEVEL	AY	A	0
SHIP:	DDG-113	CHG/VER:	1/1	

☐ NUCLEAR☐ NON-NUCLEAR

APPENDIX "D"

DEFICIENCY FORM

1. SHIP/HULL NO.:	2a. DL or DR No. (Circle One)	2b. REVISION:	3a. COMPONENT NAME:	3b. TYPE:	3c. PHASE:	3d. REPEAT:
DDG-113			96350D BERP 02 LEVEL	AY	A	0
4a. ICN:		4b. KEY OP:	5. LOC SPACE/LVL:	FRAME:	P/S/C:	6. CAUSED BY:
38BC116801		A01				

7. DESCRIPTION:

8. ORIGINATOR:	NAME:	BADGE:	SHOP/CODE:	DATE:	PHONE NO.:
----------------	-------	--------	------------	-------	------------

9. CORRECTIVE ACTION:

10. EVALUATOR:	NAME:	BADGE:	SHOP/CODE:	DATE:	PHONE NO.:
----------------	-------	--------	------------	-------	------------

FOR NON-NUCLEAR USE ONLY

11. RFD/RFW REQ'D ☐	LAR REQ'D ☐	SRD/PLAN REV REQ'D ☐
ILS MOD REQ'D ☐	DWG NO.: _____	S/A NO.: _____

12. ISOLATION SATISFACTORY:	SIGN:	BADGE:	SHOP/CODE:	DATE:	PHONE NO.:
--------------------------------	-------	--------	------------	-------	------------

13. SUBSAFE OQE RECORD?	SIGN:	BADGE:	SHOP/CODE:	DATE:	PHONE NO.
YES ☐ NO ☐					

14. CORRECTIVE ACTION COMPLETE:	SIGN:	BADGE:	SHOP/CODE:	DATE:	PHONE NO.

15. INSPECTION REQ'D?	INSPECTION COMPLETE/SIGN:	BADGE:	SHOP/CODE:	DATE:	PHONE NO.
:YES ☐ NO ☐					


16. RECORDS REVIEW COMPLETE (DR ONLY)	SIGN:	BADGE:	SHOP/CODE:	DATE:	PHONE NO.

DL's ISSUED
(DR ONLY)

☐ NON-NUCLEAR

1. SHIP/HULL NO.:	2a. DL or DR No. (Circle One)	2b. REVISION:	3a. COMPONENT NAME:	3b. TYPE:	3c. PHASE:	3d. REPEAT:
DDG-113			96350D BERP 02 LEVEL	AY	A	0

This image shows a full page of white paper with horizontal blue or grey ruling lines. The lines are evenly spaced and run across the width of the page, typical of notebook paper. There are no margins, text, or other markings on the page.

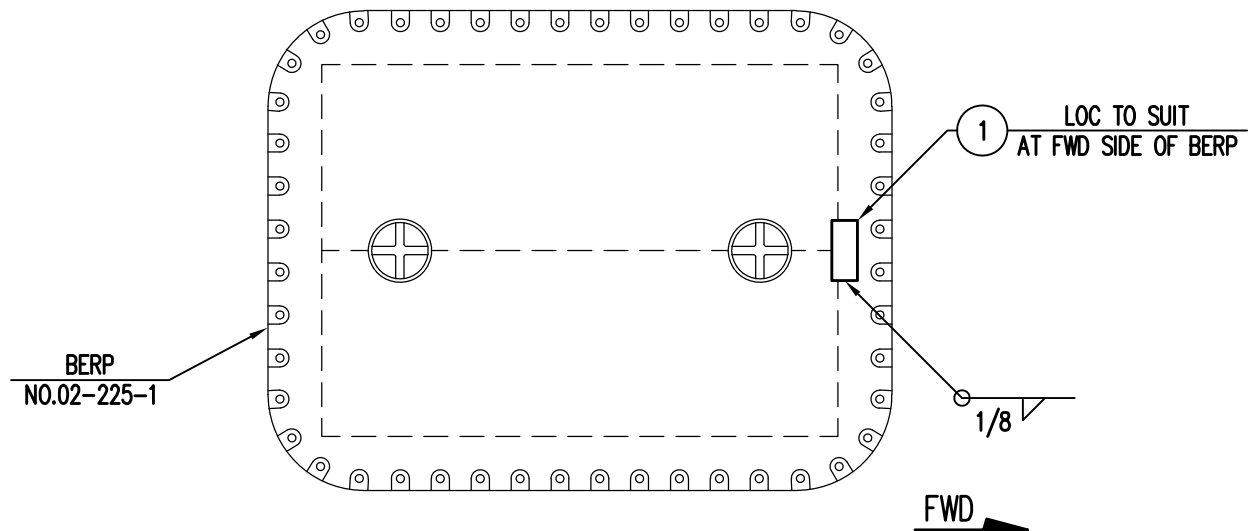

DETAIL 1-B

INSTL OF LABEL PLATE
ON BERP NO.02-225-1


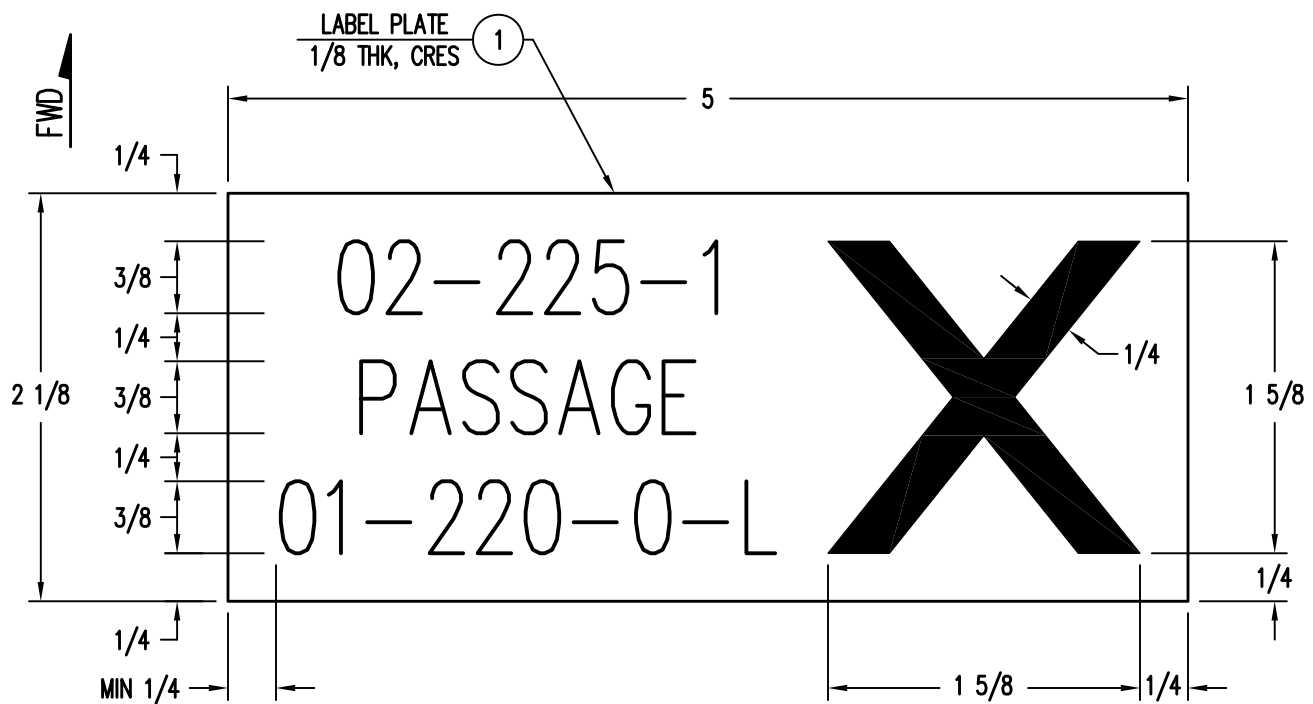


FIGURE 1-A

LABEL PLATE
FOR BERP NO.02-225-1

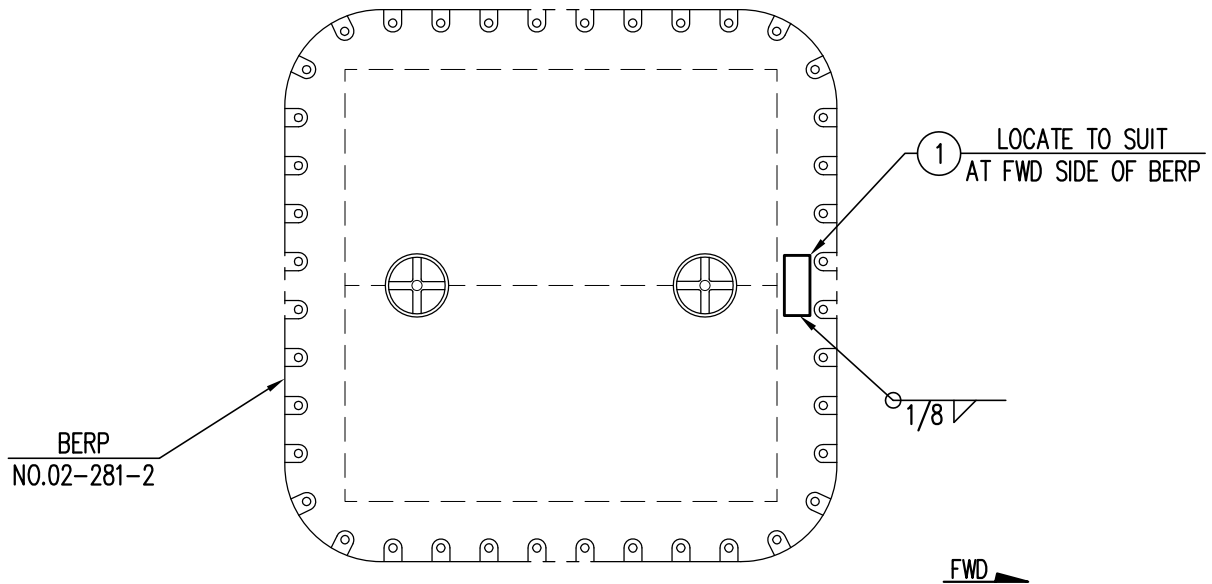

DET 1-B
INSTL L/P ON BERP NO.02-281-2


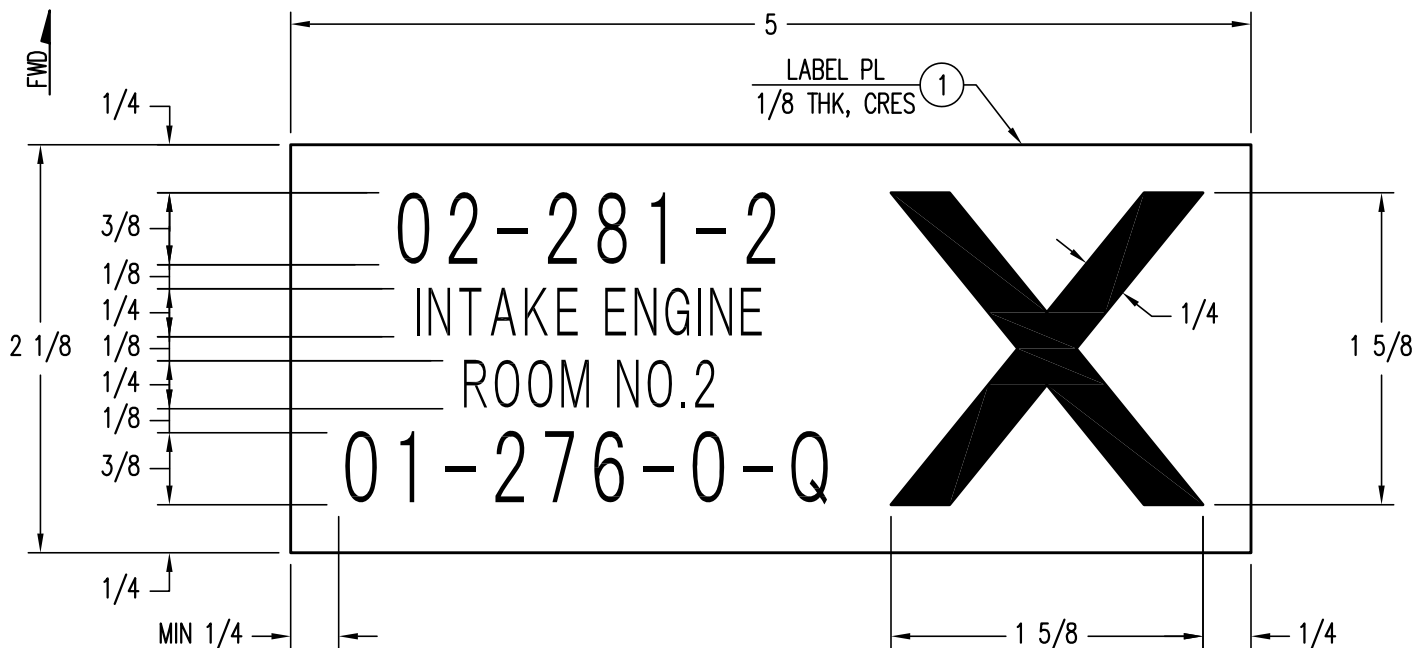


FIGURE 1-A
L/P FOR BERP NO.02-281-2

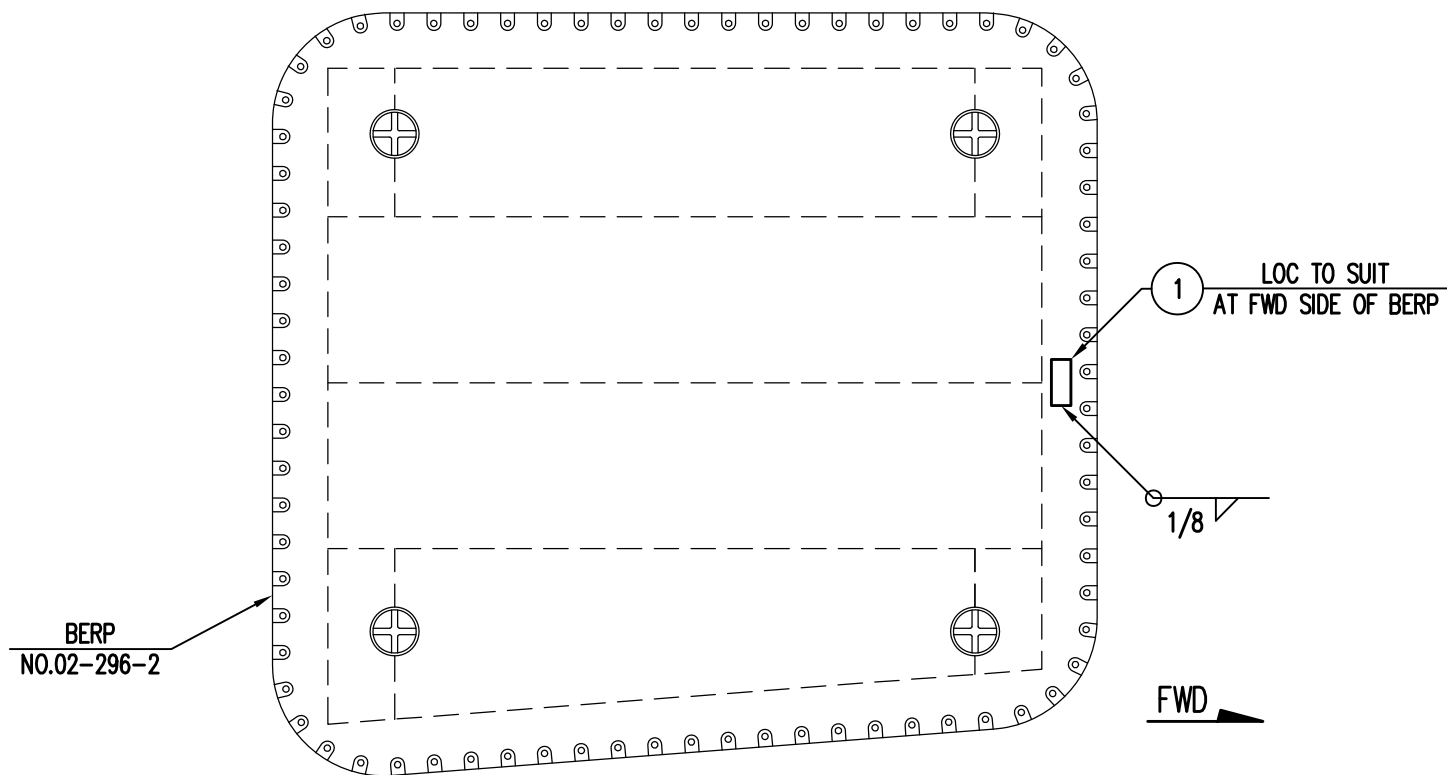

DETAIL 1-B

INSTL OF LABEL PLATE
ON BERP NO.02-296-2

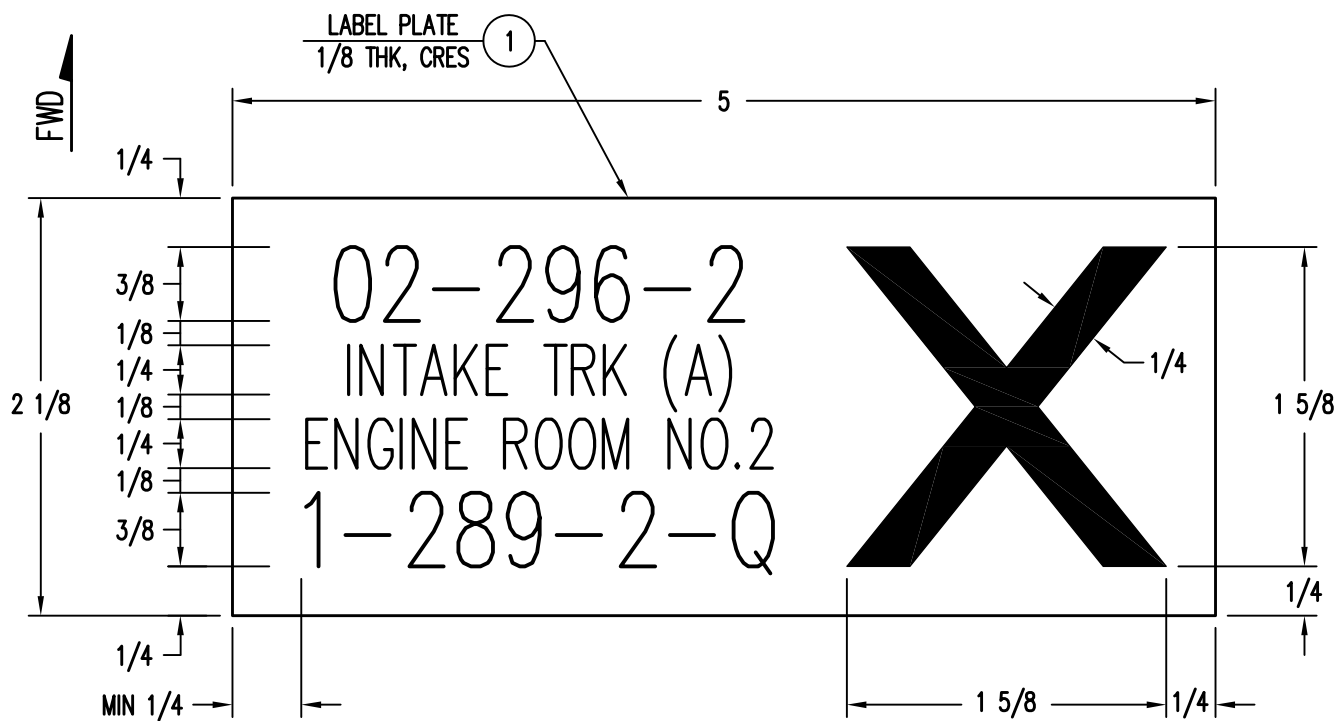


FIGURE 1-A

LABEL PLATE
FOR BERP NO.02-296-2

NOTES:

1. LABEL PLATE FOR BERP 02-225-1, 02-281-2, 02-296-2, AND 02-296-4 SHOWN ON FIGURE 1-A SHALL BE FABRICATED IN ACCORDANCE WITH MIL-P-15024 TYPE-B (ENGRAVED, DEPTH .016 INCHES) WITH CRES PLATE (PC NO. 1).
2. LABEL PLATE SHALL BE INSTALLED ON BERP AS SHOWN ON DET 1-B WITH WELDING PER SRF-JRMC PROCESS INSTRUCTION NO. 100-2 OR NAVSEA STD ITEM NO. 009-12 RESPECTIVELY. AFTER ALL WELDS, VT SHALL BE REQUIRED IN ACCORDANCE WITH PARAGRAPH 6.4 OF MIL-STD-1689.

TABLE-1 (FOR MATERIAL LIST)

PC NO	DESCRIPTION	QTY	MATERIAL	SPEC	REMARKS
1	LABEL PLATE, 5 x 2 1/8 x 1/8 THK M/F SHEET, .125 THK	4 EA	CRES TYPE 316/316L	AST A240	

TEST AND INSPECTION RECORD

QA FORM 17 Planning must fill in blocks identified by a ♦ prior to issuing

Page 1 of 3

♦ 1. SHIP USS JOHN FINN	HULL NO. DDG-113	♦ 2. JCN EXSA-ZC00	♦ 3. LWC/SHOP KTR	♦ 4. CWP/REC SER NO. N/A	♦ 5. SYSTEM/COMPONENT BERP SECURING FITTING
♦ 6. REFERENCES (COMPONENT DETAIL/ASSEMBLY DRAWING AND REV)					
A. JFMM Rev. D Chg-3 Vol IV Ch 13		B. DWG 167-8877495 Rev. B		C. DWG 3495 Rev. -	
D.		E.		F.	
♦ 7. PART DESCRIPTION/PIECE NO.:		SECURING FITTING ON BERP NO. 02-225-1, 02-281-2, 02-296-2, & 02-296-4			
♦ 8. DESCRIPTION OF TEST AND/OR INSPECTION: <u>STATIC LOAD TEST FOR SECURING FITTING ON BERP</u> - Fix the removal plate to the rigid and steady structure by using rigging equipment, putting counter weight or any other method not to be moved or affected by test weight. - Rig the load indicating device to securing fitting and locate it in the normal working direction. - Observe the load indicating device and slowly apply a static load of 2,000 (+100, - 0) LBs in the above direction. Hold for 10 minutes. Record the test data on Table 1. - Slowly remove the test load and visually inspect the tested securing fitting to meet the following acceptance criteria. <u>ACCEPTANCE CRITERIA</u> There must be no visible damage or permanent deformation on the tested securing fitting. - Remove all test equipment and rigging gear equipment after completion of this test. - Repeat step One through 5 for remaining securing fitting.					
9. RESULTS: See Continuation Sheet-1 and Sheet-2.					
10. CRAFTSMAN SIGNATURE			11. QA INSPECTOR SIGNATURE		
DATE			DATE		
			Not Required		
12. RECORD HAS BEEN REVIEWED FOR COMPLETENESS					
QA WCS SIGNATURE (QAO/QAS SIGNATURE FOR SUBSAFE/SOC/SFCC ONLY)				DATE	

9. RESULTS:

TABLE-1

BERP NUMBER	TEST LOAD	TEST DURATION	TEST RESULT
02-225-1	LBs	MIN	SAT / UNSAT
	LBs	MIN	SAT / UNSAT
02-281-2	LBs	MIN	SAT / UNSAT
	LBs	MIN	SAT / UNSAT
02-296-2	LBs	MIN	SAT / UNSAT
	LBs	MIN	SAT / UNSAT
	LBs	MIN	SAT / UNSAT
	LBs	MIN	SAT / UNSAT
02-296-4	LBs	MIN	SAT / UNSAT
	LBs	MIN	SAT / UNSAT
	LBs	MIN	SAT / UNSAT
	LBs	MIN	SAT / UNSAT
TEST LOAD: 2,000 (+100, -0) LBs / TEST DURATION: 10 MINUTES (Reference: A, B, and C)			
<u>ACCEPTANCE CRITERIA:</u> There must be no visible damage or permanent deformation on the tested securing fitting.			

***TEST FIXTURE INFO:**

--