

WebAIM Short Form TASK GROUP INSTRUCTION

08-AUG-2025 0806

20.15.6.0.9333 (July 2025)

ICN: 38BC186301 KeyOp: A01

TGI NO:	COMPONENT NAME: SPRT SRF SVCE LINE	TYPE: AY	PHASE: A	REPEAT: 0	CHG/VER: 0/0
SHIP/HULL NO: DDG-113	SHIP/HULL NAME: USS JOHN FINN	PROJECT: BC1	SYSTEM:	PLANT ID:	CASREP CAT:
CU PHASE TITLE: F/O – PROVIDE SRF-JRMC SUPPORT WORK FOR SERVICE LINE					
PREPARING ACTIVITY:		STATUS: APP		WORKING STATUS:	
PREPARED BY: NAKAGAWA, DAICHI		CODE: 231A	PHONE: 3152430969	DATE: 17-JUN-2025	
APPROVED BY: NAKAMURA, YUUJI		CODE: 231A	PHONE: 3152436041	DATE: 19-JUN-2025	
CONCURRED BY:		CODE:	PHONE:	DATE:	
REASON FOR WORK/NEED FOR CHANGE: EX00L040					
JCN: EX00-L040					
SPECIAL REQUIREMENTS: TGI Short Form					
CU PHASE DESCRIPTION: 1. SCOPE/PURPOSE: 1.1 Title: SRF-JRMC Support Work for Service Line; provide 1.2 Location of Work: 1.2.1 01 Level Weather, Port and Starboard (Stbd) 1.2.2 02 Level Weather, Port and Stbd 1.2.3 Main Deck Weather, Port and Stbd 1.3 Identification: 1.3.1 Quantity (One Lot), Installation, Maintenance, and Removal Service of Temporary Containment Enclosure of Hatch, Scuttle, and Door Opening for Service Line Work by SRF-JRMC					
ZONE MANAGER: YAGINUMA, TAKEHIDE		ZONE:	COMPARTMENT:	LEVEL:	FRAME: SIDE:
JOB SUMMARY ID: 863A5201	TOT MAN HR.:	TOT DUR:	TOT JML COST:	PLANNING ACCEPTANCE:	

WORK CERTIFICATION SIGNATURES:	DLs												
COMPLETION OF WORK REVIEW:				BADGE NO:	SHOP/CODE:	PHONE:	DATE:						
RECORDS REVIEW:				BADGE NO:	SHOP/CODE:	PHONE:	DATE:						



WebAIM Short Form TASK GROUP INSTRUCTION

08-AUG-2025 0806

20.15.6.0.9333 (July 2025)

(Continued)

ICN: 38BC186301

KeyOp: A01

TGI NO:	COMPONENT NAME: SPRT SRF SVCE LINE	TYPE: AY	PHASE: A	REPEAT: 0	CHG/VER: 0/0
SHIP/HULL NO: DDG-113	SHIP/HULL NAME: USS JOHN FINN	PROJECT: BC1	SYSTEM:	PLANT ID:	CASREP CAT:
CU PHASE TITLE: F/O – PROVIDE SRF-JRMC SUPPORT WORK FOR SERVICE LINE					

CU PHASE DESCRIPTION (Cont.)

Maximum Enclosure Size: 7 Feet Hight x 6 Feet Wide x 6 Feet Long

Remarks: Modification of the temporary containment enclosure up to 5 times.

Maintenance of the cover of temporary containment enclosure up to 5 times.

See Sketch Enclosure-01 for location and details.

1.3.2 Quantity (One Lot), Installation and Removal Service of Temporary Life Rail of Hatch and Scuttle Opening for Service Line Work by SRF-JRMC

Remarks: See Sketch Enclosure-01 for locations.

1.3.3 Quantity (One Lot), Installation and Removal Service of Bridge for Service Line Work by SRF-JRMC

Maximum Bridge Width Size: 4 Feet

Remarks: Modification of the bridge up to 5 times.

See Sketch Enclosure-01 for location and details.

1.4 Security Classification: None.

1.5 Initial Condition: None.

1.6 Contractor work start date: 4/20/26

1.7 Contractor work completion date: 6/22/26

2. PROCEDURE:

2.1 Provide support work listed in 1.3.1 through 1.3.3. See 2.2.3.

2.1.1 The protection cover must be installed where the enclosure and bridge contact the deck and bulkhead for preventing damage.

2.2 Notes:

2.2.1 Planner: Code 231A D. Nakagawa, 243-0969

2.2.2 Work Integration Manager (WIM): Code 333 T. Yaginuma, 080-5419-0598

2.2.3 Exact installation locations, details, and work dates for enclosure, life rail, and bridge will be provided by SRF-JRMC WIM, Code 333.

2.2.4 JCN EX00-L040 is related to this TGI.

2.3 Government Furnished Material (GFM): None.

2.4 SRF-JRMC will provide the following service work: (TGI No. 38BC186301S02)

2.4.1 [C740] Crane and crane rigging service.

2.4.2 [X99E] Utility service, electrical.

WebAIM Short Form TASK GROUP INSTRUCTION

08-AUG-2025 0806

20.15.6.0.9333 (July 2025) (Continued) ICN: 38BC186301 KeyOp: A01

TGI NO:	COMPONENT NAME: SPRT SRF SVCE LINE	TYPE: AY	PHASE: A	REPEAT: 0	CHG/VER: 0/0
SHIP/HULL NO: DDG-113	SHIP/HULL NAME: USS JOHN FINN	PROJECT: BC1	SYSTEM:	PLANT ID:	CASREP CAT:
CU PHASE TITLE: F/O – PROVIDE SRF-JRMC SUPPORT WORK FOR SERVICE LINE					

CU PHASE DESCRIPTION (Cont.)					
2.4.3 [X99M] Utility service, including low pressure air supply, water supply, and steam supply. 2.4.4 [X99V] Temporary ventilation service. 2.4.5 [C106.1] Safety inspection for SRF-JRMC employees. 2.4.6 [C106.2] Gas free inspection for SRF-JRMC employees. 2.4.7 [C133] QA inspection for (G) symbol(s).					

Ref. No.	Document/Drawing Number	DOCUMENT/DRAWING TITLE	REV	CHG NO.	CPY REQ	PARAGRAPH	SECT	PG	CHPT
----------	-------------------------	------------------------	-----	---------	---------	-----------	------	----	------

WebAIM Short Form TASK GROUP INSTRUCTION

08-AUG-2025 0806

20.15.6.0.9333 (July 2025)

(Continued)

ICN: 38BC186301

KeyOp: A01

TGI NO:	COMPONENT NAME: SPRT SRF SVCE LINE	TYPE: AY	PHASE: A	REPEAT: 0	CHG/VER: 0/0
SHIP/HULL NO: DDG-113	SHIP/HULL NAME: USS JOHN FINN	PROJECT: BC1	SYSTEM:	PLANT ID:	CASREP CAT:
CU PHASE TITLE: F/O – PROVIDE SRF-JRMC SUPPORT WORK FOR SERVICE LINE					

Ref. No.	Document/Drawing Number	DOCUMENT/DRAWING TITLE	REV	CHG NO.	CPY REQ	PARAGRAPH	SECT	PG	CHPT
1	NSI FY-26	NAVSEA Standard Items	-	1	N				
2	LI FY-26	Local Standard Items	-	ORG	N				

TASK NAME / TASK DESCRIPTION	SHOP/ TSD	TS	SF WC	CREW #	MHRS	RWRK
2.1 RGRS , CARP	22/KE	PC				
CFM: for covering material and Misc such as other consumable.	22/MQ	CS				
Process Funding Document	10/CT	OM				

MATERIAL REFERENCES			
REF NO.	DOCUMENT/DRAWING NUMBER	DOCUMENT/DRAWING TITLE	REV

ICN: 38BC186301	KEY OP: A01
-----------------	-------------


MATERIAL LIST												
ITEM NO.	PC NO.	REF NO.	M / C	DESCRIPTION	STOCK NUMBER	GENERIC MATL TYPE	LVL	QA	HAZ MAT	DOC NO.	QTY REQD/ UNIT	QTY USED/ UNIT

ATTACHMENT LIST

TITLE	FILE NAME	SAVED DATE
ENCLOSURE-01	38BC186301A01-Sketch.pdf	17-JUN-2025 0000

Temporary Containment Enclosure and Bridge Location

*Bridge installation aligned with the harbor position.

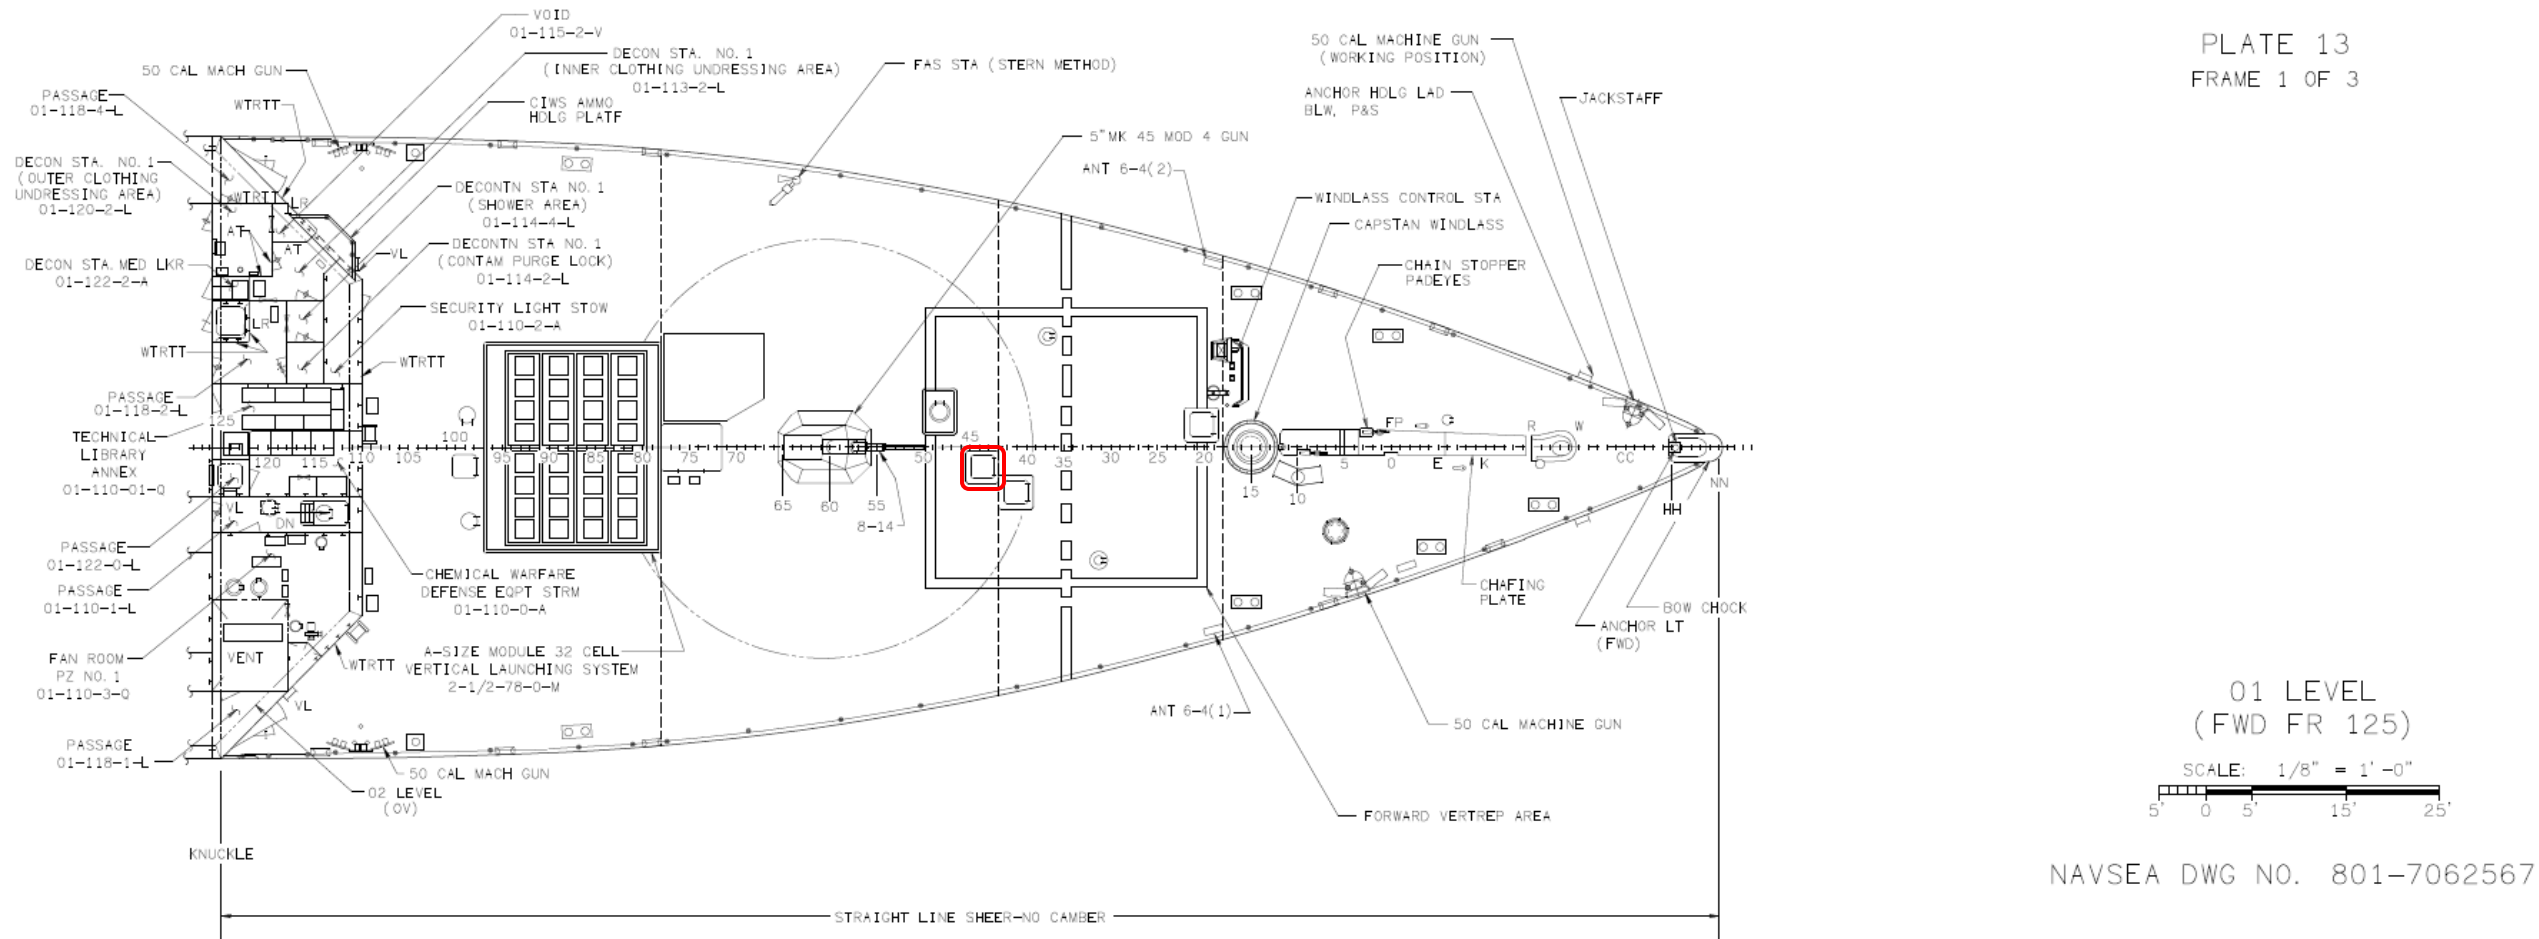

SKETCH


ENCLOSURE-01

SHEET 1 OF 4

38BC186301A01

Temporary Containment Enclosure and Bridge Location

*Bridge installation aligned with the harbor position.

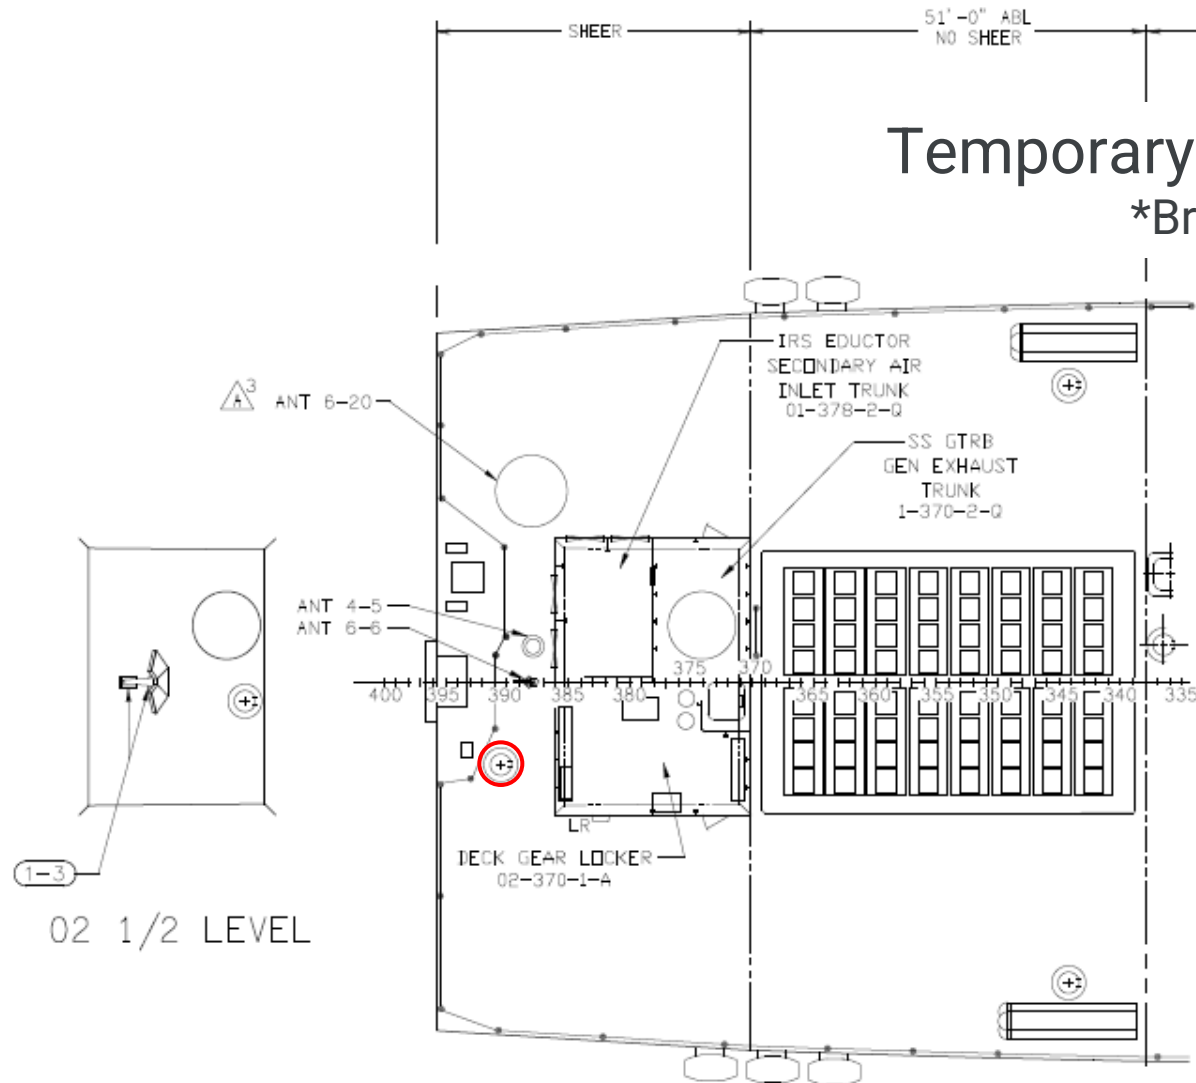

02 1/2 LEVEL

02 LEVEL
(FR 335-400)

SCALE: 1/8" = 1' - 0"



NAVSEA DWG NO. 801-7062567

SKETCH

ENCLOSURE-01


SHEET 3 OF 4

38BC186301A01

Temporary Containment Enclosure and Bridge Location

*Bridge installation aligned with the harbor position.

PLATE 14
FRAME 3 OF 3

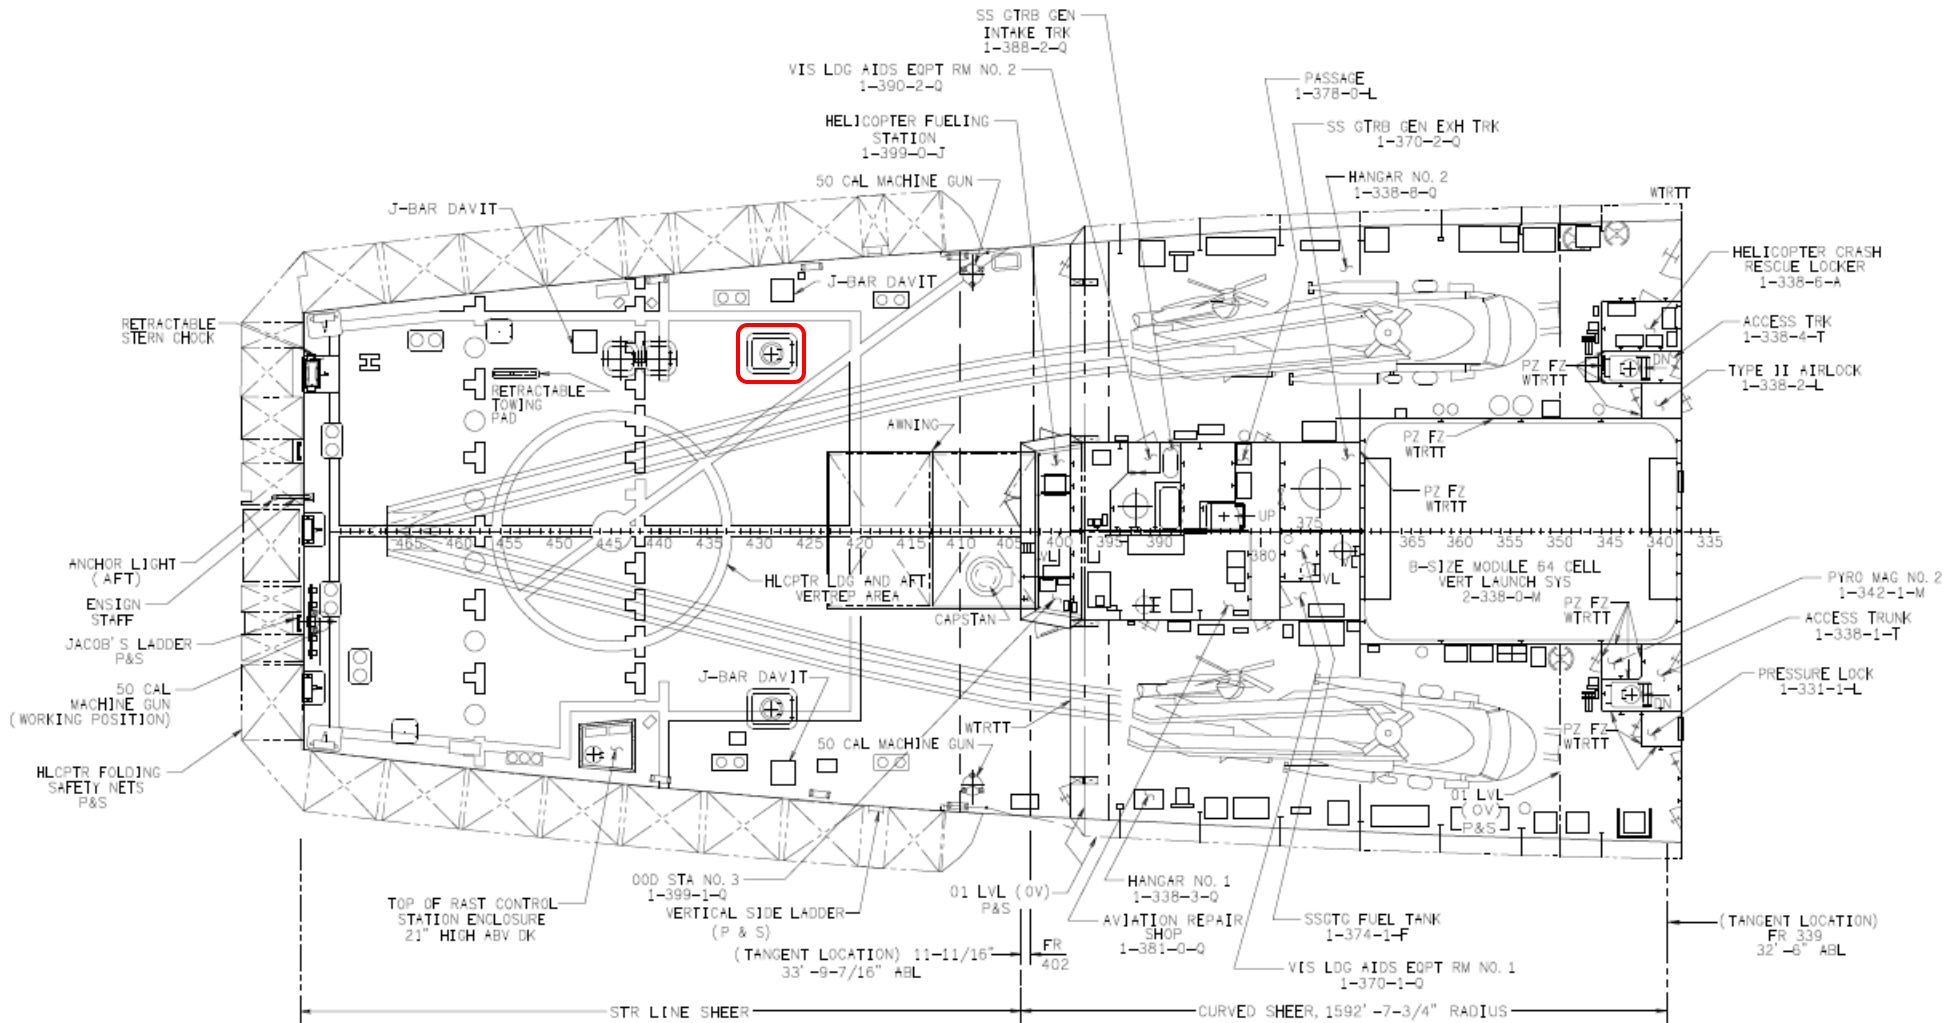

MAIN DECK
(AFT FR 335)

SCALE: 1/8" = 1'-0"



NAVSEA DWG NO. 801-7062350

SKETCH

ENCLOSURE-01

SHEET 4 OF 4

38BC186301A01