
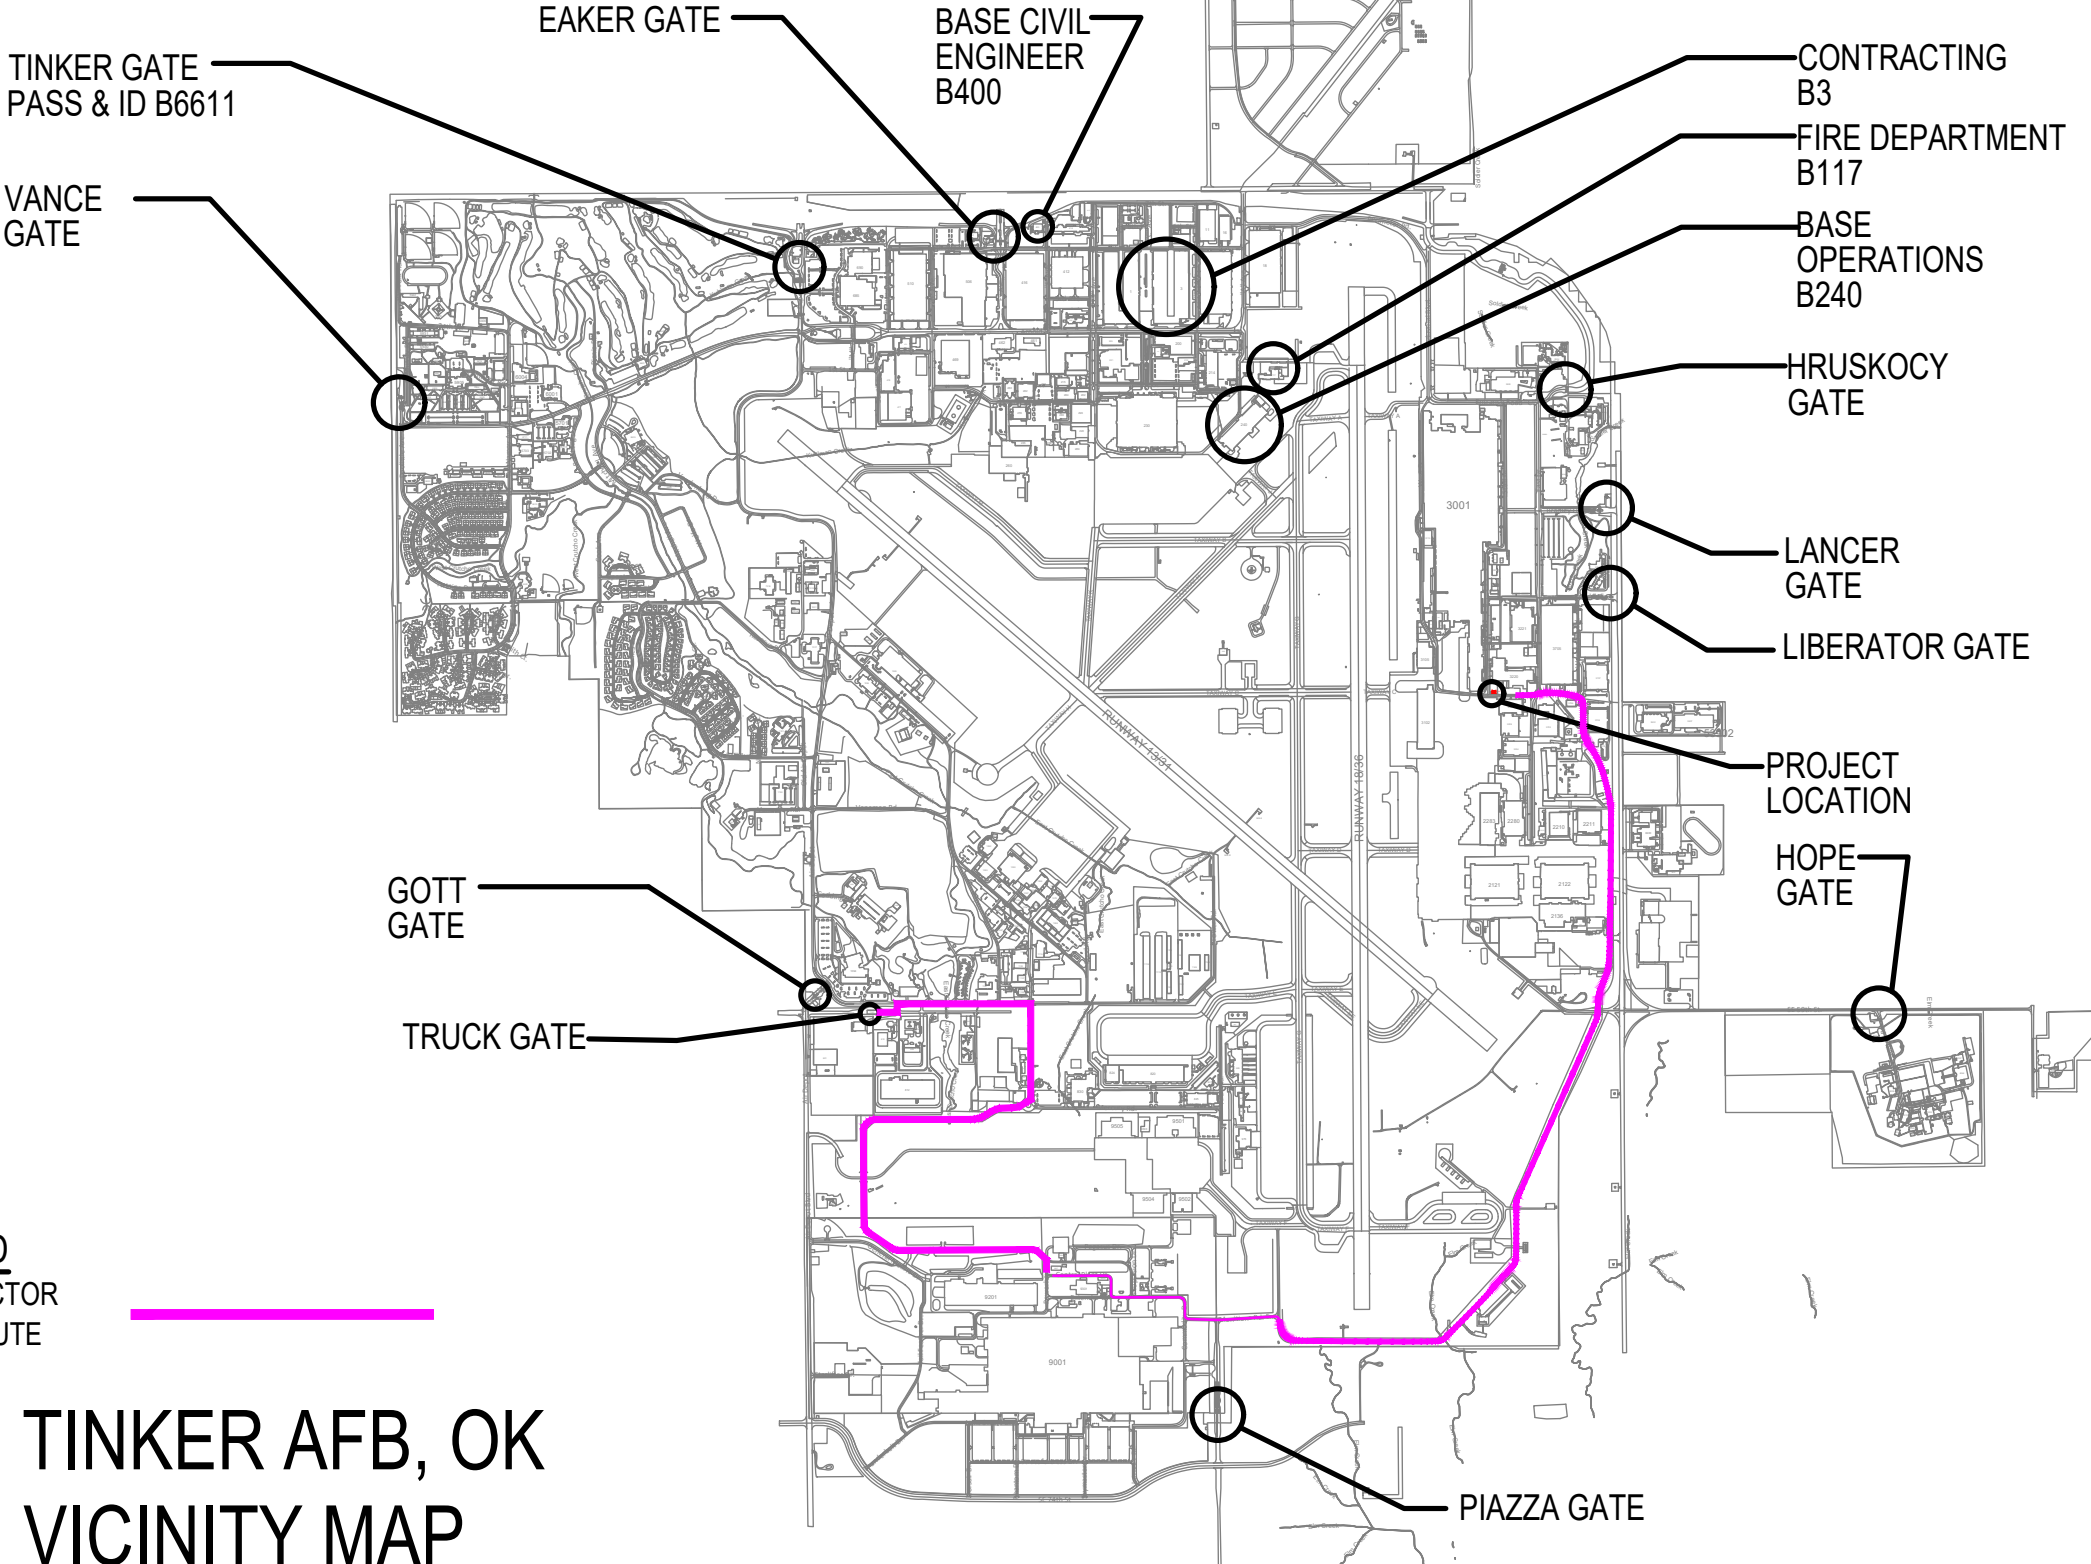


WWYK230053
REPLACE VAULT AND
FUEL TANK, B3202

KEY PLAN:

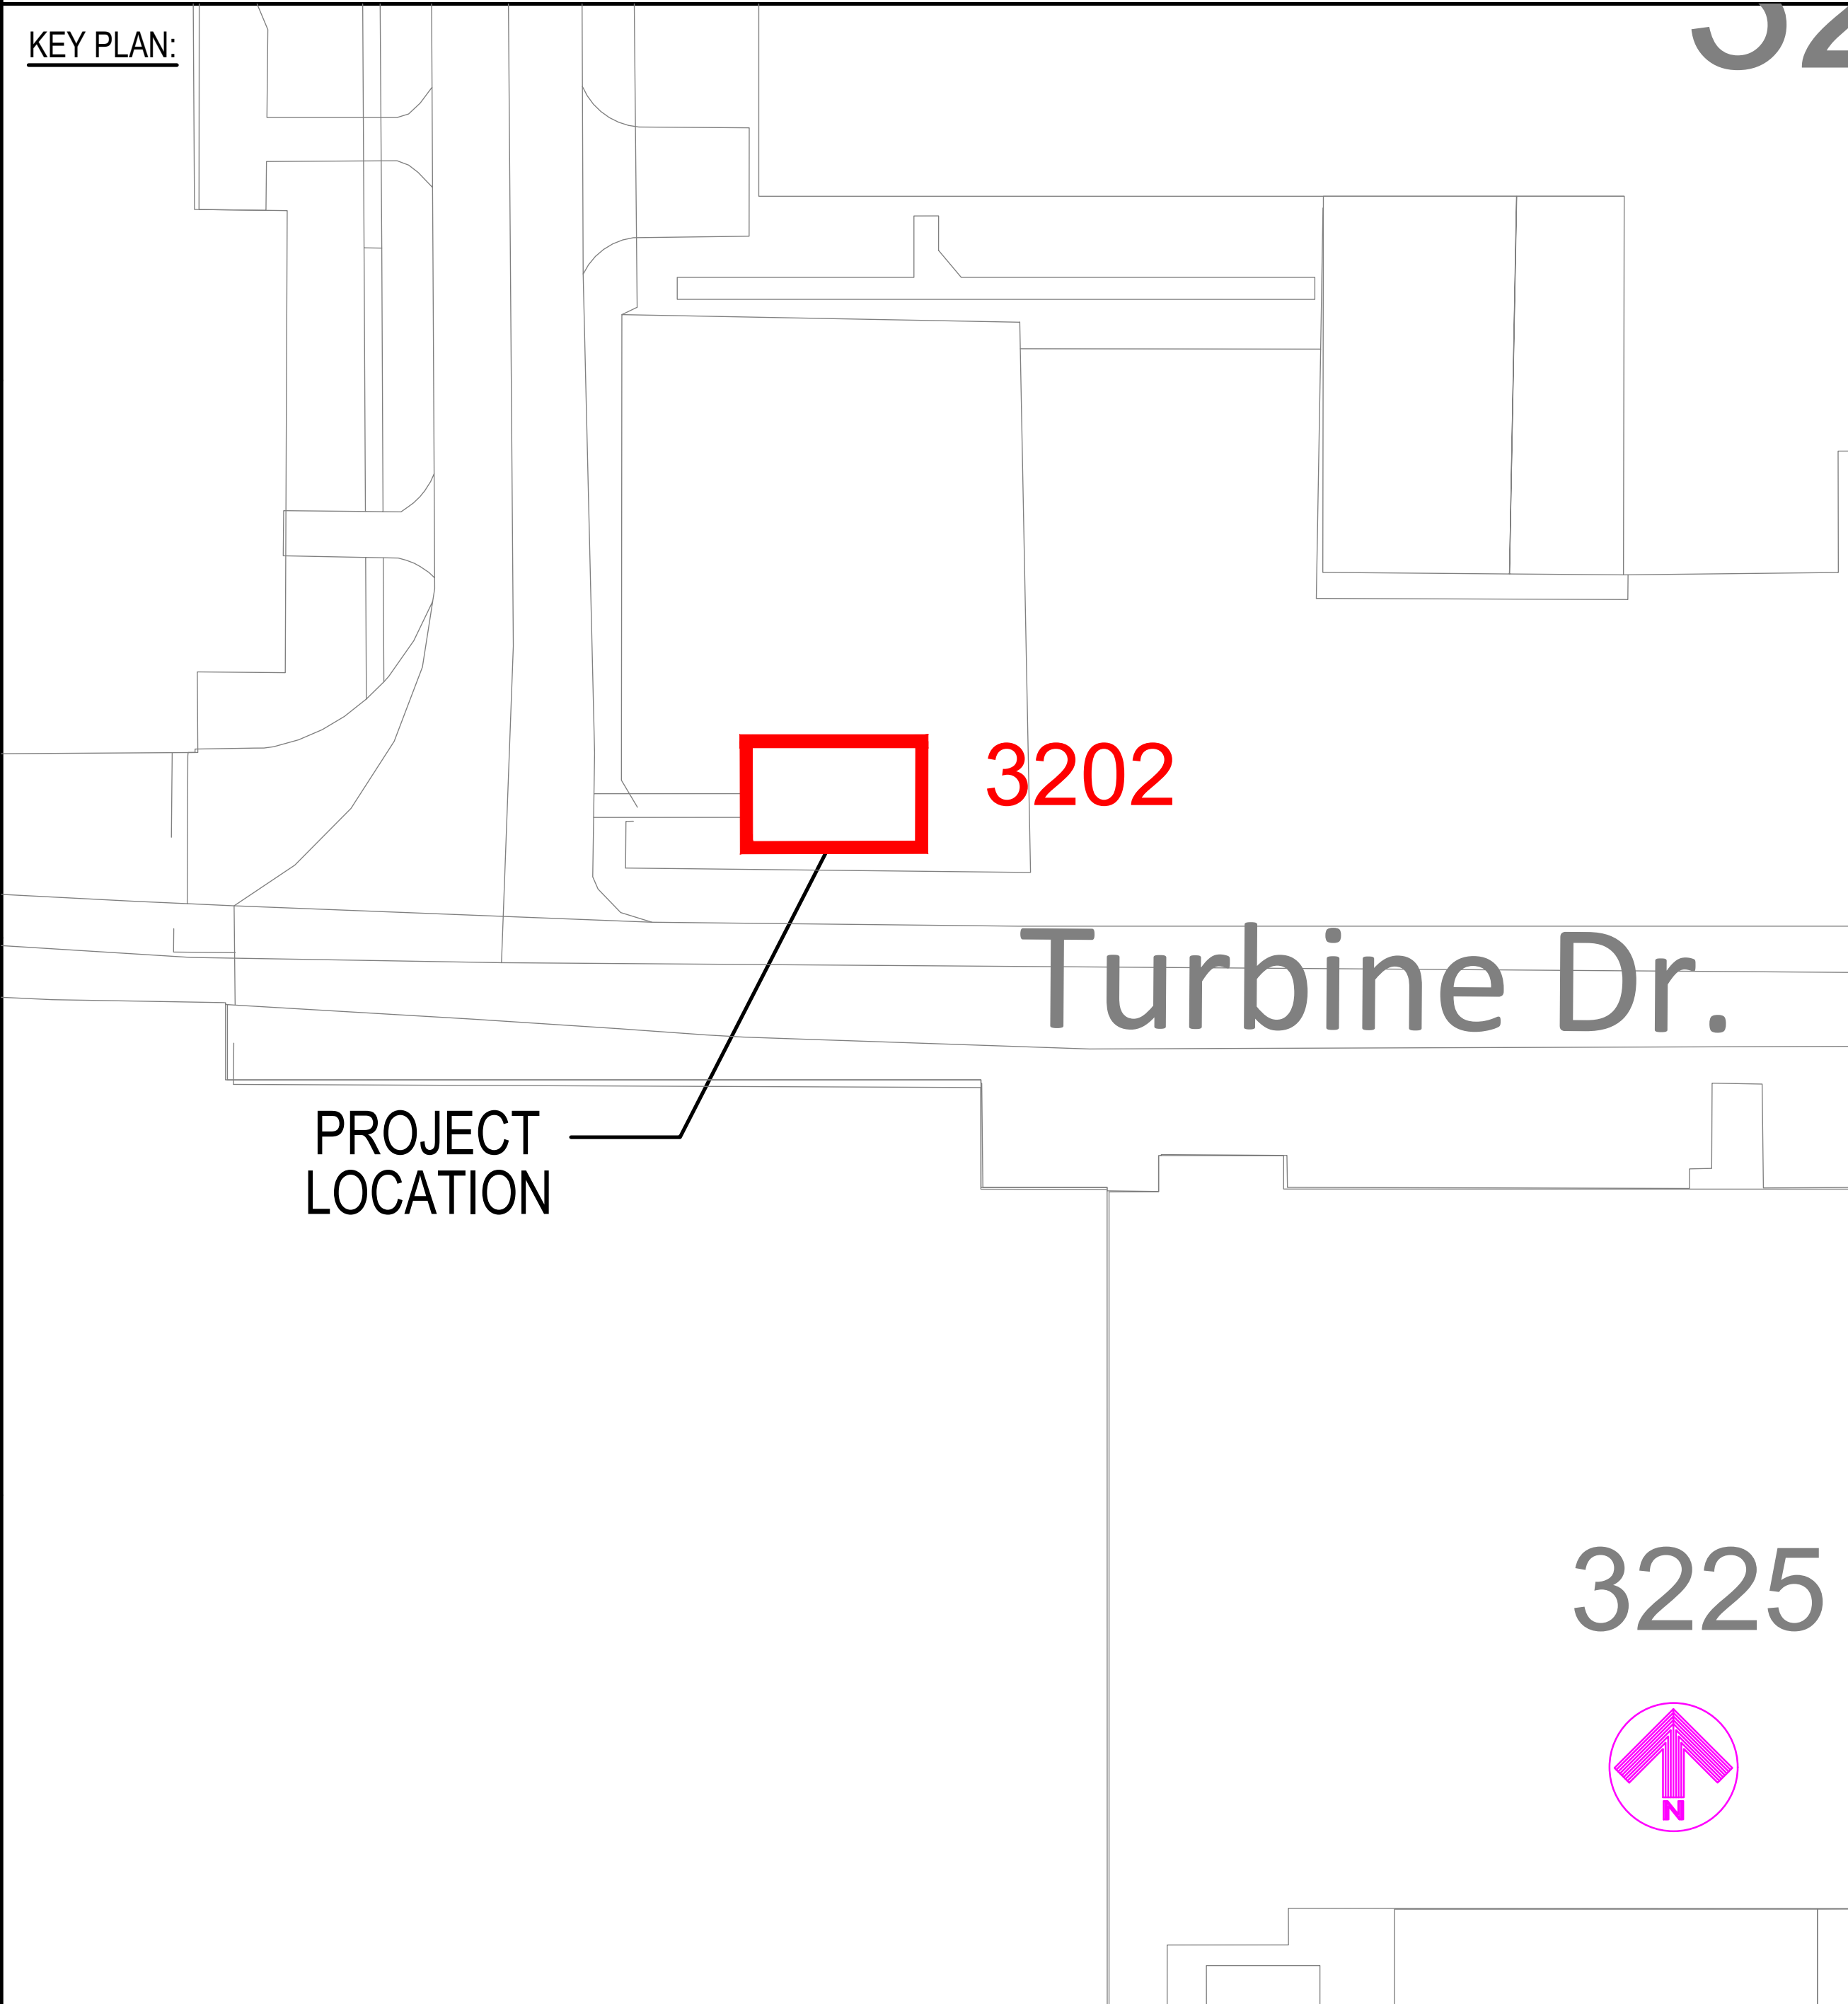

LEGEND
CONTRACTOR
HAUL ROUTE

TINKER AFB, OK
VICINITY MAP

GENERAL NOTES:

1. BRAND NAMES: REFERENCE TO SPECIFIC BRAND NAMES OR COMPANIES IS FOR THE PURPOSE OF ESTABLISHING MINIMUM QUALITY STANDARDS, IDENTIFICATION AND GUIDANCE AND IS NOT INTENDED TO LIMIT SELECTION OF OTHER MANUFACTURERS THAT ARE EQUAL OR EXCEED THE SPECIFIED ITEMS IN TERMS OF PHYSICAL PROPERTIES, INCLUDING, COLOR RANGE, FINISH, DURABILITY, APPEARANCE, PERFORMANCE CHARACTERISTICS, AND OTHER FACTORS. OTHER PRODUCTS, MATERIALS, COLORS AND SYSTEMS, MAY BE SUBMITTED FOR EVALUATION AND APPROVAL/DISAPPROVAL BY THE CONTRACTING OFFICER.
2. THIS SET OF CONSTRUCTION DOCUMENTS SHALL BE CONSIDERED AS A WHOLE IN THAT THE GENERAL CONTRACTOR AND ALL THE SUB-CONTRACTORS ARE RESPONSIBLE FOR THE INFORMATION PRESENTED ON ALL SHEETS ON THE SET OF DRAWINGS AND ALL SECTIONS OF THE SPECIFICATIONS.
3. THE CONTRACTOR IS RESPONSIBLE FOR ERECTING ALL CONSTRUCTION FENCING AND BARRICADES AS REQUIRED TO PROTECT CONSTRUCTION MATERIAL AND TO PREVENT ANY UNAUTHORIZED PERSONNEL FROM ENTERING THE CONSTRUCTION SITE.
4. ANY DAMAGE TO THE EXISTING GROUNDS OR FACILITIES CAUSED BY CONSTRUCTION TRAFFIC OR ANY CONSTRUCTION OPERATION SHALL BE REPAIRED OR REPLACED BY THE CONTRACTOR TO MATCH OR EXCEED EXISTING CONDITIONS AT NO ADDITIONAL COST TO THE GOVERNMENT.
5. ALL WORK NOTED & LOCATED IN THESE DOCS SHALL BE UNDERSTOOD BY THE CONTRACTOR TO REQUIRE ALL NEW LABOR & MATERIALS UNLESS SPECIFICALLY NOTED TO BE "EXISTING" OR "BY OTHERS".

PROJECT DRAWING INDEX

SEQ.	SHT.	SHEET TITLE
		GENERAL
1	G-101	GENERAL NOTES & VICINITY MAP
		DISCIPLINE
2	C-100	AERIAL IMAGE WITH UTILITIES
3	CD-101	DEMOLITION PLAN VAULT AND FUEL TANK
4	R-101	DEMOLITION AND NEW WORK ROOF PLAN
5	MD-101	MECHANICAL DEMOLITION PLAN
6	M-101	MECHANICAL NEW WORK PLAN
7	ED-101	ELECTRICAL DEMOLITION PLAN
8	E-101	ELECTRICAL NEW WORK PLAN

SIGNATURES

CORROSION ENGINEER: (CECE)	DATE:
CE OPERATIONS: (CECO)	DATE:
ZONE MANAGER:	DATE:
CONSTRUCTION MANAGEMENT: (CECE)	DATE:
FIRE DEPARTMENT: (CEFT)	DATE:
SAFETY:	DATE:
INDUSTRIAL HYGIENE:	DATE:
ENVIRONMENTAL:	DATE:
ASBESTOS EVALUATION:	DATE:
COMMUNICATIONS: (COMM)	DATE:
USING AGENCY:	DATE:
REVIEWED BY:	DATE:
REVIEWED BY:	DATE:
DESIGN MANAGER: (CECE)	DATE:
CHIEF DESIGN BRANCH: (CECE)	DATE:
CHIEF ENGINEER DIR: (CECE)	DATE:
BASE CIVIL ENGINEER: (CE)	DATE:

AIR FORCE MATERIEL COMMAND
77 ARMY CIVIL ENGINEER DIRECTORATE
TINKER AFB, OK

CONCEPT
DESIGN

PROJECT INFORMATION

WWYK230053
REPLACE VAULT AND
FUEL TANK, B3202

TINKER AIR FORCE BASE, OKLAHOMA

REVISIONS	DATE	DESCRIPTION
MARK		

MANAGEMENT INFORMATION	DATE	DESCRIPTION
ISSUE DATE: 25 Jun 2025		
DESIGN GROUP: TEP-A-SRM		
DESIGNED BY:		
DRAWN BY: S STARR		
CHECKED BY: B WYMER		
DESIGN FILE LOCATION:		


GENERAL NOTES
AND
VICINITY MAP

SHEET TITLE

G-101

SHEET NUMBER

01 OF 08

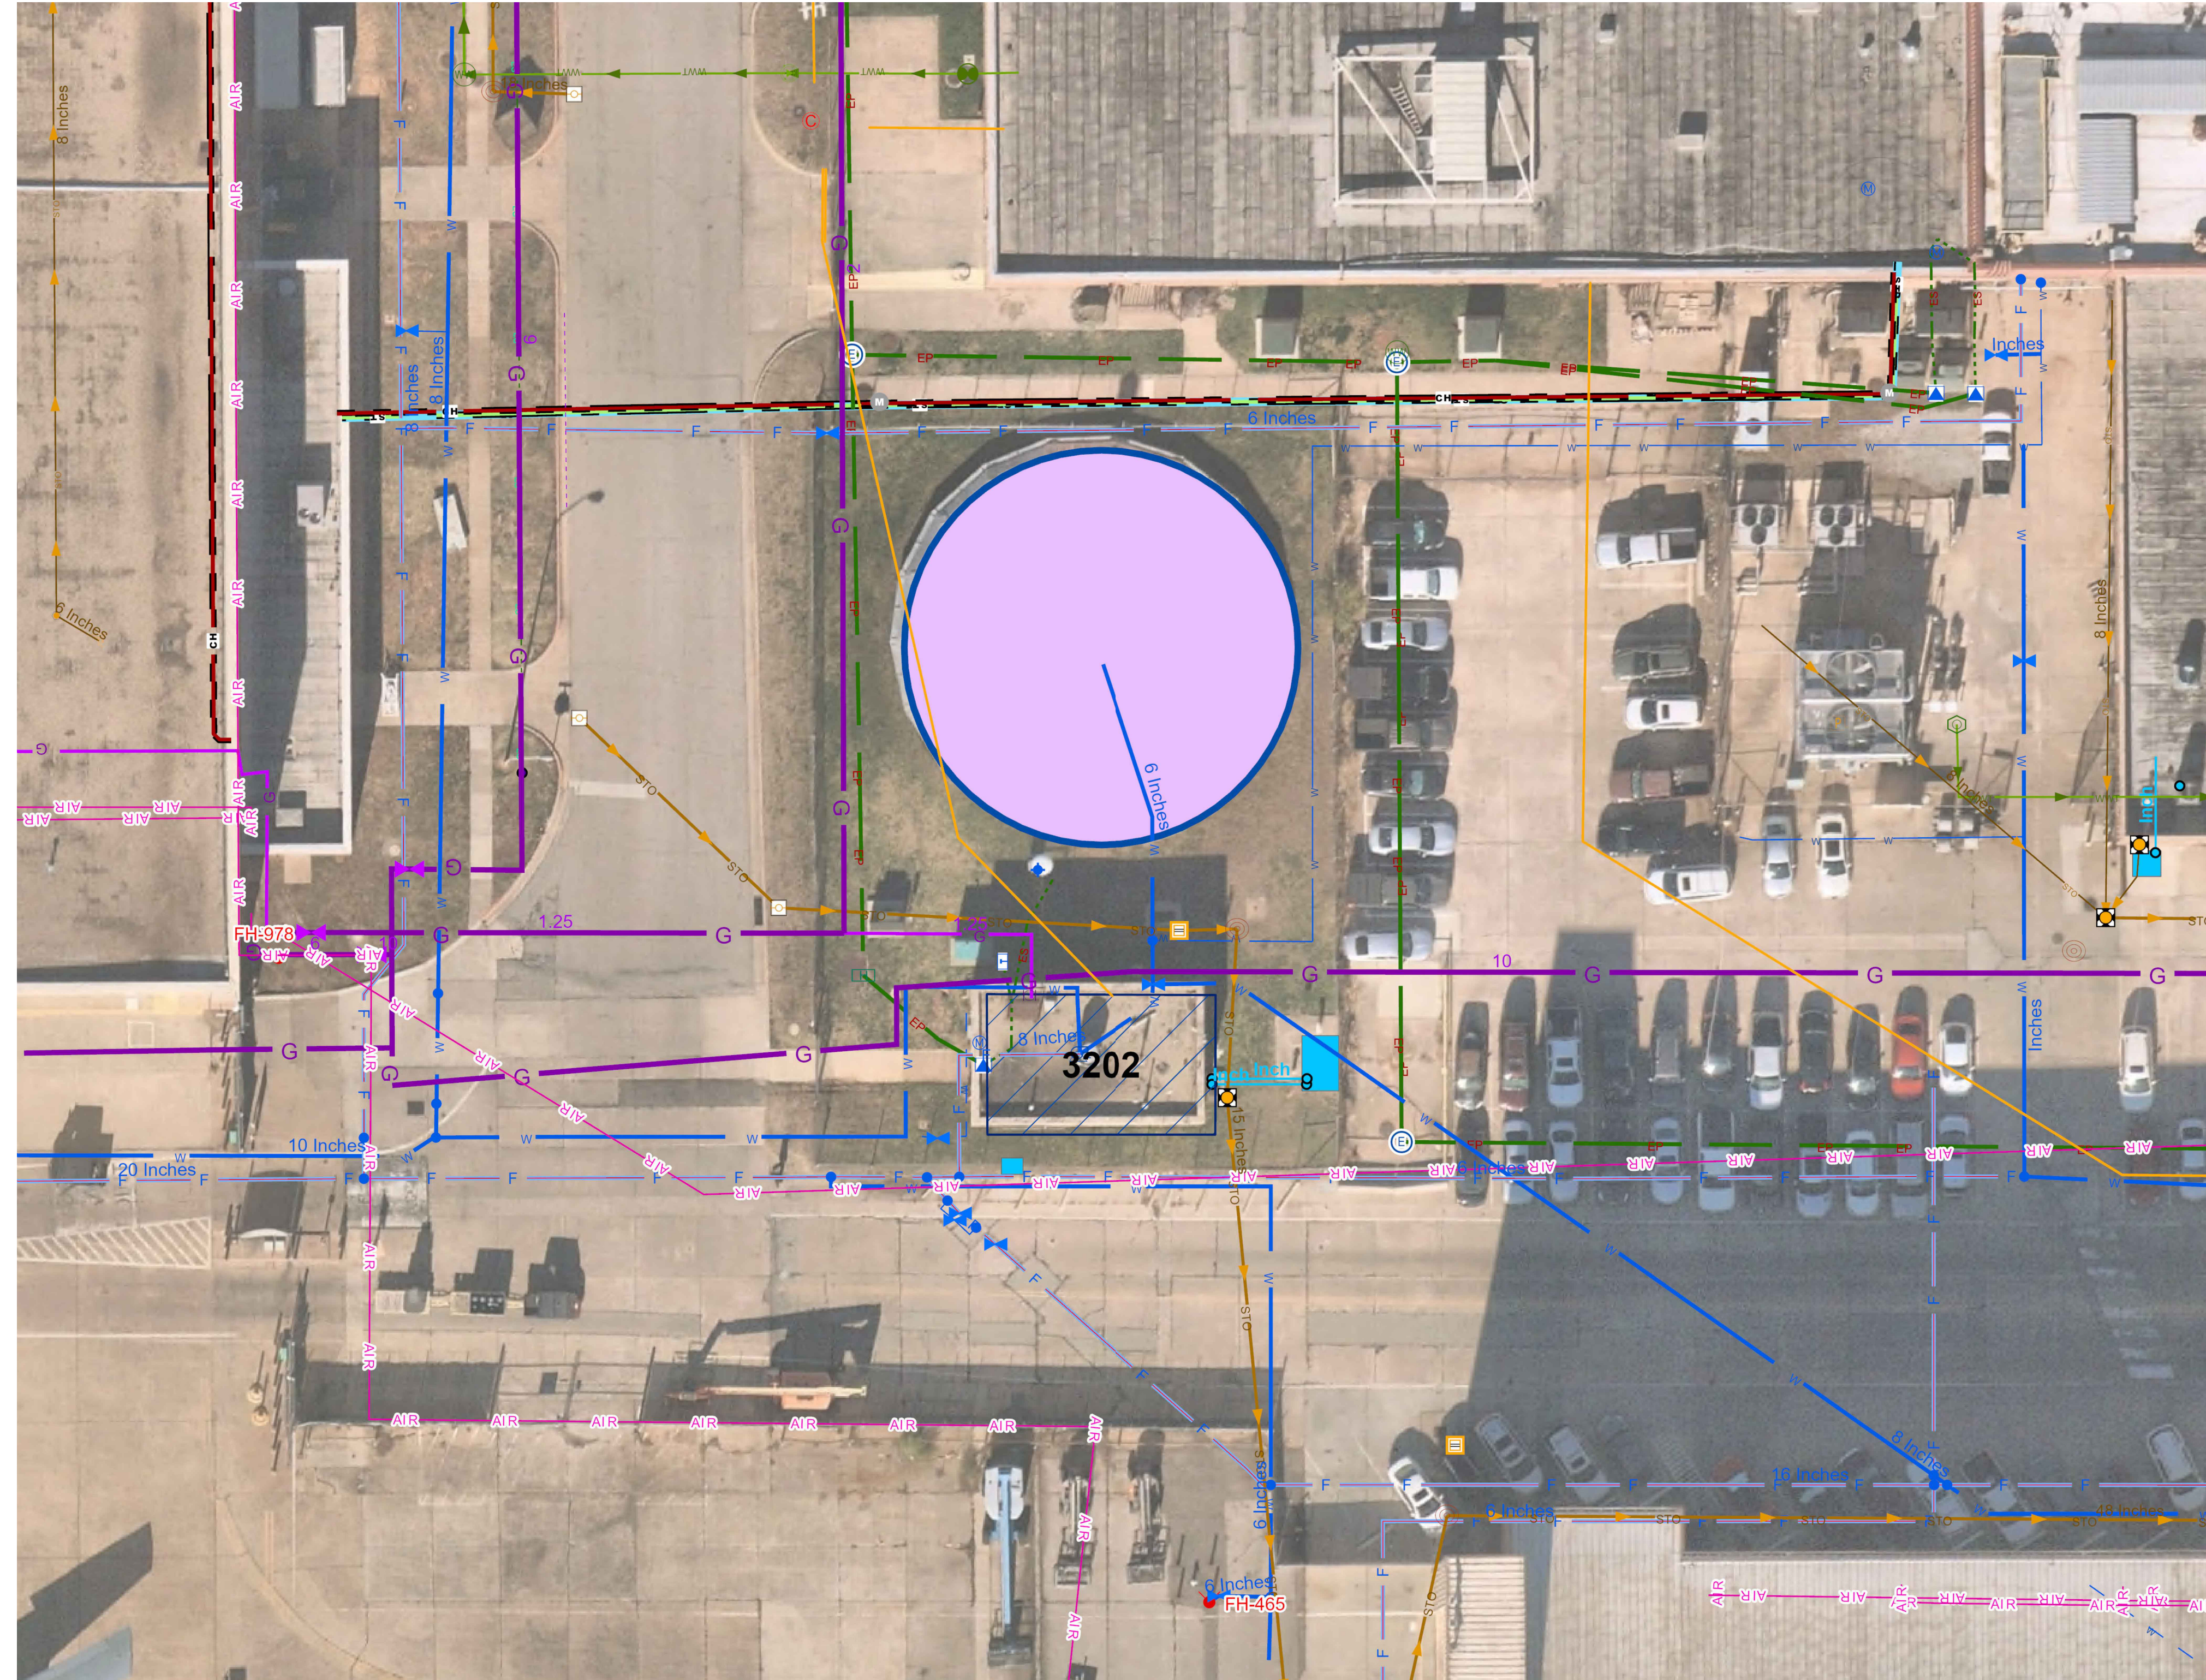

1 AERIAL IMAGE WITH UTILITIES

GENERAL NOTES

1. THE DRAWING WAS PREPARED FROM EXISTING DRAWINGS AND LIMITED ACCESS FOR FIELD OBSERVATIONS. CONTRACTOR SHALL FIELD VERIFY EXISTING CONDITIONS FOR ACCURACY.
2. CONTRACTOR SHALL VERIFY AND PROTECT ALL UTILITIES FROM DAMAGE DURING DEMOLITION AND CONSTRUCTION.



AIR FORCE MATERIEL COMMAND
ABW CIVIL ENGINEER DIRECTORATE
TINKER AFB, OK

CONCEPT DESIGN

WWYK230053
REPLACE VAULT AND
FUEL TANK, B3202

TINKER AIR FORCE BASE, OKLAHOMA


REVISION	DATE	DESCRIPTION
ISSUE DATE: 25 Jun 2025		
DESIGN GROUP: TEA-SRM		
DESIGNED BY: J ALLEN		
DRAWN BY: S STARR		
CHECKED BY: B WYMER		
DESIGN FILE LOCATION:		
Eng\Design\2020\2023\2023003010_ Support\0_3 Drawings\		

AERIAL IMAGE WITH UTILITIES

SHEET NUMBER_____

C-100

SHEET 02 OF 08

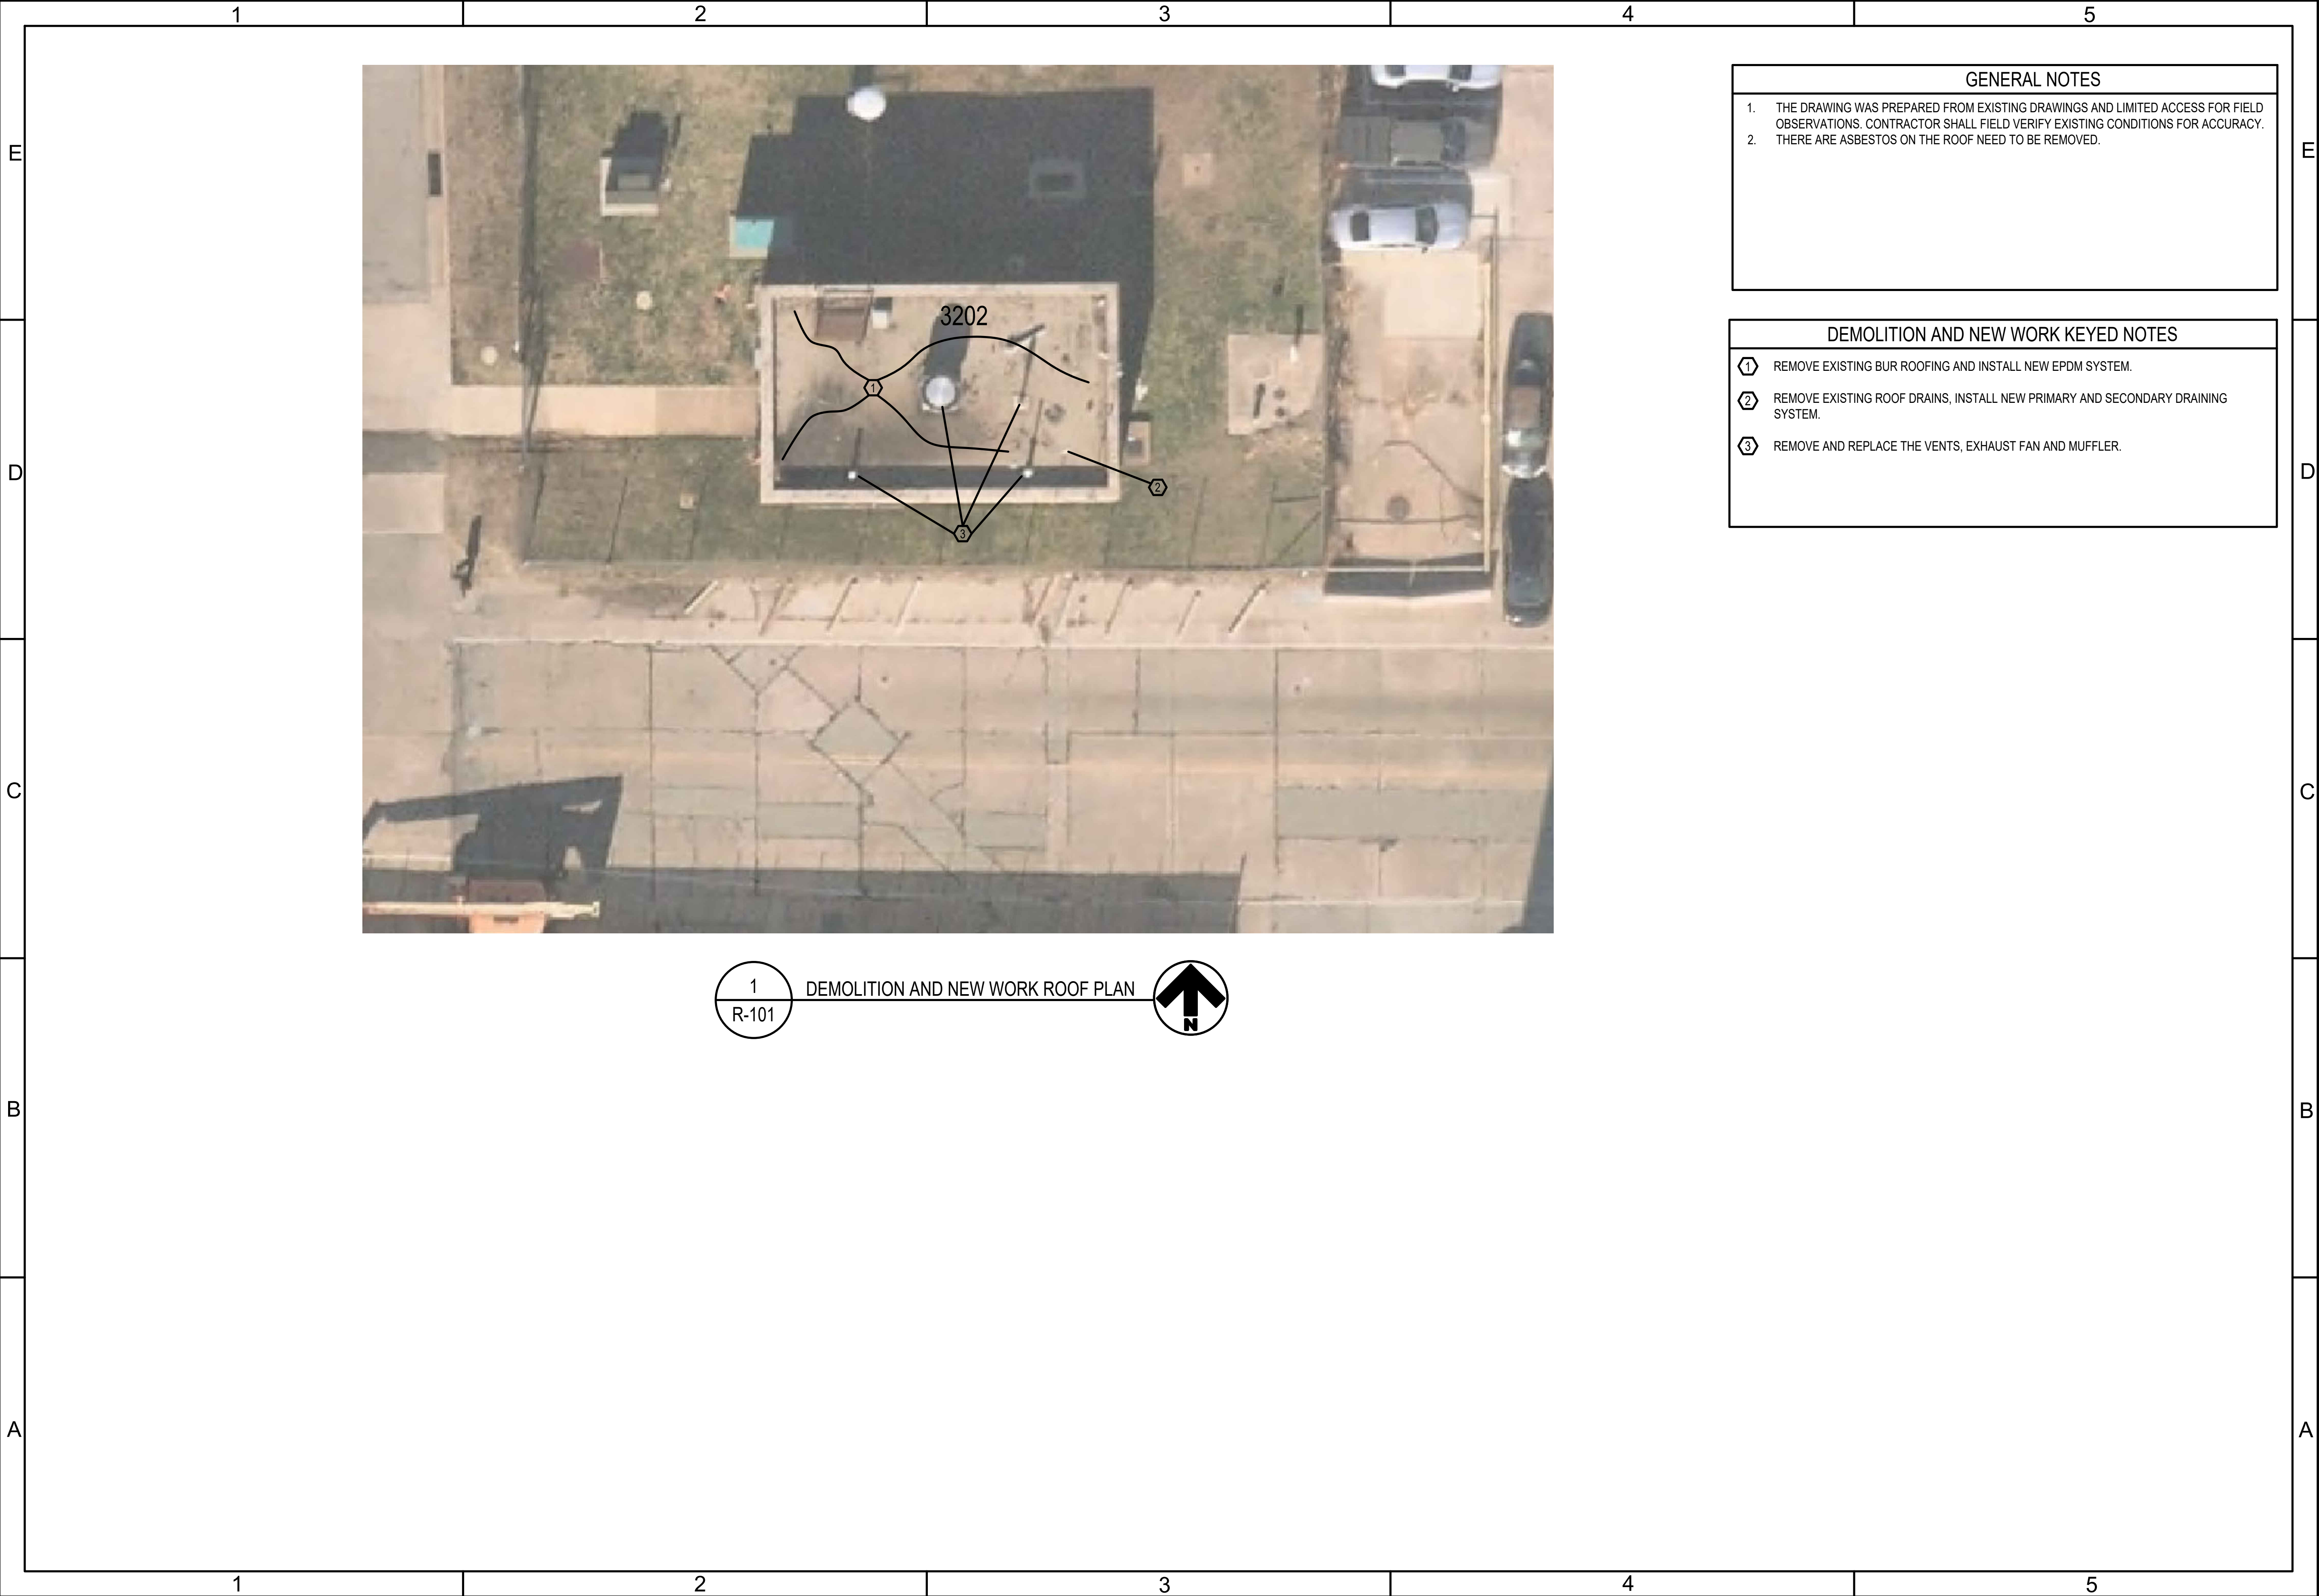

GENERAL NOTES

1. THE DRAWING WAS PREPARED FROM EXISTING DRAWINGS AND LIMITED ACCESS FOR FIELD OBSERVATIONS. CONTRACTOR SHALL FIELD VERIFY EXISTING CONDITIONS FOR ACCURACY.

2. THERE ARE ASBESTOS ON THE ROOF NEED TO BE REMOVED.

DEMOLITION AND NEW WORK KEYED NOTES

1. REMOVE EXISTING BUR ROOFING AND INSTALL NEW EPDM SYSTEM.

2. REMOVE EXISTING ROOF DRAINS, INSTALL NEW PRIMARY AND SECONDARY DRAINING SYSTEM.

3. REMOVE AND REPLACE THE VENTS, EXHAUST FAN AND MUFFLER.


AIR FORCE MATERIEL COMMAND
72 ARMY CIVIL ENGINEER DIRECTORATE
TINKER AFB, OK

CONCEPT DESIGN

WWYK230053
REPLACE VAULT AND
FUEL TANK, B3202

TINKER AIR FORCE BASE, OKLAHOMA


MANAGEMENT INFORMATION		REVISIONS		PROJECT INFORMATION	
ISSUE DATE	DESIGN GROUP	MARK	DATE	DESCRIPTION	
25 Jun 2025	TEPA-SRM				
	DESIGNED BY: A ALAWADI				
	DRAWN BY: S STARR				
	CHECKED BY: B WYMER				

Engt\Design\2020\2023\20230053\0_Support\0_3_Drawings

DEMOLITION AND
NEW WORK
ROOF PLAN

R-101

04 OF 08

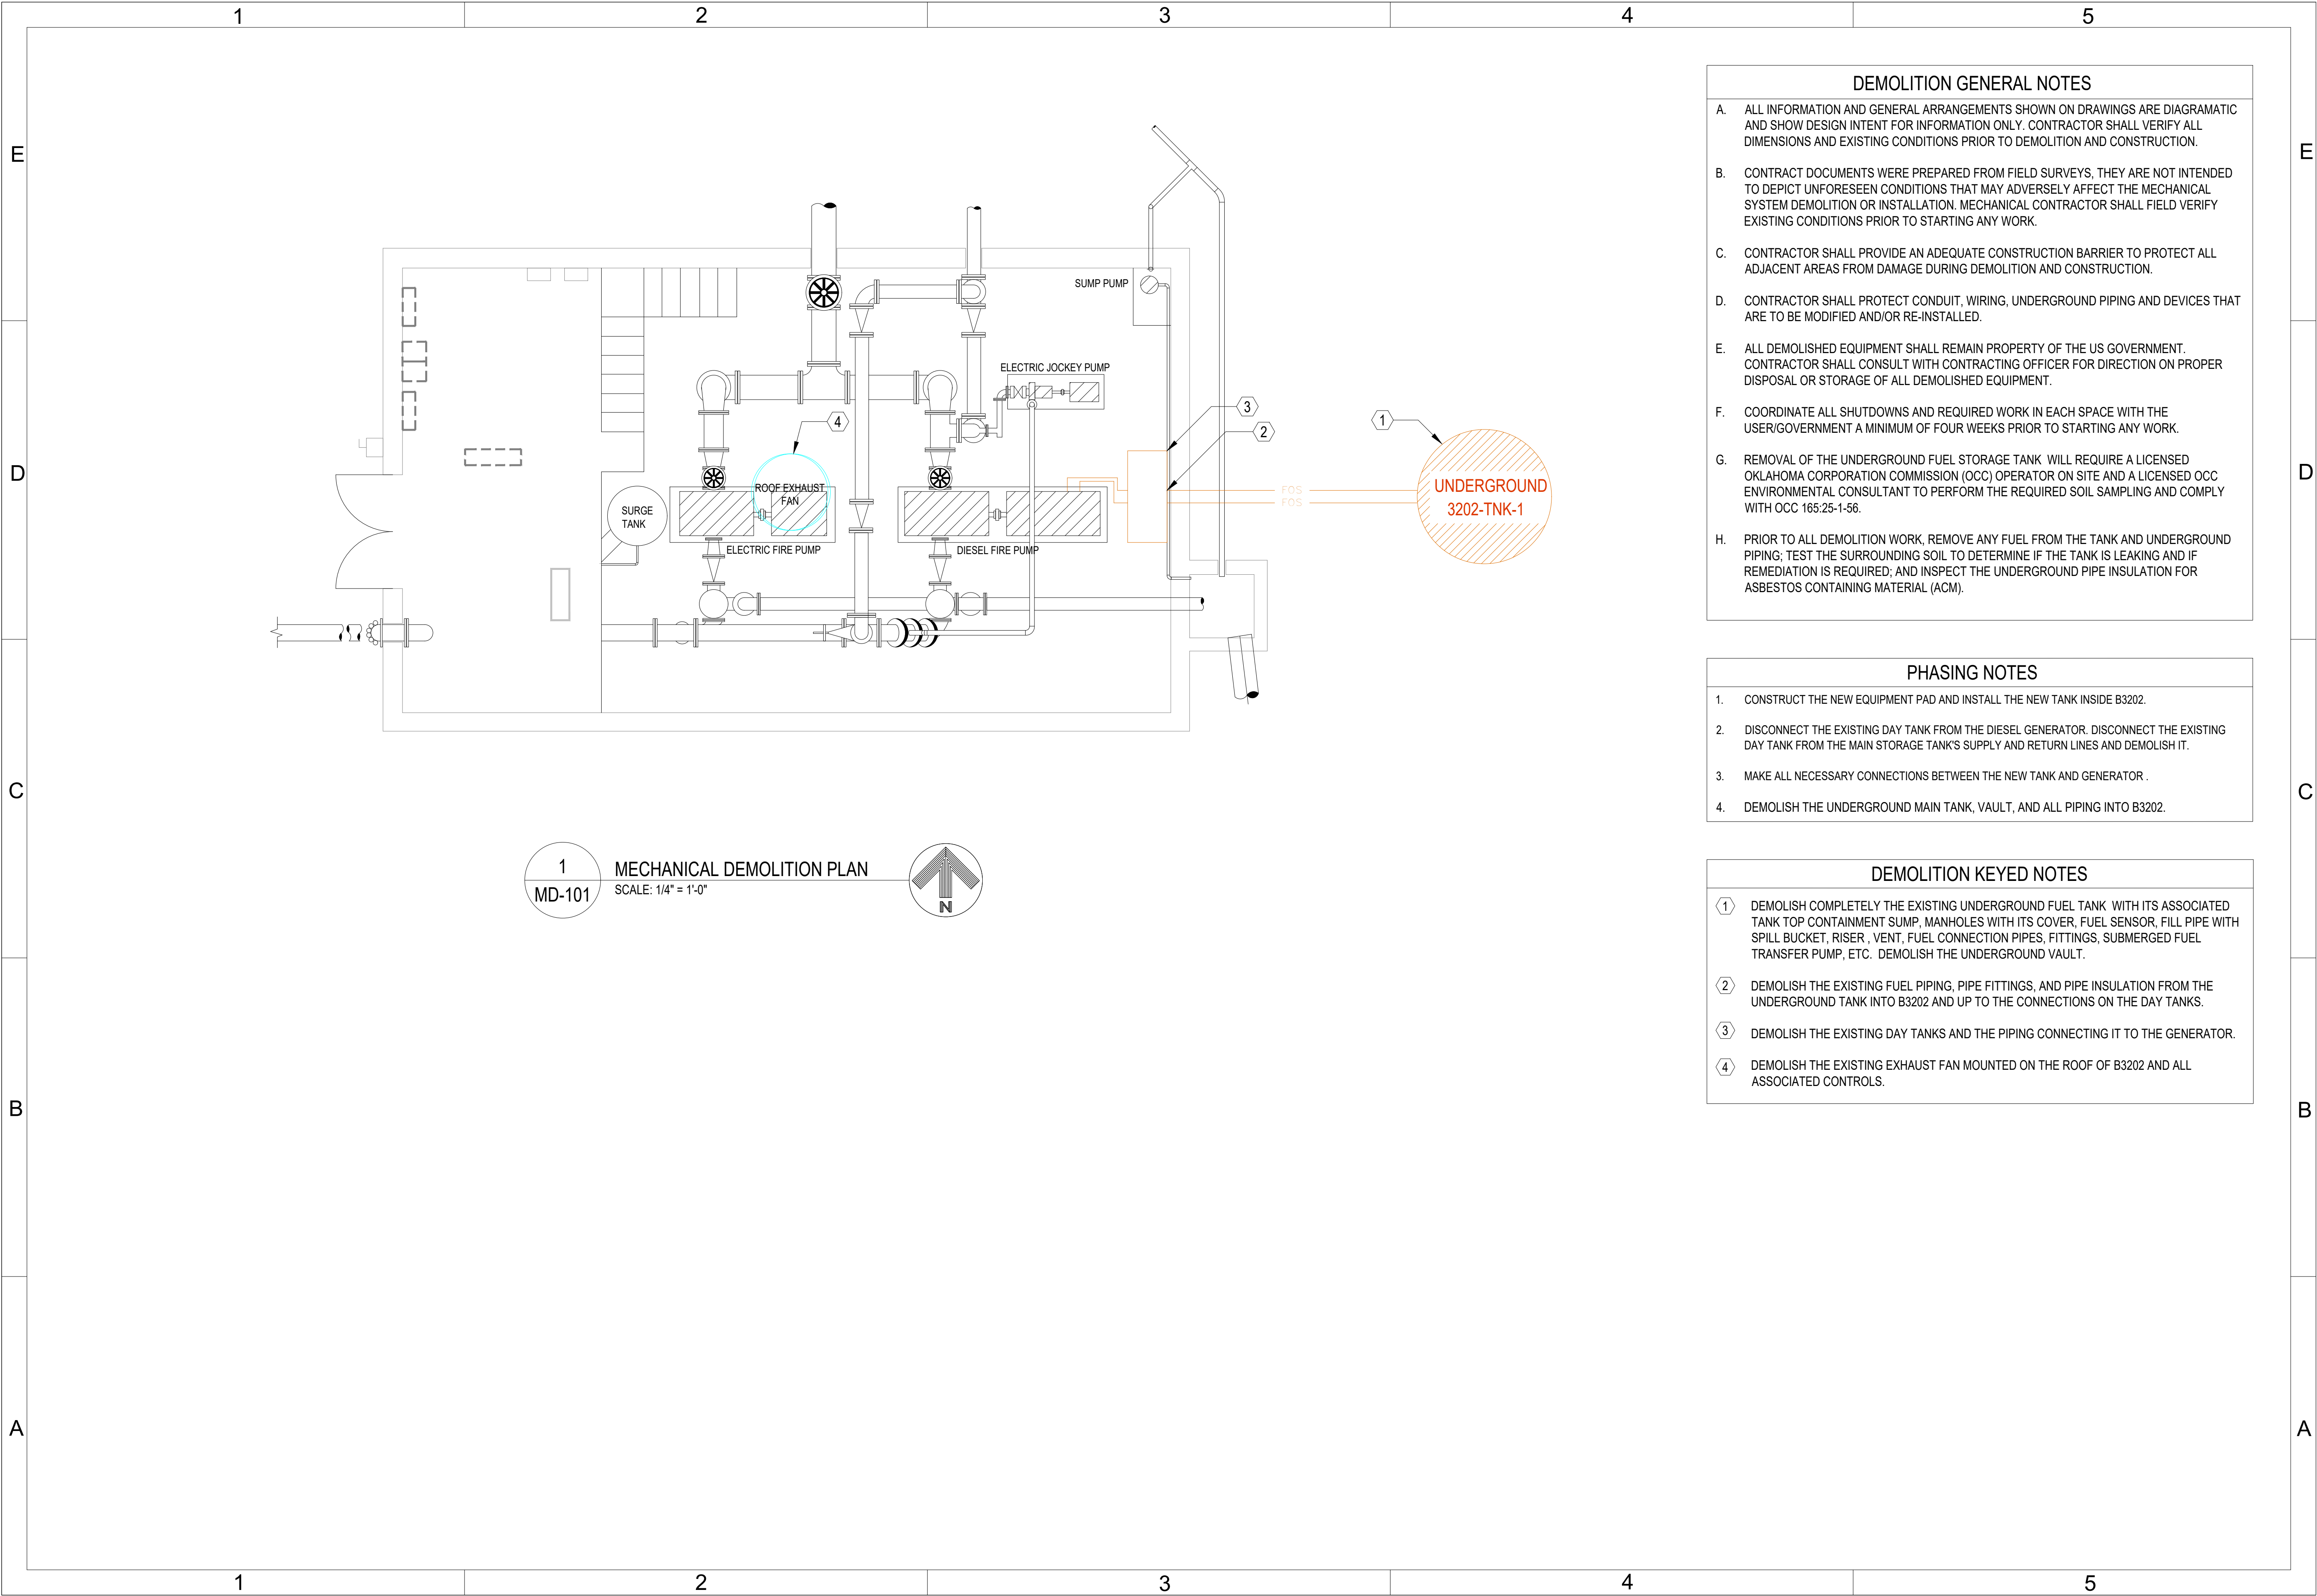

DEMOLITION GENERAL NOTES

- A. ALL INFORMATION AND GENERAL ARRANGEMENTS SHOWN ON DRAWINGS ARE DIAGRAMATIC AND SHOW DESIGN INTENT FOR INFORMATION ONLY. CONTRACTOR SHALL VERIFY ALL DIMENSIONS AND EXISTING CONDITIONS PRIOR TO DEMOLITION AND CONSTRUCTION.
- B. CONTRACT DOCUMENTS WERE PREPARED FROM FIELD SURVEYS, THEY ARE NOT INTENDED TO DEPICT UNFORESEEN CONDITIONS THAT MAY ADVERSELY AFFECT THE MECHANICAL SYSTEM DEMOLITION OR INSTALLATION. MECHANICAL CONTRACTOR SHALL FIELD VERIFY EXISTING CONDITIONS PRIOR TO STARTING ANY WORK.
- C. CONTRACTOR SHALL PROVIDE AN ADEQUATE CONSTRUCTION BARRIER TO PROTECT ALL ADJACENT AREAS FROM DAMAGE DURING DEMOLITION AND CONSTRUCTION.
- D. CONTRACTOR SHALL PROTECT CONDUIT, WIRING, UNDERGROUND PIPING AND DEVICES THAT ARE TO BE MODIFIED AND/OR RE-INSTALLED.
- E. ALL DEMOLISHED EQUIPMENT SHALL REMAIN PROPERTY OF THE US GOVERNMENT. CONTRACTOR SHALL CONSULT WITH CONTRACTING OFFICER FOR DIRECTION ON PROPER DISPOSAL OR STORAGE OF ALL DEMOLISHED EQUIPMENT.
- F. COORDINATE ALL SHUTDOWNS AND REQUIRED WORK IN EACH SPACE WITH THE USER/GOVERNMENT A MINIMUM OF FOUR WEEKS PRIOR TO STARTING ANY WORK.
- G. REMOVAL OF THE UNDERGROUND FUEL STORAGE TANK WILL REQUIRE A LICENSED OKLAHOMA CORPORATION COMMISSION (OCC) OPERATOR ON SITE AND A LICENSED OCC ENVIRONMENTAL CONSULTANT TO PERFORM THE REQUIRED SOIL SAMPLING AND COMPLY WITH OCC 165.25-1-56.
- H. PRIOR TO ALL DEMOLITION WORK, REMOVE ANY FUEL FROM THE TANK AND UNDERGROUND PIPING; TEST THE SURROUNDING SOIL TO DETERMINE IF THE TANK IS LEAKING AND IF REMEDIATION IS REQUIRED; AND INSPECT THE UNDERGROUND PIPE INSULATION FOR ASBESTOS CONTAINING MATERIAL (ACM).

PHASING NOTES

1. CONSTRUCT THE NEW EQUIPMENT PAD AND INSTALL THE NEW TANK INSIDE B3202.
2. DISCONNECT THE EXISTING DAY TANK FROM THE DIESEL GENERATOR. DISCONNECT THE EXISTING DAY TANK FROM THE MAIN STORAGE TANK'S SUPPLY AND RETURN LINES AND DEMOLISH IT.
3. MAKE ALL NECESSARY CONNECTIONS BETWEEN THE NEW TANK AND GENERATOR .
4. DEMOLISH THE UNDERGROUND MAIN TANK, VAULT, AND ALL PIPING INTO B3202.

DEMOLITION KEYED NOTES

- ① DEMOLISH COMPLETELY THE EXISTING UNDERGROUND FUEL TANK WITH ITS ASSOCIATED TANK TOP CONTAINMENT SUMP, MANHOLES WITH ITS COVER, FUEL SENSOR, FILL PIPE WITH SPILL BUCKET, RISER , VENT, FUEL CONNECTION PIPES, FITTINGS, SUBMERGED FUEL TRANSFER PUMP, ETC. DEMOLISH THE UNDERGROUND VAULT.
- ② DEMOLISH THE EXISTING FUEL PIPING, PIPE FITTINGS, AND PIPE INSULATION FROM THE UNDERGROUND TANK INTO B3202 AND UP TO THE CONNECTIONS ON THE DAY TANKS.
- ③ DEMOLISH THE EXISTING DAY TANKS AND THE PIPING CONNECTING IT TO THE GENERATOR.
- ④ DEMOLISH THE EXISTING EXHAUST FAN MOUNTED ON THE ROOF OF B3202 AND ALL ASSOCIATED CONTROLS.



AIR FORCE MATERIEL COMMAND
72 ARMY CIVIL ENGINEER DIRECTORATE

TINKER AFB, OK

CONCEPT
DESIGN

WWYK230053
REPLACE VAULT AND
FUEL TANK, B3202

TINKER AIR FORCE BASE, OKLAHOMA

PROJECT INFORMATION

MANAGEMENT INFORMATION

ISSUE DATE: 25 Jun 2025

DESIGN GROUP: TEPA-SRM

DESIGNED BY: T ARMSTRONG

DRAWN BY: S STARR

CHECKED BY: B WYMER

DESIGN FILE LOCATION:
Engr\Design\2020\2023\20230053\0_Support\0_3_Drawings\

REVISIONS

MARK

DATE

DESCRIPTION


SHEET TITLE

MECHANICAL
DEMOLITION
PLAN

SHEET NUMBER

MD-101

SHEET 05 OF 08

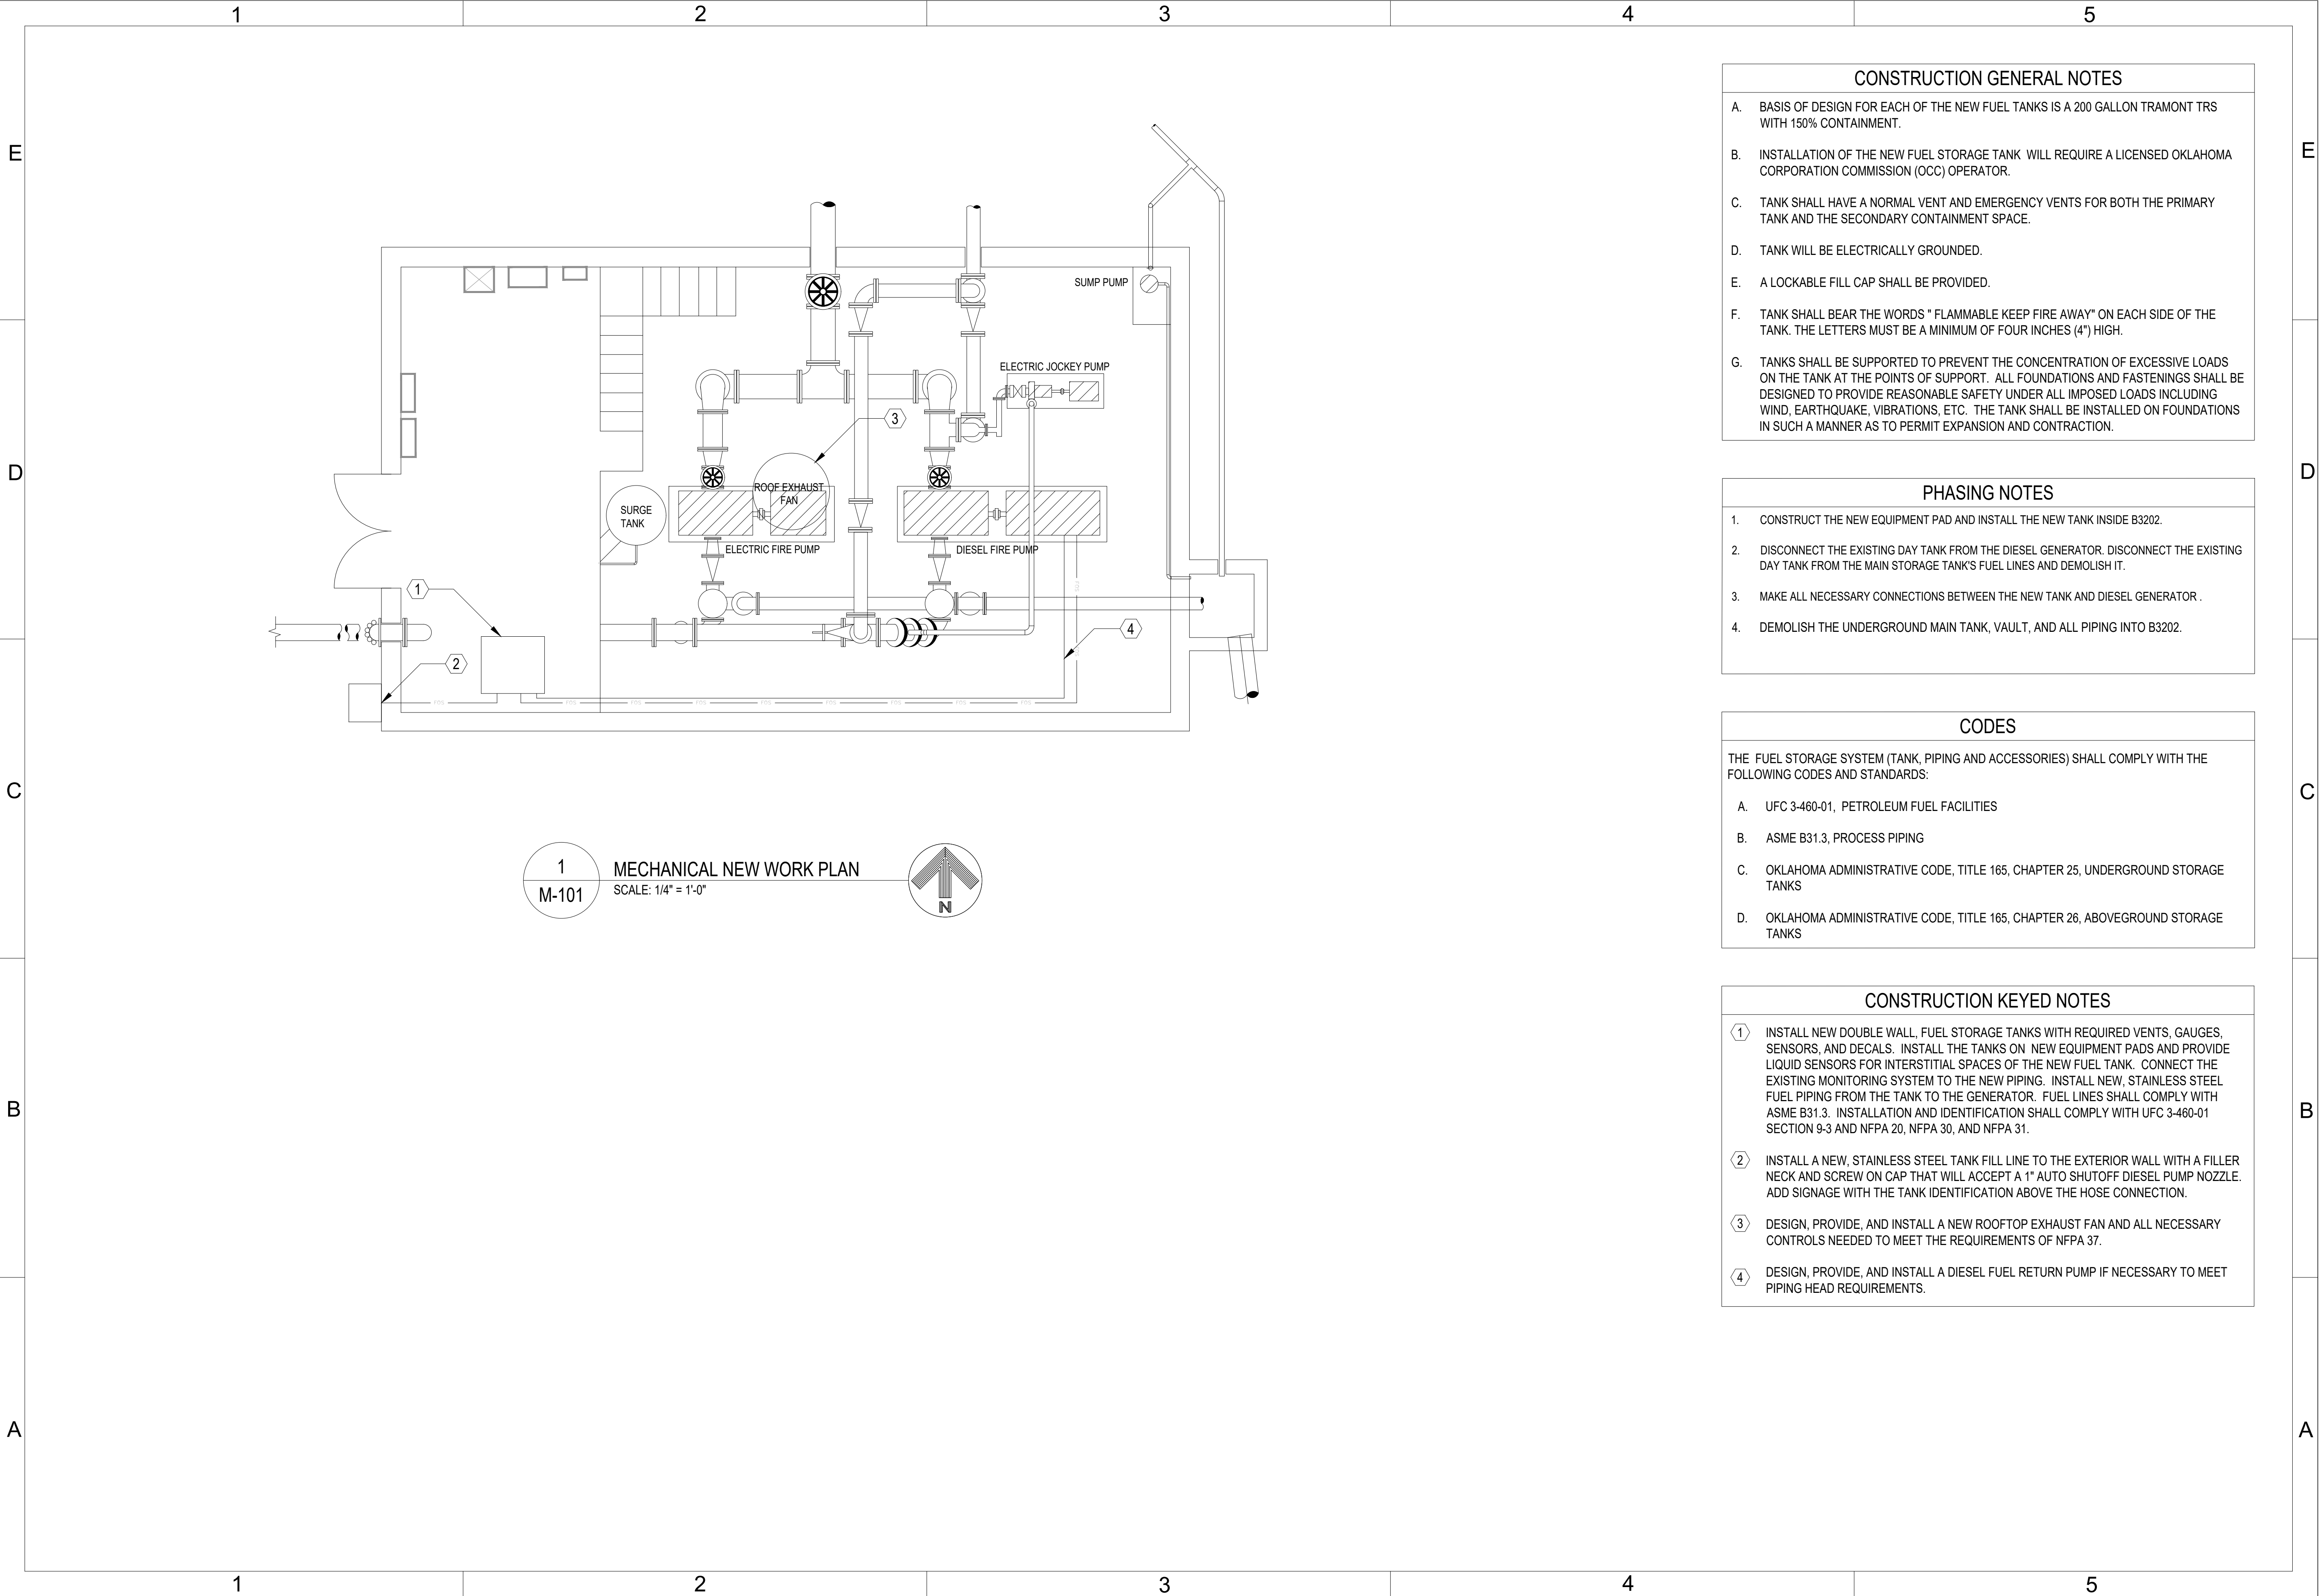

- CONSTRUCTION GENERAL NOTES
- A.

BASIS OF DESIGN FOR EACH OF THE NEW FUEL TANKS IS A 200 GALLON TRAMONT TRS WITH 150% CONTAINMENT.
- B.

INSTALLATION OF THE NEW FUEL STORAGE TANK WILL REQUIRE A LICENSED OKLAHOMA CORPORATION COMMISSION (OCC) OPERATOR.
- C.

TANK SHALL HAVE A NORMAL VENT AND EMERGENCY VENTS FOR BOTH THE PRIMARY TANK AND THE SECONDARY CONTAINMENT SPACE.
- D.

TANK WILL BE ELECTRICALLY GROUNDED.
- E.

A LOCKABLE FILL CAP SHALL BE PROVIDED.
- F.

TANK SHALL BEAR THE WORDS "FLAMMABLE KEEP FIRE AWAY" ON EACH SIDE OF THE TANK. THE LETTERS MUST BE A MINIMUM OF FOUR INCHES (4") HIGH.
- G.

TANKS SHALL BE SUPPORTED TO PREVENT THE CONCENTRATION OF EXCESSIVE LOADS ON THE TANK AT THE POINTS OF SUPPORT. ALL FOUNDATIONS AND FASTENINGS SHALL BE DESIGNED TO PROVIDE REASONABLE SAFETY UNDER ALL IMPOSED LOADS INCLUDING WIND, EARTHQUAKE, VIBRATIONS, ETC. THE TANK SHALL BE INSTALLED ON FOUNDATIONS IN SUCH A MANNER AS TO PERMIT EXPANSION AND CONTRACTION.

- PHASING NOTES
1.

CONSTRUCT THE NEW EQUIPMENT PAD AND INSTALL THE NEW TANK INSIDE B3202.
2.

DISCONNECT THE EXISTING DAY TANK FROM THE DIESEL GENERATOR. DISCONNECT THE EXISTING DAY TANK FROM THE MAIN STORAGE TANK'S FUEL LINES AND DEMOLISH IT.
3.

MAKE ALL NECESSARY CONNECTIONS BETWEEN THE NEW TANK AND DIESEL GENERATOR .
4.

DEMOLISH THE UNDERGROUND MAIN TANK, VAULT, AND ALL PIPING INTO B3202.

- CODES
- THE FUEL STORAGE SYSTEM (TANK, PIPING AND ACCESSORIES) SHALL COMPLY WITH THE FOLLOWING CODES AND STANDARDS:
- A.

UFC 3-460-01, PETROLEUM FUEL FACILITIES
- B.

ASME B31.3, PROCESS PIPING
- C.

OKLAHOMA ADMINISTRATIVE CODE, TITLE 165, CHAPTER 25, UNDERGROUND STORAGE TANKS
- D.

OKLAHOMA ADMINISTRATIVE CODE, TITLE 165, CHAPTER 26, ABOVEGROUND STORAGE TANKS

- CONSTRUCTION KEYED NOTES
- ①

INSTALL NEW DOUBLE WALL, FUEL STORAGE TANKS WITH REQUIRED VENTS, GAUGES, SENSORS, AND DECALS. INSTALL THE TANKS ON NEW EQUIPMENT PADS AND PROVIDE LIQUID SENSORS FOR INTERSTITIAL SPACES OF THE NEW FUEL TANK. CONNECT THE EXISTING MONITORING SYSTEM TO THE NEW PIPING. INSTALL NEW, STAINLESS STEEL FUEL PIPING FROM THE TANK TO THE GENERATOR. FUEL LINES SHALL COMPLY WITH ASME B31.3. INSTALLATION AND IDENTIFICATION SHALL COMPLY WITH UFC 3-460-01 SECTION 9-3 AND NFPA 20, NFPA 30, AND NFPA 31.
- ②

INSTALL A NEW, STAINLESS STEEL TANK FILL LINE TO THE EXTERIOR WALL WITH A FILLER NECK AND SCREW ON CAP THAT WILL ACCEPT A 1" AUTO SHUTOFF DIESEL PUMP NOZZLE. ADD SIGNAGE WITH THE TANK IDENTIFICATION ABOVE THE HOSE CONNECTION.
- ③

DESIGN, PROVIDE, AND INSTALL A NEW ROOFTOP EXHAUST FAN AND ALL NECESSARY CONTROLS NEEDED TO MEET THE REQUIREMENTS OF NFPA 37.
- ④

DESIGN, PROVIDE, AND INSTALL A DIESEL FUEL RETURN PUMP IF NECESSARY TO MEET PIPING HEAD REQUIREMENTS.

AFMC

AIR FORCE MATERIEL COMMAND

72 ARMY CIVIL ENGINEER DIRECTORATE

TINKER AFB, OK

CONCEPT DESIGN

PROJECT INFORMATION

WWYK230053

REPLACE VAULT AND FUEL TANK, B3202

TINKER AIR FORCE BASE, OKLAHOMA

MANAGEMENT INFORMATION

ISSUE DATE: 25 Jun 2025

DESIGN GROUP: TEPA-SRM

DESIGNED BY: T ARMSTRONG

DRAWN BY: S STARR

CHECKED BY: B WYMER

DESIGN FILE LOCATION: Engr\Design\2020\2023\20230053\0_Support\0_3_Drawings\


SHEET TITLE

MECHANICAL NEW WORK PLAN

SHEET NUMBER

M-101

SHEET 06 OF 08

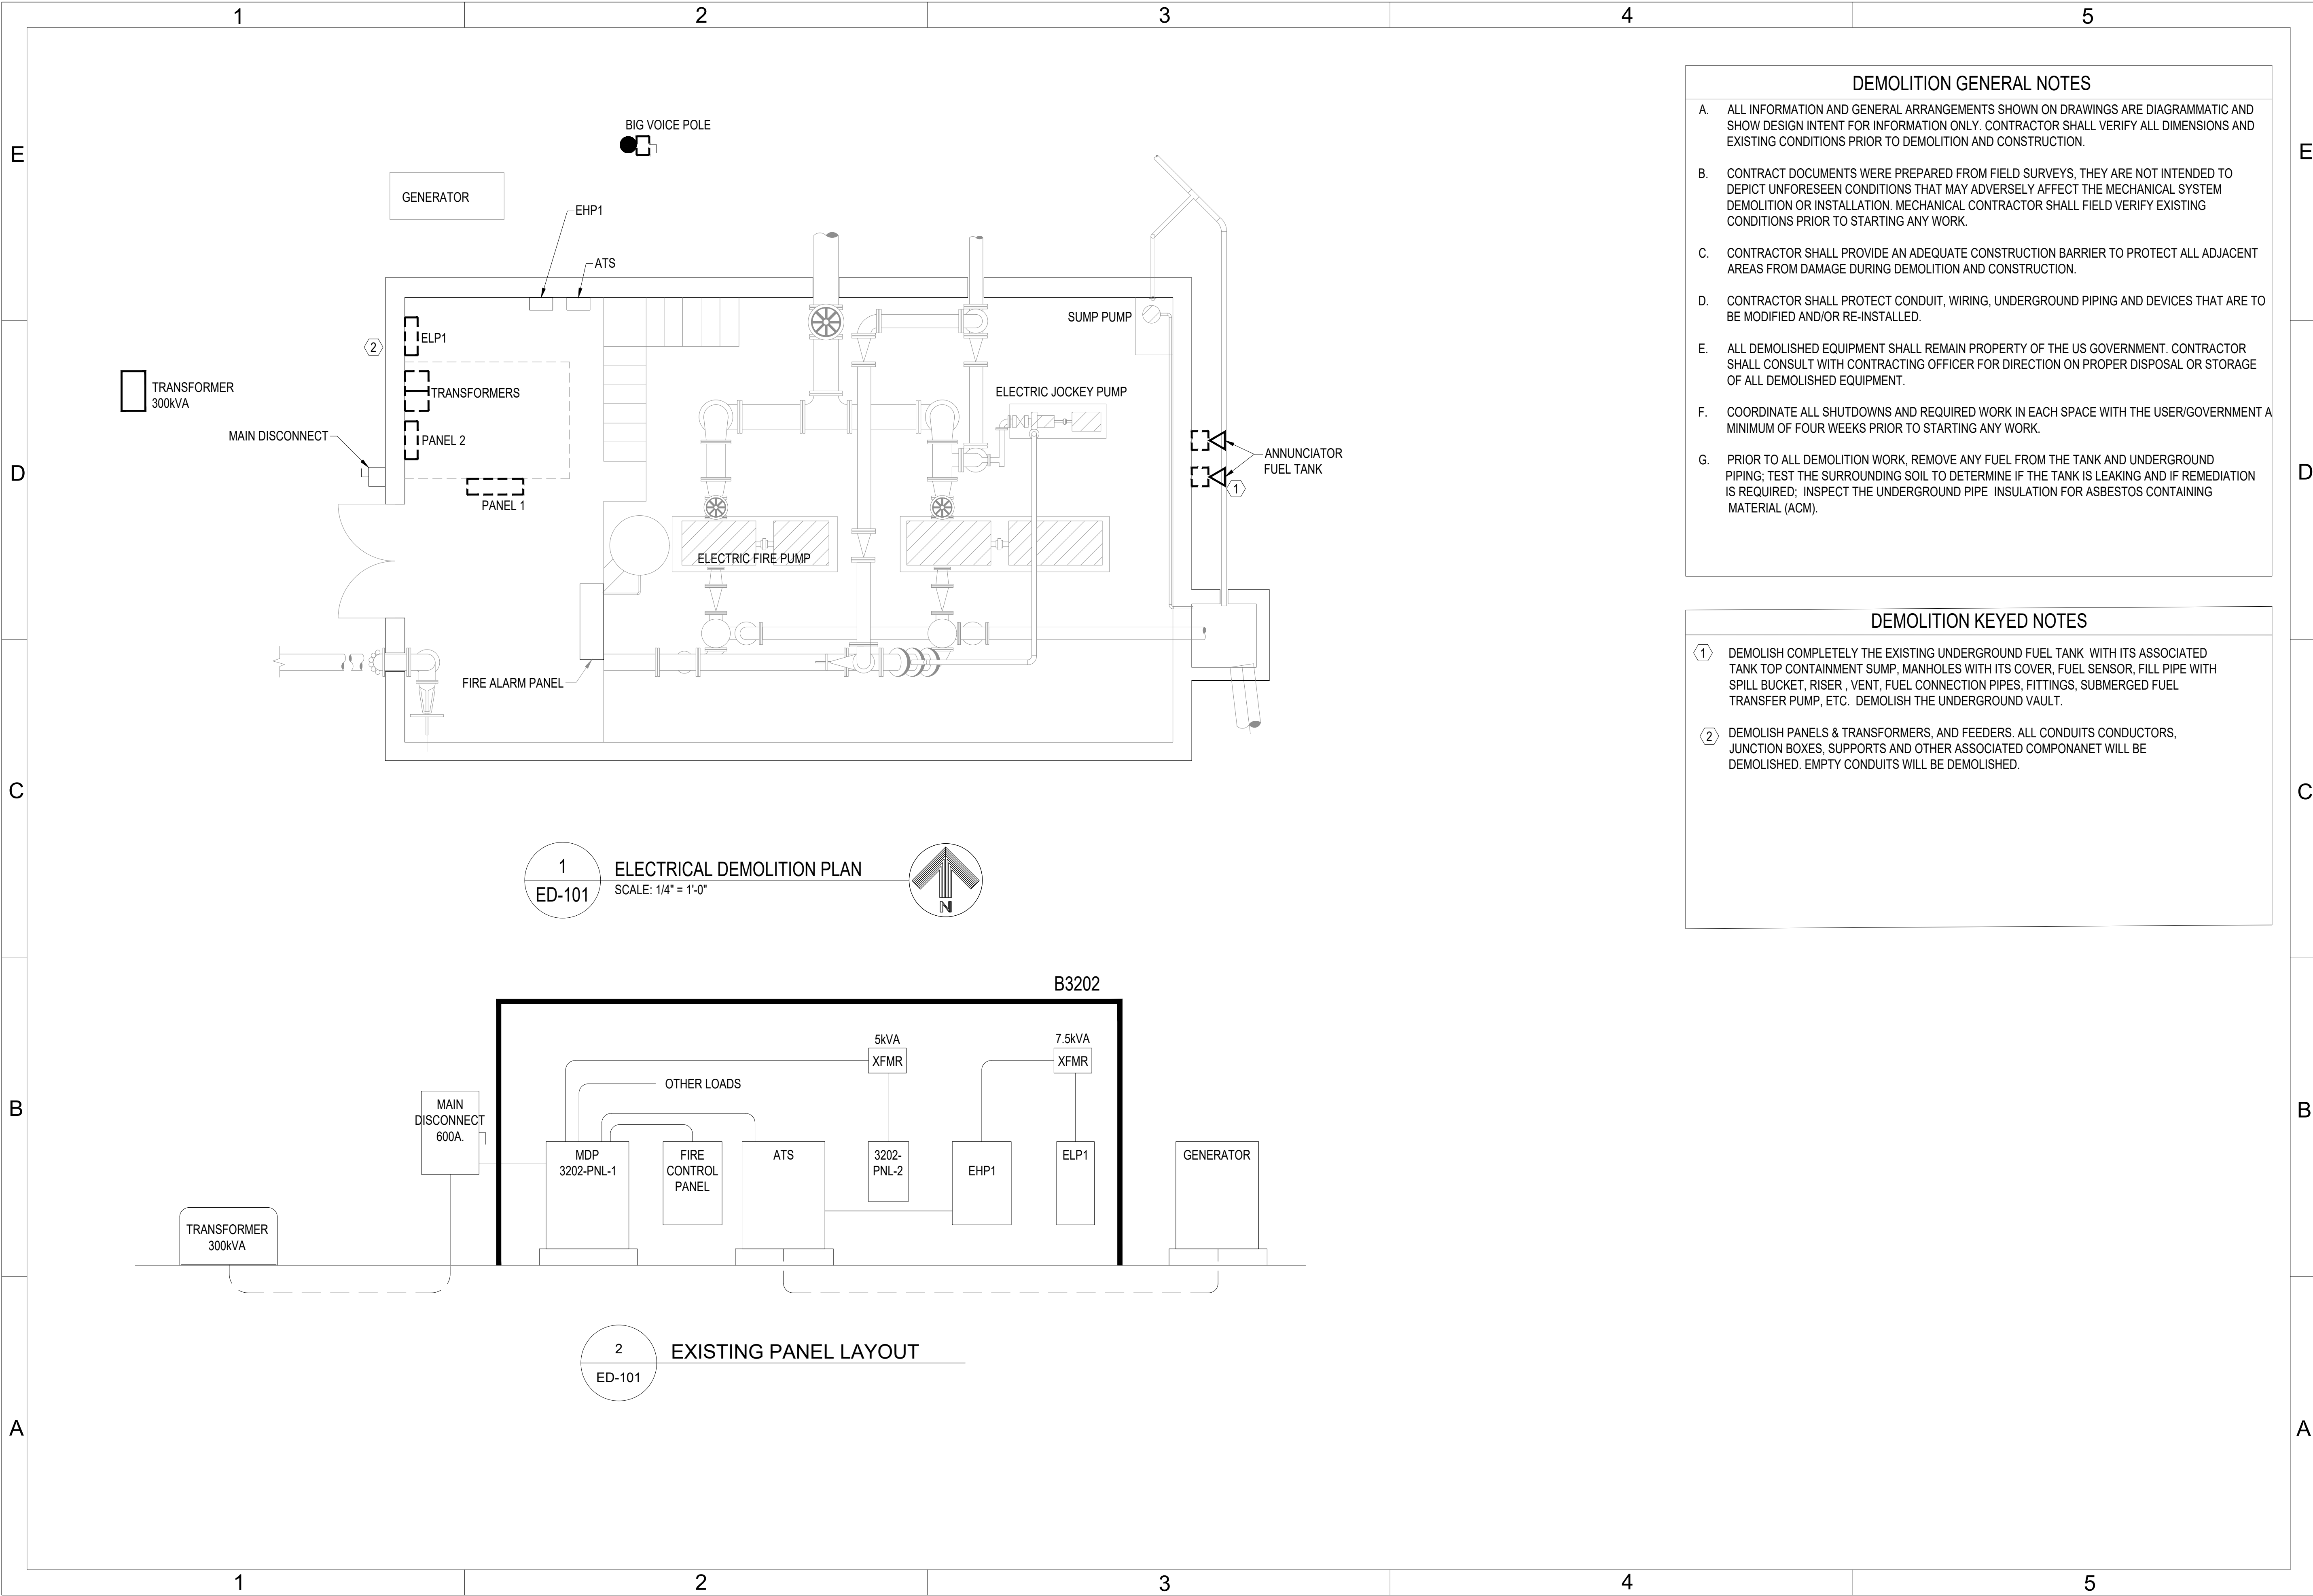

DEMOLITION GENERAL NOTES

- A. ALL INFORMATION AND GENERAL ARRANGEMENTS SHOWN ON DRAWINGS ARE DIAGRAMMATIC AND SHOW DESIGN INTENT FOR INFORMATION ONLY. CONTRACTOR SHALL VERIFY ALL DIMENSIONS AND EXISTING CONDITIONS PRIOR TO DEMOLITION AND CONSTRUCTION.
- B. CONTRACT DOCUMENTS WERE PREPARED FROM FIELD SURVEYS, THEY ARE NOT INTENDED TO DEPICT UNFORESEEN CONDITIONS THAT MAY ADVERSELY AFFECT THE MECHANICAL SYSTEM DEMOLITION OR INSTALLATION. MECHANICAL CONTRACTOR SHALL FIELD VERIFY EXISTING CONDITIONS PRIOR TO STARTING ANY WORK.
- C. CONTRACTOR SHALL PROVIDE AN ADEQUATE CONSTRUCTION BARRIER TO PROTECT ALL ADJACENT AREAS FROM DAMAGE DURING DEMOLITION AND CONSTRUCTION.
- D. CONTRACTOR SHALL PROTECT CONDUIT, WIRING, UNDERGROUND PIPING AND DEVICES THAT ARE TO BE MODIFIED AND/OR RE-INSTALLED.
- E. ALL DEMOLISHED EQUIPMENT SHALL REMAIN PROPERTY OF THE US GOVERNMENT. CONTRACTOR SHALL CONSULT WITH CONTRACTING OFFICER FOR DIRECTION ON PROPER DISPOSAL OR STORAGE OF ALL DEMOLISHED EQUIPMENT.
- F. COORDINATE ALL SHUTDOWNS AND REQUIRED WORK IN EACH SPACE WITH THE USER/GOVERNMENT A MINIMUM OF FOUR WEEKS PRIOR TO STARTING ANY WORK.
- G. PRIOR TO ALL DEMOLITION WORK, REMOVE ANY FUEL FROM THE TANK AND UNDERGROUND PIPING; TEST THE SURROUNDING SOIL TO DETERMINE IF THE TANK IS LEAKING AND IF REMEDIATION IS REQUIRED; INSPECT THE UNDERGROUND PIPE INSULATION FOR ASBESTOS CONTAINING MATERIAL (ACM).

DEMOLITION KEYED NOTES

- ① DEMOLISH COMPLETELY THE EXISTING UNDERGROUND FUEL TANK WITH ITS ASSOCIATED TANK TOP CONTAINMENT SUMP, MANHOLES WITH ITS COVER, FUEL SENSOR, FILL PIPE WITH SPILL BUCKET, RISER, VENT, FUEL CONNECTION PIPES, FITTINGS, SUBMERGED FUEL TRANSFER PUMP, ETC. DEMOLISH THE UNDERGROUND VAULT.
- ② DEMOLISH PANELS & TRANSFORMERS, AND FEEDERS. ALL CONDUITS CONDUCTORS, JUNCTION BOXES, SUPPORTS AND OTHER ASSOCIATED COMPONANET WILL BE DEMOLISHED. EMPTY CONDUITS WILL BE DEMOLISHED.



AIR FORCE MATERIEL COMMAND
72 ARMY CIVIL ENGINEER DIRECTORATE

TINKER AFB, OK

CONCEPT DESIGN

PROJECT INFORMATION

WWYK230053
REPLACE VAULT AND
FUEL TANK, B3202

TINKER AIR FORCE BASE, OKLAHOMA

MANAGEMENT INFORMATION	ISSUE DATE	DESIGN GROUP	DESIGNED BY	DRAWN BY	CHECKED BY	REVISIONS	
						MARK	DESCRIPTION
ISSUE DATE: 25 Jun 2025							
DESIGN GROUP: TEPA-SRM							
DESIGNED BY: C BARBOZA							
DRAWN BY: S STARR							
CHECKED BY: B WYMER							
DESIGN FILE LOCATION: Engr\Design\2020\2023\20230053\0_Support\0_3_Drawings\1							

ELECTRICAL DEMOLITION PLAN

SHEET TITLE

SHEET NUMBER

ED-101

SHEET 07 OF 08

