

AMENDMENT OF SOLICITATION			1. CONTRACT ID CODE		PAGE OF PAGES 1/2		
2. AMENDMENT NO. A001		3. EFFECTIVE DATE 3/31/2026		4. REQUISITION/PURCHASE REQ. NO.		5. PROJECT NO. (If applicable) N/A	
6. ISSUED BY Department of State - American Embassy - Asunción JOINT ADMINISTRATIVE ORGANIZATION GENERAL SERVICES OFFICE 1776 Mcal. López Ave. Asunción - Paraguay			CODE		7. ADMINISTERED BY (If other than Item 6) Same a block #6		
8. NAME AND ADDRESS OF CONTRACTOR (NO., street,city,county,State,and ZIP Code)				X			9a. AMENDMENT OF SOLICITATION NO. 19PA1026Q0001
							9b. DATED (SEE ITEM 11) 3/31/2026
				10a. MODIFICATION OF CONTRACT/ORDER NO.			
				10b. DATED (SEE ITEM 13)			
11. THIS ITEM ONLY APPLIES TO AMENDMENTS OF SOLICITATIONS							
[X] The above numbered solicitation is amended as set forth in Item 14. The hour and date specified for receipt of Offers [] is extended, [X] is not extended. Offers must acknowledge receipt of this amendment prior to the hour and date specified in the solicitation or as amended, by one of the following methods: (a) By completing Items 8 and 15, and returning <u>1</u> copies of the amendment; (b) By acknowledging receipt of this amendment on each copy of the offer submitted; or (c) By separate letter or telegram which includes a reference to the solicitation and amendment numbers. FAILURE OF YOUR ACKNOWLEDGMENT TO BE RECEIVED AT THE PLACE DESIGNATED FOR THE RECEIPT OF OFFERS PRIOR TO THE HOUR AND DATE SPECIFIED MAY RESULT IN REJECTION OF YOUR OFFER. If by virtue of this amendment you desire to change an offer already submitted, such change may be made by telegram or letter, provided each telegram or letter makes reference to the solicitation and this amendment, and is received prior to the opening hour and date specified.							
12. ACCOUNTING AND APPROPRIATION DATA (If required)							
13. THIS ITEM APPLIES ONLY TO MODIFICATIONS OF CONTRACTS/ORDERS, IT MODIFIES THE CONTRACT/ORDER NO. AS DESCRIBED IN ITEM 14.							
A. THIS CHANGE ORDER IS ISSUED PURSUANT TO: (Specify authority) THE CHANGES SET FORTH IN ITEM 14 ARE MADE IN THE CONTRACT ORDER NO. IN ITEM 10A.							
B. THE ABOVE NUMBERED CONTRACT/ORDER IS MODIFIED TO REFLECT THE ADMINISTRATIVE CHANGES (such as changes in paying office, appropriation date, etc.) SET FORTH IN ITEM 14, PURSUANT TO THE AUTHORITY OF FAR 43.103(b)							
C. THIS SUPPLEMENTAL AGREEMENT IS ENTERED INTO PURSUANT TO AUTHORITY OF:							
X D. OTHER (Specify type of modification and authority)							
E. IMPORTANT: Contractor [] is not, [] is required to sign this document and return _____ copies to the issuing office.							
14. DESCRIPTION OF AMENDMENT/MODIFICATION (Organized by UCF section headings, including solicitation/contract subject matter where feasible.) The purpose of this amendment is to update SECTION B Statement of the work Except as provided herein, all terms and conditions of the document referenced in Item 9A or 10A, as heretofore changed, remains unchanged and in full force and effect.							
15A. NAME AND TITLE OF SIGNER (Type or print)				16A. NAME OF CONTRACTING OFFICER Edward Swann			
15B. NAME OF CONTRACTOR/OFFEROR BY _____ (Signature of person authorized to sign)		15C. DATE SIGNED 30-105		16B. UNITED STATES OF AMERICA BY  (Signature of Contracting Officer)		 DATE SIGNED 30 MAR. 2026	


1. To update SECTION B – Statement of Work: the changes/inclusions are yellow highlighted below.

1. PROJECT OVERVIEW

This project consists of repairing the floor slope in nine (9) shower stalls located in nine (9) bathrooms at the Marine Security Guard Quarters. These bathrooms were constructed without proper slope in the shower stalls, causing water to flow out of the shower area and wet the bathroom floor during use. This condition creates both an operational inconvenience, requiring additional cleaning effort, and a safety hazard due to slippery floors that could lead to falls.

☒ Bathroom shower stall already fixed as a test.

Eight (8) out of nine (9) bathroom shower stalls are pending for repairs.

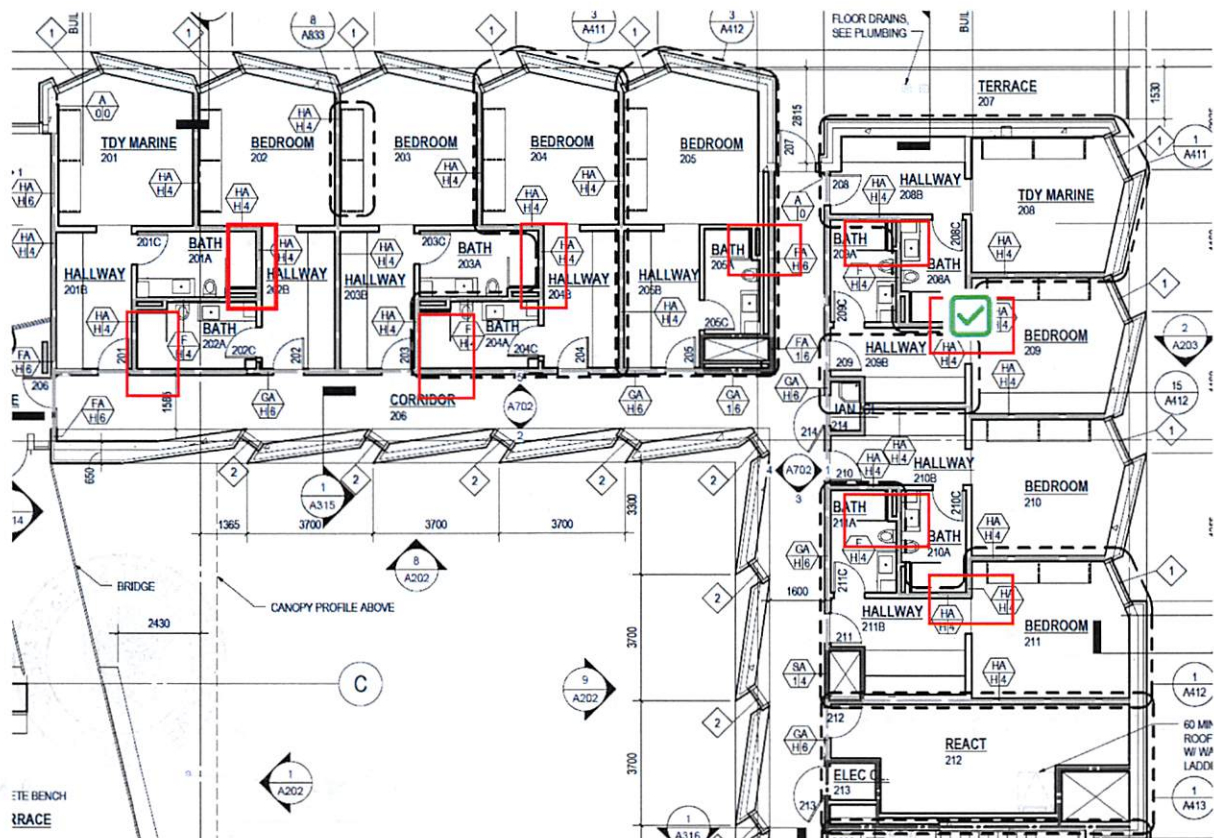

☒ Bathroom shower stall already fixed as a test

☐ Existing shower stall pending repairs

2. BACKGROUND

The Facility Management Office (FAC) conducted a test project by opening one bathroom to establish work conditions, determine the time required, identify necessary materials, and assess other project requirements. This test phase has informed the scope of work for the remaining eight bathrooms.

3. SCOPE OF WORK

The contractor shall perform the following work in each of the eight (8) bathrooms remaining:

- a. Remove the existing glass block, installed to contain water, which is embedded in the ceiling.



This picture shows how the glass was installed at the bathroom stall, Post request installing an extruded aluminum frame supported from above-ceiling space (which would be easier to replace later without re-ceiling work).

- b. Remove the existing shower floor entirely.



This picture shows the drainage type after the shower stall floor was removed

- c. Modify the plumbing system as necessary
- d. Install new flooring with proper slope to ensure water drainage toward the drain
- e. Install new glass enclosure for the shower area. New glass must not be embedded in the ceiling. Shower area glass partitions must follow safety glass standards (laminated or tempered). Install an extruded aluminum frame supported from above-ceiling space (which would be easier to replace later without re-ceiling work).

It must also feature a sliding laminated glass door with handles on both sides.

- f. The Contractor shall install shower floors in accordance with industry standards and Department of State requirements as specified herein.

g. Technical Requirements

g.1 Shower Floor Slope

The Contractor shall construct shower floors with a minimum slope of $\frac{1}{4}$ inch per foot (2% slope) toward the drain. The slope shall not exceed $\frac{1}{2}$ inch per foot. Slopes flatter than $\frac{1}{4}$ inch per foot or steeper than $\frac{1}{2}$ inch per foot are not acceptable due to ponding and slip hazards, respectively.

g.2 Flooring Material and Slip Resistance

The Contractor shall install shower floor finishes that meet slip resistance criteria in accordance with ANSI A137.1. The flooring material shall have a minimum Dynamic Coefficient of Friction (DCOF) of 0.42 for interior wet areas.

h. Coordination and Approval

Prior to commencing work, the Contractor shall coordinate all technical specifications with the OBO Post Architect to confirm:

- Compliance with current OBO design standards
- Compliance with applicable building codes
- Adherence to project-specific criteria

No work shall begin until the OBO Post Architect provides written approval of the proposed materials and installation methods.

i. Standards and References

- ANSI A137.1 (American National Standards for Ceramic Tile)
- OBO Design Standards (current edition)
- Applicable local building codes

4. WORK SCHEDULE AND ACCESS

All work must be performed during hours authorized by the Marine Security Guards, which correspond to Embassy working hours:

- **Monday through Thursday:** 7:00 AM to 5:00 PM
- **Friday:** 7:30 AM to 11:30 AM

No work is authorized outside these hours or on weekends without prior written approval.

5. INSURANCE REQUIREMENTS

The contractor must provide all insurance required by local law and Defense Base Act (DBA) coverage to perform this work.

6. DELIVERABLES

- Eight (8) fully repaired shower stalls with proper floor slope
- Nine (9) laminated glass panels with their respective sliding doors.
- All work completed to U.S. government standards

- Final inspection and acceptance by the Contracting Officer's Representative (COR)
- Dust control, an exhaust system and vacuum should be always installed during the repair.
- Contractor must include a deep cleaning upon completion of each shower stall.

7. PICTURES

- The following pictures are for references for the areas where the contractor must cover and seal to minimize the dust.



- The following pictures are for references showing the existing type of shower glass panels and the drainage system



- NEW shower stall floor and drainage after completion of the test unit.



Longitudinal floor grate drainage specifications



The Contractor shall furnish and install a longitudinal floor grate drainage system in MSGQ bathroom stalls. The drainage system shall be designed to efficiently evacuate water in areas with high liquid flow.

Materials and Specifications:

- **Grate material:** Stainless steel grate and PVC base

- **Load rating:** Suitable for light pedestrian traffic
- **Finish:** Subject to availability in the local market; the Facilities Management Office will approve options submitted by the Contractor
- **Dimensions:** **Length:** 70 cm, 80 cm, or 90 cm, as required to match bathroom stall dimensions. **Width:** 5.5 cm. **Drainage pipe diameter:** 40 mm

Installation Requirements:

- Install drainage system per manufacturer's specifications
- Ensure proper slope for water evacuation (minimum 2% slope toward drain)
- Coordinate drain location with plumbing rough-in
- Secure grate to prevent displacement during use
- Test drainage system for proper water flow upon completion

Submittals:

The Contractor shall provide product data for review and approval by the Facilities Management Office prior to installation, including:

- Manufacturer's specifications and installation instructions
- Material certifications
- Load rating documentation
- Warranty information
- See the following link as a reference:

https://tigrecombr-prod.s3.us-east-1.amazonaws.com/fichas/default/files/produtos/ficha-tecnica/FT_Ralo+Linear+e+Ralo+Invisi%CC%81vel_Final_0.pdf

Comments:

- The Embassy will provide an exhaust system but the anyway the contractor must have vacuum cleaners, whether for one or two bathrooms to minimize the generation of airborne dust.
- Contractors must protect floors and walls.
- Contractors are allowed to use the bathrooms located at the downstairs, services area

Except as provided herein, all terms and conditions of this solicitation remains unchanged and in full force and effect.

NOTHING FOLLOWS