




VICINITY MAP

UNITED STATES DEPARTMENT OF AGRICULTURE

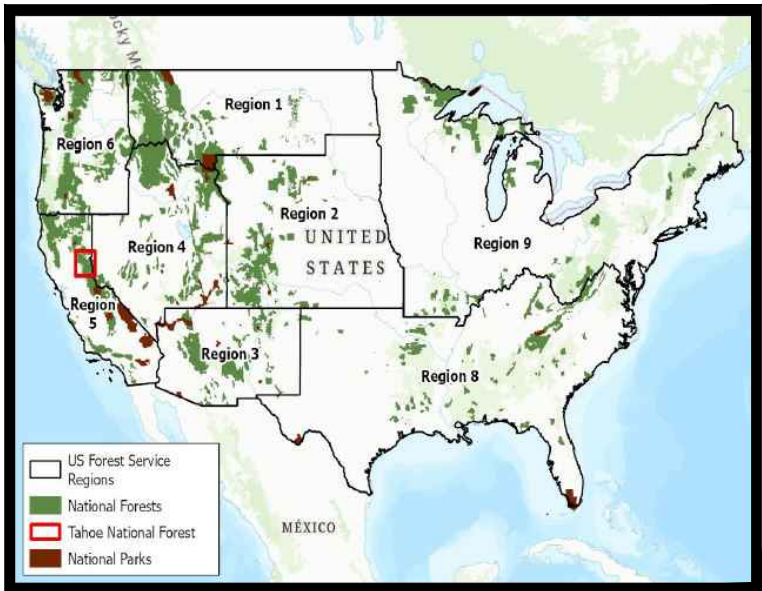

FOREST SERVICE



PLACER COUNTY, CALIFORNIA

R(05) PACIFIC SOUTHWEST REGION

TAHOE NATIONAL FOREST

• • •

MOSQUITO FIRE- TRAIL BRUSHING

INDEX

SHEET

SHEET NO.

TITLE SHEET	1
SITE VICINITY MAPS	2
SCHEDULE OF ITEMS	3
WORKLISTS	4
TRAIL CONSTRUCTION TERMS	5
CLEARING LIMITS TREES/LOGS	6
CLEARING LIMITS BRUSHING	7

REVIEWED BY:

PUBLIC SERVICES STAFF OFFICER

DATE

RECOMMENDED BY:


FOREST TRAILS COORDINATOR

DATE

APPROVED BY:

DISTRICT RANGER

DATE

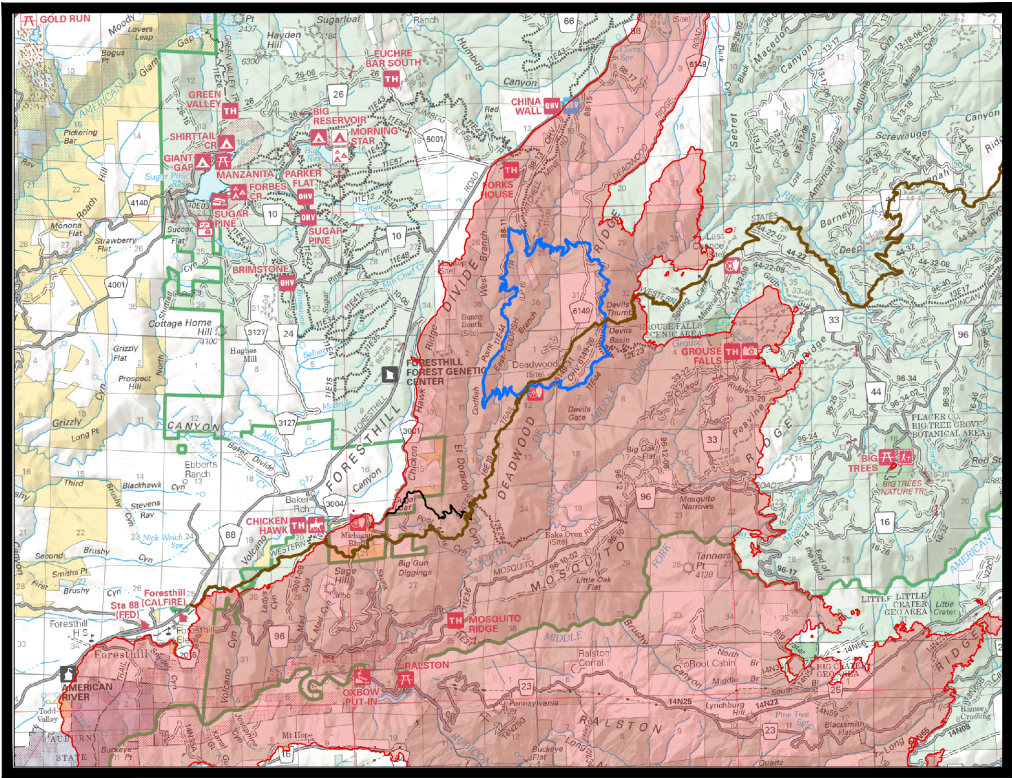

PROJECT SITES

REVISIONS:

No. 1	DATE	INITIALS
No. 2	DATE	INITIALS
No. 3	DATE	INITIALS

DESIGN:	DATE
DRAWN:	DATE
CHECKED:	DATE

U.S. DEPARTMENT OF AGRICULTURE
FOREST SERVICE
TRAIL BRUSHING CONTRACT



PROJECT NAME & LOCATION

MOSQUITO FIRE- TRAIL BRUSHING
TAHOE NATIONAL FOREST
AMERICAN RIVER RANGER DISTRICT

DRAWING NAME

TITLE SHEET

SECTION

900 - GENERAL

TYPICAL ID

TTL

REVISION DATE

05/28/25

NO SCALE

DRAWING NO.

STD_900-01

SHEET

1

OF 7

○ Mile Markers

Western States Trail: Mile 2.75 - 5.22

Western States Trail: Mile 5.22 - 8.6

Western States Trail: Mile 8.6 - 10.4

Western States Trail: Mile 10.4 - 12.07

16E10 / Western States Trail


11E44 / Loop 6 Trail

Eldorado Jeep Trail (Access Route)

Paved Road

Dirt Road

MAP LEGEND

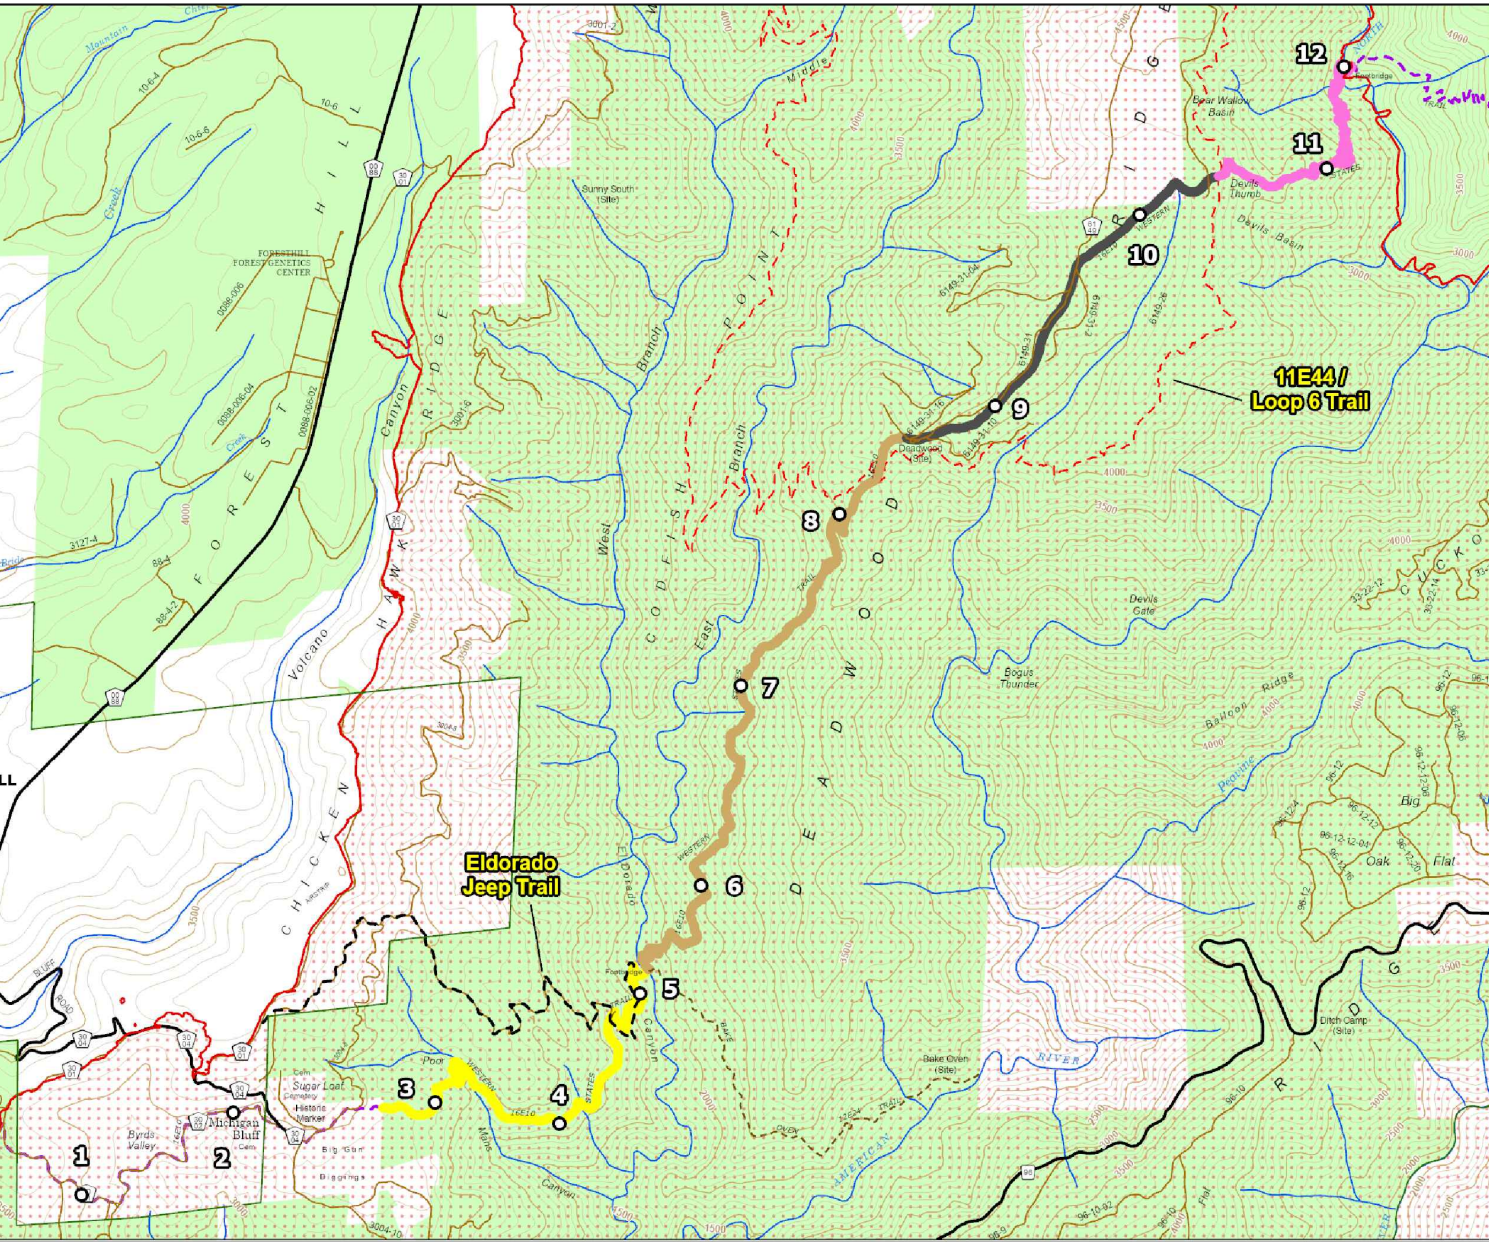

WESTERN STATES TRAIL VICINITY MAP
NTS

○ Mile Markers

Loop 6: Mile 0.0 - 0.4

Loop 6: Mile 0.9 - 6.97

Loop 6: Mile 6.97 - 10

Loop 6: Mile 10 - 12.05

Loop 6: Mile 12.05 - 14.84

Loop 6: Mile 14.84 - 15.41

16E10 / Western States Trail

Paved Road

Dirt Road


11E38 / Tie 5-6 Trail

88-11 / Mitchell Mine Road

PLA-6149 / Deadwood Ridge Road

6149-26 / Deadwood Cutoff Road

MAP LEGEND

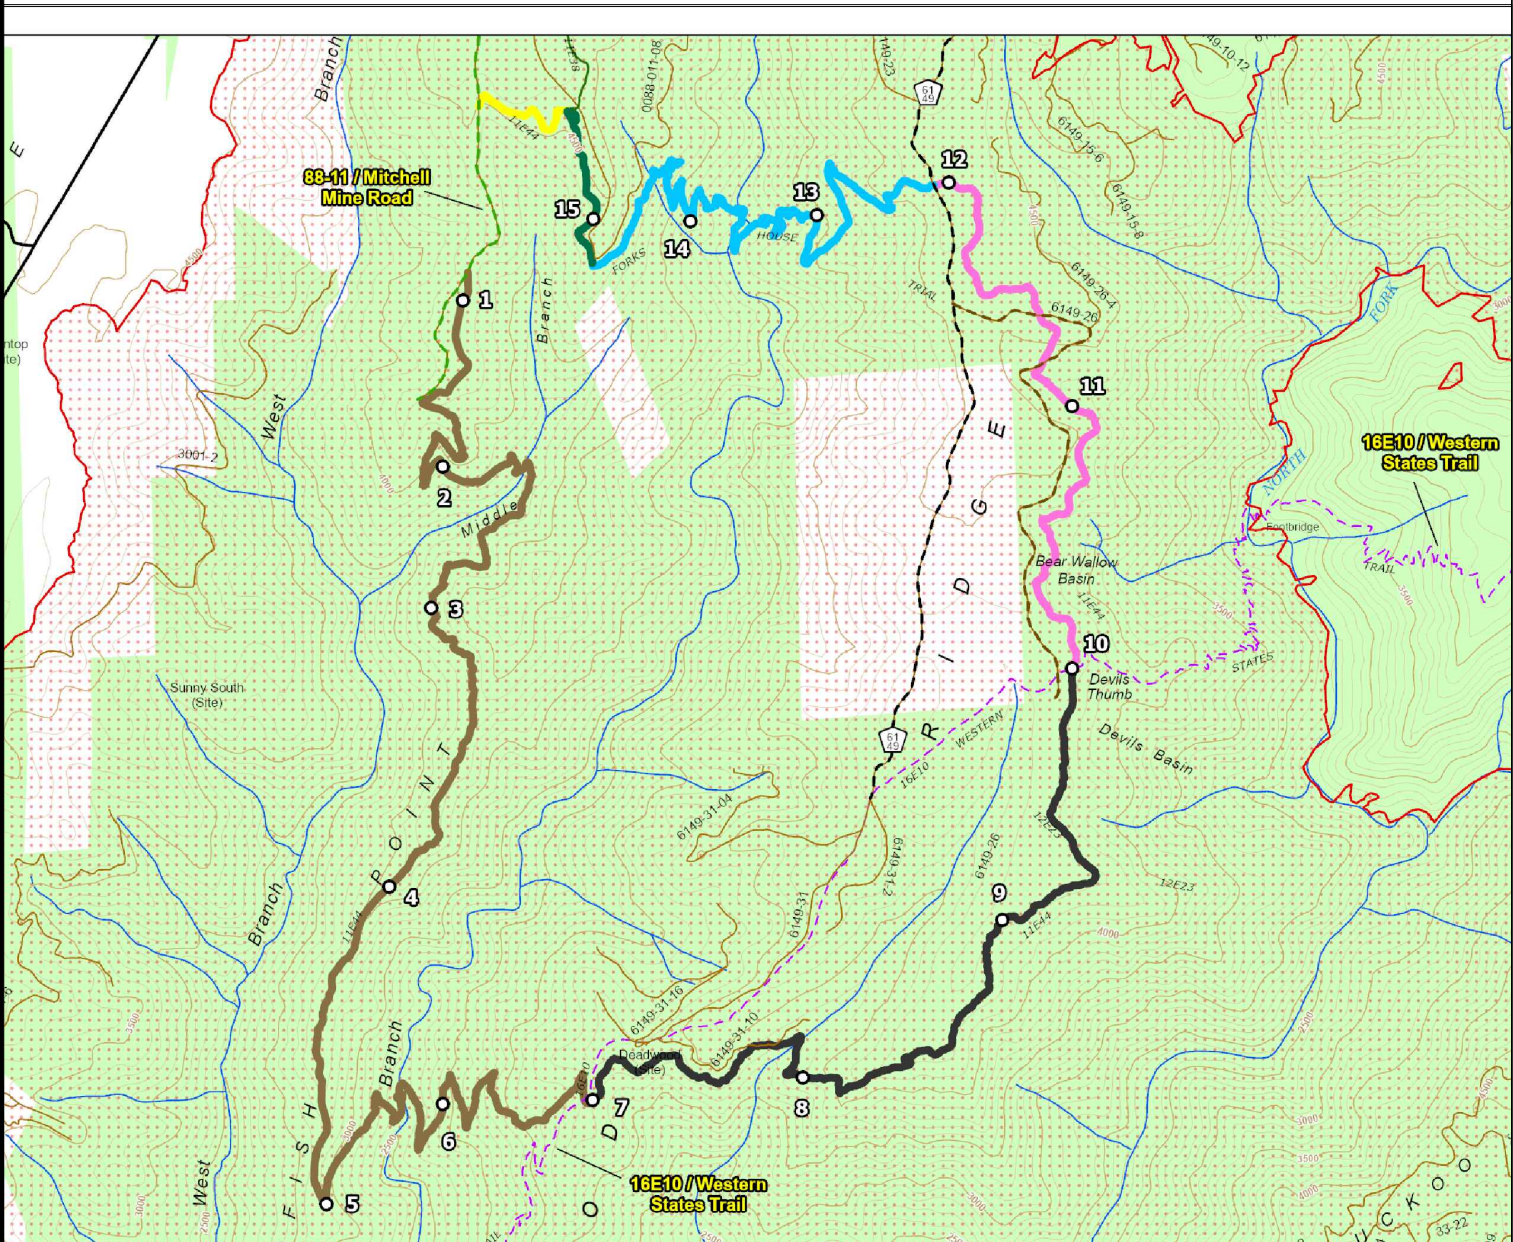

LOOP 6 TRAIL VICINITY MAP
NTS

U.S. DEPARTMENT OF AGRICULTURE
FOREST SERVICE
TRAIL BRUSHING CONTRACT

PROJECT NAME & LOCATION
MOSQUITO FIRE- TRAIL BRUSHING
TAHOE NATIONAL FOREST
AMERICAN RIVER RANGER DISTRICT

DRAWING NAME
SITE VICINITY MAPS

SECTION
900 - GENERAL

TYPICAL ID
VCM

REVISION DATE
9/16/25

NO SCALE

DRAWING NO.
STD_900-02

SHEET
2 OF 7

TYPICAL ID DEFINITIONS

	DRAWING NUMBER	TYP ID	DRAWING NAME		DRAWING NUMBER	TYP ID	DRAWING NAME
1	STD_900-01	TTL	TITLE_SHEET	59	STD_932-10-01	TPK	TURNPIKE
2	STD_900-02	VCM	VICINITY_MAP	60	STD_932-20-01	TPF	TURNPIKE_W/FOUNDATION
3	STD_900-03	GNT	GENERAL_NOTES	61	STD_933-10-01	SRB	STACKED_ROCK_BARRIER
4	STD_900-04	WKL	WORK_LIST	62	STD_933-20-01	MRB	MASONRY_ROCK_BARRIER
5	STD_900-05	LD1	LINE_DIAGRAM	63	STD_933-20-02	CMB	CONCRETE_MASONRY_UNIT_BARRIER
6	STD_900-06	LD2	LINE_DIAGRAM	64	STD_933-30-01	BRG	BARRIER_RAIL_ON_GRADE
7	STD_900-07	PP1	PLAN_PROFILE_10	65	STD_933-40-01	BRP	BARRIER_RAIL_ON_POST
8	STD_900-08	PP2	PLAN_PROFILE_20	66	STD_933-40-02	TBP	TIMBER BARRIER ON POST
9	STD_906-01	SOQ	SUMMARY_OF_QUANTITIES	67	STD_933-50-01	CRB	CURBS
10	STD_910-01	STT	STANDARD_TRAIL_TERMS	68	STD_933-60-01	WGR	GUARDRAIL
11	STD_911-01	TSF/TCS	TYPICAL_CROSS_SECTION_SLOPE_FINISH	69	STD_934-10-01	SP1	STANDARD_PUNCHEON
12	STD_911-02	TDD/TOC	TYPICAL_OBSTRUCTION_CLEARANCE_SECTION	70	STD_934-10-02	SP2	STANDARD_PUNCHEON
13	STD_911-03	TRT	TYPICAL_RETAINERS	71	STD_934-20-01	NDP	NO_DECK_PUNCHEON
14	STD_911-30-01	ETR	EXISTING_TRAIL_RESTORATION	72	STD_935-10-01	LCB	LOG_CRIB
15	STD_911-60-01	OBT	OBLITERATION_OF_TRAILS	73	STD_935-20-01	RRW	STACKED_ROCK_RETAINING_WALL
16	STD_912-01	CLT	CLEARING_LIMITS_TREES_LOGS	74	STD_935-30-01	BRW	GABION_BASKET_RETAINING_WALL
17	STD_912-02	CLB	CLEARING_LIMITS_BRUSHING	75	STD_935-40-01	MRW	MASONRY_ROCK_RETAINING_WALL
18	STD_913-01	TSS	TYPICAL_SURFACING_SECTION	76	STD_935-40-02	CUM	CONCRETE_MASONRY_UNIT_RETAINING_WALL
19	STD_913-02	TSR	TYPICAL_SURFACING_SECTION_W/RETAINERS	77	STD_935-50-01	CCW	CAST_INPLACE_CONCRETE_WALL
20	STD_913-03	THS	TYPICAL_HARDENED_SURFACING	78	STD_936-10-01	ITS	INDIVIDUAL_TIMBER_PINNED_STEP
21	STD_913-04	HSR	TYPICAL_HARDENED_SURFACING_W/RETAINERS	79	STD_936-10-02	IRS	INDIVIDUAL_ROCK_STEP
22	STD_913-40-01	GUS	GRID_UNIT_SURFACING	80	STD_936-20-01	ORS	OVERLAPPING_ROCK_STEP
23	STD_913-50-01	RRS	RIPRAP_SURFACING	81	STD_936-20-02	OTS	OVERLAPPING_TIMBER_STEP
24	STD_914-01	CTN	CLIMBING_TURN	82	STD_936-30-01	CRL	CRIB_LADDER
25	STD_915-01	TAS	TALUS_SECTION	83	STD_936-40-01	STC	STAIRCASE
26	STD_916-01	TPS/TOS	TURNOUT_&_PASSING_SECTION	84	STD_937-10-01	RLS	HANDRAIL_SYSTEM
27	STD_917-10-01	NFD	NATURAL_FORD	85	STD_938-10-01	SB1	STANDARD_BOARDWALK
28	STD_917-20-01	RF1	CONSTRUCTED_ROCK_FORD	86	STD_938-10-02	SB2	STANDARD_BOARDWALK
29	STD_917-20-02	RF2	CONSTRUCTED_ROCK_FORD	87	STD_938-10-03	SB3	STANDARD_BOARDWALK
30	STD_917-30-01	LF1	CONSTRUCTED_LOG_FORD	88	STD_938-20-01	EB1	ELEVATED_BOARDWALK
31	STD_917-30-02	LF2	CONSTRUCTED_LOG_FORD	89	STD_938-20-02	EB2	ELEVATED_BOARDWALK
32	STD_918-10-01	RKF	ROCK FOUNDATIONS	90	STD_938-20-03	EB3	ELEVATED_BOARDWALK
33	STD_918-20-01	GBF	GABION BASKET FOUNDATIONS	91	STD_938-20-04	EB4	ELEVATED_BOARDWALK
34	STD_918-30-01	CBF	CRIB FOUNDATIONS	92	STD_938-30-01	SNR	STEP_N_RUN
35	STD_918-40-01	GEF	GEOSYNTHETIC FOUNDATIONS	93	STD_941-10-01	PWF	POST_N_WIRE_FENCE
36	STD_918-50-01	CDF	CORDUROY FOUNDATIONS	94	STD_941-20-01	PRF	POST_N_RAIL_FENCE
37	STD_921-10-01	SCV	STANDARD_CULVERTS	95	STD_941-30-01	WWF	WOVEN_WIRE_FENCE
38	STD_921-20-01	CVH	STANDARD_CULVERTS_W/HEADWALLS	96	STD_941-40-01	JLF	JACK_LEG_FENCE
39	STD_921-30-01	RCV	ROCK_CULVERT	97	STD_941-50-01	SRF	STACKED_RAIL_(WORM)_FENCE
40	STD_921-40-01	TCV	TREATED_TIMBER_BOX_CULVERT	98	STD_942-10-01	WRG	WIRE_GATE
41	STD_921-50-01	OTD	OPEN_TOP_DRAIN	99	STD_942-10-02	WWG	WOVEN_WIRE_GATE
42	STD_921-60-01	ACV	BOTTOMLESS_ARCH_ROCK_HEADWALL	100	STD_942-20-01	MSG	METAL_SWING_GATE
43	STD_921-70-01	LCV	LOG_CULVERTS	101	STD_942-20-02	WSG	WOOD_SWING_GATE
44	STD_922-10-01	RWB	ROCK_WATERBAR	102	STD_942-20-03	WKG	WOOD_SWING_GATE (FOR KISSING GATES)
45	STD_922-20-01	TWB	LOG_OR_TREATED_TIMBER_WATERBAR	103	STD_942-30-01	LRG	LOOSE_RAIL_GATE
46	STD_922-30-01	BWB	BELTED_WATERBAR	104	STD_942-40-01	KG1	ACCESSIBLE_KISSING_GATE_IN_FENCE
47	STD_923-10-01	RSP	ROCK_SPILLWAY	105	STD_942-40-02	KG2	ACCESSIBLE_KISSING_GATE_ON_FENCE
48	STD_924-10-01	RUD	ROCK_UNDERDRAIN	106	STD_942-50-01	CHI	ACCESSIBLE_CHICANES
49	STD_924-20-01	SUD	SHEET_UNDERDRAIN	107	STD_944-10-01	STL	STILES
50	STD_924-20-02	SDP	SHEET_UNDERDRAIN_W/PIPE	108	STD_945-10-01	BLD	BOLLARDS
51	STD_925-01	TDS	TYPICAL_DITCH_SECTIONS	109	STD_950-01	SNM	SIGNS_&_MARKERS
52	STD_926-01	BRM	BERMS	110	STD_951-01	LIN	LOCATION_&_INFORMATION
53	STD_927-10-01	DD1	DRAIN_DIP	111	STD_951-02	SPI	SIGN_&_POST_INSTALLATION
54	STD_927-10-02	DD2	DRAIN_DIP_DETAILS	112	STD_952-01	RTM	ROUTE_MARKERS
55	STD_928-10-01	CKD	CHECK_DAM	113	STD_953-01	RSM	REASSURANCE_MARKER
56	STD_931-10-01	SW1	SWITCHBACK_TYPE_1	114	STD_955-01	RCC	ROCK_CAIRN_CONSTRUCTION
57	STD_931-20-01	SW2	SWITCHBACK_TYPE_2	115	STD_981-01	SMF	SEEDING_MULCHING_&_FERTILIZING
58	STD_931-30-01	SW3	SWITCHBACK_TYPE_3				

GENERAL NOTES

Work Item	Unit	Quantity	Base	Optional	General Notes
Mobilization	LS	1	X		N/A
Loop 6 Trail Brushing and Clearing .40 miles-Start of Loop 6 to FR88-11 (mile 00—0.4)	LF	2112		X	Corridor cutback of vegetative regrowth post fire, 3 feet both side of trail. 8 feet in height. 0-4 inch diameter, clear trail 18-24 inches where obstructed.
Loop 6 Trail Brushing and Clearing 6.07 miles- FR88-11 to Junction with Western States Trail (mile 9—6.97)	LF	32,049	X		Corridor cutback of vegetative regrowth post fire, 3 feet both side of trail. 8 feet in height. 0-4 inch diameter, clear trail 18-24 inches where obstructed.
Loop 6 Trail Brushing and Clearing 3.03 miles- Junction with Western States Trail to Devils Thumb (mile 6.97—10)	LF	15998.4		X	Corridor cutback of vegetative regrowth post fire, 3 feet both side of trail. 8 feet in height. 0-4 inch diameter, clear trail 18-24 inches where obstructed.
Loop 6 Trail Brushing and Clearing 2.05 miles- Devils Thumb to Deadwood Road (mile 10—12.05)	LF	10284		X	Corridor cutback of vegetative regrowth post fire, 3 feet both side of trail. 8 feet in height. 0-4 inch diameter, clear trail 18-24 inches where obstructed.
Loop 6 Trail Brushing and Clearing 2.79 miles- Deadwood Road to FR88-11-08 (mile 12.05—14.84)	LF	14731.2		X	Corridor cutback of vegetative regrowth post fire, 3 feet both side of trail. 8 feet in height. 0-4 inch diameter, clear trail 18-24 inches where obstructed.
Loop 6 Trail Brushing and Clearing .57 miles- FR88-11-08 to end of Loop 6 (mile 14.85—15.41)	LF	3009.6		X	Corridor cutback of vegetative regrowth post fire, 3 feet both side of trail. 8 feet in height. 0-4 inch diameter, clear trail 18-24 inches where obstructed.
WST Trail Brushing and Clearing 2.47 miles-Michigan Bluff to El Dorado Bridge (mile 2.75—5.22)	LF	13041.6		X	Corridor cutback of vegetative regrowth post fire, 3 feet both side of trail. 8 feet in height. 0-4 inch diameter, clear trail 18-24 inches where obstructed.
WST Trail Brushing and Clearing 3.38 miles-El Dorado Bridge to Deadwood Cemetery (mile 5.22—8.6)	LF	17846.4		X	Corridor cutback of vegetative regrowth post fire, 3 feet both side of trail. 8 feet in height. 0-4 inch diameter, clear trail 18-24 inches where obstructed.
WST Trail Brushing and Clearing 1.8 miles-Deadwood Cemetery to Devils Thumb (mile 8.6—10.4)	LF	9504		X	Corridor cutback of vegetative regrowth post fire, 3 feet both side of trail. 8 feet in height. 0-4 inch diameter, clear trail 18-24 inches where obstructed.
WST Trail Brushing and Clearing 1.67 miles- Devils Thumb to Swinging Bridge (mile 10.4—12.07)	LF	8817.6		X	Corridor cutback of vegetative regrowth post fire, 3 feet both side of trail. 8 feet in height. 0-4 inch diameter, clear trail 18-24 inches where obstructed.

WORK LIST

Work Item	Unit	Quantity	Base	Optional
Mobilization	LS	1	X	
Loop 6 Trail Brushing and Clearing .40 miles-Start of Loop 6 to FR 88-11 (mile 00—0.4)	LF	2112		X
Loop 6 Trail Brushing and Clearing 6.07 miles- FR 88-11 to Junction with Western States Trail (mile .9—6.97)	LF	32,049	X	
Loop 6 Trail Brushing and Clearing 3.03 miles- Junction with Western States Trail to Devils Thumb (mile 6.97—10)	LF	15998.4		X
Loop 6 Trail Brushing and Clearing 2.05 miles- Devils Thumb to Deadwood Road (mile 10—12.05)	LF	10284		X
Loop 6 Trail Brushing and Clearing 2.79 miles- Deadwood Road to FR 88-11-08 (mile 12.05—14.84)	LF	14731.2		X
Loop 6 Trail Brushing and Clearing .57 miles- FR 88-11-08 to end of Loop 6 (mile 14.85—15.41)	LF	3009.6		X
WST Trail Brushing and Clearing 2.47 miles-Michigan Bluff to El Dorado Bridge (mile 2.75—5.22)	LF	13041.6		X
WST Trail Brushing and Clearing 3.38 miles-El Dorado Bridge to Deadwood Cemetery (mile 5.22—8.6)	LF	17846.4		X
WST Trail Brushing and Clearing 1.8 miles-Deadwood Cemetery to Devils Thumb (mile 8.6—10.4)	LF	9504		X
WST Trail Brushing and Clearing 1.67 miles- Devils Thumb to Swinging Bridge (mile 10.4—12.07)	LF	8817.6		X



U.S. DEPARTMENT OF AGRICULTURE

FOREST SERVICE

TRAIL BRUSHING CONTRACT

PROJECT NAME & LOCATION

MOSQUITO FIRE- TRAIL BRUSHING
TAHOE NATIONAL FOREST
AMERICAN RIVER RANGER DISTRICT

DRAWING NAME

WORK LIST

SECTION

900 - GENERAL

TYPICAL ID
GNT

REVISION DATE

05/28/25

NO SCALE

DRAWING NO.


STD_900-04

SHEET

4

OF

7

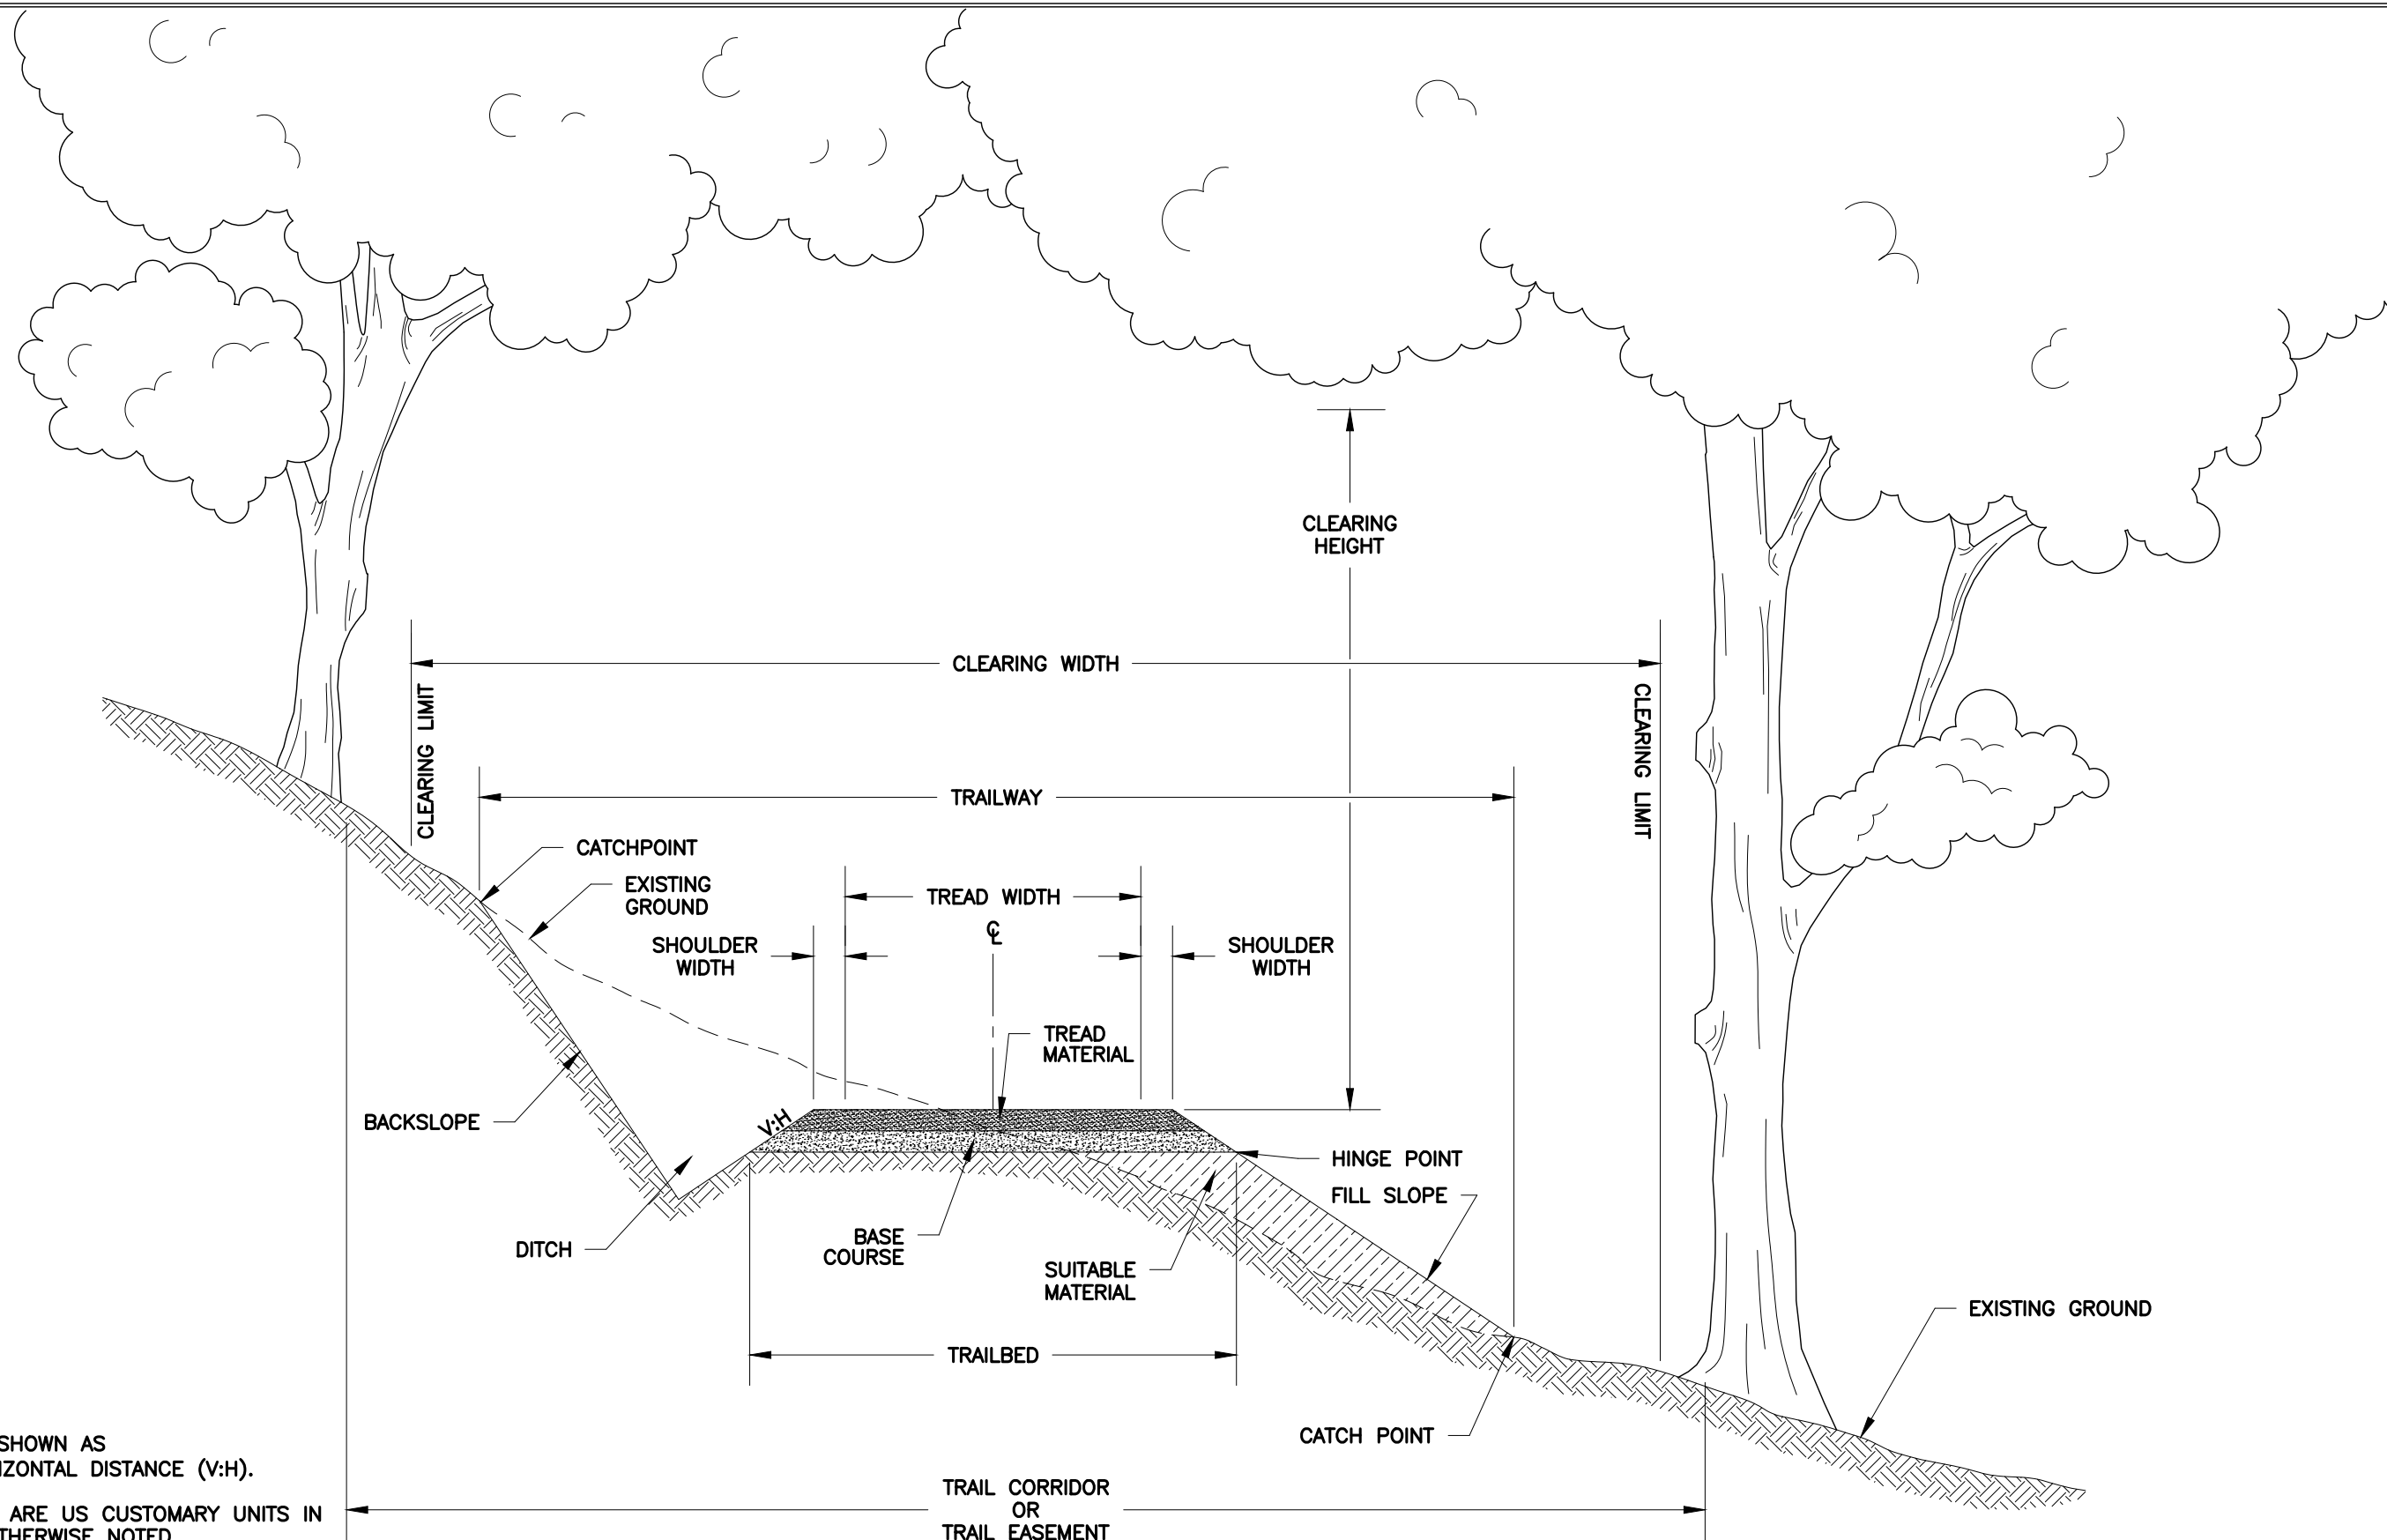

NOTES:

ALL SLOPES ARE SHOWN AS
VERTICAL-TO-HORIZONTAL DISTANCE (V:H).

ALL UNITS SHOWN ARE US CUSTOMARY UNITS IN
INCHES UNLESS OTHERWISE NOTED.



U.S. DEPARTMENT OF AGRICULTURE
FOREST SERVICE
TRAIL BRUSHING CONTRACT

PROJECT NAME & LOCATION

MOSQUITO FIRE- TRAIL BRUSHING
TAHOE NATIONAL FOREST
AMERICAN RIVER RANGER DISTRICT

DRAWING NAME

STANDARD TRAIL TERMS

SECTION

910 - TRAILWAY

TYPICAL ID

STT

REVISION DATE

05/28/25

NO SCALE

DRAWING NO.


STD_910-01

SHEET

5 OF **7**

CLEARING LIMITS - TREES AND LOGS

TYPICAL ID	CLEARING METHOD	CLEARING LIMITS			* LEAVE TREES		CLEAR ZONE			STUMPS	HAZARD TREE	DISPOSAL METHOD	COMMENTS
		DOWNHILL WIDTH A	UPHILL WIDTH B	CLEARING HEIGHT C	DISTANCE (FEET) D	DIAMETER (INCHES)	DOWNHILL WIDTH E	UPHILL WIDTH F	MAXIMUM OBSTRUCTION HEIGHT G	MAXIMUM HEIGHT H	REMOVAL WIDTH I		
	C 7	3'	3'	8'	3'	4	1'	1'	1'	3"	N/A	D 1	

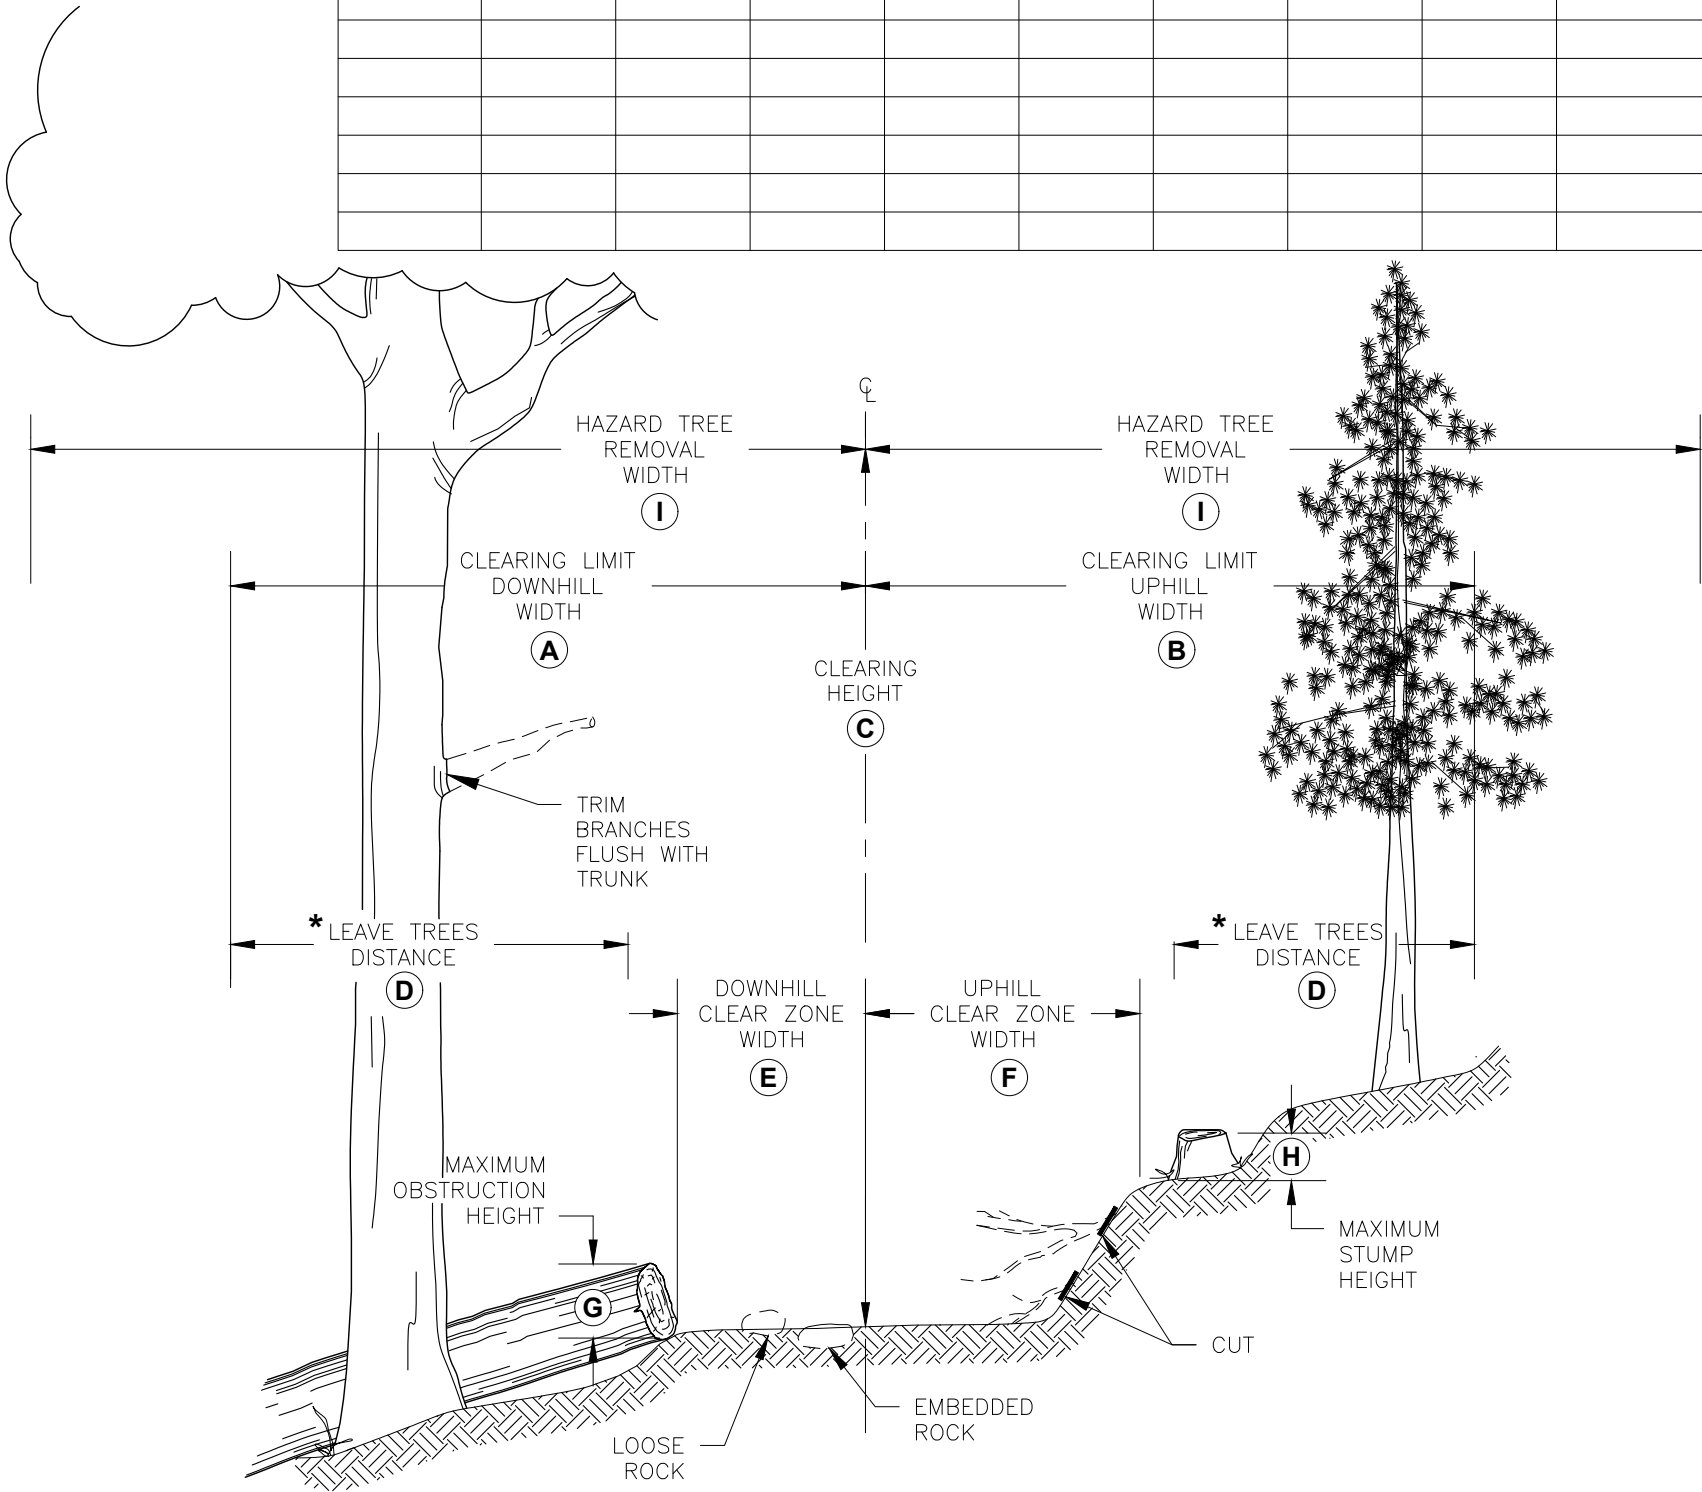

CLEARING METHOD

CLEARING TYPE	CLEARING METHOD	COMMENTS
C1	NEW CONSTRUCTION	TREES, PRUNING, & BRUSH
C2	CLEARING LIMIT RESTORATION	TREES, PRUNING, LOGS, BRUSH & MAINTENANCE
C3	TRAIL OPENING	LOGGING OUT, LOOSE ROCK & DRAINAGE CLEARING
C4	HAZARD TREE REMOVAL	ALONG TRAIL CORRIDOR
C5	HAZARD TREE REMOVAL	INDIVIDUAL (AS MARKED)
C6	LOOSE ROCK & ROOT REMOVAL	
C7	BRUSHING	BRUSHING ALONG TRAIL CORRIDOR

LEAVE TREES: LEAVE TREES SHOULD BE LIVE, SOUND & UNDAMAGED WITH UNCOMPROMISED ROOT SYSTEMS.


HAZARD TREES: HAZARD TREES ARE TREES THAT ARE STANDING OR LEANING DEAD TREES LARGER THAN 8 INCHES IN DIAMETER AND GREATER THAN 90 FEET IN HEIGHT.

DISPOSAL METHOD

DISPOSAL TYPE	DISPOSAL METHOD	COMMENTS
D1	LOP AND SCATTER OUTSIDE TRAILWAY	LOP AND SCATTER OUTSIDE TRAILWAY
D2	LOP AND SCATTER ON FILL SLOPE	
D3	PILE AND BURN	
D4	CHIP	
D5	HAUL TO DISPOSAL SITE	
D6		

CLEARING LIMITS - BRUSHING

TYPICAL ID	CLEARING METHOD	BRUSHING LIMITS			MOWING LIMITS		DISPOSAL METHOD	COMMENTS
		UPHILL WIDTH J	DOWNHILL WIDTH K	CLEARING HEIGHT L	UPHILL WIDTH M	DOWNHILL WIDTH N		
	C 9	3'	3'	8'	1'	1'	D 1	

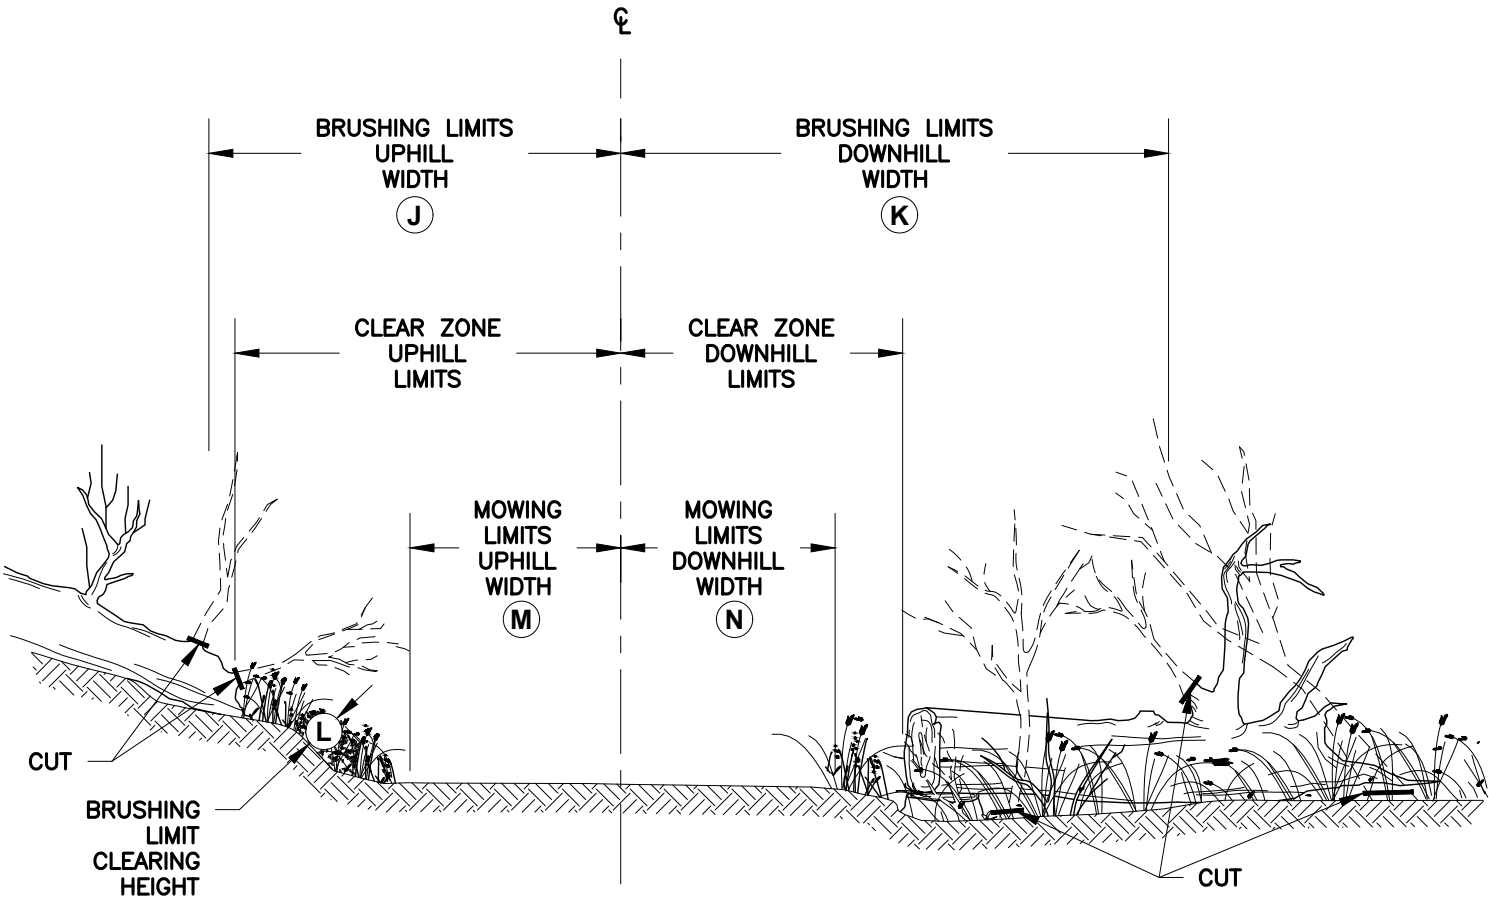

NOTE:
SEE SHEET STD_912-01 FOR
CLEAR ZONE LIMITS

CLEARING METHOD

CLEARING TYPE	CLEARING METHOD	COMMENTS
C9	BRUSHING	
C10	MOWING	
C11		

DISPOSAL METHOD

DISPOSAL TYPE	DISPOSAL METHOD	COMMENTS
D1	LOP AND SCATTER OUTSIDE TRAILWAY	
D2	LOP AND SCATTER ON FILL SLOPE	
D3	PILE AND BURN	
D4	CHIP	
D5	HAUL TO DISPOSAL SITE	
D6		