



OLMSTED, IL
LD 53 ACCESS ROAD
112574, FY2025

A triangle with the number 1 inside.

SIGNATURES AFFIXED BELOW INDICATE
OFFICIAL RECOMMENDATION AND
APPROVAL OF ALL DRAWINGS IN THIS SET.

APPROVAL RECOMMENDED: *

NATHAN FISCHER, PE
TECHNICAL LEAD

*APPROVAL RECOMMENDED SIGNATURE
INDICATES DESIGN AND QUALITY CONTROL
REVIEWS ARE COMPLETE, INCLUDING ITR/ATR
CERTIFICATION.

APPROVED: **

IAN F. MITCHELL, PE
CHIEF, ENGINEERING DIVISION

** THIS PROJECT WAS DESIGNED BY THE U.S.
ARMY CORPS OF ENGINEERS, LOUISVILLE
DISTRICT.
INDIVIDUALS WHOSE SIGNATURES AND
REGISTRATION DESIGNATIONS APPEAR ON
THESE DOCUMENTS ARE OPERATING WITHIN
THE SCOPE OF THEIR EMPLOYMENT.
SIGNATURES ARE REQUIRED BY
ER 1110-1-8152.

SHEET ID


GI001



U.S. ARMY CORPS OF ENGINEERS LOUISVILLE DISTRICT 600 DR. MARTIN LUTHER KING JR. PLACE LOUISVILLE, KY.	DESIGNED BY: D. LOGAN	ISSUE DATE: MARCH 2028
	CHECKED BY: D. LOGAN	SOLICITATION NO.:
	CHECKED BY: R. HARRIS	CONTRACT NO.:
	SUBMITTED BY: D. FISCHER	
	DATE: 12/1/2028	
	SIZE: ANSI (FULL BLEED D (22.00 X 34.00 INCHES))	

D 53 ACCESS ROAD
OLMSTED, IL
112574, FY2025

COVER SHEET

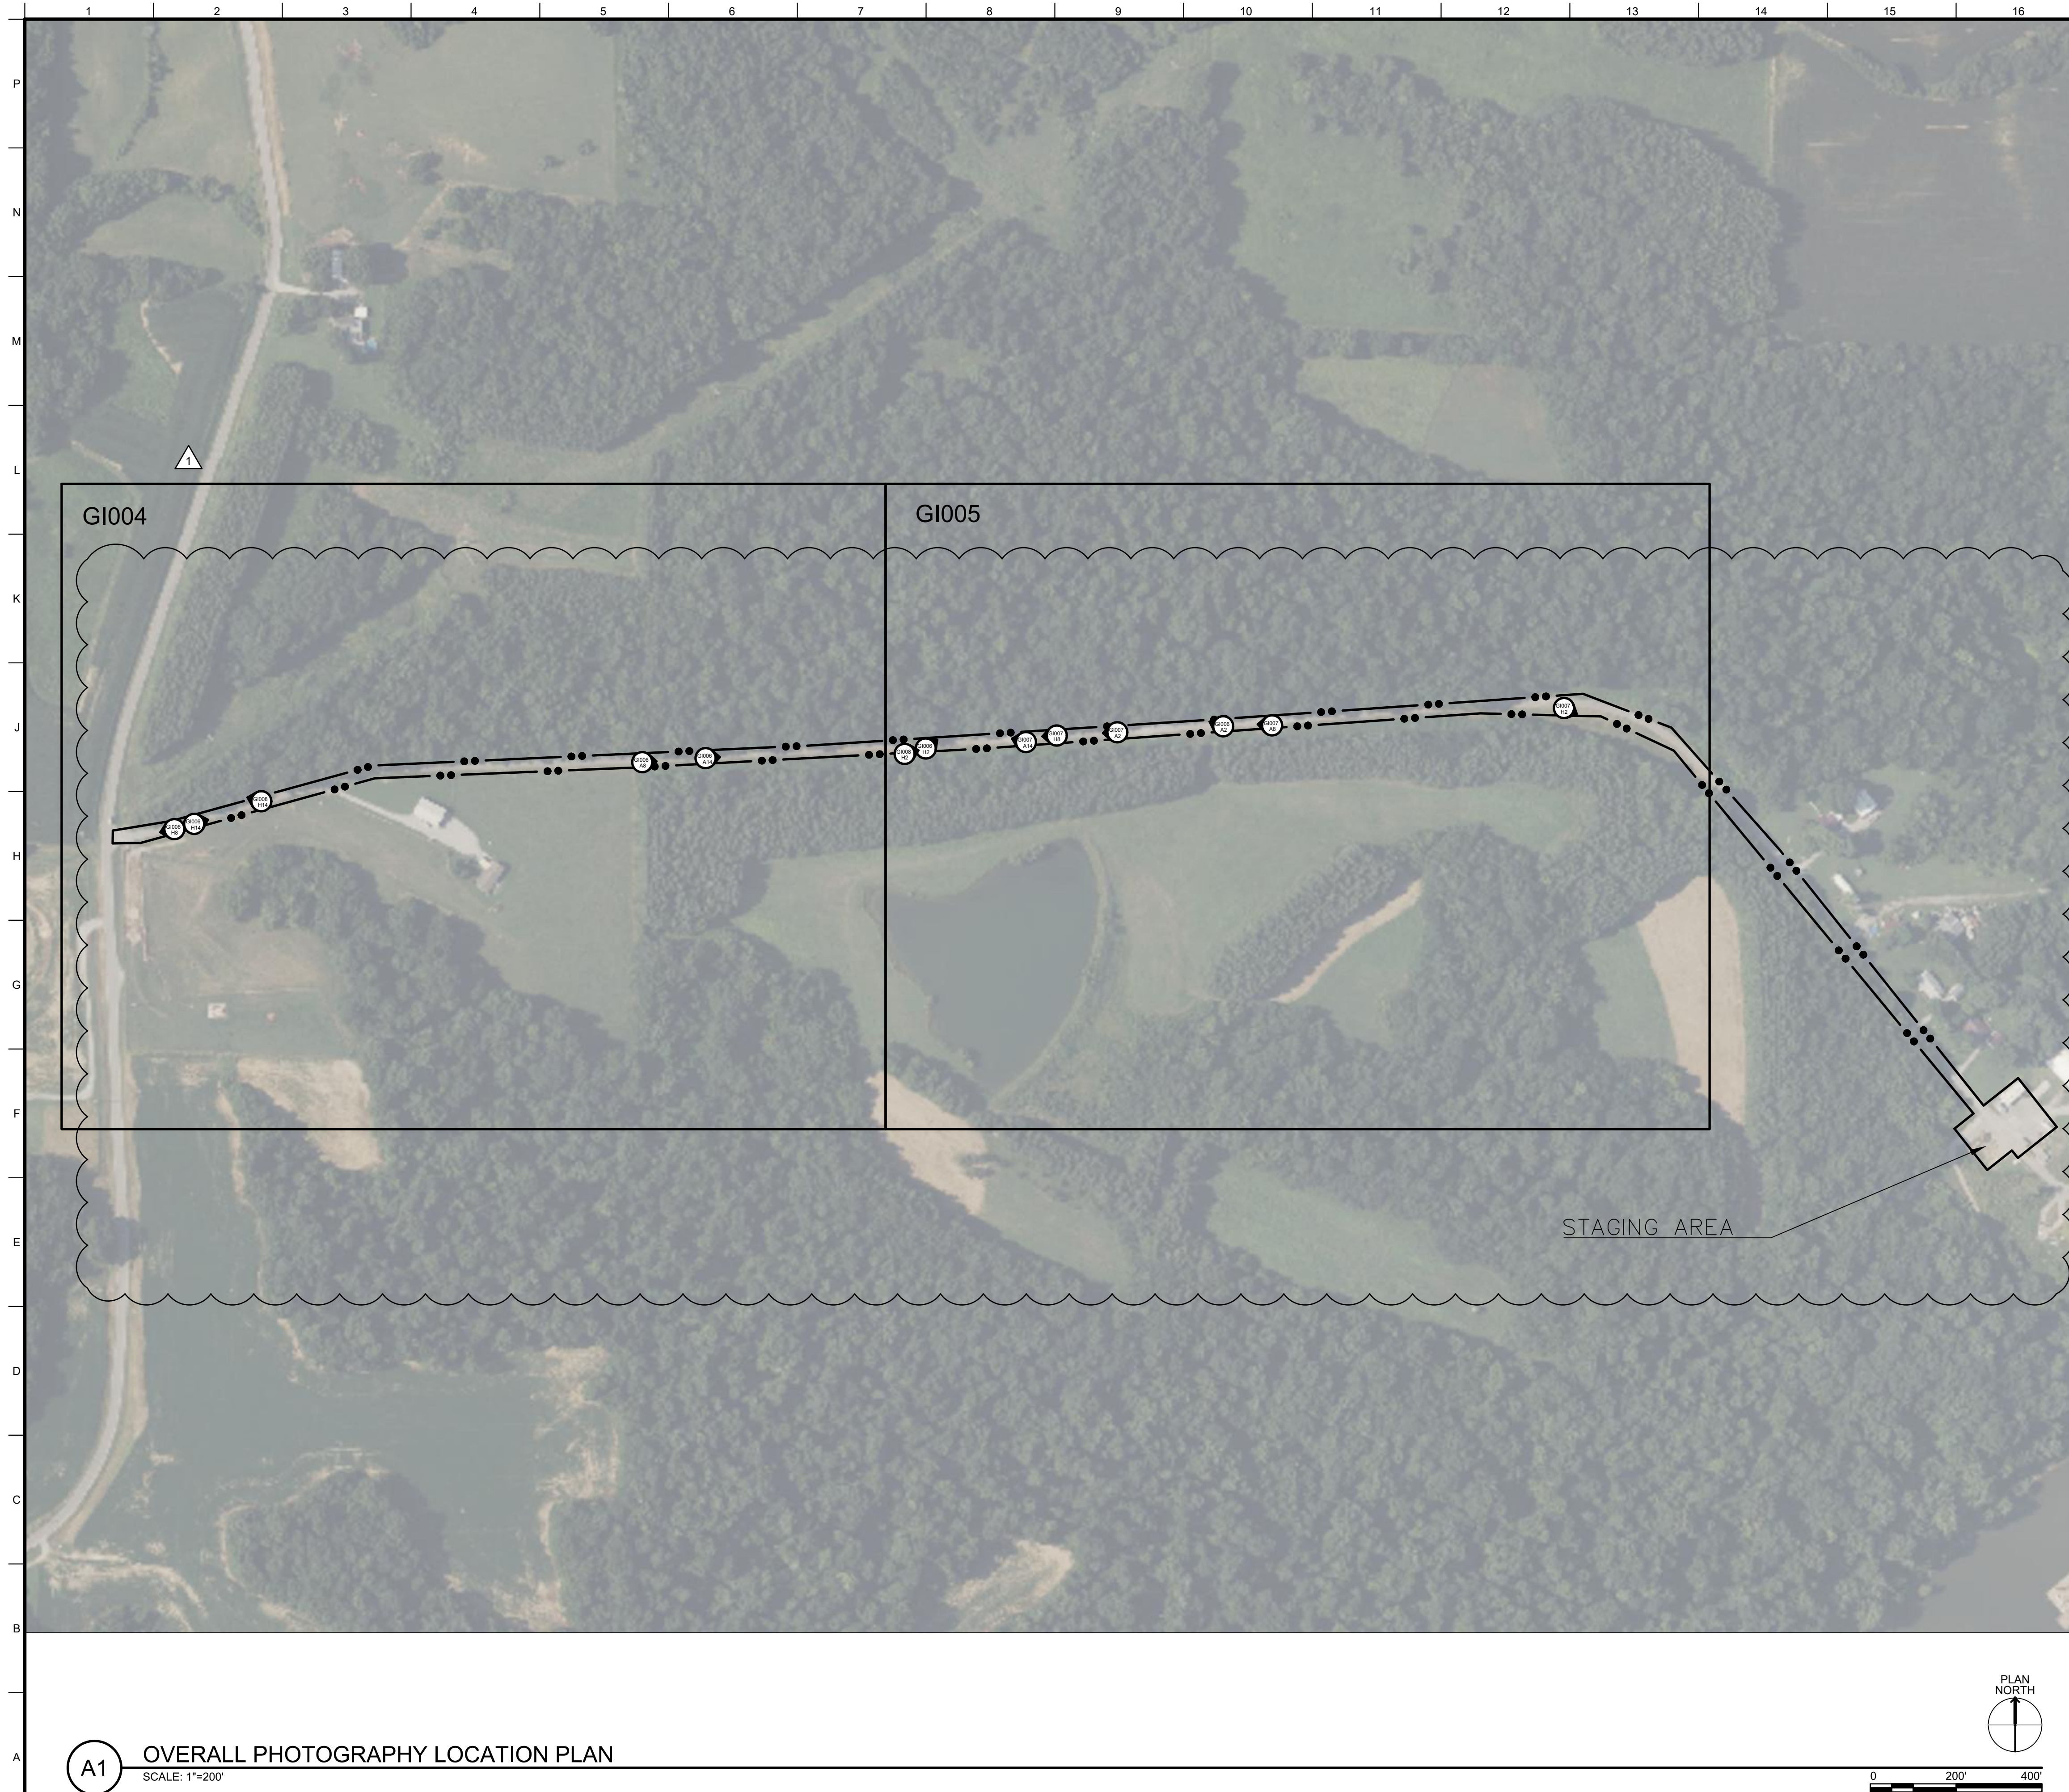

GENERAL SHEET NOTES	
---------------------	--

1. PHOTOS TAKEN ON 10-1-2024.
2. SEE SHEETS GI006 - GI008 FOR SITE PHOTOS.
3. AERIAL PHOTOGRAPH IMPORTED FROM BING MAPS 2024 .



**S Army Corps
f Engineers®**


[illegible]

U.S. ARMY CORPS OF ENGINEERS LOUISIANA DISTRICT 600 DR. MARTIN LUTHER KING, JR. PLACE LOUISVILLE, KY. 40202	DRAWN BY: D. LOGAN		MARCH 2026	
	CHECKED BY: D. LOGAN		SOLICITATION NO.:	
	DESIGNED BY: N. FISCHER		CONTRACT NO.:	
	SIZE:			
	ANSI D			

LEGEND



PHOTO LOCATION
ARROW DENOTES LOCATION



CONTRACTOR WORK LIMITS

LD 33 ACCESS ROAD
OLMSTED, IL
112574, FY2025


SHEET ID

GI003



A1 PHOTOGRAPHY LOCATION PLAN

SCALE: 1"=80'



GENERAL SHEET NOTES

- PHOTOS TAKEN ON 10-1-2024.
- SEE SHEETS GI006 - GI008 FOR SITE PHOTOS.
- AERIAL PHOTOGRAPH IMPORTED FROM BING MAPS 2024 .


LEGEND



PHOTO LOCATION
ARROW DENOTES LOCATION



CONTRACTOR WORK LIMITS



**US Army Corps
of Engineers**

MARK	DESCRIPTION	DATE
1	REVISED IN ACCORDANCE WITH AMENDMENT 0003	APR 2026

DESIGNED BY: D. LOGAN	ISSUE DATE: MARCH 2026
DRAWN BY: D. LOGAN	SOLICITATION NO.:
CHECKED BY: R. HARRIS	CONTRACT NO.:
SUBMITTED BY: N. FISCHER	
SIZE: ANSI D	

U.S. ARMY CORPS OF ENGINEERS
LOUISVILLE DISTRICT
600 DR. MARTIN LUTHER KING JR. PLACE
LOUISVILLE KY, 40202

LD 53 ACCESS ROAD
OLMSTED, IL
112574, FY2025

PHOTOGRAPHY LOCATION PLAN

SHEET ID

GI004



A1 PHOTOGRAPHY LOCATION PLAN

SCALE: 1"=80'



0 80' 160'

GENERAL SHEET NOTES

1. PHOTOS TAKEN ON 10-1-2024.
2. SEE SHEETS GI006 - GI008 FOR SITE PHOTOS.
3. AERIAL PHOTOGRAPH IMPORTED FROM BING MAPS 2024 .


LEGEND



PHOTO LOCATION
ARROW DENOTES LOCATION



CONTRACTOR WORK LIMITS



**US Army Corps
of Engineers**

MARK	DESCRIPTION	DATE
1	REVISED IN ACCORDANCE WITH AMENDMENT 0003	APR 2026

DESIGNED BY: D. LOGAN	ISSUE DATE: MARCH 2026
DRAWN BY: D. LOGAN	SOLICITATION NO.:
CHECKED BY: R. HARRIS	CONTRACT NO.:
SUBMITTED BY: N. FISCHER	
SIZE:	ANSI D

U.S. ARMY CORPS OF ENGINEERS
LOUISVILLE DISTRICT
600 DR. MARTIN LUTHER KING JR. PLACE
LOUISVILLE KY 40202

LD 53 ACCESS ROAD
OLMISTED, IL
112574, FY2025

PHOTOGRAPHY LOCATION PLAN

SHEET ID

GI005

C:\ED\PUBLIC\CAD\CIVIL\112574 - FY25 LD 53 ACCESS ROAD\PLAN SETS\03_SHEETS\OLMISTED SITE PHOTOGRAPHY.DWG
AEC_B&W_S1B
12:48:28 PM 4/1/2026



SITE PHOTO (013)
SCALE: NTS

SITE PHOTO (015)
SCALE: NTS

LD 53 ACCESS ROAD
OLMSTED, IL
112574, FY2025

SHEET ID

GI008



**US Army Corps
of Engineers®**


[illegible]

U.S. ARMY CORPS OF ENGINEERS LOUISVILLE DISTRICT 600 DR. MARTIN LUTHER KING, JR. PLACE LOUISVILLE KY, 40202	DESIGNED BY: DRAWN BY: CHECKED BY: R. HARRIS	ISSUE DATE: SOLICITATION NO.: CONTRACT NO.:
	SUBMITTED BY: R. HARRIS	
	SIZE: ANSI D	

CERTIFIED FINAL


O:\ED\PUBLIC\CAD\CIVIL\112574 - FY25 LD 53 ACCESS ROAD\PLAN SETS\03_SHEETS\IOLMSTED SITE PHOTOGRAPHY.DWG
12:48:32 PM 4/1/2026
AEC B&W STB

12:48:32 PM 4/1/2026 AEC_B&W.STB

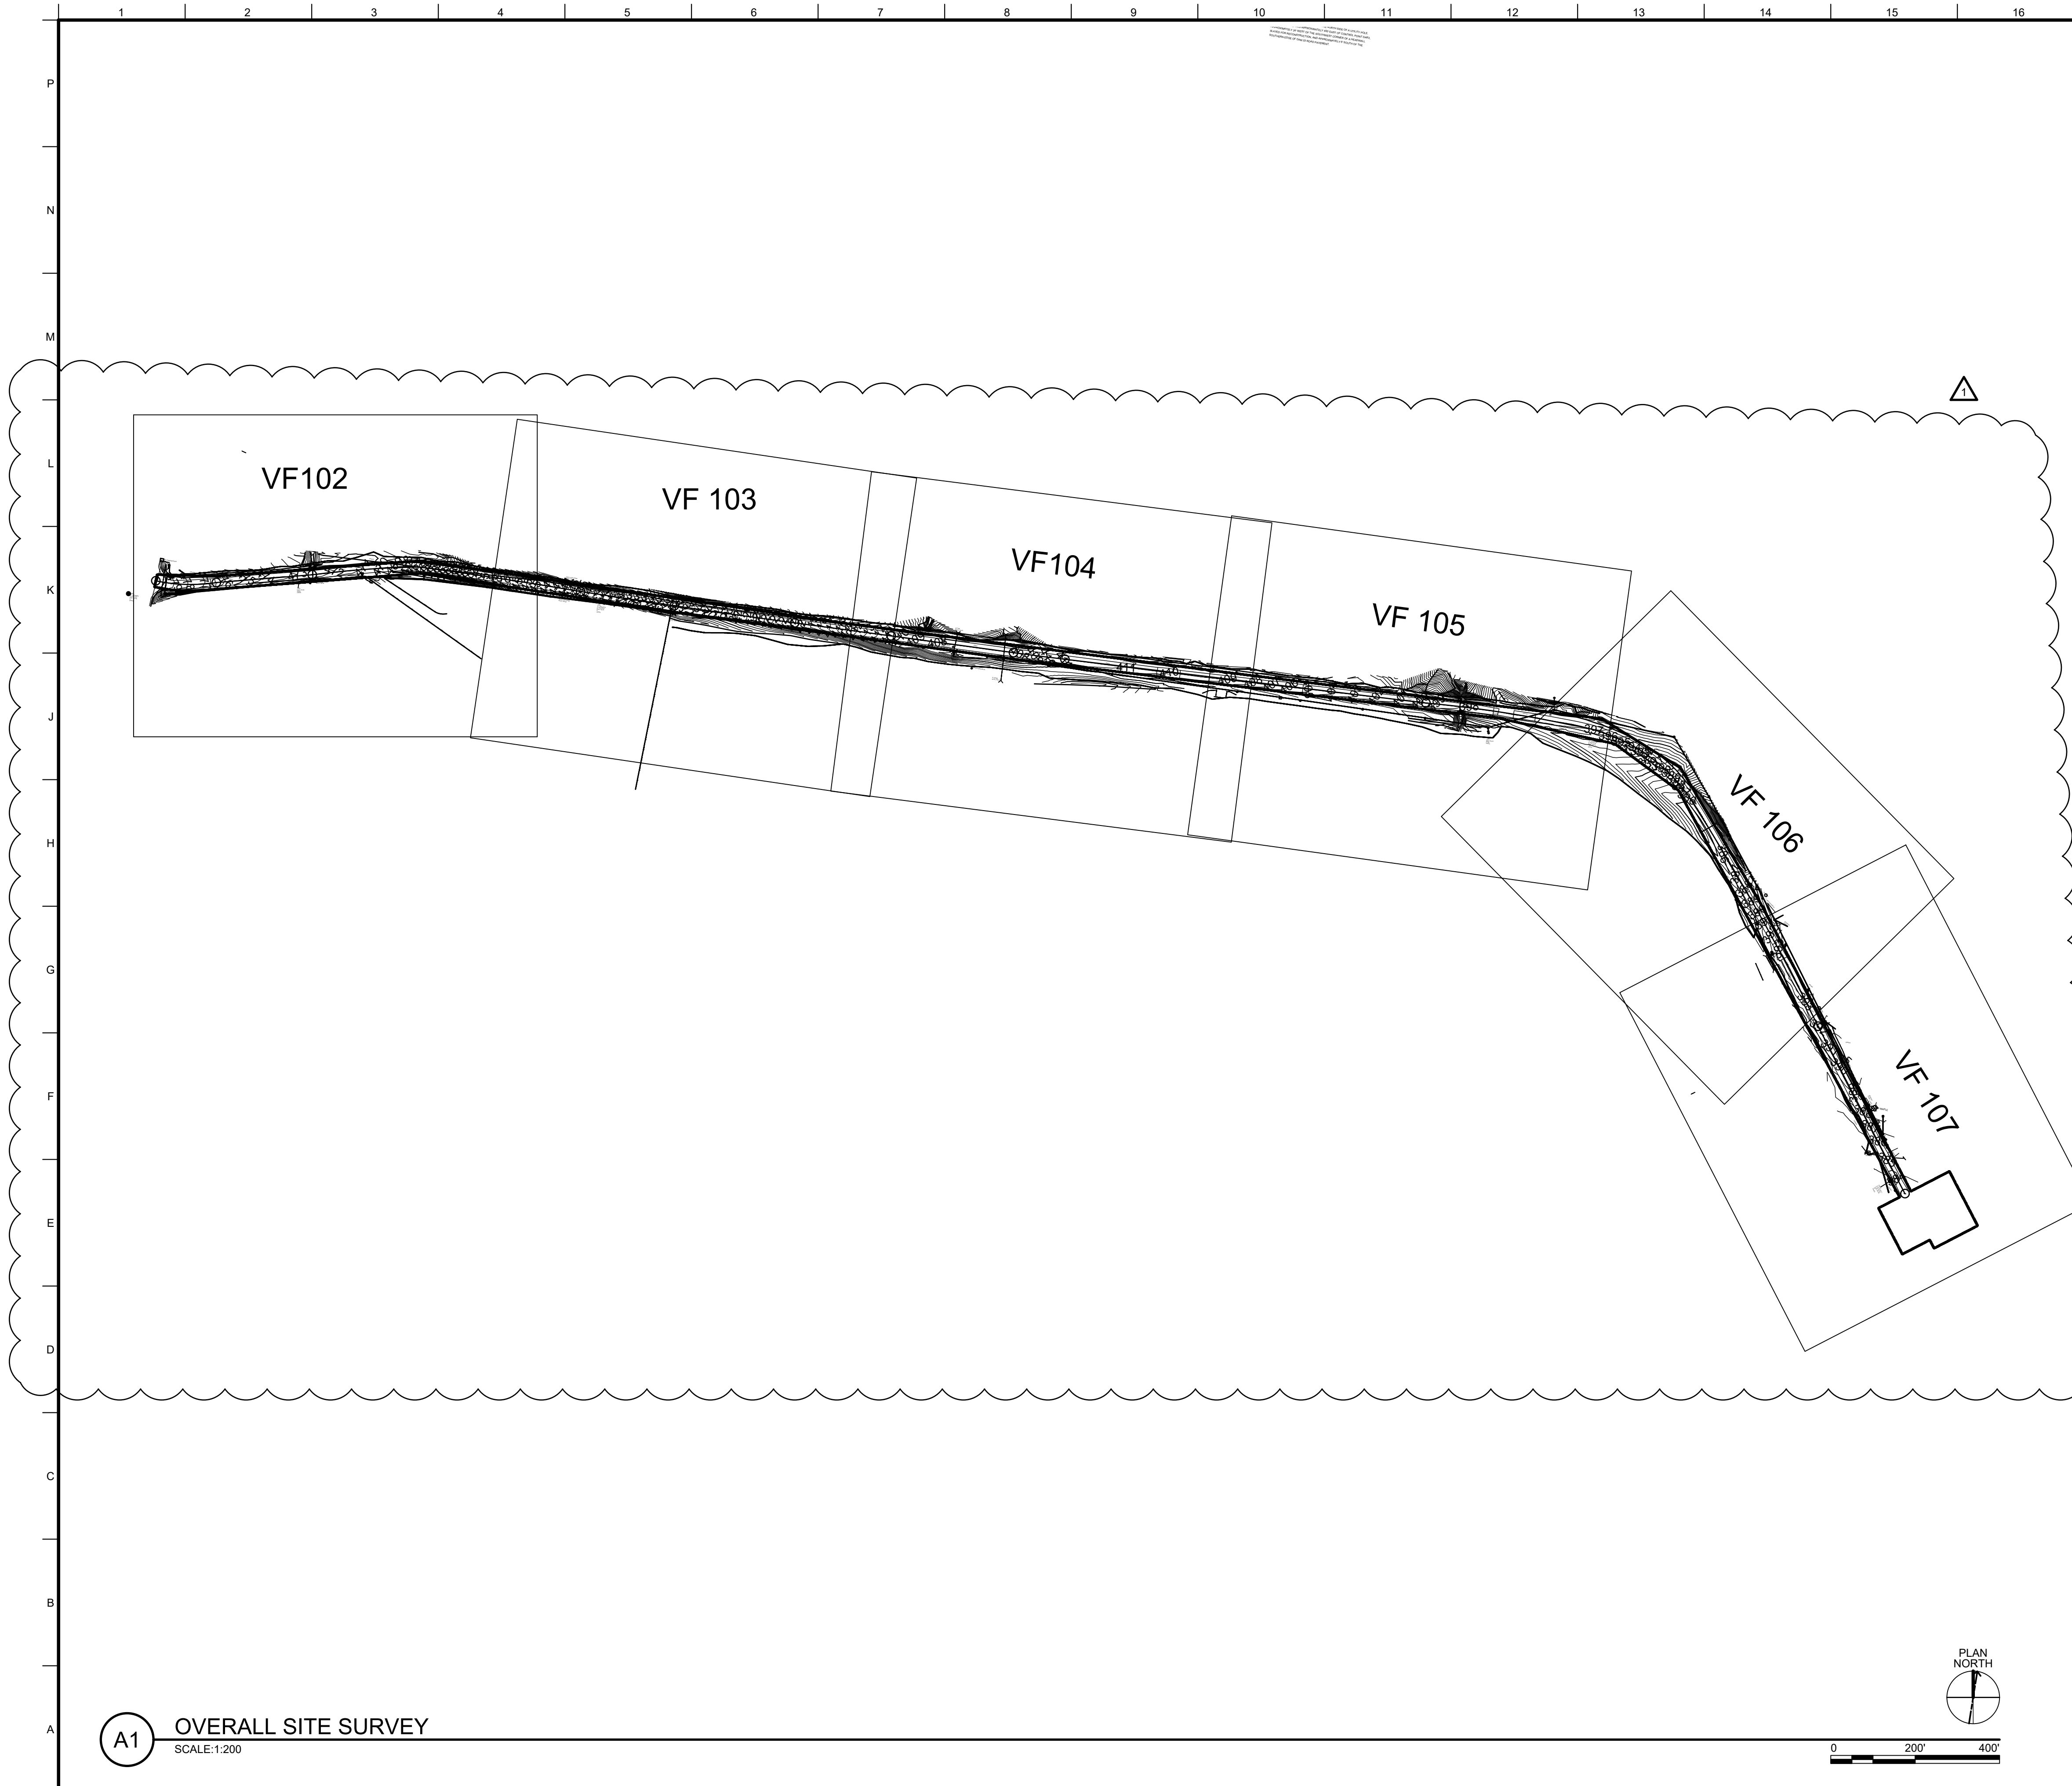


GENERAL SHEET NOTES	
---------------------	--

1. HORIZONTAL DATUM NAD83 KENTUCKY STATE PLANES, SOUTH ZONE, U.S. SURVEY FEET.
2. VERTICAL DATUM IS NAVD1988.
3. SITE SURVEY COMPLETED IN FEB 2025.
4. AN APPROXIMATE UTILITY LAYOUT IS BEING PROVIDED. THE CONTRACTOR IS RESPONSIBLE FOR FIELD VERIFYING ALL EXISTING UTILITIES. THE CONTRACTING OFFICER SHOULD BE NOTIFIED OF ANY CONFLICTS OR DISCREPANCIES PRIOR TO INSTALLATION. THE CONTRACTOR MUST REPLACE OR REPAIR ANY UTILITIES THAT ARE DAMAGED DURING CONSTRUCTION.
5. CONTRACTOR MUST VERIFY CONTROL PRIOR TO ANY EXCAVATION.
6. CONSTRUCTION MUST BE LAID OUT USING CONTROL PROVIDED TO COINCIDE WITH ORIGINAL SURVEY AND DESIGN.
7. NOT ALL CONCRETE JOINTS ARE SHOWN

[illegible]


U.S. ARMY CORPS OF ENGINEERS LOUISVILLE DISTRICT 600 DR. MARTIN LUTHER KING JR. PLACE LOUISVILLE KY, 40202	DESIGNED BY:	ISSUE DATE:
	DLOGAN	MARCH 2026
	DRAWN BY:	SOLICITATION NO.:
	DLOGAN	
	CHECKED BY:	CONTRACT NO.:
	R-HARRIS	
	SUBMITTED BY:	
	N. FISCHER	
	SIZE:	
ANSI FULL BLEED D (22.00 X 34.00 INCHES)		

LEGEND

- | | |
|---|---------------------------------|
|  | CONTROL POINT LOCATION |
|  | CONTRACTOR WORK LIMITS |
|  | EXISTING WATER LINE |
|  | EXISTING GAS LINE |
|  | EXISTING SANITARY LINE |
|  | EXISTING OVERHEAD ELECTRIC LINE |
|  | EXISTING STORM LINE |
|  | EXISTING CONTOURS |
|  | EXISTING FENCE |
|  | EXISTING TREELINE |
|  | EXISTING DITCHLINE |
|  | EXISTING CULVERT |


LD 53 ACCESS ROAD
OLMSTED, IL
112574, FY2025

SHEET ID
VF101

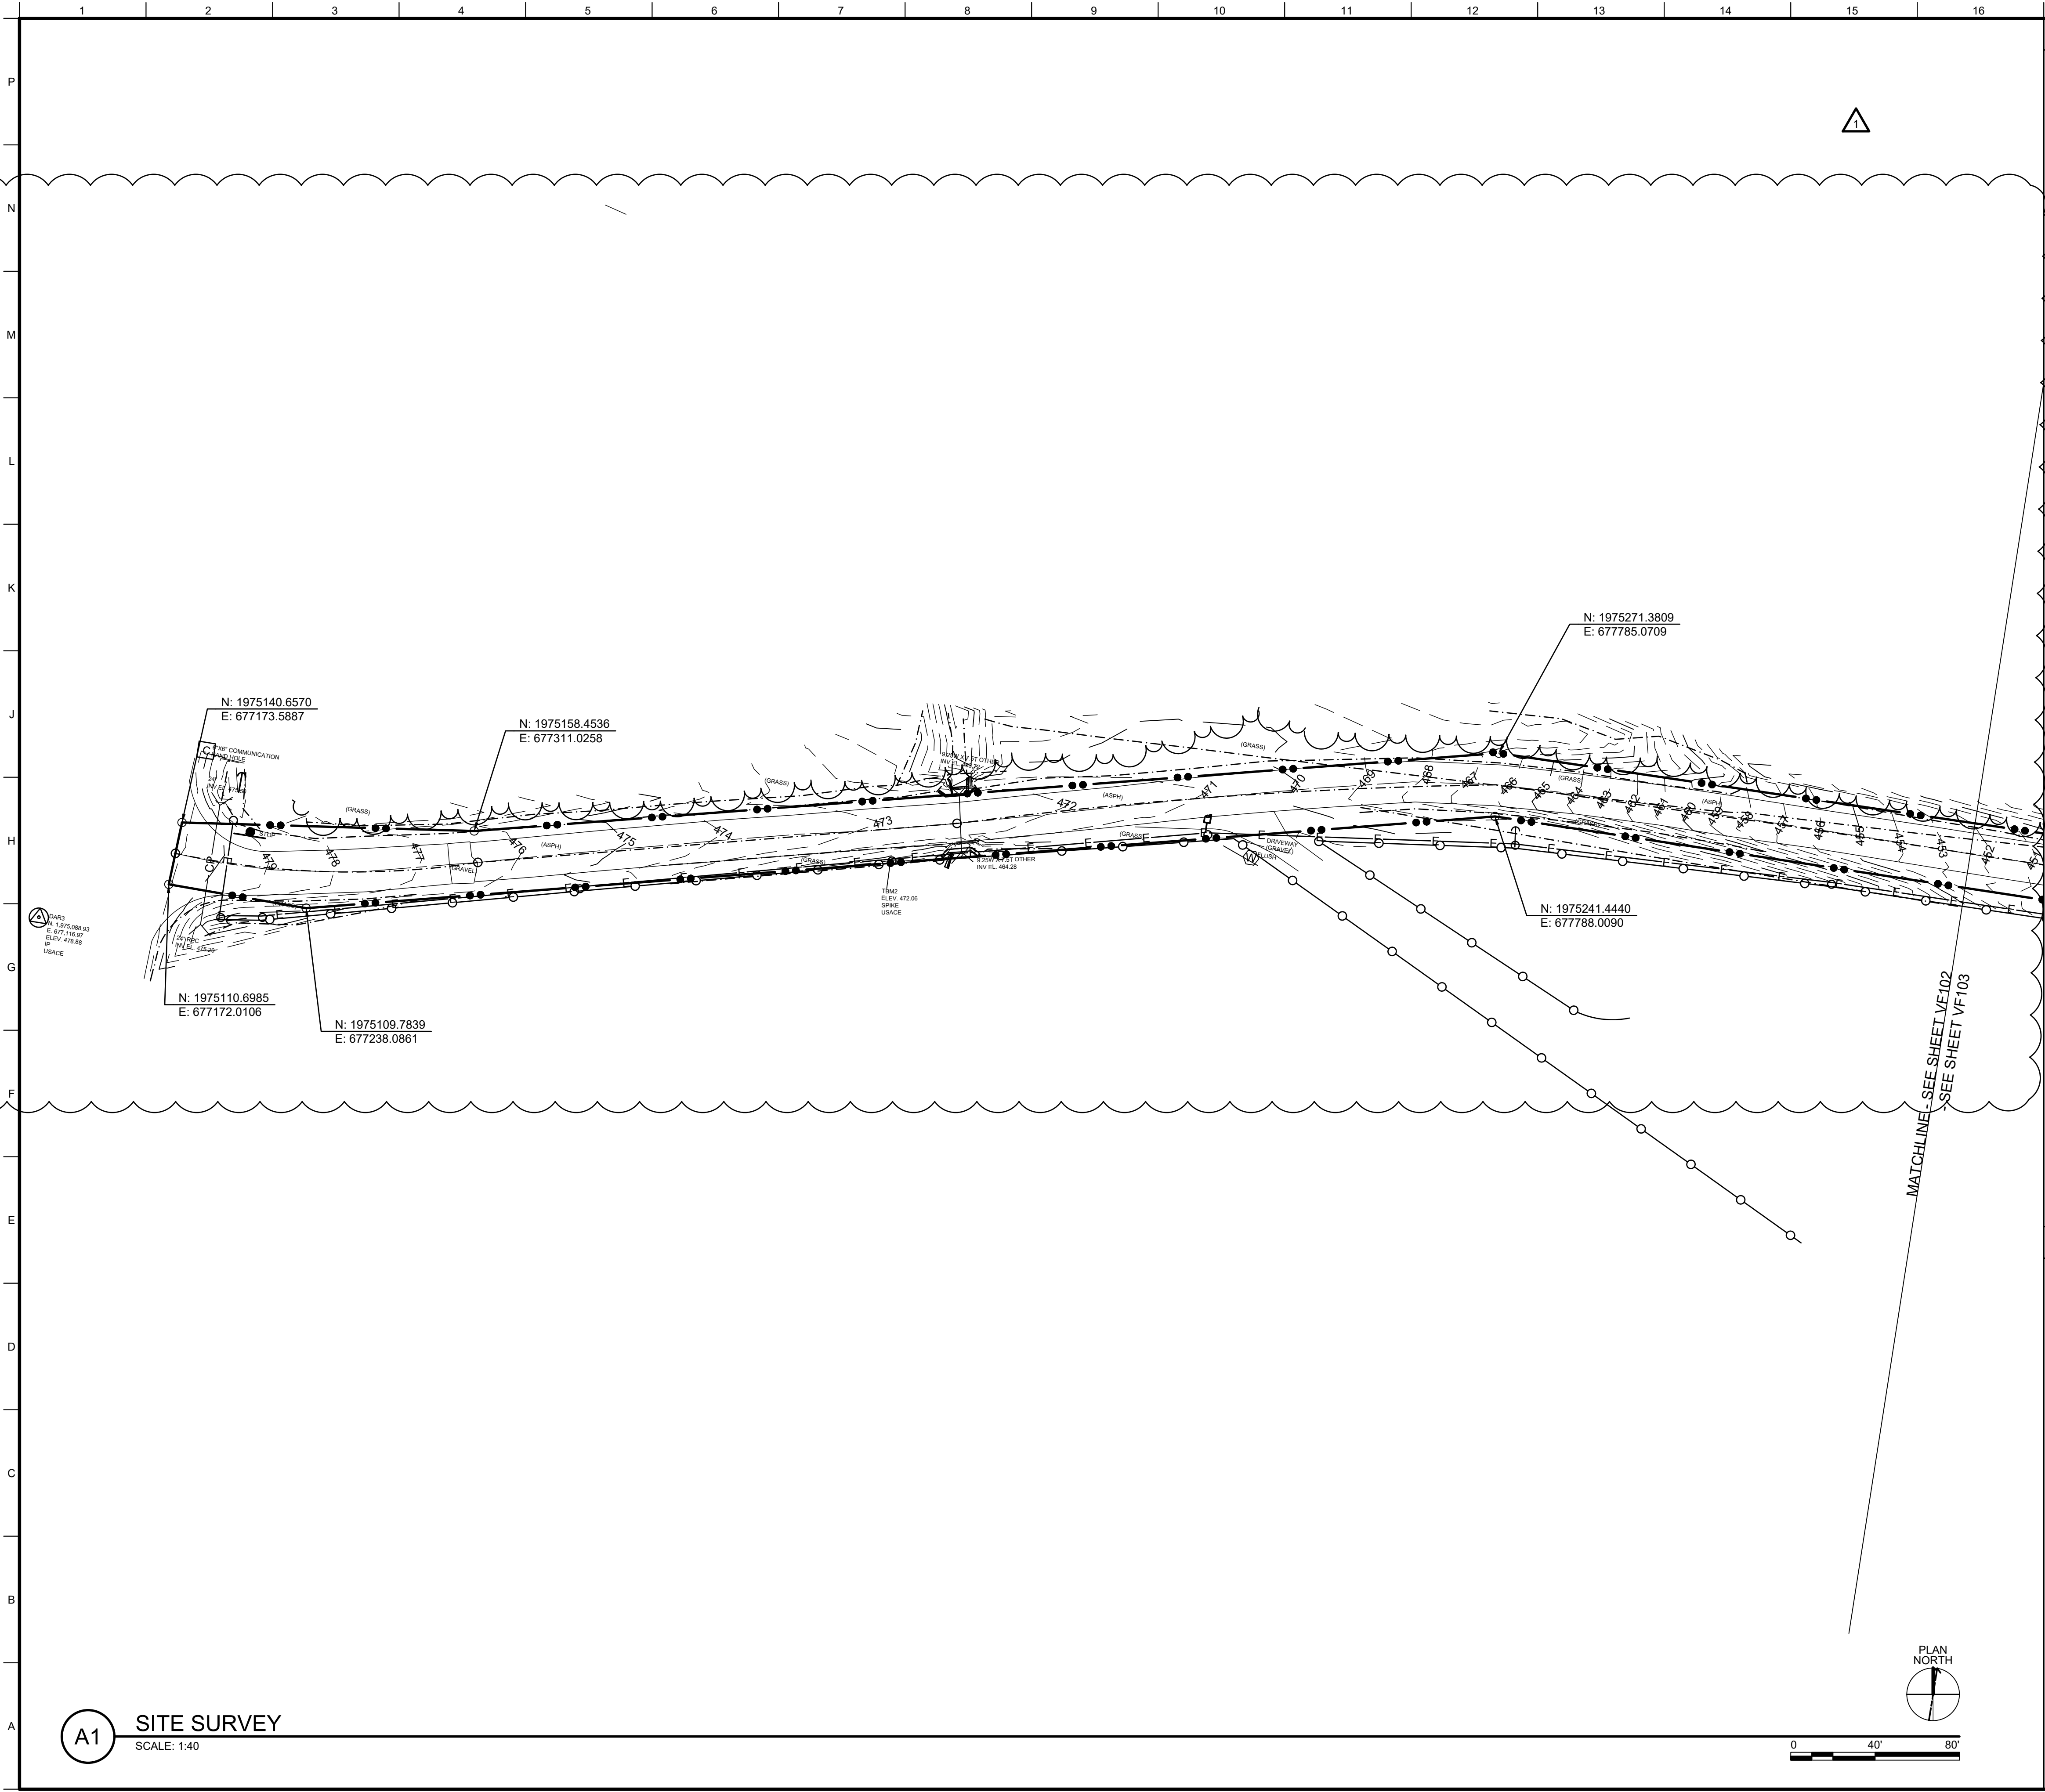

GENERAL SHEET NOTES

1. HORIZONTAL DATUM NAD83 KENTUCKY STATE PLANES, SOUTH ZONE, U.S. SURVEY FEET.
2. VERTICAL DATUM IS NAVD1988.
3. SITE SURVEY COMPLETED IN FEB 2025.
4. AN APPROXIMATE UTILITY LAYOUT IS BEING PROVIDED. THE CONTRACTOR IS RESPONSIBLE FOR FIELD VERIFYING ALL EXISTING UTILITIES. THE CONTRACTING OFFICER SHOULD BE NOTIFIED OF ANY CONFLICTS OR DISCREPANCIES PRIOR TO INSTALLATION. THE CONTRACTOR MUST REPLACE OR REPAIR ANY UTILITIES THAT ARE DAMAGED DURING CONSTRUCTION.
5. CONTRACTOR MUST VERIFY CONTROL PRIOR TO ANY EXCAVATION.
6. CONSTRUCTION MUST BE LAID OUT USING CONTROL PROVIDED TO COINCIDE WITH ORIGINAL SURVEY AND DESIGN.
7. NOT ALL CONCRETE JOINTS ARE SHOWN




DATE	DESCRIPTION
APR 2026	REVISED IN ACCORDANCE WITH AMENDMENT 0003
1	MARK

DESIGNED BY:	ISSUE DATE:
U.S. ARMY CORPS OF ENGINEERS	LOUISVILLE DISTRICT
600 DR. MARTIN LUTHER KING JR. PLACE	LOUISVILLE KY, 40202
DR. LOGAN	SOLICITATION NO.:
CHECKED BY:	CONTRACT NO.:
SUBMITTED BY:	
N. FISCHER	
SIZE:	ANSI FULL BLEED D (22.00 X 34.00 INCHES)

LEGEND


- △ CONTROL POINT LOCATION
- ● — CONTRACTOR WORK LIMITS
- W — EXISTING WATER LINE
- G — EXISTING GAS LINE
- SAN — EXISTING SANITARY LINE
- E — EXISTING OVERHEAD ELECTRIC LINE
- SD — EXISTING STORM LINE
- - -865- - - EXISTING CONTOURS
- — EXISTING FENCE
- — — EXISTING TREELINE
- — — EXISTING DITCHLINE
- CP — CP — CP — CP — EXISTING CULVERT

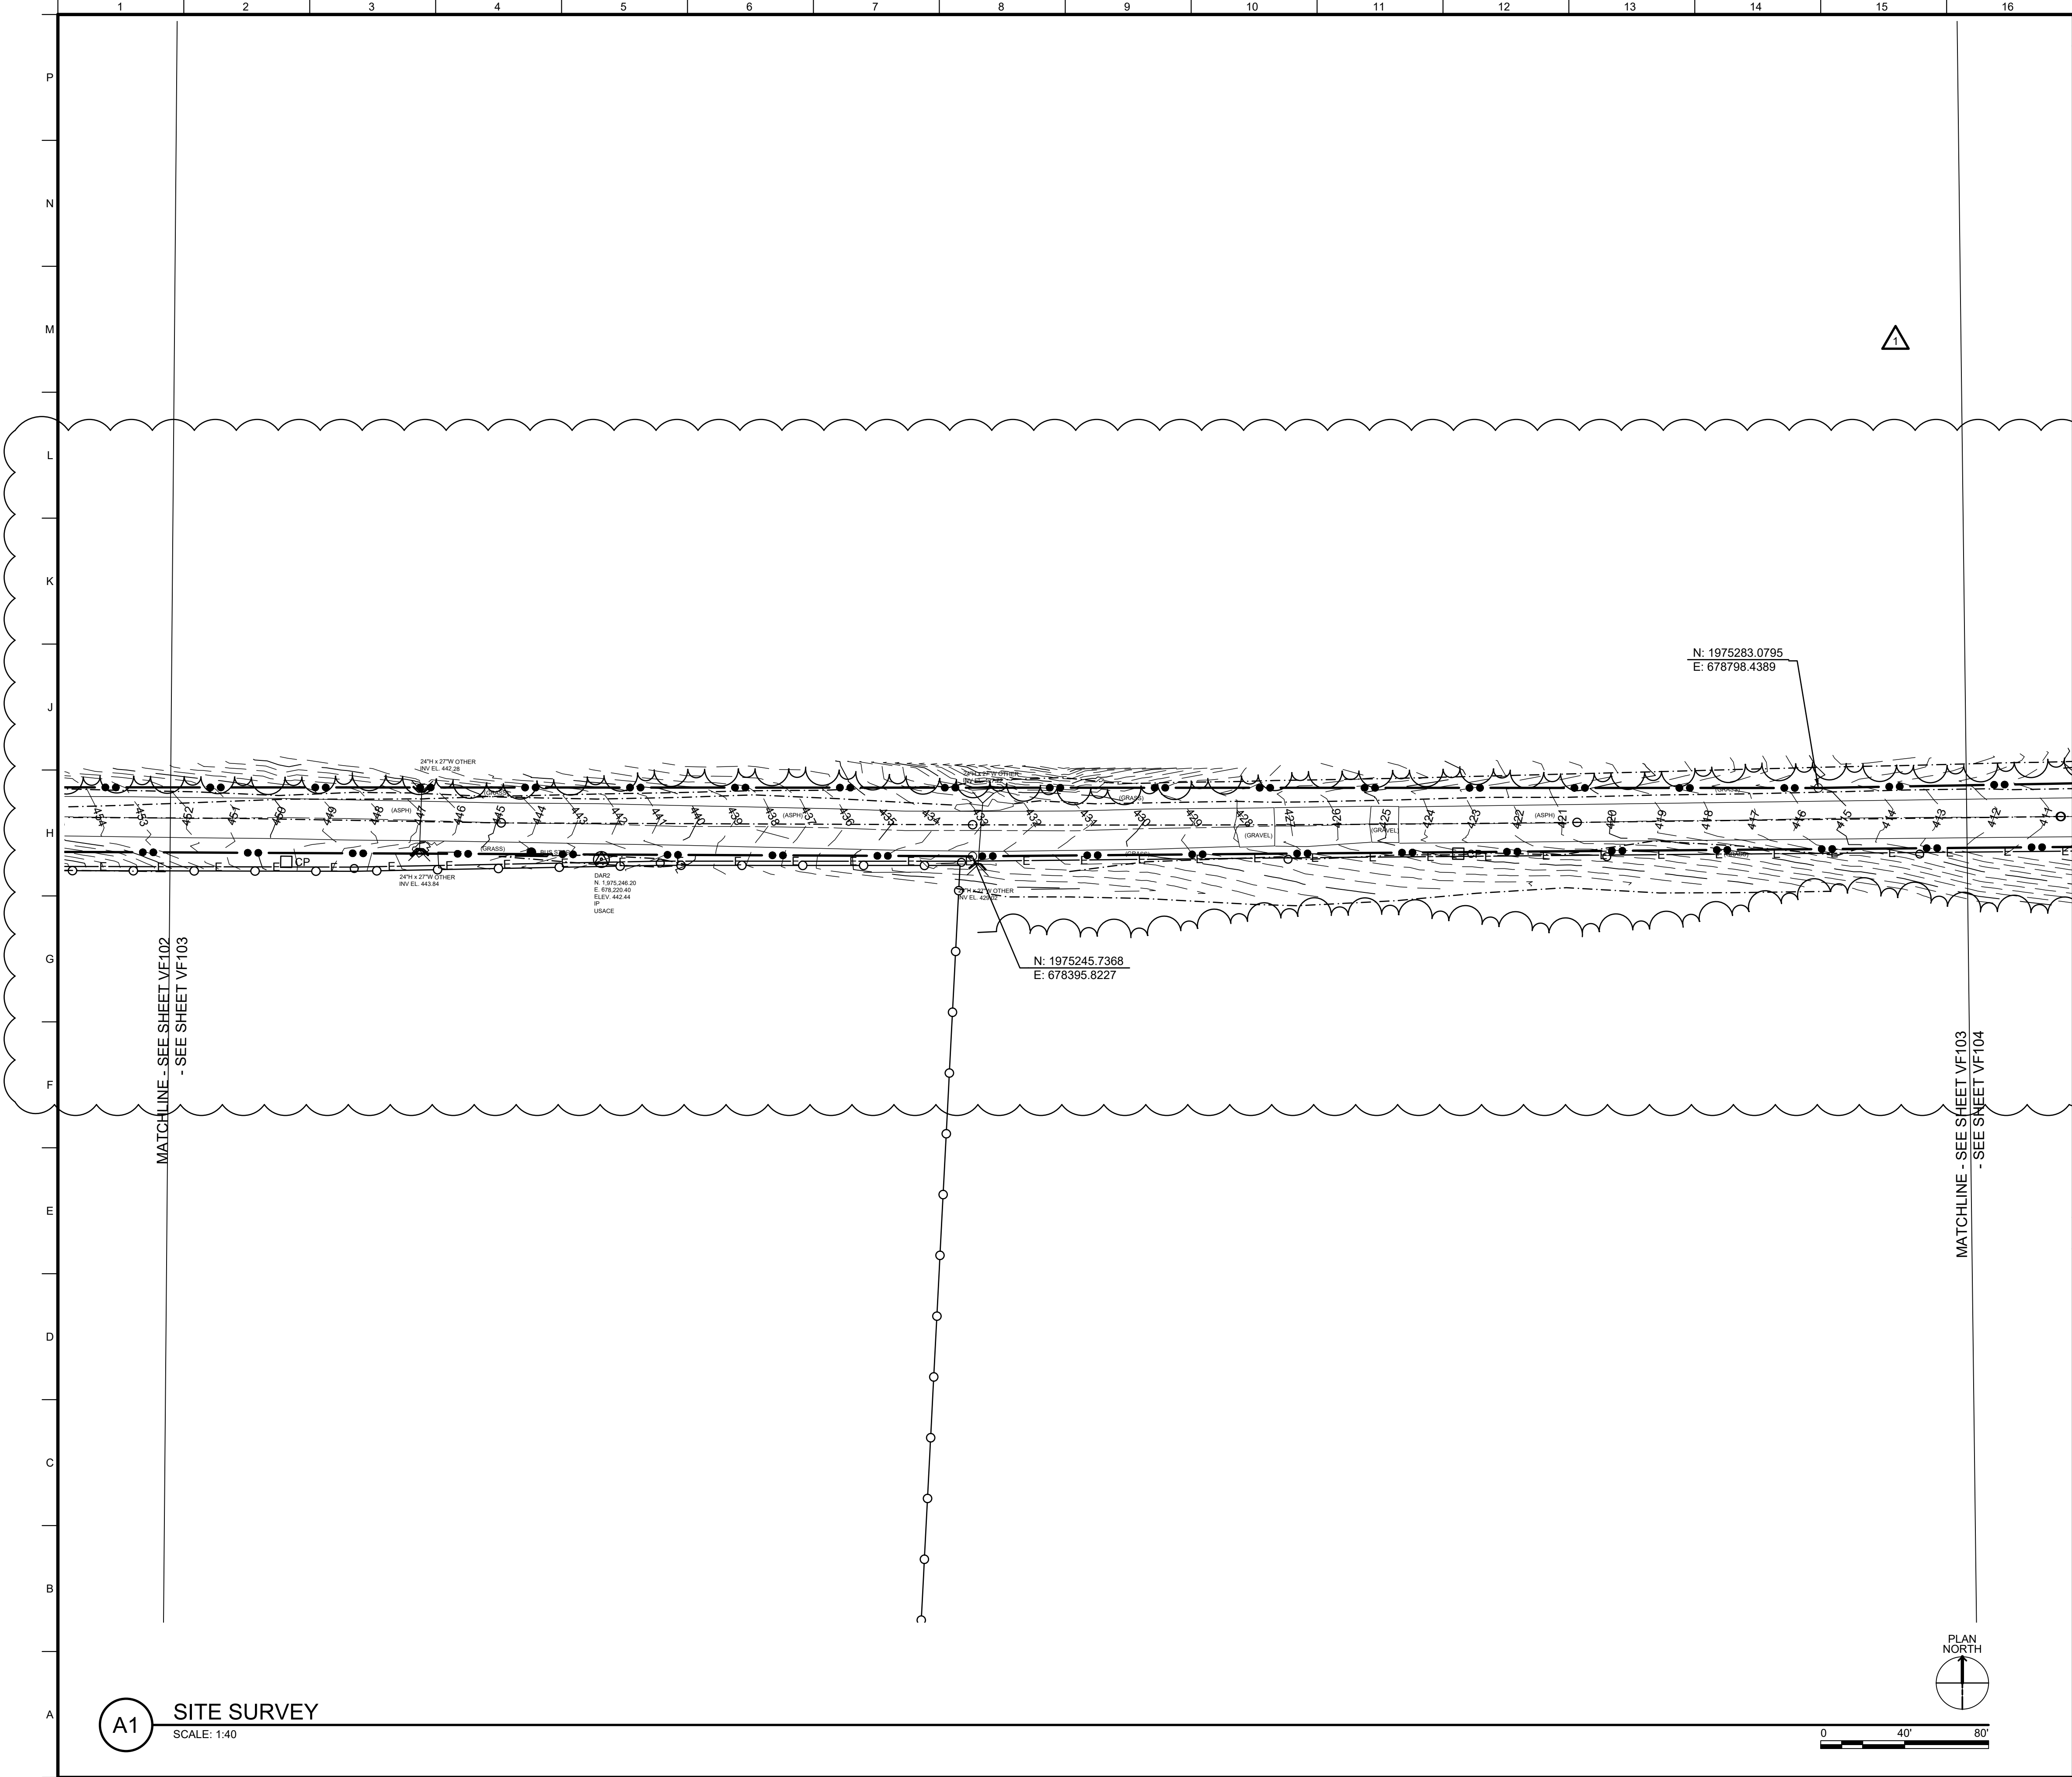

GENERAL SHEET NOTES

1. HORIZONTAL DATUM NAD83 KENTUCKY STATE PLANES, SOUTH ZONE, U.S. SURVEY FEET.
2. VERTICAL DATUM IS NAVD1988.
3. SITE SURVEY COMPLETED IN FEB 2025.
4. AN APPROXIMATE UTILITY LAYOUT IS BEING PROVIDED. THE CONTRACTOR IS RESPONSIBLE FOR FIELD VERIFYING ALL EXISTING UTILITIES. THE CONTRACTING OFFICER SHOULD BE NOTIFIED OF ANY CONFLICTS OR DISCREPANCIES PRIOR TO INSTALLATION. THE CONTRACTOR MUST REPLACE OR REPAIR ANY UTILITIES THAT ARE DAMAGED DURING CONSTRUCTION.
5. CONTRACTOR MUST VERIFY CONTROL PRIOR TO ANY EXCAVATION.
6. CONSTRUCTION MUST BE LAID OUT USING CONTROL PROVIDED TO COINCIDE WITH ORIGINAL SURVEY AND DESIGN.
7. NOT ALL CONCRETE JOINTS ARE SHOWN

LEGEND

-  CONTROL POINT LOCATION
-  CONTRACTOR WORK LIMITS
-  W EXISTING WATER LINE
-  G EXISTING GAS LINE
-  SAN EXISTING SANITARY LINE
-  E EXISTING OVERHEAD ELECTRIC LINE
-  SD EXISTING STORM LINE
-  -865- EXISTING CONTOURS
-  EXISTING FENCE
-  EXISTING TREELINE
-  EXISTING DITCHLINE
-  EXISTING CULVERT



US Army Corps
of Engineers®

DATE
APR 2026
DESCRIPTION
1 REVISED IN ACCORDANCE WITH AMENDMENT 0003


DESIGNED BY:	ISSUE DATE:
D LOGAN	MARCH 2026
DRAWN BY:	SOLICITATION NO.:
D LOGAN	
CHECKED BY:	CONTRACT NO.:
R HARRIS	
SUBMITTED BY:	
N FISCHER	
SIZE:	ANSI FULL BLEED D (22 00 X 34 00 INCHES)

U.S. ARMY CORPS OF ENGINEERS LOUISVILLE DISTRICT 600 DR. MARTIN LUTHER KING JR. PLACE LOUISVILLE KY. 40202

LD 53 ACCESS ROAD
OLMSTED, IL
112574, FY2025


SITE SURVEY

SHEET ID
VF103

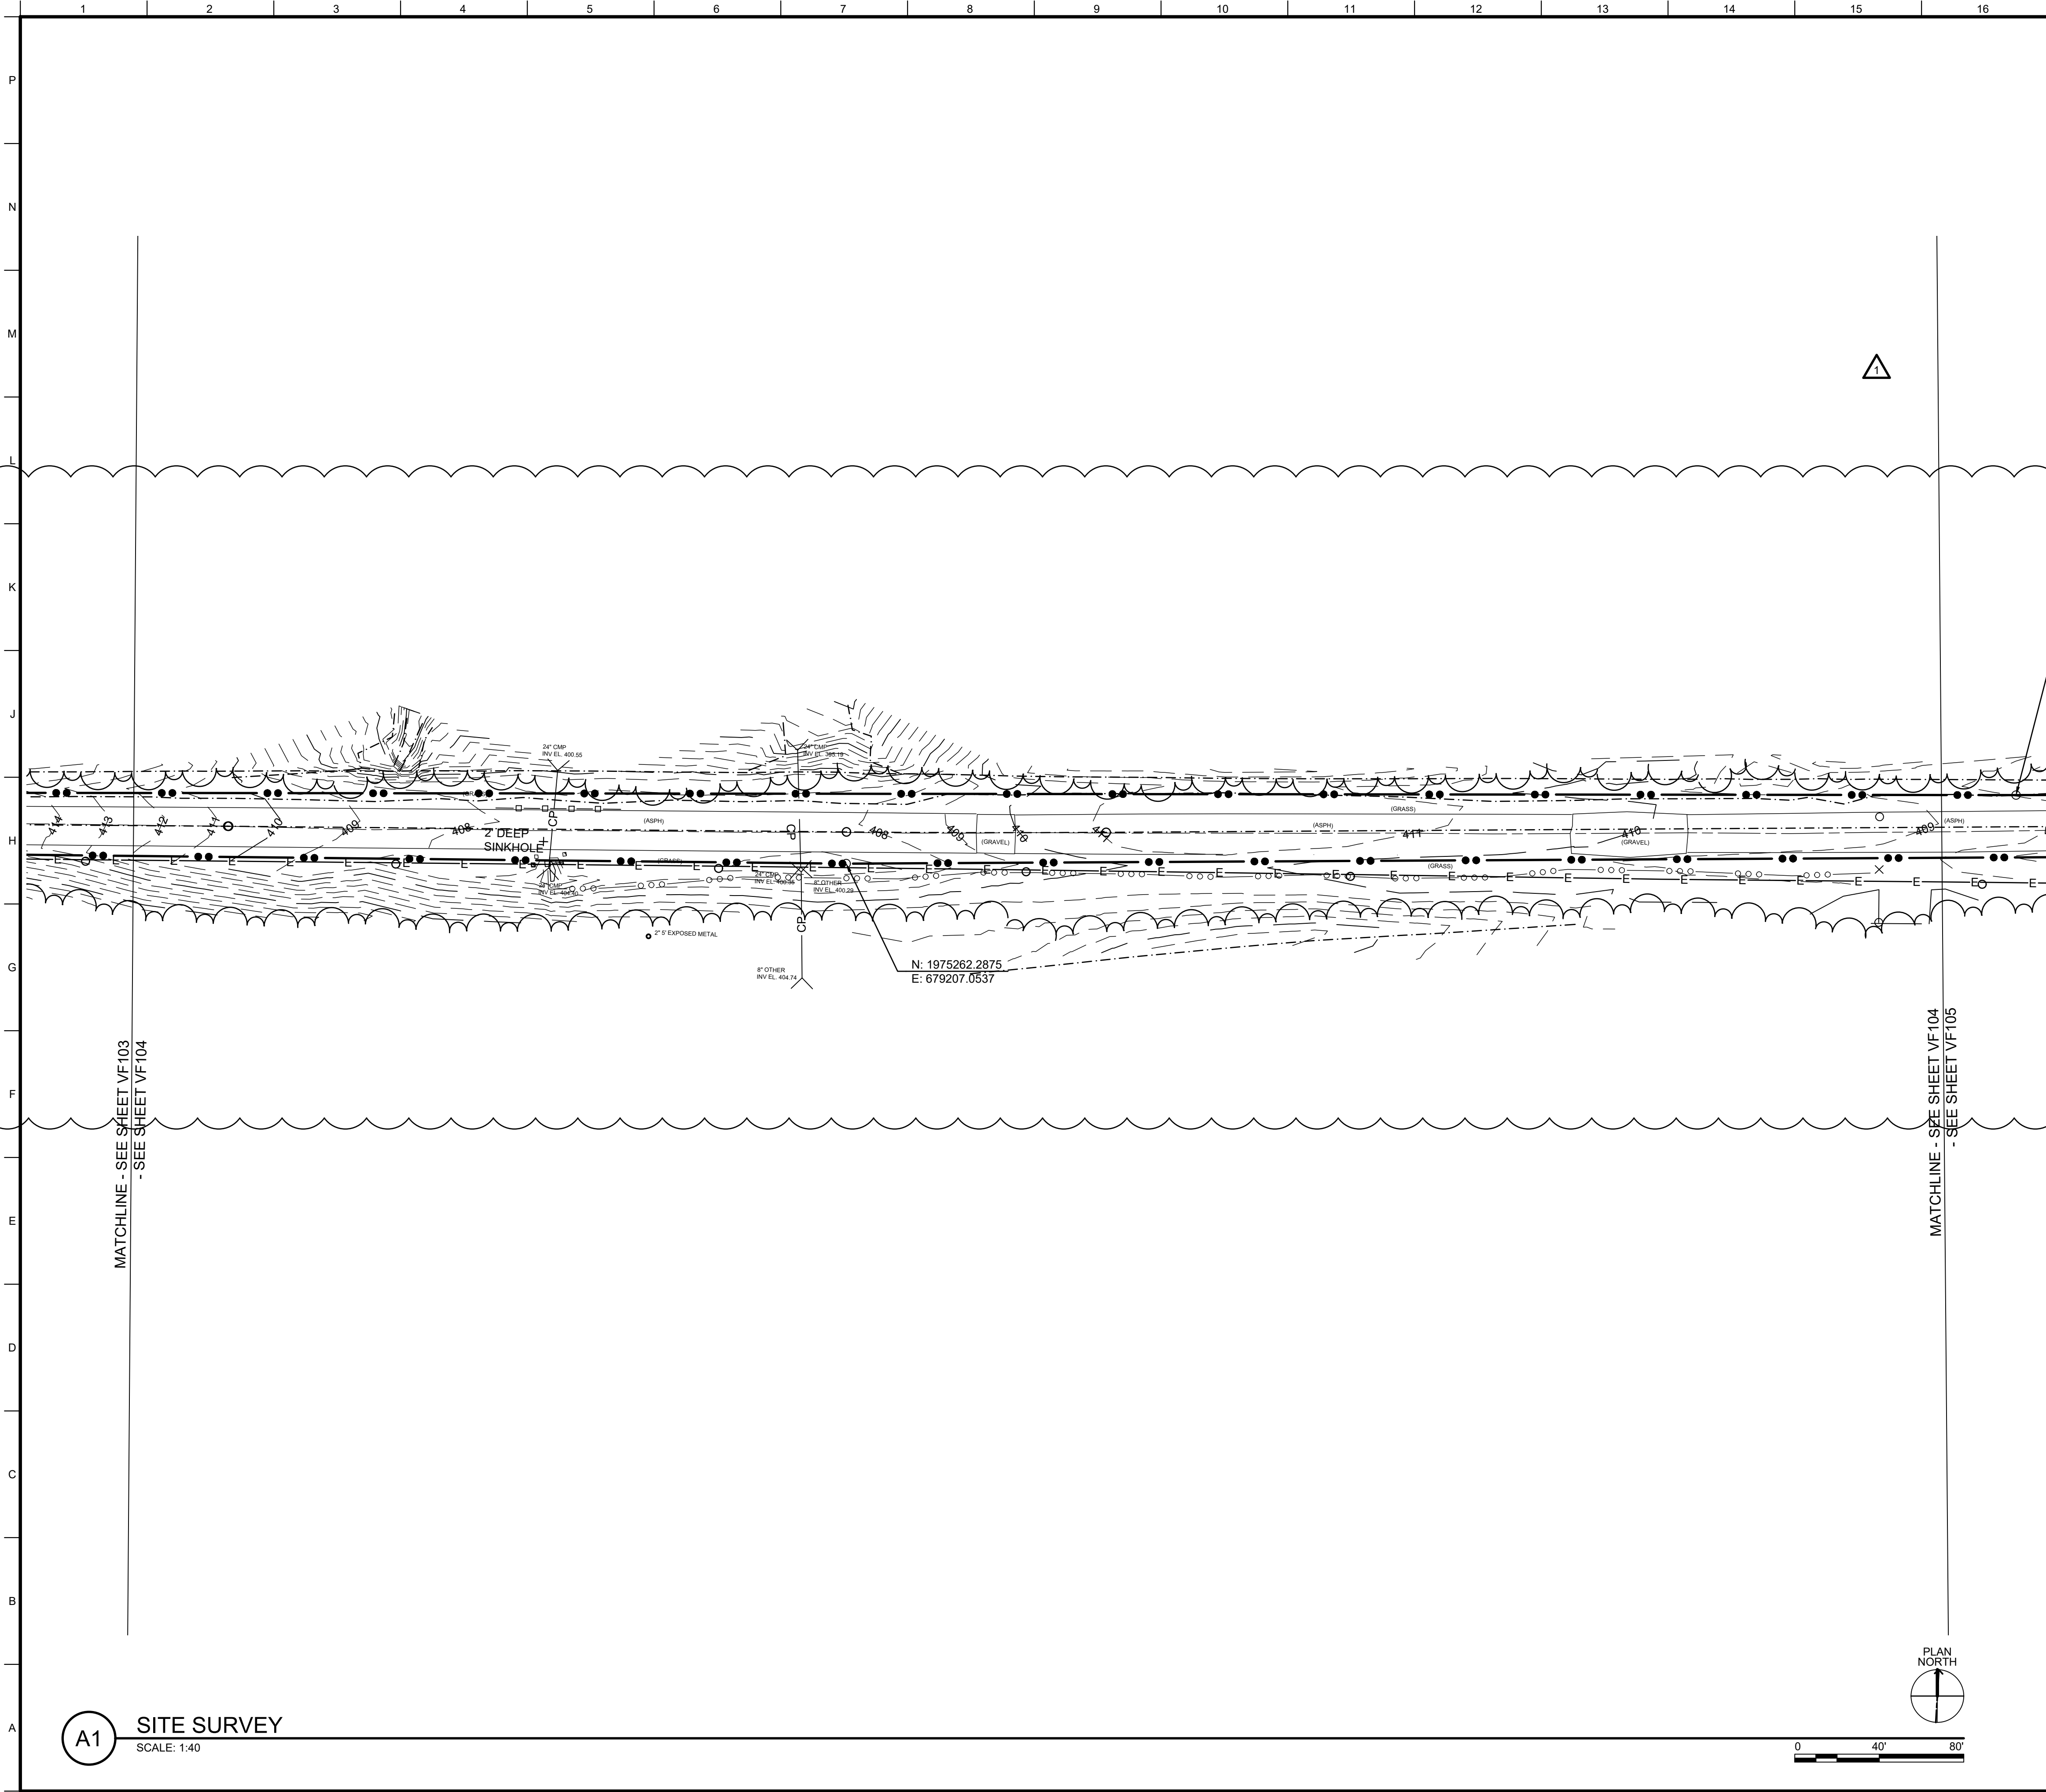

GENERAL SHEET NOTES

- HORIZONTAL DATUM NAD83 KENTUCKY STATE PLANES, SOUTH ZONE, U.S. SURVEY FEET.
- VERTICAL DATUM IS NAVD1988.
- SITE SURVEY COMPLETED IN FEB 2025.
- AN APPROXIMATE UTILITY LAYOUT IS BEING PROVIDED. THE CONTRACTOR IS RESPONSIBLE FOR FIELD VERIFYING ALL EXISTING UTILITIES. THE CONTRACTING OFFICER SHOULD BE NOTIFIED OF ANY CONFLICTS OR DISCREPANCIES PRIOR TO INSTALLATION. THE CONTRACTOR MUST REPLACE OR REPAIR ANY UTILITIES THAT ARE DAMAGED DURING CONSTRUCTION.
- CONTRACTOR MUST VERIFY CONTROL PRIOR TO ANY EXCAVATION.
- CONSTRUCTION MUST BE LAID OUT USING CONTROL PROVIDED TO COINCIDE WITH ORIGINAL SURVEY AND DESIGN.
- NOT ALL CONCRETE JOINTS ARE SHOWN



DATE	DESCRIPTION
APR 2026	REVISED IN ACCORDANCE WITH AMENDMENT 0003
1	MARK

DESIGNED BY: MARCH 2026	ISSUE DATE: MARCH 2026
DRAWN BY: D. LOGAN	SOLICITATION NO.:
CHECKED BY: R. HARRIS	CONTRACT NO.:
SUBMITTED BY: N. FISCHER	
SIZE: ANSI FULL BLEED D (22.00 X 34.00 INCHES)	

U.S. ARMY CORPS OF ENGINEERS
LOUISVILLE DISTRICT
600 DR. MARTIN LUTHER KING JR. PLACE
LOUISVILLE KY, 40202


LEGEND

- CONTROL POINT LOCATION
- CONTRACTOR WORK LIMITS
- EXISTING WATER LINE
- EXISTING GAS LINE
- EXISTING SANITARY LINE
- EXISTING OVERHEAD ELECTRIC LINE
- EXISTING STORM LINE
- EXISTING CONTOURS
- EXISTING FENCE
- EXISTING TREELINE
- EXISTING DITCHLINE
- EXISTING CULVERT

A1 SITE SURVEY
SCALE: 1:40


LD 83 ACCESS ROAD
OLMSTED, IL
112574, FY2025
SITE SURVEY

SHEET ID
VF104

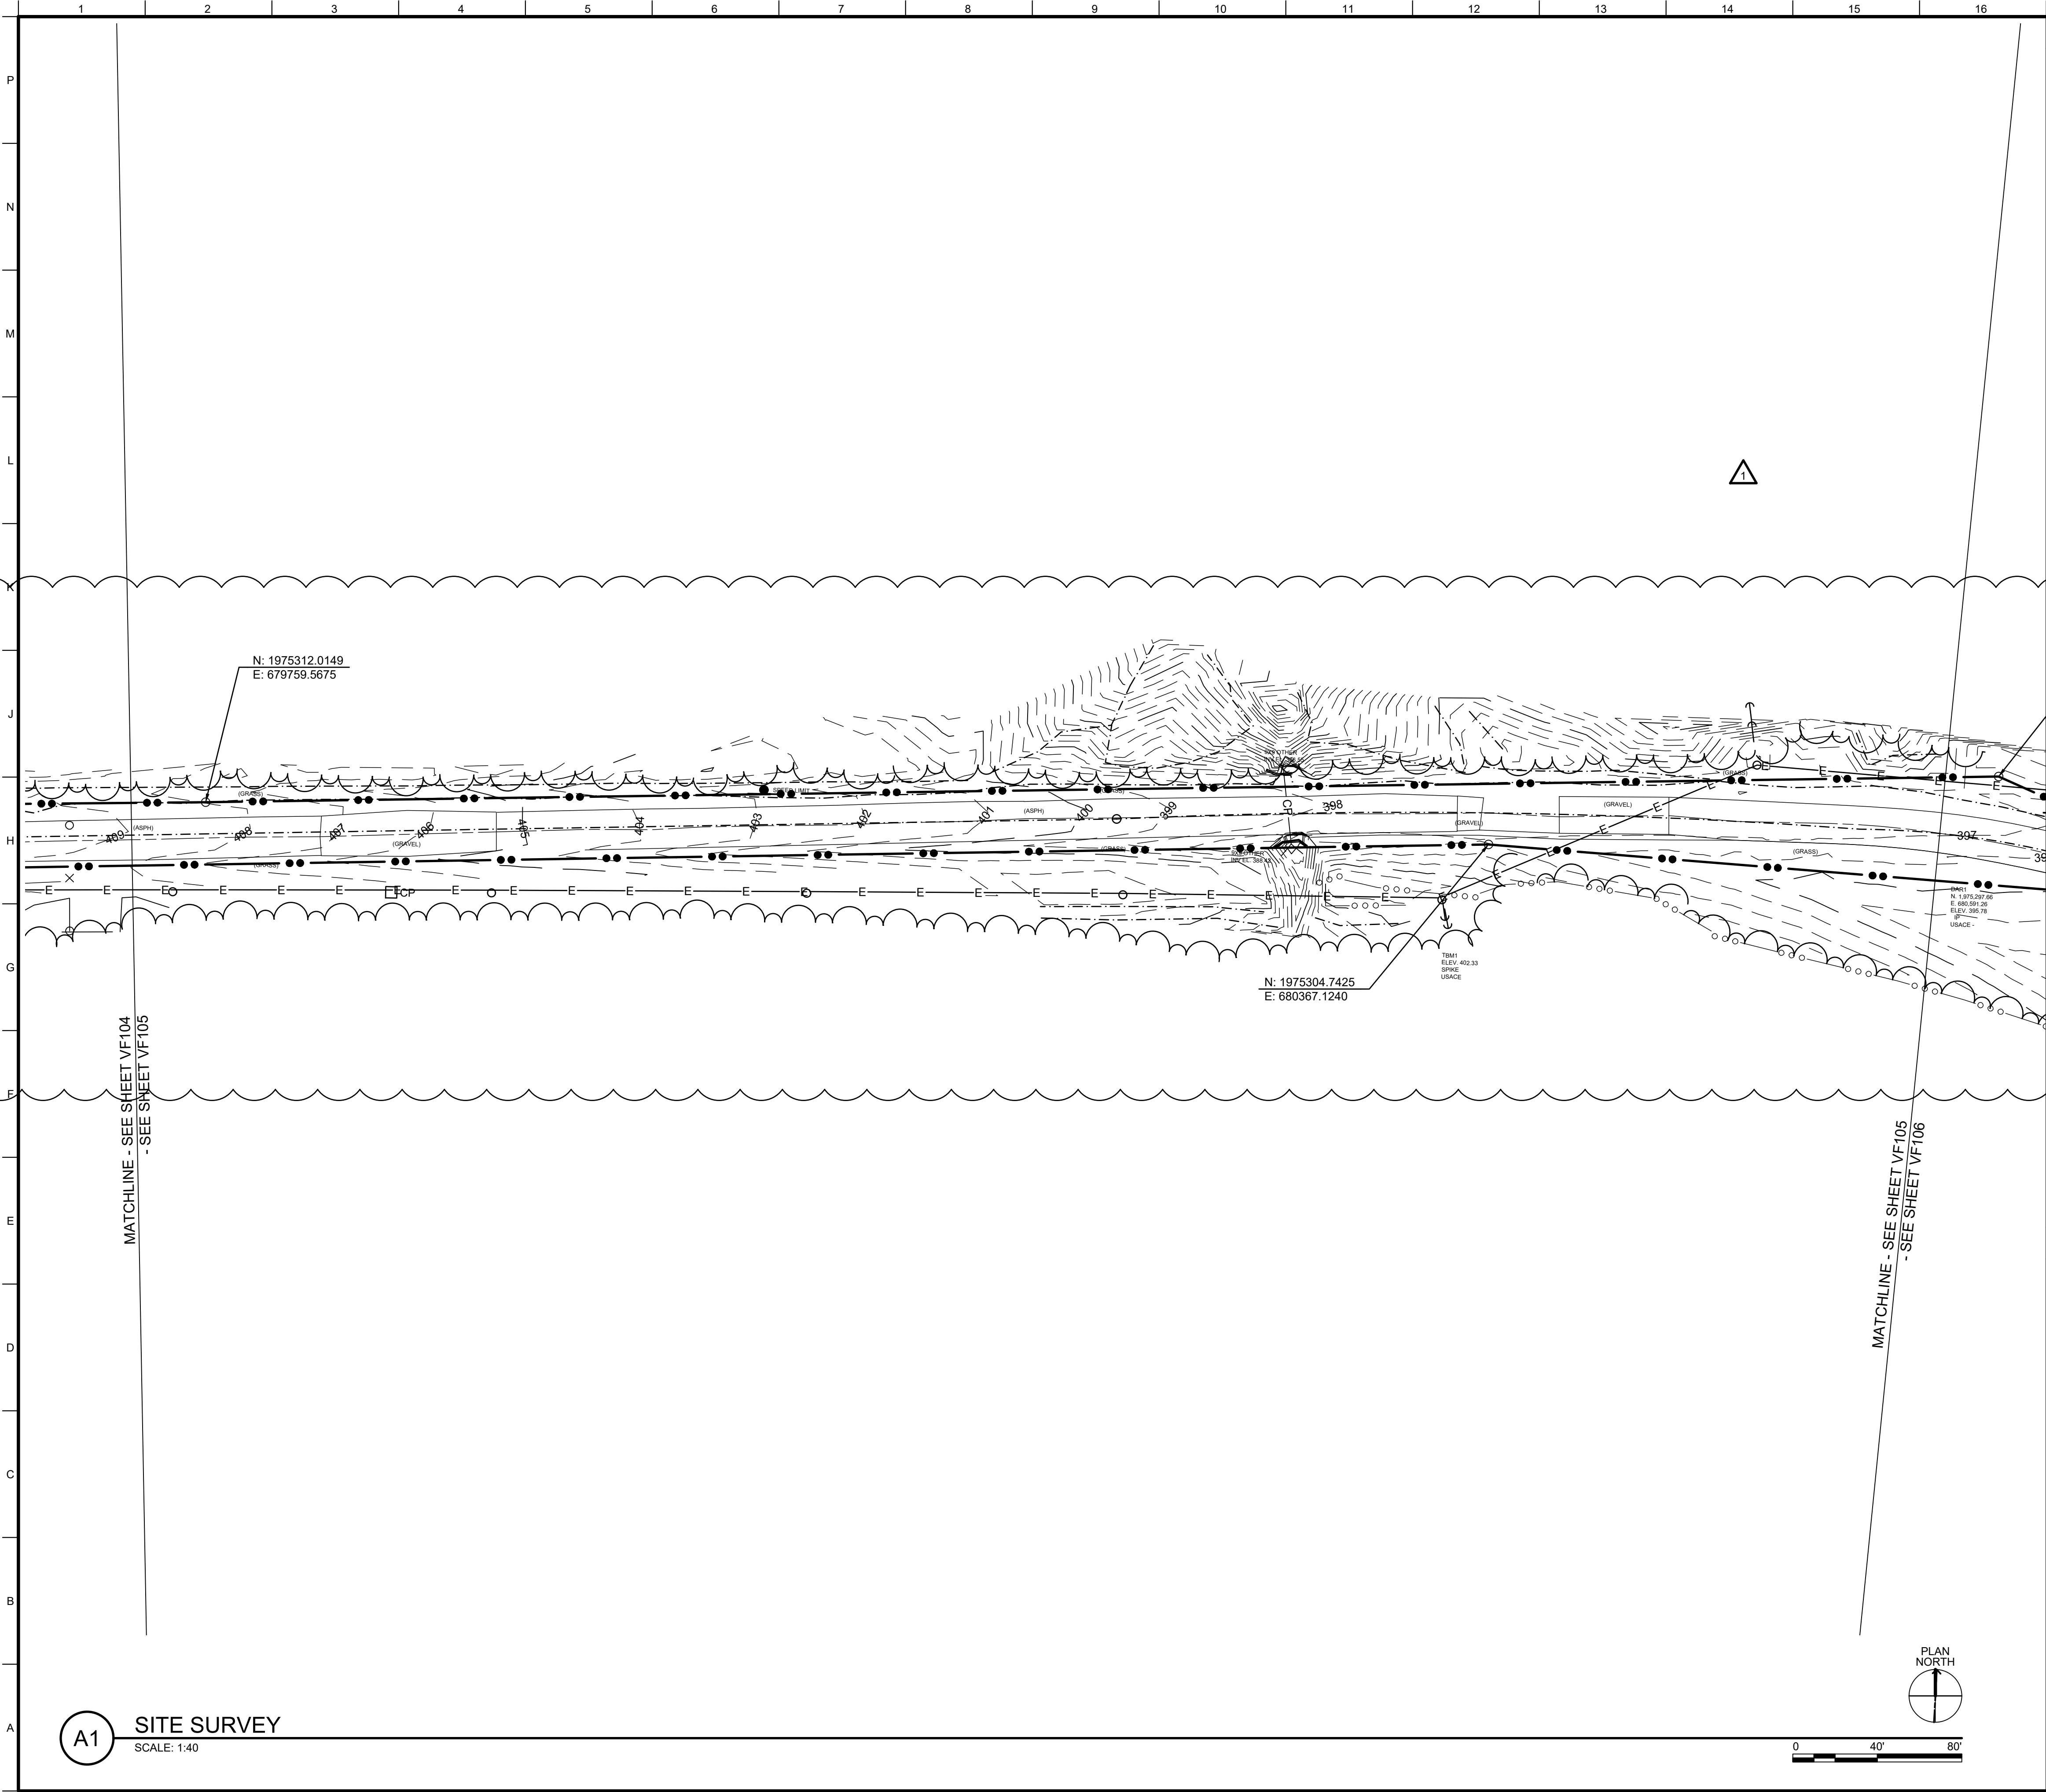

GENERAL SHEET NOTES

1. HORIZONTAL DATUM NAD83 KENTUCKY STATE PLANES, SOUTH ZONE, U.S. SURVEY FEET.
2. VERTICAL DATUM IS NAVD1988.
3. SITE SURVEY COMPLETED IN FEB 2025.
4. AN APPROXIMATE UTILITY LAYOUT IS BEING PROVIDED. THE CONTRACTOR IS RESPONSIBLE FOR FIELD VERIFYING ALL EXISTING UTILITIES. THE CONTRACTING OFFICER SHOULD BE NOTIFIED OF ANY CONFLICTS OR DISCREPANCIES PRIOR TO INSTALLATION. THE CONTRACTOR MUST REPLACE OR REPAIR ANY UTILITIES THAT ARE DAMAGED DURING CONSTRUCTION.
5. CONTRACTOR MUST VERIFY CONTROL PRIOR TO ANY EXCAVATION.
6. CONSTRUCTION MUST BE LAID OUT USING CONTROL PROVIDED TO COINCIDE WITH ORIGINAL SURVEY AND DESIGN.
7. NOT ALL CONCRETE JOINTS ARE SHOWN



DATE	APR 2026
DESCRIPTION	REVISED IN ACCORDANCE WITH AMENDMENT 0003
MARK	1

DESIGNED BY:	D. LOGAN
DRAWN BY:	D. LOGAN
CHECKED BY:	R. HARRIS
SUBMITTED BY:	N. FISCHER
SIZE:	ANSI FULL BLEED D (22.00 X 34.00 INCHES)
ISSUE DATE:	MARCH 2026
SOLICITATION NO.:	
CONTRACT NO.:	
U.S. ARMY CORPS OF ENGINEERS LOUISVILLE DISTRICT 600 DR. MARTIN LUTHER KING JR. PLACE LOUISVILLE KY, 40202	

LEGEND


- CONTROL POINT LOCATION
- CONTRACTOR WORK LIMITS
- EXISTING WATER LINE
- EXISTING GAS LINE
- EXISTING SANITARY LINE
- EXISTING OVERHEAD ELECTRIC LINE
- EXISTING STORM LINE
- EXISTING CONTOURS
- EXISTING FENCE
- EXISTING TREELINE
- EXISTING DITCHLINE
- EXISTING CULVERT

A1 SITE SURVEY
SCALE: 1:40


LD 53 ACCESS ROAD
OLMSTED, IL
112574, FY2025

SITE SURVEY


SHEET ID
VF105

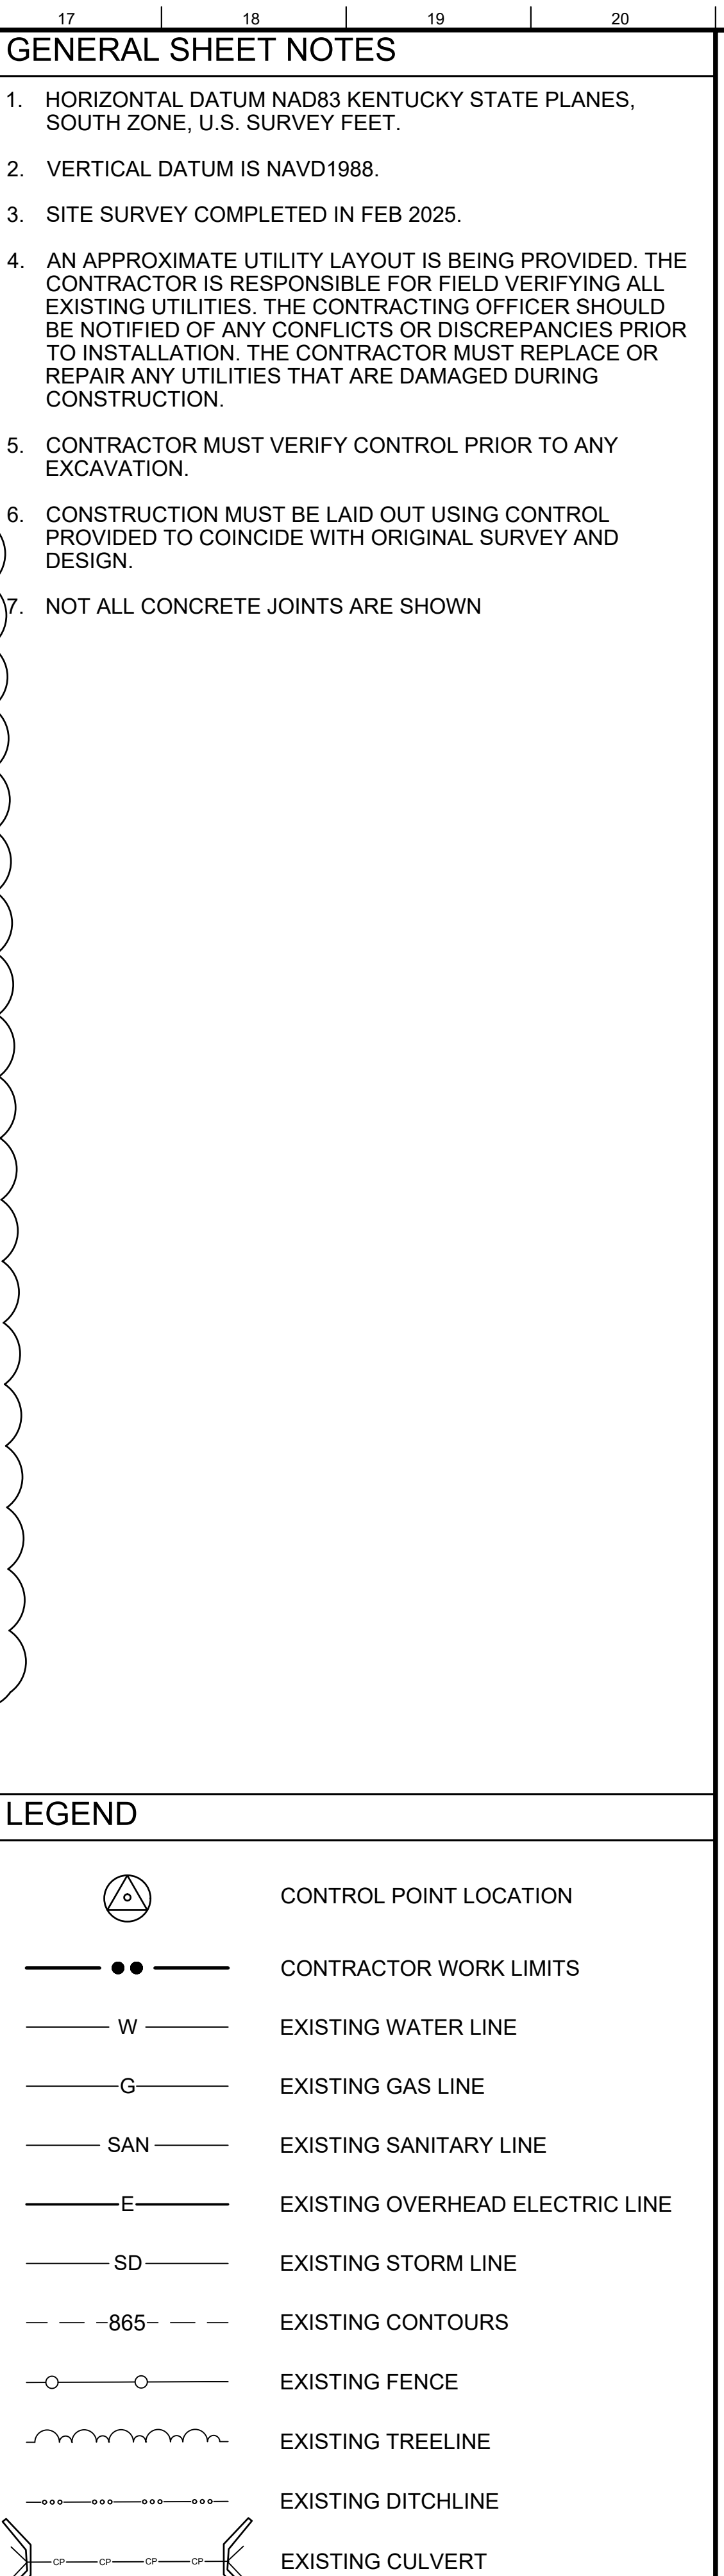


RTIFIED FINAL W912QR-6040629_Plans-0003

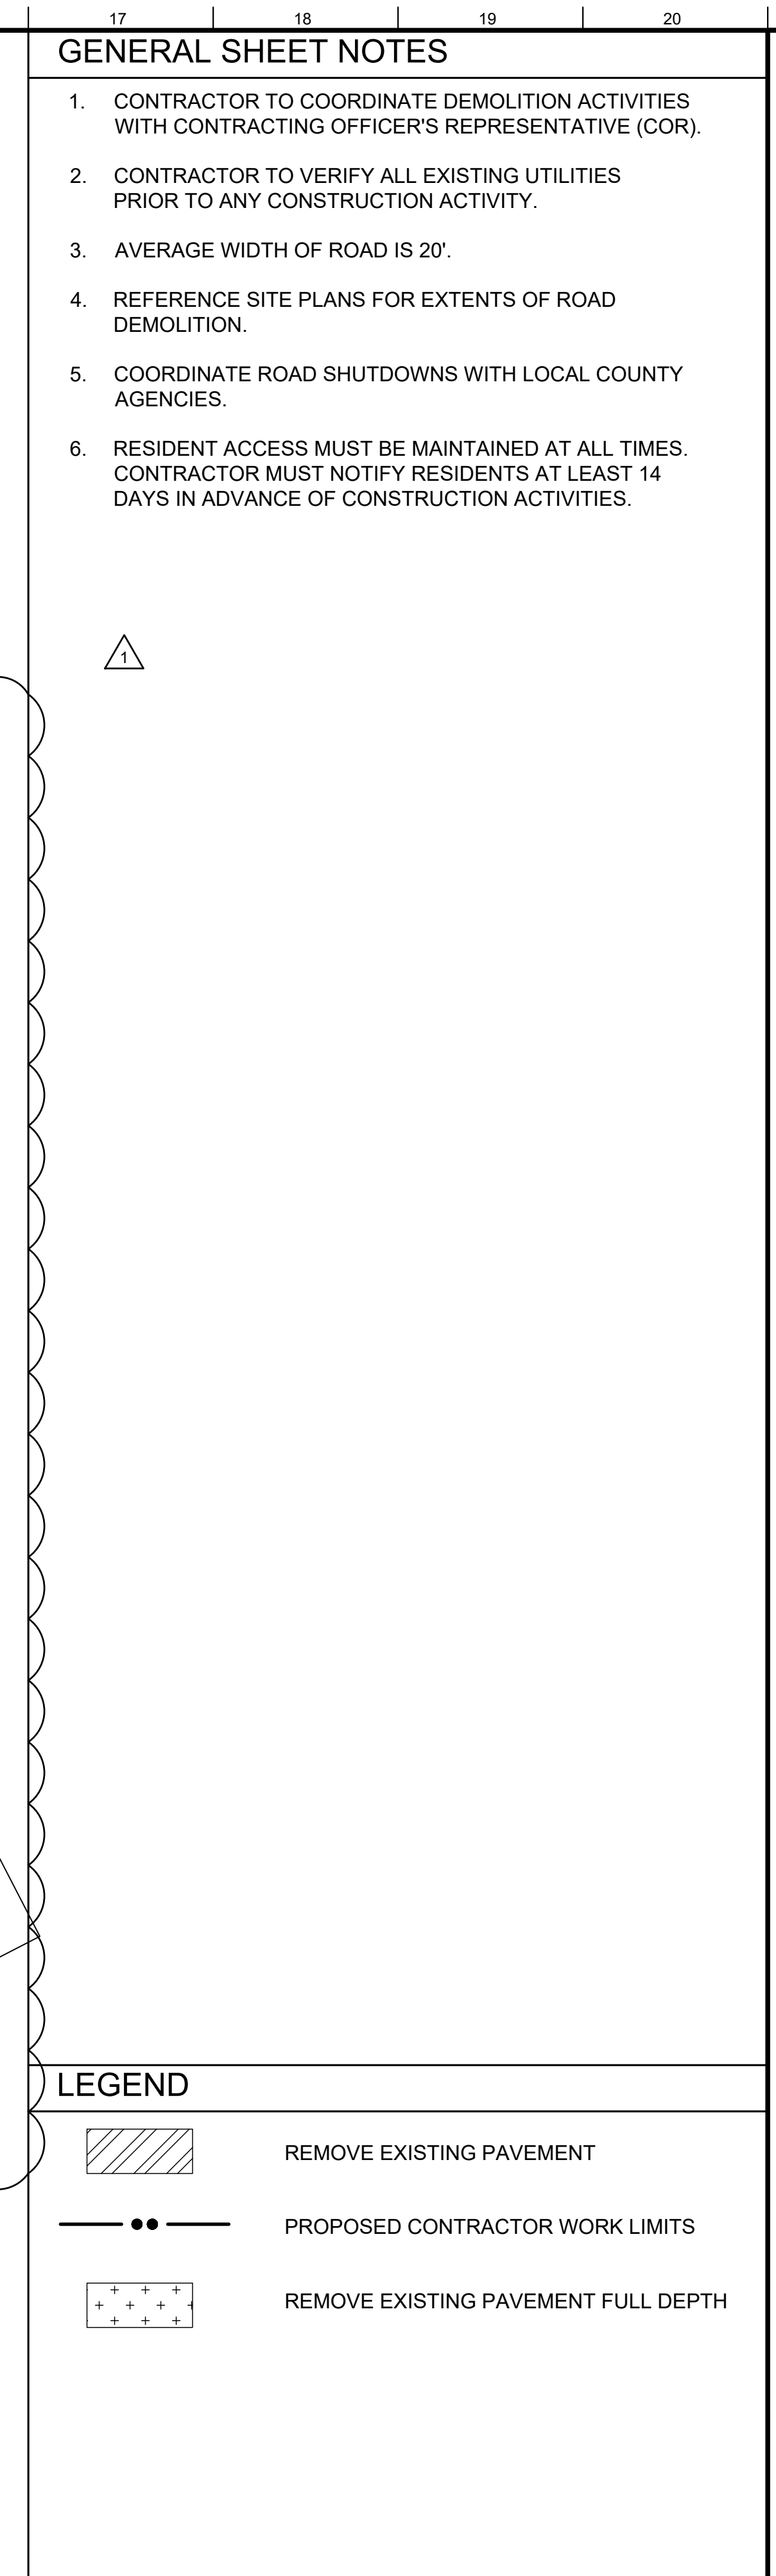

RTIFIED FINAL W912QR-60440629_Plans-0003 O:\EDPUBLIC\CAD\CIVIL\112574 - FY25 LD 53 ACCESS ROAD\PLAN SETS\02 DRAWINGS\01\MSTD NEW BASE.DWG AEC_B&W.STB 12:48:46 PM 4/1/2026

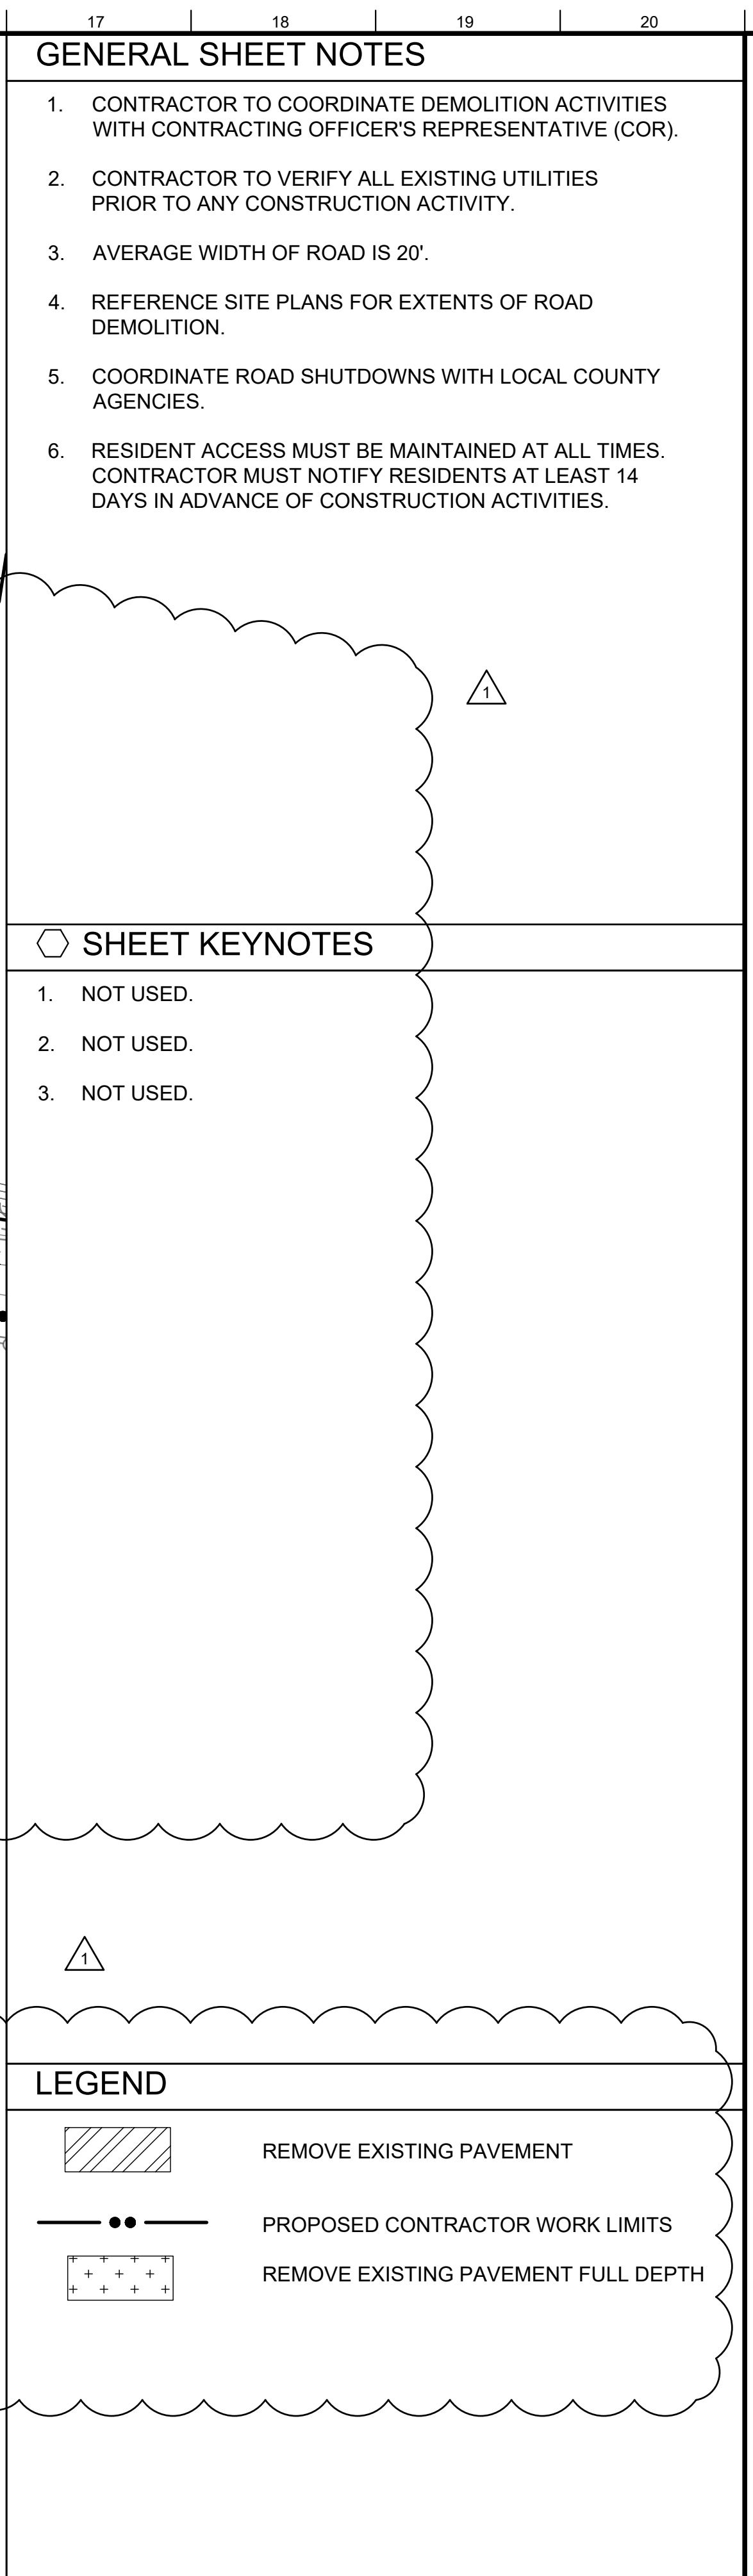

CERTIFIED FINAL
W912QR-60440629_Plans-0003
 O:\EDPUBLIC\CAD\CIVIL\112574 - FY25 LD 53 ACCESS ROAD\PLAN SETS\02_DRAWINGS\01\LISTED NEW BASE.DWG
 AEC B&W.STB
 12:48:48 PM 4/1/2026

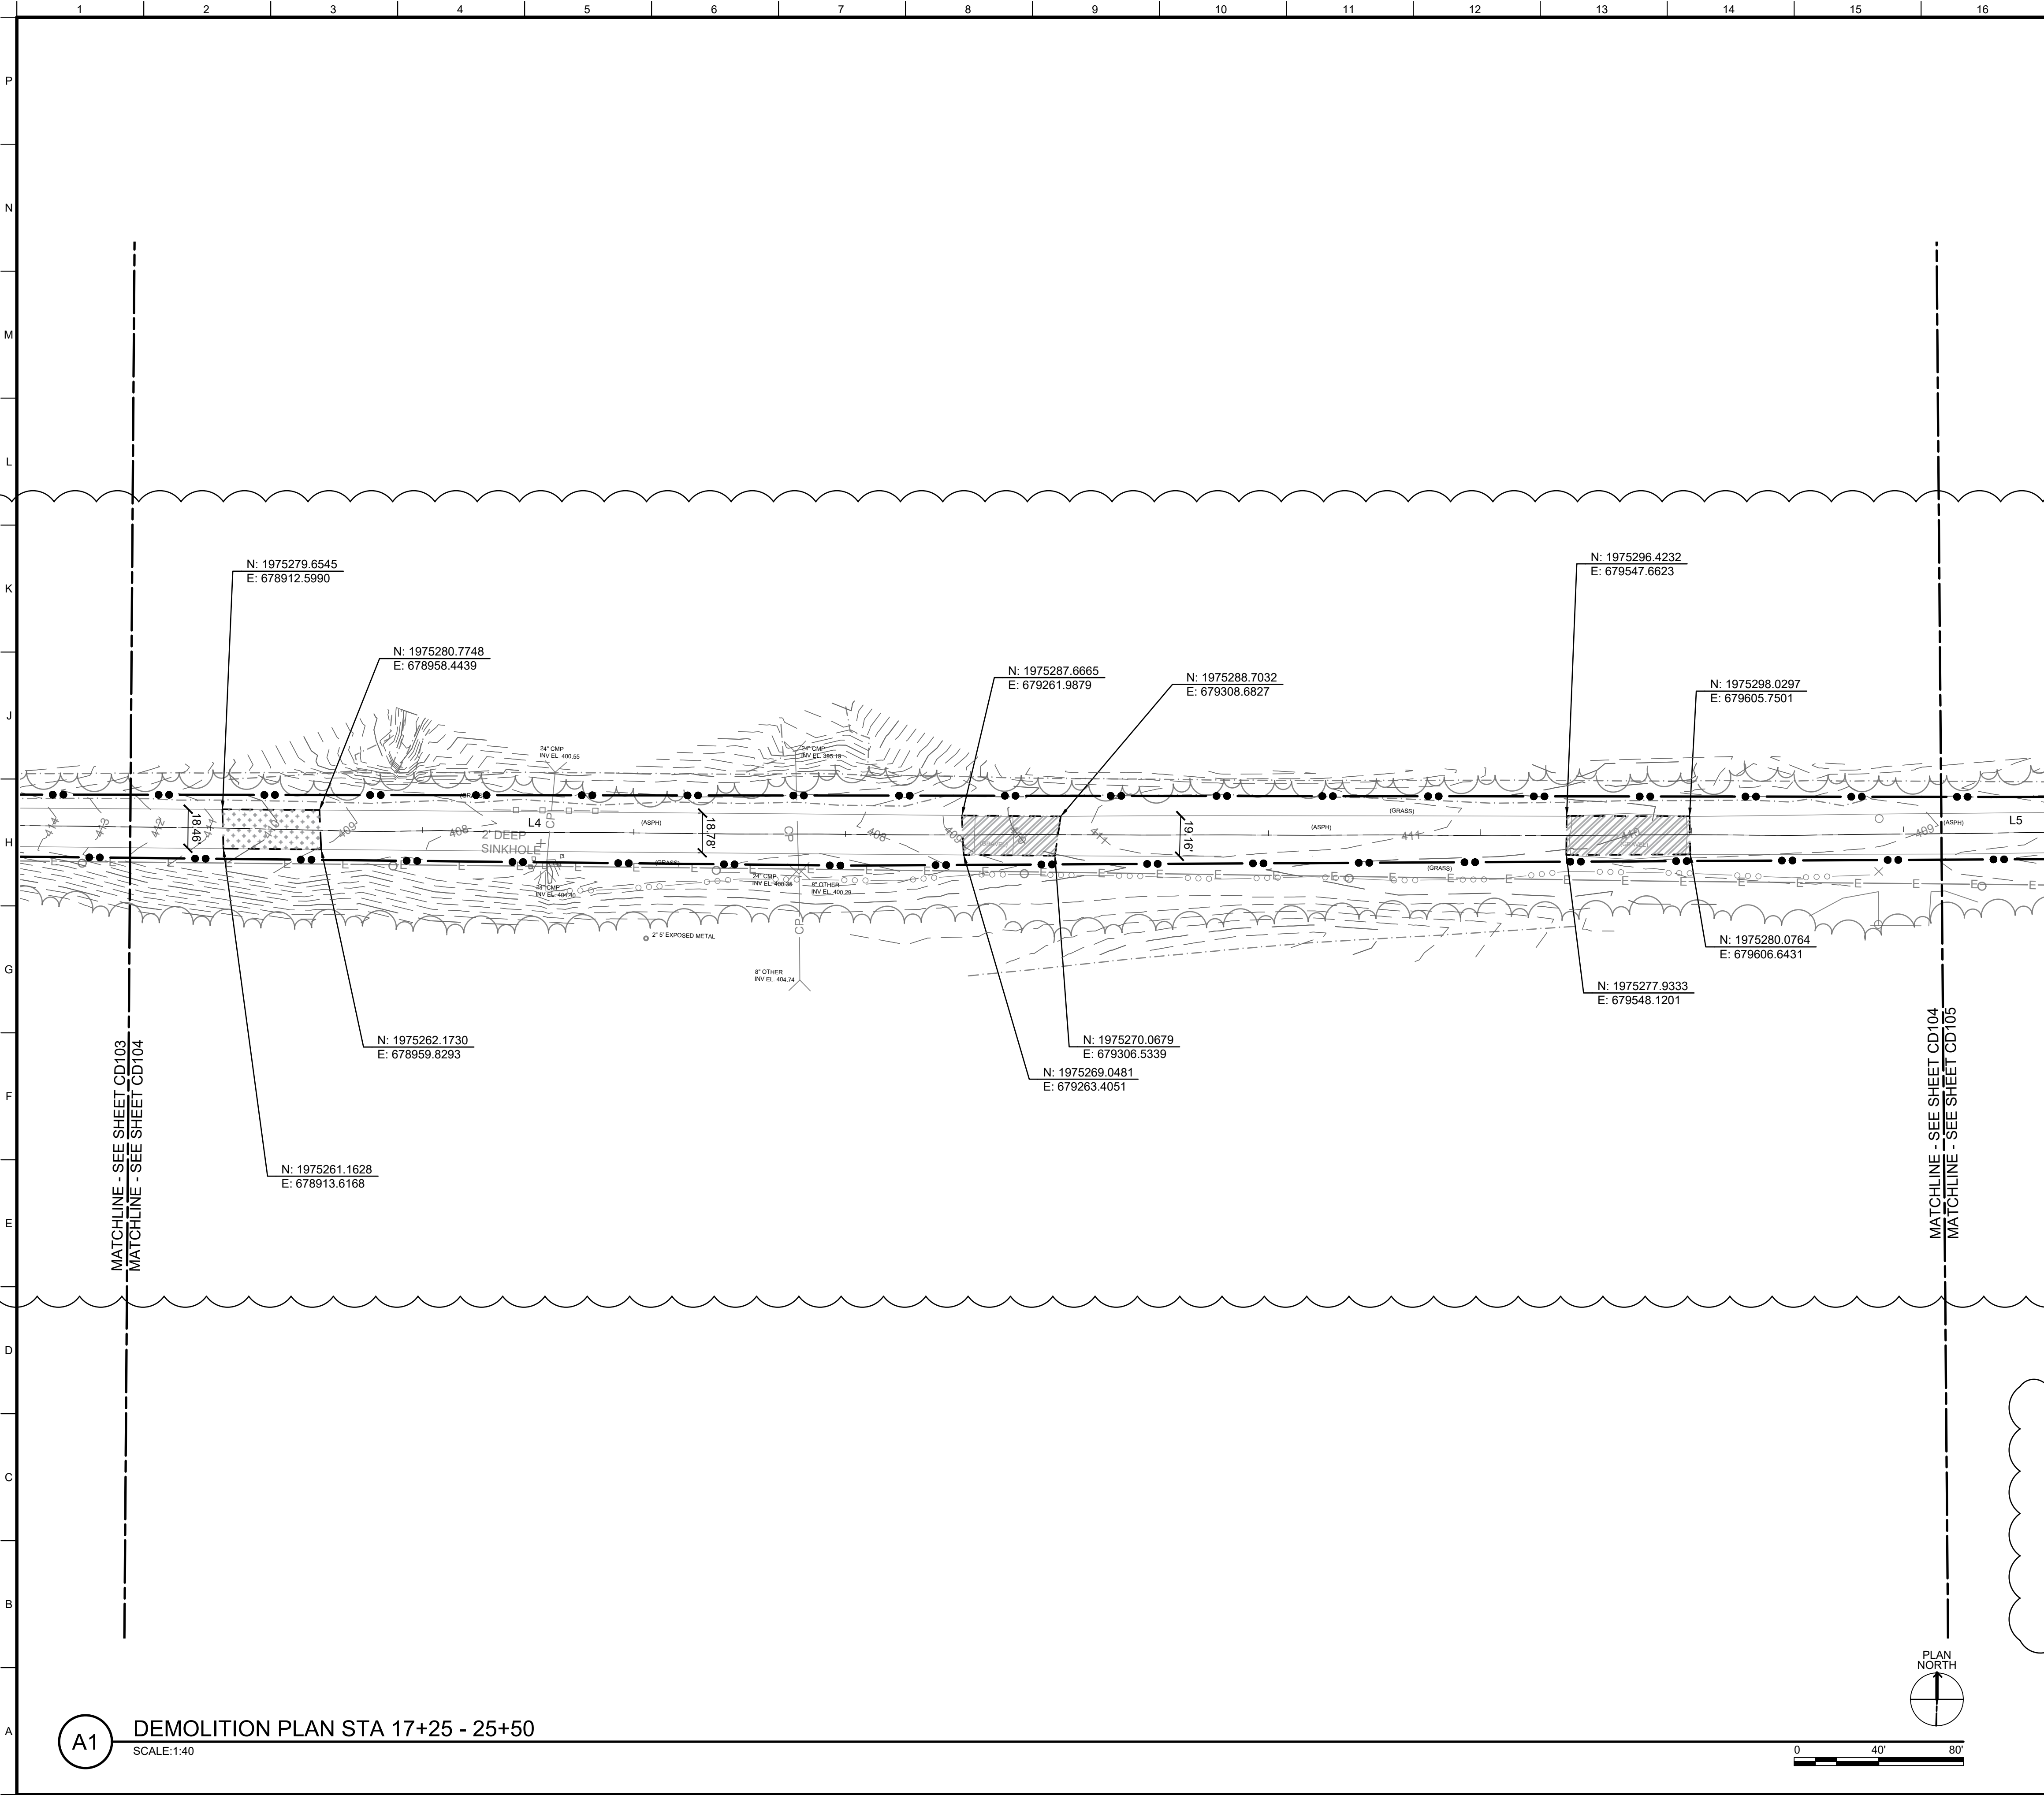

GENERAL SHEET NOTES

1. CONTRACTOR TO COORDINATE DEMOLITION ACTIVITIES WITH CONTRACTING OFFICER'S REPRESENTATIVE (COR).
2. CONTRACTOR TO VERIFY ALL EXISTING UTILITIES PRIOR TO ANY CONSTRUCTION ACTIVITY.
3. AVERAGE WIDTH OF ROAD IS 20'.
4. REFERENCE SITE PLANS FOR EXTENTS OF ROAD DEMOLITION.
5. COORDINATE ROAD SHUTDOWNS WITH LOCAL COUNTY AGENCIES.
6. RESIDENT ACCESS MUST BE MAINTAINED AT ALL TIMES. CONTRACTOR MUST NOTIFY RESIDENTS AT LEAST 14 DAYS IN ADVANCE OF CONSTRUCTION ACTIVITIES.

SHEET KEYNOTES

1. NOT USED.
2. NOT USED.
3. NOT USED.

LEGEND

- REMOVE EXISTING PAVEMENT
- PROPOSED CONTRACTOR WORK LIMITS
- REMOVE EXISTING PAVEMENT FULL DEPTH




DATE	DESCRIPTION	MARK
APR 2026	REVISED IN ACCORDANCE WITH AMENDMENT 0003	1

DESIGNED BY: D. LOGAN	ISSUE DATE: MARCH 2026
DRAWN BY: D. LOGAN	SOLICITATION NO.:
CHECKED BY: R. HARRIS	CONTRACT NO.:
SUBMITTED BY: N. FISCHER	
SIZE: ANSI FULL BLEED D (22.00 X 34.00 INCHES)	

U.S. ARMY CORPS OF ENGINEERS LOUISVILLE DISTRICT 600 DR. MARTIN LUTHER KING JR. PLACE LOUISVILLE KY, 40202	DEMOLITION PLAN
---	-----------------

SHEET ID
CD104

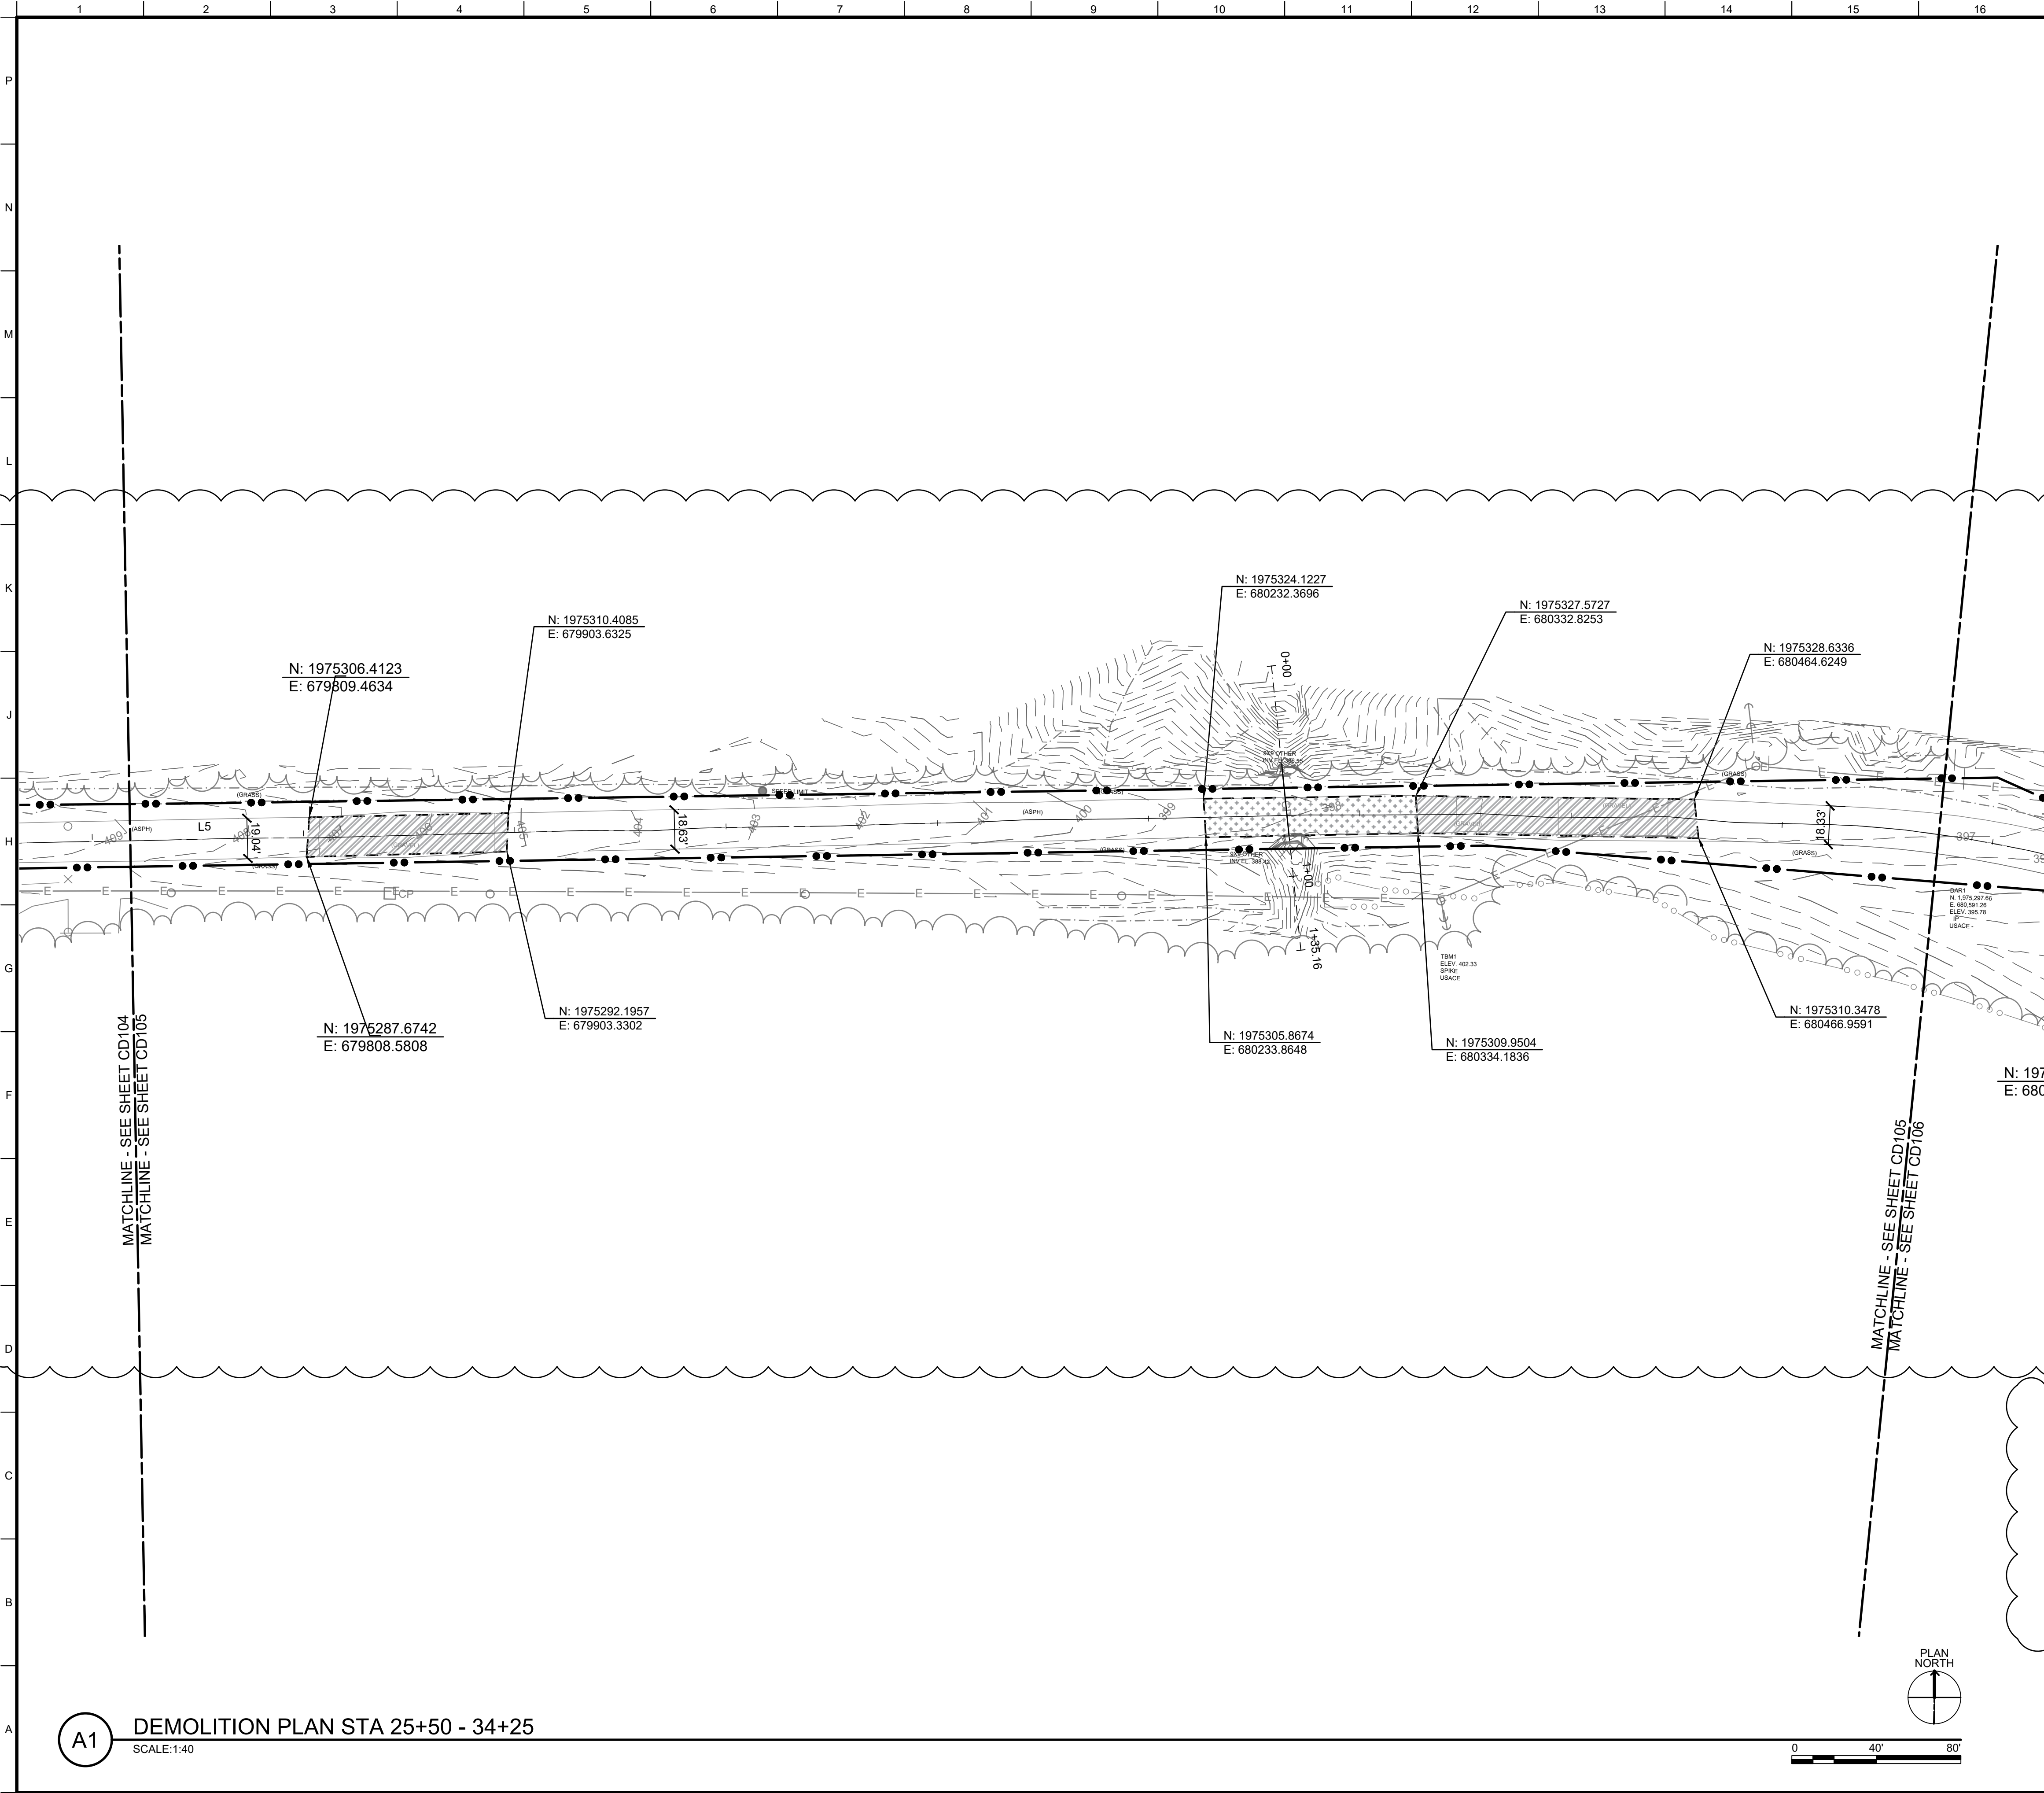

GENERAL SHEET NOTES


1. CONTRACTOR TO COORDINATE DEMOLITION ACTIVITIES WITH CONTRACTING OFFICER'S REPRESENTATIVE (COR).
2. CONTRACTOR TO VERIFY ALL EXISTING UTILITIES PRIOR TO ANY CONSTRUCTION ACTIVITY.
3. AVERAGE WIDTH OF ROAD IS 20'.
4. REFERENCE SITE PLANS FOR EXTENTS OF ROAD DEMOLITION.
5. COORDINATE ROAD SHUTDOWNS WITH LOCAL COUNTY AGENCIES.
6. RESIDENT ACCESS MUST BE MAINTAINED AT ALL TIMES. CONTRACTOR MUST NOTIFY RESIDENTS AT LEAST 14 DAYS IN ADVANCE OF CONSTRUCTION ACTIVITIES.

SHEET KEYNOTES

1. NOT USED.
2. NOT USED.
3. NOT USED.

LEGEND

- REMOVE EXISTING PAVEMENT
- PROPOSED CONTRACTOR WORK LIMITS
- REMOVE EXISTING PAVEMENT FULL DEPTH




DATE	DESCRIPTION	MARK
APR 2026	REVISED IN ACCORDANCE WITH AMENDMENT 0003	1

DESIGNED BY: D. LOGAN	ISSUE DATE: MARCH 2026
DRAWN BY: D. LOGAN	SOLICITATION NO.:
CHECKED BY: R. HARRIS	CONTRACT NO.:
SUBMITTED BY: N. FISCHER	
SIZE: ANSI FULL BLEED D (22.00 X 34.00 INCHES)	

U.S. ARMY CORPS OF ENGINEERS LOUISVILLE DISTRICT 600 DR. MARTIN LUTHER KING JR. PLACE LOUISVILLE KY, 40202	DEMOLITION PLAN
---	-----------------

SHEET ID
CD105

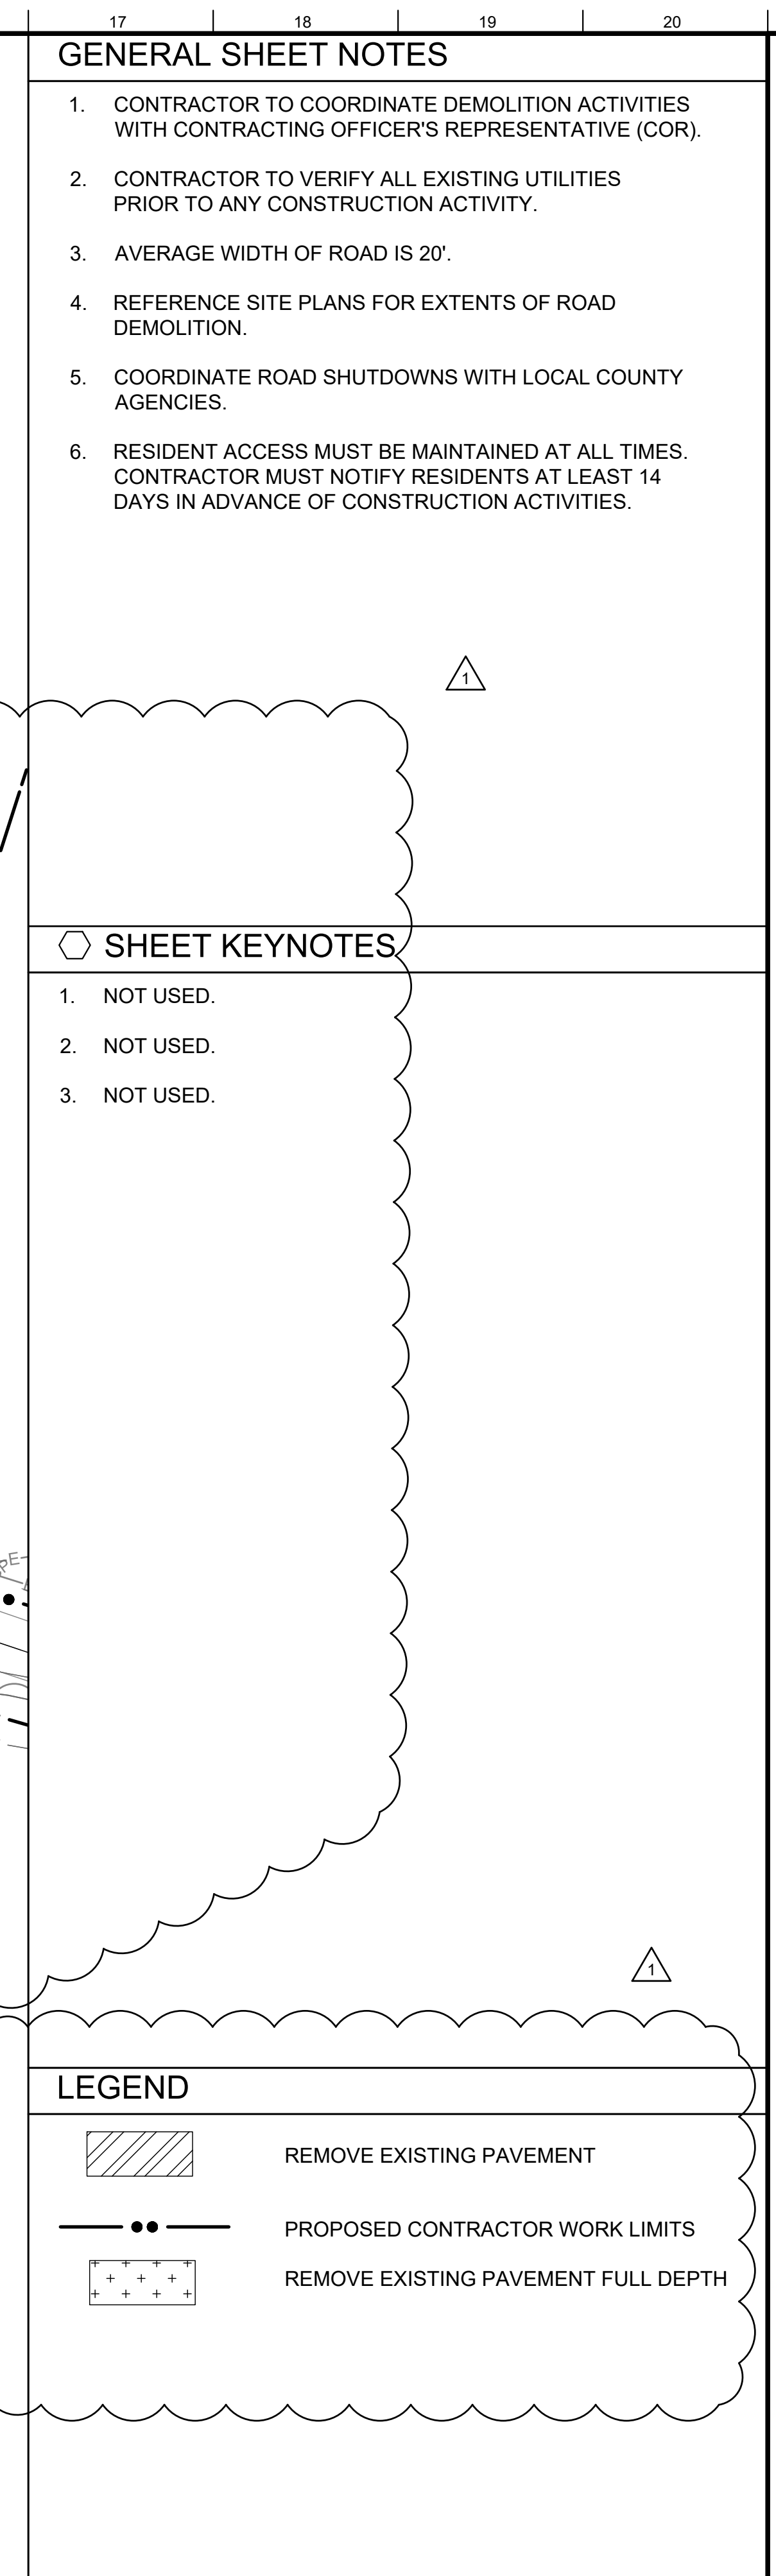



-

[illegible]


LEGEND	
	REMOVE EXISTING PAVEMENT
	PROPOSED CONTRACTOR WORK LIMITS
	REMOVE EXISTING PAVEMENT FULL DEPTH

RTIFIED FINAL
W912QR-60440629_Plans-0003
12:48:54 PM 4/1/2026
AEC_B&I.STB
O:\EDIPUBLIC\CAD\CIVIL\112574 - FY25 LD 53 ACCESS ROAD\PLAN SETS\02_DRAWINGS\LISTED NEW BASE.DWG

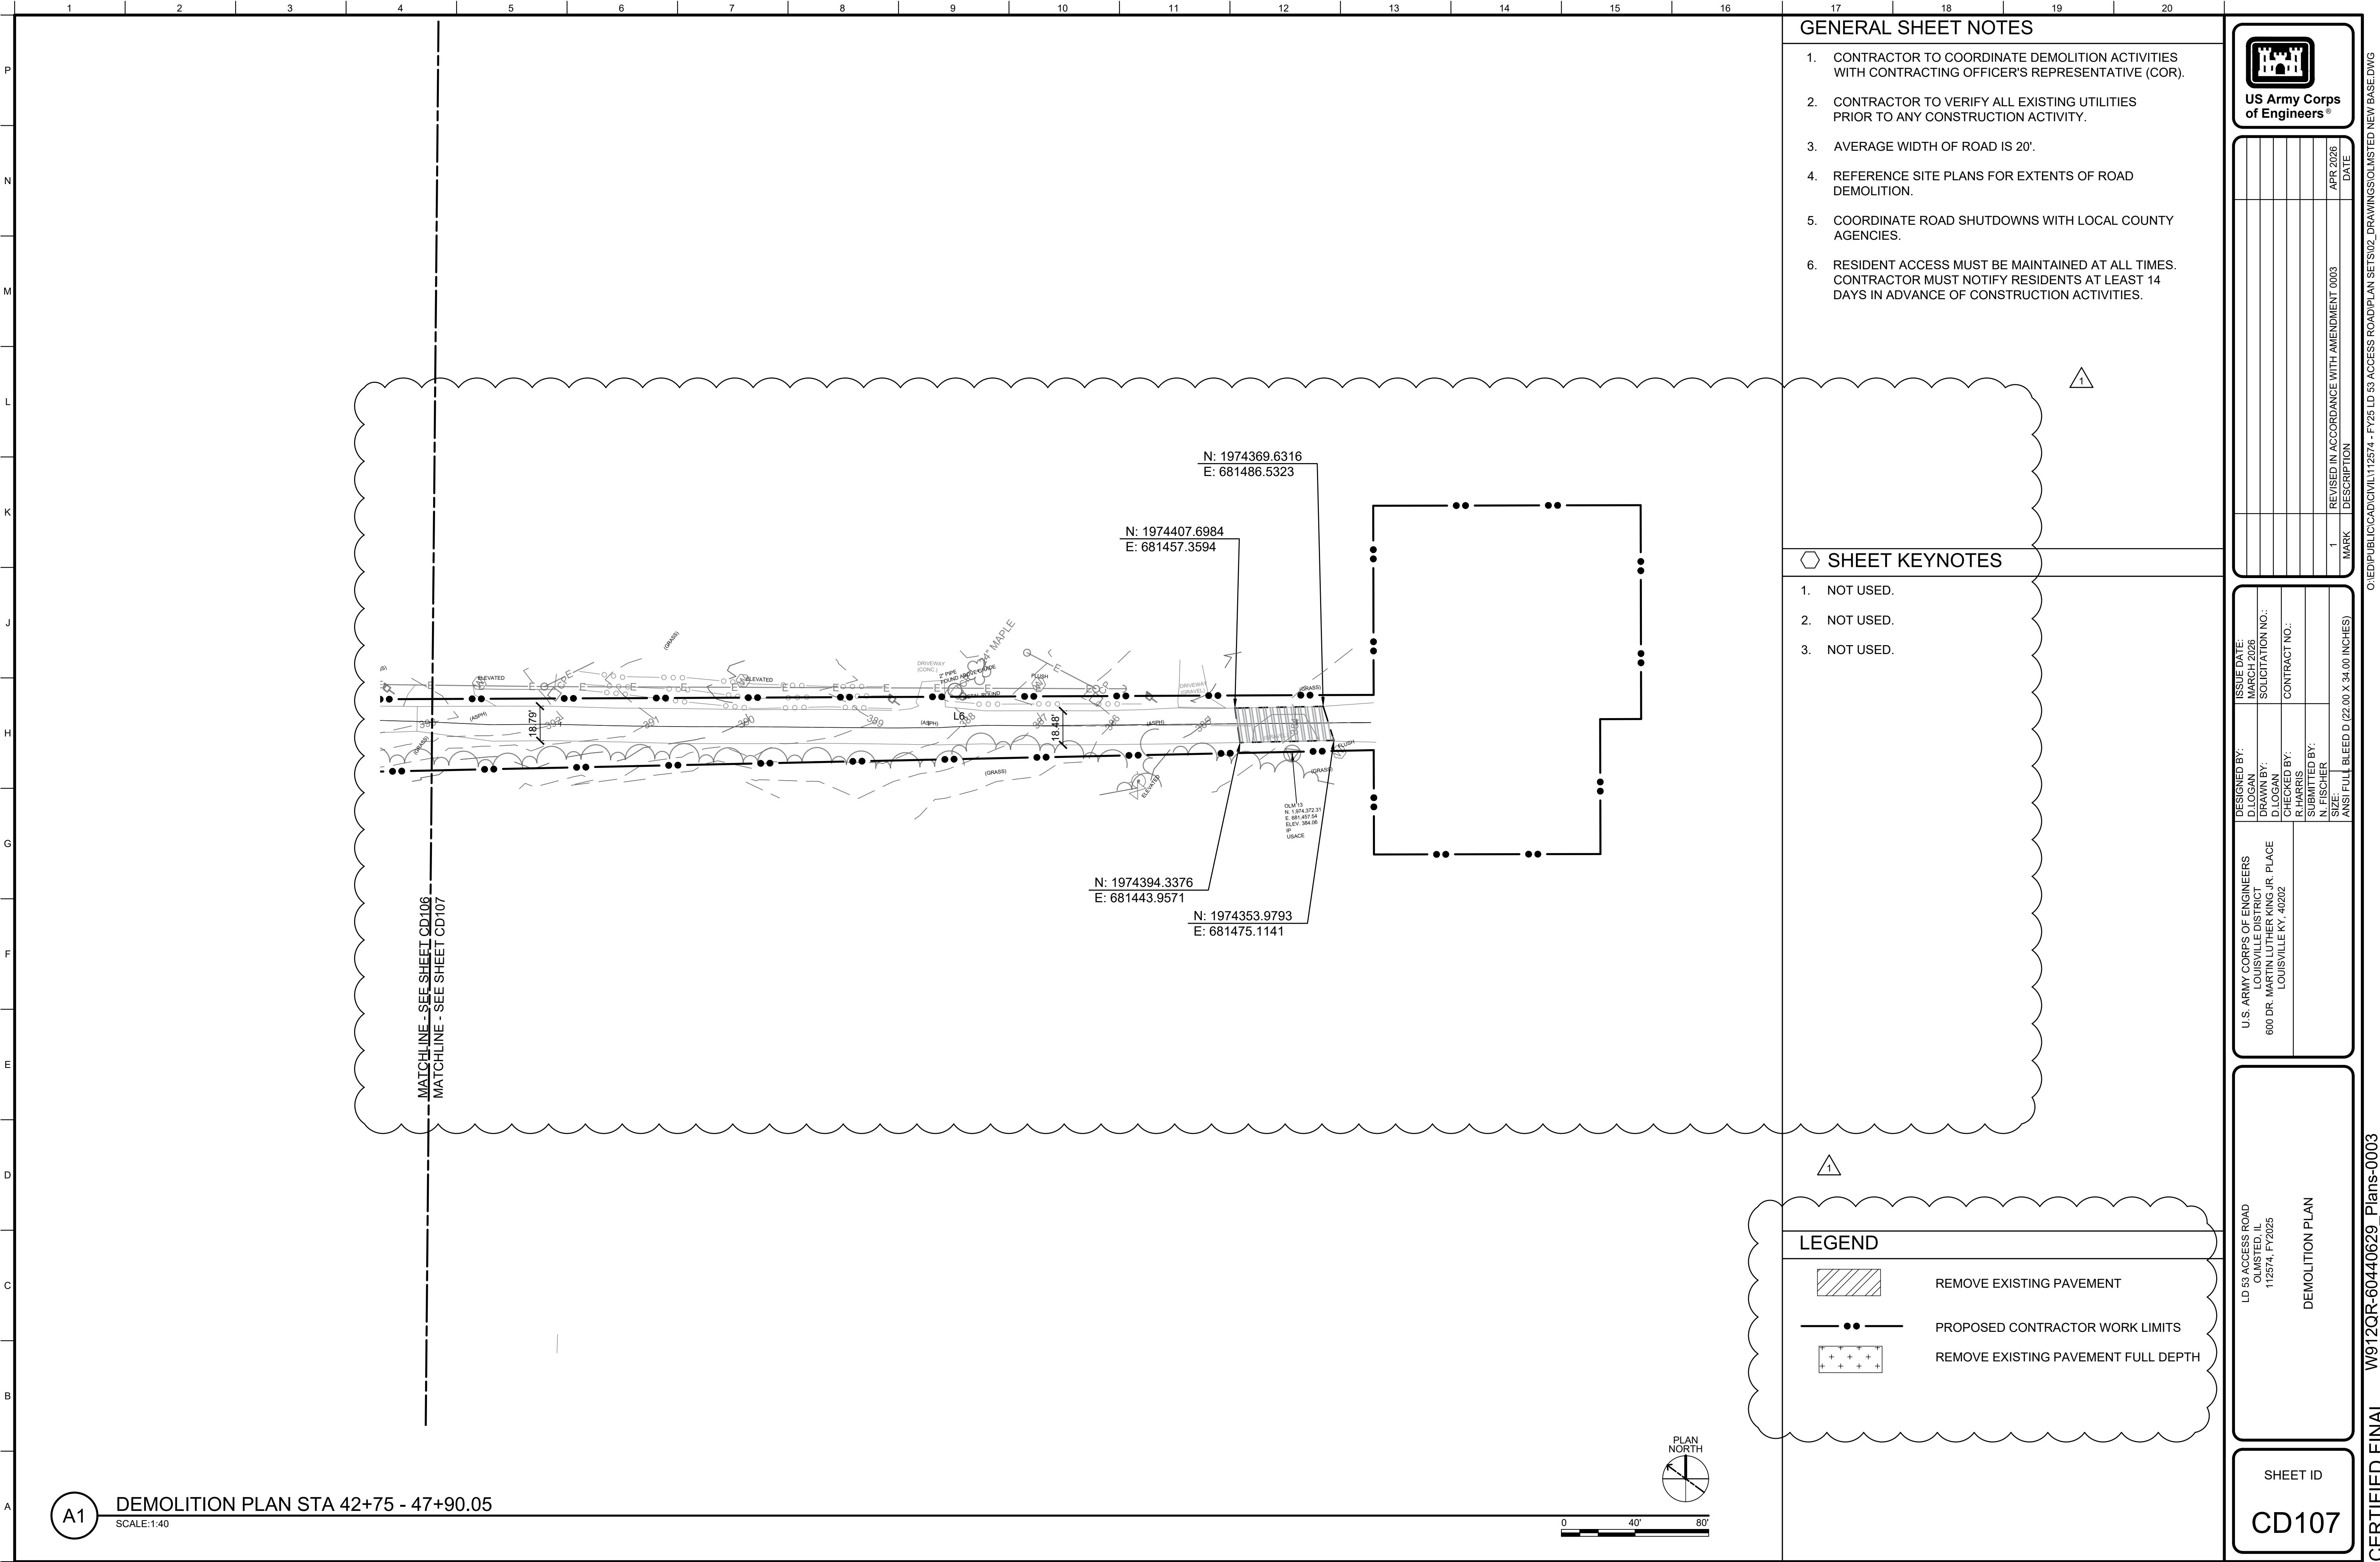


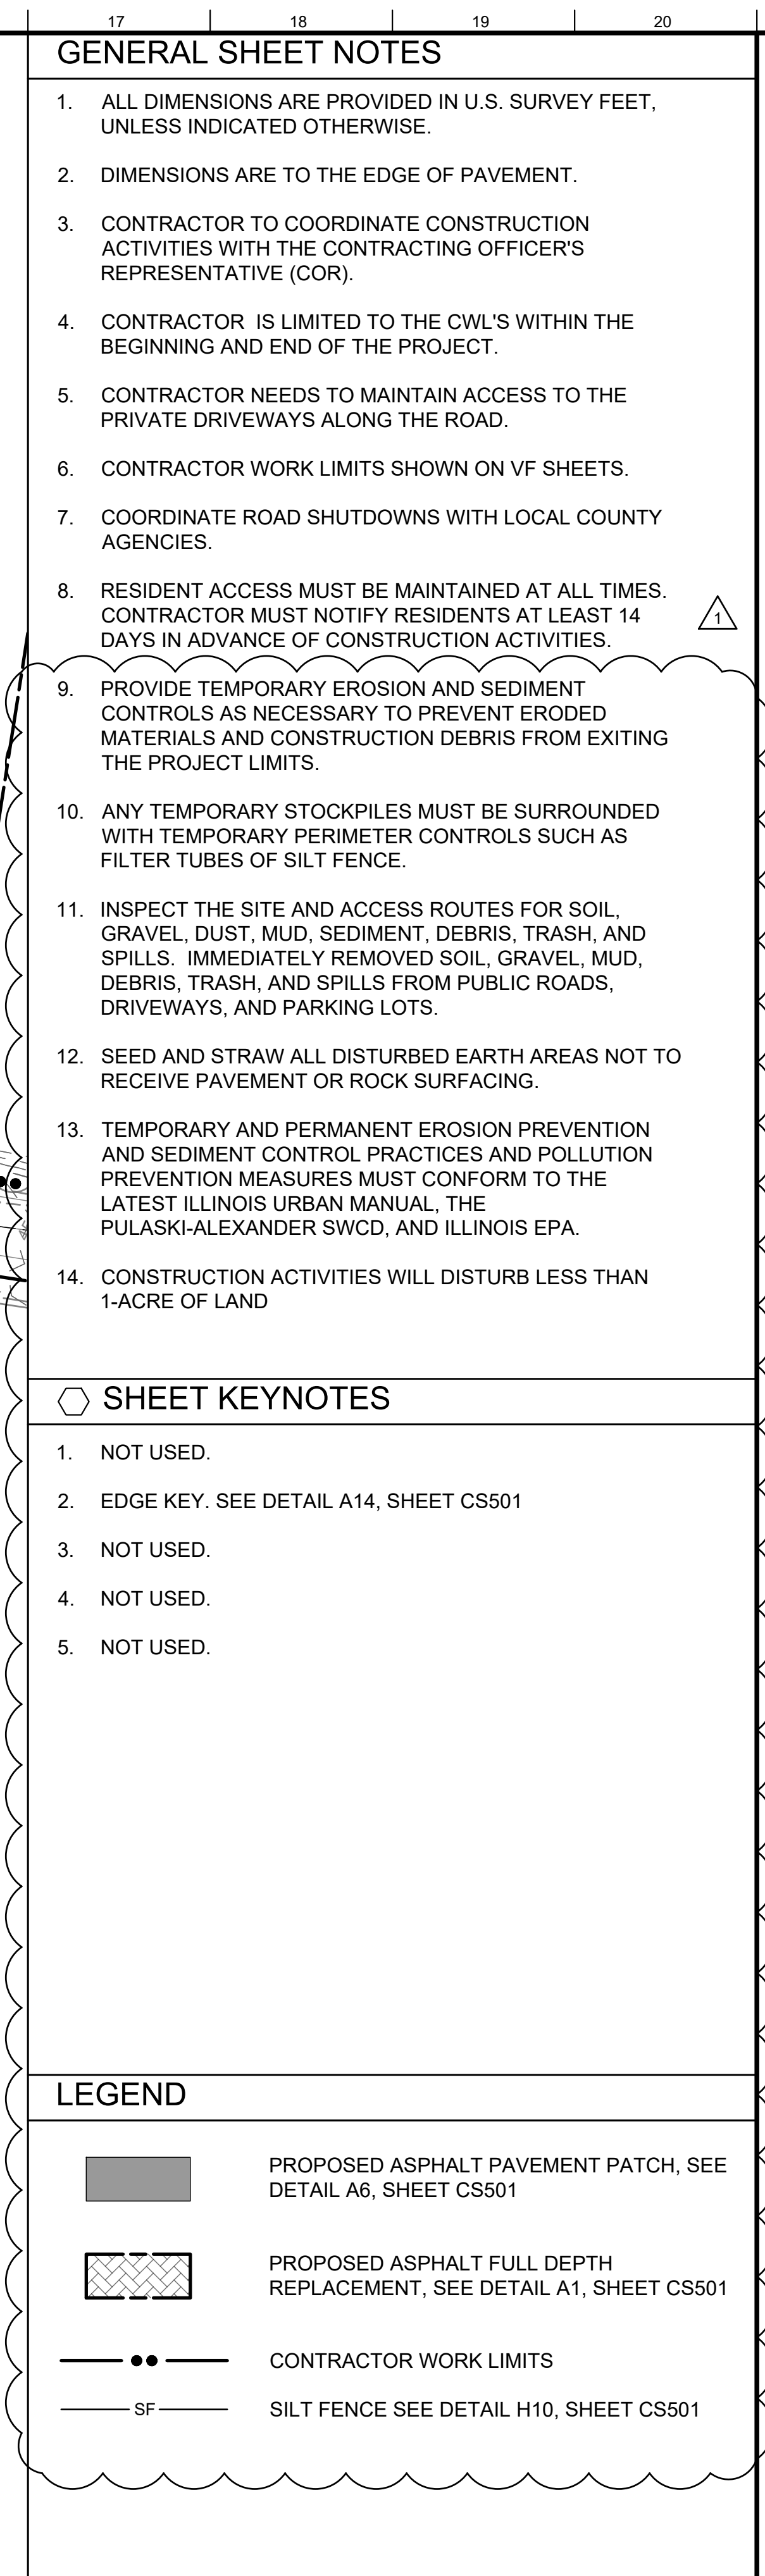

CERTIFIED FINAL W912QR-60440629_Plans-0003
O:\EDIPUBLIC\CAD\CIVIL\112574 - FY25 LD 53 ACCESS ROAD\PLAN SETS\02_DRAWINGS\QLMSTED NEW BASE.DWG
AEC B&W.STB
12:49:00 PM 4/1/2026

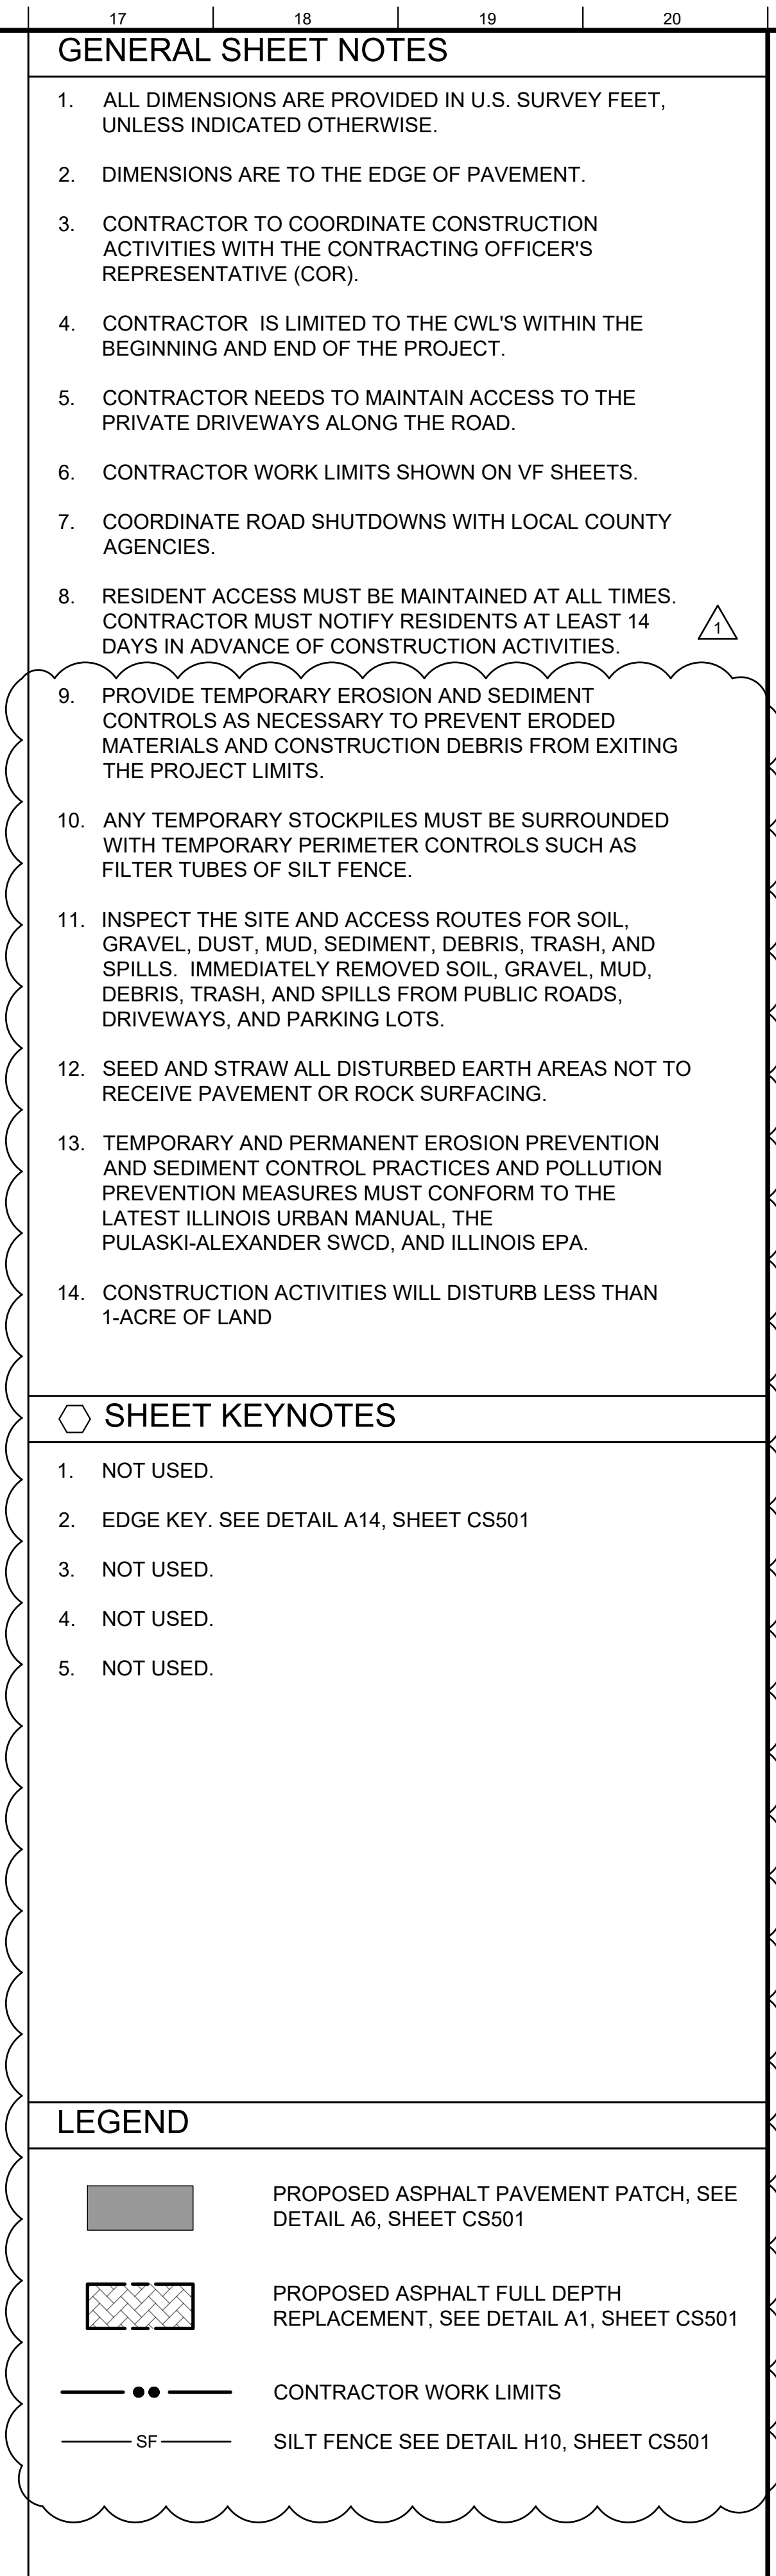

RTIFIED FINAL W912QR-60440629_Plans-0003 O:\EDIPUBLIC\CAD\CIVIL\112574 - FY25 LD 53 ACCESS ROAD\PLAN SETS\02 DRAWINGS\01\MSTED NEW BASE.DWG AEC_B&W.STB 12/49/01 PM 4/1/2026

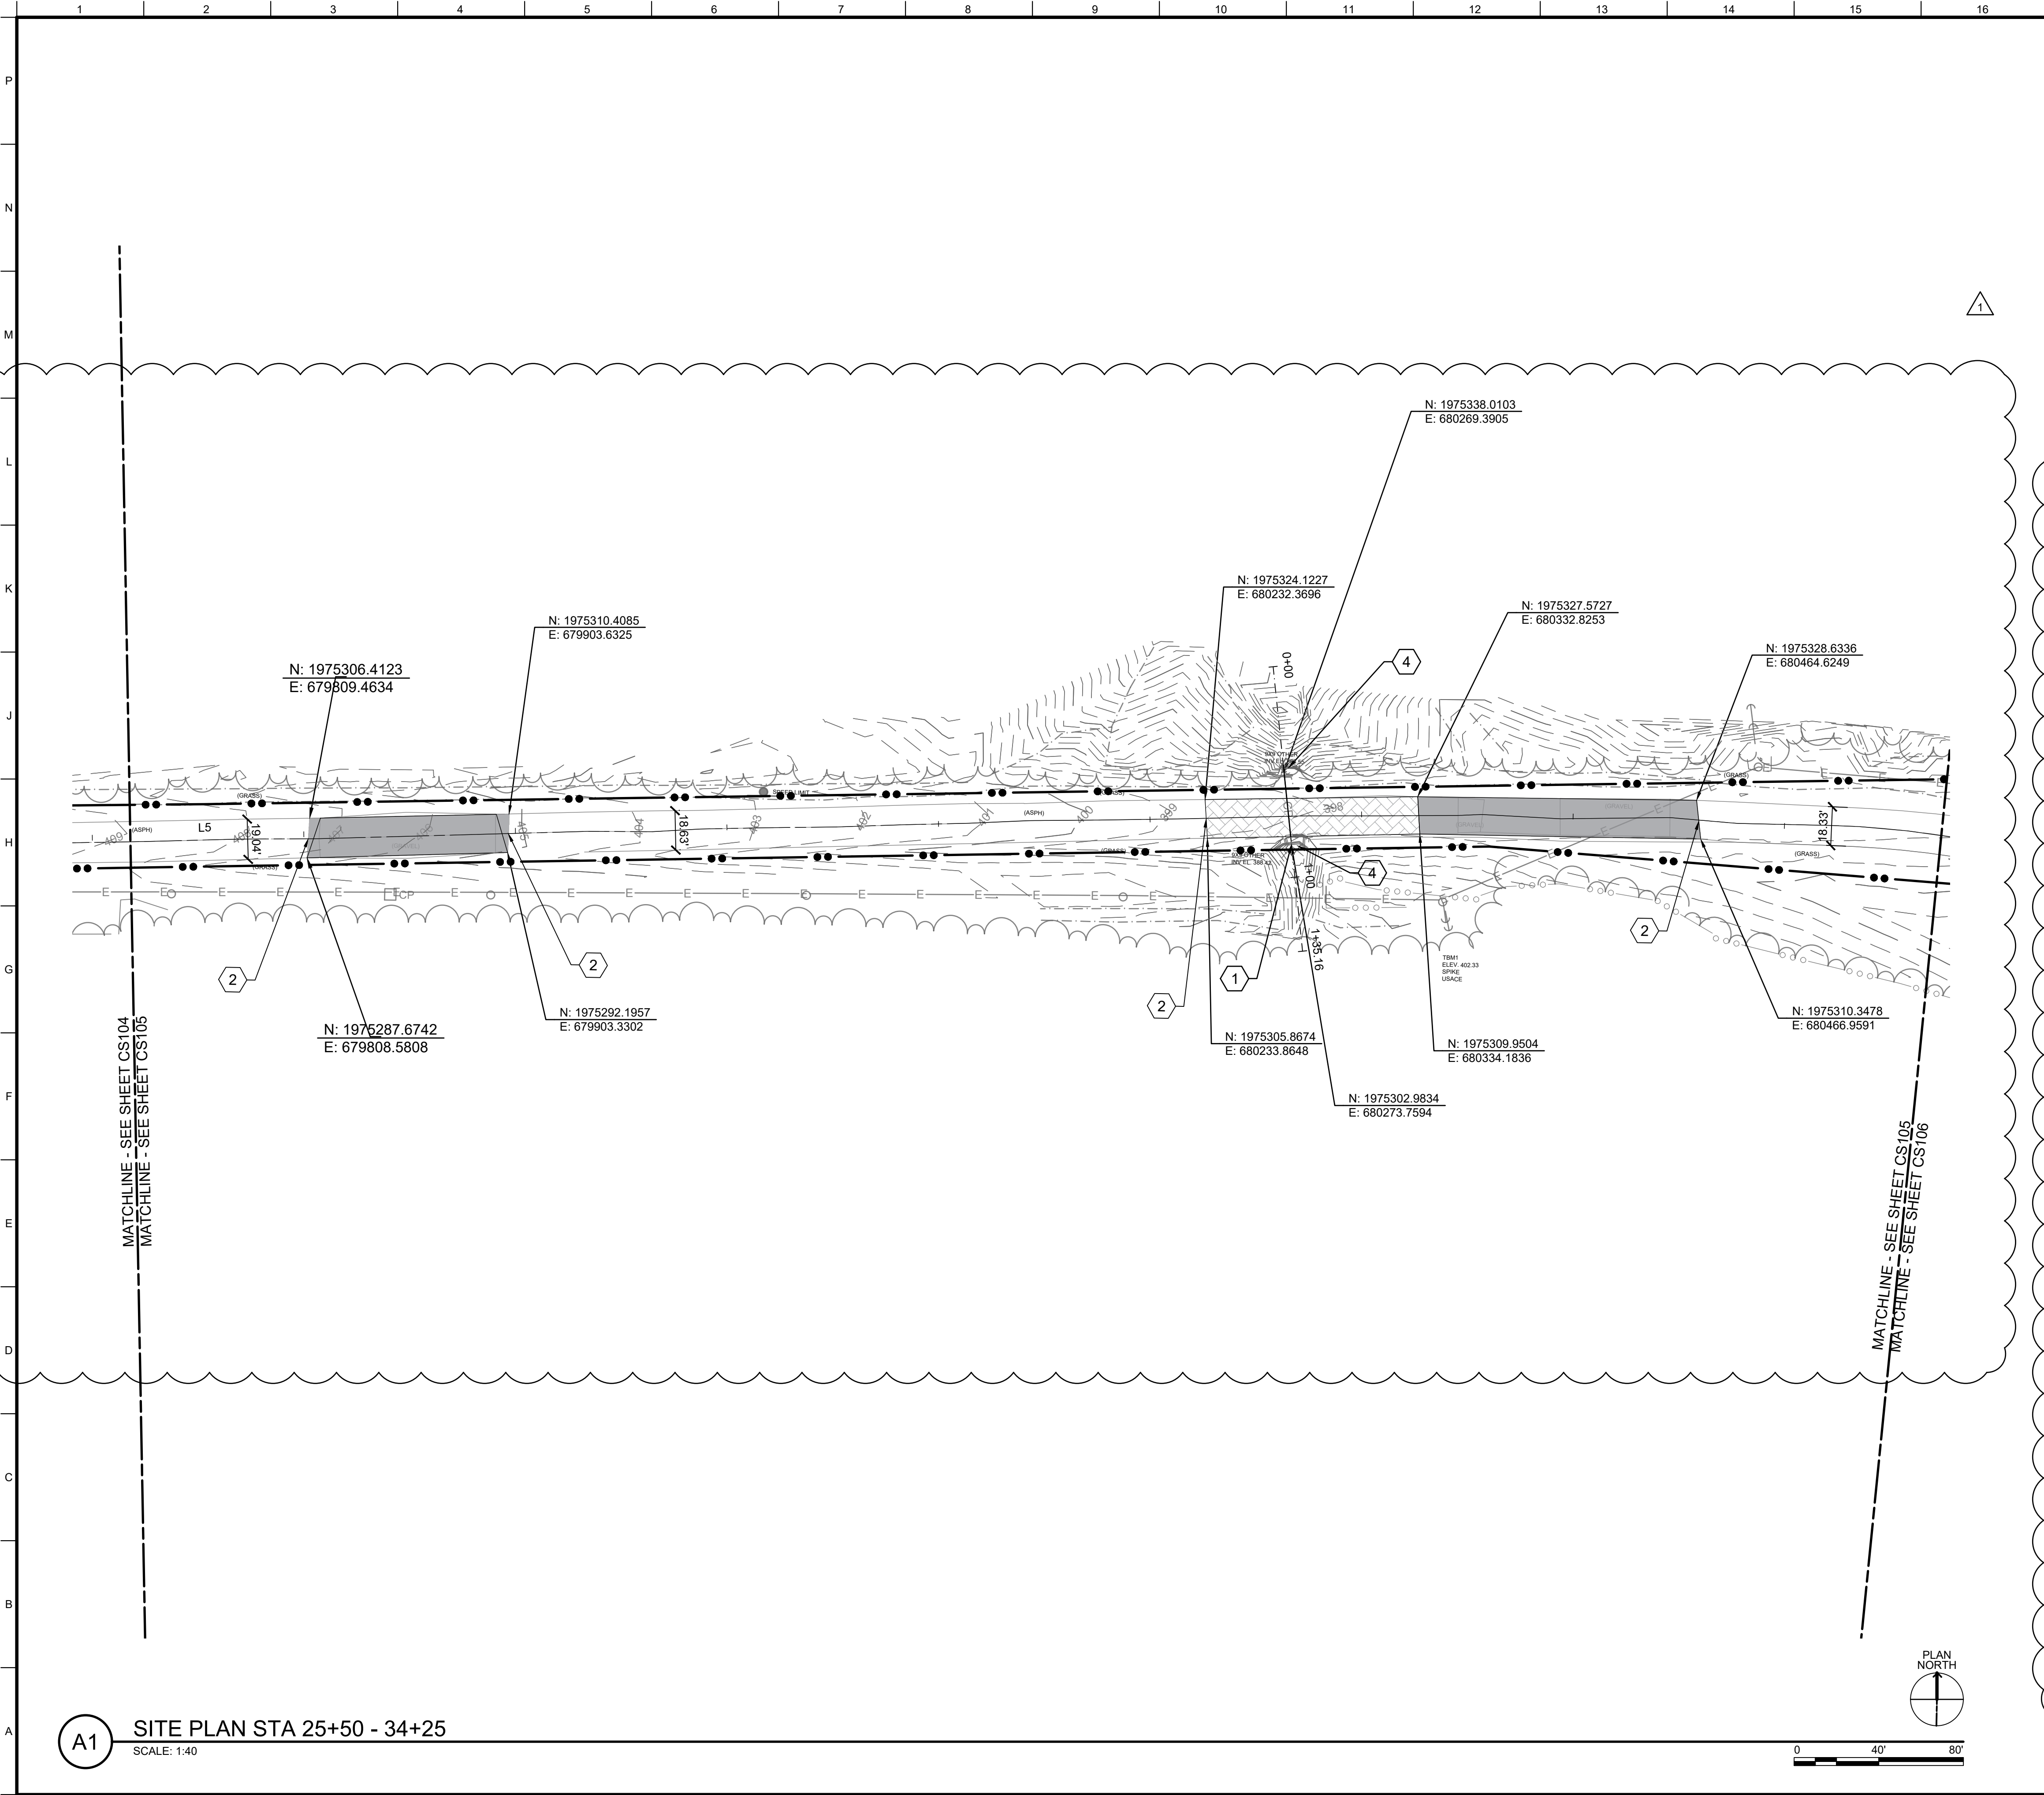

GENERAL SHEET NOTES

1. ALL DIMENSIONS ARE PROVIDED IN U.S. SURVEY FEET, UNLESS INDICATED OTHERWISE.
2. DIMENSIONS ARE TO THE EDGE OF PAVEMENT.
3. CONTRACTOR TO COORDINATE CONSTRUCTION ACTIVITIES WITH THE CONTRACTING OFFICER'S REPRESENTATIVE (COR).
4. CONTRACTOR IS LIMITED TO THE CWL'S WITHIN THE BEGINNING AND END OF THE PROJECT.
5. CONTRACTOR NEEDS TO MAINTAIN ACCESS TO THE PRIVATE DRIVEWAYS ALONG THE ROAD.
6. CONTRACTOR WORK LIMITS SHOWN ON VF SHEETS.
7. COORDINATE ROAD SHUTDOWNS WITH LOCAL COUNTY AGENCIES.
8. RESIDENT ACCESS MUST BE MAINTAINED AT ALL TIMES. CONTRACTOR MUST NOTIFY RESIDENTS AT LEAST 14 DAYS IN ADVANCE OF CONSTRUCTION ACTIVITIES.
9. PROVIDE TEMPORARY EROSION AND SEDIMENT CONTROLS AS NECESSARY TO PREVENT ERODED MATERIALS AND CONSTRUCTION DEBRIS FROM EXITING THE PROJECT LIMITS.
10. ANY TEMPORARY STOCKPILES MUST BE SURROUNDED WITH TEMPORARY PERIMETER CONTROLS SUCH AS FILTER TUBES OF SILT FENCE.
11. INSPECT THE SITE AND ACCESS ROUTES FOR SOIL, GRAVEL, DUST, MUD, SEDIMENT, DEBRIS, TRASH, AND SPILLS. IMMEDIATELY REMOVED SOIL, GRAVEL, MUD, DEBRIS, TRASH, AND SPILLS FROM PUBLIC ROADS, DRIVEWAYS, AND PARKING LOTS.
12. SEED AND STRAW ALL DISTURBED EARTH AREAS NOT TO RECEIVE PAVEMENT OR ROCK SURFACING.
13. TEMPORARY AND PERMANENT EROSION PREVENTION AND SEDIMENT CONTROL PRACTICES AND POLLUTION PREVENTION MEASURES MUST CONFORM TO THE LATEST ILLINOIS URBAN MANUAL, THE PULASKI-ALEXANDER SWCD, AND ILLINOIS EPA.
14. CONSTRUCTION ACTIVITIES WILL DISTURB LESS THAN 1-ACRE OF LAND

SHEET KEYNOTES

1. NOT USED.
2. EDGE KEY. SEE DETAIL A14, SHEET CS501
3. NOT USED.
4. NOT USED.
5. NOT USED.

LEGEND

- PROPOSED ASPHALT PAVEMENT PATCH, SEE DETAIL A6, SHEET CS501
- PROPOSED ASPHALT FULL DEPTH REPLACEMENT, SEE DETAIL A1, SHEET CS501
- CONTRACTOR WORK LIMITS
- SILT FENCE SEE DETAIL H10, SHEET CS501




US Army Corps
of Engineers®

DATE	DESCRIPTION	MARK
APR 2026	REVISED IN ACCORDANCE WITH AMENDMENT 0003	1

DESIGNED BY: D. LOGAN	ISSUE DATE: MARCH 2026
DRAWN BY: R. HARRIS	SOLICITATION NO.:
CHECKED BY: N. FISCHER	CONTRACT NO.:
SUBMITTED BY: N. FISCHER	
SIZE: ANSI FULL BLEED D (22.00 X 34.00 INCHES)	

LD 53 ACCESS ROAD OLMSTED, IL 112574, FY2025	SITE PLAN STA 25+50 - 34+25
--	-----------------------------

SHEET ID
CS105

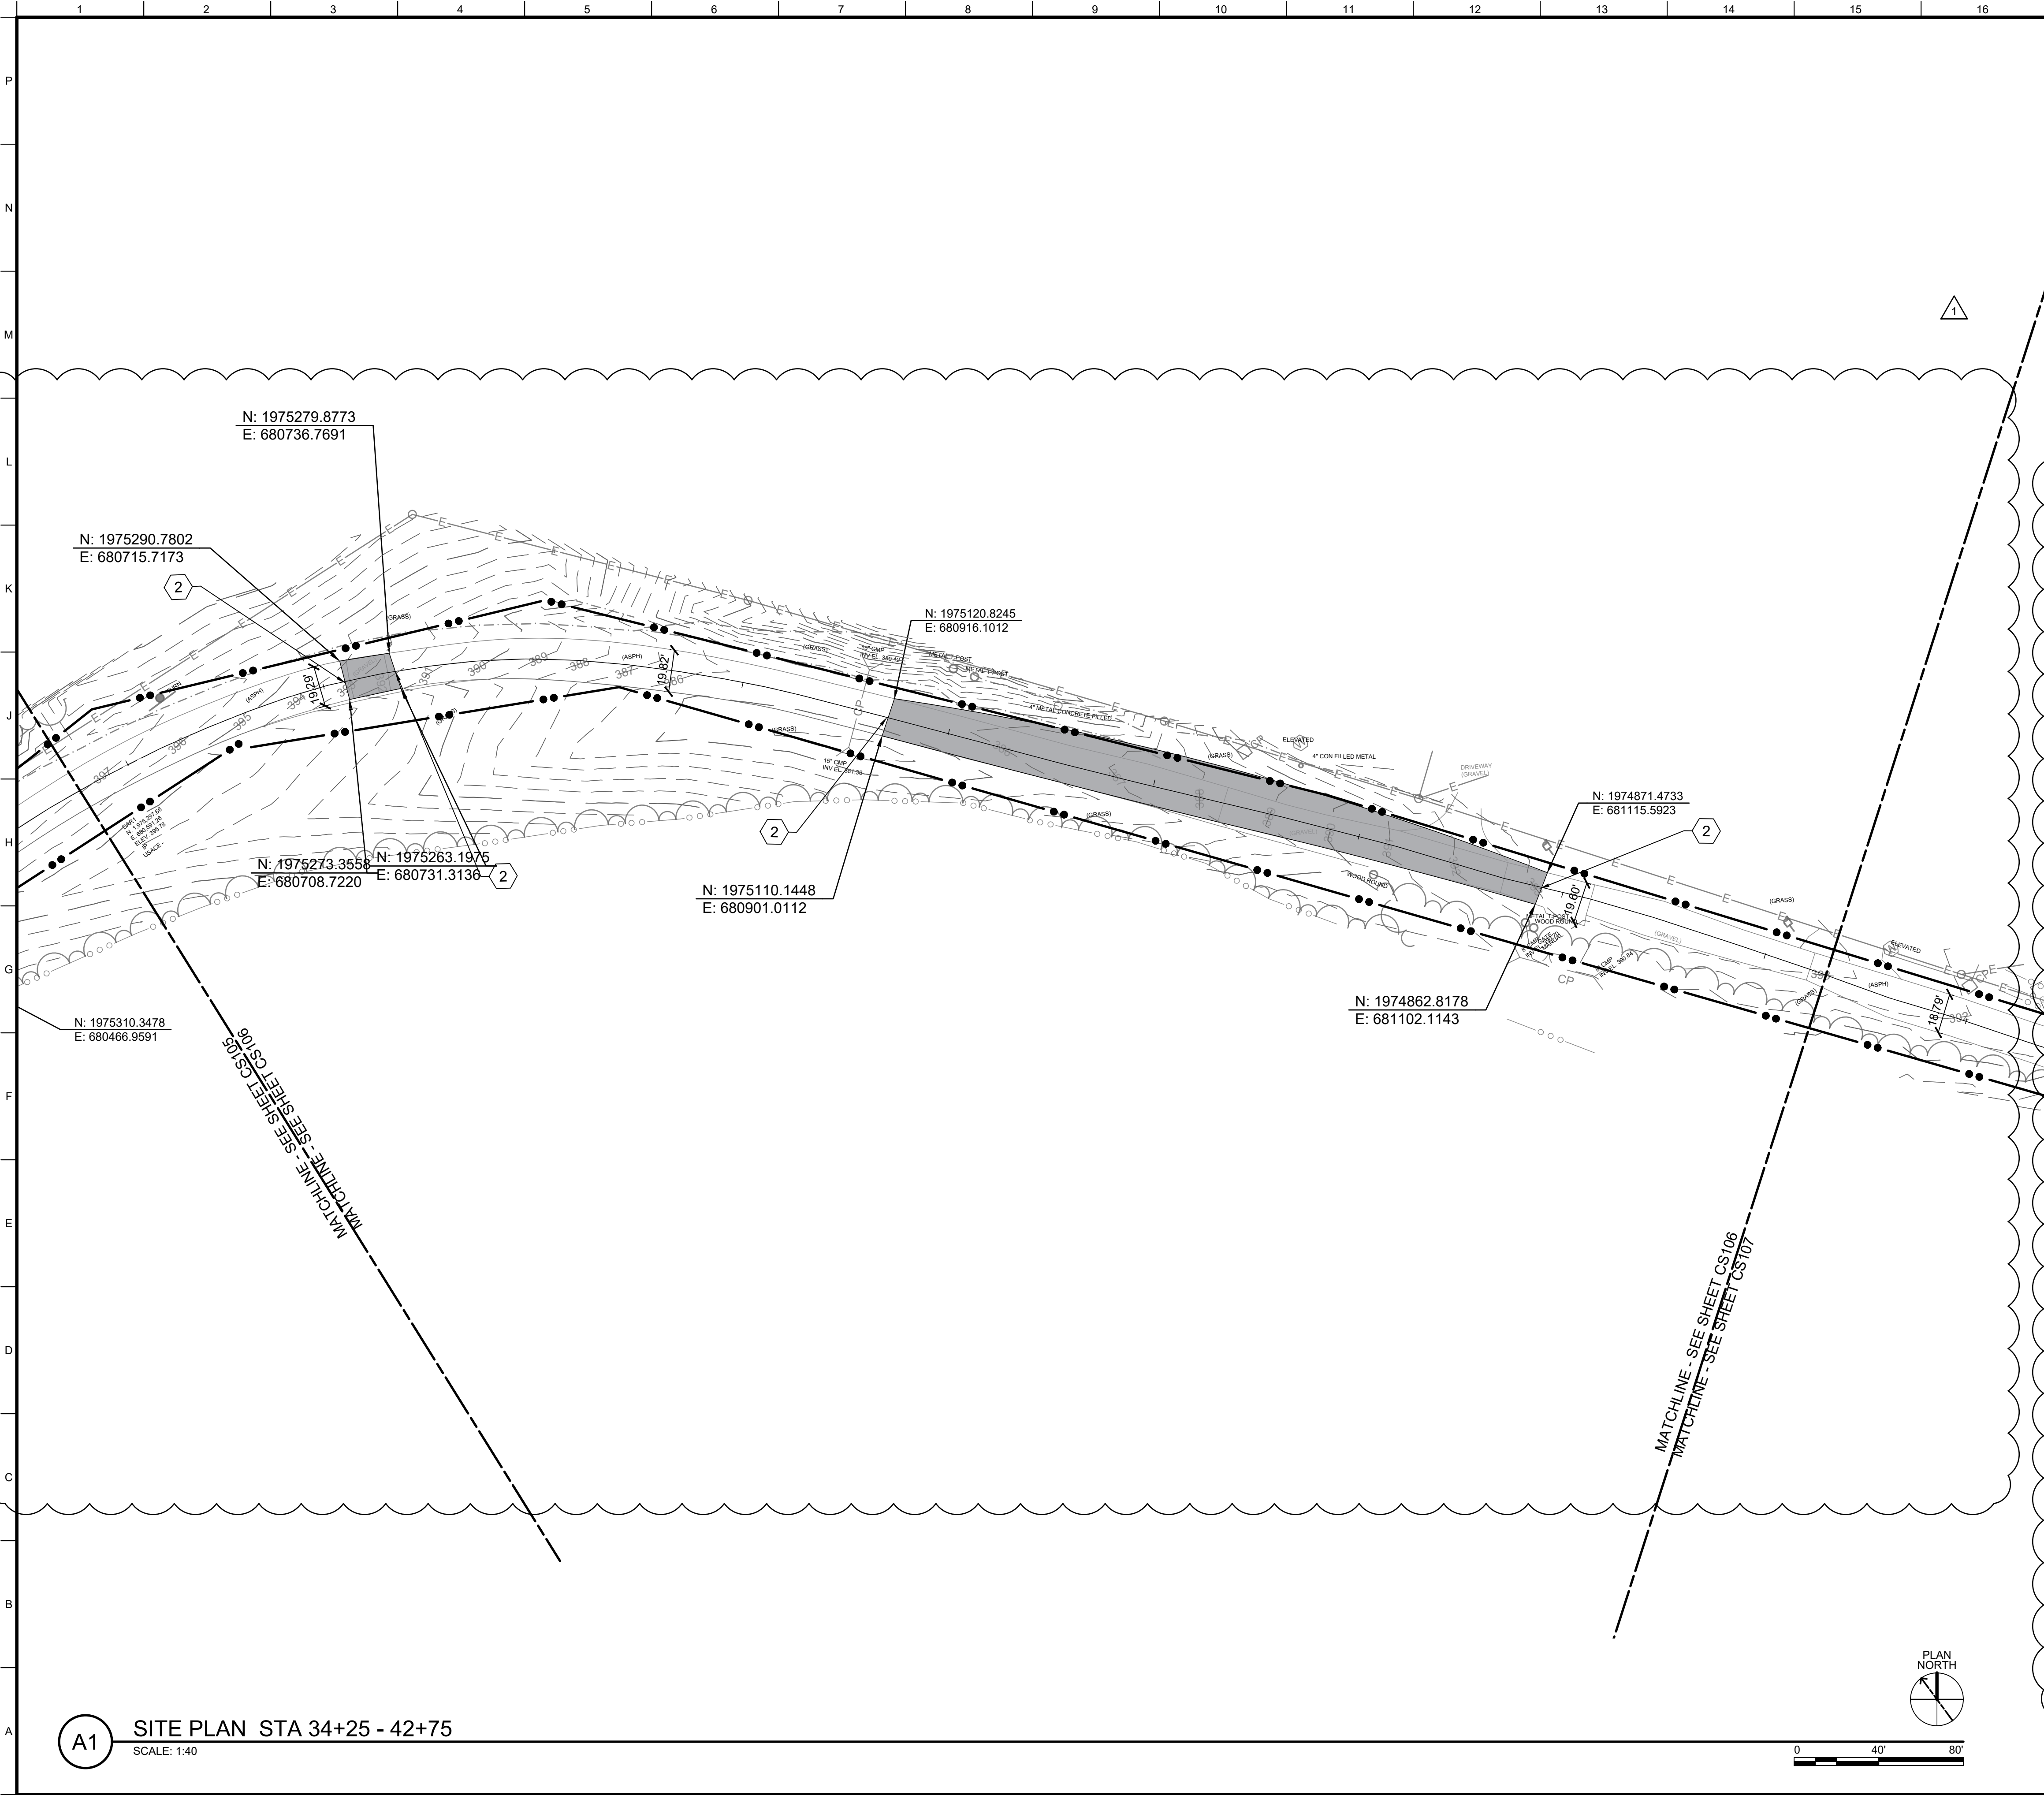

GENERAL SHEET NOTES


1. ALL DIMENSIONS ARE PROVIDED IN U.S. SURVEY FEET, UNLESS INDICATED OTHERWISE.
2. DIMENSIONS ARE TO THE EDGE OF PAVEMENT.
3. CONTRACTOR TO COORDINATE CONSTRUCTION ACTIVITIES WITH THE CONTRACTING OFFICER'S REPRESENTATIVE (COR).
4. CONTRACTOR IS LIMITED TO THE CWL'S WITHIN THE BEGINNING AND END OF THE PROJECT.
5. CONTRACTOR NEEDS TO MAINTAIN ACCESS TO THE PRIVATE DRIVEWAYS ALONG THE ROAD.
6. CONTRACTOR WORK LIMITS SHOWN ON VF SHEETS.
7. COORDINATE ROAD SHUTDOWNS WITH LOCAL COUNTY AGENCIES.
8. RESIDENT ACCESS MUST BE MAINTAINED AT ALL TIMES. CONTRACTOR MUST NOTIFY RESIDENTS AT LEAST 14 DAYS IN ADVANCE OF CONSTRUCTION ACTIVITIES.
9. PROVIDE TEMPORARY EROSION AND SEDIMENT CONTROLS AS NECESSARY TO PREVENT ERODED MATERIALS AND CONSTRUCTION DEBRIS FROM EXITING THE PROJECT LIMITS.
10. ANY TEMPORARY STOCKPILES MUST BE SURROUNDED WITH TEMPORARY PERIMETER CONTROLS SUCH AS FILTER TUBES OF SILT FENCE.
11. INSPECT THE SITE AND ACCESS ROUTES FOR SOIL, GRAVEL, DUST, MUD, SEDIMENT, DEBRIS, TRASH, AND SPILLS. IMMEDIATELY REMOVED SOIL, GRAVEL, MUD, DEBRIS, TRASH, AND SPILLS FROM PUBLIC ROADS, DRIVEWAYS, AND PARKING LOTS.
12. SEED AND STRAW ALL DISTURBED EARTH AREAS NOT TO RECEIVE PAVEMENT OR ROCK SURFACING.
13. TEMPORARY AND PERMANENT EROSION PREVENTION AND SEDIMENT CONTROL PRACTICES AND POLLUTION PREVENTION MEASURES MUST CONFORM TO THE LATEST ILLINOIS URBAN MANUAL, THE PULASKI-ALEXANDER SWCD, AND ILLINOIS EPA.
14. CONSTRUCTION ACTIVITIES WILL DISTURB LESS THAN 1-ACRE OF LAND

SHEET KEYNOTES

1. NOT USED.
2. EDGE KEY. SEE DETAIL A14, SHEET CS501
3. NOT USED.
4. NOT USED.
5. NOT USED.

LEGEND

- PROPOSED ASPHALT PAVEMENT PATCH, SEE DETAIL A6, SHEET CS501
- PROPOSED ASPHALT FULL DEPTH REPLACEMENT, SEE DETAIL A1, SHEET CS501
- CONTRACTOR WORK LIMITS
- SILT FENCE SEE DETAIL H10, SHEET CS501



US Army Corps
of Engineers®


DATE	DESCRIPTION	MARK
APR 2026	REVISED IN ACCORDANCE WITH AMENDMENT 0003	1

DESIGNED BY: D. LOGAN	ISSUE DATE: MARCH 2026
DRAWN BY: D. LOGAN	SOLICITATION NO.:
CHECKED BY: R. HARRIS	CONTRACT NO.:
SUBMITTED BY: N. FISCHER	
SIZE: ANSI FULL BLEED D (22.00 X 34.00 INCHES)	

U.S. ARMY CORPS OF ENGINEERS
LOUISVILLE DISTRICT
600 DR. MARTIN LUTHER KING JR. PLACE
LOUISVILLE KY, 40202

LD 53 ACCESS ROAD
OLMSTED, IL
112574, FY2025
SITE PLAN

SHEET ID
CS106

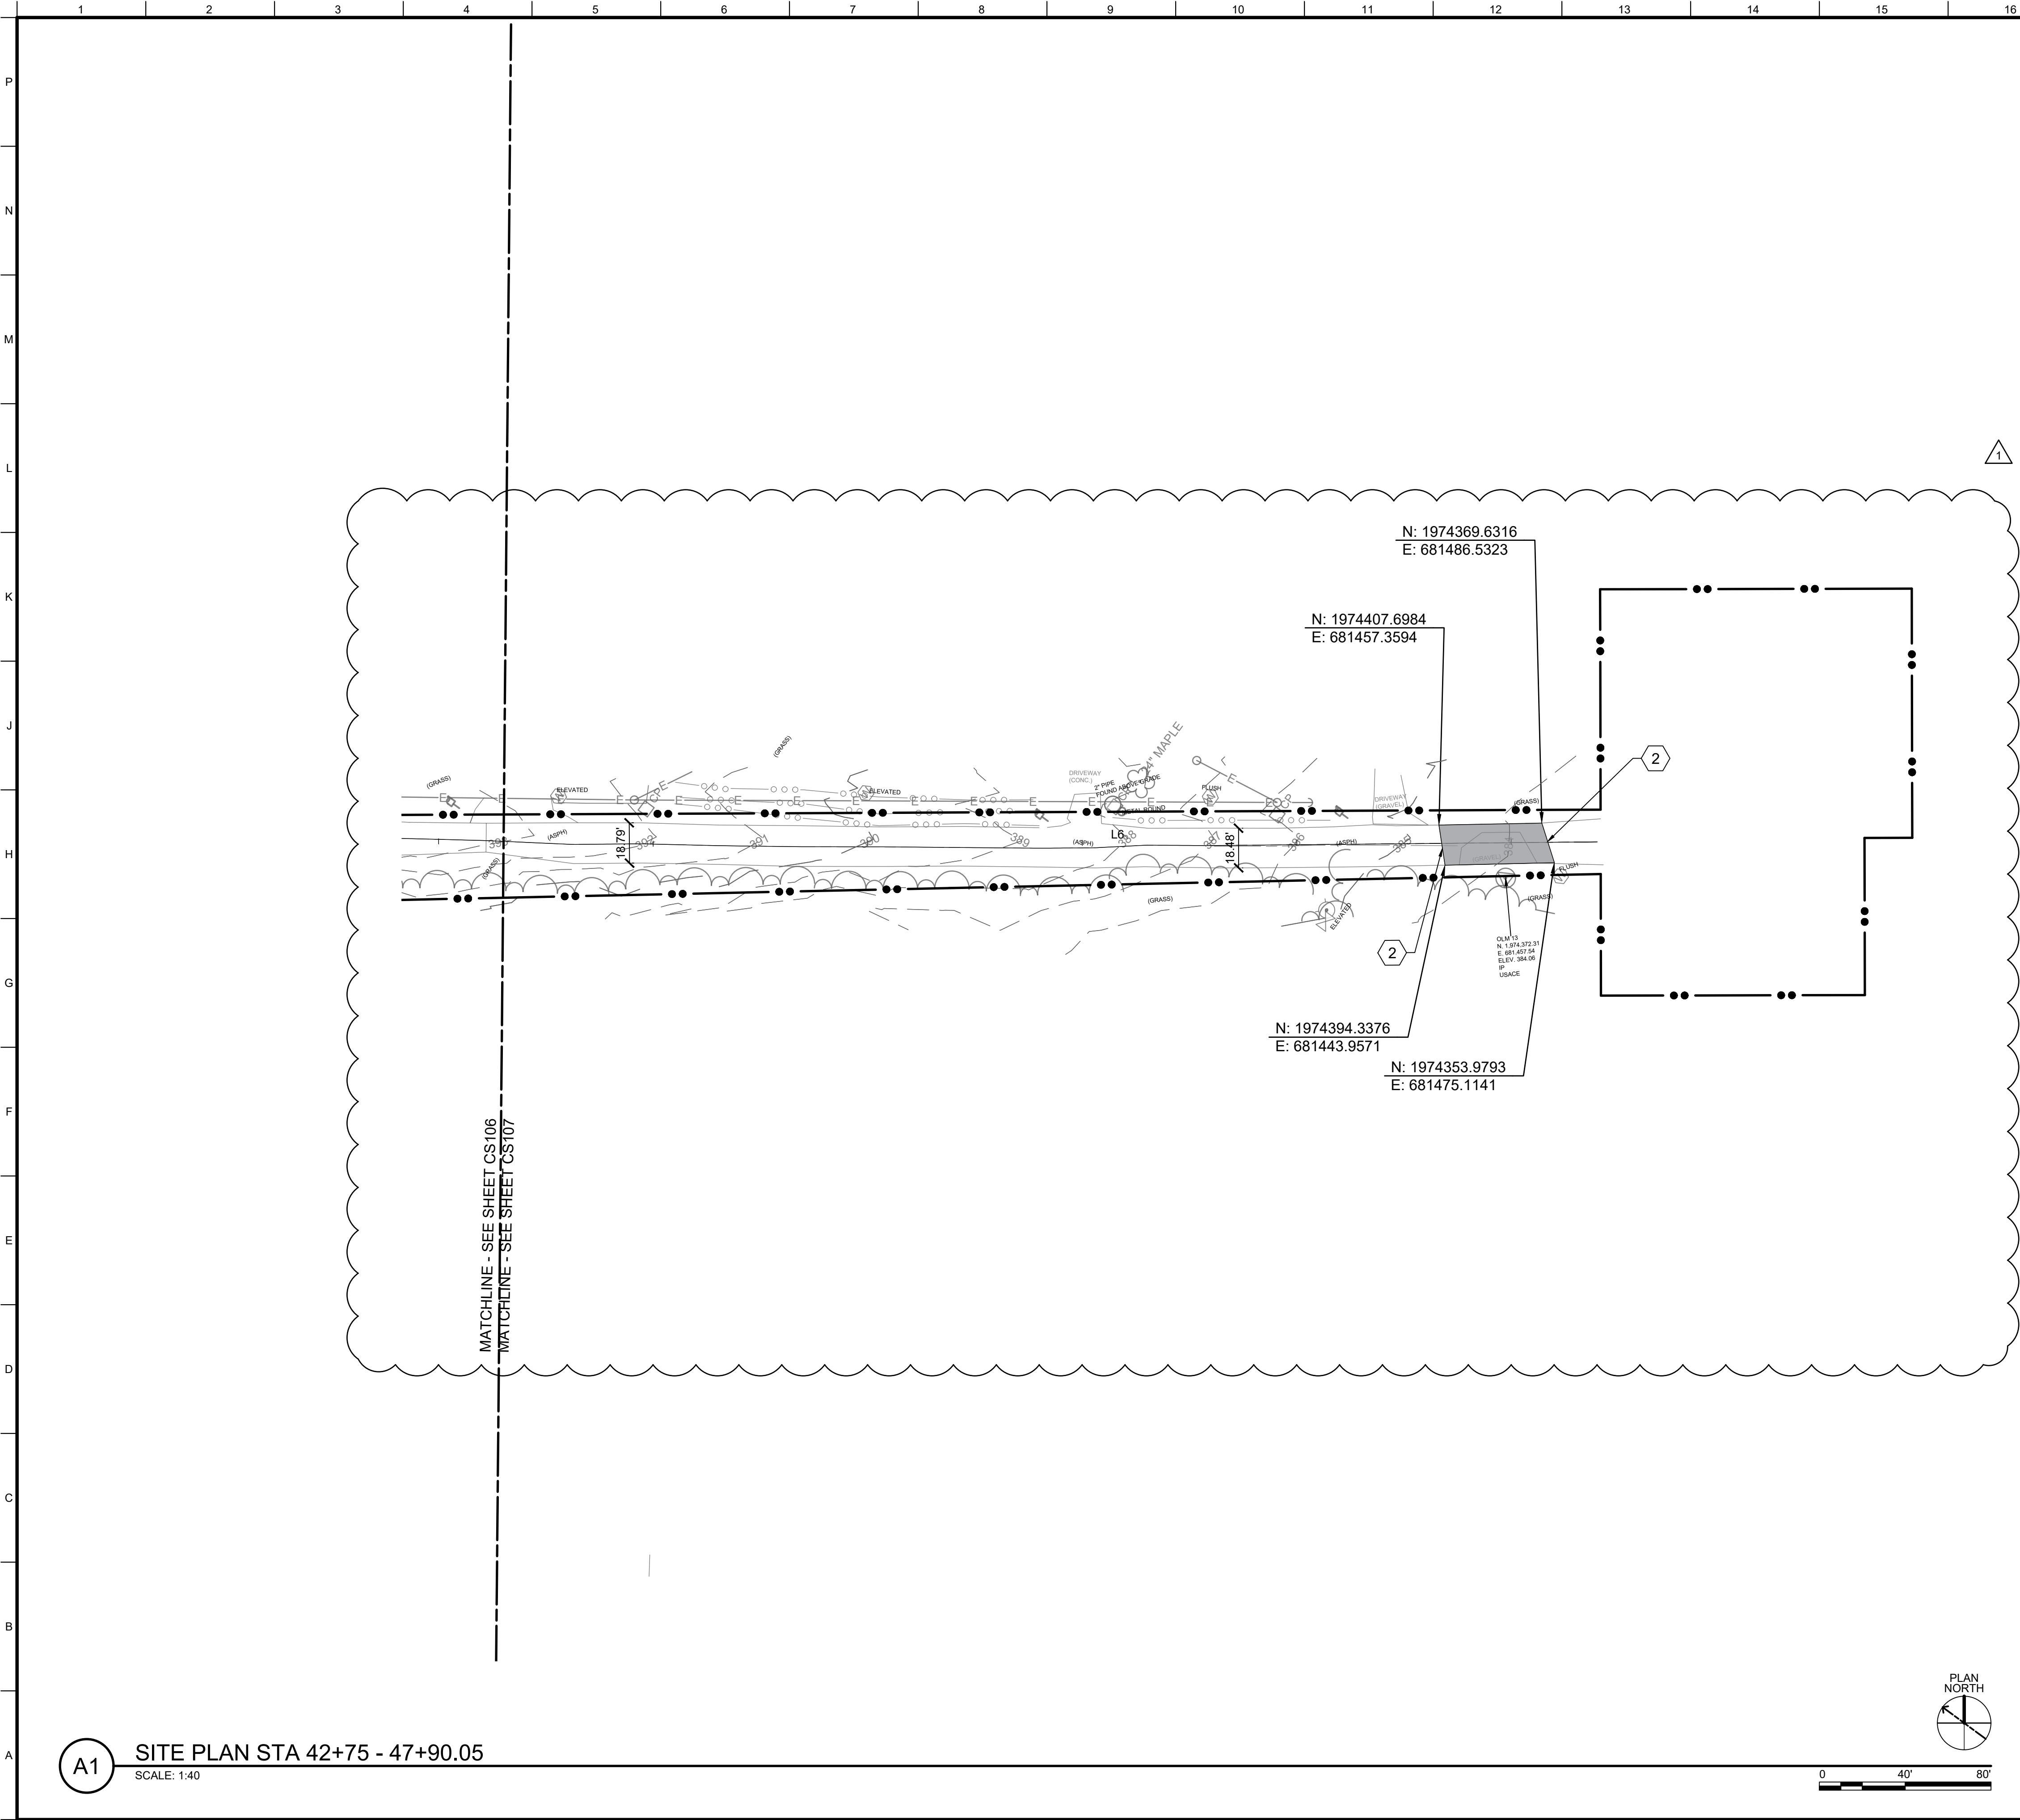

GENERAL SHEET NOTES


1. ALL DIMENSIONS ARE PROVIDED IN U.S. SURVEY FEET, UNLESS INDICATED OTHERWISE.
2. DIMENSIONS ARE TO THE EDGE OF PAVEMENT.
3. CONTRACTOR TO COORDINATE CONSTRUCTION ACTIVITIES WITH THE CONTRACTING OFFICER'S REPRESENTATIVE (COR).
4. CONTRACTOR IS LIMITED TO THE CWL'S WITHIN THE BEGINNING AND END OF THE PROJECT.
5. CONTRACTOR NEEDS TO MAINTAIN ACCESS TO THE PRIVATE DRIVEWAYS ALONG THE ROAD.
6. CONTRACTOR WORK LIMITS SHOWN ON VF SHEETS.
7. COORDINATE ROAD SHUTDOWNS WITH LOCAL COUNTY AGENCIES.
8. RESIDENT ACCESS MUST BE MAINTAINED AT ALL TIMES. CONTRACTOR MUST NOTIFY RESIDENTS AT LEAST 14 DAYS IN ADVANCE OF CONSTRUCTION ACTIVITIES.
9. PROVIDE TEMPORARY EROSION AND SEDIMENT CONTROLS AS NECESSARY TO PREVENT ERODED MATERIALS AND CONSTRUCTION DEBRIS FROM EXITING THE PROJECT LIMITS.
10. ANY TEMPORARY STOCKPILES MUST BE SURROUNDED WITH TEMPORARY PERIMETER CONTROLS SUCH AS FILTER TUBES OF SILT FENCE.
11. INSPECT THE SITE AND ACCESS ROUTES FOR SOIL, GRAVEL, DUST, MUD, SEDIMENT, DEBRIS, TRASH, AND SPILLS. IMMEDIATELY REMOVED SOIL, GRAVEL, MUD, DEBRIS, TRASH, AND SPILLS FROM PUBLIC ROADS, DRIVEWAYS, AND PARKING LOTS.
12. SEED AND STRAW ALL DISTURBED EARTH AREAS NOT TO RECEIVE PAVEMENT OR ROCK SURFACING.
13. TEMPORARY AND PERMANENT EROSION PREVENTION AND SEDIMENT CONTROL PRACTICES AND POLLUTION PREVENTION MEASURES MUST CONFORM TO THE LATEST ILLINOIS URBAN MANUAL, THE PULASKI-ALEXANDER SWCD, AND ILLINOIS EPA.
14. CONSTRUCTION ACTIVITIES WILL DISTURB LESS THAN 1-ACRE OF LAND

SHEET KEYNOTES

1. NOT USED.
2. EDGE KEY. SEE DETAIL A14, SHEET CS501
3. NOT USED.
4. NOT USED.
5. NOT USED.

LEGEND

- PROPOSED ASPHALT PAVEMENT PATCH, SEE DETAIL A6, SHEET CS501
- PROPOSED ASPHALT FULL DEPTH REPLACEMENT, SEE DETAIL A1, SHEET CS501
- CONTRACTOR WORK LIMITS
- SILT FENCE SEE DETAIL H10, SHEET CS501



US Army Corps
of Engineers®

DATE	DESCRIPTION	MARK
APR 2026	REVISED IN ACCORDANCE WITH AMENDMENT 0003	1

DESIGNED BY: D. LOGAN	ISSUE DATE: MARCH 2026
DRAWN BY: D. LOGAN	SOLICITATION NO.:
CHECKED BY: R. HARRIS	CONTRACT NO.:
SUBMITTED BY: N. FISCHER	
SIZE: ANSI FULL BLEED D (22.00 X 34.00 INCHES)	

U.S. ARMY CORPS OF ENGINEERS
LOUISVILLE DISTRICT
600 DR. MARTIN LUTHER KING JR. PLACE
LOUISVILLE KY, 40202

LD 53 ACCESS ROAD OLMSTED, IL 112574, FY2025	SITE PLAN
--	-----------

SHEET ID

CS107

