



PERFORMANCE WORK STATEMENT

**Replace 1,665 Fire Suppression Sprinkler Heads and
Pendants at 15 MAFS
PROJECT No: GHNL 25-0346**

Prepared By:

90 CES/CEM

Missile Engineering

F.E. Warren Air Force Base, Wyoming

Alexander M. McGrew, PE
Civil Engineer

10 Jan 2026

Service Contract

Table of Contents

SECTION 1: OVERVIEW	3
SECTION 2: SERVICE SUMMARY	6
SECTION 3: GOVERNMENT FURNISHED PROPERTY AND/ OR SERVICES.....	6
SECTION 4: GENERAL INFORMATION	7
SECTION 5: SECURITY REQUIREMENTS	11
SECTION 6: PRINCIPLE FEATURES OF WORK.....	11
CONTROLLED UNCLASSIFIED INFORMATION (CUI).	Error! Bookmark not defined.
EXISTING CONDITIONS.....	Error! Bookmark not defined.
CSI 01 – GENERAL REQUIREMENTS	Error! Bookmark not defined.
CSI 02 – EXISTING CONDITIONS.....	20
CSI 21-13-16 – FIRE PROTECTION DRY PIPE SPRINKLER SYSTEM	21
END OF PERFORMANCE WORK STATEMENT	27
ATTACHMENT 1 – MAFs Limit of Potential Ground Disturbance	28
ATTACHMENT 2 – Contract Data Requirements List (CDRL)	29
APPENDIX 1 – GENERAL REFERENCES	30

Performance Work Statement

Replace 1,665 Fire Suppression Sprinkler Heads and Pendants at 15 MAFs

Project No: GHLN 25-0346

10 Jan 2026

SECTION 1: OVERVIEW

1. This project includes replacing 111 fire suppression sprinkler heads and pendants at each of the 15 Missile Alert Facilities (MAFs) and service fire suppression alarm system at 14 MAFs. The MAFs are a secure site and under the control of F.E. Warren Air Force Base, Wyoming.
2. Basic Services: The Contractor shall provide all labor, materials, equipment, and transportation necessary to replace 1,665 fire suppression sprinklers or pendants and service the fire suppression alarm system as specified in this *Performance Work Statement*, in strict compliance with the specifications, applicable drawings, attachments, and the *Terms and Conditions* of the Contract as well as all applicable local, state, and federal standards and practices in the industry. The Contractor shall conduct, perform, and document all work performed.
 - a. Materials for this project shall refer to sprinklers, pendants, all associated components thereof, and any other components of the Fire Suppression Replaced by the Contractor during this project.
 - b. The Contractor will supply materials, install a turnkey, fully functional final product, tested, and operational product meeting the performance requirements outlined by this PWS and the specifications.
 - c. The Contractor shall provide the following document during or at the conclusion of the project:
 - i. During project, as needed Contract Documents (**CDRLs A0001 through A0019**)
 - ii. Post-Project Report (PPR) (**CDRL A0020**)
 - d. The services are to include:
 - i. Replace 111 dry system fire suppression sprinkler heads or pendants, materials, at each MAF because they no longer meet fire code due to age. A project total of 1,665 sprinkler heads as a like in kind replacement.
 - Replace fifty-one (51) existing Victaulic Model V2704 sprinkler heads with fifty-one (51) new Victaulic Model V2726 sprinkler heads or approved equivalent at each MAF for a project total of 765.
 - a. V2704 is no longer manufactured.
 - Replace seven (7) existing Victaulic Model V2710 sprinklers heads with seven (7) new Victaulic Model V2710 sprinkler heads or approved equivalent at each MAF for a project total of 105.
 - Replace forty-three (43) existing Victaulic Model V3618 pendants with forty-three (43) new Victaulic Model V3302 or approved equivalent at each MAF for a project total of 645.
 - a. The contractor will not charge the government additional expense due to incorrectly ordered models or equipment.
 - b. Contractor will submit pre-installation plan (**CDRL A0017**) with pendent lengths and locations for verification by CES/CEM 90 during installation.
 - Replace ten (10) existing Victaulic Model V3904 sprinkler heads with ten (10) new Victaulic Model V3102 or approved equivalent at each MAF for a project total of 150.
 - a. V3904 is no longer manufactured.
 - b. The two (2) V3904 sprinkler heads installed in the generator room must be brass, to match existing.
 - c. The other eight (8) V3904 sprinkler heads are to be with a white escutcheon.
 - The contractor will provide new models matching existing equipment in appearance,

fit in walls, and fit in ceilings without gaps.

- a. Note some existing V3618 do not have escutcheon plates these models will need to be replaced with new model with escutcheon plates.
- All damage to walls, ceilings, or to any other MAF components due to this project activities shall be fixed or replaced at no additional cost to the government.
- The contractor will conduct a Field Survey at each MAF (15 in Total) to determine the existing pendent length for the existing forty-three (43) V3618 prior to ordering replacement models.
 - a. During the Field Survey the contractor shall verify the location and model of all the existing materials in the fire suppression system to be replaced.
- For bidding purposes, the breakdown in pendent lengths is:
 - a. Ten (10) pendants in the eight inches (8") to twenty-four inches (24") pendent length range.
 - b. Twenty-four pendants in the twenty-five inches (25") to forty-two inches (42") pendent length range.
 - c. Nine (9) pendants in the forty-three inches (43") to forty-eight (48") pendent length range.
- Contractor will submit purchase documents (**CDRL A0015**) including unit prices, quantities ordered, and lead times for materials to be delivered.
- Before and after installing new materials, Contractor will perform a pneumatic pressure test of the system verifying no leaks in the fire suppression system and report the results (CDRLs A0017 & A0020).
 - a. The Pre-Install Pressure Leak Test will be performed by the Contractor to identify pressure leak locations in the fire suppression prior to material install and pressure leak locations will be fixed by 90 CES/CEM.
 - i. 90 CES/CEM will arrange for timely repair of pressure leak locations.
 - 1. The PoP will not be adjusted if there are other MAF fire suppression systems ready for pressure test and/or material install based on passing Pre-Install Pressure Leak Test.
 - a. The PoP will only be adjusted under the following circumstances:
 - i. All available MAFs have installs complete and remaining MAFs are pending pressure leak location repairs.
 - 2. The Contractor shall perform a subsequent Pre-install Pressure Leak test within 48-hours CO authorizing the additional test.
 - 3. In the Contractor's bid the Contractor shall bid only one Pre-Install Pressure Leak Test at each of the 15 MAFs; i.e. one per MAF.
 - ii. The contractor shall provide a unit cost for additional pressure tests after leaks are repaired by 90 CES/CEM.
 - 1. The unit cost for additional pressure test shall be included in the contractor's proposal.
 - b. After new materials are installed, the contractor will perform a Post Pressure Leak Test and fix all pressure leak locations found in the Post Pressure Leak Test in the fire suppression system prior to final inspection.

- i. The Contractor will perform additional Post Pressure Leak Test until there are no pressure leak locations found prior to final inspection.
 1. 90 CES/CEM will confirm test results with the Contractor prior to final inspections.
 - a. Final inspections shall not include a pressure test if 90 CES/CEM observed the final pressure test.
 - ii. Subsequent Post Pressure Leak Test shall be performed by the Contractor and leak locations repaired at no additional expense to the government.
 - ii. Service the existing fire suppression alarm controls in the below-grade tunnel junction, Launch Control Capsule (LCC), and Launch Control Equipment Building (LCEB) for 14 MAFs as outlined below.
 - a. NOTE: MAF H01 fire suppression alarm system has already been serviced and is excluded from this contract.
 - b. The existing FCAP is manufactured by Honeywell and model is Notifier.
- Services will include the following:
 - a. Calibrate gas detectors for the existing fire alarm system in 14 MAFs.
 - i. Provide all SDS and calibration gas information (**CDRLs A0002 & A0013**) used to calibrate the existing fire alarm system and SDS.
 - b. Replace the eight ampere-hours batteries in 14 MAFs
 - c. Test the fire suppression alarm system operability at the 14 MAFs.
 - d. Update software with manufacture's current software version at time of contract award.
- iii. The contractor will included all of the following in the PPR (**CDRL A0020**):
 - Pre-install Plan Sheet for each of the 15 MAFs including field survey measurements for existing V3618.
 - a. One MAF per sheet in pdf format, a minimum total of 15 sheets for the Pre-project Plan Sheets, with all data collected during the Field Survey.
 - b. The Contractor will document locations and dates of leaks found during the Pre-Install Pressure Test, to include all subsequent test dates and leak locations identified as needed, and date 90 CES/CEM notified the Contractor repairs were complete.
 - c. Written test reports.
 - Post Install Plan Sheet for each of the 15 MAFs with as built red lines and will include:
 - a. One MAF per sheet in pdf format, a minimum total of 15 sheets for the Post Project Plan Sheets, with all data collected during the Field Survey.
 - b. Actual length of V3302 ordered and installed as red lines as a post-project plan sheet for each MAF; both as callouts on MAF plan sheet and tables organized by MAFs and pendent number provided in contract drawings.
 - c. Date of each new material was installed for each location at each of the 15 MAFs and date the pendent or sprinkler passed 90CES/CEM inspection.
 - d. The Contractor will document locations and dates of leaks found during the Post Install Pressure Test, to include all subsequent test dates and leak locations identified as needed, and date the Contractor completed the leak location repairs.

- e. Written test reports.
 - Provide AutoCAD files, without proprietary fonts or features, used to draw or develop Pre-install Plan Sheets and Post Install Plan Sheet.
 - Report calibration corrections made to gas detectors organized by each MAF in an easy-to-understand format (**CDRL A0021**) for the CO and 90 CES/CEM.
 - Complete receipts including unit cost of materials, quantities ordered and installed in each MAF; if materials are on one receipt are for multiple MAFs the Contractor will note which MAFs on the receipt.
 - Note all calibration actions taken to calibrate gas detectors at 14 MAFs.
 - Note the expected length of life for batteries installed at the 14 MAFs.
 - The Contractor will revise the PPR as many times as needed until the CO and 90CES/CEM determine the PPR is satisfactory for 90 CES/CEM
- e. Contractor Data Requirements List (CDRL) and Frequencies are identified in Attachment 2.

SECTION 2: SERVICE SUMMARY

1. The contractor service delivery requirements are summarized into performance objectives that relate directly to the standards of performance required to meet mission needs. For the Performance Objective to be met, service delivery shall be in substantial compliance with applicable performance standards. The Performance Threshold describes the minimum overall levels of service delivery required for acceptable quality control. Failure to meet these Performance Thresholds means that Contractor Quality Control is unacceptable. The following is a list of the key performance objectives that will be verified as contractually compliant by Government personnel. However, inspection of any contract required is authorized.

PERFORMANCE	PWS PARA.	PERFORMANCE THRESHOLD	METHOD OF SURVEILLANCE
SS-1: Replace all V2704 with V2726	Sections 1 and 2	<i>Zero Discrepancies</i> Like in Kind Replacement of all existing V2704 with new V2726 at all 15 MAFs.	100 % Installation Customer Feedback
SS-2: Replace all V2710 with New V2710	Sections 1 and 2	<i>Zero Discrepancies</i> Like in Kind Replacement of all existing V2710 with new V2710 at all 15 MAFs..	100 % Installation Customer Feedback
SS-3- Replace all V3618 with V3302	Sections 1 and 2	<i>Zero Discrepancies</i> Like in Kind Replacement of all existing V3618 with new V3302 at all 15 MAFs..	100 % Installation Customer Feedback
SS-4- Replace all V3904 with V3102	Sections 1 and 2	<i>Zero Discrepancies</i> Like in Kind Replacement of all existing V3904 with new V3102 at all 15 MAFs.	100 % Installation Customer Feedback
SS-5- Service fire suppression alarm system	Sections 1 and 2	<i>Zero Discrepancies</i> Service the fire suppression alarm system at 14 MAFs; calibrate gas detectors, replace batteries, and test alarm system.	100 % Service Customer Feedback
SS-6- Provide all Requested Documentation	Sections 1, 2, 5, and 6	<i>Zero Discrepancies</i> Send all required project documentation for this project in accordance with this PWS.	100% PDF File Customer Feedback
SS-7: Provide Post Project Report	Sections 1, 2, 4, and 6	<i>Zero Discrepancies</i> Complete Post Project Report after all MAFs have passed final inspection.	100% PDF File Customer Feedback

SECTION 3: GOVERNMENT FURNISHED PROPERTY AND/ OR SERVICES

1. This section is not applicable to this project.

- a. None.

SECTION 4: GENERAL INFORMATION

1. **Quality Control:** The Contractor is required to control the quality-of-service delivery and offer the Government for acceptance only services which conform to contract requirements. The overall control of quality shall meet the specified performance thresholds for each requirement in the Service Summary.
 - a. At a minimum contractor shall record which new materials were installed and location of installation for each day new material is being installed (**CDRLs A0004 & A0020**).
2. **Quality Control Plan:** The Contractor shall develop and maintain a quality control plan (QCP) to ensure the contract is continuous, cost-effective, and efficient when removing waste, transporting, and disposing of the debris removed for this contract. The Contractor shall develop and implement procedures to track, identify, prevent, remedy, and ensure non-recurrence of defective services. The Contractor's QCP (**CDRL A0004**) shall be submitted to the CO within ten (10) working days after contract award. The plan shall be determined to be suitable by the CO and 90 CES/CEM or revisions requested and Contractor submitting all requested revisions to be completed 15 working days before starting work on the site.
 - a. QCP shall include a visual means to see what is existing and what is new, i.e. tape at new materials or a similar means.
 - b. QCP plan shall be subject to comment and modification based on CO and 90CES/CEM feedback until QCP is satisfactory as determined by the CO and 90CES/CEM.
3. **Quality Assurance:** The Government will evaluate the Contractor's performance to ensure services are received based on Contractor documents (**CDRLs A0001, A0004, A0005, A0006, A0014, A0016, A0017**) and 90 CES/CEM QA approval of work based on DAF and FE Warren AFB Policies and Regulations. Additionally, the Government will evaluate the Contractor's performance through on-site inspections and receipt of customer complaints. The Government will inspect each task as completed. The Government will investigate complaints received from customers. The Government representative will make final determination of the Validity of customer complaint(s) in cases of disagreement with customer(s). Remedies for non-conforming services will be resolved IAW the applicable Inspection/Acceptance clause attached within the contract.
4. **Project Scheduling:** The Contractor shall submit Project and Work Schedule (**CDRL A0001**) to the CO with guidance from the 90 CES/CEM within fifteen (15) working days after award of the Contract. The Contractor shall keep the CO and 90CES/CEM up to date with Contract Documents (**CDRLs A0001, A0006, A0016**)
 - a. Provide a means for contact after normal working hours for notification of emergency changes to the schedule. If work is not coordinated as stated, Air Force personnel may not be available, work may not be permitted, and the Government shall not incur any additional cost as a result.
 - b. For this performance of work, advance scheduling is required. Therefore, an AF Form 3064 *Contract Progress Schedule* and AF Form 3065 *Contract Progress Report* shall be submitted monthly (**CDRLs A0001, A0005, and A0006, A0016**).
 - c.
5. **Location and Hours of Operation:**
 - a. Location: The work shall be performed at the following MAFs located in Colorado, Nebraska, and Wyoming. The distances from F.E. Warren AFB are indicated in Table 1. Accomplish all work in accordance with the Service Contract Specifications.

Table 1			
SITE	COUNTY	STATE	DISTANCE (MILES)
A-01	Laramie	WY	68
B-01	Banner	NE	77
C-01	Banner	NE	94
D-01	Kimball	NE	76
E-01	Kimball	NE	59
F-01	Kimball	NE	86
G-01	Cheyenne	NE	102
H-01	Cheyenne	NE	128
I-01	Cheyenne	NE	121
J-01	Logan	CO	126
K-01	Kimball	NE	84
L-01	Weld	CO	81
M-01	Logan	CO	127
N-01	Weld	CO	123
O-01	Weld	CO	73

- b. Hours of Operation: The Contractor shall perform the services required under this contract during the hours listed for the location identified in Table 1. Working hours will be between the hours of 7:30 a.m. (start processing on site) and 4:00 p.m. (terminated work off site) excluding Saturdays, Sundays, and Federal Holidays. An Escort Official (e.g., 90 CES/CEM Inspector or other) will be provided during these hours.
- i. Recognized Federal Holidays:
- New Year's Day (January 1).
 - Birthday of Martin Luther King, Jr. (Third Monday in January).
 - Washington's Birthday (Third Monday in February).
 - Memorial Day (Last Monday in May).
 - Juneteenth National Independence Day (June 19).
 - Independence Day (July 4).
 - Labor Day (First Monday in September).
 - Columbus Day (Second Monday in October).
 - Veterans Day (November 11).
 - Thanksgiving Day (Fourth Thursday in November).
 - Christmas Day (December 25).
- c. The Contractor shall coordinate all work with the CO and 90 CES/CEM to verify that work can be performed as scheduled before traveling to the work site.
- i. Provide a minimum of ten (10) working days' notice, in writing, before beginning work.
- ii. Provide a means for contact after normal working hours for notification of emergency changes to the schedule.
5. **Period of Performance (PoP):** PoP this project is **120 calendar days**.
- a. In the case of the winter season that has a direct impact to performing the work outlined in this SOW, the Contractor shall notify the Government, they can no longer perform work. 90 CES/CEM will validate that the weather no longer allows work to be performed within the specifications. The contractor is responsible to update the Contractor Documents (**CDRLs A0001, A0005, A0006, and A0016**) and any other Contractor Documents as noted by 90 CES/CEM.
- i. If the reason for stopping work is due to weather impacted material supplies, the Contractor shall provide a letter to support the winter suspension (**CDRL A0018**).

- ii. The project will be placed into suspension and the remaining number of PoP days will be documented.
 - iii. When weather conditions become favorable for work, the CO will begin coordinating with the Contractor to establish a timeline for their return to work.
 - iv. When suspension is lifted, a new completion date will be established based on the remaining PoP days.
- 6. **Utility Services:** The Contractor shall provide all utilities, to include but not limited to portable generators, water (drinking and construction), and phone services for Contractor personnel, as needed.
 - a. When working at the MAFs/LFs, limited utilities are available.
 - i. At the MAFs, commercial power (120/208V), restrooms, and limited drinking water will be available for use by Contractor personnel.
 - ii. At the LFs, portable latrines are stationed and will be available for use by Contractor personnel.
 - b. The Contractor shall provide site facilities for lunch and break areas, as needed.
- 7. **Environmental Controls:** Compliance with Laws and Regulations: The contractor shall be knowledgeable of and comply with all applicable Interstate, federal, state, and local laws, regulations, and requirements regarding environmental protection to include **Section 01 57 19.05 32**
- 8. **Environmental Protection** from Unified Facilities Guide Specifications (UFGS), appendix 1. In the event environmental laws/regulations change during the term of this contract, the Contractor is required to comply as such laws come into effect. If there is an increase or decrease in cost because of the change, the contractor shall inform the CO pursuant to notify requirements and negotiate a modification to the contract.
 - a. Notification of Environmental Spill: If the contractor spills or releases any substances constrained in 40 CFR 302 into the environment, the contractor or its agent shall immediately report the incident to the F.E. Warren AFB Fire Dept and Environmental. Contact numbers are listed under 4.7.6. The liability for the spill or release of such substance(s) rests solely with the contractor and its agent.
 - b. Hazardous Materials: If hazardous materials will be used in the execution of this contract, the contractor shall comply with all federal, state, and local regulations concerning the use, storage, and reporting of the hazardous material in accordance with AFMAN 32-7002, Environmental Compliance and Pollution Prevention. The Contractor shall be required to obtain authorization per the Installation hazardous Materials Management Program before ordering or purchasing any hazardous product and may not bring a hazard material onto F.E. Warren AFB property nor use a hazardous material until the contractor receives all required authorizations. This authorization process may take up to three weeks. The contractor shall provide the information listed in **Attachment 1 of Section 01 57 19.05 32** to request authorization for all hazardous materials proposed for use on FE Warren AFB or the missile field.
 - c. The Contractor shall coordinate all hazardous materials (HAZMAT), to include each compound or chemical intended to be utilized on the site, with 90 CES Environmental (307-773-2594) for review and approval prior to delivery and use on the site.
 - i. A hazardous material is defined in Federal Standard, FED/STD-313F (Tables I and II). The definition of materials presenting a health hazard or physical hazard is found in 29 CFR 1910.
 - ii. The HAZMAT approval documentation (**CDRLs A0002 and A0013**) shall be maintained on the site and all workers shall familiarize themselves with their contents.
 - iii. The Contractor shall be responsible for establishing a system, which tracks the procurement, delivery to site, installation, and disposal of all hazardous materials including proper disposal documents.
 - iv. The Contractor shall be held responsible for proper cleanup and disposal of any hazardous or toxic materials spilled while completing the work in this contract. All cleanups shall be accomplished in accordance with applicable Local, State, and Federal

- regulations.
- v. No ozone depleting substances shall be used while completing the work in this contract.
- vi. This includes the exterior/interior of adjacent buildings and parking lot/access road.
- vii. The work site shall be returned to a like condition in which it was found prior to the start of work or to the satisfaction of 90 CES/CEM Escort/Inspector or 90 CES/CEM Chief Construction Engineer.
- viii. Damage to Air Force property caused by Contractor vehicles, operations, equipment, or personnel shall be repaired at Contractor's expense with no additional cost to the Government. Skilled craftsmen in the trade shall repair such damage to the satisfaction of CO with guidance from the 90 CES/CEM.
- ix. Any suspected damage to Air Force property shall be documented and submitted to 90 CES/CEM with a detailed description of the type and location of damage within seventy-two (72) hours of damage.
- d. Green Procurement Program (GPP): In performance of this contract, the following requirements are to be adhered to as required Environmental Protection Agency (EPA) designated recycled content products, Information Technology (IT) Energy Star products/appliances, Federal Energy Management Program (FEMP) Designated Energy Efficient Low Stand By Power products/appliances, U.S. Department of Agriculture (USDA) Bio based/Bio preferred products, Environmentally preferable products, Electronic Product Environmental Assessment Tool (EPEAT) registered products, Water Sense or other water efficient products, non- or Low Ozone depleting substances under the Significant New Alternatives Policy (SNAP), non or Low toxic or hazardous constituents (e.g. non-VOC paint) and any other environmentally sustainable product/method, to the greatest extent possible.
- e. Staging/Storing: Materials and equipment not stored at Contractor's facilities shall be stored on approved Air Force property or approved adjacent private or public properties.
 - i. Staging/Storing on Air Force Property.
 - ii. The Contractor shall obtain written approval prior to storing on Air Force Property.
 - iii. The Air Force will not supply a facility for stockpile storage or material storage. Unkempt, insecure, or unsightly storage shall not be allowed.
 - iv. A storage plan may be required if storage containers are to be left near the site, for security considerations.
 - v. Staging/Storing on Adjacent Properties.
 - vi. The Contractors not storing on Air Force property shall store on adjacent private or public properties within the Limit of Potential Ground Disturbance as shown in Attachment 1.
 - vii. The Contractor shall obtain written consent (**CDRL A0007**) of the landowner or leaseholder, see PWS Section 5; Adjacent, Private, and / or Public Property, Landowners, Leaseholders.
 - viii. Upon identification, a map detailing the staging/storing area shall be submitted (**CDRL A007**).
- f. Environmental Compliance:
 - i. Contractor is responsible for complying with the state environmental quality regulations, and the Environmental Protection Agency, depending on contract location, Region 7 or 8 Office in Kansas or Denver for any National Pollutant Discharge Elimination System (NPDES) Construction General Permits.
- 9. **Safety Requirements:** The Contractor is solely responsible for all safety on the project including, but not limited to traffic control, trenching, confined space entry, equipment and materials storage, and compliance by all employees with Base Regulations.
 - a. In performing work under this contract, the Contractor shall:
 - i. Conform to the safety requirements contained in the contract for all activities related to the accomplishment of the work.
 - ii. Particular care shall be exercised in connection with the operation of vehicles and other

- equipment on the site.
 - iii. Project safety shall be coordinated with the Air Force prior to commencing service.
- b. Notify the Air Force of all modifications to the Safety Plan.
- c. Contractor shall comply with the rules, regulations, standards, and requirements of the Department of Defense (DoD) AFI 32-7002, *Environmental Compliance and Pollution Prevention*, Section 1.3 for Statutes and Regulations (<http://www.e-publishing.af.mil>), the Environmental Protection Agency (EPA 40 CFR Subchapter I, Part 260-268 and FED-STD-313C, Tables I and II) and 20 CFR 1910), the Occupational Safety and Health Administration (OSHA www.osha.gov), and all applicable Federal, State, and Local requirements regarding disturbing or removing hazardous materials.
- d. The federal government is not exempt from compliance with environmental and labor regulations.
- e. The Contractor shall notify the CO with guidance from the 90 CES/CEM of any emergency situation(s).
- f. The Contractor shall educate each employee to ensure clear understanding of the following:
 - i. A review of hazards inherent in the work environment and the precautions required to reduce the hazard.
 - ii. The Contractor shall always maintain a complete first aid kit.
 - iii. Location of first aid and other emergency facilities shall be identified.
 - iv. Detailed description of what to do in case of injury, fire, or identification of a safety hazard.
 - v. Review of daily cleanup procedures, including location and review of company safety rules (either posted or handout).
 - vi. The Contractor shall provide all personal protective equipment (PPE) including, but not limited to, ear plugs, goggles, face shields, gloves, safety shoes, and hard-hats. Complete instructions on where and how to use all PPE shall be given by the Contractor.
 - vii. All personnel shall wear PPE when required by the Contractor or 90 CES/CEM.
 - viii. Hospitals near various sites are noted below for emergency purposes.

Cheyenne Regional Medical Center	Regional West Medical Center	Sterling Regional Medical Center
214 E. 23 rd St. Cheyenne, WY 82001 307-634-2273	4021 Avenue B Scottsbluff, NE 69361 308-635-3711	615 Fairhurst St. Sterling, CO 80751 970-522-0122

SECTION 5: SECURITY REQUIREMENTS

1. The Contractor and their personnel, to include employees and any subcontractors, shall comply with pertinent Air Force security regulations while working on the project. Special security clearances such as Confidential, Secret, etc., are not required of the Contractor or Contractor representatives for the performance of this project.
2. **Real-ID Compliance Identification:** IAW DodM 5200.08V2_DAFMAN31-101V3_DAFGM 2024-01, Installation Perimeter Access Control.
 - a. Base access and Entry Authority Lists (EAL) requests will require Real ID-Compliant identification for base access and EAL creation.
 - b. Failure of the vendor to ensure personnel have Real ID-compliant identification will result in denial of base access and EAL requests.
 - c. Levels of Security: Individuals performing work under this contract shall comply with applicable program security requirements. Contractors will support the following levels of security: Unclassified and Unclassified But Sensitive.

3. **Base Access:** The Contractor shall request access onto F.E. Warren AFB through the CO or authorized representative a minimum of three (3) working days prior to needed entry.
 - a. One form of ID, as a legible photocopy or electronically scanned valid driver's license, state photo ID card, or official state/federal photo ID card shall be submitted for each employee requiring base access.
4. **Missile Field Access/EALs:** Access to MAFs is controlled by the U.S. Air Force. All Contractor personnel, vehicles, and equipment entering the site shall be listed on an effective Entry Authority List (EAL) (**CDRL A0003**), created by the Air Force.
 - a. The Contractor shall provide, via DoD SAFE, complete, valid, and legible data to be used to produce the initial EAL, prior to their initial commencement of work, and to maintain the EAL. The standard processing time for all EAL actions is thirty (30) calendar days. Any request to create add to, modify, correct, or renew the EAL (**CDRL 0003**) shall be submitted at least thirty-one (31) calendar days before needing entry to site. The Contractor shall remain current on information that may change or expire (e.g., IDs or license plates) during the contract period and shall submit updates accordingly. Any delays caused by the submission of incomplete, invalid, or illegible data will be at no cost to the Government. 90 CES/CEM will provide the expiration date for each EAL (**CDRL A0003**), when the date is made effective, to the Contractor and the CO.
 - i. Identification cards that expire during the service period shall be updated and photocopies or scanned copies shall be sent to the CO or their authorized representative thirty-one (31) calendar days (**CDRL A0003**) prior to expiration or the person shall be dropped from the EAL thirty (30) calendar days before the expiration date.
 - b. The Contractor shall submit the following for each employee (to include prime, subcontractor, and delivery/testing services employees).
 - i. One form of ID, as a legible photocopy or electronically scanned valid driver's license, state photo ID card, or official state/federal photo ID card. The same ID shall be shown for entrance onto site once the EAL is effective.
 - ii. Employers name and address with city and state.
 - c. The Contractor shall submit the following for each vehicle and piece of equipment, to include trailers. Standard hand-held equipment is not required to be on an EAL.
 - i. Vehicle Type
 - ii. Make/Model
 - iii. Year
 - iv. Color
 - v. License plate state
 - vi. License plate # or VIN #
 - d. The Contractor shall submit the following for each camera.
 - i. Make/Model
 - ii. Serial number
 - e. Additional pieces of equipment to be added to the EAL after the initial EAL has been submitted will add, at minimum, an additional twenty-one (21) working days for an EAL to become active.
5. **Site Entry:**
 - a. To gain entry onto site, Contractor personnel shall be
 - i. Listed on an effective EAL (**CDRL A0003**).
 - ii. Identified by Escort Official.
 - iii. Able to produce, for verification, the exact form of ID given for the EAL process.
 - iv. Submit to physical and electronic search of person and materials.
 - v. Physically escorted on-site by an authorized Escort Official and remain under constant escort surveillance while on site.
 - vi. Not in possession of any banned electronic devices.
 - vii. In possession of equipment/cameras listed on an effective EAL.
 - b. Upon arrival, the Escort Official will identify all Contractor personnel and verify identifications.

- c. Contractor personnel not listed on the EAL or those who cannot provide proper identification shall not be permitted on site.
 - d. Processing onto and off the sites may require approximately thirty (30) minutes each and shall not be considered delay time.
- 6. Vehicles/Equipment:**
- a. Contractor vehicles and equipment listed on an effective EAL (**CDRL A0003**) will be allowed to park inside the security fence to support the work under this contract and shall be searched by Security personnel prior to entry.
 - i. The Contractor shall obtain approval from 90 CES/CEM prior to leaving vehicles and equipment parked overnight.
 - The contractor shall not park mobile equipment in LF overnight inside the fence secured area at the MAFs will not be allowed.
 - ii. Contractor vehicles and equipment shall be placed so as not to interfere with gates, emergency escape routes, antenna, and other above ground structures.
 - b. The access road from the main road to site is controlled by the U.S. Air Force. The area adjacent to the access road is private, federal, state, or county property.
 - i. The Contractor shall obtain approval from 90 CES/CEM prior to parking vehicles and equipment on the access road.
 - Vehicles parked on the access road shall be clear of the perimeter fence or gate by a minimum of twenty-five feet (25').
- 7. Contraband:**
- a. The Contractor shall ensure contraband items are not brought onto site by Contractor personnel. The following items are considered contraband on MAFs sites.
 - i. Privately owned firearms to include rifles, shotguns, handguns, air/pellet guns, and sling shots.
 - ii. Privately owned ammunition or unauthorized ammunition.
 - iii. Knives less than four inches in length are permitted.
 - iv. Explosives, except for official use or storage.
 - v. Illegal drugs or controlled substances.
 - vi. Equipment/cameras not listed on an effective EAL (**CDRL A0003**).
 - b. Cellular phones are permitted in certain areas; however, the use of photographic capabilities is never permitted. The Escort Official and/or Security personnel will identify areas where cellular phones are/are not permitted and will confiscate improperly used cellular phones.
- 8. Anti-Terrorism:**
- a. Notifications: If the Contractor (contract employees/subcontractors) identify any suspicious activity, they shall contact the Base Defense Operations Center (BDOC) at 307-773-3501 (on-base)/Missile Security Control (MSC) at 307-773-2701 (off-base) and notify the CO and 90 CES/CEM that they contacted the BDOC and/or MSC.
 - b. Training: Contractor employees that require routine physical access to a Federally-controlled facility or military installation shall complete Level I antiterrorism awareness training within thirty (30) calendar days of requiring access and annually thereafter and send a copy of their employees' training certificate(s) to the CO. Training is located at Joint Knowledge Online (JKO) website: <https://jkodirect.jten.mil/Atlas2/page/login/Login.jsf>
- 9. F.E. Warren AFB Communications:** The majority of work will be at areas where commercial phone service is not available. The following phone numbers are provided for assistance in conducting on-base telephone communications.

OFFICE	NUMBER
Emergency	911
Base Operator	(307) 773-1110
Visitor Control Center (VCC)	(307) 773-3694
Contracting Office	(307) 773-3411/5751
Fire Department Tech Services	(307) 773-5528
Civil Engineer Squadron (CES)	(307) 773-3600
CES Missile Engineering	(307) 773-2438
CES Customer Service	(307) 773-3175
CES Environmental	(307) 773-2594
Missile Wing Safety	(307) 773-1842
Bioenvironmental Engineering	(307) 773-3088

- 10. Interrupted Site Access:** If existing access to the site is to be temporarily blocked, temporary access shall be properly provided by the Contractor. The Contractor shall notify the CO twenty-one (21) calendar days prior to any interruption of access to the site. The date, site(s) affected, length of time, and alternate entry method shall be submitted on a *Site Interruption Plan* (**CDLRs A0004, A0005, A0006, A0016**) in writing for approval.
- 11. Vacating The Work Area:** During exercises, natural disaster, and national emergencies or for security reasons, the Contractor may be required to vacate a work area.
- 12. Staging/Storing:** Materials and equipment not stored at Contractor's facilities shall be stored on approved Air Force property or approved adjacent private or public properties.
- Staging/Storing on Air Force Property:
 - The Contractor shall obtain approval from 90 CES/CEM prior to storing on Air Force property. Unkempt, insecure, or unsightly storage shall not be allowed.
 - The Contractor shall promptly address the issues when notified by the CO or 90CES/CEM.
 - There is limited facility storage space at the MAFs and immobile and large non-portable equipment, as defined by the CO and 90CES/CEM shall be allowed overnight storage on a case-by-case basis.
 - A review by security forces would take time and if review time causes lost time there shall not be an extension of the PoP.
 - There is no facility storage space at the LFs.
 - A storage plan may be required if storage containers are to be left on or near the site, for security considerations.
 - Staging/Storing on Adjacent Properties:
 - Contractors not storing on Air Force property shall store on adjacent private or public properties within the Limit of Potential Ground Disturbance as shown in Attachment 1.
 - The Contractor shall obtain written consent of the landowner or leaseholder (**CDLRs A0006, A0007, A0016**).
- 13. Adjacent, Private, &/or Public Property/Landowners/Leaseholders:** Contractor shall obtain written agreements and lien releases (**CDRL A0007**) with adjacent private and public landowners and leaseholders when operations require use of these properties for storage or access to Air Force property. Landowner Agreements will allow the use of property by Contractor and the lien releases shall release the Air Force from any damage to private property because of Contractor operations. Where leaseholders are present on the property, the signatures of both landowners and leaseholders are required. Copies of agreements and lien releases shall be supplied to the CO *prior* to the start of work on each site. The Contractor will not be allowed to start work on a site until agreements are in place.
- 14. Operational Security (OPSEC):** The Contractor shall adhere to the following minimum requirements in support of this requirement:

- a. All contractors, subcontractors, their employees, associates, and consultants who have access to critical information and indicators shall comply with the Air Force-sponsored Operations Security (OPSEC) program.
- b. OPSEC is an information-related capability that preserves friendly essential secrecy by using a process to identify, control, and protect critical information and indicators. If critical information and indicators are disclosed, it could allow adversaries or potential adversaries to identify and exploit friendly vulnerabilities leading to increased risk to mission failure or the loss of life. The desired effect of OPSEC is to influence the adversary's behavior and actions by reducing the adversary's ability to collect and exploit critical information and indicators about friendly activities.
- c. Responsibilities:
 - i. The Contractor shall ensure employees receive OPSEC education that includes an overview of the OPSEC process; the definition of OPSEC; its purpose; what is critical information; the individual's role in protecting critical information; and the general adversary threat to the AF's critical information. Additionally, OPSEC education shall include updated threat information, changes to critical information and indicators, new procedures and/or OPSEC measures implemented, altered, or deleted by the organization.
 - ii. DoD Contractors with OPSEC requirements or those who have access to critical information and indicators shall complete initial and annually-recurring refresher training. Accomplishment of initial OPSEC training shall not exceed ninety (90) calendar days from initial assignment to a contract with OPSEC requirements. Access to mission-critical information will not be allowed until OPSEC education has been completed and documented.
 - iii. OPSEC education is a continuous requirement. The host unit OPSEC coordinator shall track OPSEC training status to include the personnel working on the contract, when each individual has received the required initial OPSEC training, and when refresher training is due and/or completed.
 - iv. The Contractor's personnel shall not discuss government operations in public or over unprotected or unencrypted communications. Controlled unclassified information (CUI) may only be transmitted as directed in this SOW.
 - v. The Contractor shall not post to company websites, publications, newsletters, or any other media any images, data, or any other information that reveals sensitive government operations, personnel, equipment, and/or classified or controlled unclassified information. When in doubt, the company press release related to this contract should be coordinated through the COR or CO, as applicable.
 - vi. Prior to seeking approval through F.E. Warren AFB Public Affairs, any information to be released outside of official U.S. Government channels, via any media to include electronic communication, shall be approved through an OPSEC review. All personnel shall promptly report OPSEC-related incidents, issues, and concerns to the host-unit OPSEC coordinator.
 - vii. The Contractor shall restrict access to those individuals with a valid need-to-know who are actually providing services under the contract. Further dissemination to other contractors, subcontractors, or any other government agencies and private individuals or organizations is prohibited unless authorized in writing.
 - viii. Because observation of events, operations, physical changes, etc. may reveal National Security Information, specific restrictions are needed to preclude unintentional release of this information to unauthorized parties. Unauthorized disclosure and transfer of National Security Information is punishable under 18 USC§793. Therefore, the Contract Personnel shall not disclose to unauthorized third parties, post to unofficial sites to include Social Networking sites any images, data/information, or observed events that reveal sensitive government operations, personnel, equipment, including but not limited to

- Tactics, techniques, and procedures, production, work schedules, any visible or concealed modifications, upgrades, additions to vessels, aircraft, or weapons or equipment; increases, change, or decrease in work/deployment frequency or government personnel, vehicles, vessel, and/or aircraft movements; specialized equipment orders, deliveries, shipments, etc. Unauthorized disclosures and attempts to solicit this type of information by unauthorized third parties or others not affiliated with this contract shall be reported to the COR or CO, as applicable.
- Government issued badges, identification shall be removed and/or concealed from plain sight when off base and shall not be left in vehicles or unprotected areas. Badges and passes may not be duplicated, copied, or loaned to others. Lost or stolen identification badges, vehicle passes, etc., will be immediately reported to the COR, CO, and/or installation Security Office.

15. Controlled Unclassified Information (CUI):

- Contractors shall follow CUI safeguarding and dissemination controls in accordance with Part 2002 of Title 32 CFR DoDI 5200.48, Controlled Unclassified Information; and DoDI 5200.48 DAFI 16-1403, Controlled Unclassified Information.
 - Unlike classified information, an individual or organization generally does not need to demonstrate a need-to-know to access CUI, unless required by a law, regulation, or government-wide policy, but shall have a lawful government purpose for such access.
- Marking Requirements: Contractors shall follow CUI marking requirements in accordance with DoDI 5200.48 and DoDI 5200.48 DAFI 16-1403.
- Dissemination: Contractors shall follow CUI dissemination requirements in accordance with DoDI 5200.48 and DoDI 5200.48 DAFI 16-1403.
- Storage: Contractors shall follow CUI storage requirements in accordance with DoDI 5200.48 and DoDI 5200.48 DAFI 16-1403.
 - During work hours, steps shall be taken to minimize the risk of access by unauthorized personnel, such as not reading, discussing, or leaving CUI information unattended where unauthorized personnel are present.
 - After working hours, CUI information will be stored in unlocked containers, desks, or cabinets if the government or government-contract building provides security for continuous monitoring access. If the building security is not provided, the information shall be stored in locked desks, file cabinets, bookcases, locked rooms, or similarly secured areas.
- Transmission: Contractors shall follow CUI transmission requirements in accordance with DoDI 5200.48 and DoDI 5200.48 DAFI 16-1403.
 - DoD SAFE shall be the primary method of submitting information and documentation.
 - CUI information and material may be transmitted via first class mail, parcel post, or, bulk shipments.
 - When practical, CUI information may be transmitted electronically (e.g., data, website, or e-mail), via approved secure communications systems or systems utilizing other protective measures such as Public Key Infrastructure or transport layer security (e.g., https).
 - The contractor shall avoid wireless telephone transmission of CUI when other options are available.
 - CUI transmission via facsimile machine is permitted:
 - The sender is responsible for determining whether appropriate protection will be available at the receiving location before transmission (e.g. facsimile machine attended by a person authorized to receive CUI facsimile machine located in a controlled government environment).
 - Contractors will remain cognizant of aggregation and compilation of CUI based on the potential to generate classified information pursuant to security classification guidance.
- Disposition: Contractors shall follow CUI disposition requirements in accordance with DoDI 5200.48 and DoDI 5200.48 DAFI 16-1403.

- i. Record and non-record copies of CUI documents will be disposed of in accordance with Chapter 33 of title 44, U.S.C. and the DoD Components' records management directives. When destroying CUI, including in an electronic form, agencies shall do so in a manner making it unreadable, indecipherable, and irrecoverable. If the law, regulation, or government-wide policy specifies a method of destruction, agencies shall use the method prescribed.
 - ii. Record and non-record copies of CUI documents may be destroyed by means approved for destroying classified information or by any other means making it unreadable, indecipherable, and irrecoverable the original information such as those identified in NIST SP 800-88 and in accordance with Section 2002.14 of Title 32, CFR.
- g. Disclosure: Contractors shall follow CUI disclosure requirements in accordance with DoDI 5200.48 and DoDI 5200.48 DAFI 16-1403.
 - i. Contractors shall follow CUI disclosure requirements in in accordance with DoDI 5200.48 and DoDI 5200.48 DAFI 16-1403.
 - ii. Contractor shall immediately notify the CO and servicing Information Protection Office of unauthorized disclosure of CUI.

SECTION 6: PRINCIPAL FEATURES OF WORK

NOTE: Refer to this *Performance Work Statement*, drawings, and attachments for complete details of work. This scope is a general overview of intended work.

1. For this performance of work, advance scheduling is required. Therefore, an AF Form 3064 *Contract Progress Schedule* and AF Form 3065 *Contract Progress Report* shall be submitted monthly (**CDRLs A0001, A0005, and A0006, A0016**).
2. **Submittals:** Pre-approval proposed materials must be attained prior to material install. Thus, prior to starting any work and in accordance with AF Form 66 *Schedule of Material Submittals* (aka "Submittal Register") (**CDRL A0019**), submit material and equipment lists to include camera information, shop drawings and/ or Pre-install Plan, certificates, test results, operation instructions, commercial product warranty or guarantee, manufacturer's brochures, catalog cuts, Safety Data Sheets (SDS), parts lists, and samples on AF Form 3000 *Material Approval Submittal* (**CDRLs A0002 and A0013**) to the CO for approval with guidance from the 90 CES/CEM. All submitted materials will be reviewed in accordance with the following requirements, listed specifications, and referenced specifications.
 - a. Must include outlines, dimensional, assembly and subassembly drawings, parts list and other data required to completely describe each item to be used.
 - b. When more than one model, series or design is illustrated on any one submittal sheet, the item of intended use shall be highlighted and clearly marked with an arrow or asterisk to eliminate confusion as to the product to be approved. Any materials and/or methods not in strict conformance with requirements of this contract shall also be submitted for review and approval.
 - c. Submittals shall be provided as one (1) searchable electronic copy via DoD SAFE. Each Contractor-supplied item shall be submitted for approval to the CO with guidance from the 90 CES/CEM *prior* to installation. In no case shall materials be incorporated into the work unless prior written approval is obtained from the CO and 90 CES/CEM.
 - d. All submittal information shall be provided by the Contractor, not more than fifteen (15) working days (**CDRL A0019**) prior to any site work or by the date determined by the CO and 90 CES/CEM at the pre-service meeting. One signed and dated copy of the submittal shall be returned to the Contractor after approval or disapproval to the CO with guidance from the 90 CES/CEM.
 - e. Submittals shall not include information on items other than those provided under this contract.
 - f. Optional or upgraded items and related information shall only be shown in submittals if included or provided to the Air Force as a portion of this contract.
 - g. The Contractor shall review and forward all submittals (**CDRL A0019**), including subcontractors' submittals, and shall submit all materials as listed via DoD SAFE to the CO with guidance from the 90 CES/CEM for approval.

- h. By reviewing and submitting items, the Contractor will be responsible for all measurements, criteria, materials, catalog numbers and similar data being verified by the Contractor, and each submittal has been coordinated within the requirements of this *Performance Work Statement*.
- 3. **Shop Drawings:** Shop drawings and/or Pre-install Plan shall be submitted (**CDRL A0019**) for all items or components to be fabricated or assembled and requiring detail drawings more than, or to complement, the general drawings and details included in the plans.
 - a. The plans shall be supplemented by shop drawings as necessary to adequately control the work. Shop drawings and/ or Pre-install Plan may consist of drawings, diagrams, SDS, illustrations, schedules, calculations, or other data prepared by the Contractor, subcontractor, manufacturer, supplier, or distributor illustrating specific portions of the work being fabricated or installed in accordance with the details in the Plans, the PWS, and Specifications.
 - b. The Contractor will assume the risk of all work done prior to approval of shop drawings and/ or Pre-install Plan shall be done at Contractor's risk.
 - c. Approval of shop drawings and/ or Pre-install Plan shall not relieve the Contractor's obligation to meet all requirements of the plans and specifications, nor relieve the Contractor's responsibility for the correctness of the shop drawings and/ or Pre-install Plan.
 - d. If shop drawings and/ or Pre-install Plan are returned for correction, corrections shall be made, and the drawings re-submitted for review and comment.
 - e. All drawings shall be marked with the appropriate classification and per *Submittal*.
 - f. Product Data: Manufacturer's product data for all commercial products, components, devices, or distinct units shall be submitted by Contractor for review *prior* to installation in the work
 - i. Product data will include catalog sheets, brochures, SDS, diagrams, schematics, schedules, performance starts, illustrations and other standard descriptive data (**CDRLs A0004, A0008, A0009, A0010, A0011, A0012, A0013, A0014, and A0019**).
 - ii. All product data submitted shall be clearly marked to identify pertinent materials, products, or models to be incorporated in the work. All dimensions, clearances, tolerances, performance characteristics, specifications, wiring diagrams, and other such pieces of information shall be clearly marked or highlighted (**CDRLs A0008, A0009, A0010, A0011, A0012, A0013, A0014 and A0019**).
 - iii. Each data documents submitted shall indicate the project name, project number, Contractor's name, and date (**CDRLs A0008, A0009, A0010, A0011, A0012, A0013, A0014 and A0019**).
 - g. Certificates of Compliance: Manufacturer's certificate of compliance (**CDRLs A0014, A0019, and A0020**) for all materials to be incorporated in the work shall be submitted for approval to the CO with guidance from the 90 CES/CEM *prior* to execution of the work.
 - i. Said certificates shall certify compliance with project specifications, applicable reference standards or specifications, and test data requirements as required. Certificates shall be marked with the project name, project number, title or purpose, and date.
 - ii. Certificates shall further contain the name, title and signature of the person certified the product, and the name and address of the corporation or business supplying the product and certificate.
- 4. **Test Results:** Tests performed on a material prior must be in accordance with section labelled, "Product Data" before incorporating the material in the work. All test results documenting compliance with project specifications and/or applicable reference standards or specifications including certificate of compliance (**CDRLs A001, A002, A003, A004, and A006**) will be sent to CO for approval with guidance from 90 CES/CEM
 - a. Quality control testing performed during the execution of the work shall be submitted upon completion of the test in accordance with these specifications.
 - i. All material testing shall be in accordance with "Submittal" section. Results will be submitted to CO with guidance from 90 CES/CEM's approval. (**CDRLs A0004, A0008, A0009, A0010, A0011, A0012, A0013, A0014 and A0019**). Four (4) copies of the test reports, indicating observations, and results of tests, indicating compliance or noncompliance with Contract Documents. *NOTE:* Written test reports shall be received by the CO and 90 CES/CEM within one (1) week of testing.

- Written test reports must be received by the CO and 90 CES/CEM within one (1) week of testing shall include four (4) copies of the test reports, indicating observations, and results of tests, indicating compliance or noncompliance with Contract Documents.
 - ii. Written test reports must be received by the CO and 90 CES/CEM within one (1) week of testing shall include four (4) copies of the test reports, indicating observations, and results of tests, indicating compliance or noncompliance with Contract Documents.
 - iii. Test Frequency:
 - Testing frequency shall be completed per the contract as defined by but not limited to manufacturer's recommendations, PWS requirements, and/or Federal/State/Local Standards & Regulations (**CDRLs A0008, A0009, A0010, A0011, A0012, A0013, A0014 and A0019**).
 - A Line Item quantity for testing shall include all applicable tests required to adequately determine compliance with the specified requirements. Where more than one (1) test is required to achieve an evaluation, the line item quantity is still defined as one (1) item.
 - Testing frequency shall be completed per the contract as defined by but not limited to manufacturer's recommendations, PWS requirements, and/or Federal/State/Local Standards & Regulations (**CDRLs A0008, A0009, A0010, A0011, A0012, A0013, A0014 and A0019**).
 - A Line Item quantity for testing shall include all applicable tests required to adequately determine compliance with the specified requirements. Where more than one (1) test is required to achieve an evaluation, the line item quantity is still defined as one (1).
 - iv. The Contractor shall perform inspections, and any other services specified for this contract and mentioned in corresponding section of PWS.
 - v. Inspecting shall occur both on and off the project Site(s).
5. **Quality Control:** Contractor shall provide and maintain an effective quality control program.
- a. Should the manufacturers' instructions conflict with contract documents, the Contractor shall request clarifications from the CO with guidance from 90 CES/CEM before proceeding with the manufacturers' instructions.
 - b. The Contractor shall comply with standards and references for this contract. If standards and specifications conflict, clarification will be requested from the CO with guidance from the 90 CES/CEM, or their technical advisor.
 - c. The contractor shall maintain copies of the contract's standards and references throughout contract duration.
 - d. The Contractor will maintain a copy at the work Site(s) (**CDRLs A0001 to A0020**).
6. **Excavation:** : Not Used
7. **Burning/Welding:** The Contractor shall obtain an AF Form 592 *Hot Work Permit* (aka "Burn Permit"), at least three (3) working days prior to work. Coordinate with the onsite Air Force Inspector or contact the 90 CES/CEM at (307) 773-2438 for requirements, initiation, and completion of permit.
- a. Contractor shall have the completed permit control number prior to any burning/welding operations.
8. **Request for Information:** Any change in the condition(s) with or clarification(s) to this project shall be presented to the CO with guidance from the 90 CES/CEM via a *Request for Information* (RFI) form prior to any work proceeding.
- a. The form shall be completed by the Primary Contractor and processed through the CO.
 - b. The RFI will reflect whether the change or modification will be at no cost modification to the Government. The RFI will also have all agreeing parties' signatures.
9. **Modifications:** Any change in the condition(s) or modification(s) to the project shall be presented to the CO with guidance from the 90 CES/CEM via a *Request for Information* (RFI) form prior to any change or modification.
- a. The form shall be completed by the Primary Contractor and processed through the CO.
 - b. The RFI will reflect whether the change or modification will be a completed modification. The RFI will also have all agreeing parties' signatures.
 - c. Only the CO has approval authority for modifications.

- i. Modifications made without the CO approval shall be at the Contractors' own risk.
- 10. **Red Lines:** Contractor shall submit post-service (redlined), as-built drawings to the CO with guidance from the 90 CES/CEM prior to project close out (**CDRL A0017 and A0020**).
 - a. As-Built Drawings shall be prepared, maintained, and submitted during the service process noting all changes, revisions, discrepancies, clarifications, or any other information for the limited purpose of assessing conformance with information given and the design concept expressed in the contract documents. As-Built Drawings shall be complete showing all dimensions, geometry, location, connection, and operation of elements.
 - b. Hardcopy and digital format for verification of completed work and final project closeout, utilizing AutoCAD, Autodesk Design Review or similar electronic drafting software.
 - i. The CAD files shall not have proprietary features, fonts, line types, etc.
 - c. As-Built drawings (**CDRL A0020**) shall be submitted for information for the limited purpose of assessing conformance with information given and the design concept expressed in the contract documents and recording the location with length of every V3302 on separate plan sheet for each MAF including of the date of installation.
 - d. Drawings shall be marked with the appropriate classification and CUI level.
- 11. **Warranties:** The Contractor shall submit the warranty documents within Thirty (30) calendar days prior to final acceptance of each delivery order, obtain and submit written warranties (**CDRL A0014**) for all equipment, products, goods, and services supplied under this contract.
 - a. Each warranty will be furnished with the name, address, and telephone number of the guarantor's representative, who will honor the guarantee during the written guarantee period and will provide the service prescribed by the terms of the guarantee.
 - b. The equipment installed under this contract shall be guaranteed against defective materials, installation, and workmanship for a period of not less than twelve (12) months from the date of acceptance, either for beneficial use or final acceptance, whichever is the earliest, but not

CSI 02 – EXISTING CONDITIONS

- 1. The contractor shall perform an inspection encompassing the existing conditions of each sprinkler head, pendent, associated fire water header, and fire suppression alarm system to be serviced.
 - a. The contractor shall verify all quantities, locations, and condition of materials to be replaced.
 - b. The contractor shall verify no pipes adjoining materials to be replaced are leaking and no part of the fire suppression system is leaking prior to starting work.
 - i. All existing leaks found are to be recorded on the Contract Documents (**CDRLs A0017 and A0020**)
 - c. The contractor shall verify all sprinkler heads and pendants prior to ordering new sprinkler head and pendants.
 - i. There shall be no additional expense to the government for incorrectly ordered items.
 - d. The contractor shall document the existing V3618 for location in system with length of pendent and document data in a pre-project plan sheet (**CDRLs A0017 and A0019**).
 - e. The contractor shall abide by the Federal Acquisition Regulation, "FAR 52.237-2: Protection of Government Buildings, Equipment, and Vegetation."
 - f. Removing or altering existing work in such a manner as to prevent injury or damage to any portions of the existing work which remain.
 - g. Repair or replace portions of existing work which have been altered during service operation to match existing or adjoining work, will be approved by the CO with guidance from the 90 CES/CEM.
 - h. The Contractor will test the Fire Suppression System prior to installing new materials to verify there are no leaks in the system.
 - i. At the completion of operation, existing work shall be in condition equal to or better than that which existed before new work started.

CSI 21-13-16 – FIRE PROTECTION DRY PIPE SPRINKLER SYSTEM

1. **SYSTEM DESCRIPTION:** The Contractor will replace existing dry pipe pendants and sprinkler heads as indicated on the drawings. Except as modified herein, the system must meet the requirements of NFPA 13.

- a. Existing Hydraulic Design:

Hydraulic System Roof Piping	
Location	Roof Piping
Calculation Number	1
Number of sprinklers	6
Basis of Design	
Density	0.10 gpm / sprinkler
Area of Discharge	694 ft ²
Inside Hose Allowance	0 gpm
Outside Hose Allowance	100 gpm
System Demand	
GPM Discharge	100.26 gpm
Residual Pressure at Base of Riser	31.67 psi
System Demand at Street	
GPM Required	200.26 gpm
PSI Required	37.23 psi
PSI Available	64.62 psi
Safety Factor	27.39 psi (42.4%)

Hydraulic System Ceiling Piping	
Location	Ceiling Piping
Calculation Number	2
Number of sprinklers	6
Basis of Design	
Density	0.10 gpm / sprinkler
Area of Discharge	694 ft ²
Inside Hose Allowance	0 gpm
Outside Hose Allowance	100 gpm
System Demand	
GPM Discharge	100.77 gpm
Residual Pressure at Base of Riser	29.71 psi
System Demand at Street	
GPM Required	200.77
PSI Required	35.27 psi
PSI Available	64.56 psi
Safety Factor	29.29 psi (45.4%)

- b. Basis for Calculations: The design must include an adequate water supply to meet the sprinkler water demand. The designer must provide waterflow test results and hydraulic calculations to ensure that the system demand will be met.
- c. A waterflow test was performed on G01 and resulted in a static pressure of 55 psi with a residual pressure of 48 psi.

2. **SUBMITTALS (CDRL A0019):** Government approval is required and must be obtained for submittals. Partial submittals and submittals not fully complying with NFPA 13 and this specification section must be returned disapproved without review and the contractor shall correct the submittal at no additional cost to the government. SD-02, SD-03 and SD-05 must be submitted simultaneously. Shop drawings (SD-02), product data (SD-03) and calculations (SD-05) must be prepared by the designer and combined and submitted as one complete package. The QFPE must review the SD-02/SD-03/SD-05 submittal package for completeness and compliance with the Contract provisions prior to submission to the Government. The QFPE must provide a Letter of Confirmation that they have reviewed the submittal package for compliance with the contract provisions. This letter must include their professional engineer stamp and signature. Partial submittals and submittals not reviewed by the QFPE must be returned disapproved without review. Submit the following in accordance with Section 01 33 00 SUBMITTAL (CDRL A0019) from Unified Facilities Guide Specifications (UFGS), appendix 1.
- a. Procedures:
 - i. SD-01 Preconstruction Submittals CO and 90 CES/CEM
 - ii. Qualified Fire Protection Engineer (QFPE); CO and 90 CES/CEM
 - iii. Sprinkler System Installer; CO and 90 CES/CEM
 - iv. Nitrogen Generation System Commissioning Technician; CO and 90 CES/CEM
 - v. SD-02 Shop Drawings; CO and 90 CES/CEM
 - vi. Shop Drawing; CO and 90 CES/CEM
 - vii. SD-03 Product Data; CO and 90 CES/CEM
 - viii. Sprinklers; CO and 90 CES/CEM
 - ix. Pipe Hangers and Supports; CO and 90 CES/CEM
 - x. Sprinkler Alarm Switch; CO and 90 CES/CEM
 - xi. High/Low-Nitrogen Pressure Supervisory Switch; CO and 90 CES/CEM
 - xii. Nitrogen Generation System; CO and 90 CES/CEM
 - xiii. Nameplates; CO and 90 CES/CEM
 - xiv. SD-05 Design Data; CO and 90 CES/CEM
 - xv. SD-06 Test Reports Test Procedures; CO and 90 CES/CEM
 - xvi. SD-07 Certificates; CO and 90 CES/CEM
 - xvii. Verification of Compliant Installation; CO and 90 CES/CEM
 - xviii. Request for Government Final Test; CO and 90 CES/CEM
 - xix. SD-10 Operation and Maintenance Data Operating and Maintenance (O&M) Instructions; CO and 90 CES/CEM
 - xx. Spare Parts Data; CO and 90 CES/CEM
 - xxi. SD-11 Closeout Submittals As-built drawings; CO and 90 CES/CEM
 - xxii. Quality Assurance (CDRL A0004); CO and 90 CES/CEM
3. **PRECONSTRUCTION SUBMITTALS:** Within 30 days of contract award but no less than 15 days prior to commencing work on site, the prime Contractor must submit the following for review and approval. SD-02, SD-03 and SD-05 submittals received prior to the review and approval of the qualifications must be returned Disapproved Without Review. All resultant delays are the sole responsibility of the prime Contractor.
4. **SHOP DRAWING (CDRL A0019) AND/ OR PRE-INSTALL PLAN:**
- a. Three (3) copies of the shop drawings, no later than 28 days prior to the start of system installation. Working drawings conforming to the requirements prescribed in NFPA 13 and must be no smaller than ISO A1, ANSI D, and the Contract Drawings. Each set of drawings must include the following:
 - b. A descriptive index with drawings listed in sequence by number. A legend sheet identifying device symbols, nomenclature, and conventions used in the package.
 - c. Floor plans drawn to a scale not less than 1:100 1/8-inch equals 1-foot clearly showing locations of devices, equipment, risers, electrical power connections and other details required to clearly describe the proposed arrangement.
 - d. Actual center-to-center dimensions between sprinklers on branch lines and between branch lines; from end sprinklers to adjacent walls; from walls to branch lines; from sprinkler feed

- mains, cross mains and branch lines to finished floor and roof or ceiling. A detail must show the dimension from the sprinkler and sprinkler deflector to the ceiling in finished areas.
- e. Longitudinal and transverse building sections showing typical branch line and cross main pipe routing, elevation of each typical sprinkler above finished floor and elevation of "cloud" or false ceilings in relation to the building ceilings. Plan and elevation views which establish that the equipment will fit the allotted spaces with clearance for installation and maintenance.
 - f. Riser layout drawings drawn to a scale of not less than 1:25 1/2-inch equals 1-foot to show details of each system component, clearances between each other and from other equipment and construction in the room.
 - g. The calculated volume of each system.
 - h. Product Data: Three (3) copies of annotated catalog data to show the specific model, type, and size of each item. Catalog cuts must also indicate the NRTL listing. The data must be highlighted to show model, size, options, and other pertinent information, that are intended for consideration. Data must be adequate to demonstrate compliance with all contract requirements. Product data for all equipment must be combined into a single submittal.
 - i. Operating and Maintenance (O&M) Instructions: Submit in accordance with Section 01 78 23 OPERATION AND MAINTENANCE DATA from Unified Facilities Guide Specifications (UFGS), appendix 1, as supplemented and modified by this specification section. Provide 15 manuals and one pdf version on electronic media. The manuals must include the manufacturer's name, model number, parts list, list of parts and tools that should be kept in stock by the owner for routine maintenance, simplified wiring and controls diagrams, troubleshooting guide, and recommended service organization (including address and telephone number) for each item of equipment. Submit spare parts data for each different item of material and equipment specified. The data must include a complete list of parts and supplies, and a list of parts recommended by the manufacturer to be replaced after 1-year and 3 years of service. Include a list of special tools and test equipment required for maintenance and testing of the products supplied.
 - j. Regulatory Requirements: Equipment and material must be listed or approved. Listed or approved, as used in this Section, means listed, labeled or approved by a Nationally Recognized Testing Laboratory (NRTL) such as UL Fire Prot Dir or FM APP GUIDE. The omission of these terms under the description of an item of equipment described must not be construed as waiving this requirement. All listings or approvals by testing laboratories must be from an existing ANSI or UL published standard. The recommended practices stated in the manufacturer's literature or documentation are mandatory requirements.
 - k. Delivery, Storage, and Handling: Protect all equipment delivered and placed in storage from the weather, excessive humidity and temperature variations, dirt and dust, or other contaminants. All pipes must be either capped or plugged until installed.
 - l. Extra Materials: Spare sprinklers and wrench(es) must be provided as spare parts in accordance with NFPA 13.

5. MATERIALS AND EQUIPMENT:

- a. Standard Products: Provide materials, equipment, and devices listed for fire protection service when so required by NFPA 13 or this specification. Select material from one manufacturer, where possible, and not a combination of manufacturers, for a particular classification of materials. Material and equipment must be the standard products of a manufacturer regularly engaged in the manufacture of the products for at least 2 years prior to bid.
- b. Nameplates: Major components of equipment must have the manufacturer's name, address, type or style, model or serial number, catalog number, date of installation, installing Contractor's name and address, and the contract number provided on a new name plate permanently affixed to the item or equipment. Nameplates must be etched metal or plastic, permanently attached by screws to control units, panels or adjacent walls.
- c. Identification and Marking: Pipe and fitting markings must include name or identifying symbol of manufacturer and nominal size. Pipe must be marked with ASTM designation. Valves and equipment markings must have name or identifying symbol of manufacturer, specific model number, nominal size, name of device, arrow indicating direction of flow, and position of installation (horizontal or vertical), except if valve can be installed in either position. Markings

- must be included on the body casting or on an etched or stamped metal nameplate permanently on the valve or cover plate.
- d. Pressure Ratings: Valves, fittings, couplings, alarm switches, and similar devices must be rated for the maximum working pressures that can be experienced in the system, but in no case less than 175 psi.
 - e. Sprinklers: Sprinklers must comply with UL 199 and NFPA 13. Sprinklers with internal O-rings are not acceptable. Sprinklers in high heat areas including attic spaces or in close proximity to unit heaters must have temperature classification in accordance with NFPA 13. Extended coverage sprinklers are permitted for loading docks, residential occupancies, and high-piled storage applications only.
 - f. Pendent Sprinkler: Pendent sprinkler must be recessed, quick-response, dry pendent type with nominal K-factor to match existing pendants. Assembly must include an integral escutcheon as noted on the project plans.
 - g. Upright Sprinkler: Upright sprinkler must be stainless steel quick-response type with a nominal K-factor to match existing sprinklers.
 - h. Sidewall Sprinkler: Sidewall sprinkler must be the quick-response, recessed, dry sidewall type. Sidewall sprinkler must have a nominal K-factor to match the existing. Sidewall sprinkler must have a stainless steel finish.
 - i. Corrosion-Resistant Sprinkler: Corrosion-resistant sprinkler must be the upright and pendent type installed in locations as indicated. Corrosion-resistant coatings must be factory-applied by the sprinkler manufacturer.
 - j. Accessories:
 - k. Pendent Sprinkler Escutcheon: Escutcheon must be one-piece with white color with a depth in accordance with fire code, manufacturer recommendations, and suitable for installation on pendent sprinklers. The escutcheon must have a factory finish that matches the existing escutcheon.
 - l. Sprinkler Guard: Listed guard must be a steel wire cage designed to encase the sprinkler and protect it from mechanical damage. Guards must be provided on sprinklers located to generally match the existing.
 - m. Verifying Actual Field Conditions: Before commencing work, examine all adjoining work on which the contractor's work that is dependent for perfect workmanship according to the intent of this specification section, and report to the Contracting Officer's Representative a condition which prevents performance of first class work. No "waiver of responsibility" for incomplete, inadequate or defective adjoining work will be considered unless notice has been filed before submittal of a proposal.
6. **INSTALLATION:** The installation must be in accordance with the applicable provisions of NFPA 13, NFPA 24 and publications referenced therein. Installation of in-rack sprinklers must comply with applicable provisions of NFPA 13. Locate sprinklers to match the existing locations.
- a. Piping offsets, fittings, and other accessories required must be furnished to provide a complete installation and to eliminate interference with other construction.
 - b. Wherever the contractor's work interconnects with work of other trades the Contractor must coordinate with other Contractors to insure all Contractors have the information necessary so that they may properly install all necessary connections and equipment. Identify all work items needing access (dampers and similar equipment) concealed above hung ceilings by permanent color coded pins/tabs in the ceiling directly below the item.
 - c. The Contractor must provide required supports and hangers for piping, conduit, and equipment so that loading will not exceed allowable loadings of structure. Submittal of a bid must be a deemed representation that the contractor submitting such bid has ascertained allowable loadings and has included in his estimates the costs associated in furnishing required supports.
 - d. Waste Removal: At the conclusion of each day's work the Contractor shall clean up and stockpile on site all waste, debris, and trash which may have accumulated during the day as a result of work by the contractor and of his presence on the job. Sidewalks and streets adjoining the property must be kept broom clean and free of waste, debris, trash and obstructions caused by the Contractor's project and/ or work activities.

- i. The Contractor shall clean up waste or other project related debris when requested by 90 CES/CEM. The contractor shall clean in a timely manner when requested.
7. **ELECTRICAL:** Except as modified herein, electric equipment and wiring must be in accordance with Section 26 20 00 INTERIOR DISTRIBUTION SYSTEM from Unified Facilities Guide Specifications (UFGS), appendix 1.
8. **PAINTING:** Color code mark piping red as specified in Section 09 90 00 PAINTS AND COATINGS from Unified Facilities Guide Specifications (UFGS), appendix 1.
9. **FIELD QUALITY CONTROL:**
 - a. Test Procedures: Submit detailed test procedures, prepared and signed by the NICET Level III or above Fire Sprinkler Technician, and the representative of the installing company, and reviewed by the QFPE 60 days prior to performing system tests. Detailed test procedures must list all components of the installed system. Test procedures must include sequence of testing, time estimate for each test, and sample test data forms. The test data forms must be in a check-off format (pass/fail with space to add applicable test data; similar to the forms in NFPA 13 .) The test procedures and accompanying test data forms must be used for the pre-Government testing and the Government final testing.
 - b. Provide space to identify the date and time of each test. Provide space to identify the names and signatures of the individuals conducting and witnessing each test.
 - c. Verification of Compliant Installation: Conduct inspections and tests to ensure that equipment is functioning properly. Tests must meet the requirements of paragraph entitled "Minimum System Tests" and "System Acceptance" as noted in NFPA 13. The Contractor [and QFPE] must be in attendance at the pre-Government testing to make necessary adjustments. After inspection and testing is complete, provide a signed Verification of Compliant Installation letter by the QFPE that the installation is complete, compliant with the specification and fully operable. The letter must include the names and titles of the witnesses to the pre-Government tests. Provide all completion documentation as required by NFPA 13 and the test reports noted below.
 - d. NFPA 13 Aboveground Material and Test Certificate
 - e. NFPA 13 Underground Material and Test Certificate
 - f. Request for Government Final approval When the verification of compliant installation has been completed, submit a formal request for Government final approval to the Designated Fire Protection Engineer (DFPE), Contracting Officers Designated Representative (COR). Government final testing will not be scheduled until the DFPE has received copies of the request for Government final testing and Verification of Compliant Installation letter with all required reports. Government final testing will not be performed until after the connections to the building fire alarm system installation fire alarm reporting system have been completed and tested to confirm communications are fully functional. Submit request for test at least 15 calendar days prior to the requested test date.
 - g. Correction of Deficiencies: If equipment was found to be defective or non-compliant with contract requirements, perform corrective actions and repeat the tests. Tests must be conducted and repeated if necessary until the system has been demonstrated to comply with all contract requirements.
 - h. Government Final Tests: The tests must be performed in accordance with the approved test procedures in the presence of the DFPE. Furnish instruments and personnel required for the tests. The following must be provided at the job site for Government Final Testing:
 - i. The manufacturer's technical representative.
 - j. The contractor's Qualified Fire Protection Engineer (QFPE).
 - k. Marked-up red line drawings of the system as actually installed.
 - l. Government Final Tests will be witnessed by the 90 CES/CEM designee, Designated Fire Protection Engineer, Contracting Officer, Qualified Fire Protection Engineer (QFPE). At this time, all required tests noted in the paragraph "Minimum System Tests" must be repeated at their discretion.
10. **SYSTEM ACCEPTANCE:** Following acceptance of the system, the Contractor must deliver as-built drawings and O&M manuals to the Contracting Officer for review until acceptance is granted; multiple

revisions may be necessary. Submit six sets of detailed as-built drawings. The drawings must show the system as installed, including deviations from both the project drawings and the approved shop drawings. These drawings must be submitted within two weeks after the final acceptance test of the system. At least one set of as-built (marked-up) drawings must be provided at the time of, or prior to the final acceptance test.

- a. Provide electronic portable document formats drawings, sized no less than the contract drawings files. Furnish one set of CDs containing software back-up and CAD based drawings in latest version of AutoCAD.
- b. Provide operating and maintenance (O&M) instructions.
- c. Onsite Training: Conduct a training course for the responding fire department and operating and maintenance personnel as designated by the Contracting Officer. Training must be performed on two separate days to accommodate different shifts of Fire Department personnel for a period of 4 hours of normal working time and must start after the system is functionally complete and after the final acceptance test. The on-site training must cover all of the items contained in the approved Operating and Maintenance Instructions.

11. REFERENCES: The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

- a. American Water Works Association (AWWA)
 - i. AWWA C111/A21.11 (2023) Rubber-Gasket Joints for Ductile-Iron Pressure Pipe and Fittings
- b. ASTM International (ASTM)
 - i. ASTM A53/A53M (2024) Standard Specification for Pipe, Steel, Black and Hot-Dipped, Zinc-Coated, Welded and Seamless
 - ii. ASTM A135/A135M (2021) Standard Specification for Electric-Resistance-Welded Steel Pipe
 - iii. ASTM A153/A153M (2023) Standard Specification for Zinc Coating (Hot-Dip) on Iron and Steel Hardware
 - iv. ASTM A183 (2014; R 2020) Standard Specification for Carbon Steel Track Bolts and Nuts
 - v. ASTM A536 (2024) Standard Specification for Ductile Iron Castings
 - vi. ASTM B75/B75M (2020) Standard Specification for Seamless Copper Tube
 - vii. ASTM B88 (2022) Standard Specification for Seamless Copper Water Tube
 - viii. ASTM B88M (2020) Standard Specification for Seamless Copper Water Tube (Metric)
- c. FM GLOBAL (FM)
 - i. FM APP GUIDE (updated on-line) Approval Guide <https://www.approvalguide.com/>
- d. Intelligence Community Standard (ICS)
 - i. ICS 705-1 (2010) Physical and Technical Security Standard for Sensitive Compartmented Information Facilities
- e. National Fire Protection Association (NFPA)
 - i. NFPA 13 (2025; TIA 24-3) Standard for the Installation of Sprinkler Systems
 - ii. NFPA 24 (2025) Standard for the Installation of Private Fire Service Mains and Their Appurtenances
 - iii. NFPA 101 (2024) Life Safety Code
 - iv. NFPA 291 (2025) Recommended Practice for Fire Flow
 - v. NFPA 1963 (2019) Standard for Fire Hose Connections
- f. National Institute for Certification in Engineering Technologies (NICET)
 - i. NICET 1014-7 (2012) Program Detail Manual for Certification in the Field of Fire Protection Engineering Technology (Field Code 003) Subfield of Automatic Sprinkler System Layout
 - ii. UL Solutions (UL)
 - iii. UL 199 (2022; Reprint Feb 2025) UL Standard for Safety Automatic Sprinklers for Fire-Protection Service
 - iv. UL 405 (2013; Reprint Dec 2024) UL Standard for Safety Fire Department Connection Devices


- v. UL 789 (2004; Reprint May 2024) UL Standard for Safety Indicator Posts for Fire-Protection Service
- vi. UL Fire Prot Dir UL Product IQ (updated online) at:
 - <https://productiq.ulprospector.com/en>

END OF PERFORMANCE WORK STATEMENT

DRAFT

ATTACHMENT 1 – MAFs Limit of Potential Ground Disturbance

Drawings are publicly available (not controlled/classified).
(Approximately 210 ft from Boundary with Easement)

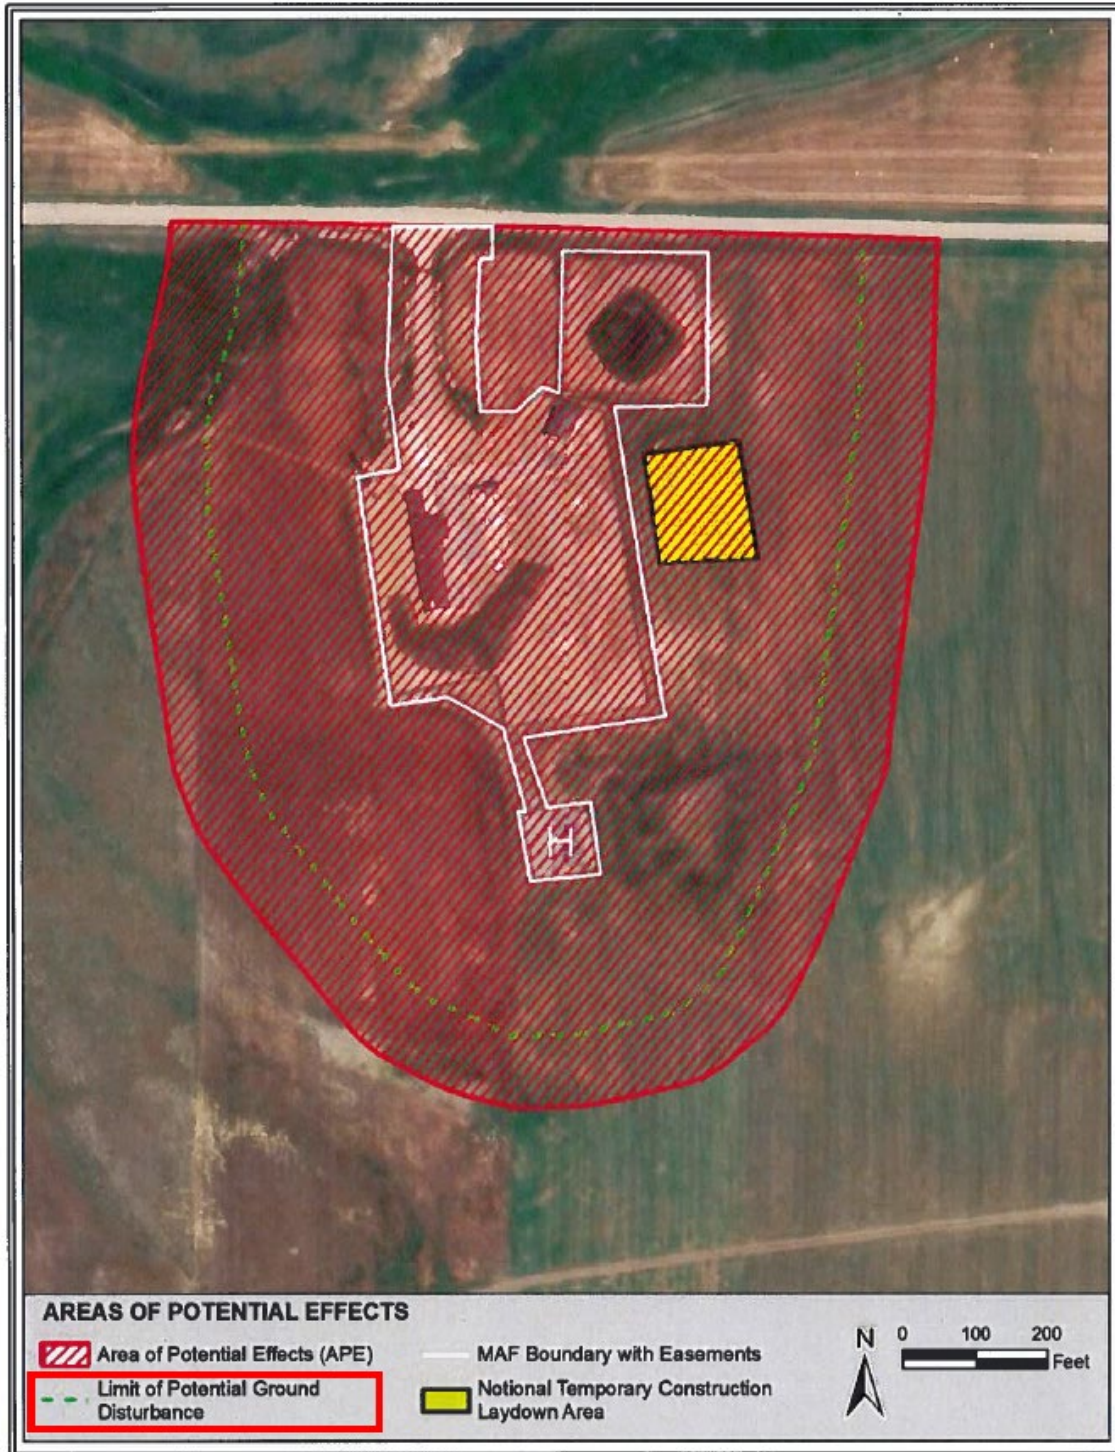

ATTACHMENT 2 – Contract Data Requirements List (CDRL)

All deliverables shall meet professional standards and the requirements set forth in the applicable contractual documents. The Contractor shall be responsible for delivering all specified end items. The end items listed in the table below are outputs, which fall within the scope of this effort and are illustrative of the type of work the Government expects to require.

Title	Submission Date	Distribution	Copies
A0001, Project and Work Schedule, Sections 1,4,&6	Within 15 working days of contract award.	CO	4 each
A0002, Safety Data Sheets (SDS) and HAZMAT Documents, Sections 1,4,&6	Within ten working days of contract award.	CO	4 each
A0003, Entry Access List (EAL), Sections 1,4,&5	Within ten working days of contract award.	CO	1 each
A0004, Quality Control Plan, Sections 1,4,5&6	Within ten working days of contract award.	CO	1 each
A0005, Site Interruption Plan, Sections 1,4,5,&6	30 calendar days before work begins.	CO	1 each
A0006, Progress Report, Sections 1,4,5,&6	Each Monday after notice to proceed until all MAFs pass final inspection.	CO	1 each
A0007, Liens or Landowner Agreements, Sections 1,4,&5	One working day before using adjacent lands.	CO	1 each
A0008, V2726 Manufacture Data, Sections 1,4,&6	Within ten working days of contract award.	CO	3 each
A0009, V2710 Manufacture Data, Sections 1,4,&6	Within ten working days of contract award.	CO	3 each
A0010, V3302 Manufacture Data, Sections 1,4,&6	Within ten working days of contract award.	CO	3 each
A0011, V3904 Manufacture Data, Sections 1,4,&6	Within ten working days of contract award.	CO	3 each
A0012, Battery Manufacture Data, Sections 1,4,&6	Within ten working days of contract award.	CO	3 each
A0013, Calibration Gas Data and Documents, Sections 1,4,5&6	Within ten working days of contract award.	CO	3 each
A0014, Warranty Documents, Sections 1,4,&6	Within ten working days of contract award.	CO	3 each
A0015, All Material Purchase Documents from Suppliers, Sections 1&4	Within five working days of receiving purchase documents.	CO	1 each
A0016, Contract Schedule Updates, Sections 1,4,5,&6	One day after demobilization from each MAF.	CO	1 each
A0017, Pre-Installation Plan, Sections 1,4,&6	15 working days before starting work on site.	CO	1 each
A0018, Time Lost Letter, Sections 1,4,&5	Within one working day of a lost day.	CO	1 each
A0019, Submittal Documents (AF Form 66), Sections 1,4,&6	15 working days prior to agreed date for site work to start.	CO	4 each
A0020, Post-Project Report, Sections 1,4,&6	Within ten working days of passing final inspections of all MAFs.	CO	1 each
A0021, Gas Detection Calibration Report, Section 1	Sample within ten working days of contract award. Final within one working day of calibration.	CO	16 each

- Sections listed above refer to the Sections in the PWS.

APPENDIX 1 – GENERAL REFERENCES

NOTE: Any Specifications and/or Regulations shall be in accordance with the most current)

1) References

- a. Title 40 CFR Environmental Protection Agency (EPA), Subchapter I, Part 260-268
- b. Title 29 CFR 1910 OSHA,
- c. Federal Standard, FED-STD-313C, Tables I and II
- d. Federal Acquisition Regulation (FAR) 52.237-2: *Protection of Government Buildings, Equipment, and Vegetation*
- e. DoD AFI 32-7002, *Environmental Compliance and Pollution Prevention*, Section 1.3 for Statutes and Regulations

2) WEBSITES:

- Acceptable Document-Submittals
DoD SAFE: www.safe.app.mil
- Anti-Terrorism
<https://jkodirect.jten.mil/Atlas2/page/login/Login.jsf>
- Occupational Safety and health Administration (OSHA)
www.osha.gov
- Department of Defense
<http://www.e-publishing.af.mil>
- Unified Facilities Guide Specifications (UFGS)
<https://www.wbdg.org/dod/ufgs?page=0>

3) USAF Submittal Forms (AF...)

- a. Form 103 *Base Civil Engineering Work-Clearance Request* aka “Dig Permit”
- b. Form 592 *Hot Work Permit* aka “Burn Permit”
- c. Form 66 *Schedule of Material Submittal Form*
- d. Form 3000 *Material Approval Submittal*
- e. Form 3064 *Contract Progress Schedule*
- f. Form 3065 *Contract Progress Report*