

Sources Sought Notice

SUBJECT* Camp Butler National Cemetery – National Shrine Project 806-NSP25-004

GENERAL INFORMATION

CONTRACTING OFFICE'S ZIP CODE*	22172
SOLICITATION NUMBER*	36C78626B0008
RESPONSE DATE/TIME/ZONE	03-16-2026 10:00 CENTRAL TIME, CHICAGO, USA
ARCHIVE	60 DAYS AFTER THE RESPONSE DATE
RECOVERY ACT FUNDS	N
SET-ASIDE	SDVOSBC
PRODUCT SERVICE CODE*	Z1QA
NAICS CODE*	561730
CONTRACTING OFFICE ADDRESS	Department of Veterans Affairs National Cemetery Administration Contracting Services 18434 Joplin Road Triangle VA 22172
POINT OF CONTACT*	Contracting Officer Shane Hilts shane.hilts@va.gov 402-714-8099

PLACE OF PERFORMANCE

ADDRESS	Camp Butler National Cemetery
----------------	-------------------------------

***= Required Field**

Sources Sought Notice

Sources Sought Notice

	5063 Camp Butler Rd
	Springfield Illinois
POSTAL CODE	62707
COUNTRY	USA

ADDITIONAL INFORMATION

AGENCY'S URL	https://www.cem.va.gov/
URL DESCRIPTION	National Cemetery Administration
AGENCY CONTACT'S EMAIL ADDRESS	
EMAIL DESCRIPTION	

Sources Sought Notice

DESCRIPTION

SOURCES SOUGHT NOTICE (Market Research)

Camp Butler National Cemetery – National Shrine Project

Project No.: 806-NSP25-004

Agency: Department of Veterans Affairs (VA), National Cemetery Administration (NCA)

Set-Aside Intent: 100% SDVOSB

NAICS (anticipated): 561730 – Landscaping Services (*Size Standard: \$10.5M*)

VA/NCA may consider alternate NAICS if industry feedback supports a better fit (e.g., 238990). Offerors may comment in their capability statements.

1. Purpose

This is a **Sources Sought Notice** only. The Government is conducting market research to identify **qualified SDVOSB firms** capable of performing the work described herein. **This is not a solicitation**; no award will be made from this announcement. Do not submit pricing. Responses will help determine acquisition strategy (including confirmation of a 100% SDVOSB set-aside) and NAICS selection.

2. Project Overview

Site: Camp Butler National Cemetery, 5063 Camp Butler Rd, Springfield, IL 62707

Work Area: Burial sections and surrounding areas listed in Exhibit A of the SOW.

Period of Performance: **365 calendar days** from Notice to Proceed.

Seasonal Windows: Turf renovation limited to *April 15–June 30* and *August 15–October 15*; turf must be established prior to onset of winter (bare ground is unacceptable).

Work Hours: 8:00 AM–4:30 PM, Monday–Friday (except Federal holidays). Work around funerals/ceremonies is mandatory.

Magnitude of Work (non-binding): The Government anticipates a construction/services effort likely between \$350,000 and \$500,000.

Project intent: Achieve National Shrine standards via precise **headstone alignment, raise/reset, cleaning**, and comprehensive **turf renovation** while protecting the dignity of the cemetery and its operations.

3. Scope Summary (see attached SOW for full details)

The selected contractor shall furnish **all labor, supervision, materials, equipment, and management** to complete **full section renovation** in specified areas, including but not limited to:

- **Professional Surveying & Layout**

Sources Sought Notice

- Licensed land surveyor to perform headstone location/elevation and topographic surveys; develop **Headstone Realignment Plans** and **Final Grading Plans**; install temporary and permanent control markers; stake grades.
- **Earthwork & Site Preparation**
 - Vegetation removal; excavation, backfill, compaction; subgrade amendment (gypsum & organics); base aggregates; leveling sand; topsoil placement and compaction; finish grading for positive drainage.
- **Headstone Activities (Upright and Flat)**
 - Headstone identification/tagging and joint verification with COR using BOSS records.
 - **Upright headstones:** remove from sockets; store on each gravesite; re-dig sockets; install aggregate base/backfill; reset and align to specified tolerances (plumb within 1°; spacing tolerances $\leq 1/8"$); establish smooth, flowing transitions across terrain; minimum 4" cover remaining for topsoil/sod.
 - **Flat markers:** extract, store on gravesite; install **plastic geogrid headstone support system** with compacted aggregate base/leveling sand; reset markers to **1" above finished grade**; align laterally, transversely, and diagonally with adjacent sections ($\leq 1/8"$ tolerance).
 - **Headstone cleaning** using NCA-approved biological cleaners (e.g., D/2, WeatherZyme) and low-pressure water per SOW; test cleaning and documentation required.
- **Turf Renovation (Sod)**
 - Soil testing (imported and onsite); amendments; erosion/sediment control; fine grading; **Blue Tag certified sod** installation; irrigation head adjustments; establishment period and warranty.
- **Quality Control & Reporting**
 - Daily/weekly schedules; daily construction logs; joint inspections; schedule of values; **Contractor Quality Control Plan (QCP)**; compaction testing with accredited lab; documentation of cleaned and reset markers; as-built drawings.
- **Protection & Conduct**
 - Strict cemetery decorum; protect utilities, irrigation, vegetation; safe operations around ceremonies; staging area fencing with privacy screening; housekeeping and cleanup.

Note: The SOW emphasizes that **headstones/markers are not removed off their gravesites** during work; when sockets are opened, stones are stored and protected **on their associated gravesite** and then reset. All tolerances, materials, methods, and seasonal constraints must be met to achieve acceptance.

Sources Sought Notice

4. Anticipated Key Deliverables/Standards

- Existing Conditions Survey; Headstone Realignment Layout; Final Grading Plans.
 - Daily/weekly reports; QA/QC test reports; submittal register.
 - Proper compaction per ASTM D698/D1557; surveying per SOW.
 - Headstone alignment tolerances ($\leq 1/8"$) and vertical plumb ($\leq 1^\circ$).
 - Turf establishment & one-year workmanship warranty.
 - As-built drawings and closeout documentation.
-

5. SDVOSB Eligibility

Respondents **must** be a verified SDVOSB at time of response and at time of any future award. **Verification:** SBA **Veteran Small Business Certification (VetCert)** in the SBA Veteran Certification Program (formerly VA CVE). Include your **VetCert approval letter or screenshot** and **UEI**.

6. Submission Instructions

Response Due: March 16, 2026 at 10:00am CST

Email To: Shane Hilts at shane.hilts@va.gov

Subject Line: *Sources Sought – 806-NSP25-004 – Camp Butler – SDVOSB – [Your Company Name]*

Page Limit: 10 pages max (excluding cover page and VetCert proof).

File Format: Single PDF

Your Capability Statement should address:

1. Company Information

- Legal name; UEI; address; point of contact; phone/email; SBA VetCert proof; NAICS affirmation (561730 or alternative proposed).

2. Relevant Experience (Past 5 years)

- Up to **three (3)** similar projects of comparable scope/complexity:
 - Headstone raise/reset/realignment & cleaning in active cemeteries (VA/NCA or similar).
 - Turf renovation with sod, seasonal windows, irrigation coordination.

Sources Sought Notice

- Survey-driven alignment work with tight tolerances in sensitive/public environments.
- For each: owner, location, period of performance, contract value, your role (prime/sub), scope summary, **measured tolerances achieved**, customer POC.

3. Technical Approach & Key Capabilities

- **Surveying & Layout** (licensed surveyor; control monuments; CAD/BIM);
- **QA/QC & Testing** (compaction, soils, lab accreditation);
- **Headstone Handling & Alignment** (methods, tools, tolerances, geogrid system experience);
- **Soils & Turf Agronomy** (soil testing, amendments, sod sourcing, establishment);
- **Irrigation interface** and repairs;
- **Safety & Cemetery Operations** (work around ceremonies; decorum; traffic control; dust control);
- **Environmental compliance** (RCRA disposal; spill prevention);
- **Schedule management** (critical path, seasonal phasing, daily/weekly meetings).

4. Capacity & Resources

- Staffing plan; superintendent qualifications (min. 3 years comparable work); key subs (survey, testing lab, sod grower); equipment list (track-type equipment on burial sections); ability to surge workforce if behind schedule.

5. Risk & Constraints Management

- Plan to meet SOW tolerances; manage weather; avoid utility damage; protect headstones/markers and vegetation; maintain strict decorum; comply with holiday/ceremony restrictions.

6. Bonding & Financial

- **Bonding capacity** (single/project and aggregate) and surety letter (if available).
- **Insurance** (GL, Auto, Workers' Comp) – summary limits.

7. Comments to the Government (Optional)

- Feedback on **NAICS**, **period of performance**, **seasonal constraints**, and any commercial practices that improve outcomes while preserving shrine standards.

7. Disclaimers

Sources Sought Notice

- This notice is for **planning purposes only** and does not commit the Government to any solicitation or award.
- The Government will not reimburse costs associated with responding.
- Do not submit proposals or pricing.
- Proprietary information should be clearly marked.

End of Document

Table of Contents

A. STATEMENT OF WORK

B. SPECIFICATIONS

- SECTION 01 33 23 - SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES
- SECTION 01 45 29 - TESTING LABORATORY SERVICES
- SECTION 02 21 13 - SITE SURVEYS (LIMITED)
- SECTION 31 00 00 - EARTHWORK
- SECTION 32 39 20 - HEADSTONE SETTING, ALIGNMENT AND CLEANING
- SECTION 32 92 24 - TURF RENOVATION

C. LIST OF EXHIBITS

D. LIST OF ATTACHMENTS

A. STATEMENT OF WORK

GENERAL REQUIREMENTS

1.1 SUMMARY OF WORK:

- A. **WORK AREA:** All work is to be performed on Camp Butler National Cemetery, in the burial sections and surrounding areas listed in the work area schedule. (See Exhibit 'A' – Camp Butler National Cemetery Renovation Areas.)

- B. **CEMETERY SECTION RENOVATION:** The Contractor gaining award must provide all personnel, management, supplies, transportation, equipment and supervision necessary to perform and complete all work to provide complete section renovation for the cemetery sections indicated that includes, but not limited to: site surveying; preparing grading plans and headstone realignment plans; vegetation removal, grading and drainage, excavation and backfill; headstone identification/tagging; headstone handling; flat marker geogrid support system; headstone re-installation; headstone cleaning; turf renovation; and site restoration work. Note: "Headstone" includes both upright headstones and flat markers.

The Contractor will complete all work within **Three Hundred and Sixty-Five (365)** calendar days after receipt of Notice of Award, subject to all terms, conditions, provisions, and schedules of the contract. Performance must be in accordance with the requirements, conditions, terms and representations contained in this solicitation.

Note: The effective period of Turf Renovation component of the project shall occur between April 15 to June 30 for spring, and from August 15 to October 15 for fall of awarded period of performance. Turf must be established prior to the onset of winter season. Bare ground is not acceptable during this time.

- C. One of the most important considerations in erecting or emplacing a headstone or marker is that of precision in alignment. Much of the beauty that exists or should exist in a national cemetery is the direct result of perfectly aligned headstones and markers. It only takes one headstone or marker out of alignment to spoil the appearance of an entire row, and thereby, the appearance of the entire section. The appearance of the finished work shall be gravesite section(s) of contoured grass landscape, with headstones set and aligned with each other in the vertical, horizontal, lateral and diagonal directions within the tolerances specified herein. It is critical that existing conditions are surveyed, and contours adjusted as necessary and approved by the COR to produce such an appearance. Failure to achieve this finished work will be basis for accepting or not accepting the finished work.

- D. Provide all work to complete a single gravesite and the immediate surrounding turf in accordance with the statement of work, drawings and specifications. Immediate surrounding turf is that turf that begins at the gravesite and runs up to the adjoining gravesites, section boundaries, fences, curbs, sidewalks, garden or tree lines and as further defined on the drawings. Award will be made based on entire cemetery Sections listed including "Row or "Rows" of gravesites and may contain Government Upright Headstones and/or Flat Markers as defined herein. A single "Row" of gravesites is defined as an array of continuous gravesites that begins and ends at the limits of a single section. The number of actual gravesites in each row may and does vary.
- E. The quantities of gravesites listed for each section is for bidding purposes only. Prior to beginning work of gravesite renovation, the Contractor must provide a survey of the area within the scope of work by a professional land surveyor licensed in the state of Illinois. The survey will locate the physical boundaries of the limit of work shown on the Drawings, gravesites markers, (upright or flat), reserved gravesites, section markers, control monuments, edge of pavement, curb lines, walkways, trees, valve boxes, vaults, walls, fences, and all other visible structures within the limit-of-work. The survey will provide a summary table listing total quantities of each type of gravesite marker (upright and flat markers) within each burial section and total area of turf renovation. Quantities listed must be certified by the professional land surveyor. (See Section "SITE SURVEY" for additional requirements.) Based on the survey, the actual quantities of gravesites and area of turf renovation will be determined. If there are inconsistencies in the number of gravesites and turf renovation, the CO will negotiate with the contractor via a Request for Equitable Adjustment based off the original bid price.
- F. **TO ENSURE THE ACCURACY OF MARKER PLACEMENT DURING THE RAISE AND REALIGNMENT PROJECT, THE FOLLOWING PROCEDURES WILL BE FOLLOWED BY CEMETERY PERSONNEL / CONTRACTING OFFICERS REPRESENTATIVE (COR) AND THE CONTRACTOR BEFORE THE RAISE / REALIGNMENT PROCESS BEGINS:**

The Contracting Officer Representative (COR) and the Contractor or designee as listed in the official contract documents must conduct a joint gravesite verification and inspection prior to the removal of headstones/markers from any gravesite. The COR will provide a copy of the Burial Register Report from the Burial Operation Support System (BOSS) to the Contractor. The Burial Register Report will be used to verify the section, row, grave number, first and last name of each decedent and the condition of the headstone/marker included in the scope of work (SOW). All inconsistencies will be researched, discussed and resolved with the Cemetery Director prior to moving any headstone or marker from the gravesite. Upon completion of the joint survey and corrective actions as necessary, the COR and the Contractor must certify the verification and inspection, by signing the Burial

Register Report printout. The CO/COR will give the approval to begin the project. When the Contractor finishes working each day, a joint re-inspection will be completed for all headstones and markers raised & realigned. The Contractor and the COR will re-inspect and verify the accuracy of the placement of headstones or markers on the correct gravesite using the same Burial Register Report that was used for the initial inspection. A copy of the original, signed verification and inspection form must be forwarded to the Contracting Officer, a copy of the report will be maintained by the Cemetery. Copies of the inspections/verification forms will be provided to the contractor's designee and COR for their official contract files.

The Contractor will protect all headstones and markers from damage during the process. The Contractor will ensure that headstones and marker are protected from damage or being discolored from dirt or soil contact. Contractor must submit transmittals to the COR on the method of elevating headstones and markers for approval.

HEADSTONES AND MARKERS WILL NOT BE PHYSICALLY REMOVED FROM THE GRAVESITE DURING THE PROJECT.

PRICE/COST SCHEDULE

ITEM NO.	DESCRIPTION	UNIT	TOTAL PRICE
BASE BID PERIOD OF PERFORMANCE: 365 DAYS			
001	<i><u>BASE BID: FULL CEMETERY SECTION RENOVATION</u></i> <i>(SECTIONS: CS-B, CS-C, CS-D, CS-E, CS-F 4, A)</i>	LUMP SUM	\$ _____

<i>TOTAL OF BASE BID</i>	
BASE BID – LUMP SUM BID AMOUNT	\$ _____
GRAND TOTAL BID AMOUNT	\$ _____

Note (1): The professional land surveyor must measure the total square feet of area to receive turf replacement/renovation to include all of the cemetery sections defined in the work area. Excluded from the total square-footage calculation for turf replacement/renovation are the footprint of paving, gravesite markers, headstones, section

markers, valve boxes, trees, mulched beds, and any other site feature which deducts from the area of turf.

Note (2): Irrigation Systems: Irrigation systems are to be protected in place. Any damage to the irrigation system must be repaired by the Contractor at no additional cost to the Government. Work to be accomplished under this contract does not involve new installation of irrigations lines, sprinkler heads or other associated fixtures. However, the work does involve the raising and/or lowering of sprinkler heads, and irrigation valve boxes. The Contractor must submit a request to the COR/Cemetery Director to make temporary adjustments to the irrigation system in the sections subject to the contract so as not to interfere with the Contractor's activities. Temporary adjustments include: temporary removal and capping of sprinkler heads; temporary adjustment of arc patterns of sprinkler heads; and temporary adjustments to irrigation scheduling. All irrigation adjustments must be restored to their original condition prior to installation of new sod.

1.2 BURIAL SECTION DATA:

CAMP BUTLER (806) FY26 SHRINE PROJECT						
Cemetery Section	Gravesite Type	Approx. Gravesite Size	Headstone Type	Number of Headstones	Approx Turf Area	Work Type
Full Section Renovation as described herein includes all the following: Headstone Support System, Marker Raise, Reset, and Realign, Complete Turf Renovation, and Headstone Cleaning.						
Raise & Realign as described herein includes all the following: Headstone Support System, Marker Raise, Reset, and Realign, Turf Renovation as needed, and Headstone Cleaning.						
BASE BID						
CS-B	URN	3X3	FLAT GRANITE	482	4792	FULL
CS-C	URN	4X4	FLAT GRANITE	506	9104	FULL
CS-D	URN	4X4	FLAT GRANITE	374	6708	FULL
CS-E	URN	4X4	FLAT GRANITE	440	7667	FULL
CS-F	URN	4X4	FLAT GRANITE	72	1438	FULL
4	CASKET	5X10	UPRIGHT MARBLE	393	21562	FULL
A	CASKET	5X10	UPRIGHT MARBLE	289	15812	FULL

1.3 THE NCA MISSION: The National Cemetery Administration honors veterans with a final resting place and lasting memorials that commemorate their service to our Nation. National cemeteries are national shrines. The standards of maintenance, appearance and operational procedures performed by the Contractor at this cemetery must reflect this nation's concern for those interred there. For this reason, the Contractor's strict adherence to the specifications is required and is essential. The Contractor must demonstrate a clear understanding of, and the sensitivity to, environmental issues during the performance of the contract.

1.4 **CONTRACTING OFFICER'S REPRESENTATIVE (COR):**

- A. The VA Contact Person is Chris Roberts the Camp Butler National Cemetery Assistant Director and COR for the project. The COR or their designee(s) will make site visits on a regular basis. The COR may designate an "authorized on site designee" to observe work progress.

- B. The Contracting Officer's Representative (COR) responsibilities will include, but not be limited to surveillance of services required under this contract; determining the adequacy of Contractor performance according to the specifications of this contract; acting as the Government's representative; ensuring compliance with contract requirements insofar as the work is concerned; and advising the CO of any contract issues. The COR cannot authorize deviations from the specifications and requirements of this contract. In the event the Contractor deviates without approval from the CO, such deviation shall be at the risk of the Contractor and any cost related thereto shall be borne by the Contractor. The COR designated for this proposed contract will be officially appointed in writing by the CO.
- C. If work is authorized to be performed after hours or on weekends/holidays and an emergency should occur, the Contractor shall contact the VA Police Office in the absence of the COR or their designee. The VA Police will then contact the COR or take appropriate action.

1.5 CEMETERY LOCATION: The services will be performed at one (1) location:

CAMP BUTLER NATIONAL CEMETERY
5063 Camp Butler Rd, Springfield, IL 62707

1.6 CONTRACTOR DUTIES:

- A. Contractor Superintendent: A competent and experienced Contractor Superintendent must be provided by the Contractor for not less than two (2) hours a day whenever work is being performed - other than trash and debris pick-up. The Contractor Superintendent must have not less than three (3) years experience as a direct supervisor of a commercial service operation that included surveying, soil excavation, and site construction in industrial, commercial or public sites. The Contractor Superintendent must ensure all specifications are being met, ensure contract work does not conflict with ceremonies and funerals, and ensure that employees are adequately supervised, and proper conduct is maintained. In the absence of the Superintendent, the Contractor must appoint an English-speaking crew foreman or an employee who must be responsible to ensure that the work is being accomplished in an expeditious manner, is performed in accordance with the contract specifications and that the work must progress without undue delay.
- B. Work Hours: Work shall be performed between the hours of 8:00 a.m. to 4:30 p.m., Monday through Friday, except for Holidays, unless otherwise directed by the COR. At Contractor request and with the written permission of the COR, work shall also be permitted to be scheduled for weekends and/or Holidays. When emergency situations, that are caused by the Contractor or severe adverse weather prohibits work during the week, then he/she must obtain approval from the COR to work on weekends in order to meet the period of performance. The

Government will not compensate the Contractor for any alternate work schedules needed for the Contractor to complete all contract work within the specified project duration time frame. No work is permitted on Veterans Day and Memorial Day and the two days immediately prior to Memorial Day for preparation. Notwithstanding, if any work under this contract shall be performed outside of the VA's normal working hours (8:00 a.m. to 4:30 p.m. Monday through Friday), then Contractor must notify the COR at least 48 hours in advance.

- C. Federal Holidays: Memorial Day, Juneteenth, Independence Day, Labor Day, Veterans Day, Thanksgiving Day, Christmas Day, New Year's Day, Martin Luther King, Jr., Washington's Day*

Federal law (5 U.S.C. 6103) establishes the following public holidays for Federal employees. Please note that most Federal employees work on a Monday through Friday schedule. For these employees, when a holiday falls on a non-workday -- Saturday or Sunday -- the holiday usually is observed on Monday (if the holiday falls on Sunday) or Friday (if the holiday falls on Saturday).

**This holiday is designated as "Washington's Birthday" in section 6103(a) of title 5 of the United States Code, which is the law that specifies holidays for Federal employees. Though other institutions such as state and local governments and private businesses may use other names, it is our policy to always refer to holidays by the names designated in the law.*

- D. After Normal Hours On-Call/Emergency Situations: The Contractor must establish and maintain a point-of-contact to receive emergency calls from the COR(s). The point-of-contact must be available on a 24-hour basis including during weekends, Federal Holidays and after normal hours of operation. The Contractor must provide name/telephone number(s) for Project Manager (Home & Office), Superintendent, and Foreman, including normal and emergency/after-hours contact numbers, mobile, and fax numbers. In the event of an emergency situation, repairs must be made as expeditiously as circumstances allow or within (24) hours upon initial emergency call. If work is authorized to be performed after hours or on weekends/holidays and an emergency should occur, the Contractor must contact the COR and the Cemetery Director. In the absence of the COR and the Cemetery Director, the Contractor must contact the local police.

1.7 WORK SCHEDULE

- A. Two weeks after Notice to Proceed, the Contractor must provide a Work Plan in the form of a critical path timeline schedule (i.e., Gantt chart) includes, at a minimum, the date of Notice to Proceed, the submittal period, the mobilization date, the start and completion dates of each major work element, showing sequence of section renovations listing each task and subtask, and total time required to complete the renovation, testing and inspection dates, punch

list/correction period, demobilization, project completion date, and subsequent maintenance periods. The schedule should prove that the work will be completed within the allotted time for completion of the contract.

- B. Submit proposed Work Plan in electronic and hard copy formats for COR review and approval prior to start of project. The Work Plan must make considerations for weather delays, planting dates, Federal holidays and burial services. The schedule accounts for all work, is logical in its progression through the Cemetery, and is realistic and feasible given daily operations and delays which occur at the cemetery. The Work Plan must be updated weekly to accurately reflect the work that has been completed and any adjustments to milestones and target completion dates. The updated Work Plan must be distributed to the project team and presented to the COR prior to the beginning of weekly progress meetings.

1.8 PROJECT MEETINGS and REPORTING:

- A. The Contractor must report each workday to the Cemetery Director or COR at the main office of the Camp Butler National Cemetery. Contractor must log in and obtain funeral and/or special schedules as defined herein. This check in is mandatory. Daily meetings will be at an agreed upon time between the COR and the Contractor. The Contractor must provide an anticipated work schedule each workday or as agreed upon with the Cemetery Director or COR, and to ensure that no work is being performed at the immediate site of a scheduled interment or ceremony. These daily meetings shall also be an opportunity for the Contractor to ask questions and ensure he/she understands the off-limit areas, which will vary, depending on the event. The Contractor's site manager can thus assign tasks accordingly throughout the rest of the Cemetery, so that productive use of labor and equipment is assured, and downtime is avoided. If the Contractor fails to re-direct employees away from an event in a timely fashion, the COR(s) will then assist in doing so. Daily meetings shall be at an agreed upon time between the COR and the Contractor.
- B. A list of scheduled ceremonies will be provided the week prior to the event, and a list of scheduled funerals will be provided daily. The Contractor must be solely responsible for ensuring that no contract work causes any funeral, ceremony, procession or visitation to be delayed, altered, or otherwise impacted in such a way that the dignity or security of the event is compromised. The Contractor must be solely responsible for staying abreast of all such upcoming events and when in doubt, he/she must ask the COR(s).
- C. The Contractor site manager must provide WEEKLY and DAILY work schedules to the CO and COR. The contractor is required to schedule all required services and is further required to comply with their schedule except for delays beyond his/her control. Such delays shall be coordinated through the CO. The work schedule must include deficient work identified by contractor's quality control inspections and not yet corrected.

- D. The Contractor must submit the WEEKLY schedule every Friday by 3:00 P.M. indicating the work to be performed during the following week and the DAILY schedule must be submitted each workday by 8:00 A.M. indicating work being performed on that day.
- E. The Contractor must meet with the COR or authorized designee, at the end of each workday to present documents showing services performed and ensure that work is on schedule.
- F. The Contractor's site manager must provide weekly an accurate written report identifying all work that took place within the previous seven calendar days. The Contractor must document services performed, indicate the location where work was to be performed, and provide information to the COR as required. The report must include an updated Project Work Plan to prove that the work is progressing according to schedule. (See Article 1.8 – "Phasing and Work Sequencing" for requirements of the Project Work Plan.)
- G. In instances where the COR determines that the work is behind schedule, he/she will notify the Contracting Officer and the Contractor must increase workforce and/or hours of operation at no additional cost to the Government in order to achieve completion of the contract work within the specified timeframe.
- H. The VA will set-up and conduct regular virtual Project Meetings. The frequency of these meetings shall be at least weekly or as determined by the CO. The CO, COR, District Project Manager are expected to attend these meetings. On the Contractor's side, the Contractor's project manager and site manager at a minimum must attend these meetings. The Contractor's subcontractor(s) may be asked to attend as appropriate. Be prepared to discuss matters such as procedures, progress, problems, scheduling, coordination, changes, discrepancies, submissions, etc. The VA will record and distribute meeting minutes to all parties.

1.9 SCHEDULE OF VALUES

- A. Two weeks after Notice to Proceed, the Contractor must provide the CO and COR with a Schedule of Values for each major work element in the contract to assist the COR with verification of work performed and to justify progress payments for work completed.

1.10 CLEAN UP and DISPOSAL:

- A. The Contractor must be responsible for cleaning cemetery structures, headstones, monuments, and roadways that are soiled or stained as a result of Contractor's performance. The Contractor must wash-down with water all soiled or stained structures headstones, and monuments at the end of each workday. Roadways

must be cleaned with a street sweeper each day as needed to keep the existing roads free from dirt and mud resulting from Contractor operations. No hazardous chemicals shall be used at any time on Government property. The Contractor must bear all costs associated with washing and cleaning. Any such washing/cleaning must be brought to the immediate attention of the COR prior to washing/cleaning.

- B. The Government will not provide receptacle(s) for disposal of debris related to this contract. The Contractor shall be permitted to place his/her trash receptacle dumpsters in the COR approved "Contractor Staging Area".
- C. At the end of each day the Contractor must remove all debris from the cemetery site resulting from the work. The Contractor must ensure at all times that rubbish and trash generated by the Contractor is kept clear of vehicular and pedestrian traffic throughout the site.
- D. The Contractor must dispose of all hazardous waste in accordance with the Resource Conservation and Recovery Act (RCRA) and all other applicable Federal, State, and Local law and regulations. The Contractor is required to obtain required disposal permits from the State regulatory agency. On-installation storage or disposal of hazardous waste is NOT allowed.

1.11 WORK PERFORMED BY OTHERS ON SITE:

- A. The Government may undertake or award other contracts for additional work at or near the site of work for this contract. The Contractor must fully cooperate with any other contractors and with Government employees and must carefully adapt scheduling and performance of work, and needing any direction, it will be provided by the COR(s). The Contractor must be responsible for reporting to the COR(s) any problems or questions that shall arise with any other personnel on site during the period of performance of this contract. The Contractor must not take it upon him or herself to resolve any problems or issues with other on-site contractors or employees, but rather must leave it to the COR(s) to resolve the issue.
- B. The Contractor (including his/her employees, subcontractors, consultants or the like must not operate trucks, tractors, and other heavy equipment on any turf area except as provided in this contract to perform work or as authorized by the COR. The Contractor must be responsible for repairing turf damage caused by the Contractor's equipment and staff at no additional cost to the Government.

1.12 WORK ENVIRONMENT:

- A. All work under this contract shall be performed primarily outdoors and personnel performing these services shall be exposed to wind, sun, cold, dampness, frost, fog and rain. These conditions, may, at times, be extreme. The contractor must

take all necessary precautions to protect his/her employees from the elements to the maximum practicable extent. Weather shall not be considered an excusable delay in meeting specifications or project schedule. The Contractor understands that it shall be necessary to work throughout all weather conditions (unless highly extreme, causing equipment rutting and/or hazards, damage to turf, and dangerous to employees or public) and to apply additional labor and equipment as necessary to meet deadlines, at no additional cost to the Government. If weather conditions are so extreme such that work performed on that day may cause more damage to the cemetery grounds than good, (e.g., equipment rutting) and/or posing hazards to employees or public, the COR has the authority to stop work until conditions improve and the COR directs continuation of performance.

- B. Due to the sensitive mission of the cemetery, the work could occasionally involve contact with and/or exposure to grieving individuals. Contractor personnel must exercise and exhibit absolute decorum, composure and stability at all times and refer such individuals to Cemetery Staff.

1.13 CONTRACTOR-FURNISHED ITEMS:

- A. The Contractor must be responsible for supplying all equipment, personnel, tools, supplies and materials necessary to perform the services required by this contract.
- B. Contractor-furnished items necessary to perform work as required under this contract must be furnished, maintained and operated by the contractor and must be consistent and fully compliant with all applicable OSHA, Federal, State, County, City laws, ordinances and regulations.
- C. The Contractor must be responsible for the supply, maintenance and repair of all contractor-owned equipment. This includes minor maintenance/repair and minor operating parts for equipment such as lubrication, oil changes, spark plugs, gaskets, cotter pins/keys, electric extension cords, etc., to keep all equipment in good operational condition throughout the period of performance of this contract. No contractor equipment maintenance repairs of any kind can be done on cemetery property without COR(s) approval.
- D. Contractor Staging Areas: Primary staging area shall be in the Cemetery spoils area, or as directed by the COR. The Contractor must install a 6-foot high chain link fence with privacy screen fabric and gates around this entire area for duration of the work in those sections. Contractor must base operations out of these staging areas, using it for materials, equipment storage, administration, employee toilets, trash dumpster area, employee parking, employee lunch/break area, etc. After completion of project work, Contractor must remove fencing and restore the area back to original condition.

- E. The Contractor must be responsible for ensuring that all of his/her motor vehicles and equipment meet State inspection, safety, licensing, registration, and insurance requirements.
- F. Only Contractor equipment and supplies (property) required to perform work under this contract must be stored at the Contractor's designated storage area at the end of each workday. No personal property, equipment, or vehicles shall be stored on the cemetery premises.
- G. Electricity: In case the Contractor requires electricity while in performance of this contract, the Contractor shall provide and utilize portable generators as necessary to complete the work. If Contractor hookup to Camp Butler National Cemetery electrical distribution system is approved by COR, the Contractor shall provide all necessary connections and complete connection work in accordance with NEC requirements, and at no additional cost to the Government.
- H. Water: Water will only be made available via Contractor connection to existing Cemetery water system in existing locations where connection is available, at no cost to the Contractor for purposes of this contract only. The Contractor shall be responsible for making connections to this water supply in accordance with local regulations. Coordination and COR-approval is required for water connection assemblies. Water outlets must be equipped with shut-off valves to prevent water waste. Contractor must not obstruct normal traffic flow on adjacent roads while water is being obtained. In locations where Cemetery water system is not readily available, the Contractor must provide and utilize portable water tanks and/or water trucks as necessary to transport water to areas where needed in order to complete the work required by this contract, at no additional cost to the Government.
- I. Refuse Facilities: The Contractor must provide his/her own REFUSE FACILITIES, and these shall only be located in the COR approved "Staging Area". The Contractor shall not be authorized to place dumpsters or refuse facilities in any other location at the cemetery other than the approved staging area. The contractor shall be required to dispose of all debris and other waste materials generated by his/her work at a licensed off-site landfill unless otherwise directed by the COR. The Government will not provide receptacles for disposal of debris as a result of the services provided under this contract. In case of Hazardous Materials contractor is required to obtain required disposal permits from the State regulatory agency.
- J. Portable Toilets: The Contractor must provide portable chemical toilets for use by workmen as necessary to comply with applicable OSHA requirements. These portable toilet facilities must be kept clean and free of excessive odors, insects, etc. Locate portable toilet facilities in the COR approved Contractor Staging Area only. It shall not be permissible to locate portable toilet facilities in any other locations throughout the cemetery. The use of the permanent cemetery

toilet facilities by workmen is strictly prohibited throughout the duration of this contract. All connections and appliances connected therewith must be removed prior to completion of contract, and premises left perfectly clean. The Contractor and Contractor's workers must not use Cemetery restroom facilities.

- K. Identification, Parking, Smoking, and VA Regulations: The Contractor's employees must wear visible identification at all times while on the premises of the Cemetery. It shall be the responsibility of the Contractor to park in the appropriate designated parking areas. The Cemetery will not invalidate or make reimbursement for parking violations of the Contractor under any conditions. Smoking shall be prohibited inside any buildings at the Cemetery. Possession of weapons is prohibited. Enclosed containers, including tool kits, shall be subject to search. Violations of VA regulations will result in citation answerable in the United States (Federal) District Court, not a local district, state, or municipal court.

1.14 STANDARDS OF CONTRACTOR AND EMPLOYEE CONDUCT:

- A. Contractor personnel must be required to adhere to the following standards of dress, conduct, supervision and training while performing work on Government property. These standards and regulations are enforceable under Title 38, U.S.C., Part I, Chapter 9, Section 5901. It will be subject to immediate enforcement action by the Contracting Officer if these standards are not adhered to during the period of performance of this contract. Contractor management must be responsible for training and safety precautions prescribed by OSHA regarding safety equipment and devices.
- B. Contractor personnel must be fully clothed at all times, to include upper garment to cover body from the waist to the neck and long pants or slacks. Clothing must be clean, and presentable and suitable to the work while maintaining proper appearance and decorum indicative for a National Shrine. Overall cleanliness and personal hygiene are imperative. Uniform shirts and hats are preferred. If uniforms are used, they must be in unison among all employees. Garments, which have a message, slogan or printing of any kind other than the Contractor's business attire, shall be prohibited. T-shirts and/or tank tops as outer garments are prohibited. Protective/safety clothing and shoes must meet or exceed OSHA and state requirements. The Contractor must maintain a neat and professional appearance throughout its workforce, vehicles, equipment, and maintenance areas.
- C. The Contractor/personnel must not engage in loud or boisterous behavior, angry outbursts or use profane or abusive language at any time on Government premises. Playing radios and/or electronic games/devices is prohibited. Due to the sensitive mission of the cemetery, Contractor employees shall come into daily contact with grieving individuals, therefore Contractor employees must exercise and exhibit absolute decorum, courtesy, and respect while within the cemetery or at its perimeter or entrances. Inquiries from cemetery visitors must

be politely referred to Government cemetery staff. Gratuities of any kind must be strictly prohibited.

- D. Contractor personnel must consume food and beverage only within areas designated by the COR(s). Intoxication, and violence or criminal acts of any kind will not be tolerated, and is cause for immediate removal from Government property. Use or sale of intoxicating beverages and/or drugs is strictly prohibited (including legalized marijuana use). Use of tobacco products is only allowed in specific areas designated by the COR/Cemetery Director.
- E. Contractor employees must only take breaks/rest periods and lunch breaks at the Contractor Staging Area, not in the field. Eating and drinking (except water) is prohibited in the work areas and within sight of a committal shelter during a service.
- F. Workers must utilize contractor provided temporary chemical toilet facilities located only in the Contractor Staging Area. Misconduct shall form the basis for immediate contract enforcement action, to include immediate removal from the cemetery.
- G. No tools, equipment or other items will be placed or leaned on headstones or monuments. Contractor personnel must not lean, sit, or stand on or against headstones or monuments. Nor can they drive over them. Contractor personnel must use tools approved by the Contracting Officer Representative (COR), to lift markers out of the ground; pickaxes are not an acceptable tool for moving markers.
- H. Identification, Parking, Smoking, and VA Regulations: The Contractor's employees must wear visible identification at all times while on the premises of the Cemetery. Contractor employees may park privately owned vehicles in the area designated for parking by the COR. It is the responsibility of the Contractor to park in the appropriate designated parking areas. The Cemetery will not invalidate or make reimbursement for parking violations of the Contractor under any conditions. Workers are not allowed to park throughout the cemetery grounds, and violation of this requirement shall form the basis for immediate contract enforcement action, to include immediate removal from the cemetery. Smoking is prohibited inside any buildings at the Cemetery. Possession of weapons is prohibited. Enclosed containers, including tool kits, shall be subject to search. Violations of VA regulations may result in citation answerable in the United States (Federal) District Court, not a local district, state, or municipal court.
- I. Orientation for Contractor Employees:
 - 1. The Contractor will be responsible to ensure that Contractor employees coming to the work site will receive complete information on each of these subjects:

- a. Safety and Environmental Protection, and Fire Safety.
 - b. Project Work Schedule.
 - c. Rules Pertaining to Workers.
 - d. General Parameter Job Related Issues.
 - e. Disaster procedures.
 - f. All technical requirements of the project.
2. The Contractor will be responsible to ensure Contractor employees providing work on this contract are fully trained and completely competent to perform the required work.
 3. The Contractor must be responsible to ensure that his/her employees (including contractor's consultants, subcontractors, etc.) are aware of all the terms and conditions set forth above in this solicitation package regarding their performance and conduct during the performance period of this contract. Each contractor and subcontractor employee must sign a Statement of Compliance, (Attachment 8); the Contractor must deliver the signed statements to the COR before work may begin or before any new employee is allowed to work on Cemetery grounds

J. Labor Force and Equipment:

1. The Contractor must be aware of the intensive labor and equipment requirements needed to meet contract specifications. Contractor must be responsible to provide, labor and equipment as necessary to meet deadlines at no additional cost to the Government. The Contractor must provide additional resources necessary to meet or return to specified work requirements after special events and/or services. The Contractor must determine the number of employees and the amount and kinds of equipment needed during the period of performance.
2. Employee Listing: The Contractor must maintain and provide the COR a current list of all employees on site including subcontractor personnel. The list must include the employee's name, job title, and driver's license number.
3. Employee Identification: The Contractor's employees must wear visible identification at all times while on the premises of the Cemetery.

1.15 SAFETY and ENVIRONMENTAL PROTECTION:

- A. The Contractor is responsible to ensure that all work must be done in a manner that safeguards all VA visitors, employees, and public. The Contractor must be solely responsible for any and all actions initiated and/or completed by his/her employees. Furthermore, the contractor and his/her employees must have a clear understanding of, and be sensitive to, such environmental issues as ground water contamination, wetlands, etc., and be consistent and fully compliant with all

applicable Federal, State, County and City laws, ordinances, Right-to-Know laws, EPA guidelines, and regulations.

- B. Matters related to safety, and any actions of the Contractor, must meet all safety requirements of Camp Butler National Cemetery's Safety Officer, Department of Veterans Affairs, OSHA, and the State. It is incumbent upon the Contractor to be familiar with these requirements. "Safety" must also include the Contractor having a safety representative who maintains regular and routine contact with the Safety Officer at Camp Butler National Cemetery.
- C. Adequate warning devices, barricades (orange construction fence), guards, flagmen or other necessary precautions must be provided by the Contractor at all work sites to eliminate hazards and for the protection, safety, and warning of all public visitors, pedestrians, cemetery employees, and vehicular traffic within the area. All open and unattended holes in the ground must be covered with plywood and/or barricaded for pedestrian safety. All work areas will be secured with barricades (orange construction fence) at the end of each workday.
- D. Contractor fuel storage containers must be limited to those less than 55-gallon storage capacity. Any fuel storage must comply with environmental laws and regulations.
- E. Spill Prevention, Containment, and Clean-up: The Contractor must contain, clean up, and report all spills on Government property in a manner that complies with all applicable Federal, State, and Local laws and regulations or otherwise stated herein, and the installation spill control plan at no cost to the Government.
- F. Dust Control: Keep dust down at all times, including during nonworking periods. Sprinkle or treat with dust suppressants, the soil at the site, haul roads, and other areas disturbed by operations. Dry power brooming will not be permitted. Instead, use vacuuming, wet mopping, wet sweeping, or wet power brooming.

1.16 FIRE SAFETY:

- A. Applicable Publications: Publications listed below form part of this Article to the extent referenced. Publications are referenced in text by basic designations only.
 - 1. National Fire Protection Association (NFPA):
 - a. 10-2013 Standard for Portable Fire Extinguishers
 - b. 70-2017 National Electrical Code
 - 2. Occupational Safety and Health Administration (OSHA)
 - a. 29 CFR 1910 Safety and Health Regulations for Personal Protection, Safety Color Codes, Portable Power Tools, Electrical Safety and Portable Electric Equipment.

- B. Fire Safety Plan: Establish and maintain a fire protection program in accordance with 29 CFR 1910. Prior to start of work, prepare a plan detailing service-specific fire safety measures, including periodic status reports and submit to COR for review.
- C. Site and Building Access: Maintain free and unobstructed access to facility emergency services and for fire, police and other emergency response forces in accordance with NFPA 241.
- D. Separate temporary facilities, such as trailers, storage sheds, and dumpsters, from existing buildings and new construction by distances in accordance with NFPA 241. For small facilities with less than 6 m (20 feet) exposing overall length, separate by 3m (10 feet). Locate only in staging area where approved by COR.
- E. Temporary Electrical: Install, use and maintain installations in accordance with 29 CFR 1910, NFPA 241 and NFPA 70. If temporary electrical is required, the Contractor must notify the COR prior to use of Temporary Electrical Services.
- F. Means of Egress: Do not block exiting for occupied buildings, including paths from exits to roads.
- G. Fire Extinguishers: Provide and maintain extinguishers in service areas and temporary storage areas in accordance with 29 CFR 1926, 29 CFR 1910, NFPA 241 and NFPA 10.
- H. Flammable and Combustible Liquids: Store, dispense and use liquids in accordance with 29 CFR 1910, NFPA 241 and NFPA 30.
- I. Smoking: Smoking is prohibited except in designated smoking areas.

1.17 OPERATIONS AND STORAGE AREAS:

- A. Working space and space available for storing materials is to be where approved by COR in the Contractor's "Staging Area". The Contractor must confine all operations (including storage of materials) on Government premises to areas authorized or approved by the COR or Contracting Officer.
- B. The Contractor must hold and save the Government, its officers and agents, free and harmless from liability of any nature occasioned by the Contractor's performance. It is understood that the VA will not be held responsible for any damage to the Contractor's equipment, materials, supplies or the like that result from vandalism, theft etc. while on site.
- C. Temporary buildings (e.g., storage sheds, shops, offices) and utilities may be erected by the Contractor only with the approval of the COR and shall be built with labor and materials furnished by the Contractor without expense to the

Government. The temporary buildings and utilities shall remain the property of the Contractor and must be removed by the Contractor at his/her expense upon completion of the work.

- D. The Contractor must, under regulations prescribed by the Contracting Officer or COR, use only established roadways, or use temporary roadways constructed by the Contractor when and as authorized by the COR or Contracting Officer. Vehicles must not be loaded beyond the loading capacity recommended by the manufacturer of the vehicle or prescribed by any Federal, State, or local law or regulation. When it is necessary to cross curbs or sidewalks, the Contractor must protect them from damage. The Contractor must repair or pay for the repair of any damaged curbs, sidewalks, or roads.
- E. Execute work in such a manner as to interfere as little as possible with work being done by others. Keep roads clear of service materials, debris, standing service equipment and vehicles at all times.
- F. Do not store materials and equipment in other than assigned areas.
- G. Fence: Before work operations begin, Contractor must provide a chain link fence, six feet minimum height, around the staging area. Provide gates as required for access with necessary hardware, including hasps and padlocks. Fasten fence fabric to terminal posts with tension bands and to line posts and top and bottom rails with tie wires spaced at maximum 15 inches. Bottom of fences must extend to one inch above grade. Fence fabric must be covered with HDPE privacy screen. Screen color must be dark green or black with 85% minimum density sufficient to obscure view of the items within. After completion of project work, Contractor must remove fencing and restore area back to original condition.
- H. To minimize interference of service activities with flow of Cemetery traffic, comply with the following:
 - 1. Keep roads, walks and entrances to grounds, to parking and to occupied areas of buildings clear of materials, debris and standing service equipment and vehicles. At least one lane must be open to traffic at all times.
 - 2. Coordination of work with COR/Cemetery Director or authorized designee: The burial activities at a National Cemetery will take precedence over Contractor activities. The Contractor must cooperate and coordinate with the COR/Cemetery Director or authorized designee, in arranging schedule to cause the least possible interference with cemetery activities in actual burial areas. Work noise during the interment services must not disturb the service. Trucks and workmen must not pass through the service area during this period.

1.18 THE GOVERNMENTS RESPONSIBILITIES:

- A. Upon award of the contract, the Government will inform the Contractor prior to commencing the work, of any known damages to the cemetery grounds, headstones/markers or any other areas that the Contractor is unaware of and not responsible for. In addition, upon award of the contract, a walk-through of the cemetery grounds will be scheduled by mutual agreement of the Government and Contractor, and will be attended by the COR, and appropriate contractor personnel (to include the Contractor Supervisor and Project Manager). The Contracting Officer is an optional attendee.
- B. The Government will not provide the Contractor with any furnishings, fuel storage, equipment, materials, restrooms, or telephones.
- C. Notification of Non-Compliance: The COR will notify the Contractor of any detected non-compliance with the foregoing requirements. The Contractor must take immediate corrective action after receipt of such notice. Such notice, when delivered to the Contractor at the work site, shall be deemed sufficient for the purpose of notification. If the Contractor fails or refuses to comply promptly, the Contracting Officer may issue an order ceasing all or part of the work until satisfactory corrective action has been taken. No part of the time lost due to such cessation direction shall be made the subject of claim for extension of time for excess costs or damages by the Contractor.

1.19 PHASING AND WORK SEQUENCING:

- A. Contract work must be accomplished in a sequenced manner, with work limited to occurring in no more than one contiguous area at any given time in order to minimize overall disruption to the cemetery. Requests to work on more contiguous area at a time may be submitted to the COR for approval. Approval/disapproval will be based on the impact to the cemetery operations and the progress and workmanship of the contractor, as determined by the COR. Work should not proceed into subsequent areas until such time that that work has been completed in prior areas. Submit proposed project Work Plan sequence for COR review and approval prior to start of project.
- B. The effective period of construction shall occur between March and November of each year weather permitting. Turf must be established prior to the onset of winter season. Bare ground is not acceptable during this time.

1.20 USE OF CEMETERY FACILITIES:

- A. The Government shall not be responsible for any loss, damage, or theft of Contractor items. Contractor shall be responsible for acceptable standards of housekeeping and custodial maintenance of cemetery facilities used by Contractor's employees.

- B. The Government will not furnish a storage building at the Cemetery site for use by the Contractor to store supplies and equipment. However, the Government will provide an area designated for the Contractor's use. The Contractor can establish facilities to include but not limited to office site, covered storage, portable toilet facilities etc. on or in the designated area after such facilities are approved by the COR and Contracting Officer (CO). All utilities to this area are the responsibility of the Contractor. The Government will not be responsible for any damage to or loss of the Contractor's equipment and supplies stored on the Government's premises. The Contractor shall be responsible for maintaining fire extinguishers and other safety equipment.
- C. The Contractor will be responsible for safely storing any chemicals, pesticides, herbicides, cleaning solutions, etc. in accordance with manufacturers recommendations. An SDS (Safety Data Sheet) is required for all chemicals, pesticides, herbicides and cleaning solutions.
- D. Electricity and phone service will NOT be furnished by the Government for the Contractor's work area. (See "Contractor-Furnished Items".)

1.21 SUPERVISION AND TRAINING:

- A. The Contractor must provide a supervisor who speaks and writes fluent English on site, and at all times when Contractor personnel are on the premises.
- B. The Contractor must be responsible for maintaining satisfactory standards of personnel conduct and work performance and must administer disciplinary action as required. The Contractor is expected to remove any employees from the Cemetery for cause, to include, but not limited to, safety violations, other misconduct in performance of duty under these specifications and/or conduct contrary to the best interests of the Government. If the Contractor fails to act in this regard, or the reason for a removal is immediately required to protect the interests of the Government, the COR may direct the removal of an employee from the premises. Contractor objections to any such action will be referred to the Contracting Officer (CO) for final resolution; however, the Contractor will first immediately comply with COR direction pending any CO final resolution at a later time or date. The Contractor will not be due any type of compensation for their costs incurred as a result of an employee being removed for cause; unless the removal is directed by the COR, and is later found invalid and/or unreasonable by the Contracting Officer.
- C. The Contractor must also be responsible for training and safety precautions for Contractor employees performing work under these specifications. OSHA standards must be observed by the Contractor in all work performed. Contractor must ensure that appropriate safety equipment is used by Contractor personnel and must be used as prescribed by OSHA standards, including hard hats, safety

shoes, safety glasses, and hearing protection devices. The following OSHA and NFPA standards and codes are to be adhered to:

1. National Fire Protection Association (NFPA): 10-2013 Standard for Portable Fire Extinguishers
2. Occupational Safety and Health Administration (OSHA) 29 CFR 1910 Safety and Health Regulations for Personal Protection, Safety Color Codes, Portable Power Tools, Electrical Safety and Portable Electric Equipment.
3. Site and Building Access: Maintain free and unobstructed access to facility emergency services and for fire, police and other emergency response forces in accordance with NFPA 241.

1.22 INSPECTION AND CLEANING OF CEMETERY FACILITIES:

- A. The Contractor will perform a weekly inspection. During this inspection the appearance of the Cemetery will be observed, and any deficiencies from the contract will be noted. Deficiencies must be corrected as soon as practicable. Items that need correcting outside the scope of the contract will be reported to the COR or their representative.
- B. The Contractor will be required to submit inspection reports and work accomplished to the COR weekly. The inspection forms will be provided to the Contractor. (See Attachments 1 and 2 – “Work Summary and Progress Report”.)

1.23 INSTALLATION DURING CEMETERY FUNCTIONS:

- A. Contractor personnel must not operate motorized equipment or conduct other commercial activities within the designated area during interment services. The COR will identify the designated area. The COR or their representative shall furnish the Contractor with a schedule of all interments and/or ceremonies no later than the close of business of the day prior to the scheduled interment, and a minimum of three (3) days before any ceremonial events.

1.24 PERFORMANCE EVALUATION MEETING:

- A. The issuance of a Contract Discrepancy Report (CDR), found at Attachment 4, may be cause for the scheduling of a meeting among the Contractor, Contracting Officer, and the COR. A mutual effort will be made to resolve all problems identified. The Government will prepare written minutes of the meeting. The Contractor, Contracting Officer, and the COR will sign minutes of the meeting(s).
- B. Should the Contractor not concur with the minutes, they will so state their objections in writing to the Contracting Officer, within ten calendar days, and also explain the reasons for non-concurrence. The Contracting Officer will review and consider the reasons submitted for the Contractor's non-concurrence and make a decision to revise or uphold the comments as written. The Contracting

Officer will notify the Contractor of the decision in writing within ten calendar days of submission of any objections.

1.25 CONTRACTOR RESPONSE TIMES:

- A. During Normal Working Hours: The Contractor must be prepared to shift workers and work areas as necessary to safeguard the cemetery and its visitors and restore the work area(s) to a safe condition. The Contractor must respond to all normal working hours' requests made by the COR(s) within 30 minutes of the initial notification.
- B. After Normal Hours: After Hours requests warrant rapid response in order to safeguard the cemetery and its visitors and restore the work area(s) to a safe condition. The Contractor must respond to all after normal hours requests made by the COR(s) within one (1) hour of the initial call.
- C. Calls by other Government employees other than the COR(s) shall not be acted upon, but shall be referred to the COR(s) for review. Repairs must begin as expeditiously as circumstances allow and should normally be completed within (24) hours of the initial emergency call. The Contractor must keep the COR(s) fully informed of the situation and what action will be taken to secure and correct the situation.

1.26 CONTRACTOR'S QUALITY CONTROL PLAN (QCP):

- A. The Contractor must establish and maintain a complete QCP to assure the requirements of this contract are provided as specified. This QCP will be forwarded to the Contracting Officer along with the requested initial proposal and may be revised as necessary during the life of the contract, with concurrence of the COR and Contracting Officer. The Contracting Officer will review the QCP and list any needed clarifications, and return to Contractor for response, if necessary. The Contractor's QCP must include the following or have incorporated into during performance of contract, at a minimum:
 - 1. An inspection plan covering all services required by this contract. The inspection plan must specify the areas to be inspected on either a scheduled or unscheduled basis, how often inspections will be accomplished and documented, and the title of the individual(s) who will perform the inspections.
 - 2. On-site records of all inspections conducted by the Contractor noting necessary corrective action taken. The Government reserves the right to request copies of any and/or each inspection.
 - 3. Incorporation of either active or established internal policy and procedures for updating equipment and procedures that may affect performance of contract.

4. The methods for identifying and preventing deficiencies in the quality of service performed, before the level of performance becomes unacceptable; and the organizational functions, intermediate supervisory responsibilities, and overall management responsibilities for ensuring total acceptable performance.
5. On-site records identifying the character, physical capabilities, certifications and ongoing training of each employee performing services under this contract.
6. A log to account for all requests for immediate service. The log must indicate the date and time of services, and description of results and completion of these services.
7. On-site records of any complaints or problems, with procedures taken to allow for corrections and/or elimination before effects caused interruption of performance of contract.

1.27 QUALITY ASSURANCE:

- A. The COR will evaluate the Contractor's performance through on-site inspections, evaluation of the Contractor's quality control program and receipt of complaints from cemetery personnel.
- B. The COR will also receive and investigate complaints from various customers visiting the Cemetery. The Contractor must be responsible for initialing validated visitor complaints. The COR shall make final determination of the validity of visitor complaint(s).
- C. The COR will initially inspect each task in the process of Cemetery Section Renovation as work progresses utilizing Attachment 3 – "Contract Performance & Quality Assurance Report". The COR will note in the report if the work "did or did not" meet the requirements of the contract and corrective actions needed. The COR will provide a copy of the report to the CO and Contractor for further action.
- D. The COR may inspect each task as completed or increase the number of quality control inspections if called for by repeated failures discovered during inspections or repeated customer complaints. Likewise, the COR may decrease the number of quality control inspections if performance dictates.

1.28 ACTIONS:

- A. Normally, the COR will verbally advise or give a written inspection report to the Contractor of discrepancies the first time they occur and ask the Contractor to correct the problem. A notation will be made on the COR checklist of the date and the time the deficiency was discovered and the date and time the Contractor was notified.

- B. If the Government created any of the discrepancies, these will not be counted against the Contractor's performance. When the Government has caused the Contractor to perform in an unsatisfactory manner, the COR will forward a written notice to the responsible organizational element requesting corrective action be taken.
- C. When the Contractor is not meeting the acceptable limits of satisfactory performance, a CDR will be issued to the Contractor. The seriousness of the failures should govern whether to issue CDR at the end of the period, or as soon as the limits of satisfactory performance are exceeded.
- D. When a CDR is issued for a service, the Contracting Officer and/or the COR may exercise any contractual remedy available for non-performance, in accordance with FAR 52.212-4, "Inspection and Acceptance".
- E. If the Contractor does not achieve satisfactory performance by the end of the next period or agreed suspense date, further actions may be considered, to include a determination on whether continued performance by the contractor is feasible.

1.29 HISTORIC PRESERVATION:

- A. Where the Contractor or any of the Contractor's employees, prior to, or during the services work, are advised of or discover any possible archeological, historical and/or cultural resources, the Contractor must immediately notify the COR verbally, and then with a written follow up.
- B. The COR/Cemetery Director may direct the Contractor to follow behind other projects as they are completed, so as to not disrupt work sequence of existing contracts under construction.

1.30 EXPOSURE OR ACCIDENTAL DISCOVERY OF REMAINS:

- A. Should any on-site activity, incident, emergency, or disaster result in exposure and/or damage to any remains, container for remains (i.e., casket or urn), or outer burial container, the Contractor must IMMEDIATELY notify the Cemetery Director, the COR and/or the CO for guidance; and stop any further work and await permission to proceed.

1.31 INSPECTIONS AND SURVEYS:

- A. PROFESSIONAL SURVEYING SERVICES - A registered professional land surveyor or registered civil engineer whose services are retained and paid for by the Contractor must be used for layout control of work and to restore any grave section corner monuments that may be disturbed as a result of the Contractors performance of the contract work.
- B. Survey: Before any work is started, the Contractor must make a thorough digital video survey with the COR of areas in which contract work occurs and areas of

anticipated routes of access, etc., and provide a copy to the COR. This digital video survey must include:

1. Existing conditions at site. Use a video camera to survey and document existing conditions prior to start of work. Contractor is to provide the digital video camera and memory media for this purpose. The Contractor must turnover one copy of the completed video survey data to COR prior to starting work. The video survey must sufficiently document the pre-construction alignment of headstones in adjacent areas to use as a comparison to the post-construction alignment documentation.
 2. Re-Survey: At the final inspection and acceptance the Contractor and COR together shall make a thorough re-survey of the areas where contract work occurred. Re-survey report must list any damages caused by Contractor's workmen in executing work of this contract.
- C. Daily Log of Construction report: Contractor must prepare a daily construction log and submit them weekly to the CO, COR and District PM for all construction related work, including representative photos documenting work accomplished. (i.e., submit 5 separate daily reports once a week.) Contractor may use a standardized daily construction log form acceptable to the COR, or the VA-provided form. (See Attachment 9 Contractor's Daily Log of Construction Form.)

1.32 PROTECTION OF EXISTING VEGETATION, STRUCTURES, EQUIPMENT, UTILITIES, AND IMPROVEMENTS:

- A. Damage to Government property: The Contractor must be responsible for repair or replacement of any contractor damaged cemetery structure, to include: turf, curb, road pavement, headstones or markers, irrigation equipment, valve boxes, grid monument control markers, trees, plant beds, etc., which are chipped, marred, damaged and/or ruined at the fault of the Contractor and must bear all costs associated with replacement and reinstallation. Any such damage must be brought to the immediate attention of the appointed Contracting Officer Representative (COR) prior to repair/replacement/installation.
- B. The Contractor shall preserve and protect all structures, equipment, and vegetation (such as trees, shrubs, and grass) on or adjacent to the work site, which shall not be removed, and which does not unreasonably interfere with the work required under this contract. The Contractor shall only remove trees when specifically authorized to do so by the COR, and must avoid damaging vegetation that will remain in place. If the Contractor is obstructed by tree roots within the drip-line of a standing tree that are 2 inches in diameter or greater, the Contractor must request an inspection by the COR. The COR will inspect and determine if any roots will be pruned. If any limbs or branches of trees are broken during contract performance, or by the careless operation of equipment,

or by workmen, the Contractor must trim those limbs or branches with a clean cut and remove and properly dispose of from the site as defined herein.

- C. The Contractor must protect from damage all existing improvements and utilities at or near the work site and on adjacent property of a third party, the locations of which are made known to or are known by the Contractor. The Contractor must immediately notify the COR of any such occurrence and repair any damage to those facilities, including those that are the property of a third party, resulting from failure to comply with the requirements of this contract or failure to exercise reasonable care in performing the work. If the Contractor fails or refuses to repair the damage promptly, the Contracting Officer will have the necessary work performed and charge the cost to the Contractor.
- D. Where work conflicts with existing utility/service lines (above ground/below ground), the corresponding utilities company and the COR will be notified and the Contractor must obtain any necessary permits/ blue prints and cooperate with the utilities company/cemetery staff to avoid any damage or liability, and provide a safe work environment for his/her employees. Contractor must be responsible for damages to utilities, above and below ground.
- E. Maintenance of Existing Turf:
 - 1. The Contractor must not interfere with maintenance of turf areas not “currently” being renovated. Once the Contractor has moved into a cemetery section, the Contractor must be responsible for maintaining healthy turf where turf renovation is not a part of the contracted work for that section to include: watering, fertilizing, pest control and mowing/edging. Any turf that is allowed to die or become stressed as a result of improper maintenance must be restored by the Contractor at no additional cost to the Government to the satisfaction of the COR. If turf restoration is required due to contractor negligence, the turf must be maintained for an additional period not less than 30-days after being restored to include watering, fertilizing, pest control and mowing/edging. Once section renovation has been accepted by the Government, the turf shall be returned to the care of the Government and/or the Government’s grounds maintenance contractor.
- F. Protection of Existing Utilities: Contractor must be responsible for damages to utilities, above and below ground. If the Contractor fails or refuses to repair the damage promptly, the Contracting Officer may have the necessary work performed and charge the cost to the Contractor.
- G. Interruption of Utilities Services:
 - 1. No utility service such as water, gas, steam, sewers or electricity, or fire protection systems and communications systems shall be interrupted without prior approval of COR.

2. The Contractor must not interrupt irrigation to areas not “currently” being renovated. If necessary, the contractor must cap off, run by-pass lines or manually irrigate as necessary, as to not affect areas not currently being renovated.
 3. Contractor must submit a request to interrupt any such services to COR, in writing, a minimum of 48 hours in advance of proposed interruption. Request must include the reason, date, exact time of, and approximate duration of such interruption.
 4. Contractor will be advised (in writing) of approval of request, or of which other date and/or time such interruption will cause least inconvenience to operations of Cemetery. Interruption time approved by COR may occur at other than Contractor's normal working hours.
- H. Refer to Articles, "Inspections and Surveys", "Restoration", and "Operations and Storage Areas" for additional instructions concerning repair of damage to structures and site improvements.

1.33 RESTORATION:

- A. Contractor must remove, cut, alter, reinstall, replace, patch and repair existing work as necessary. Except as otherwise shown or specified, do not disturb any water, steam, gas, or electric services without prior approval of the COR or Contracting Officer. Existing work to be completed and that is found to be defective in any way, must be reported to the COR before it is disturbed. Materials and workmanship used in restoring work must conform in type and quality to that of original service, except as otherwise shown or specified.
- B. Upon completion of contract, deliver work complete and undamaged. Existing cemetery features (lawns, paving, roads, walks, etc.) disturbed or removed as a result of performing required new work, must be patched, repaired, reinstalled, or replaced with new work, and refinished and left in as good condition as existed before commencing work. All restoration work must be accomplished without undue delay.
- C. At Contractor's own expense, Contractor must immediately restore to service and repair any damage caused by Contractor's workmen/subcontractors to existing cemetery infrastructure.
- D. Expense of repairs to such utilities and systems not shown on drawings or locations of which are unknown will be covered by adjustment to contract time and price.
- E. The Contractor must be responsible for replacement of any headstones or markers, which are chipped, marred, or damaged at the fault of the Contractor

and must bear all costs associated with replacement and reinstallation. Any such damage must be brought to the attention of the COR prior to replacement or reinstallation.

1.34 LAYOUT OF WORK:

- A. The Contractor must lay out the work and must be responsible for all measurements in connection with the layout. Where burial section grid monumentation exists, it may be utilized for all headstone row layout work, and contractor must coordinate all associated field layout dimensions with COR prior to start of work. The Contractor must furnish, at Contractor's own expense, all stakes, templates, platforms, equipment, tools, materials, and labor required to layout any part of the work. The Contractor must be responsible for executing the work to the lines and grades needed to accomplish the work and to ensure that grave markers are correctly and accurately located on their associated gravesites.
- B. The Contractor must also be responsible for maintaining and preserving all temporary and permanent stakes and other marks until authorized by the COR to remove them. If such marks are destroyed by the Contractor or through Contractor's negligence before their removal is authorized, the Contracting Officer will order the contractor to replace them, or deduct the expense of the replacement from any amounts due or to become due to the Contractor.
- C. PROFESSIONAL SURVEYING SERVICES - A registered professional land surveyor or registered civil engineer whose services are retained and paid for by the Contractor must be used for layout control of work and to restore any grave section corner monuments that may be disturbed as a result of the Contractor's performance of the contract work.

1.35 AS-BUILT DRAWINGS:

- A. The Contractor must maintain one set of as-built drawings, which must be kept current during performance of the project, to include all contract changes, modifications, and indicating work progress on a section-by-section basis.
- B. Contractor must deliver one set of as-built drawings to the COR within 15 calendar days after acceptance of the project by the Contracting Officer.
- C. Provide as-built drawings of any modifications to the irrigation system. Graphically show pipe routing and dimension pipe locations from two permanent fixed points on the site.

1.36 DISPOSAL OF HAZARDOUS WASTE:

- A. The Contractor must not dispose of any hazardous materials at any location on the cemetery premises except as specified and/or authorized by the COR/Cemetery Director.

1.37 METRIC CONVERSIONS:

- A. Any measurements stated in this specification or in any documents associated with the proposed contract as normally used inch-pound units can be converted to metric units providing they fall within the tolerances specified using conversion tables contained in the latest revision of Federal Standard No. 376. Any measurements only given in inch-pound units are not meant to be restrictive. If the General Requirements require replacement of parts to be included as part of the contract, and a product (part) is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request must be made to the Contracting Officer to determine if the product is acceptable.

1.38 GENDER:

- A. For the purpose of equal rights, wherever the masculine gender is used in this solicitation, and the resulting contract, it shall be considered to include both masculine and feminine gender.

1.39 SALES OF COMPANIES OR NAME CHANGES:

- A. The Contractor, gaining award of the contract, will notify the Contracting Officer (Attn: Department of Veterans Affairs, National Cemetery Administration, Centralized Contracting Division, (41D3A), 74 Barrett Heights Road, Suite 309, Stafford, VA 22556., in writing immediately upon entering an agreement (either oral or written) to sale or transfer all or part of its stock or other ownership interest to any other party. This Contractor must also, contact the Contracting Officer immediately in writing (at the above referenced address) in the event a company name change shall happen, with information as to the reasons and/or determinations causing this action.

B. SPECIFICATIONS

SECTION	DIVISION 01 – GENERAL REQUIREMENTS.
01 33 23	SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES
01 45 29	TESTING LABORATORY SERVICES
SECTION	DIVISION 02 – EXISTING CONDITIONS
02 21 13	SITE SURVEYING (LIMITED)
SECTION	DIVISION 31 – EARTHWORK
31 00 00	EARTHWORK

SECTION	DIVISION 32 – EXTERIOR IMPROVEMENTS
32 39 20	HEADSTONE SETTING, ALIGNMENT AND CLEANING
32 92 24	TURF RENOVATION

SECTION 01 33 23 - SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES

PART 1 - GENERAL

- 1.1 Refer to Articles titled SPECIFICATIONS AND DRAWINGS FOR CONSTRUCTION (FAR 52.236-21) and, SPECIAL NOTES (VAAR 852.236-91), in Section, GENERAL CONDITIONS.
- 1.2 For the purposes of this contract, samples (including laboratory samples to be tested), test reports, certificates, and manufacturers' literature and data shall also be subject to the previously referenced requirements. The following text refers to all items collectively as SUBMITTALS.
- 1.3 Submit for approval, all of the items specifically mentioned under the separate sections of the specification, with information sufficient to evidence full compliance with contract requirements. Materials, fabricated articles and the like to be installed in permanent work must equal those of approved submittals. After an item has been approved, no change in brand or make will be permitted unless:
 - A. Satisfactory written evidence is presented to, and approved by Contracting Officer, that manufacturer cannot make scheduled delivery of approved item or;
 - B. Item delivered has been rejected and substitution of a suitable item is an urgent necessity or;
 - C. Other conditions become apparent which indicates approval of such substitute item to be in best interest of the Government.
- 1.4 Submittals must be accompanied by a Submittal Register Log provided by the Contracting Officer.
- 1.5 Forward submittals in sufficient time (a minimum of 10 calendar days, exclusive of mailing time) to permit proper consideration and approval action by Government. Time submission to assure adequate lead time for procurement of contract - required items. Delays attributable to untimely and rejected submittals (including any laboratory samples to be tested) will not serve as a basis for extending contract time for completion.
- 1.6 Submittals will be reviewed for compliance with contract requirements by Contracting Officer, and action thereon will be taken by the Contracting Officer.
- 1.7 Upon receipt of submittals, Contracting Officer will assign a file number thereto. Contractor, in any subsequent correspondence, must refer to this file and

identification number to expedite replies relative to previously approved or disapproved submittals.

- 1.8 The Government reserves the right to require additional submittals, whether or not particularly mentioned in this contract. If additional submittals beyond those required by the contract are furnished pursuant to request therefore by Contracting Officer, adjustment in contract price and time will be made in accordance with Articles titled CHANGES (FAR 52.243-4) and CHANGES - SUPPLEMENT (VAAR 852.236-88) of the GENERAL CONDITIONS.
- 1.9 Schedules called for in specifications and shown on shop drawings must be submitted for use and information of Department of Veterans Affairs and District Engineers. However, the Contractor must assume responsibility for coordinating and verifying schedules. The Contracting Officer assumes no responsibility for checking schedules or layout drawings for exact sizes, exact numbers and detailed positioning of items.
- 1.10 Submittals must be submitted by Contractor only and shipped prepaid. Contracting Officer assumes no responsibility for checking quantities or exact numbers included in such submittals.
 - A. Submit samples in single units unless otherwise specified. Submit shop drawings, schedules, manufacturers' literature and data, and certificates in quadruplicate, except where a greater number is specified.
 - B. Submittals will receive consideration only when covered by a transmittal letter signed by Contractor. Letter must be sent via first class mail and must contain the list of items, name of Cemetery, name of Contractor, contract number, applicable specification paragraph numbers, applicable drawing numbers (and other information required for exact identification of location for each item), manufacturer and brand, ASTM or Federal Specification Number (if any) and such additional information as may be required by specifications for particular item being furnished. In addition, catalogs must be marked to indicate specific items submitted for approval.
 1. A copy of letter must be enclosed with items, and any items received without identification letter will be considered "unclaimed goods" and held for a limited time only.
 2. Each sample, certificate, manufacturers' literature and data must be labeled to indicate the name and location of the Cemetery, name of Contractor, contract number, manufacturer, brand, specification section number, ASTM (as applicable), and location(s) on project.
 3. Required certificates must be signed by an authorized representative of manufacturer or supplier of material, and by Contractor.
 - C. In addition to complying with the applicable requirements specified in preceding Article 1.9, samples which are required to have Laboratory Tests under the separate sections of the specification must be tested, at the expense of Contractor, in a commercial laboratory approved by Contracting Officer.

1. Laboratory must furnish Contracting Officer with a certificate stating that it is fully equipped and qualified to perform intended work, is fully acquainted with specification requirements and intended use of materials and is an independent establishment in no way connected with organization of Contractor or with manufacturer or supplier of materials to be tested.
 2. Certificates must also set forth a list of comparable projects upon which laboratory have performed similar functions during past five years.
 3. Samples and laboratory tests must be sent directly to an approved commercial testing laboratory.
 4. Contractor must send a copy of transmittal letter to the Contracting Officer with submission of material to a commercial testing laboratory.
 5. Laboratory test reports must be sent directly to Contracting Officer for appropriate action.
 6. Laboratory reports must list contract specification test requirements and a comparative list of the laboratory test results. When tests show that the material meets specification requirements, the laboratory must so certify on test report.
 7. Laboratory test reports must also include a recommendation for approval or disapproval of tested item.
- D. If submittal samples have been disapproved, resubmit new samples as soon as possible after notification of disapproval. Such new samples must be marked "Resubmitted Sample" in addition to containing other previously specified information required on label and in transmittal letter.
- E. Approved samples will be kept on file by the Contracting Officer at the site until completion of contract, at which time such samples will be delivered to Contractor as Contractor's property. Where noted in technical sections of specifications, approved samples in good condition may be used in their proper locations in contract work. At completion of contract, samples that are not approved will be returned to Contractor only upon request and at Contractor's expense. Such request should be made prior to completion of the contract. Disapproved samples that are not requested for return by Contractor will be discarded after completion of contract.
- F. Submittal drawings (shop, erection or setting drawings) and schedules, required for work of various trades, must be checked before submission by technically qualified employees of Contractor for accuracy, completeness and compliance with contract requirements. These drawings and schedules must be stamped and signed by Contractor certifying to such check.
1. For each drawing required, submit two (2) legible 20-lb Bond plots/prints; and one Portable Document Format (PDF) drawing file.
 2. Plots/prints must be full size.
 3. Each drawing must have marked thereon, proper descriptive title, including Cemetery location, project number, manufacturer's number,

reference to contract drawing number, detail Section Number, and Specification Section Number.

4. A space 120 mm by 125 mm (4-3/4 by 5 inches) shall be reserved on each drawing to accommodate approval or disapproval stamp.
5. Submit drawings, ROLLED WITHIN A MAILING TUBE, fully protected for shipment.
6. One electronic file of approved or disapproved shop drawings will be forwarded to Contractor.
7. When work is directly related and involves more than one trade, shop drawings must be submitted to Contracting Officer under one cover.
8. Drawing files must be emailed to the CO, COR and Project Manager. (Files attachments are not to exceed 10MB per email message.)

- 1.11 Samples, shop drawings, test reports, certificates and manufacturers' literature and data, shall be submitted for approval to the CO, COR and Project Manager:

Auvorie Benson Contracting Office (CO)	Cemetery Director	John Roark Project Manager (PM)
National Cemetery Administration 18434 Joplin Rd, Triangle, VA 22172 Tel: (571) 320-0283 Email: Auvorie.Benson@va.gov	Camp Butler National Cemetery 5063 Camp Butler Rd, Springfield, IL 62707	National Cemetery Administration Tel.: 317.447.1140 Email: john.roark2@va.gov

- 1.12 At the time of transmittal, the Contractor must also send a copy of the complete submittal directly to the Contracting Officer.
- 1.13 One copy of the approved submittals must be sent directly to the CO and COR.

END OF SECTION

SECTION 01 45 29 - TESTING LABORATORY SERVICES

PART 1 - GENERAL

1.1 DESCRIPTION:

This section specifies materials testing activities and inspection services required during project construction to be provided by a Testing Laboratory retained and paid for by Contractor.

1.2 APPLICABLE PUBLICATIONS:

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by the basic designation only.

B. American Association of State Highway and Transportation Officials
(AASHTO):

- T27-99.....Standard Specification for Sieve Analysis of Fine
and Coarse Aggregates
- T96-02.....Standard Specification for Resistance to
Degradation of Small-Size Coarse Aggregate by
Abrasion and Impact in the Los Angeles Machine
- T99-01.....Standard Specification for the Moisture-Density
Relations of Soils Using a 2.5 Kg (5.5 lb.) Rammer
and a 305 mm (12 in.) Drop
- T104-99.....Standard Specification for Soundness of Aggregate
by Use of Sodium Sulfate or Magnesium Sulfate
- T180-01.....Standard Specification for Moisture-Density
Relations of Soils using a 4.54 kg (10 lb.) Rammer
and a 457 mm (18 in.) Drop
- T191-02.....Standard Specification for Density of Soil In-Place
by the Sand-Cone Method
- T205-86(R1996)Standard Specification for Density of Soil In-Place
by the Rubber-Balloon Method
- T238-97.....Standard Specification for Density of Soil and Soil-
Aggregate in Place by Nuclear Methods (Shallow
Depth)

C. American Society for Testing and Materials (ASTM):

- C 88-99a.....Standard Test Method for Soundness of Aggregates
by Use of Sodium Sulphate or Magnesium Sulfate.
- C 131-03.....Standard Test Method for Resistance to
Degradation of Small-Size Coarse Aggregate by
Abrasion and Impact in the Los Angeles Machine.
- C 136-96a.....Standard Test Method for Sieve Analysis of Fine
and Coarse Aggregates.

D 75.-97	Standard Practice for Sampling Aggregates.
D698 (2012e1)	Standard Test Method for Laboratory Compaction Characteristics of Soil Using Standard Effort
D 854-02	Standard Test Method for Specific Gravity of Soil Solids by Water Pycnometer.
D1556-00	Standard Test Method for Density and Unit Weight of Soil in Place by the Sand-Cone Method
D1557-12	Test Method for Laboratory Compaction Characteristics of Soil Using Modified Effort
D2167-94(R2001)	Standard Test Method for Density and Unit Weight of Soil in Place by the Rubber Balloon Method
D2216-98	Standard Test Method for Laboratory Determination of Water (Moisture) Content of Soil and Rock by Mass
D2974-(2000).....	Standard Test Methods for Moisture, Ash, and Organic Matter of Peat and Other Organic Soils
D3740-(2001).....	Standard Practice for Minimum Requirements for Agencies Engaged in the Testing and/or Inspection of Soil and Rock as Used in Engineering Design and Construction

1.3 REQUIREMENTS:

- A. Accreditation Requirements: Testing Laboratory retained and paid for by the Contractor must be accredited by one or more of the National Voluntary Laboratory Accreditation Program (NVLAP) programs acceptable in the geographic region for the project. Furnish to the Contracting Officer a copy of the Certificate of Accreditation and Scope of Accreditation. For testing laboratories that have not yet obtained accreditation by a NVLAP program, submit an acknowledgement letter from one of the laboratory accreditation authorities indicating that the application for accreditation has been received and the accreditation process has started, and submit to the Contracting Officer for approval, certified statements, signed by an official of the testing laboratory attesting that the proposed laboratory, meets or conforms to the ASTM standards listed below as appropriate to the testing field.
 1. Laboratories engaged in testing of construction materials shall meet the requirements of ASTM E329.

2. Laboratories engaged in testing of soil and rock, as used in engineering design and construction, shall meet the requirements of ASTM D3740.
 3. Laboratories engaged in non-destructive testing (NDT) shall meet the requirements of ASTM E543.
 4. Laboratories engaged in Hazardous Materials Testing shall meet the requirements of OSHA and EPA.
- B. Inspection and Testing: Testing laboratory must inspect materials and workmanship and perform tests described herein and additional tests requested by Contracting Officer. When it appears materials furnished, or work performed by Contractor fails to meet construction contract requirements, Testing Laboratory must direct attention of Contracting Officer to such failure.
- C. Written Reports: Testing laboratory must submit test reports to Contracting Officer, Contractor, and Local Building Authority within 24 hours after each test is completed unless other arrangements are agreed to in writing by the Contracting Officer. Submit reports of tests that fail to meet construction contract requirements on colored paper.
- D. Verbal Reports: Give verbal notification to Contracting Officer immediately of any irregularity.

PART 2 - PRODUCTS (NOT USED)

PART 3 - EXECUTION

3.1 EARTHWORK TESTING:

- A. General: The Testing Laboratory must provide qualified personnel, materials, equipment, and transportation as required to perform the services identified/required herein, within the agreed to schedule and/or time frame. The work to be performed shall be as identified herein and must include but not be limited to the following:
1. Observe fill and subgrades during proof-rolling to evaluate suitability of surface material to receive fill or base course. Provide recommendations to the Contracting Officer regarding suitability or unsuitability of areas where proof-rolling was observed. Where unsuitable results are observed, witness excavation of unsuitable material and recommend to Contracting Officer extent of removal and replacement of unsuitable materials and observe proof-rolling of replaced areas until satisfactory results are obtained.
 2. Provide part time observation of fill placement and compaction and field density testing in work areas and provide part time observation of fill placement and compaction and field density testing in geogrid Flat

Marker headstone support system areas to verify that earthwork compaction obtained is in accordance with these specifications.

B. Compaction Testing:

1. Determine maximum density and optimum moisture content for each type of fill, backfill, subgrade and topsoil material used, in compliance with ASTM D698.
 - a. Subgrade: At least 1 test for every 1850 sq-m (20,000 sq.-ft.) of compacted backfill, but in no case fewer than 10 tests.
 - b. Topsoil Backfill: At least 1 test for every 1850 sq-m (20,000 sq.-ft.) of compacted topsoil backfill, but in no case fewer than 10 tests.
2. Determine maximum density and optimum moisture content for each type of for aggregate base material used, in compliance with ASTM D1557.
 - a. Aggregate Base: At least 1 test for every 185 sq-m (2,000 sq.-ft.) of compacted aggregate base, but in no case fewer than 10 tests.
3. Field density tests: Testing agency will test compaction of soils in place according to ASTM D 1556, ASTM D 2167, and ASTM D 2937, as applicable.
4. Should the testing laboratory propose alternative testing methods, they should provide satisfactory explanation to the Contracting Officer before the tests are conducted.
5. When testing agency reports that subgrades, fills, or backfills have not achieved degree of compaction specified, scarify and moisten or aerate, or remove and replace soil to depth required; recompact and retest until specified compaction is obtained.

C. Materials Testing:

1. Laboratory Testing: Materials Testing is to be conducted by an independent laboratory, recognized by the State of Illinois, with the experience and capability to conduct the testing indicated and that specializes in types of tests to be performed.
2. Provide manufacturer's laboratory tests analyses with product submittals indicating compliance with these specifications.
3. On-Site Existing Topsoil Testing: Test existing topsoil in each region as indicated in these specifications. (See Turf Renovation.)
4. Imported Topsoil Testing: Test each imported topsoil as indicated in these specifications. (See Turf Renovation.)
5. Post-Amendment Topsoil Testing: Test each amended topsoil as indicated in these specifications. Test results must indicate that the amended topsoil is not deficient in essential nutrients and meets the requirements of these specifications. (See Turf Renovation.)
6. Compost Testing: Provide Certificates showing compliance with these specifications. (See Turf Renovation.)
7. Elemental Sulfur: Provide Manufacturer's Material Data Sheets showing compliance with these specifications. (See Turf Renovation.)

8. Agricultural Gypsum: Provide Manufacturer's Material Data Sheets showing compliance with these specifications. (See Turf Renovation.)
9. Mycorrhizae: Provide Manufacturer's Material Data Sheets showing compliance with these specifications. (See Turf Renovation.)

END OF SECTION

SECTION 02 21 13 - SITE SURVEYS (LIMITED)

- 1.1 **GENERAL:** The contractor must perform all surveying services necessary to provide a headstone location/elevation and topographic survey of existing site features. This survey will form the basis for developing the final grade for re-installing the headstones at the proper elevations in order to achieve proper headstone alignment, and positive drainage. Provide a legend on each sheet identifying all features on the drawings. Provide north arrow and graphic scale. Show headstone direction arrows for each section which indicate the direction the front of the marker is facing the viewer. Provide burial section data in a table showing section number, gravesite grid size, headstone type (upright or flat), number of headstones, number of reserved gravesites, area of sod in square-feet in each section.
- 1.2 **PROJECT LIMITS:** The area to be surveyed must include the sections or portions thereof, at the National Cemetery that are to be renovated as part of this contract. Unless indicated on the plan or approved by the Contracting Officer (CO), the survey limits must extend to a minimum of 20 feet beyond the sections being renovated. The survey must locate each headstone using standard survey coordinates and record the position and elevation, and the contour of the grades.
- 1.3 **HEADSTONE SURVEY:** The contractor must survey the same corner (i.e., upper left) of each marker at finished grade, taken while facing the front of the marker. It will be this corner that will be used to realign the headstones. Once selected, the selected corner must not change throughout the contract. The survey must locate each marker, using standard survey coordinates and map them in CAD format drawings.
 - A. **HEADSTONE REALIGNMENT PLANS:** Overlay a proposed realignment grid that is aligned with as many of the marker coordinates as possible. The proposed realignment grid must align with all adjacent realignment grids wherever possible so that headstones in adjacent sections visually align with each other. The realignment grid is based on the gravesite dimensions for the section under renovation, (i.e., 5'x10', 4'x8', 3'x8', 4'x4', 3'x3'). Highlight headstones whose existing location deviates more than 6 inches from the proposed realignment grid. Tie the realignment grids with dimensions to horizontal controls such as existing gravesite control monuments (if exist), other permanent existing survey datum, or temporary Contractor-installed gravesite control markers at both ends of each row of headstones. Show the

locations of temporary control markers on the Headstone Realignment Plans. Submit 2 hard copies stamped “PRELIMINARY – FOR REVIEW” and PDF format electronic files to the Midwest District Project Manager and COR for review. NO MARKERS WILL BE MOVED FROM THEIR ORIGINAL LOCATION UNTIL THE PROPOSED REALIGNMENT HAS BEEN SUBMITTED AND APPROVED BY THE COR.

1.4 SUBMITTAL REQUIREMENTS:

- A. The Contractor must submit the following to the Midwest District Project Manager and the COR according to the project schedule:
 - 1. Existing Conditions Site Survey: Four (4) hard copies and an electronic file of the existing headstone layout in reference to existing headstone elevations and their locations, existing topographic survey based on spot elevations, existing contours, and other existing site features. The survey must include headstones in all adjacent sections not being raised and realigned to the extent necessary to prove the proposed headstone alignment layout will align with the existing headstones in adjacent sections.
 - 2. Proposed Headstone Realignment Layout Plans: Four (4) hard copies and an electronic file of the COR-approved, proposed headstone realignment grids with respect to gravesite dimensions for each section showing existing headstones locations, existing gravesite control monuments (if exist), Contractor-installed temporary survey control markers, and existing site features.
 - a. Submit a 20 scale (1 inch = 20 feet) overall headstone realignment layout plan showing that adjacent sections' realignment grids are able or unable to align with each other.
 - b. Provide 10 scale (1 inch = 10 feet) enlargements of each section or region for Midwest District Engineer's and COR's review.
 - 3. Proposed Final Grading Plans: Four (4) hard copies and electronic files of the proposed contours and existing contours; proposed headstone layout based on the approved realignment grid; proposed headstone elevations at each upper left corner of each headstone; elevations of each key stone; existing drainage patterns and other existing site features.
- B. Once the Midwest District Project Manager and COR are satisfied with the Existing Conditions Site Survey; The Proposed Headstone Realignment Layout; and Proposed Final Grading Plans, the contractor must submit four (4) final hard copy sets of all drawings, the final CAD files and final PDF files with the COR's approval signature block for approval. Once approved, the COR shall return two signed hard copies to the Contractor.

PART 2 - PRODUCTS – (Not Used)

PART 3 - EXECUTION

3.1 HEADSTONE SURVEY, TOPOGRAPHIC SURVEY, and GRADING PLAN:

- A. New Headstone Elevations and Finished Grading Plan: Based on the completed survey of existing headstone elevations and their location, and the topographic survey, the Contractor must develop and submit for approval a final headstone elevation/position plan and section grading plan showing spot elevations at proposed finish grade for each headstone and proposed contours at 1/10 foot contour intervals. Show existing 1-foot contours for reference. The finished grading plan shall incorporate the addition of topsoil to existing grades as indicated on the drawings to fill low spots and depressions in the burial sections. Proposed finished grades must provide positive drainage off burial sections and into drainage structures where applicable. (See Exhibit 'C'.) Proposed Grading plans showing excessive cut or fill at existing grades will not be approved.
- B. Contour Interval: Existing contours shall be indicated by broken lines, drawn at 1/10 foot intervals, or otherwise approved or required interval. Proposed contours shall be indicated by solid lines drawn at 1/10 foot intervals. One-foot interval contours shall be drawn with a heavier line weight than 1/10-foot contour lines. Label elevation of each one-foot contour interval.
- C. Spot Elevations: Spot elevations shall be provided on an approximate 25 foot minimum grid pattern, and at all other appropriate locations where site features, structures, paved surfaces, and utilities require greater detail to illustrate existing conditions. Provide spot elevations at the top and bottom of abrupt changes in grade. Provide spot elevations at headstones and rim elevations for drain inlets. Provide spot elevations at trees.

END OF SECTION

SECTION 31 00 00 - EARTHWORK

PART 1 - GENERAL

1.1 DESCRIPTION OF WORK

- A. This section includes the requirements for earthwork including, but not limited to, the following:
 - 1. Vegetation removal.
 - 2. Site preparation.
 - 3. Excavation and embankment.
 - 4. Filling and backfilling.
 - 5. Site grading.
 - 6. Base aggregate placement and compaction.
 - 7. Levelling sand.
 - 8. Amended topsoil placement and compaction.
 - 9. Soil disposal.

1.2 DEFINITIONS

- A. Headstones: The term “Headstone” and “Marker” when used generically, includes both upright headstones and flat marker headstones. Work in this project includes both Upright and Flat Marker Headstones. When there is need to distinguish between the two types of headstones, Upright Headstones will be referred to as “Upright Headstones” or “Uprights”; and Flat Marker Headstones will be referred to as “Flat Markers” or “Flats”.
- B. Borrow Material: Borrow materials are soils generated during excavation operations at the site.
 - 1. Backfill: Backfill shall be obtained from onsite excavation. The material shall be used as indicated on the Drawings. It must be free of organic matter, debris and other deleterious substances. The material shall contain no particles greater than 2 inches in any dimension.
- C. Unsatisfactory Materials: Materials that do not comply with the requirements listed above are unsatisfactory. Unsatisfactory materials also include nonengineered fills; trash; refuse; backfills from previous construction; and material classified as satisfactory that contain or are contaminated with unsatisfactory material. The Contracting Officer must be notified of any contaminated materials.
- D. Degree of compaction: Degree of compaction is expressed as a percentage of the maximum density obtained by the test procedure presented in ASTM D 698, abbreviated as a percent of laboratory maximum density.
- E. Unauthorized excavation: Removal of materials beyond indicated sub-grade elevations or dimensions without written authorization by the Contracting Officer. No payment will be made for unauthorized excavation or remedial work required to correct unauthorized excavation.
- F. Subgrade: Surface or elevation remaining after completing excavation, or top surface of a fill or backfill immediately below base or topsoil materials.
- G. Topsoil: ASTM D 5268; natural or cultivated surface-soil layer containing organic matter and sand, silt, and clay particles, conforming to USDA classification for Loam or Sandy Loam; friable, pervious, and compatible in texture with the existing soil to prevent a perched water table; a minimum of 4SAR percent and a maximum of 6 percent organic material content; pH range between 6 and 8; reasonably free of subsoil, clay lumps, gravel, rocks and other objects more than 13 mm (1/2-inch) in any dimension; and free of weeds, roots, and other extraneous materials harmful to plant growth.
- H. Amended Topsoil: (See Section 32 92 24, “Turf Renovation”).
- I. Abbreviations:

1. USDA. United States Department of Agriculture.
2. ASTM. American Society for Testing and Materials.
3. NTEP. National Turfgrass Evaluation Program

1.3 RELATED WORK

- A. Protection of existing utilities, fire protection services, existing equipment, roads, and pavements: Section 01010, GENERAL REQUIREMENTS.
- B. Vegetation removal: Section 32 92 24, TURF RENOVATION.
- C. Amendment of existing site topsoils: Section 32 92 24, TURF RENOVATION.

1.4 SUBMITTALS

- A. Unless otherwise noted, submittals shall be made a minimum of 14 days before commencing the Work specified in this Section. The following shall be submitted in accordance with Section 01 33 23 - SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.
 1. Import Materials: Contractor must submit the following for each imported material a minimum of 14 days prior to delivery:
 - a. Material source(s).
 - b. Particle size analysis in accordance with ASTM C136.
 - c. Material samples.
 2. Import Topsoil Testing: Contractor must submit Agricultural Soil Suitability Test and Report with recommendations for correcting soil deficiencies for review and approval of COR for each source of import topsoil supplied to the project.
 3. Compost Analysis: Provide documentation from supplier that compost meets criteria below in Part 2—Products. Supplier(s) shall provide testing from an independent soil testing laboratory to test representative sample(s) of compost and furnish compost analysis report for approval of Midwest District Agronomist through the COR for review and approval.
 4. Equipment List: Contractor must submit a list of equipment to be utilized for the work 7 days prior to mobilization. The list must include equipment make, model, year, tire or track dimensions, weight and other information. The use of wheeled equipment is prohibited on cemetery burial sections. Contractor must use only track-type equipment to prevent overcompaction of soils.
 5. Construction Procedures Plan: Contractor must submit a plan 14 days minimum prior to material construction that includes, but not be limited to: marker surveying and identification/tagging; marker pulling (describe method how work will be accomplished without removing markers from the

gravesites); removing irrigation heads, capping irrigation risers; excavation and embankment; rough grading; cross-ripping subgrade; amending subsoil; Flat Marker headstone support system installation; marker re-installation (both uprights and flats); re-installing irrigation heads and restoring irrigation system; placing and amending topsoil; sod installation; equipment use; erosion control; and protection to be provided in the event of rain, wind, heat or other potential cause of damage.

1.5 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.

- B. American Society for Testing and Materials (ASTM):

D698-00	Laboratory Compaction Characteristics of Soil Using Standard Effort (12,400 ft. lbf/ft ³ (600 kN m/m ³))
D1556-00	Density and Unit Weight of Soil in Place by the Sand-Cone Method
D1557-12	Laboratory Compaction Characteristics of Soil Using Modified Effort (56,000 ft-lbf/ft ³ (2700 kN m/m ³))
D2940-98	Graded Aggregate Material for Bases or Subbases for Highways or Airports
Division 300.....	State of Illinois Department of Transportation (NMDOT) Division 300 - (2019) Standard Specifications - Section 303 – Base Course

1.6 UTILIZATION OF EXCAVATED MATERIALS

- A. Contractor excavated and stockpiled materials may be used as fill and backfill materials as specified. Excavated materials must be stockpiled in designated stockpile areas. No excavated material must be disposed of to obstruct the flow of any stream or road, endanger a partly finished structure, impair the efficiency or appearance of any structure, or be detrimental to the completed work in any way.
- B. Excess soil material shall be disposed of off-site in a lawful manner.

PART 2 – PRODUCTS

2.1 MATERIALS

- A. Aggregate Base/Backfill for supporting and backfilling around Upright Headstones must be 3/8-inch minus crushed aggregates in conformance to Illinois DOT (NMDOT) Standard Specifications, Section 519, Subsection 519.2.2, Fine Aggregates, Grading No. 2.

Sieve Size % Passing by Weight	
Sieve Size	% of Passing
3/4 in.	--
1/2 in.	100
3/8 in.	90-100
No. 4	70-85
No. 8	50-70
No. 16	35 to 55
No. 30	20 to 35
No. 50	8 to 20
No. 100	2 to 10
No. 200	sand equivalent = 75

- B. Base Aggregate for Flat Marker geogrid support system must be 3/4 - 0 inch crushed aggregate in conformance to NMDOT (3/4-inch minus crushed aggregate).
- C. Leveling Sand for Flat Markers must be 1/4-inch minus crushed aggregate with 90-100 percent passing the No. 4 screen and maximum 6 percent passing the No. 200 screen
- D. Amended Topsoil: (See “Turf Renovation”.)
- E. Elemental Sulfur: Granular, biodegradable, containing a minimum of 90 percent sulfur, with a minimum of 99 percent passing through No. 6 sieve and a maximum of 10 percent passing through No. 40 sieve.
- F. Agricultural Lime: Pelletized Lime (90% Calcium Carbonate equivalent derived from ground limestone).
- G. Gypsum Equivalent: Mined Anhydrite Calcium Sulfate and Hydrated Calcium Sulfate. Minimum 90 percent calcium sulfate, pelletized, SGN 250.
a. Available Product: ‘Best’, Soil Buster; or approved equal.
- H. Organic Soil Amendments: Acceptable types of organic soil amendments include peat moss, humus or peat, well-rotted manure, various mature composts, and

- commercially available combinations thereof. Acceptable compost may be derived from natural organic sources such as food or animal residuals, yard trimmings, or biosolids. Organic soil amendment shall be free of all woody fibers, seeds, and leaf structures, plastic and other petroleum products, free of toxic and non-organic matter, and free from objectionable odors. Unacceptable sources of organic matter include untreated sludge from wastewater treatment plants, fresh manure, sawdust, and immature composts.
- I. Compost: Well-decomposed, commercially manufactured, stable, and weed-free organic matter from agricultural, food, biosolids, or yard debris sources; free of refuse (less than 1 percent by dry weight), plastics, contaminants or any material toxic to plant growth; composted for a minimum of 9 months and reached a monitored temperature of 140 degrees F for at least one week; tested, at minimum, every six months for noxious weeds; and conforming to the following:
1. Organic Matter Content: 60 to 80 percent of dry weight as determined by ash method.
 2. Moisture Content: 35 to 55 percent by weight.
 3. Inerts: less than 0.5% by dry weight.
 4. pH range of 6.0 to 8.0.
 5. Soluble salts: less than 2 decisiemens (dS)/m.
 6. Particle size: 100 percent passing through 1/2-inch (13-mm) sieve.
 7. Nutrient Content: sum of N, P, K percent of wet weight, less than 5%.
 8. Trace Metals: Pass per US EPA Class A Standard, 40 CFR 503.32 (a).
 9. Maturity Indicator (bio-assay): Greater than 80% seedling emergence relative to positive control.
 10. Stability Indicator: Carbon dioxide evolution rate is less than 8 mg CO₂-C per g OM per day – “Stable”.
 11. Tested, at minimum, every six months for noxious weeds.
 12. Organic matter source (feedstock): Agricultural, food, or industrial residuals; biosolids; yard trimmings; or source-separated or compostable mixed solid waste.
 13. Organic Matter Content: 30 to 65 percent of dry weight as determined by ash method.
 14. Processed to meet U.S. Composting Council's Seal of Testing Assurance Program, or equivalent.
- J. Peat Moss: Peat shall be a natural product of peat moss, hypnum moss, reed sedge peat/peat humus derived from a fresh-water site. Peat shall be shredded and granulated to pass through a 13 mm (1/2 inch) mesh screen and conditioned in storage piles for at least six months after excavation. Characteristics as follows: pH (3.5 to 4.5); EC (0-0.1 mmhos/cm); SAR <5; Dry Density (60-90 g/l); Moisture content (38 to 50%); Organic matter (98-99%).
- K. Imported Topsoil: ASTM D5268; natural or cultivated surface-soil layer having the following characteristics:

1. Sand, silt, and clay particles in percentages conforming to USDA classification for Loam or Sandy Loam;
 2. Micro and macro-nutrients in proper quantities essential for plant health;
 3. Contain a minimum of 4 percent and a maximum of 10 percent organic material content;
 4. Have pH range between 6.5 and 7.5;
 5. Be friable, pervious, and black or a darker shade of brown;
 6. Be free of subsoil, clay lumps, gravel, rocks and other objects more than 1/2 inch (13mm) in any dimension;
 7. Be free of weeds, roots, and other extraneous materials harmful to plant growth.
- L. Mycorrhizae: Endomycorrhizal powder inoculum consisting of the following 4 species blend of propagules of arbuscular mycorrhizal fungi: Glomus intraradices, Glomus mosseae, Glomus aggregatum, and Glomus etunicatum. Minimum 100,000 spores/propagules per pound. The powder particle size shall be less than 300 microns (100 percent passing the #50 screen). Available Products: 'MycoApply Micronized Endo' by Mycorrhizal Applications, Inc.; 'Super Fine Endo' by Mycorrhizal Products.com; or equal.

PART 3 – EXECUTION

3.1 SITE PREPARATION

- A. Lines and Grades: With the services of a Registered Professional Land Surveyor or Registered Civil Engineer, specified in Site Survey section, the Contractor must survey and document existing lines and grades and submit for approval, new lines and grades in order to achieve grades that provide a smooth surface, free from irregular surface changes and provide positive drainage. The intent is to eliminate any irregular surface changes and depressions that trap surface water and provide movement of water off cemetery sections and/or into storm water structures. Grading must comply with compaction requirements and grade cross sections, lines, and elevations indicated by the approved Contractor-provided Grading Plan. Where spot grades are indicated the grade must be established based on interpolation of the elevations between the spot grades while maintaining appropriate transition at structures and paving and uninterrupted drainage flow into inlets.
- B. Trees and Shrubs: Protect from damage, existing trees and shrubs which are not shown to be removed in construction area. Immediately repair damage to existing trees and shrubs by trimming, cleaning and painting damaged areas, including roots, in accordance with standard industry horticultural practice for the geographic area and plant species. Do not store materials closer to trees and shrubs that are to remain, than the farthest extension of their limbs. If the Contractor is obstructed by tree roots within the drip-line of a standing tree that are 2 inches in diameter or greater, the Contractor must request an inspection by the COR. The COR will inspect and determine if any roots will be pruned.

- C. Vegetation Removal: Remove turfgrass sod, weeds and their roots from within limit of work area. Cut a clean line between sod to be removed and sod in adjacent cemetery sections to be protected, in addition to any sod in adjacent cemetery sections requiring removal to accomplish excavation for work required. Haul vegetation off-site in a lawful manner.

3.2 SUBGRADE PREPARATION

- A. The ground surface on which fill is to be placed must be cleared of vegetation.
- B. After vegetation removal, shape the subgrade to lines, grades, and sections shown on the approved, Contractor-provided grading plan, providing allowance for incorporation of soil amendments and placement of 2-inches of imported topsoil.
- C. Soft or otherwise unsatisfactory material must be removed and replaced with satisfactory excavated material or other approved material as directed. Existing low areas and those resulting from removal of unsatisfactory material must be brought up to required grade with satisfactory materials, and the entire subgrade must be shaped and compacted as specified.
- D. Stones 2 inches and larger must be removed and replaced with satisfactory excavated material or other approved material as directed.
- E. If the Contractor excavates below the lines and grades indicated on the Construction Drawings, Contractor must place fill to elevate these areas back to grade at no additional cost to the Government.
- F. The prepared subgrade surface must be reasonably smooth, free of holes, depressions greater than 3 inch deep, or protrusion extending above the surface more than 3 inch. No overlying materials shall be placed until the subgrade has been checked and approved. The subgrade surface must be protected and restored if damaged.

3.3 SUBGRADE AMENDMENT

- A. Prior to compacting final subgrades, cross-rip existing subsoil to a depth of 8 to 12-inches to scarify, and amend with gypsum equivalent and organic soil amendments.
- B. Broadcast gypsum equivalent at a rate of 1 ton per acre (~50 lbs./1000 sq-ft); and spread approved organic soil amendments throughout the turf renovation area. The rate of incorporation of the organic soil amendments shall be based upon the organic content of the tested and approved organic soil amendments, so as to produce a finished soil with an organic matter content of between four (4%) and six percent (6%).

- C. Incorporate the gypsum equivalent and organic soil amendment by disc harrowing, rototilling or other means to provide a uniformly homogenous mixture to depth of 6 to 8 inches.
- D. Supply additional organic soil amendment material, after in-place testing and approval, as may be needed to give the required organic matter content and finished grades under the Contract without additional cost to the Government.

3.4 SOIL MOISTURE CONTROL

- A. Uniformly moisten or aerate subgrade and each subsequent fill or backfill soil layer before compaction to within 2 percent of optimum moisture content.
 - 1. Do not place backfill or fill soil material on surfaces that are muddy, frozen, or contain frost or ice.
 - 2. Remove and replace, or scarify and air dry otherwise satisfactory soil material that exceeds optimum moisture content by 2 percent and is too wet to compact to specified dry unit weight.

3.5 FILL AND BACKFILL

- A. Place backfill and fill soil materials in layers not more than 8 inches (200 mm) in loose depth for material compacted by heavy compaction equipment, and not more than 4 inches (100 mm) in loose depth for material compacted by hand-operated tampers.
- B. Place backfill and fill soil materials evenly on all sides of structures to required elevations, and uniformly along the full length of each structure.
- C. Compact soil materials to not less than the following percentages of maximum dry density according to ASTM D 698 for cohesive soils and ASTM D 1557 for granular soils:
 - 1. Under lawn, compact each layer of backfill or fill soil material at 85 percent.
 - 2. Under flat headstones, compact each layer of backfill or fill soil material at 95 percent.
 - 3. Under Flat Marker headstone support system compact each layer of backfill or fill soil material at 95 percent.

3.6 GRADING

- A. Grading must be in conformance with the approved, Contractor-provided, Site Grading Plan. Excavation and finish grades must be constructed to within plus or minus 0.1 foot of the indicated grades. The finished surface of the excavations and fills must be free of depressions and must be reasonably smooth in accordance with the grade tolerances.

- B. Establish rough grades per the approved, Contractor-provided Site Grading Plan, making allowance for the placement of 2-inches of imported topsoil, and headstone support system to depths indicated.
- C. Slope grades to prevent ponding. Finish subgrades to required elevations within the following tolerances:
 - 1. Lawn: Plus or minus 1 inch (25 mm).
 - 2. Flat Markers: Plus or minus 1/2 inch (13 mm).

3.7 BASE COURSE (UPRIGHT HEADSTONES)

- A. Place base course on subgrades free of mud, frost, snow, or ice.
- B. On prepared subgrade, place and compact base course under markers as follows:
 - 1. Place base course 3 inches minimum depth compacted in 1-1/2 inch lifts.
 - 2. Compact base course at optimum moisture content to required grades, lines, cross sections, and thickness to 95 percent of maximum dry density according to ASTM D-1557.
 - 3. See Upright Headstone Installation on Exhibit 'B' – Headstone Setting Details.

3.8 AGGREGATE BACKFILL (UPRIGHT HEADSTONES)

- A. Place aggregate backfill along sides of properly positioned markers as follows:
 - 1. Place and compact aggregate backfill in 1-1/2 inch lifts until within 4 inches of finish grade.
 - 2. Compact backfill at optimum moisture content to required grades, lines, cross sections, and thickness to 95 percent of maximum dry density according to ASTM D 1557.
 - 3. See Upright Headstone Installation on Exhibit 'B' – Headstone Setting Details.

3.9 BASE COURSE (FLAT MARKER SUPPORT SYSTEM)

- A. Place base course for Flat Marker support system on subgrades free of mud, frost, snow, or ice.
- B. On prepared subgrade, place and compact base course in trench under flat marker support geogrids at flat marker locations as follows:
 - 1. Place base course 6 inches (150 mm) or less in compacted thickness in a single layer.
 - 2. Compact base course at optimum moisture content to required grades, lines, cross sections, and thickness to 95 percent of maximum dry density according to ASTM D 1557.
 - 3. Aggregate finish grades must be constructed to within plus or minus 0.1 foot of the indicated grades. The finished surface of the aggregate must be free of

depressions and must be reasonably smooth in accordance with the grade tolerance.

4. See Flat Marker Installation Details on Exhibit 'B' – Headstone Setting Details.

3.10 TOPSOIL PLACEMENT

- A. Placement and compaction of imported topsoil shall occur after the initial setting of the Flat Marker headstones onto the plastic headstone support system to prevent intermingling of subgrade soil and imported topsoil during excavation for placement of support system aggregate base. (See “Section 32 39 20 – FLAT MARKER SUPPORT SYSTEM, HEADSTONE SETTING, ALIGNMENT, BACKFILLING, AND HEADSTONE CLEANING”.)
- B. Scarification: Scarify previously compacted subgrade to a depth of 1 to 2 inches prior to placement of imported topsoil to prevent soil layering.
- C. Mycorrhizae: Immediately prior to the placement of imported topsoil, broadcast Mycorrhizae onto the scarified subsoil at the 0.5 lb./1000 sq-ft using properly calibrating spreading equipment.
- D. Place and compact 2-inches of imported topsoil throughout the entire area of turf renovation and compact to 85 percent maximum dry density per ASTM D-698. Test compaction levels of topsoil per “SECTION 01 45 29 – TESTING LABORATORY SERVICES.”
 1. Compact topsoil using hand or mechanized equipment well suited to soil being compacted. Do not operate heavy mechanized or vibratory compaction equipment which may over-compact the soil. The Contractor must not operate trucks, tractors, and other heavy wheeled equipment in excess of 2 tons, or track equipment in excess of 3 tons on any burial section except when authorized in writing by the COR(s). Topsoil must be thoroughly tamped to prevent further sinkage, but the soil must not be compacted to the degree that it prevents the growth of healthy turf.
- E. Amend topsoil as recommended by results of imported topsoil soil test reports as indicated in “SECTION 32 94 00 – TURF RENOVATION.”

3.11 FIELD QUALITY CONTROL

- A. Test compaction of soils in place per “C. SECTION 01 45 29 – TESTING LABORATORY SERVICES.”

3.12 DISPOSAL OF MATERIALS

- A. Excess Soil: Excess soil and amended topsoil shall remain the property of the Government. Haul excess soil to location on the cemetery site as directed by the COR and stockpile or spread evenly over the designated area.

- B. Excess soil amendments shall remain the property of the Government. Haul excess materials to a location on the cemetery site as directed by the COR and stockpile in mounds not exceeding 6 feet in height and cover with opaque plastic sheeting as directed by the COR.
- C. Dispose organic matter, vegetation, unsuitable soil materials and excess excavated soil materials generated by the Contractor off-site in a lawful manner.

3.13 CLEAN UP

- A. Upon completion of earthwork operations, clean all work areas within contract limits, and soil manufacturing plant. Remove tools, and equipment. Provide site clear, clean and free of debris. Remove all debris, rubbish, and excess materials unless noted otherwise, from Cemetery Property.

END OF SECTION

SECTION 32 39 20 –HEADSTONE SETTING, ALIGNMENT AND CLEANING (Upright and Flat Marker Headstones)

PART 1 - GENERAL

1.1 SUMMARY

- A. This section includes:
 - 1. Headstone and gravesite verification survey.
 - 2. Headstone protection and handling.
 - 3. Headstone removal.
 - 4. Flat Marker support system.
 - 5. Headstone setting.
 - 6. Headstone alignment.
 - 7. Headstone backfilling
 - 8. Headstone re-verification.
 - 9. Headstone cleaning.
- B. Related Sections:
 - 1. Division 31 Section "Earthwork" for excavation, filling and backfilling, and rough grading.
 - 2. Division 31 Section "Earthwork" for base aggregates and leveling aggregates.
 - 3. Division 31 Section "Earthwork" for topsoil placement.
 - 4. Division 32 Section "Turf Renovation" for weed control, soil preparation, and sodding.

1.2 SUBMITTALS

- A. Product Data: For the following:
 - 1. Plastic Flat Marker support geogrid.
 - 2. Headstone Biological Cleaner.

1.3 HEADSTONE and GRAVESITE VERIFICATION

TO ENSURE THE ACCURACY OF HEADSTONE AND MARKER PLACEMENT DURING THE RAISE AND REALIGNMENT PROJECT, THE FOLLOWING PROCEDURES WILL BE FOLLOWED BY MEMORIAL SERVICE NETWORK PERSONNEL, CEMETERY PERSONNEL AND CONTRACTING OFFICER'S REPRESENTATIVE (COR) BEFORE THE RAISE & REALIGNMENT PROCESS BEGINS

- A. The Midwest District will provide each cemetery with the correct Gravesite Layout Map(s) prior to beginning the Raise & Realign (R&R) project. The Contracting Officer's Representative (COR) or cemetery director/designee as listed in the official contract documents shall conduct an initial gravesite verification survey prior to the (R&R) of any headstone or marker in the Cemetery. The COR will obtain a copy of the Burial Register Report from the Burial Operation Support System (BOSS) and current gravesite layout map(s) obtained from the Midwest District office for the verification survey. The Burial Register Report and gravesite layout map(s) will be used to verify the section, row, grave number, first and last name of each decedent and the condition of the headstone/marker included in the scope of work (SOW). All inconsistencies will be researched, discussed and resolved with the Midwest District Director prior to the R&R of any headstone or marker.
- B. Upon completion of the verification survey and corrective actions as necessary, the COR shall certify the survey by signing the Initial Headstone/Marker Raise & Realign Verification Survey form, (See Attachment 5.) A copy of the signed Headstone/Marker Raise & Realign Verification Survey sheet must be forwarded to the Contracting Officer (CO) which will be incorporated into the contract files; a copy of the survey will be maintained by the cemetery. Additional copies of the survey will be retained by the COR for the official contract files. The CO will give the approval to begin the R&R process.
- C. Prior to the completion of each workday, a Daily Headstone/Marker Raise & Realign Verification Survey will be completed for all headstones and markers raised & realigned, (See Attachment 6). The COR/cemetery director/designee will verify the accuracy of the placement of headstones or markers on the correct gravesite using the same Burial Register Report and gravesite layout map(s) that were used for the initial headstone/marker verification survey. Daily, the COR will inform the contractor/designee of all identified inconsistencies and ensure corrective actions are completed that day. The Daily Headstone/Marker Raise & Realign Verification Survey will be maintained by the COR for certifying payments for completed work, tracking project progress and other administrative needs.

- D. The Contractor's performance and progress on this contract will be measured weekly based on how timely, accurately, and adequately he/she accomplishes and completes the weekly work schedules needed to systematically accomplish the contract work over the duration of the project. In instances where the COR determines that the work is behind schedule, he will notify the Contracting Officer and the Contractor must increase workforce and/or hours of operation at no additional cost to the Government in order to achieve completion of the contract work within the specified timeframe.

1.4 HEADSTONE CARE and HANDLING

- A. **HEADSTONES AND/OR MARKERS WILL NOT BE PHYSICALLY REMOVED FROM THE GRAVESITE DURING THE HEADSTONE RAISE AND REALIGNMENT AND TURF RENOVATION PROJECTS.**
- B. When site conditions are restrictive and it is not possible to safely operate equipment while keeping the headstones/markers on the gravesite, the contractor will prepare these sites by hand. At no time may headstones/markers be removed from the gravesites. Markers must never be handled or treated in a disrespectful manner. Do not step on or drive equipment on top of markers. Do not use hand tools to "flip" markers over as a means of relocating markers.
- C. The Contractor is responsible to protect headstones and markers from damage or being discolored from contact with dirt, soil or other contaminants during the course of the contract.

PART 2 – PRODUCTS

2.1 PLASTIC HEADSTONE SUPPORT GEOGRID:

- A. High Density Polyethylene (HDPE) geogrids specifically designed for flat gravesite marker reinforcement and alignment. Geogrids must be in the form of a tray with raised edges to mitigate the shifting markers out of alignment. Geogrid units must be equipped with tabs to interlock with adjoining units.
1. Dimensions - 13" x 13" x 1-5/8"
 2. Mass per Piece - 0.53 LBS.
 3. Density - 0.0322 LBS. per Cubic Inch.
 4. Approved Product: 'MarkerGrid', as manufactured by Nursery West Corporation, 11463 Broadacres Road NE, Hubbard, OR 97032;
 5. Approved Substitution: 'GrassPave²' (20m length by 0.5m wide), as manufactured by Invisible Structures, Inc. 1600 Jackson St., Suite 310, Golden, CO 80401; or approved equal.

2.2 HEADSTONE CLEANER:

- A. Non-hazardous, biodegradable liquid that removes stains from mold, algae, mildew, lichens and air pollutants from marble and granite. Contains no acids, salts, or chlorine; pH neutral; safe to use around plants.
- B. Only NCA-approved cleaners shall be used. Cleaners current approved by NCA are 'D/2 Biological Solution' by D/2 Biological Solutions, Inc.; and 'Weather-Zyme' by United Laboratories, Inc.

2.3 AGGREGATES:

- A. See Section 31 00 00 – EARTHWORK for aggregate bases, aggregate backfill and levelling sand for headstones.

PART 3 – EXECUTION

3.1 UPRIGHT MARKER HEADSTONE REMOVAL, RESETTING, REALIGNMENT AND BACKFILL REQUIREMENTS:

A. WORK OVERVIEW

- 1. This subsection outlines Headstone Removal, Resetting, Realignment and Backfill services, defined as: work consisting of extracting Upright headstones; excavating headstone sockets; placement and compaction of foundation aggregate base; resetting, aligning headstones, backfilling and compacting with aggregate backfill, and backfilling and compacting with subbase and/or topsoil at headstones reset in the new earthen sockets, as well as inventorying and assuring accurate placement on each gravesite to be renovated. The Contractor must provide all supervision, professional advice/guidance, labor, parts, materials, equipment, transportation and personnel to provide the services defined herein.
- 2. Headstones must be accurately adjusted and precisely reinstalled on the correct gravesites by utilizing Contractor-provided temporary gravesite plotting maps, approved, Contractor-provided headstone realignment plans, temporary Contractor-installed gravesite control markers, and temporary Contractor-installed control pin markers at the ends of each gravesite row.

B. UPRIGHT HEADSTONE REMOVAL

- 1. Standard marble headstones are approximately 42 inches long, 13 inches wide, 4 inches thick, approximate weight: 230 pounds.
- 2. All headstones (and other features causing interference with the removal of the Headstones) must be tagged with the unique numbering scheme and surveyed by the contractor prior to removal. Identification tags and survey

must be reviewed with the COR prior to headstone removal. Tags must be COR-approved, non-permanent attachments to the Headstones that can be removed without damage to the headstones upon completion of the work.

3. All temporary markers causing interference with the raise and realignment of upright headstone operation must be removed and replaced on the gravesite as soon as practicable, but no later than the close of business each day. Floral, commemorative, or other types of decorations (arrangements) causing interference with the work must be removed from the gravesite in accordance with the cemetery Floral Policy.
4. Prior to starting work in each burial section, a registered surveyor must install a temporary control pin marker at ends of each gravesite row. The Contractor must create an as-built map showing specific location of each individual headstone by actual number and name in order to facilitate precise headstone reinstallation in the correct location. (See SECTION 02 21 00 - SITE SURVEYS.)
5. Prior to removing headstones from the soil they will be verified with the Contractor-produced gravesite plotting maps. Contractor must verify the accuracy of these maps with the COR prior to removing any headstones.
6. Locations for Reserved Upright Headstones will also be verified with the Contractor-produced grave plotting maps. Contractor must verify the accuracy of these maps with the COR. Contractor must show on the as-built map the specific location of each individual reserved headstone by actual number and name.
7. Headstones will be removed from their sockets by using wooden, and or metal clamps. If metal clamps are used the area that contacts the headstone must be protected with a rigid fabric that will prevent damage to, and marking of, the headstone. Clamps may be attached to a 'Bob Cat' or similar machine to extract headstone from socket. Use care not to scratch or damage headstones in any manner. (Note: In areas where smaller than standard size headstones may occur, coordinate specified measurements and dimensions of required work with COR.)
8. **WHEN HEADSTONES ARE REMOVED FROM THEIR SOCKETS, THEY MUST BE CAREFULLY STORED ON EACH ASSOCIATED GRAVESITE.** The headstones must be carefully excavated and stored on the gravesite without coming into contact with the ground. DO NOT place on dirt piles or mud; they should be carefully placed on each associated gravesite and protected in such a way as to prevent any soiling, and be out of the way of any other work. The headstones must be laid with front inscription side up while the headstone is lying horizontally. The headstone must be protected from direct ground contact while lying

horizontally. The protection method must be as approved by the COR and must be free of deterioration in weather. An approved method is to support each headstone with two wood 4x4's. Alternate methods can be approved. Cardboard must not be used. Wood or other suitable appropriate and attractive material must be used to keep the headstones from contact with the soil while lying horizontally during the construction period. This also shows respect towards the families visiting the gravesites and the remains that are buried.

C. UPRIGHT HEADSTONE SETTING

1. After headstones are removed from their sockets, headstone sockets must be re-dug in accordance with the approved Headstone Realignment Plan providing three (3) inch clearance at the front, back, sides and underneath the headstone, for total socket dimensions of ten inches (10") by nineteen inches (19"). Headstone sockets must be dug to the required depth to meet the specified height and alignment requirements and finish grades established by the approved Grading Plan. All headstone sockets must be clean and free of loose dirt and debris prior to adding crushed aggregate base.
2. Crushed aggregate base must be moisture conditioned within $\pm 2\%$ of the optimum moisture content and added in 1-1/2" lifts and compacted to 90% to 95% relative density per ASTM D 1557 in the bottom of the dug sockets to provide a minimum three inch (3") footing under the base of the headstone prior to the re-installation of the headstones. The actual measurement will vary depending on the how much the headstone needs to be raised or lowered and must be approved by the COR. (See Exhibit 'B' – Headstone Setting Details.)
 - a. Tamping Tools: Must be approved by COR prior to use. Tamping tools must have sufficient impact area and weight to achieve 90% to 95% compaction of the aggregate. Tamping tools having wood handles and those with insufficient mass are not acceptable.
3. The headstone must be carefully lowered into the socket onto the compacted aggregate base. During the alignment process crushed aggregate backfill must be placed around all four sides of the headstones in 1-1/2" lifts and compacted to 90% to 95% relative density per ASTM D 1557, providing a minimum thirteen inches (13") depth of crushed aggregate backfill along the sides of the headstone as measured from the bottom of the headstone. After establishment of subgrades per the approved Grading Plan there will be a minimum of four inches (4") of space remaining from the top of the compacted aggregate backfill to the ground surface to allow for placement of 2-inches of imported topsoil and turfgrass sod.

4. Existing headstone sockets that exceed the correct depth requirements must be filled with sufficient crushed aggregate base and compacted to 90% to 95% relative density per ASTM D 1557 to achieve the correct final depth. All headstone sockets must be clean and free of loose dirt and debris prior to adding crushed aggregate base. After filling in the deep sockets in this manner, proceed with headstone realignment.
5. In cases where no portion of the existing headstone sockets can be reused due to a significant realignment shift, apply the following procedures:
 - a. After removal of the headstones, backfill and compact the existing socket prior to digging the new socket. Backfill and compact the existing socket with suitable soil or other COR-approved material to 90% to 95% relative density per ASTM D 1557 in 1-1/2" inch lifts making allowance for placement of 2-inches of imported topsoil and sod.
6. The completed raised and realigned headstones must be anchored firmly in place such that the headstones are rigid with no give or play in any direction regardless of the soil and terrain conditions. All headstones must be firmly set and anchored in place with no movement from reasonable forces subjected by the COR, (e.g., using one arm to shake).

D. UPRIGHT HEADSTONE RAISE AND REALIGNMENT:

1. Prior to starting work in each burial section the required gravesite row/gravesite spacing layout dimensions must be verified and certified by a licensed surveyor and coordinated with the COR.
 - a. The Contractor must use a licensed surveyor to install temporary control markers to conform to the section layout.
 - b. The Contractor must use a licensed surveyor to accurately and precisely install temporary control pin markers at the ends of each gravesite row in accordance with the approved Gravesite Realignment Plans.
 - c. The Contractor must use a licensed surveyor to stake locations for new permanent gravesite control monuments as indicated in the approved gravesite realignment plans.
 - d. The Contractor must use a licensed surveyor to accurately and precisely set grade stakes as required to establish finish grades in accordance with the approved Grading Plans.
2. Headstones must be accurately and precisely reinstalled on the correct gravesites by utilizing temporary grave plotting maps, existing permanent gravesite control monuments where available, temporary contractor installed gravesite control markers, and temporary contractor installed control pin markers at the ends of each gravesite row. All measurements, setting of string lines, and the layout of rows/columns must be taken from

existing or temporary gravesite control markers, and NOT from previously set headstones, unless otherwise directed by the COR.

3. The proposed finish grades on the approved Contractor-provided Grading Plan (including 2-inches of imported topsoil) must be established by setting grade stakes for the entire section to be raised and aligned in all directions by a licensed surveyor for the approval of the COR. The Contractor must interpolate finish grades to allow all of the headstones in the section to be aligned vertically without having drastic changes in headstone heights (several inches) between the rows and columns of headstones in ALL directions.
4. In irregular terrain where sloping and uneven ground conditions exist, all headstones and markers will be set at the proper height and overall level necessary to provide a smooth, flowing transition between ALL headstones in ALL directions through uneven terrain. The Contractor must take the adjoining sections and/or terrain into consideration when establishing finish grades. IMPORTANT: To meet the requirement of a smooth, flowing transition, the Contractor may be required to set the headstones at a height other than at the required 25 inches above grade with approval by the COR. (See Exhibit 'C' – Upright Headstone Realignment Diagrams.)
5. Keystone Placement and Installation
 - a. The headstone realignment process starts by the selection of specific headstones throughout the gravesite section to be designated as "Keystones" (or "Key" stones) for use throughout the remainder of the realignment process. Keystones are ones that are visibly in line with the majority of the rest of the headstones in the row as identified by the Gravesite Realignment Plans, and are as close as possible to the proper measurements for that section of headstones. Keystones must be chosen and utilized throughout the section at a maximum spacing of every 10th headstone or at a more frequent spacing as necessary in areas of sloped or rolling terrain at crests and valleys in order to achieve a smooth, flowing transition between the rows and columns. (See Exhibit 'C'.)
 - b. Each of the Keystones must be permanently set in accordance with the requirements of "Upright Headstone Setting" article at the proper location and at the proper height using the approved Gravesite Realignment Maps and approved Grading Plans. The Keystones must be laid out to the correct dimensions to match the required measurements for the section such that the rows and columns are evenly spaced. The vertical height of the Keystones shall be set 25 inches above the proposed finish grades on the approved Grading Plan throughout the entire section in order to achieve a smooth, flowing transition between all the rows and columns. (See Exhibit 'C'.)

- c. All Keystones must be vertically plumbed and aligned by leveling the front, back, and sides while raising or lowering the headstone as necessary to achieve a height of 25 inches above the proposed finish grades. **IMPORTANT:** To meet the requirement of a smooth, flowing transition, the Contractor may be required to set the Keystones at a height other than at the required 25 inches above finished grade with approval by the COR.
 - d. The COR must approve of the quantity, location, height, and installation of the Keystones prior to the Contractor continuing with the realignment process.
6. The next step in the headstone realignment process is the Contractor selects a row and a column of headstones at the center or close to the center of the section to be realigned with approval from the COR. (See Exhibit 'C'.)
7. Install heavy string lines along the front, sides, tops, and transversely of all applicable Keystones. The string lines must be laid out to the correct dimensions as determined by Keystones and the approved Gravesite Realignment Plans such that the rows and columns are evenly spaced. These lines are marked with the proper measurements for the section being aligned to show distance between headstones. All remaining headstones in the row are then aligned along the strings front to back and side-to-side even with the measured marks on the line. All headstones must be vertically plumbed and aligned by leveling the front, back, and sides while raising or lowering the headstone as required to achieve a height of 25 inches above the proposed finish grades. Maximum vertical, lateral, and transverse tolerance of any headstone off the alignment string lines and/or marks must be 1/8", or less. **IMPORTANT:** To meet the requirement of a smooth, flowing transition, the Contractor may be required to set the headstone at a height other than at the required 25 inches above grade with approval by the COR. These measurements must be adhered to as closely as possible and may be adjusted to suit unique site conditions with approval by the COR. (See Exhibit 'C'.)
8. The first row of reset/realigned headstones in each burial section must be inspected by COR for appearance, spacing, depth, alignment, plumb, height, accuracy, and smoothness in grade transition. No further setting of headstones shall be done until this first row has been inspected and accepted by the COR. It is the Contractors responsibility to notify the COR 24 hours in advance of when each of these inspections will be needed.
9. All remaining headstones in all rows, columns, and transverse directions are then raised and re-aligned in accordance with above. The installation, adjusting, and setting of the remaining headstones must meet the requirements of the "Headstone Setting" article. (See Exhibit 'C'.)

10. Place and compact aggregate backfill as indicated in “Headstone Setting” article between the headstone and the earthen socket to secure the headstone in alignment. (See Upright Headstone Installation Detail on Exhibit ‘B’ – Headstone Setting Details.) The alignment of the headstones should be checked frequently during this process because the tamping may move the headstone out of level or off the mark on the line. Maximum vertical, lateral, and transverse tolerance of any headstone off the alignment string lines and/or marks must be 1/8”, or less.
11. Headstones must be installed to within one degree (1°) of fully vertical when measured on front and sides using a digital level.
12. The measurements between rows or columns of headstones and between the headstones within each row or column may differ from one gravesite section to the next. This condition is to be discussed with COR where this is found to occur. These measurements must be adhered to as closely as possible. Some variances may be allowed by the COR in order to keep a uniform appearance of headstones being aligned from one section to the other.
13. Any upright headstones broken or damaged by the Contractor must be reported to the COR or the Cemetery Director by close of business each working day in order that the grave can be properly marked. The Contractor must be responsible for the cost of the headstone replacement. The cost of the replacement headstones will be deducted from Contractor's invoice(s). All headstone replacements must be coordinated with the COR. Any existing permanent gravesite control monuments, temporary Contractor-installed control markers, grid or sectional monuments that are disturbed, displaced, or broken must be replaced and properly reset by a licensed surveyor at the Contractor's expense. Curbs, roads, walks, turf, trees, utilities, etc. existing above and below the ground that are damaged or disturbed by the Contractor during performance of contract work must be repaired at the Contractor's expense at no additional cost to the Government. The requirements of this paragraph must be completed by the Contractor within fourteen (14) workdays, unless otherwise agreed to by the COR.
14. Government furnished headstones that are permanently removed from a grave for any purpose must be transported by the Contractor to an approved location on cemetery grounds and destroyed in any convenient manner, ensuring that the replaced headstone cannot be used for private, personal, or commercial activities.
15. Contractor must inspect and measure each headstone when removed and document any headstones greater in length than the standard 42 inches. At the contractor's option and at no additional cost to the Government, the

Contractor can either adjust the depth of the socket to accommodate the longer headstone(s) or cut the headstone to the standard length of 42". Cutting to size will be accomplished locally.

16. Contractor must inspect each headstone when removed and document any damage or physical defect in the stone. Report findings to the COR for direction prior to resetting the headstone.

3.2 FLAT MARKER HEADSTONE HANDLING, RESETTING, REALIGNMENT AND BACKFILL REQUIREMENTS:

- A. Overview: This subsection outlines Flat Marker Headstone Setting, Alignment and Backfill requirements. Setting, Alignment, and Backfill services consist of extracting Flat Markers, constructing the Flat Marker support system, resetting, aligning, backfilling and tamping/compacting flat marker headstones to provide vertical and horizontal alignment and plumb, as well as inventorying and assuring accurate placement of headstones onto gravesites. The Contractor must provide all supervision, professional advice/guidance, labor, parts, materials, equipment, and personnel necessary to provide the services defined herein.
- B. Marker Locations: Verify with the COR the exact marker locations where Flat Marker support system, resetting, realignment, and backfill shall occur.
- C. Phasing and Work Sequencing: All work must be accomplished in a sequential manner, with work limited to no more than 2000 Marker gravesites at any given time in order to minimize overall disruption to the cemetery. The Contractor must submit a proposed "Project Work Schedule Sequence" to the COR for review and approval prior to start of project.
- D. There are two types of Flat Markers in the work area. Flat Granite Markers (G1) are approximately 24-inches long by 12- inches wide by 4 inches thick, weighing approximately 130 pounds. Thin Flat Granite Markers (J1) are approximately 24-inches long by 12- inches wide by 3 inches thick, weighing approximately 100 pounds; Small Flat Granite Markers (L1) are approximately 18-inches long by 12-inches wide by 3-inches thick, weighing approximately 50 pounds. The term "Flat Marker Headstone" may be used interchangeably with the terms "Flat Marker(s)".
- E. Flat Marker Headstone Record Keeping and Handling
 1. Handling of Flat Markers: Contractor must create an as-built map showing specific location of each individual Flat Markers by actual number and name(s) in order to facilitate precise Flat Markers reinstallation.
 2. The measurements between rows of flat markers, and flat marker within each row may differ from one burial section to the next. Discuss this issue with the

COR where this is found to occur. These measurements must be adhered to as closely as possible. Some variances may be allowed in order to keep a uniform appearance of flat markers being aligned from one section to the other. Markers must be accurately and precisely reinstalled on the correct gravesites with the use of temporary grave plotting maps, existing permanent control markers where available, with temporary contractor installed control markers accurately and precisely installed at the ends of each gravesite row.

F. Flat Marker Alignment, General

1. All measurements and string line set-ups must be taken from established section control markers and/or from temporary control markers installed by the contractor around the section and at the end of each grave row, not from previously set flat markers, unless otherwise directed by the COR. All measurements must be made in ascending grave number order. (See Exhibit 'D' – Flat Marker Realignment Diagrams.)
2. All markers in flat terrain must be leveled laterally and transversely using a bubble level. In rolling terrain where sloping ground conditions exist, all flat markers must be set with top surface at proper heights and levels to provide a uniform flowing transition through the rolling terrain.
3. Markers must be accurately and precisely reinstalled on the correct gravesites with the utilization of temporary grave plotting maps, existing permanent control markers where available and temporary contractor installed control markers accurately and precisely installed at the ends of each gravesite row.
4. Flat markers must be set in a line laterally, transversely, and diagonally with flat markers of other graves, and with flat markers in adjacent sections.
5. After all work has been completed, the flat markers in all soil and terrain conditions must be held firmly in place by the compacted topsoil and aggregate setting bed so that the flat markers are rigid with no give, play, or movement when subjected to forces by the COR.

G. Flat Marker Headstone Setting, and Alignment onto a Headstone Support System must be accomplished as follows:

1. The Contractor must pull the flat markers from the flat marker sockets and carefully store the markers on each associated gravesite.
2. (See Flat Marker Installation Details on Exhibit 'B' – Headstone Setting Details.)

3. Excavate a continuous trench under the marker support system. Compact the subgrade to 95 percent maximum dry density in accordance with ASTM D698.
4. Place and compact 3/4" minus crushed aggregate base under the plastic geogrid at marker locations. Compact to 92 to 95 percent maximum dry density in accordance with ASTM D1557 and establish proper grade for the placement of the plastic headstone support geogrid and the subsequent setting and alignment of the flat markers.
5. Place and compact amended topsoil underneath the plastic support geogrid where sod is to be planted. Compact to 90 to 92 percent maximum dry density in accordance with ASTM D698 and establish proper grade for the placement of the plastic headstone support geogrid.
6. Install continuous strip of plastic headstone support geogrid along the entire length of each flat marker row beginning at the edge of the first flat marker and continuing until reaching the far edge of the last flat marker in the same row. Connect plastic support grids together using snap on connectors in accordance with the manufacturer's printed instructions.
7. Fill voids in geogrid beneath the flat markers with 1/4-inch minus crushed aggregate levelling sand and compact with flat plate compactor.
8. Set Flat markers onto the plastic geogrid. Flat markers must be set to a depth so that the top surface of the flat marker is 1-inch above final grade in accordance with Camp Butler National Cemetery Master Plan.
9. Place and compact additional 1/4-inch minus crushed aggregate levelling sand to level flat markers as required, maximum 1-inch depth.

H. Aligning Flat Markers onto the Headstone Support System

1. The realign crew starts on a row of flat markers close to the center of the section to be realigned. Markers are chosen to be "key" stones. These keystones are ones that are visibly in line with the majority of the rest of the markers in the row, and are as close as possible to the proper measurements for that section of markers. "Key" stones must be chosen and utilized at a maximum of every 10th marker (or more frequently in areas of rolling terrain). These keystones are then aligned by leveling front and back and side-to-side, and raised or lowered to a final elevation relative to the topsoil level as determined by the COR.
2. At the start of work in each burial section, the first row of reset/realigned flat markers in each burial section will be inspected by COR for appearance, spacing, depth, alignment, plumbness, height, accuracy, and smoothness in

grade transition. No further setting of flat markers must be done until this first row has been inspected and accepted by the COR. It is the Contractors responsibility to notify the COR 24 hours in advance of when each of these inspections will be needed.

3. Heavy strings or lines must run along the side and top edges of the keystones. All line set-ups must be secured to retain proper alignment even in windy conditions. These lines are marked with the proper measurements- (size of section) for the section being aligned. All remaining flat markers in the row are then aligned along the strings front to back and side-to-side even with the measured marks on the line. Each flat marker must be adjusted front to back and side-to-side keeping the back of the flat marker along the string and the side of the flat marker along the measured mark. Maximum vertical, lateral, and transverse tolerance of any flat marker off the alignment string lines and/or marks must be 1/8-inch, or less.
 4. Each flat marker must be raised or lowered as necessary to be 1 inch above topsoil finished grade subject to the top string slopes required for the markers to flow with the sloping terrain. The flat marker must then be aligned along the string front to back and side-to-side even with the measured mark on the line. In flat terrain, the flat marker must be leveled and plumbed front to back and side-to-side keeping the back of marker along the string and the side of the marker along the measured mark.
 5. Adjustments to marker height and alignment must be made by placing and compacting 1/4-inch minus crushed aggregate levelling sand on top of the marker support geogrid.
 6. The alignment of the flat markers must be checked frequently during this process to ensure that the marker is not out of level or off the mark on the line. This process of raising and realigning is repeated for each row of markers. Flat markers in all completed work areas must be firmly set and anchored in place with no movement from forces subjected by the COR.
- I. Backfilling
1. Backfill amended topsoil into the remaining voids of the geogrid located between the flat markers and firmly compact this material into place.
 2. Backfill remaining gravesites areas around and between all flat markers from the subgrade to top of finish grade surface with 4 inches minimum of topsoil compacted to 85 percent maximum dry density in accordance with ASTM D-698 so that no settlement shall occur. Footprints must not be visible on the compacted topsoil when walked upon.

3.3 RECORD KEEPING AND REPORTING:

- A. The Contractor's Superintendent (or their designee) and COR (or COR's Representative(s)) must conduct a joint gravesite inspection and verification prior to the handling of any flat marker headstones to document the location and accuracy of all existing conditions. The COR will provide a printout of the burial records (BOSS) for this purpose with the following data fields. Section, Row, First and last name of the deceased. Upon completion of this joint survey, both the contractor's Superintendent and COR must certify the accuracy, as noted and initialed, by signing the burial record printout.
- B. Upon completion of the resetting and realignment of the headstones and markers, contractor's Superintendent and COR re-inspect and verify the accuracy of the placement of headstone and marker on the correct gravesite. Upon completion of this second joint survey, both the contractor's Superintendent and COR must certify the accuracy by re-signing the burial record printout.
- C. Record Keeping and Reporting: The Contractor's Project Manager must provide the COR(s) with weekly written accurate reports detailing the section and range of graves in that specific week. These lists will be provided on not less than a weekly basis, and must identify all of the above work that took place within the previous seven calendar days. Upon request, the Contractor's Project Manager must also provide a plan of action for the upcoming week, regarding headstone/marker locations and specific areas where work is being scheduled to occur.

3.4 HEADSTONE CLEANING:

- A. Headstone Cleaning, General: The Contractor must provide all labor, parts, equipment, supplies, transportation and personnel required to provide headstone/marker cleaning services.
- B. Definition: "Clean" under this contract means: The headstones/markers shall contain NO discoloration, environmental deposits, mold, mildew, moss, algae, lichen, dirt/mud, grass clippings, grass stains, tree sap, bird droppings, or other foreign stains and markings.
- C. Contractor Duties and Responsibilities:
 - 1. All equipment and supplies maintained and operated by the Contractor must be consistent and fully compliant with all applicable Federal, State, and County laws, ordinances and regulations and meet State inspection, safety, licensing, registration, and insurance requirements.
- D. Test-Cleaning Flat Marker Headstones
 - 1. The COR shall select five (5) badly-stained marble upright headstones and five (5) badly-stained granite flat markers for test cleaning in accordance with

the manufacturer's printed application instructions. Use dilution rates of cleaning solution as recommended by the manufacturer for granite and marble. Vary level of agitation, contact time, and rinsing for each of the five (5) test markers to determine optimum cleaning method. Allow a minimum of 7 days drying time before final inspection. Test markers shall serve as the performance standard and remain available for comparison during the cleaning process.

2. Each test marker must be carefully labeled, charted, and photographed. Approved test markers will become a part of the Work, and serve as the quality standard for similar type work on this project. Re-clean test markers not meeting quality standard.
 3. Contractor must prepare a written report detailing results of testing including description of methods employed, materials, concentration of cleaner, dwell times and other elements of test procedures as defined above.
 4. New turf sod, if installed at the time of the cleaning, must show no negative effects as a result of the cleaning process. Sod damage is unacceptable. Additional actions such as rinsing with water and/or masking of turf during application of cleaner and pressure-washing will be required at no additional cost to the Government.
- E. Cleaning of Flat Marker Headstones:
1. All temporary markers, floral, commemorative, or other types of decorations (arrangements) causing interference with the cleaning of headstones must be carefully and orderly moved from and, upon completion of the cleaning of the markers moved back to the gravesite by the Contractor.
 2. Cleaning techniques must demonstrate a clear understanding of, and the sensitivity to, such environmental issues as ground water contamination, wetlands, etc., and must be consistent and fully compliant with all applicable Federal, State, and County laws, ordinances and regulations. Clean water must be used to clean headstones. Cleaning techniques with water shall include high pressure spraying, hand scrubbing, and rinsing. When water under pressure is used, such pressure must not be greater than 500 psi. Excessive staining and/or discoloration may be removed with pressurized water and a stiff nylon brush (no wire brushes, bleach, or abrasive cleaners shall be permitted) followed by rinsing with clear water. If water used in cleaning should soften the soil around the footing of the headstone so that the headstone is loosened, care must be taken not to tip the headstone out of plumb or alignment. Care must be taken to protect the turf area from damage. Any turf damaged by the Contractor must be restored at Contractor's expense. Headstones must be set and anchored firmly in place with no movement from forces subjected by the COR or inspector after cleaning has been completed.

3. Applying the cleaner: Apply the cleaner according to the manufacturer's printed instructions. Mask the surrounding turf to minimize contact with the turf. Do not allow the cleaner to dry on the turf. Do not use cleaner product in a greater strength than the manufacturer recommends. Evenly apply the cleaner with a sprayer to saturate the surface. Always keep the stone wet during cleaning and thoroughly rinse afterwards.
4. Agitating the surface: Agitate the surface gently in a circular motion using a soft bristle brush. Work in small areas, starting from the bottom and moving toward the top of the headstone. Agitation will loosen soiling from the surface of the stone. Soft bristle brushes are required when cleaning stones. They can have natural or synthetic bristles. Vegetable brushes or soft grooming brushes for large animals are a few that can be found in chain or farm supply stores. All rough or metal edges must be covered with tape to reduce the chance of scratching the stone.
5. Rinsing the stone: Rinse after cleaning each area and to thoroughly rinse the stone at the end to make sure that no cleaner is left behind. A typical cleaning regime may include a three-person team. The first person sprays the stone surface with the biocidal cleaner. After the appropriate dwell time, a second person gently agitates the cleaner on the stone surface with a soft bristle brush, then a third person rinses the stone with clean tap water.
6. Pressure wash markers from a distance no closer than 12 inches and with a pressure of 500 psi or less. Some stones may not be able to tolerate these conditions depending on their condition. A test patch in a small unobtrusive area on the headstone is recommended prior to cleaning.
7. Contractor must submit the required Safety Data Sheets (SDS) to the COR prior to use of any chemicals including but not limited to 'D/2' and 'Weatherzyme'.
8. Should any headstones that have been cleaned but become marked, discolored, dirt covered, or muddied due to subsequent contract work including but not limited to turf re-establishment issues must be re-cleaned at no additional cost to the Government. Headstones that become discolored, dirt covered, or muddied, etc. after initial cleaning has been completed, but prior to acceptance, must be re-cleaned at no additional cost to the Government.
9. The Contractor's Superintendent must provide the COR(s) with weekly written accurate reports identifying the following: All headstones cleaned must be recorded per gravesite location. These lists will be provided on not less than a weekly basis, and must identify all of the above work that took place within the previous seven calendar days.

3.5 DAMAGE AND WARRANTY:

- A. Any headstones broken or damaged by the Contractor must be reported to the Cemetery Administrator or COR by close of business each working day in order that the grave can be properly marked. The Contractor must be responsible for the cost of the replacement if it is determined to be due to contractor not following proper procedures. The cost to replace contractor damaged upright headstones and flat markers will be deducted from the contract price at the rate of \$300.00 per headstone. Any grid or sectional monuments disturbed, displaced or broken must be replaced by the Contractor at his/her cost.
- B. Any grid or sectional monuments disturbed, must be properly reset by a licensed land surveyor at Contractor's expense at no additional cost to the Government. Curbs, roads, walks, turf, trees, utilities existing above and below the ground that are damaged or disturbed by the contractor during performance of contract work must be repaired at the expense of the contractor. Repairs to the above must be corrected by the Contractor within fourteen (14) workdays, unless otherwise agreed to with the COR.
- C. The Contractor is to warranty all work for a period of one (1) year after Final Acceptance by the Government. Workmanship pertaining to headstone adjustment, realignment, resetting, and backfilling that does not meet the specified requirements (including specified tolerance requirements) before the end of this warranty period is to be reworked, adjusted, and corrected by Contractor at no additional cost to the Government. Work performed under the warranty must be corrected within ten (10) workdays from receipt of notification or as directed by the COR.

END OF SECTION

SECTION 32 92 24 - TURF RENOVATION

PART 1 - GENERAL

1.1 TURF RENOVATION WITH SOD:

- A. General: Existing turf and weeds must be killed, removed and replaced with new sod as shown on the drawings. The area must be expertly graded and re-sodded resulting in a uniform stand of turf, high quality in appearance: Tops of upright headstone shall be 25 inches above finished grade measured to the top of the arc; tops of all flat marker headstones shall be 1-inch above the soil; or to a measurement as directed by the COR.

- B. Erosion and Sediment Control: Contractor must install and maintain erosion control material/methods to meet Federal, State, and local requirements. Copies of these requirements may be reviewed by contacting the COR(s). As necessary, the Contractor must install measures including, but not limited to, sedimentation fences and protection of storm drain inlets. Contractor is solely responsible to meet all Federal, State and local requirements for air quality, dust and particulate matter control. The Contractor is fully responsible for the control of any dust carried by the wind and will take the appropriate preventative measures.
- C. Topsoil Placement and Compaction: See “SECTION 31 00 00 - EARTHWORK, Paragraph 3.8 TOPSOIL PLACEMENT”.
- D. Agricultural Soil Testing:
1. Imported Topsoil: Soil samples must be collected from each source of imported topsoil intended for use on the project and be submitted to an independent, certified soil-testing laboratory to determine fertility requirements. Soil testing laboratories affiliated with a vendor or supplier will not be accepted. Contractor must provide a copy of each soil test results and recommendations to the COR and Midwest District Agronomist for review and approval. Soil test reports must indicate that the proposed imported topsoil(s) meets the specification for Topsoil as defined herein. Amend topsoil not meeting the pH, organic matter content, and fertility range specified by the addition of pH adjusters, organic soil amendments, and fertilizers.
 2. On-Site Existing Soil: Representative soil samples must be collected from a minimum of six (6) regions within the cemetery and be submitted to a certified agricultural soil-testing laboratory four to eight weeks prior to the intended re-sodding operation to determine fertility and pH adjustment requirements. Six (6) soil test reports are required, one for each of the regions defined below. Soil test reports must be labeled with the cemetery sections that are included in each region. Contractor must provide a copy of each soil test results and recommendations to the COR and Midwest District Agronomist for review and approval. As determined by the soil test, Elemental Sulfur and Gypsum may be required to adjust the soil pH and improve permeability, organic soil amendments to increase soil organic matter content, fertilizers to correct soil nutrient deficiencies, as well as other soil amendments to meet the specifications.
 3. Soil extractions must be performed in accordance with standard guidelines for agricultural soil sampling and under the observation of the COR.
 - a. A representative sample should consist of a composite of 15 to 20 sub-samples taken from the region where a single soil test is required.

- Equipment for sampling may be a spade, shovel, auger or soil sampling tube. Sub-samples should be extracted evenly throughout the region.
- b. Collect sub-samples from the anticipated root zone, (1 to 6 inches for turf), place in bucket, and mix thoroughly. Remove roots and leaves from the sample. Fill a clear, zip-top plastic bag with 1-quart of the soil and label each composite sample with Cemetery Name, Region number and Sections numbers.
 - c. Repeat for each of the remaining soil testing regions.
 - d. Attach a copy of this article to the work order so that the soils lab knows which soil analyses and recommendations are required.
4. Provide soil analyses in the form of a graphical report showing:
 - a. Soil composition (USDA particle size analysis indicating percentages of sand, silt and clay).
 - b. Percent organic matter.
 - c. Soil pH.
 - d. Macro and micronutrient fertility tests as determined by pH.
 - e. Salinity (ECe).
 - f. Nitrate nitrogen, ammonium nitrogen, phosphate phosphorous, potassium, calcium, magnesium, soluble copper, zinc, manganese, iron saturation extract, boron and sodium analyses.
 - g. Cation exchange capacity (CEC).
 - h. Sodium Adsorption Ratio (SAR).
 - i. Soil infiltration rate.
 5. Report suitability of tested soils for plant growth: Based upon the test results, the laboratory must provide recommendations for fertilizers and soil amendments to be applied to the soils for the establishment and maintenance of healthy turf planted from sod.
 - a. State recommendations for macro and micronutrients in pounds per 1,000 square foot, or tons per acre, as necessary to correct soil nutrient deficiencies.
 - b. State recommendations for soil amendments to be added in pounds per 1,000 square foot, or tons per acre to adjust soil pH to within the range of 6.5–7.5. (Limit elemental sulfur to 50 lbs/1000 sq-ft per application.)
 - c. State recommendations for soil amendments to be added in pounds per 1,000 square foot, or tons per acre to improve soil permeability and increase soil infiltration rates.
 - d. State recommendations for compost to be added in cubic yards per 1000 square feet to adjust soil organic matter content of the soil to a minimum of 4 percent and maximum of 6 percent.

PART 2 – PRODUCTS

2.1 COMPOST: See “SECTION 31 00 00 - EARTHWORK; article 2.1.I.”

2.2 STARTER FERTILIZER: Commercial, general-purpose turf starter fertilizer with a typical N:P:K analyses of: 16-24-10 or 16-16-16.

2.3 MULCH:

- A. Douglas Fir Bark, sized 5/8-inch minus with 100% passing 1-inch screen, to match existing bark mulch. Mulch material must be aesthetically pleasing, bark mulch, dark brown, free of any weeds and pests.
- B. Submit a 1/2 cubic foot sample to the COR for approval, prior to installation.

2.4 SOD:

- A. Sod must be nursery grown as classified in the TPI Guideline Specifications to Turfgrass Sodding, produced from Blue Tag certified seed and State of Illinois certified. The composition of the grass species in the sod shall be a mix of at least three seed cultivars. Each grass species must be a regionally adapted cultivar. The sod must be free from weeds, pests and diseases. Seed species must have achieved a NTEP average rating of 5.5 or greater out of 9. Submit sod grower's product data sheets to COR for approval prior to ordering sod.

2.5 TURF MAINTENANCE PRODUCTS:

- A. Turfgrass fertilizers based on recommendations of soils reports. commercial grade and uniform in composition, free-flowing granular complete analysis fertilizer containing a minimum of 20% by weight of nitrogen, 5% phosphoric acid and 15% potash with a minimum of 50% of the nitrogen from a controlled release source such as sulfur-coated urea.
- B. Soil conditioners, application rate and frequency based on recommendations of soils reports.
- C. Post-emergent selective herbicides for control of broadleaf and grass weeds, sedges, and other weeds in cool season turf.

PART 3 – EXECUTION

3.1 EROSION AND SEDIMENT CONTROL:

- A. Contractor must Install and maintain erosion control material/methods to meet Federal, State, and local requirements. Copies of these requirements may be reviewed by contacting the COR(s). As necessary, the Contractor must install measures including, but not limited to, sedimentation fences and protection of storm drain inlets.

- B. Contractor is solely responsible to meet with all Federal, State and local requirements for air quality, dust and particulate matter control. The Contractor is fully responsible for the control of any dust carried by the wind and will take the appropriate preventative measures.

3.2 IRRIGATION SYSTEMS:

- A. Testing and Demonstration: Cemetery personnel will test and demonstrate to the Contractor all irrigation systems and hardware prior to the start of work in any area. This inspection must be documented in the weekly work report. Note any system deficiencies in the report.
- B. Preparation: Prior to commencing any work, the Contractor will remove the irrigation heads, cap risers, and turn the heads over to the cemetery. Flag location of heads to prevent damage to irrigation piping during earthwork activities. Maintain flags until after installation of sod.
- C. Reinstallation and Adjustments:
 - 1. After headstones are reset and aligned and topsoil has been placed and compacted, uncap the existing sprinkler risers, flush irrigation lines and install the new irrigation heads in preparation for weed control measures.
 - 2. Set irrigation heads to proper height relative to finish grade for the sod installed as directed by the COR.
 - 3. Coordinate installation of irrigation heads within the turf paving system with the installer.
 - 4. Test irrigation system for leaks and proper functioning and make any necessary repairs.
 - 5. Make any nozzle changes as directed by the COR to achieve 100 percent head-to-head coverage. Make adjustments to arc and radius of the spray pattern as directed by the COR.
 - 6. Prior to the installation of sod, Contractor must ensure that all irrigation heads, valve boxes, and related components are 1 inch above finished grade, aligned correctly and in proper working order.
- D. Testing and Repair
 - 1. Any damage to the irrigation system caused by the Contractor must be repaired by the Contractor prior to sod installation at no additional cost to the Government.
 - 2. Prior to installing sod, demonstrate to the COR that the irrigation zone to receive sod is fully functional from the irrigation controller. Sod installation must be sequenced to conform to existing irrigation zones, such that sod is laid in areas that can be completely irrigated by the existing irrigation system without causing disruption to work in other areas.

3.3 VEGETATION REMOVAL:

- A. General: Remove turfgrass sod, weeds and their roots from within limits of work area. Cut a clean line between sod to be removed and sod in adjacent cemetery sections to be retained.
- B. Protection of Headstones: Ensure that the work involved for vegetation removal does not cause the headstones to be shifted out of alignment or moved from their sockets. Any misalignment of headstones must be corrected by the Contractor at no additional cost to the Government.
- C. Herbicide Application: Apply herbicide in a minimum of TWO APPLICATIONS in the sequence indicated below.
 - 1. First application: Do not turn off the irrigation system until just before the application of the herbicides. This will allow the turf to absorb the maximum amount of herbicide. Tank-mix herbicides following precautions of herbicide manufacturers.
 - 2. After the preparatory mowings, while the turf is still actively growing, the entire vegetated area must be sprayed with non-selective and selective herbicides, taking care to avoid drift of herbicides onto adjacent vegetation to be protected.
 - 3. Application rate shall be at the maximum label recommended rate for the complete kill of the existing turfgrass, *Poa annua*, sedges and other weeds.
 - 4. Follow product label instructions for elapsed time before moving to the next procedure to allow the herbicides to fully affect the plant material.
 - 5. Power rake or verticut the entire area to loosen residual plant debris, taking care not to disturb the headstone support systems where noted to be protected. Remove plant debris and dispose of legally off site.
 - 6. The area shall then be irrigated for a minimum of 14 days to encourage growth of any remaining plant material and germination of weed seed lying dormant in the topsoil.
 - 7. Second Application: When there is sufficient re-growth of vegetation as determined by the COR/Cemetery Director, the area will be retreated with non-selective and selective herbicides, again following the product label directions for time to elapse for the herbicides to fully affect the plants, before the start of soil preparation activities.
 - 8. Once again, Power rake or verticut the entire area to loosen residual plant debris as indicated above. Remove plant debris and dispose of legally off site.
 - 9. The Contractor must repeat this operation until the existing turf, *Poa annua*, sedges and other weeds have been eliminated, as determined by the COR/Cemetery Director.

3.4 IMPORTED TOPSOIL:

- A. Prior to placing imported topsoil, broadcast mycorrhizae onto the surface of the scarified subgrade. (See SECTION 32 00 00 – EARTHWORK). Place and compact 2-inches of imported topsoil to depths indicated in the Drawings to establish uniform finish grades as indicated in the approved Contractor-provided grading plan: Finish grades shall be 1-inch below flat markers; 3/4 to 1-inch (or a depth equal to the thickness of the sod root mass) below tops of curbs, concrete pads, vaults, valve boxes, etc. as directed by the COR/Cemetery Director.

3.5 AMEND TOPSOIL:

- B. Add preplant fertilizers, compost, elemental sulfur, gypsum and any other soil amendments recommended by the soils report to correct any deficiencies in the imported topsoils and to meet the requirements of these specifications.
- C. Till the soil to a depth of 4 inches to uniformly incorporate soil amendments and imported topsoil into the native topsoil to produce amended topsoil. Areas within the drip lines of existing trees shall not be tilled at a depth greater than 3 inches or backfilled not to exceed 2 inches from existing grades, or as approved by the COR. Any damage to tree roots must be avoided. If tree roots within the drip-line of a standing tree that are 1 inch in diameter or greater are encountered, the Contractor must request an inspection by the COR. The COR will inspect and determine if any roots will be pruned. The preference will be to relocate the roots into a deeper soil profile to avoid cutting of roots. Contractor must protect all trees, shrubs and plants. Plant material damaged, weakened or killed during the renovation must be replaced with its equivalent. Exceptions must be approved by the COR.
- D. Amended Topsoil (post-amended in-place soil testing): Following the incorporation of soil amendments, submit samples of amended topsoil for testing and verification that the soils meet the specifications and have no significant nutrient deficiencies. Contractor shall deliver samples to testing laboratory and shall have the test reports sent directly to the CO/COR. Tests shall be as conducted as indicated in paragraph 1.1 D.2 of this Section. No sodding shall occur until the COR has approved the amended topsoil.

3.6 FINE GRADING AND COMPACTION:

- A. General: The area will be graded and compacted to provide a smooth and flowing transition through uneven terrain and to avoid any appearance of layering of soil. Contractor shall use a laser level or similar device to maintain grade lines.

- B. Compaction: Restore the soil to an even condition before laying sod by rolling with a turfgrass roller well-suited to the soil being compacted. Do not operate mechanized vibratory compaction equipment, which may damage existing graveliners or caskets. The Contractor must not operate trucks, tractors, and other heavy equipment in excess of three (3) tons on any turf area except when authorized in writing by the COR/Cemetery Director. Finish grades must be thoroughly compacted to 85 to 90 percent dry density per ASTM D-698, to prevent further subsidence, but the soil must not be compacted to the degree that it prohibits the growth of healthy turf. The compacted soil must not show evidence of depressions when walked upon.
- C. Contractor must establish lines and grades for approval by COR/Cemetery Director or designee. Grades must conform to elevations to provide a smooth transition at curbs, trees, planters and uninterrupted drainage flow into existing drains, and to prevent any “scalping” of the new turfgrass when mowed.
- D. Contractor must request COR/Cemetery Director’s approval of lines and grades. Contractor will be responsible for any additional cut and/or fill required to ensure that the site is graded to conform to elevations as determined by the COR/Cemetery Director.

3.7 SOD BED PREPARATION:

- A. The finished bed must be fine in texture and firmly compacted and free of any stones, plant or other debris greater than 13mm (1/2 inch). All irregularities in the finished surface must be corrected to eliminate depressions and high spots.
- B. Finish grade of soil shall be the depth of sod root mass (approx. 3/4 to 1-inch) below adjacent pavement, and flush with finish grades of adjacent burial sections.
- C. Valve boxes, sprinkler heads and related irrigation components are to be adjusted to 1-inch above finish grade or as directed by the COR.
- D. Complete turf renovation only after areas are brought to the final grade and have been reviewed and approved by the COR.
- E. All finished topsoil areas must be protected from damage from vehicular or pedestrian traffic.

3.8 STARTER FERTILIZER:

- A. Two applications of starter fertilizers are required, one prior to sod placement and another after the first mowing. The fertilizer application shall be high in phosphorous and provide no greater than 1 pound of Nitrogen and at least 1 pound of Phosphorous per 1,000 square feet.
- B. Use properly calibrated fertilizer spreader equipment to broadcast fertilizers at prescribed application rates.

3.9 SOD INSTALLATION:

- A. Prior to delivery of sod, the COR(s) shall inspect the work area. Any discrepancies in the ground preparation must be corrected prior to the laying of sod in the work area.
- B. Prior to installation of the sod, the COR shall have the right to inspect and to assess the acceptability and quality of the proposed sod. The COR shall have the right to reject poor quality sod before installation.
- C. The sod shall be cut as thinly as possible (3/4 to 1-inch) to allow for faster rooting and must be cut and delivered to the work site the same day of installation. Contractor must make all necessary arrangements to protect delivered sod from excessive drying and wind damage.
- D. Sod must be laid expeditiously without interruption, until the work area is completely sodded.
- E. Stagger transverse joints in sod in a “running bond” pattern so seams in adjacent strips do not align. Sod must be laid with seams tightly matched, and then tamped lightly or rolled to ensure firm contact with the soil and no air gaps.
- F. Sod placement must conform to the existing adjacent grade. On slopes, sod shall be laid perpendicular to the direction of the slope.
- G. Sod must be cut and fitted around all markers, headstones, sprinkler heads, valve boxes, edges of paving/curbs, and other fixed objects.
- H. Sod must be cut around trees to provide location for mulch tree rings. Size of mulch rings shall be determined by the COR/Cemetery Director, but in no case less than 24 inches radius scribed around the tree trunk. For coniferous trees with branching at ground level, the mulch ring shall be cut 12 inches beyond the dripline to allow access for lawn mowers.
- I. Water sod with fine water spray within two hours of planting, or sooner if temperatures are above 80 degrees F. Irrigate to ensure thorough wetting of

the soil to a depth of at least 3 inches (75 mm). Sod must be kept continually moist until it is well rooted and able to survive with standard watering.

- J. Immediately after installation of the sod, protect against traffic or other use by erecting barricades, as required, and placing approved signs at appropriate intervals until Final Acceptance.
- K. The contractor must warranty the sod for one (1) year after the date of Final Acceptance of the project.

3.10 REQUESTS TO IRRIGATE:

- A. Requests to irrigate newly placed sod, to include amount and frequency, must be made to and approved by the COR/Cemetery Director, or their designee. Access to and programming of the irrigation remote control valves will be performed by cemetery personnel at the direction of the COR/Cemetery Director or their designee. Contractor will not manually override the electronic irrigation control system unless specifically authorized to do so by the COR/Cemetery Director, or their designee.

3.11 MULCH:

- A. Cut and remove sod in a circle around the trunks of existing trees. Provide a 3-inch deep layer mulch material to tree mulch rings, and other areas surrounding groves of trees where lack of sunlight and/or preponderance of tree roots preclude the growth of turf. The outline and extent of these areas will be determined in the field by the COR at the time of turf area surveying.
- B. Maintain mulch in a uniform depth. Hand weed and/or use appropriate chemical controls for weed control in mulch beds until Final Acceptance.

3.12 TURF ESTABLISHMENT PERIOD:

- A. The Establishment Period for turf shall begin immediately after complete sodding of a section(s) with the approval of the COR or designee, and continue for a minimum of 30 days, at which time the Government will perform the final "turf inspection" and acceptance for that particular section(s).
- B. During the 30 days Turf Establishment Period, the Contractor must:
 - 1. Eradicate all weeds. Fertilize, re-sod, and perform any other operation necessary to promote the growth of uniform, healthy, high quality turf.

2. Irrigate to keep the sod moist and healthy to promote rooting. Conserve water by scheduling multiple start times to prevent run-off. Adjust sprinkler heads to minimize overspray onto pavement.
3. Replant areas void of turf 1/2 sq-ft (one-half square foot) and larger in area with matching sod species.
4. Begin mowing with newly sharpened mower blades when grass is 100 mm (4 inches) high to a height of 65 mm to 75mm (2-1/2 inch to 3 inches) and maintain the turf at that height. Never remove more than 1/3 the leaf surface in a single mowing. Turf is also to be trimmed between the headstone markers to the same height of the surrounding turf without scalping.

3.13 CLEAN UP AND REPAIR:

- A. Upon completion of the work, the Contractor must remove all debris, rubbish, and excess material from Cemetery Property unless noted otherwise.
- B. A temporary storage site shall be provided by the cemetery for short-term storage. Contractor may provide own storage container for tools, equipment, and materials purchased for performance on this contract. Storage container shall not exceed 22 feet in length and can only be placed where approved by COR.
- C. At the end of each day the Contractor must remove all debris from the work site to disposal areas. The Contractor must ensure at all times that rubbish and trash generated by the Contractor is removed from paved areas and is kept clear of vehicular and pedestrian traffic throughout the site. The Contractor is fully responsible for disposal of debris. The Government shall not provide receptacle(s) for disposal of debris related to this contract. All unsuitable/unusable materials are to be disposed of off-site in a legal manner.
- D. Dispose of soils and organic matter, plastic, glass, metal, paper waste and concrete generated by the Contractor off-site in a legal manner.
- E. Contractors must be responsible for cleaning any cemetery structures that are soiled or stained as a result of contractor's performance. The Contractor must wash-down with water all soiled or stained structures and grounds at the end of each workday. No chemicals are to be used during the wash down. The Contractor must bear all costs associated with washing and cleaning. Any such soiled or stained areas must be brought to the immediate attention of the COR(s) prior to washing/cleaning.

- F. In areas where planting and turf work have been completed, clear the area of all debris, spoil piles, and containers. Clear all other paved areas when work in adjacent areas is completed. Remove all debris, rubbish and excess material from the Cemetery, except as permitted herein. Segregate and stockpile excess topsoil and organic soil amendments, and haul to the cemetery spoils area, or as directed by the COR.
- G. The contractor and COR(s) shall inspect the trees and shrubbery of a scheduled turf renovation area prior to the start of the renovation and note all abnormalities or existing conditions. Another inspection will be conducted after the completion of the renovation and the contractor will make all corrective actions to any noted damage. A licensed arborist will complete all corrective actions to damaged trees at the Contractor's expense.
- H. Where existing or new turf areas have been damaged or scarred during planting and construction operations, the Contractor must restore disturbed area to their original condition.

END OF SECTION

C. LIST OF EXHIBITS Pages

<u>Exhibit ‘A’</u> – Camp Butler National Cemetery Renovation Areas (22”x 34” sheet)	1
<u>Exhibit ‘B’</u> – Headstone Setting Details (22”x 34” sheet).....	1
<u>Exhibit ‘C’</u> – Upright Headstone Realignment Diagrams	2
<u>Exhibit ‘D’</u> – Flat Marker Realignment Diagrams	2
<u>Exhibit ‘E’</u> – Example Site Survey, Headstone Realignment and Grading Plans	3

D. LIST OF ATTACHMENTS Pages

<u>Attachment 1</u> – Work Summary & Progress Report (Uprights)	2
<u>Attachment 2</u> – Work Summary & Progress Report (Flats)	3
<u>Attachment 3</u> – Contract Performance & Quality Assurance Report	13
<u>Attachment 4</u> – Contract Discrepancy Report.....	1
<u>Attachment 5</u> – Initial Headstone/Marker Raise and Realign Verification Survey (form).....	1
<u>Attachment 6</u> – Daily Headstone/Marker Raise & Realign Verification Survey (form) ...	1
<u>Attachment 7</u> – Herbicide Application Data Sheet	1
<u>Attachment 8</u> – Contractor’s Employee Statement of Compliance	2
<u>Attachment 9</u> – Contractor’s Daily Log of Construction	3

ATTACHMENT 1
WORK SUMMARY & PROGRESS REPORT
UPRIGHT HEADSTONE RAISE & REALIGNMENT

WORK SUMMARY & PROGRESS REPORT		Period Covered:	From:	To:
<u>Cemetery Location:</u> <u>Project Title:</u> National Shrine Project Upright Headstone Raise and Re-alignment Contract No:		Contractor Information: 		
<i>Inspection / Acceptance: The Contractor shall only tender for acceptance those items that conform to the requirements of this contract. The Government reserves the right to inspect or test some or all of the services that have been tendered for acceptance. The Government may require re-performance of nonconforming services at no increase in contract price. The Government shall exercise its post-acceptance rights:</i> <i>1. Within a reasonable time after the defect was discovered or should have been discovered; and</i> <i>2. Before any substantial change occurs in the condition of the item unless the change is due to the defect in the item.</i>				
WORK COMPLETED & SUBMITTED FOR ACCEPTANCE (This form is not to be used as an Invoice)				
1.	Section keystones have been properly chosen with the approval of the COR in order to achieve a smooth, flowing transition between the rows and columns. Keystones have been set in accordance with the requirements using a licensed surveyor.	No. of Keystones & Section #'s:		
		Date Completed:		
2.	Upright headstone sockets are dug with a 3-inch minimum clearance on all four sides and the bottom of the headstone to meet the height and alignment requirements. Sockets are clean and free of loose dirt and debris. The crushed stone base material has been added to the correct level and fully compacted.	Quantity & Section #'s:		
		Date Completed:		
3.	Upright headstones in burial sections are uniform in height (25") above ground (20" for older/smaller headstones), horizontally and vertically plumb, with inscriptions visible, and installed to ensure a pleasing top line while compensating for irregular terrain (sloping and uneven ground). Transverse and lateral alignment is within the maximum allowable tolerance of 1/8" and vertical alignment is within one degree of fully vertical when measured on front and sides using a digital level. COR has randomly sampled the headstones to verify height and alignment.	Quantity & Section #'s:		
		Date Completed:		

4.	Completed raised and realigned headstones in all soil and terrain conditions are firmly set in place so that the headstones are rigid with no give or play. COR has randomly checked to assure headstones are firmly set in place.	Section Numbers:	
		Date Completed:	
5.	Headstones otherwise present a neat overall appearance in a line vertically, laterally & transversely and provide a uniformly flowing transition throughout the Section and with adjoining Sections.	Section Numbers:	
		Date Completed:	
6.	Headstones have been cleaned in accordance with the contract requirements.	Quantity & Section #'s:	
		Date Completed:	
Report below any circumstances which may have adversely affected work progress such as weather, strikes, delays by the Government, etc.			
Signature of Contractor:	Date Signed	Signature of Cemetery Director / COR	Date Signed
<i>Note: Contractor shall sign confirming that services indicated have been completed. Government shall also sign in acknowledgment of receipt of the Progress Report.</i>			

Duplicate Form as Necessary

ATTACHMENT 2
WORK SUMMARY & PROGRESS REPORT
FLAT MARKER RAISE & REALIGNMENT

WORK SUMMARY & PROGRESS REPORT	<i>Period Covered:</i>	From:	To:
<u>Cemetery Location:</u>	Contractor:		
Project Title: National Shrine Project			
Flat Marker Raise and Re-alignment			
<u>Inspection / Acceptance.</u> The Contractor shall only tender for acceptance those items that conform to the requirements of this contract. The Government reserves the right to inspect or test some or all of the services that have been tendered for acceptance. The Government may require re-performance of nonconforming services at no increase in contract price. The Government shall exercise its post-acceptance rights— 1. Within a reasonable time after the defect was discovered or should have been discovered; and 2. Before any substantial change occurs in the condition of the item unless the change is due to the defect in the item.			

Work Completed & Submitted for Acceptance <i>(This form is not to be used as an Invoice)</i>
--

OPTIONS 2, 3, 4 and 5			
1.	Compaction Testing	Total number of compaction tests	▶ _____ / EA
		Cemetery Section(s)	▶ _____
2.	Flat Granite Marker Setting, Alignment & Backfill onto Headstone Support System	Total # Flat Markers:	▶ _____ / EA
		Cemetery Section(s)	▶ _____

3.	Soil Compaction Testing	Total number of compaction tests	▶ _____ / EA
		Cemetery Section(s)	▶ _____
4.	Base Compaction Testing	Total number of compaction tests	▶ _____ / EA
		Cemetery Section(s)	▶ _____
5.	R&R Flat Marker Headstones	Total # Flat Markers:	▶ _____ / EA
		Cemetery Section(s)	▶ _____
6.	Clean Flat Markers	Markers cleaned	▶ _____ / EA
		Cemetery Section(s)	▶ _____
7.	Agricultural Soil Testing and Recommendations	Total number of soil tests	▶ _____ / EA
		Cemetery Section(s)	▶ _____
8.	Turf Renovation	Total Square Feet of Turf Area.	▶ _____ SF
		Cemetery Section(s):	▶ _____

<i>Report below any circumstances which may have adversely affected work progress such as weather, turf conditions, strikes, delays by the Government, etc.</i>

<i>Signature of Contractor:</i>	<i>Date Signed</i>	<i>Signature of Cemetery Director / COR</i>	<i>Date Signed</i>
_____	_____	_____	_____
<i>Note: Contractor shall sign confirming that services indicated have been completed. Government shall also sign in acknowledgment of receipt of the Progress Report.</i>			

Duplicate Form as Necessary

ATTACHMENT 3

CONTRACT PERFORMANCE & QUALITY ASSURANCE REPORT					
Location:		Contract No:		Testing of compaction of: sf of subgrade; sf of aggregate; sf of amended topsoil.	
Project Title:		Obligation No:		Total Sq-Ft Tested: _____	
COR:		Contractor:		Total Sq-Ft Accepted: _____	
Cemetery Section Inspected: _____		Date of Inspection: _____		Total Sq-Ft Rejected: _____	
Inspection Frequency:		☐ Daily ☐ Weekly ☐ Random ☐ Other (<i>please specify</i>)			
<u>Description of Services Provided</u>					
Testing				<u>STATUS</u>	
<u>REQUIREMENT:</u>				Met	*Did Not Meet
1.	Test in place compaction of Subgrade (90% maximum dry density); 1 test per 2,000 sq-ft, but not fewer than 6 tests.			[]	[]
2.	Test in place compaction of Aggregate Base (95% maximum dry density); 1 test per 2,000 sq-ft, but not fewer than 6 tests.			[]	[]
3.	Test in place compaction of Amended Topsoil (85% maximum dry density); 1 test per 20,000 sq-ft, but not fewer than 6 tests.			[]	[]

	*Deficiency(s): Detail below specific contract requirement(s) which Contractor "Did Not Meet" and necessary corrective action. (<i>Note: When deficiencies are cited, the Contractor is required to sign & acknowledge receipt of the report.</i>)		<u>Corrective Action</u>	
(a)				
(b)				
(c)				
		Date: _____		Date: _____
<i>COR Signature</i>			<i>Contractor Signature</i>	

CONTRACT PERFORMANCE & QUALITY ASSURANCE REPORT					
Location:		Contract No:		R&R Flat Headstones: Total Est. Qty	
Project Title:		Obligation No:		Quantity Inspected: _____	
COR:		Contractor:		Quantity Accepted: _____	
Cemetery Section(s) Inspected: _____		Date of Inspection: _____		Quantity Rejected: _____	
Inspection Frequency:		☐ Daily ☐ Weekly ☐ Random ☐		<u>NCA Standard:</u> Headstones are horizontally and vertically aligned. Proper height and alignment of each marker is maintained.	
		Other (please specify)			
<u>Description</u>					
Upright Headstone Reset, Realign, Backfill & Clean Headstones				<u>STATUS</u>	
<u>REQUIREMENT PER THE STATEMENT OF WORK</u>				Met	*Did Not Meet
1.	Contractor creates grave plotting maps that show specific locations of each headstone by actual number and name. Map is verified with COR.			[]	[]
2.	Section keystones have been properly chosen with the approval of the COR in order to achieve a smooth, flowing transition between the rows and columns.			[]	[]
3.	Headstones are removed from their sockets and placed on their gravesites. (Headstones are not to be removed from their respective gravesites.)			[]	[]

4.	Upright headstone sockets are dug with a 3" minimum clearance on all four sides and the bottom of the headstone to meet the height and alignment requirements. Sockets are clean and free of loose dirt and debris. The crushed stone aggregate has been added to the correct level and fully compacted at the bottom and along all sides of the headstone to the proper elevation leaving 4-inches for placement of topsoil.	[]	[]
5.	Upright headstones in burial sections are uniform in height (25") above ground (20" for older/smaller headstones), horizontally and vertically plumb, with inscriptions visible, and installed to ensure a pleasing top line while compensating for irregular terrain (sloping and uneven ground). Transverse and lateral alignment is within the maximum allowable tolerance of 1/8" and vertical alignment is within one degree of fully vertical when measured on front and sides using a digital level. COR has randomly sampled the headstones to verify height and alignment.	[]	[]
6.	Completed raised and realigned headstones in all soil and terrain conditions are firmly set in place so that the headstones are rigid with no give or play. COR has randomly checked to assure headstones are firmly set in place.	[]	[]
7.	Headstones otherwise present a neat overall appearance in a line vertically, laterally & transversely and provide a uniformly flowing transition throughout the Section and with adjoining Sections.	[]	[]
8.	Headstones have been cleaned in accordance with the contract requirements.	[]	[]
<u>*Deficiency(s):</u> Detail below specific contract requirement(s)) which Contractor <i>"Did Not Meet"</i> and necessary corrective action. (<i>Note:</i> When deficiencies are cited, the Contractor is required to sign & acknowledge receipt of the report.)		<u>Corrective Action</u>	
(a)			

(b)				
(c)				
(d)				
(e)				
(f)				
	<i>COR Signature</i>	Date: _____	<i>Contractor Signature</i>	Date: _____

CONTRACT PERFORMANCE & QUALITY ASSURANCE REPORT				
Location:		Contract No:		R&R Flat Headstones: Total Est. Qty
Project Title:		Obligation No:		Quantity Inspected: _____
COR:		Contractor:		Quantity Accepted: _____
Cemetery Section(s) Inspected: _____		Date of Inspection: _____		Quantity Rejected: _____
Inspection Frequency:		☐ Daily ☐ Weekly ☐ Random ☐ Other (please specify)		NCA Standard: Headstones are horizontally and vertically aligned. Proper height and alignment of each marker is maintained.
Flat Marker Reset, Realign, Backfill & Clean Headstones			STATUS	
REQUIREMENT PER THE STATEMENT OF WORK			Met	*Did Not Meet
1.	Contractor creates grave plotting maps that show specific locations of each marker by actual number and name. Map is verified with COR.		☐	☐
2.	Section keystones have been properly chosen with the approval of the COR in order to achieve a smooth, flowing transition between the rows and columns.		☐	☐
3.	Markers are removed from their sockets and placed on their gravesites. (Markers are not to be removed from their respective gravesites.)		☐	☐
4.	Remove the existing plastic marker support system, leveling sand, and aggregate base.		☐	☐

5.	Subgrade is ripped to a depth of 8 to 12-inches; soil buster (gypsum equivalent) and compost are applied and tilled to a depth of 6-inches. Subgrade is leveled and compacted leaving depth for 2-inches of imported topsoil and soil amendments to establish finish grade.	[]	[]
6.	A continuous trench is dug underneath the row of markers to accept the marker supports system, and the subgrade is compacted to 95% maximum dry density.	[]	[]
7.	3/4" minus crushed aggregate base is installed to design grade underneath the plastic support geogrid at marker locations only and compacted to 95% maximum dry density.	[]	[]
8.	Amended topsoil is installed to design grade underneath the plastic support geogrid where sod is to be planted and compacted to 90% maximum dry density.	[]	[]
9.	Plastic marker support geogrid is installed in continuous length for each row.	[]	[]
10.	1/4" minus crushed aggregate leveling sand is installed and compacted in the cells of the plastic marker support geogrid at marker locations only.	[]	[]
11.	Markers are correctly installed on plastic marker support geogrid: set in a line laterally, transversely, and diagonally with flat markers of other graves, and the top surfaces at proper heights and levels to provide a uniform flowing transition through the rolling terrain.	[]	[]
12.	Markers are verified to be reinstalled on the correct gravesites using temporary grave plotting maps, existing permanent control markers where available, and temporary contractor installed control markers precisely installed at the ends of each gravesite row	[]	[]

13.	Amended topsoil is placed and compacted in the cells of the plastic marker support geogrid. Amended topsoil consisting of minimum of 2-inches of imported topsoil over 2-inches of existing topsoil is placed throughout the entire renovation area where sod is to be planted.	[]	[]
14.	Imported topsoil and soil amendments are tilled to 4-inches depth into the native topsoil to create amended topsoil.	[]	[]
15.	Markers in all completed work areas are firmly set and anchored in place with no movement from forces subjected by the COR and correct in appearance, spacing, depth, alignment, plumbness, height, accuracy, and smoothness in grade transition.	[]	[]
16.	Markers are cleaned using headstone cleaning agent and pressure washing.	[]	[]
17.	Any contractor caused damage is repaired according to this Work Statement.	[]	[]
*Deficiency(s): Detail below specific contract requirement(s)) which Contractor "Did Not Meet" and necessary corrective action. <i>(Note: When deficiencies are cited, the Contractor is required to sign & acknowledge receipt of the report.)</i>		<u>Corrective Action</u>	
(a)			
(b)			
(c)			
(d)			
(e)			

(f)		
(g)		
(h)		
(i)		
(j)		
(k)		
(l)		
(m)		
(n)		
(o)		
(p)		
		Date: _____
	<i>COR Signature</i>	
		Date: _____
	<i>Contractor Signature</i>	

CONTRACT PERFORMANCE & QUALITY ASSURANCE REPORT					
Location:		Contract No:		Renovation & Re-establishment of sf of turf.	
Project Title: Headstone Support System / R-R & Clean Headstones/Turf Renovation		Obligation No:		Total Sq-Ft Inspected: _____	
COR:		Contractor:		Total Sq-Ft Accepted: _____	
Cemetery Section(s) Inspected:		Date of Inspection: _____		Total Sq-Ft Rejected: _____	
Inspection Frequency:	☐ Daily ☐ Weekly ☐ Random ☐ Other (<i>please specify</i>)				
<u>Description of Services Provided</u>					
Turf Renovation by Sod				<u>STATUS</u>	
<u>REQUIREMENTS PER THE STATEMENT OF WORK:</u>				Met	*Did Not Meet
(a)	Soil samples collected and submitted to certified soil testing laboratory. Soil test report and recommendations furnished to the COR upon completion of the laboratory testing.			[]	[]
(b)	Exposed components of the irrigation system, valve boxes, sprinklers, controllers, have been protected.			[]	[]
(c)	The entire vegetated area has been treated with an application of a non-selective and selective herbicides by a licensed pesticide applicator to kill weeds and existing turf. A minimum of 10 to 14 days has elapsed for the herbicides to fully translocate throughout all plant parts. The COR confirms that all vegetation in the treated area is completely dead.			[]	[]
(d)	The entire treated area has been power raked or verti-cut and all residual plant debris including thatch has been removed.			[]	[]

(e)	The area has been irrigated for a minimum of 14 days to encourage growth of any remaining plant material and germination of weed seed lying dormant in the topsoil.	[]	[]
(f)	The entire turf renovation area has been treated a second time with an application of a non-selective and selective herbicides by a licensed pesticide applicator to kill remaining, and newly germinated weeds and turfgrasses. A minimum of 10 to 14 days has elapsed for the herbicide to fully translocate throughout all plant parts. The COR confirms that all vegetation in the treated area is completely dead.	[]	[]
(g)	Two inches (2") of imported topsoil is applied. Fertilizer and soil amendments are broadcast onto the topsoil per soils report and thoroughly rototilled into the soil to a minimum depth of 4 inches to produce amended topsoil.	[]	[]
(h)	Amended topsoil has been graded, leveled, compacted to 85% maximum dry density, and raked to achieve a finished appearance that is smooth, uniformly level, and free of all surface ripples, depressions, high spots, low areas, ridges and stones larger than 1/2-inch. The finish grade is a maximum of the sod thickness below the adjoining grade of any finished surface and is nominally 25-inches below the tops of all upright headstones and 1-inch below the top of all flat markers unless otherwise approved by the COR.	[]	[]
(i)	Irrigation equipment is re-installed, and irrigation system tested, repaired, and determined fully functional.	[]	[]
(j)	Irrigation heads and valve boxes are brought to proper relationship with finish grade with tops of heads and valves boxes at 1-inch above finish grade.	[]	[]
(k)	Turfgrass starter fertilizer has been uniformly broadcast onto the prepared sod bed with a properly calibrated fertilizer spreader at the rate specified for the specified Kentucky Bluegrass sod.	[]	[]
(l)	Turfgrass sod has been installed using certified sod as specified. Sod pieces are not stretched or overlapped and that all joints are butted tightly to prevent voids that would cause air drying of the roots and to prevent weed growth, and lightly rolled to ensure proper soil contact.	[]	[]

(m)	Turf is properly maintained during Turf Establishment Period as described in the Work Statement: weeds, diseases, pests eradicated, bare areas re-sodded, area correctly mowed, trimmed, and irrigated.	[]	[]
(n)	Any contractor caused damage is repaired according to this Work Statement.	[]	[]
	*Deficiency(s): Detail below specific contract requirement(s) which Contractor "Did Not Meet" and necessary corrective action. (<i>Note: When deficiencies are cited, the Contractor is required to sign & acknowledge receipt of the report.</i>)	<u>Corrective Action</u>	
(a)			
(b)			
(c)			
(d)			
(e)			
(f)			
(g)			
(h)			
(i)			
(j)			
(k)			

(l)				
(m)				
(n)				
	Date: _____		Date: _____	
	<i>COR Signature</i>		<i>Contractor Signature</i>	

ATTACHMENT 4 CONTRACT DISCREPANCY REPORT (CDR)

CONTRACT DISCREPANCY REPORT				
Contract Number:			Report No. for this Discrepancy:	
To: (Contractor/Manager's Name)			From: (Name of COR)	
5. Dates				
5a. Prepared:		5b. Returned by Contractor:		5c. Action Complete:
Discrepancy or Problem: (Describe in detail. Include reference to PWS Directive; attach additional sheet if necessary.) 				
Signature of Contracting Officer or COR:				
8a. To: (Contracting Officer and/or COR)			8b. From: (Contractor)	
9. Contractor Response as to Cause, Corrective Action and Actions to Prevent Recurrence: (attach additional sheet if necessary.) 				
10a. Signature of Contractor Representative:				10b. Date:
11. Government Evaluation: (Acceptance, partial acceptance, reflection; attach additional sheet if necessary.) 				
12. Government Actions: (Reduced payment, cure notice, show cause, other) 				
13. Close Out				
	Name	Title	Signature	Date
Contractor Notified				
b. COR				
c. CO				

ATTACHMENT 5

INITIAL HEADSTONE/MARKER RAISE & REALIGN VERIFICATION SURVEY

Station Number: _____ Date: _____

Cemetery: _____ Cemetery Director: _____

Contracting Officers Representative: _____

Instructions: The Contracting Officer's Representative (COR) /Cemetery Director/Cemetery Foreman/ Work Leader/designee MUST conduct an initial survey of ALL headstones/markers included in the scope of work (SOW) before any work is performed. The COR/Cemetery Director/Cemetery Foreman/Cemetery Work Leader/designee will use the Burial Register Report and the Gravesite Layout Map(s) for the initial survey.

Discrepancy/Issue Identified: Y/N _____ Date: _____

All discrepancies/issues resolved Y/N _____ Date: _____

I certify that the Initial Headstone/Marker verification survey was completed by the COR/Cemetery Director/Foreman or Work Leader/designee. The Burial Register Report and the Gravesite Layout Map for the Cemetery and sections listed in the SOW were used to complete the survey.

COR/Director/Foreman/Work Leader/designee Signature: _____

Date: _____

Prior to the completion of the workday, a Daily Headstone/Marker R&R Verification Survey MUST be completed by the COR/Cemetery Director/Cemetery Foreman/Work Leader/designee utilizing the same Burial Register Report and Gravesite Layout Map as used in the initial survey for ALL completed work.

ATTACHMENT 6

DAILY HEADSTONE/MARKER RAISE & REALIGN VERIFICATION SURVEY

Station Number: _____

Date: _____

Cemetery: _____

Cemetery Director: _____

COR: _____

Instructions: Prior to the completion of the workday, the Cemetery Director/COR/Foreman/Work Leader/designee MUST perform a re-verification survey for ALL completed work of headstones/markers included in the scope of work. The Cemetery Director/COR/Foreman/Work Leader/designee will use the original Burial Register Report and Gravesite Layout Map used for the Initial Verification Survey.

List Sections and Headstones/Markers R&R: _____

List discrepancy/issue: _____

All discrepancies/issues resolved: Y/N _____

Cemetery Director/COR/Foreman/ Work Leader/designee informed District Office Director and Contracting Officer of all unresolved discrepancies/issues: Y/N _____

By signing below, I certify the Headstone/Marker re-verification survey was completed.

Daily Headstone Verification:

Date: _____

Time Completed: _____

COR/Director/Foreman/Work Leader/designee Signature: _____

ATTACHMENT 7: HERBICIDE APPLICATION DATA SHEET

	Date:	Applicator:	
APPLICATION SITE		Location:	
	Size of Treatment Area:	Plant Age and Condition:	
	Description (Turf, Bed etc.):	Soil Conditions:	
	Surrounding Sensitive Areas:		
	Previous Herbicides Used:		
TARGET WEED (TURF) SPECIES	Primary Weed (Turf):	Damage Observed:	
	Other Weeds (Turf) Present:	Location of Damage:	
	Other Weeds (Turf) Present:		
	Severity of Weed Problem:		
HERBICIDE(S) USED	Herbicide(s):Formulation:	Rate:	Total Amount Used:
	(1)		
	(2)		
	(3)		
	Adjuvants Type:	Amount:	Total Gallons of Diluted Spray Used:
	Surfactant Type:	Amount:	
APPLICATION	Date(s) of Application:	Weather Conditions Temperature:	
	Equipment used:	Cloud Cover:	
		Wind Speed:	
	Equipment Calibrated By:	Wind Direction:	
		Rain:	
		Travel Speed:	
		Total Hours for Application:	
	Persons Notified or Spoken to Regarding Application:		
	(1)		
	(2)		
	(3)		
FOLLOW UP	Effectiveness of Application:	Beneficials Present:	Pest Resurgence Noted:
	Injury to Non-Target Plants or Surfaces:		
COMMENTS			
Signature & Date			

ATTACHMENT 8

CONTRACTOR'S EMPLOYEE STATEMENT OF COMPLIANCE

EMPLOYEE NAME: _____

POSITION/TITLE: _____

DATE: _____

Please check the appropriate blank.

_____ New Employee, New Contractor

_____ Annual Confirmation for current Employees or Contractor(s)
(Due on Nov. 1 of each Contract year or immediately after NTP.)

FOR ALL EMPLOYEES

I have been briefed and understand the following guidance:

INITIALS

_____ The National Cemetery Administration honors veterans with a final resting place and lasting memorial that commemorate their service to our Nation. National Cemeteries are National Shrines. Therefore, the standards for management, maintenance, appearance and operational procedures have been established by the National Cemetery Administration to reflect this Nations' concern and respect for those interred there. For this reason, my strict adherence to the Performance Work Statement, Performance Work Requirements Summary and Guidance Specifications shall be required and shall be essential.

_____ I will remain aware of the remains buried in the grounds where work is being performed. The utmost care must be given to these remains and the headstones and flat grave markers that mark those gravesites and memorialize the service of individuals.

_____ I will not walk, stand, lean, sit or jump on headstones, markers, or monuments. Nor will I drive over them.

_____ I will not place or lean tools, equipment, or other items on headstones, markers, or monuments at any time.

_____ I have been briefed on the approved methods and tools to remove headstones and markers from their sockets in accordance with the Contract Specifications. I will use the tools and methods approved by the Contracting Officer's Representative (COR) to lift headstones and markers out of the ground in order to avoid damage; pickaxes are not an acceptable tool.

_____ I will not place headstones or markers on dirt piles or mud once they are removed from their sockets; in order to show appropriate respect towards the families

visiting the gravesites and the remains that are buried, I will ensure headstones and markers are carefully stored on each associated gravesite and protected from damage or soiling, in accordance with Contract Specifications.

_____ I understand that the Contractor must be responsible for replacing damaged headstones and markers and for restoring turf damaged during performance of this work.

_____ Should any on-site activity, incident, emergency, or disaster result in exposure and/or damage to any remains, container for remains (i.e., casket or urn), or outer burial container, I will IMMEDIATELY notify the Cemetery Director, the COR and/or the Contracting Officer; I will take immediate steps to protect and render safe any exposed remains; and stop any further work until the Cemetery Director provides the Contractor 's Supervisor guidance regarding disposition of the remains and permission to proceed.

SIGNATURE BLOCK

Signature

Printed Name

Date

IF THIS STATEMENT IS THE EMPLOYEE'S ANNUAL COMPLIANCE STATEMENT, THIS COMPLIANCE STATEMENT MUST BE RETURNED TO THE COR BY NOVEMBER 1 OR AFTER NTP.

AS TO STATEMENTS OR COMMITMENTS OF FUTURE ACTIONS, THIS COMPLIANCE STATEMENT COVERS THE PERIOD FROM OCTOBER 1 OF THE CALENDAR YEAR DURING WHICH THIS COMPLIANCE STATEMENT IS DUE THROUGH SEPTEMBER 30 OF THE NEXT CALENDAR YEAR.

ATTACHMENT 9
CONTRACTOR'S DAILY LOG OF CONSTRUCTION

INSPECTOR QUALITY ASSURANCE REPORT (Q.A.R.) DAILY LOG OF CONSTRUCTION		REPORT NUMBER: 01 Project Completion at 00 %			
		DATE:			
		CONTRACT NUMBER:			
Project Title: Location: Contractor: Name: Address: Phone: Contractor's Site Manager: Name: Address: Phone:		Contracting Officer: COR: Midwest District Project Managers:			
WEATHER CONDITIONS:					
Temperature: Max: ° Min: °		Precipitation: (24hour total) "		Visibility: Miles:	
				Wind Speed: mph	
WEATHER RELATED DELAYS: (Affected 50% or more of critical path?) YES OR NO			OFFICIAL WEATHER DELAY DATES:		
WORK FORCE-CONTRACTORS & SUB-CONTRACTORS:					
TRADE:	#	TRADE:	#	TRADE:	#
Project Manager					
Site Manager					
QC manager					
PM assistant					
Field Admin-					
Misc. Laborers					
Field Engineer					
Construction Mgr.					
VISITORS:			COMPANY:		

EQUIPMENT ON SITE:	
1. 2. 3. 4. 5. 6.	
MATERIALS DELIVERED TO JOB SITE:	
PROJECT COMMENTS:	
DEFICIENCIES:	
POTENTIAL CAUSES FOR DELAY:	
TESTS AND OBSERVATION:	
WORK ACCOMPLISHED / PREP. MEETINGS CONDUCTED TODAY:	
DIVISION 1: GENERAL CONDITIONS	
01 33 23 - Shop Drawings, Product Data, and Samples	
01 45 29 - Testing Laboratory Services	
DIVISION 2: EXISTING CONDITIONS	
02 21 00 – Site Surveying	

DIVISION 31: EARTHWORK			
31 00 00 - Earthwork			
DIVISION 32: EXTERIOR IMPROVEMENTS			
32 39 20 - Flat Marker Support System, Headstone Setting, Alignment, Backfilling, and Headstone Cleaning			
32 92 24 – Turf Renovation			
WEEKLY PROGRESS MEETINGS:			
Site Manager's Signature:	Date	Supervisors Initials:	Date

PHOTOS:


CAMP BUTLER
NATIONAL CEMETERY

AUGUST 2025

Updated by:
Geoff Black


[illegible]

KEY MAP

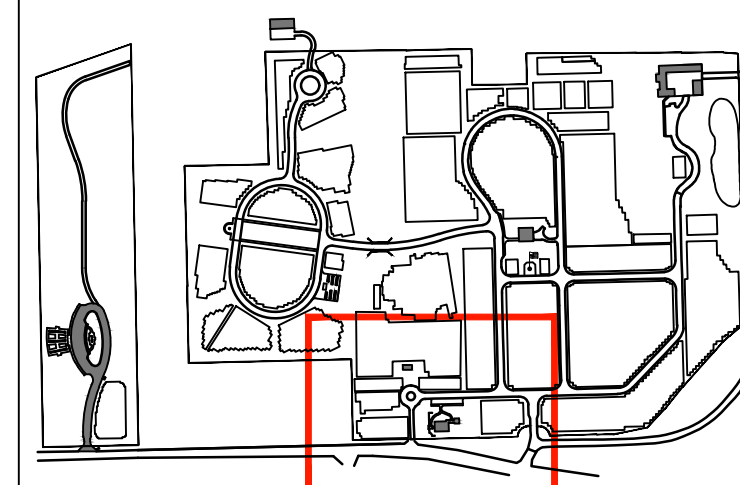

FULL CASKET GRAVESITE	CREMAIN OR MEMORIAL GRAVESITE	
		AVAILABLE GRAVESITE
		RESERVED GRAVESITE
		OCCUPIED GRAVESITE
		FULLY OBSTRUCTED
		OCCUPIED PARTIALLY OBSTRUCTED GRAVESITE
		AVAILABLE PARTIALLY OBSTRUCTED GRAVESITE (FULL CASKET SITE AVAILABLE FOR CREMAINS ONLY)
		ROW NUMBER GRAVE NUMBER

BURIAL DETAILS	
1	2
3	4
5	6
7	8
9	10
11	12
13	14
15	16
17	18
19	20
21	22
23	24
25	26
27	28
29	30
31	32
33	34
35	36
37	38
39	40
41	42
43	44
45	46
47	48
49	50
51	52
53	54
55	56
57	58
59	60
61	62
63	64
65	66
67	68
69	70
71	72
73	74
75	76
77	78
79	80
81	82
83	84
85	86
87	88
89	90
91	92
93	94
95	96
97	98
99	100

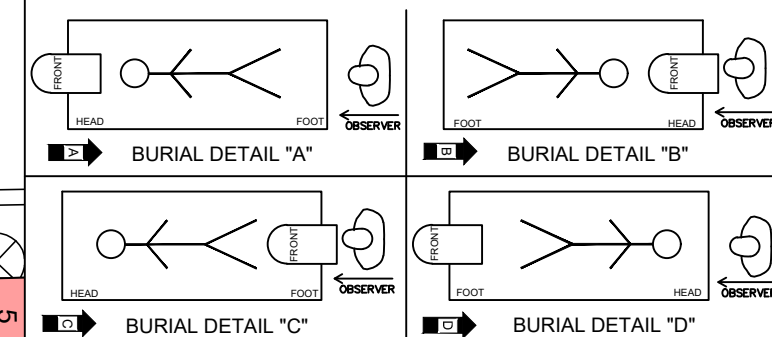

- | | | |
|-----|--|---------------------------------------|
| 26 | | CONTROL MARKER |
| 48 | | PROPERTY BOUNDARY LINE |
| 70 | | FENCE |
| 92 | | OVERHEAD ELECTRIC LINE AND POWER POLE |
| 114 | | UNDERGROUND ELECTRIC LINE |
| 136 | | COMMUNICATION LINE |
| | | FIBER OPTIC |
| | | WATER LINE |
| | | IRRIGATION LINE |
| | | SANITARY SEWER LINE |
| | | STORM DRAIN LINE |
| | | UNDERDRAIN |

SECTIONS

1, 2, 3, & 4



SECTION 5


CAMP BUTLER NATIONAL CEMETERY

AUGUST 2025

Updated by:
Geoff Black


SECTION	TYPE	SIZE	TOTAL
A	CASKET	5X10	289
B	CASKET	5X10	1,166

KEY MAP

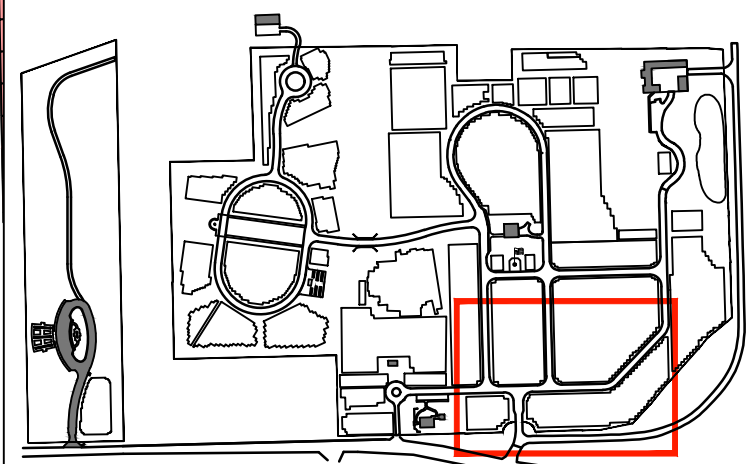


	AVAILABLE GRAVESITE
	RESERVED GRAVESITE
	OCCUPIED GRAVESITE
	FULLY OBSTRUCTED
	OCCUPIED PARTIALLY OBSTRUCTED GRAVESITE
	AVAILABLE PARTIALLY OBSTRUCTED GRAVESITE (FULL CASKET SITE AVAILABLE FOR CREMAINS ONLY)
	ROW NUMBER
	GRAVE NUMBER

BURIAL DETAILS

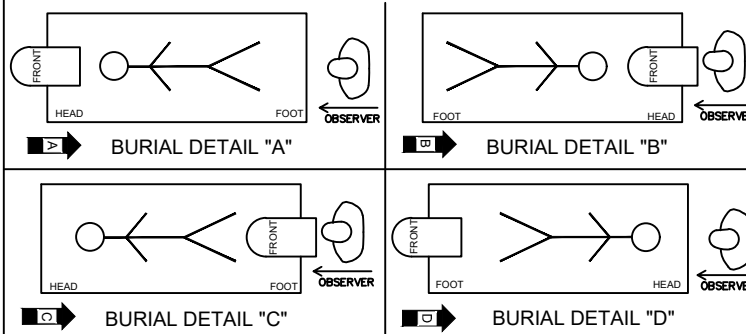

	CONTROL MARKER
	PROPERTY BOUNDARY LINE
	FENCE
	OVERHEAD ELECTRIC LINE AND POWER POLE
	UNDERGROUND ELECTRIC LINE
	COMMUNICATION LINE
	FIBER OPTIC
	WATER LINE
	IRRIGATION LINE
	SANITARY SEWER LINE
	STORM DRAIN LINE
	UNDERDRAIN

SECTIONS A & B

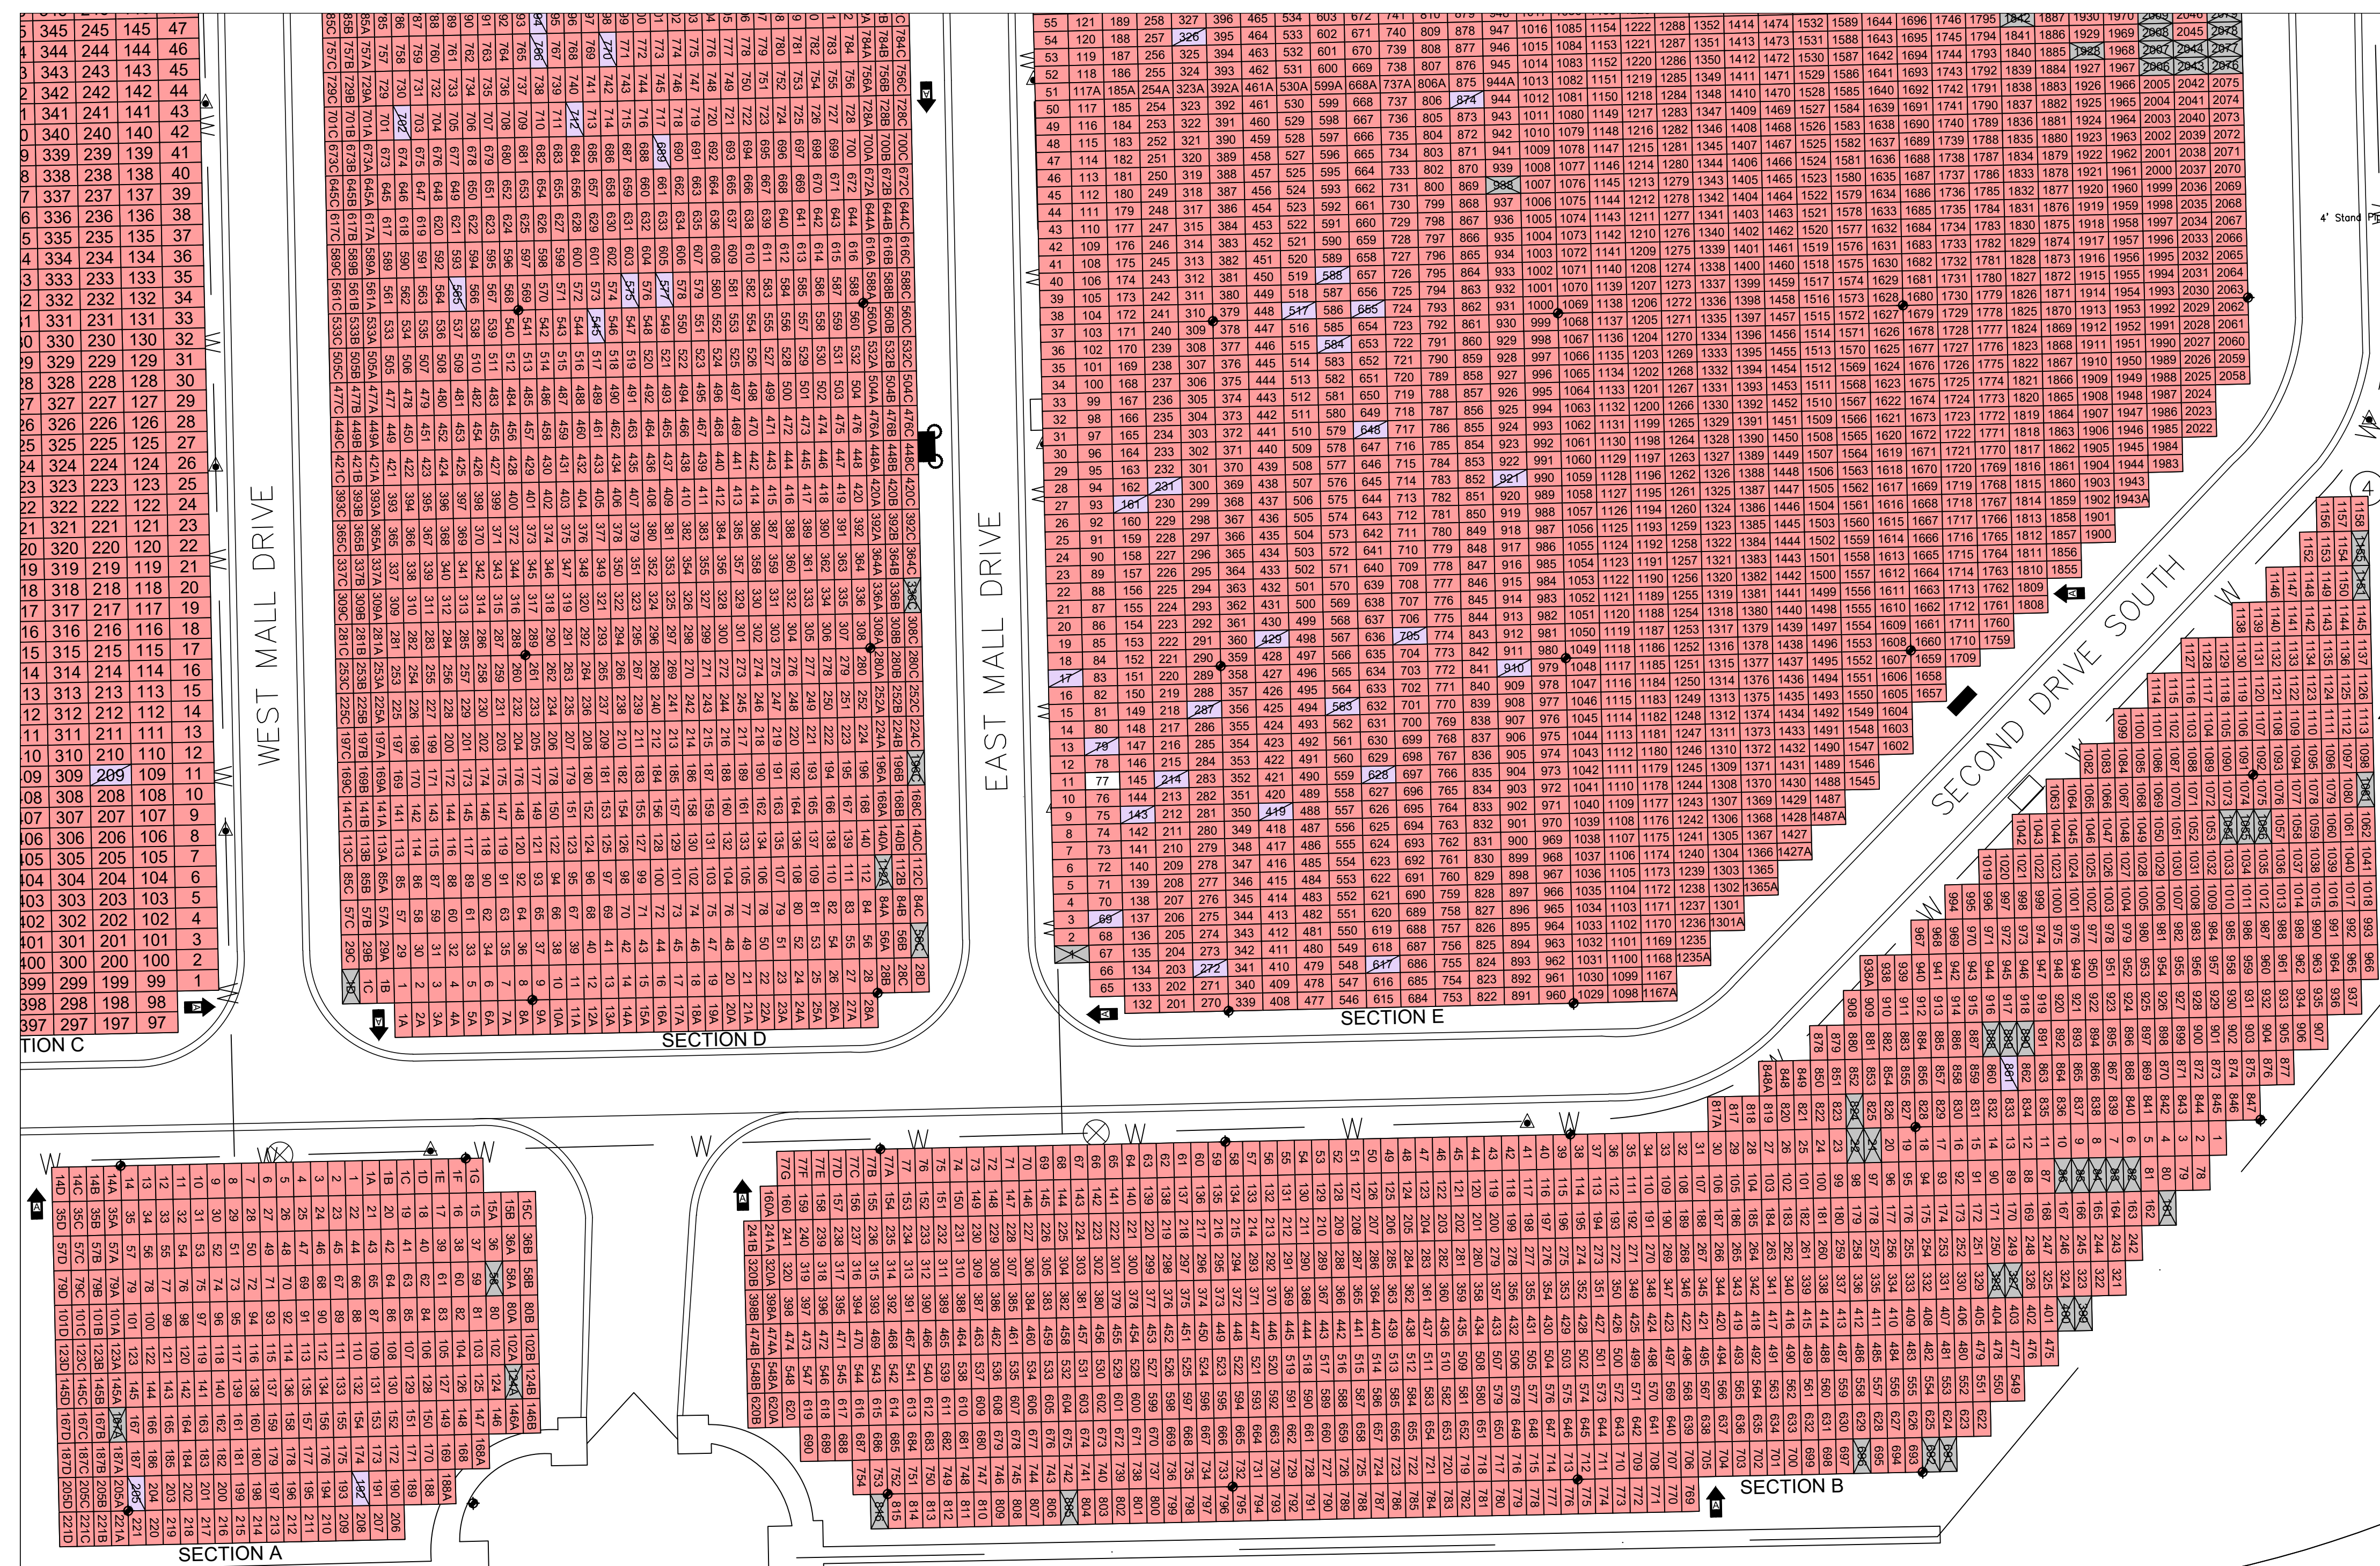


CAMP BUTLER
NATIONAL CEMETERY

AUGUST 2025

Updated by:
Geoff Black


SECTION	TYPE	SIZE	TOTAL
CONF EAST	CASKET	5X10	313
CONF SOUTH	CASKET	5X10	470
CONF WEST	CASKET	5X10	80
POW	CASKET	5X10	38

KEY MAP

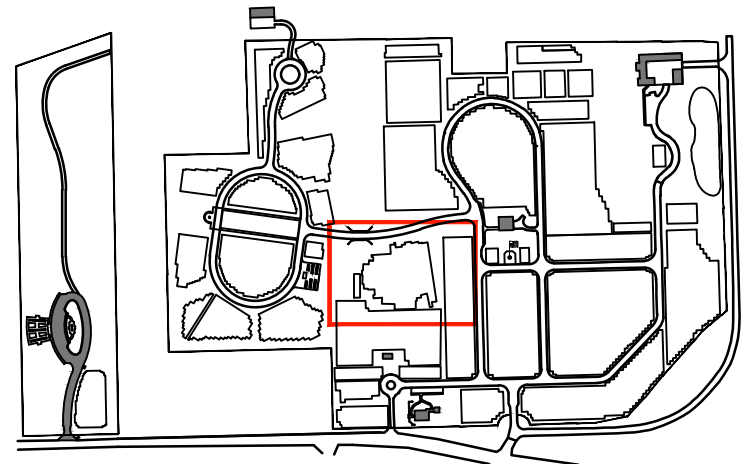

FULL CASKET GRAVESITE	CREMATION OR MEMORIAL GRAVESITE	AVAILABLE GRAVESITE
0000	0000	RESERVED GRAVESITE
0000	0000	OCCUPIED GRAVESITE
0000	0000	FULLY OBSTRUCTED
0000	0000	OCCUPIED PARTIALLY OBSTRUCTED GRAVESITE
0000	0000	AVAILABLE PARTIALLY OBSTRUCTED GRAVESITE
0000	0000	(FULL CASKET SITE AVAILABLE FOR CREMAINS ONLY)
0000	0000	ROW NUMBER
0000	0000	GRAVE NUMBER

BURIAL DETAILS

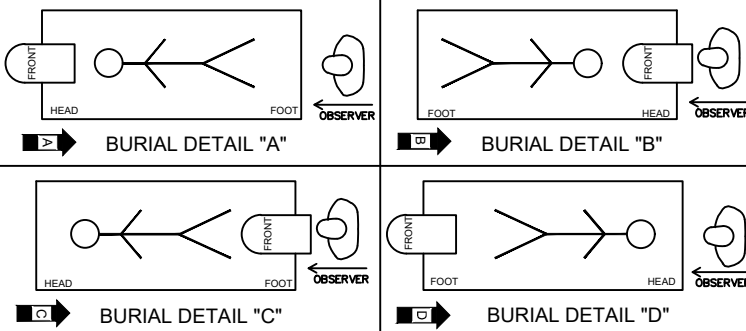

CONTROL MARKER	PROPERTY BOUNDARY LINE
FENCE	OVERHEAD ELECTRIC LINE AND POWER POLE
OE	UNDERGROUND ELECTRIC LINE
E	COMMUNICATION LINE
TC	FIBER OPTIC
FO	WATER LINE
W	IRRIGATION LINE
IRR	SANITARY SEWER LINE
SS	STORM DRAIN LINE
SD	UNDERDRAIN
UD	

CONFEDERATE
AND POW
SECTIONS



773	673	5
772	672	5
771	671	5
770	670	5
769	669	5
768	668	5
767	667	5
766	666	5
765	665	5
764	664	5
763	663	5
762	662	5
761	661	5
760	660	5
759	659	5
758	658	5
757	657	5
756	656	5
755	655	5
754	654	5
753	653	5
752	652	5
751	651	5
750	650	5
749	649	5
748	648	5
747	647	5
746	646	5
745	645	5
744	644	5
743	643	5
742	642	5
741	641	5
740	640	5
739	639	5
738	638	5
737	637	5
736	636	5
735	635	5
734	634	5
733	633	5

CONFEDERATE
SECTION



POW
SECTION


19A	19
18A	18
17A	17
16A	16
15A	15
14A	14
13A	13
12A	12
11A	11
10A	10
9A	9
8A	8
7A	7
6A	6
5A	5
4A	4
3A	3
2A	2
1A	1

940-F	902-F	879-F1	831-F
940-E	903-E	879-E1	831-E
940-D	903-D	879-D1	831-D
940-C	903-C	879-C1	831-C
940-B	903-B	879-B1	831-B
940A	903-A	879-A1	831-A
940	903	902	879
939	904	901	878
938-B	905	900	877


Updated by:
Geoff Black

[illegible]

- | BURIAL DETAILS | |
|---|---|
| <div style="border: 1px solid black; height: 20px; width: 100%;"></div> | <div style="border: 1px solid black; height: 20px; width: 100%;"></div> |



- # SECTIONS C, D, & E

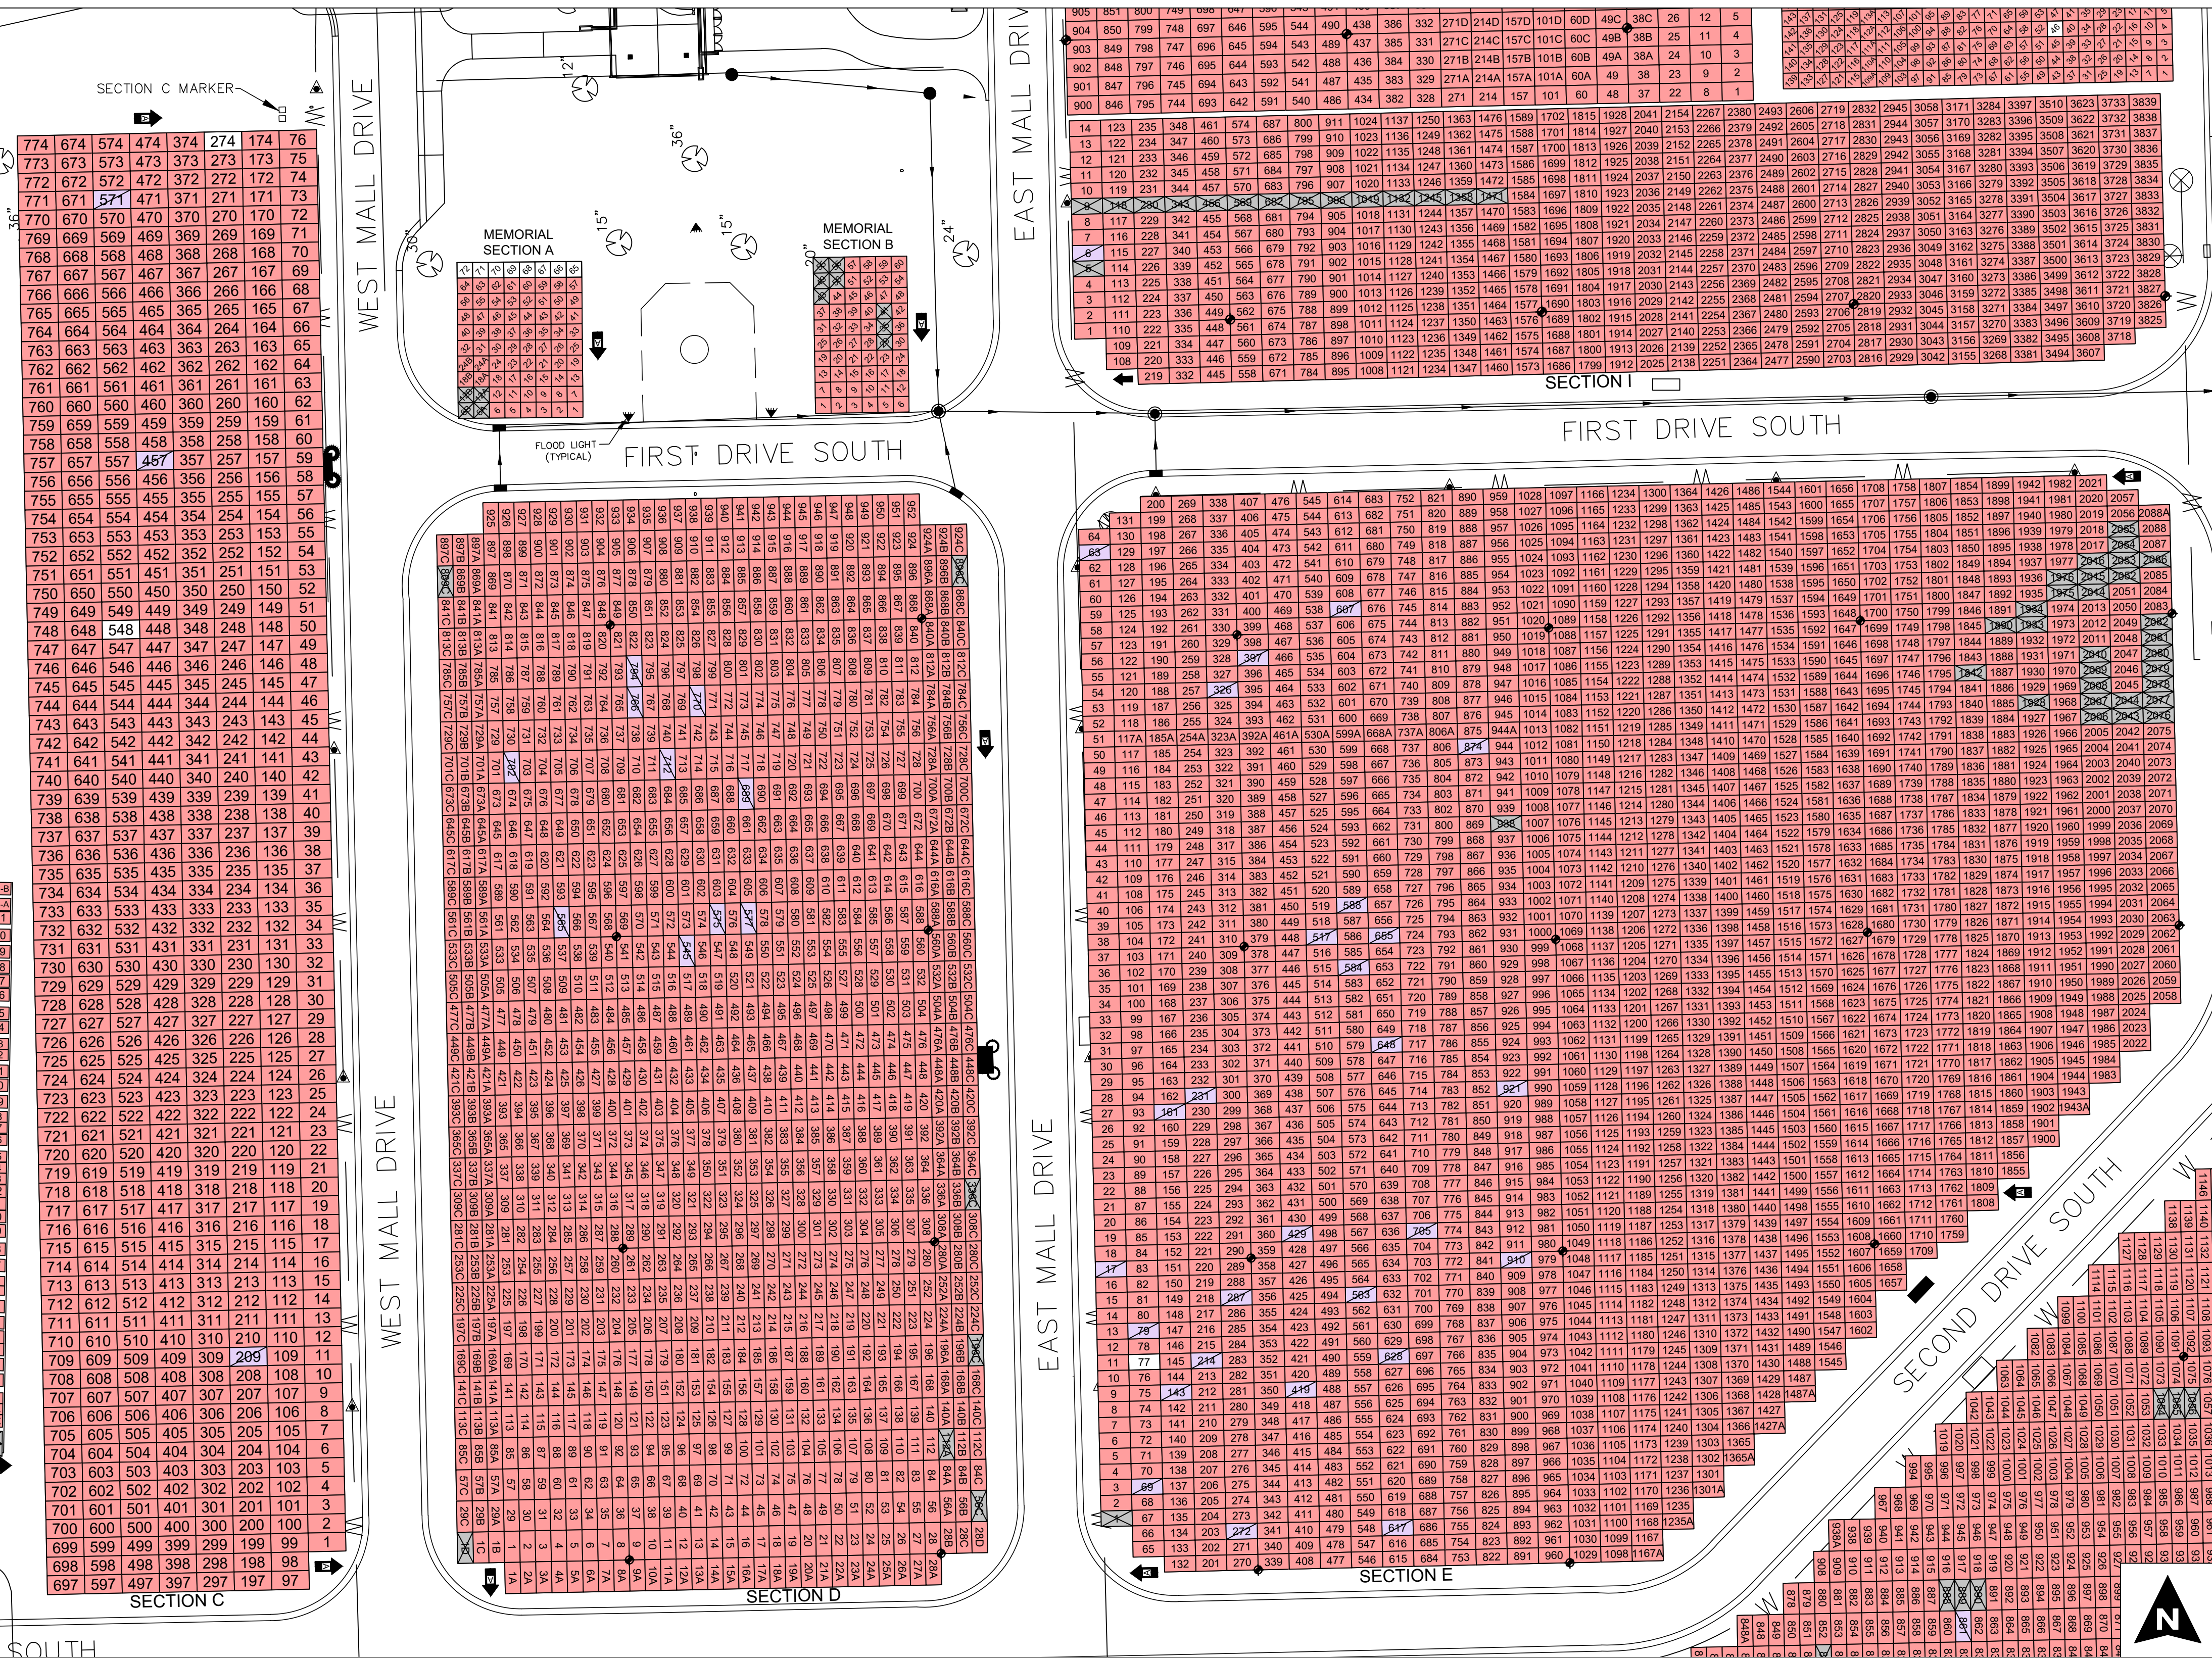


CAMP BUTLER
NATIONAL CEMETERY

AUGUST 2025

Updated by:
Geoff Black


SECTION	TYPE	SIZE	TOTAL
F	CREMAINS	5X10	1,137

KEY MAP

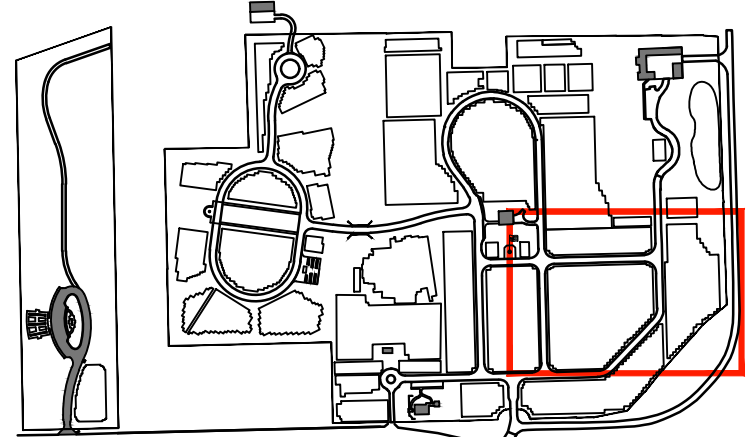

FULL CASKET GRAVESITE	CREMAIN OR MEMORIAL GRAVESITE	
0000	0000	AVAILABLE GRAVESITE
0000	0000	RESERVED GRAVESITE
0000	0000	OCCUPIED GRAVESITE
0000	0000	FULLY OBSTRUCTED
0000	0000	OCCUPIED PARTIALLY OBSTRUCTED GRAVESITE
0000	0000	AVAILABLE PARTIALLY OBSTRUCTED GRAVESITE (FULL CASKET SITE AVAILABLE FOR CREMAINS ONLY)
0000	0000	ROW NUMBER
0000	0000	GRAVE NUMBER

BURIAL DETAILS

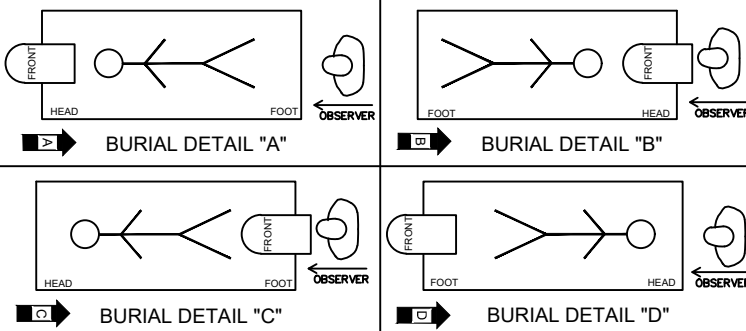

CONTROL MARKER
PROPERTY BOUNDARY LINE
FENCE
OE OVERHEAD ELECTRIC LINE AND POWER POLE
E UNDERGROUND ELECTRIC LINE
TC COMMUNICATION LINE
FO FIBER OPTIC
W WATER LINE
IRR IRRIGATION LINE
SS SANITARY SEWER LINE
SD STORM DRAIN LINE
UD UNDERDRAIN

SECTIONS
F

64GG	125GG	193GG	259GG	323GG	385GG	443GG	499GG	553GG	605GG
64FF	125FF	193FF	259FF	323FF	385FF	443FF	499FF	553FF	605FF
64EE	125EE	193EE	259EE	323EE	385EE	443EE	499EE	553EE	605EE
64DD	125DD	193DD	259DD	323DD	385DD	443DD	499DD	553DD	605DD
64CC	125CC	193CC	259CC	323CC	385CC	443CC	499CC	553CC	605CC
64BB	125BB	193BB	259BB	323BB	385BB	443BB	499BB	553BB	605BB
64AA	125AA	193AA	259AA	323AA	385AA	443AA	499AA	553AA	605AA
64A	125A	193A	259A	323A	385A	443A	499A	553A	605A
64B	125B	193B	259B	323B	385B	443B	499B	553B	605B
64C	125C	193C	259C	323C	385C	443C	499C	553C	605C
64D	125D	193D	259D	323D	385D	443D	499D	553D	605D
64E	125E	193E	259E	323E	385E	443E	499E	553E	605E
64F	125F	193F	259F	323F	385F	443F	499F	553F	605F
64G	125G	193G	259G	323G	385G	443G	499G	553G	605G
64H	125H	193H	259H	323H	385H	443H	499H	553H	605H
64I	125I	193I	259I	323I	385I	443I	499I	553I	605I
64J	125J	193J	259J	323J	385J	443J	499J	553J	605J
64K	125K	193K	259K	323K	385K	443K	499K	553K	605K
64L	125L	193L	259L	323L	385L	443L	499L	553L	605L
64M	125M	193M	259M	323M	385M	443M	499M	553M	605M
64N	125N	193N	259N	323N	385N	443N	499N	553N	605N
64O	125O	193O	259O	323O	385O	443O	499O	553O	605O
64P	125P	193P	259P	323P	385P	443P	499P	553P	605P
64Q	125Q	193Q	259Q	323Q	385Q	443Q	499Q	553Q	605Q
64R	125R	193R	259R	323R	385R	443R	499R	553R	605R
1A	64S	133	201	267	331	391	449	505	559
1	64	134	202	268	332	392	450	506	560
2	65	135	203	269	333	393	451	507	561
3	66	136	204	270	334	394	452	508	562
4	67	137	205	271	335	395	453	509	563
5	68	138	206	272	336	396	454	510	564
6	69	139	207	273	337	397	455	511	565
7	70	140	208	274	338	398	456	512	566
8	71	141	209	275	339	399	457	513	567
9	72	142	210	276	340	400	458	514	568

SECTION F

10	73	143	211	277	341	401	459	515	569	619	663	707	749	791	829	867	903
1	74	144	212	278	342	402	460	516	570	620	664	708	750	792	830	868	904
2	75	145	213	279	343	403	461	517	571	621	665	709	751	793	831	869	905
3	76	146	214	280	344	404	462	518	572	622	666	710	752	794	832	870	906
4	77	147	215	281	345	405	463	519	573	623	667	711	753	795	833	871	907
15	78	148	216	282	346	406	464	520	574	624	668	712	754	796	834	872	908
16	79	149	217	283	347	407	465	521	575	625	669	713	755	797	835	873	909
17	80	150	218	284	348	408	466	522	576	626	670	714	756	798	836	874	910
18	81	151	219	285	349	409	467	523	577	627	671	715	757	799	837	875	911
19	82	152	220	286	350	410	468	524	578	628	672	716	758	800	838	876	912
20	83	153	221	287	351	411	469	525	579	629	673	717	759	801	839	877	913
21	84	154	222	288	352	412	470	526	580	630	674	718	760	802	840	878	914
22	85	155	223	289	353	413	471	527	581	631	675	719	761	803	841	879	915
23	86	156	224	290	354	414	472	528	582	632	676	720	762	804	842	880	916
24	87	157	225	291	355	415	473	529	583	633	677	721	763	805	843	881	917
25	88	158	226	292	356	416	474	530	584	634	678	722	764	806	844	882	918
26	89	159	227	293	357	417	475	531	585	635	679	723	765	807	845	883	919
27	90	160	228	294	358	418	476	532	586	636	680	724	766	808	846	884	920
28	91	161	229	295	359	419	477	533	587	637	681	725	767	809	847	885	921
29	92	162	230	296	360	420	478	534	588	638	682	726	768	810	848	886	922
30	93	163	231	297	361	421	479	535	589	639	683	727	769	811	849	887	
31	94	164	232	298	362	422	480	536	590	640	684	728	770	812	850	888	
32	95	165	233	299	363	423	481	537	591	641	685	729	771	813	851		
33	96	166	234	300	364	424	482	538	592	642	686	730	772	814	852		
34	97	167	235	301	365	425	483	539	593	643	687	731	773				
35	98	168	236	302	366	426	484	540	594	644	688	732	774				
36	99	169	237	303	367	427	485	541	595	645	689	732A					
37	100	170	238	304	368	428	486	542	596	646	690						
38	101	171	239	305	369	429	487	543	597	647	691						
39	102	172	240	306	370	430	488	544	598	648	692						
40	103	173	241	307	371	431	489	545	599								
41	104	174	242	308	372	432	490	546	600								
42	105	175	243	309	373	433	491	547	601								
43	106	176	244	310	374	434	492	548	602								
44	107	177	245	311	375	435	493	549	603								
45	108	178	246	312	376	436	494	550	604								
46	109	179	247	313	377	437	495	551									
47	110	180	248	314	378	438	496	552									
48	111	181	249	315	379	439	497										
49	112	182	250	316	380	440	498										
50	113	183	251	317	381	441											
51	114	184	252	318	382	442											
52	115	185	253	319	383												
53	116	186	254	320	384												
54	117	187	255	321													
55	118	188	256	322													
56	119	189	257														
57	120	190	258														
58	121	191															
59	122	192															
60	123																
61	124																
62																	
63																	
64																	
65																	
66																	
67																	
68																	
69																	
70																	
71																	
72																	
73																	
74																	
75																	
76																	
77																	
78																	
79																	
80																	
81																	
82																	
83																	

SECTION HH

1	3	7	13	21	31	41	51	61	71	81	91	101	111	121	131	141	151	161	171
2	4	8	14	22	32	42	52	62	72	82	92	102	112	122	132	142	152	162	172
2A	5	9	15	23	33	43	53	63	73	83	93	103	113	123	133	143	153	163	173
2B	6	10	16	24	34	44	54	64	74	84	94	104	114	124	134	144	154	164	174
	6A	11	17	25	35	45	55	65	75	85	95	105	115	125	135	145	155	165	175
	6B	12	18	26	36	46	56	66	76	86	96	106	116	126	136	146	156	166	176
	12A	19	27	37	47	57	67	77	87	97	107	117	127	137	147	157	167	177	
	12B	20	28	38	48	58	68	78	88	98	108	118	128	138	148	158	168	178	
	20A	29	39	49	59	69	79	89	99	109	119	129	139	149	159	169	179		
	20B	30	40	50	60	70	80	90	100	110	120	130	140	150	160	170	180		

23

SECTION H

961	957	899B	845C	794C	743C	692C	641E	590F	539H	485J	433	381	327	270	213	156	100
960	956	899A	845B	794B	743B	692B	641D	590E	539G	485-I	432J	380	326	269	212	155	99
959	955	898	845A	794A	743A	692A	641C	590D	539F	485H	432-I	379	325	268	211	154	98
958	954	898	845	794	743	692	641B	590C	539E	485G	432H	378H	324	267	210	153	97
	953	897	844	793	742	691	641A	590B	539D	485F	432G	378G	323	266	209	152	96O
	952	896	843	792	741	690	641	590A	539C	485E	432F	378F	322	265	208	151	96N
	951	895	842	791	740	689	640	590	539B	485D	432E	378E	321	264	207	150	96M
	950	894	841	790	739	688	639	589	539A	485C	432D	378D	320	263	206	149	96L
	949	893	840	789	738	687	638	588	539	485B	432C	378C	319	262	205	148	96K
	948	892	839	788	737	686	637	587	538	485A	432B	378B	318	261	204	147	96
	947	891	838	787	736	685	636	586	537	485	432A	378A	317	260	203	146	96
	946	890	837	786	735	684	635	585	536	484	432	378	316	259	202	145	96H
	945	889	836	785	734	683	634	584	535	483	431	377	315	258	201	144	96G
	944	888	835	784	733	682	633	583	534	482	430	376	314	257	200	143	96F
	943	887	834	783	732	681	632	582	533	481	429	375	313	256	199	142	96E
	942	886	833	782	731	680	631	581	532	480	428	374	312	255	198	141	96D
	941	885	832	781	730	679	630	580	531	479	427	373	311	254	197	140	96C
	940	884	831	780	729	678	629	579	530	478	426	372	310	253	196	139	96B
	939	883	830	779	728	677	628	578	529	477	425	371	309	252	195	138	96A
	938	882	829	778	727	676	627	577	528	476	424	370	308	251	194	137	96
	937	881	828	777	726	675	626	576	527	475	423	369	307	250	193	136	95
	936	880	827	776	725	674	625	575	526	474	422	368	306	249	192	135	94
	935	879	826	775	724	673	624	574	525	473	421	367	305	248	191	134	93
	934	878	825	774	723	672	623	573	524	472	420	366	304	247	190	133	92
	933	877	824	773	722	671	622	572	523	471	419	365	303	246	189	132	91
	932	876	823	772	721	670	621	571	522	470	418	364	302	245	188	131	90
	931	875	822	771	720	669	620	570	521	469	417	363	301	244	187	130	89
	930	874	821	770	719	668	619	569	520	468	416	362	300	243	186	129	88
	929	873	820	769	718	667	618	568	519	467	415	361	299	242	185	128	87
	928	872	819	768	717	666	617	567	518	466	414	360	298	241	184	127	86
	927	871	818	767	716	665	616	566	517	465	413	359	297	240	183	126	85
	926	870	817	766	715	664	615	565	516	464	412	358	296	239	182	125	84
	925	869	816	765	714	663H	614F	564E	515	463	411	357	295	238	181	124	83
	924	868	815	764	713	663G	614E	564D	514	462	410	356	294	237	180	123	82
	923	867	814	763	712H	663F	614D	564C	513	461	409	355	293	236	179	122	81
	922	866	813	762H	712C	663E	614C	564B	512	460	408	354	292	235	178	121	80
	921	865	812	762G	712C	663D	614B	564A	511	459	407	353	291	234	177	120	79
	920	864	811H	762F	712C	663C	614A	564	510	458	406	352	290	233	176	119	78
	919	863	811G	762E	712D	663B	614	563	509	457	405	351	289	232	175	118	77
	918	862F	811F	762D	712C	663A	613	562	508	456	404	350	288	231	174	117	76
	917	862E	811E	762C	712B	663	612	561	507	455	403	349	287	230	173	116	75
	916D	862D	811D	762B	712A	662	611	560	506	454	402	348	286	229	172	115	74
	916C	862C	811C	762A	712	661	610	559	505	453	401	347	285	228	171	114	73
	916B	862B	811B	762	711	660	609	558	504	452	400	346	284	227	170	113	72
	916A	862A	811A	761	710	659	608	557	503	451	399	345	283	226	169	112	71
	916	862	811	760	709	658	607	556	502	450	398	344	282	225	168	111	70
	915	861	810	759	708	657	606	555	501	449	397	343	281	224	167	110	69
	914	860	809	758	707	656	605	554	500	448	396	342	280	223	166	109	68
	913	859	808	757	706	655	604	553	499	447	395	341	279	222	165	108	67
	912	858	807	756	705	654	603	552	498	446	394	340	278	221	164	107	66
	911	857	806	755	704	653	602	551	497	445	393	339	277	220	163	106	65
	910	856	805	754	703	652	601	550	496	444	392	338	276	219	162	105	64
	909	855	804	753	702	651	600	549	495	443	391	337	275	218	161	104	63
	908	854	803	752	701	650	599	548	494	442	390	336	274	217	160	103	62
	907	853	802	751	700	649	598	547	493	441	389	335	273	216	159	102	61
	906	852	801	750	699	648	597	546	492	440	388	334	272	215	158	101F	60
	905	851	800	749	698	647	596	545	491	439	387	333	271E	214E	157E	101E	59
	904	850	799	748	697	646	595	544	490	438	386	332	271D	214D	157D	101D	58
	903	849	798	747	696	645	594	543	489	437	385	331	271C	214C	157C	101C	57
	902	848	797	746	695	644	593	542	488	436	384	330	271B	214B	157B	101B	56
	901	847	796	745	694	643	592	541	487	435	383	329	271A	214A	157A	101A	55
	900	846	795	744	693	642	591	540	486	434	382	328	271	214	157	101	54

14	123	235	348	461	574	687	800	911	1024	1137	1250	1363	1476	1589	1702	1815	1928	2041	2154	2267	2380	2493	2605	2718	2831	2944	3057	3170	3283	3396	3509	3622	3732	3838
13	122	234	347	460	573	686	799	910	1023	1136	1249	1362	1475	1588	1701	1814	1927	2040	2153	2266	2379	2492	2604	2717	2830	2943	3056	3169	3282	3395	3508	3621	3731	3837
12	121	233	346	459	572	685	798	909	1022	1135	1248	1361	1474	1587	1700	1813	1926	2039	2152	2265	2378	2491	2603	2716	2829	2942	3055	3168	3281	3394	3507	3620	3730	3836

1	14	27	40	53	66	79	92	105	118
2	15	28	41	54	67	80	93	106	119
3	16	29	42	55	68	81	94	107	120
4	17	30	43	56	69	82	95	108	121
5	18	31	44	57	70	83	96	109	122
6	19	32	45	58	71	84	97	110	123
7	20	33	46	59	72	85	98	111	124
8	21	34	47	60	73	86	99	112	125
9	22	35	48	61	74	87	100	113	126
10	23	36	49	62	75	88	101	114	127
11	24	37	50	63	76	89	102	115	128
12	25	38	51	64	77	90	103	116	129
13	26	39	52	65	78	91	104	117	130

64GG	125GG	193GG	259GG	323GG	385GG	443GG	499GG	553GG	605GG
64FF	125FF	193FF	259FF	323FF	385FF	443FF	499FF	553FF	605FF
64EE	125EE	193EE	259EE	323EE	385EE	443EE	499EE	553EE	605EE
64DD	125DD	193DD	259DD	323DD	385DD	443DD	499DD	553DD	605DD
64CC	125CC	193CC	259CC	323CC	385CC	443CC	499CC	553CC	605CC
64BB	125BB	193BB	259BB	323BB	385BB	443BB	499BB	553BB	605BB




AUGUST 2025

Updated by:
Geoff Black


[illegible]

KEY MAP

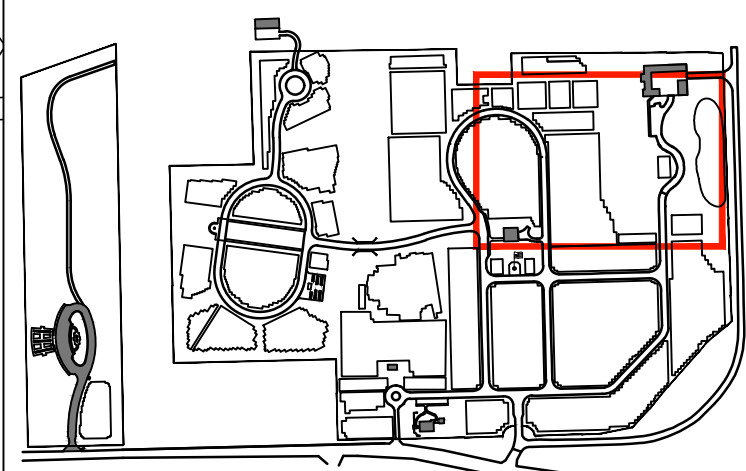

FULL CASKET GRAVESITE	CREMAIN OR MEMORIAL GRAVESITE	
0000	000	AVAILABLE GRAVESITE
0000	000	RESERVED GRAVESITE
0000	000	OCCUPIED GRAVESITE
0000	000	FULLY OBSTRUCTED
0000	000	OCCUPIED PARTIALLY OBSTRUCTED GRAVESITE
0000	000	AVAILABLE PARTIALLY OBSTRUCTED GRAVESITE (FULL CASCKET SITE AVAILABLE FOR CREMAINS ONLY)
0000	000	ROW NUMBER
0000	000	GRAVE NUMBER

BURIAL DETAILS	
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
10	10
11	11
12	12
13	13
14	14
15	15
16	16
17	17
18	18
19	19
20	20
21	21
22	22
23	23
24	24
25	25
26	26
27	27
28	28
29	29
30	30
31	31
32	32
33	33
34	34
35	35
36	36
37	37
38	38
39	39
40	40
41	41
42	42
43	43
44	44
45	45
46	46
47	47
48	48
49	49
50	50
51	51
52	52
53	53
54	54
55	55
56	56
57	57
58	58
59	59
60	60
61	61
62	62
63	63
64	64
65	65
66	66
67	67
68	68
69	69
70	70
71	71
72	72
73	73
74	74
75	75
76	76
77	77
78	78
79	79
80	80
81	81
82	82
83	83
84	84
85	85
86	86
87	87
88	88
89	89
90	90
91	91
92	92
93	93
94	94
95	95
96	96
97	97
98	98
99	99
100	100

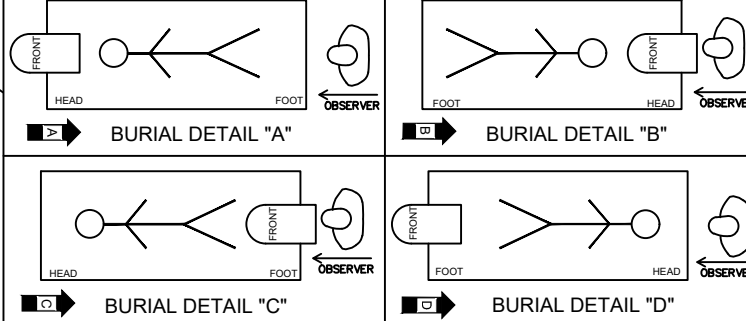

- | | |
|---|---------------------------------------|
|  | CONTROL MARKER |
| | PROPERTY BOUNDARY LINE |
|  | FENCE |
|  | OVERHEAD ELECTRIC LINE AND POWER POLE |
| | UNDERGROUND ELECTRIC LINE |
|  | COMMUNICATION LINE |
|  | FIBER OPTIC |
|  | WATER LINE |
| | IRRIGATION LINE |
|  | SANITARY SEWER LINE |
|  | STORM DRAIN LINE |
| | UNDERDRAIN |

SECTIONS G, H, & HH

[illegible]

BURIAL DETAILS

BURIAL DETAIL "A"

BURIAL DETAIL "B"

BURIAL DETAIL "C"

BURIAL DETAIL "D"

- SECTIONS
CS-B, CS-C, CS-D
CS-E, CS-F, & L

20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100	101	102	103	104	105	106	107	108	109	110	111	112	113	114	115	116	117	118	119	120	121	122	123	124	125	126	127	128	129	130	131	132	133	134	135	136	137	138	139	140	141	142	143	144	145	146	147	148	149	150	151	152	153	154	155	156	157	158	159	160	161	162	163	164	165	166	167	168	169	170	171	172	173	174	175	176	177	178	179	180	181	182	183	184	185	186	187	188	189	190	191	192	193	194	195	196	197	198	199	200	201	202	203	204	205	206	207	208	209	210	211	212	213	214	215	216	217	218	219	220	221	222	223	224	225	226	227	228	229	230	231	232	233	234	235	236	237	238	239	240	241	242	243	244	245	246	247	248	249	250	251	252	253	254	255	256	257	258	259	260	261	262	263	264	265	266	267	268	269	270	271	272	273	274	275	276	277	278	279	280	281	282	283	284	285	286	287	288	289	290	291	292	293	294	295	296	297	298	299	300	301	302	303	304	305	306	307	308	309	310	311	312	313	314	315	316	317	318	319	320	321	322	323	324	325	326	327	328	329	330	331	332	333	334	335	336	337	338	339	340	341	342	343	344	345	346	347	348	349	350	351	352	353	354	355	356	357	358	359	360	361	362	363	364	365	366	367	368	369	370	371	372	373	374	375	376	377	378	379	380	381	382	383	384	385	386	387	388	389	390	391	392	393	394	395	396	397	398	399	400	401	402	403	404	405	406	407	408	409	410	411	412	413	414	415	416	417	418	419	420	421	422	423	424	425	426	427	428	429	430	431	432	433	434	435	436	437	438	439	440	441	442	443	444	445	446	447	448	449	450	451	452	453	454	455	456	457	458	459	460	461	462	463	464	465	466	467	468	469	470	471	472	473	474	475	476	477	478	479	480	481	482	483	484	485	486	487	488	489	490	491	492	493	494	495	496	497	498	499	500	501	502	503	504	505	506	507	508	509	510	511	512	513	514	515	516	517	518	519	520	521	522	523	524	525	526	527	528	529	530	531	532	533	534	535	536	537	538	539	540
----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----

[illegible]

1680	1643	1595	1545	1492	1439	1386
1679	1642	1594	1544	1491	1438	1385
1678	1641	1593	1543	1490	1437	1384
1677	1640	1592	1542	1489	1436	1383
1676	1639	1591	1541	1488	1435	1382
1675	1638	1590	1540	1487	1434	1381
1674	1637	1589	1539	1486	1433	1380
1673	1636	1588	1538	1485	1432	1379
1672	1635	1587	1537	1484	1431	1378
1671	1634	1586	1536	1483	1430	1377
1670	1633	1585	1535	1482	1429	1376
1669	1632	1584	1534	1481	1428	1375
1668	1631	1583	1533	1480	1427	1374
1667	1630	1582	1532	1479	1426	1373
1666	1629	1581	1531	1478	1425	1372
1665	1628	1580	1530	1477	1424	1371
1664	1627	1579	1529	1476	1423	1370
1663	1626	1578	1528	1475	1422	1369
1662	1625	1577	1527	1474	1421	1368
1661	1624	1576	1526	1473	1420	1367
1660	1623	1575	1525	1472	1419	1366


358	359	360	361	362	363	364	365	366	367	368	369	370	371	372	373	374
341	342	343	344	345	346	347	348	349	350	351	352	353	354	355	356	357
324	325	326	327	328	329	330	331	332	333	334	335	336	337	338	339	340
307	308	309	310	311	312	313	314	315	316	317	318	319	320	321	322	323
290	291	292	293	294	295	296	297	298	299	300	301	302	303	304	305	306
273	274	275	276	277	278	279	280	281	282	283	284	285	286	287	288	289
256	257	258	259	260	261	262	263	264	265	266	267	268	269	270	271	272
239	240	241	242	243	244	245	246	247	248	249	250	251	252	253	254	255
222	223	224	225	226	227	228	229	230	231	232	233	234	235	236	237	238
205	206	207	208	209	210	211	212	213	214	215	216	217	218	219	220	221
188	189	190	191	192	193	194	195	196	197	198	199	200	201	202	203	204
171	172	173	174	175	176	177	178	179	180	181	182	183	184	185	186	187
154	155	156	157	158	159	160	161	162	163	164	165	166	167	168	169	170
137	138	139	140	141	142	143	144	145	146	147	148	149	150	151	152	153
120	121	122	123	124	125	126	127	128	129	130	131	132	133	134	135	136
103	104	105	106	107	108	109	110	111	112	113	114	115	116	117	118	119
86	87	88	89	90	91	92	93	94	95	96	97	98	99	100	101	102
69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85
52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68
35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51
18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34

421	422	423	424	425	426	427	428	429	430	431	432	433	434	435	436	437	438	439	440
401	402	403	404	405	406	407	408	409	410	411	412	413	414	415	416	417	418	419	420
381	382	383	384	385	386	387	388	389	390	391	392	393	394	395	396	397	398	399	400
361	362	363	364	365	366	367	368	369	370	371	372	373	374	375	376	377	378	379	380
341	342	343	344	345	346	347	348	349	350	351	352	353	354	355	356	357	358	359	360
321	322	323	324	325	326	327	328	329	330	331	332	333	334	335	336	337	338	339	340
301	302	303	304	305	306	307	308	309	310	311	312	313	314	315	316	317	318	319	320
281	282	283	284	285	286	287	288	289	290	291	292	293	294	295	296	297	298	299	300
261	262	263	264	265	266	267	268	269	270	271	272	273	274	275	276	277	278	279	280
241	242	243	244	245	246	247	248	249	250	251	252	253	254	255	256	257	258	259	260
221	222	223	224	225	226	227	228	229	230	231	232	233	234	235	236	237	238	239	240
201	202	203	204	205	206	207	208	209	210	211	212	213	214	215	216	217	218	219	220
181	182	183	184	185	186	187	188	189	190	191	192	193	194	195	196	197	198	199	200
161	162	163	164	165	166	167	168	169	170	171	172	173	174	175	176	177	178	179	180
141	142	143	144	145	146	147	148	149	150	151	152	153	154	155	156	157	158	159	160
121	122	123	124	125	126	127	128	129	130	131	132	133	134	135	136	137	138	139	140
101	102	103	104	105	106	107	108	109	110	111	112	113	114	115	116	117	118	119	120
81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100
61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80
41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60
21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40

676	677	678	679	680	681	682	683	684	685	686	687	688	689	690	691	692	693	694	695	696	697	698
630	631	632	633	634	635	636	637	638	639	640	641	642	643	644	645	646	647	648	649	650	651	652
607	608	609	610	611	612	613	614	615	616	617	618	619	620	621	622	623	624	625	626	627	628	629
584	585	586	587	588	589	590	591	592	593	594	595	596	597	598	599	600	601	602	603	604	605	606
561	562	563	564	565	566	567	568	569	570	571	572	573	574	575	576	577	578	579	580	581	582	583
538	539	540	541	542	543	544	545	546	547	548	549	550	551	552	553	554	555	556	557	558	559	560
515	516	517	518	519	520	521	522	523	524	525	526	527	528	529	530	531	532	533	534	535	536	537
492	493	494	495	496	497	498	499	500	501	502	503	504	505	506	507	508	509	510	511	512	513	514
469	470	471	472	473	474	475	476	477	478	479	480	481	482	483	484	485	486	487	488	489	490	491
446	447	448	449	450	451	452	453	454	455	456	457	458	459	460	461	462	463	464	465	466	467	468
423	424	425	426	427	428	429	430	431	432	433	434	435	436	437	438	439	440	441	442	443	444	445
400	401	402	403	404	405	406	407	408	409	410	411	412	413	414	415	416	417	418	419	420	421	422
377	378	379	380	381	382	383	384	385	386	387	388	389	390	391	392	393	394	395	396	397	398	399
354	355	356	357	358	359	360	361	362	363	364	365	366	367	368	369	370	371	372	373	374	375	376
331	332	333	334	335	336	337	338	339	340	341	342	343	344	345	346	347	348	349	350	351	352	353
308	309	310	311	312	313	314	315	316	317	318	319	320	321	322	323	324	325	326	327	328	329	330
285	286	287	288	289	290	291	292	293	294	295	296	297	298	299	300	301	302	303	304	305	306	307
262	263	264	265	266	267	268	269	270	271	272	273	274	275	276	277	278	279	280	281	282	283	284
239	240	241	242	243	244	245	246	247	248	249	250	251	252	253	254	255	256	257	258	259	260	261
216	217	218	219	220	221	222	223	224	225	226	227	228	229	230	231	232	233	234	235	236	237	238
193	194	195	196	197	198	199	200	201	202	203	204	205	206	207	208	209	210	211	212	213	214	215

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100
---	---	---	---	---	---	---	---	---	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	-----

1	3	7	13	21	31	41	51	61	71	81	91	101	111	121	131	141	151	161	171	
2	4	8	14	22	32	42	52	62	72	82	92	102	112	122	132	142	152	162	172	
2A	5	9	15	23	33	43	53	63	73	83	93	103	113	123	133	143	153	163	173	
2B	6	10	16	24	34	44	54	64	74	84	94	104	114	124	134	144	154	164	174	
	6A	11	17	25	35	45	55	65	75	85	95	105	115	125	135	145	155	165	175	
	6B	12	18	26	36	46	56	66	76	86	96	106	116	126	136	146	156	166	176	
		12A	19	27	37	47	57	67	77	87	97	107	117	127	137	147	157	167	177	
			12B	20	28	38	48	58	68	78	88	98	108	118	128	138	148	158	168	178



AUGUST 2025	Updated by:
	Geoff Black

SECTION	TYPE	SIZE	TOTAL
M	CASKET	5X10	1,545

[illegible]

BURIAL DETAILS

The diagrams illustrate four different burial details:

- BURIAL DETAIL "A"**: The stick figure is lying on its back. The head is at the left end of the coffin, and the feet are at the right end. The observer is positioned to the right of the coffin, looking at the feet.
- BURIAL DETAIL "B"**: The stick figure is lying on its back. The head is at the right end of the coffin, and the feet are at the left end. The observer is positioned to the right of the coffin, looking at the head.
- BURIAL DETAIL "C"**: The stick figure is lying on its back. The head is at the left end of the coffin, and the feet are at the right end. The observer is positioned to the right of the coffin, looking at the feet.
- BURIAL DETAIL "D"**: The stick figure is lying on its back. The head is at the right end of the coffin, and the feet are at the left end. The observer is positioned to the right of the coffin, looking at the head.

SECTION M


CAMP BUTLER
NATIONAL CEMETERY

AUGUST 2025

Updated by:
Geoff Black


[illegible]

KEY MAP

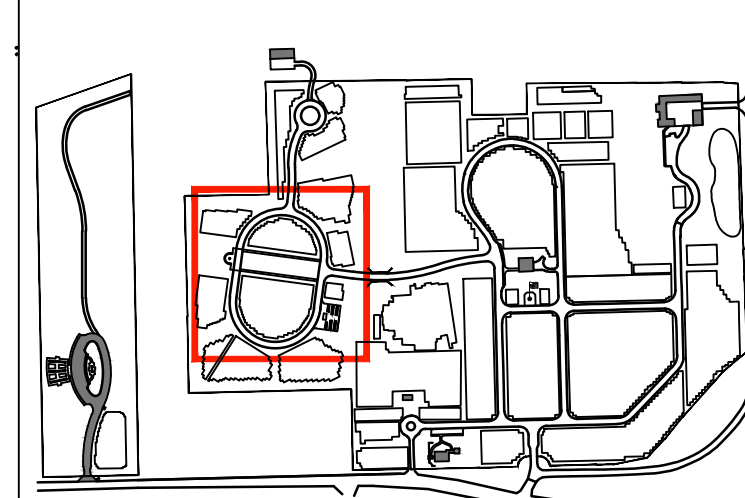

FULL CASKET GRAVESITE	CREMAIN OR MEMORIAL GRAVESITE	
		AVAILABLE GRAVESITE
		RESERVED GRAVESITE
		OCCUPIED GRAVESITE
		FULLY OBSTRUCTED
		OCCUPIED PARTIALLY OBSTRUCTED GRAVESITE
		AVAILABLE PARTIALLY OBSTRUCTED GRAVESITE (FULL CASKET SITE AVAILABLE FOR CREMAINS ONLY)
		ROW NUMBER
		GRAVE NUMBER

BURIAL DETAILS	
1	2
3	4
5	6
7	8
9	10
11	12
13	14
15	16
17	18
19	20
21	22
23	24
25	26
27	28
29	30
31	32
33	34
35	36
37	38
39	40
41	42
43	44
45	46
47	48
49	50
51	52
53	54
55	56
57	58
59	60
61	62
63	64
65	66
67	68
69	70
71	72
73	74
75	76
77	78
79	80
81	82
83	84
85	86
87	88
89	90
91	92
93	94
95	96
97	98
99	100

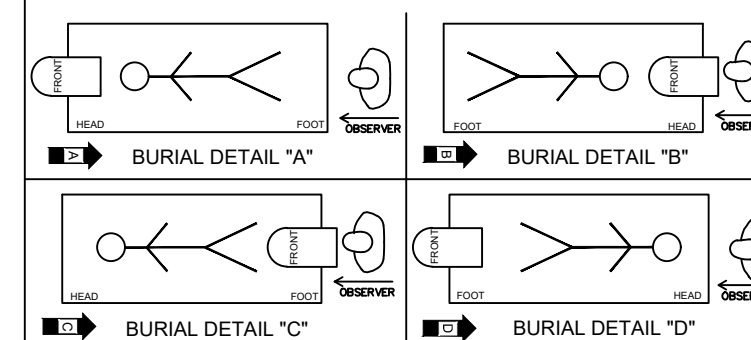

- | | |
|---|---------------------------------------|
|  | CONTROL MARKER |
|  | PROPERTY BOUNDARY LINE |
|  | FENCE |
|  | OVERHEAD ELECTRIC LINE AND POWER POLE |
|  | UNDERGROUND ELECTRIC LINE |
|  | COMMUNICATION LINE |
|  | FIBER OPTIC |
|  | WATER LINE |
|  | IRRIGATION LINE |
|  | SANITARY SEWER LINE |
|  | STORM DRAIN LINE |
|  | UNDERDRAIN |

SECTIONS O, P, Q, & T


CAMP BUTLER
NATIONAL CEMETERY

AUGUST 2025

Updated by:
Geoff Black


SECTION	TYPE	SIZE	TOTAL
R	CASKET	4X8	719
S	CASKET	4X8	562
CS-G	CREMAINS	4X4	376

KEY MAP

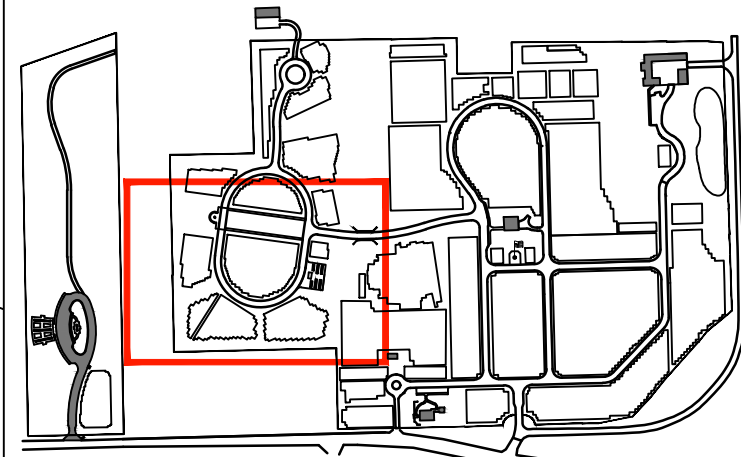


FULL CASKET GRAVESITE	CREMAIN OR MEMORIAL GRAVESITE	
0000	0000	AVAILABLE GRAVESITE
0000	0000	RESERVED GRAVESITE
0000	0000	OCCUPIED GRAVESITE
0000	0000	FULLY OBSTRUCTED
0000	0000	OCCUPIED PARTIALLY OBSTRUCTED GRAVESITE
0000	0000	AVAILABLE PARTIALLY OBSTRUCTED GRAVESITE (FULL CASKET SITE AVAILABLE FOR CREMAINS ONLY)
0000	0000	ROW NUMBER
0000	0000	GRAVE NUMBER

BURIAL DETAILS

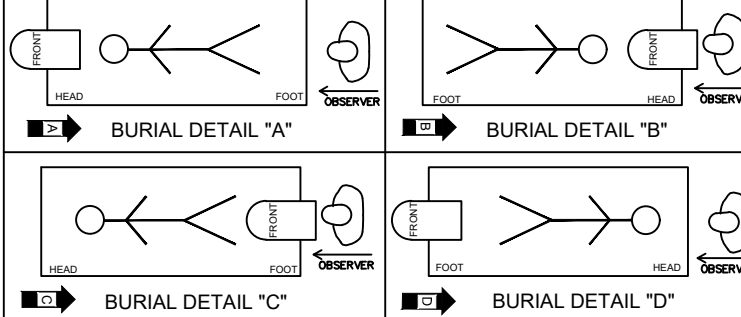

CONTROL MARKER	
—	PROPERTY BOUNDARY LINE
—	FENCE
—OE—	OVERHEAD ELECTRIC LINE AND POWER POLE
—E—	UNDERGROUND ELECTRIC LINE
—TC—	COMMUNICATION LINE
—FO—	FIBER OPTIC
—W—	WATER LINE
—IRR—	IRRIGATION LINE
—SS—	SANITARY SEWER LINE
—SD—	STORM DRAIN LINE
—UD—	UNDERDRAIN


SECTIONS
R, S, & CS-G

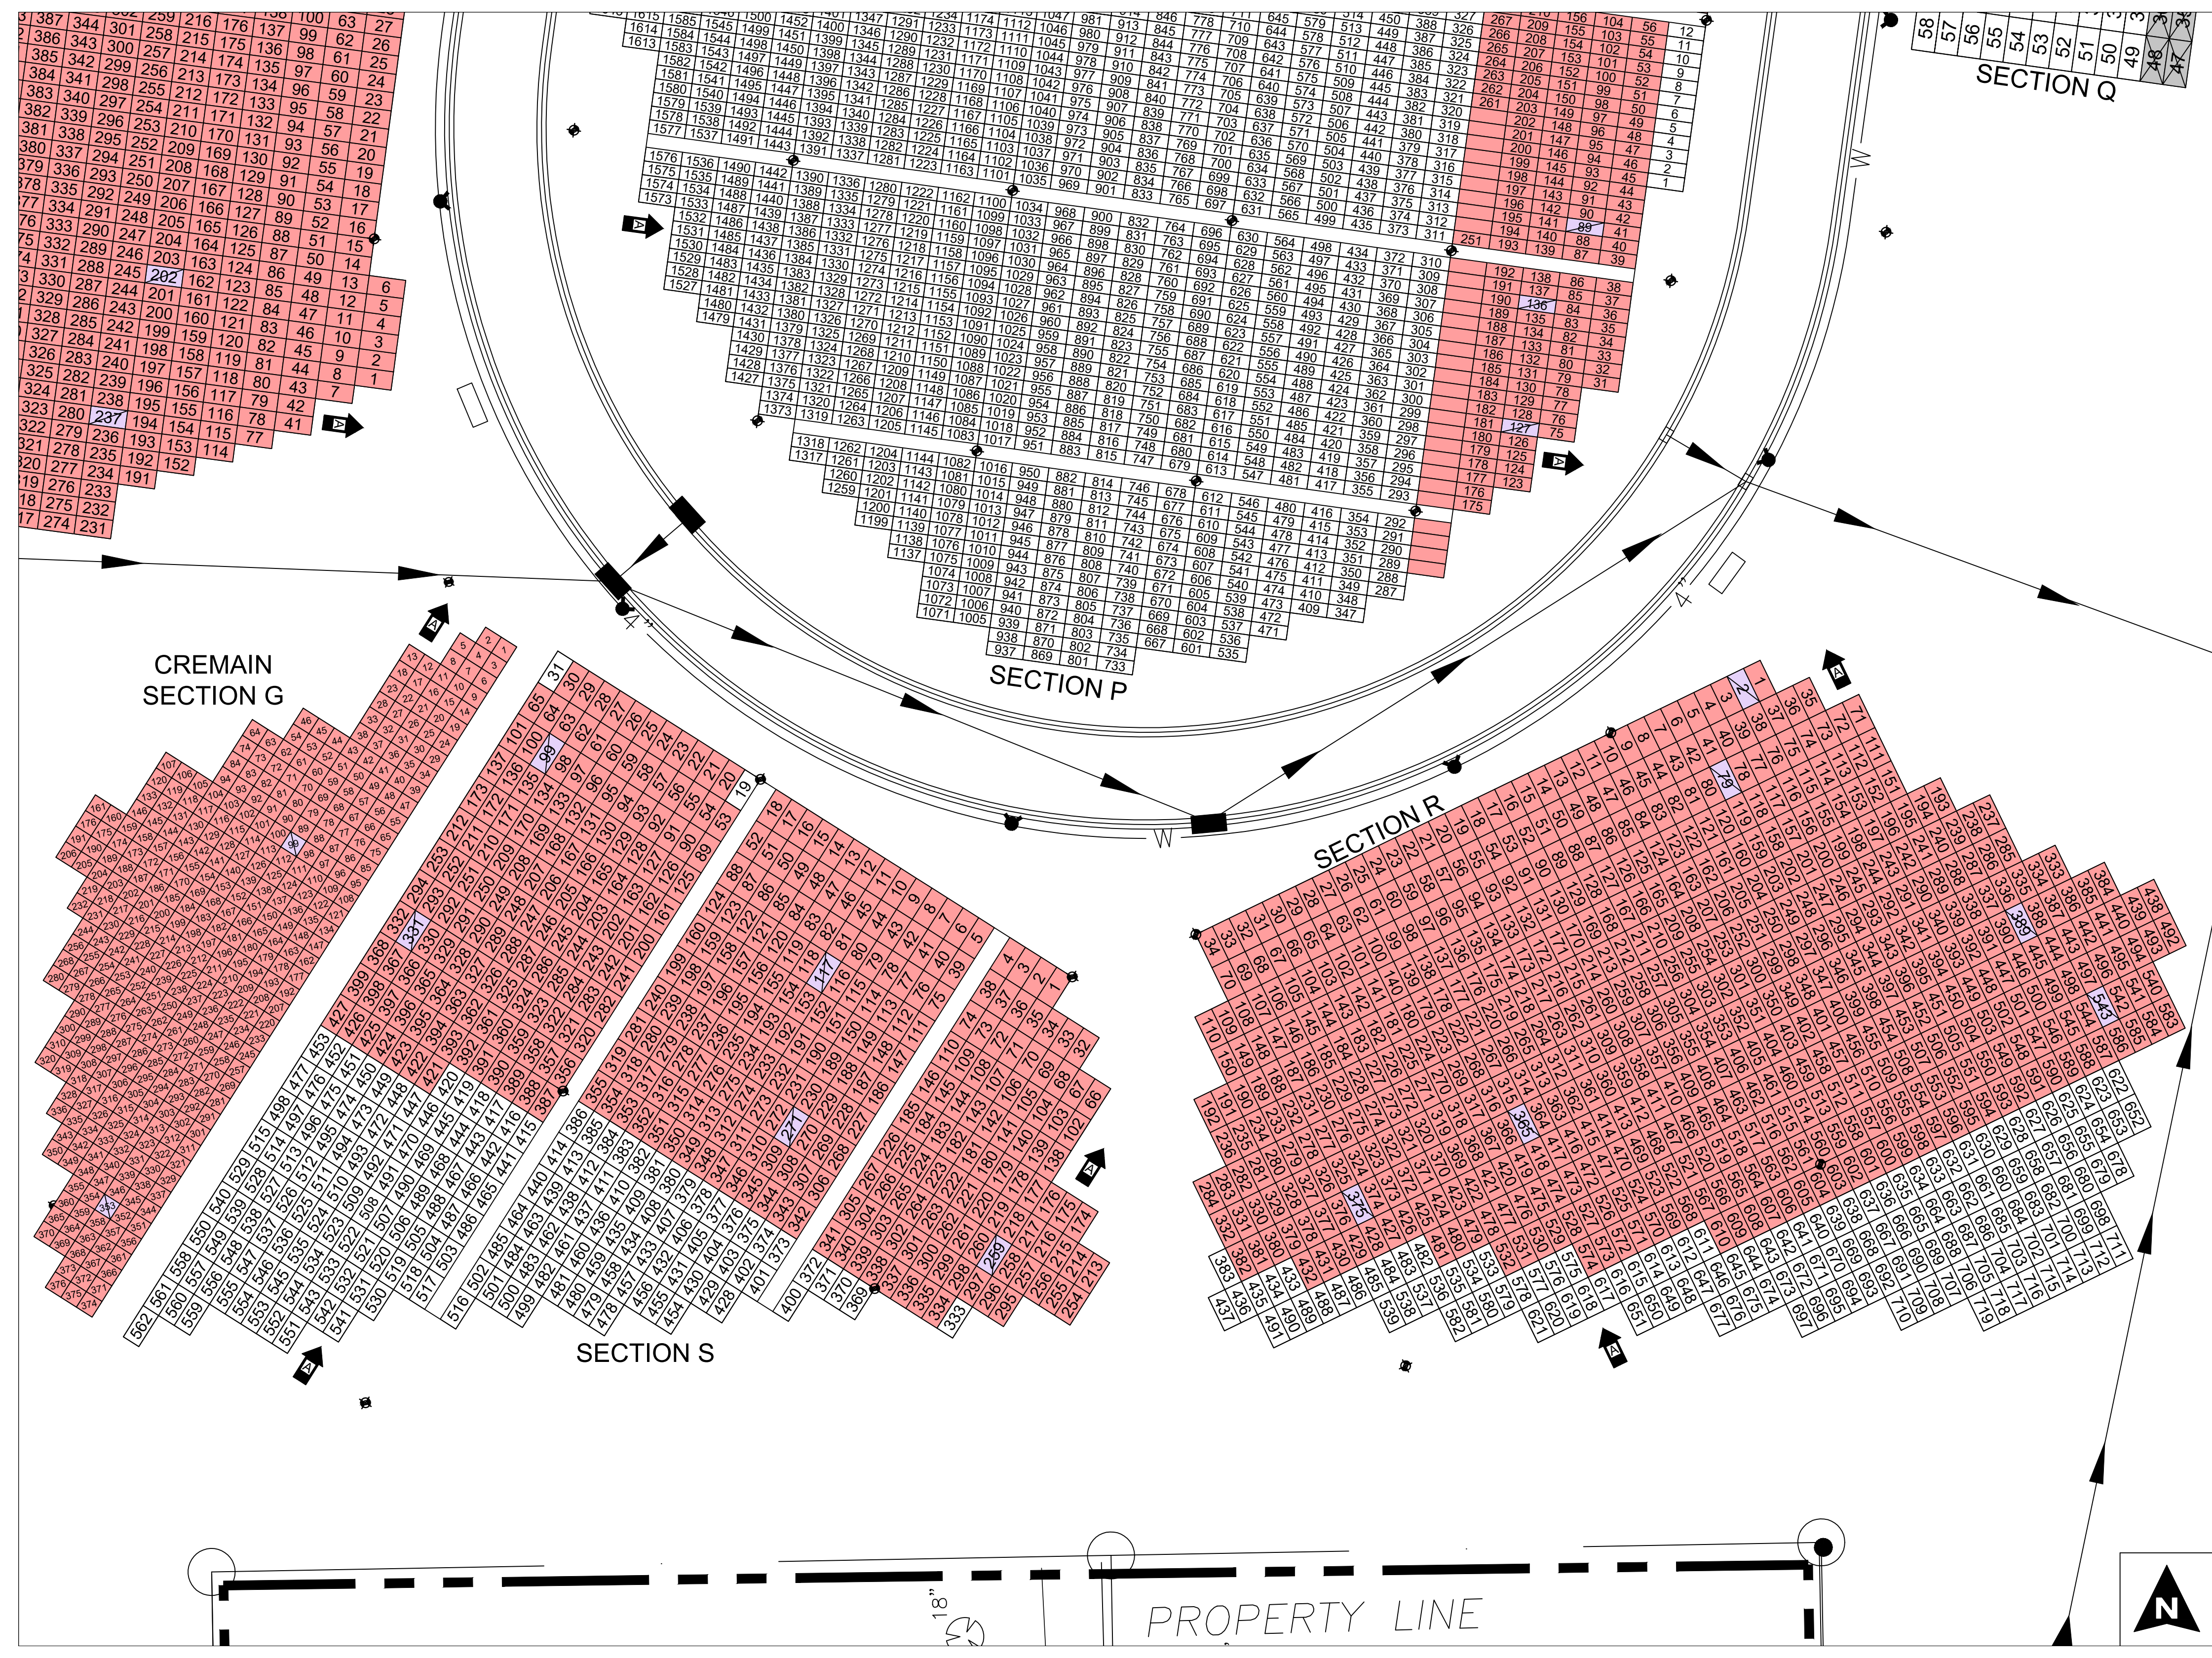

AUGUST 2025	Updated by:
	Geoff Black

Updated by:
Geoff Black

KEY MAP

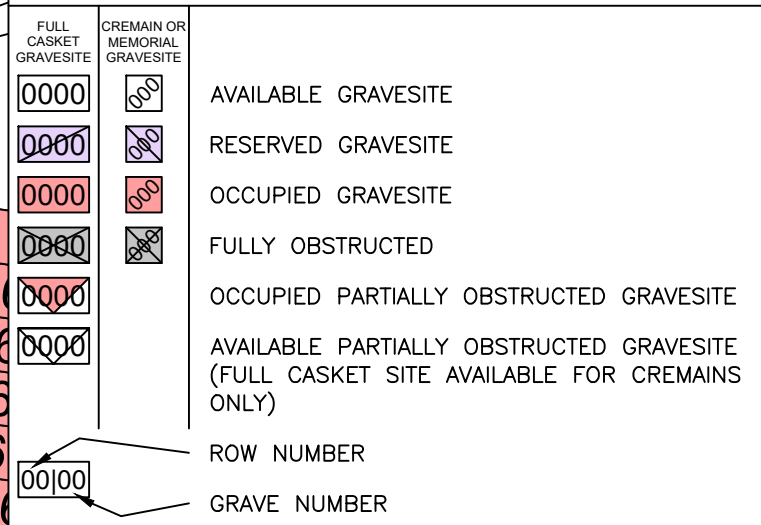



	CONTROL MARKER
	PROPERTY BOUNDARY LINE
	FENCE
	OVERHEAD ELECTRIC LINE AND POWER POLE
	UNDERGROUND ELECTRIC LINE
	COMMUNICATION LINE
	FIBER OPTIC
	WATER LINE
	IRRIGATION LINE
	SANITARY SEWER LINE
	STORM DRAIN LINE
	UNDERDRAIN



SECTION U

Updated by:
Geoff Black

KEY MAP				
---------	--	--	--	--

[illegible]

- | |
|--|
| |
|--|




CAMP BUTLER
NATIONAL CEMETERY

AUGUST 2025

Updated by:
Geoff Black

SECTION	TYPE	SIZE	TOTAL
Y	CASKET	4X8	687
Z	CASKET	4X8	243


KEY MAP

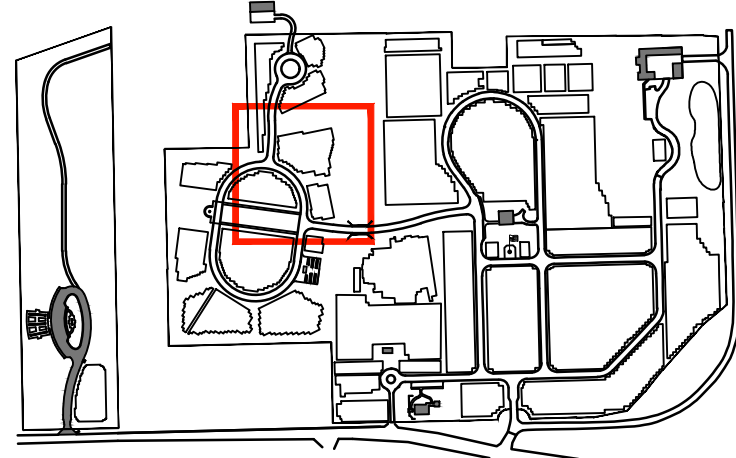

0000	AVAILABLE GRAVESITE
0000	RESERVED GRAVESITE
0000	OCCUPIED GRAVESITE
0000	FULLY OBSTRUCTED
0000	OCCUPIED PARTIALLY OBSTRUCTED GRAVESITE
0000	AVAILABLE PARTIALLY OBSTRUCTED GRAVESITE (FULL CASKET SITE AVAILABLE FOR CREMAINS ONLY)

00100	ROW NUMBER
00100	GRAVE NUMBER


BURIAL DETAILS

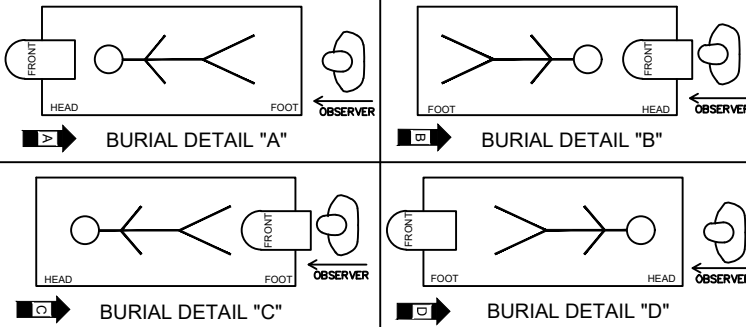


CONTROL MARKER	PROPERTY BOUNDARY LINE	FENCE	OVERHEAD ELECTRIC LINE AND POWER POLE	UNDERGROUND ELECTRIC LINE	COMMUNICATION LINE	FIBER OPTIC	WATER LINE	IRRIGATION LINE	SANITARY SEWER LINE	STORM DRAIN LINE	UNDERDRAIN
----------------	------------------------	-------	---------------------------------------	---------------------------	--------------------	-------------	------------	-----------------	---------------------	------------------	------------

SECTION
Y & Z


SECTION Y

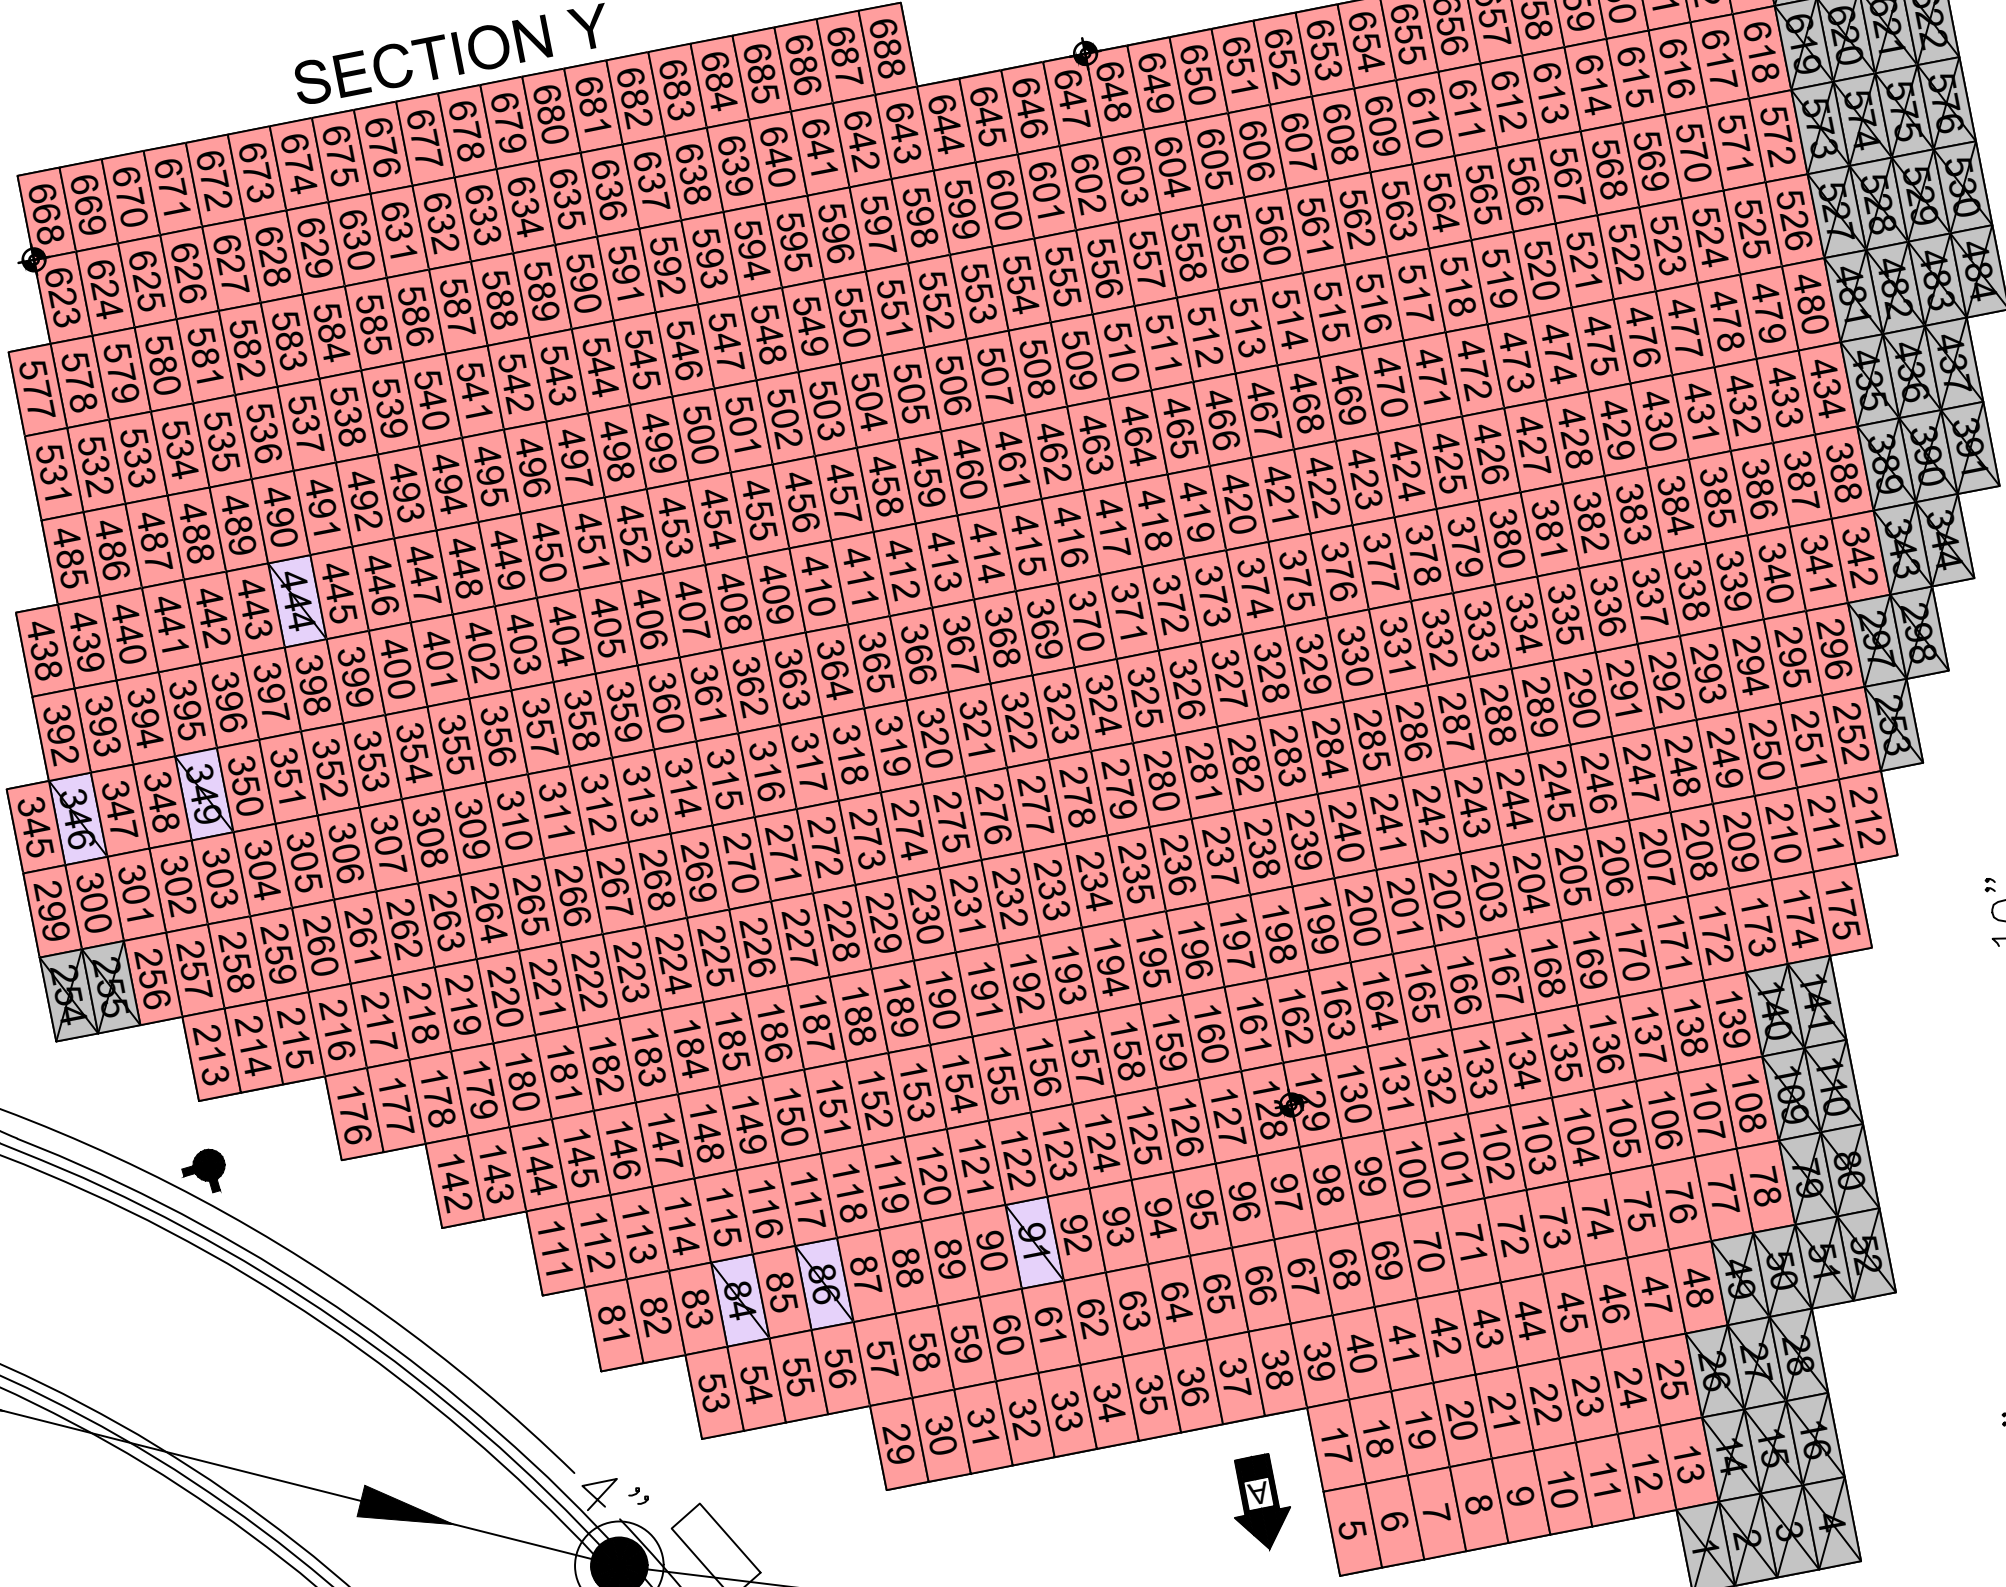

SECTION Z

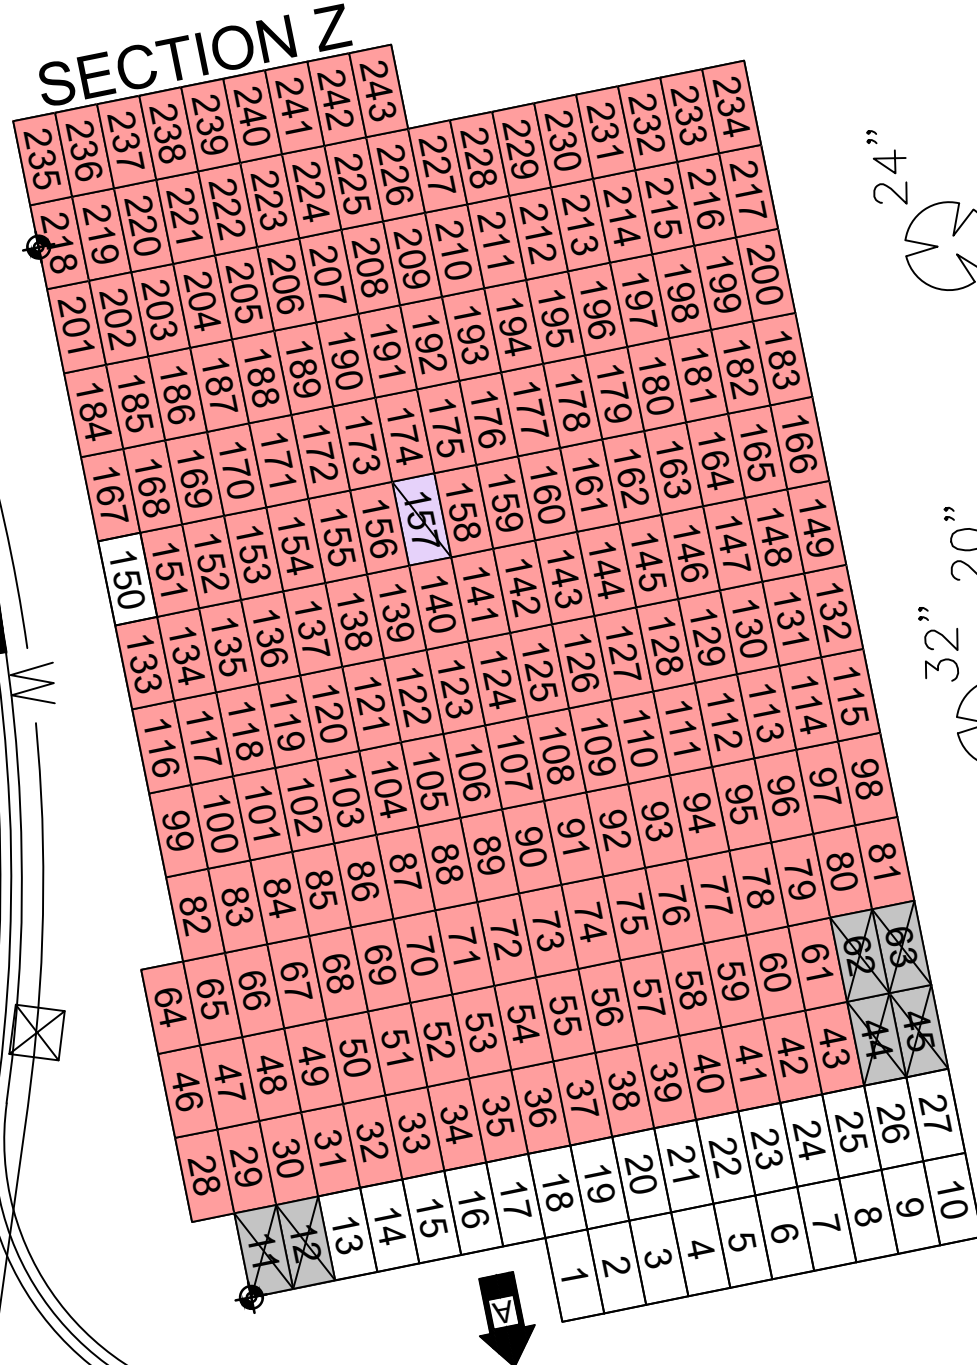

SECTION O

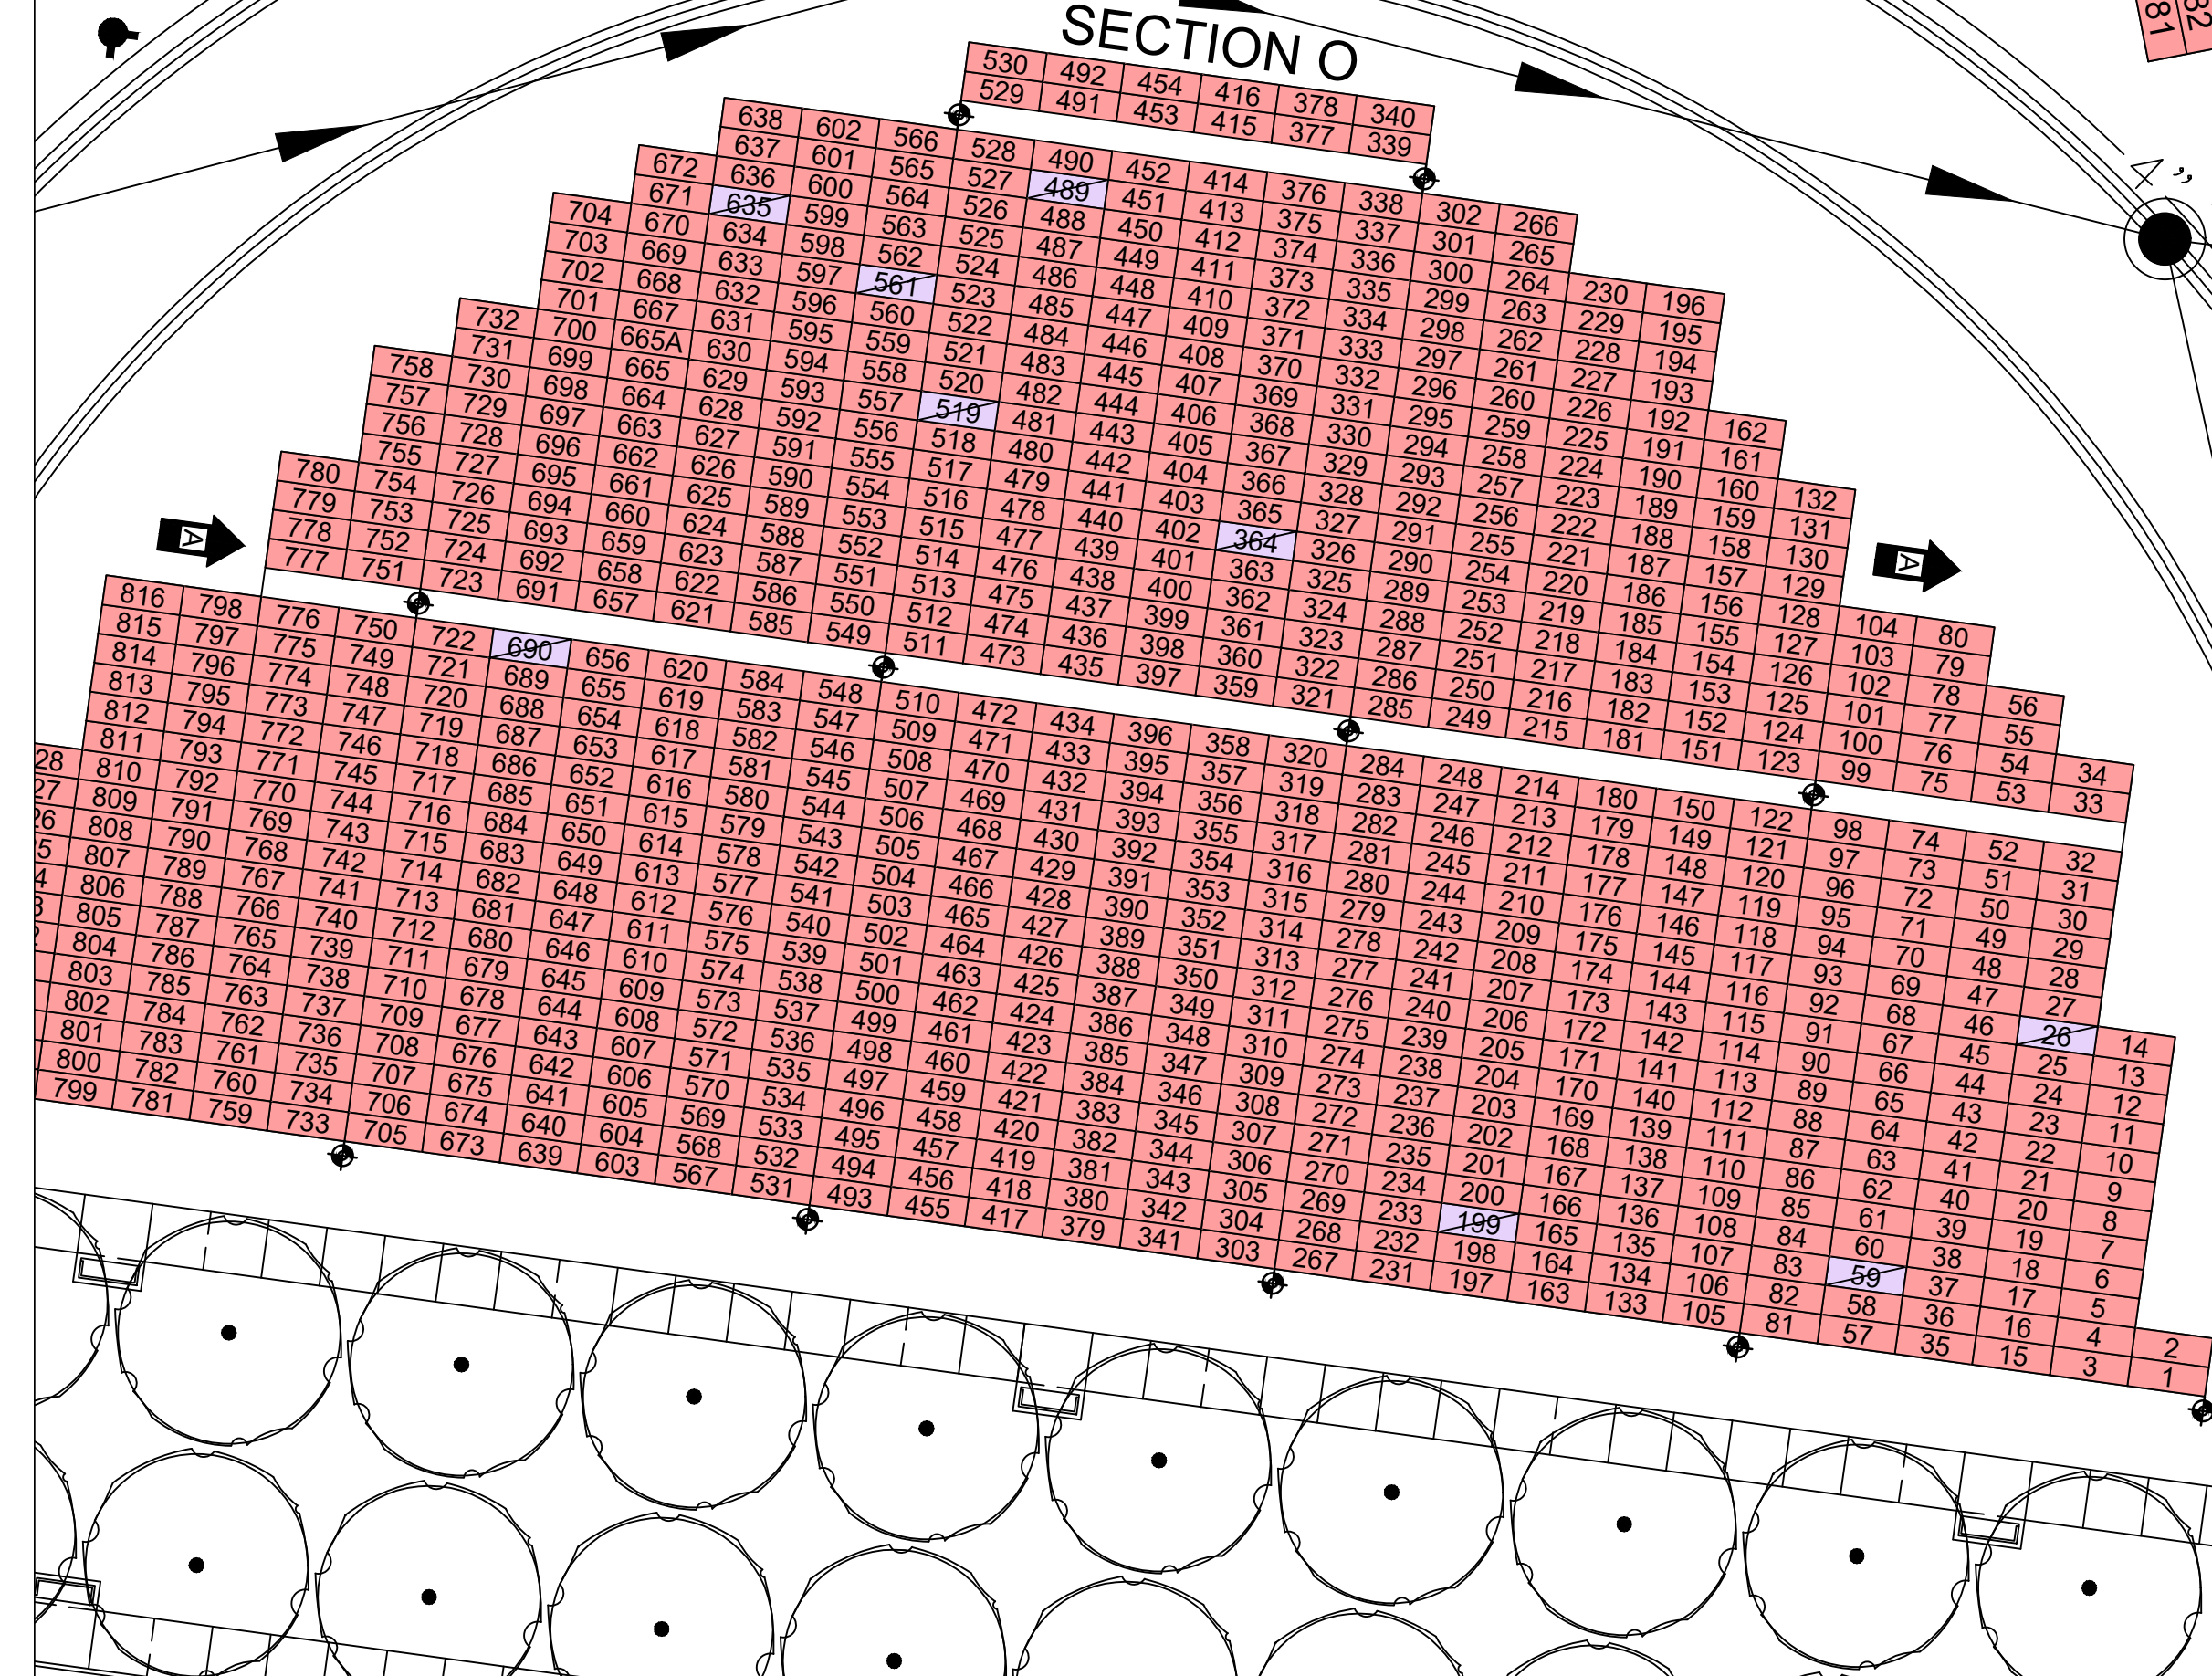

[illegible]

BURIAL DETAILS


BURIAL DETAIL "A"

BURIAL DETAIL "B"

BURIAL DETAIL "C"

BURIAL DETAIL "D"

- | | |
|---|---------------------------------------|
|  | CONTROL MARKER |
|  | PROPERTY BOUNDARY LINE |
|  | FENCE |
|  | OVERHEAD ELECTRIC LINE AND POWER POLE |
|  | UNDERGROUND ELECTRIC LINE |
|  | COMMUNICATION LINE |
|  | FIBER OPTIC |
|  | WATER LINE |
|  | IRRIGATION LINE |
| | SANITARY SEWER LINE |
| | STORM DRAIN LINE |
| | UNDERDRAIN |

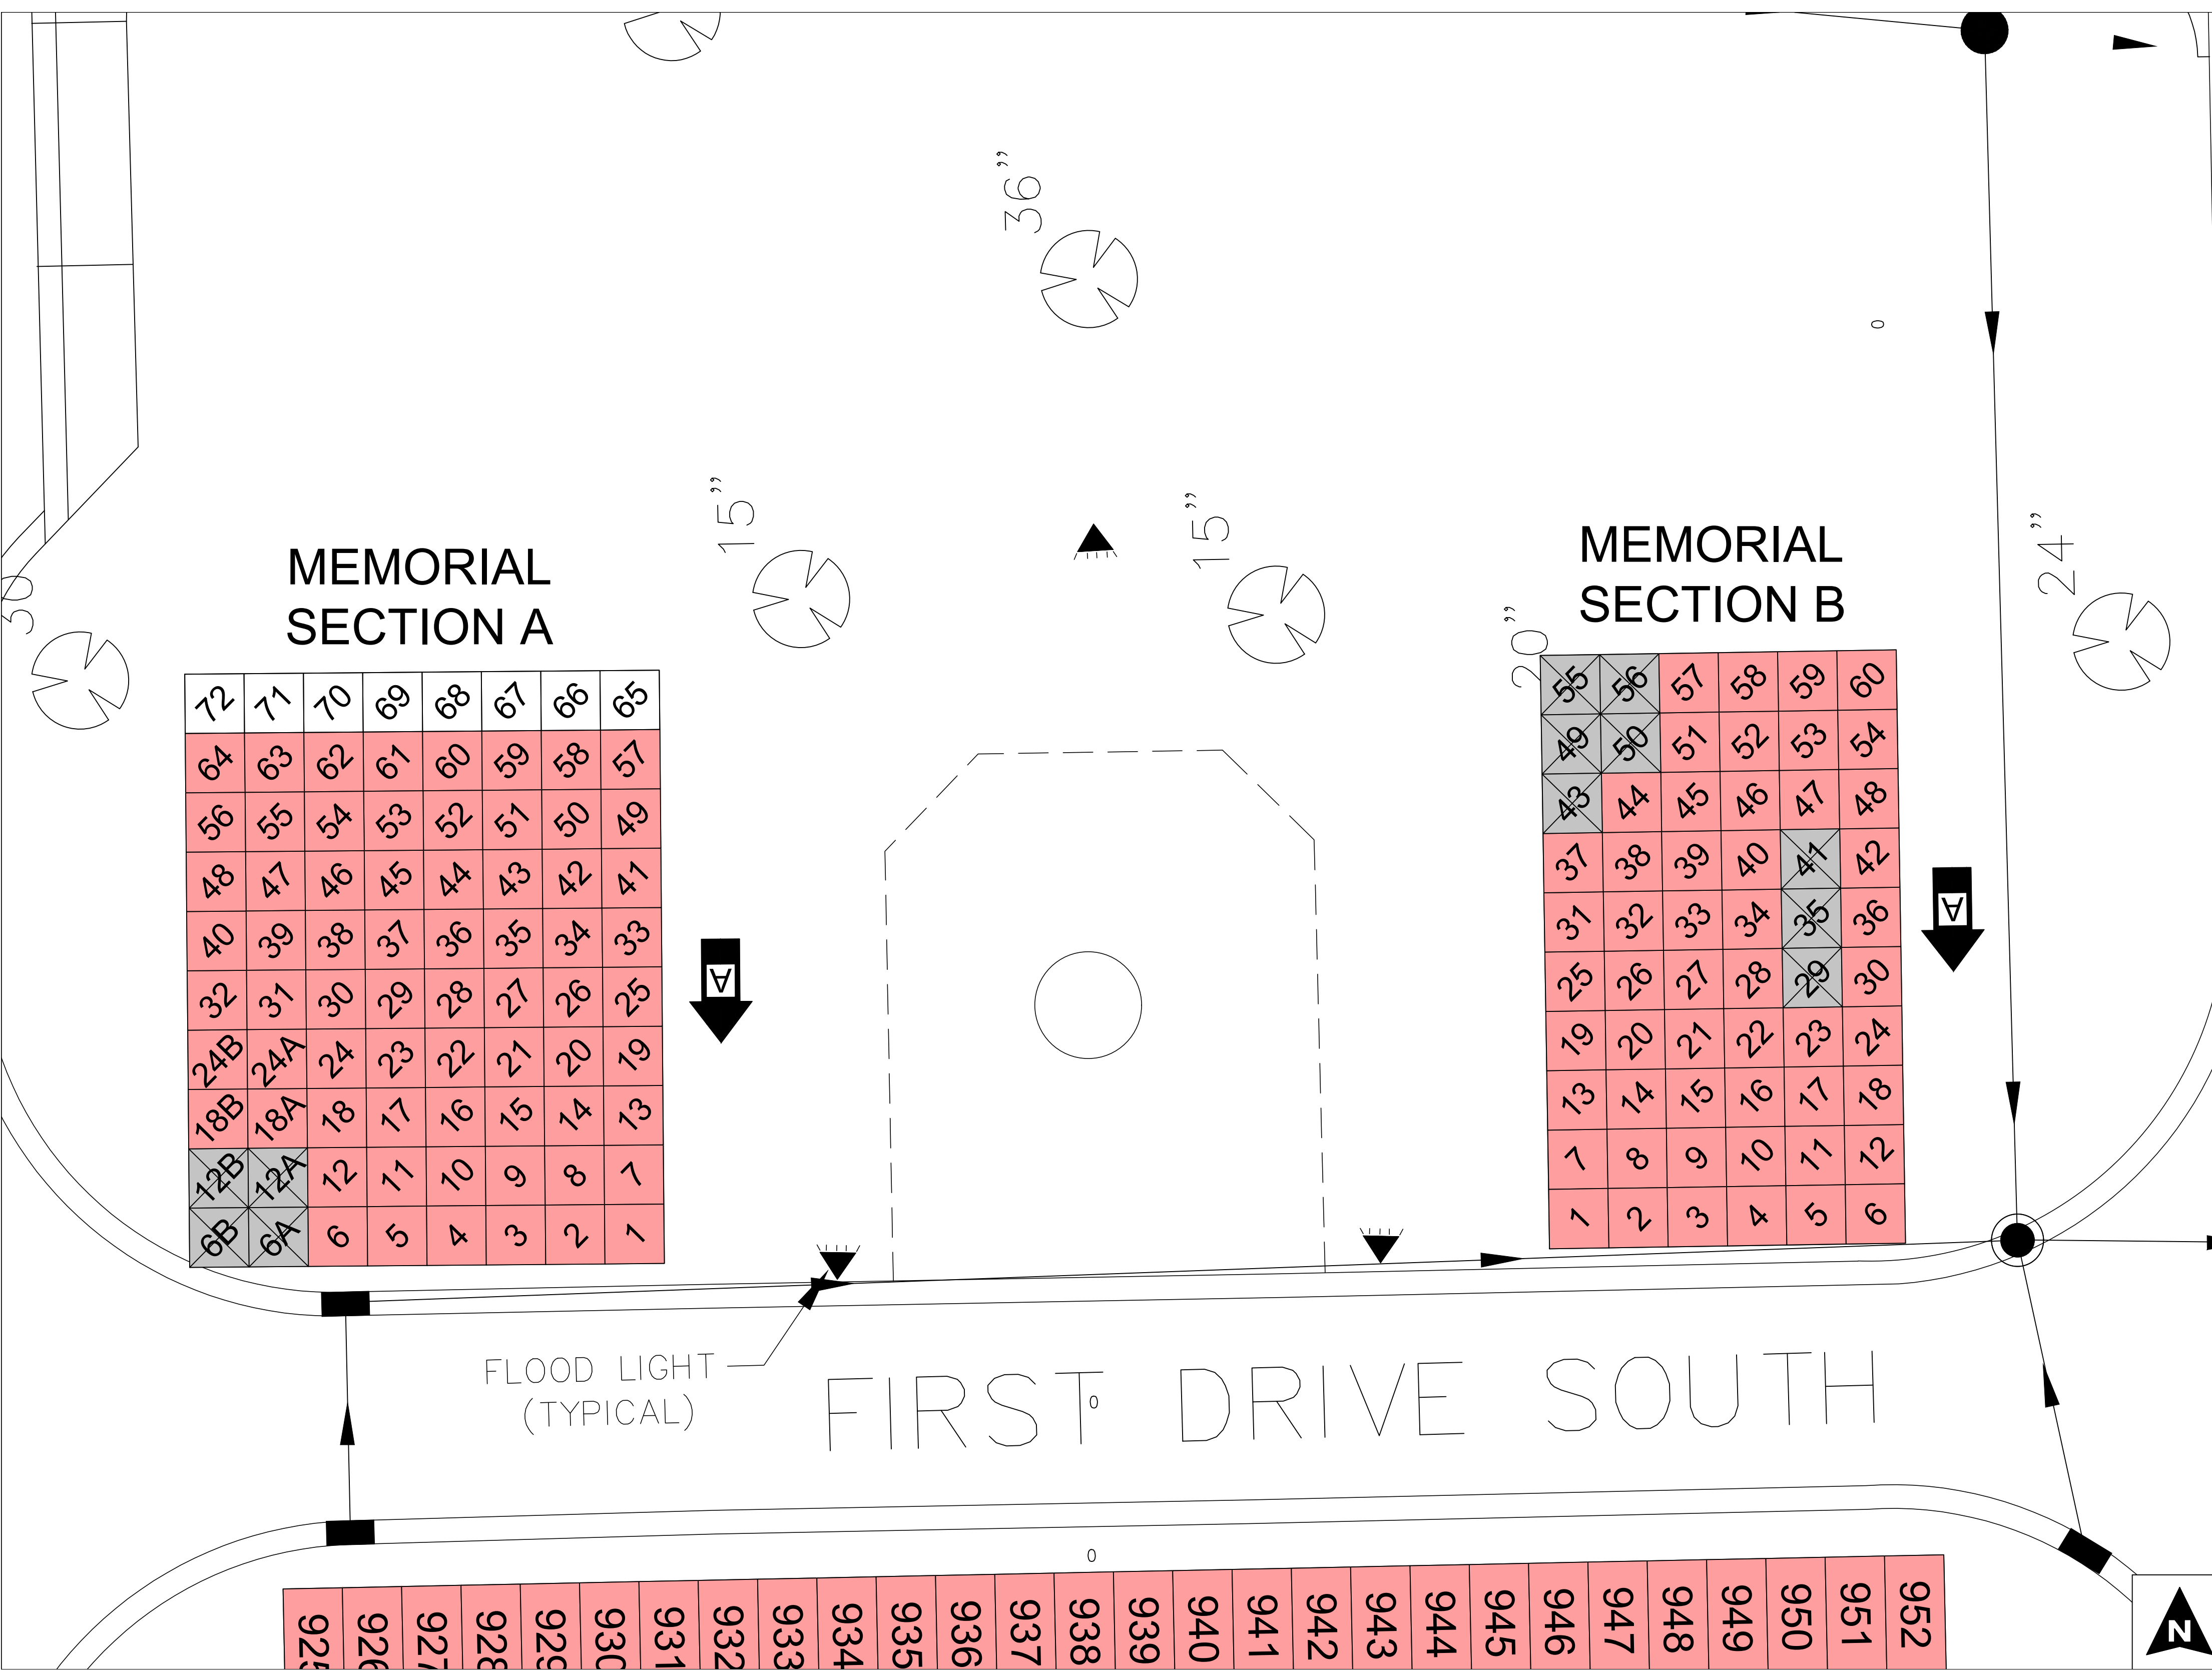


CAMP BUTLER
NATIONAL CEMETERY


AUGUST 2025

Updated by:
Geoff Black

SECTION	TYPE	SIZE	TOTAL
CC-A	NICHES	N/A	1,024

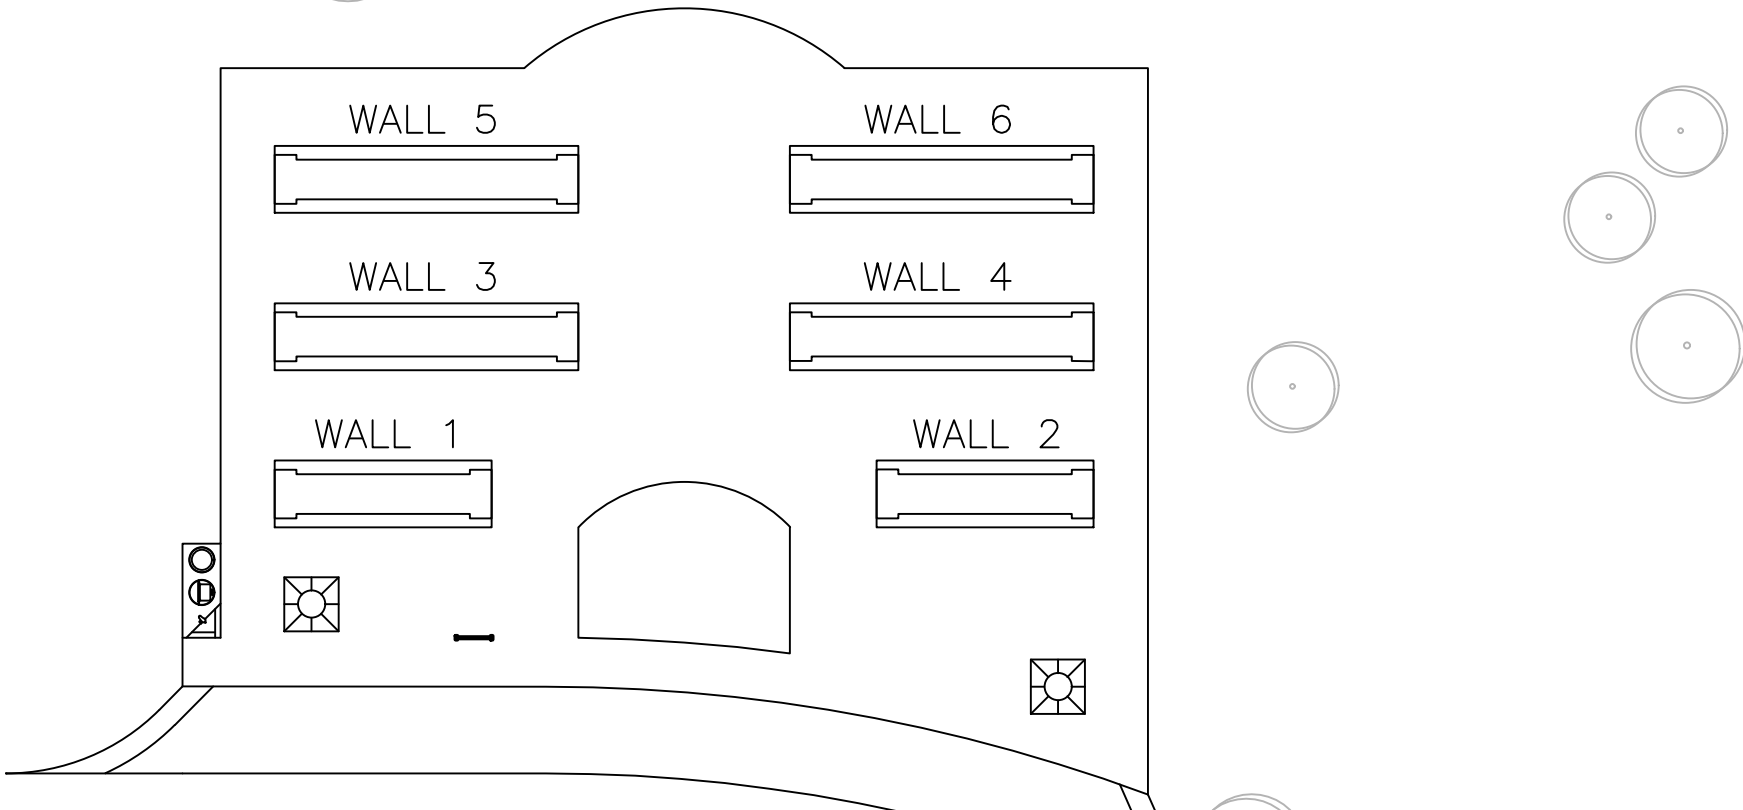

KEY MAP

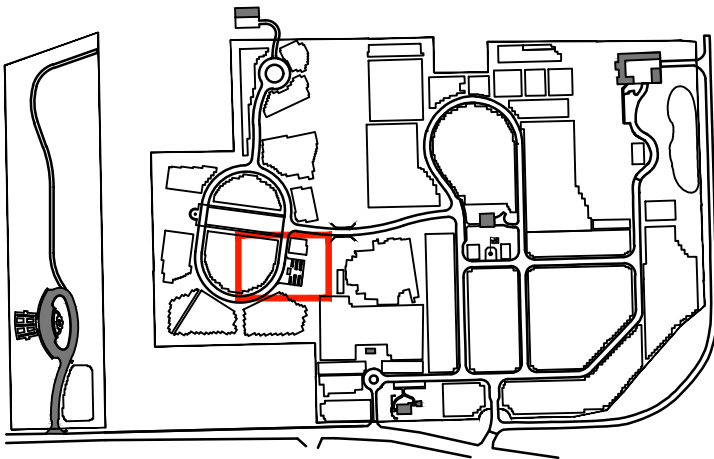

COLUMBARIUM
NICHES

- A00 AVAILABLE NICHE
- A00 RESERVED NICHE
- A00 OCCUPIED NICHE

COLUMBARIUM
COURTYARD
A

	1		5		10		15		20	
D1	C1	B1	A1							
D2	C2	B2	A2							
D3	C3	B3	A3							
D4	C4	B4	A4							
D5	C5	B5	A5							
D6	C6	B6	A6							
D7	C7	B7	A7							
D8	C8	B8	A8							
D9	C9	B9	A9							
D10	C10	B10	A10							
D11	C11	B11	A11							
D12	C12	B12	A12							
D13	C13	B13	A13							
D14	C14	B14	A14							
D15	C15	B15	A15							
D16	C16	B16	A16							
D17	C17	B17	A17							
D18	C18	B18	A18							
D19	C19	B19	A19							
D20	C20	B20	A20							
D21	C21	B21	A21							
D22	C22	B22	A22							
D23	C23	B23	A23							
D24	C24	B24	A24							

FRONT

	25		30		35		40		45	
D25	C25	B25	A25							
D26	C26	B26	A26							
D27	C27	B27	A27							
D28	C28	B28	A28							
D29	C29	B29	A29							
D30	C30	B30	A30							
D31	C31	B31	A31							
D32	C32	B32	A32							
D33	C33	B33	A33							
D34	C34	B34	A34							
D35	C35	B35	A35							
D36	C36	B36	A36							
D37	C37	B37	A37							
D38	C38	B38	A38							
D39	C39	B39	A39							
D40	C40	B40	A40							
D41	C41	B41	A41							
D42	C42	B42	A42							
D43	C43	B43	A43							
D44	C44	B44	A44							
D45	C45	B45	A45							
D46	C46	B46	A46							
D47	C47	B47	A47							
D48	C48	B48	A48							

BACK

	1		5		10		15		20	
D1	C1	B1	A1							
D2	C2	B2	A2							
D3	C3	B3	A3							
D4	C4	B4	A4							
D5	C5	B5	A5							
D6	C6	B6	A6							
D7	C7	B7	A7							
D8	C8	B8	A8							
D9	C9	B9	A9							
D10	C10	B10	A10							
D11	C11	B11	A11							
D12	C12	B12	A12							
D13	C13	B13	A13							
D14	C14	B14	A14							
D15	C15	B15	A15							
D16	C16	B16	A16							
D17	C17	B17	A17							
D18	C18	B18	A18							
D19	C19	B19	A19							
D20	C20	B20	A20							
D21	C21	B21	A21							
D22	C22	B22	A22							
D23	C23	B23	A23							
D24	C24	B24	A24							

FRONT

	25		30		35		40		45	
D25	C25	B25	A25							
D26	C26	B26	A26							
D27	C27	B27	A27							
D28	C28	B28	A28							
D29	C29	B29	A29							
D30	C30	B30	A30							
D31	C31	B31	A31							
D32	C32	B32	A32							
D33	C33	B33	A33							
D34	C34	B34	A34							
D35	C35	B35	A35							
D36	C36	B36	A36							
D37	C37	B37	A37							
D38	C38	B38	A38							
D39	C39	B39	A39							
D40	C40	B40	A40							
D41	C41	B41	A41							
D42	C42	B42	A42							
D43	C43	B43	A43							
D44	C44	B44	A44							
D45	C45	B45	A45							
D46	C46	B46	A46							
D47	C47	B47	A47							
D48	C48	B48	A48							

BACK

	1		5		10		15		20	
D1	C1	B1	A1							
D2	C2	B2	A2							
D3	C3	B3	A3							
D4	C4	B4	A4							
D5	C5	B5	A5							
D6	C6	B6	A6							
D7	C7	B7	A7							
D8	C8	B8	A8							
D9	C9	B9	A9							
D10	C10	B10	A10							
D11	C11	B11	A11							
D12	C12	B12	A12							
D13	C13	B13	A13							
D14	C14	B14	A14							
D15	C15	B15	A15							
D16	C16	B16	A16							
D17	C17	B17	A17							
D18	C18	B18	A18							
D19	C19	B19	A19							
D20	C20	B20	A20							
D21	C21	B21	A21							
D22	C22	B22	A22							
D23	C23	B23	A23							
D24	C24	B24	A24							

FRONT

	25		30		35		40		45	
D25	C25	B25	A25							
D26	C26	B26	A26							
D27	C27	B27	A27							
D28	C28	B28	A28							
D29	C29	B29	A29							
D30	C30	B30	A30							
D31	C31	B31	A31							
D32	C32	B32	A32							
D33	C33	B33	A33							
D34	C34	B34	A34							
D35	C35	B35	A35							
D36	C36	B36	A36							
D37	C37	B37	A37							
D38	C38	B38	A38							
D39	C39	B39	A39							
D40	C40	B40	A40							
D41	C41	B41	A41							
D42	C42	B42	A42							
D43	C43	B43	A43							
D44	C44	B44	A44							
D45	C45	B45	A45							
D46	C46	B46	A46							
D47	C47	B47	A47							
D48	C48	B48	A48							

BACK

	1		5		10		15		20	
D1	C1	B1	A1							
D2	C2	B2	A2							
D3	C3	B3	A3							
D4	C4	B4	A4							
D5	C5	B5	A5							
D6	C6	B6	A6							
D7	C7	B7	A7							
D8	C8	B8	A8							
D9	C9	B9	A9							
D10	C10	B10	A10							
D11	C11	B11	A11							
D12	C12	B12	A12							
D13	C13	B13	A13							
D14	C14	B14	A14							
D15	C15	B15	A15							
D16	C16	B16	A16							
D17	C17	B17	A17							
D18	C18	B18	A18							
D19	C19	B19	A19							
D20	C20	B20	A20							
D22	C22	B22	A22							
D23	C23	B23	A23							
D24	C24	B24	A24							

FRONT

A	B	C	D	25	30				35				40				45				A	B	C	D
				D25	C25	B25	A25																	
				D26	C26	B26	A26																	
				D27	C27	B27	A27																	
				D28	C28	B28	A28																	
				D29	C29	B29	A29																	
				D30	C30	B30	A30																	
				D31	C31	B31	A31																	
				D32	C32	B32	A32																	
				D33	C33	B33	A33																	
				D34	C34	B34	A34																	
				D35	C35	B35	A35																	
				D36	C36	B36	A36																	
				D																				

AUGUST 2025


SECTION	TYPE	SIZE	TOTAL
COL B	NICHES	N/A	1500

[illegible]

A00	AVAILABLE NICHE
A00	RESERVED NICHE
A00	OCCUPIED NICHE

COLUMBARIUM

B

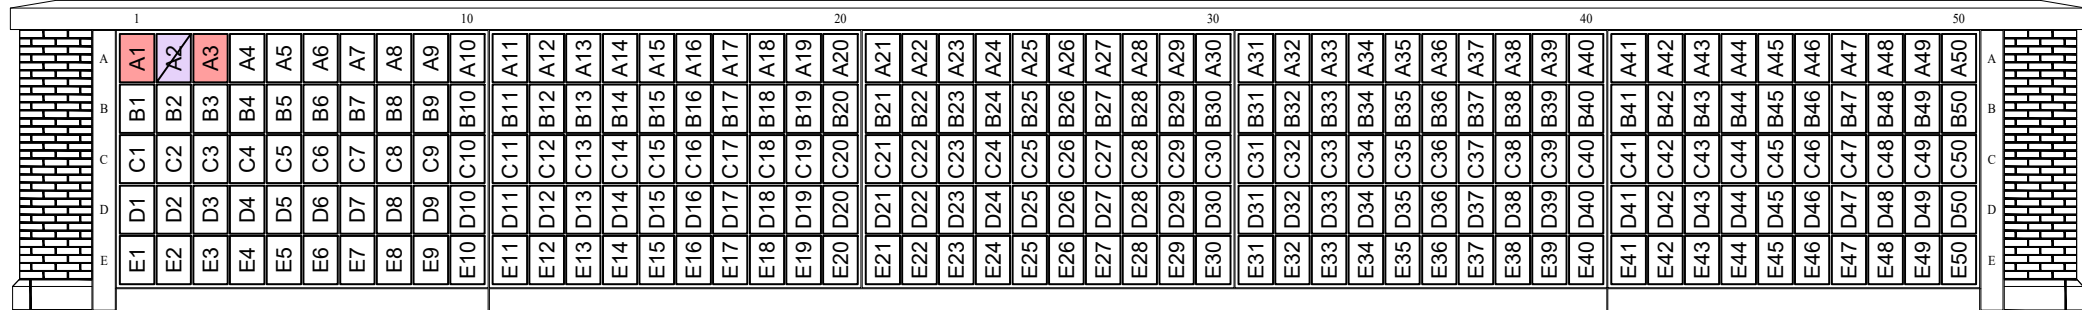
[illegible][illegible][illegible]

	1										10										20										30										40										50																																																																																																																																																																																																							
	A		B		C		D		E		A		B		C		D		E		A		B		C		D		E		A		B		C		D		E		A		B		C		D		E		A		B		C		D		E																																																																																																																																																																																															
	E1	D1	C1	B1	A1	E2	D2	C2	B2	A2	E3	D3	C3	B3	A3	E4	D4	C4	B4	A4	E5	D5	C5	B5	A5	E6	D6	C6	B6	A6	E7	D7	C7	B7	A7	E8	D8	C8	B8	A8	E9	D9	C9	B9	A9	E10	D10	C10	B10	A10	E11	D11	C11	B11	A11	E12	D12	C12	B12	A12	E13	D13	C13	B13	A13	E14	D14	C14	B14	A14	E15	D15	C15	B15	A15	E16	D16	C16	B16	A16	E17	D17	C17	B17	A17	E18	D18	C18	B18	A18	E19	D19	C19	B19	A19	E20	D20	C20	B20	A20	E21	D21	C21	B21	A21	E22	D22	C22	B22	A22	E23	D23	C23	B23	A23	E24	D24	C24	B24	A24	E25	D25	C25	B25	A25	E26	D26	C26	B26	A26	E27	D27	C27	B27	A27	E28	D28	C28	B28	A28	E29	D29	C29	B29	A29	E30	D30	C30	B30	A30	E31	D31	C31	B31	A31	E32	D32	C32	B32	A32	E33	D33	C33	B33	A33	E34	D34	C34	B34	A34	E35	D35	C35	B35	A35	E36	D36	C36	B36	A36	E37	D37	C37	B37	A37	E38	D38	C38	B38	A38	E39	D39	C39	B39	A39	E40	D40	C40	B40	A40	E41	D41	C41	B41	A41	E42	D42	C42	B42	A42	E43	D43	C43	B43	A43	E44	D44	C44	B44	A44	E45	D45	C45	B45	A45	E46	D46	C46	B46	A46	E47	D47	C47	B47	A47	E48	D48	C48	B48	A48	E49	D49	C49	B49	A49	E50	D50	C50	B50	A50

[illegible]

BACK



COLUMBARIUM B - WALL 6

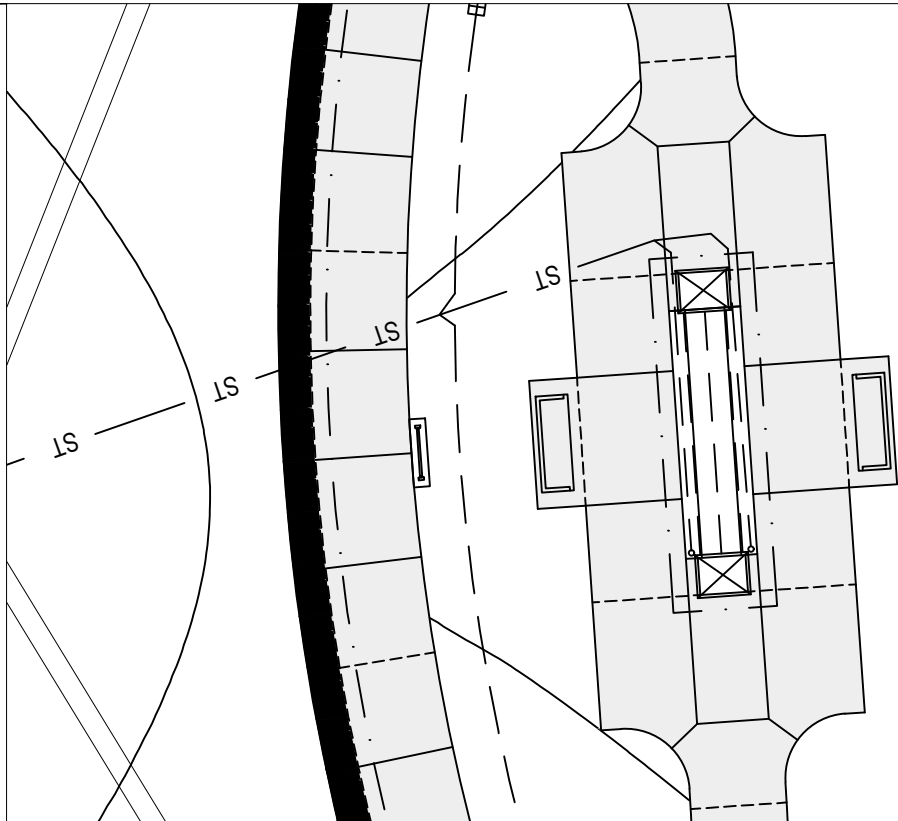


SITE PLAN -
MEMORIAL WALL



CAMP BUTLER NATIONAL CEMETERY			
AUGUST 2025			Updated by: Geoff Black
SECTION	TYPE	SIZE	TOTAL
MEM WALL	MEM	N/A	150

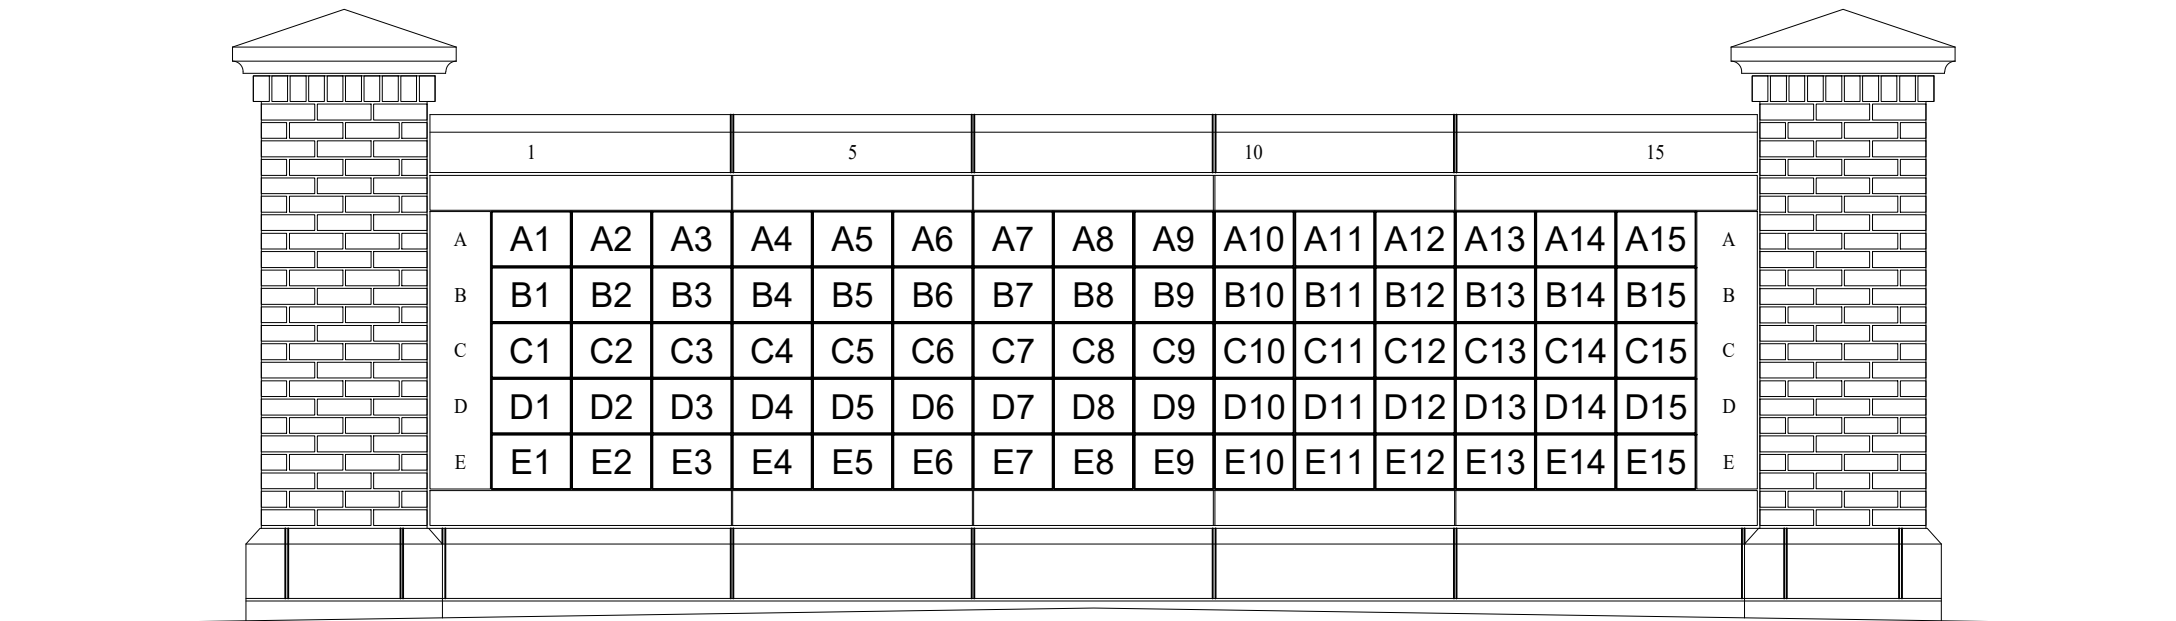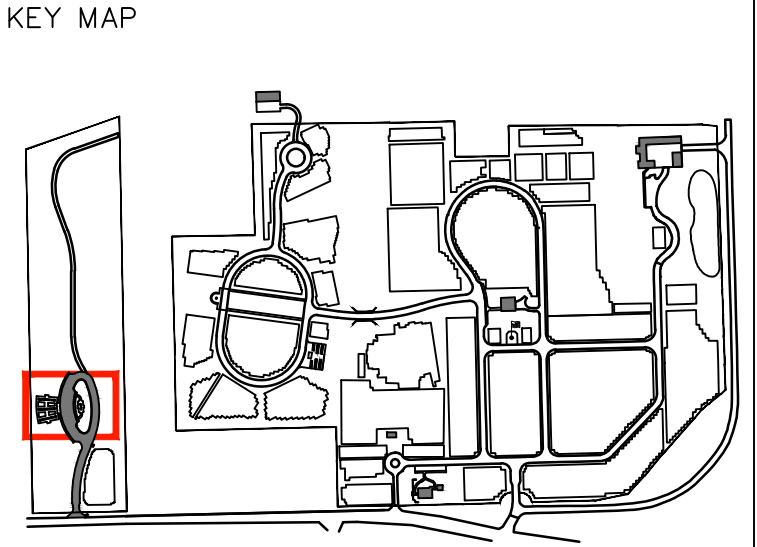

FRONT
MEMORIAL WALL

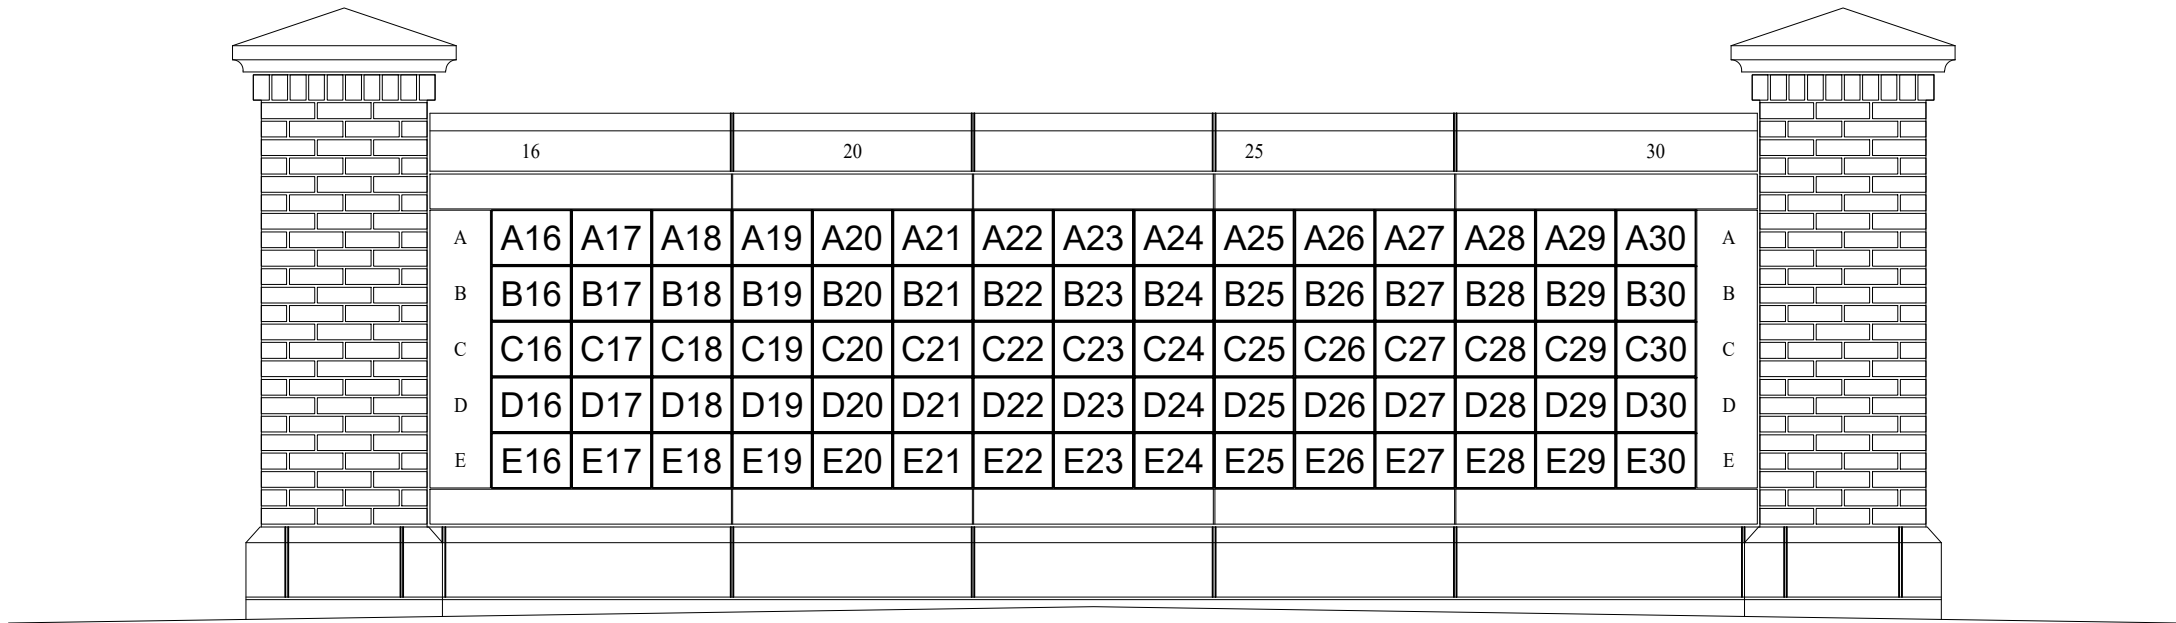


BACK
MEMORIAL WALL


MEMORIAL	
A00	AVAILABLE
A00	RESERVED
A00	OCCUPIED

MEMORIAL WALL



\\District\2-ENG\7.1-Millennium Projects\Santa Fe\904-FY22-Shrine-00_Santa Fe-Area Renovation Areas_Details.dwg 5-18-22 04:15:00 PM cemGaussM

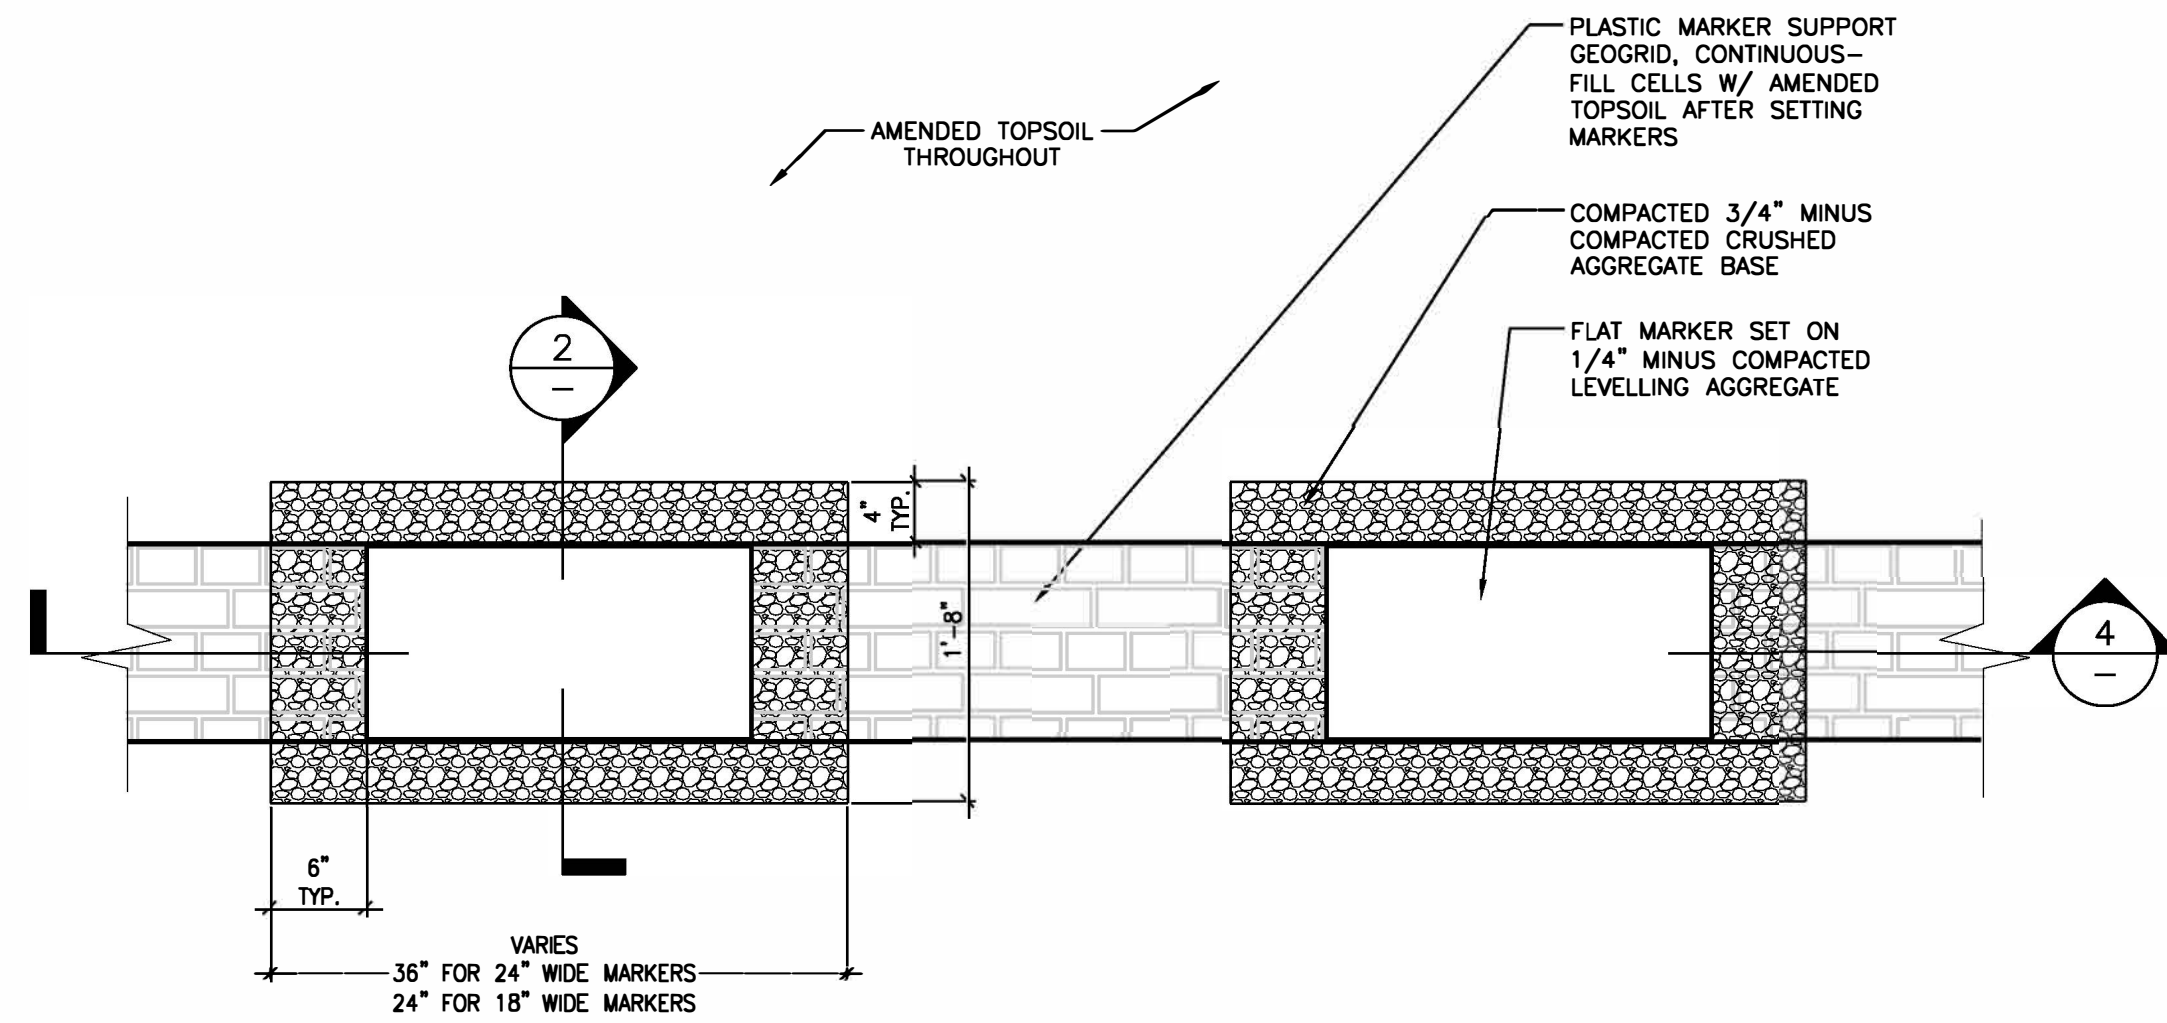


3 FLAT MARKER INSTALLATION (OPTIONS)
SCALE: N.T.S. PLAN

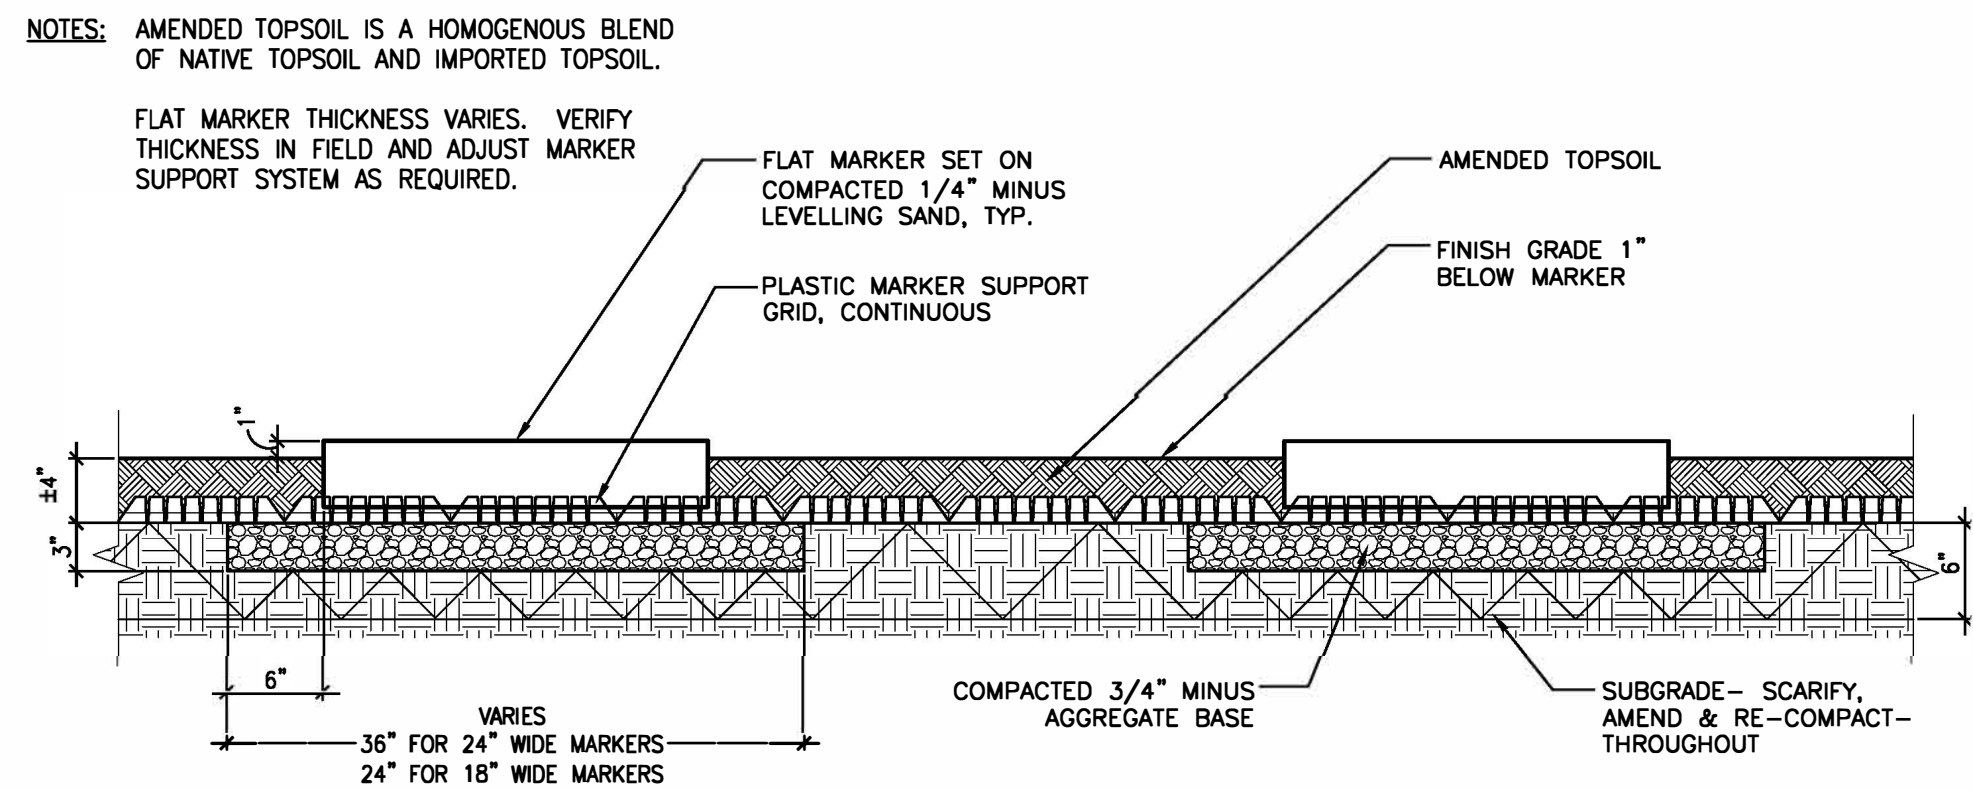

4 FLAT MARKER INSTALLATION (OPTIONS)
SCALE: N.T.S. SECTION

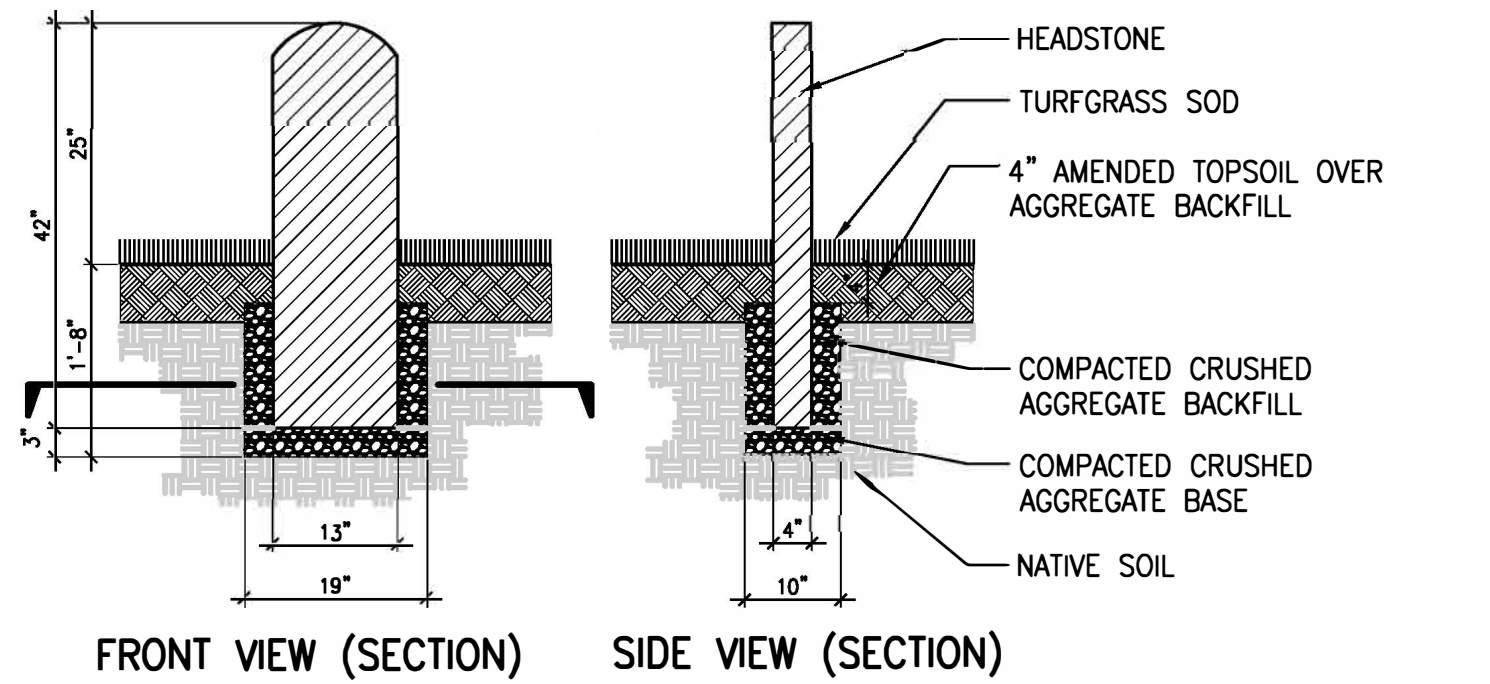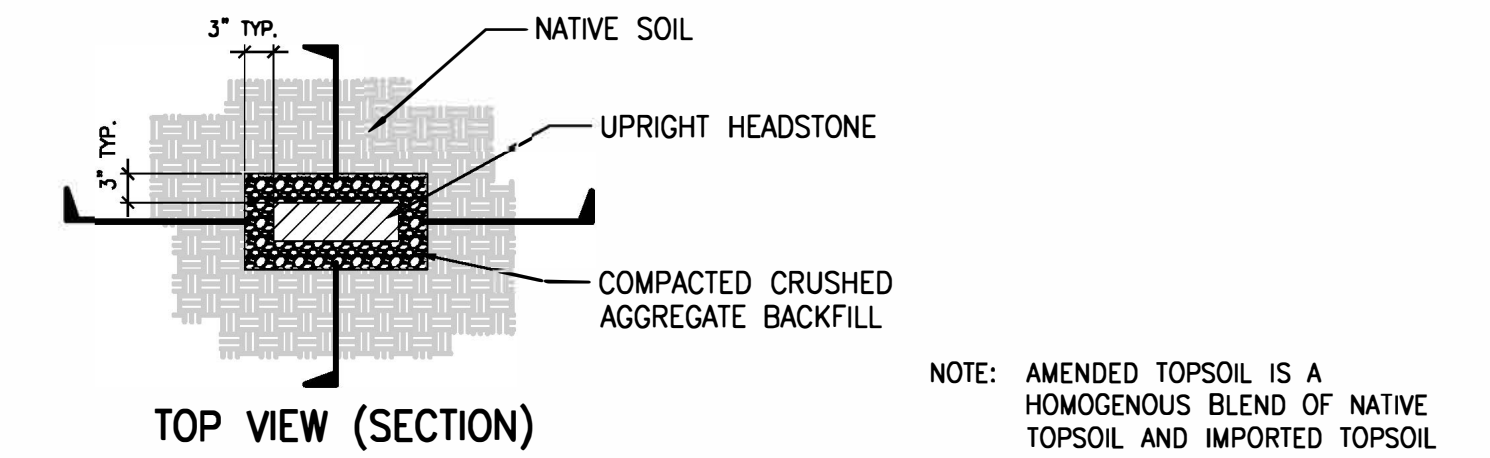

1 UPRIGHT HEADSTONE INSTALLATION (BASE BID)
SCALE: N.T.S. PLAN/SECTION/CROSS-SECTION

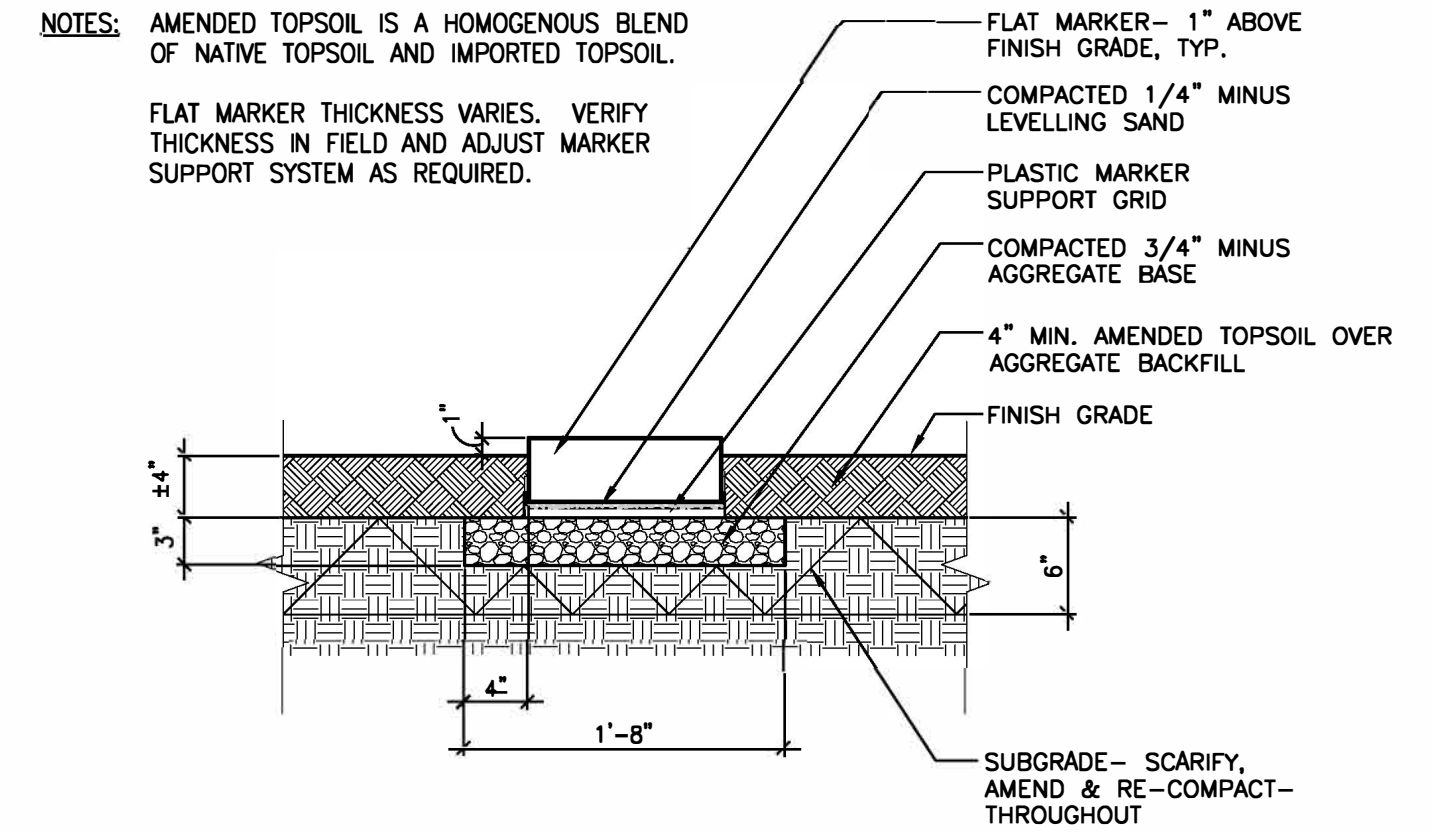

2 FLAT MARKER INSTALLATION (OPTIONS)
SCALE: N.T.S. CROSS-SECTION



NATIONAL
CEMETERY
ADMINISTRATION

Drawing Title
EXHIBIT 'B'
HEADSTONE SETTING DETAILS

Approved: Project Director

Project Title
Project Number
Location
Santa Fe National Cemetery
501 Guadalupe St
Santa Fe, NM 87501
Date

Drawing Number
L-2
Dwg. 2 of 2

National Cemetery
Administration



Revisions Date


EXHIBIT 'C'

UPRIGHT HEADSTONE REALIGNMENT DIAGRAMS

In sloping terrain additional keystone may need to be set to provide a smooth transition


Initial Keystone

Subsequent Keystone
(To be set onto the
realignment grid)

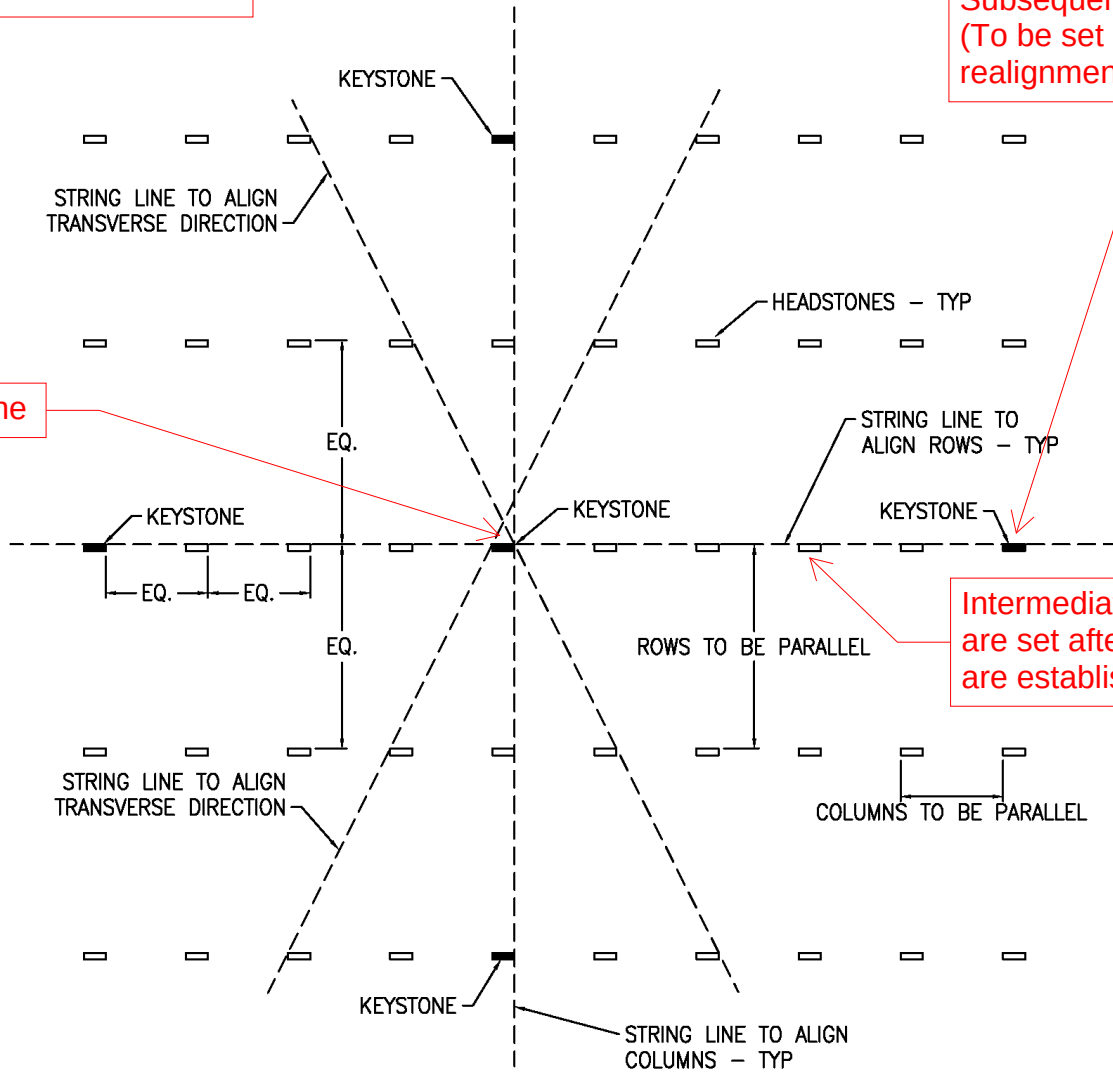


Intermediate headstones
are set after keystones
are established

FIGURE 2
PLAN VIEW OF
BURIAL SECTION REALIGNMENT

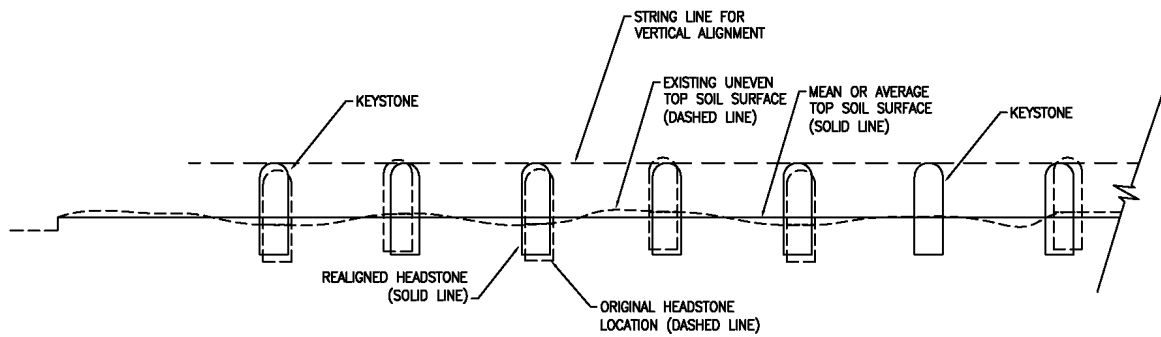

TYPICAL VERTICAL ALIGNMENT IN A FLAT SECTION

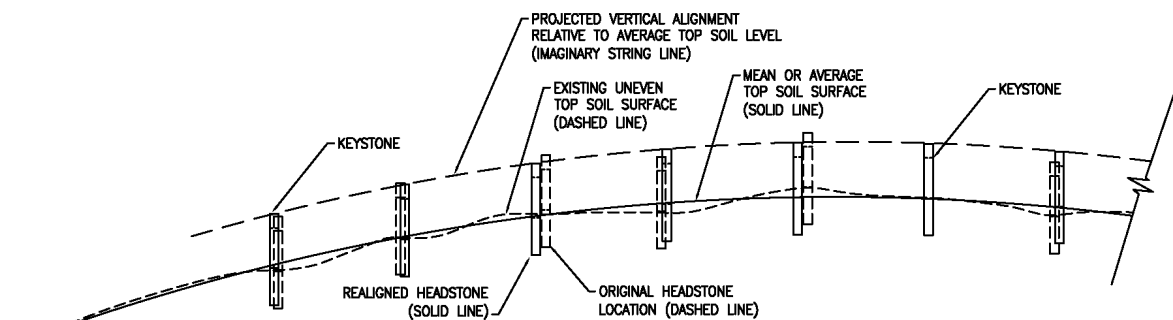


TYPICAL VERTICAL ALIGNMENT IN A SLOPED SECTION


FIGURE 3
ELEVATION VIEW OF
BURIAL SECTION REALIGNMENT


EXHIBIT 'D'

FLAT MARKER REALIGNMENT DIAGRAMS

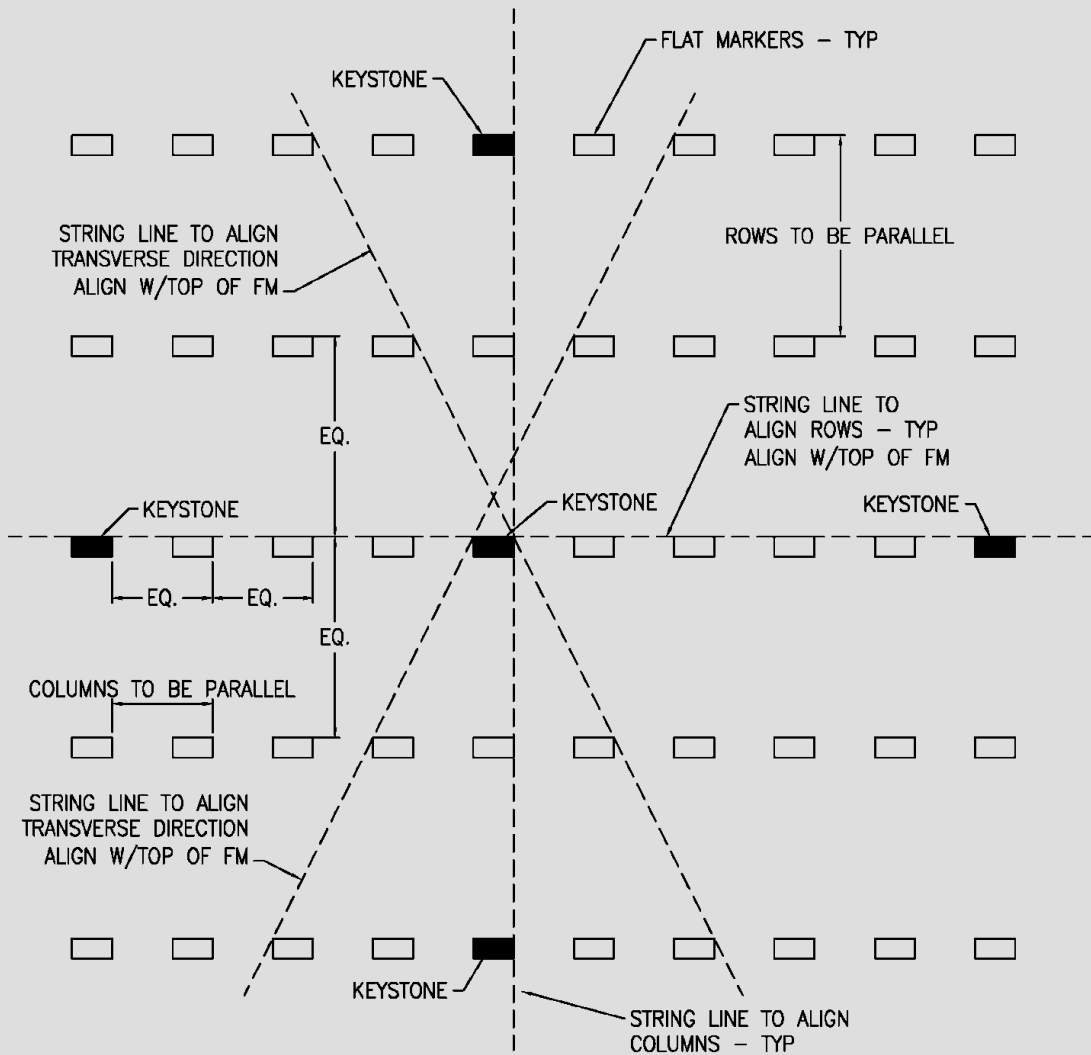

PLAN VIEW
FLAT MARKER
BURIAL SECTION LAYOUT AND REALIGNMENT

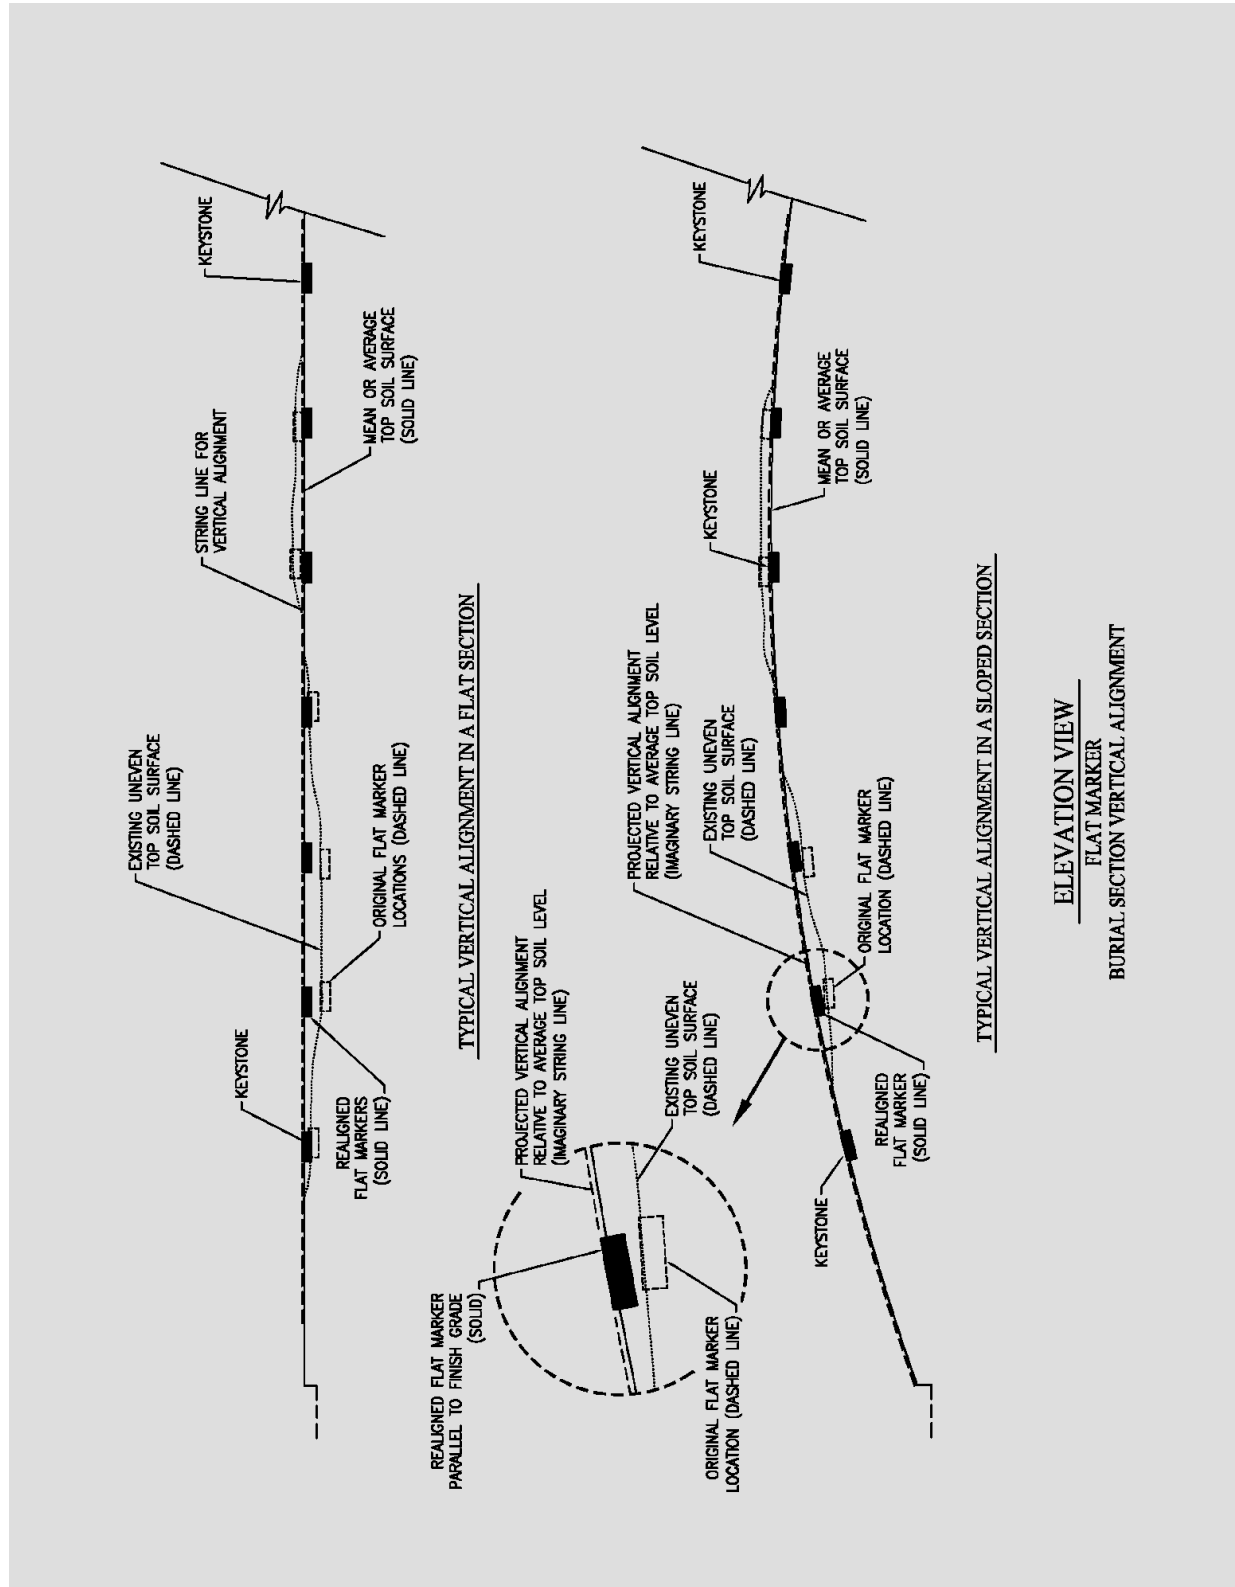



OFF-SET TO AVOID
OBSTRUCTIONS.
(TYPICAL)



1. SHADED AREAS SHOWN HEREON INDICATE HEADSTONES SHIFTING GREATER THAN 6".
2. ELEVATIONS SHOWN HEREON ARE BASED UPON SAN BRUNO HVCN SB-3 AND HAVING AN ELEVATION OF 82.66' (NAVD 88).

DATE OF FIELD SURVEY		CONSULTANTS	SECTION DATA							DRAWING TITLE HEADSTONE REALIGNMENT LAYOUT		PROJECT TITLE NATIONAL CEMETERY NATIONAL SHRINE PROJECT			PROJECT NO. N/A	
REVIEW COMMENTS – REVISED			SECTION	GRAVESITE GRID	HEADSTONES	NO. OF UPRIGHT	NO. OF FLAT	NO. OF RESERVED	AREA IN SQD						SECTION NO. 2D	
			2D	5' X 10'	UPRIGHT MARBLE	1464	3			sqft						
REVISIONS	DATE									APPROVED: CONTRACTING OFFICER REPRESENTATIVE		LOCATION			DRAWING NO. GGNC-2D DWG. 1 OF 2	
															DATE	DRAWN

