



- ### GENERAL NOTES
- ALL ITALICIZED TEXT CALLOUTS REFER TO EXISTING FEATURES.
 - FOR GENERAL PROJECT ABBREVIATIONS NOT DEFINED ON THIS SHEET, REFER TO SHEET ID 00-G-015.
 - FOR CIVIL PROJECT ABBREVIATIONS NOT DEFINED ON THIS SHEET, REFER TO SHEET ID 04-G-102.
 - ADJUSTMENTS TO PLAN BASED ON FIELD CONDITIONS WHICH DIFFER FROM THOSE PRESENTED ON THIS DRAWING WILL REQUIRE CONTRACTING OFFICER OR DESIGNATED REPRESENTATIVE'S APPROVAL BEFORE IMPLEMENTATION.

- ### GENERAL CIVIL NOTES
- CONSTRUCTION ACTIVITIES CANNOT BLOCK ACCESS TO RE OFFICE, QA TRAILER OR CONCRETE TESTING LAB.
 - ENTRANCE GATE TO SITE IS LOCKED FROM 4PM UNTIL 6AM.
 - ANY CLOSURES TO ROAD LOOP MUST BE PARTIAL ONLY AND COORDINATED PRIOR TO CLOSING WITH THE COR.
 - COORDINATE MATERIAL STORAGE WITHIN WORK LIMITS WITH COR PRIOR TO ARRIVAL.

- ### SHEET KEYNOTES
- EAST BANK
 - MAIN LOCK
 - AUXILIARY LOCK
 - RESIDENT ENGINEERS OFFICE
 - POWERHOUSE ISLAND
 - WEST BANK

LEGEND

CONTRACTOR WORK LIMITS

US Army Corps of Engineers®

MARK	DESIGN	DRWN	CHKD	SUPV	RWD	APPD	ISSD	REC'D	PROJ. ID	DATE

DESIGNED BY:	ISSUE DATE:
E. BOEGLIN	NOVEMBER 2025

DRAWN BY:	REVIEWED BY:
K. MCNEELY	

CHECKED BY:	APPROVED BY:
	M. MORRISON

SUBMITTED BY:	ISSUED BY:
	N. BERGER

SIZE:	PLOT NO.	DISC:	TVA SHEET NO.
ANSI D	8	C	

TENNESSEE VALLEY AUTHORITY


INDC
NASHVILLE DISTRICT


TENNESSEE RIVER
KENTUCKY LOCK
KENTUCKY LOCK ADDITION PROJECT
CONFERRING TRAILER CONTRACT

SITE - GENERAL
CONTRACTOR WORK LIMITS PLAN

SHEET ID
04-G-101





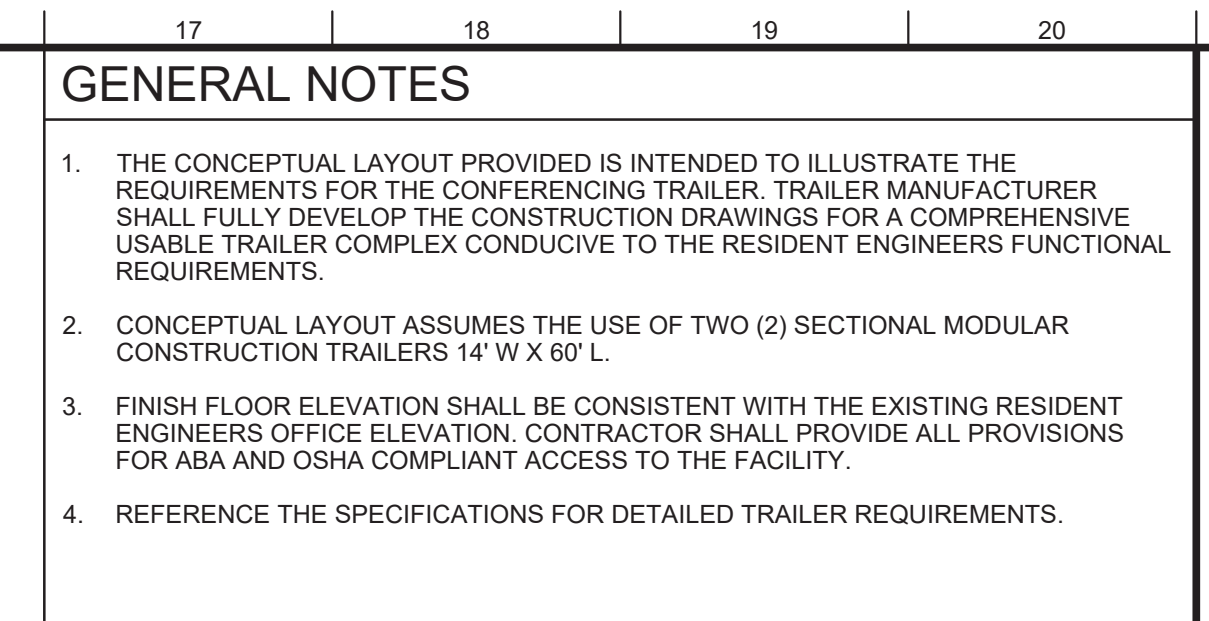


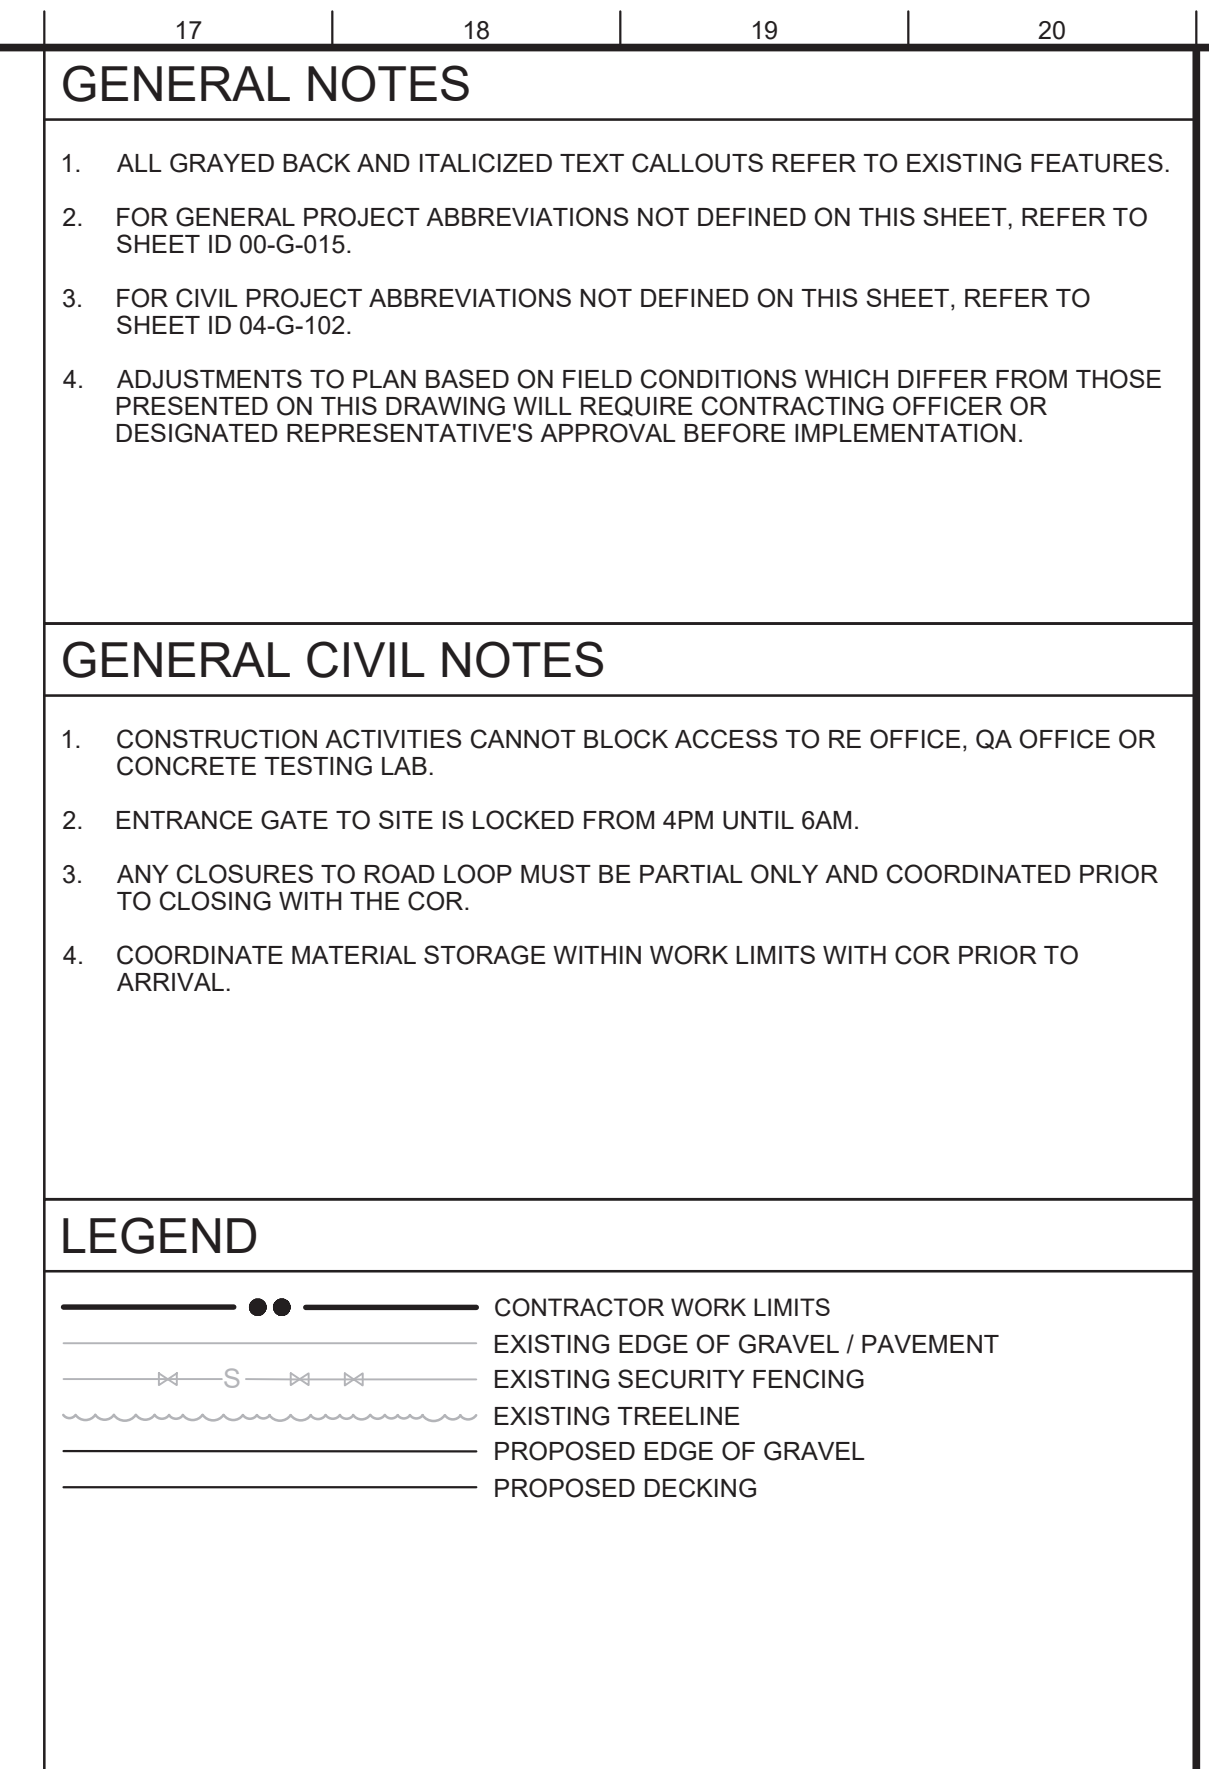

LINE TABLE								
LINE #	BP STA:	LENGTH (FT)		EP STA:	DIRECTION			
L1	0+00.00	20.50'		0+20.50	N 79° 23' 06.61" E			
L2	0+73.29	12.15'		0+85.44	S 60° 16' 56.92" E			
L3	1+50.00	25.00'		1+75.00	N 45° 44' 25.66" E			
CURVE TABLE								
CURVE #	PC STA:	PI STA:	PT STA:	DELTA (Δ)	DEGREE OF CURVATURE	RADIUS (FT)	CHORD LENGTH	LENGTH (FT)
C1	0+20.50	0+48.04	0+73.29	40° 19' 56"	076.3944	75.00'	51.71'	52.79'
C2	0+85.44	1+23.10	1+50.00	73° 58' 37"	114.5916	50.00'	60.17'	64.56'

95% CONSISTENCY REVIEW

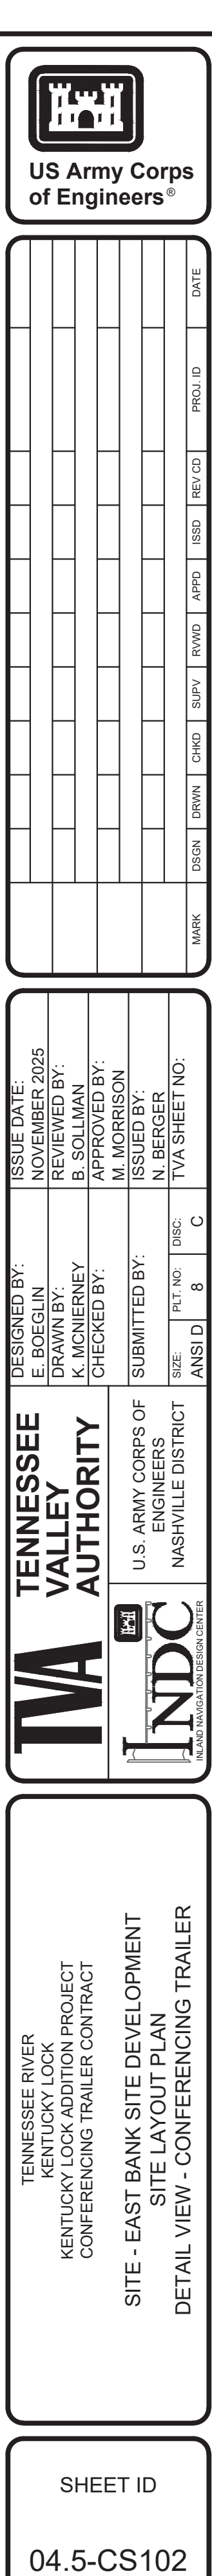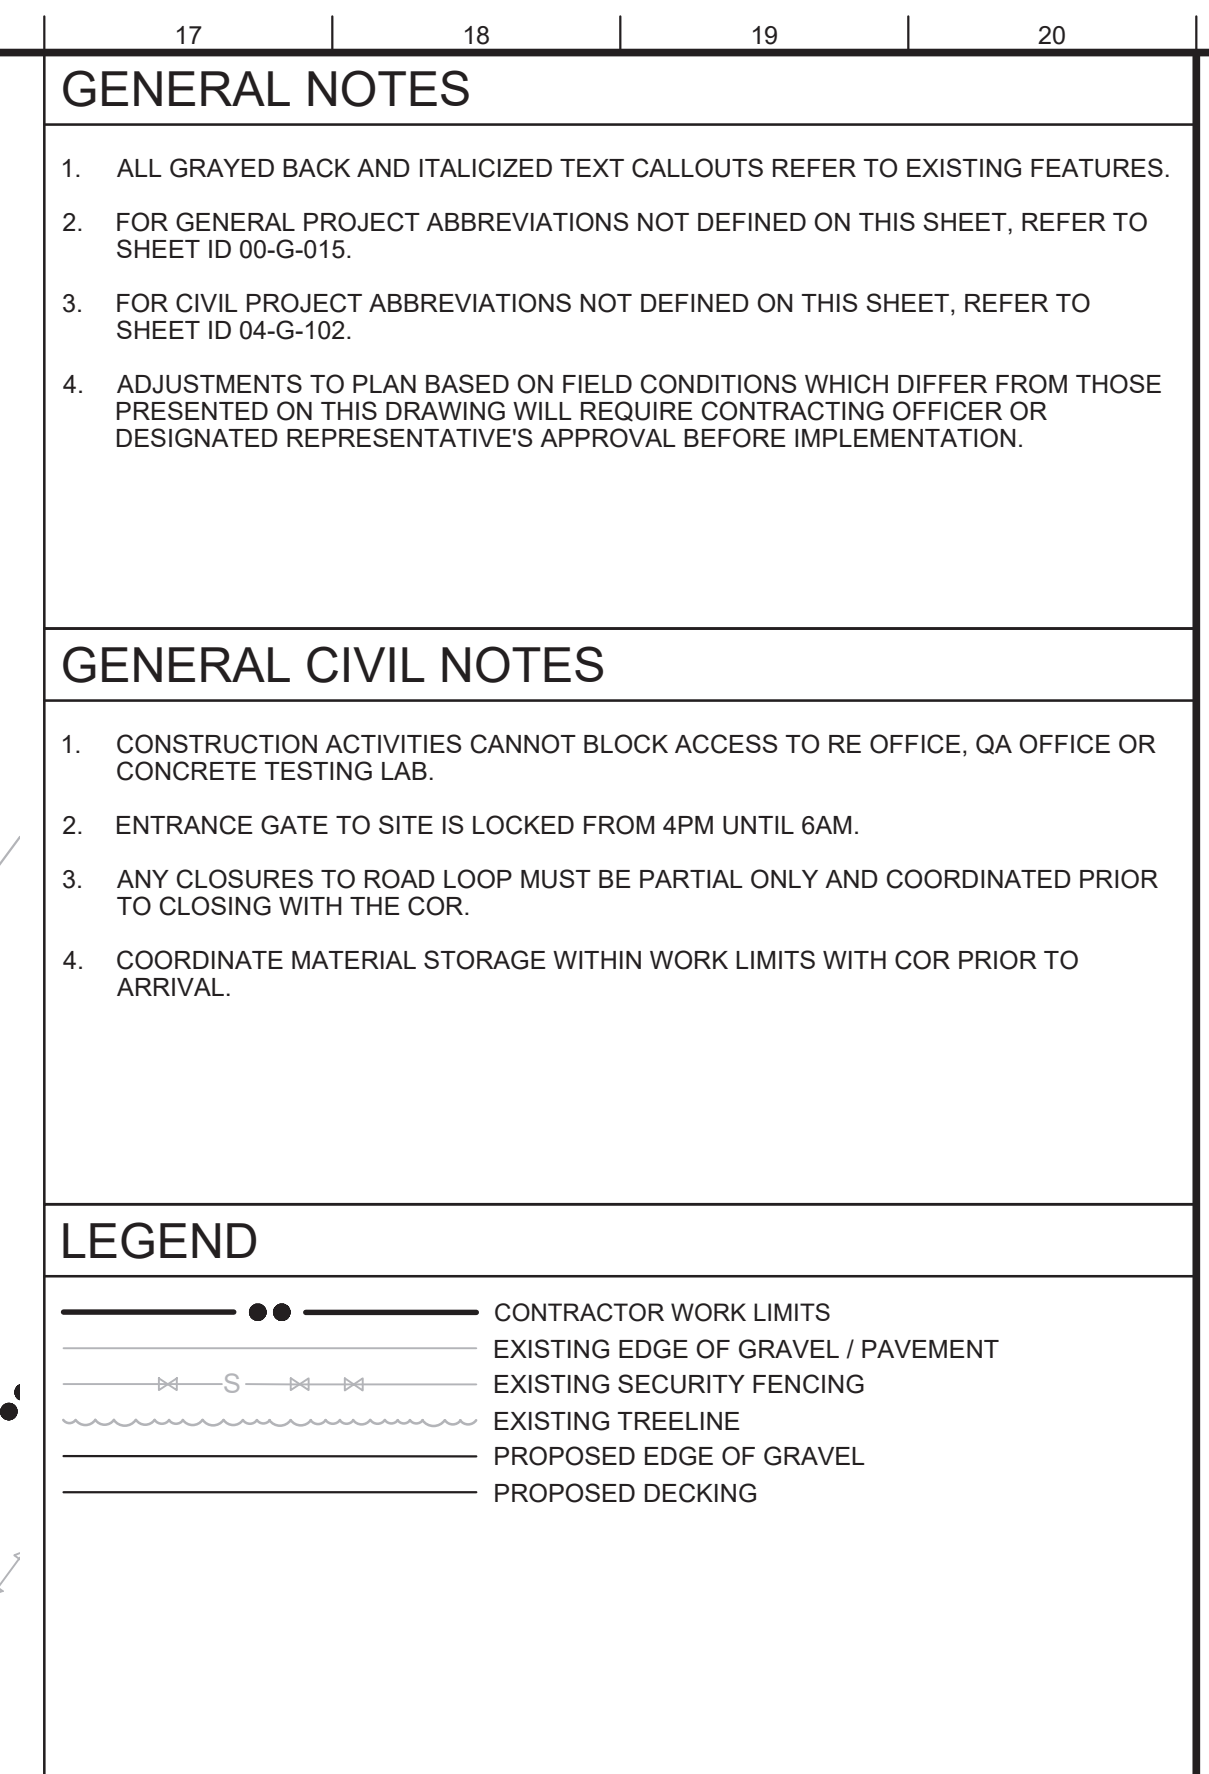

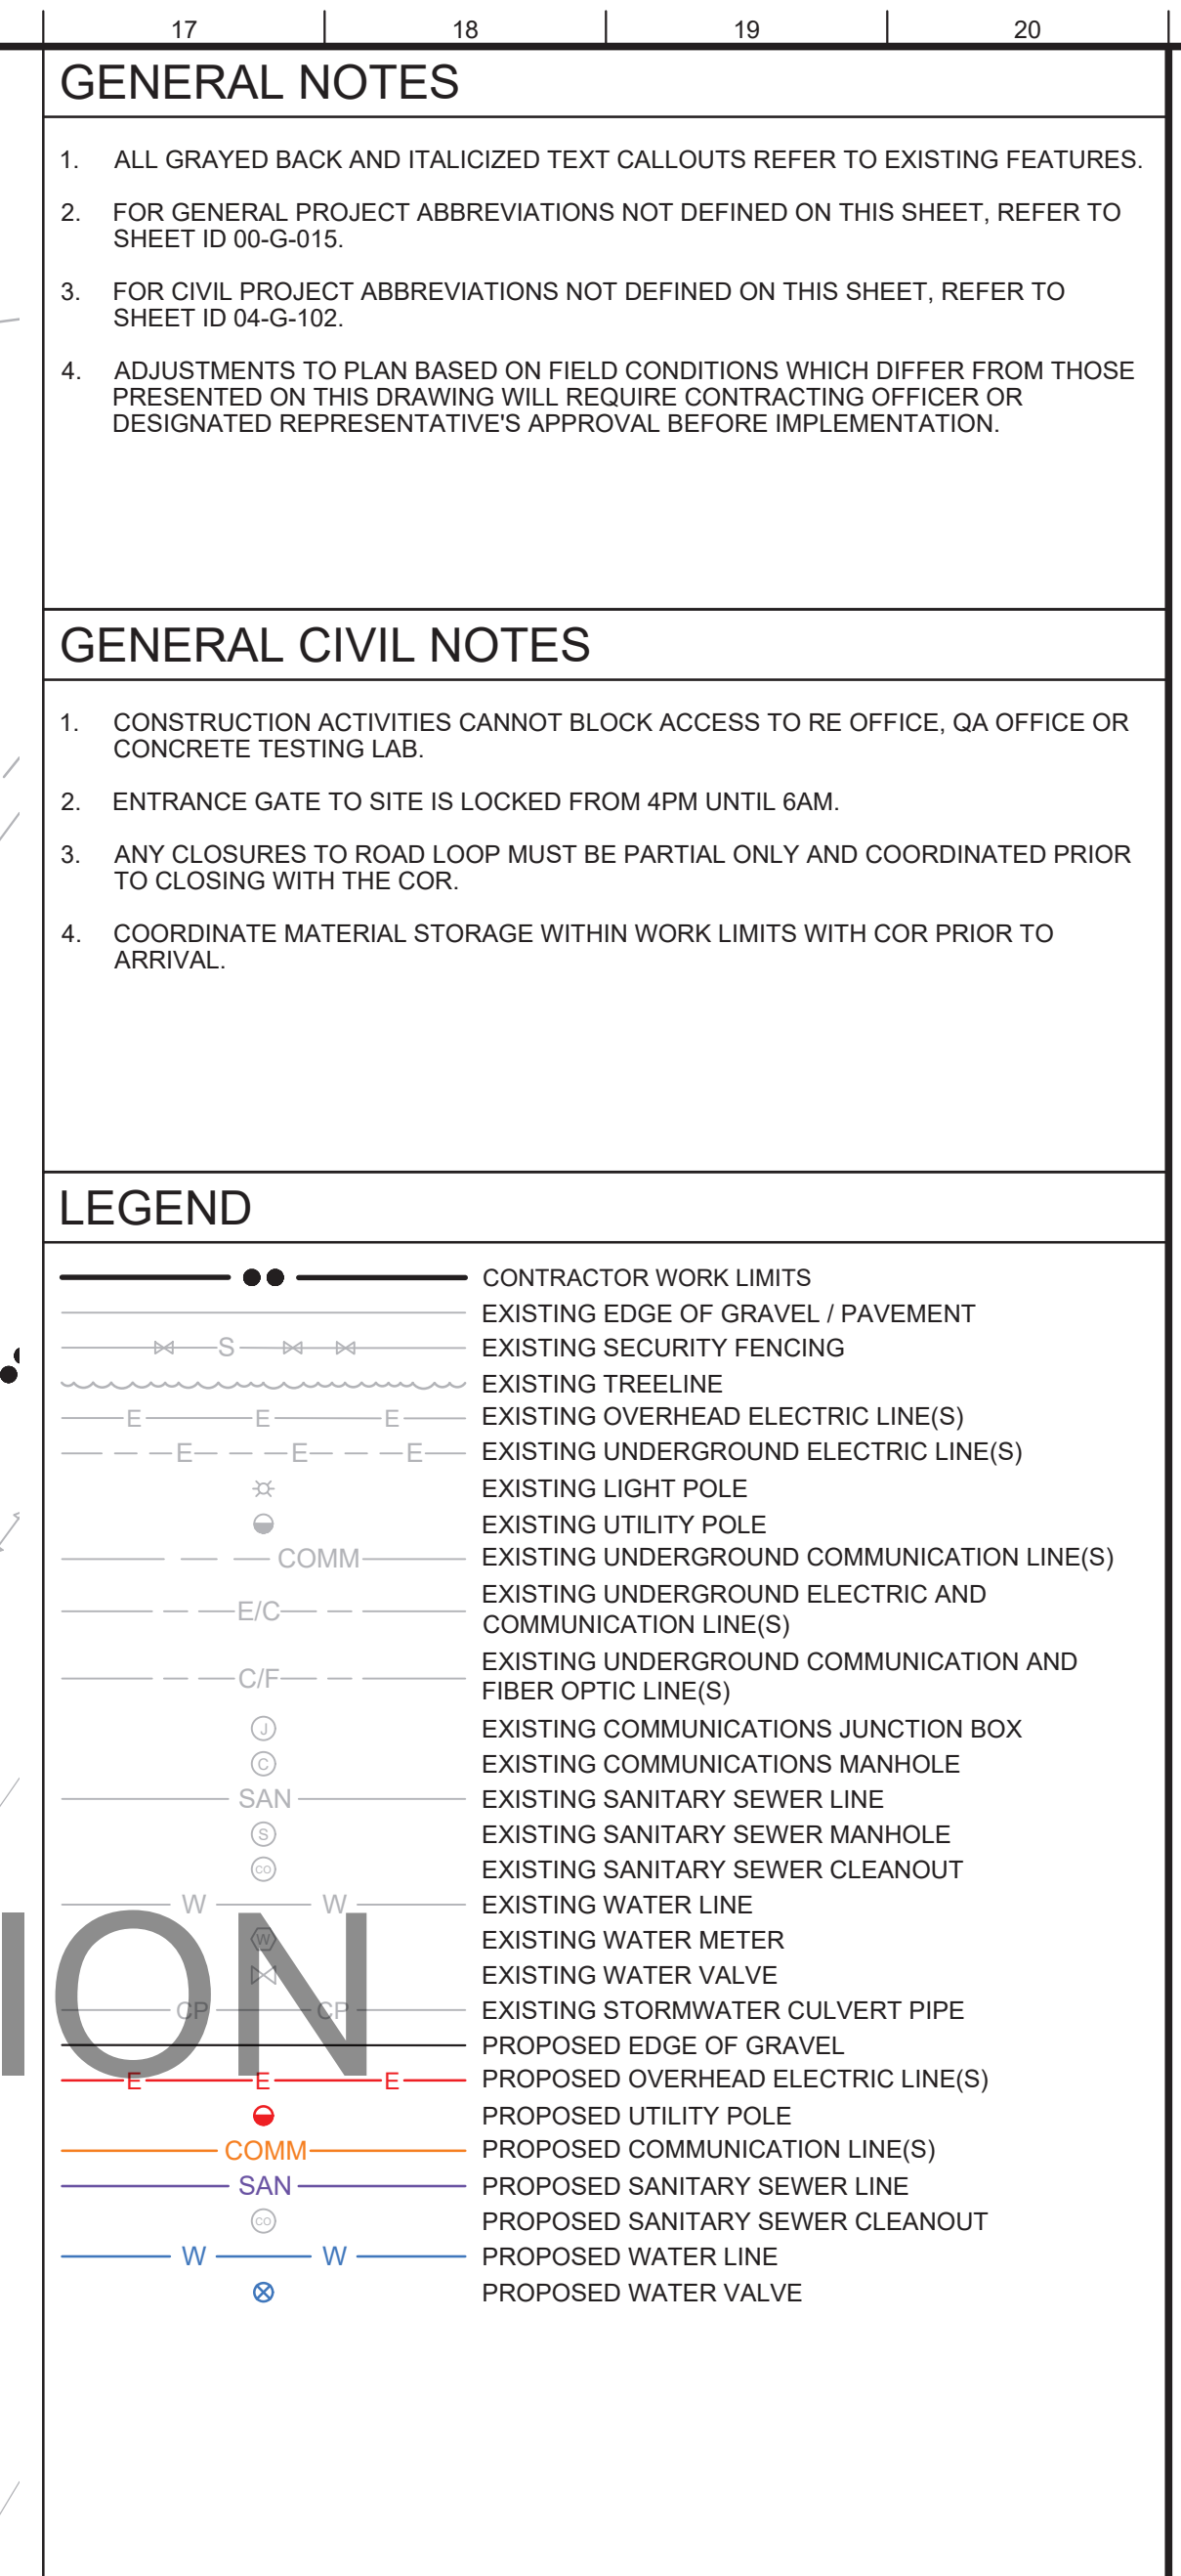

95% CONSISTENCY REVIEW