

STATEMENT OF WORK (SOW)

HVAC Short Term Lease CST 26

Part 1

General Information

1. General: The contractor shall provide all labor, supervision, management, materials, equipment (such as cabling, duct work and power generation) for the rental, delivery, and maintenance of HVAC units. The HVAC units shall be self-supported units with ducting/hoses hooked to erected 40'x 80' framed Navi-Trac brand tents and 19'x 36' Sprung brand tent structures with diesel generators. The contract shall provide HVAC cooling for a total of twenty (20) structures across five (5) compounds.

1.1 Description of Services/ Introduction: The contractor shall provide two 25-ton self-supported HVAC units to each 40'x80'Navi-Trac tent to cool the tent's internal temperature down to 68 degrees. The contractor shall provide separate 10-ton self-supported HVAC unit to each of the seven (7) Sprung structures to cool the internal temperature to 68 degrees. All diesel fuel during period of training will be provided by the Government at no cost to the contractor. The generators shall be topped off with diesel fuel at receipt and returned at any fuel level, including empty.

1.2 Background: Historically it has taken a minimum of 50 cooling tons per Navi-Trac tent to meet the stated cooling requirements of 68 degrees, with an emphasis on return air volume. Due to extreme temperatures and humidity fluctuations during the summer climate, lower tonnage HVAC units are unlikely to achieve the 68 degree internal temperatures during the day. The Navi-Trac tents have much more cooled air loss because they are not insulated, have personnel frequently going in and out of the tents and there are normal tent gaps between the walls and ceiling.

1.3 Scope: The contractor shall deliver, set up and maintain twenty-six (26) each 25-ton self-supported HVAC units and seven (7) each self-supported 10-ton HVAC units. Two (2) each 25-ton HVAC units will be attached to each 40'x 80' framed Navi-Trac tent to sufficiently cool and maintain an internal temperature of 68 degrees in each of the thirteen (13) Navi-Trac tents. Each 10-ton HVAC unit will be attached to a 19'x 36' Sprung structures to sufficiently cool and maintain an internal temperature of 68 degrees.

The contractor shall deliver and maintain the HVAC units at the following locations:

<u>Compound</u>	<u>Number of Structures Cooled</u>	<u>Fully Operational NLT</u>	<u>68 degrees by</u>	<u>Maintain 68 degrees until</u>
LSA Baker	5 Navi-Trac tents	19 May 2026 at 0800 EST	19 May 2026 at 2000 EST	03 Aug 2026 at 1600 EST
Training Area 14	2 Navi-Trac tents	21 May 2026 at 0800 EST	21 May 2026 at 2000 EST	03 Aug 2026 at 1600 EST
LSA Densberger	4 Navi-Trac tents	21 May 2026 at 0800 EST	21 May 2026 at 2000 EST	14 Aug 2026 at 1600 EST
FOB Red Lion	1 Navi-Trac tent 7 Sprung Structures	23 May 2026 at 0800 EST	23 May 2026 at 2000 EST	07 Aug 2026 at 1600 EST
Steeles Range	1 Navi-Trac tent	21 May 2026 at 0800 EST	21 May 2026 at 2000 EST	03 Aug 2026 at 1600 EST

The government will have an on-site project walk through with the contractor on 05 May 2026. The government will escort the contractor to each location and show the contractor where the Navi-Trac tents and Sprung structures will be set up. At this time, the contractor shall develop a plan on where the HVAC units will be set up. The contractor shall ask for government approval.

The contractor shall have access to each site 72 hours earlier for setup and troubleshooting the HVAC system and ducting. The contractor shall have all the HVAC systems fully operational and start cooling every Navi-Trac tent and Sprung structure no later than the fully operational date and time listed in the above table. Each Navi-Trac tent and Sprung structure shall reach the desired 68 degrees interior temperature within 12 hours of the HVAC system

being fully operational date and time. The contractor shall maintain this maximum interior temperature of 68 degrees through the “Operational Until” date and time.

1.3.1. Navi-Trac Tents. Two 25-ton HVAC units shall cool one 40’x 80’ framed Navi-Trac tent with insulated rating of R0, gravel base flooring, normal tent gaps between tent walls and ceiling and 150 personnel with an outside temperature of over 100 degrees down to 68 degrees. The tents are tan and will be in direct sunlight. The 150 personnel staying in the Navi-Trac tent will provide constant travel in and out of the tent. The HVAC units shall have the capability to feed up to four (4) each 20” tent penetration points. The penetration points are on each end of the tent, approximately 1.5 foot and 8-foot above the ground (see illustration below).

1.3.2. Sprung Structures. Each 10-ton HVAC unit shall cool one 19’x 36’ Sprung structures with insulated rating of R15, concrete base flooring and 14 personnel with an outside temperature of over 100 degrees down to 68 degrees. The tents are light green and will be in direct sunlight. The 14 personnel staying in the Sprung structures will provide constant travel in and out of the structure.

SPECIAL NOTE

Each Sprung has one set of plenum intrusion point.



The HVAC units shall have the capability to feed up to two (2) each 20” tent penetration points. The penetration points are on the end of the structure, approximately 2 foot off the ground (see illustration above).

1.3.3. Joint Inventory of Equipment

The contractor shall call 24 hours prior to confirm time with the Government Point of Contact (POC). The POC’s name and contact information will be provided at award. A joint inspection/inventory of the HVAC units shall be conducted between contractor and the Government. All systems shall be in compliance with state and federal Occupational Safety and Health Administration (OSHA) standards. Any deficiencies/damages shall be annotated at the time of inspection, and a copy of the inspection shall be provided to the POC and Contracting Officer (KO). Any discrepancies shall be corrected prior to the Government taking possession. Another joint inventory/inspection by both parties shall be conducted upon the return of equipment. Any damage or loss shall be documented during this inspection and provided to the Government prior to the contractor removing the equipment from the installation.

1.4 Contractor Support Hours:

1.4.1. Normal Contractor Support Hours. The Contractor shall provide 24/7 support with a repair technician on-site within four (4) hours from being called. The only other times the facility could be closed is during local or national emergencies or similar Government directed facility closings. The Contractor shall maintain an adequate workforce at all times, for the uninterrupted performance of all tasks defined within this SOW when the Government facility is not closed for the above reasons. When hiring personnel, the Contractor shall keep in mind that the stability and continuity of the workforce is essential.

1.4.2. Reaction time on Unserviceable Equipment. The contractor shall provide serviceable equipment at the onset of the lease and through the duration of the lease. The contractor shall provide all routine maintenance necessary to keep the equipment fully functional 100% of the time including, but not limited to, oil changes and filters. The contractor shall respond on-site with a repair team within 4 hours of notification of downed equipment. If the repair team determines the equipment is unserviceable, the contractor shall replace the downed equipment and be fully operational within 24 hours of notification. If a replacement for an unserviceable HVAC unit is not made in the time frame specified above, the Government may request a pro-rated amount for a price reduction to cover the non-availability of equipment. If any of the Navi-Trac tents or Sprung Structures have an interior temperature higher than 68 degrees Fahrenheit, the Government may take a pro-rated deduction off of the final invoice.

1.5 Government Facility Office Hours: The Government facility office hours are (6:00am to 8:00pm), seven days a week except when the Government facility is closed due to local or national emergencies, or similar Government directed facility closings.

1.5.2. Contractor access to Fort Knox: The contractor shall adhere to the following policies and procedures to receive access to Fort Knox. Access, General Protection, and Security Policy and Procedures. The Contractor and all associated subcontractor employees shall comply with applicable installation, facility, and area commander installation and/or facility access and local security policies and procedures (provided by government representatives). The contractor shall also provide all information required for background checks to meet installation access requirements to be accomplished by installation Provost Marshal Office, Director of Emergency Services (DES), or Security Office. Contractor workforce must comply with all personnel identity verification requirements as directed by DOD, HQDA, and/or local policy.

1.6 Installation Access: Access to U.S. installations, buildings and controlled areas is limited to personnel who meet security criteria and are authorized. Failure to submit required information/data and obtain required documentation or clearances will be grounds for denying access to U.S. installations, buildings and controlled areas. The Contractor shall ensure that any subcontractors used in performance of this contract complies with these requirements and that all employees, of both the Contractor and any subcontractor utilized by the Contractor, are made aware of and comply with these requirements.

The Contractor shall be aware of and comply with the requirements associated with Installation Access Control. The Government is not liable for any costs associated with performance delays due solely to a firm's failure to comply with Installation Access Control System (IACS) processing requirements.

1.6.1 Return of Passes/ Access to the Installation: The Contractor shall return installation passes to the issuing IACS office when the contract is completed or when a Contractor employee no longer requires access.

Part 2 Attachments


Please Note: These are NOT drawn to scale.

LSA Baker Layout:



UNCLASSIFIED

LSA Baker

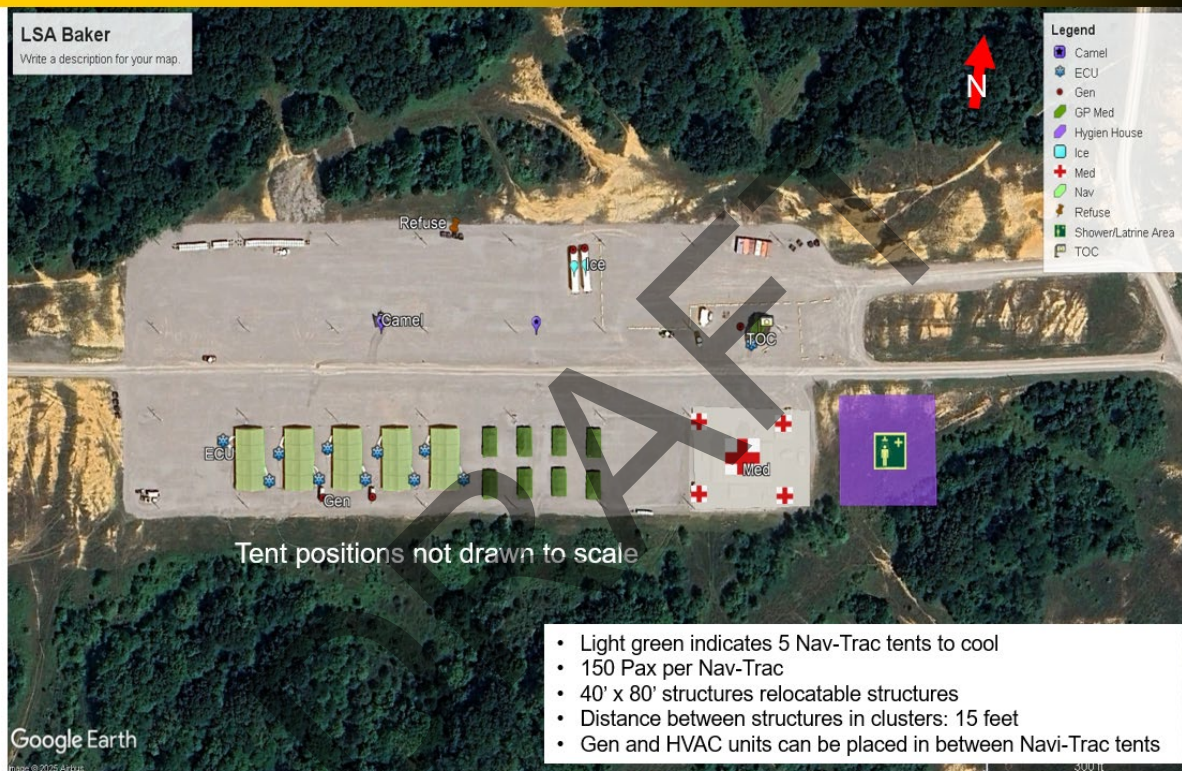


LSA Densberger Layout:



UNCLASSIFIED



LSA Densberger

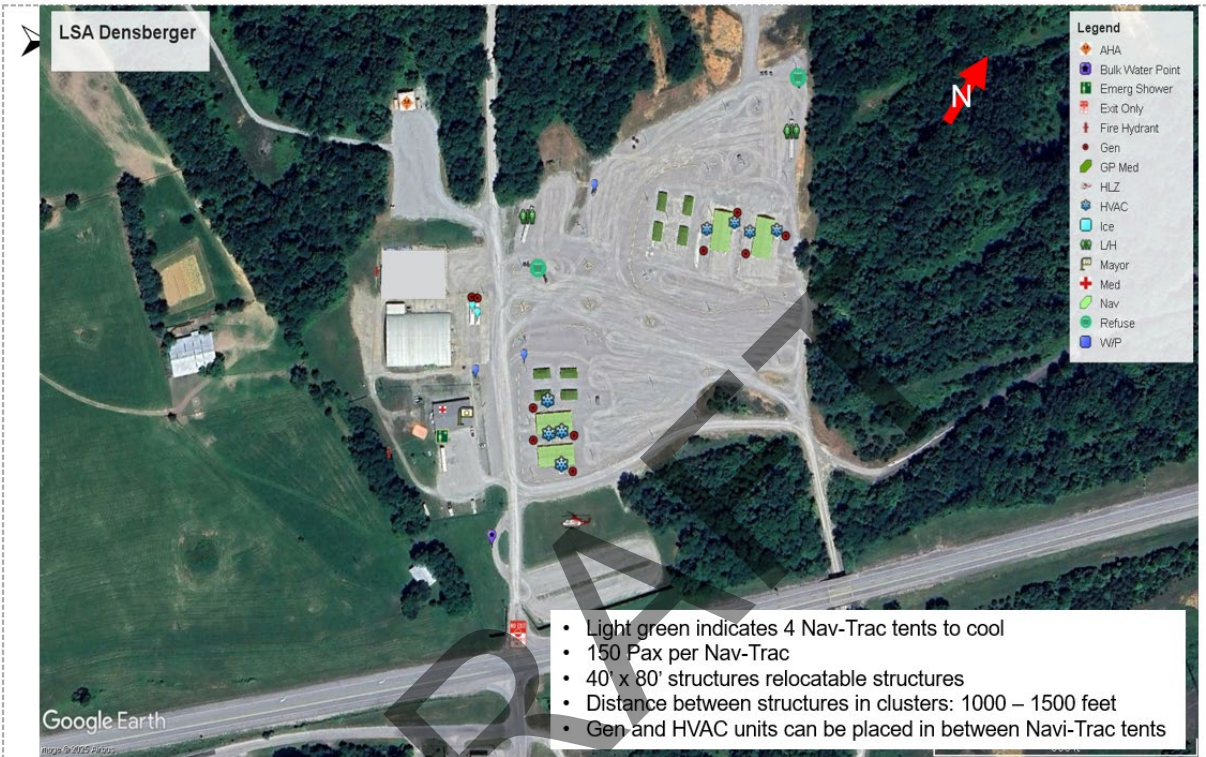

UNCLASSIFIED

Steeles Range Layout:



UNCLASSIFIED



Steeles Range



UNCLASSIFIED

Red Lion Layout:



UNCLASSIFIED

FOB Red Lion



UNCLASSIFIED

Training Area (TA) 14 Layout:



UNCLASSIFIED



TA 14 (Land Nav)



UNCLASSIFIED