


ROCK ISLAND ARSENAL JMTC
PLANT ENGINEERING
CONCRETE MOUNTING PADS
GENERAL LOCATIONS


LOCATIONS ON ROCK ISLAND ARSENAL

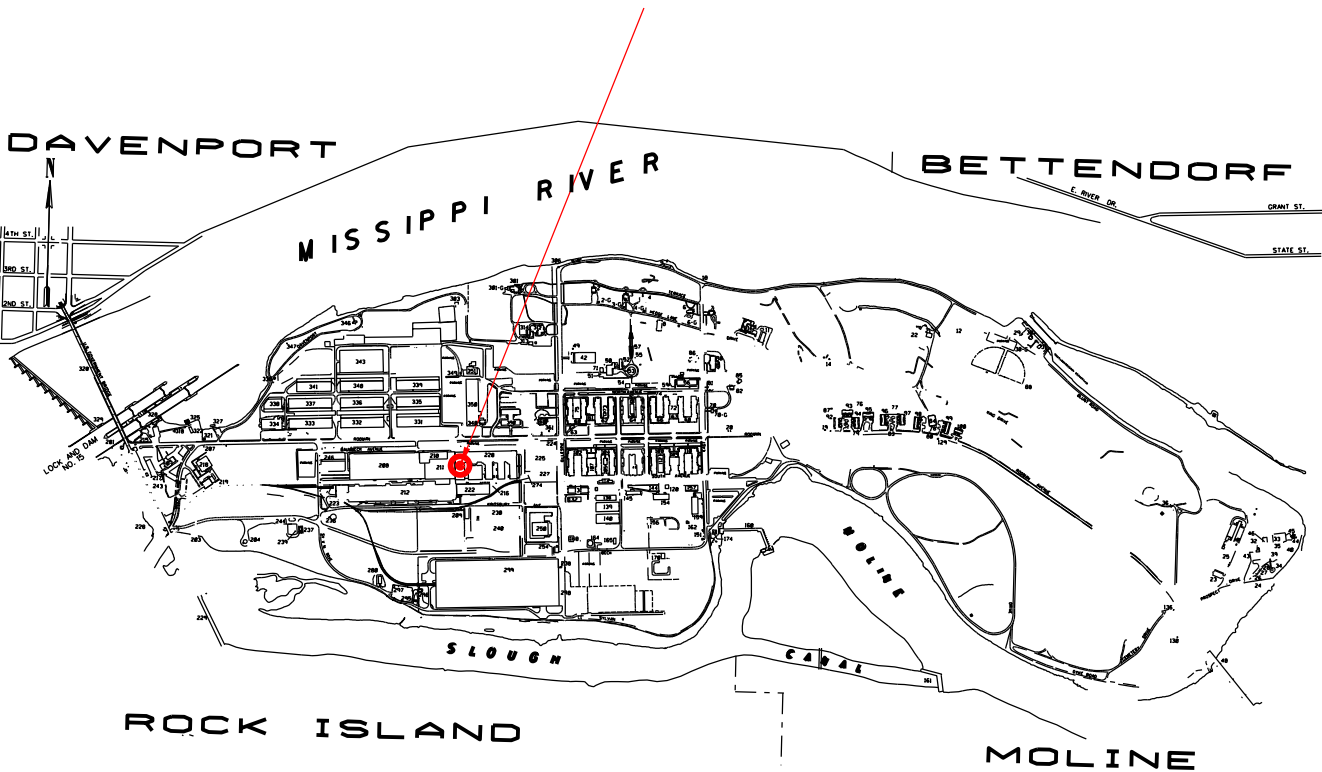

INDEX

GENERAL LOCATIONS.....	1
GENERAL NOTES.....	2
CONTRACTOR SECURITY NOTES.....	3
LOCATION/LAYOUT PLAN AREAS 1-7.....	4
DEMOLITION PLAN AREAS 1-5.....	5
CONSTRUCTION PLAN AREAS 1-5.....	6
CONSTRUCTION PLAN AREAS 7.....	7
LOCATION/LAYOUT PLAN AREA 8.....	8
DEMOLITION PLAN AREA 8.....	9
CONSTRUCTION PLAN AREA 8.....	10

BLDG 220 MACHINE MOUNTING PADS

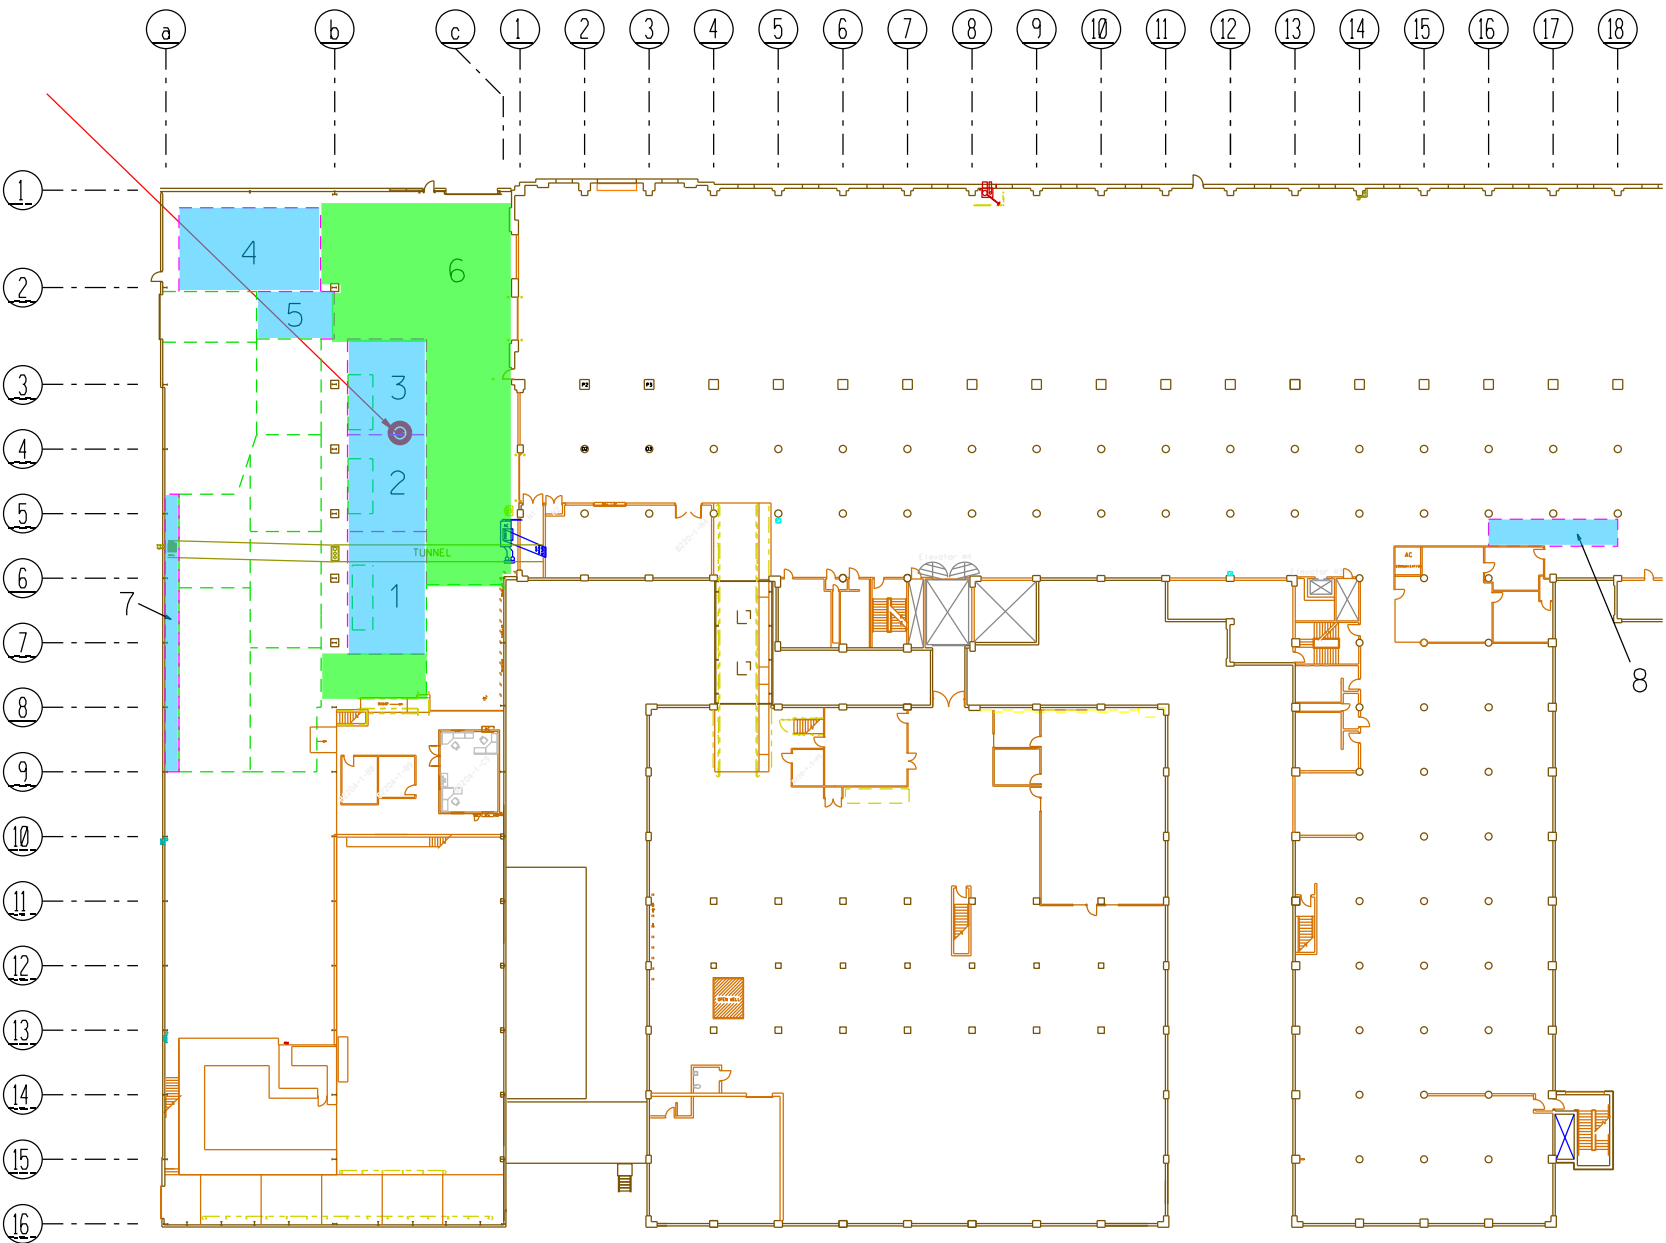

ROCK ISLAND ARSENAL PLANT ENGINEERING DIVISION TARA-LGC		
DMG CONCRETE MOUNTING PADS		
DRAWN B. McCLURE	APPROVED B. NILES	SHEET 1 OF 10
SCALE NONE	DATE 25-JUN-25	
		DRAWING NO.

ROCK ISLAND ARSENAL JMTC
PLANT ENGINEERING
CONCRETE MOUNTING PADS
GENERAL NOTES

1. THE CONTRACTOR WILL USE WATER TO ELIMINATE DUST DURING ENTIRE DEMOLITION AND CONSTRUCTION.
2. WHEN SAW CUTTING AROUND THE WORK AREA, REBAR PRESENT MUST BE CUT OFF EVEN WITH SAW CUTS.
3. THE CONTRACTOR SHALL REPAIR ANY DAMAGE TO FLOOR OR THE UNDERLYING SOIL CAUSED BY THE CONSTRUCTION.
4. THE CONTRACTOR SHALL REMOVE ALL DEBRIS SUCH AS BOLTS, CANS, BEAMS, CONDUIT, PLATES, PIPES, WOOD BLOCKS, CONCRETE AND REBAR FROM RIA IN ACCORDANCE WITH LOCAL REGULATIONS.
5. CONTRACTOR SHALL VENT EXHAUST OUTSIDE IF EQUIPMENT USED ARE GAS ENGINES. CONTRACTOR SHALL HAVE CATALYTIC CONVERTER ON ALL DIESEL ENGINES.
6. NEW CONCRETE FOR MACHINE MOUNTING PADS AND CAPS SHALL BE A MINIMUM OF 5000-PSI.
7. EXPANSION JOINT MATERIAL UP TO 84” DEEP TYPICAL. AFTER CLEAN UP IS COMPLETE, LINE MOUNTING PADS AND CAPS WITH 3/4” RIGID FOAM INSULATION FOR VIBRATION ISOLATION. JOINT SEALANT SHALL BE BASF SONOLASTIC SL-1 OR EQUAL.
8. DEMOLITION/JACK HAMMERING/REMOVAL WILL BE PERFORMED ON 2ND SHIFT STARTING FROM 2:30 TO 11:00 AT NIGHT OR SATURDAYS. FRAMING, TYING REBAR AND POURING WILL BE DAY SHIFT.
9. CONCRETE TRANSPORTED IN TRUCK MIXERS OR TRUCK AGITATIONS SHALL BE DELIVERED TO THE SITE OF THE WORK IN A PLASTIC AND WORKABLE CONDITION, SATISFACTORY FOR PLACEMETN IN THE WORK WITHOUT THE ADDITION OF WATER OR WATER AND CEMENT PRIOR TO DISCHARGING.

THE MAXIMUM HAUL TIME FOR CONCRETE TRANSPORTED IN TRUCK MIXERS OR TRUCK AGITATORS HALL BE ACCORDING TO THE FOLLOWING:

CONCRETE TEMPERATURE AT POINT OF DISCHARGE deg-F (deg-C)	HAUL TIME	
	HOURS	MINUTE
50-64 (10-17.5)	1	30
65-90 (18-32) – WITHOUT RETARDER	1	0
65-90 (18-32) – WITH RETARDER	1	30

10. THE CONTRACTOR WILL BE RESPONSIBLE FOR COORDINATING WORK SITE ACCESS WITH COMMERCIAL CONCRETE PUMPING OR POWER DOLLY OR MANUAL PROCESSES.

11. CONTRACTOR WILL COORDINATE WITH CONTRACTING OFFICER REPRESENTATIVE FOR GATE PASS AND FUNCTIONALITY.
12. CONTRACTOR WILL FOLLOW AND APPLY ALL STANDARD SAFETY RULES OF THE TRAD AND ENSURE ALL PERSONNEL UTILIZE PROPER PPE.
13. CONTRACTOR WILL PROVIDED ONE GROUND ROD DRIVEN INTO A 5-IN DIA X 6-IN DEEP RECESS IN THE MOUNTING PAD AND LEFT EXPOSED FLUSH WITH PAD SURFACE.
14. CONTRACTOR WILL PROVIDE SPOTTER/GROUND MAN FOR EQUIPMENT/TRUCKS GOING IN/OUT OF THE BUILDING AND WITHIN THE BUILDING TO ENSURE SAFE TRAFFIC AND PEDESTRIAN INTERACTIONS.
15. CONTRACTOR SHALL PROVIDE BARRICADES AROUND JOB SITE UNDER CONSTRUCTION.
16. CONTRACTOR SHALL CLEAN UP THE WORKSITE AFTER COMPLETION OF THE PROJECT.
17. DOUBLE TIED LAYERS OF #5 REBAR MESH (5/8”). 12” X-W SPACING. REBAR SHOULD BE A MINIMUM OF 4” AWAY FROM TOP OR BOTTOM SURFACE AND HAVE A MINIMUM OF 2 RODS IN EACH DIRECTION. DOWELS WILL BE DRILLED A MINIMUM OF 6” INTO THE VERTICAL FACE OF THE EXISTING CONCRETE.
18. FABRICATION AND INSTALLATION OF STRUCTURAL STEEL SHALL COMPLY WITH LATEST AMERICAN INSTITUTE OF STEEL CONSTRUCTION (AISC) STANDARDS AND SPECIFICATIONS. ALL WORK SHALL BE PERFORMED BY COMPETENT, EXPERIENCED, QUALIFIED WORKMEN.
19. CONSOLIDATE PLACED CONCRETE USING MECHANICAL VIBRATING EQUIPMENT WITH HAND RODDING AND TAMPING SO THAT CONCRTE IS WORKED AROUND REINFORCING AND OTHER EMBEDDED ITEMS AND INTO FORMS.
20. ANY DISCREPANCIES IN PLANS, OR BETWEEN PLANS AND SPECIFICATIONS SHALL BE BROUGHT TO THE ATTENTION OF RIA REPRESENTATIVES IMMEDIATELY.
21. ANY DIRT, ROCKS OR DEBRIS TO BE PLACED OUTSIDE MUST BE APPROVED WITH THE COR PRIOR TO PLACING. AREA MUST BE CONTAINED WITH CONTAINMENT BALES TO AVOID RUNOFF INTO STORMWATER SYSTEM.

ROCK ISLAND ARSENAL PLANT ENGINEERING DIVISION TARA-LGC		
DMG CONCRETE MOUNTING PADS		
DRAWN B. McCLURE	APPROVED B. NILES	SHEET 2 OF 10
SCALE NONE	DATE 25-JUN-25	DRAWING NO.

ROCK ISLAND ARSENAL JMTC
PLANT ENGINEERING
CONCRETE MOUNTING PADS
SECURITY NOTES

All contractor employees, including subcontractor employees, requiring access to Army installations, facilities, or controlled access areas shall complete AT Level I awareness training. The COR will be provided a copy of the RIA-JMTC AT Level I awareness training and assuring the training is completed.
The contractor shall sign a Memorandum of Record for each contractor employee and subcontractor employee to the RIA-JMTC Operations Center prior to a RIA-JMTC electronic keys and access pass being issued.

The contractor and all associated subcontractors employees shall provide all information required for background checks to meet installation access requirements to be accomplished by the installation Director of Emergency Services.
The contractor workforce must comply with all personal identity verification requirements (FAR clause 52.204-9, Personal Identity Verification of Contractor Personnel) as directed by DoD, HQDA, and/or local policy. In addition to the changes otherwise authorized by the change clause of this contract, should the Force Protection Condition (FPCON) at any individual facility or installation change, the Government may require changes in contractor security matters or processes.

Contractor and all associated subcontractor employees shall comply with adjudication standards and procedures using the National Crime Information Center interstate identification Index (NCIC-III) and Terrorist Screening Database (TSDB) (Army Directive 2014-05/AR 190-13), applicable installation, facility access and local security policies and procedures (provided by government representative). The COR will provide guidance to complete the Access Control Records Check request Form thru the RIA Directorate of Emergency Services.

Contractor will acquire and need to return all issued U.S. Government Common Access Cards, installation badges, and/or access passes. Use FAR 52.204-9 or PADDS Clause IF00015 IF00015 at the end of the contract or the last day of an individual contractor⁵_{32s} employment.

RIA-JMTC electronic keys and access passes are accountable items and will be returned within 24 hours of no longer being needed. Items will returned to the COR or placed in a drop box at a RIA-JMTC access point.

Contractors who routinely fail to return these items will not be issued them in support of any future contract.

The Contractor and all associated subcontractors shall brief all employees on the local iWATCH program. The iWATCH training will be provided in the RIA-JMTC AT training.

Contractor and all associated subcontractor employees shall comply with adjudication standards and procedures using the National Crime Information Center interstate identification Index (NCIC-III) and Terrorist Screening Database (TSDB) (Army Directive 2014-05/AR 190-13), applicable installation, facility access and local security policies and procedures (provided by government representative). The COR will provide guidance to complete the Access Control Records Check request Form thru the RIA Directorate of Emergency Services.

Contractor will acquire and need to return all issued U.S. Government Common Access Cards, installation badges, and/or access passes. Use FAR 52.204-9 or PADDS Clause IF00015 IF00015 at the end of the contract or the last day of an individual contractor⁵_{32s} employment.

RIA-JMTC electronic keys and access passes are accountable items and will be returned within 24 hours of no longer being needed. Items will returned to the COR or placed in a drop box at a RIA-JMTC access point.

Contractors who routinely fail to return these items will not be issued them in support of any future contract.

The Contractor and all associated subcontractors shall brief all employees on the local iWATCH program. The iWATCH training will be provided in the RIA-JMTC AT training.

During FPCONs Charlie and Delta, services may be discontinued/postponed due to higher threat. Services will resume when FPCON level is reduced to level Bravo or lower. The FPCON descriptions will be provided in the RIA-JMTC AT training.


The COR will keep the contractors informed on the current FPCON or any possible FPCON change.

Contractor personnel working on Rock Island Arsenal are subject to participation in installation RAMP security program (e.g. vehicles searches, wearing of ID badges, etc.). Contractors will comply with any instructions given by the Rock Island Arsenal Police Department.

The RAMP program is discussed in the RIA-JMTC AT training.

ROCK ISLAND ARSENAL PLANT ENGINEERING DIVISION TARA-LGC			
DMG CONCRETE MOUNTING PADS			
DRAWN	B. McCLURE	APPROVED	B. NILES
SCALE	NONE	DATE	25-JUN-25
		DRAWING	NO.
		SHEET 3 OF 10	

ROCK ISLAND ARSENAL JMTC
PLANT ENGINEERING
CONCRETE MOUNTING PADS
B220 ANNEX LAYOUT
AREAS 1 thru 7

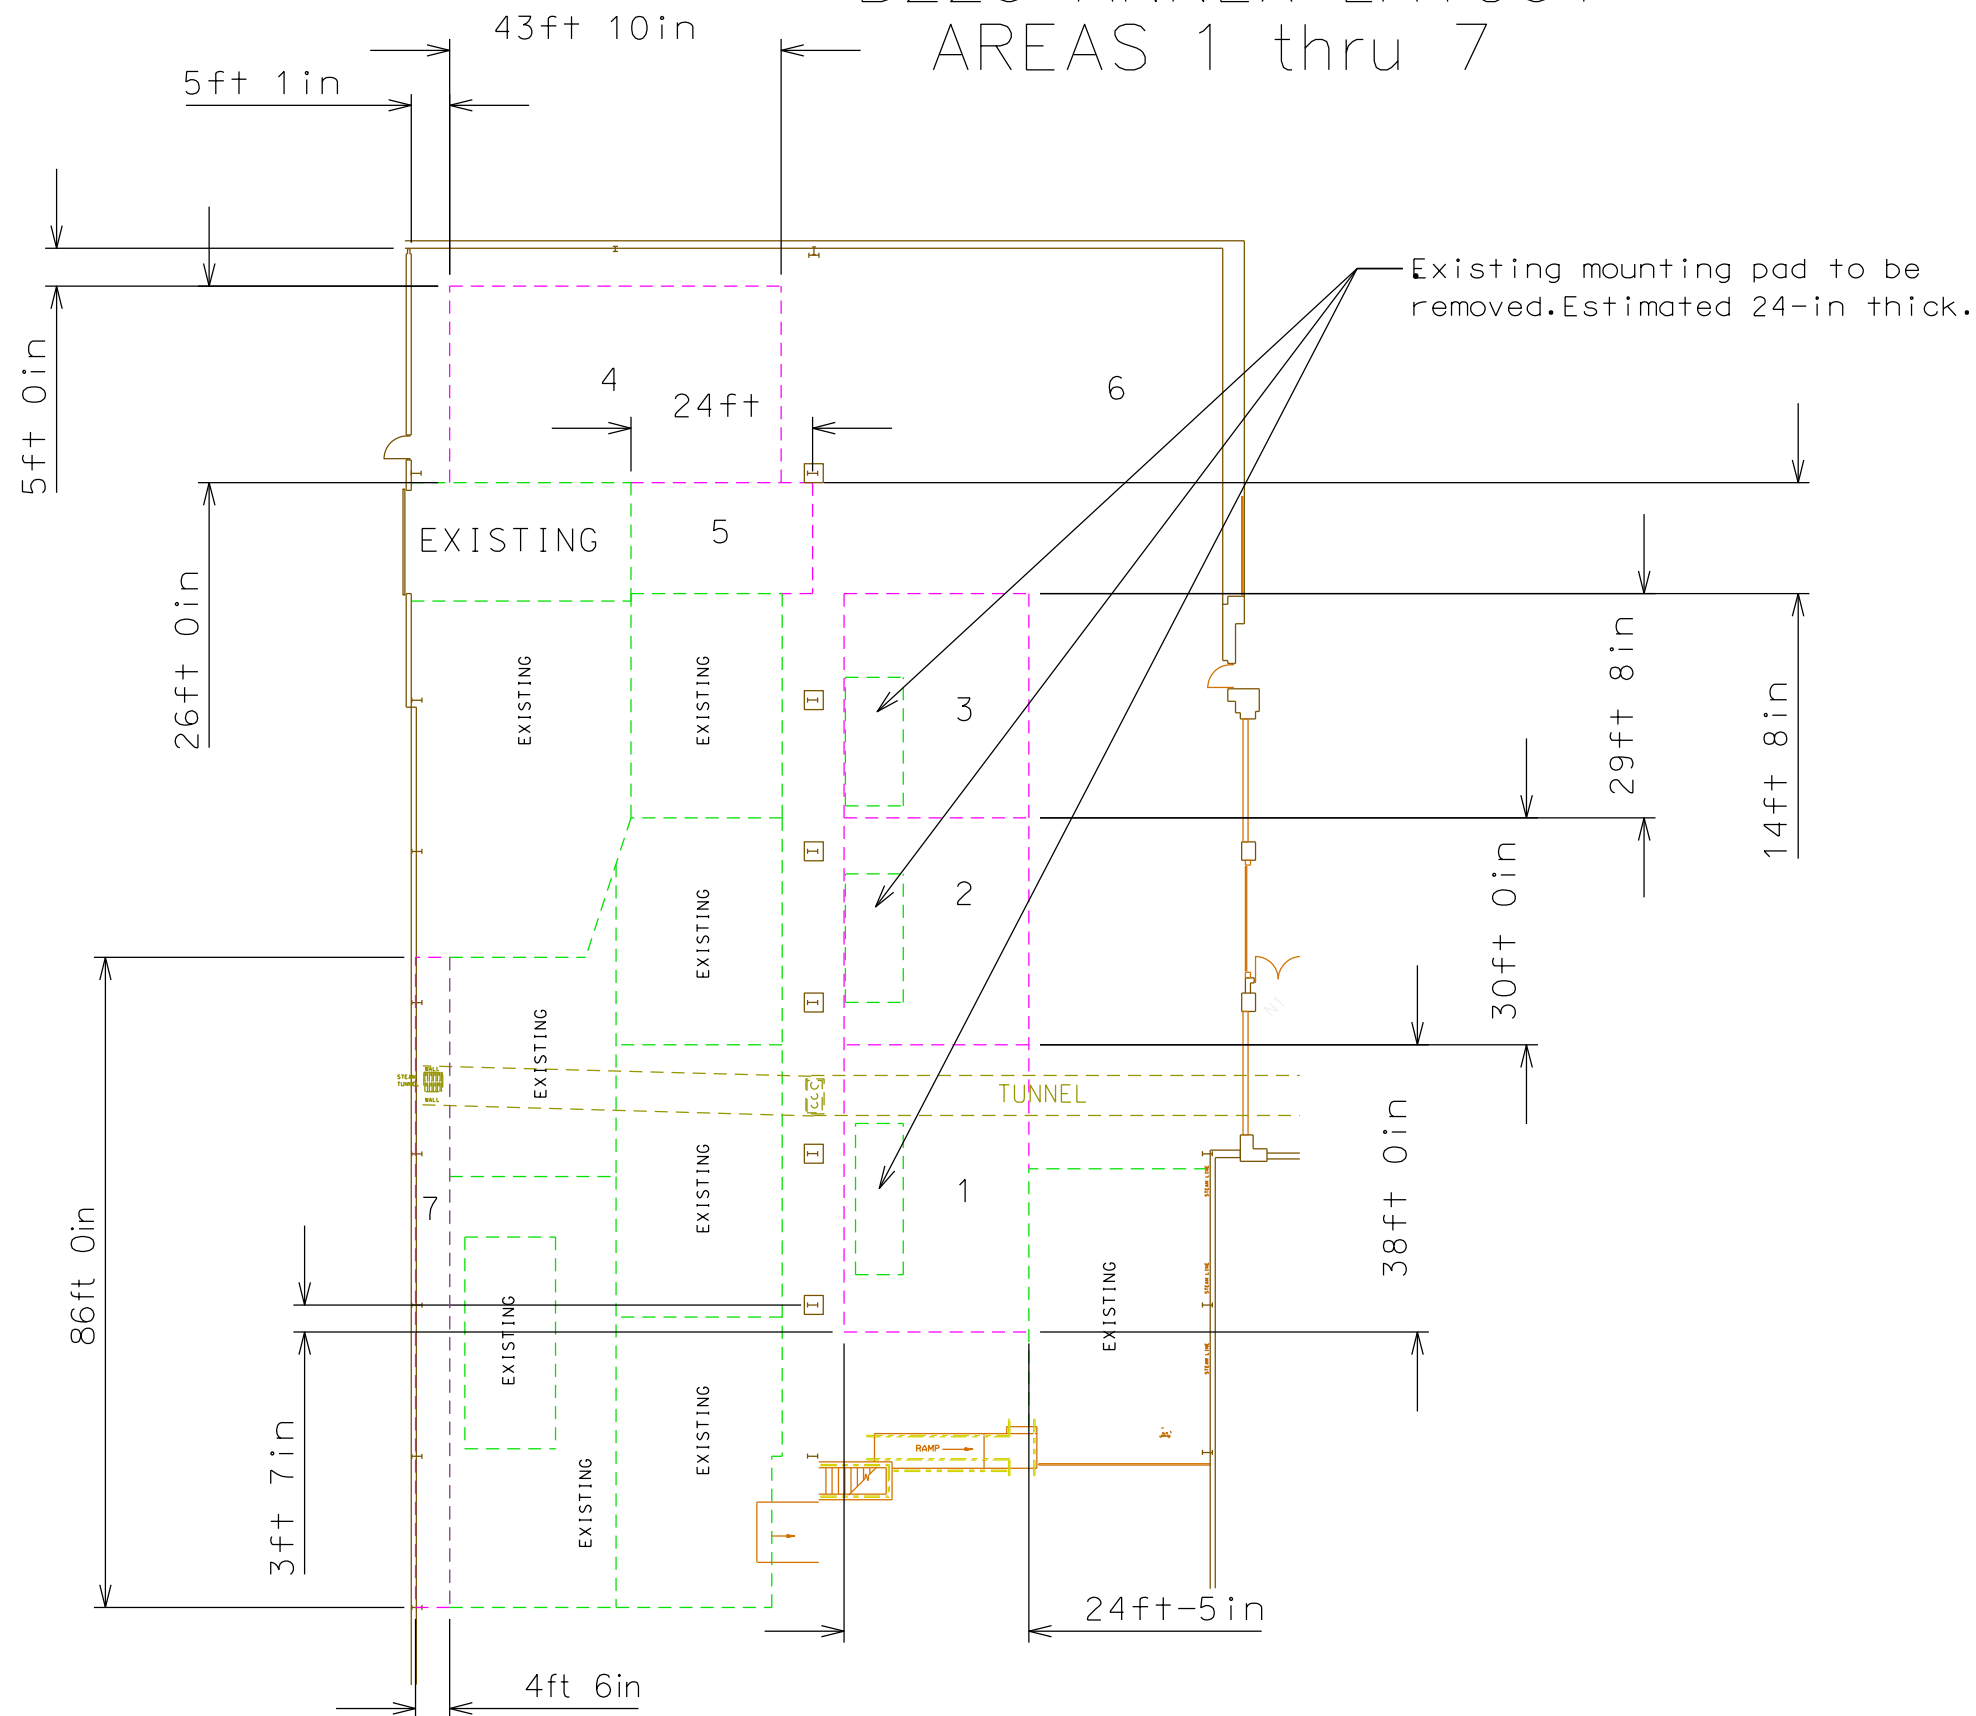

NOTES:

Areas 1 thru 5 are new concrete mounting pads described on the following pages.

Area 6 is existing concrete. It is approximately 4,500-sq-ft. The Contractor shall repair cracks and damaged concrete in this area. Then the Contractor shall grind and polish the concrete to 200-grit finish including hardening the newly exposed surface.

Area 7 has had the concrete removed. The Contractor will complete excavation, install tie-back supports and install new concrete as described on the following pages.

NOTES:


Elevation of the slabs will be based level with the current existing slabs.

In areas where the new slab meets existing concrete, the grade will be blended /sloped to meet the two grades at less than a 1% slope.

Located between column 5 and 6 on the west wall, there is an access grate to a tunnel that runs east and west roughly 8 ft below the surface grade of the existing concrete. In this area, caution will be used during removal of the existing concrete. The slab will need to be cut and lifted out of location to avoid high impact over the area of the tunnel. The Tunnel is shown in dashed lines on the corresponding drawing with the grate marked in red on the west wall.

ROCK ISLAND ARSENAL PLANT ENGINEERING DIVISION TARA-LGC		
DMG CONCRETE MOUNTING PADS		
DRAWN B. McCLURE	APPROVED B. NILES SHEET 4 OF 10	
SCALE NONE	DATE 25-JUN-25	DRAWING NO.


ROCK ISLAND ARSENAL JMTC
PLANT ENGINEERING
CONCRETE MOUNTING PADS
B220 ANNEX ELEVATION/DEMOLITION PLAN
AREAS 1 thru 5

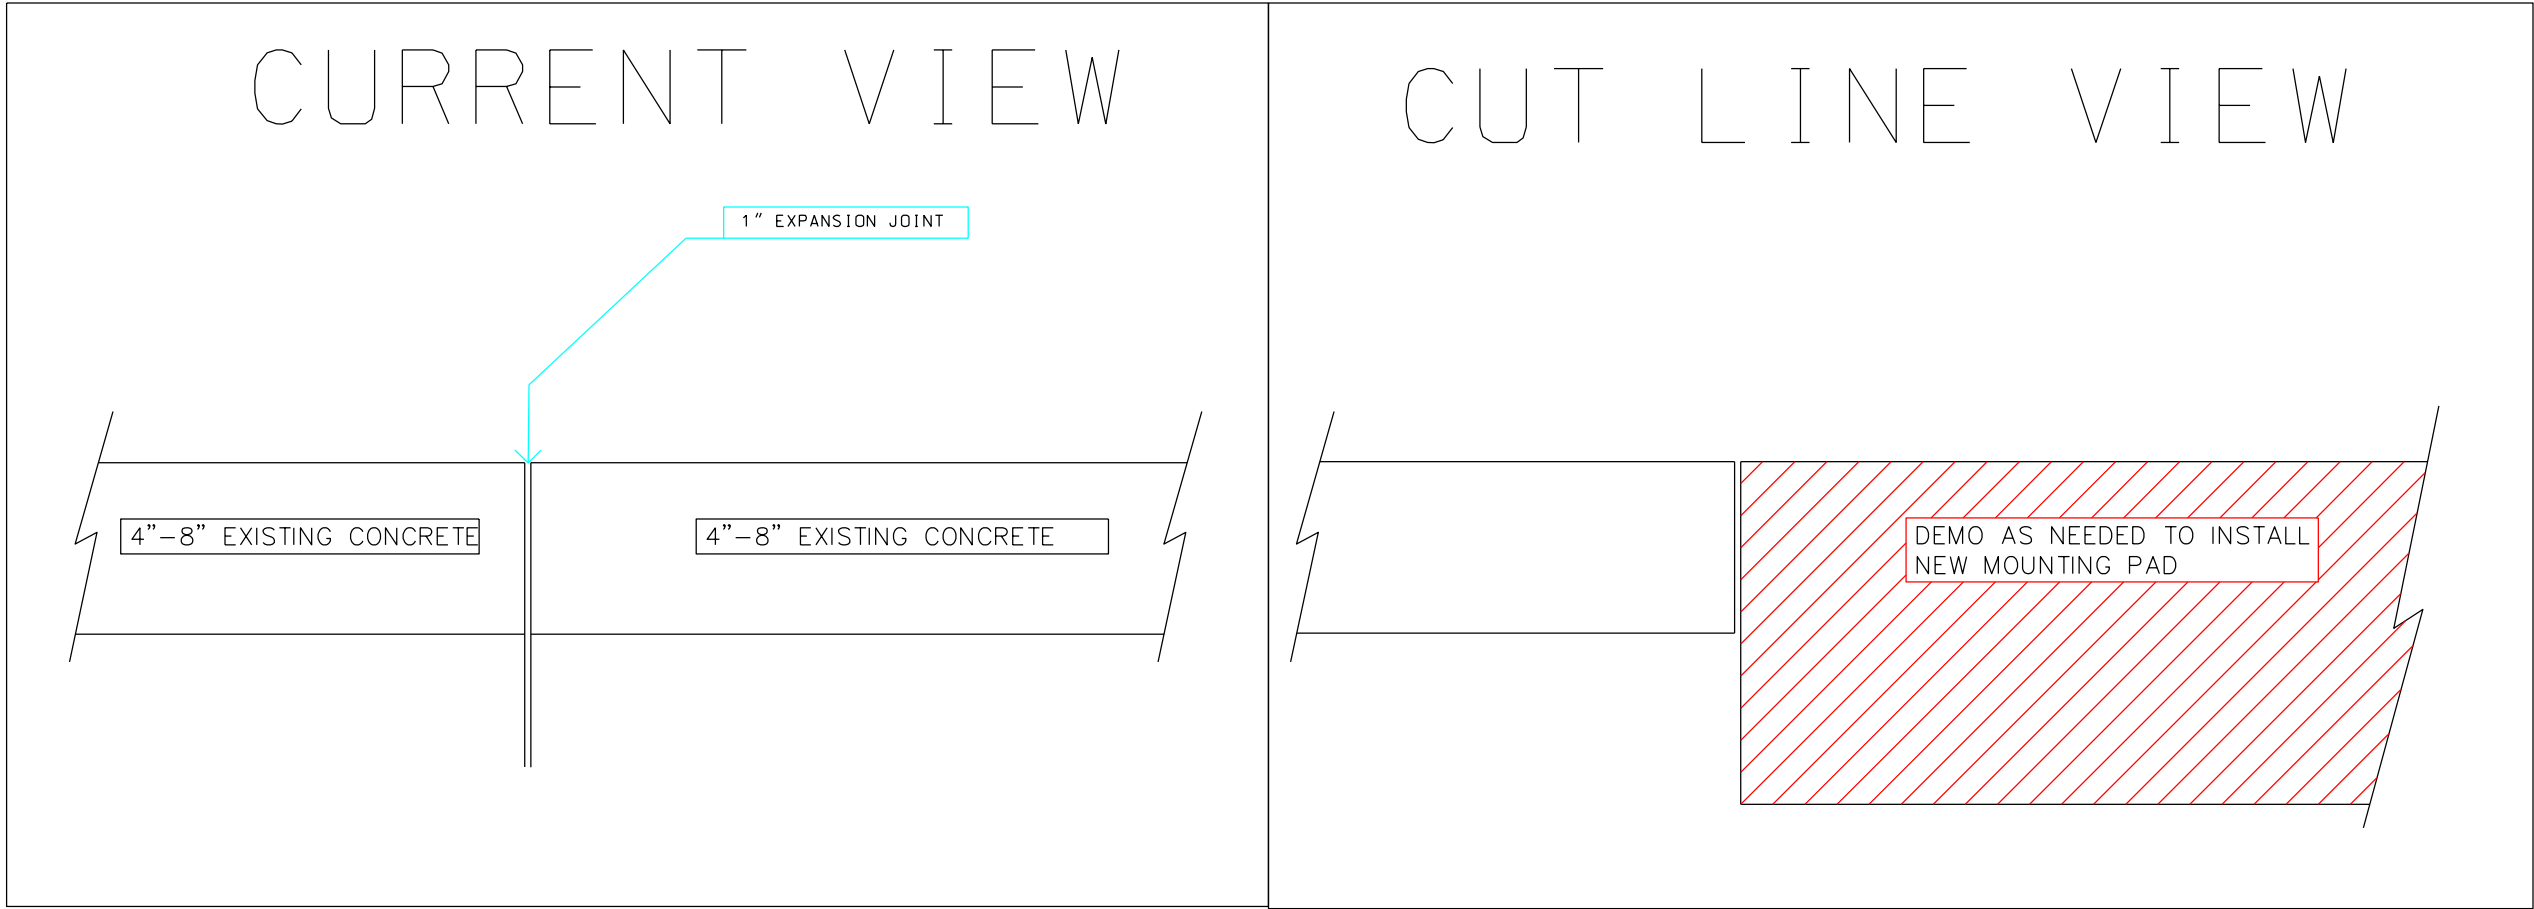

NOTE: LATHE MOUNTING PADS WILL REQUIRE REMOVAL OF EXISTING CONCRETE FLOORS THAT ARE BETWEEN 4" AND 8" THICK. BUILDING COLUMNS AND FOOTINGS WILL BE AVOIDED AND NOT DISTURBED.

ROCK ISLAND ARSENAL PLANT ENGINEERING DIVISION TARA-LGC		
CONCRETE MOUNTING PADS		
DRAWN B. McCLURE	APPROVED B. NILES SHEET 5 OF 10	
SCALE NONE	DATE 25-JUN-25	DRAWING NO.


ROCK ISLAND ARSENAL JMTC
PLANT ENGINEERING
CONCRETE MOUNTING PADS
B220 ANNEX ELEVATION/CONSTRUCTION PLAN
AREAS 1 thru 5

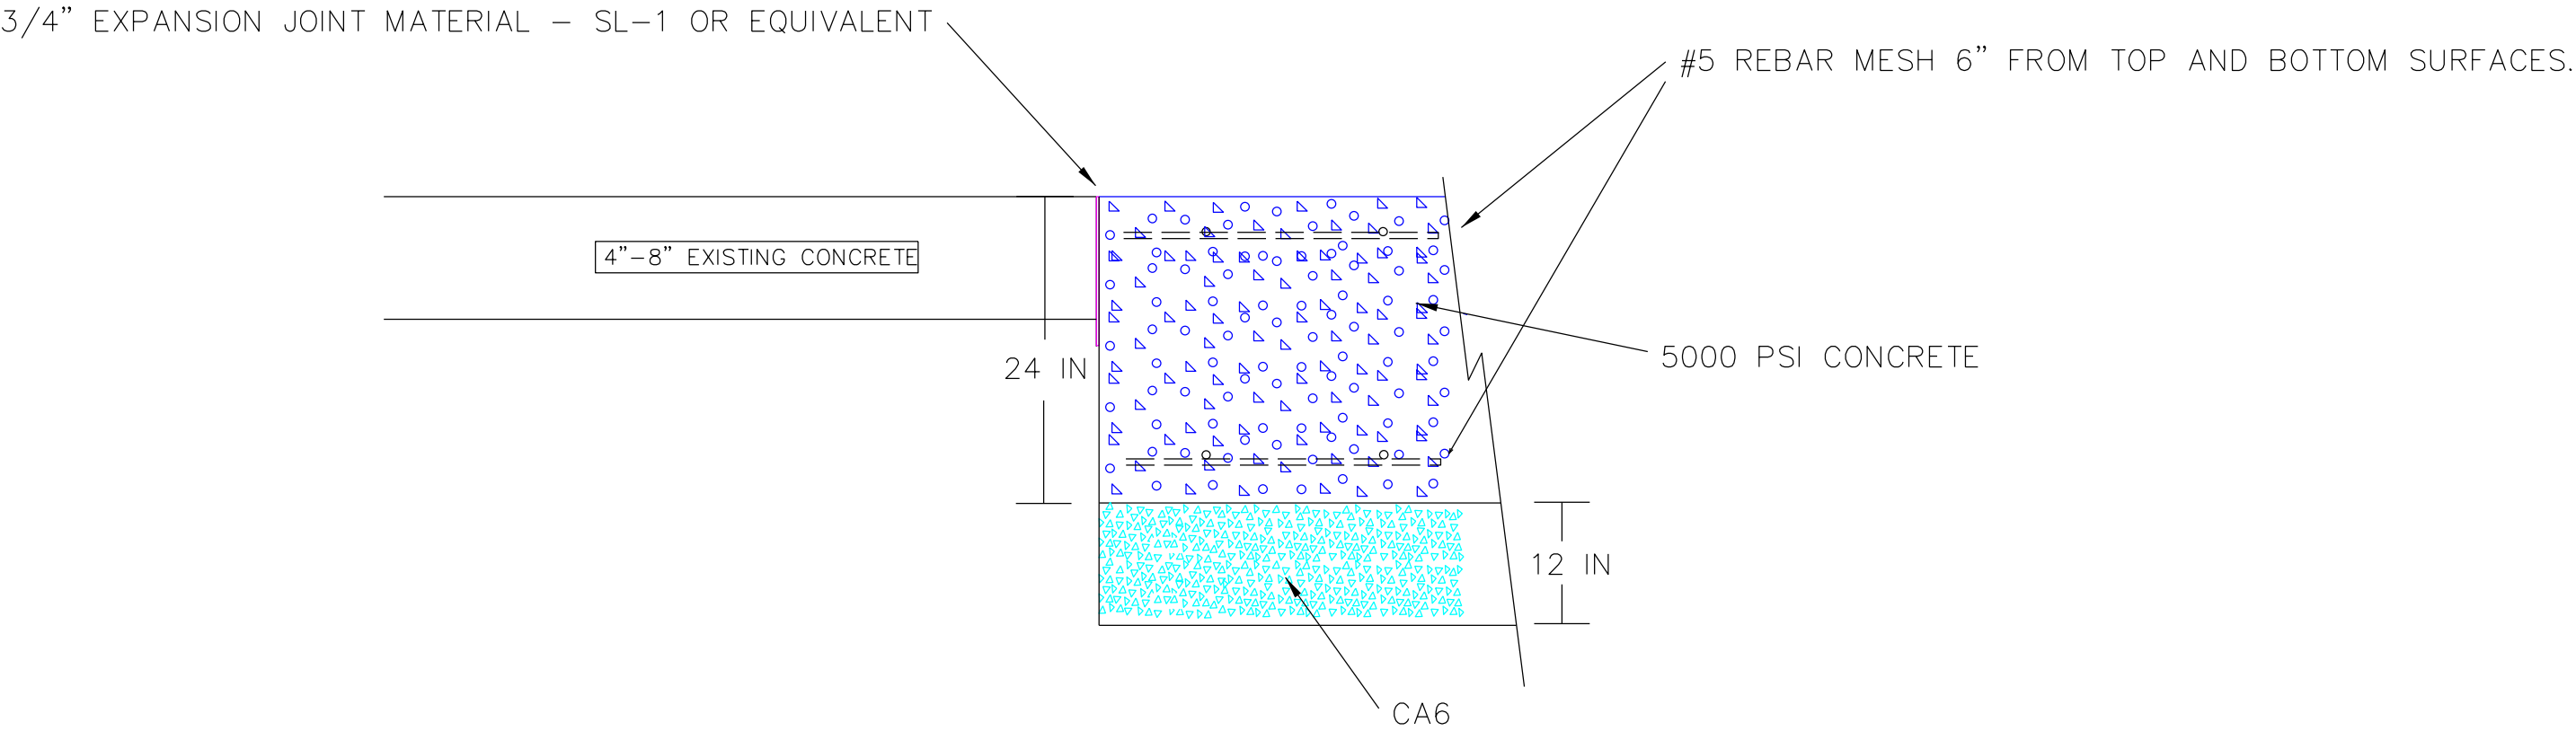

NOTE:
AREA SURROUNDING MOUNTING PADS WILL NOT ALWAYS BE THE SAME ELEVATION. MOUNTING PADS MUST MAINTAIN NO GREATER THAN 1/4" DEVIATION OVER 10'. IF THIS CANNOT MEET EXISTING CONCRETE THE FINAL 12" CAN BE SLOPED TO MEET THE EXISTING ELEVATION.

ROCK ISLAND ARSENAL PLANT ENGINEERING DIVISION TARA-LGC		
CONCRETE MOUNTING PADS		
DRAWN B. McCLURE	APPROVED B. NILES SHEET 6 OF 10	
SCALE NONE	DATE 25-JUN-25	DRAWING NO.


ROCK ISLAND ARSENAL JMTC
PLANT ENGINEERING
CONCRETE MOUNTING PADS
B220 ANNEX ELEVATION/CONSTRUCTION PLAN
AREA 7

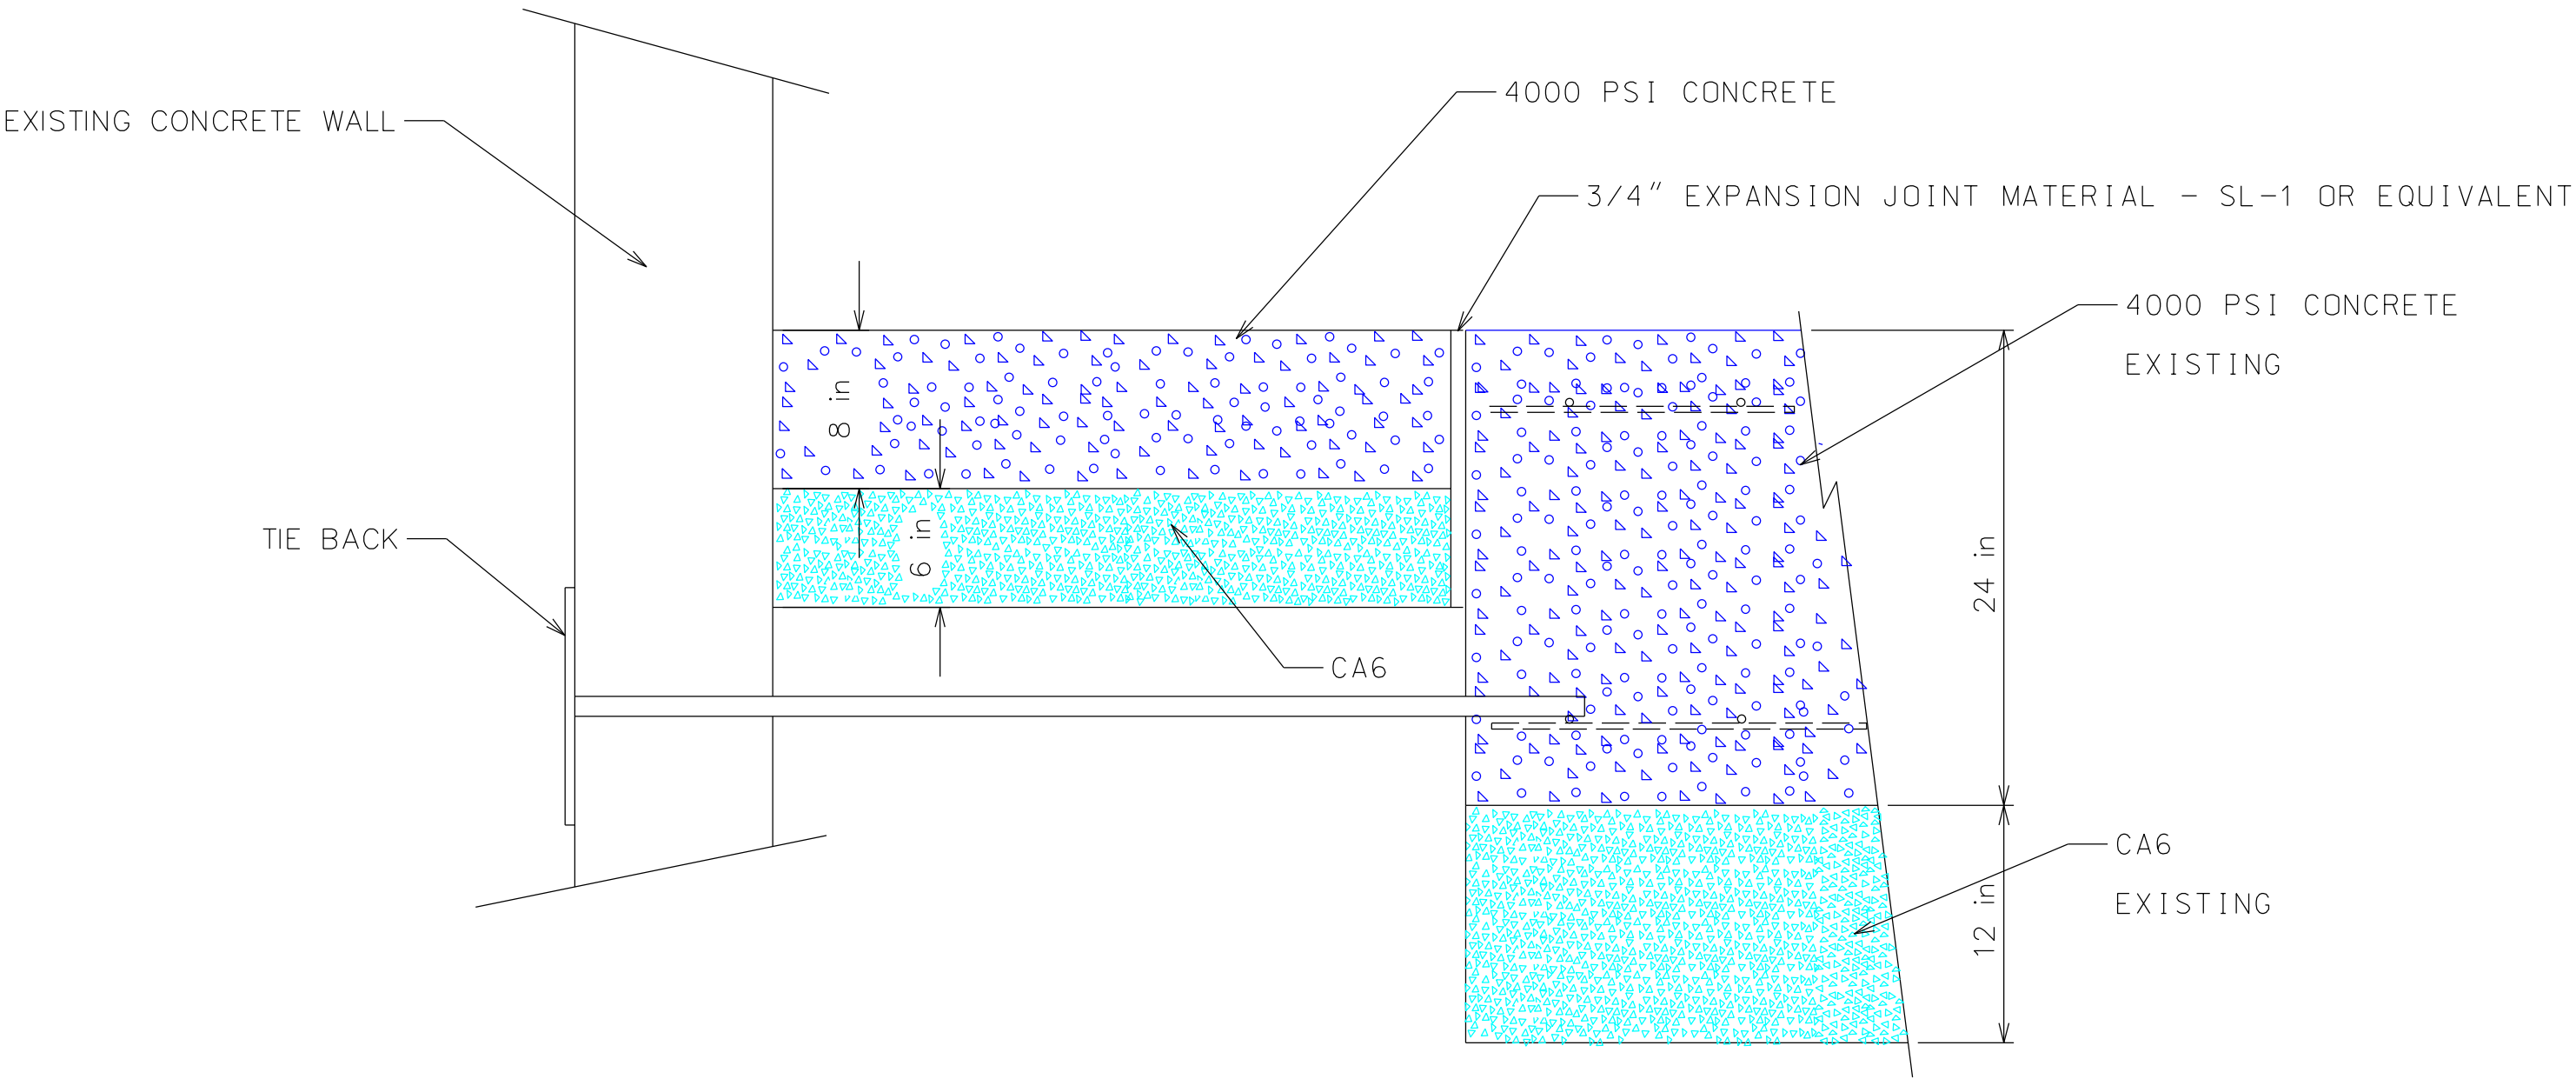

NOTE:
TIE BACKS SHALL BE 12-IN X 12-IN X 1/2-IN STEEL PLATE
WITH #8 REBAR (MATCH EXISTING FURTHER ALONG WALL). THESE
SHALL BE INSTALLED APPROXIMATELY EVERY 10-FT ALONG WALL.

ROCK ISLAND ARSENAL PLANT ENGINEERING DIVISION TARA-LGC		
CONCRETE MOUNTING PADS		
DRAWN B. McCLURE	APPROVED B. NILES SHEET 7 OF 10	
SCALE NONE	DATE 30-DEC-25	DRAWING NO.


ROCK ISLAND ARSENAL JMTC
PLANT ENGINEERING
CONCRETE MOUNTING PADS
B220 LAYOUT
AREA 8

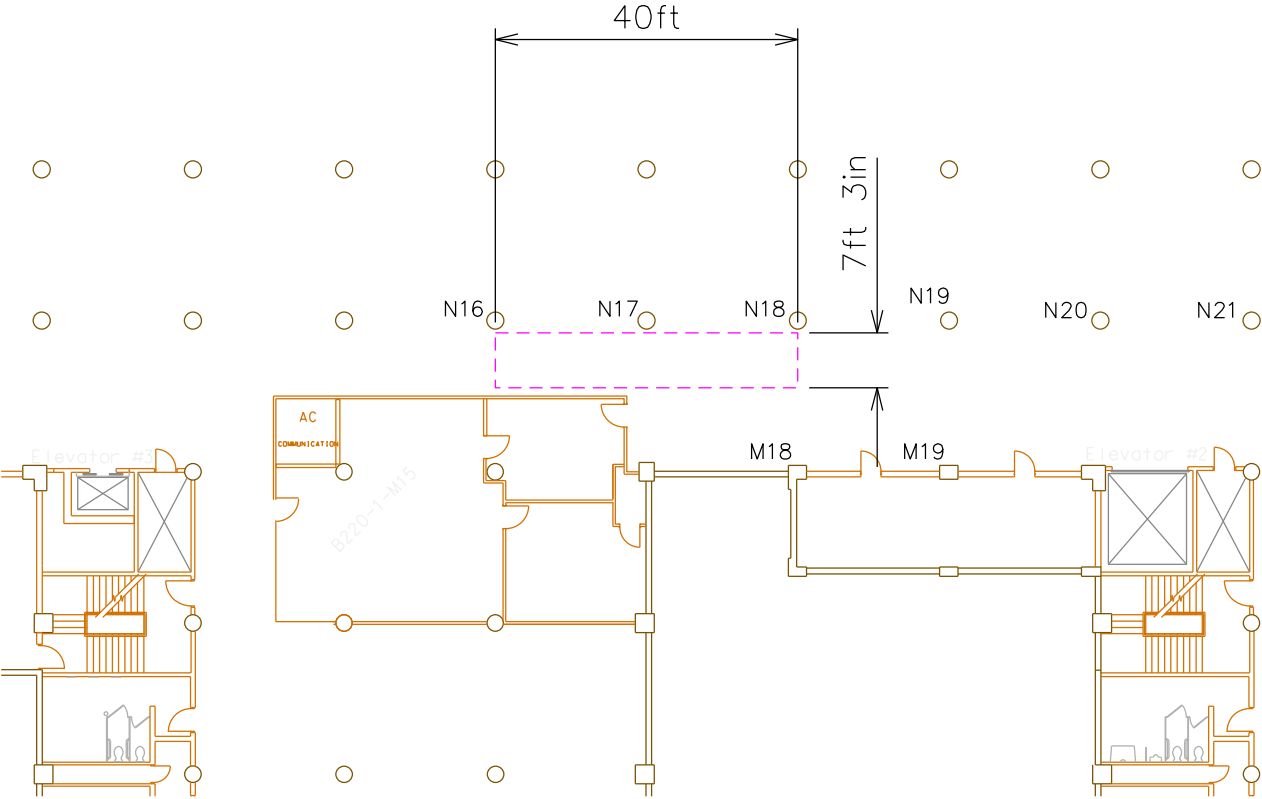

ROCK ISLAND ARSENAL PLANT ENGINEERING DIVISION TARA-LGC		
DMG CONCRETE MOUNTING PADS		
DRAWN B. McCLURE	APPROVED B. NILES SHEET 8 OF 10	
SCALE NONE	DATE 30-DEC-25	DRAWING NO.


ROCK ISLAND ARSENAL JMTC
PLANT ENGINEERING
CONCRETE MOUNTING PADS
B220 ELEVATION/DEMOLITION PLAN
AREA 8

- NOTE:
- 1. PIERCE AND SUPPORT BEFORE SAW CUTTING.
 - 2. SAW CUT FLOOR TO BE REMOVED. DO NOT CUT INTO THE TOP OF THE TUNNEL WALLS.
 - 3. LIFT PIECES OUT OF TUNNEL AREA. DO NOT LET PIECES FALL INTO TUNNEL.
 - 4. REFERENCE: BASEMENT ACCESS HATCH IS ONLY 23-IN TALL x 24 IN WIDE AND IS 56-IN FROM COMMON TUNNEL FLOOR. CONFINED SPACE PERMIT REQUIRED PRIOR TO ENTRY.

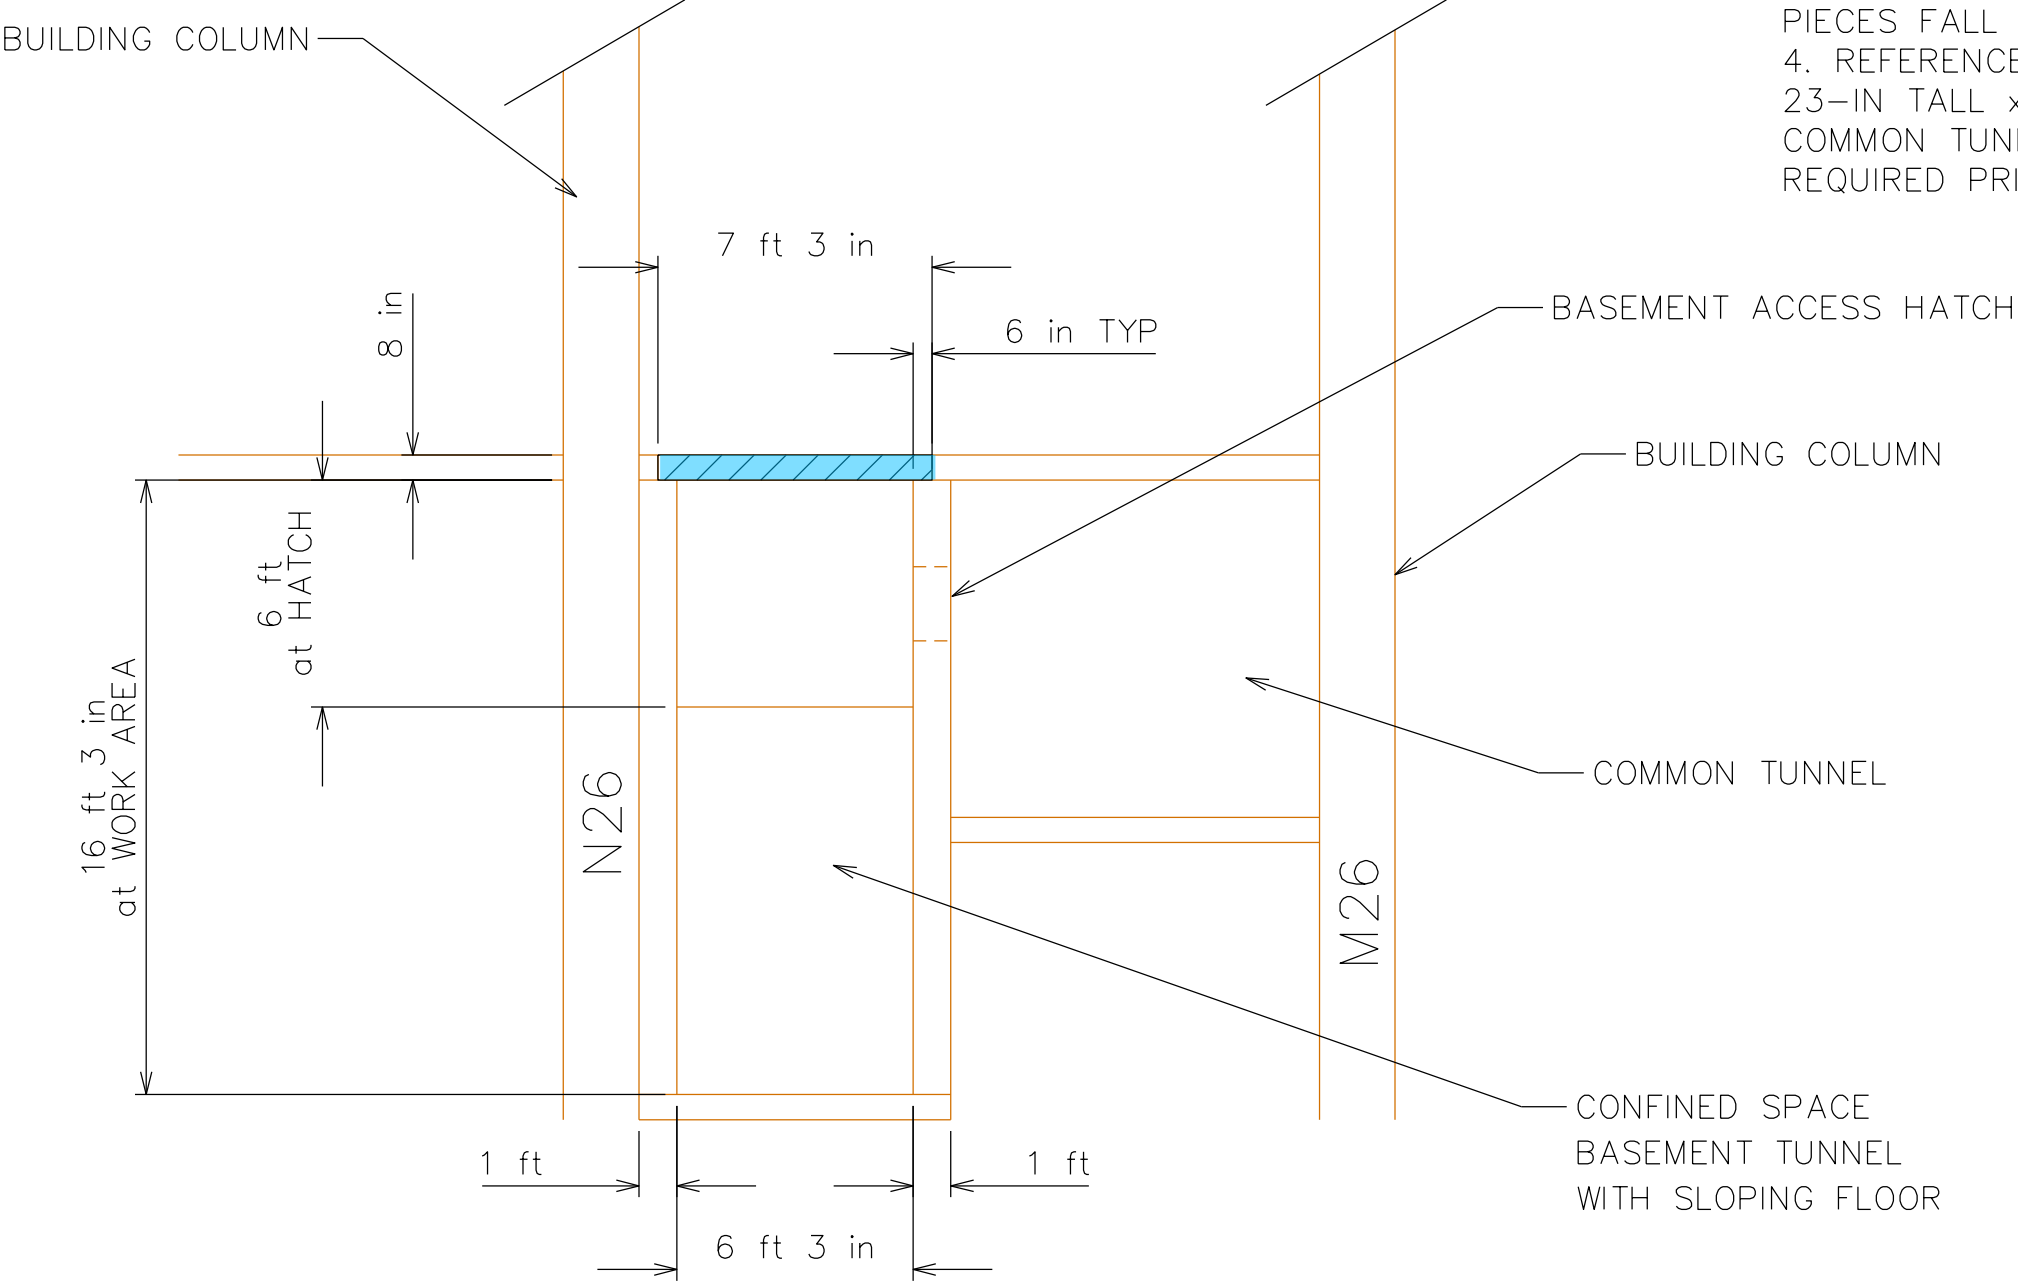

ROCK ISLAND ARSENAL PLANT ENGINEERING DIVISION TARA-LGC		
CONCRETE MOUNTING PADS		
DRAWN B. McCLURE	APPROVED B. NILES SHEET 9 OF 10	
SCALE NONE	DATE 30-DEC-25	DRAWING NO.

ROCK ISLAND ARSENAL JMTC
PLANT ENGINEERING
CONCRETE MOUNTING PADS
B220 ELEVATION/CONSTRUCTION PLAN
AREA 8

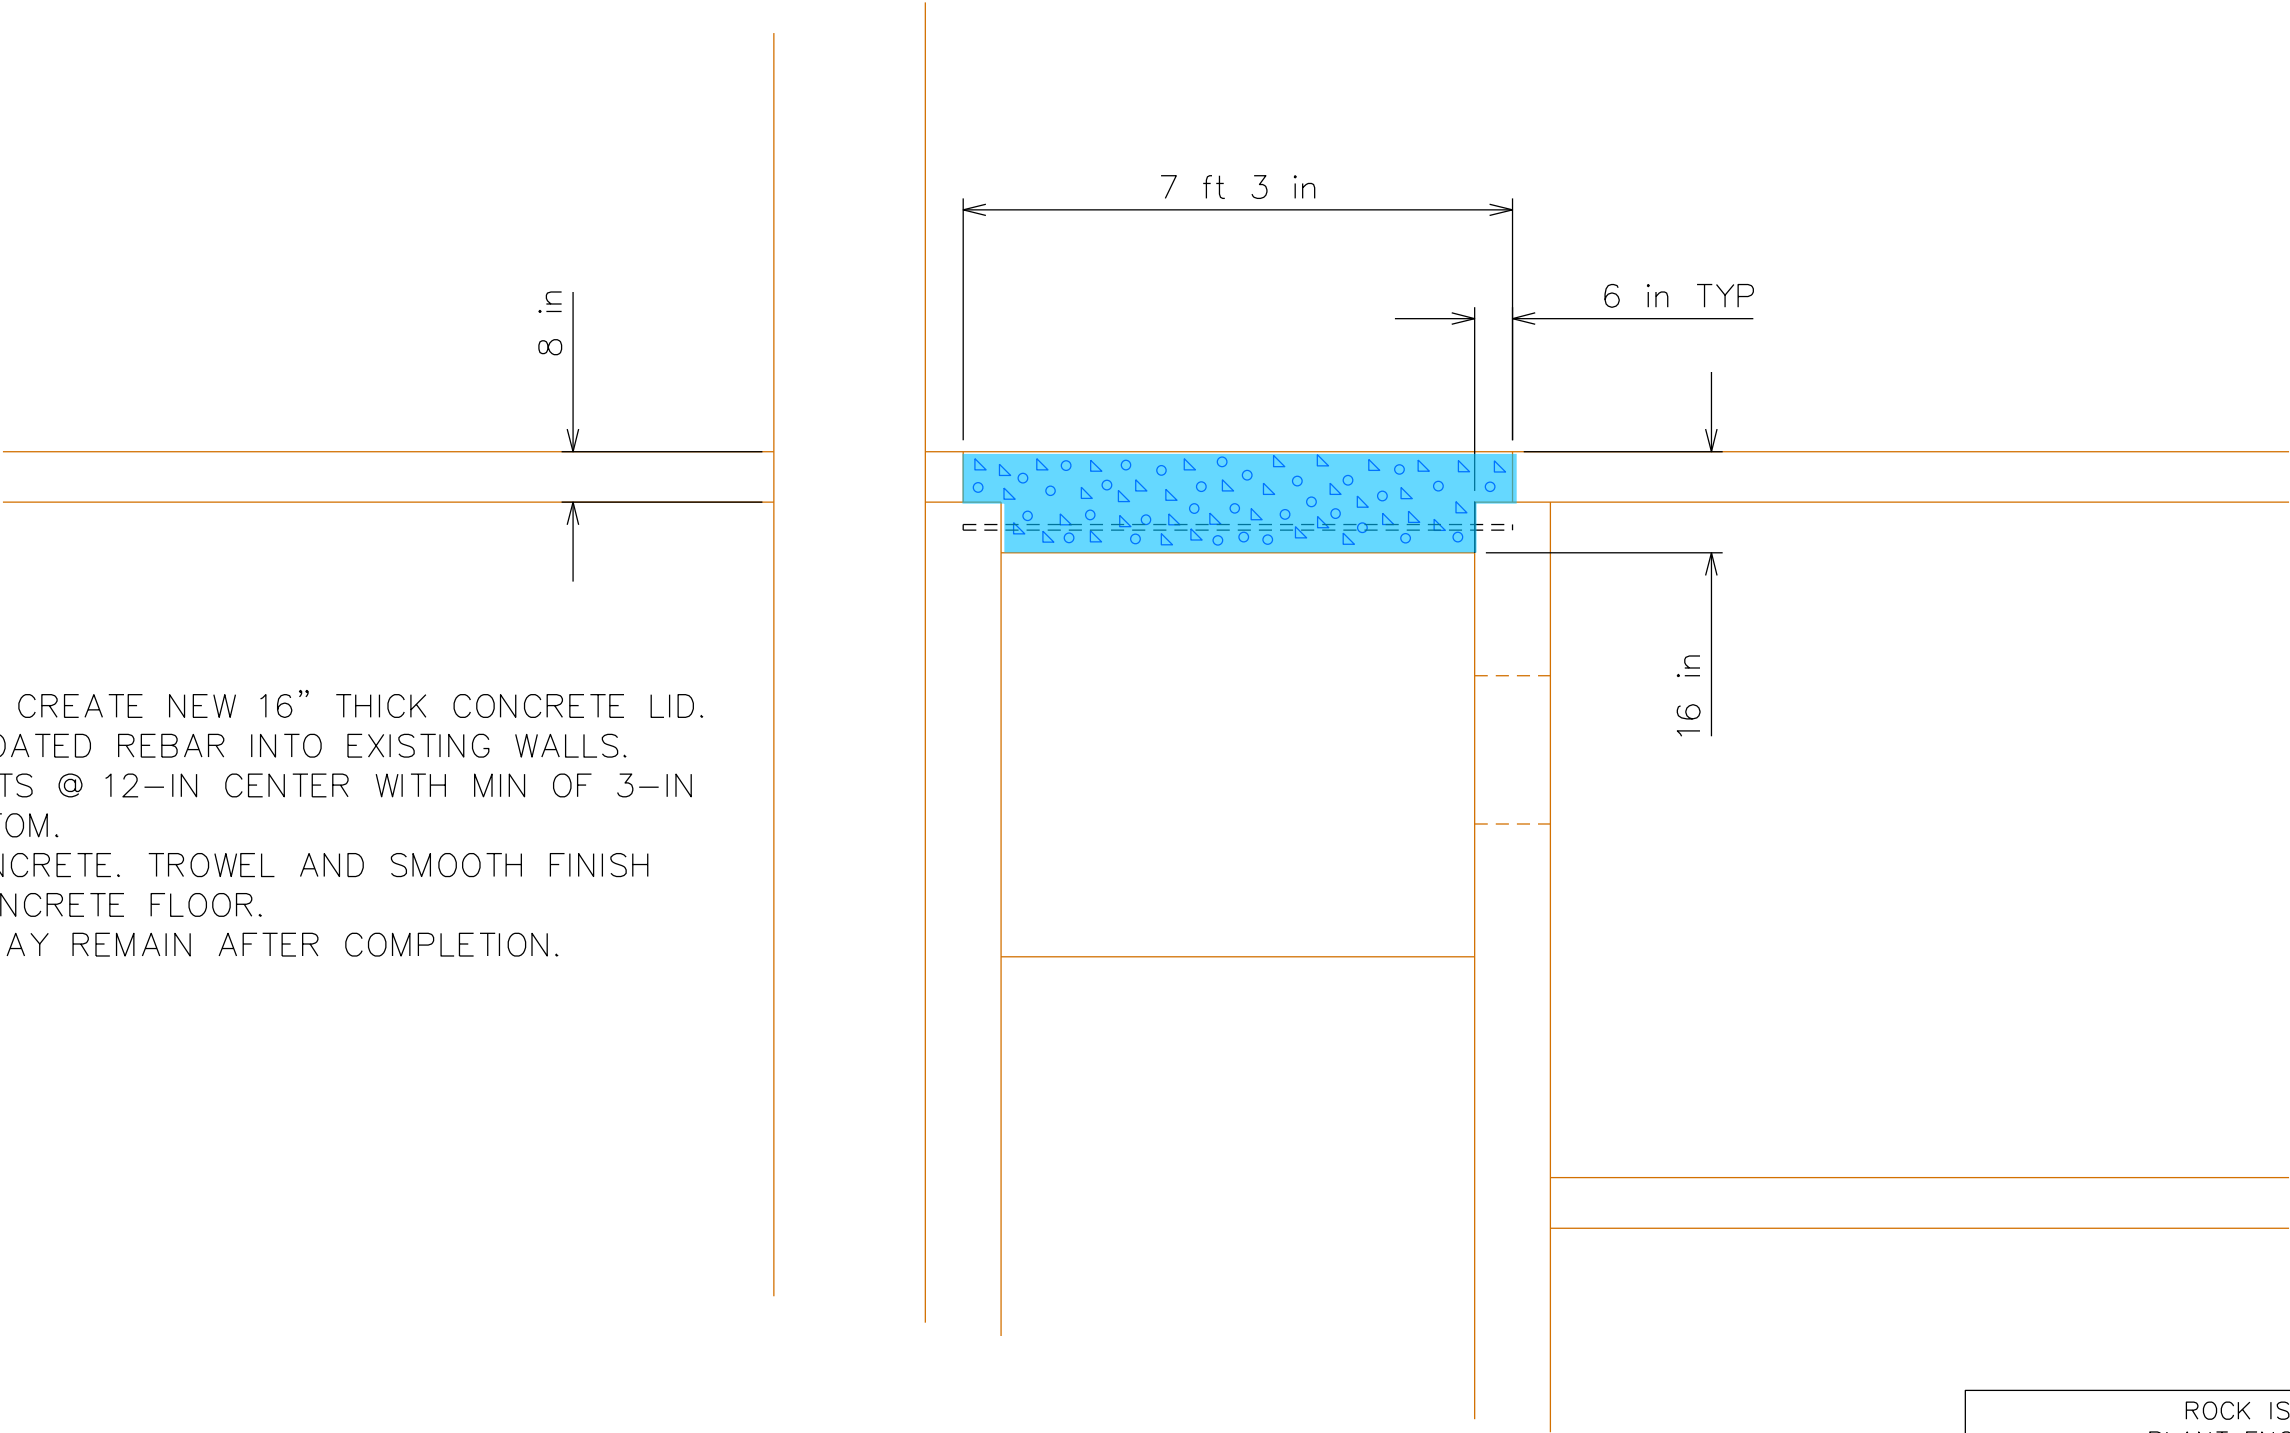

- NOTE:
- 1. FORM UNDERSIDE TO CREATE NEW 16" THICK CONCRETE LID.
 - 2. DOWEL #5 EPOXY COATED REBAR INTO EXISTING WALLS. PLACE AND TIE (2) MATS @ 12-IN CENTER WITH MIN OF 3-IN COVERAGE TOP & BOTTOM.
 - 3. POUR 4500-PSI CONCRETE. TROWEL AND SMOOTH FINISH TO MATCH EXISTING CONCRETE FLOOR.
 - 4. UNDERSIDE FORMS MAY REMAIN AFTER COMPLETION.

ROCK ISLAND ARSENAL PLANT ENGINEERING DIVISION TARA-LGC		
CONCRETE MOUNTING PADS		
DRAWN B. McCLURE	APPROVED B. NILES SHEET 10 of 10	
SCALE NONE	DATE 30-DEC-25	DRAWING NO.