


ROCK ISLAND ARSENAL JMTc
PLANT ENGINEERING
CONCRETE MOUNTING PADS
GENERAL LOCATIONS


LOCATIONS ON ROCK ISLAND ARSENAL

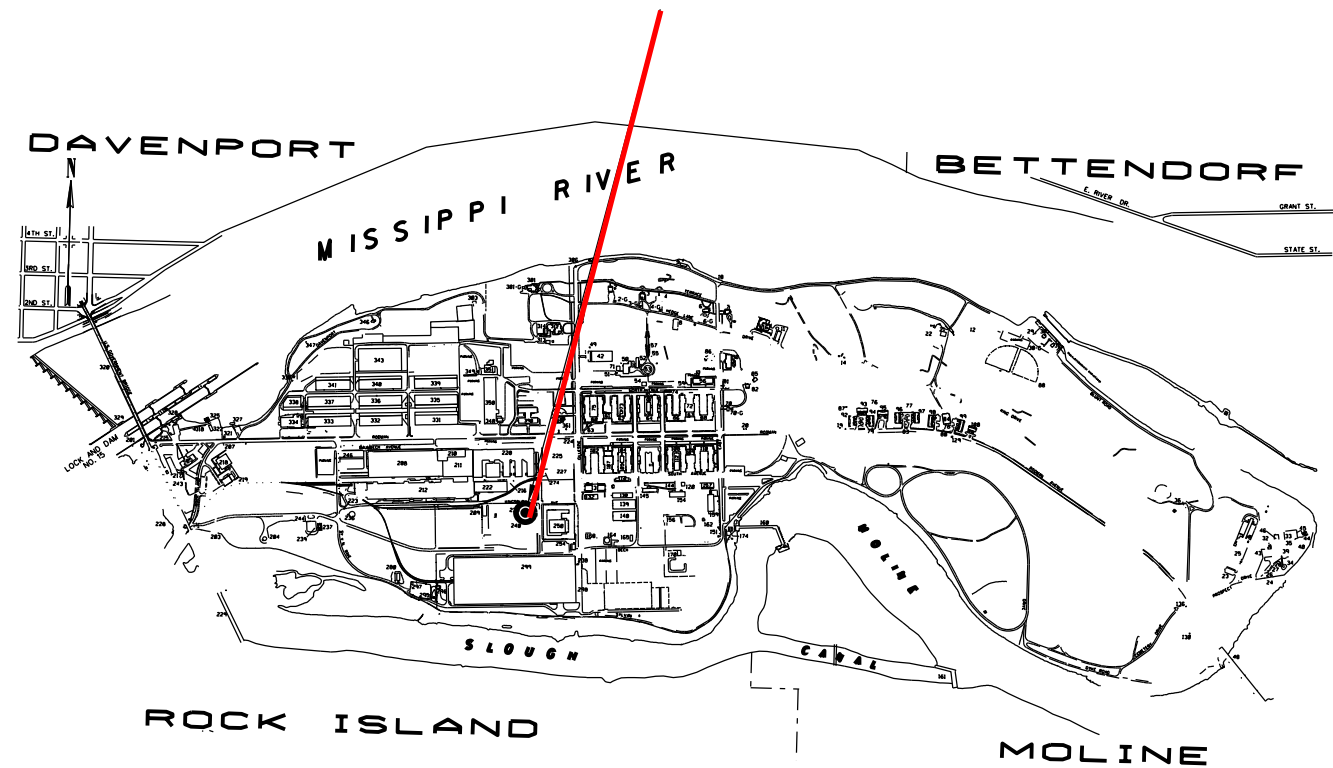

INDEX

GENERAL LOCATIONS.....	1
GENERAL NOTES.....	2
GENERAL SECURITY NOTES.....	3
LOCATION/LAYOUT PLAN.....	4
DEMOLITION PLAN.....	5
CONSTRUCTION PLAN.....	6

BLDG 230 CONCRETE WORK

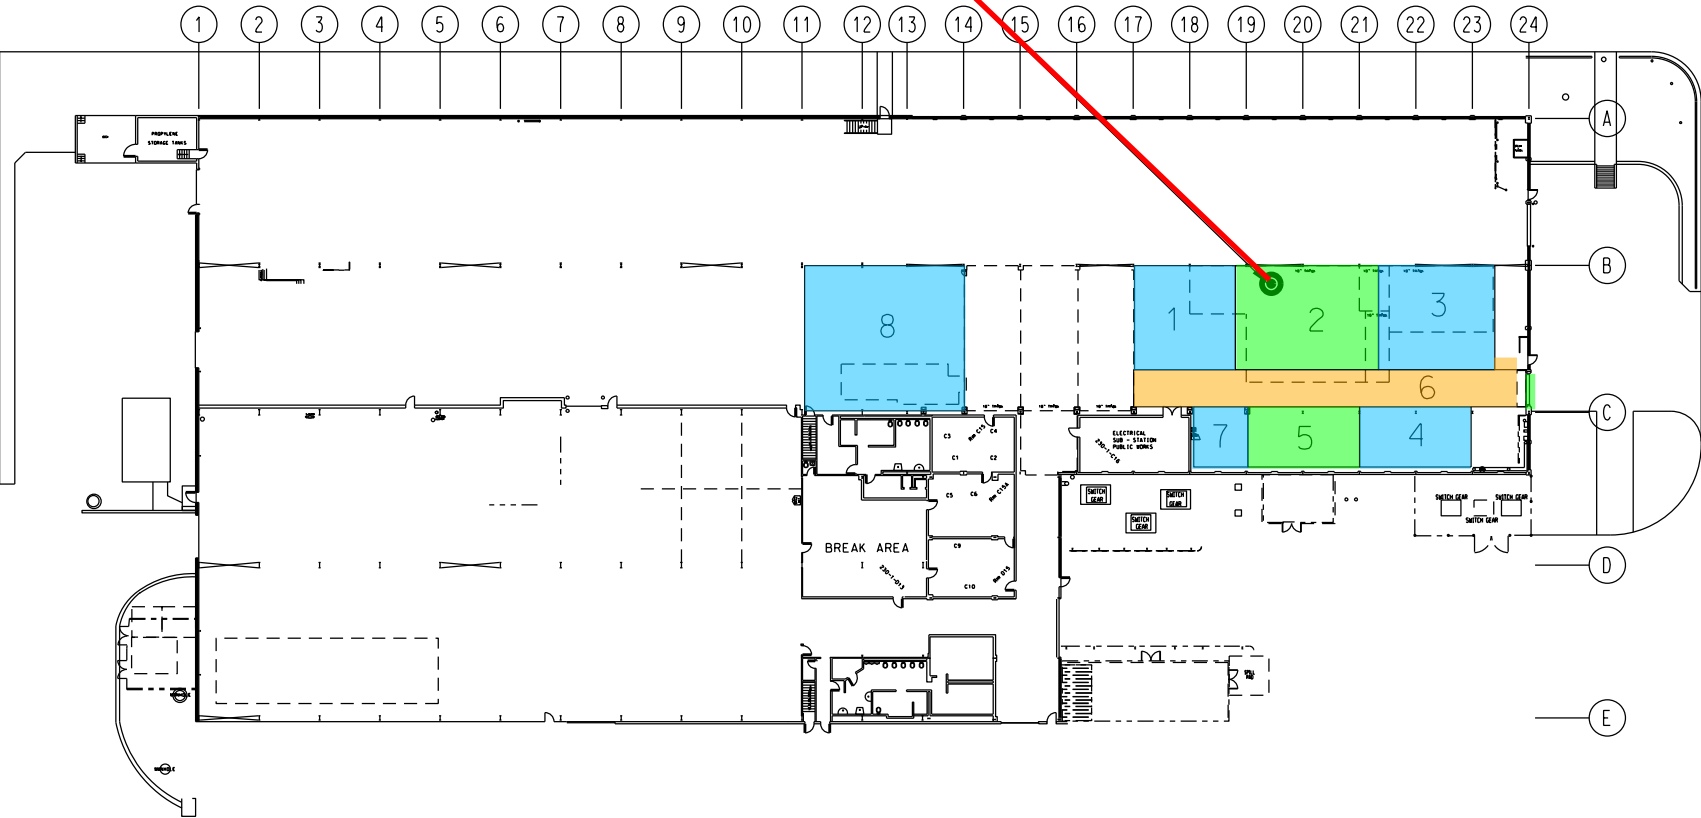

ROCK ISLAND ARSENAL
PLANT ENGINEERING DIVISION
TARA-LGC

DMG CONCRETE MOUNTING PADS

DRAWN	B. McCLURE	APPROVED	B. NILES	SHEET 1 OF 6
SCALE	NONE	DATE	11-MAR-26	DRAWING NO.

ROCK ISLAND ARSENAL JMTC
PLANT ENGINEERING
CONCRETE MOUNTING PADS
GENERAL NOTES

1. THE CONTRACTOR WILL USE WATER TO ELIMINATE DUST DURING ENTIRE DEMOLITION AND CONSTRUCTION.
2. WHEN SAW CUTTING AROUND THE WORK AREA, REBAR PRESENT MUST BE CUT OFF EVEN WITH SAW CUTS.
3. THE CONTRACTOR SHALL REPAIR ANY DAMAGE TO FLOOR OR THE UNDERLYING SOIL CAUSED BY THE CONSTRUCTION.
4. THE CONTRACTOR SHALL REMOVE ALL DEBRIS SUCH AS BOLTS, CANS, BEAMS, CONDUIT, PLATES, PIPES, WOOD BLOCKS, CONCRETE AND REBAR FROM RIA IN ACCORDANCE WITH LOCAL REGULATIONS.
5. CONTRACTOR SHALL VENT EXHAUST OUTSIDE IF EQUIPMENT USED ARE GAS ENGINES. CONTRACTOR SHALL HAVE CATALYTIC CONVERTER ON ALL DIESEL ENGINES.
6. NEW CONCRETE FOR MACHINE MOUNTING PADS AND CAPS SHALL BE A MINIMUM OF 5000-PSI.
7. EXPANSION JOINT MATERIAL UP TO 84” DEEP TYPICAL. AFTER CLEAN UP IS COMPLETE, LINE MOUNTING PADS AND CAPS WITH 3/4” RIGID FOAM INSULATION FOR VIBRATION ISOLATION. JOINT SEALANT SHALL BE BASF SONOLASTIC SL-1 OR EQUAL.
8. DEMOLITION/JACK HAMMERING/REMOVAL WILL BE PERFORMED ON 2ND SHIFT STARTING FROM 2:30 TO 11:00 AT NIGHT OR SATURDAYS. FRAMING, TYING REBAR AND POURING WILL BE DAY SHIFT.
9. CONCRETE TRANSPORTED IN TRUCK MIXERS OR TRUCK AGITATIONS SHALL BE DELIVERED TO THE SITE OF THE WORK IN A PLASTIC AND WORKABLE CONDITION, SATISFACTORY FOR PLACEMETN IN THE WORK WITHOUT THE ADDITION OF WATER OR WATER AND CEMENT PRIOR TO DISCHARGING.

THE MAXIMUM HAUL TIME FOR CONCRETE TRANSPORTED IN TRUCK MIXERS OR TRUCK AGITATORS HALL BE ACCORDING TO THE FOLLOWING:

CONCRETE TEMPERATURE AT POINT OF DISCHARGE deg-F (deg-C)	HAUL TIME	
	HOURS	MINUTE
50-64 (10-17.5)	1	30
65-90 (18-32) – WITHOUT RETARDER	1	0
65-90 (18-32) – WITH RETARDER	1	30

10. THE CONTRACTOR WILL BE RESPONSIBLE FOR COORDINATING WORK SITE ACCESS WITH COMMERCIAL CONCRETE PUMPING OR POWER DOLLY OR MANUAL PROCESSES.

11. CONTRACTOR WILL COORDINATE WITH CONTRACTING OFFICER REPRESENTATIVE FOR GATE PASS AND FUNCTIONALITY.
12. CONTRACTOR WILL FOLLOW AND APPLY ALL STANDARD SAFETY RULES OF THE TRAD AND ENSURE ALL PERSONNEL UTILIZE PROPER PPE.
13. CONTRACTOR WILL PROVIDED ONE GROUND ROD DRIVEN INTO A 5-IN DIA X 6-IN DEEP RECESS IN THE MOUNTING PAD AND LEFT EXPOSED FLUSH WITH PAD SURFACE.
14. CONTRACTOR WILL PROVIDE SPOTTER/GROUND MAN FOR EQUIPMENT/TRUCKS GOING IN/OUT OF THE BUILDING AND WITHIN THE BUILDING TO ENSURE SAFE TRAFFIC AND PEDESTRIAN INTERACTIONS.
15. CONTRACTOR SHALL PROVIDE BARRICADES AROUND JOB SITE UNDER CONSTRUCTION.
16. CONTRACTOR SHALL CLEAN UP THE WORKSITE AFTER COMPLETION OF THE PROJECT.
17. DOUBLE TIED LAYERS OF #5 REBAR MESH (5/8”). 12” X-W SPACING. REBAR SHOULD BE A MINIMUM OF 4” AWAY FROM TOP OR BOTTOM SURFACE AND HAVE A MINIMUM OF 2 RODS IN EACH DIRECTION. DOWELS WILL BE DRILLED A MINIMUM OF 6” INTO THE VERTICAL FACE OF THE EXISTING CONCRETE.
18. FABRICATION AND INSTALLATION OF STRUCTURAL STEEL SHALL COMPLY WITH LATEST AMERICAN INSTITUTE OF STEEL CONSTRUCTION (AISC) STANDARDS AND SPECIFICATIONS. ALL WORK SHALL BE PERFORMED BY COMPETENT, EXPERIENCED, QUALIFIED WORKMEN.
19. CONSOLIDATE PLACED CONCRETE USING MECHANICAL VIBRATING EQUIPMENT WITH HAND RODDING AND TAMPING SO THAT CONCRTE IS WORKED AROUND REINFORCING AND OTHER EMBEDDED ITEMS AND INTO FORMS.
20. ANY DISCREPANCIES IN PLANS, OR BETWEEN PLANS AND SPECIFICATIONS SHALL BE BROUGHT TO THE ATTENTION OF RIA REPRESENTATIVES IMMEDIATELY.
21. ANY DIRT, ROCKS OR DEBRIS TO BE PLACED OUTSIDE MUST BE APPROVED WITH THE COR PRIOR TO PLACING. AREA MUST BE CONTAINED WITH CONTAINMENT BALES TO AVOID RUNOFF INTO STORMWATER SYSTEM.

ROCK ISLAND ARSENAL PLANT ENGINEERING DIVISION TARA-LGC		
DMG CONCRETE MOUNTING PADS		
DRAWN B. McCLURE	APPROVED B. NILES	SHEET 2 OF 6
SCALE NONE	DATE 11-MAR-26	DRAWING NO.

ROCK ISLAND ARSENAL JMTC
PLANT ENGINEERING
CONCRETE MOUNTING PADS
SECURITY NOTES

All contractor employees, including subcontractor employees, requiring access to Army installations, facilities, or controlled access areas shall complete AT Level I awareness training. The COR will be provided a copy of the RIA-JMTC AT Level I awareness training and assuring the training is completed.

The contractor shall sign a Memorandum of Record for each contractor employee and subcontractor employee to the RIA-JMTC Operations Center prior to a RIA-JMTC electronic keys and access pass being issued.

The contractor and all associated subcontractors employees shall provide all information required for background checks to meet installation access requirements to be accomplished by the installation Director of Emergency Services.

The contractor workforce must comply with all personal identity verification requirements (FAR clause 52.204-9, Personal Identity Verification of Contractor Personnel) as directed by DoD, HQDA, and/or local policy. In addition to the changes otherwise authorized by the change clause of this contract, should the Force Protection Condition (FPCON) at any individual facility or installation change, the Government may require changes in contractor security matters or processes.

Contractor and all associated subcontractor employees shall comply with adjudication standards and procedures using the National Crime Information Center interstate identification Index (NCIC-III) and Terrorist Screening Database (TSDB) (Army Directive 2014-05/AR 190-13), applicable installation, facility access and local security policies and procedures (provided by government representative). The COR will provide guidance to complete the Access Control Records Check request Form thru the RIA Directorate of Emergency Services.

Contractor will acquire and need to return all issued U.S. Government Common Access Cards, installation badges, and/or access passes. Use FAR 52.204-9 or PADDS Clause IF00015 IF00015 at the end of the contract or the last day of an individual contractor⁵/_{32s} employment.

RIA-JMTC electronic keys and access passes are accountable items and will be returned within 24 hours of no longer being needed. Items will returned to the COR or placed in a drop box at a RIA-JMTC access point.

Contractors who routinely fail to return these items will not be issued them in support of any future contract.

The Contractor and all associated subcontractors shall brief all employees on the local iWATCH program. The iWATCH training will be provided in the RIA-JMTC AT training.

Contractor and all associated subcontractor employees shall comply with adjudication standards and procedures using the National Crime Information Center interstate identification Index (NCIC-III) and Terrorist Screening Database (TSDB) (Army Directive 2014-05/AR 190-13), applicable installation, facility access and local security policies and procedures (provided by government representative). The COR will provide guidance to complete the Access Control Records Check request Form thru the RIA Directorate of Emergency Services.

Contractor will acquire and need to return all issued U.S. Government Common Access Cards, installation badges, and/or access passes. Use FAR 52.204-9 or PADDS Clause IF00015 IF00015 at the end of the contract or the last day of an individual contractor⁵/_{32s} employment.

RIA-JMTC electronic keys and access passes are accountable items and will be returned within 24 hours of no longer being needed. Items will returned to the COR or placed in a drop box at a RIA-JMTC access point.

Contractors who routinely fail to return these items will not be issued them in support of any future contract.

The Contractor and all associated subcontractors shall brief all employees on the local iWATCH program. The iWATCH training will be provided in the RIA-JMTC AT training.

During FPCONs Charlie and Delta, services may be discontinued/postponed due to higher threat. Services will resume when FPCON level is reduced to level Bravo or lower. The FPCON descriptions will be provided in the RIA-JMTC AT training.

The COR will keep the contractors informed on the current FPCON or any possible FPCON change.

Contractor personnel working on Rock Island Arsenal are subject to participation in installation RAMP security program (e.g. vehicles searches, wearing of ID badges, etc.). Contractors will comply with any instructions given by the Rock Island Arsenal Police Department.

The RAMP program is discussed in the RIA-JMTC AT training.

ROCK ISLAND ARSENAL PLANT ENGINEERING DIVISION TARA-LGC		
DMG CONCRETE MOUNTING PADS		
DRAWN B. McClURE	APPROVED B. NILES	SHEET 3 OF 6
SCALE NONE	DATE 11-MAR-26	DRAWING NO.

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.



THE PROJECT IS FOR REMOVING EXISTING CONCRETE AND
INSTALLATION OF UP TO 7 - 18 INCH THICK CONCRETE REINFORCED
PADS AND 1 LONG ISLEWAY. ALL PLADS WILL BE DOWELLED TOGETHER
BUT STILL HAVE ISOLATION BETWEEN PADS AND JOINTS FILLED WITH
SELF LEVELING SEALER.



1.) AREA SURROUNDING FOUNDATIONS WILL NOT ALWAYS BE THE SAME ELEVATION. FOUNDATION MUST MAINTAIN NO GREATER THAN A 1/4" OVER 10' DEVEATION. THE MIDDLE OF THE BUILDING AND THE EAST END MAY NOT BE AT THE SAME ELEVATION. ALL NEW SLABS SHOULD BE THE SAME HEIGHT EXCEPT THE SHORT SECTION NEAR THE OVERHEAD DOOR. THE SECTION NEAR THE OVERHEAD DOOR CAN BE SLOPED TOWARDS THE EXTERIOR OF THE BUILDING BUT NO MORE THAN 1% SLOPE.

2) THE THRESHOLD GOING THROUGH THE OVERHEAD DOOR WILL BE REPLACED UP TO 24 INCHES PAST THE EXTERIOR OF THE DOOR OPENING.

3) THE PADS MARKED #4 AND #7 WILL BE MARKED AS AN "OPTION"
BASED ON FUNDING ALLOWANCE FOR PROJECT.

ROCK ISLAND ARSENAL PLANT ENGINEERING DIVISION TARA-LGC		
DMG CONCRETE MOUNTING PADS		
DRAWN B. MCCLURE	APPROVED B. NILES SHEET 4 OF 6	
SCALE NONE	DATE 11-MAR-26	DRAWING NO.


ROCK ISLAND ARSENAL JMTC
PLANT ENGINEERING
B230 CONCRETE WORK ELEVATION/DEMOLITION PLAN

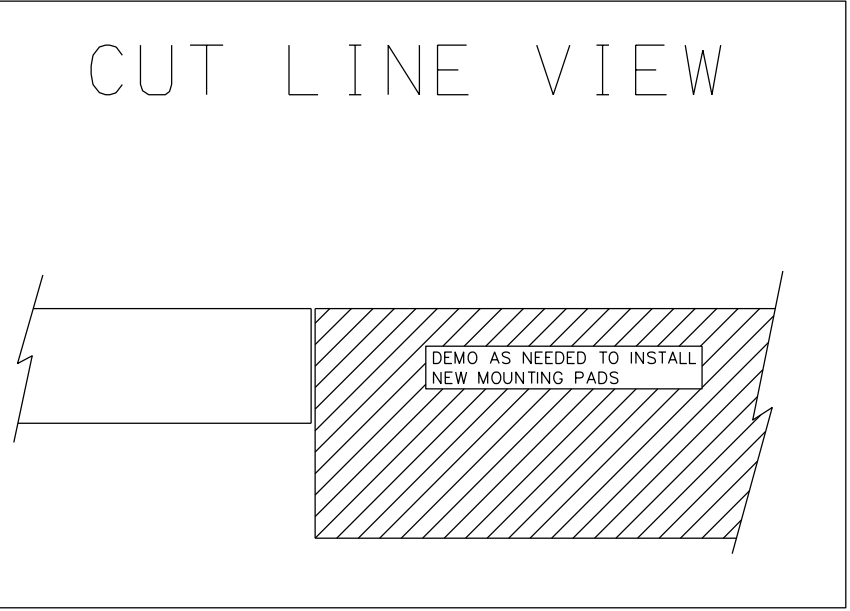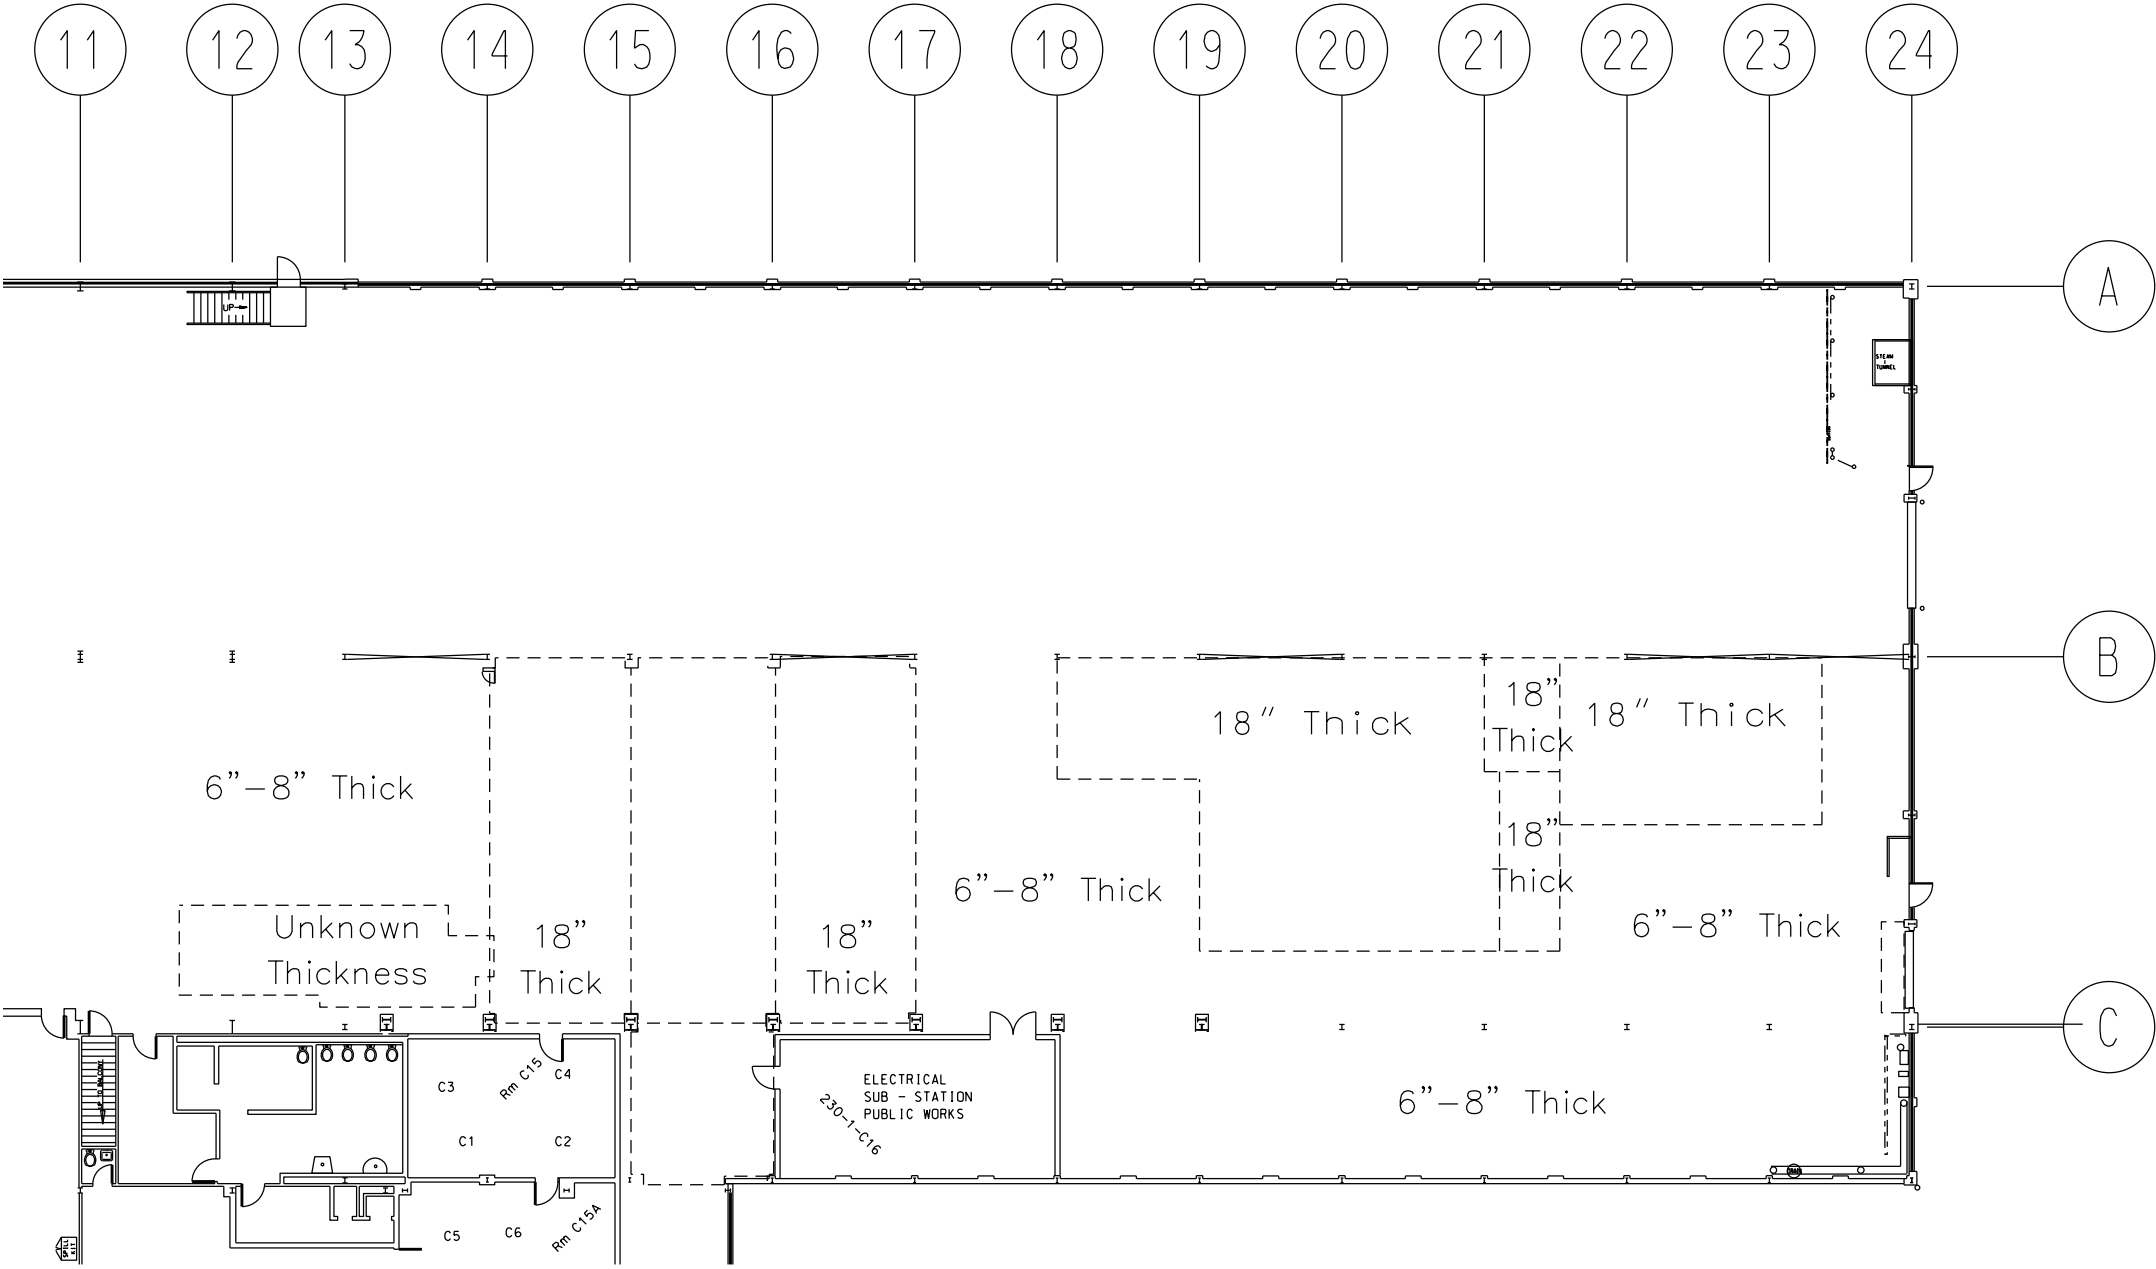

NOTE: BUILDING COLUMNS AND FOOTINGS WILL BE AVOIDED AND NOT DISTURBED.

ROCK ISLAND ARSENAL PLANT ENGINEERING DIVISION TARA-LGC		
CONCRETE MOUNTING PADS		
DRAWN B. McCLURE	APPROVED B. NILES SHEET 5 OF 6	
SCALE NONE	DATE 11-MAR-26	DRAWING NO.

ROCK ISLAND ARSENAL JMTC
PLANT ENGINEERING
B230 CONCRETE WORK ELEVATION/CONSTRUCTION PLAN

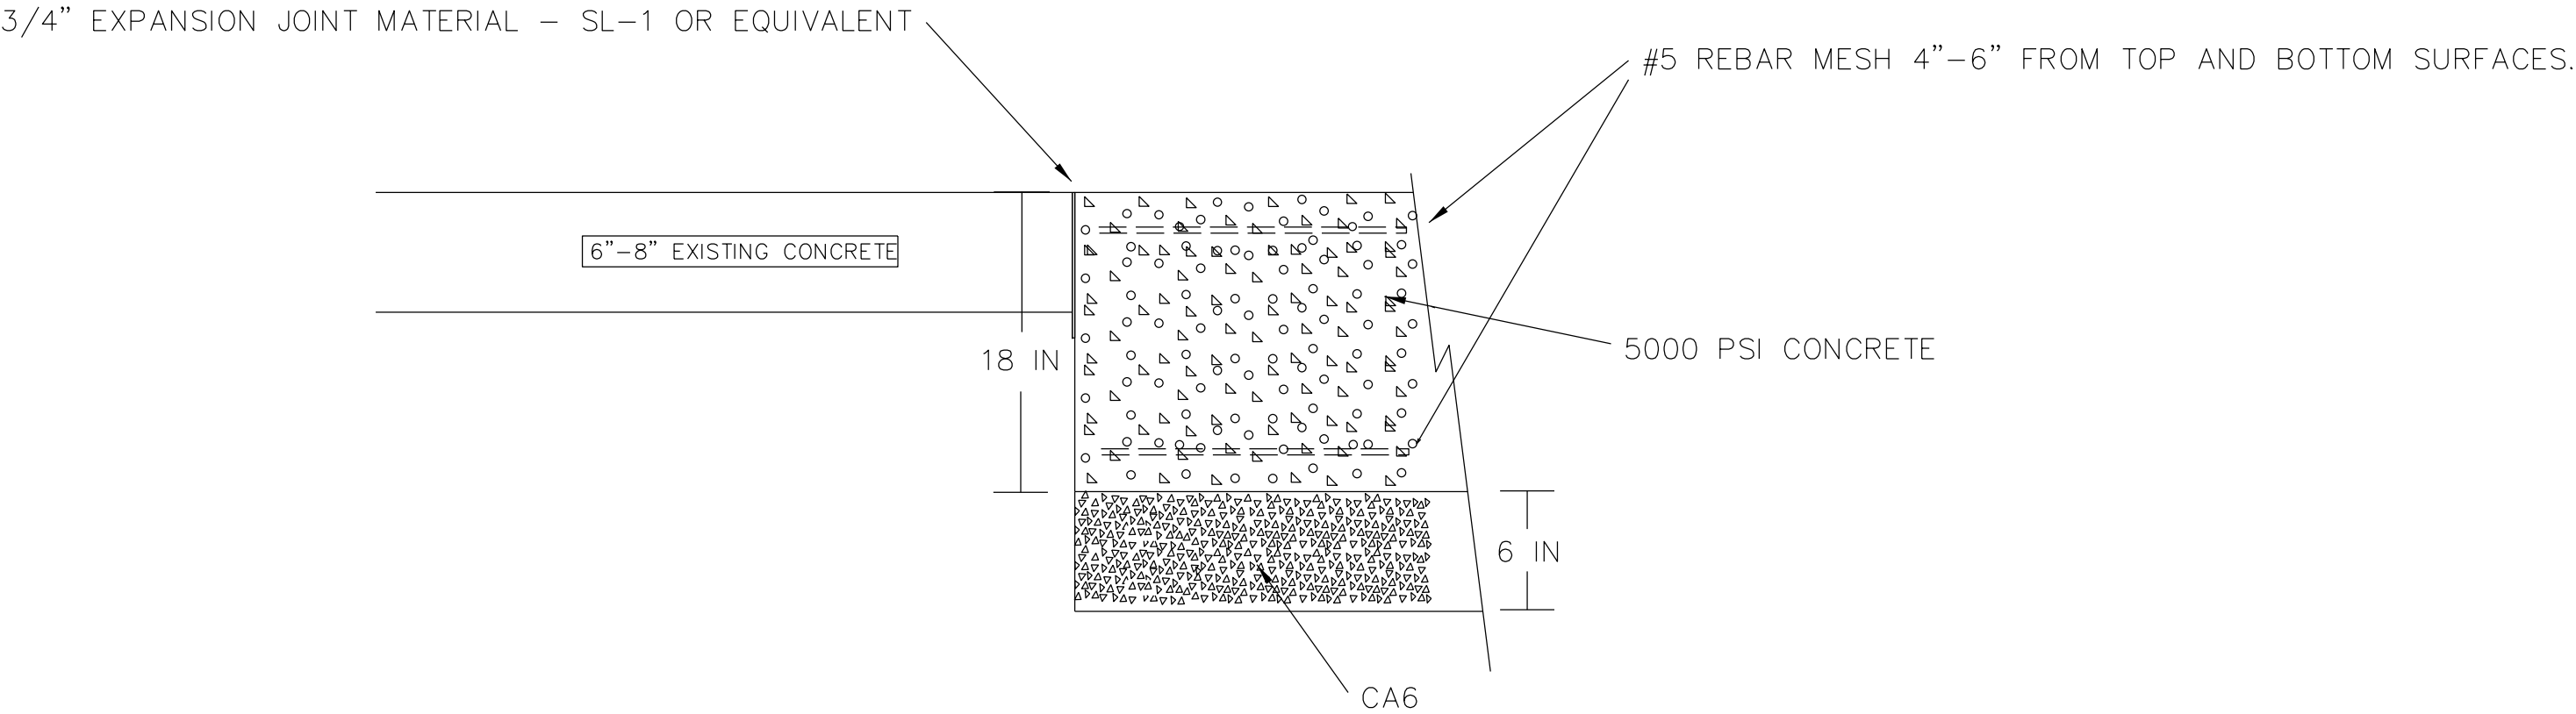

NOTE:
AREA SURROUNDING MOUNTING PADS WILL NOT ALWAYS BE THE SAME ELEVATION. MOUNTING PADS MUST MAINTAIN NO GREATER THAN 1/4" DEVIATION OVER 10'. IF THIS CANNOT MEET EXISTING CONCRETE THE FINAL 12" CAN BE SLOPED TO MEET THE EXISTING ELEVATION.

ROCK ISLAND ARSENAL PLANT ENGINEERING DIVISION TARA–LGC		
CONCRETE MOUNTING PADS		
DRAWN B. McCLURE	APPROVED B. NILES SHEET 6 OF 6	
SCALE NONE	DATE 11–MAR–26	DRAWING NO.