

PERFORMANCE WORK STATEMENT
FOR
VERTICAL TRANSPORTATION EQUIPMENT
MAINTENANCE, REPAIR, & INSPECTION
SERVICES

March 2025

**PERFORMANCE WORK STATEMENT (PWS)
FOR
VERTICAL TRANSPORTATION EQUIPMENT MAINTENANCE,
REPAIR, & INSPECTION SERVICES**

1. DESCRIPTION OF SERVICES. The Contractor shall provide all management, tools, supplies, equipment, parts and labor necessary to maintain, repair, and inspect the real property vertical transportation equipment (VTE) at Malmstrom Air Force Base (MAFB), both on the main base and at remote Missile Alert Facilities (MAFs), in a manner that will ensure continuous and safe operation (full maintenance and repair with the exception of the exclusions listed in paragraph 2 below). The VTE and their locations are listed in Appendix B. NOTE: The term “VTE” in this Performance Work Statement (PWS) includes all equipment listed in Appendix B: freight and passenger elevators, escalators, and may include wheelchair/stair lifts, dock levelers, and dumbwaiters.

1.1. This full maintenance contract signifies a VTE service provider (Contractor) takes total service responsibility for the equipment identified in the contract. Except those services covered in paragraph 2 below, the monthly fixed price includes all inspections, maintenance, repairs, replacements, and routine and emergency service calls. This contract allows the Government to budget total yearly costs and eliminates concerns relating to individual parts repair or replacement invoicing. The Contractor assumes all responsibility and determines the amount of service visits and types of service required to keep the VTE operating safely and within the performance objectives of paragraph 6.

1.2. Work conducted on VTE will be in accordance with the American Society of Mechanical Engineers (ASME) A17.1-2007 (or applicable code for year VTE put in service), Safety Code for Elevators and Escalators (ASME A17.1), ANSI/ASME A17.2-2010, Guide for Inspection of Elevators, Escalators, and Moving Walks (applicable to equipment), A17.3-2011, Safety Code for Existing Elevators and Escalators (applicable to equipment), National Fire Protection Association Standards (NFPA), Unified Facilities Criteria (UFC) 3-600-01, Fire Protection Engineering for Facilities, Occupational Safety and Health Administration (OSHA) Standards and the recommendations of the original equipment manufacturer (OEM).

2. EXCLUDED SERVICES. The following are not covered in the full maintenance service arrangement and are considered over and above services:

2.1. Alterations (a.k.a., modernizations) are not covered in the full maintenance service arrangement. (See Paragraph 3.2)

- 2.2. Acts by parties other than the Contractor of vandalism, abuse, negligence, damage resulting from rescue and recovery operations, acts of God (including damage resulting from emergency power generator power spikes and low quality) are not included in the contract.
- 2.3. Additional items excluded in the full maintenance coverage are cosmetic, construction, ancillary components of the VTE system including the finishing, repairing or replacement of the cab enclosure, ceiling frames, hoistway door panels, door frames, sills, car flooring, floor covering, main line power switches, main power breaker(s), hydraulic elevator jack outer housing, buried piping, smoke and fire sensors, fire service reports, main communication feeders to controller, security systems, batteries for emergency lighting and lowering that are not solely dedicated to the VTE, air conditioners, and heaters.
- 2.4. Routine cleaning and refinishing of the interior of cars and the exterior of the hoistway doors and frames is not included in the basic full maintenance service.
- 2.5. In the event that the Contractor encounters an item of work included in paragraph 2.1 through 2.4, the Contractor will report the situation to the Contracting Officer's Representative (COR). The report will include the work location, a detailed scope of the required work, justification for Contractor determination that the work was not included in the contract, and an itemized cost estimate (including time to repair, all required parts and a breakdown of labor hours). **NOTE: Any part, component or assembly unavailable from the manufacturer due to obsolescence, remains the Contractor's responsibility to obtain an engineered equivalent product from a commercial source.**

3. DEFINITIONS:

- 3.1. **Maintenance, Repair and Replacement.** Maintenance, repair and replacement are on existing VTE and included in the contract scope of services. All maintenance, repair and replacement of damaged, broken, or worn parts are to be done in a manner that ensures that the equipment may be operated safely. Maintenance, repair and replacement are actions to restore equipment to a state in which it may safely perform its required operations as installed in accordance with the manufacturer's recommendations. See ASME A17.1 for requirements.
- 3.2. **Alteration.** An alteration is also on existing VTE but is not included under the full maintenance service arrangement. Alteration/modernization will be covered on an over and above Contract Line Item or it may result in a modification to the contract. The typical alteration results in a betterment to the safe operation of the equipment. In the case of elevators, when an alteration is made, all affected safety requirements must be complied with. All work as part of an alteration is required to comply with specific requirements of the current ASME A17.1 Code edition.

4. MAINTENANCE AND INSPECTION SERVICES:

- 4.1.** The Contractor with the CO/COR (or representative) shall determine the working order, inspection status and condition of all VTE listed in Appendix B within thirty (30) calendar days of contract award. The Government will either replace missing items or repair all items not in working order or serviceable condition, or the CO will direct the Contractor to replace the missing items, accomplish the repair, and reimburse the Contractor in accordance with the contract. The CO will give instructions for situations where a unit requires a level of repair potentially constituting alteration as described by paragraph 3. The Contractor and the CO shall certify their agreement as to the working order of the equipment. All repair work shall be in accordance with standard commercial practices using only new parts of equal quality specified by the VTE manufacturer in effecting repairs (substitution of a different component is only permitted where it is equivalent to that which was tested, as determined by the certifying agency).
- 4.2.** The Contractor shall develop and submit to the Government an annual written Maintenance Control Program (MCP) for each VTE within thirty (30) calendar days after contract award to cover the basic contract and any option periods. The MCP shall, at a minimum, include required inspections, timelines for inspections and maintenance to be performed. The Contractor shall perform inspections and maintenance of all VTE in accordance with the MCP. The MCP shall ensure compliance with all minimum code requirements.
- 4.3.** The Contractor shall perform maintenance in accordance with the MCP to ensure reliable and continuous safe operation. The maintenance work shall be in accordance with commercial practices or manufacturer's specifications, if available, and shall be intended to maintain the VTE in safe and reliable operating condition. The MCP is required to specify appropriate intervals for specific maintenance items.
- 4.4.** Cleaning of equipment spaces and daily cleanup of job sites in conjunction with maintenance, inspections and tests, and repairs are required.
- 4.5.** The Contractor shall perform necessary inspections and tests as required under ASME A17.1 Appendix N, using a Qualified Elevator Inspector (QEI). The first annual test shall include the five-(5)-year test for all traction and roped hydraulic elevators regardless of due date. The three- (3) - year test shall be scheduled in conjunction with the annual test two years later from the first annual test.

- 4.6. The Government may perform inspections of the VTE at no cost to the Contractor for purposes of capital asset management and quality assurance. If discrepancies are discovered during these inspections, the Contractor will be notified in writing of any determination and may be responsible for the corrective actions.
- 4.7. The Contractor shall prepare and submit a written report within two (2) business days of work. The report shall identify each VTE, the location, maintenance work performed, repairs needed, date of inspection, name of inspector, and overall condition of the VTE.
- 4.8. The Contractor shall maintain a copy of all current VTE inspection documentation, along with an index indicating the location, date inspected, and date of the next required inspection having provided the original to the CO/COR. The index and copies of certificates shall be delivered to the CO/COR upon request; however, no later than one (1) business day of a request to review.

5. REPAIR SERVICE CALLS. Contractor shall provide service calls (routine and emergency) under the full maintenance service agreement at no additional charge. All repair work shall be done in accordance with standard commercial practices. Contractor shall repair and replace components of the VTE at no additional cost to the Government. When a component in a labeled product is replaced, it must be replaced with an identical component manufactured under the original labeling service (certifying agency). Substitution of a different component is only permitted where it is equivalent to that which was tested, as determined by the certifying agency. The parts used for replacement are required to comply with all the requirements that the old parts originally complied with. The Unified Facilities Guide Specifications (UFGS) and the UFC will be used to benchmark acceptable replacement components. See UFGS 14 21 00. 00 20 Electric Traction Elevators, UFGS 14 21 13 Electric Traction Freight Elevators, UFGS 14 21 23 Electric Traction Passenger Elevators, and UFGS 14 2 00 Hydraulic Elevators for guidance.

5.1. Routine Calls. Service calls will be classified as routine when the work or adjustments do not qualify as an emergency call.

5.1.1. Facility Managers, 341 CES maintenance personnel and VTE users will communicate repair needs to the CO/COR. The CO/COR will communicate routine repair needs to the Contractor.

5.1.2. The Contractor shall respond in-person to the VTE and begin work on routine service calls at no additional cost to the Government within 72 hrs after receipt of the call on regular scheduled work days/hours.

5.1.3. The Contractor shall report to the work location, survey the repair, and provide the CO/COR an estimate of time and cost of repairs not covered in

the full maintenance service contract, but necessary to bring the VTE back to operation. The Contractor shall commence repair work after notification from the CO/COR. The Contractor shall prepare and submit to the CO/COR a written report within two business days after the repair. The report shall include the date and time of the service call, the location of the VTE, the repairs performed, and the name of the technician performing the repairs.

- 5.2. Emergency Calls.** Emergency calls are defined as calls made for services when a VTE system fails and constitutes a danger to personnel; threatens to damage properties; or threatens to disrupt activity, operations, and/or training missions.

- 5.2.1. The following personnel are authorized to request an emergency call:

The CO and the COR
COR – (406)-731-6825
Missile Engineering Chief – (406) 731-1448
Deputy of Operations – (406) 731-6177
COR Supervisor – (406) 731-6140
Backup COR – (406) 731-6549

Authorized personnel will communicate an emergency repair need to the Contractor as quickly as possible. The individual requesting the emergency repair will communicate the day/time and nature of the request to the CO/COR as quickly as possible.

- 5.2.2. The Contractor shall respond in person to the VTE and begin work on emergency service calls within 24 hours after receipt of the call.
- 5.2.3. The Contractor shall report to the work location, survey the repair, and provide base contracting an estimate of time to repair and cost of repairs not covered in the basic full maintenance service contract but necessary to bring the VTE back to operation. The Contractor shall commence repair work after notification from the CO/COR. The Contractor shall prepare and submit to the CO/COR a written report within two business days after the emergency repair. The report shall include the date and time of the service call, the location of the VTE, the repairs performed, and the name of the technician performing the repairs.

6. SERVICES SUMMARY.

The Government will evaluate the Contractor performance in accordance with the following criteria. Performance evaluations will be rendered in one or more Government databases for that purpose.

Performance Objective	PWS Para	Performance Threshold
1. Written Maintenance Control Program (MCP) for each VTE for all equipment. MCP identifies all maintenance intervals to include safety inspections.	4.2.,4.3.,4.5.	MCP in accordance with ASME A17.1 delivered to CO in 30 calendar days of contract award.
2. Perform Preventative Maintenance. Elevators are fully operational.	1.1.	95% of elevators are operational at all times.
3. Repair Service Calls. Repairs are made in a timely manner; Customers are informed of expected repair time. Response and repair is made within the specified time.	5.1., 5.1.1.,5.1.2.,5.1.3.,5.2.,5.2.2	Response to and repairs of service calls are timely 95% of the time.
4. Service Call Repairs – Repair Quality. Repairs are of high quality resulting in reduced call backs.	5	Only two call backs of the same problem (same instance) each month.
5. Submit Maintenance and Repair Reports. Accurate reports are delivered within two business days.	4.1.,4.2.4.7.,4.8.	Submit reports in a manner consistent with PWS 95% of the time.

- **All timeframes are based on normal duty hours**

7. GOVERNMENT FURNISHED PROPERTY AND SERVICES. The Government does not anticipate providing any government furnished property (GFP).

8. GENERAL INFORMATION.

8.1. QUALITY CONTROL. Contractor shall develop and maintain a quality control program (QCP) to ensure maintenance and repair services are performed in accordance with ANSI/ASME A17 and other applicable standards and codes. The Contractor shall develop and implement procedures to eliminate reoccurrence of once identified/repaired defects. As a minimum, the Contractor shall develop quality control procedures that address the areas identified in Paragraph 6, *Service Summary*. The QCP shall demonstrate how the Contractor ensures quality performance during the contract period of performance. The Contractor shall maintain the QCP throughout the period of performance of the contract. The CO will be provided updates to the QCP as they occur during the period of performance. The QCP will identify the procedures in writing for inspections, individual responsible, VTE MCP, and the location of all inspection records and key control logs which will always be available to the government upon request. The QCP will have the inspection forms and records which will be used for the service. The Contractor will identify to the CO/COR the responsible quality control inspector to notify in case of customer complaints.

8.2. QUALITY ASSURANCE. The Government will periodically evaluate the

Contractor's performance in accordance with the Quality Assurance Surveillance Plan.

- 8.3. HOURS OF OPERATION/HOLIDAYS:** Work shall be performed during the duty hours identified below: Normal Duty Hours, Weekdays are between 7:30 a.m. and 4:30 p.m., Monday through Friday, excluding recognized federal holidays as defined by the Service Contract Act (SCA) Wage Determination. All inspections shall be scheduled and accomplished 7:30 a.m. to 4:30 p.m., Monday through Friday, excluding Saturday, Sunday, and federal holidays.

Main Base	0730 – 1630 Monday – Friday
Missile Alert Facilities	0730 – 1630 Monday – Friday

The CO will provide the Contractor minimum 14 days notice of any change to the standard hours of operation. The CO/COR and 341 CES will coordinate emergency repairs required outside these hours. The Contractor must receive CO/COR approval to perform routine inspections or repairs outside standard hours of operation.

Note: Capsule crew change requirements may affect the ability of Contractor personnel to continuously work on VTE at MAFs during standard hours of operation. Contractor may request to modify standard hours to maximize access to VTE. The CO/COR will review the request in coordination with 341 CES.

- 8.4. RECOGNIZED FEDERAL HOLIDAYS.** The contractor is not required to provide routine service on the following days: New Years Day, Martin Luther King Day, Presidents Day, Memorial Day, Juneteenth, Independence Day, Labor Day, Columbus Day, Veterans Day, Thanksgiving Day, and Christmas Day. NOTE: Normally, if the holiday falls on Saturday, it is observed on Friday. If the holiday falls on Sunday, it is observed on Monday.
- 8.5. SECURITY REQUIREMENTS.** The contractor shall comply with all established Air Force regulations and Malmstrom security policies and procedures. This information will be briefed and provided to the contractor during the pre-performance conference. Security and base access requirements are contained in clause 5352.242-9000, "Contractor Access to Air Force Installations." Contractor employees will be required to obtain and display identification badges. Anticipate delays in getting commercial vehicles on base and in restricted areas and allow time for commercial vehicles to reach their destination by driving designated routes at posted speed limits throughout the base. Procedures for commercial vehicle access to the base are subject to change without prior notice. IAW 18 United States Code § 795, it is expressly prohibited to capture any photograph, video, sketch, picture, drawing, map, or graphical representation of any DoD resources, facilities, or

personnel conducting official business without obtaining explicit permission from the installation commander.

- 8.6. MAIN BASE ENTRY** The Contractor shall furnish a Contracting Entry Authority List (CEAL), attached, of employees needing access on base to the CO. Employees without a badge and identification in their possession will be denied access to the base and work areas.
- 8.7 MISSILE FIELD ENTRY** In order to gain entry onto a missile site, Contractor personnel must be listed on an Entry Authorization List (EAL), identified by Government inspector/escort personnel, and physically escorted on site by authorized Government inspector/escort personnel. The number of personnel authorized entry shall be kept to a minimum. The general contractor shall submit all subcontractors that need to be on the EAL, but must limit personnel to a reasonable number. The CO shall deny any EAL request that has excessive numbers of workers listed. Entry procedures listed below may change in accordance with increased threat levels without prior notice. **Thirty (30) working days prior to the initial commencement of work, the Contractor must submit to the CO for the Missile Engineering Scheduler a form showing the name EXACTLY as it appears on the state issued ID, birth date, Social Security Account Number (SSAN), state issued driver's license number and state from which it was issued for each worker. The CO will provide the form (Excel format) to the Contractor. This list will be used to prepare the EAL referenced above.**

Note: Being listed on the Malmstrom Air Force Base CEAL does not automatically qualify you to work in the Malmstrom Air Force Base Missile Field.

Deletions to the EAL may be made without preparing a new list but must be requested by the Contractor in writing. However, a new list must be submitted by the Contractor for any additions to the EAL. All requested changes in writing to an approved list may require up to thirty (30) working days for approval.

8.8. ANTI-TERRORISM (AT) AWARENESS TRAINING

In accordance with DoDI O-2000.16v1_AFI 10-245-O, Antiterrorism (AT) Program Implementation, ensure Level I - AT Awareness Training is completed by all contractors within 30 days of requiring access, and annually thereafter. The training will be provided by the government. The objective of the training is to provide personnel with requisite knowledge necessary to remain vigilant and enable employment of AT tactics, techniques, and procedures.

8.9 COMBATING TRAFFICKING IN PERSONS (CTIP) In accordance with FAR 52.222-50, Combating Trafficking in Persons, the Contractor shall notify its employees of The United States Government's policy prohibiting trafficking in persons, described in paragraph (b) of this clause and the actions that will be taken against employees or agents for violations of this policy. Contractors, subcontractors, and their employees shall not:

- Engage in any form of trafficking in persons during performance of the contract.
- Procure commercial sex acts during performance of the contract.
- Use forced labor in the performance of the contract.

8.10. FORCE PROTECTION CONDITION (FPCON)

Contractor personnel are required to abide by all real-world Force Protection Condition (FPCON) measures, random anti-terrorism measures (RAMs), shelter-in-place orders, evacuations and lock-down notices as directed. Examples include mandatory badge or ID checks, facility single points-of-entry and searches of hand carried items

8.11. PERFORMANCE OF SERVICE DURING CRISIS OR HEIGHTENED SECURITY

This service is not determined to be essential for performance during crisis according to DODI 1100.22, Policy and Procedures for Determining Workforce Mix.

8.12. CONTINUATION OF ESSENTIAL DEPARTMENT OF DEFENSE SERVICES DURING CRISIS DECLARED BY THE NATIONAL COMMAND AUTHORITY OR OVERSEAS COMBATANT COMMANDER.

Emergency repairs will continue to be needed during crisis situations. Inspections, maintenance and regular repairs may be delayed during a crisis event.

8.13. SPECIAL QUALIFICATIONS. The Contractor will be licensed by the State in which the work is conducted to provide the services specified in this contract. All work will be performed by personnel who are trained and qualified for the systems and equipment. Contractor personnel shall be certified by appropriate federal and state regulatory agencies to meet federal and local certification requirements (documentation provided to CO/COR upon request) in maintenance of VTE.

8.14. SCHEDULE COORDINATION. The Contractor shall be responsible for coordinating all phases of his/her operations with the appropriate base personnel through the CO/COR. The facilities shall remain in operation while the Contractor

is working, and it is up to the Contractor to coordinate around the normal activities of the facility.


8.15. ENVIRONMENTAL CONTROL. The Contractor shall comply, and assure that all subcontractors comply, with all applicable federal, state, and local laws, regulations, ordinances, policies and standards related to environmental matters. Where applicable, the Contractor shall use environmentally safe products in the course of completion of their project. The Contractor shall maintain, in company vehicle on site, Material Safety Data Sheets (MSDS) for all chemicals. A copy of all MSDS will be provided to the CO/COR. The MSDS data is subject to random checks by the government. Contractor shall maintain, and provide on demand, an inventory of materials being brought on the Government facility. The Contractor shall complete, and provide on demand, monthly inventories of HAZMAT used, including but not limited to: solvents, paints, degreasers, greases, Ozone Depleting Substances, and oils brought on to the Government facility. If the Contractor spills or releases any HAZMAT or other substance contained in 40 CFR 302 into the environment, the Contractor shall immediately notify the CO/COR and appropriate emergency responders. The Contractor is responsible for all costs associated with clean-up and restoration, including any applicable fines and/or penalties. The Contractor shall maintain a spill plan as required by federal, state, and local laws and regulations.

8.16. ASBESTOS. The Contractor shall comply with Section 29 CFR 1910.1001(j)(7)(iv). VTE may be located in facilities that may contain ACM or RACM. The Contractor (not the Government) shall determine if performing work under the contract may result in exposure to ACM.

APPENDICES

- A.** Missile Field Map
- B.** VTE Inventory
- C.** CEAL Form

A. Missile Field Map

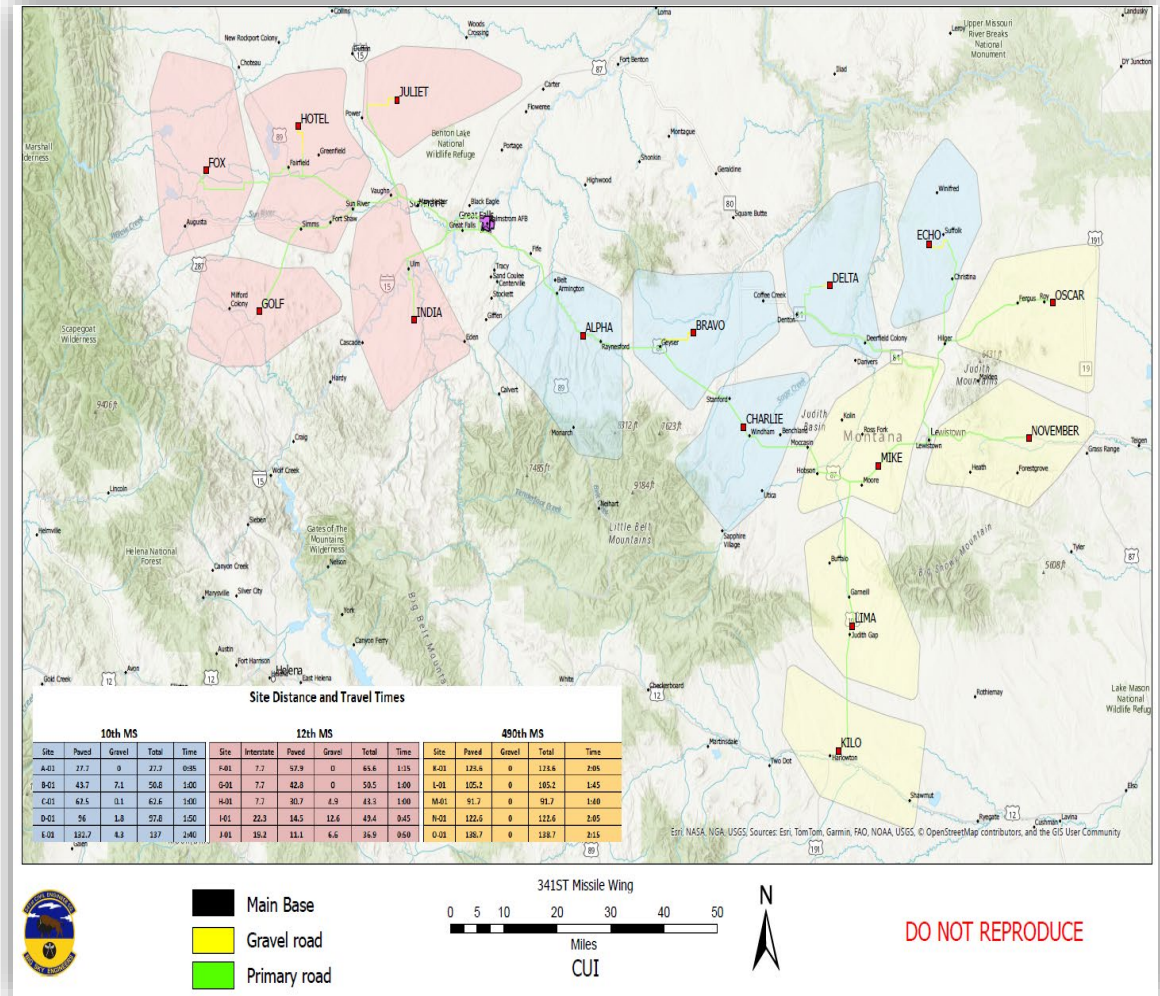

AppendicesA_Missile Field Map.pdf

Link -

B. VTE Inventory

Item #	Manufacturer	Types	Location	Date of Last Annual Inspection	Date of Last 5 Year (Load Test) Inspection
Elevator A01	Hollister Whitney	Electric	A-01 Passenger Elevator	16 Sept 2024	08 Sept 2020
Elevator B01	Hollister Whitney	Electric	B-01 Passenger Elevator	16 Sept 2024	08 Sept 2020
Elevator C01	Hollister Whitney	Electric	C-01 Passenger Elevator	16 Sept 2024	08 Sept 2020
Elevator D01	Hollister Whitney	Electric	D-01 Passenger Elevator	23 Sept 2024	23 Sept 2020
Elevator E01	Hollister Whitney	Electric	E-01 Passenger Elevator	23 Sept 2024	09 Sept 2020
Elevator F01	Hollister Whitney	Electric	F-01 Passenger Elevator	09 Sept 2024	10 Sept 2020
Elevator G01	Hollister Whitney	Electric	G-01 Passenger Elevator	09 Sept 2024	10 Sept 2020
Elevator H01	Hollister Whitney	Electric	H-01 Passenger Elevator	09 Sept 2024	23 Sept 2020
Elevator I01	Hollister Whitney	Electric	I-01 Passenger Elevator	09 Sept 2024	10 Sept 2020
Elevator J01	Hollister Whitney	Electric	J-01 Passenger Elevator	09 Sept 2024	10 Sept 2020
Elevator K01	Hollister Whitney	Electric	K-01 Passenger Elevator	16 Sept 2024	08 Sept 2020
Elevator L01	Hollister Whitney	Electric	L-01 Passenger Elevator	16 Sept 2024	08 Sept 2020
Elevator M01	Hollister Whitney	Electric	M-01 Passenger Elevator	23 Sept 2024	09 Sept 2020
Elevator N01	Hollister Whitney	Electric	N-01 Passenger Elevator	23 Sept 2024	09 Sept 2020
Elevator O01	Hollister Whitney	Electric	O-01 Passenger Elevator	23 Sept 2024	09 Sept 2020
Elevator 500	Dover	Electric	Bldg. 500 Passenger Elevator	07 Aug 2024	07 Sept 2020
Elevator 82110	Dover	Electric	Bldg. 82011 Passenger Elevator	07 Aug 2024	07 Sept 2020
Elevator 1441	Concord	Roped Hydraulic	Bldg. 1441 Passenger Elevator	07 Aug 2024	07 Sept 2020
Elevator 1012	Schindler	Electric	Bldg. 1012 Passenger Elevator	07 Aug 2024	08 Dec 2020
Elevator 1455	ThyssenKrupp	Hydraulic	Bldg. 1455 Passenger Elevator	03 Mar 2025	03 Mar 2025



appendicesB_VTEInventory.pdf

Link -

C. CEAL Form

[illegible]

appendicesC_CEALF
orm.xlsx

Link -