


VA Project No. 654-22-003 (B) REPLACE DIETETICS & CATH LAB FLOORING

DEPARTMENT OF VETERANS AFFAIRS VA Sierra Nevada Healthcare System

975 Kirman Avenue, Reno, NV 89502

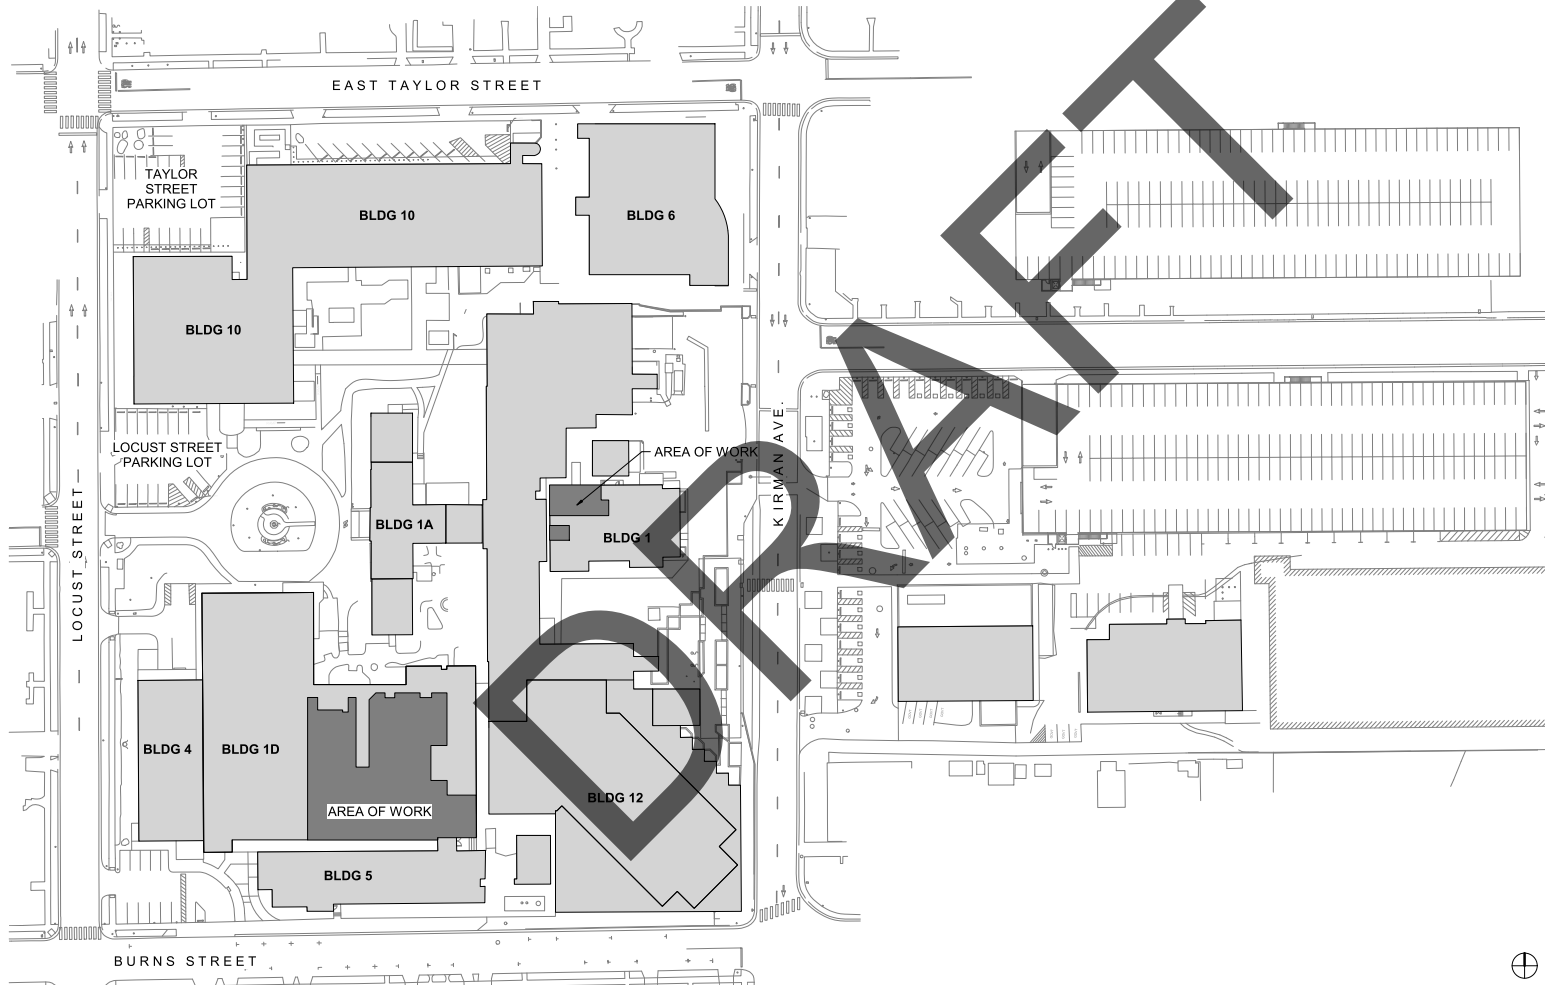

PROJECT DESCRIPTION

REMOVAL AND REPLACEMENT OF EXISTING FLOORING SYSTEMS IN THE OR SUITES/SURROUNDING WARD, DIETETICS OFFICES AND CARDIAC CATH LAB

DEDUCT ALTERNATES

N/A

PROJECT DATA

PROJECT ADDRESS: 975 KIRMAN AVENUE
RENO, NV 89502

BUILDING 1
CONSTRUCTION TYPE: 8 (SPRINKLERED)
STORIES: 6
BLDG OCCUPANCY: HEALTHCARE
AREA OF WORK: DIETETICS 1,174 SF

BUILDING 1D
CONSTRUCTION TYPE: 8 (SPRINKLERED)
STORIES: 5
BLDG OCCUPANCY: HEALTHCARE
AREA OF WORK: CATH LAB 842 SF
OPERATING SUITES 10,904 SF

TOTAL AREA OF WORK: 12,920 SF

PROJECT TEAM

FACILITY
Department of Veterans Affairs
VA Sierra Nevada Healthcare System
Engineering Services
975 Kirman Avenue
Reno, NV 89502

ARCHITECT
MAArchitects, Inc.
385 Van Ness Ave., Suite 110
Torrance, CA 90501

Contact: Sofie O'Brien
P: 424.302.5271
E: s.obrien@ma-architects.net

SHEET INDEX


GENERAL

GI-000 COVER SHEET
GI-001 GENERAL NOTES AND STANDARDS
GI-002 ABBREVIATIONS & SYMBOLS
GI-003 OVERALL REFERENCE PLANS
GI-010 PROJECT PHASING (3RD FLOOR)
GI-102 2ND FLOOR PHOTO REFERENCE PLAN
GI-103 3RD FLOOR PHOTO REFERENCE PLAN
GI-103A 3RD FLOOR PHOTOS

ARCHITECTURAL

AD-202 2ND FLOOR DEMO / EQUIPMENT LIST (DIETETICS & CATH LAB)
AD-203 3RD FLOOR DEMO / EQUIPMENT LIST (OR SUITES)
AE-202 2ND FLOOR RENOVATION PLAN (DIETETICS & CATH LAB)
AE-203 3RD FLOOR RENOVATION PLAN (OR SUITES)
AE-203A 3RD FLOOR OR SUITES FLOORING PATTERNS
AE-800 ROOM FINISH SCHEDULE & DETAILS

VICINITY MAP

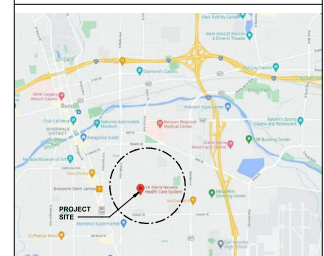

Reference Site Plan
1" = 40'-0"

Revisions: Rev. Date Description 06.02.2022 100% Issue for Bid	CONSULTANT	ARCHITECT / ENGINEER OF RECORD MAArchitects, Inc. Planning - Architecture - Interiors 385 Van Ness Ave., Suite 110, Torrance, CA 90501 www.ma-architects.net Project Number 21658	Stamp	 	Drawing Title COVER SHEET Approved:	Phase 100% Contract Documents Issue for Bid FULLY SPRINKLERED	Project Title REPLACE OR, DIETETICS & CATH LAB FLOORING (PART B) Location: VA Sierra Nevada Healthcare System 975 Kirman Avenue, Reno, NV 89502 Issue Date: 06.02.2022 Checked: SMC Drawn: SO/AA	VA Project Number 654-22-003 (B) Building Number Bldg 1 and 1D Drawing Number GI-000
---	-------------------	---	--------------	--	--	--	---	--

				PROJECT GENERAL NOTES GENERAL NOTES CONTINUED. 13. THE THE CONTRACTOR SHALL, IN ADVANCE OF THE WORK, PREPARE COORDINATION DRAWINGS SHOWING THE LOCATION OF OPENINGS THROUGH SLABS, THE PIPE SLEEVES AND HANGER ASSETS, AS WELL AS THE LOCATION AND ELEVATION OF UTILITY LINES, INCLUDING, BUT NOT LIMITED TO, CONVEYOR SYSTEMS, PNEUMATIC TUBES, DUCTS, AND CONDUITS AND PIPES TWO INCHES AND LARGER IN DIAMETER. THESE DRAWINGS, INCLUDING PLANS, ELEVATIONS, AND SECTIONS AS APPROPRIATE, SHALL CLEARLY SHOW THE MANNER IN WHICH THE UTILITIES FIT INTO THE AVAILABLE SPACE AND RELATE TO EACH OTHER AND TO EXISTING BUILDING ELEMENTS. DRAWINGS SHALL BE OF APPROPRIATE SCALE TO SATISFY THE PREVIOUSLY STATED PURPOSES, BUT NOT SMALLER THAN 3/8-INCH SCALE. DRAWINGS MAY BE COMPOSITE WITH DISTINCTIVE COLORS FOR THE VARIOUS TRADES OR MAY BE SEPARATE BUT FULLY COORDINATED DRAWINGS (SUCH AS SEPARATE PHOTOGRAPHIC PAPER REPRODUCTIONS OF THE SAME SCALE. SEPARATE DRAWINGS SHALL DEPICT IDENTICAL BUILDING AREAS OR SECTIONS AND SHALL BE CAPABLE OF BEING OVERLAD IN ANY COMBINATION. THE SUBMITTED DRAWINGS FOR A GIVEN AREA OF THE PROJECT SHALL SHOW THE WORK OF ALL TRADES THAT WILL BE INVOLVED IN THAT PARTICULAR AREA. COMPLETE COMPOSITE DRAWINGS OR SIX COMPLETE SETS OF SEPARATE REPRODUCIBLE DRAWINGS SHALL BE PROVIDED BY THE GOVERNMENT NOT LESS THAN 30 DAYS PRIOR TO THE SCHEDULED BEGINNING OF THE WORK IN THE AREA ILLUSTRATED BY THE DRAWINGS, FOR THE PURPOSE OF SHOWING THE CONTRACTOR'S PLANNED METHODS OF INSTALLATION. THE OBJECTIVES OF SUCH DRAWINGS ARE TO PROMOTE CAREFULLY PLANNED WORK SEQUENCE AND PROPER TRADE COORDINATION, IN ORDER TO ASSURE THE EXPEDITIOUS SOLUTIONS OF PROBLEMS AND THE INSTALLATION OF LINES AND EQUIPMENT AS CONTEMPLATED BY THE CONTRACT DOCUMENTS WHILE AVOIDING OR MINIMIZING ADDITIONAL COSTS TO THE CONTRACTOR AND TO THE GOVERNMENT. IN THE EVENT THE CONTRACTOR, IN COORDINATING THE VARIOUS INSTALLATIONS AND IN PLANNING THE METHOD OF INSTALLATION, FINDS A CONFLICT IN LOCATION OR ELEVATION OF ANY OF THE UTILITIES WITH THEMSELVES, WITH STRUCTURAL ITEMS OR WITH OTHER CONSTRUCTION ITEMS, HE/SHE SHALL BRING THIS CONFLICT TO THE ATTENTION OF THE CONTRACTING OFFICER IMMEDIATELY. IN DOING SO, THE CONTRACTOR SHALL EXPLAIN THE PROPOSED METHOD OF SOLVING THE PROBLEM OR SHALL REQUEST INSTRUCTIONS AS TO HOW TO PROCEED. IF ADJUSTMENTS BEYOND THOSE OF USUAL TRADES COORDINATION ARE NECESSARY, UTILITIES INSTALLATION WORK WILL NOT PROCEED IN ANY AREA PRIOR TO THE SUBMISSION AND COMPLETION OF THE GOVERNMENT REVIEW OF THE COORDINATED DRAWINGS FOR THAT AREA, NOR IN ANY AREA IN WHICH CONFLICTS ARE DISCLOSED BY THE COORDINATION DRAWINGS, UNTIL THE CONFLICTS HAVE BEEN CORRECTED TO THE SATISFACTION OF THE CONTRACTING OFFICER. IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO SUBMIT THE REQUIRED DRAWINGS IN A TIMELY MANNER CONSISTENT WITH THE REQUIREMENTS TO COMPLETE THE WORK COVERED BY THIS CONTRACT WITHIN THE SPECIFIED CONTRACT TIME. 14. CONTRACTOR SHALL SUPPLY ALL LABOR, MATERIALS, EQUIPMENT, TOOLS AND SERVICES NECESSARY FOR THE PROPER EXECUTION AND COMPLETION OF ALL WORK SHOWN, DESCRIBED, OR REASONABLY IMPLIED, BUT NOT LIMITED TO THAT EXPLICITLY INSTALLED IN THE CONTRACT DOCUMENTS. THE CONTRACTOR SHALL BE RESPONSIBLE FOR ALL QUANTITY, FITTING AND PATCHING THAT MAY BE REQUIRED TO COMPLETE WORK OR TO MAKE ITS SEVERAL PARTS FIT TOGETHER. THE GENERAL CONTRACTOR IS RESPONSIBLE TO REVIEW AND COORDINATE THE WORK OF ALL SUBCONTRACTORS, TRADES, AND SUPPLIERS WITH ALL REQUIREMENTS OF THE CONTRACT DOCUMENTS. APPLICABLE STANDARDS APPLICABLE STANDARDS: VA Directives, Design Manuals, Master Specifications, VA National CAD Standard Application Guide, and other Guidance on the Technical Information Library (TIL) (http://www.dcm.va.gov/til). VA PG 18-10 Architectural Design Manual (Aug. 1, 2014) VA PG 18-10 Electrical Design Manual (Dec. 1, 2019) 2018 International Building Code (IBC) (Only when specifically referenced in VA Design Documents, see notes below) 2018 NFPA 101 Life Safety Code 2019 NFPA 241 Standard for Safeguarding Construction, Alteration, and Demolition Operations 2018 NFPA National Fire Codes with the exception of NFPA 5000 and NFPA 900 2020 NFPA 780 Standards for Installation of Lightning Protection Systems Occupational, Safety and Health Administration (OSHA) Standards 2019 VA Seismic Design Requirements, H-18-B 2017 National Electrical Code (NEC) (NFPA 70) 2018 International Plumbing Code (IPC) 2019 Safety Code for Elevators and Escalators, American Society of Mechanical Engineers (ASME) A 17.1. 2017 ASME Boiler and Pressure Vessel Code 2019 National Roofing Contractors Associations (NRCA) Roofing Manual: Membrane Roof Systems ASME Code for Pressure Piping 2015 Architectural Barriers Act Accessibility Standards (ABAAS) including VA supplement, Barrier Free Design Guide (PG-16-13) Building Code Requirements for Reinforced Concrete, American Concrete Institute and Commentary (ACI 318) Manual of Steel Construction, Load and Resistance Factor Design Specifications for Structural Steel Buildings, American Institute of Steel Construction (AISC) Energy policy Act of 2005 (EPAct) DOE Interim Final Rule: Energy Conservation Standards for New Federal, Commercial and Multi-Family High-Rise Residential Buildings and New Low-Rise Residential Buildings, 10 CFR Parts 431, 434 and 435 Federal Leadership in High Performance and Sustainable Buildings: Memorandum of Understanding (MOU) Executive Order 13423: Strengthening Federal Environmental, Energy, and Transportation Management Executive Order 13514: Federal Leadership in Environmental, Energy, and Economic Performance (Oct. 5, 2009) The Provisions for Construction and Safety Signs. Stated in the General Requirements Section 01 00 00 of the VA Master Construction Specification. Ventilation for Acceptable Indoor Air Quality - ASHRAE Standard 62.1 - 2016. Safety Standard for Refrigeration Systems - ASHRAE Standard 15 - 2016. Energy Standard for Buildings Except Low Rise Residential Buildings - ASHRAE 90.1 - 2016 GENERAL NOTES: 1. THE FOLLOWING GENERAL NOTES APPLY TO THE ENTIRE SET OF DRAWINGS LISTED BY THE "INDEX OF DRAWINGS". 2. FOR GENERAL NOTES, ABBREVIATIONS, AND SYMBOLS APPLICABLE ONLY TO THE DRAWINGS OF ONE DISCIPLINE, REFER TO THE DRAWINGS OF THAT DISCIPLINE - SEE "INDEX OF DRAWINGS". 3. APPLICABLE PORTIONS OF THE CODES, REGULATIONS, AND STANDARDS LISTED HERE ARE INCORPORATED BY REFERENCE INTO THE REQUIREMENTS OF THIS CONTRACT AND ESTABLISH MINIMUM REQUIREMENTS WITH WHICH THE WORK MUST COMPLY. THIS PROJECT AND ALL PARTS OF THE WORK ASSOCIATED WITH THE PROJECT - INCLUDING MATERIALS, METHODS, ASSEMBLIES, ETC. - SHALL COMPLY WITH ALL APPLICABLE GOVERNING RULES, CODES, REGULATIONS, ORDINANCES, AND LAWS OF ALL FEDERAL, STATE, DISTRICT, TERRITORIAL, AND LOCAL GOVERNMENT AUTHORITIES HAVING JURISDICTION OVER THE DESIGN, CONSTRUCTION, AND OCCUPANCY OF THE PROJECT. WHETHER LISTED BY THE CONTRACT DOCUMENTS OR NOT, NO PART OF THE CONTRACT DOCUMENTS SHALL BE CONSTRUED TO REQUIRE OR PERMIT WORK CONTRARY TO AN APPLICABLE GOVERNING RULE, CODE, REGULATION, ORDINANCE, OR LAW. NO PART OF THE CONTRACT DOCUMENTS SHALL BE CONSTRUED TO REQUIRE OR PERMIT WORK CONTRARY TO AN APPLICABLE GOVERNING RULE, CODE, REGULATION, ORDINANCE, OR LAW. 4. INSTALL ALL MANUFACTURED ITEMS, MATERIALS, AND EQUIPMENT IN STRICT ACCORDANCE WITH THE MANUFACTURER'S SPECIFICATIONS. 5. ANY WORK INSTALLED IN CONFLICT WITH THE CONTRACT DRAWINGS, CODE REQUIREMENTS OR MANUFACTURER REQUIREMENTS WITHOUT THE PRIOR APPROVAL OF THE GOVERNMENT AND THE ARCHITECT SHALL BE CORRECTED AT THE CONTRACTORS EXPENSE. THE CONTRACTOR SHALL PROMPTLY CORRECT ALL WORK REJECTED BY THE GOVERNMENT AS DEFECTIVE OR AS FAILING TO CONFORM TO THE CONTRACT DOCUMENTS. WHETHER OBSERVED BEFORE OR AFTER SUBSTANTIAL COMPLETION AND WHETHER OR NOT FABRICATED, INSTALLED OR COMPLETED, THE CONTRACTOR SHALL BEAR ALL COSTS OF CORRECTING SUCH REJECTED WORK, NOT TO BE REIMBURSED. 6. THE ARCHITECTURAL DRAWINGS ARE A PART OF A LARGER SET OF DRAWINGS WHICH, WHEN COMPLETE, CONSISTS OF ALL DRAWINGS LISTED BY THE INDEX OF DRAWINGS. THE SET OF DRAWINGS, WHEN COMPLETE, CONSISTS OF ALL DRAWINGS LISTED BY THE "INDEX OF DRAWINGS". PARTIAL SETS OF DRAWINGS ARE INCOMPLETE. THE WORK DESCRIBED BY THE DRAWINGS OF ANY ONE DISCIPLINE MAY BE AFFECTED BY THE WORK DESCRIBED ON DRAWINGS OF ANOTHER DISCIPLINE OR MANUFACTURER INSTALLATION REQUIREMENTS. SHOULD THEY DISAGREE IN THEMSELVES, OR WITH EACH OTHER, BIDS SHALL BE BASED ON THE MOST EXPENSIVE COMBINATION OF QUALITY AND QUANTITY OF WORK INDICATED. ANY DISCREPANCY BETWEEN THESE DOCUMENTS SHALL BE IMMEDIATELY BROUGHT TO THE ATTENTION OF THE ARCHITECT FOR CLARIFICATION. 7. THE ARCHITECTURAL FLOOR PLANS, REFLECTED CEILING PLANS, SECTIONS, AND ELEVATIONS ILLUSTRATE THE DESIGN INTENT. THE ARCHITECTURAL DRAWINGS ESTABLISH AND COORDINATE THE FINISHED APPEARANCE AND LOCATION OF MANY, BUT NOT ALL, EXPOSED ELEMENTS OF THE WORK. THE STRUCTURAL, MECHANICAL, ELECTRICAL, PLUMBING, OTHER DRAWINGS, AND JOB SPECIFICATIONS ARE SUPPLEMENTARY TO ARCHITECTURAL WORKING DRAWINGS. THE WORK DESCRIBED BY THE DRAWINGS OF ANY ONE DISCIPLINE MAY BE AFFECTED BY THE WORK DESCRIBED ON DRAWINGS OF ANOTHER DISCIPLINE OR MANUFACTURER INSTALLATION REQUIREMENTS. SHOULD THEY DISAGREE IN THEMSELVES, OR WITH EACH OTHER, BIDS SHALL BE BASED ON THE MOST EXPENSIVE COMBINATION OF QUALITY AND QUANTITY OF WORK INDICATED. ANY DISCREPANCY BETWEEN THESE DOCUMENTS SHALL BE IMMEDIATELY BROUGHT TO THE ATTENTION OF THE ARCHITECT FOR CLARIFICATION. 8. THE SPECIFICATIONS ARE INTENDED TO COMMUNICATE THE DETAILED PROPERTIES AND QUALITY OF THE INDIVIDUAL MATERIALS, ASSEMBLIES, AND SYSTEMS THAT COMPRISE THE WORK. THE FUNCTIONAL AND PERFORMANCE REQUIREMENTS FOR THE INDIVIDUAL PARTS OF THE WORK, AND THE FABRICATION AND INSTALLATION REQUIREMENTS FOR INDIVIDUAL PARTS OF THE WORK, THE SPECIFICATIONS TAKE PRECEDENCE OVER THE DRAWINGS WITH RESPECT TO INFORMATION OF THIS NATURE. 9. PROPRIETARY PRODUCTS OR ASSEMBLIES UTILIZED AS "BASIS OF DESIGN": - ON OCCASION, THE DRAWINGS MAY REFER TO A SINGLE PROPRIETARY PRODUCT OR ASSEMBLY WHILE THE SPECIFICATIONS LIST TWO OR MORE ACCEPTABLE MANUFACTURERS AND/OR PRODUCTS. WHEN THIS OCCURS, THE PRODUCT OR ASSEMBLY ILLUSTRATED BY THE DRAWINGS IS THE "BASIS OF DESIGN" PRODUCT OR ASSEMBLY. - THE DIMENSIONS, MOUNTING HEIGHTS, CLEARANCES, AND ACCESS REQUIREMENTS OF SPECIFIED PRODUCTS AND ASSEMBLIES OTHER THAN THE "BASIS OF DESIGN" MAY VARY FROM THAT SHOWN BY THE DRAWINGS. - THE CONTRACTOR MAY UTILIZE ANY OTHER SPECIFIED PRODUCT OR ASSEMBLY IN LIEU OF THE "BASIS OF DESIGN" PRODUCT OR ASSEMBLY, AS APPROVED BY GOVERNMENT'S REPRESENTATIVE. HOWEVER, THE CONTRACTOR IS RESPONSIBLE (AT NO ADDITIONAL EXPENSE TO THE GOVERNMENT) FOR ALL COORDINATION AND REVISIONS TO DIMENSIONS AND/OR DETAILS NECESSARY TO ACHIEVE THE SAME FUNCTIONAL AND AESTHETIC DESIGN INTENT AS ILLUSTRATED BY THE "BASIS OF DESIGN" SHOWN BY THE CONTRACT DOCUMENTS. 10. THE GENERAL CONTRACTOR AND ALL SUBCONTRACTORS ARE RESPONSIBLE FOR EXAMINING CONTRACT DOCUMENTS, FIELD CONDITIONS, AND CONFIRMING THAT WORK IS BUILDABLE AS SHOWN BEFORE PROCEEDING WITH CONSTRUCTION. IT IS NOT INTENDED THAT THE CONTRACT DOCUMENTS INCLUDE EACH AND EVERY SUB-SYSTEM AND COMPONENT NECESSARY TO FULLY AND PROPERLY COMPLETE THE WORK. SUB-SYSTEMS, SUB-COMPONENTS OR DETAILS REQUIRED OR NORMALLY INCLUDED AS TRADE PRACTICE MAY NOT BE SPECIFICALLY MENTIONED NOR SHOWN. THE GENERAL CONTRACTOR IS RESPONSIBLE FOR OBTAINING CLARIFICATION FROM THE ARCHITECT BEFORE PROCEEDING WITH WORK IN QUESTION OR RELATED WORK. 11. ALL WORK NOTED "N.I.C." OR "NOT IN CONTRACT" IS TO BE ACCOMPLISHED BY A CONTRACTOR OTHER THAN THE GENERAL CONTRACTOR AND IS NOT TO BE PART OF THE CONSTRUCTION AGREEMENT. THE GENERAL CONTRACTOR IS SOLELY RESPONSIBLE TO COORDINATE WITH ALL OTHER CONTRACTORS PER REQUIREMENTS ESTABLISHED BY GOVERNMENT, WHICH ARE UNDER SEPARATE CONTRACT WITH THE GOVERNMENT. 12. THE ARCHITECT / ENGINEERS SHALL NOT HAVE CONTROL, OR CHARGE OF AND SHALL NOT BE RESPONSIBLE FOR CONSTRUCTION MEANS, METHODS, TECHNIQUES, SEQUENCE OR PROCEDURE, OR FOR SAFETY PRECAUTIONS AND PROGRAMS IN CONNECTION WITH THE WORK, ALL OF WHICH SHALL BE THE SOLE RESPONSIBILITY OF THE GENERAL CONTRACTOR. 13. IT IS THE CONTRACTOR'S RESPONSIBILITY TO REVIEW AND COORDINATE THE WORK OF ALL SUBCONTRACTORS, TRADES, AND SUPPLIERS WITH ALL REQUIREMENTS OF THE CONTRACT DOCUMENTS BEFORE COMMENCING CONSTRUCTION, AND TO ASSURE THAT ALL PARTIES ARE AWARE OF ALL REQUIREMENTS, REGARDLESS OF WHERE THE REQUIREMENTS OCCUR IN THE CONTRACT DOCUMENTS, WHICH MIGHT AFFECT THE WORK OF THAT PARTY. CONTRACTOR SHALL SUPPLY ALL LABOR, MATERIALS, EQUIPMENT, TOOLS AND SERVICES NECESSARY FOR THE PROPER EXECUTION AND COMPLETION OF ALL WORK SHOWN, DESCRIBED, OR REASONABLY IMPLIED, BUT NOT LIMITED TO THAT EXPLICITLY INDICATED IN THE CONTRACT DOCUMENTS. THE CONTRACTOR SHALL BE RESPONSIBLE FOR ALL CUTTING, FITTING OR PATCHING THAT MAY BE REQUIRED TO COMPLETE WORK OR TO MAKE ITS SEVERAL PARTS FIT TOGETHER.			
--	--	--	--	---	--	--	--

APPLICABLE STANDARDS

APPLICABLE STANDARDS:
VA Directives, Design Manuals, Master Specifications, VA National CAD Standard Application Guide, and other Guidance on the Technical Information Library (TIL) (<http://www.dcm.va.gov/til>).
VA PG 18-10 Architectural Design Manual (Aug. 1, 2014)
VA PG 18-10 Electrical Design Manual (Dec. 1, 2019)
2018 International Building Code (IBC) (Only when specifically referenced in VA Design Documents, see notes below)
2018 NFPA 101 Life Safety Code
2019 NFPA 241 Standard for Safeguarding Construction, Alteration, and Demolition Operations
2018 NFPA National Fire Codes with the exception of NFPA 5000 and NFPA 900
2020 NFPA 780 Standards for Installation of Lightning Protection Systems
Occupational, Safety and Health Administration (OSHA) Standards
2019 VA Seismic Design Requirements, H-18-B
2017 National Electrical Code (NEC) (NFPA 70)
2018 International Plumbing Code (IPC)
2019 Safety Code for Elevators and Escalators, American Society of Mechanical Engineers (ASME) A 17.1.
2017 ASME Boiler and Pressure Vessel Code
2019 National Roofing Contractors Associations (NRCA) Roofing Manual: Membrane Roof Systems
ASME Code for Pressure Piping
2015 Architectural Barriers Act Accessibility Standards (ABAAS) including VA supplement, Barrier Free Design Guide (PG-16-13)
Building Code Requirements for Reinforced Concrete, American Concrete Institute and Commentary (ACI 318)
Manual of Steel Construction, Load and Resistance Factor Design Specifications for Structural Steel Buildings, American Institute of Steel Construction (AISC)
Energy policy Act of 2005 (EPAct)
DOE Interim Final Rule: Energy Conservation Standards for New Federal, Commercial and Multi-Family High-Rise Residential Buildings and New Low-Rise Residential Buildings, 10 CFR Parts 431, 434 and 435
Federal Leadership in High Performance and Sustainable Buildings: Memorandum of Understanding (MOU)
Executive Order 13423: Strengthening Federal Environmental, Energy, and Transportation Management
Executive Order 13514: Federal Leadership in Environmental, Energy, and Economic Performance (Oct. 5, 2009)
The Provisions for Construction and Safety Signs. Stated in the General Requirements Section 01 00 00 of the VA Master Construction Specification.
Ventilation for Acceptable Indoor Air Quality - ASHRAE Standard 62.1 - 2016.
Safety Standard for Refrigeration Systems - ASHRAE Standard 15 - 2016.
Energy Standard for Buildings Except Low Rise Residential Buildings - ASHRAE 90.1 - 2016



3rd Floor Reference Plan
1" = 30'-0"

2nd Floor Reference Plan
1" = 30'-0"


Revisions:			CONSULTANT		ARCHITECT / ENGINEER OF RECORD		Stamp					Drawing Title		Phase		Project Title		VA Project Number	
Rev.	Date	Description										OVERALL REFERENCE PLANS		100% Contract Documents Issue for Bid		REPLACE OR, DIETETICS & CATH LAB FLOORING (PART B)		654-22-003 (B)	
08.02.2022 100% Issue for Bid																		Building Number	
																		Bldg 1 and 1D	
																		Drawing Number	




⑦ GI-2559 - Cardiac Cath Lab



⑦ GI-2559B - Cardiac Cath Lab Support Spaces

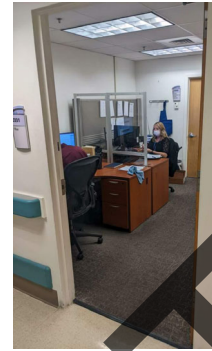

⑦ GI-2331 - Office

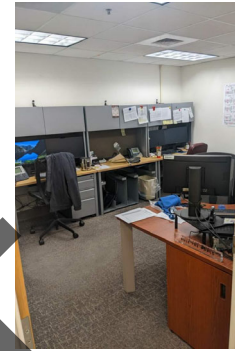


⑦ GI-2332 - Office




⑦ GI-2335 - Staff Lounge (Used as Office)



⑦ GI-2337 - Office (Used as Staff Lounge)

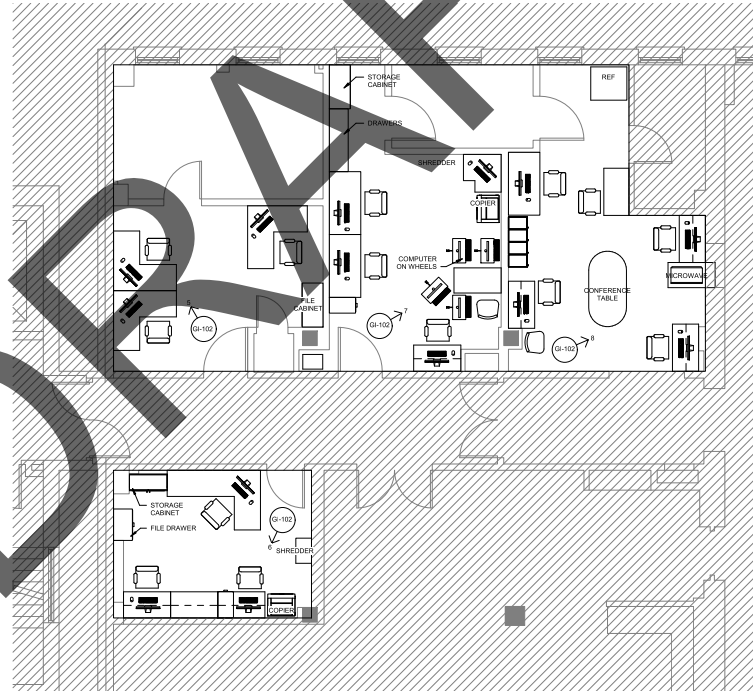


⑦ 2nd Floor Dietetics Photo Reference Plan
1/4" = 1'-0"

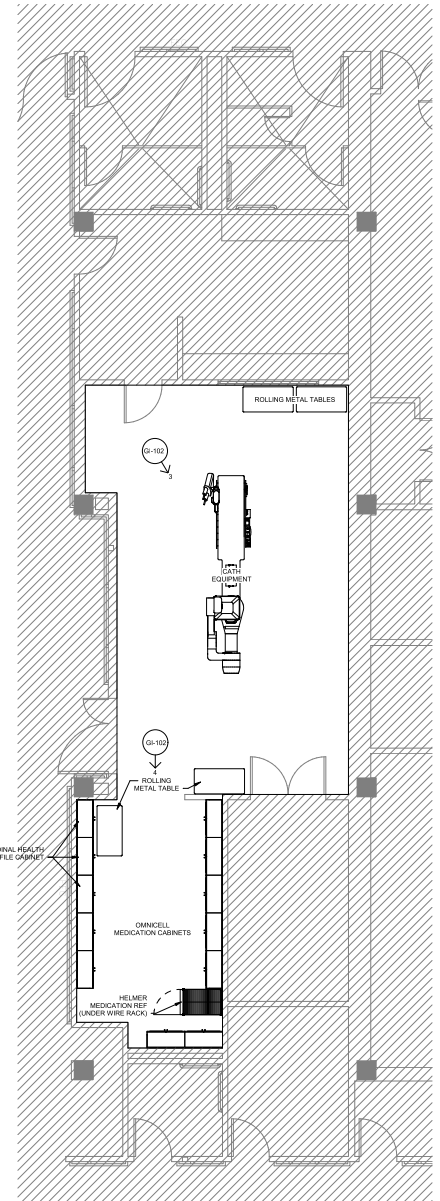

⑦ 2nd Floor Cath Lab Photo Reference Plan
1/4" = 1'-0"

Revisions:			CONSULTANT	ARCHITECT / ENGINEER OF RECORD	Stamp	 	Drawing Title		Phase	Project Title		VA Project Number		
Rev.	Date	Description					2nd FLOOR PHOTO REFERENCE PLAN		100% Contract Documents Issue for Bid	REPLACE OR, DIETETICS & CATH LAB FLOORING (PART B)		654-22-003 (B)		
08.02.2022	100%	Issue for Bid										Building Number Bldg 1 and 1D		
				MA Architects, Inc. Planning - Architecture - Interiors 385 Van Ness Ave., Suite 110, Torrance, CA 90501 www.ma-architects.net Project Number 21658			Approved:		FULLY SPRINKLERED	Location: VA Sierra Nevada Healthcare System 923 Korman Avenue, Reno, NV 89502		Drawing Number		
										Issue Date 08.02.2022		Checked SMc	Drawn SO/AA	GI-102

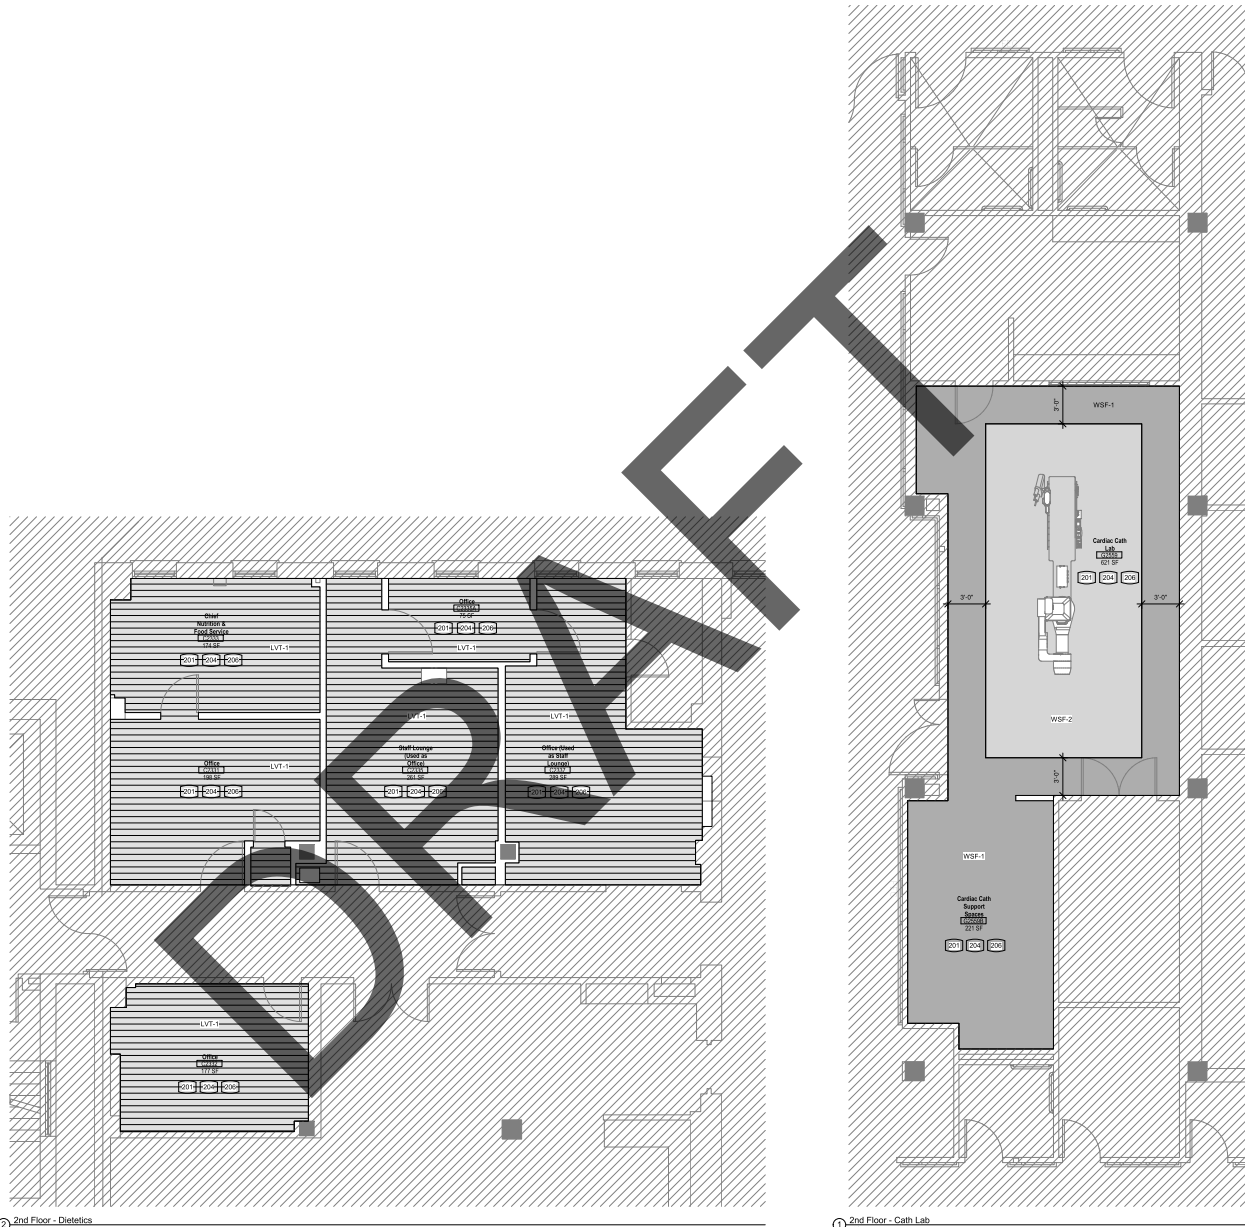

PARTITION LEGEND:

	(E) 1-HOUR RATED FIRE PARTITION
	(E) 2-HOUR RATED FIRE BARRIER
	(E) ACOUSTICAL / NON-RATED PARTITION
	(E) PARTITION TO BE DEMOLISHED

NOTE:

-CONTRACTOR TO VERIFY ALL DIMENSIONS BEFORE COMMENCEMENT OF WORK.

-DIMENSIONS: WALL DIMENSIONS ARE FACE OF FINISHED FACE TO FINISHED FACE UNLESS NOTED OTHERWISE. WINDOW / DOOR DIMENSIONS ARE TO CENTER LINE OF WINDOW / DOOR.


-ALL MTL STUDS ARE 4" U.N.D. (MATCH FRAMING OF CURRENT CONDITIONS AS APPLICABLE)

-WHERE DIMENSION IS PRECEDED BY A (±) SYMBOL, THIS REPRESENTS A "FLOAT" IN LAYING OUT THE WORK. CONTRACTOR IS TO NOTIFY ARCHITECT IN WRITING, PRIOR TO FRAMING, IF DIMENSION EXCEED ±2" FOR DIRECTION ON HOW TO PROCEED.

Key Notes

- 201 INSTALL NEW FLOORING & INTEGRAL COVERED WALL BASE (REFER TO FINISH SCHEDULE & DETAILS).
- 204 GENERAL NOTE: EQUIPMENT CARTS & FURNISHINGS REMOVED BY VA STAFF WILL BE REPLACED BY VA STAFF AFTER CONSTRUCTION COMPLETION.
- 206 GENERAL NOTE: PATCH & PAINT WALLS WHERE DAMAGED DURING CONSTRUCTION ACTIVITIES (MATCH EXISTING FINISHES).

KEY PLAN

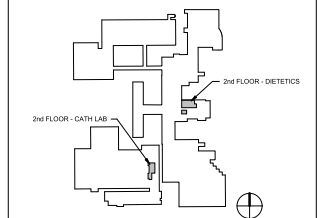

Revisions:	Rev.	Date	Description
	05.02.2022	100% Issue for Bid	

CONSULTANT

ARCHITECT / ENGINEER OF RECORD

Stamp

MA Architects, Inc.
Planning - Architecture - Interiors
385 Van Ness Ave., Suite 110, Torrance, CA 90501 www.ma-architects.net
Project Number 21658



Drawing Title
**2nd FLOOR RENOVATION PLAN
(DIETETICS & CATH LAB)**

Approved:

Phase
**100% Contract Documents
Issue for Bid**

**FULLY
SPRINKLERED**

Project Title
**REPLACE OR, DIETETICS &
CATH LAB FLOORING (PART
B)**

Location:
VA Sierra Nevada Healthcare System
823 Sierra Nevada Blvd., Ste. 100
Issue Date: 08.02.2022
Checked: SMC
Drawn: SO/AA

VA Project Number
654-22-003 (B)

Building Number
Bldg 1 and 1D
Drawing Number
AE-202

Exclude from bid

	130	LVT-1	RES-A
	62	RES-A	RES-A
	43	RES-A	RES-A
ry	443	RES-A	RES-A