

FACILITIES REDUCTION PROGRAM PERFORMANCE WORK STATEMENT

PRE-DEMOLITION SURVEY

VARIOUS BUILDINGS NASA AMES Research Center, CA San Francisco, CA

**Revision 0
24 March 2026**

1.0 GENERAL STATEMENT OF SERVICES

1.1 Introduction and Purpose. NASA has tasked the US Army Corps of Engineers Engineering and Support Center, Huntsville, to initiate a Facility Reduction requirement at the AMES research center in San Francisco, CA. Buildings are considered excess and will be demolished. The purpose of this contract is to procure Pre-demolition surveys according to the requirements set forth in this Performance Work Statement (PWS)

1.2 Site Description and Location. AMES Research Center, 64 Facilities at Moffett Blvd, Mountain View, CA 94035.

1.3 Security Requirements. The Contractor shall be required to comply with all Installation entrance and security requirements. The Contractor shall be responsible for assuring that all employees meet the access requirements of the Installation prior to the execution of work action on the Installation. The Contractor will be required to present identification for base access installation requirements.

1.3.1.1 AT Level I Training. All contractor employees, including subcontractor employees, requiring access to Federally controlled facility or Military Installations, facilities, controlled access areas, or require network access, shall complete AT Level I awareness training within 30 calendar days after contract start date or effective date of incorporation of this requirement into the contract, whichever is applicable. Upon request, the contractor shall submit certificates of completion for each affected contractor employee and subcontractor employee, to the COR or to the contracting officer (if a COR is not assigned), within 5 calendar days after completion of training by all employees and subcontractor personnel. AT Level I awareness training is available at the following website: <http://jko.jten.mil/courses/at11/launch.html>; or it can be provided by the RA ATO in presentation form which will be documented via memorandum.

1.3.1.2 Access and General Protection/Security Policy and Procedures. All contractors and all associated sub-contractors employees shall comply with applicable installation, facility and area commander installation/facility access and local security policies and procedures (provided by government representative). The contractor shall also provide all information required for background checks to meet installation/facility access requirements to be accomplished by installation Provost Marshal Office, Director of Emergency Services or Security Office. Contractor workforce must comply with all personal identity verification requirements (FAR clause 52.204-

9, Personal Identity Verification of Contractor Personnel) as directed by DOD, HQDA and/or local policy. In addition to the changes otherwise authorized by the changes clause of this contract, should the Force Protection Condition (FPCON) or Health Protection Condition (HPCON) at any installation or facility change, the Government may require changes in contractor security matters or processes.

1.3.1.2b For contractors who do not require a CAC but do require access to a DoD facility or installation. Contractor and all associated sub-contractors employees shall comply with adjudication standards and procedures using the National Crime Information Center Interstate Identification Index (NCIC-III) and Terrorist Screening Database (TSDB) (Army Directive 2014-05 / AR 190-13), applicable installation, facility and area commander installation/facility access and local security policies and procedures (provided by government representative, as NCIC and TSDB are available), or, at OCONUS locations, in accordance with status of forces agreements and other theater regulations.

1.3.1.3 Suspicious Activity Reporting Training (e.g. iWATCH, CorpsWatch, or See Something, Say Something). Military Installations have suspicious activity reporting requirement. Report suspicious activities to appropriate law enforcement agencies. Infringement of the base policy may result in a fine or incarceration.

1.3.1.5 Contractors will be escorted in areas where they may be exposed to classified and/or sensitive materials and/or sensitive or restricted areas. All contract employees, including subcontractor employees who are not in possession of the appropriate security clearance or access privileges, will be escorted in areas where they may be exposed to classified and/or sensitive materials and/or sensitive or restricted areas.

1.3.1.6 Pre-screen candidates using E-Verify Program. The Contractor must pre-screen Candidates using the E-verify Program (<http://www.uscis.gov/e-verify>) website to meet the established employment eligibility requirements. The Vendor must ensure that the Candidate has two valid forms of Government issued identification prior to enrollment to ensure the correct information is entered into the E-verify system. An initial list of verified/eligible Candidates must be provided to the COR no later than 3 business days after the initial contract award.

1.4 Cybersecurity Maturity Model Certification (CMMC) Requirements. The scope of this effort requires the contractor and/or subcontractor information system to process, store, or transmit FCI or CUI, and requires the contractor and/or subcontractor to comply with CMMC requirements. The Contractor shall have and maintain for the duration of this contract, order, or agreement a current CMMC status at the following CMMC level, or higher: *CMMC Level 2 (Self)* for all information systems used in performance of the contract, task order, or delivery order that process, store, or transmit FCI or CUI. See DFARS 252.204-7021 “Contractor Compliance With the Cybersecurity Maturity Model Certification Level Requirements”, for the definitions, requirements, reporting, and subcontract information for this contract/order/agreement”

2.0 OBJECTIVE - The objective of this Performance Work Statement is to plan and complete the environmental sampling of facilities at the installation. The structures of concern are listed in Table I. The sampling will determine ACM and ORM materials and complete a Waste Stream

Analysis for RCRA 8 metals, lead-based paint (LBP) and PCB's-in-paint for those parts of the structure currently identified as potentially having any painted components. Following sampling, the Contractor shall be able to completely quantify the environmental contamination present and the methods required to remove and dispose of said contamination in a safe manner. All sampling shall be planned and performed in accordance with Federal, State, and local regulations for the installation. All recommendations for follow-on actions shall also be in accordance with Federal, State, and local regulations. Laboratory testing and analysis shall be completed within the workdays identified in table two following the respective site sampling field activity completion. The results of the site investigation and sampling effort will be provided in an individual Pre-Demolition Assessment Report for the installation that will be submitted within the workdays identified in table two following the receipt of sample results. The intent of this contract effort is to provide comprehensive sampling for all ACM/ORM materials to include the facility exterior, roof, basement/crawl spaces, etc. The Contractor shall make every reasonable effort to access these areas when present in each facility. The Report will specifically address any areas within given structures that were not accessible during the survey and state the size of the area not accessed, and current or immediate previous use of the area not sampled.

3.0 DETAILED DESCRIPTION OF SERVICES

3.1 General Requirements. All work performed by the Contractor shall be designed and implemented in a manner which conforms to this PWS and all applicable Federal, State, and local requirements. The Contractor shall present a complete description of the planning and assessment process as applied to the subject facilities.

3.2 (Task 1) Pre-Demolition Assessments.

3.2.1 (Task 1.1) Accident Prevention Plan and Sampling Plan. No more than the workdays identified in table two after award, the Contractor shall prepare and submit an Accident Prevention Plan (APP), including the Sampling Plan. No Site Investigation shall be performed until the APP has been reviewed and approved by the Government. The APP must include recommendations for utilization of Personnel Protective Equipment (PPE) as required to ensure worker protection to the extent required by law or recommended as prudent and appropriate by the contractor. The types and numbers of samples per material type shall be generally described, as well as the process for collecting and securing the samples. The laboratory used for analysis shall be identified. Any special conditions required by State or Commonwealth regulations shall also be noted in the plan.

When the work plan is submitted, please provide a separate submittal consisting of the Abbreviated Accident Prevention Plan, Activity Hazard Analysis, and SSHO Qualifications. Specific requirements for these safety submittals can be found in Appendix D Safety Requirements.

The Site-Safety Health Officer (SSHO) and the Quality Control Manager (QCM) shall always be present on-site while field activities are occurring. The SSHO shall comply with all applicable safety criteria and shall use their discretion to determine which activities require the SSHO to be present, and where the SSHO will be for day-to-day operations.

Government Designated Authority (GDA) for reviewing and accepting all required safety submittals is the HNC Safety Office.

The APP and all Activity Hazard Analysis' (AHAs) shall be reviewed and accepted by the Government Safety Office prior to the notice to proceed. The installation or additional stake holders may require reviews of the Contractor's AHAs which shall be accommodated by the Contractor.


Reference Appendix D for safety additional requirements/details.

Table 1
Target Facilities

Row	Facility No.	Sq ft	Facility Type	Year of Construction	Notes
1	N144	121,950	General Warehouse	1952	
2	N204	14,681	Administration Support Building	1955	
3	N216	2,273	Machine Shop	1941	
4	N217	861	Magnetic Standards Lab	1969	
5	N217A	2,990	Magnetic Test Facility	1972	
6	N235	10,850	Cafeteria Building	1964	
7	N239A	31,639	Life Sci. Lab. High Bay	1966	
8	N251	3,744	Motor Pool	1977	
9	N253B	90	Sentry House (Gate 18)	1965	
10	T127-D	800	Recycle Office Trailer	2001	
11	T20-G	15,840	Modular Office Building	1988	
12	T35-A	5,760	Modular Office Trailer Complex	2002	
13	T35-B	2,880	Modular Office Trailer Complex	2002	
14	T35-C	2,880	Modular Office Trailer Complex	2002	
15	006	12,964	Mixed Use Warehouse	1933	

16	029	1,056	NASA Bicycle Distribution Fac.	1933	
17	082	560	General/Athletic Storage	1944	
18	111	4,100	Transportation Storage	1944	
19	146	38,545	Transportation Garage	1952	
20	148	15,785	Enlisted Men's Barracks	1953	
21	149	16,013	Enlisted Men's Barracks	1953	
22	150	15,785	Enlisted Men's Barracks	1953	
23	151	15,785	Enlisted Men's Barracks	1953	
24	152	41,047	Conference & Admin Center	1953	
25	153	15,845	Administration Building	1953	
26	154	15,848	Administration Building	1953	
27	155	16,013	Administration Building	1953	
28	156	15,785	Administration Building	1953	
29	184	280	Maintenance Storage	1955	
30	380	300	Bus/Personnel Shelter	1957	
31	459	280	Recreation Storage	1950	
32	526	640	EM Club Storage	1970	
33	533	578	Chase Park Restrooms	1971	
34	534	784	BBQ Shelter	1971	
35	543	9,460	Research Laboratory Building	1973	
36	544	11,180	Auto Hobby Shop	1974	
37	566	6,800	Administration Building	1979	
38	574	960	Storage Warehouse B	1982	
39	944	14,794	Recreation Center	1941	
40	945	2,676	Athletic Field Dressing Rooms	1941	

41	950	4,692	Hazardous Material Storage	1989	
42	951	668	Insecticide Material Storage	1957	
43	958	800	Covered Storage	1956	
44	992	2,952	Transportation Truck Repair Shop	1957	
45	512A	27,499	Enlisted Barracks	1970	
46	512B	18,627	Enlisted Barracks	1970	
47	512C	1,301	Enlisted Barracks	1970	
48	547B	2,610	NASA Exchange Service building	1974	
49	547C	19,900	BEQ	1974	
50	547D	10,212	NASA Exchange Lodge	1974	
51	547E	19,900	BEQ	1974	
52	T36-A	2,208	Office Trailer	2002	
53		N/A	6x6 Supersonic Wind Tunnel Demo at N226	1946	
54	005	N/A	Water Tower and Storage Tank	1932	200,000 Gal.
55	161	N/A	Service Station/Fuel Island 1 & 2	1952	10,000 Gal.
56	572	N/A	Racquetball Courts	1979	
57	582	N/A	Ellis Gate Marquee	1982	
58	585	N/A	Vehicle Wash Platform/Facility	1983	
59	590	N/A	12 KV Substation Switchgear	1986	10,500 KVA
60	964	N/A	Basketball Court	1942	
61	965	N/A	Volleyball Courts	1942	
62	966	N/A	Softball Field #2	1957	
63	967	N/A	Softball Field #1	1955	

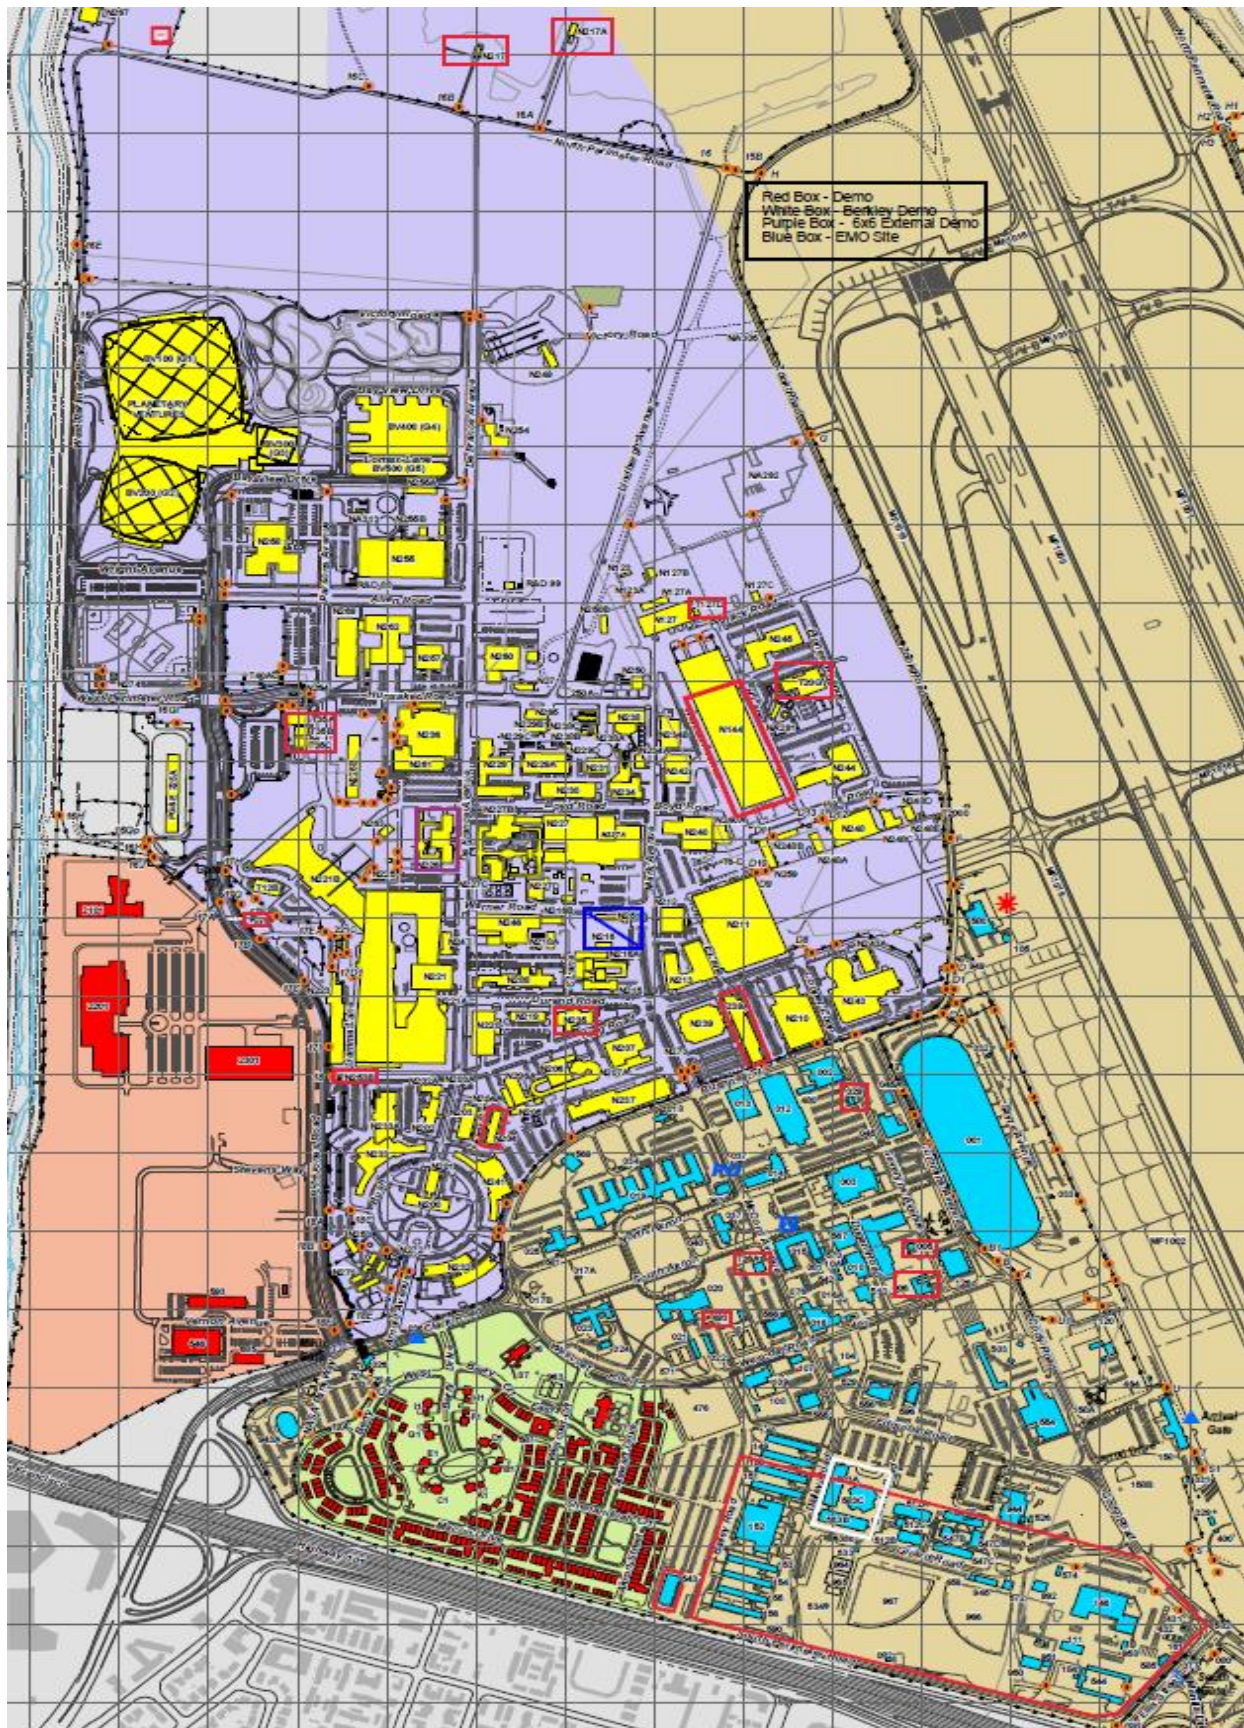

3.2.2 (Task 1.2) Pre-Demolition Assessments. The Contractor shall provide the manpower, equipment and materials required to perform the sampling effort in the required facilities at the installation in accordance with all applicable local and federal regulations. The contractor shall ensure sufficient PPE, as required, is available for all contractor personnel and up to four additional Government employees.

For those facilities shown in Table 1, sampling shall be performed for the following:

- Assess for the presence of ACM, using destructive methods
- The assessment team shall ensure evaluation of the entire building to include the following spaces:
 - Coring of the roof.
 - Basement/crawl spaces.
 - Coring of exterior walls.
 - If there are any spaces that do not appear accessible, immediately contact the COR for potential access while remaining onsite. Any spaces not accessible during the assessment shall be noted within the Final Report. Additionally, safe access to hazardous work locations must be addressed on applicable task specific AHAs.
- Assess the presence and type of any ORM found. Quantities and types shall be listed for each building surveyed. Make note of all ORMs within the Final pre-demolition assessment report. Typical ORM items include but are not limited to mercury switches, fluorescent bulbs, and PCB ballasts in each building. Quantities shall be developed for cost estimating purposes.
- Assess the facilities for lead-based paint and PCB's-in-paint and provide a composite waste stream analysis, using standard EPA TCLP metals and PCB testing. The final report shall include a recommended disposal methodology to include recommendations supporting recycling of concrete, block and brick in accord with state regulations.
- Provide photographs of the building exterior and all interior rooms for each facility. Photographic coverage should include all positive results ACM/ORM found in the structure as well as any unique items and/or details that may impact demolition cost. Also provide photographs of the electrical lines and power drops to each structure. Locations of the power de-energize points for each facility is critical, i.e., where are the transformer(s) that serve each secondary drop line to the building.
- Patch and or repair building envelopes at sample/test locations sufficient to make them weathertight and prevent deterioration.
- Quantify all homogeneous areas sampled regardless of sample result.

3.2.3 (Task 1.3) Preparation of the Pre-Demolition Assessment Report. After all sampling results are obtained, the Contractor shall prepare and submit for approval the Pre-Demolition Assessment Report. The report shall present, in addition to a description of the effort performed, a summation of the results found, and a layout of any contamination determined to exist. As needed, the Contractor shall consult with appropriate regulatory authorities within each state

and/or commonwealth to determine the nature of any specific sampling required. The contractor shall make recommendations, as necessary, regarding pre-demolition remediation efforts required along with extents and associated costs.

3.3 (Task 2) Project Management. The Contractor shall, during the life of this contract, manage the Contract in accordance with this PWS

3.4 (Task 3) Consulting Services. The Contractor shall provide consulting support during subsequent abatement and/or demolition, answering RFIs, assessment of potential engineering change proposals, and material submittal reviews. For bidding purposes assume labor expensed by the contractor shall not exceed more than 80 hours of total labor (at the Senior Industrial Hygienist level) during the abatement and/or demolition. The Contractor shall be responsive in a timely manner to avoid project delays and assist with answering RFIs, assessment of potential engineering change proposals, and material submittal reviews. Hours invoiced shall be verifiable and proof provided.

3.5 Resident Management System. The Government will use the Resident Management System 3.0 for Windows (RMS 3) to assist in monitoring and administration of this contract. The Contractor shall use the Government furnished Contractor Module of RMS, referred to as RMS 3/CM, to record, maintain, and submit various information throughout the contract period. The Contractor module, user manuals, updates, and training information can be downloaded from the RMS web site:

<http://rms.usace.army.mil>

This joint Government-Contractor use of RMS 3 will facilitate electronic exchange of information and overall management of the contract. RMS3/CM provides the means for the Contractor to input, track, and electronically share information with the Government in the following areas: Administration, Finances, Quality Control, Submittals, Reporting, and Scheduling.

4.0 SCHEDULE AND SUBMITTALS

4.1 Schedule. Unless authorized by the Contracting Officer, the Contractor shall be required to perform all work within the following schedule (days are working days). Final schedule shall be based on Contractor's proposed schedule but shall not exceed the durations presented below. If no priority or work column is provided, then the Contractor shall state the progression and sequence of work with the Proposal.

- a) Non-working days include:
 - i) All federal holidays
 - ii) The eight days between 25 December and 1 January.

A more detailed schedule will be developed within workdays identified in Table 2 after award (Item 2, below), which will document the project field window planned for the installation.

Table 2
Milestone Schedule

ITEM	MILESTONE	CONTRACT SCHEDULE (Schedule is in Working Days)			
		Start	Finish	Duration	Base Line
1	Contract Award - Milestone	0	1	1	START
2	Submit APP/Sampling Plan, Detailed Schedule	1	11	10	
3	Review APP/Related Documents	11	16	5	
4	Re-Submit APP/Related Documents	16	26	10	
5	Review and Acceptance of APP and Related Documents	26	31	5	
6	Process/Issue Pre-Demo Assessment NTP	31	41	10	
7	Pre-Demo Assessment	41	111	70	
8	Submit preliminary results table for Table I Facilities	111	131	20	
9	Submit Pre-Demo Assessment Report for Table I Facilities.	131	141	10	
10	Review of Pre-Demo Assessment Report for Table I Facilities.	141	151	10	
11	Re-Submittal of Pre-Demo Assessment Report for Table I facilities.	151	161	10	
12	Review and Acceptance of Pre-Demo Assessment Report for Table I Facilities	161	166	5	END
	TOTAL WORKING DAYS		166		

4.2 Submittals

4.2.1 General Submittal Requirements.

a) Distribution. The Contractor is responsible for production and distribution of all documents. The Contractor shall provide all submittals via RMS, with one electronic copy of submittals to the CEHNC Project Manager assigned to this task. Submittals are due not later than the close of business on the dates shown in table 2.

b) Partial Submittals. Partial submittals will not be accepted without prior written authorization of the Contracting Officer.

c) Cover Letters. A cover letter shall accompany each document and indicate the contract number, project, project phase, the date comments are due, to whom comments are submitted, the date and location of the review conference, etc., as appropriate. (Note that, depending on the recipient, not all letters will contain the same information.) The contents of the cover letters should be coordinated with the CEHNC PM prior to the submittal date.

d) Reproducibles. All submittals shall be provided via RMS in Microsoft Word or Adobe PDF format and in compliance with DID Preparation of submittals and work plan.

e) Mailing Address. All Submittals shall be submitted in electronic format to CEHNC Project Manager and uploaded in RMS.

5.0 PUBLIC AFFAIRS

The Contractor shall not publicly disclose any data generated or reviewed under this contract. The Contractor shall refer all requests for site information and contract information to the Contracting Officer, Huntsville Center. Reports and data generated under this contract shall become the property of the Department of Defense, and distribution to any other source by the Contractor, unless authorized by the Contracting Officer, is prohibited. The Contractor shall notify the Contracting Officer and Installation Public Affairs Office prior to any contacts with regulatory agencies.

6.0 MANAGEMENT OF FUNDS

Funds for this Contract will be managed at the level specified in the negotiations. No transfer of funds by the Contractor between tasks will be allowed without the prior approval of the Contracting Officer or the Contracting Officer's Representative.

7.0 INVOICING

The Contractor shall prepare and submit invoices to the U.S. Army Engineering Corps of Engineers, Engineering and Support Center, Facilities Reduction Program (CEHNC-FRP) for technical review and payment. The required method for invoice submittal is the US Army Corps of Engineer's Resident Management System (RMS). Submit the payment request and prompt payment certification in RMS, supplemented with signed copies of prompt payment and invoice documents through email correspondence.

Email electronic submissions to email address: FRPInvoices@usace.army.mil

Receipt of Invoices:

Disbursement of Payment will be made by:

U.S. Army Corps of Engineers Finance Center
5722 Integrity Drive
Millington, TN 38054-5005

8.0 ORDER OF PRECEDENCE

In the event of a conflict or inconsistency between any of the requirements of the various portions of the contract, precedence shall be given in the following order:

- 1) Any portions of the accepted proposal or accepted work plan that exceed the requirements of the solicitation.
- 2) As between the accepted work plan and the accepted proposal:
 - a) Any portion of the accepted proposal that exceeds the accepted work plan
 - b) Any portion of the accepted work plan that exceeds the accepted proposal

- c) The requirements of the contract solicitation and then the requirements of the basic contract.
- 3) Those portions of the accepted proposal or accepted final design that meet but do not exceed the solicitation requirement.

9.0 REFERENCES

9.1 All available documentation is being submitted as part of the RFP package. Such documentation includes pictures and location drawings of each.

9.2 All applicable local, State, and Federal regulations.

10.0 APPENDICES

- 10.1 Appendix A: Quality Assurance Surveillance Plan (QASP)
- 10.2 Appendix B: Strategy For Performing In-Situ Waste Determinations as Part of a Pre-Demolition Facility Assessment
- 10.3 Appendix C: AT Requirements
- 10.4 Appendix D: Safety Requirements
 - 11.4.1 Safety Requirements
 - 11.4.2 Accident Prevention Plan Template
 - 11.4.3 Activity Hazard Analysis Template
 - 11.4.4 Site Safety and Health Officer (SSHO) Designation Letter Template
- 10.5 Appendix E: Contractor Quality Control Requirements
- 10.6 Appendix F: List of Supplemental Government Documentation
- 10.7 Appendix G: ProjNet Questions and Responses

APPENDIX A

QUALITY ASSURANCE SURVEILLANCE PLAN (QASP)

Quality Assurance Surveillance Plan (QASP)

1.0 Performance Requirements Summary

The table on the following page lists the PWS requirements/deliverables that the Government shall monitor. The absence of any contract requirement from the PRS/QASP does not detract from its enforceability nor limit the rights or remedies of the Government under any other provision of the contract, including the clauses entitled “Inspection of Services” and “Default.”

The table defines the standard for each listed PWS service, sites the respective specification, provides the method of surveillance, and describes disincentives for not meeting acceptable standards.

2.0 Government Quality Assurance

The Contracting Officer (KO) has overall responsibility for overseeing the Contractor’s performance. The KO shall monitor day-to-day contract compliance and administration. The COR shall assist the KO with their duties and is responsible for technical administration of the project. The COR also assures proper Government surveillance of the Contractor’s performance and shall monitor, record, and report on the technical performance of the Contractor on a day-to-day basis. The COR, along with USACE subject matter experts, shall assure the Contractor is meeting contract PWS standards, as well as all Federal, state, and local regulatory requirements. The Government intends to use the following methods to monitor standards:

- ☐ Inspection and review of all required documents and submittals.
- ☐ Periodic inspection of work processes or output.
- ☐ 100% inspection at the completion of key work segments and deliverables.
- ☐ Customer feedback.

3.0 Performance Evaluation

Performance of services shall be evaluated to determine whether or not it meets the performance requirements of the contract. The COR shall evaluate and report Contractor performance to the Contracting Officer at each milestone and delivery per the project schedule. Progress inspection reports shall be submitted as required. When the performance requirement is not met, a contract discrepancy report (CDR) shall be issued to the Contractor by the Contracting Officer. The Contractor must respond to the CDR and return it to the contracting officer within five (5) calendar days of receipt. Failure to meet acceptable performance standards may result in one or all of the following actions:

- ☐ Issue a temporary work stoppage awaiting corrective action.
- ☐ Withdrawal of work
- ☐ Terminate the contract.
- ☐ Terminate the SATOC (basic) contract.

DA Form 5473-R Performance Requirements Summary

Required Service	Paragraph . Number	Standard	Method of surveillance	Incentives / Disincentives
(Task 1.1) Accident Prevention Plan and Sampling Plan	3.2.1	APP and Sampling plan meets the requirements of the PWS with minimal deficiencies requiring no more than one revision.	Govt. review	Govt. may reject in whole, or in part, Plans that do not comply with PWS requirements. Contractor must resolve and correct deficiencies in reasonable time or shall be subject to issuance of show cause notice/bad performance rating and possible termination.
(Task 1.2) Pre-Demolition Assessments	3.2.2	All site work is completed on or before the dates in the accepted proposal.	Govt. review	Satisfactory Past Performance Ratings will be given based upon successful completion of the project within the schedule conveyed in Par. 4.0. Likewise Highly Successful or Marginal may be given for completion of project in advance of the schedule or after the target completion, respectively.
(Task 1.3) Preparation of the Pre-Demolition Assessment Report	3.2.3	The Pre-Demolition Assessment Report meets the requirements of the PWS with minimal deficiencies requiring no more than one revision.	Govt. review	Govt. may reject in whole, or in part, Plans that do not comply with PWS requirements. Contractor must resolve and correct deficiencies in reasonable time or shall be subject to issuance of show cause notice/bad performance rating and possible termination.

APPENDIX B

FACILITY REDUCTION PROGRAM

STRATEGY FOR PERFORMING IN-SITU WASTE DETERMINATIONS AS PART OF A PRE-DEMOLITION FACILITY SURVEY/ASSESSMENT

17 November 2021

1st Revision: 08 March 2023

2nd Revision: 11 Aug 2023

3rd Revision: 24 April 2025

Introduction

Pre-Demolition Surveys/Assessments for the Facility Reduction Program (FRP) are performed for the purpose of determining presence and extent of Asbestos Containing Material (ACM) and Other Regulated Material (ORM), and to support the removal of each prior to demolition, as required by law. Thus, such assessments for ACM and ORM are performed in accordance with established regulations, by many capable assessment firms.

General

Pre-demolition Surveys need to be coordinated with an Installation's Environmental Office:

- ✚ Base courtesy.
- ✚ Base Environmental can provide historical context, to include particular areas/materials that have been a concern and require additional attention.
- ✚ Use of an XRF (as discussed below) introduces a radiation source, which requires coordination and Command approval in order to bring on any installation.
- ✚ Use of an XRF will require certifications in many states.

The Huntsville Center FRP requires that an In-Situ Waste Determination also be completed as part of the standard Pre-Demo Facility Assessment in order to assess and quantify the presence of both Lead based Paint (LBP) and PCB's-in-paint. The purpose for this is to give a "heads up" to our demo customers if there will be hazardous disposal concerns associated with the building debris which could cause additional cost to the demolition project.

Regulations require waste disposal be done in a particular manner, using disposal sampling of a representative sample of the debris pile and the Toxicity Characteristic Leaching procedure (TCLP) analysis for the RCRA 8 Metals. Once shown to be non-hazardous for the RCRA 8, the building debris is loaded and disposed of. The In-Situ Waste Determination is done on the building materials of a facility, as it stands, prior to demolition. FRP considers the entire facility to be the Decision Unit (DU) for consideration. Toward this aim, the in-Situ Waste Determination should be approached as follows:

LBP Determination

- ✚ Determination should be made regarding the percentages of the various building materials that make up the facility structure (ie wood, concrete, CMU, metal, wallboard,

- etc).
- ✚ The sample to be taken should be comprised of each type of building material found in accordance with the percentage of that building on which it is present. For example, if a building is considered to be 60% concrete/CMU, 30% wood (framing and wallboard) and 10% metal, then the sample to be taken should reflect the same percentages as the materials considered to be present.
- ✚ Use of XRF as a screening tool to see where the highest relative levels of lead are located is acceptable in order to enable biased grab samples to be taken. However, TCLP is the only acceptable (to the FRP) analysis approach for determining disposal alternatives.
- ✚ Both painted and unpainted materials should be collected for inclusion in the sample. Or, samples of unpainted surfaces can be collected and tested by themselves, in addition to collection of samples from painted surfaces to be tested by themselves. Painted samples should be selected/collected; in much the same way as ACM samples are selected, to be representative of different Homogeneous Areas (HA's). The term "paint histories" is applicable, with the color/relative time of application and substrate material representing a particular paint history. For example, if a particular white paint is used in a room that is CMU/concrete below, supporting wood framing and wallboard above, that would be considered two paint histories.
- ✚ Painted material surfaces should be sampled to include not just the paint, but the substrates as well. (Note: the presence of flaked paint on the walls/floor of a building is a separate issue, to be handled following the sweeping up and containerization of such flakes, if existent, prior to demolition. At that point, the paint flakes would be sampled on their own prior to disposal).
- ✚ As with different forms of ACM, the Contractor will be expected to estimate the amount of material being affected by each paint so that an estimation of the amounts of affected materials can be derived as part of the Pre-Demo Survey.
- ✚ Samples should be analyzed for presence/amount of contamination for the RCRA 8 metals using the Toxicity Characteristic Leaching Procedure (TCLP). However, TCLP is the only acceptable (to the FRP) analysis approach for determining disposal alternatives.

PCB's-in-Paint Determination

PCB's-in-paint refers to the fact that in years past, paints were manufactured with PCB's in them to give the paints increased plasticity/stability, increased water and chemical resistance and, in facilities that employed heat processes, to allow better conductance of heat in building materials.

- ✚ The sampling for PCB's will be performed using the same general process as the above for LBP and in accordance with "*EPA Region I Standard Operating Procedure for Sampling Porous Surfaces for Polychlorinated Biphenyls (PCBs)*", May 2011.
- ✚ Sampling should be done of both painted and unpainted surfaces to demonstrate if unpainted concrete has absorbed any PCB's emanating from other potential sources (glazes, caulking, sealants, nearby equipment). Painted and unpainted samples shall be analyzed separately and distinctly, so as to avoid conclusions in the paints that affect the unpainted concrete, as well.

- ✚ As with different forms of ACM, the Contractor will be expected to estimate the amount of material being affected by each paint history so that an estimation of the amounts of affected materials can be derived as part of the Pre-Demo Survey.
- ✚ Samples should be analyzed for presence/amount of contamination for PCB's using a totals analysis (as opposed to a TCLP) to determine the concentration of PCB's (if any) within the paints:
 - Analyses should provide MDL's that are <0.5 ppm.
 - Data will be developed to support installation decision-making with respect to appropriate disposal.

APPENDIX C
AT REQUIREMENTS

APPENDIX D

SAFETY REQUIREMENTS

- 1) **GENERAL** - ALL work under this contract will abide by the latest version of the U.S. ARMY CORPS OF ENGINEERS (USACE) EM 385-1-1 Safety and Health Requirements Manual at time of award. In addition to the detailed requirements included in the provisions of this contract, comply with all federal, state, and local (including host nation laws), ordinances, criteria, rules, and regulations will be followed. If a work element is not covered by regulatory requirements a consensus standard will apply. Where the requirements of this specification, applicable laws, criteria, ordinances, regulations, and referenced documents vary, the most stringent requirements govern.
- 2) **SUBMITTALS**
 - a) General Information - Government acceptance is required for the following submittals.
 - i) Accident Prevention Plan (APP).
 - (1) A qualified person must prepare the written APP. Prepare the APP in accordance with Section 2-7.b in the 2024 EM 385-1-1 using the mandatory ENG Form 6293. A link for this Form can be found in the EM 385-1-1 Para 2-10.d. If jobsite-specific information is not available when APP is submitted Site Specific Addendums (SSAs) shall be submitted to the APP once information is acquired.
 - (2) Submit the APP to the Contracting Officer no more than 30 days before mobilization for work activities. Work cannot proceed without an accepted APP, and/or SSA (if required), and site- specific Activity Hazard Analysis or Analyses (AHA/s). Once reviewed and accepted by the Huntsville Center Safety Office, the APP, SSAs and AHAs will be enforced as part of the contract.
 - (3) Disregarding the provisions of this contract or the accepted APP is cause for stopping of work, at the discretion of the Contracting Officer. The Project Manager in consultation with the CEHNC Contracting Officer and Safety Office will provide correspondence to the contractor with the reason/s for stop work and the requirements necessary to resume work. Continuously review and update the APP, as necessary, throughout the life of the contract, not to exceed 12 months. If updates are made resubmit to the Huntsville Center Safety Office for review and acceptance.
 - (4) The Government considers the Prime Contractor to be the "controlling authority" for the safety and health of the subcontractors. As a minimum the Prime Contractor will:
 1. Inform their subcontractors of the safety provisions under the terms of the contract and the penalties for noncompliance.
 2. Coordinate the work to prevent one craft from interfering with or creating hazardous working conditions for other crafts.
 3. Inspect subcontractor operations to ensure that accident prevention

- responsibilities are being carried out.
4. Provide an interpreter who is fluent in English and the language being translated if English is not the foreman's primary language.
 5. Describe the methods to evaluate past safety performance of potential subcontractors in the selection process.
 6. Describe innovative methods used to ensure and monitor safe work practices of subcontractors.
 7. Incorporate unusual or high-hazard activities not identified in the original APP as a SSA before the work is started. The SSA must be submitted to the Huntsville Center Safety Office for review and acceptance.
 8. If any severe hazard exposure (i.e. imminent danger) becomes evident, stop work in the area, secure the area, develop a plan to remove the exposure and control the hazard. Notify the Contracting Officer within 24 hours of discovery.
 9. Eliminate and remove the hazard.
 10. In the interim, take all necessary action to restore and maintain safe working conditions in order to safeguard onsite personnel, visitors, the public (as defined by ASSE/SAFE A10.34), and the environment.
- (5) The SHO must provide and maintain the APP and a log of signatures by each subcontractor foreman, attesting that they have read and understand the APP, and make the APP and log available on-site to the Contracting Officer and/or the Huntsville Center Safety Office upon request.
- ii) Site Specific Addendum (SSA); SSAs are required if work will be conducted on two or more sites. The SSA shall be submitted to the Huntsville Center Safety Office for acceptance prior to work starting on an additional location. An SSA contains detailed site-specific information only applicable to a specific location. It shall be attached to the APP as an addendum and be onsite. An SSA shall include the following minimum requirements: The Site-Specific Addendum shall include, as a minimum:
- (1) Contractor Name
 - (2) Contract Number
 - (3) Project Name
 - (4) Site Specific Project Location
 - (5) Safety Officer name/s and responsibilities
 - (6) Identify point of contact at location (e.g. QAE)
 - (7) Emergency Response Plan
 - (8) Security information (contact information) if applicable.
 - (9) Activity Hazard Analysis shall be attached to each SSA
- iii) Activity Hazard Analysis (AHA).
- Before beginning each activity, task, or Definable Feature of Work (DFOW) involving a type of work presenting hazards not experienced in previous project operations, or where a new work crew or subcontractor is to perform the work, the Contractor(s) performing that work activity must prepare an AHA. AHAs must be

developed by the Prime Contractor. If the Prime Contractor requires a subcontractor or any sub tier-contractor or supplier performing the work, to develop an AHA/s, it shall be provided to the SHO for review and approval before submitting to the Huntsville Center Safety Office for review and acceptance. AHAs must be signed by the SHO and the subcontractor Competent Person performing the work.

Format the AHAs in accordance with Section 2-6.d in the EM 385-1-1, or as directed by the Huntsville Center Safety Office. The Government reserves the right to require the Contractor to revise and resubmit the AHA/s if it fails to effectively identify the work sequences, specific anticipated hazards, site conditions, control measures to be implemented, risk assessment code (RAC), equipment, materials, and personnel qualifications. AHAs must be submitted, reviewed, and found acceptable by the Huntsville Center Safety Office before initiation of work at the job site.

Each employee performing work as part of an activity, task or DFOV must review the AHA for that work and sign a signature log specifically maintained for that AHA prior to starting work on that activity. The SHO must maintain a signature log on site for every AHA. Provide employees whose primary language is other than English, with an interpreter to ensure a clear understanding of the AHA and its contents.

Prime Contractor shall review the AHA list periodically (at least annually in conjunction with an APP review) and update as necessary when procedures, scheduling, or hazards change. Use the AHA during daily inspections by the SHO to ensure the implementation and effectiveness of the required safety and health controls for that work activity.

- iv) Safety and Health Officer (SHO) Qualifications; Proof of competency/qualification for all SHO must be submitted, reviewed, and found acceptable by the Huntsville Center Safety Office before initiation of work at the job site. These qualifications shall be included in the APP. (Reference Para 2-8.b in the EM 385-1- 1 as well as the mandatory SSHO Designation Form – the ENG Form 6282).

- v) ***The Safety and Health Officer shall be designated in writing in the APP.***

3) **SITE QUALIFICATIONS, DUTIES, AND MEETINGS**

- a) Safety Officer Requirement This contract requires a minimum of one designated Site Safety and Health Officer to manage and oversee the implementation of the Prime Contractors Safety Program. No work shall be conducted at the site of work until the approved SSHO, his designated alternate, or a temporary designated SSHO is on site in accordance with Section 2-8.b in the EM 385-1-1
- b) Safety and Health Officer Responsibilities:
 - i) Meet the qualifications for Level 1 SSHO found on the Mandatory ENG

Form 6282 Site Safety and Health Officer Designation Letter.

- ii) Designate an equally qualified Alternate SHO to fulfill the same roles and responsibilities if off-site for a period longer than 24 hours. (Alternate SHO/s shall be part of the APP and be designated by their employer in writing on an Appointment Memo.)
 - iii) Assist the Contractor's project management team responsible for managing, communicating, implementing, and enforcing compliance with the Contractor's APP and other accepted safety and health submittals.
 - iv) **Dual Hatting:** Dual hatting is allowed on portions of this project.
 - 1. The SSHO **is allowed** to dual hat with the QC.
 - 2. The SSHO shall **not** dual hat with the Superintendent.
- c) Contractor Contract Responsibilities
- i) No work shall be conducted at the site of the work until a SSHO is present.
 - ii) All levels of SHOs qualifications with an Appointment Memo must be submitted to and accepted by the CEHNC SOHO prior to work commencing on the site of the work.
 - iii) There must be a CEHNC accepted APP and an SSHO prior to any work being performed. It is the prime contractor's responsibility to ensure the SSHO clearly meet the minimum requirements of this policy.
 - iv) Responsibilities and Lines of Authority. The SSHO responsible for ensuring all the safety and health requirements are being met shall be identified in the Responsibilities and Lines of Authority section of the APP. This section of the APP shall illustrate reporting procedures from the SSHO. The SSHO for the task order/award shall ensure all competent/qualified persons have the proper qualifications and training and shall maintain all documentation for the project. All documentation shall be available upon request to the GDA.
 - v) The APP shall include discussion as to how the SSHO will ensure the requirements of the prime contractor's safety program, EM 385-1-1, OSHA, any additional local laws and regulations, and all accepted safety plans are implemented. This shall include but not limited to the review of site documentation, site audits, training, and meetings.
 - vi) A tailgate (a.k.a. toolbox) meeting is required prior to work activity. The accepted Activity Hazard Analysis (AHA) shall be reviewed at each tailgate. Any step, hazard and/or control changes made to an accepted AHA shall be identified (pen- and-ink) on the AHA along with the RAC. If the initial Risk Assessment Code (RAC) determination in the accepted AHA increases due to a change made to the work task or procedure by the workers, all work shall cease and the AHA shall be resubmitted to the CEHNC SOHO for review and acceptance prior to proceeding. All persons conducting work identified in the AHA shall review it and acknowledge the review by signing the AHA.
- d) Post Award Meeting
- Contractor representatives who have a responsibility or significant role in accident prevention on the project must attend the meeting. This includes the project superintendent/PM, Safety and Occupational Health officer.

4) ***PERSONNEL DUTIES:***

a) The Site Safety and Health Officer Shall:

- i) Conduct safety and health inspections daily prior to each shift, when a new DFO begins, when new workers begin work, and when work plans change or high hazard work activities begin. Maintain a written log which includes area/operation inspected, date of inspection, identified hazards, recommended corrective actions, estimated and actual dates of corrections.
- ii) Conduct mishap investigations and complete required accident reports. Report all recordable mishaps to the Contracting Officer within 24 hours.
- iii) Use and maintain OSHA's Form 300 to log work-related injuries and illnesses occurring on the project site for Prime Contractors and subcontractors. Post and maintain the Form 300A on the site Safety Bulletin Board as required by OSHA.
- iv) Maintain applicable safety reference material on the job site
- v) Review the APP and AHAs for compliance with EM 385-1-1, and approve, sign, implement and enforce them.
- vi) Establish a Safety and Occupational Health (SOH) Deficiency Tracking System that lists and monitors outstanding deficiencies until resolution.
- vii) Ensure subcontractor compliance with safety and health requirements.
- viii) Maintain a list of hazardous chemicals on site and their material Safety Data Sheets (SDS).
- ix) Provide and keep a record of site safety orientation and indoctrination for contractor employees, subcontractor employees, and site visitors.
- x.) Perform safety program tasks (e.g. ensure training and qualifications of site workers, document safety meetings, AHA reviews and site-specific updates, inspections, etc.) as required and directed by a SHO or corporate safety official.

5) ***HIGH HAZARD ACTIVITIES***

- a) If/when the Contractor is tasked to perform work which is not covered in a previously submitted AHA, a separate AHA shall be submitted minimally 15 days prior to planned start date and must be approved by the Contracting Officer or his/her designated representative prior to commencement of work Per Spec 01 35 26.
- b) Tasks involving any of the following are considered "High Hazard" activities:
 - i) Permit Required Confined Space Entry
 - ii) Fall Protection
 - iii) Load Handling Equipment (Any type of lifting equipment)
 - iv) Destruction or Demolition Projects
 - v) Electrical
 - vi) Hazardous Energy Control
 - vii) Working in, on, over, or around (within 5 feet) of water

The contractor is required to have a SSHO who shall have no other responsibilities, for any work repair being done on these activities. The above “high hazard” list is not meant to be comprehensive and does not relieve the contractor from maintaining an acceptable level of safety, in accordance with the EM 385-1-1, at all times work is being performed.

Certain hazardous activities require Site and Task Specific Plans to be submitted to and accepted by the USACE Huntsville Safety Office prior to conducting work. These plans can be submitted as part of the APP or submitted for acceptance at least 15 days prior to the work. These plans, including mandatory site and task specific requirements, can be found in the cited sections of the EM 385-1-1 (2024 Ed) below:

- a. Site Specific Fall Protection and Prevention Plan/Program -Section 21-7
 - b. Trenching and Excavation Plan – Section 25-7
 - c. Crane Plans – Standard Lift Plan Section 34-7.b, Critical Lift Plan Section 34-7.d
 - d. Demolition Plan – Section 17-7
 - e. Energized Work Plan/Permit – Section 11-8
 - f. Permit Required Confined Space Entry – Section 34-2.h
 - g. Scaffolding – Mandatory Specific AHA detailing requirements in Section 22-6 and 22-7
 - h. Steel Erection – 28-7.a
- c) Display of Safety Information. Within 7 calendar day(s) after commencement of work, erect a safety bulletin board at the job site. Where size, duration, or logistics of project do not facilitate a bulletin board, will require the Prime Contractor to have a notebook on site with all safety bulletin board information as required by the EM 385-1-1, Section 1-8.f.(2).(a)-(h) (SOH Bulletin Board requirements and mandatory information, EM 385-1-1). Safety documentation shall be accessible on site (to include all mandatory information for employee and visitor review). Where required, maintain information on safety bulletin board as required by EM 385-1-1, Section 1-8.f.(2).(a)-(h).
- d) Notifications and Reports
- i) Mishap Reporting and Investigation shall comply with Table 2-1 in Section 2-9 in the EM 385-1-1. Notify the Contracting Officer, USACE PM, and Huntsville Center Safety Office by email or telephonically as soon as practical, but no more than 24 hours after any mishaps including recordable accidents, incidents, and near misses. Serious accidents as listed in Table 2-1 in Section 2-9 in the EM 385-1-1 must be reported immediately to the Contracting Officer, USACE Huntsville PM, and USACE Huntsville Safety Office. After email and or telephonic notification to the entities above, the notifications shall be submitted via RMS under the QC daily reports tab. The updated 2021 version of the ENG Form 3394 is the mandatory form to use to provide an Initial Accident Report (IAR box on the form) and the Final Accident Report (FAR box on the form). The IAR is required to be submitted to the USACE KO/PM within 24 hours of any recordable accident or significant near

miss and the FAR is required to be submitted within 7 days of any recordable accident or significant near miss.

- ii) Monthly Exposure Reports Man-hours and Lost Workday Reporting. Submit project work hours to the Contracting Officer's Representative (COR) monthly in the format provided by the COR. Work hours include all hours on the project where an employee is in an on-duty pay status. The Contractor shall complete a report of exposure hours. The report shall be on the electronic data collection tool provided by the COR described as total hours associated where workers are exposed to the activity hazards and forwarded to the Contracting Officer no later than close of business (COB) the 10th day of the following month. If no hours are worked on the project/task, a report showing "zero (0)" is required.

ACCIDENT PREVENTION PLAN TEMPLATE (ENG FORM 6293, AUG2024)
(THIS APP TEMPLATE WILL ALSO BE PROVIDED AS A FILLABLE PDF)

Print Form

Save As

U.S. Army Corps of Engineers (USACE) ACCIDENT PREVENTION PLAN (APP) For use of this form, see EM 385-1-1; the proponent agency is CESO.	
Purpose: An APP is a written site-specific Safety & Occupational Health plan that documents project, contract, and job-specific potential hazards in the workplace, and the company policies, controls, and work practices that will be used to minimize those hazards. They are an integral part of the planning and risk management process. The APP must be developed by a Competent Person and reviewed and approved by the prime contractor and corporate safety official. Upon contractor approval, the plan must be submitted to the Contracting Officer (KO) or Contracting Officer Representative (COR) for review and acceptance prior to the performance of any work. No contract work can begin without a KO or COR accepted APP. The completed APP must be posted on the SOH bulletin board, or a notice posted on the board stating the location of the plan.	
PART 1 - SIGNATURES	
Plan Preparer - For example: Qualified Person (QP), Competent Person (CP), or project Quality Control (QC).	
1. Name:	2. Title:
3. Email Address:	4. Phone Number:
5. Signature	
Plan Approver - Corporate Safety Official	
1. Name:	2. Title:
3. Email Address:	4. Phone Number:
5. Signature	
Plan Concurrence - For example: Industrial hygienist, Project Manager, Superintendent, Site Safety & Health Officer, Quality Control, etc.	
1. Name:	2. Title:
3. Email Address:	4. Phone Number:
5. Signature:	
PART 2: PROJECT INFORMATION	
1. Project Name:	

2. Project Address (attach map in Appendix 1):	
3. Estimated Project Start Date:	4. Estimated Project Completion Date:
5. Project Description / Description of work to be performed:	

Print Form

Save As

PART 3: PRIME CONTRACTOR INFORMATION

1. Prime Contractor Name:
2. Contract Number:
3. Project Manager Name:
4. Quality Control (QC) Manager Name:
5. Contractor Corporate Safety Official Name:
6. Primary Site Safety & Health Officer (SSHO) Name:
7. Alternate Site Safety & Health Officer (SSHO) Name(s):

PART 4: SOH COMMITMENT AND POLICY

1. Provide a statement of safety and health policy detailing commitment to providing a safe and healthful workplace for all employees on this project.
2. Provide a statement outlining the Contractor's safety program goals and objectives.

3. Identify policies and procedure regarding non-compliance with safety requirements.		
4. Provide written procedures for holding managers and supervisors accountable for safety.		
5. Prime contractor is responsible for the implementation and enforcement of the SOH program for contractor employees, subcontractors, suppliers, and visitors at the site of work?	☐ Yes	☐ No
6. Prime contractor will require subcontractors, suppliers, and visitors to comply with the APP and EM 385-1-1?	☐ Yes	☐ No
7. No work will be performed unless a designated SSHO is present on the site of work.	☐ Yes	☐ No
8. A list of all known subcontractor(s) and supplier(s) are listed in Appendix 2.	☐ Yes	☐ No
9. If all subcontractor(s) and supplier(s) are not known at the time of initial APP submittal, Appendix 2 will be updated and resubmitted to the KO/COR for acceptance prior to the start of any work activities.	☐ Yes	☐ No
10. All subcontractors will have a copy of the APP, applicable AHAs and will be required to comply with them.	☐ Yes	☐ No
11. Subcontractors and suppliers at the site of work will abide by the EM 385-1-1, this APP, and all AHAs.	☐ Yes	☐ No
12. This APP and AHAs will be available to all workers at the site of work.	☐ Yes	☐ No

Print Form

Save As

PART 5: TRAINING

1. All employees will be trained according to applicable EM 385-1-1, federal, state, and local requirements prior to the commencement of work.	☐ Yes	☐ No
2. The following personnel are identified and designated as personnel responsible for SOH on this project. Add the following documentation to Appendix 3 of this worksheet: 1) SSHO designation letter (ENG Form 6282), 2) instructor signed OSHA 30-hour card (or course completion certificate if within 90 days of having completed the OSHA 30-hour training), and 3) proof of 24 hours of competency of SOH training within the last 3 years for the personnel identified below. (EM 385-1-1, Chapter 2, 2-3 Personnel Qualification/Training): (Check and list names of personnel being designated) ☐ Primary SSHO Name: ☐ Alternate SSHO Name(s):		
3. QP(s) and CP(s) required by EM 385-1-1 (for example, excavation, confined space, scaffolding, fall protection, etc.) for this project will be included in Appendix 3. Include 1) List of names or designation letters and 2) proof of qualification/competency.		

PART 6: SOH INSPECTIONS			
1. All applicable inspections required by EM 385-1-1, contract, federal, state, and local requirements will be completed.		☐ Yes	☐ No
2. The following personnel are assigned to conduct inspections, the type of inspection and frequency for the worksite. At minimum the SSHO must conduct daily site inspections.			
Who will conduct inspection?	Frequency?	What type of inspection?	
+ -			
3. Employees that conduct inspections will have technical proficiency needed to perform inspections. Proof of inspector's training/qualification is included in Appendix 3.		☐ Yes	☐ No
4. Deficiencies will be documented and tracked as required by this EM 385-1-1?		☐ Yes	☐ No
6. Will any external inspections be required (for example, USCG, OSHA, etc.)? ☐ Yes ☐ No If yes, describe:			
PART 7: ACCIDENT REPORTING AND INVESTIGATION			
1. Exposure data (man-hours worked) will be reported to KO/COR as required by the contract?		☐ Yes	☐ No
2. All accidents will be reported as soon as possible according to EM 385-1-1?		☐ Yes	☐ No
3. All accidents occurring incidentally to an operation, project, or facility for which the EM 385-1-1 is applicable will be thoroughly investigated and analyzed. Corrective actions to prevent reoccurrence will be implemented as soon as reasonably possible. The KO/COR will be notified when corrective actions are completed.		☐ Yes	☐ No
4. Accident notification will be provided to the KO/COR as stated below:		☐ Yes	☐ No
ACCIDENT TYPE	KO/COR NOTIFICATION TIME		
Fatality, permanent and partial disability, or property damage over \$600,000	Immediately, no later than (NLT) 8 hours		
All other accidents and near misses	Immediately, NLT 24 hours		
Print Form	Save As		
PART 8: SOH OVERSIGHT			
1. A risk management process that meets or exceeds the requirement of the EM 385-1-1 will be implemented on this project site?		☐ Yes	☐ No
2. Hazardous conditions and unsafe acts will be immediately corrected?		☐ Yes	☐ No
3. APP and AHAs will be prepared by a QP or CP according to the EM 385-1-1 prior to the start of any work activities on the site of work (as much as the information can be known at that point in time).		☐ Yes	☐ No
4. The plans and AHAs will be updated throughout the life of the project to include changes in personnel, equipment, conditions, etc. Additional revisions must be incorporated as necessary to reflect changing site conditions, construction methods, personnel roles and responsibilities and construction schedules.		☐ Yes	☐ No

5. No activity/work will be started at the site of work until the APP is reviewed and submitted to the KO/COR for acceptance, with the site-specific plans and procedures required by the EM 385-1-1 to complete the project?	☐ Yes	☐ No
6. APP and AHAs will be provided to and reviewed by all workers involved in the activity prior to work?	☐ Yes	☐ No
7. Workers will sign AHA(s) to concur with identified job steps and controls needed to mitigate hazards?	☐ Yes	☐ No
PART 9: SEVERE WEATHER PLAN		
1. The SSHO or designated onsite personnel is responsible for checking the weather conditions at a minimum of twice a day?	☐ Yes	☐ No
2. What severe weather forecast will require the SSHO to monitor weather conditions continuously? Describe.		
3. What are the training requirements for severe weather precautions and actions?		
4. Identify area of retreat or other actions to be taken such as evacuation, shelter in place, etc.		
5. Identify procedures to stop outdoor activities if extreme weather conditions to include thunderstorms are in the area.		
Print Form		Save As

PART 10: ACTIVITY HAZARD ANALYSIS (RISK MANAGEMENT)		
1. Major phases of work anticipated:		
2. Definable Features of Work (DFOW) <i>Note.</i> An activity-specific AHA will be submitted to the KO/COR for each DFOW prior to any work being performed.		
3. List equipment to be used:		
4. Anticipated High-Risk Activities: (See examples below, check all ☐ that apply): Electrical and/or Hazardous Energy ☐ Working at Heights ☐ Scaffolding ☐ Diving ☐ Load Handling Equipment ☐ Occupational Exposure ☐ Confined Space ☐ Excavations & Trenching ☐ Other: _____ ☐ Other: _____ ☐ Other: _____ ☐ Other: _____		
5. Detailed project-specific hazards and controls will be provided utilizing AHAs for each activity/DFOW.	☐ Yes	☐ No
6. No work will begin on an activity/DFOW until the initial AHA addressing the project-specific hazards has been developed, reviewed, and accepted by the KO/COR. (See EM 385-1-1 Chapter 2 section 2-6).	☐ Yes	☐ No
7. AHAs are living documents and are intended to be created, utilized in the field, and updated (by the workers) as necessary.	☐ Yes	☐ No
8. Workers/crews will have accepted AHA(s) that reflects current site conditions, personnel, equipment, control measures, etc. while the work is being performed?	☐ Yes	☐ No
9. AHA will be used by the contractor personnel to assure work is being performed consistent with the AHA?	☐ Yes	☐ No
10. Once the activity has been completed, the AHA will be available and kept onsite for the length of the contract.	☐ Yes	☐ No
11. AHAs for unknown work activities will be submitted to the KO/COR prior to work and attached to Appendix 4 of this	☐ Yes	☐

document.			No
12. Who has the authority to accept residual risk on AHA(s)? (List below)			
Category of Risk	Approval Authority (Name and Title)		
Extremely High Risk			
High Risk			
Medium Risk			
Low Risk			
Print Form	Save As		
PART 11: REQUIRED PROJECT SITE-SPECIFIC PLANS AND PROCEDURES			
1. Based on a risk assessment of contracted activities and on mandatory OSHA compliance programs, the contractor will ensure that all applicable SOH risks and associated compliance plans are in place.		☐ Yes	☐ No
2. Include all project-specific compliance plans, as applicable to the work being performed, and as identified below. The plans will incorporate project-wide procedures to control hazards to which the employees of all project employers may be exposed.		☐ Yes	☐ No
3. These plans and procedures will be coordinated with all project employers and be included in project-specific emergency response and evacuation procedures.		☐ Yes	☐ No
4. Address each of the plans in the outline below in the order that they are listed. Option 1: If a plan is applicable, develop and attach it to Appendix 5. Submit to the KO/COR with this worksheet for acceptance prior to work. Option 2: If a plan is applicable, but all of the minimum required information for the plan is not yet known, provide justification next to each plan title, and provide an expected date the plan will be created, reviewed, and attached to Appendix 5. Submit to the KO/COR with this worksheet for acceptance prior to work. Option 3: If a plan is not applicable because of the nature of the work to be performed, provide justification next to each plan title.			
Minimum plans required by EM 385-1-1	Reference EM 385-1-1 paragraph:	Select Option	Justification for Option 2 and Option 3
Exposure Control Plan	3-7.a		
AED Program	3-7.b		
Construction Site Plan	4-7.a		
Access/Haul Road Plan	4-7.b		
Hearing Conservation Program	5-7.a		
Respiratory Protection Program	5-7.b		
Hazard Communication (HazCom) Program	6-7.a		
Process Safety Management (PSM) Program	6-7.b		
Lead Compliance Plan	6-7.c		
Asbestos Management Plan	6-7.d		
Ionizing Radiation Safety Plan	6-7.e		
Radiofrequency Plan	6-7.e		
Abrasive Blasting Plan	6-7.f		

Thermal Stress Management Plan	6-7.g		
Mold Remediation Plan	6-7.h		
Silica Compliance Plan	6-7.i		
Fatigue Management Plan	6-7.j		
Night Operations Lighting Plan	7-7		
Traffic Control Plan	8-7		
Fire Prevention Plan	9-7.a		
Wildland Fire Management Plan	9-7.b		
Housekeeping Plan (Welding and Cutting)	10-7		
Electrical Safety Plan	11-7.a		
Assured Equipment Grounding Conductor Program	11-7.b		
Site-Specific Energy Control Plan	12-7.a		
Standard Lift Plan	16-7.a & b		

Print Form

Save As

Standard Lift Plan (Floating Plant)	16-7.a & c		
Critical Lift Plan	16-7.a & d		
Pile Driving Plan	16-7.a & e		
Structural Demolition Plan	17-7		
Soft Demolition Plan	17-7		
Emergency Plan for Marine Activities	19-7.a		
Severe Weather Plan for Marine Activities	19-7.b		
Float Plans	19-7.c		
Tow Plans	19-7.d		
Fall Protection and Prevention Plan	21-7.a		
Rescue Plan	21-7.b		
Scaffold Work Plan	22-7.b		
Rope Access Work Plan	23-7		
Excavation and Trenching Plan	25-7		
Compressed Air Work Plan	26-7.a & b		
Contingency Response Plan	26-7.a & c		
Emergency Rescue Plans and Equipment	26-7.a & d		
Ventilation and Dust Control Plan	26-7.a & e		
Fire Prevention and Protection Plan	26-7.a & f		
Formwork and Shoring Plan	27-7.a		

Precast Concrete Plan	27-7.b		
Masonry Erection Plan	27-7.c		
Steel Erection Plan	28-7		
Explosive Site Safety Plan	29-7.a		
Master Blasting Plan	29-7.b		
Vibration Monitoring Plan	29-7.c		
Safe Practices Plan	30-7.a & b		
Dive Operations Plan	30-7.a & c		
Emergency Management Manual	30-7.a & d		
Snorkeling Plan	30-7.a & e		
Tree Maintenance and Removal Plan	31-7		
Construction Safety and Phasing Plan	32-7.a		
Safety Plan Compliance Document	32-7.b		
Aviation Pre-Accident Plan	33-7.f		
Confined Space Plan	34-7.b & c		
Housekeeping Plan (Sanitation)	35-7.a		
Extermination Plan	35-7.b		
Site Safety and Health Plan	36-7.a		
Comprehensive Work Plan	36-7.b		
Emergency Response Plan	36-7.c		

Print Form

Save As

PART 12: PROJECT SITE COORDINATION

1. Provide procedures for coordinating SOH activities with other employers on the site of work:

PART 13: REQUIRED APPENDICES

Indicate if each of the following items are, or are not, attached to this plan.

Appendix 1. Project Map	☐ Yes	☐ No
Appendix 2. Subcontractor/Suppliers	☐ Yes	☐ No
Appendix 3. Personal Qualifications and Designations	☐ Yes	☐ No
Appendix 4. Activity Hazard Analysis	☐ Yes	☐ No

Appendix 5. Site-specific plans and procedures	☐ Yes	☐ No
Appendix 6. Any additional plans, procedures, etc. can be added to this appendix and will be coordinated with the KO/COR.	☐ Yes	☐ No

ACTIVITY HAZARD ANALYSIS (ENG FORM 6206, SEP 2024)

(THIS AHA TEMPLATE WILL BE PROVIDED AS A FILLABLE PDF)

U.S. Army Corps of Engineers (USACE) ACTIVITY HAZARD ANALYSIS (AHA) For use of this form, see EM 385-1-1; the proponent agency is CESO.																																		
Purpose: The Activity Hazard Analysis is a tool used in the Risk Management Process. Risk management is a business process that includes the identification, assessment, and prioritizing of risks, followed by coordinated and economical application of resources to minimize, monitor, and control the probability and/or impact of unfortunate events to an acceptable level.																																		
The overall residual risk assessment code (RAC) must be communicated and accepted by the proper approval authority before beginning the activity.																																		
AHAs must be provided to, and reviewed by, all involved employees prior to starting the task. Each employee must document their review with a signature in the last section of form.																																		
Activity: _____ Location: _____ Prepared By: _____ Reviewed By: _____ Notes: _____	Date: _____	Overall RAC (Use highest code)	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th colspan="5" style="text-align: center; background-color: #cccccc;">Probability</th> </tr> <tr> <th style="width: 15%;">Frequent</th> <th style="width: 15%;">Likely</th> <th style="width: 15%;">Occasional</th> <th style="width: 15%;">Seldom</th> <th style="width: 15%;">Unlikely</th> </tr> <tr> <td style="background-color: red; color: white;">E</td> <td style="background-color: red; color: white;">E</td> <td style="background-color: orange; color: white;">H</td> <td style="background-color: orange; color: white;">H</td> <td style="background-color: yellow; color: black;">M</td> </tr> <tr> <td style="background-color: red; color: white;">E</td> <td style="background-color: orange; color: white;">H</td> <td style="background-color: orange; color: white;">H</td> <td style="background-color: yellow; color: black;">M</td> <td style="background-color: green; color: white;">L</td> </tr> <tr> <td style="background-color: orange; color: white;">H</td> <td style="background-color: yellow; color: black;">M</td> <td style="background-color: yellow; color: black;">M</td> <td style="background-color: green; color: white;">L</td> <td style="background-color: green; color: white;">L</td> </tr> <tr> <td style="background-color: yellow; color: black;">M</td> <td style="background-color: green; color: white;">L</td> <td style="background-color: green; color: white;">L</td> <td style="background-color: green; color: white;">L</td> <td style="background-color: green; color: white;">L</td> </tr> </table>		Probability					Frequent	Likely	Occasional	Seldom	Unlikely	E	E	H	H	M	E	H	H	M	L	H	M	M	L	L	M	L	L	L	L
Probability																																		
Frequent	Likely	Occasional	Seldom	Unlikely																														
E	E	H	H	M																														
E	H	H	M	L																														
H	M	M	L	L																														
M	L	L	L	L																														
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th style="width: 20%;">JOB STEPS</th> <th style="width: 20%;">HAZARDS (Recognized/Anticipated)</th> <th style="width: 40%;">CONTROLS (ACTIONS TO ELIMINATE OR MINIMIZE HAZARDS)</th> <th style="width: 20%;">RESIDUAL RAC</th> </tr> <tr> <td style="height: 40px;"></td> <td></td> <td></td> <td></td> </tr> </table>					JOB STEPS	HAZARDS (Recognized/Anticipated)	CONTROLS (ACTIONS TO ELIMINATE OR MINIMIZE HAZARDS)	RESIDUAL RAC																										
JOB STEPS	HAZARDS (Recognized/Anticipated)	CONTROLS (ACTIONS TO ELIMINATE OR MINIMIZE HAZARDS)	RESIDUAL RAC																															
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th style="width: 20%;">EQUIPMENT</th> <th style="width: 20%;">TRAINING</th> <th style="width: 60%;">INSPECTION</th> </tr> <tr> <td style="height: 40px;"></td> <td></td> <td></td> </tr> </table>					EQUIPMENT	TRAINING	INSPECTION																											
EQUIPMENT	TRAINING	INSPECTION																																

Involved Personnel: PPE Required:			
Approval Authority (<i>digital signature</i>)			
PRINTED NAME:		PRINTED TITLE:	
DIGITAL SIGNATURE:		DATE:	
Approval Authority information is based on overall RAC according to EM 385-1-1, para 1-6 or 2-6, as applicable.			
EMPLOYEE DOCUMENTATION SHEET AHAs must be provided to and reviewed by all involved employees prior to starting the task. Each employee must document their review with a signature.			
NAME	OCCUPATION / DESIGNATION (Job Title) / (Competent or Qualified Person)	SIGNATURE	DATE

PREVIOUS EDITIONS ARE OBSOLETE.

SITE SAFETY AND HEALTH OFFICER (SSHO) (ENG FORM 6282, AUG 2024)
DESIGNATION LETTER TEMPLATE

(THIS TEMPLATE WILL BE PROVIDED AS A FILLABLE PDF)

U.S. Army Corps of Engineers (USACE) SITE SAFETY & HEALTH OFFICER (SSHO) DESIGNATION LETTER For use of this form, see EM 385-1-1; the proponent agency is CESO.			
Purpose: This document designates personnel responsible for overseeing and ensuring the implementation of the prime contractor's Safety & Occupational Health (SOH) program. This designation letter will be signed by the company's official responsible for the SOH program (e.g., <i>Corporate Safety Manager</i>).			
Submit the following documentation to the Contracting officer (KO) or Contracting Officer Representative (COR) as part of the Accident Prevention Plan: 1) This signed SSHO Designation Letter (Eng Form 6282); 2) An instructor-signed OSHA 30-hour card (or course completion certificate if within 90 days of completing the OSHA 30-hour training); and 3) proof of 24 hours of competency of SOH training within the last 3 years.			
PART I: COMPLETED BY COMPANY'S SOH PROGRAM OFFICIAL			
1. Project Name		2. Contract Number	
3. Location			
4. The designated SSHO on this form meets the minimum EM 385-1-1 training and experience requirements for the selected level below and is knowledgeable of the SOH requirements for this project and has the authority to stop work when required.			
SSHO Level	OSHA 30-Hour	Competency Training	Experience
☐ Level 1	Construction or General Industry	24 hours of documented formal classroom or online SOH-related training within the past five years and must maintain competency by taking 24 hours every three-year period for the duration of the contract.	5 years of cumulative safety experience, within the last ten years, managing or implementing a SOH program on projects similar in industry type, size, and complexity as the project described in the contract scope of work.
☐ Level 2	Construction or General Industry	24 hours of documented formal classroom or online SOH-related training within the past five years and must maintain competency by taking 24 hours every three-year period for the duration of the contract.	3 years of cumulative safety experience, within the last 10 years, managing or implementing a SOH program on projects similar in industry type, size, and complexity as the project described in the contract scope of work.
☐ Level 3	Qualified or Competent Person		
5. Summary of required safety experience:			
By my signature below, I certify that the information I provided on this form is true and correct to the best of my knowledge.			
Company SOH Official Name		Company SOH Official Title	

Company SOH Official Signature		Date
PART II: COMPLETED BY DESIGNATED SSHO		
SSHO Name	Date	SSHO Signature

APPENDIX E

CONTRACTOR QUALITY CONTROL REQUIREMENTS.

1. *CONTRACTOR QUALITY CONTROL*

1.1. The Contractor shall provide and maintain an effective quality control program that complies with the Contract Clause (FAR 52.246-12), the below stated quality control requirements and the quality control requirements stated in the respective section of the Technical Specifications.

1.2. The Contractor shall establish a quality control system to perform sufficient inspection and testing of all items of work, including that of their subcontractors. The quality control system shall ensure conformance with applicable specifications and drawings with respect to materials, workmanship, finish, functional performance, and identification.

1.3. The quality control system will be established for all work except where the technical provisions of the contract provide for specific Government control by inspections, tests, or other means. The Contractor's quality control system will specifically include the surveillance and tests required in the technical provisions of the contract specifications.

1.3.1. The Contractor's quality control system is the means by which they assure themselves their work complies with the requirements of the contract plans and specifications. The controls shall be adequate to cover all operations, including both on and off-site.

1.3.2. The Contractor shall not build up or conceal any feature of the work containing uncorrected defects, and payment on deficient items will be withheld until they are satisfactorily corrected.

1.3.3. Triple Hatting is NOT allowed. The Contractor's appointed job site supervisor has to be separate role from the Quality Representative (QR). When supplemented by special technicians or testing facilities to perform all specified tests, balancing, adjusting and/or regulating mechanical and electrical devices, equipment and/or systems it will be done in writing. As an option, an industry recognized testing laboratory approved by the Contracting Officer or COR may be used for said testing.

1.3.4. The contractor is responsible for maintaining an effective quality control system. Recurring deficiencies indicate the system is not adequate and the contractor's performance is failing to meet government's minimum acceptable standards. If, in the opinion of the Contracting Officer, an unacceptable number of deficiencies are occurring in the contractor's performance, the Contracting Officer may direct the contractor to revise its operations to correct the defective performance. Failure by the contractor to provide acceptable revisions and/or to improve contract performance may result in the termination of the contract for default.

1.3.5. In the event the Contractor utilizes the service of a commercial testing laboratory, the Contracting Officer reserves the right to check laboratory equipment for compliance with the standards set forth in the contract specifications and to check the laboratory technician's testing procedures and techniques.

APPENDIX F

LIST OF SUPPLEMENTAL GOVERNMENT DOCUMENTATION

APPENDIX G

PROJNET QUESTIONS AND RESPONSES