

PERFORMANCE WORK STATEMENT (PWS)
United States Military Academy at West Point
Chief Information Officer/G6, Distributed Antenna System Modernization Phase 1

Performance Work Statement
(Includes associated Performance Requirements Summary (PRS))
Distributed Antenna System Modernization Phase 1
4 December 2025
(DRAFT)

PART 1

GENERAL INFORMATION

1. General: This is a non-personal service(s) contract under which the personnel rendering the service(s) are not subject, either by the contract's terms or by the manner of its administration, to the supervision and control usually prevailing in relationships between the Government and its employees.

1.1 Description of Services/Introduction: This is a non-personal service(s) contract to provide the upgrade and renovation of existing commercial cellular Distributed Antenna Systems(DAS) components and equipment that are at end of life technology, and replace them with current 5g capability. The contractor shall provide all labor, equipment and consumables to upgrade capability in support of providing modern capabilities to the Cadet, Staff and Faculty of the United States Military Academy (USMA), Westpoint, New York.

1.2 Background: The Chief Information Officer, G6(CIO/G6) has identified the need to upgrade the existing cellular distribution systems within key buildings due to the inability to support modern fifth-generation mobile network(5G) enhancements offered by the core carriers. AT&T, T-Mobile, and VERIZON, currently provide signals to the academy to enable cellular service to all Cadet, Faculty and Staff cellular phone subscribers. The carrier signals are distributed within the Academic buildings through a Distributed Antenna System (DAS) installed within each building. These systems ensure that the cellular service signals are maintained within the buildings since outside antenna signals cannot penetrate construction walls and indoor barriers. These systems directly support life, safety, and administrative communications.

1.2.1 The CIO/G6 has identified that the current equipment cannot support new and emerging capabilities of 5G cellular technology since the existing equipment was installed and manufactured before 5G was developed. Currently, the equipment can only support 4G LTE. The enhancement of the equipment to support 5G will provide all mobile subscribers with the following capabilities:

- a. **Faster Speeds.** This enables high-quality streaming, fast downloads, and smooth video conferencing.

PERFORMANCE WORK STATEMENT (PWS)
United States Military Academy at West Point
Chief Information Officer/G6, Distributed Antenna System Modernization Phase 1

b. Greater Capacity. Supports more devices per square mile, ideal for densely populated areas and numerous devices that utilize cellular for internet services- IoT (Internet of Things) deployments.

c. Improved Reliability. Enhanced network stability and better coverage.

1.3 Scope: The Contractor shall provide non-personal service(s), to Engineer the removal and replacement of existing Distributed Antenna infrastructure and components that are unable to support 5G signal capability to new and emerging cellular technologies. All major equipment provided shall be standardized and be manufactured by Advanced RF Technologies (ADRF). This PWS provides for the upgrade of 3 separate facilities 1 primary, and 2 optional buildings, contingent upon funding.

1.3.1 The contractor will be required to provide a RF Propagation plot, a.k.a. "Heat Map" of all facilities to develop a design plan for antenna and component installations.

1.3.2 Building 758, Jefferson Hall Library. The contractor will perform a preliminary RF Propagation study to be used within the engineering design. The contractor shall remove and replace all active components, passive components, cables, and antennas and replace the system in its entirety to provide for the capability of 5G cellular technology. All new active components will be installed using the existing racks/spaces vacated by the removed systems.

- a. The contractor shall be responsible for the disposition of all removed equipment and materials no longer required under 1.3.1
- b. The contractor shall install new cable, passive and active equipment to provide for a 100% upgrade to 5G capability, supporting ATT, T-Mobile, Verizon signal distribution within the facility.
- c. The contractor shall be responsible for coordination of interruption of services with the CIO/G6 Network Service Branch, DAS Maintenance contractor, and if required the major carrier's.
- d. The contractor shall test and certify that the system's performance meets or exceed specified performance levels and provide results to the CIO/G6 Network Service Branch.
- e. The contractor shall develop and provide "As Built" drawings which identify locations and inventory of all antenna's, cable routes, and telecom equipment. All drawings and sketches developed under this PWS shall become the property of the CIO/G6 upon final draft at the completion of this project

1.3.3 OPTION 1. Redundant Power. Building 758, Jefferson Hall Library. Contingent upon funding, the contractor shall provide a back-up power system to all active DAS equipment capable of a 2hour emergency power in the event of an electrical outage.

1.3.4 OPTION 2. General Instructional Building (GIB). This facility is adjacent to the Jefferson Hall Library and serves as a temporary class and administrative area for displaced academic

PERFORMANCE WORK STATEMENT (PWS)
United States Military Academy at West Point
Chief Information Officer/G6, Distributed Antenna System Modernization Phase 1

and staff functions during the academies multiyear Academic Building Upgrade Program (ABUP). Contingent upon funding, the contractor shall provide the following:

- a. The contractor shall perform an RF Propagation study to design the effective placement of antennas and infrastructure.
- b. The contractor shall be responsible for the disposition of all removed equipment and materials no longer required under 1.3.3
- c. The contractor shall install new cable, passive and active equipment to provide for a 100% upgrade to 5G capability, supporting AT&T, T-Mobile, Verizon signal distribution within the facility.
- d. The contractor shall be responsible for coordination of interruption of services with the CIO/G6 Network Service Branch, DAS Maintenance contractor, and if required the major carriers.
- e. The contractor shall test and certify that the system's performance meets or exceed specified performance levels and provide results to the CIO/G6 Network Service Branch.
- f. The contractor shall develop and provide "As Built" drawings which identify locations and inventory of all antenna's, cable routes, and telecom equipment. All drawings and sketches developed under this PWS shall become the property of the CIO/G6 upon final draft at the completion of this project.

1.3.5. OPTION 3. General Instructional Building (GIB). Contingent upon funding. The contractor shall provide and install redundant power to all active DAS components installed within 1.3.3.

1.3.6. OPTION 4. Building 752, Mahan Hall. Contingent upon funding, the contractor shall remove all active DAS equipment and replace the components with newly manufactured Advanced RF Technologies (ADRF) equipment. The equipment shall provide 5G signaling throughout the existing infrastructure. Under this option, all passive components shall remain pending funding for replacement.

- a. The contractor shall be responsible for the disposition of all replaced equipment
- b. The contractor shall coordinate service outages with the CIO/G6 Network Service Branch.
- c. The contractor shall test and certify that the system's performance meets or exceed specified performance levels and provide results to the CIO/G6 Network Service Branch.

PERFORMANCE WORK STATEMENT (PWS)
United States Military Academy at West Point
Chief Information Officer/G6, Distributed Antenna System Modernization Phase 1

- d. The contractor shall ensure that the system provides for a 100% upgrade to 5G capability, supporting AT&T, T-Mobile, Verizon signal distribution within the facility.
- e. The contractor shall be responsible for coordination of interruption of services with the CIO/G6 Network Service Branch, DAS Maintenance contractor, and if required the major carrier's.
- f. The contractor shall develop and provide "As Built" drawings which identify locations and inventory of all telecom equipment and rack elevations. All drawings and sketches developed under this PWS shall become the property of the CIO/G6 upon final draft at the completion of this project.

1.3.7. OPTION 5. Building 752, Mahan Hall. Contingent upon funding, the contractor shall provide and install Redundant Power to all active DAS Components installed under 1.3.4.

1.3.8 OPTION 6. Building 752, Mahan Hall. Contingent upon funding, the contractor shall remove and replace all passive equipment, including cabling, and antennas and replace the DAS Infrastructure in its entirety.

- a. The contractor shall perform an RF Propagation Study for the efficient placement of antennas and passive components.
- b. The contractor is responsible for the disposition of all cabling and components removed under this option.
- c. The contractor shall be responsible for coordination of interruption of services with the CIO/G6 Network Service Branch, DAS Maintenance contractor, and if required the major carriers.
- d. The contractor shall install newly manufactured material and components that are rated for cellular 5G performance.
- e. The contractor shall test and certify that the system's performance meets or exceed specified performance levels and provide results to the CIO/G6 Network Service Branch.
- f. The contractor shall ensure that the system provides for a 100% upgrade to 5G capability, supporting AT&T, T-Mobile, Verizon signal distribution within the facility.
- g. The contractor shall develop and provide "As Built" drawings which identify locations and inventory of all antenna's, cable routes, and telecom equipment. All drawings and sketches developed under this PWS shall become the property of the CIO/G6 upon final draft at the completion of this project.

PERFORMANCE WORK STATEMENT (PWS)
United States Military Academy at West Point
Chief Information Officer/G6, Distributed Antenna System Modernization Phase 1

1.4 Objectives: The objective of this contract is to provide:

- a. Removal of equipment which cannot support 5G cellular services.
- b. Install new ADRF DAS Systems which will provide 100% coverage and 5g signal capability for all major cellular carriers within the building(s).
- c. Upgrade DAS Infrastructure to include cable, antennas and associated components to enhance 5G performance, based upon RF Propagation studies.

1.5 Type of Contract: FIRM FIXED PRICE

1.6 Period of Performance: 180 Days from award of contract.

1.7 Place of Performance: The work to be performed under this contract will be performed Building 758, Jefferson Hall Library.

OPTION 1. Redundant Power, Building 758, Jefferson Hall Library. Contingent on funding.

OPTION 2. General Instructional Building(GIB). OPTION 2, Contingent on funding.

OPTION 3. General Instructional Building (GIB). Contingent upon funding.

OPTION 4. Building 752, Mahan Hall, Contingent on funding.

OPTION 5. Building 752, Mahan Hall. Contingent upon funding

OPTION 6. Building 752, Mahan Hall. Contingent upon funding.

United States Military Academy, Westpoint, NY, 10996.

1.8 Site Survey. All prospective contractors will be offered a site survey to review the requirement of this PWS. All site surveys will be coordinated through the Contracting Officer.

1.9 Contractor Travel: Reserved

1.10 Other Direct Costs (ODCs): Special Equipment rental, Hi Reach scaffolding.

PERFORMANCE WORK STATEMENT (PWS)
United States Military Academy at West Point
Chief Information Officer/G6, Distributed Antenna System Modernization Phase 1

PART 2

SPECIFIC REQUIREMENTS

2.1 Basic Services: The Contractor shall provide services for the upgrade and renovation of existing commercial cellular Distributed Antenna Systems (DAS) components and equipment that are at end of life technology and replace them with current 5g capability. The contractor shall provide all labor, equipment and consumables to upgrade capability in support of providing modern capabilities to the Cadet, Staff and Faculty of the United States Military Academy (USMA), Westpoint, New York. The work performed under this PWS shall conform to the following standards

Table 1 Applicable Standards

Standard	Purpose
BICSI 006	DAS design and implementation
NFPA 70 (NEC)	Electrical safety and installation
IEEE 1100, 1584, 3007.1	Grounding, arc-flash, ESD safety
IFC Section 510	Fire code compliance for public safety DAS
FCC Regulations	Frequency and interference control
47 CFR 1.1310	Radiofrequency Radiation Exposure Limits
47 CFR 90.219,	Use of Signal Boosters
ANSI/TIA-569,	Telecommunications Pathways and Spaces
ANSI/TIA-606	Administration Standard for Telecommunications Infrastructure
TIA TSB-5018	Structured Cabling Infrastructure Guidelines to Support Distributed Antenna Systems
Manufacturers Guidelines	Major Equipment Manufacturers Installation Guidance
ANSI/TIA-607-E	Telecommunications Bonding and Grounding

PERFORMANCE WORK STATEMENT (PWS)
United States Military Academy at West Point
Chief Information Officer/G6, Distributed Antenna System Modernization Phase 1

Standard	Purpose
ANSI/TIA-568.3-E	Optical Fiber Cabling and Components
ANSI/TIA-756-B	Customer Owned Outside Plant Telecommunications Infrastructures
BICSI TDMM 15th Ed.	

- a. All network enabled hardware and software must support Internet Protocol version 6 (IPv6).
- b. All hardware and software must meet all federal Section 508 requirements.

2.1.1. Major Active Equipment. All active equipment must be newly manufactured provided by Advanced RF Technologies (ADRF).

2.1.2 DAS Performance Specifications. All Distributed Antenna Systems shall be certified and perform to the below specifications.

Table 2 Performance Specifications

Category	Target Value	Area	Comments	
RSRP < 3 GHz	-95 dBm	>95%	-95dBm or better RSRP design target is required for all systems over 95% of the Coverage Area	
RSRP > 3 GHz)	-100 dBm	>95%	-100 dBm or better RSRP design target is required for all systems over 95% of the Coverage Area.	
SINR	> 4 dB	> 95%	The SINR is greater than 4 dB with a loading of 100% for 95%+ of coverage area.	
Dominance Over Macro	6 dB	100%	The design should be at a minimum 6 dB stronger than the peak macro benchmark data at any point in the entire coverage area.	

PERFORMANCE WORK STATEMENT (PWS)
United States Military Academy at West Point
Chief Information Officer/G6, Distributed Antenna System Modernization Phase 1

2.1.3 Spectrum Requirements. The following Spectrum Requirements support the objective of this requirement.

Table 3 Spectrum Requirements

ATT
▪ 700 MHz LTE
▪ 850 MHz 5G
▪ PCS LTE
▪ AWS LTE
▪ 2.3GHz LTE
▪ C Band 5G
VERIZON
700 MHz LTE
▪ 850 MHz 5G
▪ PCS LTE
▪ AWS LTE
▪ C-Band 5G
T-Mobile
PCS LTE/5G
▪ AWS LTE
▪ 2.5 GHz 5

2.1.4 Contractor Work Plan: The Contractor shall prepare and maintain a Work Plan. The plan, as a minimum, shall identify regularly scheduled work (to include location, work to be completed, timeline, etc.) The Contractor's proposed Work Plan shall be submitted to the Contracting Officer via the COR for review within 10DAYS after date of contract award (**Deliverable 1**). The workplan can be Microsoft Project or Excell spreadsheet which would define milestones. Any proposed change to the accepted Final Work Plan is required to be resubmitted via the COR for review and acceptance by the Contracting Officer at a minimum 5 calendar days prior to implementation.

2.2 Tasks: Building 758, Jefferson Hall Library. Task requirements for Building 758, Jefferson Hall consist of the following:

PERFORMANCE WORK STATEMENT (PWS)
United States Military Academy at West Point
Chief Information Officer/G6, Distributed Antenna System Modernization Phase 1

2.2.1. The contractor shall perform an RF Propagation Study to establish the optimal placement of passive antennas and components. The contractor shall identify and remove all active DAS components from the facility and dispose of the equipment in accordance with environmental and regulatory guidelines and local regulations.

- a. STANDARD(STD). The equipment will be removed and disposed of in accordance with environmental and regulatory guidelines and local regulations.
- b. STD. The Contractor shall ensure that all personnel involved in the removal and transportation of removed equipment follows OSHA Standard 1910.176- Handling Materials.
- c. STD. The contractor shall coordinate downtime of sectors to the CIO/G6 Network Service Branch and Major Carriers as appropriate.
- d. STD. The contractor shall not use Government facilities for disposal of any equipment/materials removed under this PWS.
- e. STD. All areas impacted by removal of infrastructure shall be cleaned and clear of debris. Floors and office areas which may have been impacted by dust, falling debris shall be cleaned and remedied before the end of every workday.

2.2.2. The contractor shall perform a RF Propagation study to assess the building layout for optimal antenna placement, validate cable routes, and passive components.

- a. STD. Provide floor plan with antenna locations and cable route to the COR before implementation. **(Deliverable # 11)**
- b. No work will be performed pending the acceptance of the plan as communicated by the COR.

2.2.3. The contractor shall install active equipment within the assigned telecommunications area within the racks and spaces vacated by the equipment removed in section 2.2.1.

- a. STD. All equipment shall be installed in accordance with the manufacturer's specifications.
- b. STD. All personnel assigned for the installation of equipment shall be experienced and certified to perform this task, in addition to certifications required by ADRF.

2.2.4 Infrastructure Installation. The contractor will install all passive equipment to include antennas, cabling, connectors, taps, splitters ect.. from the active equipment throughout its respective zone.

PERFORMANCE WORK STATEMENT (PWS)
United States Military Academy at West Point
Chief Information Officer/G6, Distributed Antenna System Modernization Phase 1

- a. STD. All infrastructure installation practices will be installed in accordance with references in Table 1.
- b. STD. All cables will be dressed and secure with a neat appearance.
- c. STD. All personnel assigned to this task will be qualified and or certified in the installation of DAS Infrastructure.

2.2.5. Testing and certification. The contractor shall provide certification and performance measures for both passive and active systems.

- a. STD. All cable will be tested end to end
- b. STD. The contractor shall coordinate active operation with the COR and or CIO/G6 Network Service branch.
- c. STD. Active test results will meet the requirements in Table 2 and Table 3.

2.2.6. Closeout Documentation. The contractor shall provide final design plan, RF Propagation studies, test results, As Built.

- a. STD. Final documentation shall be in electronic format. All drawings shall be in ADOBE PDF format.
- b. Final documentation shall be provided to the COR within 15 days of close-out. **(Deliverable #12)**

2.2.7. OPTION 1. Contingent upon funding. The contractor shall provide and install a redundant back-up power system to the active DAS equipment installed within building 758, Jefferson Hall Library.

- a. STD. The systems will be rated for 2hrs.
- b. STD. The contractor will perform a service test along with the COR to validate the performance of the system.

2.3. OPTION 2. General Instructional Building(GIB). The contractor shall provide the assessment and replacement of existing DAS equipment with newly manufactured ADRF equipment to support 5G cellular technologies. The contractor shall perform a RF Propagation study to determine the optimal placement of antenna and passive components.

PERFORMANCE WORK STATEMENT (PWS)
United States Military Academy at West Point
Chief Information Officer/G6, Distributed Antenna System Modernization Phase 1

2.3.1 The contractor shall perform an RF Propagation Study to establish the optimal placement of passive antennas and components. The contractor shall identify and remove all active DAS components from the facility and dispose of the equipment in accordance with environmental and regulatory guidelines and local regulations.

- a. STANDARD(STD). The equipment will be removed and disposed of in accordance with environmental and regulatory guidelines and local regulations.
- b. STD. The Contractor shall ensure that all personnel involved in the removal and transportation of removed equipment follows OSHA Standard 1910.176- Handling Materials.
- c. STD. The contractor shall coordinate downtime of sectors to the CIO/G6 Network Service Branch and Major Carriers as appropriate.
- d. STD. The contractor shall not use Government facilities for disposal of any equipment/materials removed under this PWS.
- e. STD. All areas impacted by removal of infrastructure shall be cleaned and clear of debris. Floors and office areas which may have been impacted by dust, falling debris shall be cleaned and remedied before the end of every workday.

2.3.2. The contractor shall perform a RF Propagation study to assess the building layout for optimal antenna placement, validate cable routes, and passive components.

- a. STD. Provide floor plan with antenna locations and cable route to the COR before implementation. **(Deliverable # 11)**
- b. No work will be performed pending the acceptance of the plan as communicated by the COR.

2.3.3. The contractor shall install active equipment within the assigned telecommunications area within the racks and spaces vacated by the equipment removed in section 2.2.1.

- a. STD. All equipment shall be installed in accordance with the manufacturer's specifications.
- b. STD. All personnel assigned for the installation of equipment shall be experienced and certified to perform this task.(CERTIFICATION)

2.3.4 Infrastructure Installation. The contractor will install all passive equipment to include antennas, cabling, connectors, taps, splitters ect.. from the active equipment throughout its respective zone.

PERFORMANCE WORK STATEMENT (PWS)
United States Military Academy at West Point
Chief Information Officer/G6, Distributed Antenna System Modernization Phase 1

- a. STD. All infrastructure installation practices will be installed in accordance with references in Table 1.
- b. STD. All cables will be dressed and secure with a neat appearance.
- c. STD. All personnel assigned to this task will be qualified and or certified in the installation of DAS Infrastructure.

2.3.5. Testing and certification. The contractor shall provide certification and performance measures for both passive and active systems.

- a. STD. All cable will be tested end to end
- b. STD. The contractor shall coordinate active operation with the COR and or CIO/G6 Network Service branch.
- c. STD. Active test results will meet the requirements in Table 2 and Table 3.

2.3.6. Closeout Documentation. The contractor shall provide final design plan, RF Propagation studies, test results, As Builts.

- a. STD. Final documentation shall be in electronic format. All drawings shall be in ADOBE PDF format.
- b. Final documentation shall be provided to the COR within 15 days of close-out.
(Deliverable #12)

2.3.7. OPTION 3. Contingent upon funding. The contractor shall provide and install a redundant back-up power system to the active DAS equipment installed within building GIB Facility adjacent to building 758, Jefferson Hall Library.

2.4. OPTION 4. Contingent upon funding. The contractor shall remove all active components and replace and install new ADRF equipment to support 5G cellular technologies within Building 752, Mahan Hall. Existing passive equipment and cabling shall be reused.

2.4.1. The contractor shall identify and remove all active DAS components from the facility. and dispose of the equipment in accordance with environmental and regulatory guidelines and local regulations.

- a. STD. The contractor shall not use Government facilities for disposal of any equipment/materials removed under this PWS.

PERFORMANCE WORK STATEMENT (PWS)
United States Military Academy at West Point
Chief Information Officer/G6, Distributed Antenna System Modernization Phase 1

- b. STD. The equipment will be removed and disposed of in accordance with environmental and regulatory guidelines and local regulations.
- c. STD. The Contractor shall ensure that all personnel involved in the removal and transportation of removed equipment follows OSHA Standard 1910.176- Handling Materials.
- d. STD. The contractor shall coordinate downtime of sectors to the CIO/G6 Network Service Branch and Major Carriers as appropriate.

2.4.2. The contractor shall install active equipment within the assigned telecommunications area within the racks and spaces vacated by the equipment removed in section 2.4.1.

- a. STD. All equipment shall be installed in accordance with the manufacturer's specifications.
- b. STD. All personnel assigned for the installation of equipment shall be experienced and certified to perform this task.

2.4.3. Testing and certification. The contractor shall provide certification and performance measures for both passive and active systems.

- a. STD. All cable will be tested end to end.
- b. STD. Any defective components shall be identified and replaced by the contractor
- c. STD. The contractor shall coordinate outages and disruptions of active operation with the COR, CIO/G6 Network Service branch and major carriers.
- d. STD. Active test results will meet the requirements in Table 2.
- e. STD. The contractor shall coordinate downtime of sectors to the CIO/G6 Network Service Branch and Major Carriers as appropriate.

2.4.4. Closeout Documentation. The contractor shall provide final design plan, RF Propagation studies, test results, As Builds.

- a. STD. Final documentation shall be in electronic format. All drawings shall be in ADOBE PDF format
- b. Final documentation shall be provided to the COR within 15 days of close-out. (Deliverable #12)

PERFORMANCE WORK STATEMENT (PWS)
United States Military Academy at West Point
Chief Information Officer/G6, Distributed Antenna System Modernization Phase 1

2.5. OPTION 5. Contingent upon funding, the contractor shall remove and replace all passives equipment including antennas and cable and replace the DAS infrastructure with a new infrastructure which is rated for 5G performance.

- a. STD. The contractor shall not use Government facilities for disposal of any equipment/materials removed under this PWS.
- b. STD. The equipment will be removed and disposed of in accordance with environmental and regulatory guidelines and local regulations.
- c. STD. The Contractor shall ensure that all personnel involved in the removal and transportation of removed equipment follows OSHA Standard 1910.176- Handling Materials.
- d. STD. The contractor shall coordinate downtime of sectors to the CIO/G6 Network Service Branch and Major Carriers as appropriate.

2.5.1. The contractor shall perform a RF Propagation study to assess the building layout for optimal antenna placement, validate cable routes, and passive components.

- a. STD. Provide floor plan with antenna locations and cable route to the COR before implementation. **(Deliverable # 11)**
- b. No work will be performed pending the acceptance of the plan as communicated by the COR.

2.5.2. Infrastructure Installation. The contractor will install all passive equipment to include antennas, cabling, connectors, taps, splitters ect.. from the active equipment throughout its respective zone.

- a. STD. All infrastructure installation practices will be installed in accordance with references in Table 1.
- b. STD. All cables will be dressed and secure with a neat appearance
- c. STD. All personnel assigned to this task will be qualified and certified in the installation of DAS Infrastructure.

2.5.3. Testing and certification. The contractor shall provide certification and performance measures for both passive and active systems.

- a. STD. All cable will be tested end to end.
- b. STD. Any defective components shall be identified and replaced by the contractor.

PERFORMANCE WORK STATEMENT (PWS)
United States Military Academy at West Point
Chief Information Officer/G6, Distributed Antenna System Modernization Phase 1

- c. STD. The contractor shall coordinate outages and disruptions of active operation with the COR and or CIO/G6 Network Service branch.
- d. STD. Active test results will meet the requirements in Table 2.
- e. STD. The contractor shall coordinate downtime of sectors to the CIO/G6 Network Service Branch and Major Carriers as appropriate.

2.5.4. Closeout Documentation. The contractor shall provide final design plan, RF Propagation studies, test results, As Built.

- a. STD. Final documentation shall be in electronic format. All drawings shall be in ADOBE PDF format.
- b. Final documentation shall be provided to the COR within 15 days of close-out.

(Deliverable #12)

2.5.5. OPTION 6. Contingent upon funding Contingent upon funding. The contractor shall provide and install a redundant back-up power system to the active DAS equipment installed within building 752, Mahan Hall.

2.6 Service Contract Reporting: RESERVED

PERFORMANCE WORK STATEMENT (PWS)
United States Military Academy at West Point
Chief Information Officer/G6, Distributed Antenna System Modernization Phase 1

Table 4 Performance Requirement Summary

PERFORMANCE OBJECTIVE	STANDARD	PERFORMANCE THRESHOLD ACCEPTABLE QUALITY LEVELS (AQLs)	METHOD OF SURVEILLANCE
PRS#1 para 2.2.2/2.3.2./2.5.1. The contractor shall perform an RF Propagation Study to establish the optimal placement of passive antennas and components.	ANSI/BICSI 006-2020	100% Compliance	100% Inspection
PRS#2 - PWS para 2.2.3/2.3.3/2.4.2./ The contractor shall install active equipment within the assigned telecommunications area within the racks and spaces	Per Manufacturer instructions, applicable standards within Table 1, and sub paragraphs a-b	100% Compliance	100% Inspection
PRS#3 PWS para 2.2.6/2.3.6/2.4.3/2.5.2. Testing and certification. The contractor shall provide certification and performance measures for both passive and active systems.	All systems shall conform to applicable standards in Table 1, Performance measures within Table 2 and Manufacturers specifications	100% Compliance	100% Inspection
PRS#4 - PWS para 2.2.4/2.3.4/2.5./ The contractor will install all passive equipment to include antennas, cabling, connectors, taps, splitters ect.. from the active equipment throughout its respective zone.	In accordance with references in Table 1.	100% Compliance	100% Inspection

PERFORMANCE WORK STATEMENT (PWS)
United States Military Academy at West Point
Chief Information Officer/G6, Distributed Antenna System Modernization Phase 1

PRS #5 - The contractor shall provide certification and performance measures for both passive and active systems.	Active test results will meet the requirements in Table 2, and sub bullets a-e	Zero Deviation from Standard	100% Inspection
PRS#6 para, 2.2.7/2.3.7/2.5.4. The contractor shall provide and install a redundant back-up power system to the active DAS equipment installed within Bldg 758, GIB, and building 752, Mahan Hall	Installation will be in accordance with manufacturers instructions. All service interruptions will be coordinated through the COR	Zero Deviation from Standard	100% Inspection
PRS#7 para, 2.4.1/2.4. 2.5./ The contractor shall remove all active components and replace and install new ADRF equipment to support 5G cellular technologies within Bldg 758, GIB, and Bldg 752	-The equipment will be removed and disposed of in accordance with environmental and regulatory guidelines and local regulations. - The Contractor shall ensure that all personnel involved in the removal and transportation of removed equipment follows OSHA Standard 1910.176- Handling Materials. - The contractor shall coordinate downtime of sectors to the CIO/G6 Network Service Branch and Major Carriers as appropriate. - The contractor shall not use	Zero Deviation from Standard	100% Inspection

PERFORMANCE WORK STATEMENT (PWS)
United States Military Academy at West Point
Chief Information Officer/G6, Distributed Antenna System Modernization Phase 1

	Government facilities for disposal of any equipment/materials removed under this PWS. All areas impacted by removal of infrastructure shall be cleaned and clear of debris. Floors and office areas which may have been impacted by dust, falling debris shall be cleaned and remedied before the end of every workday.		
PRS# 7, para. 2.2.6/2.3.6/2.4.4/2.5.3/ The contractor shall provide final test results, As Built to CIO/G6 Network Service Branch.	All files will be electronic. All drawings and "As-builts" will be in PDF format	Zero Deviation from Standard	100% Inspection

PERFORMANCE WORK STATEMENT (PWS)
United States Military Academy at West Point
Chief Information Officer/G6, Distributed Antenna System Modernization Phase 1

PART 3

RESERVED

PERFORMANCE WORK STATEMENT (PWS)
United States Military Academy at West Point
Chief Information Officer/G6, Distributed Antenna System Modernization Phase 1

PART 4

QUALITY ASSURANCE

4.1 Quality Control Plan (QCP): The Contractor shall develop and maintain a QCP to ensure services are performed in accordance with (IAW) this PWS. The Contractor shall develop and implement procedures to identify, prevent, and ensure non-recurrence of defective services. The Contractor's QCP is the means by which it assures that the work provided complies with the requirements of the contract.

The Contractor's Proposed QCP shall be submitted to the Contracting Officer (KO) through the Contracting Officer's Representative (COR) for review within 10DAYS after date of contract award (**Deliverable #2**)

The Government will review and either notify the Contractor in writing of acceptance of the plan or return their comments to the Contractor within 5 working days. If the Government has provided comments, the Contractor shall then have 5 working days to submit a Final QCP. After receipt of the Final QCP, the Contractor may receive the Contracting Officer's acceptance in writing. Any proposed changes to the accepted QCP are required to be resubmitted for acceptance by the Contracting Officer no later than 5 working days prior to the anticipated change and before implementation by the Contractor. The timeline noted above will apply for review and acceptance for proposed changes. At a minimum, the QCP must include and answer the following to be acceptable:

a. A chart showing the organizational structure and lines of authority, the names, qualifications, duties, responsibilities, and classification of each member of the Contractor's Quality Control Team.

b. How the Contractor will monitor work to ensure performance complies with all deliverables (etc. timelines, deadlines, and goals);

c. How the Contractor will monitor work to ensure performance complies with all specifications and requirements of the contract, including the contract's clauses;

d. How the Contractor will monitor and ensure staff qualifications remain current and valid including Department of Defense (DoD) Contractor Personnel Office (DOCPER) processes/approvals throughout contract performance;

f. How the Contractor will inventory and track maintenance of all Government Provided Equipment / Materials;

g. How the Contractor will identify, investigate, and correct any non-conforming performance and prevent similar deficiencies in the future; and

PERFORMANCE WORK STATEMENT (PWS)
United States Military Academy at West Point
Chief Information Officer/G6, Distributed Antenna System Modernization Phase 1

h. How the Contractor will file and save all Quality Control related documents for the life of the contract plus 5 years.

4.1.1 The Contractor shall inform the COR of issues or potential issues that might affect the performance within 2 hours of identifying those issues. Verbal reports shall be followed by written reports within 1DAY.

4.2 Quality Assurance: The Government will evaluate the Contractor's performance under this contract in accordance with the Quality Assurance Surveillance Plan (QASP). This plan is primarily focused on what the Government must do to ensure that the Contractor has performed in accordance with the performance standards. It defines how the performance standards will be applied, the frequency of surveillance, and the acceptable quality levels (performance thresholds).

4.3 Performance Requirements Summary(PRS). The Contractor service requirements are summarized into performance objectives that relate directly to mission essential items. The performance threshold briefly describes the minimum acceptable levels of service required for each requirement

4.4 Post Award Conference/Periodic Progress Meetings: The Contractor shall attend any post award conference convened by the contracting activity or contract administration office in accordance with FAR Subpart 42.5. The Contracting Officer, COR, and other Government personnel, as appropriate, may meet periodically with the Contractor to review the Contractor's performance. At these meetings the Contracting Officer will apprise the Contractor of how the Government views the Contractor's performance and the Contractor shall apprise the Government of problems, if any, being experienced. Appropriate action shall be taken to resolve outstanding issues. These meetings shall be at no additional cost to the Government.

4.4.1 The Contractor shall attend, participate in, and furnish input to scheduled and unscheduled meetings, conferences, and briefings that relate to the functions and services herein as required by the Government to provide effective communication and impart necessary information. The Contract Manager or designated representative shall attend meetings as requested by the Government. Meeting attendees shall at times include Contractor managerial, supervisory, and other personnel knowledgeable of the subject matter. Meetings may start or end outside of regular duty hours.

PERFORMANCE WORK STATEMENT (PWS)
United States Military Academy at West Point
Chief Information Officer/G6, Distributed Antenna System Modernization Phase 1

PART 5

KEY PERSONNEL

5.1 Key Personnel- Contractor: The following personnel are considered key personnel by the Government: The Contractor shall provide a Program/Contract Manager who shall be responsible for the performance of the work. Each of these individuals shall be provided in writing to the Contracting Officer no later than 5 DAYS after contract award (**Deliverable #4**). The Contract Manager and Alternate Contract Manager shall have full authority to act for the Contractor on all contract matters relating to daily operation of this contract. The Contract Manager or Alternate Contract Manager shall be available between 0700 and 1700. Qualifications for all key personnel are listed below:

Contractor Key Personnel	Functional Responsibility
Contract/Program Manager	Responsible for the operational planning, establishment, execution, and evaluation of a multifaceted program/project typically consisting of a set of closely related subprograms or associated activities. Oversees fiscal, operational, administrative, and human resources management of the program; seeks and develops outside funding sources, serves as principal point of representation and liaison with external constituencies on operational matters, and provides day-to-day technical/professional guidance and leadership as appropriate to the area of expertise.
Systems Engineer	Performs high-level systems analysis, evaluation, design, integration, documentation, and implementation of very complex application that requires a thorough knowledge of administrative and technical skills. Directs and participates in all phases of system development with emphasis on planning, analysis, evaluation, integration, testing and acceptance phases (IV&V and DT&E). Applies higher-level business or technical principles and methods to very difficult technical problems to arrive at automated engineering solution.
Site Lead	Provides installation and operational support of voice and data communications hardware and software systems. Designs, develops, implements, tests, debugs, and maintains communications systems. Performs configuration of operating system and security patches for host and distributed systems and implements incident

PERFORMANCE WORK STATEMENT (PWS)
United States Military Academy at West Point
Chief Information Officer/G6, Distributed Antenna System Modernization Phase 1

	response procedures during incidents of a network or host security breach. May provide leadership and direction to a team of specialists for these functions. Reviews customer requirements and makes recommendations for changes to existing technical architecture. Comply with prescribed customer, industry and agency standards.
Telecommunications Installer(s)	Provides installation and operational support of voice and data communications hardware and software systems. Designs, develops, implements, tests, debugs, and maintains communications systems. Performs configuration of operating system and security patches for host and distributed systems, and implements incident response procedures during incidents of a network or host security breach. Complies with prescribed customer, industry and agency standards.
Quality Control Manager	Responsible for carrying out procedures to ensure that all information systems products and services meet organization standards and end-user requirements. Performs and leads tests of software to ensure proper operation and freedom from defects. May create test data for applications. Documents and works to resolve all complex problems. Reports progress on problem resolution to management. Devises improvements to current procedures and develops models of possible future configurations. Acts as information resource about assigned areas to technical writers and other Quality Assurance Analysts. Performs complex workflow analysis and recommends quality improvements.

5.2. Key Personnel- Government

Government Key Personnel	Functional Responsibility
Contracting Officer(KO)	A person with the authority to enter into, administer, and/or terminate contracts and make related determinations and findings. The term includes certain authorized representatives of the contracting officer acting within the limits of their authority as delegated by the contracting officer.

PERFORMANCE WORK STATEMENT (PWS)
United States Military Academy at West Point
Chief Information Officer/G6, Distributed Antenna System Modernization Phase 1

	"Administrative contracting officer (ACO)" refers to a contracting officer who is administering contracts. "Termination contracting officer (TCO)" refers to a contracting officer who is settling terminated contracts. A single contracting officer may be responsible for duties in any or all of these areas. Reference in this regulation (48 CFR chapter 1) to administrative contracting officer or termination contracting officer does not- (1) Require that a duty be performed at a particular office or activity; or (2) Restrict in any way a contracting officer in the performance of any duty properly assigned.
Contracting Officer Representative (COR)	As determined by the Contracting Officer, a COR will be appointed and identified by letter of designation, a copy of which will be provided to the Contractor by the Contracting Officer. The designation letter states the responsibilities and limitations of the COR, especially regarding changes in cost or price, estimates, or changes in delivery dates. The COR is not authorized to change any of the terms and conditions of the resulting order. The COR monitors all technical aspects of the contract and assists in contract administration. The COR is not authorized to obligate the Government. If the work is not written in the contract, the COR is not authorized to request new work. The COR is authorized to perform the following functions: assure that the Contractor performs the technical requirements of the contract, perform inspections necessary in connection with contract performance, maintain written and oral communications with the Contractor concerning technical aspects of the contract, issue written interpretations of technical requirements, including Government drawings, designs, specifications, monitor Contractor's performance and notifies both the Contracting Officer and Contractor of any deficiencies, coordinate availability of Government property, and coordinate site entry of Contractor personnel.

PERFORMANCE WORK STATEMENT (PWS)
United States Military Academy at West Point
Chief Information Officer/G6, Distributed Antenna System Modernization Phase 1

PERFORMANCE WORK STATEMENT (PWS)
United States Military Academy at West Point
Chief Information Officer/G6, Distributed Antenna System Modernization Phase 1

PART 6

FACILITY AND SECURITY INFORMATION

6.1 Recognized Holidays: The following provides information on recognized holidays for the purpose of the PWS. If submittal of any documentation (e.g. deliverables, submittals, etc.) deadlines fall on a holiday, the closest workday prior to the holiday will apply as the deadline for submittal.

6.1.1 U.S. Holidays: Work shall not be performed on U.S. federally recognized holidays occurring during the normal workweek unless otherwise directed by the Contracting Officer. When a U.S. holiday occurs on a Saturday or a Sunday, the holiday is observed on the preceding Friday or following Monday, respectively.

New Year's Day January 1st
Presidents' Day 3rd Monday in February
Juneteenth June 19th
Labor Day 1st Monday in September
Veteran's Day November 11th
Christmas Day December 25th

M. L. King Memorial Day 3rd Monday in Jan
Memorial Day last Monday in May
Independence Day July 4th
Columbus Day 2nd Monday in October
Thanksgiving Day 4th Thursday in November

6.1.2 Should the United States Congress and/or the President of the United States sign into law any new federal holidays not listed above, guidance will be given as to the availability of personnel and the effected hours of operation where the work is being conducted. Contractors will be notified as soon as any new holiday guidance is given to the Department of Defense, Department of the Army and the United States Military Academy at West Point.

6.2 Operating Hours: The Government facility office hours, facility operating hours, and the Contractor support hour requirements often coincide, however, they may differ. Please refer to the following.

6.2.1 Government Facility Office Hours: The Government facility office hours are 7:00 am and 5:00 pm (0700 – 1700 hours) Monday thru Friday except U.S. Holidays identified in paragraph 1.5.3.1 above or when the Government facility is closed due to local or national emergencies, administrative closings, or similar Government directed facility closings.

6.2.2 Government Facility Operating Hours: The Government facility operating hours are 7:00 am and 5:00 pm (0700 – 1700 hours) Monday thru Friday except U.S. Holidays identified in paragraph 6.1.1, above or when the Government facility is closed due to local or national emergencies, administrative closings, or similar Government directed facility closings.

6.2.3 Contractor Support Hours: The Contractor shall provide support between the hours of 7:00 am and 5:00 pm (0700 – 1700 hours) Monday thru Friday except on Federal holidays or when the Government facility is closed due to local or national emergencies, administrative closings, or similar Government directed facility closings. The Contractor shall maintain an

PERFORMANCE WORK STATEMENT (PWS)
United States Military Academy at West Point
Chief Information Officer/G6, Distributed Antenna System Modernization Phase 1

adequate workforce at all times, for the uninterrupted performance of all tasks defined within this PWS when the Government facility is not closed for the above reasons. When hiring personnel, the Contractor shall keep in mind that the stability and continuity of the workforce is essential.

6.3 Blackout dates: USMA is an educational institution and located at the United States Army Garrison – West Point. Certain Army functions, as well as USMA activities, occur throughout the calendar year where contractors are prohibited from conducting work. Work during these dates is allowed to continue based on mission requirements and coordination between the government and contractor; however, these dates are subject to blackout due to the Academy's mission and operations.

6.4 Security Requirements: The following information is provided on security related matters.

6.4.1 Security Program: Contractor personnel performing work under this contract must comply with the standards as defined within this document.

6.4.1.1 Alien Employment. The contractor shall not employ any alien who does not have a valid US Immigration I-551 or I-94. The contractor shall provide valid social security numbers and citizenship status of all employees to the Government, upon request.

6.4.1.2 E-Verify. E-Verify is an Internet based system operated by the Department of Homeland Security (DHS) in partnership with the Social Security Administration (SSA) that allows participating employers to electronically verify the employment eligibility of their newly hired employees. E-Verify is currently free to employers and is available in all 50 states. E-Verify provides an automated link to federal databases to help employers determine employment eligibility of new hires and the validity of their Social Security numbers. E-Verify are the best means for determining employment eligibility of new hires and the validity of their Social Security numbers.

(1) Contractors shall use E-Verify on all employees that will be working on this installation, under this contract. This shall be done prior to the employee starting work on the installation.

PERFORMANCE WORK STATEMENT (PWS)
United States Military Academy at West Point
Chief Information Officer/G6, Distributed Antenna System Modernization Phase 1

For E-Verify information: www.dhs.gov/E-Verify 1-888-464-4218

(2) The United States Government has adopted a zero tolerance policy regarding trafficking in persons. Additional information about trafficking in persons may be found at the website for the Department of State's Office to Monitor and Combat Trafficking in Persons' at <http://www.state.gov/g/tip>. Government contracts shall :

(a) Prohibit contractors, contractor employees, subcontractors, and subcontractor employees from —

(b) Engaging in severe forms of trafficking in persons during the period of performance of the contract;

(c) Procuring commercial sex acts during the period of performance of the contract; or

(d) Using forced labor in the performance of the contract;

(e) Require contractors and subcontractors to notify employees of the prohibited activities described in paragraph (a) of this section and the actions that may be taken against them for violations; and

(f) Impose suitable remedies, including termination, on contractors that fail to comply with the requirements of paragraphs (a) and (b) of this section.

6.4.2 Personnel Security Clearance Requirements: The contractor shall be responsible for safeguarding all government equipment, information, and property provided for contractor use. At the close of each work period, government facilities, equipment, and materials shall be secured.

6.4.3 Installation Access: Access to U.S. installations, buildings and controlled areas is limited to personnel who meet security criteria and are authorized. Failure to submit required information/data and obtain required documentation or clearances will be grounds for denying access to U.S. installations, buildings and controlled areas. The Contractor shall ensure that any subcontractors used in performance of this contract complies with these requirements and that all employees, of both the Contractor and any subcontractor utilized by the Contractor, are made aware of and comply with these requirements.

The Contractor shall be aware of and comply with the requirements associated with Installation Access Control. The Government is not liable for any costs associated with performance delays due solely to a firm's failure to comply with Installation Access Control System (IACS) processing requirements.

The Contractor shall return installation passes to the issuing IACS office when the contract is completed or when a Contractor employee no longer requires access.

PERFORMANCE WORK STATEMENT (PWS)
United States Military Academy at West Point
Chief Information Officer/G6, Distributed Antenna System Modernization Phase 1

6.4.3.1 6.4.3.1 Force Protection Conditions (FPCON's).

During higher Force Protection Conditions (FPCON's) Contract personnel are required to comply with all Antiterrorism policies and procedures while on the installation. Contract personnel may be directed to enter the installation through certain access control points where they can best be identified and searched. Contractor personnel may be prohibited from certain portions of the installation during exercises and actual emergencies.

- (1) Contractors will comply with parking restrictions and will not park in unauthorized parking areas or within 82 feet of an inhabited building when directed.
- (2) Access control roster (personnel and vehicles) must be provided. Names / vehicles verified by the company and received background screening. Substitutes receive same vetting process prior to work.
- (3) All contractor personnel and vehicles are subject to search while on the installation
- (4) In the event of an identified restricted/exclusion area, the contractor personnel will not be authorized without specific permission or an escort.
- (5) Access may be denied during increased readiness or Force Protection Conditions (FPCON's).

6.4.3.2 Under no circumstances will Contractors Park in Central Parking Area (CPA)

Lots. The local general, visitor, and government designated parking areas SHALL NOT be used by the contractor. No general contractor or subcontractor employee parking is available near the immediate site. The contractor will need to identify and locate parking facilities for general and subcontractors on/off of West Point and provide a means for shuttling workers to the site. West Point shuttle services will not be used for transporting workers to the site.

Contractors and construction vehicles can only park in pre-approved designated staging areas or as identified in their contract, but not in contradiction of the CPRA Policy or the Installation Access policy #13 dated 12 December 2022. Central Area Parking is reserved for Staff and Faculty and requires a special pass. In accordance with AR 190-5, persons who operate a motor vehicle on West Point shall be deemed to have given consent for the removal and temporary impoundment of the privately owned vehicle (POV) and construction equipment when it is:

- (1) Parked illegally.
- (2) Interfering with operations
- (3) Creating a safety hazard
- (4) Left unattended in a restricted or controlled area.

PERFORMANCE WORK STATEMENT (PWS)
United States Military Academy at West Point
Chief Information Officer/G6, Distributed Antenna System Modernization Phase 1

(5) Parked in a Central Parking Area (CPA) lot without the proper CPA Pass

(6) Parked in a reserved space authorized by the Installation Commander

The COR overseeing the contract will review and coordinate all contractor pass requests. All contractor vehicles requiring access to the Cadet Area will require a Cadet Area Pass (CAP). The Contractor must coordinate with the COR immediately upon vehicle assignment. The Contractor will need to provide the following information:

Make, Model, Year, Color and Registration (Tag Number)

6.4.4 Installation Pass Log: The contractor must first stop at the West Point Visitor's Control Center (VCC) and complete a background check to get access to the installation. It is located at 2107 New South Post Rd, Highland Falls, New York 10928, Ph: (845) 938-2638. The Visitor Control Center is open Monday-Sunday from 6 a.m. to 10 p.m. When the Visitor Control Center is closed, visitors will be directed to proceed to Stony Lonesome Gate for a background check and temporary pass. If you do not have a Department of Defense issued identification card, you will be considered one of three categories: Escorted Visitors, Foreign Visitors and Unescorted Visitors. A current driver's license or passport will suffice for identification, but effective October 1, 2020, driver's licenses and identification cards from specific territories and states that do not comply with the REAL ID Act of 2005 are not to be used as the sole source for identity verification to access Federal installations. A listing of the current state-by-state compliance is available at REAL ID Act Status of States & Territories. Additional information can be found at: <https://home.army.mil/westpoint/index.php/about/visitor-information>

In addition, the Contractor shall provide the Contracting Officer, via the COR, an Initial Installation Pass Log within 5DAYS after the contractor's workforce have satisfied all access requirements (**Deliverable #4**). The log must at a minimum contain the following information Last Name, First Name, Company, Supervisor Contact. The log shall be updated as employees are added or removed. The Updated Installation Pass Log shall be current and available at any time upon request by the Government and submitted to the COR within 5DAYS after any changes to the log.

6.4.5 Individual Termination or Expiration of Employment: The Contractor shall collect the installation access passes the same day employment of an individual has expired or has been terminated and shall return them to the issuing office within 3 days (**Deliverable #5**).

6.4.5.1 Contract Termination or Cancellation: Upon termination or cancellation of this contract, the Contractor shall collect all outstanding installation access passes and return them to the issuing office within 5 working days (**Deliverable #6**).

6.6 Common Access Cards (CAC) and CAC Log: Before CAC issuance, the contractor employee requires, at a minimum, a favorably adjudicated National Agency Check with Inquiries (NACI) or an equivalent or higher investigation in accordance with Army Directive

PERFORMANCE WORK STATEMENT (PWS)
United States Military Academy at West Point
Chief Information Officer/G6, Distributed Antenna System Modernization Phase 1

2014-05. The contractor employee will be issued a CAC only if duties involve one of the following: (1) Both physical access to a DoD facility and access, via login, to DoD networks on-site or remotely; (2) Remote access, via logon, to a DoD network using DoD-approved remote access procedures; or (3) Physical access to multiple DoD facilities or multiple non-DoD federally controlled facilities on behalf of the DoD on a recurring basis for a period of 6 months or more. At the discretion of the sponsoring activity, an initial CAC may be issued based on a favorable review of the FBI fingerprint check and a successfully scheduled NACI at the Office of Personnel Management. The Contractor shall ensure safeguarding of Personally Identifiable Information (PII) and comply with requirements under 1.22.5.

6.6.1 The Contractor shall provide a CAC log within the 30 calendar days after contract award and within five (5) days after changes have been made (**Deliverable #7**) (unless circumstances require otherwise and as directed by the Contracting Officer). The COR will provide format and content for the log during the post award meeting. Note - CACs are Government property and must be accounted for.

6.6.2 For contractors that do not require CAC but require access to a DoD facility or installation. Contractor and all associated sub-contractor's employees shall comply with adjudication standards and procedures using the National Crime Information Center Interstate Identification Index (NCIC-III) and Terrorist Screening Database (TSDB) (Army Directive 2014-05/AR 190-13), applicable installation, facility and area commander installation/facility access and local security policies and procedures (provided by government representative).

6.7 Background Checks: The contractor must first stop at the West Point Visitor's Control Center (VCC) and complete a background check to get access to the installation IAW section 6.4.4.

6.8 Physical Security: The Contractor shall safeguard all Government equipment, information, and property provided for Contractor use. At the close of each work period, Government facilities, equipment, and materials shall be secured IAW the Army Physical Security Program (AR 190-13).

6.8.1 Operations Security (OPSEC) Requirements: Contractor personnel shall adhere to facility security policies and restrictions. The Contractor shall immediately report suspicious activities to security personnel.

6.9 Key Control: RESERVED

6.9.1 Lock Combinations: RESERVED

6.10 Badging for Cadet Central Area. The contractor must first stop at the West Point Visitor's Control Center (VCC) and complete actions IAW 6.4.4.

PERFORMANCE WORK STATEMENT (PWS)
United States Military Academy at West Point
Chief Information Officer/G6, Distributed Antenna System Modernization Phase 1

6.11 Visitors: If you are not a Department of Defense issued identification card holder you must obtain an Automated Installation Entry (AIE) by filling out an AIE Credential Request Form.

6.11.1 Escorted Visitors: Escorted visitors are persons who enter West Point accompanied by a qualified escort. Escorted visitors do not need to visit the Visitor Control Center but must remain with the qualified escort and have in their possession an approved form of identification at all times. Department of Defense Identification Card: If you are in possession of a valid (not expired) Department of Defense-issued identification card, you may enter West Point and other federally controlled installations.

6.11.2 Qualified Escorts: Qualified escorts are Department of Defense identification card holders. This includes Common Access Card holders (Military, Civilian Government employees and contractors who have received a NACI background check. A qualified escort must accompany each individual he or she is escorting and can only escort up to 15 individuals.

6.11.3 Unescorted Visitors: Unescorted visitors are persons 18 years of age and above without a valid (not expired) Department of Defense-issued identification card. Unescorted visitors are asked to report to the Visitor Control Center at 2107 New South Post Road, West Point, NY 10996 to apply for a West Point AIE Credential. The Visitor Control Center is open Monday-Sunday from 6 a.m. to 10 p.m. When the Visitor Control Center is closed, visitors will be directed to proceed to Stony Lonesome Gate for a background check and temporary pass.

6.11.4 Identification of Contractor Employees: All Contractor personnel attending meetings, answering Government telephones, and working in other situations where their Contractor status is not obvious to third parties must identify themselves, to include proper marking of signature blocks in correspondence, to avoid creating an impression in the minds of members of the public that they are Government officials. The Contractor shall ensure that all documents or reports, produced by Contractors are suitably marked as Contractor products or that Contractor participation is appropriately disclosed.

6.12 DoD8140 Adherence. All contractor personnel will adhere to requirements for training and certification as defined by DoD8140 and relevant components defined in AR25-1 and AR25-2.

6.13 Section 508 Compliance. All equipment and materials capable of supporting Section 508 compliance will be required to do so in support of the United States Government, the United States Army, and the United States Military Academy.

6.14 Internet Protocol Version 6 (IPv6). All equipment and capabilities recommended by the contractor must support IPv6 natively and must support endpoints utilizing IPv6 as well.

6.15 Contractor workspace RESERVED

PERFORMANCE WORK STATEMENT (PWS)
United States Military Academy at West Point
Chief Information Officer/G6, Distributed Antenna System Modernization Phase 1

6.16 Data Rights: The Government has unlimited rights to all documents and materials produced under this contract. All documents and materials, to include the source codes of software, produced under this contract shall be Government owned and are the property of the Government with all rights and privileges of ownership and copyright belonging exclusively to the Government. These documents and materials may not be used or sold by the Contractor without written permission from the Contracting Officer. All materials supplied to the Government shall be the sole property of the Government and may not be used for any other purpose. This right does not abrogate any other Government rights.

6.17 Non-Disclosure Requirements: RESERVED

6.18 Non-Disclosure Statements: RESERVED

6.19 Protection of Government and Contract Information: Per Public Use Notice of Limitations stated by Defense imagery Management operations Center and contained at www.dimoc.mil/resources/limitations/, the Contractor shall not cite any information (e.g., contract information, pictures, locations, etc.) obtained through this contract on any hard copy or digital marketing tools to include its company website.

6.20 Organizational Conflict of Interest (OCI): RESERVED

6.21 Government Property and Services: RESERVED

PERFORMANCE WORK STATEMENT (PWS)
United States Military Academy at West Point
Chief Information Officer/G6, Distributed Antenna System Modernization Phase 1

PART 7

SAFETY

7.1 Safety: The following provides information pertaining to Safety and Accident Prevention:

7.1.1 The Contractor is responsible for all employees who are assigned to this contract, are familiar with all risk's associated with the tasks performed under this PWS and that all applicable Personal Protective Equipment(PPE), is used in accordance with the manufacturer's guidelines.

a. In all areas where construction, demolition, alteration, building, or similar related activities take place, the Contractor shall have the following minimum personal protective clothing and equipment requirements in place for any person working on or visiting the site:

Short sleeve shirt;

Long trousers.

Steel-toed safety boots

Hard hat.

Eye Protection

7.2 In addition to other requirements for accident prevention specified in this contract, the Contractor shall comply with all Federal and State requirements governing safety and health protection on construction sites and other applicable occupational safety codes. The Contractor shall indicate its plan for compliance considering conditions of the work described by the design, technical proposal, operational activities of the Government or others in the area of the work, identification of the coordinator, and implementation of all other accident prevention provisions of this contract.

7.4 Environmental Compliance: The following provides information on Environmental Compliance.

7.4.1 Environmental Compliance Plan and Program: If contract requires the use of hazardous materials/substances, the Contractor shall, prior to mobilization, inform the Contracting Officer (KO)/Contracting Officer Representative (COR) of the types and number of hazardous materials needed to be brought onto the Garrison in order to fulfill their contractual requirements. Contractors shall also provide the Safety Data Sheets, storage requirements and proposed storage locations for the hazardous material. The KO/COR shall provide a copy of this information to the Garrison Fire Department and the Environmental Division.

PERFORMANCE WORK STATEMENT (PWS)
United States Military Academy at West Point
Chief Information Officer/G6, Distributed Antenna System Modernization Phase 1

The Contractor shall clean up at its own expense any contamination, including soil and ground water contamination caused by hazardous materials/substances brought onto the garrison, or by his activities. The Contractor must immediately report any hazardous substance spills to the Garrison Fire Department at (315) 774-9200.

PERFORMANCE WORK STATEMENT (PWS)
United States Military Academy at West Point
Chief Information Officer/G6, Distributed Antenna System Modernization Phase 1

PART 8

TRAINING

8.1 Required Training: The following provides information on training requirements.

8.1.1 Anti-Terrorism (AT) Level I Training: Pursuant to Department of Defense Instruction Number 2000.16, "DoD Antiterrorism (AT) Standards," dated October 2, 2006, each contractor employee requiring access to a Federally-controlled installation, facility and/or Federally-controlled information system(s) shall complete Level I AT Awareness Training on an annual basis and receive a certificate of completion. The training is accessible from any computer and is available at <https://jkodirect.jten.mil/Atlas2/page/login/Login.jsf> follow the below instructions:

1. Click – DOD CAC or No DOD CAC
2. Next click - I am a U.S. mil, government civil servant, or contract employee
3. Next click - I've been directed to take required training on JKO
4. Next click - Courses
5. I do not have a .MIL, .GOV, or .NDU.EDU address or I am a Multi-National Student
6. Fill out the contact sheet and email to sponsor (COR)
7. Sponsor (COR) will email to the JKO help desk

8.1.2 OPSEC Training: All Contractor employees, including subcontractors, shall complete Level I OPSEC training within 10 calendar days of employment under this contract. Verification of the training shall be provided to the COR within after completion of the training. OPSEC Level I training is available at <http://www.cdse.edu/catalog/elearning/GS130.html>. Contractor personnel must complete refresher training every 12 months. Verification of the training shall be provided to the COR within 10 calendar days after completion of the training.

If training cannot be conducted on the website, the Contractor shall coordinate with the COR, who will contact the local OPSEC Officer at their assigned location for classroom training. Contractor personnel completing training in the classroom will receive a certificate or the training attendance roster signed by the OPSEC Officer. Verification of the training shall be provided to the COR within 10 calendar days after completion of the training.

8.1.3 iWATCH Training: The Contractor shall brief all personnel performing work under this contract on the local iWATCH program [training standards provided by the requiring activity Antiterrorism Office (ATO)]. This local developed training will be used to inform employees of the types of behavior to watch for and instruct employees to report suspicious activity to the COR. This training shall be completed within 30 calendar days of contract award with the results reported to the COR NLT 45 calendar days after contract award.

(a) New employees/contractors shall complete the training within 10 calendar days of commencing performance of work under this contract.

PERFORMANCE WORK STATEMENT (PWS)
United States Military Academy at West Point
Chief Information Officer/G6, Distributed Antenna System Modernization Phase 1

The COR and contractor are responsible for ensuring that all applicable employees have completed antiterrorism awareness training and shall certify that their workforce has completed the training through the submission of completion certificate(s) to the Contracting Officer and the Contracting Officer's Representative (if appointed) within five working days after contract award or prior to access to a Federally-controlled installation or information system.

(b) In the event that the automated system is not available (e.g., server problems), Level I AT Awareness Training can be provided by a qualified instructor. However, if the training is not completed online, the Level I AT Awareness Instructor qualification must be coordinated with the USAG Antiterrorism Officer (or Installation Security equivalent) and the resultant name(s) of approved instructors shall be provided the contracting officer or designee along with all associated cost or schedule impacts to the contract. (c) Antiterrorism performance (Level I AT Awareness Training attendance and compliance) may be documented as a performance metric under the resultant contract, and be part of past performance information in support of future source selections.

(c) Documentation of this training will be made available to the Installation Antiterrorism Officer upon request.

8.1.4 Information Assurance (IA) Training RESERVED

8.1.5 RESERVED

8.1.6 DoD and Army Certification Compliance. RESERVED

8.1.7 Personally Identifiable Information (PII): RESERVED

PERFORMANCE WORK STATEMENT (PWS)
United States Military Academy at West Point
Chief Information Officer/G6, Distributed Antenna System Modernization Phase 1

PART 9

DEFINITIONS & ACRONYMS

9. Definitions and Acronyms

9.1 Definitions: Although not inclusive of every term used within this PWS, the following provides a list of definitions used throughout this PWS and commonly used in the acquisition field.

Contractor – means a supplier or vendor awarded a contract to provide specific supplies or service to the Government. The term used in this contract refers to the prime.

Contractor-acquired Property - means property acquired, fabricated, or otherwise provided by the Contractor for performing a contract and to which the Government has title.

Day – means, unless otherwise specified, a calendar day.

Defective Service – means a service output that does not meet the standard of performance associated with the Performance Work Statement.

Deliverable – means anything that can be physically delivered but may include non-manufactured things such as meeting minutes or reports.

Government-furnished Property – As reflected in FAR 52.245-1, Government-furnished Property “means property in the possession of, or directly acquired by, the Government and subsequently furnished to the Contractor for performance of a contract. Government-furnished property includes, but is not limited to, spares and property furnished for repair, maintenance, overhaul, or modification. Government-furnished property also includes contractor-acquired property if the contractor-acquired property is a deliverable under a cost contract when accepted by the Government for continued use under the contract

Government Property - means all property owned or leased by the Government. Government property includes both Government-furnished and Contractor-acquired property. Government property includes material, equipment, special tooling, special test equipment, and real property. Government property does not include intellectual property and software.

Property Administrator - means an authorized representative of the Contracting Officer appointed in accordance with agency procedures, responsible for administering the contract requirements and obligations relating to Government property in the possession of a Contractor.

PERFORMANCE WORK STATEMENT (PWS)
United States Military Academy at West Point
Chief Information Officer/G6, Distributed Antenna System Modernization Phase 1

High Level Objective (HLO) – means a key overarching result-based objective for a project necessary to achieve the project’s vision. HLOs are similar to Level 2 in a Work Breakdown Structure. Each HLO may contain several statements to flesh out the areas necessary to meet the objective.

Physical Security – means that part of security concerned with physical measures designed to safeguard personnel; to prevent unauthorized access to equipment, installations, material, and documents; and to safeguard against espionage, sabotage, damage, and theft.

Quality Assurance – (or Government contract quality assurance) means the various functions, including, inspection, performed by the Government to determine whether a Contractor has fulfilled the contract obligations pertaining to quality and quantity.

Quality Assurance Surveillance Plan (QASP) – means the key Government-developed surveillance process document and is applied to Performance-Based Service Contracting (PBSC). The QASP is used for managing Contractor performance assessment by ensuring that systematic quality assurance methods validate that Contractor quality control efforts are timely, effective, and are delivering the results specified in the contract or task order. The QASP directly corresponds to the performance objectives and standards (i.e., quality, quantity, timeliness) specified in the Performance Work Statement (PWS). It provides specific details on how the Government will survey, observe, test, sample, evaluate, and document Contractor performance results to determine if the Contractor has met the required standards for each objective in the PWS. The QASP, with very few if any exceptions, is an internal to Government document.

Quality Control – means all necessary measures taken by the Contractor to assure that the quality of an end product or service shall meet contract requirements.

Statement – means the specific results-based activities required to satisfy HLOs. A statement contains a result, the context of the statement, and the required action(s). Statements focus on “what” is to be accomplished; however, they are not prescriptive in describing “how” the outcome is to be achieved. Each HLO may have several statements to flesh out the areas necessary to meet the objective. Statements are similar to Level 3 in a Work Breakdown Structure.

Subcontractor – means one that enters into a contract with a prime Contractor. The Government does not have privity of contract with the subcontractor.

Workday - The number of hours per day the Contractor provides services in accordance with the contract.

Work Week - Monday through Friday, unless otherwise specified.

PERFORMANCE WORK STATEMENT (PWS)
United States Military Academy at West Point
Chief Information Officer/G6, Distributed Antenna System Modernization Phase 1

9.2 Acronyms: Although not inclusive of every term used within this PWS, or that may be included in an acquisition, the following provides a list of acronyms commonly used in the acquisition field.

ACOR	Alternate Contracting Officer's Representative
AE	Army in Europe
AFARS	Army Federal Acquisition Regulation Supplement
AHA	Activity Hazard Analysis
AOR	Area of Responsibility
AR	Army Regulation
AT	Anti-terrorism
ATCTS	Army Training Certification Tracking System
CAC	Common Access Card
CCE	Contracting Center of Excellence
CFE	Conventional Forces Europe
CFR	Code of Federal Regulations
CONUS	Continental United States (excludes Alaska and Hawaii)
COR	Contracting Officer's Representative
COTS	Commercial-Off-the-Shelf
DA	Department of the Army
DAS	Distributed Antenna System
DD250	Department of Defense Form 250 (Receiving Report)
DD254	Department of Defense Contract Security Requirement List
DFARS	Defense Federal Acquisition Regulation Supplement
DMDC	Defense Manpower Data Center
DoD	Department of Defense
FAR	Federal Acquisition Regulation
FRG	Federal Republic of Germany
GFP	Government Furnished Property
HLO	High Level Objective
HIPAA	Health Insurance Portability and Accountability Act of 1996
IA	Information Awareness
IAC	Installation Access Control
IACO	Installation Access Control Office
ID	Identification
IGCE	Independent Government Cost Estimate
IT	Information Technology
JTR	Joint Travel Regulation
JPAS	Joint Personnel Adjudication System
KO	Contracting Officer
OCI	Organizational Conflict of Interest
OCONUS	Outside Continental United States (includes Alaska and Hawaii)
ODC	Other Direct Costs

PERFORMANCE WORK STATEMENT (PWS)
United States Military Academy at West Point
Chief Information Officer/G6, Distributed Antenna System Modernization Phase 1

OPSEC	Operations Security
PA	Property Administrator
PII	Personally Identifiable Information
PIPO	Phase In/Phase Out
POC	Point of Contact
PRS	Performance Requirements Summary
PWS	Performance Work Statement
QA	Quality Assurance
QAP	Quality Assurance Program
QASP	Quality Assurance Surveillance Plan
QC	Quality Control
QCP	Quality Control Program
RA	Requiring Activity
RCO	Regional Contracting Office
SIGE	Safety and Health Protection Plan
STD	Standard
TE	Technical Exhibit
USAG	United States Army Garrison
USAREUR	United States Army Europe
UOM	Unit of Measure
WREN	Westpoint Research and Development Network

PERFORMANCE WORK STATEMENT (PWS)
United States Military Academy at West Point
Chief Information Officer/G6, Distributed Antenna System Modernization Phase 1

PART 10

GOVERNMENT PROPERTY (GP) AND SERVICES

10. Government Property and Services

10.1 Services: NONE

10.2 Facilities: The Government will provide the necessary workspace for the contractor staff to provide the support outlined in this PWS to include desk space, and other items necessary to maintain an office environment. For access to the facilities beyond normal duty hours, the contractor shall coordinate approval with the COR.

10.3 Utilities: The Government will provide all utilities in the facility will be available for the contractor's use in performance of duties outlined in this PWS. The contractor shall instruct employees in utilities conservation practices. The contractor shall be responsible for operating under conditions that preclude the waste of utilities. The Contractor shall instruct employees in utilities conservation practices. The Contractor shall operate under conditions that preclude the waste of utilities, which include turning off the water faucets or valves, light switches, etc. after using the required amount to accomplish tasks requiring the use of the utilities.

10.4 Equipment: The Government will provide access to equipment and operating areas affected by this PWS.

10.5 Special Tooling and Test Equipment: NONE

10.6 Materials: RESERVED

10.7 Training: The Government will provide the following training: AT Level 1 Awareness, OPSEC, iWATCH.

10.8 Common Access Cards (CAC): The Government will provide Common Access Cards (CAC) via the MPS- Mission Partner Sponsorship Web Application. (Web site <https://mpartnerspnrweb.dmdc.osd.mil/mpartnerspnrweb/app/>).

**PERFORMANCE WORK STATEMENT (PWS)
United States Military Academy at West Point
Chief Information Officer/G6, Distributed Antenna System Modernization Phase 1**

PART 11

CONTRACTOR FURNISHED ITEMS AND SERVICES

11.1. Contractor Furnished Property and Services

11.2. General: The Contractor shall furnish all personnel, equipment, supplies, transportation, tools, materials, supervision, and other items necessary to perform services as described in the PWS and associated contract documents, except for those items specified in Part 10, Government Property and Services.

11.3 Secret Facility Clearance: RESERVED

11.4. Materials: The contractor shall provide all materials and to satisfy the requirements within this PWS.

11.5 Vehicles and Equipment: The Contractor shall provide all vehicle and equipment necessary to perform tasks within this PWS. All vehicles and equipment shall be owned or leased by the contractor. The Contractor shall not use any Government-owned tools, materials, or parts to maintain Contractor vehicles and equipment without prior written approval of the Contracting Officer. The COR may inspect the Contractor's vehicles and equipment at any time.

11.6. Background Checks): RESERVED.

PERFORMANCE WORK STATEMENT (PWS)
United States Military Academy at West Point
Chief Information Officer/G6, Distributed Antenna System Modernization Phase 1

PART 12

APPLICABLE PUBLICATIONS

12.1. Applicable Publications (Current Editions): The following publications, manuals, regulations, etc. are mentioned in this PWS and are listed below.

- 12.2. Department Of Defense Contract Security Classification Specification (DD Form 254)
- 12.3. Department of Defense Security Agreement (DD Form 441)
- 12.4. National Industrial Security Program Operating Manual (DoD 5220.22-M)
- 12.5. The Army Physical Security Program (AR 190-13)
- 12.6. U.S. Army Corps of Engineers Safety and Health Requirements Manual (EM 385-1-1)
- 12.7. Information Assurance Workforce Improvement Program (DoD 8570-M)
- 12.8. Information Assurance Training Certification and Workforce Management Directive (DoDD 8570.01)
- 12.9. Information Assurance (AR 25-2)
- 12.10. Electromagnetic Compatibility Directive (2004/108/EC)
- 12.11. Policies and Procedures for Property Accountability (AR 735-5)
- 12.12. BICSI 006 DAS design and implementation
- 12.13 NFPA 70 (NEC) Electrical safety and installation
- 12.14 IEEE 1100, 1584, 3007.1 Grounding, arc-flash, ESD safety
- 12.15 IFC Section 510 Fire code compliance for public safety DAS
- 12.16 FCC Regulations Frequency and interference control
- 12.17 47 CFR 1.1310 Radiofrequency Radiation Exposure Limits
- 12.18 47 CFR 90.219, Use of Signal Boosters
- 12.19 ANSI/TIA-569, Telecommunications Pathways and Spaces
- 12.20 ANSI/TIA-606 Administration Standard for Telecommunications Infrastructure
- 12.21 TIA TSB-5018 Structured Cabling Infrastructure Guidelines to Support Distributed Antenna Systems
- 12.22 Manufacturers Guidelines Major Equipment Manufacturers Installation Guidance
- 12.23 ANSI/TIA-607-E Telecommunications Bonding and Grounding

**PERFORMANCE WORK STATEMENT (PWS)
United States Military Academy at West Point
Chief Information Officer/G6, Distributed Antenna System Modernization Phase 1**

PART 7

ATTACHMENT AND TECHNICAL EXHIBIT LISTING

7. Attachment and Technical Exhibit List

7.1 Technical Exhibit A – Deliverables Schedule

7.2 Technical Exhibit B – Facility Floor Plans

7.3 Attachment 1 – Building 758, Jefferson Hall Library

7.4 Attachment 2 – General Instructions Building (GIB)

7.5 Attachment 3 – Building 752, Mahan Hall

PERFORMANCE WORK STATEMENT (PWS)
United States Military Academy at West Point
Chief Information Officer/G6, Distributed Antenna System Modernization Phase 1

TECHNICAL EXHIBIT A
DELIVERABLES SCHEDULE

<u>Deliverable</u>	<u>Frequency</u>	<u># of Copies</u>	<u>Medium/Format</u>	<u>Submit To</u>
1. Contractor Work Plan. Parag 2.1.4	10 Days after date of contract award	1	Electronic	COR
2. Quality Control Plan, para 4.1	10 Days after date of contract award	1	Electronic	COR
3. Identification of Key Personnel. Para 5.1	5 Days after contract award	1	Email	COR
4. Installation Pass Log, para 6.4.4	5 Days after all employees satisfy security requirements. 5 Days after any changes	As Needed	Electronic	COR
5. Turn in of access passes, para 6.4.5.	3 Days upon termination of employee	As Required	Issued document	Issuing Office or COR
6. Turn in of passes, para 6.4.5.1	5 Days after contract termination or cancellation	As Required	Issued Document	Issuing Office or COR
7. CaC Log. Para 6.6	30 Days after contract award. 5 Days after changes	As Required	Electronic	COR
8. Anti-Terrorism (AT) Level 1 Training. para 8.1.1	15 Days after Contract Award/15 Days upon new employees	1	Electronic	COR
9. OPSEC Training. Para 8.1.2	10 DAYS of employment under this contract	1	Electronic	COR

PERFORMANCE WORK STATEMENT (PWS)
United States Military Academy at West Point
Chief Information Officer/G6, Distributed Antenna System Modernization Phase 1

<u>Deliverable</u>	<u>Frequency</u>	<u># of Copies</u>	<u>Medium/Format</u>	<u>Submit To</u>
10. iWATCH Training. Para 8.1.3.	15 Days of Contract award, 5 days of new employees	1	Electronic	COR
11. Propagation Study, para 2.2.2.a/2.3.2.a/2.5.1.a	5 Days upon completion	1 per facility	Electronic	COR
12. Closeout Documentation. Para 2.2.6./2.3.6./2.4.4/2.5.4.	15 Days after final inspection	1 Per Facility	Electronic/Drawings in PDF	COR
<u>Deliverable</u>	<u>Frequency</u>	<u># of Copies</u>	<u>Medium/Format</u>	<u>Submit To</u>

PERFORMANCE WORK STATEMENT (PWS)
United States Military Academy at West Point
Chief Information Officer/G6, Distributed Antenna System Modernization Phase 1

TECHNICAL EXHIBIT B


Facility Floor Plans


Bldg 758 Jefferson Hall



FLOOR NET:
19132.26 SQ.FT.


FLOOR GROSS:
21493.15 SQ.FT.



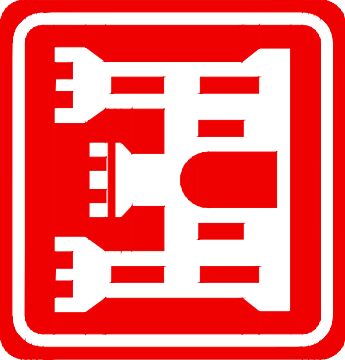

0 4' 8' 16'

SCALE: $1/8" = 1'-0"$

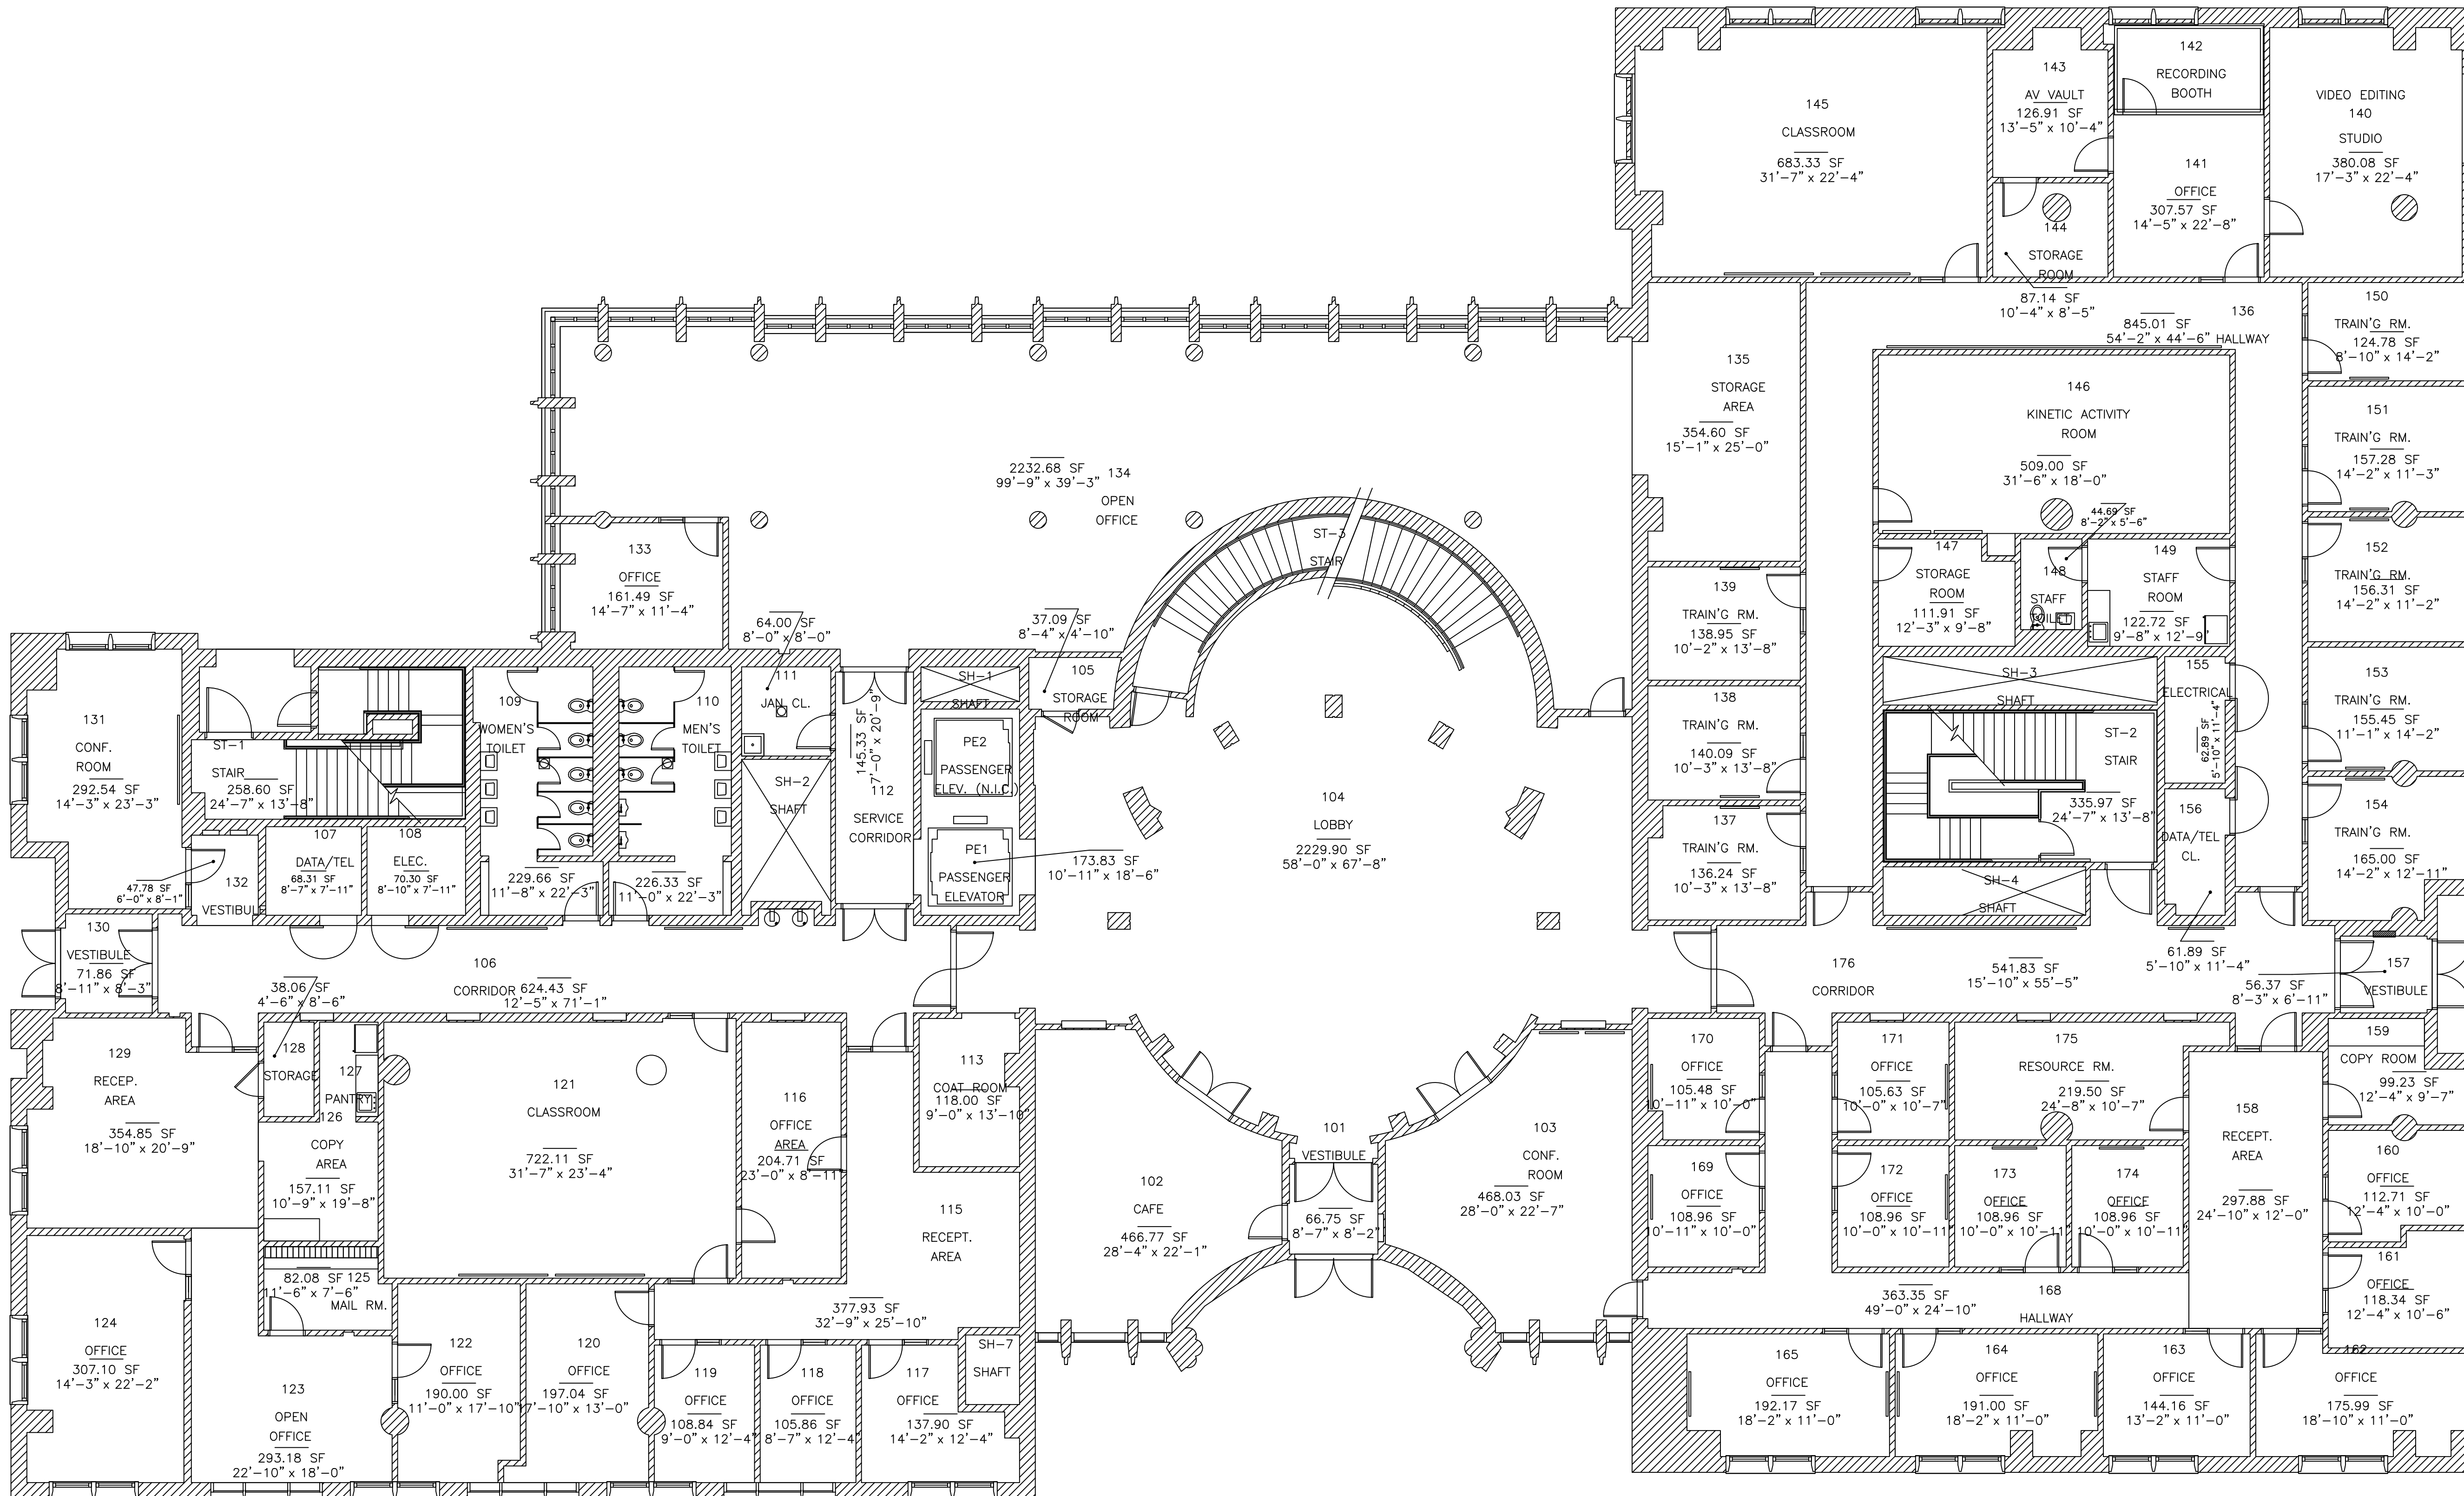


FIRST FLOOR
1/8" = 1'-0"


NOTES:
1. DIMENSIONS HAVE BEEN EITHER FIELD VERIFIED TO ±6" OR GATHERED FROM AS-BUILT DRAWINGS.
2. THIS IS A APPROXIMATE REPRESENTATION OF EXISTING CONDITIONS.

FLOOR NET:
2210.80 SQ.FT.
FLOOR GROSS:
23754.85 SQ.FT.

NOT FOR
CONSTRUCTION
DO NOT SCALE

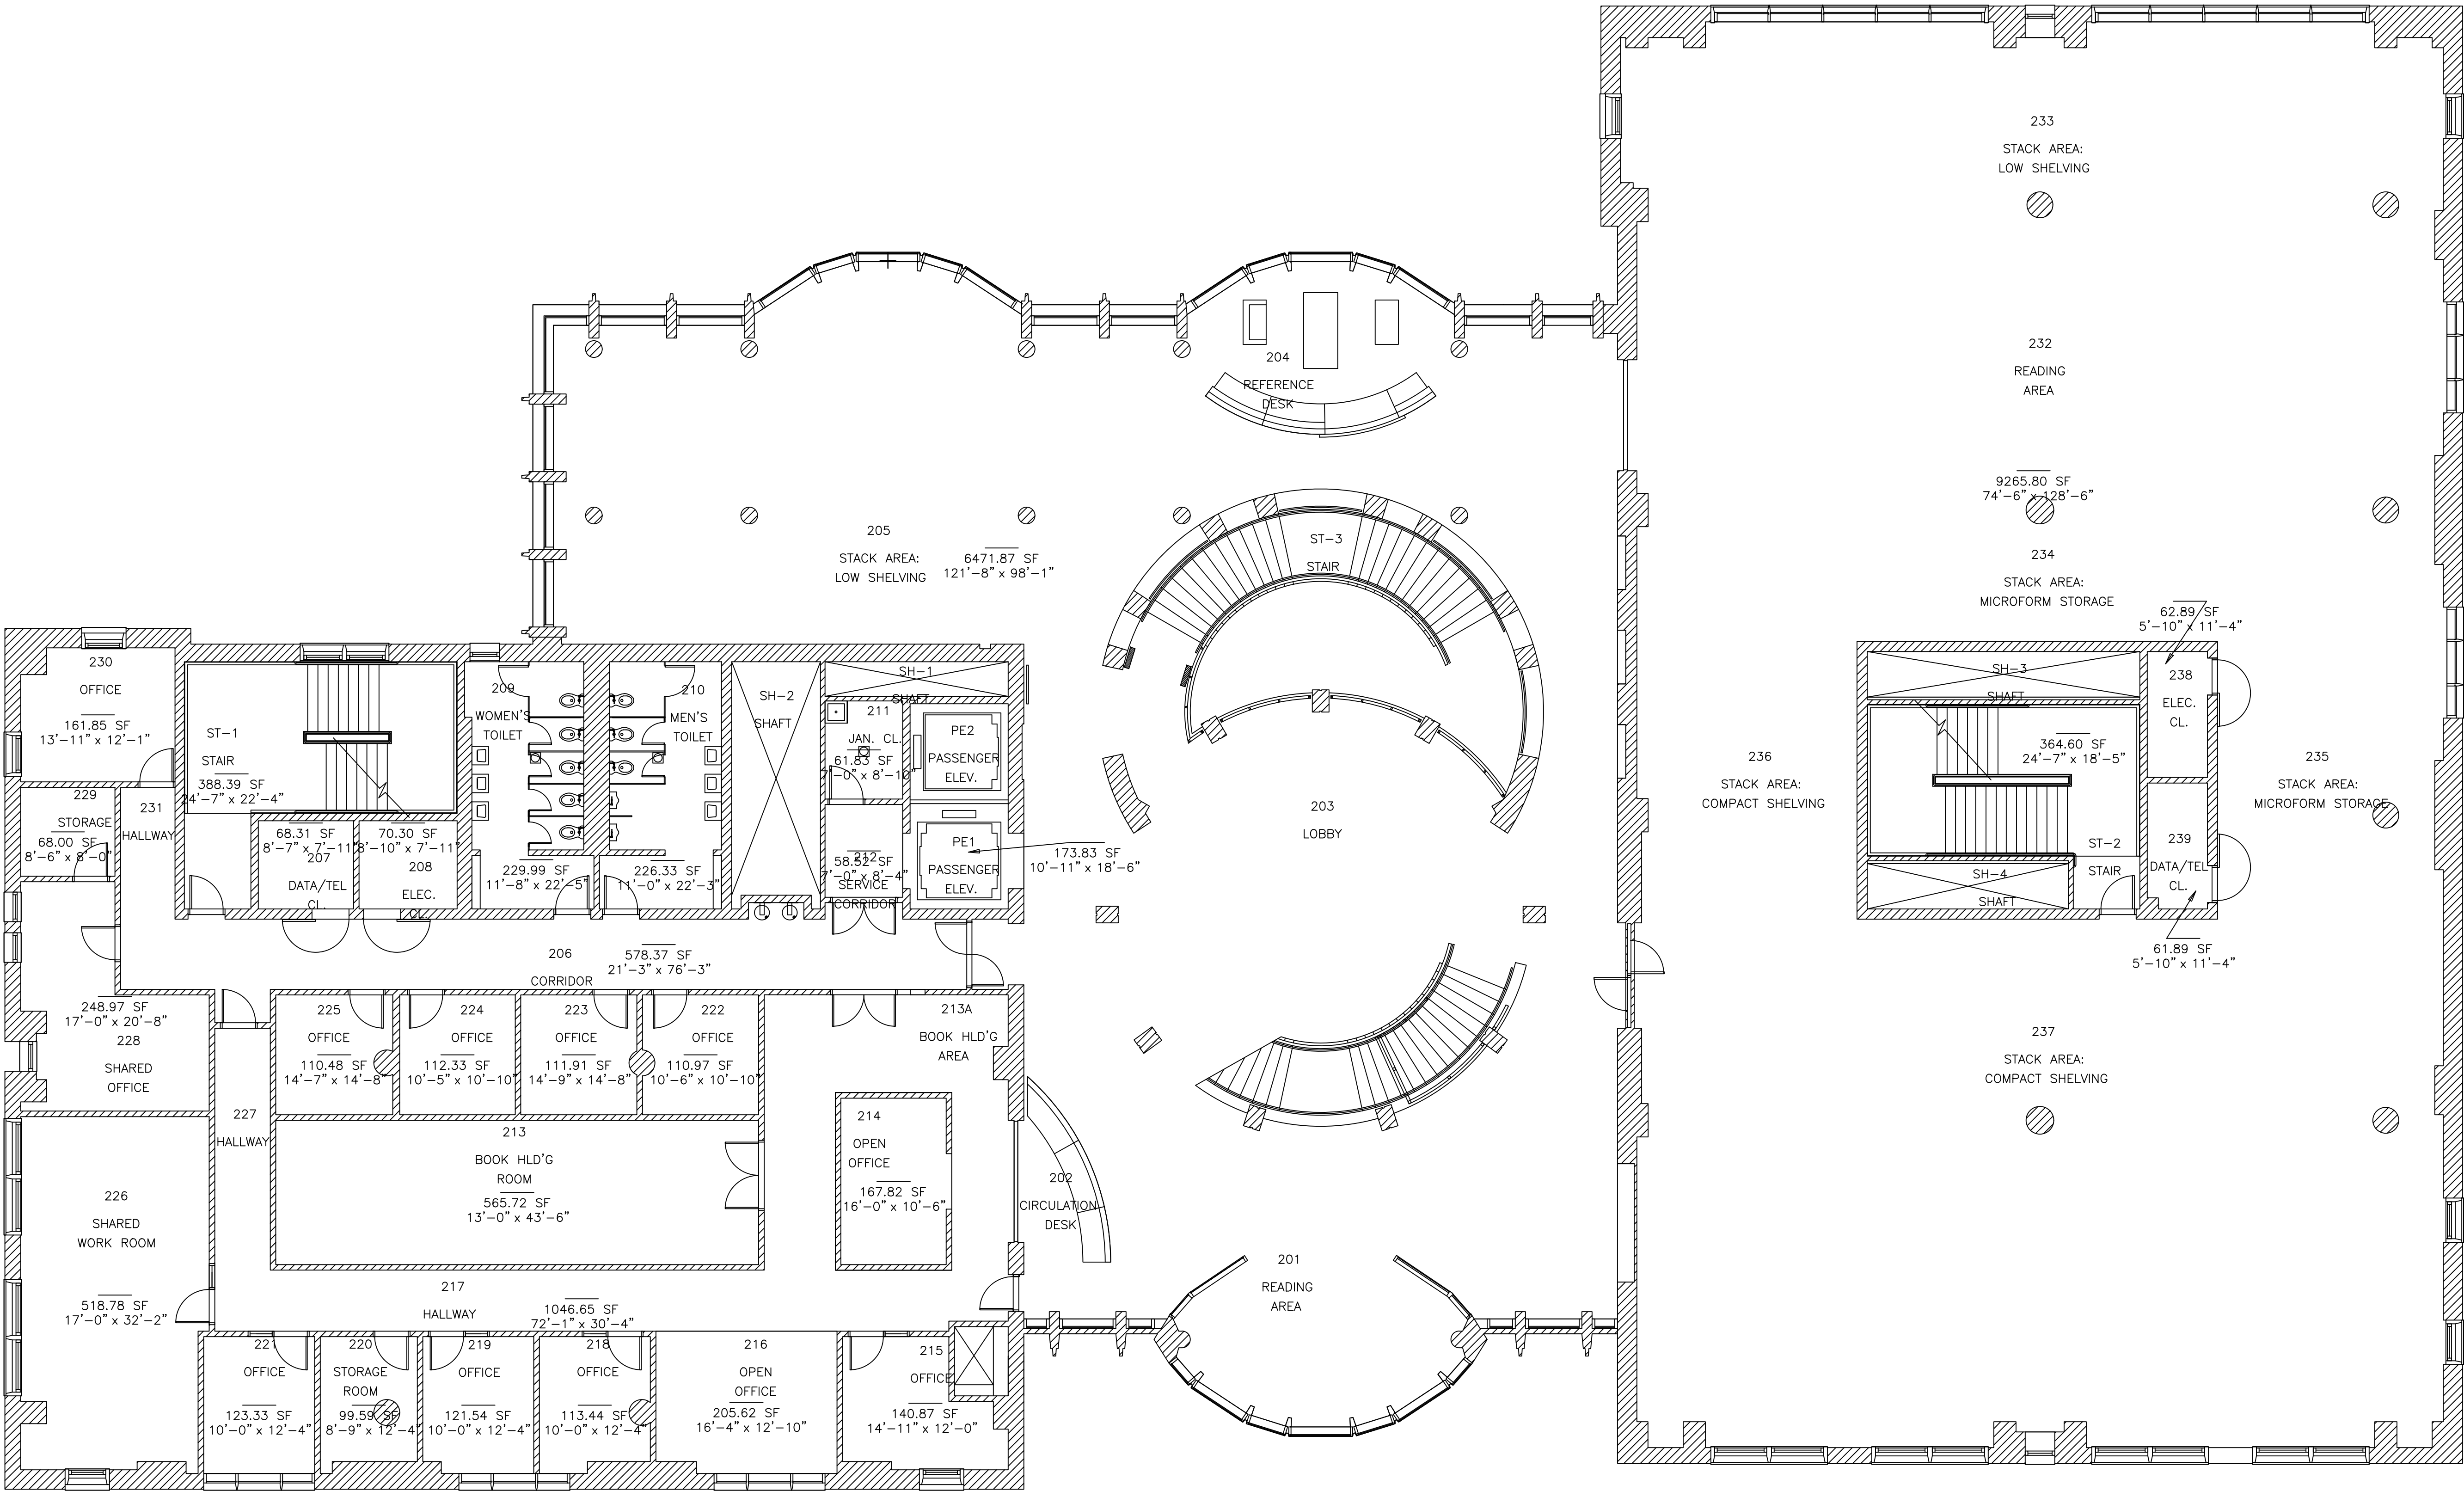

SECOND FLOOR
1/8" = 1'-0"

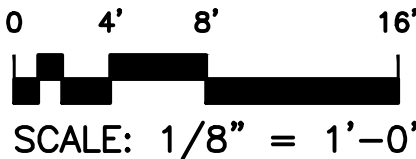

DIRECTORATE OF PUBLIC WORKS
ENGINEERING PLANS & SERVICES DIVISION
US ARMY GARRISON
WEST POINT, NY
JEFFERSON LIBRARY
SECOND FLOOR

P.M.:		CHECKED:		SUBMITTED:		APPROVED:	
DATE: NOVEMBER 12		DRAWN:		DESIGNED:		REVISIONS	
						DATE	
						BY	
						#	
						DESCRIPTION	

SHEET NUMBER:
3
SHEET 3 OF 7

NOTES:
1. DIMENSIONS HAVE BEEN EITHER FIELD VERIFIED TO ±6" OR GATHERED FROM AS-BUILT DRAWINGS.
2. THIS IS A APPROXIMATE REPRESENTATION OF EXISTING CONDITIONS.


N


FLOOR NET:
22154.41 SQ.FT.

FLOOR GROSS:
23751.08 SQ.FT.


NOT FOR
CONSTRUCTION
DO NOT SCALE

DPW
Directorate of Public Works



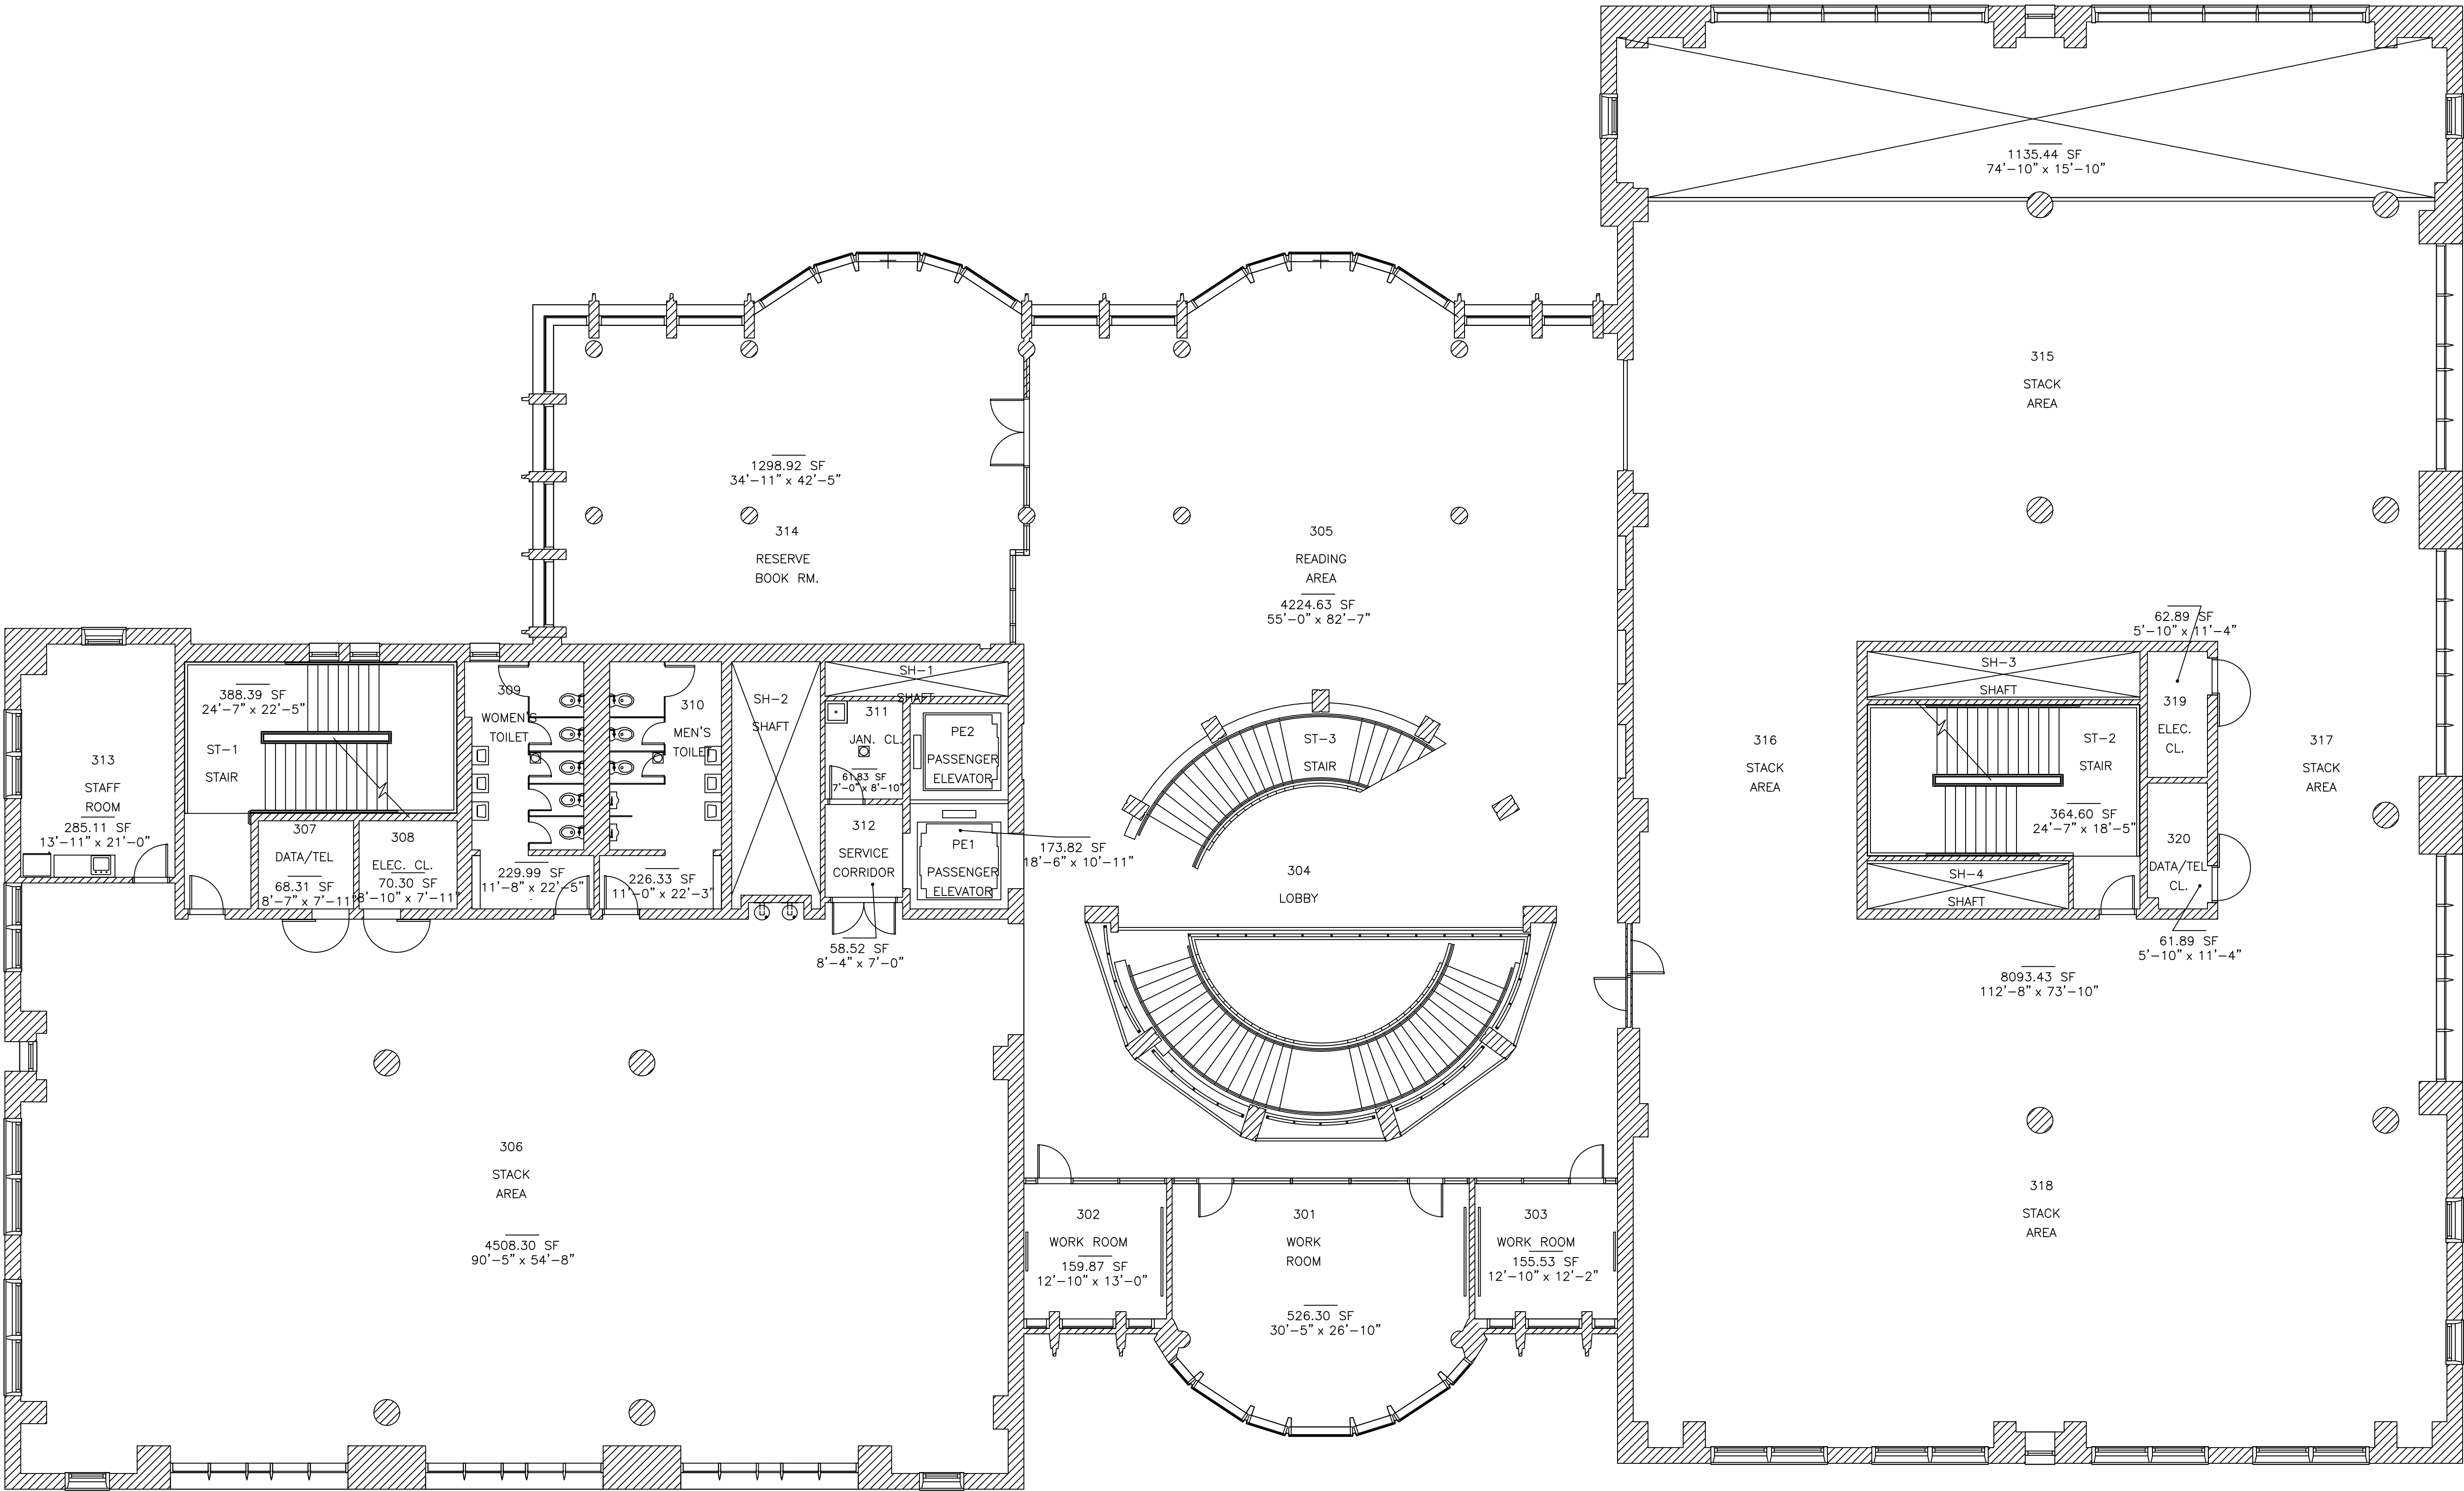


THIRD FLOOR
1/8" = 1'-0"

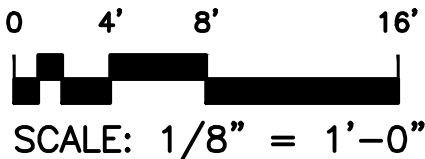

SCALE: 1/8" = 1'-0"		P.M.:	
DATE: NOVEMBER 12		CHECKED:	
DRAWN:		SUBMITTED:	
DESIGNED:		APPROVED:	


REVISIONS			
#	DESCRIPTION	DATE	BY

NOTES:
1. DIMENSIONS HAVE BEEN EITHER FIELD VERIFIED TO ±6" OR GATHERED FROM AS-BUILT DRAWINGS.
2. THIS IS A APPROXIMATE REPRESENTATION OF EXISTING CONDITIONS.



FLOOR NET:
21558.70 SQ.FT.
FLOOR GROSS:
23531.23 SQ.FT.

NOT FOR
CONSTRUCTION
DO NOT SCALE



SCALE: 1/8" = 1'-0"	P.M.:
	CHECKED:
	SUBMITTED:
	APPROVED:
DATE: NOVEMBER 12	
DRAWN:	
DESIGNED:	

REVISIONS		
#	DESCRIPTION	DATE



DIRECTORATE OF PUBLIC WORKS
ENGINEERING PLANS & SERVICES DIVISION
US ARMY GARRISON
WEST POINT, NY
JEFFERSON LIBRARY
FOURTH FLOOR

SHEET NUMBER:


5

SHEET 5 OF 7

FOURTH FLOOR
1/8" = 1'-0"

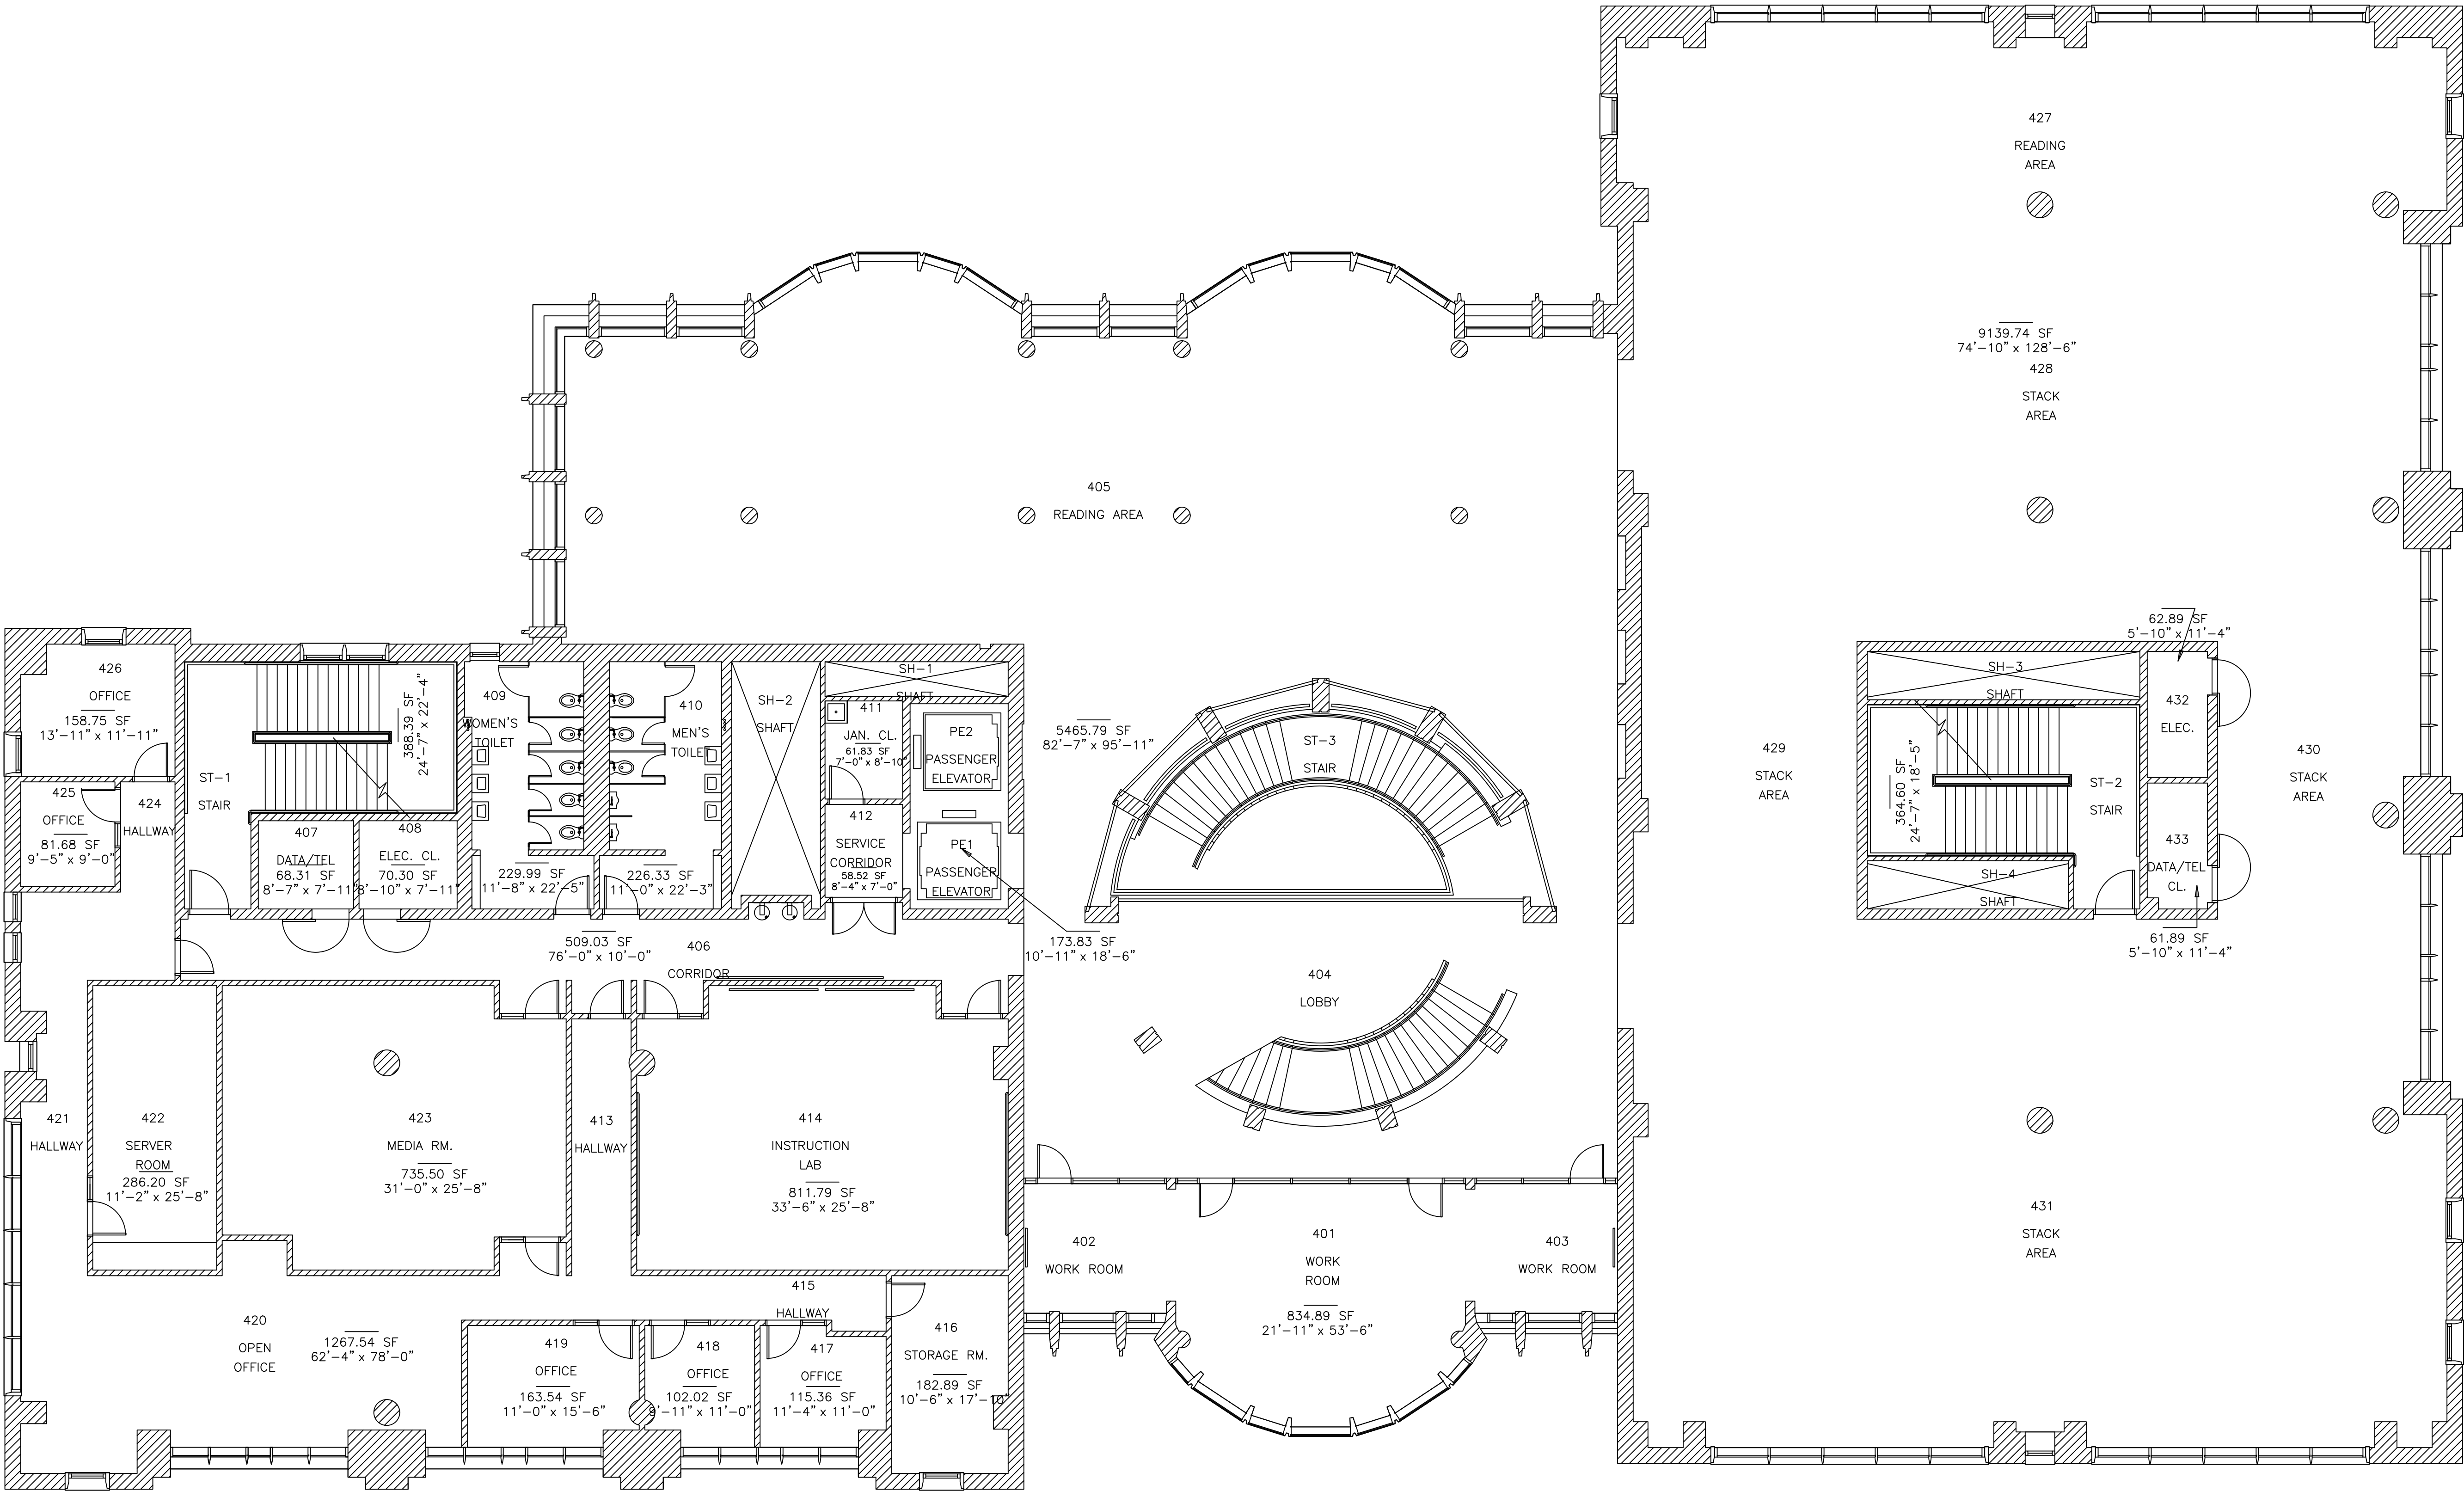
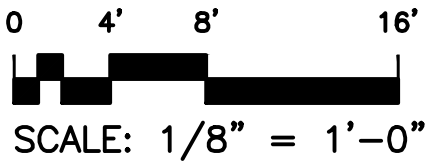


NOTES:
1. DIMENSIONS HAVE BEEN EITHER FIELD VERIFIED TO ±6" OR GATHERED FROM AS-BUILT DRAWINGS.
2. THIS IS A APPROXIMATE REPRESENTATION OF EXISTING CONDITIONS.




FLOOR NET:
21558.70 SQ.FT.
FLOOR GROSS:
23531.23 SQ.FT.

NOT FOR
CONSTRUCTION
DO NOT SCALE

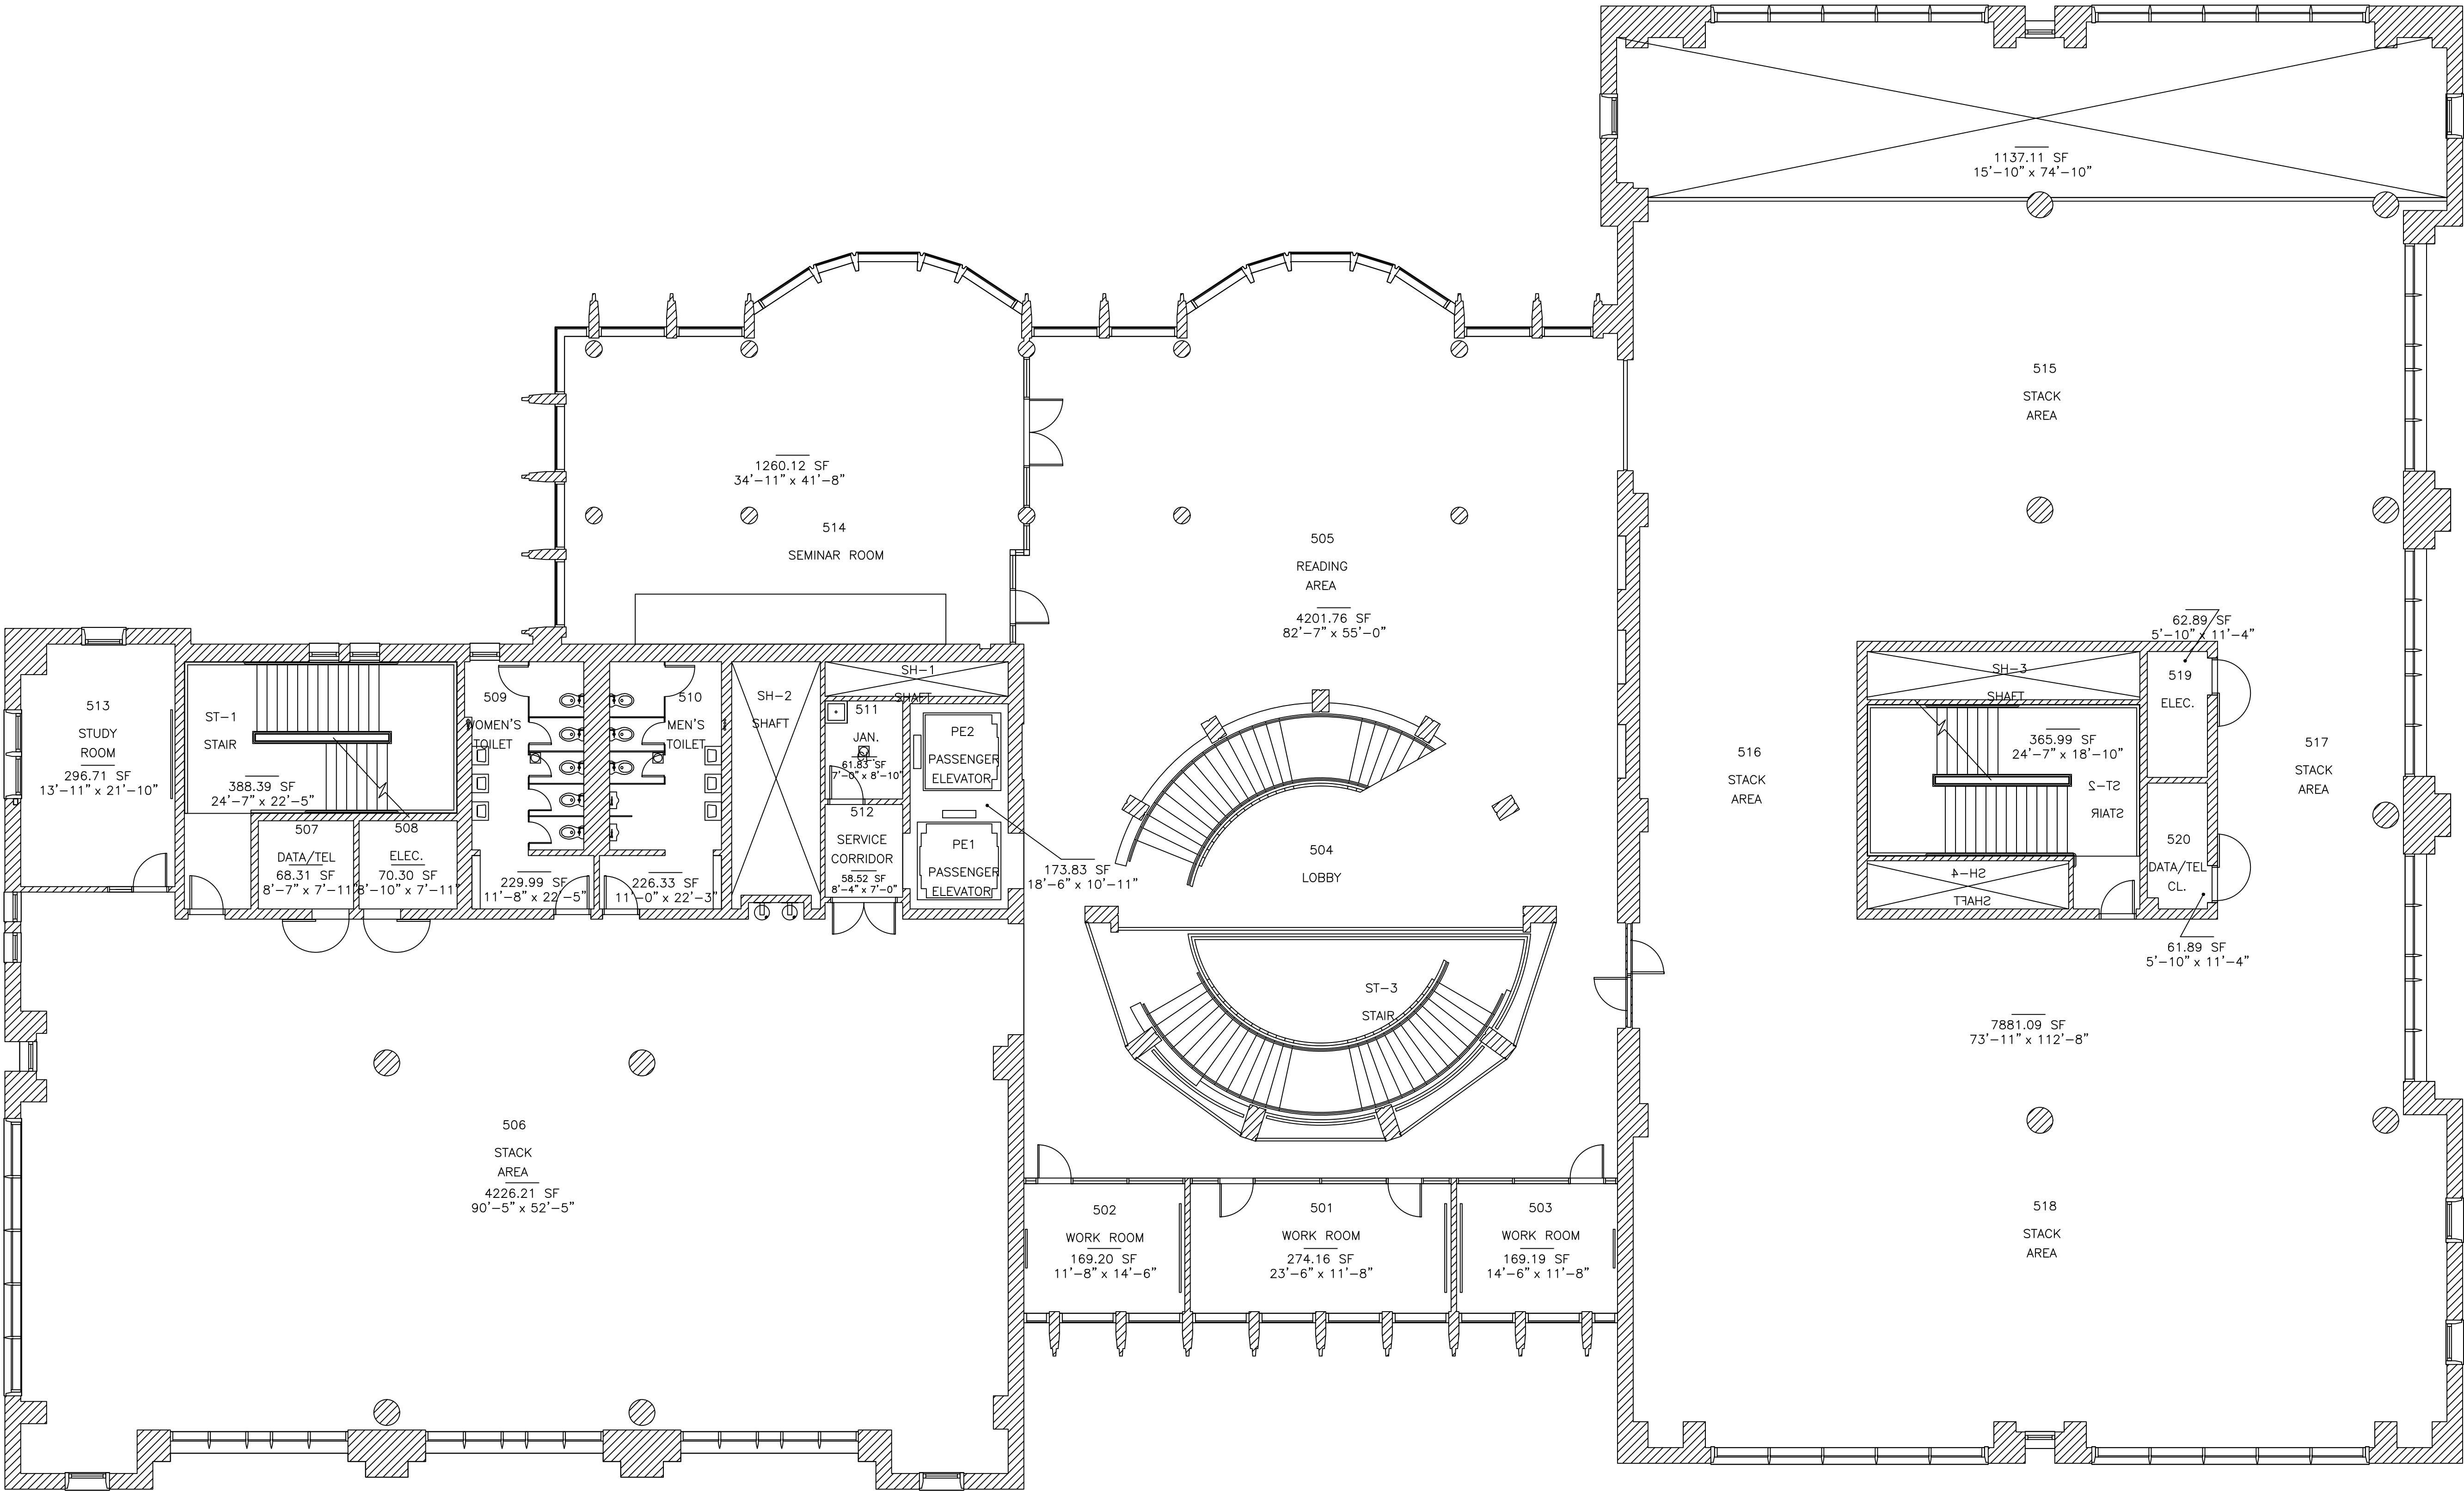



FIFTH FLOOR
1/8" = 1'-0"

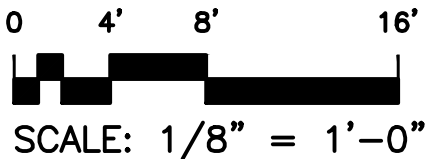

SCALE: 1/8" = 1'-0"		P.M.:	
DATE: NOVEMBER 12	CHECKED:		
DRAWN:	SUBMITTED:		
DESIGNED:	APPROVED:		
REVISIONS			
#	DESCRIPTION	DATE	BY

DIRECTORATE OF PUBLIC WORKS
ENGINEERING PLANS & SERVICES DIVISION
US ARMY GARRISON
WEST POINT, NY
JEFFERSON LIBRARY
FIFTH FLOOR

NOT FOR
CONSTRUCTION
DO NOT SCALE

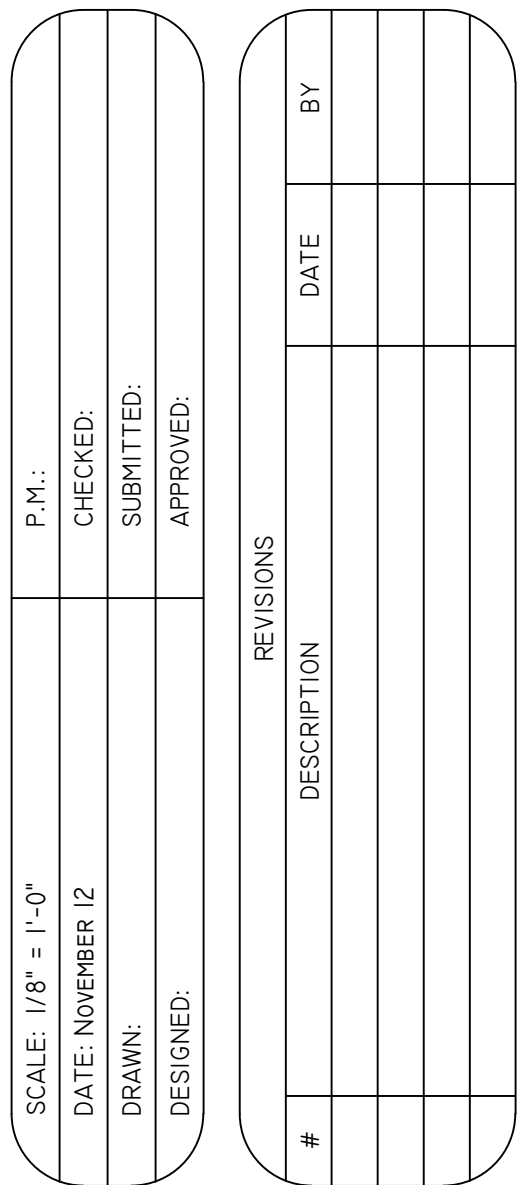


DIRECTORATE OF PUBLIC WORKS
ENGINEERING PLANS & SERVICES DIVISION
US ARMY GARRISON
WEST POINT, NY

JEFFERSON LIBRARY
SIXTH FLOOR

7



SHEET 7 OF 7

SIXTH FLOOR
1/8" = 1'-0"

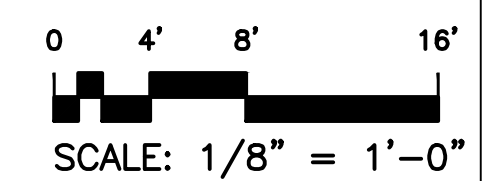

PERFORMANCE WORK STATEMENT (PWS)
United States Military Academy at West Point
Chief Information Officer/G6, Distributed Antenna System Modernization Phase 1

General Instruction Building/Bldg 752 Mahan Hall

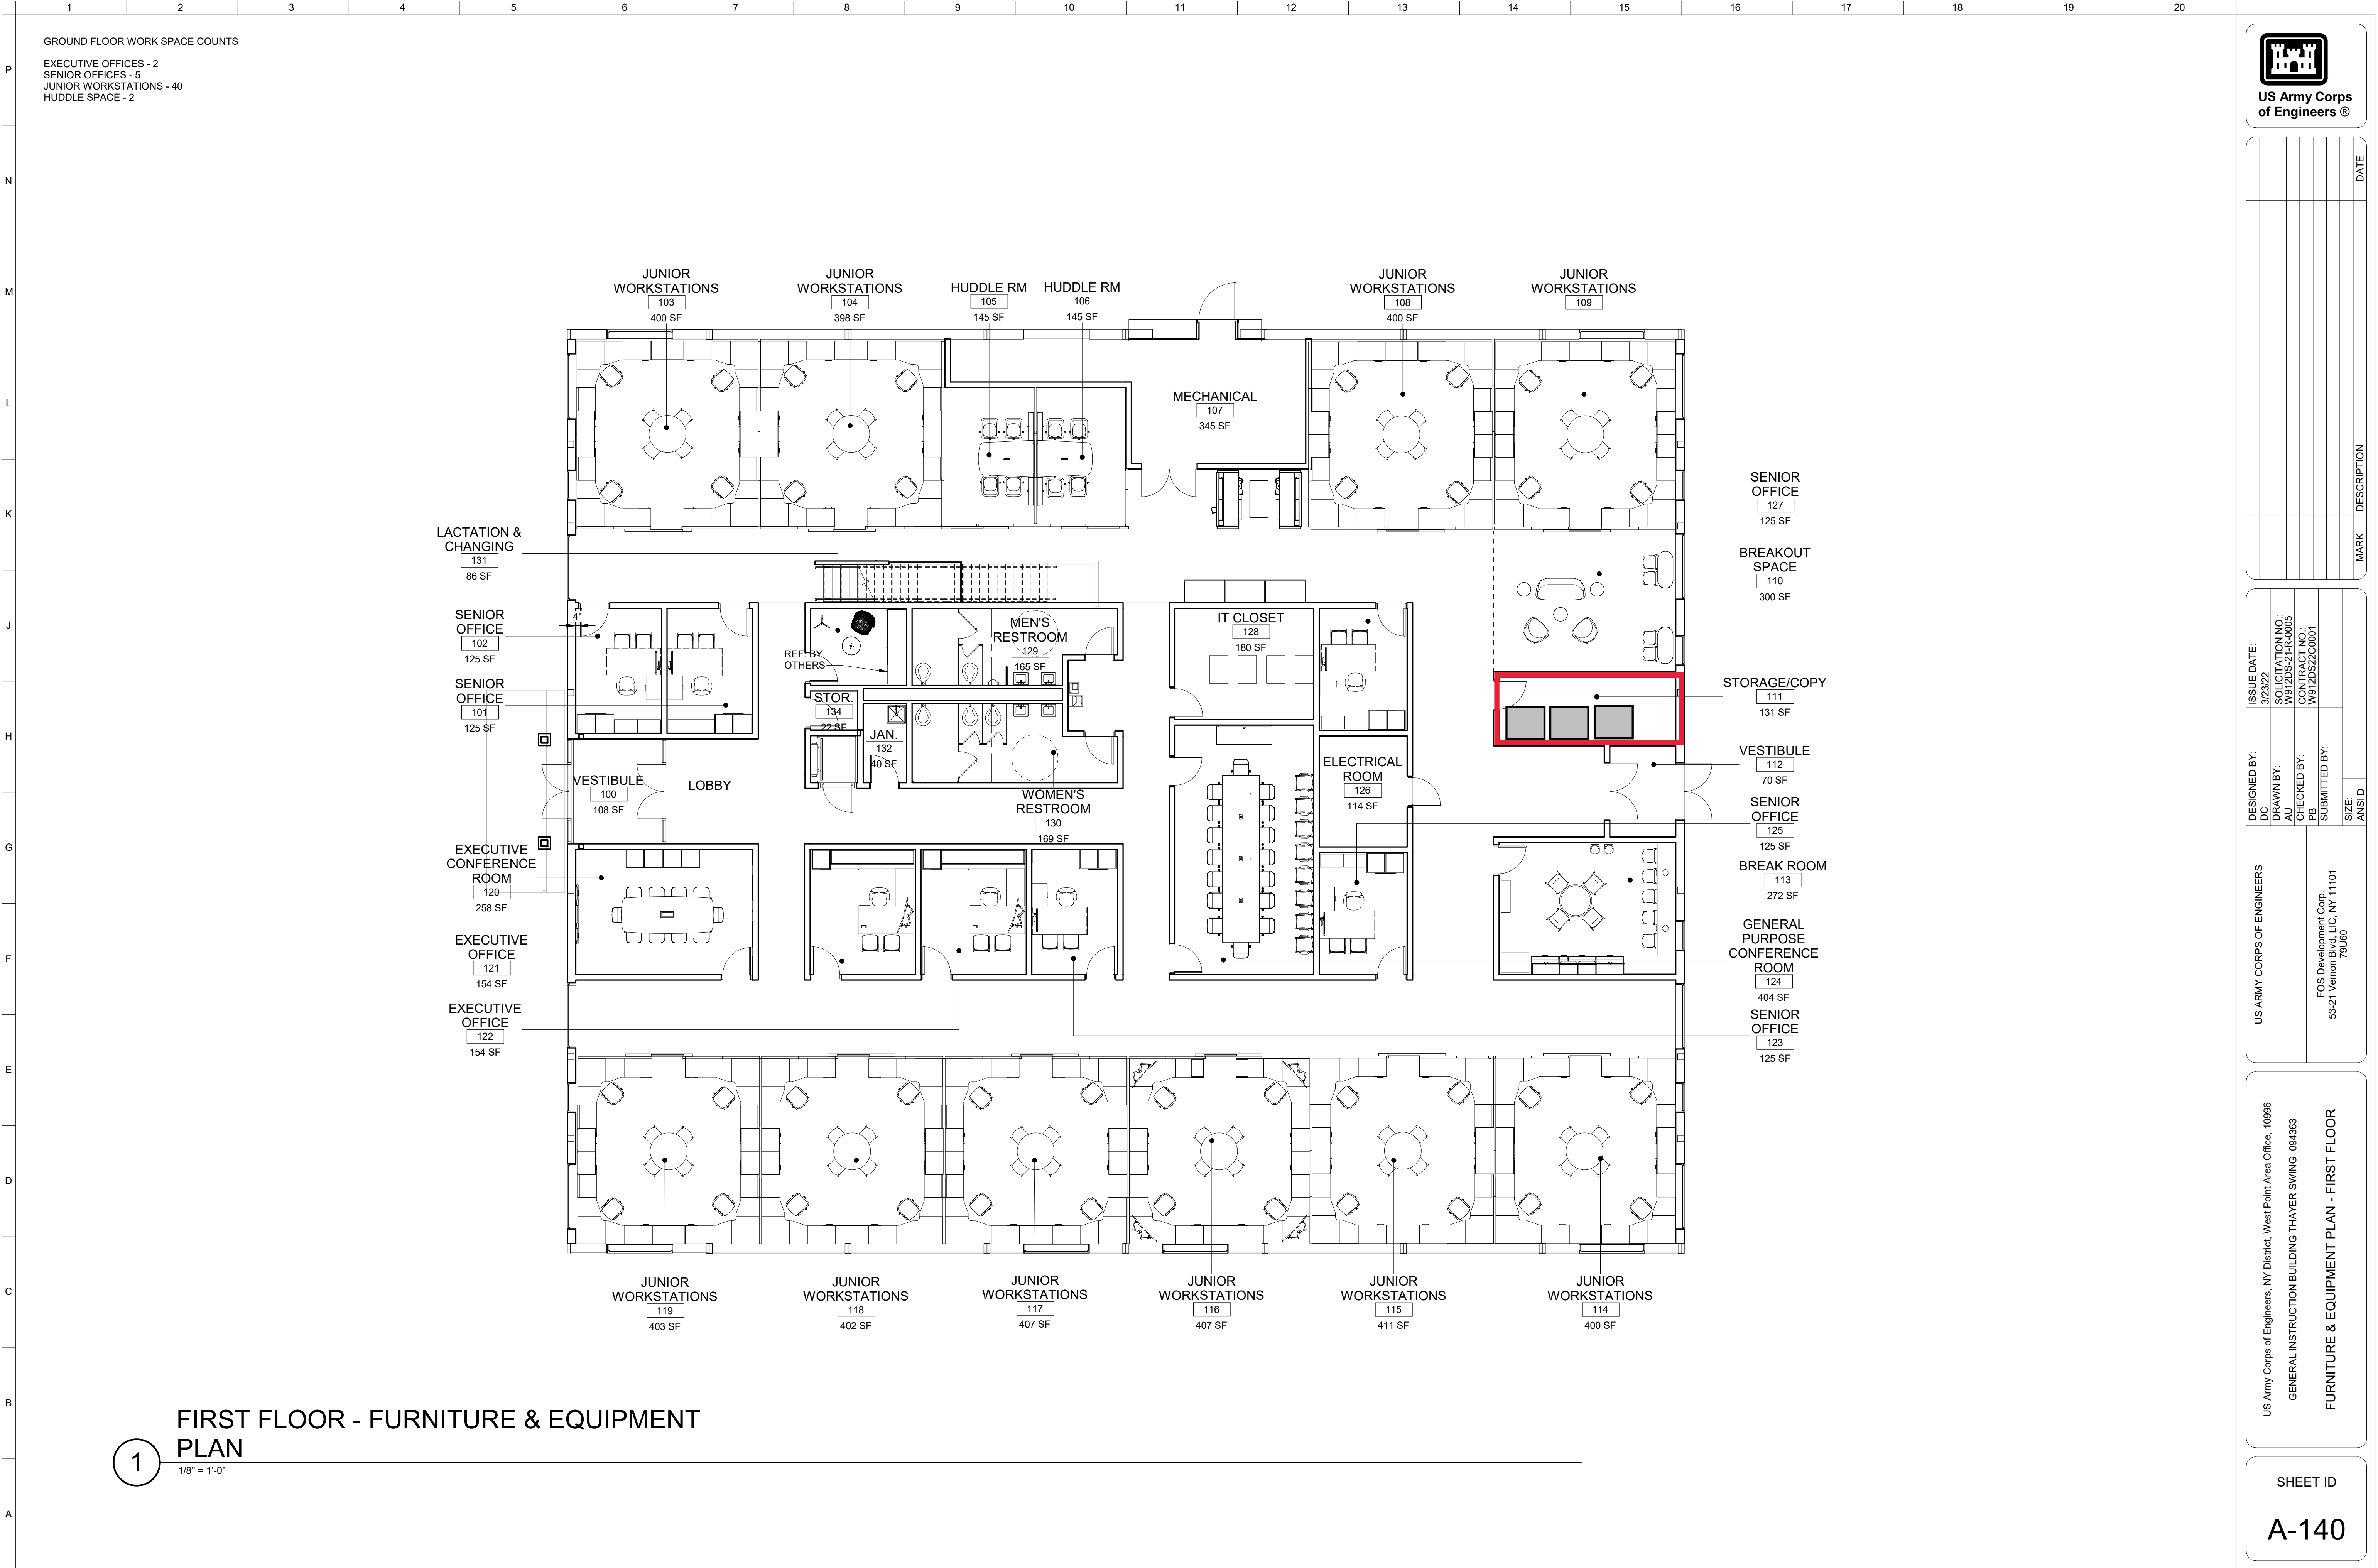

MARK	DESCRIPTION	DATE

DESIGNED BY: DC	ISSUE DATE: 3/23/22
DRAWN BY: AU	SOLICITATION NO.: W912DS22-R-0005
CHECKED BY: PB	CONTRACT NO.: W912DS22C0001
SUBMITTED BY:	
SIZE: ANSI D	
US ARMY CORPS OF ENGINEERS	
FOS Development Corp. 53-21 Vernon Blvd, LIC, NY 11101 73060	

US Army Corps of Engineers, NY District, West Point Area Office, 10996
GENERAL INSTRUCTION BUILDING THAYER SWING 094363
FURNITURE & EQUIPMENT PLAN - FIRST FLOOR

SHEET ID
A-140

SENIOR OFFICES - 10
JUNIOR WORKSTATIONS - 4

The floor plan of the 2nd floor includes the following areas:

- SENIOR OFFICE 201:** 121 SF, located at the top left.
- SENIOR OFFICE 202:** 121 SF, located at the top center.
- SENIOR OFFICE 203:** 121 SF, located at the top right.
- SENIOR OFFICE 204:** 121 SF, located at the top right.
- SENIOR OFFICE 209:** 121 SF, located at the bottom left.
- SENIOR OFFICE 208:** 121 SF, located at the bottom center-left.
- SENIOR OFFICE 207:** 121 SF, located at the bottom center-right.
- SENIOR OFFICE 206:** 121 SF, located at the bottom right.
- SENIOR OFFICE 205:** 121 SF, located at the bottom right.
- JUNIOR WORKSTATIONS 211:** 204 SF, located on the right side.
- JUNIOR WORKSTATIONS 212:** 208 SF, located on the right side.

The plan also shows a central staircase, a large conference room on the left, and a reception area at the bottom left.

$$1/8'' = 1'-0''$$
[illegible]

FOS Development Corp. 53-21 Vernon Blvd, LIC, NY 11101 73060	SIZE:	ASND
	SUBMITTED BY:	
	CHECKER:	W912DS2C0001
	CHECKED BY:	W912DS21R-0005
	DRAWN BY:	3/23/22
	AUTHOR:	W912DS21R-0005
	CONTRACT NO.:	W912DS21R-0005

GENERAL INSTRUCTION BUILDING THAYER SWING 094363
FURNITURE & EQUIPMENT PLAN - MEZZANINE

A-141


BIM 360://2141_West Point_Thayer Swing/PN094363_GIB_ARCH.rvt

File Path:

3/23/2022 6:30:28 PM

Plot Date:

NOTES:
1. DIMENSIONS HAVE BEEN EITHER FIELD VERIFIED TO .46" OR GATHERED FROM AS-BUILT DRAWINGS.
2. THIS IS A APPROXIMATE REPRESENTATION OF EXISTING CONDITIONS.



FLOOR NET:
4,649 SQ. FT.
FLOOR GROSS:
4,570.90 SQ. FT.

NOT FOR
CONSTRUCTION
DO NOT SCALE




Architect/Engineer: The Corporation of Architects, Inc. 1000 Broadway, New York, NY 10003
Architect/Engineer: The Corporation of Architects, Inc. 1000 Broadway, New York, NY 10003

SCALE: 3/16" = 1'-0"	P.M.: PROJECTMANAGER
DATE: SEPTEMBER 12	CHECKED:
DRAWN:	SUBMITTED:
DESIGNED:	APPROVED:

REVISIONS			
#	DESCRIPTION	DATE	BY

DIRECTORATE OF PUBLIC WORKS
ENGINEERING PLANS & SERVICES DIVISION
US ARMY GARRISON
WEST POINT, NY


MAHAN HALL - 0752
FLOOR "F"

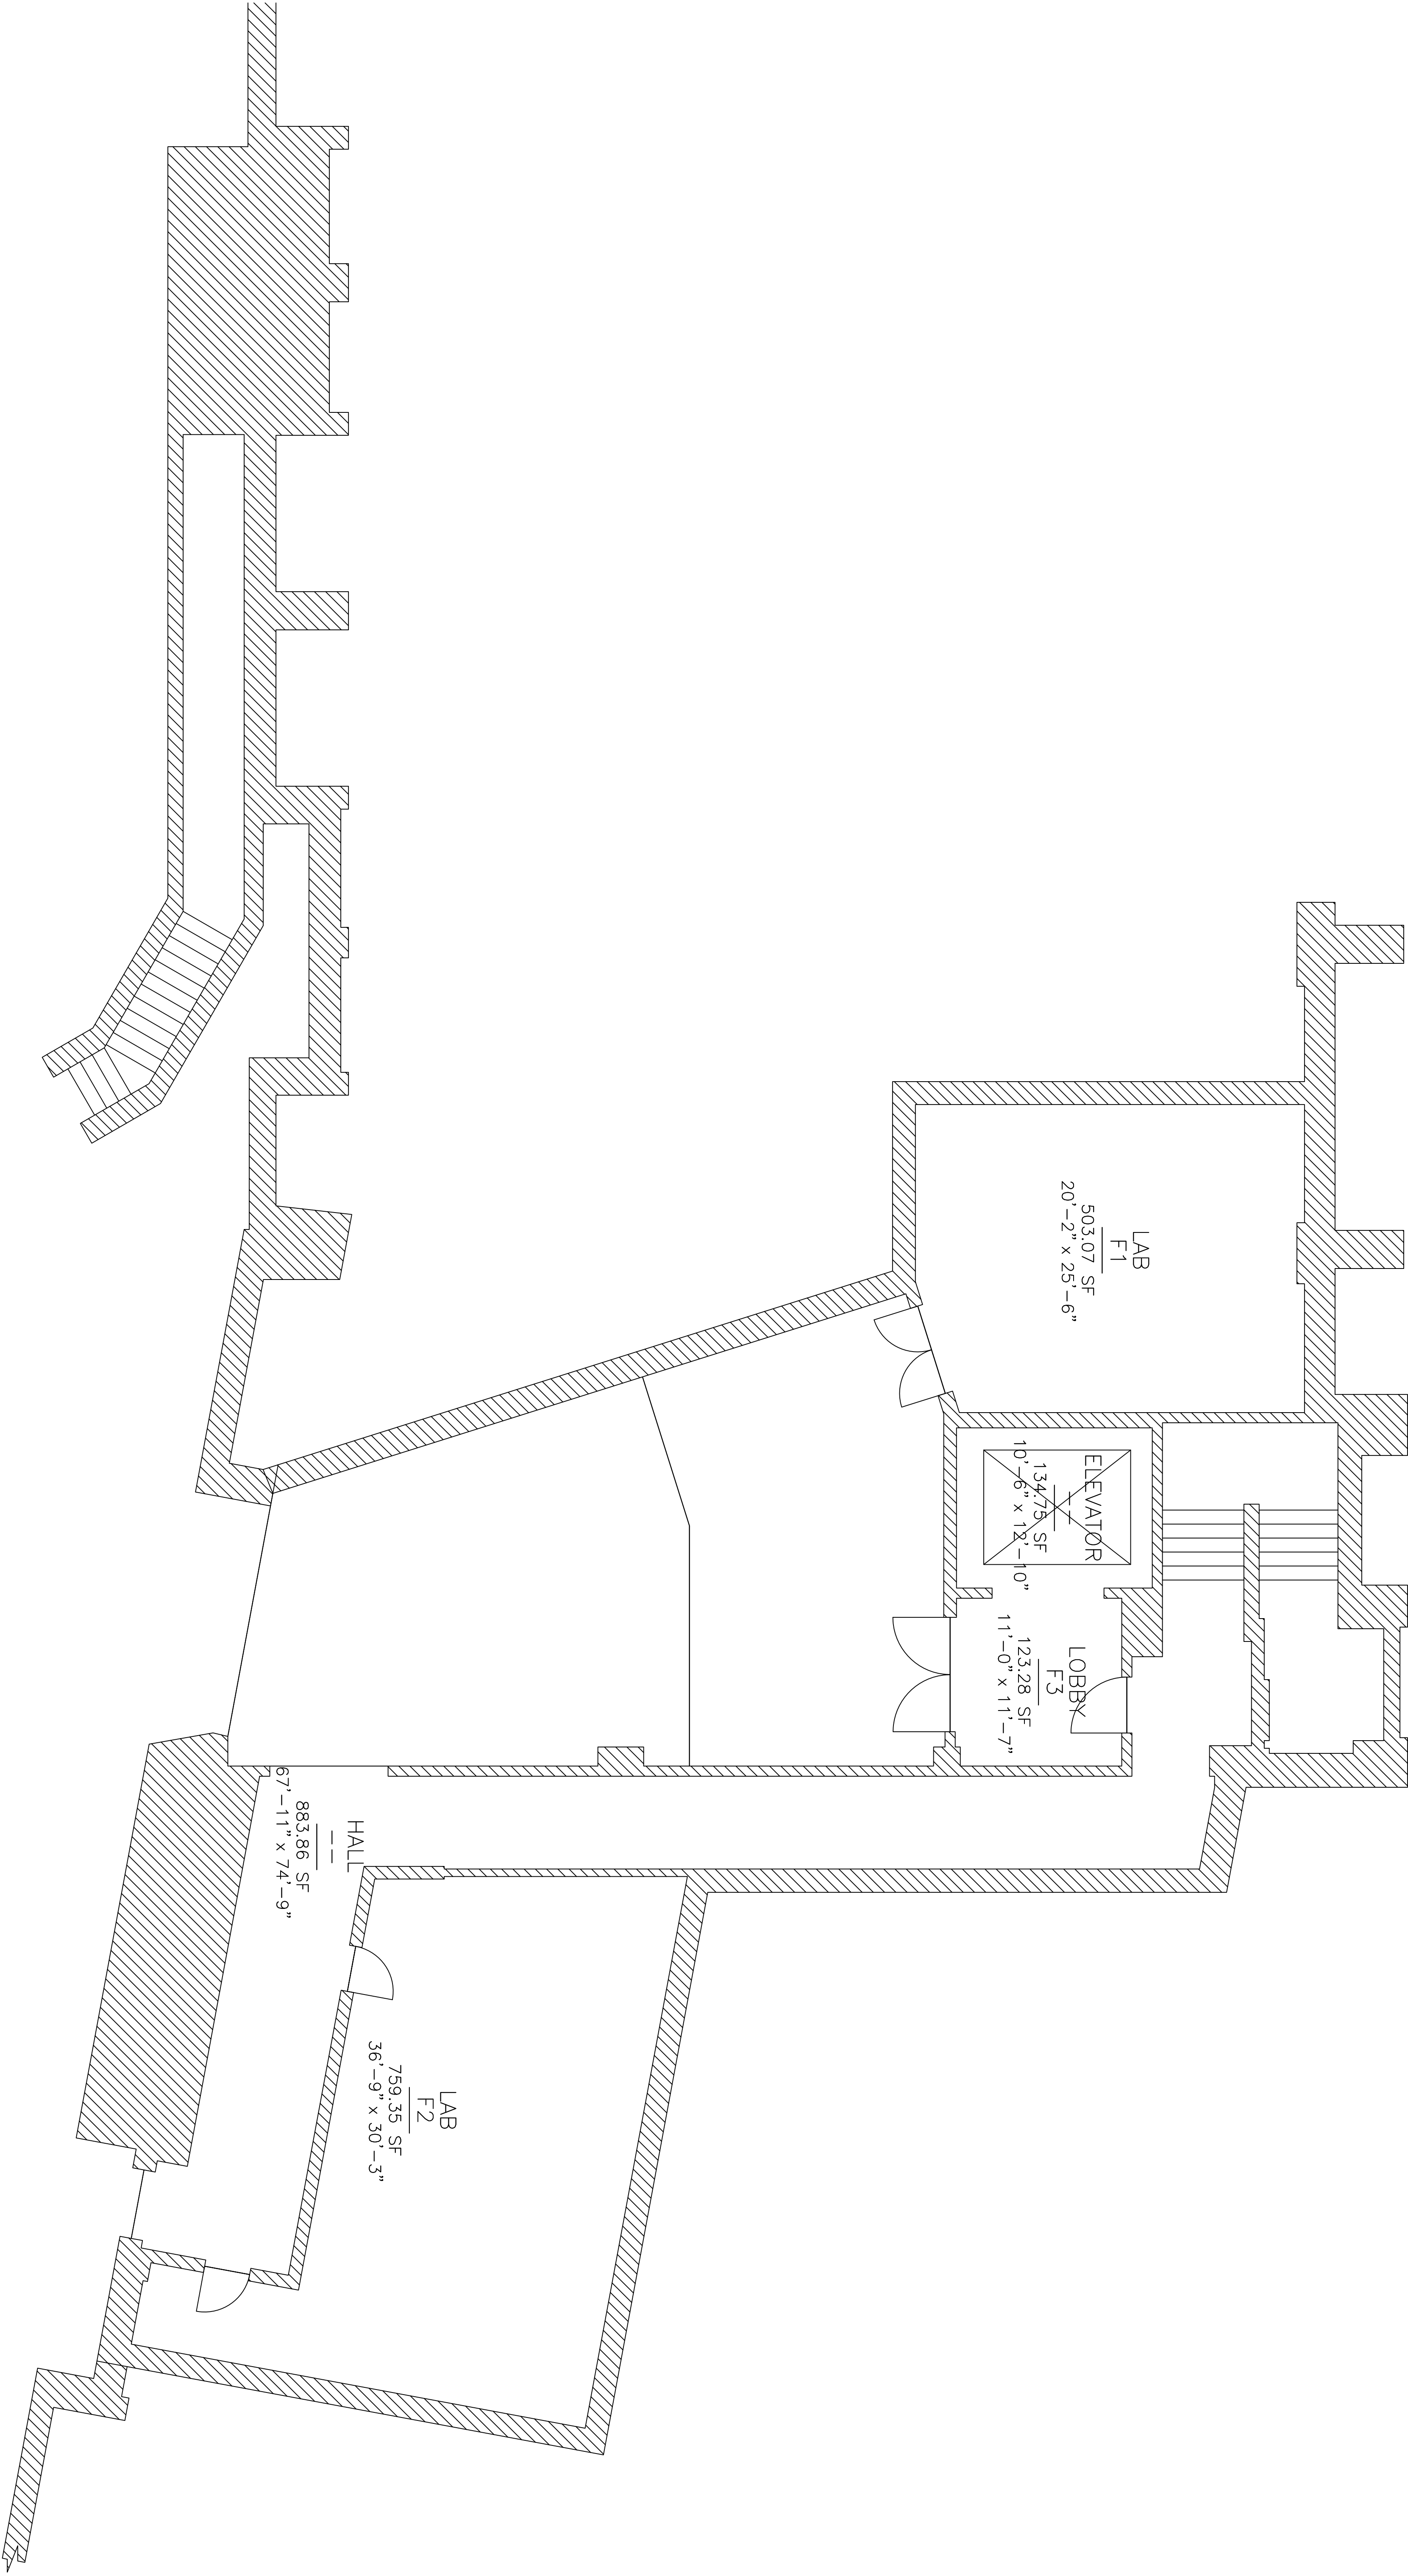

BASEMENT
3/16" = 1'-0"


0 4' 8' 16'
SCALE: 1/8" = 1'-0"

NOTES:
1. DIMENSIONS HAVE BEEN EITHER FIELD VERIFIED TO .46" OR GATHERED FROM AS-BUILT DRAWINGS.
2. THIS IS A APPROXIMATE REPRESENTATION OF EXISTING CONDITIONS.



FLOOR NET:
14,027 SQ. FT.
FLOOR GROSS:
21,237.97 SQ. FT.

NOT FOR
CONSTRUCTION
DO NOT SCALE



DPW/Engineering - All construction drawings shall be in 1/8" = 1'-0" unless otherwise noted.

P.M.: PROJECTMANAGER
CHECKED:
SUBMITTED:
APPROVED:

SCALE: 3/32" = 1'-0"
DATE: SEPTEMBER 12
DRAWN:
DESIGNED:

REVISIONS			
#	DESCRIPTION	DATE	BY

DIRECTORATE OF PUBLIC WORKS
ENGINEERING PLANS & SERVICES DIVISION
US ARMY GARRISON
WEST POINT, NY
MAHAN HALL - 0752
FLOOR "E"


SHEET NUMBER:

2

SHEET 2 OF 10




BASEMENT
3/32" = 1'-0"



SCALE: 1/8" = 1'-0"

NOTES:
1. DIMENSIONS HAVE BEEN FIELD VERIFIED TO ±.6"
2. THIS IS A APPROXIMATE REPRESENTATION OF
EXISTING CONDITIONS.



PROJECT:
FLOOR: GROSS FT.
FLOOR: NET FT.

NOT FOR
CONSTRUCTION
DO NOT SCALE



REVISIONS			
#	DESCRIPTION	DATE	BY


P.M.:	
CHECKED:	
SUBMITTED:	
APPROVED:	

SCALE: 3/32" = 1'-0"	
DATE: SEPTEMBER 2012	
DRAWN:	
DESIGNED:	


MAHAN HALL - 752
FLOOR "D"

DIRECTORATE OF PUBLIC WORKS
ENGINEERING PLANS & SERVICES DIVISION
US ARMY GARRISON
WEST POINT, NY


SHEET NUMBER:
3
SHEET 3 OF 10

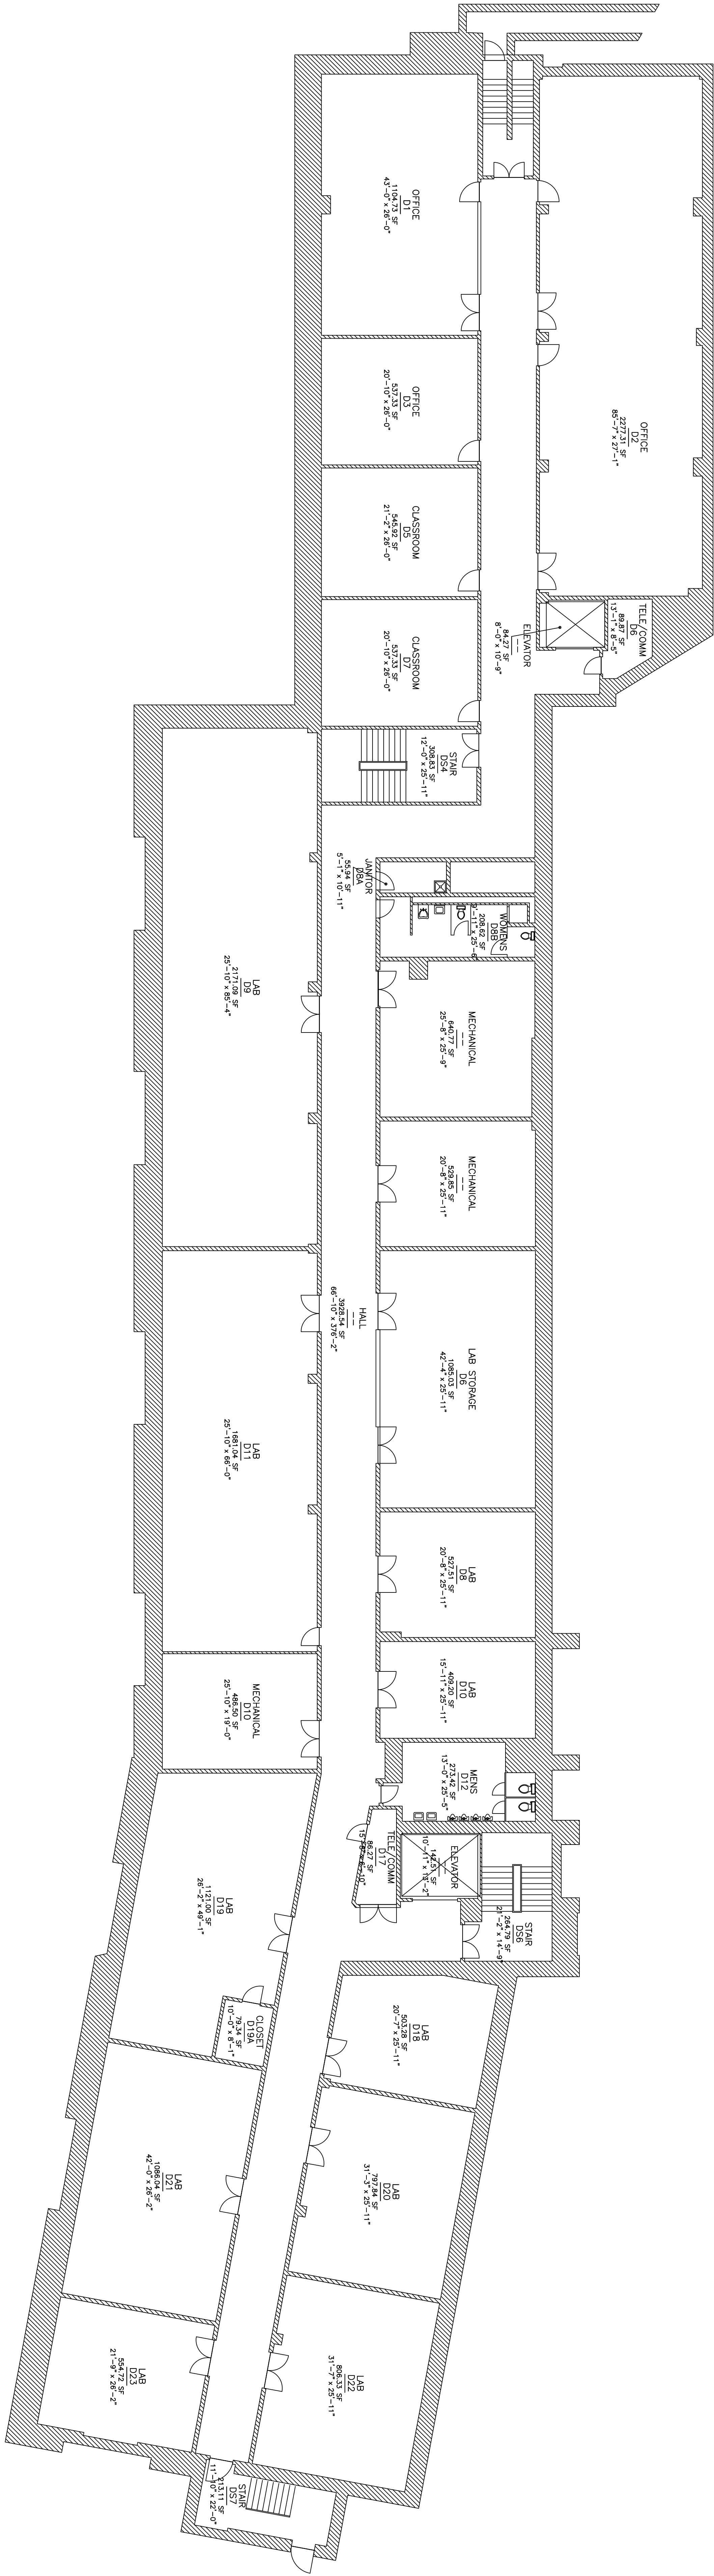

PLAN
3/32" = 1'-0"



NOTES:
1. DIMENSIONS HAVE BEEN FIELD VERIFIED TO ±.6"
2. THIS IS A APPROXIMATE REPRESENTATION OF
EXISTING CONDITIONS.



TOTAL AREA:
23008.20 SQ. FT.
FLOOR GROSS AREA
13207.50 SQ. FT.

NOT FOR
CONSTRUCTION
DO NOT SCALE



DPW
Directorate of Public Works

REVISIONS			
#	DESCRIPTION	DATE	BY


P.M.:	
CHECKED:	
SUBMITTED:	
APPROVED:	

SCALE: 3/32" = 1'-0"	
DATE: SEPTEMBER 2012	
DRAWN:	
DESIGNED:	

MAHAN HALL - 752
FLOOR "C"

DIRECTORATE OF PUBLIC WORKS
ENGINEERING PLANS & SERVICES DIVISION
US ARMY GARRISON
WEST POINT, NY


SHEET NUMBER:
4
SHEET 4 OF 10

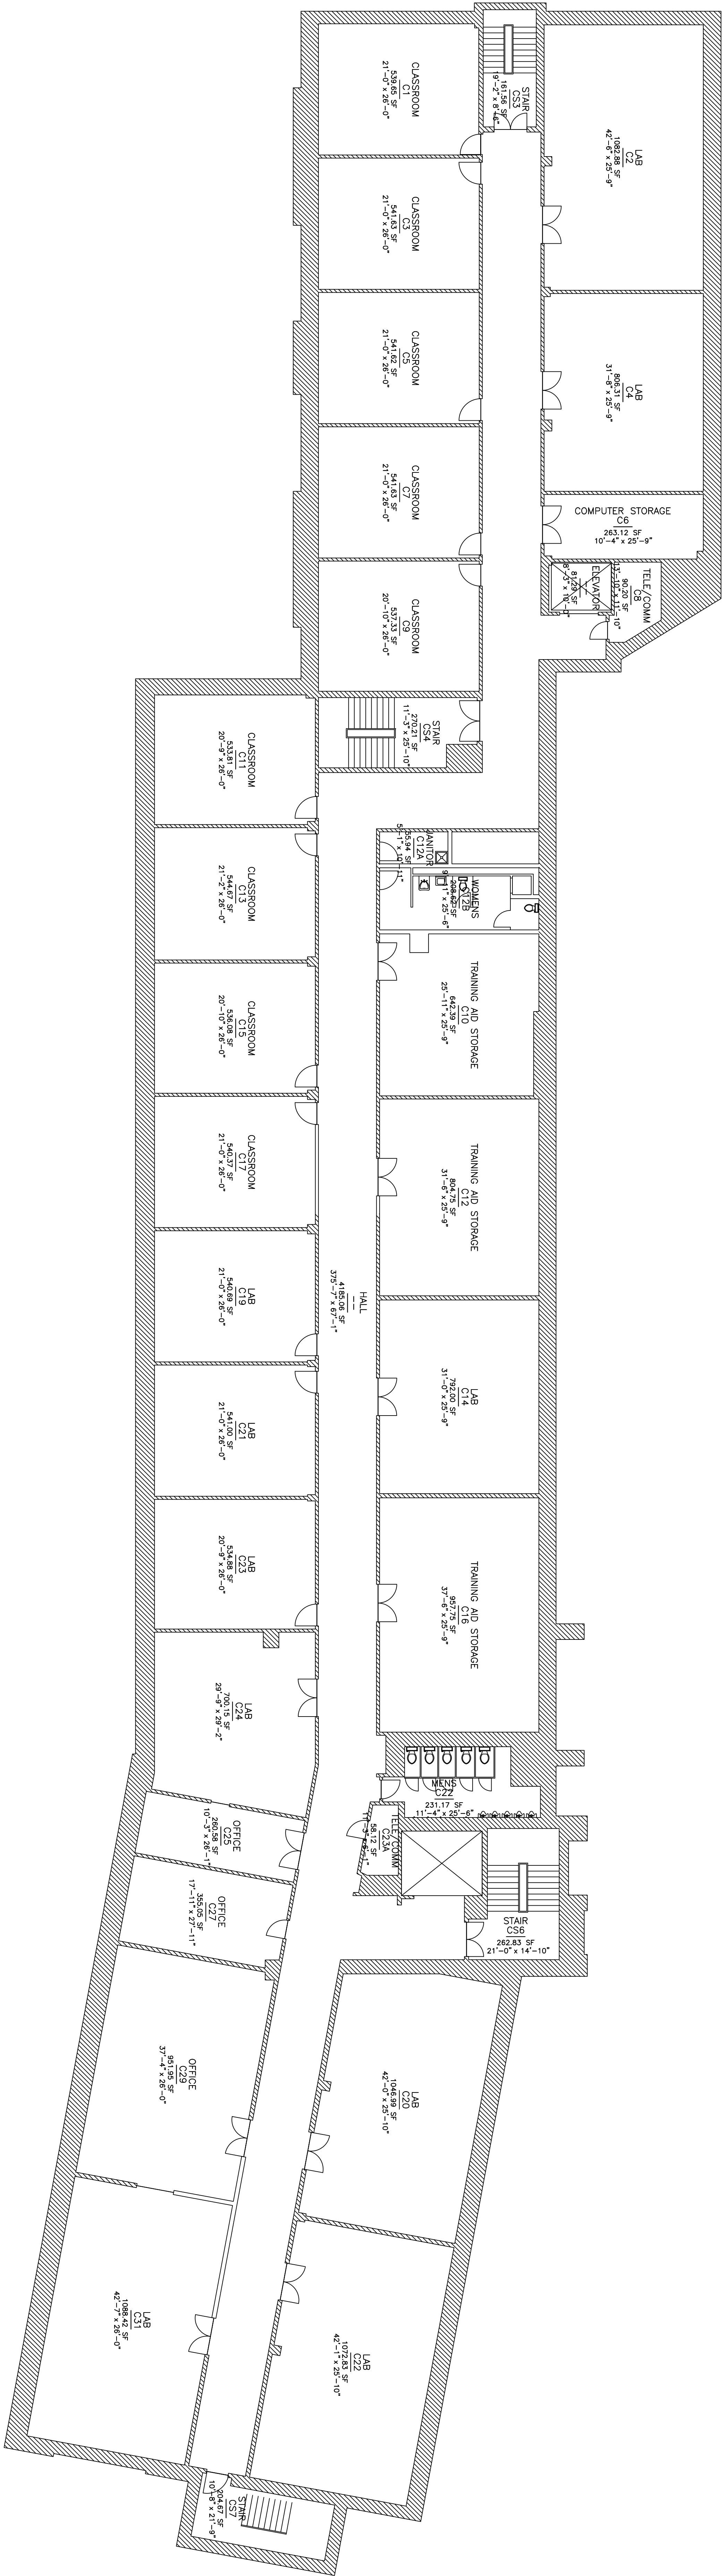

PLAN
3/32" = 1'-0"


0 4' 8' 16'
SCALE: 1/8" = 1'-0"

- NOTES:
1. DIMENSIONS HAVE BEEN FIELD VERIFIED TO ±6"
 2. THIS IS A APPROXIMATE REPRESENTATION OF EXISTING CONDITIONS.



FLOOR NET
1504.50 FT.
FLOOR GROSS
1836.34 SQ.FT.

NOT FOR
CONSTRUCTION
DO NOT SCALE



Revised: 09/2012. All dimensions shall be verified in the field. The field verification shall be the final authority.

SCALE: 1/8" = 1'-0"	P.M.:
DATE: SEPTEMBER 2012	CHECKED:
DRAWN:	SUBMITTED:
DESIGNED:	APPROVED:


REVISIONS		
#	DESCRIPTION	DATE

DIRECTORATE OF PUBLIC WORKS
ENGINEERING PLANS & SERVICES DIVISION
US ARMY GARRISON
WEST POINT, NY


MAHAN HALL - 0752
FLOOR 'B'

SHEET NUMBER:
5


SHEET 5 OF 10

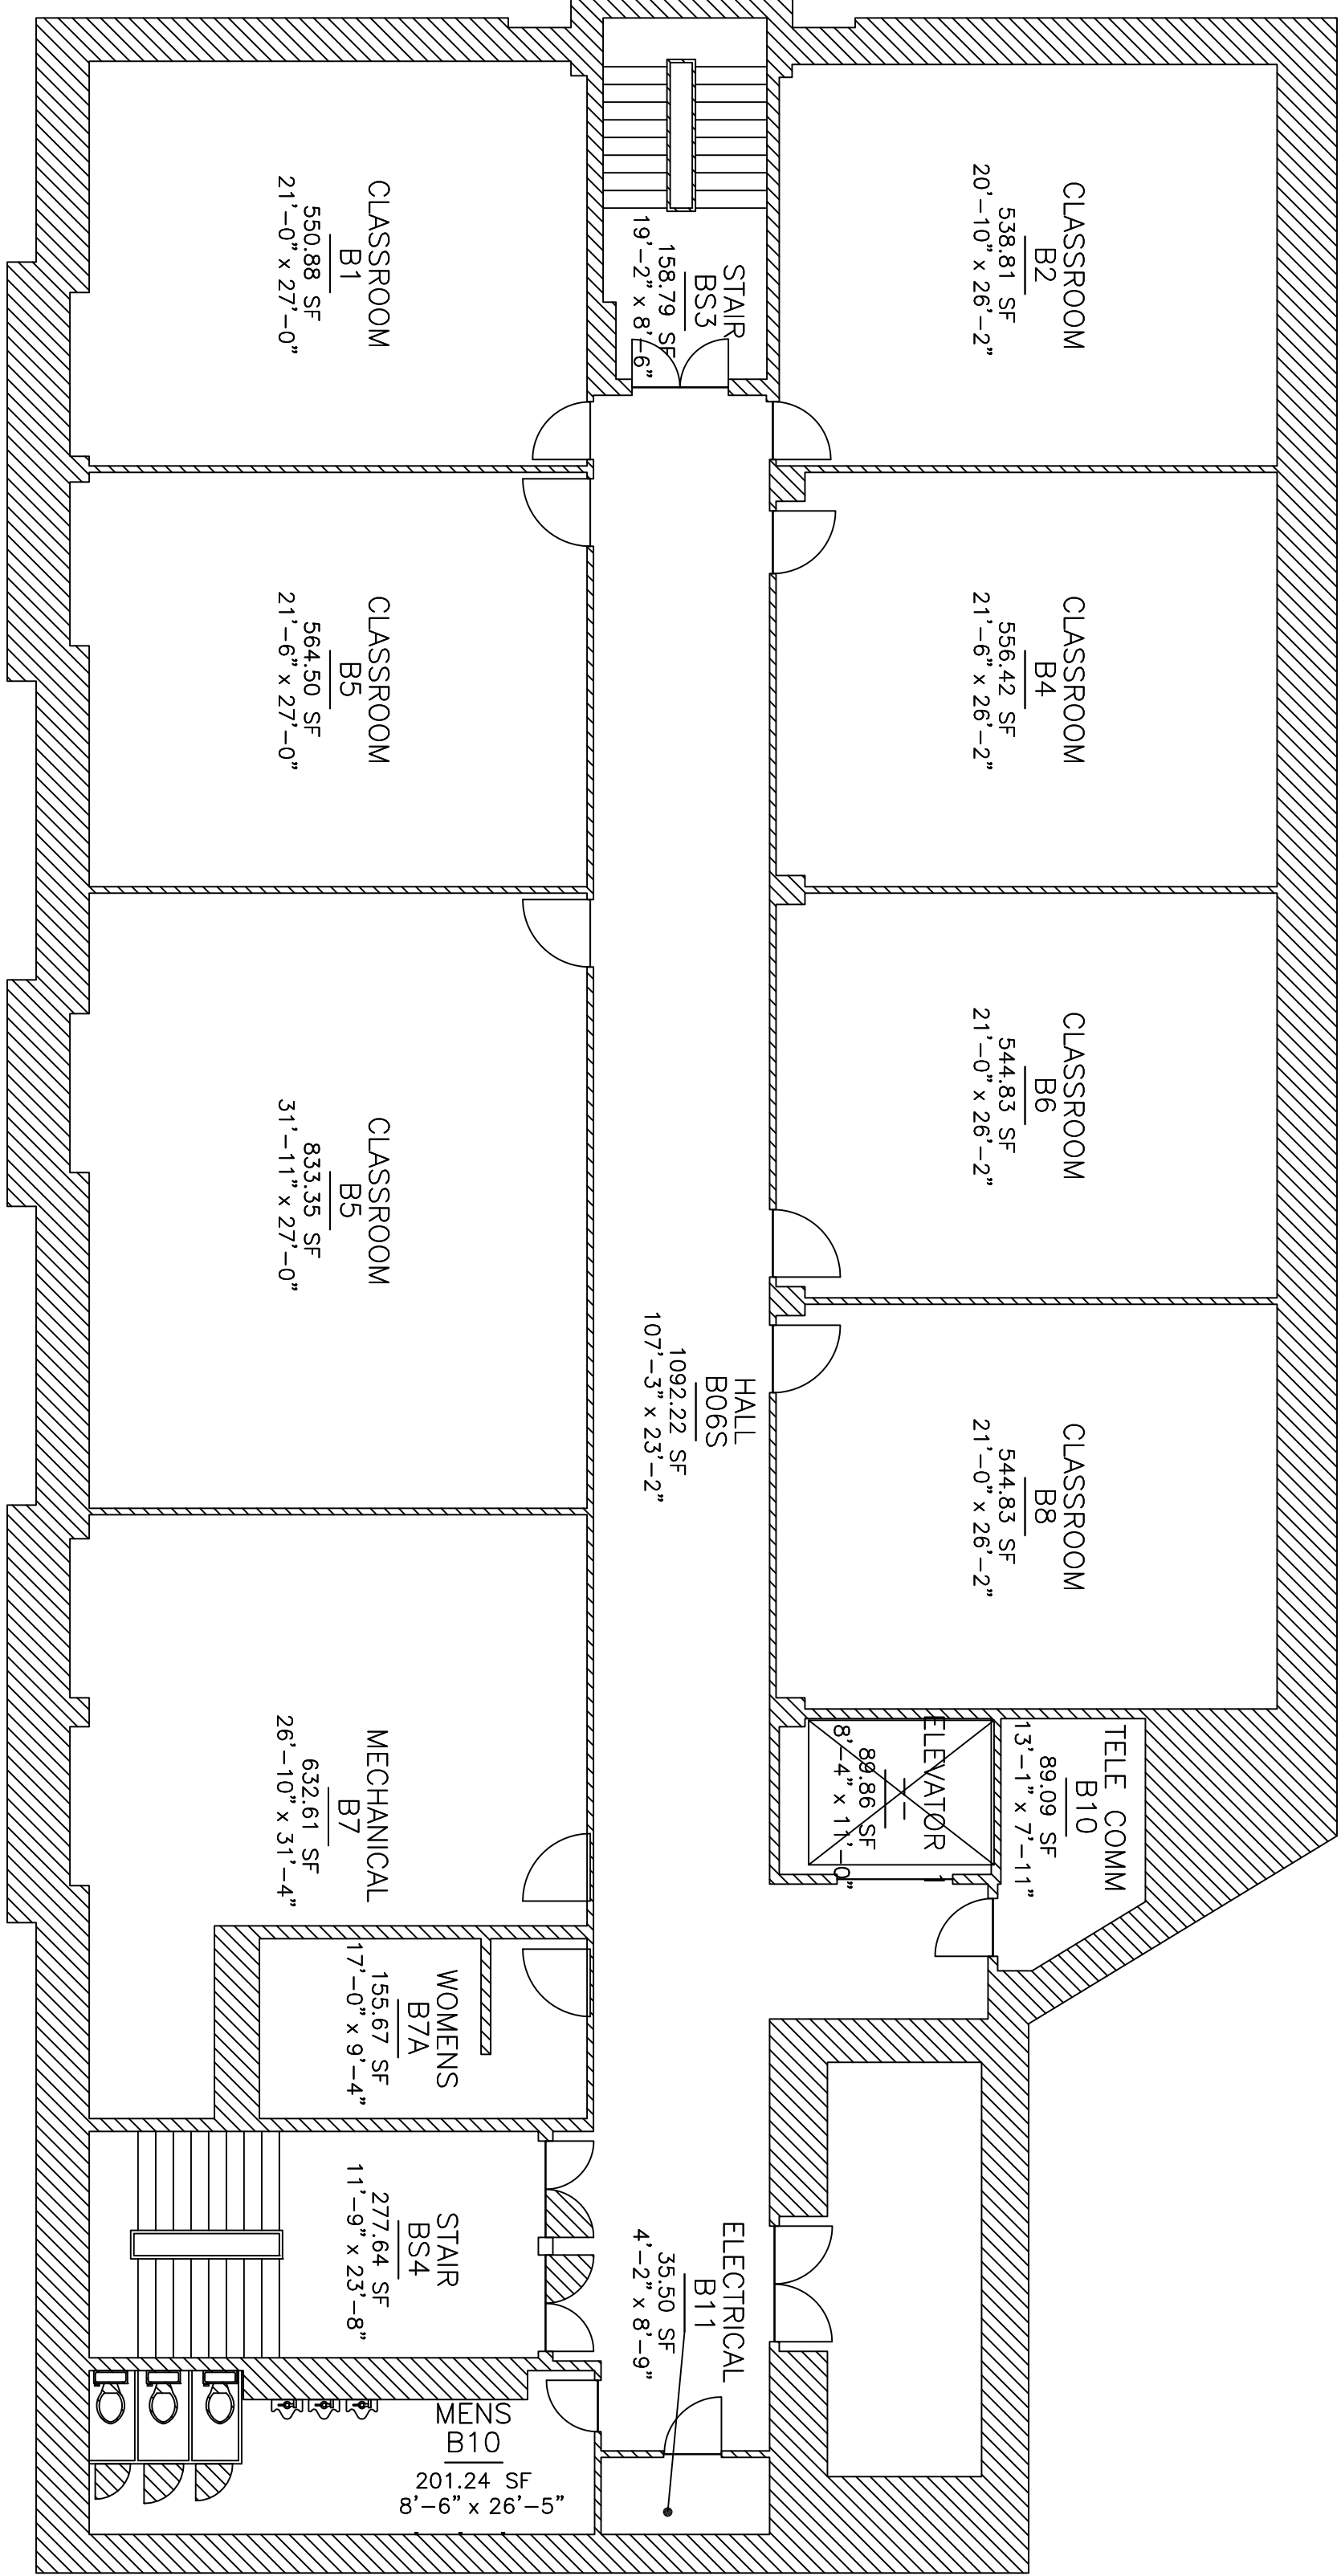

FLOOR "B" SOUTH
1/8" = 1'-0"

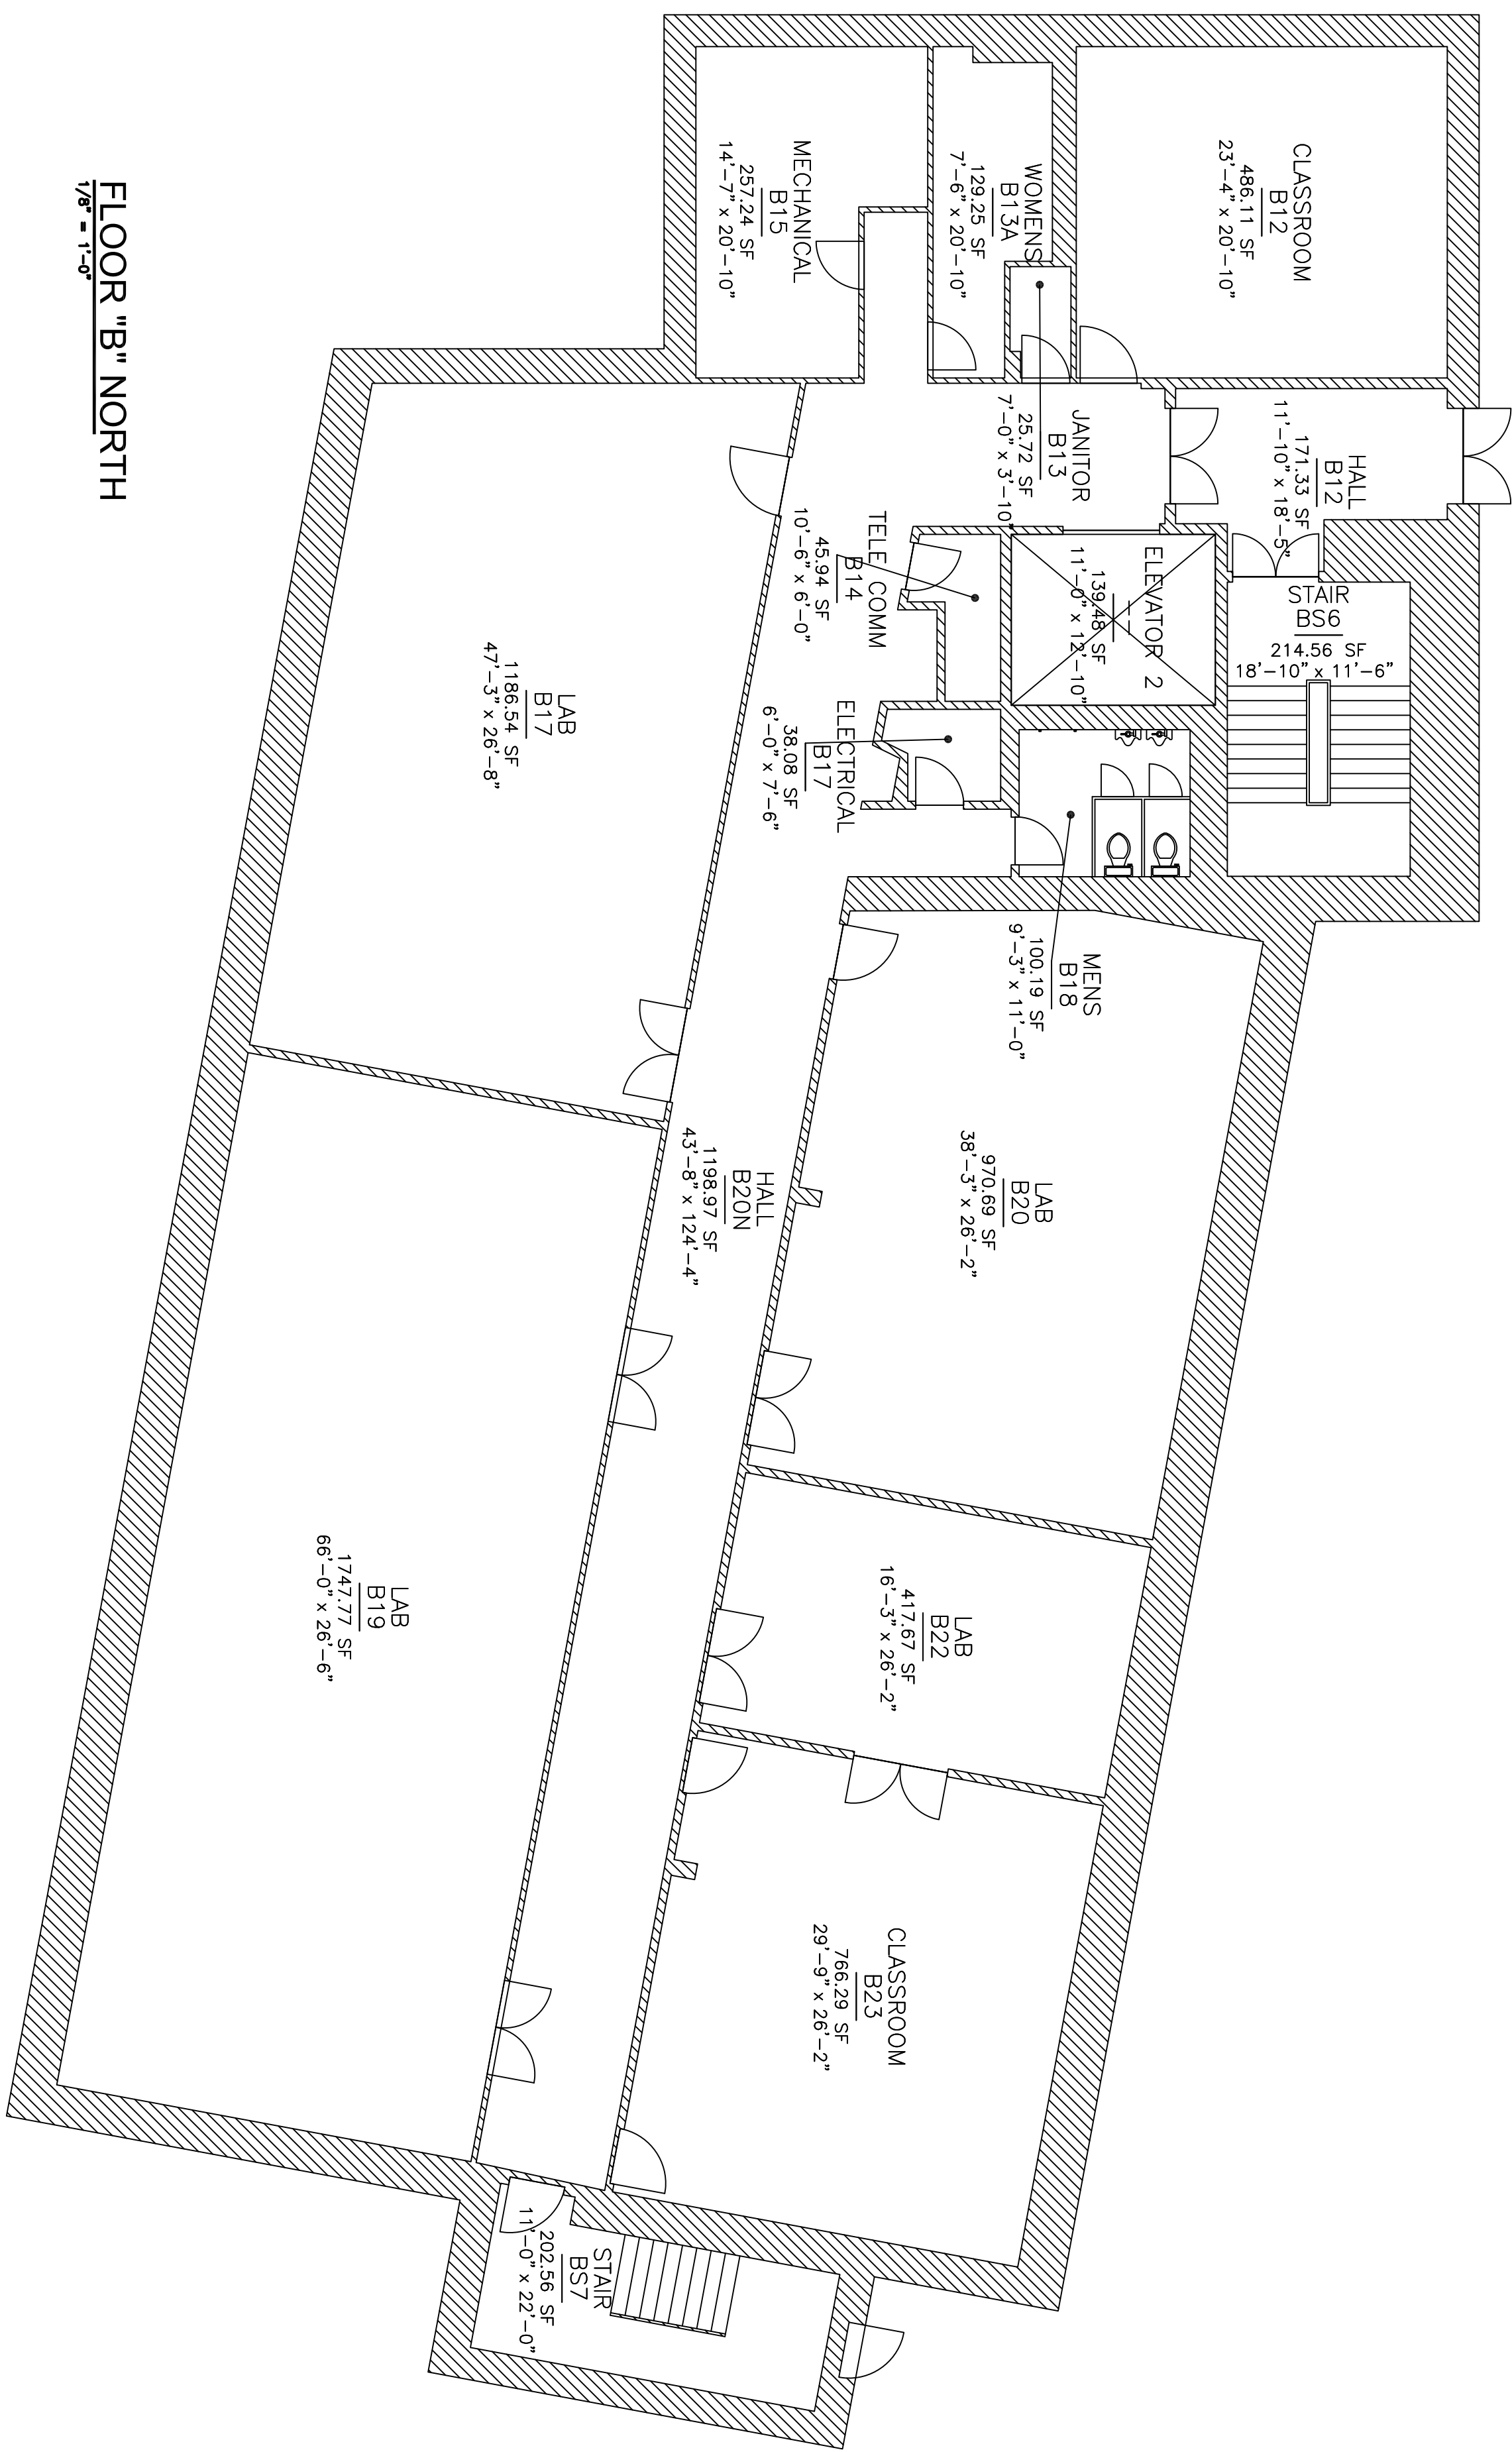


FLOOR "B" NORTH
1/8" = 1'-0"




SCALE: 1/8" = 1'-0"

- NOTES:
1. DIMENSIONS HAVE BEEN FIELD VERIFIED TO ±6"
 2. THIS IS A APPROXIMATE REPRESENTATION OF EXISTING CONDITIONS.



FLOOR AREA:
FLOOR GROSS: 11,951.63 SQ. FT.

NOT FOR
CONSTRUCTION
DO NOT SCALE

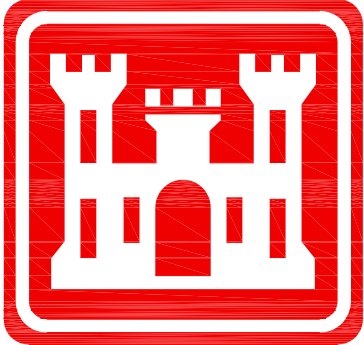


DPW/Engineering - All construction drawings submitted for review must be in PDF format.

SCALE: 1/8" = 1'-0"		P.M.:	
DATE: SEPTEMBER 2012		CHECKED:	
DRAWN:		SUBMITTED:	
DESIGNED:		APPROVED:	
REVISIONS			
#	DESCRIPTION	DATE	BY


DIRECTORATE OF PUBLIC WORKS
ENGINEERING PLANS & SERVICES DIVISION
US ARMY GARRISON
WEST POINT, NY

MAHAN HALL - 0752
FLOOR 'A'

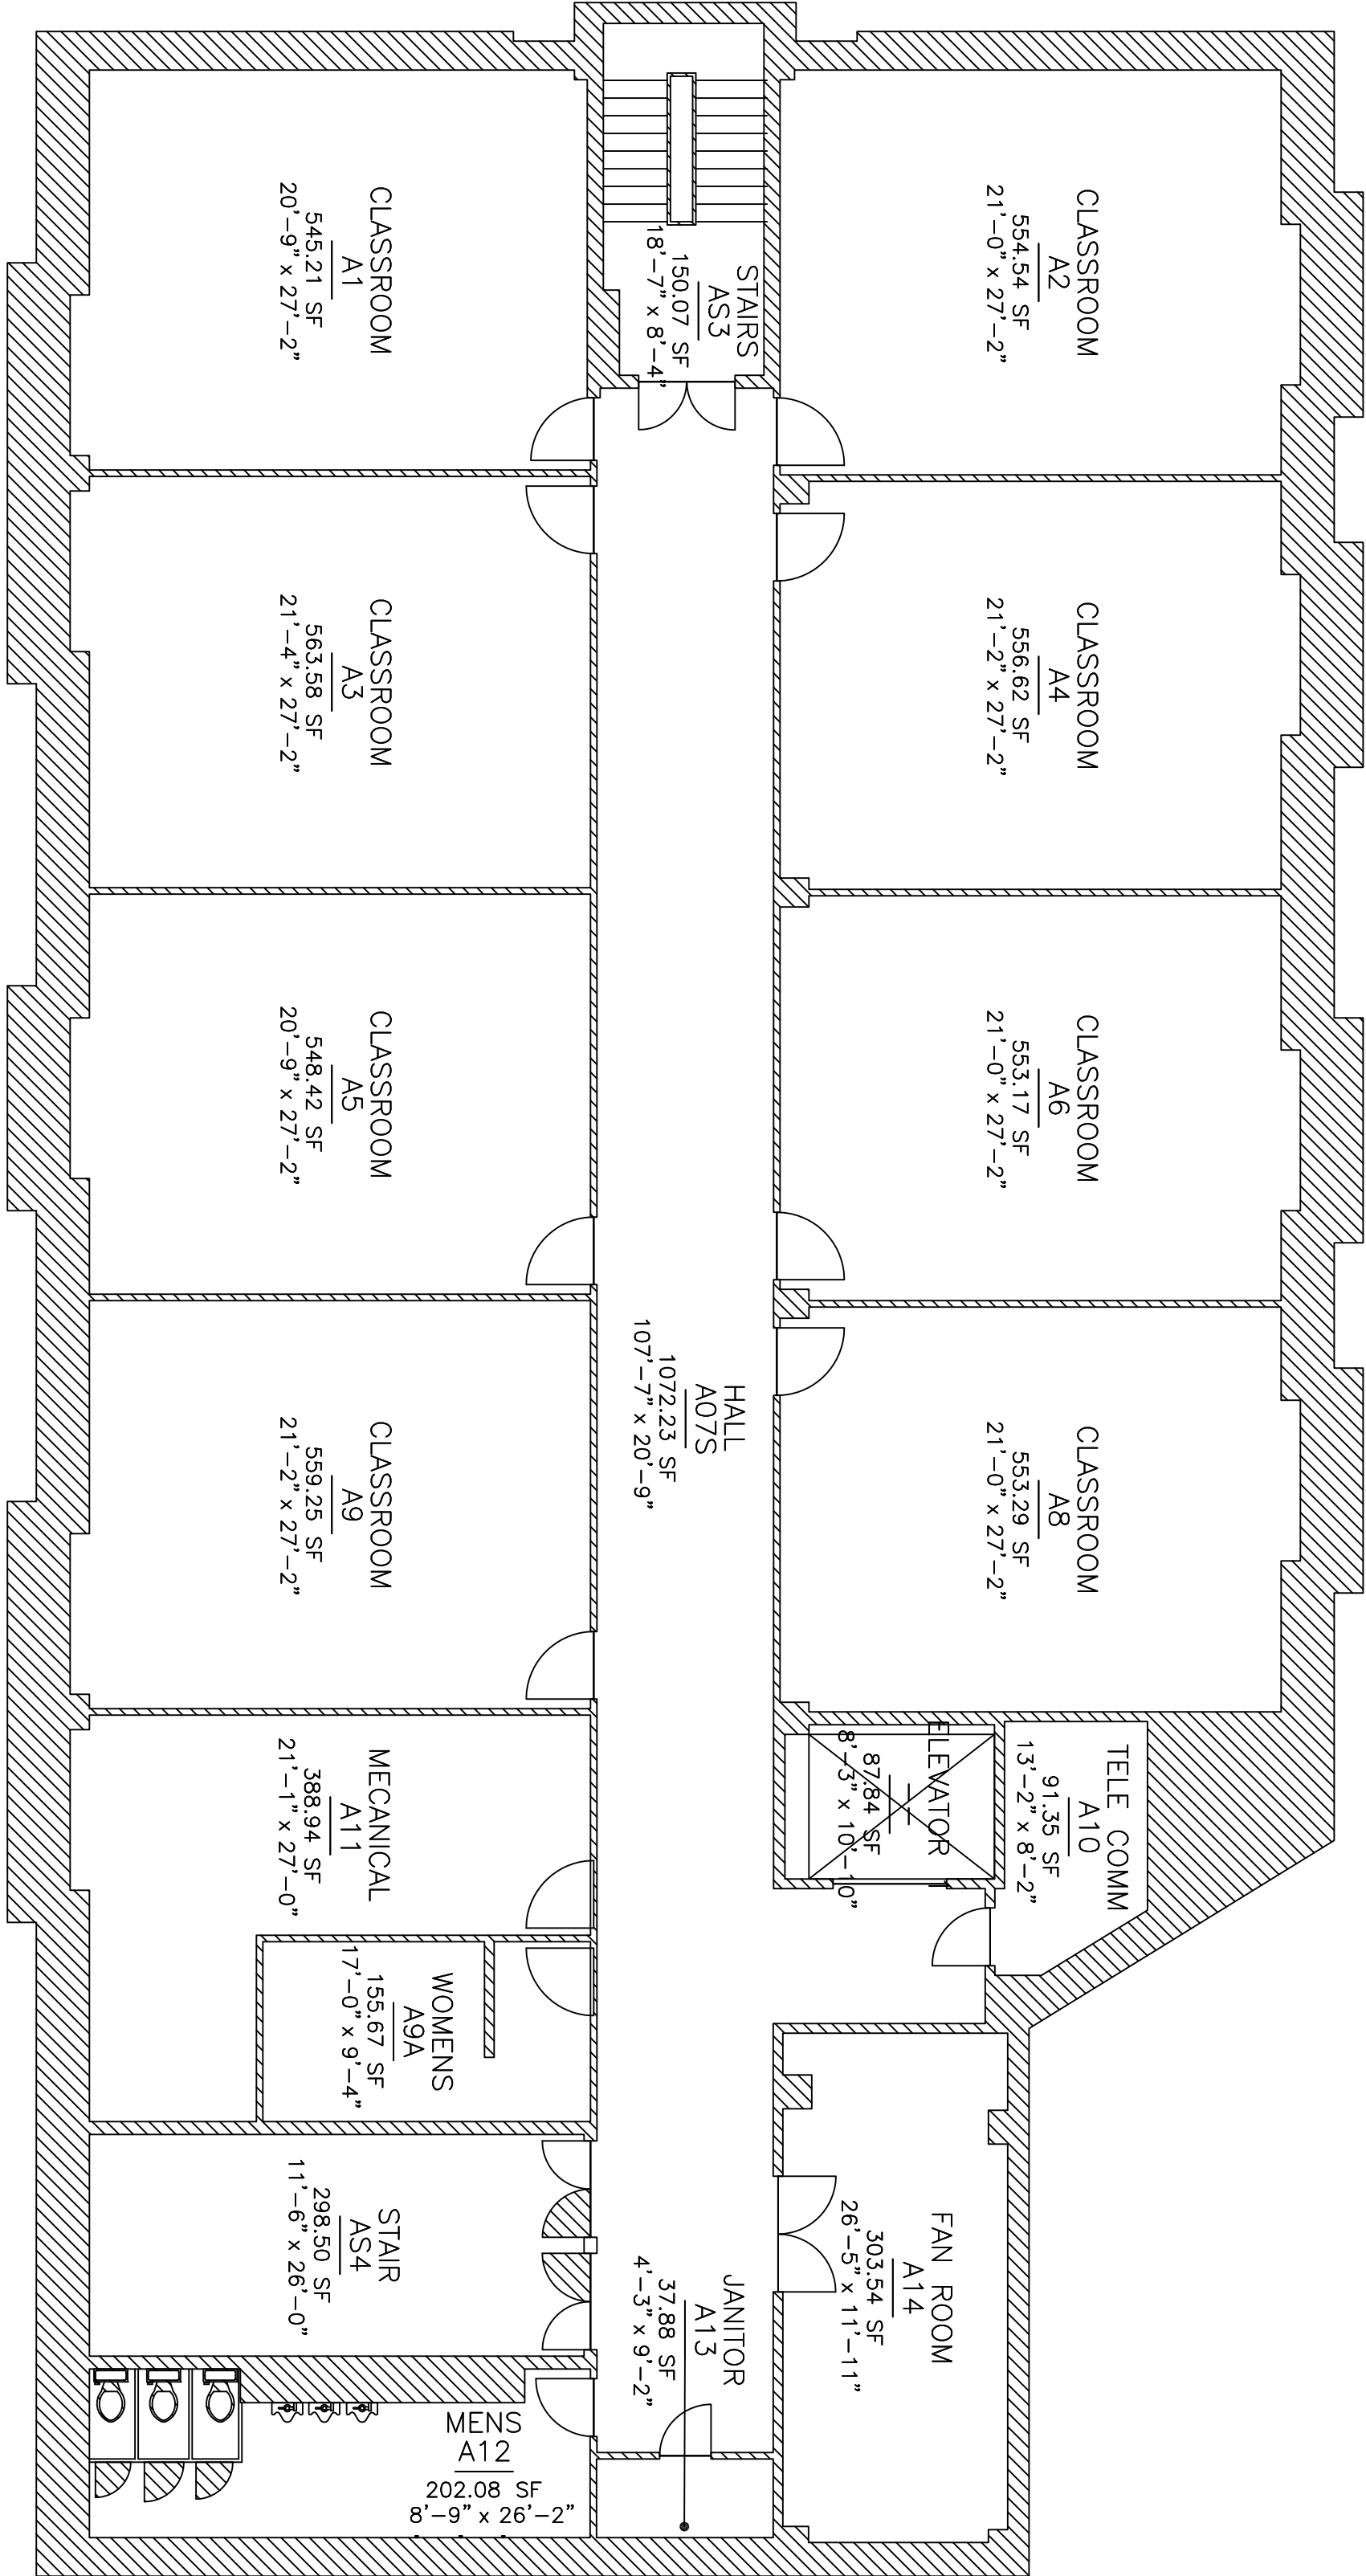

FLOOR 'A' SOUTH

1/8" = 1'-0"

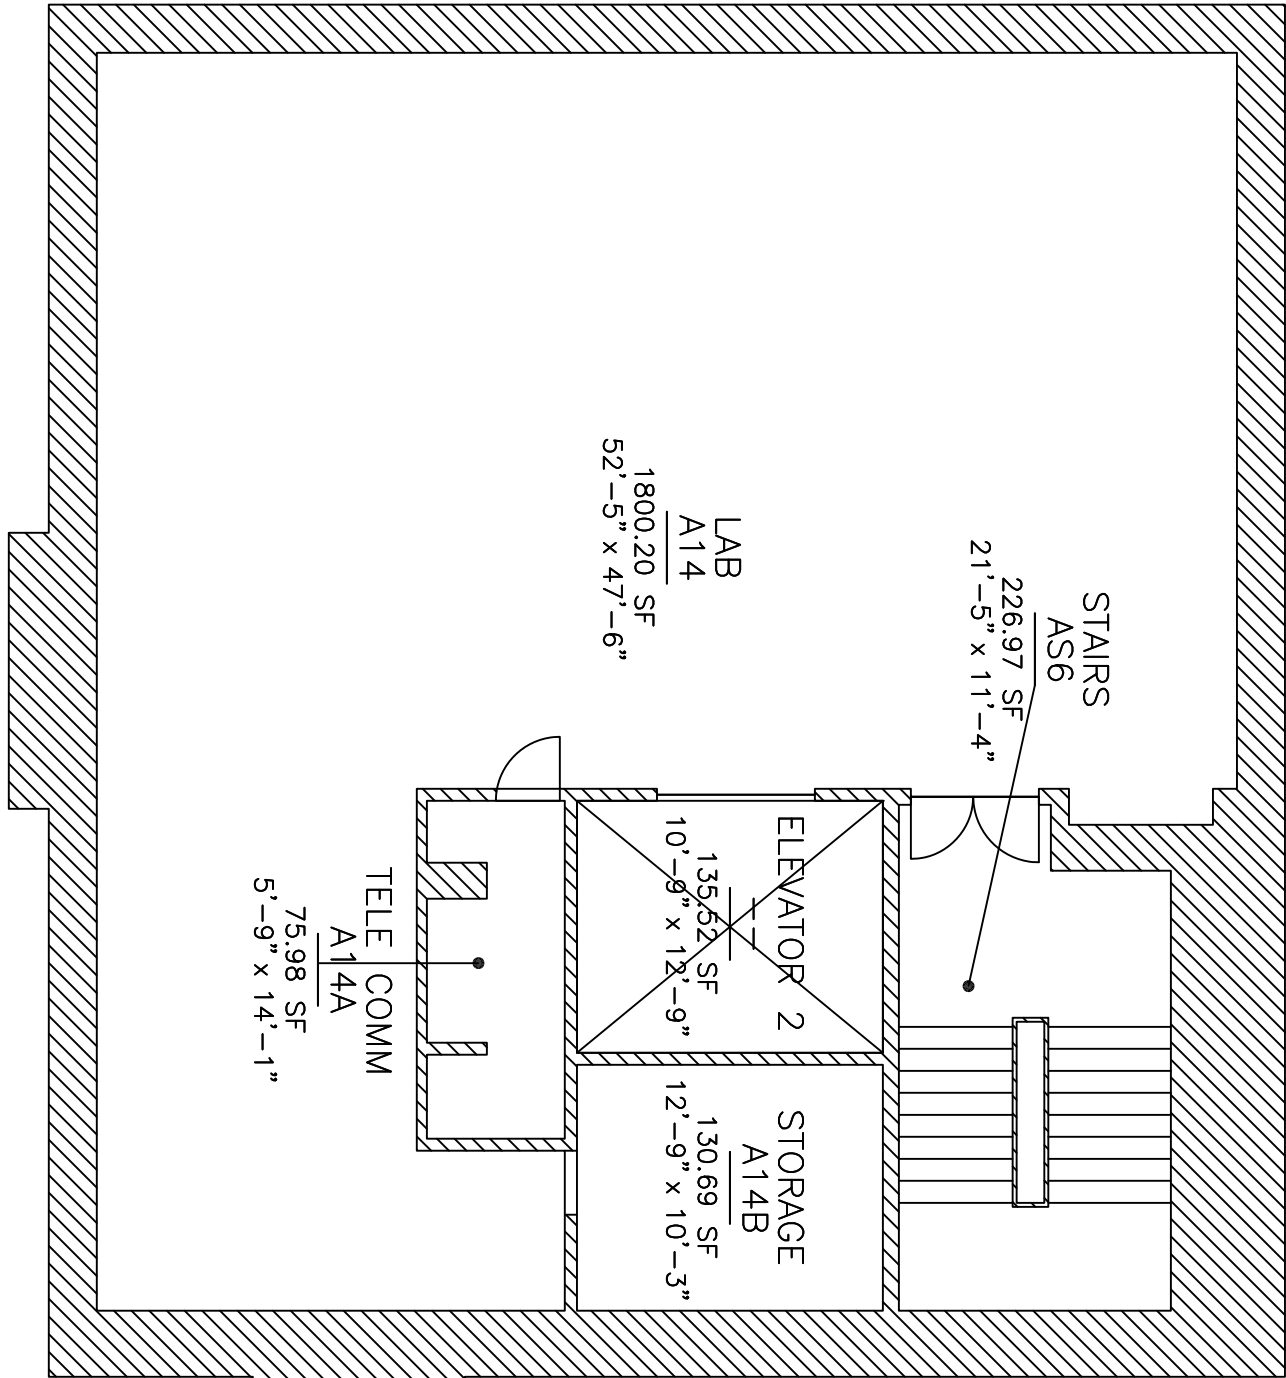


FLOOR 'A' NORTH

1/8" = 1'-0"

0 4' 8' 16'
SCALE: 1/8" = 1'-0"

- NOTES:
1. DIMENSIONS HAVE BEEN FIELD VERIFIED TO .46"
 2. THIS IS A APPROXIMATE REPRESENTATION OF EXISTING CONDITIONS.



FIRST FLOOR
13,002 SQ. FT.
FLOOR GROSS:
27,662.75 SQ. FT.

NOT FOR
CONSTRUCTION
DO NOT SCALE



DPW/Engineering - 1000 Washington Boulevard, West Point, NY 10996-1000, Tel: 845-368-3800

SCALE: 3/32" = 1'-0"	P.M.:
DATE: SEPTEMBER 2012	CHECKED:
DRAWN:	SUBMITTED:
DESIGNED:	APPROVED:


REVISIONS		
#	DESCRIPTION	DATE

DIRECTORATE OF PUBLIC WORKS
ENGINEERING PLANS & SERVICES DIVISION
US ARMY GARRISON
WEST POINT, NY
MAHAN HALL - 0752
FIRST FLOOR


SHEET NUMBER:

7

SHEET 7 OF 10

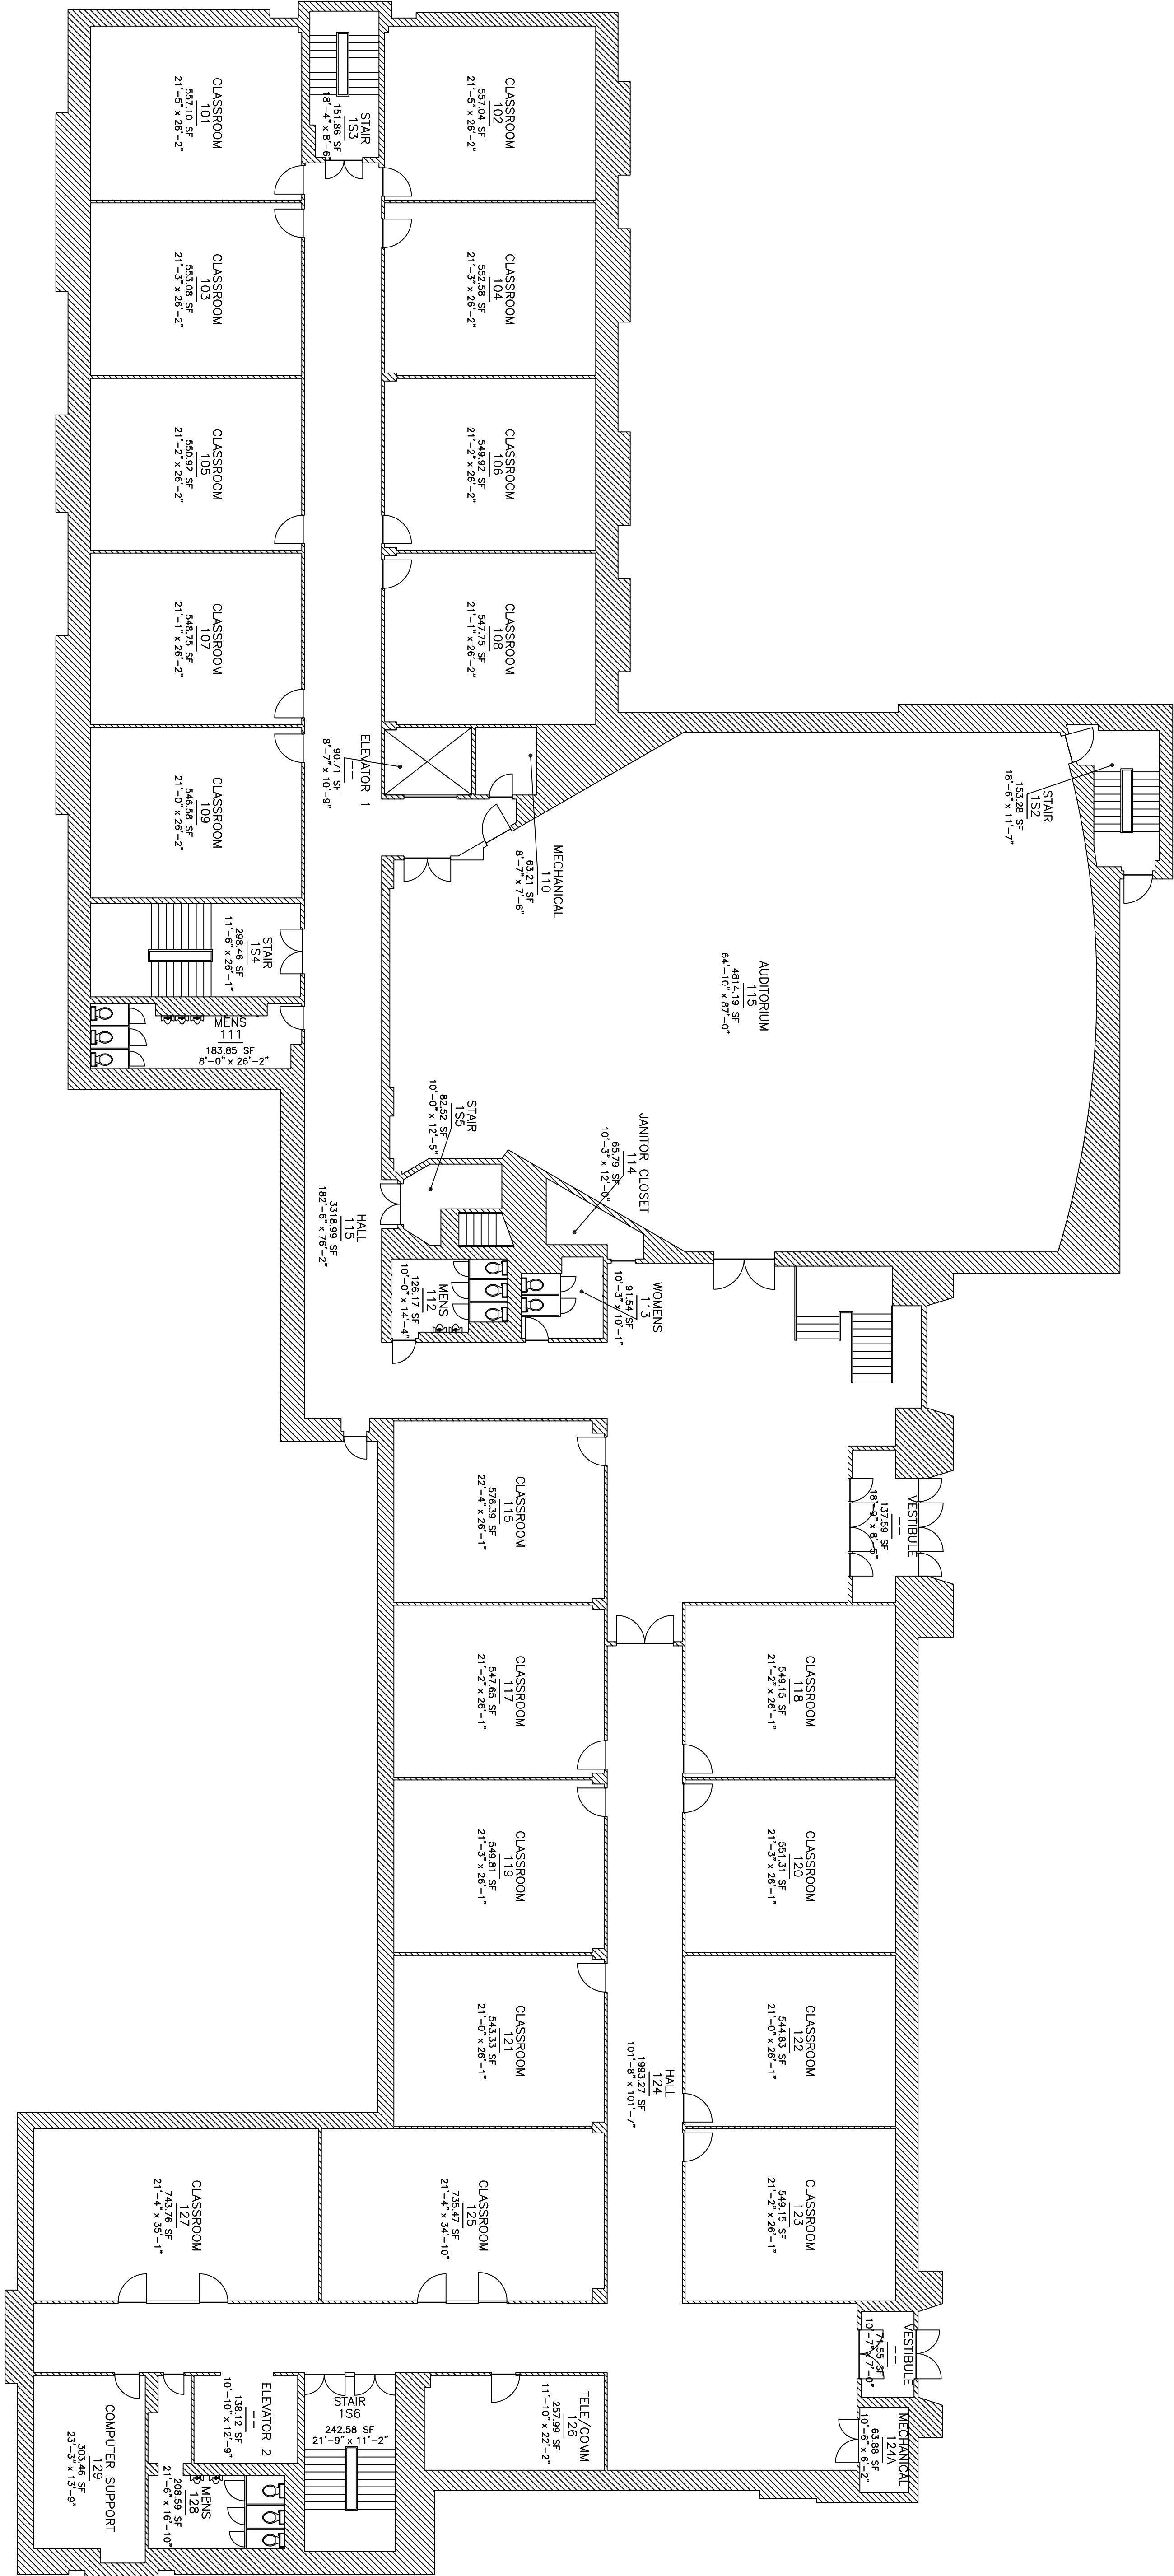


FIRST FLOOR
3/32" = 1'-0"




SCALE: 1/8" = 1'-0"

- NOTES:
1. DIMENSIONS HAVE BEEN FIELD VERIFIED TO .±6"
 2. THIS IS A APPROXIMATE REPRESENTATION OF EXISTING CONDITIONS.



FLOOR AREA:
23,005 SQ. FT.
FLOOR GROSS:
27,600 SQ. FT.

NOT FOR
CONSTRUCTION
DO NOT SCALE

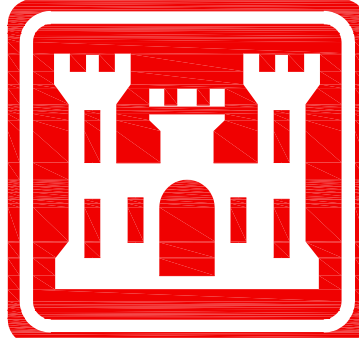

DPW/Engineering - 1000 Washington Building, Washington, DC 20004, Tel: 202-396-1000

SCALE: 3/32" = 1'-0"	P.M.:
DATE: SEPTEMBER 2012	CHECKED:
DRAWN:	SUBMITTED:
DESIGNED:	APPROVED:


REVISIONS		
#	DESCRIPTION	DATE

DIRECTORATE OF PUBLIC WORKS
ENGINEERING PLANS & SERVICES DIVISION
US ARMY GARRISON
WEST POINT, NY
MAHAN HALL - 0752
SECOND FLOOR


SHEET NUMBER:

8

SHEET 8 OF 10

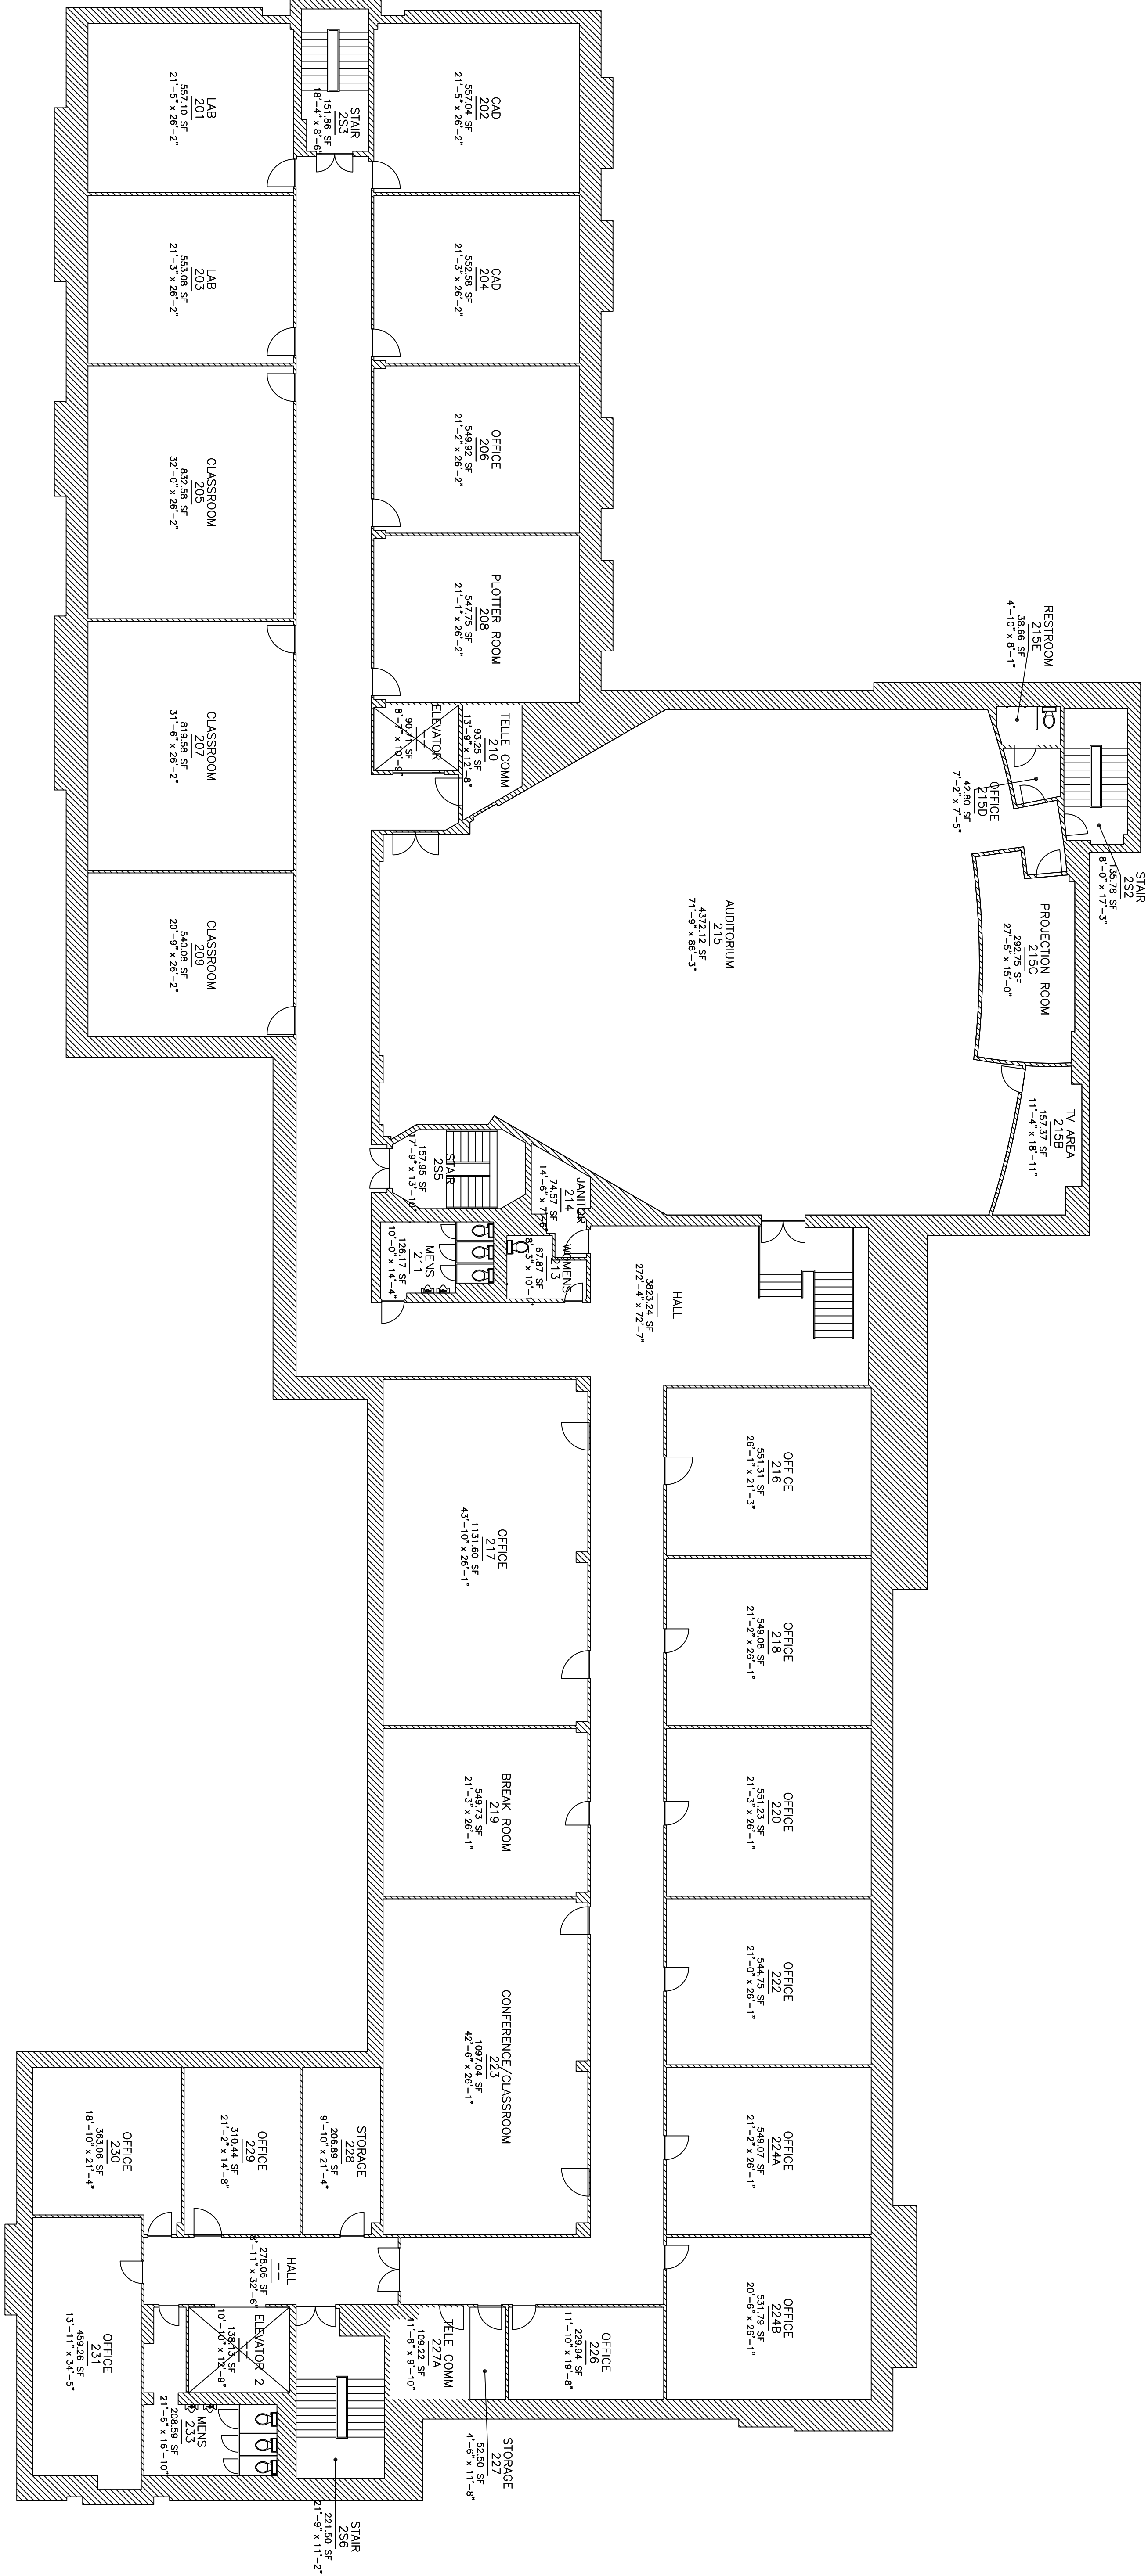


SECOND FLOOR
3/32" = 1'-0"




SCALE: 1/8" = 1'-0"

- NOTES:
1. DIMENSIONS HAVE BEEN FIELD VERIFIED TO .46"
 2. THIS IS A APPROXIMATE REPRESENTATION OF EXISTING CONDITIONS.




FLOOR AREA:
23,039 SQ. FT.
FLOOR GROSS:
27,600 SQ. FT.

NOT FOR
CONSTRUCTION
DO NOT SCALE

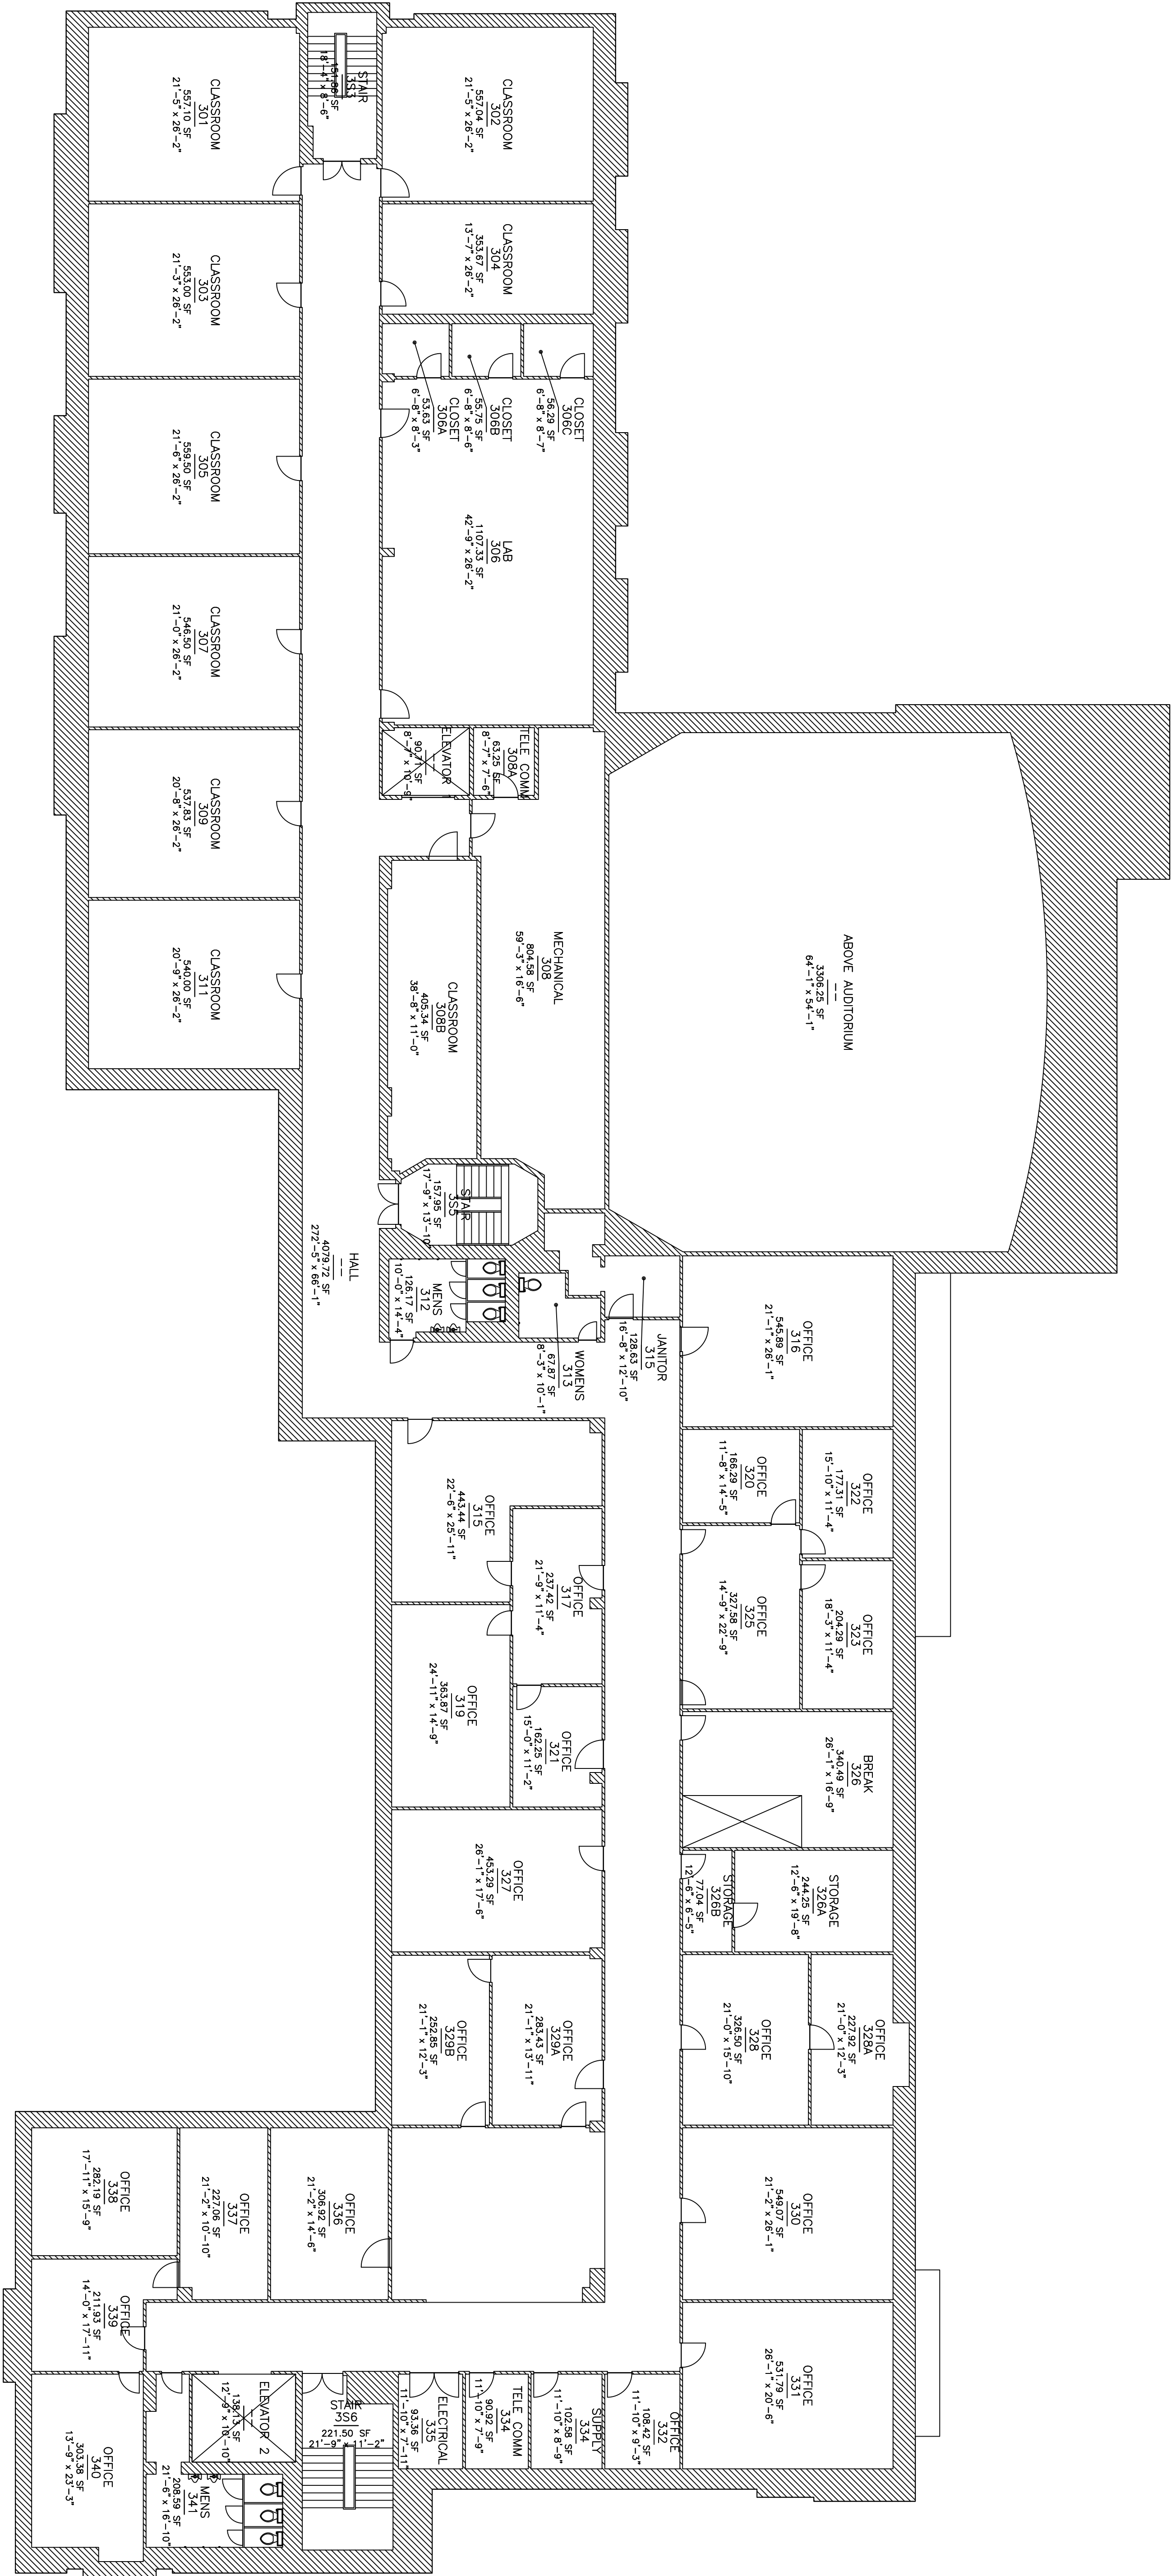

THIRD FLOOR

3/32" = 1'-0"



SHEET NUMBER:

9

SHEET 9 OF 10


DIRECTORATE OF PUBLIC WORKS
ENGINEERING PLANS & SERVICES DIVISION
US ARMY GARRISON
WEST POINT, NY
MAHAN HALL - 0752
THIRD FLOOR

SCALE: 3/32" = 1'-0"
DATE: SEPTEMBER 2012
DRAWN:
DESIGNED:

P.M.:
CHECKED:
SUBMITTED:
APPROVED:


REVISIONS		
#	DESCRIPTION	DATE

- NOTES:
1. DIMENSIONS HAVE BEEN FIELD VERIFIED TO .46"
 2. THIS IS A APPROXIMATE REPRESENTATION OF EXISTING CONDITIONS.



FLOOR NET:
14,534.6 SQ. FT.
FLOOR GROSS:
19,069.44 SQ. FT.

NOT FOR
CONSTRUCTION
DO NOT SCALE



Revised: 09/20/2012 by: [Redacted] Date: 09/20/2012

SCALE: 3/32" = 1'-0"	P.M.:
DATE: SEPTEMBER 2012	CHECKED:
DRAWN:	SUBMITTED:
DESIGNED:	APPROVED:


REVISIONS		
#	DESCRIPTION	DATE

DIRECTORATE OF PUBLIC WORKS
ENGINEERING PLANS & SERVICES DIVISION
US ARMY GARRISON
WEST POINT, NY
MAHAN HALL - 0752
FOURTH FLOOR

SHEET NUMBER:


10

SHEET 10 OF 10

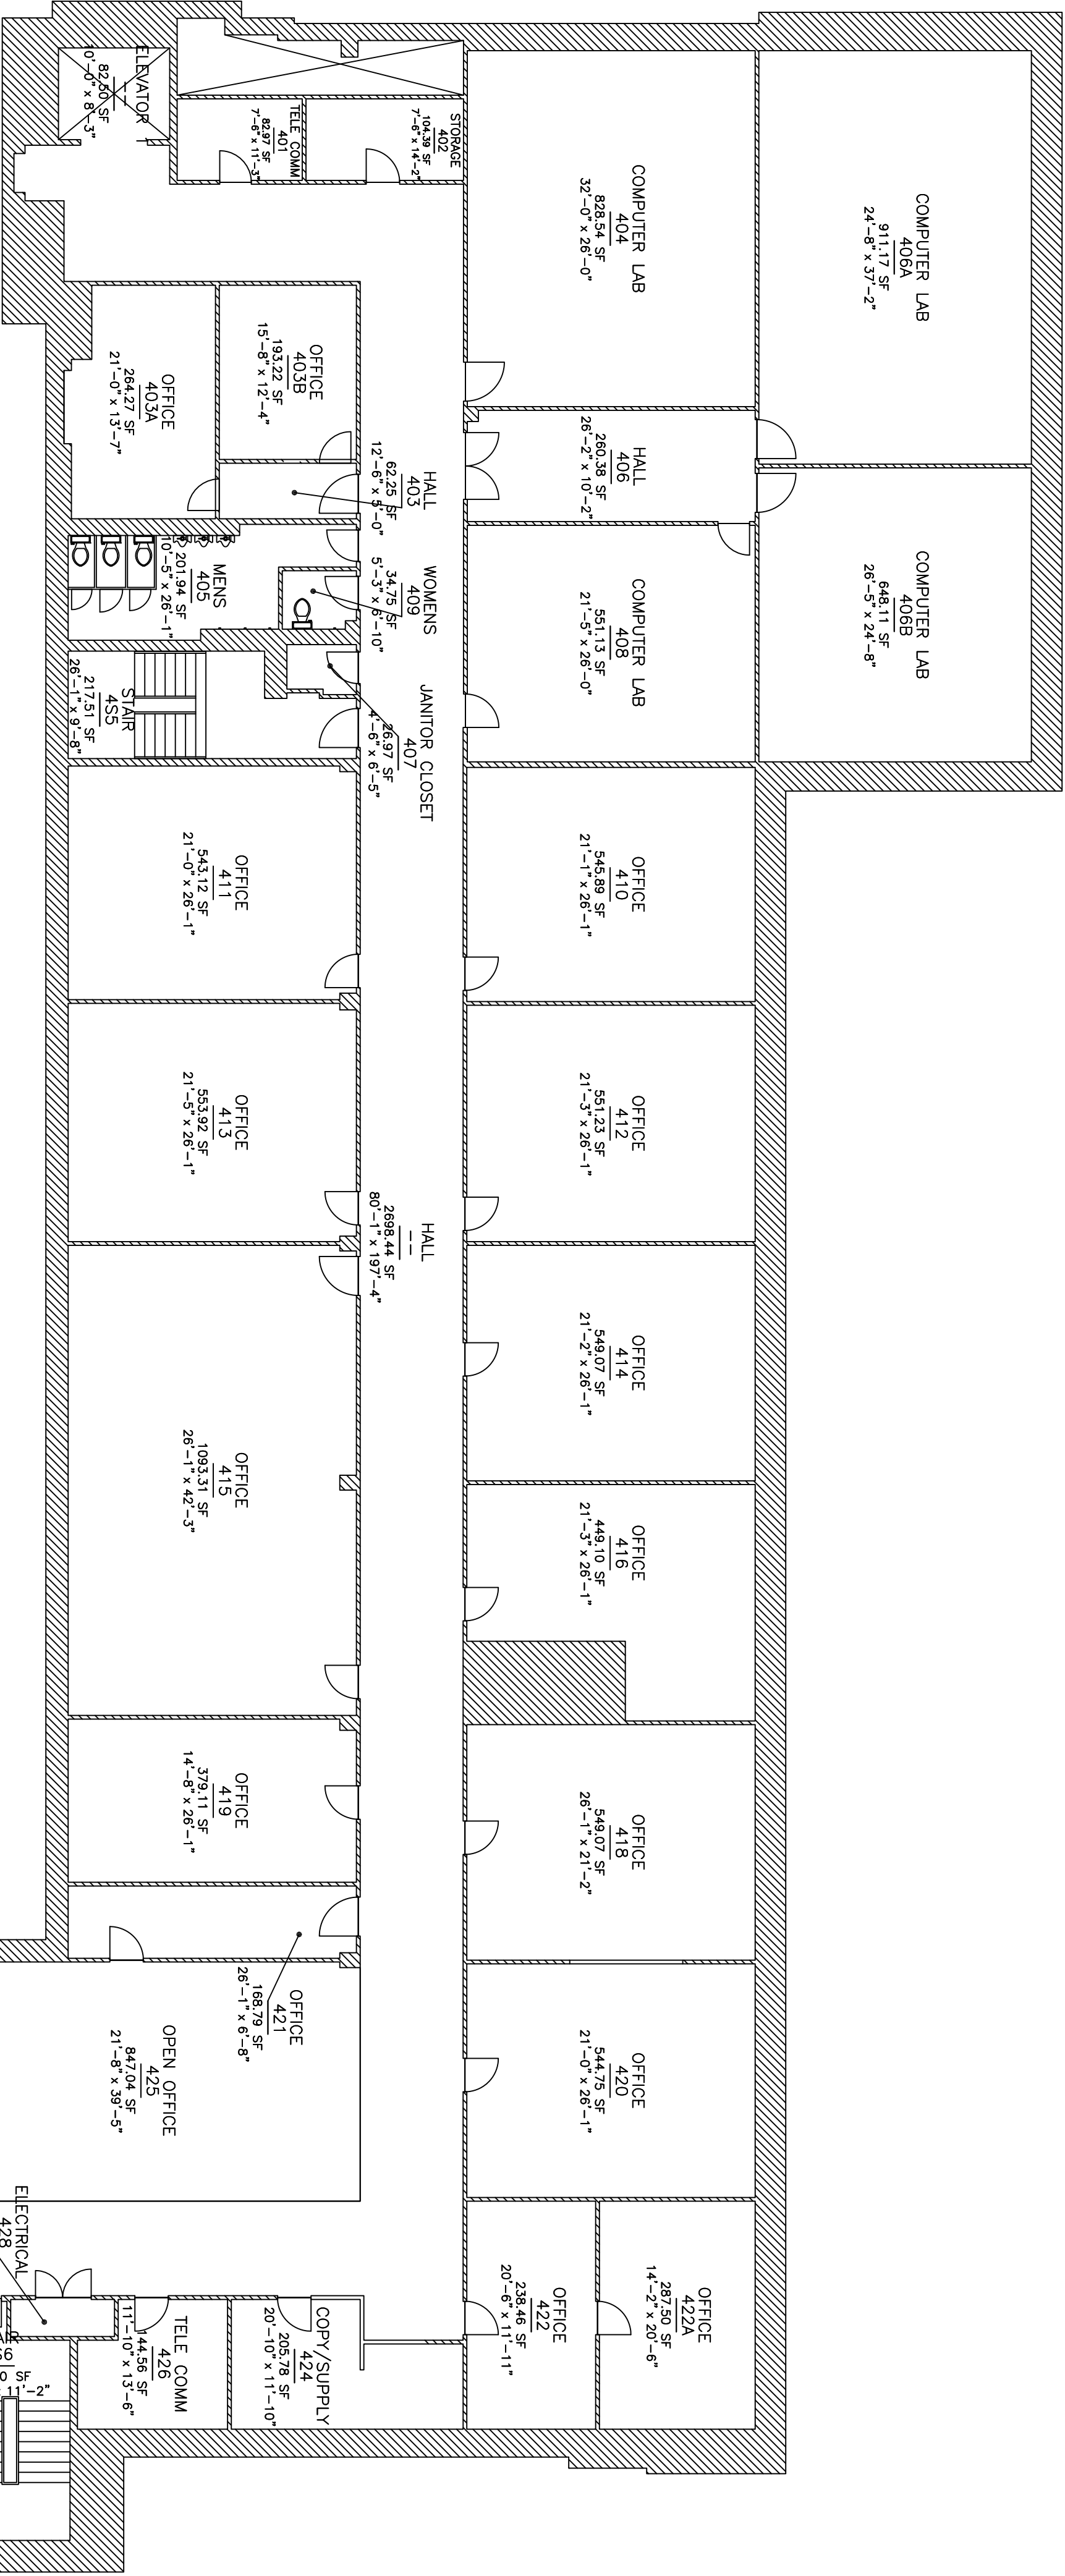

FOURTH FLOOR

3/32" = 1'-0"



SCALE: 1/8" = 1'-0"