



VICINITY MAP

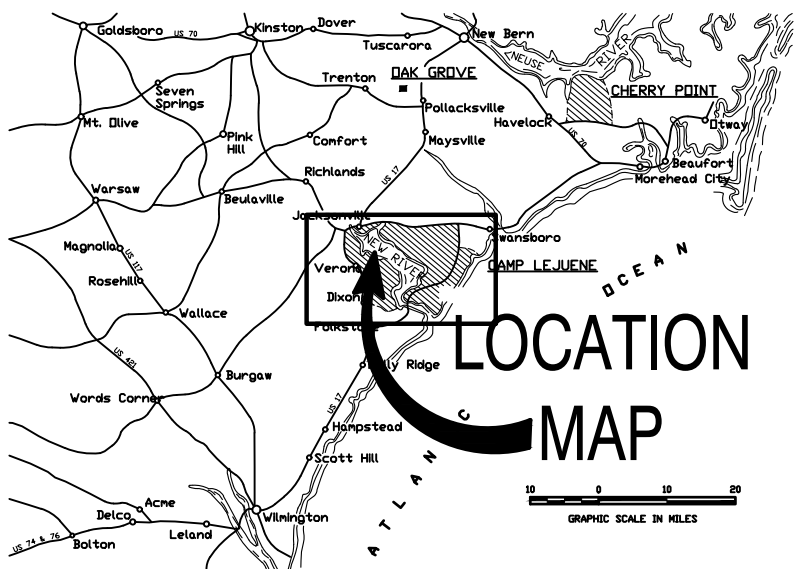


128 FREEZER DOOR REPLACEMENT

CAMP LEJEUNE, N.C.

LOCATION MAP

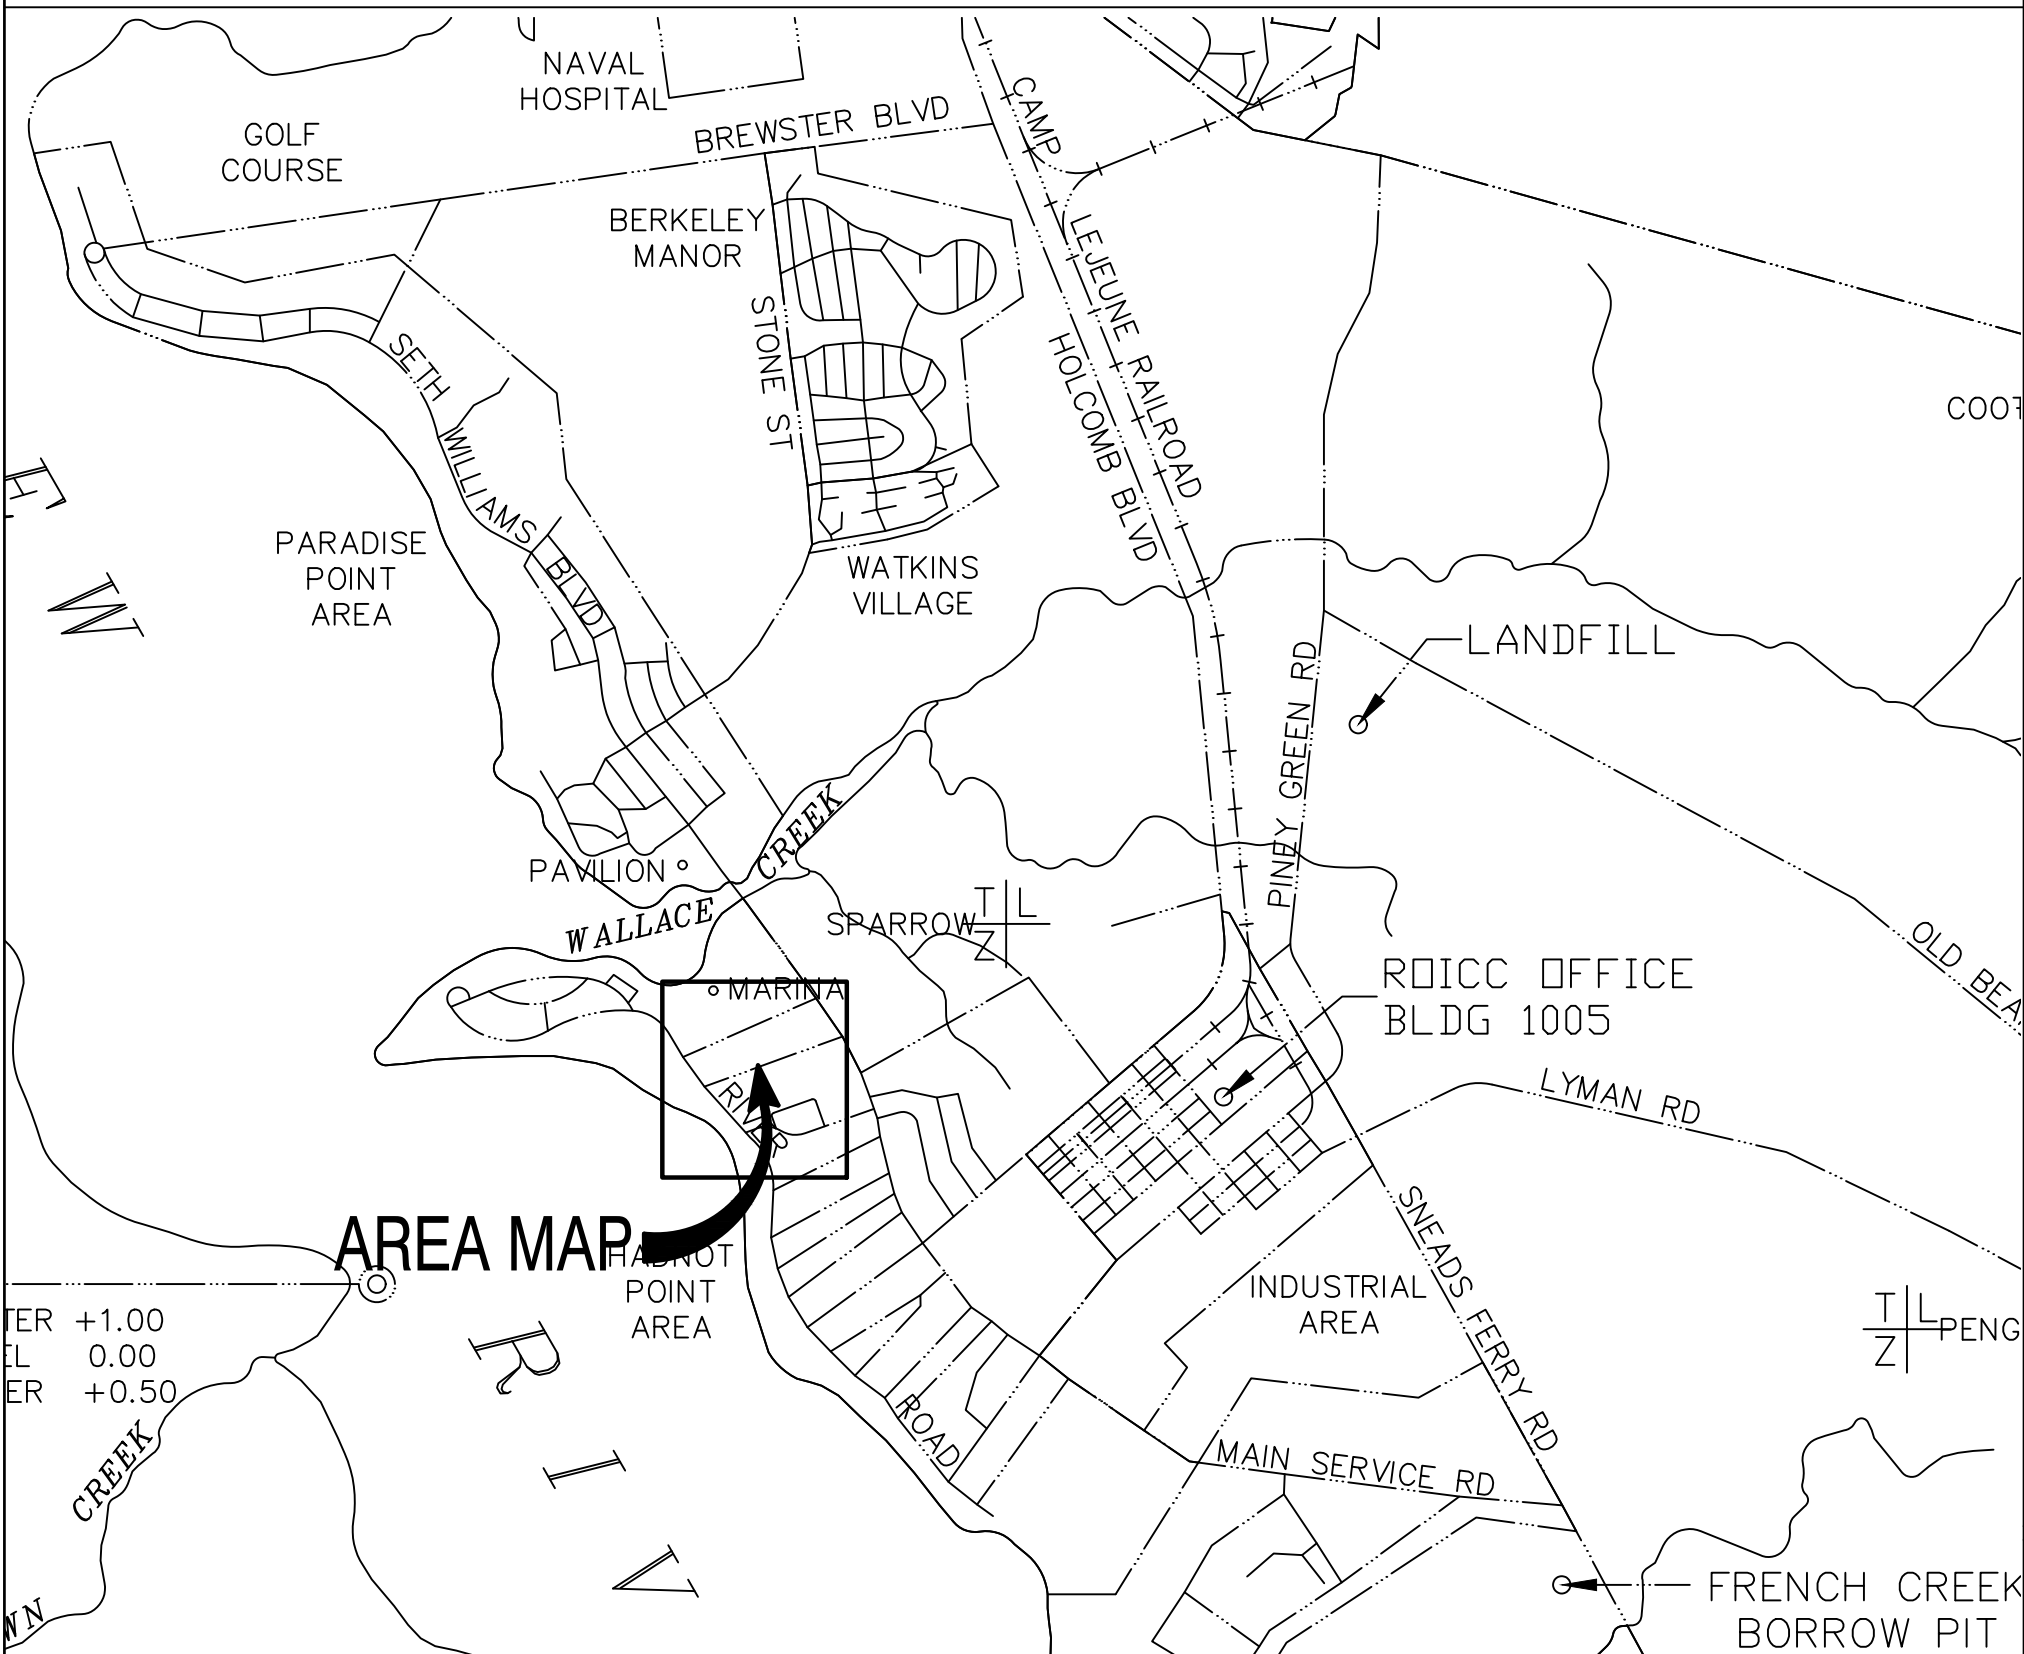


AREA MAP

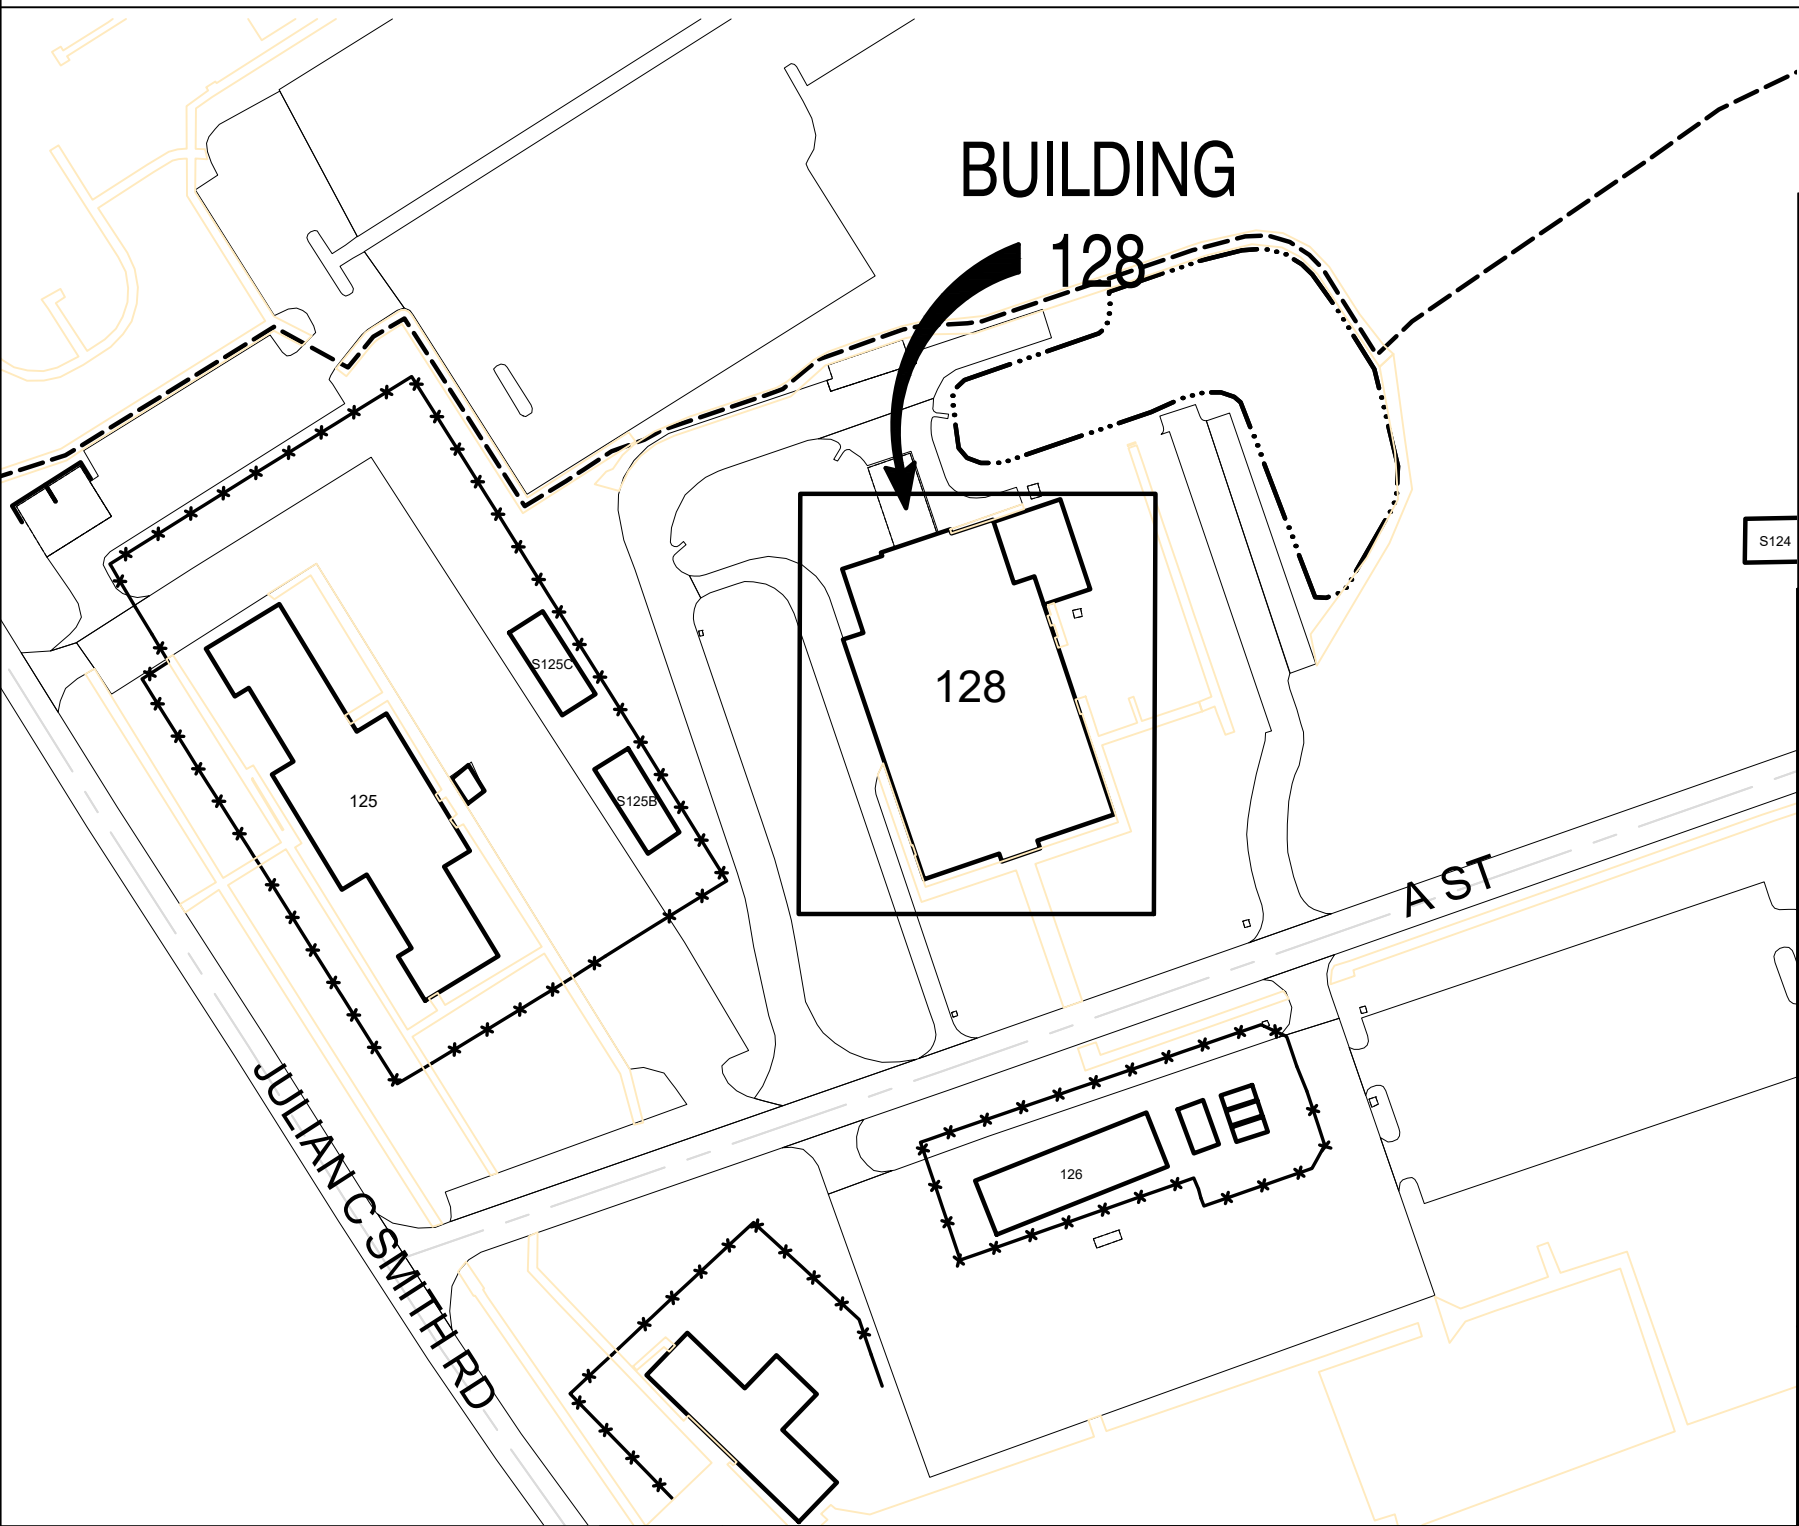

DRAWING INDEX

SHEET #	SHEET NAME
T1	TITLE SHEET, AREA MAPS
A1	NOTES
A2	FLOOR PLAN
A3	FREEZER SCHEDULE

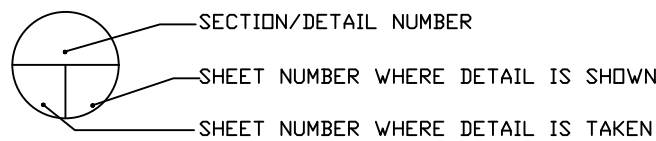

BLDG. 128	SHEET 1 OF 4
MACC #25-0448	PROJECT #25M075CN
DWG. DANA WHITMORE	USMC CAMP LEJEUNE

T1

TITLE PAGE

SCOPE OF WORK: The Contractor shall provide all material, labor, equipment, and supervision required to accomplish the following:

GENERAL DESCRIPTION – this scope of work is to be accomplished at 128 located on "A" street at Camp Lejeune, North Carolina. This project will consist of removing and replacing One(1) Freezer door. Contractor to provide new doors in existing opening, Contractor to repair walls and floor to facilitate the new replacement door, door frame, and hardware for air tight seal of doors.

DETAILED REQUIREMENTS AND SPECIFICATIONS: The Contractor shall take his own field measurements in determining required materials and costs for the following.

SPECIAL SCHEDULING AND ACCESS: Access and scheduling to the work area shall be arranged through contracting officer's representative for the OICC office and the tenant of the building. point of contact for access to building is Terry Castleberry, Mr. Castleberry can be reached at 910-451-6270

NOTES:

1. The measurements and quantities furnished here are for reference only. The Contractor is responsible for actual field verification prior to bidding, ordering material and during every step of construction for existing surfaces, dimensions and conditions.
2. Repair, refinish all areas damaged or disturbed by new work to be provided under this contract.
3. Contractor may only use the Camp Lejeune sanitary landfill for the disposal of asbestos containing materials, building products with tightly adhered lead containing paint, non-contaminated clean dirt and clean gravel. the hours of operations are 0730-1530 Monday- Thursday and 0730-1430 on Friday. delivery of acceptable materials (identified above) shall be by appointment only. appointment made by phone at 1-910-457-5011 or 1-910-451-2946.
4. All other contractor generated material shall be weighed through the base landfill scales before being removed from the base. Contractor utilizing the base scale will require contracting officers assisted per-registration with the landfill manager.
5. The Contracting Officer will register the contract via e-mail, with the base landfill. all haul vehicles will maintain a secure vehicle placed as a condition to utilize the scale. E-mail the Contractors information to the landfill clerk, include the name on the prime contractor, contract number, job name / description, completion date and whether or not any above material will be delivered to the landfill.
6. Prior to performing "hot work" (welding, cutting, etc.) or operating other flame -producing spark producing devices, a written permit shall be requested from the fire division. contractors are required to meet all criteria before a permit is issued. the contractor will provide at least two (2) twenty (20) pound 4A:20 BC rated extinguishers for normal "hot work". all extinguishers shall be current inspection tagged, approved safety pin and tamper resistant seal. It is also mandatory to have a designated fire watch for any "hot work" done at this activity. The fire watch shall be trained in accordance with NFPA 51b and remain on site for a minimum of thirty (30) minutes after work is completed.
7. Contractor is to be aware of all rules, regulation and codes required for successful completion of project.

SUBMITTALS:

1. Contractor shall make electronic copies of all submittals, include the approved transmittal sheets and provide two (2) CD/DVD'S containing all submittals for project. the CD/DVD'S shall be marked "complete submittal package - "128 FREEZER DOOR" with contract # as issued by contracting officer.
2. AFTER AWARD: The Contractor shall furnish the contracting officer, material, specifications for selection and approval prior to the ordering and installation of said materials.
3. The Contractor is required to submit a schedule detailing when they and or any subcontractor will be working. the schedule must be approved by government before beginning work.
4. The Contractor shall submit to the contracting officer, the manufacture's product specifications, complete with technical products data for all of the material being used in this process. the product specification shall as a minimum, provide the technical details on the following items.
5. SUBMIT:
 - A. Shop drawings.
 - B. Installation drawings /shop drawings
 - C. Product data
 - C.A. Manufactures Technical Data sheet
 - C.B. Material Safety Data Sheets (MADA)
 - C.C. Maintenance Data
 - D. Warranty (10 year commercial limited warranty)
 - E. As-built drawings auto-cad and adobe PDF formats
6. QUALIFICATIONS:
 - 6.1. Fabricator and Installer qualifications: minimum of three years documented experience in installing refrigerators, and freezer doors, similar in scope and complexity to this project.
 - 6.2. Installer shall be certified Installer by door manufacture.

PROVIDE AND INSTALL COMPLETE INSTALLATION OF

1. FREEZER DOOR:
 - 1.1. DOOR SIZE: 72" X 61-1/2", 100 mm 4 inch thickness, filled with insulation. provide each door panel with an outside and inside diamond plate , match existing.
 - 1.2. Waterproof thermometer for registering temperature inside box.
2. Anti-condensing strip heaters around the perimeter of door panel jambs.
 - 2.1. Provide top and each side of door with a resilient
 - 2.2. Non-magnetic, or thermoplastic with magnetic steel core gasket
3. Bottom edge of door:
 - 3.1. Provide a replaceable,adjustable rubber or vinyl wiper gasket
4. Hardware shall be polished stainless steel:
 - 4.1. Two self-closing, spring-loaded hinges for each door
 - 4.1.1. Include plated steel pin and section 11 41 11 page 12 cam-lift type bearing
 - 4.1.2. Door latch with cylinder lock and with provisions for padlock include safety-release handle to permit opening from inside when locked
5. DOOR STOPS:

Where necessary to prevent walk-in freezer door from striking adjacent walls, plumbing fixtures or food service equipment when door is open.

Provide protective bumpers:

Equip the exterior sides of refrigerator that are not installed against each other or against a wall with protective bumpers.


Fabricate bumpers from either 1.5 mm 0.059 inch thick galvanized steel or stainless steel channel or from solid rubber or rubber-like materials having a Durometer hardness of $\frac{75}{5}$
6. GASKET:

Either natural or synthetic rubber gaskets and in accordance with NSF/ANSI.

Where frames are used, the panels must fit together with gaskets that are designed for 50 percent compression.

 - 6.1. Protect air flow inhibiting strip curtains.

128 REFRIGERATOR FREEZER DOOR REPLACEMENT	BLDG. 128	SHEET 2 OF 4
USMC CAMP LEBJUNE	MACC #25-0448	PROJECT #25M075CN
	DWG. DATA WHITMORE	

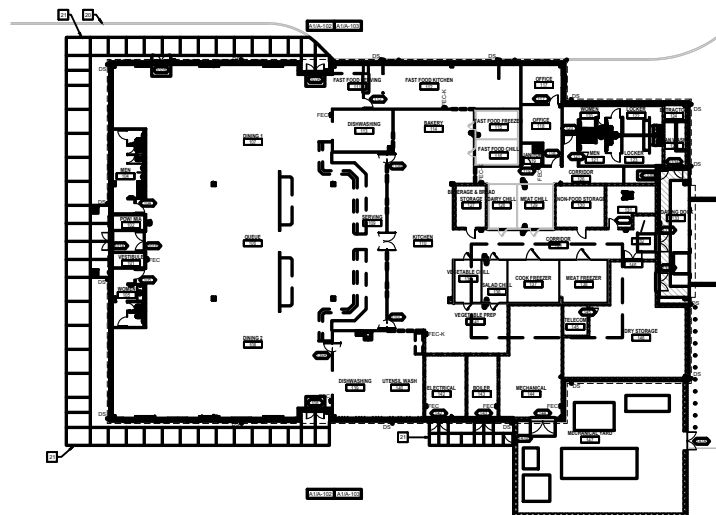

1 128 OVERALL FLOOR PLAN
A2 | A2
1/32" = 1'-0" 0 20' 40' 80'


GENERAL WORK NOTES (BUILDING G640)

1. PROVIDE NEW INTERIOR FREEZER DOORS, FRAMES, ALL HARDWARE, WHERE INDICATED. SEE DOOR SCHEDULE ON THIS SHEET.
2. CONTRACTOR SHALL VISIT SITE TO VERIFY LOCATIONS OF EXISTING FREEZER DOOR. BUILDING WILL REMAIN IN THE OPERATION AND COOLER TEMPERATURE MUST BE MAINTAINED FOOD ITEMS PROTECTED.
3. CONTRACTOR SHALL CONDUCT A SITE VISIT TO VERIFY MATERIAL OF EXISTING AND MATERIAL NEED FOR WALL, AND FLOOR FRAMING, FOR A COMPLETE INSTALLATION OF FREEZER DOOR.
4. CONTRACTOR SHALL PROVIDE NEW STAINLESS STEEL THRESHOLD. SECURE TO FLOOR FOR A SMOOTH TRANSITION. PROVIDE NEW DOOR. MATCH EXISTING ALUMINUM DIAMOND METAL PLATE AND
5. CONTRACTOR SHALL COMPLY WITH:
ASTM E84 2023
NSF ANSI 2(2022)
NSF ANSI 7(2023)
UL 207 (2022)
UL 723 (2020)

NEW WORK NOTES (BUILDING G640 ONLY)

SEE FLOOR PLAN ON SHEET A2

- 1 DEMO EXISTING FREEZER DOORS. JAMBS, HEADERS, THRESHOLD.
- 2 PATCH EXISTING JAMB FRAMES WALLS AND CEILING WERE DEMOLISHED OF EXISTING FREEZER DOOR.
PROVIDE METAL STUDS FOR WALL AS NEEDED.
- 3 MODIFY EXISTING OPENINGS OF NEW FREEZER DOORS FOR A COMPLETE AIR TIGHT SEAL TO INCLUDE HEADER, JAMBS AND FLOORING. LEVEL AND PLUMB
PROVIDE NEW FREEZER DOOR, FRAME AND HARDWARE. SEE DOOR SCHEDULE ON THIS SHEET.
- 4 INSTALL STAINLESS STEEL FREEZER DOORS, FASTENERS AND HARD WARE.
PROVIDE REFRIGERATOR OR FREEZER COMPLETE TO INCLUDE TRIM, HARDWARE, DOOR (84" X 61-1/2"), AND ALL LABOR AND MATERIALS NECESSARY FOR A COMPLETE INSTALLATION AS MANUFACTURED BY BALLY REFRIGERATED FREEZER DOORS OR APPROVED EQUAL. SEE FREEZER SCHEDULE.

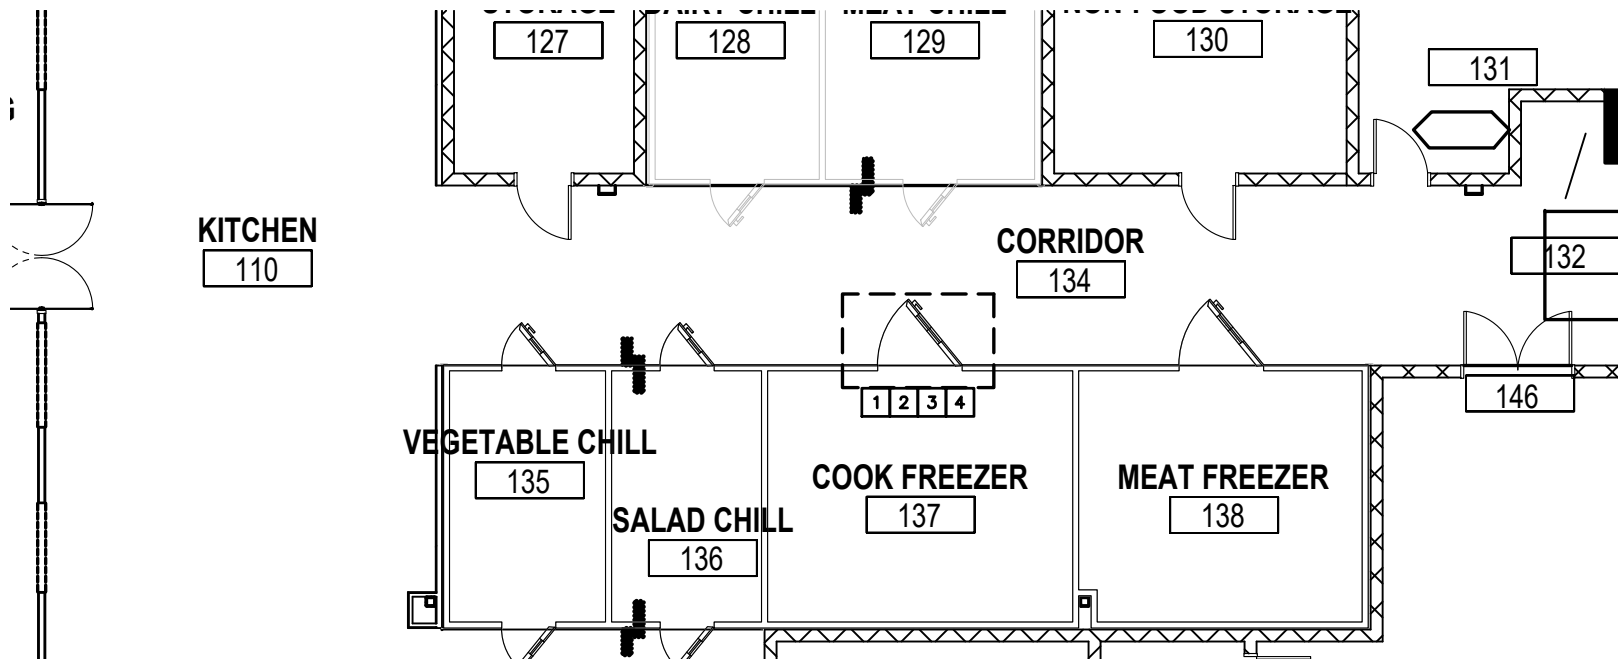

2 128 FREEZER FLOOR PLAN
A2 | A2
3/16" = 1'-0" 0 20' 40' 80'



ROOM 137 EXTERIOR

ROOM 137 INTERIOR

FREEZER DOOR			
ROOM NO.	ROOM NAME	SIZE	TEMP (FAHRENHEIT)
137	COOK. FREEZER.	20'-8"x29'-6"	30°

EXISTING FINISH SCHEDULE FOR REFERENCE ONLY							
ROOM NO.	ROOM NAME	FLOOR	BASE	WALL	CEILING		NOTES
					MATERIAL	HEIGHT	
137	MEAT FREEZER	QT	N/A	MTL PANEL	MTL PANEL	72"	

128 REFRIGERATOR FREEZER DOOR REPLACEMENT	BLDG. 128	SHEET 4 OF 4
	MACC #25-0448	
	DWG. DANA WHITMORE	PROJECT #25M075CN