

OFFICE OF
INFORMATION
TECHNOLOGY

Capital Region Readiness Center Facilities Maintenance Support Services

Performance Work Statement

February 27, 2026 | Space & Facilities Management

FOR INTERNAL USE ONLY

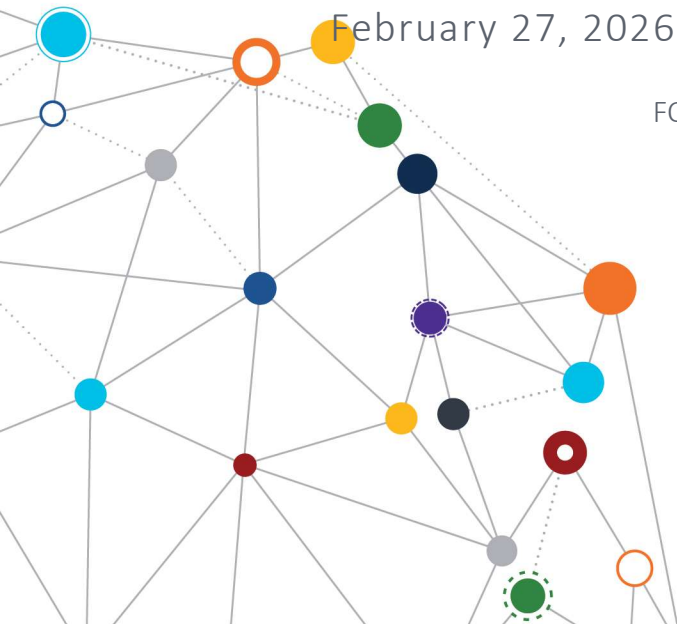


Table of Contents

Facilities Maintenance Support Services 3

1 Background and Objectives..... 3

2 Applicable Standards, Regulations, and Documents..... 4

3 Scope of Work 6

4 Contractor Qualifications and Responsibilities..... 7

5 Management, Supervision and Workforce..... 9

6 Specific Tasks and Deliverables 13

7 Deliverables Error! Bookmark not defined.

8 Work Classification and Service Request Response Time 20

9 Access..... 21

10 Vehicle and Equipment Access 21

11 Supplies and Materials 21

12 Notification 21

13 Performance Metrics 22

14 Government Responsibilities 23

15 Price/Cost Schedule..... 24

16 Position/Task Risk Designation Level(s) and Contractor Personnel Security Requirements 34

17 Points Of Contact 36

18 Addendum A 37

19 Addendum B 40

20 Service Specific Attachments..... 45



Facilities Maintenance Support Services

1 Background and Objectives

- A. The United States Department of Veterans Affairs (VA) Capital Region Readiness Center (CRRC) is a federally-owned Office of Information Technology (OIT) facility, located on the VA Medical Center (VAMC) campus in Martinsburg, WV. The facility is a single story building of approximately 66,300 gross square feet (gsf) in size. The facility includes office space, mechanical and engineering space, and a 9300 square foot data floor. The CRRC Air Quality Management Permit is provided by the Martinsburg VAMC.
- B. The CRRC is part of VA National Data Center network and has a mission-critical role in that network. The facility is a 24/7/365 operation. Maintaining the CRRC is critical to the readiness objective of the mission.
- C. All employees of Contractor, and subcontractors, shall comply with VA security management program and obtain permission of facility management, be identified by project and employer, and are restricted from unauthorized access.
- D. Parking will be provided on campus, in Lot “A”, adjacent to the CRRC, and in Lot “O”, at no additional cost to the Contractor.
- E. Type of Contract: Firm Fixed Price (FFP)
- F. Period and Place of Performance: The period of performance is one (1) twelve-month base period and four (4) twelve-month option periods.

Base period: 6/13/2026 – 6/12/2027

Option Period One: 6/13/2027 – 6/12/2028 **Option Period Three:** 6/13/2029 – 6/12/2030
Option Period Two: 6/13/2028 – 6/12/2029 **Option Period Four:** 6/13/2030 – 6/12/2031

1. The primary place of performance is:

Department of Veterans Affairs
Capital Region Readiness Center
221 Butler Avenue, Building 511
Martinsburg, WV 25405

2. The secondary places of performance are:

Department of Veterans Affairs
VA IT Training Academy
239 Lowe Drive, Suite 100
Shepherdstown, WV 25443

Department of Veterans Affairs
OIT Shepherdstown Facility
239 Lowe Drive, Suite 101
Shepherdstown, WV 25443



2 Applicable Standards, Regulations, and Documents

- A. In the performance of the tasks associated with this PWS, the Contractor shall comply with the following:
1. Contract clauses for security and personnel related requirements;
 2. VA Program Management Standards as defined in the Acquisition Program Management Framework (APMF);
 3. Project Management Accountability System (PMAS), and other VA doctrine and standards;
 4. FIPS 201-3, "Personal Identity Verification (PIV) of Federal Employees and Contractors," January 24, 2022;
 5. NFPA 110, "Standard for Emergency and Standby Power Systems", 2022 ed.
 6. 5 U.S.C. § 552a, as amended, "The Privacy Act of 1974";
 7. Section 508 of the Rehabilitation Act of 1973, as amended (29 U.S.C. 794d);
 8. 42 U.S.C. § 2000d "Title VI of the Civil Rights Act of 1964";
 9. 36 C.F.R. Part 1194 "Electronic and Information Technology Accessibility Standards," July 1, 2003;
 10. VA Directive and Handbook 0710, Personnel Suitability and Security Program, May 2, 2016;
 11. Sections 508 of the Rehabilitation Act (29 U.S.C. § 794d), as amended by the Workforce Investment Act of 1998 (P.L. 105-220), August 7, 1998;
 12. VA Directive 6500, "VA Cybersecurity Program," January 23, 2019;
 13. VA Handbook 6500, "VA Information Security Program," March 10, 2015;
 14. VA Handbook 6500.6, "Contract Security," March 12, 2010;
 15. VA Handbook 5015, Employee Learning and Professional Development June 25, 2010;
 16. VA Directive 6102, VA Internet/Intranet Services August 5, 2019;
 17. VA Directive 6221, Accessible Information and Communications Technology October 16, 2017;
 18. VA Directive 0003, Technical Specifications and Design Standards For VA Learning April 26, 2012;
 19. VA Directive 0004, Education and Learning Delivery System April 20, 2012;
 20. VA Directive 0006, Talent Management System (TMS) E-Learning Section 508 September 18, 2012;

21. Sharable Content Object Reference Model (SCORM) Edition Specification (www.adlnet.gov/resources) and Aviation Industry CBT Committee (AICC) per their use in 3.0 below;
22. NIST SP 800-53 (rev.5) September 2020 and Release 5.2.0 on August 27, 2025;
23. NIST SP 800-47.
24. ANSI/NETA MTS-2023, Standard for Maintenance Testing Specifications for Electrical Power Equipment and Systems, March 6, 2023.

3 Scope of Work

The Contractor shall provide all labor, supervision, coordination, tools, equipment, materials, and services necessary to operate, monitor, maintain, repair, and support the Government facility's mission-critical infrastructure systems. Services include routine operations, preventive maintenance coordination, corrective maintenance coordination, system monitoring, testing oversight, reporting, and compliance with applicable standards and regulations.

All systems shall be maintained according to manufacturer's recommendations for service level and interval. Demonstrated best practice may be considered based on actual use and application. Under no circumstances shall any systems be removed from service prior to notification of CRRC government staff and all affected parties. All necessary training and certifications to maintain the systems and associated equipment listed below shall be provided by the Contractor.

Areas of Responsibility (Systems, Equipment and Capabilities)

Building Certifications (e.g., Lightning Protection, Fuel Storage Tanks, Back Flow Preventer, Elevator Lift)	Fall Protection
	Fire Alarm Control Panel (FACP)
	Flooring maintenance
Fuel Services Maintenance & Monitoring (fuel storage, tanks, pumps, lines, controllers, and conditioning)	General plumbing
	Generator Electrical Paralleling Switchgear
	Generators, Emergency Power
Maintain Perimeter Security Fence, Vehicle and Pedestrian Gates	Handicap Door Openers
	Humidifiers
Physical Environment Maintenance (General, Data Floor, Data Closets)	Heating, Ventilation, Air Conditioning (incl. RTU's)
	Inclement weather preparedness
Power Management Modules (PMM) Maintenance & Repair	Laborer - furniture move, hang fixtures
	Loading Dock Doors Maintenance & Repair
Systems Monitoring (Building Management, Supervisory Control & Data Acquisition)	Lock-out/Tag-out (LOTO)
	Maintain Foyer Flooring
Appliance service, minor	Maintain/Repair perimeter fencing
Architectural finishes	Maintain Water Fountains/Bottle Fillers
Asphalt Sealer & Crack Repair	Mini-Split (Data Closets) Maintenance
Battery Monitoring & Maintenance	Parking Lot Restriping
Blower Coil Units (BCU)	Procure/Install electrical whips, breakers
Chillers/Chilled Water Pumps/Dry Coolers	Procure/Install HVAC Filters
Circuit Breaker Testing	Provide Building Support Personnel - 24/7 staff
Clean Agent Fire Suppression System Maintenance	Roof and Exterior Building Surface Maintenance
Computer Room Air Handlers (CRAH)	Sewage Lift/Grinder Pumps

Dock Levelers	Sidewalk treating & clearing in inclement weather
Electrical Control, UPS Batteries	Signage Maintenance & Repair
Electrical Gear, Square D	Steam Generators
Electrical, Data Floor	Tile Cutting
Electrical, General	Uninterruptible Power Supply (UPS) and Batteries
Elevator Lift Maintenance	Warehouse / Loading Dock support
Emergency Generators	Water Heater Maintenance & Repair

4 Contractor Qualifications and Responsibilities

- A. The Contractor shall provide and maintain, at a minimum, sufficient qualified personnel to ensure continuous, safe, and reliable operation, maintenance, and monitoring of all critical infrastructure systems within the Capital Region Readiness Center (CRRC). Staffing levels shall be structured and maintained to fully support all operational, preventive and corrective maintenance, reporting, and compliance requirements, ensuring uninterrupted mission readiness and immediate response to contingencies. Under no circumstances shall maintenance or operational activities be curtailed, deferred, or compromised due to insufficient staffing.
- B. The Contractor shall ensure all assigned personnel are fully qualified, certified, and competent to perform maintenance, repair, operation, modification, and preventive maintenance (PM) work required under this contract. Personnel shall have demonstrated experience commensurate with their position responsibilities and the critical nature of the facility systems.
- C. At a minimum, the Contractor shall staff the following key and technical positions:
 - Site Manager / Program Manager: Responsible for overall contract execution, staffing, scheduling, coordination, and quality assurance.
 - Lead Critical Systems Engineer: Provides technical oversight, system diagnostics, and infrastructure optimization.
 - Electrical Technicians (minimum of two): Electrician-qualified personnel capable of independent electrical troubleshooting, switching, and emergency power restoration.
 - Multi-Trade Critical Infrastructure Technicians: Skilled in mechanical, HVAC, controls, fuel systems, and general maintenance/light carpentry.
 - Controls / BMS / SCADA Technician: Responsible for monitoring, maintaining, and troubleshooting control systems.
 - Administrative Support: As required to support compliance reporting, scheduling, and documentation.
- D. The Contractor shall ensure a minimum of two (2) qualified building-support personnel are physically present onsite at all times, across three (3) shifts per day, 24 hours per day, seven

(7) days per week, 365 days per year. Remote or on-call personnel shall not meet this requirement. Deviation from this minimum onsite staffing level is only allowed under an approved Single-Person Shift Event Protocol, as authorized by the Government.

- E. The Contractor shall coordinate all necessary trades, technical support assets, and specialized vendors to meet the requirements of this contract. When additional resources are required, including subcontractors, OEM-authorized service providers, or specialty vendors, the Contractor shall plan, resource, and coordinate all efforts under this contract. The Contractor remains fully responsible for overall performance, safety, quality assurance, documentation, and timely completion of all services.
- F. The Contractor shall develop and maintain an integrated project and staffing plan, resource appropriately, and coordinate ongoing and emergent activities with the Contracting Officer's Representative (COR) or designated representative. The Contractor shall also provide personnel, as needed, to perform routine facility support tasks (e.g., hanging pictures, moving furniture) at two other designated facilities, within 10 miles, when directed.
- G. All personnel assigned to CRRC operations shall meet the following minimum qualifications:
- Minimum three (3) years hands-on experience with mission-critical facility systems, including UPS, ATS, switchgear, generators, CRAHs, chillers, BMS/SCADA.
 - Current OSHA 29 CFR 1910 Subpart S and NFPA 70E-compliant training.
 - Documented OEM-specific training or certification for CRRC systems (e.g., Schneider EcoStruxure/PME, ASCO/Generac, Liebert/Vertiv).
 - Demonstrated Tier 1 and Tier 2 troubleshooting capabilities.
 - Trainees, escort-required personnel, or unqualified staff shall not be counted toward required staffing levels.
- H. Capabilities
- Tier 1 Personnel: Personnel capable of routine monitoring, basic troubleshooting, alarm acknowledgment, and execution of documented SOPs.
- Tier 2 Personnel: Personnel with advanced diagnostic capability, OEM-system familiarity, and authority to perform system resets and incident response without escalation.
- At least one (1) Tier 2-qualified individual shall be physically present onsite on every shift.
- I. The Contractor shall obtain all licenses, manufacturer authorizations, and permits required to perform the work under this contract. The Contractor shall take all necessary precautions to protect persons and property from injury or damage during performance and shall be responsible for any injury to its personnel or others, as well as any damage to personal or public property, caused by the Contractor, its employees, or its Subcontractors. Prior to starting work at the CRRC, the Contractor shall submit for COR approval a resume for each

employee, including experience, copies of current licenses, and other related qualification information.

- J. Upon award, the Contractor shall perform a comprehensive inspection of the site to document the actual condition of each system and shall provide a plan to remediate identified deficiencies. No claim shall be allowed for correction of deficiencies alleged to have existed prior to the date of this inspection. The Contractor shall not be liable for repairs except those resulting from its own actions. The Contractor shall be responsible for purchasing parts and seeking reimbursement as other direct costs (ODCs), and the Government shall furnish replacement equipment.

5 Management, Supervision and Workforce

- A. The Contractor shall manage the total work effort required under this contract to ensure timely, complete, and high-quality performance of all services and tasks. This includes, at a minimum, planning, scheduling, report preparation, and establishing and maintaining records and quality control processes. The Contractor shall staff sufficient personnel with the management capability and technical expertise necessary to perform the work in accordance with sound, efficient, and mission-critical facility management practices. The Contractor shall provide a Program Manager (PM) with full authority to act for the Contractor on all contractual and operational matters for the duration of the contract. The Contractor shall designate in writing to the COR the name of the PM and a qualified alternate who is authorized to act in the PM's absence. The PM shall ensure appropriate technical staff are available to perform preventive maintenance, scheduled onsite maintenance, and Emergency Remedial Maintenance 24 hours per day, 7 days per week, as required by this contract.
- B. The Contractor's staffing plan shall use a coverage multiplier sufficient to account for leave, training, sick time, Federal holidays, required certifications, after-hours call-backs, and surge response. The Contractor shall ensure continuous operational capability even when one or more personnel are unavailable.
- C. The Contractor shall provide a Program Manager who is available between 0800 and 1630, Monday through Friday, excluding Federal holidays. This individual is responsible for overall contract management and coordination and serves as the primary point of contact with the Government. When no scheduled or emergency maintenance or repair work is in progress and the CRRC is in normal operations under the oversight of qualified, onsite Contractor-provided plant operators, the Program Manager and/or Assistant Program Manager are not required to be physically present at the CRRC. When the Program Manager or Assistant Program Manager are not onsite, the shift plant operator(s) shall serve as the onsite point of contact and are

responsible for notifying the Program Manager and the COR of any issues at the CRRC. The qualifications of the Program Manager shall be reviewed and approved by the COR prior to starting work under the contract.

The Program Manager shall have substantial, progressive experience in the operation, maintenance, and modification of mission-critical facilities of not less than 50,000 square feet, with systems complexity equivalent to that of the CRRC, including demonstrated supervisory and/or management responsibility at the facility or plant engineering level. Formal trades education, journeyman-level qualifications, OEM training, and industry certifications in relevant disciplines (e.g., electrical, mechanical, HVAC, controls, construction) are strongly preferred and may be considered more important than a traditional four-year degree. A college degree (e.g., in Engineering or Business Administration) may be considered a plus but is not mandatory when the candidate demonstrates equivalent technical and management competency through trades training and experience. Any deviation from these qualification standards is at the discretion of the COR or VA Project Manager.

- D. The Contractor shall provide one or more Assistant Program Managers (APMs) who, in the PM's absence, are authorized and capable of performing PM duties. The technical qualifications of each APM shall be reviewed and approved by the COR prior to the individual performing any duties as Assistant Program Manager. Each Assistant Program Manager shall have a minimum of three (3) years of technical background experience at the journeyman level in plant maintenance, operation, and modification in one or more trades (e.g., carpenter, electrician, HVAC, plumber, or other building operations and maintenance trades), and at least three (3) years of management and/or supervisory experience in plant maintenance, operation, or modification of a facility of not less than 50,000 square feet with equipment and systems complexity equivalent to that of the CRRC. Industry-recognized licenses, certifications, and documented trades training shall be primary indicators of qualification for this role.
- E. The Contractor shall provide one (1) full-time, qualified electrician physically onsite Monday through Friday during standard business hours. The electrician shall hold a state-issued journeyman or master electrician license, maintain current NFPA 70E electrical safety training, and demonstrate experience supporting mission-critical electrical infrastructure (e.g., UPS, ATS, switchgear, generators). Planned or unplanned absences shall be backfilled with an equally qualified electrician. Due to the presence of medium- and low-voltage distribution systems, UPS systems, emergency generators, static switches, switchgear, and power monitoring systems, the Contractor shall maintain no fewer than two (2) electrician-qualified personnel on staff who are capable of performing electrical switching, lockout/tagout, emergency

troubleshooting, and restoration activities. At no time shall the facility be dependent upon a single individual for the safe execution of electrical operations.

- F. The Contractor shall maintain a Staff Competency Matrix documenting each assigned employee's experience, certifications, OEM training, NFPA/OSHA compliance status, and Tier designation. The Contractor shall update this matrix at least quarterly and whenever personnel changes occur.
- G. While factory-trained technicians are preferred, not all systems require factory training, and many preventive maintenance skills are transferable. The Contractor shall ensure that all equipment is maintained in accordance with manufacturer specifications, but such work is not required to be performed exclusively by factory-trained personnel. The Contractor shall not rely on subcontractors for routine corrective maintenance of core systems unless pre-approved by the COR.
- H. Personnel assigned to facility operations and maintenance roles shall be qualified for the systems they support. At a minimum, responsibilities include: monitoring facility systems and conditions; performing inspections and operational checks; coordinating preventive maintenance activities; identifying alarms, abnormal conditions, or deficiencies; initiating corrective actions or escalation; coordinating access and escorting specialty service providers; maintaining safety and security compliance; and documenting work performed and system status. These responsibilities apply across all trades, including electrical, mechanical, HVAC, controls, fuel systems, and fire protection systems.
- I. All technical personnel shall be cross-trained in at least one additional trade discipline to provide redundancy across electrical systems, mechanical systems, controls/BMS, emergency power systems, and fuel systems. The Contractor shall maintain a skills matrix that demonstrates capability overlap and redundancy.
- J. To ensure safety, reliability of operations, and alignment with industry best practices for mission-critical facilities, the Contractor shall implement and enforce a fatigue mitigation policy. Personnel shall not work more than 10 consecutive hours in any 24-hour period, exceed 60 total hours in a 7-day period (except during declared emergencies), or return to duty without a minimum 10-hour rest period between shifts. In emergency conditions requiring extended operations, extended hours shall be approved by the Facility Manager or qualified designee, relief personnel shall be scheduled as soon as practicable, and no individual shall exceed 12 hours of continuous duty without documented justification.

- K. The Contractor shall maintain the capability to surge staffing to support planned maintenance evolutions, provide dual-person coverage for electrical switching events, and perform major corrective actions without degrading routine preventive maintenance. The staffing plan shall demonstrate how surge capability will be achieved while remaining compliant with the fatigue mitigation requirements.
- L. The Contractor acknowledges that CRRC operations support critical VA infrastructure and Veteran data systems. Staffing levels shall be sufficient to minimize reliance on third-party vendors, prevent avoidable delays in corrective maintenance, maintain in-house technical capability, and support expanding VA initiatives.

Single-Person Shift Event Protocol

A Single-Person Shift Event is an unscheduled reduction below the required two (2) qualified onsite personnel. When such an event occurs, the Contractor shall:

- Notify the COR within fifteen (15) minutes.
- Deploy a qualified replacement within one (1) hour.
- Limit single-person coverage to no more than 120 minutes.
- Submit an incident report within twenty-four (24) hours documenting root cause, duration, impacted systems, and corrective and preventive actions (CAPA).

More than two (2) Single-Person Shift Events in a calendar quarter shall be considered a failure to meet minimum staffing requirements and may be treated as non-performance under this contract.

Remote Monitoring Support

Remote monitoring may supplement but shall never replace, required onsite staffing. Remote monitoring is authorized only when:

- The COR has been notified of a staffing shortage.
- At least one (1) qualified individual remains physically onsite.
- A second qualified individual is actively enroute.
- Remote monitoring is restricted to observation, status review, and alarm acknowledgment only.

Prohibited Uses of Remote Monitoring

Remote monitoring shall not be used to:

- Provide routine shift coverage
- Conduct inspections or building rounds
- Perform resets or emergency response actions

- Justify reductions in staffing

Remote Monitoring Log

The Contractor shall submit a daily log for any remote monitoring period, containing start and end times, reason for activation, remote personnel involved, onsite personnel present, system events observed, and restoration time of full staffing.

Cybersecurity Requirements

All remote access must comply with VA Handbook 6500, NIST SP 800-53 Rev. 5, and applicable VA cybersecurity policies.

6 Specific Tasks and Deliverables

The Contractor shall provide the following recurring reports and logs as part of contract deliverables:

- Quarterly Competency Verification Report.
- Monthly Staffing Compliance Log.
- Daily Remote Monitoring Logs (for any day on which remote monitoring is utilized).

All reports, schedules, notifications, and correspondence shall be submitted in current, Government-compatible versions of Microsoft Office or Adobe Portable Document Format (PDF).

Preventive Maintenance (PM) schedules shall be submitted to the COR annually, prior to the beginning of each period of performance, for review and acceptance. PM schedules shall be provided in an electronic format acceptable to the Government and shall identify, at a minimum, each asset, PM task, frequency, and estimated labor hours.

A. General Maintenance (Representative Tasks)

The following maintenance and repair services shall be performed under this contract. The lists below are illustrative of the expected scope and are not exhaustive.

1. Carpentry

Includes miscellaneous finish carpentry tasks such as interior and exterior doors, trims, jambs, sills, locks, closers; furnishings and cabinets (hinges, pulls, cam locks, ledges, supports); base trims and casings; drop ceiling tile repair and replacement; raised floor panel modifications; mounting and placement of video monitoring equipment and brackets; installation of fixed and semi-permanent furnishings and interior fixtures; repair and maintenance of aluminum awning entrances and supports; repair of card reader

pedestals, guard shack components, access doors, and pedestrian access gates. Miscellaneous locksmith services related to keys and cores are included.

2. Painting

Includes light and medium drywall patch and repair, minor drywall installation, paint touch-up and color matching. Work may include ceiling tile touch-up or replacement where practical, interior repainting of limited areas, and exterior touch-up and area painting of vinyl stucco finishes and concrete tilt-wall panels. Work includes caulking/sealing of joints, jambs, sills, and similar locations, using materials consistent with base building specifications. Wood finishes shall match existing finishes.

3. Commercial Domestic Plumbing

Includes maintenance of water heaters, sinks, toilets, urinals, water fountains and bottle fillers, faucets, flush and faucet sensors, showers and controls, circulator pumps, mixing valves, traps, drains, couplings, shutoff valves, hose bibs, hydrants, seals, gaskets, and caulked joints associated with fixtures and trims. Services shall include an emergency response capability consistent with typical commercial plumbing needs.

4. Vehicle Gate Entry and Exit Systems

Includes a scheduled PM program and corrective repairs for vehicle gate controllers, ground loops, gate leaves, mag-locks, tensioners, sensors, and related components.

5. Loading Dock Platforms and Levelers

Includes PM and repair of two (2) loading dock leveler systems, including controls, sensors, hydraulics, safety devices, lubrication, adjustments, and general care per manufacturer instructions and industry best practices.

6. Wheelchair Lift

Includes PM and corrective maintenance in accordance with manufacturer recommendations and all applicable West Virginia inspection and certification requirements.

7. Overhead Doors

Includes PM and corrective maintenance for two automatic and one manual overhead door. Work includes inspection, adjustment, lubrication, cleaning, and repair per manufacturer recommendations and industry best practices.

8. General Concrete Maintenance and Repairs

Includes repair of concrete steps, pads, curbs, bollard bases, walkways, footings, and similar components as they deteriorate due to wear, settlement, or weather. Core drilling is included when required and directed by the COR.

9. Roof-Mounted Safety Barriers and Roof Hatch Barriers

Includes annual inspection and maintenance of roof safety lines, posts, signage, connections, railings, portable harness anchors, gates, and roof protection pads. Work includes testing, painting, lubrication, parts replacement, and reporting for annual safety compliance. OSHA-compliant access methods, equipment, and a documented roof safety program are required.

10. GAF-TPO Membrane Roof Maintenance

Requires use of GAF-certified roof mechanics to inspect and maintain warranted GAF TPO roof systems. Certifications shall be documented. Includes twice-yearly PM plus reactive leak and damage response. Warranty coordination with GAF, leak reporting, and segregation of warranted versus non-warranted repairs are required. Work includes repair of membrane, walk pads, penetrations, flashing, drains, scuppers, and other associated roof components.

11. Fixed Glass Windows and Glazing Systems

Includes maintenance and repair of storefront and other fixed exterior and interior glazing systems and supports. Work includes replacement of damaged glass (single or insulated), repair or replacement of hollow metal and aluminum frames, glazing stops, beads, spacers, connectors, and related components, with at least annual inspection. A workplace safety program specific to glazing work is required.

12. Stanley Commercial Entry and Passage Door Systems

Includes semi-annual PM and reactive maintenance for Stanley-operated entry and passage doors (two double exterior airlock units and five interior doors). Work includes inspection, adjustments, repairs, lubrication, operational testing, and sensor checks.

13. Electrical (Building General)

Includes low-voltage distribution from branch panels through outlets, switches, and local controls; lamp and ballast replacement; fixture and lens replacement and cleaning; device replacement; and GFCI testing. The electrical contractor shall be qualified to work on equipment, motors, and controls up to 480V/3-phase/600A/600V and experienced with data floor branch circuits, PMMs, and raised floor environments. Adherence to NEMA codes, lockout/tagout (LOTO), and appropriate safe-work practices is mandatory.

B. HVAC Maintenance

The Contractor shall inspect and maintain, at a minimum, Blower Coil Units (BCUs), chillers, dry coolers, electric heaters, exhaust fans, glycol feed pumps, rooftop units (RTUs), split systems,

steam generators/humidifiers, and Variable Air Volume (VAV) boxes, in accordance with manufacturer instructions and without disrupting CRRC operations.

C. Generator Maintenance

For purposes of this section, fuel system components integral to generator operation (including day tanks, local fuel piping between the day tanks and generators, fuel filters, and associated controls) are considered part of the generator system. Bulk fuel storage tanks, main fuel distribution piping, fuel treatment systems, and secondary containment are covered under Section K – Fuel System Service.

1. **PM Service:** Submit a formal preventive maintenance (PM) schedule to the COR and Building Engineer. Provide three minor visits and one major service visit annually for each of the three MTU2250RXC6DT2 (2250 kW) generators and the 100RJC6DT3 (100 kW) life safety generator. Each visit shall follow industry standard checklists for inspection, testing, adjustment, and calibration to maintain performance, response time, and power quality.
2. **Spare Parts:** Develop and submit for COR approval a list of critical emergency spare parts for the MTU and John Deere generators. The Government will procure and store approved spare parts onsite for use by emergency service personnel.

Maintenance and repairs for generators and integral fuel system components (including day tanks, local fuel piping between day tanks and generators, fuel lines, controllers, and fuel conditioning systems) shall be in accordance with manufacturer guidelines and NFPA 110, ANSI/NETA MTS-2023, and other applicable NFPA, IEEE, and NEMA standards.

Electrical Power Distribution, CRAH, SCADA, BMS, Fire Suppression, UPS, and Fuel System Services

The Contractor shall provide all supervision, management, labor, materials, supplies, tools, test equipment, and incidentals necessary to perform a complete preventive maintenance and corrective repair program for all covered systems, without disrupting CRRC operations. All work shall follow current manufacturer instructions, applicable codes and standards, and industry-recognized best practices.

D. Switchgear and Electrical Power Distribution

The Contractor shall perform comprehensive inspection, testing, and preventive maintenance for switchgear, switchboards, distribution panels, protective devices, and associated equipment at intervals recommended by the manufacturer and at least in accordance with ANSI/NETA MTS-2023 (or current successor standard). Activities shall include visual and mechanical inspection, functional exercising, electrical testing, thermographic scanning, and documentation of test results and

corrective actions. Infrared (IR) surveys shall be performed while equipment is energized to detect loose, corroded, or overloaded connections; identified deficiencies shall be corrected and re-tested, with color IR images included in the final report to the COR.

E. Computer Room Air Handlers (CRAH)

The Contractor shall inspect, test, and maintain all CRAH units in accordance with manufacturer recommendations and data center best practices, ensuring redundancy and environmental stability in critical spaces. All work shall be scheduled and coordinated to avoid unplanned loss of cooling capacity and shall include filter changes, coil cleaning, checks of fans, belts, condensate management, controls, and alarms.

F. Supervisory Control and Data Acquisition (SCADA)

The Contractor shall perform scheduled inspections (minimum four per year) and preventive maintenance on the SCADA system, including servers, workstations, network components, input/output modules, and field interfaces. Preventive maintenance shall be performed in accordance with manufacturer documentation and shall verify proper alarming, trending, data integrity, and system redundancy. Contractor personnel shall be knowledgeable and experienced with the most recent release of the site SCADA platform (e.g., EcoStruxure) and associated components.

G. Building Management System (BMS)

The Contractor shall perform a minimum of four BMS preventive maintenance inspections per year, including controller health checks, point-to-point verification, alarm functionality, sequence of operation review, and backup/restore validation. Work shall be coordinated so as not to disrupt normal CRRC operations. Contractor personnel shall be knowledgeable and experienced with TAC/Andover controllers and EcoStruxure software or their current successors.

H. Clean Agent Fire Suppression System

The Contractor shall maintain the clean agent fire suppression system in accordance with NFPA 72, NFPA 2001, and manufacturer requirements, including inspections, functional testing, verification of agent quantity and pressure, enclosure integrity inspections, and required documentation. A Fike-certified (or OEM-certified) service provider shall perform system testing, maintenance, and upgrades. All work shall be coordinated to avoid impairing fire protection in critical spaces; any impairment shall be reported and managed in accordance with applicable NFPA and VA requirements.

I. Generator and Paralleling Switchgear

The Contractor shall inspect, test, and maintain generator switchgear, paralleling gear, and automatic transfer switches (ATS) in accordance with manufacturer guidelines, NFPA standards, and ANSI/NETA MTS-2023 (or current successor standard). Work shall include functional testing of automatic and manual transfer operations, protective relays, communication links, control logic, and synchronization features. The Contractor shall provide up to four (4) hours of annual onsite training for up to five CRRC personnel covering sequence of operations, manual transfer procedures, and routine checks and inspections.

Only manufacturer-approved replacement parts shall be used. Reconditioned or refurbished parts shall not be installed without prior written approval from the COR. Removed parts shall be turned over to the COR unless required for warranty/core return, in which case disposition shall be coordinated on a case-by-case basis.

J. Uninterruptible Power Systems (UPS) and Battery Monitoring

The Contractor shall provide a complete preventive maintenance and repair program for all UPS units and Power Management Modules (PMMs), including internal inspections, functional testing, calibration, firmware updates, alarm verification, and load transfer tests, in accordance with manufacturer specifications. Contractor personnel shall be knowledgeable and experienced with the installed UPS platforms (e.g., MGE Galaxy 8000, MGE Galaxy 5000, PMMs) and shall possess OEM certification and tools necessary to interface with the equipment for history review and diagnostic analysis.

The Contractor shall also support UPS battery monitoring systems, including configuration, data review, and reporting of battery health, impedance, temperature, current, voltage, and system trends. The Contractor shall maintain all required software licensing and training to support the monitoring system and shall provide periodic reports and recommendations to the COR.

K. Fuel System Service

For purposes of this section, bulk and distribution fuel system components are distinct from generator-integral components described in Section C. This section covers fuel oil storage tanks, day tanks not integral to a single generator, transfer pumps, main fuel piping, controls, sensors, secondary containment, monitoring systems, and fuel treatment systems.

The Contractor shall inspect, test, and maintain these fuel system components in accordance with NFPA 30/30A, NFPA 110 (EPSS), the International Fire Code Section 604 (current edition), applicable California Air Resources Board (CARB) G-70-162 guidance, and manufacturer

recommendations. Preventive maintenance shall be scheduled so that no more than one redundant system is out of service at any given time. Personnel performing fuel system work shall hold applicable licenses and have a minimum of three (3) years of recent experience on comparable systems.

L. Other Direct Costs

Other Direct Costs (ODCs) include parts, materials, and supplies that must be procured to return systems and equipment to fully operational status under this contract. The ODC funding identified in the applicable contract line item(s) is based on historical unscheduled service needs and may not be exceeded without prior written approval from the Contracting Officer. The Contractor shall obtain COR concurrence before purchasing any single ODC item above the threshold established in the contract and shall provide itemized documentation with each ODC reimbursement request.

Task	PWS Reference Paragraph	Deliverable
General Maintenance	6.A.1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13	Weekly Reports
		PM Schedule
HVAC Maintenance	6.B	Weekly Reports
		PM Schedule
Generator Maintenance	6.C.1,2	Monthly Report
		PM Schedule
Switchgear Preventive Maintenance	6.D	Annual Report
		PM Schedule
CRAH PM	6.E	Monthly Report
		PM Schedule
SCADA	6.F	Monthly Report
		PM Schedule
BMS PM	6.G	Monthly Report
		PM Schedule
Clean Agent	6.H	Quarterly Report
		PM Schedule
Generator and Paralleling Switchgear	6.I	Weekly Reports
		PM Schedule
UPS Battery and Monitoring	6.J	Weekly Reports
		PM Schedule
Fuel System Service	6.K	Monthly Containment
		Quarterly Report
		PM Schedule
Other Direct Costs	6.L	Monthly

7 Work Classification and Service Request Response Time

- A. **Emergencies** - Emergency service calls will be classified as such at the discretion of the Contractor PM, the COR, or the approved designee. Emergency service requests are applicable where the work consists of correcting failures that constitute an immediate danger to personnel or property, threaten the secure mission of the CRRC, or disrupt critical facility operations, including, but not limited to, environmental spills and issues, broken water pipes, electrical power outages, electrical problems that may cause fire or shock, gas or oil leaks, major air conditioning or heating problems, etc., or any work considered by the PM, COR, or designee, to be of an emergency nature.

The Contractor shall respond to emergency service requests immediately, within the shortest possible time consistent with available resources, not to exceed four (4) hours. The Contractor shall provide a written account of any emergency callback, to include costs incurred and plan for permanent correction of the problem, to the COR, or designee, the morning of the next working day.

- B. **Urgent** - Urgent service calls will also be classified at the discretion of the Contractor PM, the COR, or the approved designee. Urgent calls consist of providing services or correcting failures that do not pose an immediate threat to personnel, property or missions but will soon, if not corrected, pose an immediate threat to the CRRC personnel and/or systems.

Examples of these types of service requests include, but are not limited to, inoperative electrical circuits, inoperative lighting above a work station, flush valve stuck open, any malfunctions to equipment that affect the operations of sensitive building occupants, or any work considered to be of an urgent nature. The Contractor shall respond to urgent service requests within the shortest possible time consistent with available resources, not to exceed twenty-four (24) hours, unless the priority is elevated.

- C. **Routine** – Routine service will be classified as such when neither Emergency nor Urgent applies. The Contractor shall respond promptly to routine, scheduled and unscheduled, work requests and provide, within two (2) days, a solution and anticipated timeframe to remediate or repair. Unscheduled maintenance is defined as unanticipated repairs or tasks that must be performed in order to return the facility to full operational status.

8 Access

- A. The CRRC is a secure federal site. Access to certain secure areas, within the building, will require reviewing and acknowledging the Rules of Behavior policy. Current federally acceptable means of identification for access is required for all personnel on all visits. Access to data, equipment lists, equipment specifications, floor plans, and one-line diagrams will be provided by CRRC COR or designee. Use of photographic, recording or data capture equipment, laptops or tablet computing devices is only permitted with permission of the COR and the building Information Systems Security Officer.

9 Vehicle and Equipment Access

- A. The CRRC compound is a Tier 3 restricted access site. Access by Contractor's vehicles for service must be noted in Contractor's request for scheduled access. All parties arriving are subject to Security Screening, will need to show identification, allow inspection of vehicles, equipment, bags, boxes, containers and any other articles brought on site. If Contractor needs to store materials, trailers, or equipment on site for their work, permission must be sought beforehand.

10 Supplies and Materials

- A. Supplies and materials will be provided by the Contractor. Owner maintains a database of all specified materials, components and parts comprising the building package. The Contractor is required to provide repair and/or replacement parts equal to or better than the components in place. Inquiries, request for substitution or replacement of component parts will be made to the contract COR, or designee. COR may request material submittals prior to installation. Contractor will use their best judgment when using substitute material so as not to delay needed work, especially when there is a time-sensitivity.

11 Notification

- A. The Contractor will notify the COR/Facility Engineer, or designee, of pending PM and non-program (not PM) maintenance or repair needs. FTE Members of the CRRC Facilities and Engineering Support staff may also make notification of needed service. Notification will be via the method agreed upon by the contractor and the COR/ designee. Service tickets will be printed, and unit diagrams, manufacturer's recommendations and other supporting documentation will be attached as needed. PM notifications will include

trade, room number, service category, urgency, expected date of arrival (if outside resources are required), hours on the job, general detail of service needed, notes to include any follow up, list of materials in general (detailed list on vendor's paperwork) and point of contact (POC) information. Notifications will require an acknowledgement and response, and will indicate expected arrival, crew size, identity of service personnel for building security, any special support or assistance needed from CRRC, after hours support, and early arrival notification. Normal hours of operation at CRRC are M-F from 0600 to 1630hrs, except federal holidays.

12 Performance Metrics

- A. The Government will utilize a Quality Assurance Surveillance Plan (QASP) throughout the life of the contract to ensure that the Contractor is performing the services required by this PWS in an acceptable manner. The Government reserves the right to alter or change the surveillance methods in the QASP at its own discretion. Performance measures for satisfactory completion of the order shall be measured by completion of the listed deliverables and by completion of tasks identified. Completion of deliverables shall remain within the scope of the approved PWS. At a minimum, the following metrics shall be applied:
1. There are no deficiencies in the review and analysis performed by the Contractor that result in incorrect or inadequate assumptions, which, in turn, result in unacceptable recommendations.
 2. There are no deficiencies in the development of reports, documents or functional requirements, which could result in delays in meeting established timelines.
 3. All written documentation is crafted in a skilled business style and in plain language.
 4. All work is completed within the established and agreed upon time frames.
 5. The content of deliverables will be highly professional.
 6. The table below defines the Performance Standards and Acceptable Performance Levels for Objectives associated with this effort.

Performance Objective	Performance Standard	Acceptable Performance Levels	Surveillance Method
1. Technical Needs	- Shows understanding of requirements - Efficient and effective in meeting requirements - Meets technical needs and mission requirements - Offers quality services/products	Satisfactory or higher	Periodic Direct Observation
2. Project Milestones and Schedule	- Quick response capability - Products completed, reviewed, delivered in timely manner - Notifies customer in advance of potential problems	Satisfactory or higher	Periodic Direct Observation
3. Project Staffing	- Currency of shared service expertise - Personnel possess necessary knowledge, skills and abilities to perform tasks	Satisfactory or higher	Periodic Direct Observation
4. Value Added	- Provided valuable service to Government - Services/products delivered were of desired quality	Satisfactory or higher	Periodic Direct Observation

*Details regarding performance will be documented by the Government via the Contractor Performance Assessment Reporting System (CPARS).

13 Government Responsibilities

- A. Provide workspace/workstations.
- B. Government-furnished Equipment (Laptops)

14 Price/Cost Schedule

Item Information:

ITEM #	DESCRIPTION OF SERVICES	QTY	UNIT	UNIT PRICE	TOTAL AMOUNT
0001	General Maintenance PWS 6.A.1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13 Contract Period: Base POP Begin: 6-13-2026 POP End: 6-12-2027	12	MO	\$ _____	\$ _____
0002	HVAC Maintenance PWS 6.B Contract Period: Base POP Begin: 6-13-2026 POP End: 6-12-2027	12	MO	\$ _____	\$ _____
0003	Generator Maintenance PWS 6.C.1,2 Contract Period: Base POP Begin: 6-13-2026 POP End: 6-12-2027	12	MO	\$ _____	\$ _____
0004	Switchgear Preventive Maintenance PWS 6.D Contract Period: Base POP Begin: 6-13-2026 POP End: 6-12-2027	12	MO	\$ _____	\$ _____
0005	CRAH PM PWS 6.E Contract Period: Base POP Begin: 6-13-2026 POP End: 6-12-2027	12	MO	\$ _____	\$ _____
0006	SCADA PWS 6.F	1	LT	\$ _____	\$ _____

	Contract Period: Base POP Begin: 6-13-2026 POP End: 6-12-2027				
0007	BMS PM PWS 6.G Contract Period: Base POP Begin: 6-13-2026 POP End: 6-12-2027	12	MO	\$ _____	\$ _____
0008	Clean Agent Fire Suppression PWS 6.H Contract Period: Base POP Begin: 6-13-2026 POP End: 6-12-2027	12	MO	\$ _____	\$ _____
0009	Generator Switchgear PWS 6.I Contract Period: Base POP Begin: 6-13-2026 POP End: 6-12-2027	12	MO	\$ _____	\$ _____
0010	UPS Battery and Monitoring PWS 6.J Contract Period: Base POP Begin: 6-13-2026 POP End: 6-12-2027	12	MO	\$ _____	\$ _____
0011	Fuel System Service PWS 6.K Contract Period: Base POP Begin: 6-13-2026 POP End: 6-12-2027	12	MO	\$ _____	\$ _____
0012	Other Direct Costs PWS 6.L Contract Period: Base POP Begin: 6-13-2026 POP End: 6-12-2027	1	LT		
				Base Period Total =	\$ _____

ITEM #	DESCRIPTION OF SERVICES	QTY	UNIT	UNIT PRICE	TOTAL AMOUNT
1001	General Maintenance PWS 6.A.1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13 Contract Period: Base POP Begin: 6-13-2027 POP End: 6-12-2028	12	MO	\$ _____	\$ _____
1002	HVAC Maintenance PWS 6.B Contract Period: Base POP Begin: 6-13-2027 POP End: 6-12-2028	12	MO	\$ _____	\$ _____
1003	Generator Maintenance PWS 6.C.1,2 Contract Period: Base POP Begin: 6-13-2027 POP End: 6-12-2028	12	MO	\$ _____	\$ _____
1004	Switchgear Preventive Maintenance PWS 6.D Contract Period: Base POP Begin: 6-13-2027 POP End: 6-12-2028	12	MO	\$ _____	\$ _____
1005	CRAH PM PWS 6.E Contract Period: Base POP Begin: 6-13-2027 POP End: 6-12-2028	12	MO	\$ _____	\$ _____
1006	SCADA PWS 6.F Contract Period: Base POP Begin: 6-13-2027 POP End: 6-12-2028	1	LT	\$ _____	\$ _____
1007	BMS PM PWS 6.G Contract Period: Base	12	MO	\$ _____	\$ _____

	POP Begin: 6-13-2027 POP End: 6-12-2028				
1008	Clean Agent Fire Suppression PWS 6.H Contract Period: Base POP Begin: 6-13-2027 POP End: 6-12-2028	12	MO	\$ _____	\$ _____
1009	Generator Switchgear PWS 6.I Contract Period: Base POP Begin: 6-13-2027 POP End: 6-12-2028	12	MO	\$ _____	\$ _____
1010	UPS Battery and Monitoring PWS 6.J Contract Period: Base POP Begin: 6-13-2027 POP End: 6-12-2028	12	MO	\$ _____	\$ _____
1011	Fuel System Service PWS 6.K Contract Period: Base POP Begin: 6-13-2027 POP End: 6-12-2028	12	MO	\$ _____	\$ _____
1012	Other Direct Costs PWS 6.L Contract Period: Base POP Begin: 6-13-2027 POP End: 6-12-2028	1	LT		
				Base Period Total =	\$ _____

ITEM #	DESCRIPTION OF SERVICES	QTY	UNIT	UNIT PRICE	TOTAL AMOUNT
2001	General Maintenance PWS 6.A.1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13 Contract Period: Base POP Begin: 6-13-2028 POP End: 6-12-2029	12	MO	\$ _____	\$ _____
2002	HVAC Maintenance PWS 6.B Contract Period: Base POP Begin: 6-13-2028 POP End: 6-12-2029	12	MO	\$ _____	\$ _____
2003	Generator Maintenance PWS 6.C.1,2 Contract Period: Base POP Begin: 6-13-2028 POP End: 6-12-2029	12	MO	\$ _____	\$ _____
2004	Switchgear Preventive Maintenance PWS 6.D Contract Period: Base POP Begin: 6-13-2028 POP End: 6-12-2029	12	MO	\$ _____	\$ _____
2005	CRAH PM PWS 6.E Contract Period: Base POP Begin: 6-13-2028 POP End: 6-12-2029	12	MO	\$ _____	\$ _____
2006	SCADA PWS 6.F Contract Period: Base POP Begin: 6-13-2028 POP End: 6-12-2029	1	LT	\$ _____	\$ _____
2007	BMS PM PWS 6.G Contract Period: Base	12	MO	\$ _____	\$ _____

	POP Begin: 6-13-2028 POP End: 6-12-2029				
2008	Clean Agent Fire Suppression PWS 6.H Contract Period: Base POP Begin: 6-13-2028 POP End: 6-12-2029	12	MO	\$ _____	\$ _____
2009	Generator Switchgear PWS 6.I Contract Period: Base POP Begin: 6-13-2028 POP End: 6-12-2029	12	MO	\$ _____	\$ _____
2010	UPS Battery and Monitoring PWS 6.J Contract Period: Base POP Begin: 6-13-2028 POP End: 6-12-2029	12	MO	\$ _____	\$ _____
2011	Fuel System Service PWS 6.K Contract Period: Base POP Begin: 6-13-2028 POP End: 6-12-2029	12	MO	\$ _____	\$ _____
2012	Other Direct Costs PWS 6.L Contract Period: Base POP Begin: 6-13-2028 POP End: 6-12-2029	1	LT		
				Base Period Total =	\$ _____

ITEM #	DESCRIPTION OF SERVICES	QTY	UNIT	UNIT PRICE	TOTAL AMOUNT
3001	General Maintenance PWS 6.A.1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13 Contract Period: Base POP Begin: 6-13-2029 POP End: 6-12-2030	12	MO	\$ _____	\$ _____
3002	HVAC Maintenance PWS 6.B Contract Period: Base POP Begin: 6-13-2029 POP End: 6-12-2030	12	MO	\$ _____	\$ _____
3003	Generator Maintenance PWS 6.C.1,2 Contract Period: Base POP Begin: 6-13-2029 POP End: 6-12-2030	12	MO	\$ _____	\$ _____
3004	Switchgear Preventive Maintenance PWS 6.D Contract Period: Base POP Begin: 6-13-2029 POP End: 6-12-2030	12	MO	\$ _____	\$ _____
3005	CRAH PM PWS 6.E Contract Period: Base POP Begin: 6-13-2029 POP End: 6-12-2030	12	MO	\$ _____	\$ _____
3006	SCADA PWS 6.F Contract Period: Base POP Begin: 6-13-2029 POP End: 6-12-2030	1	LT	\$ _____	\$ _____
3007	BMS PM PWS 6.G Contract Period: Base	12	MO	\$ _____	\$ _____

	POP Begin: 6-13-2029 POP End: 6-12-2030				
3008	Clean Agent Fire Suppression PWS 6.H Contract Period: Base POP Begin: 6-13-2029 POP End: 6-12-2030	12	MO	\$ _____	\$ _____
3009	Generator Switchgear PWS 6.I Contract Period: Base POP Begin: 6-13-2029 POP End: 6-12-2030	12	MO	\$ _____	\$ _____
3010	UPS Battery and Monitoring PWS 6.J Contract Period: Base POP Begin: 6-13-2029 POP End: 6-12-2030	12	MO	\$ _____	\$ _____
3011	Fuel System Service PWS 6.K Contract Period: Base POP Begin: 6-13-2029 POP End: 6-12-2030	12	MO	\$ _____	\$ _____
3012	Other Direct Costs PWS 6.L Contract Period: Base POP Begin: 6-13-2029 POP End: 6-12-2030	1	LT		
				Base Period Total =	\$ _____

ITEM #	DESCRIPTION OF SERVICES	QTY	UNIT	UNIT PRICE	TOTAL AMOUNT
4001	General Maintenance PWS 6.A.1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13 Contract Period: Base POP Begin: 6-13-2030 POP End: 6-12-2031	12	MO	\$ _____	\$ _____
4002	HVAC Maintenance PWS 6.B Contract Period: Base POP Begin: 6-13-2030 POP End: 6-12-2031	12	MO	\$ _____	\$ _____
4003	Generator Maintenance PWS 6.C.1,2 Contract Period: Base POP Begin: 6-13-2030 POP End: 6-12-2031	12	MO	\$ _____	\$ _____
4004	Switchgear Preventive Maintenance PWS 6.D Contract Period: Base POP Begin: 6-13-2030 POP End: 6-12-2031	12	MO	\$ _____	\$ _____
4005	CRAH PM PWS 6.E Contract Period: Base POP Begin: 6-13-2030 POP End: 6-12-2031	12	MO	\$ _____	\$ _____
4006	SCADA PWS 6.F Contract Period: Base POP Begin: 6-13-2030 POP End: 6-12-2031	1	LT	\$ _____	\$ _____
4007	BMS PM PWS 6.G Contract Period: Base	12	MO	\$ _____	\$ _____

	POP Begin: 6-13-2030 POP End: 6-12-2031				
4008	Clean Agent Fire Suppression PWS 6.H Contract Period: Base POP Begin: 6-13-2030 POP End: 6-12-2031	12	MO	\$ _____	\$ _____
4009	Generator Switchgear PWS 6.I Contract Period: Base POP Begin: 6-13-2030 POP End: 6-12-2031	12	MO	\$ _____	\$ _____
4010	UPS Battery and Monitoring PWS 6.J Contract Period: Base POP Begin: 6-13-2030 POP End: 6-12-2031	12	MO	\$ _____	\$ _____
4011	Fuel System Service PWS 6.K Contract Period: Base POP Begin: 6-13-2030 POP End: 6-12-2031	12	MO	\$ _____	\$ _____
4012	Other Direct Costs PWS 6.L Contract Period: Base POP Begin: 6-13-2030 POP End: 6-12-2031	1	LT		
				Base Period Total =	\$ _____

15 Position/Task Risk Designation Level(s) and Contractor Personnel Security Requirements

- A. The C&A requirements do not apply, and a Security Accreditation Package is not required.
- B. **Position/Task Risk Designation Level(s)** - The position sensitivity and the level of background investigation commensurate with the required level of access for the following tasks within the Performance Work Statement are:

Position Sensitivity	Background Investigation (in accordance with Department of Veterans Affairs 0710 Handbook, "Personnel Security Suitability Program," Appendix A)
Low	National Agency Check with Written Inquiries (NACI) A NACI is conducted by OPM and covers a 5-year period. It consists of a review of records contained in the OPM Security Investigations Index (SII) and the DOD Defense Central Investigations Index (DCII), FBI name check, FBI fingerprint check, and written inquiries to previous employers and references listed on the application for
Moderate	Moderate Background Investigation (MBI) A MBI is conducted by OPM and covers a 5-year period. It consists of a review of National Agency Check (NAC) records [OPM Security Investigations Index (SII), DOD Defense Central Investigations Index (DCII), FBI name check, and a FBI fingerprint check], a credit report covering a period of 5 years, written inquiries to previous employers and references listed on the application for employment; an interview with the
High	Background Investigation (BI) A BI is conducted by OPM and covers a 10-year period. It consists of a review of National Agency Check (NAC) records [OPM Security Investigations Index (SII), DOD Defense Central Investigations Index (DCII), FBI name check, and a FBI fingerprint check report], a credit report covering a period of 10 years, written inquiries to previous employers and references listed on the application for employment; an interview with the subject, spouse, neighbors, supervisor, co-workers; court records, law

Position Sensitivity and Background Investigation Requirements			
West Virginia	Low/NACI	Moderate/MBI	High/BI
		X	

- C. The Tasks identified above, and the resulting Position Sensitivity and Background Investigation requirements identify, in effect, the Background Investigation requirements for Contractor individuals, based upon the tasks the particular Contractor individual will be working. The submitted Contractor Staff Roster must indicate the required Background Investigation Level for each Contractor individual based upon the tasks the Contractor individual will be working, in accordance with their submitted proposal.
- D. **Contractor Personnel Security Requirements – Contractor Responsibilities**
1. The Contractor shall prescreen all personnel requiring access to the computer systems to ensure they maintain the appropriate Background Investigation, and are able to read, write, speak and understand the English language.
 2. Within 3 business days after award, the Contractor shall provide a roster of Contractor and Subcontractor employees to the COR to begin their background investigations. The roster shall contain the Contractor's Full Name, Full Social Security Number, Date of Birth, Place of Birth, and individual background investigation level requirement (based upon Section 6.1 Locations).
 3. The Contractor should coordinate the location of the nearest VA fingerprinting office through the COR. Only electronic fingerprints are authorized.
 4. Required documentation listed under additional information.
 5. The Contractor personnel will receive an email notification from the Security and Investigation Center (SIC), through the Electronics Questionnaire for Investigations Processes (e-QIP) identifying the website link that includes detailed instructions regarding completion of the investigation documents (SF85, SF85P, or SF 86). The Contractor personnel shall submit all required information related to their background investigations utilizing the Office of Personnel Management's (OPM) Electronic Questionnaire for Investigations Processing (e-QIP).
 6. The Contractor is to certify and release the e-QIP document, print and sign the signature pages, and send them to the COR for electronic submission to the SIC. These should be submitted to the COR within 3 business days of receipt of the e-QIP notification email.
 7. The Contractor shall be responsible for the actions of all personnel provided to work for VA under this contract. In the event that damages arise from work

performed by Contractor provided personnel, under the auspices of this contract, the Contractor shall be responsible for all resources necessary to remedy the incident.

8. A Contractor may be granted unescorted access to VA facilities and/or access to VA Information Technology resources (network and/or protected data) with a favorably adjudicated Special Agreement Check (SAC) or "Closed, No Issues" (SAC) finger print results, training delineated in VA Handbook 6500.6 (Appendix C, Section 9), and, the signed "Contractor Rules of Behavior." However, the Contractor will be responsible for the actions of the Contractor personnel they provide to perform work for VA. The investigative history for Contractor personnel working under this contract must be maintained in the database of the Office of Personnel Management (OPM).
9. The Contractor, when notified of an unfavorably adjudicated background investigation on a Contractor employee as determined by the Government, shall withdraw the employee from consideration in working under the contract.
10. Failure to comply with the Contractor personnel security investigative requirements may result in termination of the contract for default.
11. Contractors, Contractor personnel, Subcontractors, and Subcontractor personnel are expected to meet the standard cyber security and privacy training requirements as outlined in VA Handbook 6500, and are required to complete annual Security and Privacy training providing all certificates to the COR.

16 Points Of Contact

VA Program Manager

Name: Michael Boynton
Address: CRRC, 221 Butler Avenue, Martinsburg, WV
Voice: 304-596-8316
Email: Michael.Boynton@va.gov

Contracting Officer's Representative

Name: Michael Boynton
Address: CRRC, 221 Butler Avenue, Martinsburg, WV
Voice: 304-596-8316
Email: Michael.Boynton@va.gov

Contracting Officer

Name:
Address: SAC-F Frederick, MD
Voice:
Email:

Contract Specialist

Name:
Address: SAC-F Frederick, MD
Voice:
Email:

17 Addendum A

A1. VA Enterprise Architecture Compliance

The applications, supplies, and services furnished under this contract must comply with One-VA Enterprise Architecture (EA), available at <http://www.ea.oit.va.gov/index.asp> in force at the time of issuance of this contract, including the Program Management Plan and VA's rules, standards, and guidelines in the Technical Reference Model/Standards Profile (TRMSP). VA reserves the right to assess contract deliverables for EA compliance prior to acceptance.

A1.1. VA Internet and Intranet Standards

The Contractor shall adhere to and comply with VA Directive 6102 and VA Handbook 6102, Internet/Intranet Services, including applicable amendments and changes, if the Contractor's work includes managing, maintaining, establishing and presenting information on VA's Internet/Intranet Service Sites. This pertains but is not limited to: creating announcements; collecting information; databases to be accessed, graphics and links to external sites. Internet/Intranet Services Directive 6102 is posted at (copy and paste the following URL to browser):

http://www1.va.gov/vapubs/viewPublication.asp?Pub_ID=409&FType=2

Internet/Intranet Services Handbook 6102 is posted at (copy and paste following URL to browser):

http://www1.va.gov/vapubs/viewPublication.asp?Pub_ID=410&FType=2

A2. Physical Security & Safety Requirements

The Contractor and their personnel shall follow all VA policies, standard operating procedures, applicable laws and regulations while on VA property. Violations of VA regulations and policies may result in citation and disciplinary measures for persons violating the law.

1. The Contractor and their personnel shall wear visible identification at all times while they are on the premises.
2. VA does not provide parking spaces at the work site; the Contractor must obtain parking at the work site if needed. It is the responsibility of the Contractor to park in the appropriate designated parking areas. VA will not invalidate or make reimbursement for parking violations of the Contractor under any conditions.
3. Smoking is prohibited inside/outside any building other than the designated smoking areas.

4. Possession of weapons is prohibited.
5. The Contractor shall obtain all necessary licenses and/or permits required to perform the work, except for software licenses that need to be procured from a Contractor or Contractor in accordance with the requirements document. The Contractor shall take all reasonable precautions necessary to protect persons and property from injury or damage during the performance of this contract.

A3. Confidentiality and Non-Disclosure

The Contractor shall follow all VA rules and regulations regarding information security to prevent disclosure of sensitive information to unauthorized individuals or organizations.

The Contractor may have access to Protected Health Information (PHI) and Electronic Protected Health Information (EPHI) that is subject to protection under the regulations issued by the Department of Health and Human Services, as mandated by the Health Insurance Portability and Accountability Act of 1996 (HIPAA); 45 CFR Parts 160 and 164, Subparts A and E, the Standards for Privacy of Individually Identifiable Health Information ("Privacy Rule"); and 45 CFR Parts 160 and 164, Subparts A and C, the Security Standard ("Security Rule"). Pursuant to the Privacy and Security Rules, the Contractor must agree in writing to certain mandatory provisions regarding the use and disclosure of PHI and EPHI.

1. The Contractor may have access to some privileged and confidential materials of VA due to damage and/or mutilated letters. These printed and electronic documents are for internal use only, are not to be copied or released without permission, and remain the sole property of VA. Some of these materials are protected by the Privacy Act of 1974 (revised by PL 93-5791) and Title 38. Unauthorized disclosure of Privacy Act or Title 38 covered materials is a criminal offense.
2. The VA CO will be the sole authorized official to release in writing, any data, draft deliverables, final deliverables, or any other written or printed materials pertaining to this contract. The Contractor shall release no information. Any request for information relating to this contract presented to the Contractor shall be submitted to the VA CO for response.
3. Contractor personnel recognize that in the performance of this effort, Contractor personnel may receive or have access to sensitive information, including information provided on a proprietary basis by carriers, equipment manufacturers and other private or public entities. Contractor personnel agree to safeguard such information and use the information exclusively in the performance of this contract. Contractor shall follow all VA rules and regulations regarding information

security to prevent disclosure of sensitive information to unauthorized individuals or organizations as enumerated in this section and elsewhere in this Contract and its subparts and appendices.

4. Contractor shall limit access to the minimum number of personnel necessary for contract performance for all information considered sensitive or proprietary in nature. If the Contractor is uncertain of the sensitivity of any information obtained during the performance this contract, the Contractor has a responsibility to ask the VA CO.
5. Contractor shall train all their employees involved in the performance of this contract on their roles and responsibilities for proper handling and nondisclosure of sensitive VA or proprietary information. Contractor personnel shall not engage in any other action, venture or employment wherein sensitive information shall be used for the profit of any party other than those furnishing the information. The sensitive information transferred, generated, transmitted, or stored herein is for VA benefit and ownership alone.
6. Contractor shall maintain physical security at all facilities housing the activities performed under this contract, including any Contractor facilities according to VA-approved guidelines and directives. The Contractor shall ensure that security procedures are defined and enforced to ensure all personnel who are provided access to patient data must comply with published procedures to protect the privacy and confidentiality of such information as required by VA.
7. Contractor must adhere to the following:
 - a. The use of “thumb drives” or any other medium for transport of information is expressly prohibited.
 - b. Controlled access to system and security software and documentation.
 - c. Recording, monitoring, and control of passwords and privileges.
 - d. All terminated personnel are denied physical and electronic access to all data, program listings, data processing equipment and systems.
 - e. VA, as well as any Contractor (or Subcontractor) systems used to support development, provide the capability to cancel immediately all access privileges and authorizations upon employee termination.
 - f. Contractor PM and VA PM are informed within twenty-four (24) hours of any employee termination.
 - g. Acquisition sensitive information shall be marked "Acquisition Sensitive" and shall be handled as "For Official Use Only (FOUO)".
 - h. Contractor does not require access to classified data.

8. Regulatory standard of conduct governs all personnel directly and indirectly involved in procurements. All personnel engaged in procurement and related activities shall conduct business in a manner above reproach and, except as authorized by statute or regulation, with complete impartiality and with preferential treatment for none. The general rule is to strictly avoid any conflict of interest or even the appearance of a conflict of interest in VA/Contractor relationships.

18 Addendum B

B1. General

Contractors, Contractor personnel, Subcontractors, and Subcontractor personnel shall be subject to the same Federal laws, regulations, standards, and VA Directives and Handbooks as VA and VA personnel regarding information and information system security.

B2. Security Incident Investigation

The term “security incident” means an event that has, or could have, resulted in unauthorized access to, loss or damage to VA assets, or sensitive information, or an action that breaches VA security procedures. The Contractor/Subcontractor shall immediately notify the COR and simultaneously, the designated ISO and Privacy Officer for the contract of any known or suspected security/privacy incidents, or any unauthorized disclosure of sensitive information, including that contained in system(s) to which the Contractor/Subcontractor has access.

To the extent known by the Contractor/Subcontractor, the Contractor/Subcontractor’s notice to VA shall identify the information involved, the circumstances surrounding the incident (including to whom, how, when, and where the VA information or assets were placed at risk or compromised), and any other information that the Contractor/Subcontractor considers relevant.

With respect to unsecured protected health information, the business associate is deemed to have discovered a data breach when the business associate knew or should have known of a breach of such information. Upon discovery, the business associate must notify the covered entity of the breach. Notifications need to be made in accordance with the executed business associate agreement.

In instances of theft or break-in or other criminal activity, the Contractor/Subcontractor must concurrently report the incident to the appropriate law enforcement entity (or entities) of jurisdiction, including the VA OIG and Security and Law Enforcement. The Contractor, its employees, and its Subcontractors and their employees shall cooperate with VA and any law enforcement authority responsible for the investigation and prosecution of any possible criminal law violation(s) associated with any incident. The Contractor/Subcontractor shall cooperate with VA in any civil litigation to recover VA information, obtain monetary or other compensation from a third party for damages arising from any incident, or obtain injunctive relief against any third party arising from, or related to, the incident.

B3. Liquidated Damages for Data Breach

Consistent with the requirements of 38 U.S.C. §5725, a contract may require access to sensitive personal information. If so, the Contractor is liable to VA for liquidated damages in the event of a data breach or privacy incident involving any SPI the Contractor/Subcontractor processes or maintains under this contract.

The Contractor/Subcontractor shall provide notice to VA of a “security incident” as set forth in the Security Incident Investigation section above. Upon such notification, VA must secure from a non-Department entity or the VA Office of Inspector General an independent risk analysis of the data breach to determine the level of risk associated with the data breach for the potential misuse of any sensitive personal information involved in the data breach. The term 'data breach' means the loss, theft, or other unauthorized access, or any access other than that incidental to the scope of employment, to data containing sensitive personal information, in electronic or printed form, that results in the potential compromise of the confidentiality or integrity of the data. Contractor shall fully cooperate with the entity performing the risk analysis. Failure to cooperate may be deemed a material breach and grounds for contract termination.

Each risk analysis shall address all relevant information concerning the data breach, including the following:

1. Nature of the event (loss, theft, unauthorized access);
2. Description of the event, including:
3. Date of occurrence;
4. Data elements involved, including any PII, such as full name, social security number, date of birth, home address, account number, disability code;
5. Number of individuals affected or potentially affected;

6. Names of individuals or groups affected or potentially affected;
7. Ease of logical data access to the lost, stolen or improperly accessed data in light of the degree of protection for the data, e.g., unencrypted, plain text;
8. Amount of time the data has been out of VA control;
9. The likelihood that the sensitive personal information will or has been compromised (made accessible to and usable by unauthorized persons);
10. Known misuses of data containing sensitive personal information, if any;
11. Assessment of the potential harm to the affected individuals;
12. Data breach analysis as outlined in 6500.2 Handbook, *Management of Security and Privacy Incidents*, as appropriate; and
13. Whether credit protection services may assist record subjects in avoiding or mitigating the results of identity theft based on the sensitive personal information that may have been compromised.

Based on the determinations of the independent risk analysis, the Contractor shall be responsible for paying to VA liquidated damages in the amount of \$37.50 per affected individual to cover the cost of providing credit protection services to affected individuals consisting of the following:

1. Notification;
2. One year of credit monitoring services consisting of automatic daily monitoring of at least 3 relevant credit bureau reports;
3. Data breach analysis;
4. Fraud resolution services, including writing dispute letters, initiating fraud alerts and credit freezes, to assist affected individuals to bring matters to resolution;
5. One year of identity theft insurance with \$20,000.00 coverage at \$0 deductible; and
6. Necessary legal expenses the subjects may incur to repair falsified or damaged credit records, histories, or financial affairs.

B4. Security Controls Compliance Testing

On a periodic basis, VA, including the Office of Inspector General, reserves the right to evaluate any or all of the security controls and privacy practices implemented by the Contractor under the clauses contained within the contract. With 10 working-days' notice, at the request of the Government, the Contractor must fully cooperate and assist in a Government-sponsored security controls assessment at each location wherein VA information is processed or stored, or information systems are developed, operated, maintained, or used on behalf of VA, including those initiated by the Office of Inspector

General. The Government may conduct a security control assessment on shorter notice (to include unannounced assessments) as determined by VA in the event of a security incident or at any other time.

B5. Training

All Contractor employees and subcontractor employees requiring access to VA information and VA information systems shall complete the following before being granted access to VA information and its systems:

1. Sign and acknowledge (either manually or electronically) understanding of and responsibilities for compliance with the *Contractor Rules of Behavior*, Appendix D relating to access to VA information and information systems;
2. Successfully complete the *VA Privacy and Information Security Awareness and Rules of Behavior* training and annually complete required security training;
3. Successfully complete *Privacy and HIPAA Training* if Contractor will have access to PHI;
4. Successfully complete the appropriate VA privacy training and annually complete required privacy training;
5. Successfully complete any additional cyber security or privacy training, as required for VA personnel with equivalent information system access

The Contractor shall provide to the CO and/or the COR a copy of the training certificates and certification of signing the Contractor Rules of Behavior for each applicable employee within 1 week of the initiation of the contract and annually thereafter, as required.

Failure to complete the mandatory annual training and sign the Rules of Behavior annually, within the timeframe required, is grounds for suspension or termination of all physical or electronic access privileges and removal from work on the contract until the training and documents are complete.

B6. Government Responsibilities

The following needs to be provided by the COR to the Contractor:

The Security Investigations Center will require the following forms from the Contractor or to the Contractor's personnel: Within 3 business days after award, the Contractor shall provide a roster of Contractor and Subcontractor employees to the COR to begin their background investigations.

The roster shall contain:

1. Contractor's Full Name, Full Social Security Number, Date of Birth, Place of Birth, and individual background investigation level requirement (based upon Sections 3.1 and 3.2 Tasks).
2. The Contractor should coordinate the location of the nearest VA fingerprinting office through the COR. Only electronic fingerprints are authorized.
3. For a Low Risk designation the following forms are required to be completed: 1. OF-306 and 2. DVA Memorandum – Electronic Fingerprints. For Moderate or High Risk, the following forms are required to be completed: 1. VA Form 0710 and 2. DVA Memorandum – Electronic Fingerprints. These should be submitted to the COR within 5 business days after award. (DVA Memorandum – Electronic Fingerprints is filled out by the VA Facility that took the electronic fingerprints)
4. The Contractor personnel will receive an email notification from the Security and Investigation Center (SIC), through the Electronics Questionnaire for Investigations Processes (e-QIP) identifying the website link that includes detailed instructions regarding completion of the investigation documents (SF85, SF85P, or SF 86). (The SF85 does not need to be uploaded because OPM is going paperless and the Contractor will complete this questionnaire online when the e-QIP link is sent.) (DVA Memorandum – Electronic Fingerprints is filled out by the VA Facility that took the electronic fingerprints) (Please be advised that the Contractor will need all the necessary information easily accessible as the website will time out and they can lose the information they inputted if they take too long to fill it in.)The Contractor personnel shall submit all required information related to their background investigations utilizing the Office of Personnel Management's (OPM) Electronic Questionnaire for Investigations Processing (e-QIP).

The Contractor is to certify and release the e-QIP document, print and sign the signature pages, and send them to the COR for electronic submission to the SIC. These should be submitted to the COR within 3 business days of receipt of the e-QIP notification email.

The SIC will then upload the e-QIP signature pages to e-QIP and release the case file to OPM for investigation.

The SIC will notify the CO and Contractor after adjudicating the results of the background investigations received from OMB.

19 Service Specific Attachments

Attachment A – Typical Roles and Responsibilities

Attachment B – General Switchgear and RussElectric Paralleling Switchgear

Attachment C – Building Maintenance System (BMS)

Attachment D – Clean Agent Fire Suppression System

Attachment E – Computer Room Air Handlers (CRAH)

Attachment F – Uninterruptible Power System (UPS)

Attachment G – Uninterruptible Power System (UPS) Battery Monitoring

Attachment H – Fuel System Service

Attachment I – Electrical System Service

Facilities Maintenance Support Services Typical Roles and Responsibilities

1. Plant Operators

Must be skilled and knowledgeable with regard to the operation of plant systems. They must be well-versed with control and monitoring systems, engineering drawings, and Microsoft Office applications. Prepare work orders and distribute to appropriate management and Government representative. Keep an accurate record of trouble calls and work orders. May dispatch orders and/or relay messages and special instructions to craft personnel using radio, computer, or telephone equipment. Plant operators must have the ability to monitor the operation of computer-controlled building HVAC, building management system (BMS), and other alarm systems while onsite. Operators must be able to recognize the magnitude of a problem, the need for assistance, and accurately communicate this information. Three (3) years commercial HVAC experience or five (5) years equivalent experience in the operation of automated building environmental systems of the size and complexity of the CRRC. Provides shift reports prior to end of shift. At this time, there is no computerized maintenance management system (CMMS) available for use. In addition to monitoring the condition of the facility, plant operators are often tasked with providing additional services for the primary and secondary locations. Duties often include the following: Training, Technical/Administrative (reports, technical writing), light carpentry (hanging pictures, moving furniture), escort vendors/visitors, maintenance planning, and preventive maintenance

2. Plant Maintenance Mechanic

Must have the ability to perform basic install/repair/operations of pneumatic, electrical, electronic, computerized energy management systems, sensors and associated systems for the equipment that will be operated and checked for proper operation during monitoring. The plant mechanics should have at least three (3) years commercial HVAC experience in the size and complexity of the CRRC. Plant Maintenance Mechanics provide the first look response into system failures and coordinate the appropriate action for the maintenance and sustainment of the facility.

3. Elevator Mechanic

Must be properly trained and appropriately certified in the maintenance and repair of elevators and lifts. Must be able to perform maintenance, adjustments, and repair of elevators and lifts, and should have the ability to perform solid-state electronics troubleshooting, repair and replacement on elevators at a facility the size of the CRRC.

4. Fire Suppression Systems Technician

Must be appropriately trained and/or certified, by state or local ordinance, in portable/fixed systems or automatic fire suppression systems. The technician should have the ability to perform inspections and preventive maintenance on a facility the size of CRRC.

**Facilities Maintenance Support Services
Typical Roles and Responsibilities****Attachment A
con't.****5. Electrical**

Electrician must have the ability to perform complete installation / repair / replacement of electrical systems on a facility the size and complexity of the CRRC. Must have demonstrated advanced technical knowledge in solving complex problems related to existing electrical and new installations. Must be able to accurately interpret prints, schematics and manufacturer's technical documents. The electrician shall have current applicable certifications and should have five (5) years' journeymen experience.

Contractor must provide staff who are knowledgeable and experienced with Square D electrical equipment and other listed items. Technicians performing the electrical tests and inspections shall be trained and experienced concerning the apparatus and systems being evaluated. These individuals must be capable of conducting the tests in a safe manner and with complete knowledge of the hazards involved. They must be able to evaluate the test data and make a judgment on the continued serviceability or non-serviceability of the specific equipment.

On-site field service work shall be supervised directly by a Supervising Field Service Engineer. The Supervising Field Service Engineer shall be accredited as a Certified Electrical Test Technologist by the National Institute for Certification in Engineering Technologies (NICET) or the NETA and should have a minimum of 5 years of experience on similar major testing projects. (Note: Persons with high qualifications such as a B.S. or higher degree in engineering need not be accredited or certified, provided they can demonstrate that they have the required specialized knowledge and at least 5 years' experience in testing switchgear and electrical power distribution systems.) Electrical work experience in a data center environment is desired.

All other testing technicians assigned to the project must be certified by NICET, NETA, or must have equivalent qualification certification. Test assistants and apprentices may be assigned to the project as assistants to certified technicians at a ratio not to exceed two certified to one non-certified assistant or apprentice.

Each on-site Contractor shall have completed the Occupational Safety & Health Administration (OSHA) approved 10-hour construction safety training. Copies of NETA, OSHA and any other applicable certificates shall be delivered to the VA Project Engineer before any work can begin on site. Contractors should have technical training, and track records of working experience in maintenance, inspection, and testing of the Electrical Power Distribution System and its components in healthcare, industrial, educational, and commercial facilities for a minimum of five (5) continuous years.

**Facilities Maintenance Support Services
Typical Roles and Responsibilities****Attachment A
con't.**

Contractors shall have safety training – either on-the-job or class-room type - in electrical safety outlined in the OSHA Standard 29 Code of Federal Regulations (CFR) 1910 Subpart S - Electrical, and the National Fire Protection Association (NFPA) 70E – Standard for Electrical Safety in the Workplace. Training certifications shall be submitted to the VA CRRC COR (Project Engineer) prior to work. If no training certifications are available, the Contractor's employer shall certify, in writing, that They has met this requirement, and submit it to the VA CRRC COR prior to work. Contractors shall be equipped with all necessary tools, equipment, and Personal Protective Equipment (PPE) to perform the work safely, effectively, and timely. Tools, equipment, and PPE shall comply with the requirements of OSHA Standard 29 CFR 1910, Subpart I, and NFPA 70E.

6. Generator Maintenance Technician

Perform Preventive Maintenance, inspections, repairs, and service for diesel engine driven generator sets, electrical controls, and automatic transfer switches. Technician must be capable of electrical and mechanical troubleshooting and repair of engines and automatic transfer switches. Technician should be capable of diagnosing and repairing engines, electrical component problems, interpret electrical, schematic, and mechanical drawings. Technician will be required to perform service and maintenance on machines up to 2,250 KW Generator Sets.

7. Carpenter (general/finish)

Must have three (3) years of experience in performing general carpentry and finish work.

8. Painter

Must have the ability to perform in the preparation and painting of industrial surfaces in a building of the size of the CRRC.

9. Plumber

Shall be appropriately licensed / certified to perform commercial plumbing work on a facility the size and complexity of the CRRC.

10. Heating, Ventilation and Air Conditioning Mechanic

The HVAC mechanic shall have all applicable and current certifications, will comply with all applicable government requirements, and should have five (5) years journeymen experience. HVAC mechanics must have demonstrated advanced technical knowledge in solving complex problems related to HVAC systems and system components. Must be able to accurately interpret prints, schematics and manufactures technical documents and must have the ability to perform the installation, overhaul and repair of HVAC systems and equipment of the size and type installed at the CRRC.

**Facilities Maintenance Support Services
Typical Roles and Responsibilities****Attachment A
con't.****11. Roof Mechanic/Technician**

The roof mechanic should have five (5) years of experience with commercial roofing installation, maintenance, repair and troubleshooting. In order to preserve the integrity of the roof membrane warranty, experience will include maintenance and repair of TPO membrane roofing and roof decks, low slope flashing systems, wall parapet base flashing and caps. Knowledge and training experience with 2012 IBC standards with regard to installation and repair of membrane roof systems is required. Understanding of, and experience with, GAF Certified Low Slope Roofing Contractor requirements and GAF or equal Certified Contractor Program is required. Roof safety experience, fall hazard training, fall hazard barriers, fall arrest gear training and usage is required, as well as documented and current certification of training. Roof mechanic will have knowledge and familiarity with ASTM D5538 "Practices for Thermoplastic Elastomers"; ASTM D66878 "Specifications for Thermoplastic Polyolefin Based Sheet Roofing". Training and knowledge similar to NRCA Roof 101 "Low Slope Roof Assemblies"; NRCA "Roof Inspection, Diagnosis and Repair for Commercial Buildings" or experience equal to this certification is required. OSHA 10 Hour Training certification is required, and OSHA 3755-05 2015 "Protecting Roofing Workers" knowledge and understanding is essential training for this work.

12. General Maintenance Worker

Should have three (3) years' experience in performing general maintenance and repair of equipment and buildings requiring practical skill and knowledge of trades as painting, carpentry, masonry and plumbing. Work involves a variety of installation and maintenance repair including concrete sidewalks and steps, repairing walls, ceilings, installation of floor and carpet tiles, repairing and replacing sinks, repairing of roofs, both interior and exterior and works with other trades as required. Additional duties include modifying floor tiles for the data floor.

Facilities Maintenance Support Services

Generator Switchgear and RussElectric Paralleling Switchgear

Generator Switchgear

Equipment/ Services	Size/Type	Qty	Mfr
UPS Output Switchgear	(1) N-Tron 108 TX Ethernet Switch (2) Modicon Momentum Discrete Input Adapter (1) EGX100	1	Schneider
PDU Monitoring	(1) N-Tron 105FX Ethernet Switch (2) EGX100	1	Schneider
UPS Switchgear	(1)N-Tron 108TX Ethernet Switch	1	Schneider
GB Switchgear	(1) CM3000 wired to a third-party Adam 4572 Gateway (7) MicroLogic Trip Units on LV Breakers	1	Schneider
UPS1 Switchgear	(1) CM33500 Circuit Monitor (7) MicroLogic Trip Units on LV Breakers	1	Schneider
UPSG1 Switchgear	(1) CM4000 Circuit Monitor (4) MicroLogic Trip Units on LV Breakers	1	Schneider
M-IA Switchgear	(1) CM3350 Circuit Monitor (14) MicroLogic Trip Units on LV Breakers	1	Schneider
M-IB Switchgear	(1) CM3350 Circuit Monitor (14) MicroLogic Trip Units on LV Breakers	1	Schneider
DBIA Switchgear	(2) MicroLogic Trip Units on LV breakers (12) I-Line breakers	4	Schneider
CDBIB Switchgear	(3) MicroLogic Trip Units on LV breakers (14) I-Line breakers	1	Schneider
MGE UPS	(4) MGE EPS6000 UPS Modules (1) MGE EPS 6000 Static Switch	1	Schneider
MGE PDU/MCM	(20) MGE MCM Modules	1	Schneider
MGE PDU BCPMA-1	(10) BCPMA084D	1	Schneider
MGE PDU BCPMA-2	(10) BCPMA084D	1	Schneider
Database Server	PowerLogic/SCADA PLS 7.2	1	Schneider
Webclient Server	StruxureWare Power Monitoring	1	Dell/Schneider
Active Paging Module	APM	1	Dell/Schneider

Facilities Maintenance Support Services**Generator Switchgear and RussElectric Paralleling Switchgear****Russelectric Paralleling Switchgear****Control Cabinets**

- Inspect interior wiring for signs of cracking and wear, overheating, or deterioration of insulation.
- Inspect and tighten control circuit wiring and bus connections as needed.
- Check switches for contact continuity, clean and adjust relay contacts.
- Inspect all common and ground wire connections, measure and record resistance to ground.
- Inspect control transformers, inspect fuses and provide backup fuses of correct rating.

Circuit Breakers

- Inspect and clean breaker mechanisms, inspect interlocks and contacts, lubricate, check overcurrent trip settings.
- Clean interior of breaker cubicles, re-install breakers and check trip operation.

Indicators and Displays

- Inspect all indicator lights, inspect and check annunciator alarm, check pre-alarms and shutdown failure mode indications.
- Clean and adjust reverse power relay and check trip calibration and report.

System Tests

- Bring all engines on line and check for operation of governor and voltage regulators.
- Check phase to phase and phase to neutral frequency and report.
- Check manual dead bus circuitry, check manual engine synchronization.
- Review operation of generator controls with CRRRC Facilities Management.

Cabinets – Cleaning

- Do full exterior cleaning and wipe down cabinets including tops.
- Vacuum and wipe down interiors.
- Check operation of doors and access panels, lube, and adjust latches and locks.

Automatic Transfer Switch**Interior Wiring and Components:**

- Make visual inspection of all wiring and wire connections for signs of wear or fault.
- Inspect and re-torque to specifications all control circuit terminal connections.
- Check and tighten plug-in connections.
- Inspect relays and manual switch components for contact continuity and soundness.
- Inspect common and ground wiring, measure, record and report resistance to ground readings.
- Check lug connections and mounts and re-torque as needed and report this if re-torque is needed.

Facilities Maintenance Support Services**Generator Switchgear and RussElectric Paralleling Switchgear****Mechanical Inspection Points:**

- Inspect and re-torque all bus connections and report to the VA CRRC COR.
- Inspect main contactors and arcing contactors.
- Inspect length of linkage.
- Inspect all motor and other mounting hardware for tightness, re-torque and report to the COR.
- Check heim joints, interlock rod, handle brackets.
- Inspect and lubricate all lube points and points subject to wear if not lubed properly.

Other Items

- Verify operation of LED indicators proving that (Computer Processing Unit) is in normal operation, that ATS is in Normal mode and that ATS is per specification when in emergency position. Check and test LED indicators showing Normal position status, Normal power available, Transfer to normal, Engine Start Relay, Emergency Position indicator, Transfer to emergency indicator, Block Transfer and Load Shed. Check time delay settings and function in all modes per the Timer Set-up menu.
- Check and record Normal and Emergency Source Voltages at all settings.
- Verify Engine Start signal function, Transfer to Emergency, Transfer to normal via manufacturer's standard test protocols.
- Using testing purposed and calibrated equipment perform infrared scanning diagnostic for rise in ambient values on energized main contacts, bus works and cable lugs at load conditions.
- Completed a full wipe down of exterior and full interior cleaning of the apparatus, vacuum interior, inspect door closure for security, clean and clear all vents and airways.

Manufacturer	Cubicle:	Dwg / Job #:	Component #:
1	(Uninterruptible Power Source) – 1 Transfer Control Station		
Ruselectric Corp.	D – 1	34858-P-GB	E-100502
2	Load Bank Circuit Breaker Control Station		
Ruselectric Corp.	D – 2	34858-P-GB	E-100503
3	Master Control Cabinet		
Ruselectric Corp.	CC	34858-P-GB	E-100504
4	Generator Control Cabinet		
Ruselectric Corp.	C-1	34858-P-GB	E-100505
5	Generator Control Cabinet		
Ruselectric Corp.	C-2	34858-P-GB	E-100507
6	Generator Control Cabinet		
Ruselectric Corp.	C-3	34858-P-GB	E-100508
7	Transfer Control Cabinet		
Ruselectric Corp.	D-3	34858-P-GB	E-100509
8	Distribution Cabinet		
Ruselectric Corp.	D-4	34858-P-GB	E-100510
9	Automatic Transfer Switch		
Ruselectric Corp.	n/a	34997-1A/B	RTBLB-2254CEF

**Facilities Maintenance Support Services
Building Maintenance System (BMS)**

BMS Equipment / Services	Size/Type	Qty	Mfr.
Andover BacNet Controllers	b3920, 16 UI, 8 DO, 8AO, 1 Smart Sensor per Rm Sens Input, Exp_Port	3	Andover
Andover BacNet Controllers	b3814, 8 UI, 4 DO, 4 AO w/overrides, 1 Smart Sensor/Rm Sens In, Exp Port	2	Andover
Andover BacNet Controllers	b3867, 4 UI, 1 Sm/Rm Sens In, 5 Triac Out, 2 AO	3	Andover
Andover BacNet Controllers	b3624, 24 Universal Inputs	1	Andover
Andover BacNet Controllers	b3865, 4 UI, 1 Airflow, 1 IBS Actuator, 3 FA Triac Out, 1 Sm/Rm Sens In	48	Andover
Andover BacNet B Link Controllers	BACnet MS/TP Repeater,120/240VAC	1	Andover
BCX -CR-INF-64	10/100bT,exp port,64 Inf Nodes, 10-28VDC/24VAC	1	Andover
BCX -CR-INF-8	10/100bT,exp port,8 Inf Nodes, 10-28VDC/24VAC	5	Andover
Computer	Workstation	2	Dell
Database Server	Server	1	Dell
Webclient Server	Server	1	Dell
Peripherals	ROAM 1/0 Tool	1	Andover

Facilities Maintenance Support Services

Clean Agent Fire Suppression System

The following is a list of equipment that has been identified in the graphic annunciator panels and as relevant for programming of the software.

Equipment/Services	Size/Type	Qty.	Mfr.
Cheeta Xi Releasing Control Panel	10-068-R-1	1	Fike
Photoelectric Detector Head	63-1052	112	Fike
Manual Release Station	NBG-12LR	2	Notifier
Maintenance 4-Pole switch	GEM-Main	1	Gemcom
Main/Reserve 4-Pole switch	GEM-Main	1	Gemcom
Mini Monitor Module	55-045	21	Fike
Releasing Control Module	55-052	2	Fike
Gent Release Module (ARMIII)	10-1832	16	Fike
Multi-Candela Horn/Strobe	MT-24MCW-FR	6	Cooper Notification
Multi-Candela Strobe	ZRS-MCW-FR	2	Cooper Notification

Clean Agent Suppression System Test & Report – Electrical (Yearly)

Room Integrity Testing

Clean Agent Suppression System Test & Report - Mechanical (Yearly)

- Discharge Piping

Clean Agent Suppression System Test & Report - Mechanical (Every Six Months)

- Clean Agent
- Gas Cartridge Actuators
- Discharge Piping
- Discharge Nozzles
- Agent Storage Containers

NFPA 2001 Clean Agent Enclosure Integrity Test & Report (Yearly)

- Enclosure Integrity

A room pressurization test is conducted yearly to determine the presence of openings, which would affect the agent system concentration levels. The test is conducted using the Retro-Tec Corp. Door Fan System or equivalent, with integrated computer program. All testing is in accordance with NFPA2001, current edition. Contractor provides the enclosure integrity test report which includes the data, temperatures, zone data, minimum hold height, leakage area, hold time, static pressure, zone depressurization, air flow volume, orifice plate ratio with indicated leakage area for both depressurization and pressurization, zone pressurization and air flow volume.

**Facilities Maintenance Support Services
Clean Agent Fire Suppression System**

**Attachment D
con't.**

Part #	Qty	Description	Mfr
10-068-R-1	1	Cheeta Xi Releasing Control Panel	Fike
70-157	12	1000lb ECARO-25 Cylinders w/Liquid Level Indicator Assembly # 70-157-D-W	Fike
70-156	4	650lb ECARO-25 Cylinder w/Liquid Level Indicator Assembly # 70-156-D-W	Fike
70-1121	16	Low Pressure Switch	Fike
70-1651	16	Gas Cartridge Actuator (GCA)	Fike
02-4157	16	3" Check Valve	Fike
80-050-6250	2	180 Degree Discharge Nozzle-2"	Fike
80-049-4687	2	180 degree Discharge Nozzle- 1 ½"	Fike
80-049-4062	2	180 degree Discharge Nozzle- 1 ½"	Fike
80-049-4040	2	180 degree Discharge Nozzle- 1 ½"	Fike
80-041-5625	8	360 degree Discharge Nozzle- 1 ½"	Fike
80-041-4687	8	360 degree Discharge Nozzle- 1 ½"	Fike
80-041-4387	8	360 degree Discharge Nozzle- 1 ½"	Fike
80-040-4687	16	360 degree Discharge Nozzle- 1 1/4"	Fike
10-2204	1	CRM4 Relay Module	Fike
PS-12120	2	12 Volt, 12.0 Ah Battery	Power Sonic
63-1052	112	Photoelectric Detector Head	Fike
631054	112	Detector Base	Fike
NBG-12LR	2	Manual Release Station	Notifier
STI-1130	2	Stopper II Pull Station Guards	STI, Inc
GH-1	2	Abort Button w/40mm Mushroom Style Button	Various
GEM-Main	1	Maintenance Disconnect 4-Pole Switch	Gemcom
Unavailable	1	Main/Reserve Switch (4-Pole)	Gemcom
55-045	21	Mini-Monitor Module	Fike
55-052	2	Releasing Control Module	Fike
10-1832	16	Agent Release Module (ARMIII)	Fike
MT-24MCW-FR	6	Multi-Candela Horn/Strobe	Cooper Notification
ZRS-MCW-FR	2	Multi-Candela Strobe	Cooper Notification
10-2321	1	Remote LCD Display	10-2321
10-109H	2	LED Graphic Annunciator	Fike
20-040	2	Countdown Timers which abort Switch	Fike
06-463	1	Precise Vision- Software	Fike

**Facilities Maintenance Support Services
Clean Agent Fire Suppression System**

- System Discharge (Optional Deliverable)

In the event of a system discharge, the containers should be removed and sent to the factory or an “authorized” Fike distributor for valve reconditioning. The tanks shall also be filled by an authorized Fike, UL Listed and/or FM approved location in accordance with Fike’s Initial Fill Procedures, P/N 06-290. Contractor provides a four hour response time to evaluate the situation, collect and remove the tanks. Contractor provides a 72-hour response time to return the tanks and re-commission the system.

**Facilities Maintenance Support Services
Computer Room Air Handlers (CRAH)**

CRAH Units: Four (4) Inspections per year, in accordance with manufacturer specifications:

Liebert Site Scan: One (1) Inspection per year:

Liebert Leak Detection- Liqui-Tect Panel- One (1) Inspection per year:

- Complete preventive maintenance and testing per Liebert Operations and Maint. (O&M) manual.

Equipment

- Sixteen (16) Computer Room Air Handlers, model # CW114DC1A26291S
- Three (3) Computer Room Air Handlers, model # CW114DCSA26292S
- Plus associated SiteScan and Liqui-Tect Panels

**Facilities Maintenance Support Services
Uninterruptible Power Source (UPS)**

PDU-UPS: Minor Inspection Service (3) Inspections, in accordance with manufacturer specifications, per 12-month period.

PDU-UPS: Major Inspection Service-One Inspection per 12 consecutive months:

- Perform all minor service functions as listed above.
- Shut down the unit and vacuum all compartments; clean interior/exterior of the unit completely.
- Inspect and clean logic card and similar connections.
- Re-torque bus and conductor connections per specifications at unit shut down.
- Re-energize the PDU and operate and verify circuit breaker function per specification.
- Verify proper air flow and cooling through the unit.
- Perform specified test transfers of the unit per specifications.
- Verify all PDU protection settings; check and record all power supply voltages.
- Thermographic Testing- survey all equipment included in this system to record radiation signatures of all critical components. Analyze the data and make corrective action if necessary.

Equipment

- MOE Galaxy 8000 UPS Modules 2400kVA / 2160KW UPS Parallel Redundant systems, UPS-UA-1 through -4, model #72-131108-44
- MOE Galaxy 5000 UPS Module- 80kVA/72kW (S/N: 1PNK36001)
 - Includes Adjacent 3-CB Maintenance Bypass Cabinet
 - Valve-Regulated Lead Acid (VRLA) Battery Bank
- UPS System Control Switchgear, 3000Amp, 100.kAIC buss
 - MOE UPS Continuous Duty Static Switch Model72-131900-3 (S/N: H09-10044)
- Power Management Modules (PMM) 150kVA, model PMN084-42-150, Qty. 10
- Hydrogen Gas Detector: Enviroguard HYD-2C-I monitor and (1) H2 sensor
- Battery Charger/Rectifier, Alcad Model AT10-025-0113000 (S/N: 127705/736630 HJ)

**Facilities Maintenance Support Services
Uninterruptible Power Source (UPS) Battery Monitoring**

- Review & analyze impedance and voltage data for each battery (unit) and communicate all needed services and advisories to the customer
- Analysis of battery system performance during power interruptions or outages and notification of issues to customer as needed
- Analyze all alarm messages and supply necessary customer advisories for action
- Prepare and present a formal quarterly report to document the current battery system status to include the prior three months of monitoring activity
- Provide remote and on-site diagnostic support of these monitors on a needed basis
- Inspect, test, and validate the four control modules providing monitoring data
- Functional System Tests- perform standard systems on-site tests
- Remedial Repairs (Labor Only)
- Verify on-site battery system analysis compared to remote analysis
- Inspect and verify load control lead (LCL) and voltage sense lead (VSL) wiring
- Obtain and install required hardware and firmware upgrades
- Install new monitoring system back-up lithium battery
- Provide annual system refresher training for up to four Owner supported users
- Obtain and provide support to Owner for any updated system licenses
- Software upgrade subscription

Equipment

Mfr.	Model	Description
Generex	BACSKIT B4-6	Battery Monitoring System
Power Battery	SLF-12250	UPS Batteries (640)

Facilities Maintenance Support Services

Fuel System Service

The following shall be completed twice yearly:

- Above Ground Fuel Storage Tanks (AST)
- Automated Fuel Port Controller tests
- Master Controller and Fuel Oil Motor Starter Panel
- Fuel Polishing and Conditioning system tests
- Automatic Tank Gauging and Leak Detection system tests

Equipment

	Description	Mfr.	Qty.
1	Above ground fuel storage tank	Highland Tank	2
	Pumps, 2 ¾ hp	Franklin	4
	Overfill Prevention Valves	Warden	2
	Tank vents	EBW	4
2	Tank gauging and Leak Detection, TLS-350 multi-tank CPU	Veeder-Root	1
3	Master Control Station	Simplex	1
	Motor Transfer Pump Control	Simplex	1
	Control Panel	Simplex	1
4	Fuel Conditioning	Simplex	1
	SFG-10C Smartfilter Filter Element	Simplex	1
	Coalescer Element	Simplex	1
5	Fuel Delivery Access	Simplex	1
	PortFuel Delivery Controller	Simplex	1
6	Day Tank Controller	Simplex	1
	Access Port	Simplex	1

Facilities Maintenance Support Services
Electrical System Service

List of electrical equipment that shall be maintained and tested:

Gear	Name of Breaker		
UPS1	MAIN	UPS UA-1	UTILITY-1 SERVICE
	Gen Main Breaker	UPS UA-2	UTILITY-2 SERVICE
	UPSG-1 BYPASS BREAKER	UPS UA-3	UPS UA-4
M-1A	MAIN	CH-1	T4N-G-2
	GEN MAIN	CH-3 MTS	P4E-G-9
	M1B TIE BREAKER	CH-2 MTS	SPARES
	P4E-G-7A	T4N-G-3	T4N-G-1
M-1B	CH-1	T4N-G-5	M1A TIE BREAKER
	CH-3 MTS	P4E-G-4A	GEN MAIN
	CH-2 MTS	T4N-G-4	UTILITY 2 SERVICE MAIN
	SPARES		
UPSG-1	SYSTEM BY-PASS BREAKER	DISTRIBUTION BKR-1	
	LOAD BANK BREAKER	DISTRIBUTION BKR-2	
CDB1B	MAIN PRINCIPAL	Generator Main	CDB1A Tie
CDB1A	CDB1B Tie	Main Breaker	
UPS1	Gen Main Breaker	UPS UA-2	UTILITY-1 SERVICE MAIN
	UPSG-1 BYPASS BREAKER	UPS UA-3	UTILITY-2 SERVICE
	UPS UA-1	UPS UA-4	