


DEPARTMENT OF THE NAVY
HRMC (NMD)

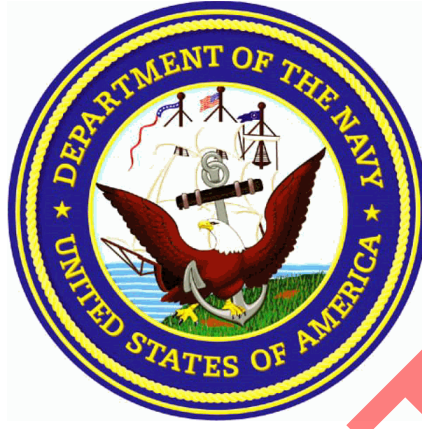

SPECIFICATIONS FOR WORK TO BE ACCOMPLISHED

SPECIFICATION NUMBER: HRMC -006-26

DRAFT

INCLUDES ALL CHANGES THROUGH 4/2/2026

INDEX

ITEMS THAT ARE STRUCK OUT IN THIS INDEX DO NOT APPLY TO THIS CONTRACT.

CATEGORY I. FY-26 STANDARD ITEMS APPLICABLE TO THIS JOB ORDER WITHOUT FURTHER REFERENCE.

<u>ITEM NO.</u>	<u>TITLE</u>	<u>CHANGE DATE</u>	<u>CHANGE</u>
009-001	General Criteria; accomplish	09/04/2024	Original
009-002	Environmental Compliance Report for Material Usage; accomplish	07/22/2024	Original
009-003	Toxic and Hazardous Substance; control	07/22/2024	Original
009-004	Quality Management System; provide	09/16/2024	Original
009-005	Temporary Access; accomplish	11/18/2024	CH-1
009-006	Maintaining Protection and Cleanliness from Non-Radioactive Operations; accomplish	07/22/2024	Original
009-007	Confined Space Entry, and Certification; accomplish	09/04/2024	Original
009-008	Shipboard Fire Protection and Fire Prevention; accomplish	09/30/2024	Original
009-010	Asbestos-Containing Material (ACM); control	09/16/2024	Original
009-018	Mine Warfare Ships Magnetic Material; control	09/04/2024	Original
009-019	Provisioning Technical Documentation (PTD); provide	07/22/2024	Original
009-020	Government Property; control	07/22/2024	Original
009-021	Alteration Verification, Logistic and Technical Data; provide	07/22/2024	Original
009-023	Interference; remove and install	11/18/2024	CH-1
009-024	Authorization, Control, Isolation, Blanking, Tagging, and Cleanliness; accomplish	09/16/2024	Original
009-034	Fire Protection of Unmanned Vessel at Contractor Facility; accomplish	07/22/2024	Original
009-039	Technical Manual Contract Requirement (TMCR) for a New Technical Manual for Commercial Equipment/Component; accomplish	07/22/2024	Original
009-040	Contractor Crane, Multi-Purpose Machine and Material Handling Equipment at a Naval Facility; provide	07/22/2024	Original
009-060	Schedule and Associated Report for CNO Availability; provide and manage	09/16/2024	Original
009-061	Shipboard Use of Fluorocarbons; control	09/16/2024	Original
009-067	Integrated Total Ship Testing; manage	09/16/2024	Original
009-068	Availability Work Certification (AWC) Data for Chief of Naval Operations (CNO) Availabilities; provide	09/16/2024	Original
009-069	Heavy Weather/Mooring Plan; provide	09/16/2024	Original
009-070	Confined Space Entry, Certification, Fire Protection, Fire Prevention and Housekeeping for Unmanned Vessels; accomplish	09/16/2024	Original
009-072	Physical Security at a Private Contractor Facility; accomplish	09/16/2024	Original
009-073	Shipboard Electrical/Electronic Cable Procedure; inspect, test, install, remove, and repair	09/16/2024	Original
009-074	Occupational, Safety and Health Plan; accomplish	09/16/2024	Original
009-080	Ship Facility; maintain	09/16/2024	Original
009-081	Compartment Closeout; accomplish	09/16/2024	Original
009-082	Installation of Equal Component Vice Specified Component; report	07/22/2024	Original
009-084	Threaded Fastener Requirement; accomplish	07/22/2024	Original
009-088	Collection, Holding and Transfer (CHT) and Motor Gasoline (MOGAS) Tank, Space, and Piping, including Sewage or MOGAS Contaminated Tank, Space, and Piping; certify	09/16/2024	Original
009-093	Emergency Planning and Community Right to Know Act (EPCRA) and Pollution Prevention Act (PPA) Information; provide	07/22/2024	Original

INDEX

<u>ITEM NO.</u>	<u>TITLE</u>	<u>CHANGE DATE</u>	<u>CHANGE</u>
009-099	Ship Departure Report; provide	09/16/2024	Original
009-100	Ship's Stability; maintain	09/16/2024	Original
009-101	Ship Transit and Berthing; accomplish	09/16/2024	Original
009-106	Work Authorization Form Coordinator (WAFCOR); provide	09/16/2024	Original
009-109	Non-SUBSAFE Work on SUBSAFE-Certified Vessel; accomplish	07/22/2024	Original
009-110	Non-Nuclear Work on a Nuclear Vessel; accomplish	07/22/2024	Original
009-111	Schedule and Associated Report for Non-CNO Availability; provide and manage	09/16/2024	Original
009-117	Combat Systems, Light Off Support; provide	09/17/2024	Original
009-118	CG Deck Loading; accomplish	07/22/2024	Original
009-120	Fact Finding and Critique of Unplanned Event; manage	09/17/2024	Original
009-122	Temporary Padeye; install and remove	11/18/2024	CH-1
009-125	Boat 65 Feet (20meters) Long and Less; accomplish	11/18/2024	CH-1
009-126	Schedule Model Review (SMR); accomplish	09/17/2024	Original
009-001PH	Waste Generated on Government Property, including Satellite Accumulation area (SAA), Managing and Disposing of Hazardous Waste (HW) and non-HW; accomplish	11/27/2024	Original
009-002PH	Dry Dock Requirement; accomplish	11/27/2024	Original
009-003PH	Additional Environmental Requirements; accomplish	11/27/2024	Original
009-004PH	Industrial Wastewater/Oily Wastewater Disposal; accomplish	11/27/2024	Original
009-007PH	Radiological Fallout Controls; accomplish	11/27/2024	Original
009-008PH	Safety of Ship Requirement; provide	11/27/2024	Original
009-008PH	Safety of Ship Requirement; provide	02/11/2025	CH-1
009-009PH	Additional Requirements for Process Control Procedure (PCP); provide and accomplish	02/11/2025	CH-1
009-040PH	Additional Requirements for Contractor Cranes, Multi-Purpose machine, and Material Handling Equipment at Joint Base Pearl Harbor Hawaii; accomplish	11/27/2024	Original
009-069PH	Pier Laydown for Pearl Harbor Naval Shipyard & IMF (PHNSY & IMF) Availability; accomplish	02/11/2025	CH-1

INDEX

ITEM NO.

TITLE

077-00-001

Hazardous Waste Produced on Naval Vessels; control

551-11-001

Air High Pressure Dehydrator (AHPD) Groom; accomplish

DRAFT

COAR: 26

ITEM NO: 077-00-001

PCN: EAMC-L003

CMP: NONE

PLANNER:

1. SCOPE:

1.1 Title: Hazardous Waste Produced on Naval Vessels; control

1.2 Location of Work:

1.2.1 Throughout the Ship

1.3 Identification:

1.3.1 Not Applicable

2. REFERENCES:

2.1 Resource Conservation and Recovery Act (RCRA)

2.2 Federal Hazardous Materials Transportation Act, 49 U.S.C. 5103

2.3 Applicable Hazardous Waste Manifest Form

2.4 10 U.S.C. 7311

3. REQUIREMENTS:

3.1 Manage and dispose of all hazardous waste listed in 3.5 in accordance with 2.1 and 2.2.

3.1.1 When a Navy generator number is required by this Work Item, submit the original of 2.3 to the SUPERVISOR for assignment of Environmental Protection Agency (EPA) or delegated state environmental agency identification number.

3.1.2 Manage and transport for Navy disposal, Navy-generated hazardous waste listed in 3.5 in accordance with 2.1 and 2.2, as designated by the SUPERVISOR.

3.1.3 Submit one legible copy of 2.3 signed by the owner or operator of the disposal facility to the SUPERVISOR within 48 hours of receipt from owner or operator of disposal facility.

3.2 Complete documentation required by 2.1 and 2.2, using EPA or delegated state environmental agency identification number in accordance with 2.4.

3.2.1 Documentation related to hazardous waste generated solely by the physical actions of Ship's Force or Navy employees (termed Navy-Generated Hazardous Waste) on board the vessel shall only bear a generator identification number issued to the Navy pursuant to applicable law. The contractor shall obtain SUPERVISOR'S concurrence with the categorization of the waste as Navy-generated before completion of the manifest. The manifest prepared shall be presented to the SUPERVISOR for completion after the hazardous waste has been identified.

3.2.2 Documentation related to hazardous waste generated solely by the physical actions of contractor personnel (termed Contractor-Generated Hazardous Waste) shall bear a generator identification number issued to the contractor pursuant to applicable law. Regardless of the presence of other material in or on the shipboard systems or structure which may have qualified a waste stream as hazardous, where the contractor performs work on a system or

structure using materials (whether or not the use of such materials was specified by the Navy) which by themselves would cause the waste from such work to be a hazardous waste, documentation related to such waste shall only bear a generator number issued to the contractor.

3.2.3 Documentation related to hazardous waste generated by the combined physical actions of Navy and contractor personnel (termed Co-Generated Hazardous Waste) shall bear a generator identification number issued to the contractor pursuant to applicable law and shall also cite in the remarks block a generator identification number issued to the Navy pursuant to applicable law. When the contractor merely drains a system and such drainage creates hazardous waste or the contractor performs work on system or structure using materials which by themselves would not cause the waste from such work to be hazardous waste but such work nonetheless creates a hazardous waste, documentation related to such waste shall bear a generator identification number issued to the contractor and shall also cite in the remarks block a generator identification number issued to the Navy. The contractor shall sign the generator certification on the Uniform Hazardous Waste Manifest whenever use of the manifest is required for disposal. The contractor shall obtain SUPERVISOR's concurrence with the categorization of the wastes as co-generated before completion of the manifest. Manifests prepared shall be presented to the SUPERVISOR for completion after the hazardous waste has been identified.

3.3 If the contractor, while performing work at a Government facility, cannot obtain a separate generator identification number from the state in which the availability will be performed, the contractor shall notify the SUPERVISOR within three business days of receipt of written notification by the state. After obtaining approval of the SUPERVISOR, the contractor shall use the Navy site generator identification number and insert in the remarks block the contractor generator identification number issued for the site where his main facilities are located.

3.4 If, for availabilities at a contractor-owned or controlled facility, the Navy cannot obtain a separate generator identification number for use at a contractor facility, the Navy shall notify the contractor within three business days of receipt of notification by the state. The contractor shall dispose of hazardous waste in accordance with 2.1, 2.2, and 3.2.3.

3.5 Hazardous waste, as identified in 2.1, expected to be produced during performance of this Job Order:

TYPE	AMOUNT		
	NAVY	CO-GENERATED	CONTRACTOR
Acid Solutions (may include spent sulfamic, citric, chromic, nitric, sulfuric, hydrochloric, etc.)	_____	_____	_____
Ethylene Glycol (Antifreeze)	_____	_____	_____
Sodium Hydroxide	_____	_____	_____
Cleaning Solvents	_____	_____	_____

Sodium Phosphates (Tri, Bi, or Mono)	_____	_____	_____
Fluorocarbons	_____	_____	_____
Morpholine	_____	_____	_____
Sodium Chromates	_____	_____	_____
Hydrazine	_____	_____	_____
Methyl Ethyl Ketone	_____	_____	_____
Spent Abrasive Blast Material (contaminated with a known hazardous waste)	_____	_____	_____
Trichloroethane	_____	_____	_____
Miscellaneous Chemicals (Rust Preventative)	_____	_____	_____
Miscellaneous Chemicals (Corrosive)	_____	_____	_____
Miscellaneous Chemicals _____	_____	_____	_____
(TCLP Toxic)			
Miscellaneous Chemicals (Reactive)	_____	_____	_____
Oil (Synthetic)	_____	_____	_____
Paints (Enamel, Latex, Epoxy, thinners, oil based, rubber paint, non-skid, lacquer, remover, varnishes)	_____	_____	_____
Paints (May include lead, cadmium, or chrome)	_____	_____	_____
Paint Strippers (phenols, lead, chromium)	_____	_____	_____
Sludges (Contaminated with a known hazardous waste)			_____
Wool Felt (contaminated with chromium and PCB's)	_____	_____	_____
Lube/Fuel Oil Soaked Rags	_____	_____	_____
Paint/Flakes (Pressure Washing Ext Hull Surfaces)	_____	_____	_____
Fuel Oil (Residual)	_____	_____	_____
Bilge Water	_____	_____	_____

Oil/Water	_____	_____	_____
AFFF/Water	_____	_____	_____
MEK Contaminated Rags	_____	_____	_____

3.5.1 Provide 0 dollars for managing and disposing of all hazardous waste listed in 3.5. Total cost greater or less than above dollar amount will be the subject of an equitable adjustment.

3.6 Submit one legible copy, in approved transferrable media of a report identifying type, amount, and disposal cost of waste listed in 3.5 that was removed during the performance of this Job Order to the SUPERVISOR.

3.6.1 The report shall include analysis or other method used to identify the waste and state whether each listed waste was hazardous (with generator assignment), non-hazardous, or did not exist.

3.6.1.1 Chemical analysis shall be accomplished by laboratories with state or EPA approved quality assurance programs.

3.6.2 The contractor shall make an effort to minimize hazardous waste generation by reducing the volume or toxicity by neutralizing, recycling, or otherwise removing it from the requirements of Subtitle C of 2.1 and include a description of such efforts in the report.

3.7 Nothing contained in this Work Item shall relieve the contractor from complying with applicable federal, state, and local laws, codes, ordinances, and regulations, including the obtaining of licenses and permits in connection with hazardous waste handling and disposal in the performance of this contract.

4. NOTES:

4.1 The waste listed in 3.5 is based on the best information available at the time of preparation of the solicitation. Hazardous waste generated during the actual performance of the work may vary in type or amount from waste listed in 3.5 which may result in renegotiation for credit or increase pursuant to Paragraph (b) of 2.4. The contractor is expected to use best management practice to identify and dispose of all hazardous waste. Some of the substances listed in 3.5 may be neutralized, recycled, or otherwise removed from the requirements of Subtitle C of 2.1. Inclusion of these substances in the waste listed in 3.5 does not preclude the contractor from taking action consistent with 2.1 to reduce or eliminate the hazardous constituents of any waste required to be disposed of under the contract in accordance with 2.2. Processes that add hazardous constituents to the bilges may require that bilge water be disposed of as a hazardous waste.

4.1.1 The types and amounts of wastes listed in 3.5 are estimates of waste to be disposed of under this contract as required by 2.4. They are not estimates of the amount of the work involved in generating that waste. The work requirements of each individual Work Item specify the actual work to be accomplished.

4.2 Hazardous wastes are determined by one or more of the following methods:

4.2.1 Chemical analysis which shows that the material characteristics of ignitability, corrosivity, reactivity, and/or toxicity (Toxicity Characteristic Leachate Procedure - TCLP) exceed the limits for that material in 40 CFR 261.20 Subpart C.

4.2.2 Reference to a Material Safety Data Sheet (MSDS), or

4.2.3 Applying knowledge of the hazardous characteristics of the waste in light of the materials or the process used.

4.3 Asbestos, bilge water, oil/water including sludge, debris and other contaminants, sludge which includes solids and sludge from ballast tanks, CHT tanks, voids, oily waste tanks, fuel ballast tanks, fuel oil tanks, skegs (West coast), PCB's (Maryland), etc., apply only in those states listing them as hazardous waste. When an availability is to be performed in a state where these items are hazardous waste, an estimate of the amount to be generated shall be included in 3.5.

5. GOVERNMENT FURNISHED MATERIAL (GFM):

5.1 LLTM:

1. None.

5.2 PUSH MATERIAL:

1. None.

5.3 KITTED MATERIAL:

1. None.

DRAFT

COAR: 26

ITEM NO: 551-11-001

PCN: EA01-7312

CMP: NONE

PLANNER:

1. SCOPE:

1.1 Title: Air High Pressure Dehydrator (AHPD) Groom; accomplish

1.2 Location of Work:

1.2.1 Engine Room Middle Level (ERML)

1.3 Identification:

1.3.1 Quantity: (One) Air High Pressure Dehydrator (AHPD)

2. REFERENCES:

2.1 Standard Items, (FY26 CHG-1)

2.2 S9551-B3-MMO-010 Rev 5, Dehydrator, HP Air, Automatic (AHPAD); Description, Operation, Maintenance, Installation and Illustrated Parts Breakdown

3. REQUIREMENTS:

3.1 Provide the services of an Original Equipment Manufacturer (OEM) to assess the material and operational condition and groom the equipment listed in 1.3.

3.2 Groom equipment listed in 1.3 to identify operational deficiencies using 2.2 for guidance.

3.2.1 Submit one legible copy, in approved transferrable media, of a report listing results of 3.2 to the SUPERVISOR.

3.2.2 Accomplish repairs to discrepancies identified in 3.2, using 2.2 for guidance.

(V) (G) "OPERATIONAL TEST"

3.3 Accomplish an operational test of equipment listed in 1.3 in accordance with 2.2.

3.3.1 Submit one legible copy, in approved transferrable media, of a report listing results of the requirements of 3.3 to the SUPERVISOR, within one business day of work completion.

4. NOTES:

4.1 Known source for Qualified Technical Representative:

Cepeda Associates, Inc.

5. GOVERNMENT FURNISHED MATERIAL (GFM) :

5.1 LLTM:

1. None.

5.2 PUSH MATERIAL:

1. None.

5.3 KITTED MATERIAL:

1. None.

DRAFT