

Project #17: I Corps JDOC Phase II

1.1. Principal Items to Be Accomplished

1.1.1. **Contractor shall construct a security fence around the perimeter of the JDOC footprint.**

1.1.1.1. Provide and install an FE-7 spec fence around the JDOC complex. All fencing visible from the parade field (to the west of the complex) and from Building 2025 (to the north of the complex) must be black ornamental to adhere to the historical requirements of the area. Other fence sections can be black powder coated chain link. All sections of the fence shall meet the FE-7 specifications

1.1.1.2. Provide and install personnel and vehicle gates as shown. The vehicle gates shall be comprised of two 12-foot swing arm gates (24 feet in total), and the personnel gates shall be 4-foot-wide single swing arm gates. Both shall have 90 deg vertical three strand outriggers atop the gates that shall match the height of the newly installed outriggers atop the new fence line.

1.1.1.3. Provide and install 10 inch diameter concrete filled pipe bollards. Each bollard shall be positioned directly in front of the vehicle gate terminal posts, spaced between one and two feet away.

1.1.1.4. Along the plan-East side where the newly installed fence line meets up with the existing four-foot tall black fence, remove that section of existing fence that overlaps the new fence line, and replace it with the new. All remaining fence shall be made to splice into the new fence seamlessly.

1.1.2. **Contractor shall Convert Building 2084 into an Operational Support Facility.**

1.1.2.1. **Contractor shall provide and install communications fiber and copper to building 2084.**

- a. Install new underground telecommunications infrastructure pathway to building 2084. Paths are approximate, contractor shall field verify and may deviate if conditions dictate after discussing with the Government representative. All work shall be completed in accordance with the Technical Criteria for the Installation of Information Infrastructure Architecture (I3A, dated February 2017) and UFC 3-580-01. Contractor shall submit TIA-606 compliant telecommunications installation drawings (to include drawings and lists of materials) and a cable test plan prior to start of construction. Prior to construction start, Contractor, DPW PM, and NEC Personnel shall attend a kick-off meeting to review all plans, routing, existing and future work, and any other necessary items related to this project.

1. Provide and install new 4" concrete-encased SCH40 duct with 9 cell (3x3) 3" textile duct from MPHH-0033 through new entrance (approx. 100 lf) into TR SW corner of B2084.

2. Provide, install, terminate (SC), label new OSP 24SM F736, 49-72) from splice in MP-0078 to new LIU in TR SW corner of B2084. Test F736, (49-72) from B2084 LIU to Hut 3727.

3. Install, label existing OSP 25 pr coiled in MPHH-0033 to new BET in TR SW corner of B2084. Test C205, 1326-1350 from B2084 to DCO 6071.

1.1.2.2. Construct new telecommunications room within the within Building 2084. Room shall adhere to the following specifications, and come equipped with the following services/fixtures.

- a. Room shall be a minimum of 5'x7'.
- b. Room shall be equipped with an elevated floor, sized appropriately for the amount of telecommunications service being installed.
- c. Room shall be tiled as appropriate for a telecom room.
- d. Walls of the newly enclosed room shall extend up to the same height as the rest of the buildings studded walls.
- e. Walls and ceiling shall be equipped with sheet metal shielding.
- f. Install overhead LED strip lighting within the room, switch to be located at the entrance of the new rooms exterior wall.
- g. Walls and ceiling must utilize ¾" Type A/C fire rated plywood along the walls as shown on Attachment X.
- h. Install two dedicated quadruplex (double duplex) outlets with the new room, location shown on Attachment X.
- i. Install grounding busbar within the room where feasible. Busbar shall meet NEC standards. Contractor shall submit this to the government for approval.
- j. Contractor shall provide a new fire alarm pull station, heat detector and fire sprinkler head in this new communication room.

- k. Ceiling shall be studded and built in the same manner as the walls, fully enclosed. New ceiling shall provide three six inch wide penetrations and conduit sleeves for telecommunications fiber to run through. Penetrations shall have bag type fire stop material installed.

1.1.2.3. Provide and install new communication drops, service, and other devices throughout building 2084.

- a. Provide and install new communications drops throughout Building 2084. Each drop shall be comprised of three separate boxes with three separate lines of fiber/conduit coming from their respective servers. Each box shall be comprised of two NIPR lines, two SIPR lines, and one TAC SIPR line.
- b. Provide and install cable trays for each of the communications requirements. This will comprise of one tray for SIPR, one for NIPR, and one more for the TAC SIPR lines. Cable trays shall be installed above the existing drop ceiling, running centrally down the hallway as shown in Attachment X, stopping at each of the eight rooms being fed. All cable trays shall be grounded.
- c. The contractor is responsible for providing and installing all necessary components of equipment to provide the service for all three of these requirements, to include but is not limited to connections, boxes, conduit, faceplates, and cabling.
- d. Contractor shall submit to the government for approval shop drawings showing routing of all new cable trays providing new communication requirements throughout the building. Shop drawings shall specify size of cable tray and show separation requirements between different classifications of cabling.

1.1.2.4. Contractor shall perform renovations and repairs to building 2084.

- a. All finishes, cove base, wall plates, shall match what was installed in building 2081 to the greatest extent possible.
- b. Remove and dispose of all wall tile, and remediate the exposed surface. The substrate shall be brought to a quality that is suitable for texturing and painting.
- c. Remove and dispose of all restroom fixtures, to include sinks, toilets, restroom partitions, mirrors, towel dispensers, soap dispensers, and urinals up to the plumbing connections within the restroom area. All fixtures shall be replaced in-kind with new fixtures. All new flushometers and sink faucets shall have manual valves – no automatic valves or faucets are to be installed.
- d. Remove and replace all floor tile, up to and including the bull nose tile acting as the base trim, and any other trim affixed to the wall. Contractor shall prepare the

substrate to a quality where no imperfections are visible through the newly installed tile. Newly installed tile shall be VCT, color and size to match that which is installed in building 2081. If settling has occurred which prohibits the ability to lay down tiles flat, the contractor shall apply a self-leveling compound to allow for a level surface. Bull nose tile base trim is not to be replaced.

- e. Refinish wall from floor to ceiling, to include where the wall tile was affixed to. If possible, the contractor may use the existing gypsum/cement board currently existing, if the existing material is in such a state that can be brought to a level four finish. Wall shall be patched where needed, and be retextured and repainted.
- f. Install cove base along the floors. Cove shall be four inches in height.
- g. Remove and replace in-kind all wall receptacles and light switches with new devices. All new finishes shall be white or eggshell in color.
- h. Remove and replace the existing troffer lights, replacing with energy efficient LED to match the size of the opening. Consolidate the electrical breaker requirements based on the new amperage required by the LED's.
- i. Remove and replace fan covers within restrooms with ones that are white in color, sized to cover the vent opening.
- j. Remove and replace two interior restroom doors within the foyer area. Both doors shall be freely swinging, with a push plate and handle. Doors shall be solid-core wood.
- k. Remove and replace three storage room doors within the foyer area. Door shall be equipped with kickstands, closers, and lockable hardware. All hardware shall be satin chrome or brushed nickel in color, all of which shall be matching whichever color is chosen.
- l. Install door trim along all doors that were replaced. Door trim shall be 2 inches wide, MDF board, painted to match the new cove base.

1.1.2.5. Perform additional renovations and upgrades.

- a. Remove and dispose of all cabinets, and countertops within each room, to include the plumbing, which shall be capped off where it terminates at the wall. Remove and dispose of all items currently affixed to the wall.
- b. Remove and replace all carpet tile, up to and including the cove base. Contractor shall prepare the substrate to a quality where no imperfections are visible through

the newly installed tile. Newly installed carpet tile shall match that which is installed in building 2081. If settling has occurred which prohibits the ability to lay down carpet tiles flat, the contractor shall apply a self-leveling compound to allow for a level surface. Bull nose tile base trim is not to be replaced.

- c. Refinish wall from floor to ceiling. If possible, the contractor may use the existing gypsum/cement board currently existing, if the existing material is in such a state that can be brought to a level four finish. Wall shall be patched where needed, and be retextured and repainted.
- d. Install cove base along the floors. Cove shall be four inches in height.
- e. Remove and replace in-kind all wall receptacles and light switches with new devices. All new finishes shall be white or eggshell in color.
- f. Remove and replace the existing troffer lights, replacing with energy efficient LED to match the size of the opening. Consolidate the electrical breaker requirements based on the new amperage required by the LED's.
- g. Install quadruplex receptacles as needed. Conduit shall be routed above the ceiling grid back to the panel. Provide and install breakers to the panel, one 20A for each of the eight rooms. All receptacle plates shall be marked with a typewritten stick-on label on the outside cover plate. Label must display the panel name and circuit breaker number. Contractor shall provide a new type-written panel schedule.

1.1.2.6. Contractor shall provide and install force protection modifications in Building 2084.

- a. Remove and replace exterior doors. New doors shall be metal clad. The right hand door of each side shall have installed on it a cipher lock. New doors shall be made of 20-gauge hollow-core steel, with a 12"x12" square window centered on each.
- b. Remove the inner double doors and their frame. Provide and install a new steel frame capable of holding new vault doors, as well as the vault doors in accordance with the following specifications.
 - 1. New vault doors shall be 18 gauge hollow metal meeting Federal specification FF-L-2740B.
 - 2. New doors shall swing inward, with the hinge pins facing the secure side of the frames.
 - 3. Doors shall not have any sight glass.

4. Install door trim along the door frame. Door trim shall be 2 inches wide, MDF board, painted to match the new cove base.
 5. All accessories shall be heavy duty and tamper resistant.
 6. Provide and install Electronic Access Control (EAC) via a combination lock, single motion egress RIM device, and controlled remote keypad with a card reader compatible with the new ICIDS IB system as shown in Attachment X. Combination lock shall be self-powered, meeting the specifications in Federal specification FF-L-2740B.
- c. Install security screens on all HVAC openings on the exterior of the building. Screens shall be made of ¼ inch (#9) mesh, case hardened, expanded steel. Screens shall be securely fastened to the brick surface utilizing tamper-proof screws.
 - d. Cover all exterior windows in a translucent one-way window film, which blocks sight into the building. In addition, provide security bars over the windows to stop physical entrance. Security bars must be mounted from the interior.
 - e. Provide and install an Intrusion Detection System (IDS) and Access Control System (ACS). Both systems shall have the following capabilities.
 1. Passive Infrared Sensors (PIRS)
 2. Remote Area Data Collector (RADC)
 3. Balance Magnetic Switches (BMS)
 4. All equipment shall be compatible with the bases existing ICIDS IV system on JBLM.
 5. All IDS equipment shall meet UL 2050 and comply with an Extent 3 installation as referenced in that same specification.
 6. All ICIDS IV equipment and programming must be installed, completed, and commissioned by an ICIDS certified integrator.
 - f. Provide and install lockboxes. Lockboxes shall have the following characteristics.
 1. Be wall mounted to the right of the newly installed vault door.
 2. Shall provide approximately 60 individual lockboxes.
 3. Each individual box shall be approximately 6"x6"x9".

4. Each individual box must be separately lockable with a key.

1.1.3. Contractor shall Convert Building 2090 into an Operational Support Facility.

1.1.3.1. Contractor shall provide and install communications fiber and copper to building 2090.

- a. Clear existing OSP 12SM F717, (7-12+6DD) from splice in MP-1080 back to MP-0078. Splice recovered 12 strands into F736, (37-48). Terminate (SC) all 12 strands on new fiber adapter panels in existing LIU in B2090. Test F736, (37-48) from B2090 LIU to Hut 3727. Relabel LIU and cable from MP-0078 to B2090.
- b. Construct new telecommunications room within the within Building 2084. Room shall adhere to the following specifications, and come equipped with the following services/fixtures.
 1. Room shall be a minimum of 5'x7'.
 2. Room shall be equipped with an elevated floor, sized appropriately for the amount of telecommunications service being installed.
 3. Room shall be tiled as appropriate for a telecom room.
 4. Walls of the newly enclosed room shall extend up to the same height as the rest of the buildings studded walls.
 5. Walls and ceiling shall be equipped with sheet metal shielding.
 6. Install overhead LED strip lighting within the room, switch to be located at the entrance of the new rooms exterior wall.
 7. Walls and ceiling must utilize $\frac{3}{4}$ " Type A/C fire rated plywood along the walls as shown on Attachment X.
 8. Install two dedicated quadruplex (double duplex) outlets with the new room, location shown on Attachment X.
 9. Install grounding busbar within the room where feasible. Busbar shall meet NEC standards. Contractor shall submit this to the government for approval.
 10. Contractor shall provide a new fire alarm pull station, heat detector and fire sprinkler head in this new communication room.

11. Ceiling shall be studded and built in the same manner as the walls, fully enclosed. New ceiling shall provide three six inch wide penetrations and conduit sleeves for telecommunications fiber to run through. Penetrations shall have bag type fire stop material installed.

1.1.3.2. Provide and install new communication drops, service, and other devices throughout building 2090.

- a. Provide and install new communications drops throughout Building 2090. Each drop shall be comprised of three separate boxes with three separate lines of fiber/conduit coming from their respective servers. Each box shall be comprised of two NIPR lines, two SIPR lines, and one TAC SIPR line.
- b. Provide and install cable trays for each of the communications requirements. This will comprise of one tray for SIPR, one for NIPR, and one more for the TAC SIPR lines. Cable trays shall be installed above the existing drop ceiling, running centrally down the hallway as shown in Attachment X, stopping at each of the eight rooms being fed. All cable trays shall be grounded.
- c. The contractor is responsible for providing and installing all necessary components of equipment to provide the service for all three of these requirements, to include but is not limited to connections, boxes, conduit, faceplates, and cabling.
- d. Contractor shall submit to the government for approval shop drawings showing routing of all new cable trays providing new communication requirements throughout the building. Shop drawings shall specify size of cable tray and show separation requirements between different classifications of cabling.

1.1.3.3. Contractor shall perform renovations and repairs to building 2090.

- a. Contractor shall repair Building 2090 in the same way that Building 2084 was repaired to include but not limited to flooring, wall, bathroom, electrical, and lighting repairs.

1.1.3.4. Contractor shall provide and install force protection modifications in Building 2084.

- a. Contractor shall provide the same force protection modifications in Building 2084 for the open storage designated areas within Building 2090.


1.1.4. Contractor shall provide and install back-up generator for buildings 2084 and 2090.

1.1.4.1. Provide and install a new emergency generator providing stand-by power supporting the MDP within buildings 2084 and 2090, and complete all electrical work, connections, grounding and bonding, and terminations for a complete and usable system. The generator shall have minimum set ratings of 175 kW, 120/208V, 3 PH, 600A. Additionally, the generator shall be equipped with the following.


- a. The generator shall have weather-proof sound enclosure and integrated UL-Listed (double-wall) integrated sub-base fuel tank conforming to NFPA 30, NFPA 30A and UL42.
- b. Provide and install a minimum 4" raised concrete pad for the generator even though it's on spring mounted bumpers. The concrete pad shall be 2,500 psi compression strength concrete reinforced with #6 rebar on 12 inch centers. This pad should be seated on a solid subsurface. The pad should be flat and level to within ½ inch.
- c. The generator shall have an integrated sub-base fuel tank incorporating double-wall Washington State environmentally compliant construction. The fuel capacity for the sub-base fuel tank shall provide a minimum 'run-time' of 48-continuous hours and incorporating 'Energy Efficient' Block Heaters and site gauge as sub-base fuel tank. Block Heaters shall have isolation valves. Block Heaters shall be installed with 'Hot Start' heating systems sized according to engine displacement.
- d. The generator, enclosure, tank and electrical switches shall be seismically-rated, and anchored in accordance with ASCE 7-10 for Zone D (Is=1.5).
- e. The generator controller shall be capable to interface the generator set to other power system equipment and network management systems using standard industry network communications.
- f. Provide and install a sound enclosure that offers an average of 75 dB(A) sound level at 23 feet utilizing 2 inches of acoustic-lined air discharge hood. Acoustic insulation to meet UL 94 HF1 flammability classification. Classification as 'weather-proof' shall prevent the accumulation of rainwater at base of generator within enclosure.
- g. Provide and install a 3-way manual transfer switch to allow safe isolated load banking testing and connection of a portable backup generator tied in at the same time, and complete all electrical work, connections, grounding and bonding. 3-Way MTS to have interlocked breakers to prevent cross-connecting power sources, female camlock receptacles for load bank section and male camlock receptacles for portable generator section. MTS shall be certified to cULus standards and NEC 700.3F compliant. If the generator is large enough, the 3-way manual transfer switch maybe installed within the generator enclosure by the generator manufacturer, otherwise it will need to be protected from elements and readily accessible.

- h. Provide and install a new 600A ATS and complete all electrical work, connections, grounding and bonding, and terminations for a complete, useable system. The new ATS shall have isolation bypass. ATS does not need to be service rated. ATS and the 3-way MTS shall all be the compatible and have NEMA 3R Enclosures.
- i. Provide and install conductors, conduit, connection and supporting hardware to connect electrical service with new ATS, new generator to new MTS, new MTS to new ATS, and new ATS to the MDP. Existing conductor and conduit that the insulation isn't fraying, have any hotspots or corrosion built-up can be reused when determined adequate for new generator installation. The Contractor shall provide grounding system connections for all new equipment and verify all grounding system connections are properly completed as required per DPW Electrical Inspector. All the conduit and wire size shall meet the NEC requirements that is currently existing. Due to existing utilities underground, Contractor shall route generator connections overhead along the exterior of the building. All conduits shall be covered with a cover/gutter like system and shall be painted to blend into the existing building exterior.
- j. Provide an enclosure around the generator to include a gate and privacy slats. Enclosure shall be sized to provide adequate spacing around the generator for maintenance. Enclosure shall be approximately 10 feet tall but shall be sized to completely hide the new generators. The sides of the enclosure shall be brick or brick facade matching the existing building brick as close as feasible. New gate shall be sized as necessary and shall swing out from the generator. Privacy slates shall match the slats used on the nearby gas meter fencing.
- k. Upon conclusion of work, contractor shall supply a comprehensive arc fault study and report for the newly installed generator and supporting equipment that includes:
 - 1. Report summary with analysis methodology, findings and recommendations
 - 2. Summary of input data for utility source, equipment and cables
 - 3. Available fault current at each equipment location with comparison to equipment rating
 - 4. Overcurrent device settings (e.g. pick-up, time delay, curve), "as found" and "as recommended"
 - 5. Incident energy level (calories/cm²) for each equipment location and recommended PPE
 - 6. Overcurrent device coordination curves including related section of the single-line diagram
 - 7. Complete system single-line diagram for the system analyzed
 - 8. Install ARC Flash warning labels based upon study results on all equipment evaluated as a part of this study


Building 2084 Existing Floorplan

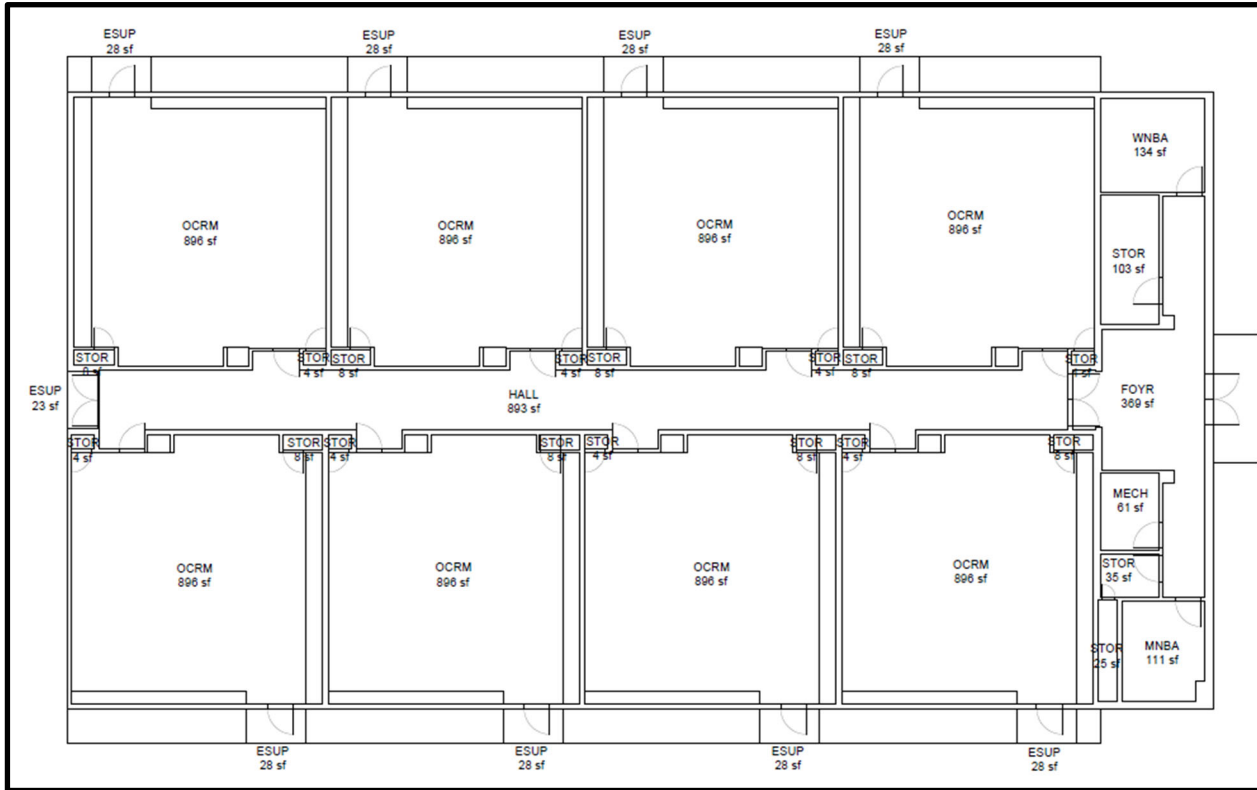


Building 2084 Proposed Floorplan

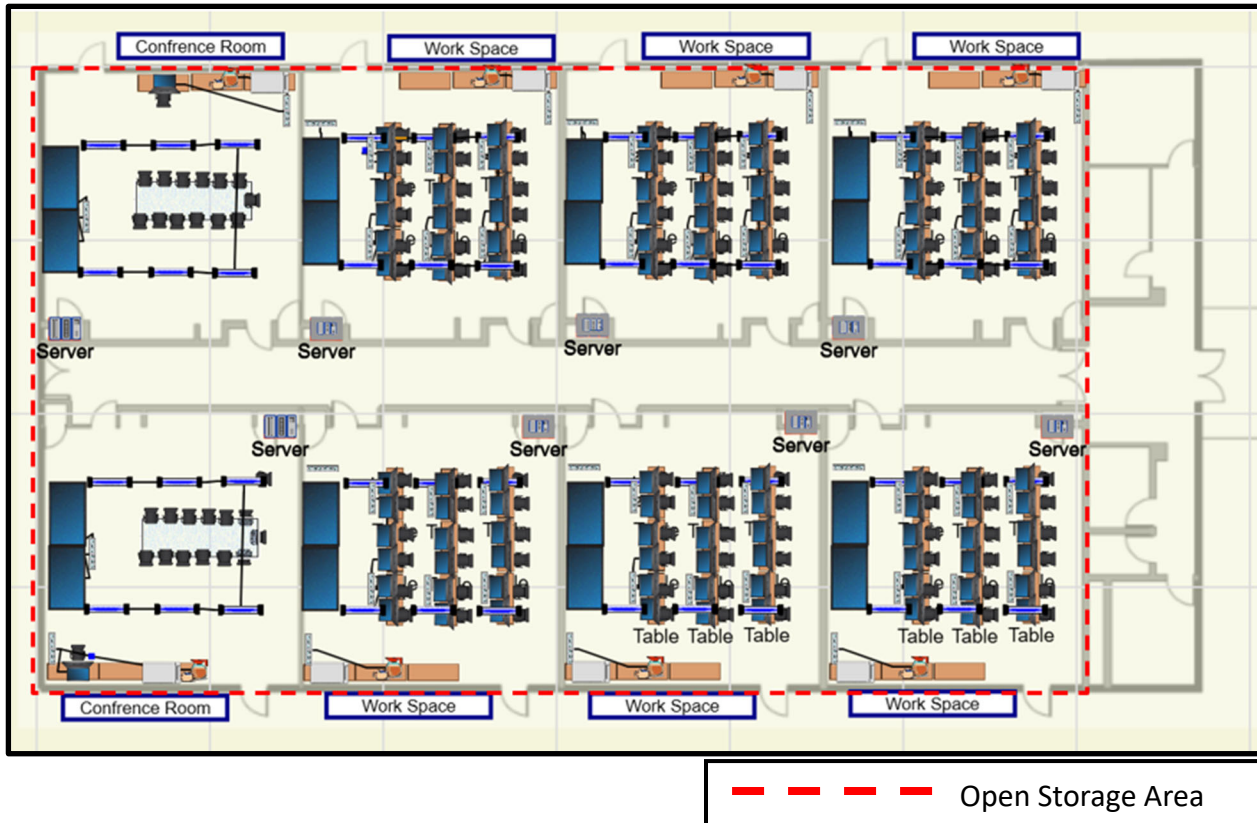


Building 2090 Existing Floorplan

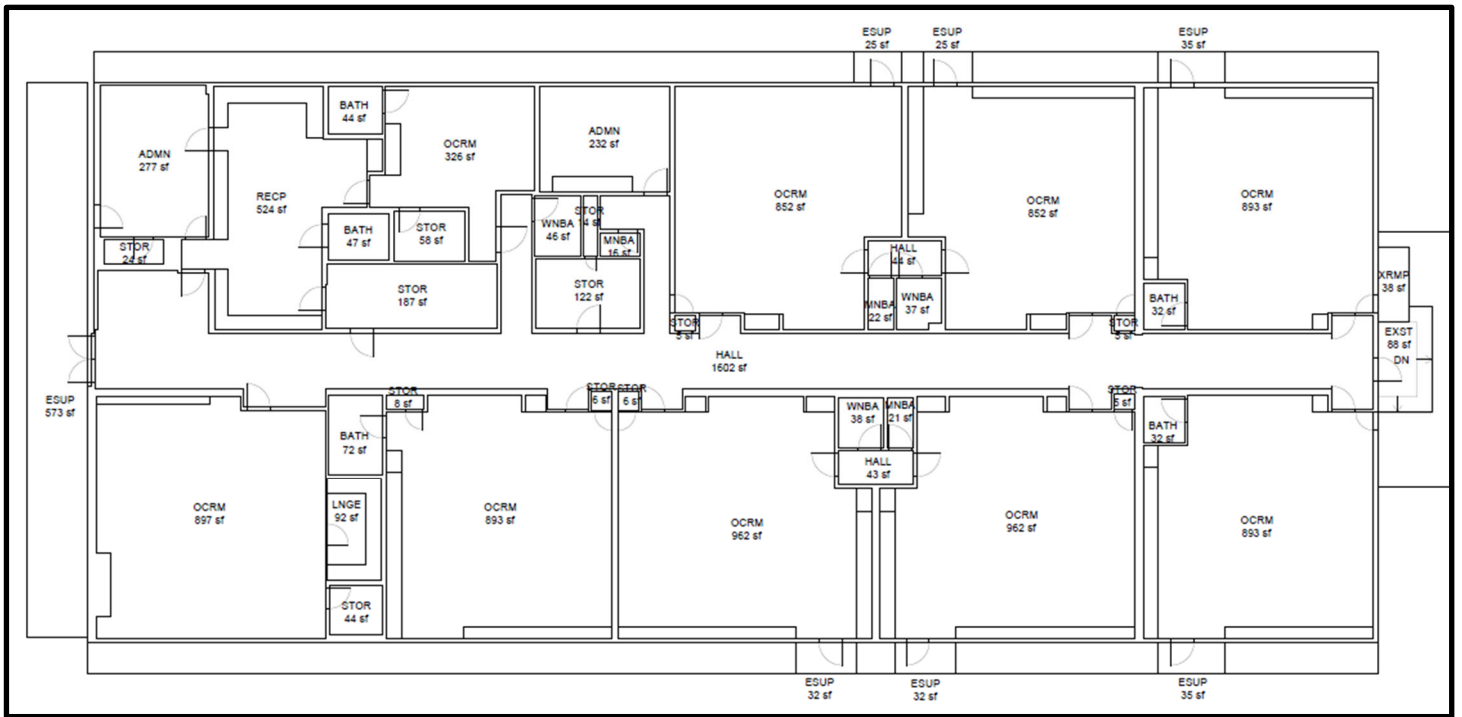

Building 2090 Proposed Floorplan

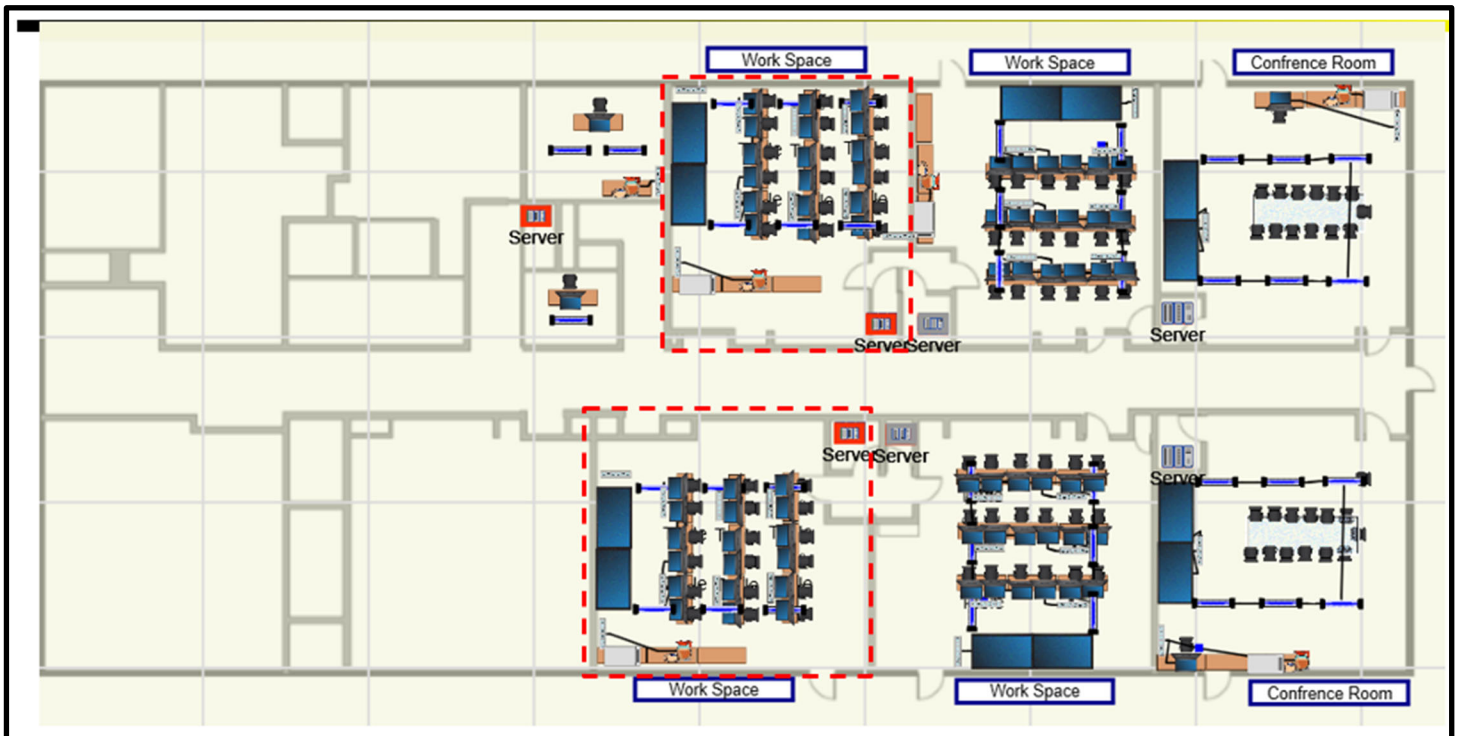

--- Open Storage Area

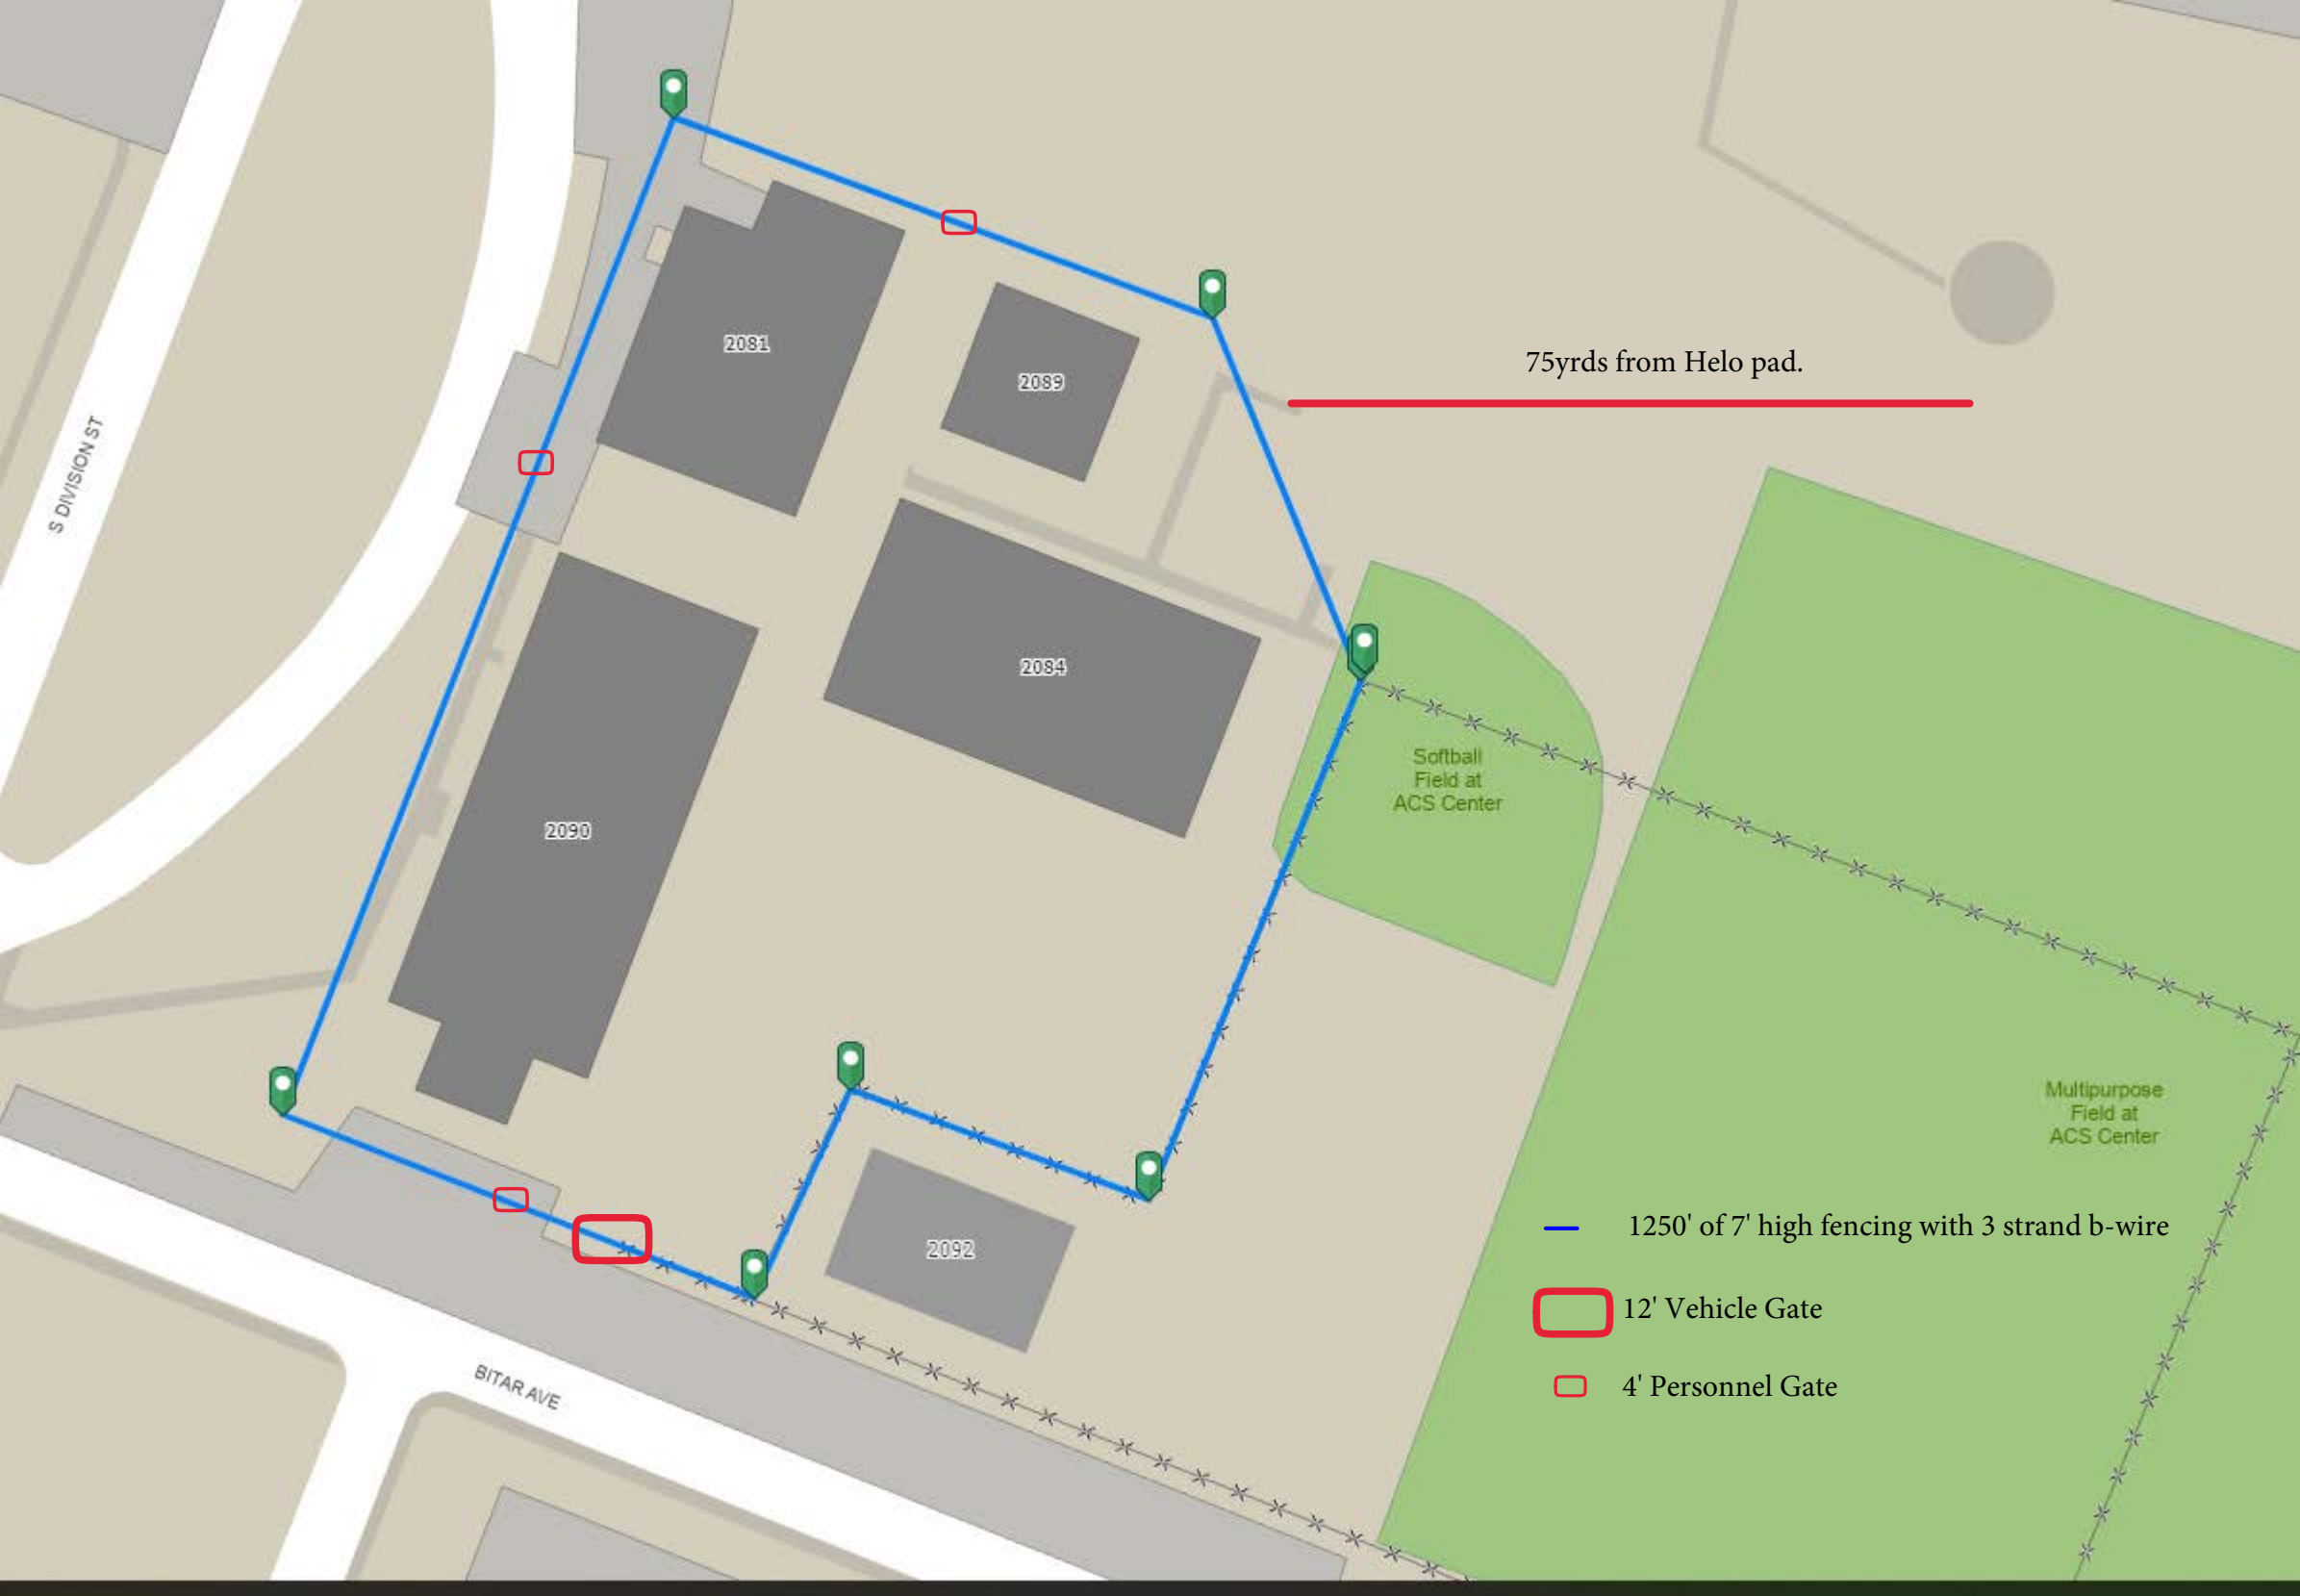


75yds from Helo pad.

— 1250' of 7' high fencing with 3 strand b-wire


□ 12' Vehicle Gate

□ 4' Personnel Gate

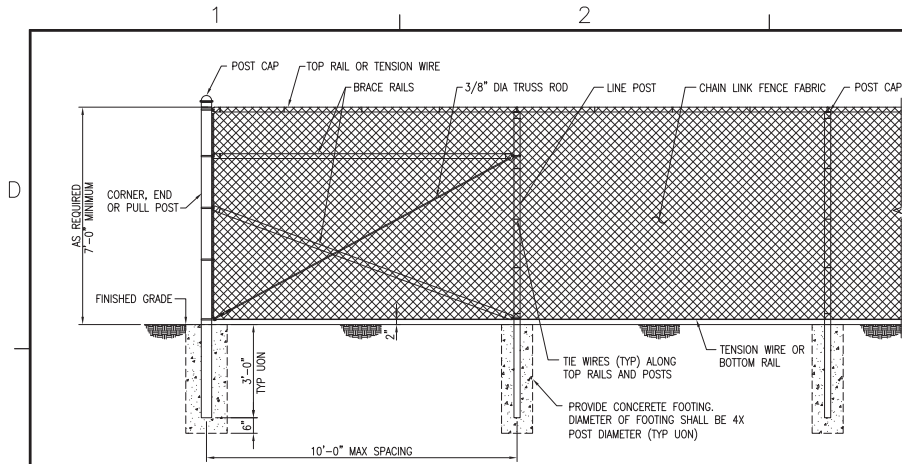

TYPICAL FENCE AND CORNER PANEL ELEVATION

SCALE: 1" = 1'-0"

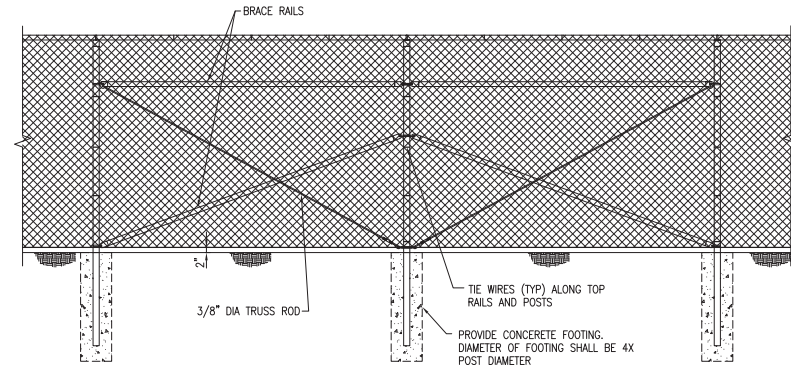


TYPICAL FENCE AND BRACED PANEL ELEVATION

SCALE: 1" = 1'-0"


NOTE (1): A BOTTOM RAIL CAN BE ADDED FOR SECURITY, IT SHALL BE INSTALLED APPROX 3" ABOVE GRADE (A MINIMUM OF 2" AND A MAXIMUM OF 4"). HARDWARE SHALL BE WELDED OR SHOT NAILED TO POSTS AND RAILS IN ORDER TO SECURE IN PLACE. ATTACH FABRIC TO NEW BOTTOM RAIL TO ELIMINATE POSSIBILITY OF PEELING UP FABRIC.

NOTE (2): SOME LOCATIONS MAY REQUIRE 8' OF FABRIC.




TYPICAL 3 STRAND BARBED WIRE AND SINGLE EXTENSION ARM CONFIGURATION

SCALE: 1" = 1'-0"




TYPICAL 6 STRAND BARBED WIRE AND DOUBLE EXTENSION ARM CONFIGURATION

SCALE: 1" = 1'-0"

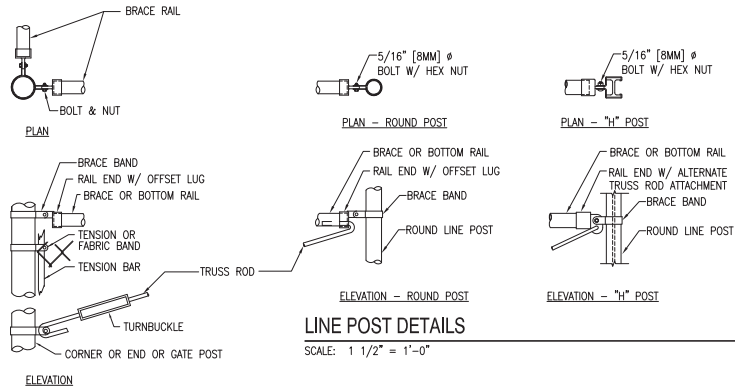

LINE POST DETAILS

SCALE: 1 1/2" = 1'-0"

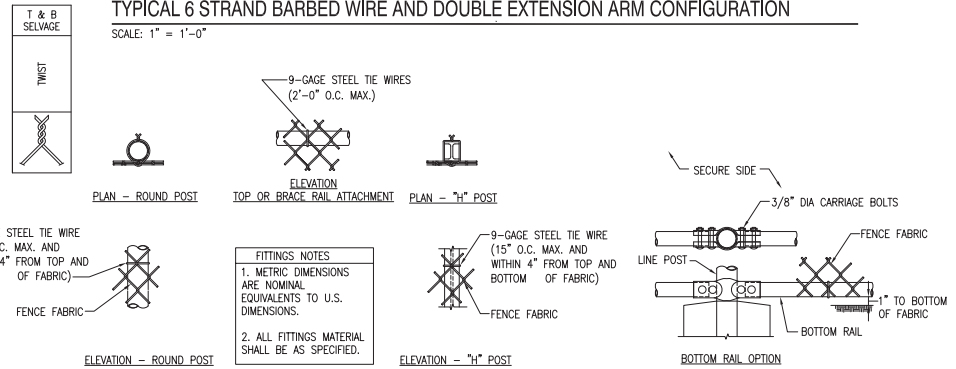

FITTINGS NOTES

1. METRIC DIMENSIONS ARE NOMINAL EQUIVALENTS TO U.S. DIMENSIONS.

2. ALL FITTINGS MATERIAL SHALL BE AS SPECIFIED.

GRAPHIC SCALES

1" = 1'-0" 0 6" 1' 2'

1 1/2" = 1'-0" 0 4" 8" 1'-4"


FILE NAME: J:\LOCK\FENCE DRAWINGS\552025-UF70-701.dwg PLOTTED: Monday, April 29, 2013 - 1:05pm

D

C



B

A




SINGLE EXTENSION ARM DETAILS

SCALE: 1" = 1'-0"

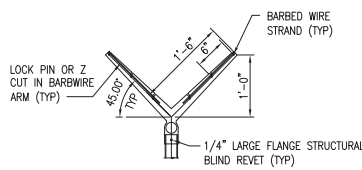


DOUBLE EXTENSION ARM DETAILS

SCALE: 1" = 1'-0"

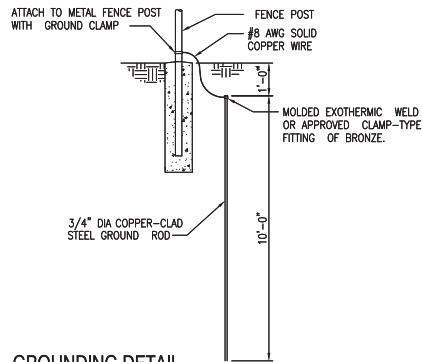

GROUNDING DETAIL

NO SCALE

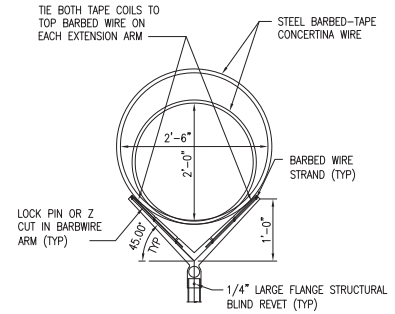

CONCERTNA WIRE MOUNTING

SCALE: 1" = 1'-0"

CHAIN LINK FENCING NOTES

- FABRIC:** THE STANDARD FENCE FABRIC SHALL BE VINYL, ZINC OR ALUMINUM-COATED STEEL WIRE CHAIN LINK WITH MESH OPENINGS NOT LARGER THAN TWO INCHES PER SIDE, AND A TWISTED AND BARBED SELVAGE AT TOP AND BOTTOM IN ACCORDANCE WITH THE SPECIFICATIONS. UTILIZE 6-GAUGE FOR BASE PERIMETER OR HEIGHTENED SECURITY ZONES AND 9-GAUGE FOR BASE INTERIOR OR WHEN JOINING AN EXISTING FENCE WHICH IS ALREADY 9-GAUGE.
- FABRIC TIES:** ONLY 12-GAUGE STEEL TIES SHALL BE USED. COATING OR PLATING WILL BE ELECTROLYTICALLY COMPATIBLE WITH THE FENCE FABRIC TO INHIBIT CORROSION.
- REINFORCEMENT:** TENSION WIRES SHALL BE INSTALLED AND INTERWOVEN (OR AFFIXED WITH FABRIC TIES) ALONG THE TOP & BOTTOM OF THE FENCE FOR STABILIZATION OF THE FENCE FABRIC.
- FENCE HEIGHT:** CHAIN LINK FABRIC SHALL BE 7' HIGH WITH AN ADDITIONAL 1' IN HEIGHT COMPOSED OF 3 STRANDS OF BARBED WIRE AS REQUIRED. THE TOTAL FENCE HEIGHT SHALL BE 8'.
- GROUND CLEARANCE:** BOTTOM OF THE FENCE FABRIC SHALL BE WITHIN TWO INCHES OF FIRM SOIL.
- TOP GUARDS:** A TOP GUARD IS AN OVERHANG OF BARBED WIRED ALONG THE TOP OF A FENCE, FACING OUTWARD (AWAY FROM PROTECTED SITE) AND UPWARD AT APPROX. 45° ANGLE. TOP GUARD SUPPORTING ARMS WILL BE PERMANENTLY AFFIXED TO THE TOP OF FENCE POSTS TO INCREASE THE OVERALL HEIGHT OF THE FENCE AT LEAST 1 FOOT. THREE STRANDS OF 12-GAUGE BARBED WIRE, EQUALLY SPACED, SHALL BE INSTALLED ON THE SUPPORTING ARMS.
- FENCE POSTS:** SHALL BE ASTM F1043 OR F1083 ROUND PIPE OR SQUARE TUBE AND SHALL BE GALVANIZED IN ACCORDANCE WITH THE SPECIFICATIONS. FENCE POST SPACING AND SIZE (DIAMETER) SHALL BE DETERMINED IN ACCORDANCE WITH CHAIN LINK FENCE MANUFACTURERS' INSTITUTE (WLG 2445). SPACING SHALL NOT EXCEED 10'-0" O.C. SIZE (DIAMETER) SHALL NOT BE LESS THAN THAT SPECIFIED.

GRAPHIC SCALES

1" = 1'-0"



UNIFIED FACILITIES CRITERIA 4-022-03 SECURITY ENGINEERING; FENCES, GATES AND GUARD FACILITIES
DEFINITIVE DRAWINGS FOR SECURITY FENCING, GATES AND CABLING

BARBED WIRE ARRANGEMENT DETAILS

UFC-701

DRAWING REVISION: 24 AUGUST 2007

JDOC PH3 OSP Solution, JDOC B2084, and B2090

B2090 OSP Fiber

Solution: In MH# MP-0078:

- Clear existing 12SM F717 (7-12+6DD) from splice case in MH# MP-1080
- Splice 12 strands into F736, 49-60 in existing splice case in MP-0078
- Terminate remaining 6-strands of the existing 12SM in the LIU in B2090.
- Re-label cable & LIU w/ new F736 cable ID#.

MP-0078 to B2084:

- Add new 12 SM OSP Fiber F736, 37-48 from splice case in MP-0078 to B2084 via NEW duct

MP-HH0033 to B2084:

- Pull in existing 25-pair OSP Copper C205, 1326-1350 (coiled in MP-HH-0033) via NEW duct

