
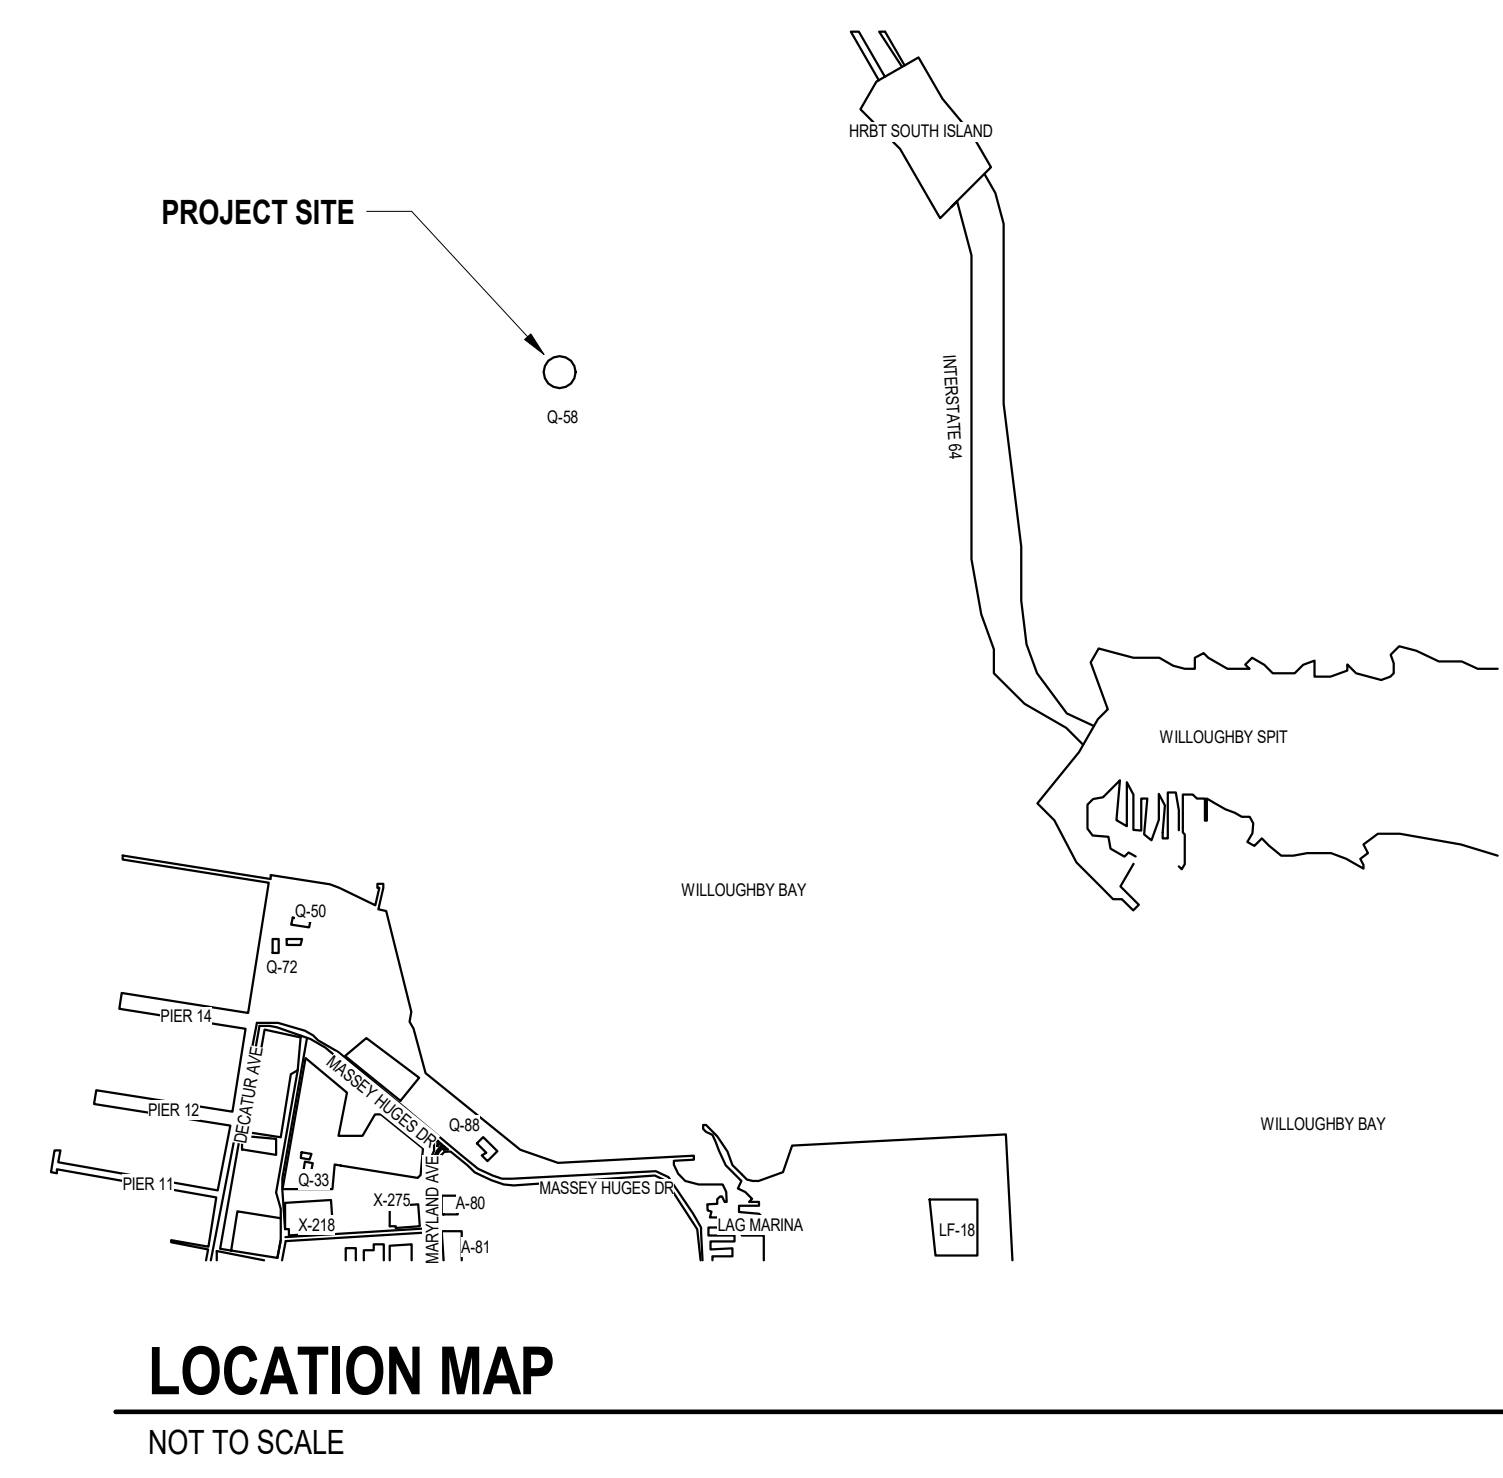


Q-58 DATA CONCENTRATOR SHED RESTORATION

NAVAL STATION - NORFOLK, VIRGINIA
01/30/2026

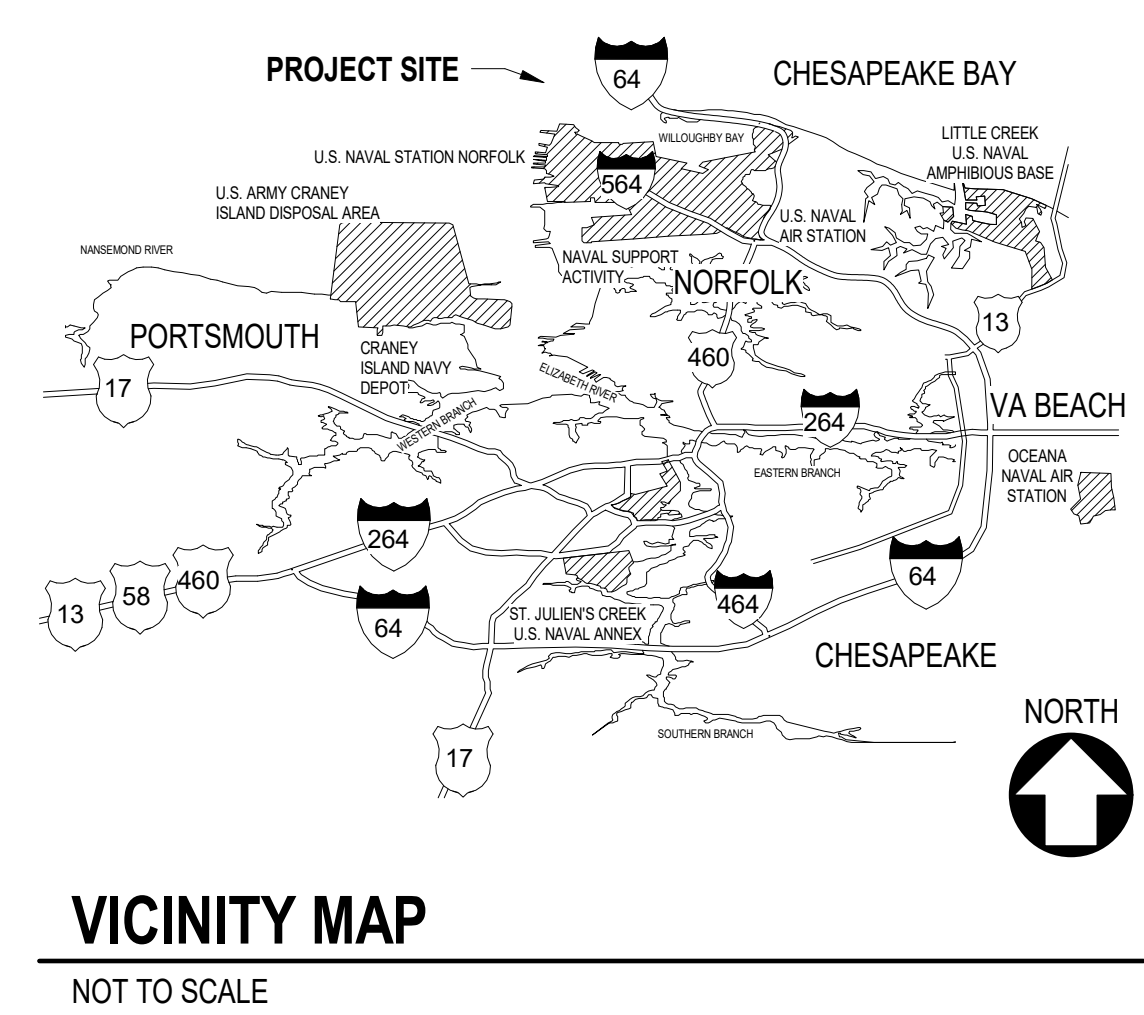

**NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND
MID-ATLANTIC**
ROICC NORFOLK
FACILITIES ENGINEERING AND ACQUISITION DIVISION
NORFOLK, VIRGINIA

1	DESIGN REVISION 1	DATE	04/17/2026	APPR
1	SYM	DESCRIPTION		

APPROVED

FOR COMMANDER NAVFAC

ACTIVITY

COMMANDER, NAVY INSTALLATIONS COMMAND

SATISFACTORY TO DATE

01/29/2026

DES

ADB

DRW

ADB

CHK

DWG

PMIDM

DEAN S. GREGORY, P.E.

BRANCH MANAGER

JAMES M. SMITH, R.A.

CHIEF ENGINEER

JOHN C. MILLER, P.E.

FIRE PROTECTION

N/A

DEPARTMENT OF THE NAVY

NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND

NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND ~ MID-ATLANTIC

NAVAL STATION - NORFOLK, VA

NAVAL STATION NORFOLK

Q-58 DATA CONCENTRATOR SHED RESTORATION

COVER SHEET

SCALE: AS NOTED

PROJECT NO.: 1673784

CONSTR. CONTR. NO. N/A

NAVFAC DRAWING NO. 12.937.903

SHEET 5 OF 5

G-001

DRAWING REVISION: 25 AUGUST 2020

GENERAL STRUCTURAL NOTES

1. THE STRUCTURAL DRAWINGS SHALL BE USED IN CONJUNCTION WITH THE EXECUTABLE SCOPE OF WORK ASSOCIATED WITH THIS PROJECT. THE CONTRACTOR MUST VERIFY THE REQUIREMENTS OF OTHER TRADES AS TO SLEEVES, CHASES, HANGERS, INSERTS, ANCHORS, HOLES, AND ADDITIONAL ITEMS TO BE PLACED OR SET IN THE STRUCTURAL WORK.
2. STRUCTURAL DRAWINGS HEREIN REPRESENT THE FINISHED STRUCTURE. THE CONTRACTOR MUST PROVIDE THE TEMPORARY SHORING, BRACING, GUYING, AND SUPPORTS REQUIRED TO ERECT AND HOLD THE STRUCTURE IN PROPER ALIGNMENT UNTIL PERMANENT SUPPORTS AND LATERAL BRACING ARE IN PLACE. THE INVESTIGATION, DESIGN, SAFETY, ADEQUACY, AND INSPECTION OF ERECTION BRACING, SHORING, TEMPORARY SUPPORTS, ETC., IS THE SOLE RESPONSIBILITY OF THE CONTRACTOR.
3. THE CONTRACTOR MUST FIELD VERIFY THE DIMENSIONS, ELEVATIONS, AND OTHER REQUIREMENTS NECESSARY FOR THE PROPER CONSTRUCTION AND ALIGNMENT OF THE NEW PORTIONS OF THE STRUCTURE TO THE EXISTING. THE CONTRACTOR SHALL MAKE ALL MEASUREMENTS NECESSARY FOR FABRICATION AND ERECTION OF STRUCTURAL MEMBERS. DISCREPANCIES SHALL BE BROUGHT TO THE ATTENTION OF THE CONTRACTING OFFICER PRIOR TO ORDERING MATERIALS OR BEGINNING WORK (CONSTRUCTION OR DEMOLITION).
4. LOCATE AND PROTECT ALL EXISTING UTILITIES NEAR WHERE WORK WILL TAKE PLACE ON THE STRUCTURE.
5. THE CONTRACTOR IS RESPONSIBLE FOR COMPLYING WITH SAFETY PRECAUTIONS AND REGULATIONS DURING THE WORK. THE STRUCTURAL ENGINEER WILL NOT ADVISE ON, NOR ISSUE DIRECTION AS TO SAFETY PRECAUTIONS AND PROGRAMS.
6. ALL ITEMS NOTED TO BE DEMOLISHED OR REMOVED WILL BECOME THE CONTRACTOR'S PROPERTY, UNLESS NOTED OTHERWISE. DISPOSITION OF THE ITEMS AND MATERIALS IS THE RESPONSIBILITY OF THE CONTRACTOR AND MUST ADHERE WITH ALL APPLICABLE FEDERAL, STATE, AND LOCAL REGULATIONS.
7. THE STRUCTURAL ENGINEER IS NOT RESPONSIBLE FOR THE MEANS, METHODS, TECHNIQUES, OR SEQUENCES OF PROCEDURES TO PERFORM THE WORK. SUPERVISION OF WORK IS THE SOLE RESPONSIBILITY OF THE CONTRACTOR.
8. DRAWINGS INDICATE GENERAL AND TYPICAL DETAILS OF CONSTRUCTION. WHERE CONDITIONS ARE NOT SPECIFICALLY SHOWN, USE SIMILAR DETAILS OF CONSTRUCTION, SUBJECT TO APPROVAL BY THE CONTRACTING OFFICER.
9. ALL STRUCTURAL SYSTEMS WHICH ARE TO BE COMPOSED OF COMPONENTS TO BE FIELD ERECTED MUST BE SUPERVISED BY THE SUPPLIER DURING MANUFACTURING, DELIVERY, HANDLING, STORAGE, AND ERECTION IN ACCORDANCE WITH THE SUPPLIER'S INSTRUCTIONS AND REQUIREMENTS.
10. ALL ASTM AND OTHER REFERENCES ARE PER THE LATEST EDITIONS OF THESE STANDARDS, UNLESS OTHERWISE NOTED.
11. SHOP DRAWINGS AND OTHER ITEMS MUST BE SUBMITTED FOR REVIEW BY THE GENERAL CONTRACTOR PRIOR TO FABRICATION. ALL SHOP DRAWINGS MUST BE REVIEWED BY THE GENERAL CONTRACTOR BEFORE SUBMITTAL. THE REVIEW IS TO BE FOR CONFORMANCE WITH THE DESIGN CONCEPT AND GENERAL COMPLIANCE WITH THE RELEVANT CONTRACT DOCUMENTS. THE REVIEW DOES NOT RELIEVE THE CONTRACTOR OF THE SOLE RESPONSIBILITY TO REVIEW, CHECK, AND COORDINATE THE SHOP DRAWINGS PRIOR TO SUBMISSION. THE CONTRACTOR REMAINS SOLELY RESPONSIBLE FOR ERRORS AND OMISSIONS ASSOCIATED WITH THE PREPARATION OF SHOP DRAWINGS AS THEY PERTAIN TO MEMBER SIZES, DETAILS, DIMENSIONS, ETC. ANY PROPOSED CHANGES MUST BE SUBMITTED IN AN RFI TO THE CONTRACTING OFFICER FOR APPROVAL.

12. IN NO CASE MAY THE REPRODUCTION OF THE CONTRACT DRAWINGS BE USED AS SHOP DRAWINGS. SUBCONTRACTOR/FABRICATOR MUST PROVIDE INDEPENDENTLY CREATED DRAWINGS BASED ON THE PLANS AND DETAILS.
13. IN ACCORDANCE WITH THE IBC, SPECIAL INSPECTIONS WILL BE REQUIRED FOR THIS PROJECT. SPECIAL INSPECTIONS MUST BE PERFORMED IN ACCORDANCE WITH THE "SCHEDULE OF SPECIAL INSPECTIONS." THE CONTRACTOR MUST NOTIFY THE SPECIAL INSPECTOR AT LEAST 48 HOURS IN ADVANCE FOR WORK THAT WILL REQUIRE INSPECTION OR TESTING.
14. TAKE CARE NOT TO DAMAGE THE EXISTING STRUCTURE. WHERE EXISTING CONSTRUCTION IS DAMAGED BY THE CONSTRUCTION REQUIRED BY THESE DOCUMENTS, REPAIR THE DAMAGED ITEM(S) WITH MATERIALS TO MATCH THE ADJACENT MATERIAL, TEXTURE, AND COLOR.
15. DO NOT HANG ITEMS FROM THE EXISTING STRUCTURE, UNLESS OTHERWISE NOTED.

GENERAL STRUCTURAL SCOPE OF WORK

1. GENERAL SCOPE OF WORK INCLUDES, BUT IS NOT LIMITED TO:
- Q-58 DATA CONCENTRATOR SHED***
- CLEAN AND REMOVE DEBRIS FROM (4) 18" DIAMETER BATTERED STEEL PIPE PILES COMPLETE AND RECOAT WITH COMMERCIAL GRADE PAINT.
 - CLEAN AND REMOVE DEBRIS FROM (2) 15' LONG W-SECTION PILE CAP BEAMS ALONG WITH SUBSEQUENT CONNECTIONS COMPLETE AND RECOAT WITH COMMERCIAL GRADE PAINT.
 - CLEAN AND REMOVE DEBRIS FROM (8) W-SECTION UPPER AND LOWER STEEL BEAMS ALONG WITH SUBSEQUENT CONNECTIONS COMPLETE AND RECOAT WITH COMMERCIAL GRADE PAINT.
 - CLEAN AND REMOVE DEBRIS FROM (4) 30" DIAMETER STEEL CONDUITS COMPLETE AND RECOAT WITH COMMERCIAL GRADE PAINT.
 - DEMOLISH EXISTING STEEL LADDER AND ASSOCIATED HARDWARE COMPLETE AND PROVIDE CODE COMPLIANT LADDER WITH FALL ARREST SYSTEM AND SWING GATE ACCESS.
 - DEMOLISH AND REMOVE (2) EXISTING 4" DIAMETER BOLLARDS COMPLETE.
 - PROVIDE (2) 4" DIAMETER STEEL BOLLARDS ON DOCKING PLATFORM AS OUTLINED IN THIS DRAWING SET.
- DOCKING PLATFORM AND FENDER FRAME SYSTEM:**
- DEMOLISH EXISTING FOAM FILLED FENDERS AND ATTACHMENT HARDWARE.
 - CLEAN EXISTING C12 STEEL CHANNELS PREVIOUSLY USED AS FENDER SUPPORTS.
 - VERIFY EXISTING C12 STEEL CHANNELS CONTAIN ENOUGH SECTION MODULUS TO ATTACH EXTENDED FENDER-LANDING SYSTEM.
 - RECOAT EXISTING C12 STEEL CHANNELS WITH COMMERCIAL GRADE PAINT PREVIOUSLY USED AS FENDER SUPPORTS.
 - PROVIDE BEAMS, CHANNELS, ANGLES AND GRATING FOR EXTENDED FENDER-LANDING SYSTEM AS OUTLINED IN THIS DRAWING SET.
 - PROVIDE (4) FOAM RUBRAIL WING-TYPE FENDERS PER MANUFACTURERS RECOMMENDATIONS.
- NOTE:
- THE GENERAL STRUCTURAL SCOPE OF WORK DESCRIBED HEREIN IS NOT ALL INCLUSIVE OF EVERY SINGLE ITEM OF WORK REQUIRED FOR THIS PROJECT. REFER TO THE EXECUTABLE SCOPE OF WORK, DESIGN DRAWING SET, AND THE BID PACKAGE DOCUMENTS FOR A COMPLETE OUTLINE OF WORK REQUIRED.

DESIGN CRITERIA NOTES

1. THE STRUCTURAL WORK TO BE PERFORMED UNDER THIS CONTRACT HAS BEEN DESIGNED TO THE APPLICABLE DESIGN STANDARD AND / OR CRITERIA OF THE FOLLOWING, UNLESS NOTED OTHERWISE:
- A. ASCE 7-22, "MINIMUM DESIGN LOADS FOR BUILDINGS AND OTHER STRUCTURES"
 - B. INTERNATIONAL BUILDING CODE 2024
 - C. INTERNATIONAL EXISTING BUILDING CODE 2024
 - D. UFC 1-200-01 (01 SEPTEMBER 2022, CH 4 17 DECEMBER 2024), "DOD BUILDING CODE"
 - E. UFC 3-301-01 (11 APRIL 2023, CH 4 3 JUNE 2025), "STRUCTURAL ENGINEERING"
 - F. SDI SD-2022, " STEEL DECK INSTITUTE STANDARD FOR STEEL DECK"
 - G. ALL ASTM AND OTHER REFERENCES ARE PER THE LATEST EDITIONS OF THESE STANDARDS AT THE CONTRACT AWARD.

2. LIVE LOADS USED IN THE DESIGN OF THESE STRUCTURES ARE AS FOLLOWS:
- HANDRAIL SYSTEM(*)

- CONCENTRATED LOAD = 200 LBS
 - DISTRIBUTED LOAD = 50 PLF
 (*) DESIGNED FOR LOAD APPLIED IN ANY DIRECTION ALONG THE T
 RAIL (PER IBC, LOADS ANALYZED INDEPENDENTLY)

- METAL DECK = 150 PSF

- DESIGN LOAD CRITERIA, DETERMINED IN ACCORDANCE WITH UFC 3-301-01, IS AS FOLLOWS:

- A. BUILDING CRITERIA: RISK CATEGORY = II (ASSUMED)
B. SNOW LOADS:

- GROUND SNOW LOAD = 36 PSF

- C. WIND LOADS
- | | |
|----------------------------------|-----------|
| - BASIC WIND SPEED, V (ULTIMATE) | = 118 MPH |
| - BASIC WIND SPEED, V (NOMINAL) | = 92 MPH |
| - EXPOSURE CATEGORY | = D |

STRUCTURAL STEEL NOTES

1. ALL STRUCTURAL STEEL MUST CONFORM TO THE SIXTEENTH EDITION OF THE ALLOWABLE STRESS DESIGN "STEEL CONSTRUCTION MANUAL" OF THE AMERICAN INSTITUTE OF STEEL CONSTRUCTION (AISC).
2. UNLESS OTHERWISE NOTED, ALL MATERIALS MUST BE IN ACCORDANCE WITH THE FOLLOWING ASTM SPECIFICATIONS:

MEMBER, ALL GALVANIZED	ASTM	MIN. STRENGTH
W-SHAPES	A992 (GRADE 50) / A572	Fy = 50 KSI
OTHER ROLLED/PLATE SHAPES	A36	Fy = 36 KSI
PIPES	A53 (GRADE B)	Fy = 46 KSI
HIGH-STRENGTH BOLTS	A325 (TYPE I)	Fu = 120 KSI
NUTS	A563 (GRADE TO MATCHBOLT)	
WASHERS	F844	
3. WELDS MUST BE IN ACCORDANCE WITH AWS D1.1 "STRUCTURAL WELDING CODE - STEEL" AND USE E70XX ELECTRODES. UNLESS OTHERWISE NOTED, PROVIDE FILLER WELDS WITH MINIMUM SIZE REQUIRED BY TABLE J2.4 OF THE "MANUAL OF STEEL CONSTRUCTION, LOAD RESISTANCE FACTOR DESIGN." ENSURE BASE MATERIAL IS SUFFICIENTLY CLEAN TO PERMIT WELDS TO BE MADE THAT MEET QUALITY REQUIREMENTS OF AWS D1.1. ALL FILLER MATERIAL MUST HAVE A MINIMUM YIELD STRENGTH OF 58 KSI.
4. PRIOR TO WELDING, THE CONTRACTOR MUST SUBMIT CERTIFICATION FOR EACH WELDER STATING THE TYPE OF WELDING AND POSITIONS QUALIFIED FOR, THE CODE AND PROCEDURE QUALIFIED UNDER, DATE QUALIFIED, AND THE FIRM AND INDIVIDUAL CERTIFYING THE QUALIFICATION TESTS.
5. HOLES IN STEEL MUST BE DRILLED OR PUNCHED. BURNING OF HOLES IS PROHIBITED.
6. SPLICING OF STEEL MEMBERS IS PROHIBITED.

STEEL DECK NOTES

1. STEEL DECK MUST CONFORM TO THE LATEST EDITION OF AMERICAN IRON AND STEEL INSTITUTE (AISI), "SPECIFICATION FOR THE DESIGN OF COLD-FORMED STEEL STRUCTURAL MEMBERS" AND STEEL DECK INSTITUTE (SDI), "DESIGN MANUAL FOR COMPOSITE DECK, FORM DECKS, AND ROOF DECKS".
2. STEEL DECK GRATING MUST COMPLY WITH THE FOLLOWING:
 - A. 1 1/4" MIN. TO 2 1/2" MAX. THICK DECKING, ABLE TO WITHSTAND 150 PSF
 - B. HOT DIPPED GALVANIZED PER ASTM A653, G90
3. MAINTAIN 1" MINIMUM EDGE DISTANCE AT ALL CONNECTIONS.


FIXED METAL LADDER NOTES

1. PROVIDE A LADDER IN ACCORDANCE WITH THE REQUIREMENTS IN THE EXECUTABLE SCOPE OF WORK DOCUMENT IN THE BID PACKAGE, THE REQUIREMENTS OF ASCE 7 AND OSHA 29 CFR 1910.23 & 1926.1053, AND NAVY FALL PROTECTION GUIDE FOR FIXED LADDERS. THESE REQUIREMENTS MUST NOT BE MODIFIED BY ANSI-ASC A14.3-2008.
2. LADDER COMPONENTS MUST BE HOT DIPPED GALVANIZED IN ACCORDANCE WITH ASTM A123.
3. SUBMIT LADDER OSHA DOCUMENTATION OR DESIGN CALCULATIONS FOR APPROVAL PRIOR TO FABRICATION. CALCULATIONS MUST BE STAMPED BY A REGISTERED PROFESSIONAL ENGINEER.

STRUCTURAL ABBREVIATIONS NOTES

B.P.	BASE PLATE
BLDG	BUILDING
BOD	BOTTOM OF DECK
BOT	BOTTOM
BRCG	BRACING
C	CHANNEL
CJ	CONTROL JOINT
CL	CENTER LINE
CLR	CLEAR
COL	COLUMN
CONC	CONCRETE
CONT	CONTINUOUS
DEMO	DEMOLISH
DOR	DESIGNER OF RECORD
DIA (OR) Ø	DIAMETER
DIM(S)	DIMENSION(S)
DWGS	DRAWINGS
E, EXIST	EXISTING
E.W.	EACH WAY
EA	EACH
EF	EACH FACE
EL, ELEV	ELEVATION
EQ, EQUIV	EQUAL, EQUIVALENT
FDN	FOUNDATION
FF EL	FINISHED FLOOR ELEVATION
FY	ALLOWABLE YIELD STRESS
GA	GAUGE
HDG, GALV	HOT DIPPED GALVANIZED
HORIZ	HORIZONTAL
HSS	HOLLOW STRUCTURAL SHAPES
IAW	IN ACCORDANCE WITH
INFO	INFORMATION
INT	INTERIOR
KSI	KILOPOUNDS (KIPS) PER SQUARE INCH
L	ANGLE
LB, LBS	POUNDS
LF	LINEAR FEET
LLH	LONG LEG HORIZONTAL
LLV	LONG LEG VERTICAL
LONG	LONGITUDINAL
MATL	MATERIAL
MAX	MAXIMUM
MD	METAL DECK
MFR	MANUFACTURER
MIN	MINIMUM
MPH	MILES PER HOUR
NS	NEAR SIDE
NTS	NOT TO SCALE
OC	ON CENTER
OPH	OPPOSITE HAND
PL	PLATE
PLF	POUNDS PER LINEAR FOOT
PSF	POUNDS PER SQUARE FOOT
PSI	POUNDS PER SQUARE INCH
RE, REF	REFERENCE
REINF	REINFORCE, -MENT
REQD	REQUIRED
SF	SQUARE FEET
SIM	SIMILAR
SPA	SPACING
SPEC	CONTRACT SPECIFICATIONS
SQ	SQUARE
SS	STAINLESS STEEL
STD	STANDARD
THK	THICKNESS
TO	TOP OF
TOS	TOP OF STEEL
TYP	TYPICAL
UNO	UNLESS NOTED OTHERWISE
VERT	VERTICAL
WI, W/O	WITH, WITHOUT
~, APPROX	APPROXIMATELY

PLAN LEGEND

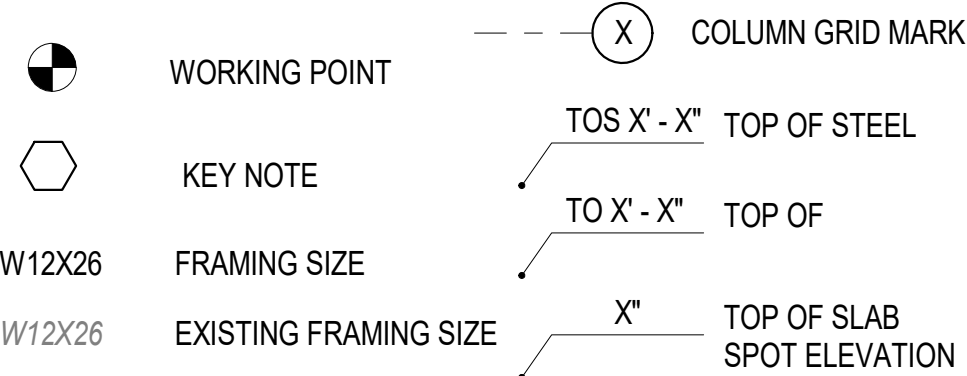


SHEET INDEX			
SHEET NO.		NAVFAC DWG. NO.	SHEET TITLE
NO.	SHEET		
1	G-001	12,937,903	COVER SHEET
2	S-001	12,937,904	STRUCTURAL SYMBOLS, LEGENDS, ABBREVIATIONS, AND NOTES
3	S-101	12,937,905	DOCKING PLATFORM
4	S-102	12,937,906	CANNISTER IMPROVEMENTS
5	S-301	12,937,907	SOUTH ELEVATION

[illegible]


APPROVED						SEC 100	
							
FOR COMMANDER NAVAC						4-17-36	
ACTIVITY							
COMMANDER, NAVY INSTALLATIONS COMMAND							
SATISFACTORY TO DATE						01/28/2026	
DES	ADB	DRW	ADB	CHK	DSG		
PM/DM				DEAN S. GREGORY, P.E			
BRANCH MANAGER				JAMES M. SMITH, R.A.			
CHIEF ENGINEER				JOHN C. MILLER, P.E.			
FIRE PROTECTION						N/A	

NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND
DEPARTMENT OF THE NAVY
MID-ATLANTIC
MILITANT FORCE NORFOLK
NAVAL STATION - NORFOLK, VIRGINIA
NORFOLK, VIRGINIA
Q-58 DATA CONCENTRATOR SHED RESTORATION
STRUCTURAL SYMBOLS, LEGENDS, ABBREVIATIONS, AND NOTES


SCALE: AS NOTED			
EPROJECT NO.:		1673784	
CONSTR. CONTR. NO.		N/A	
NAVFAC DRAWING NO.		12.937.904	
SHEET	2	OF	5

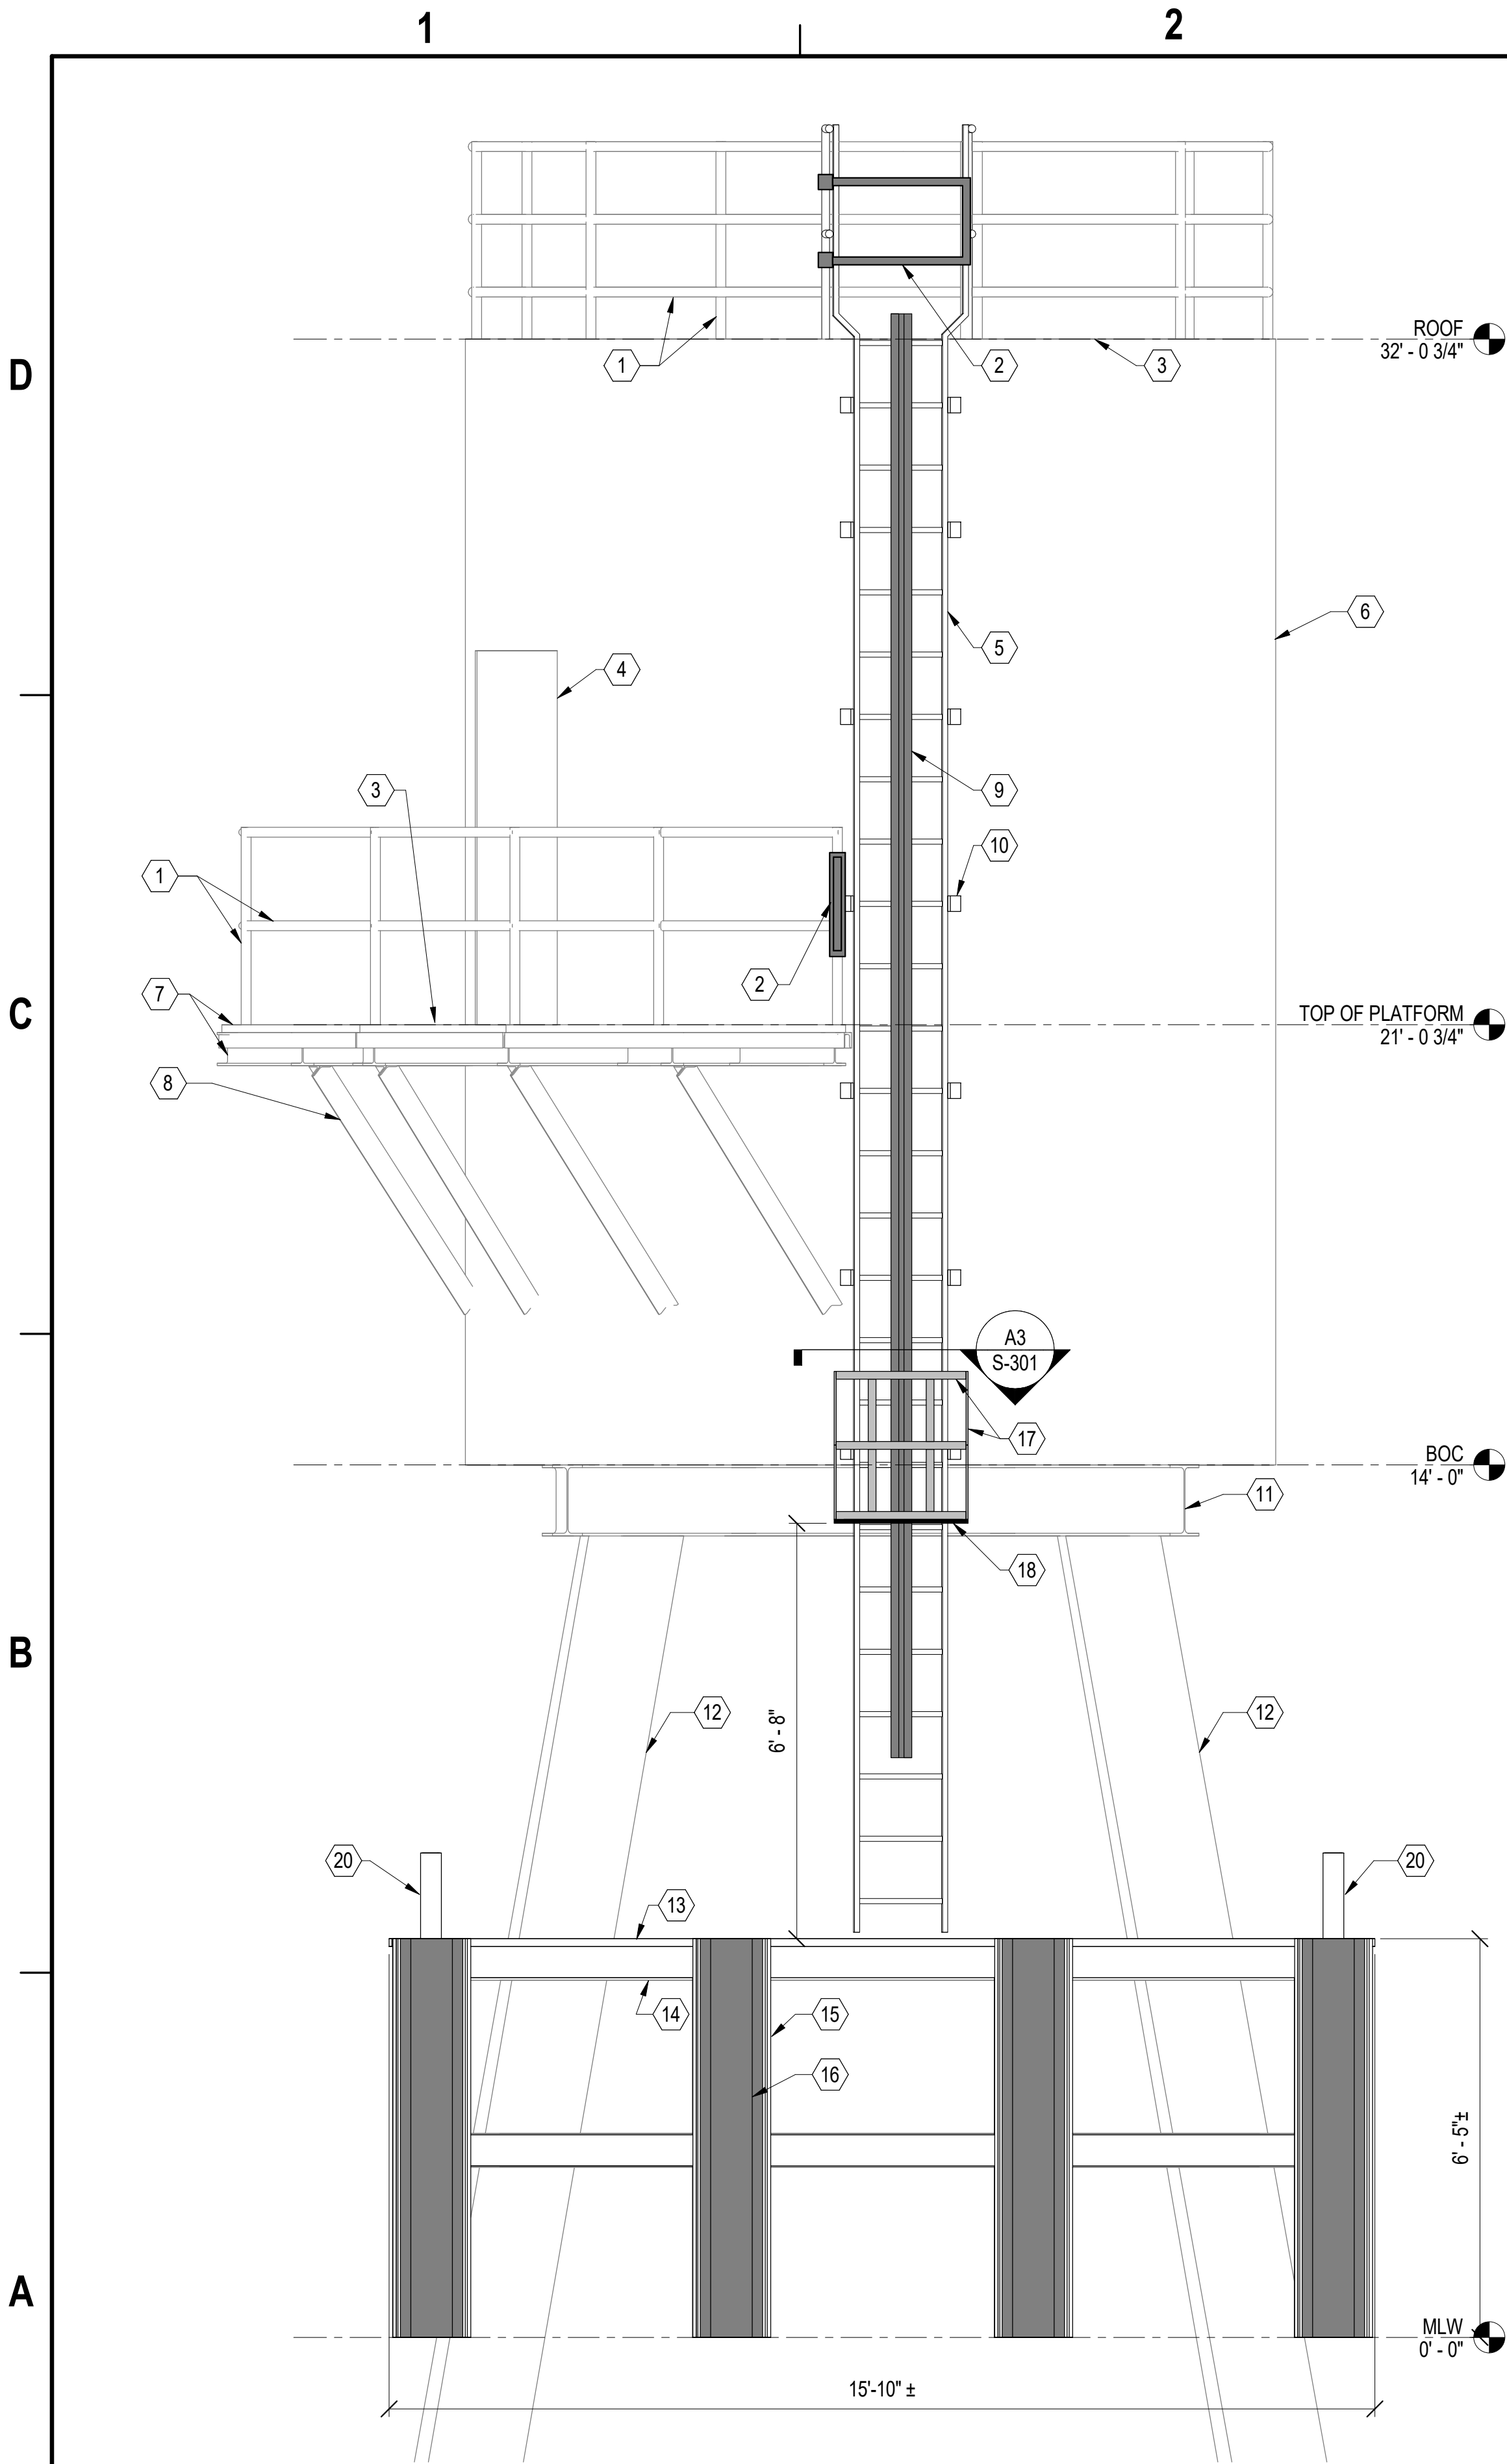


A1 SOUTH ELEVATION
1/2" = 1'-0"

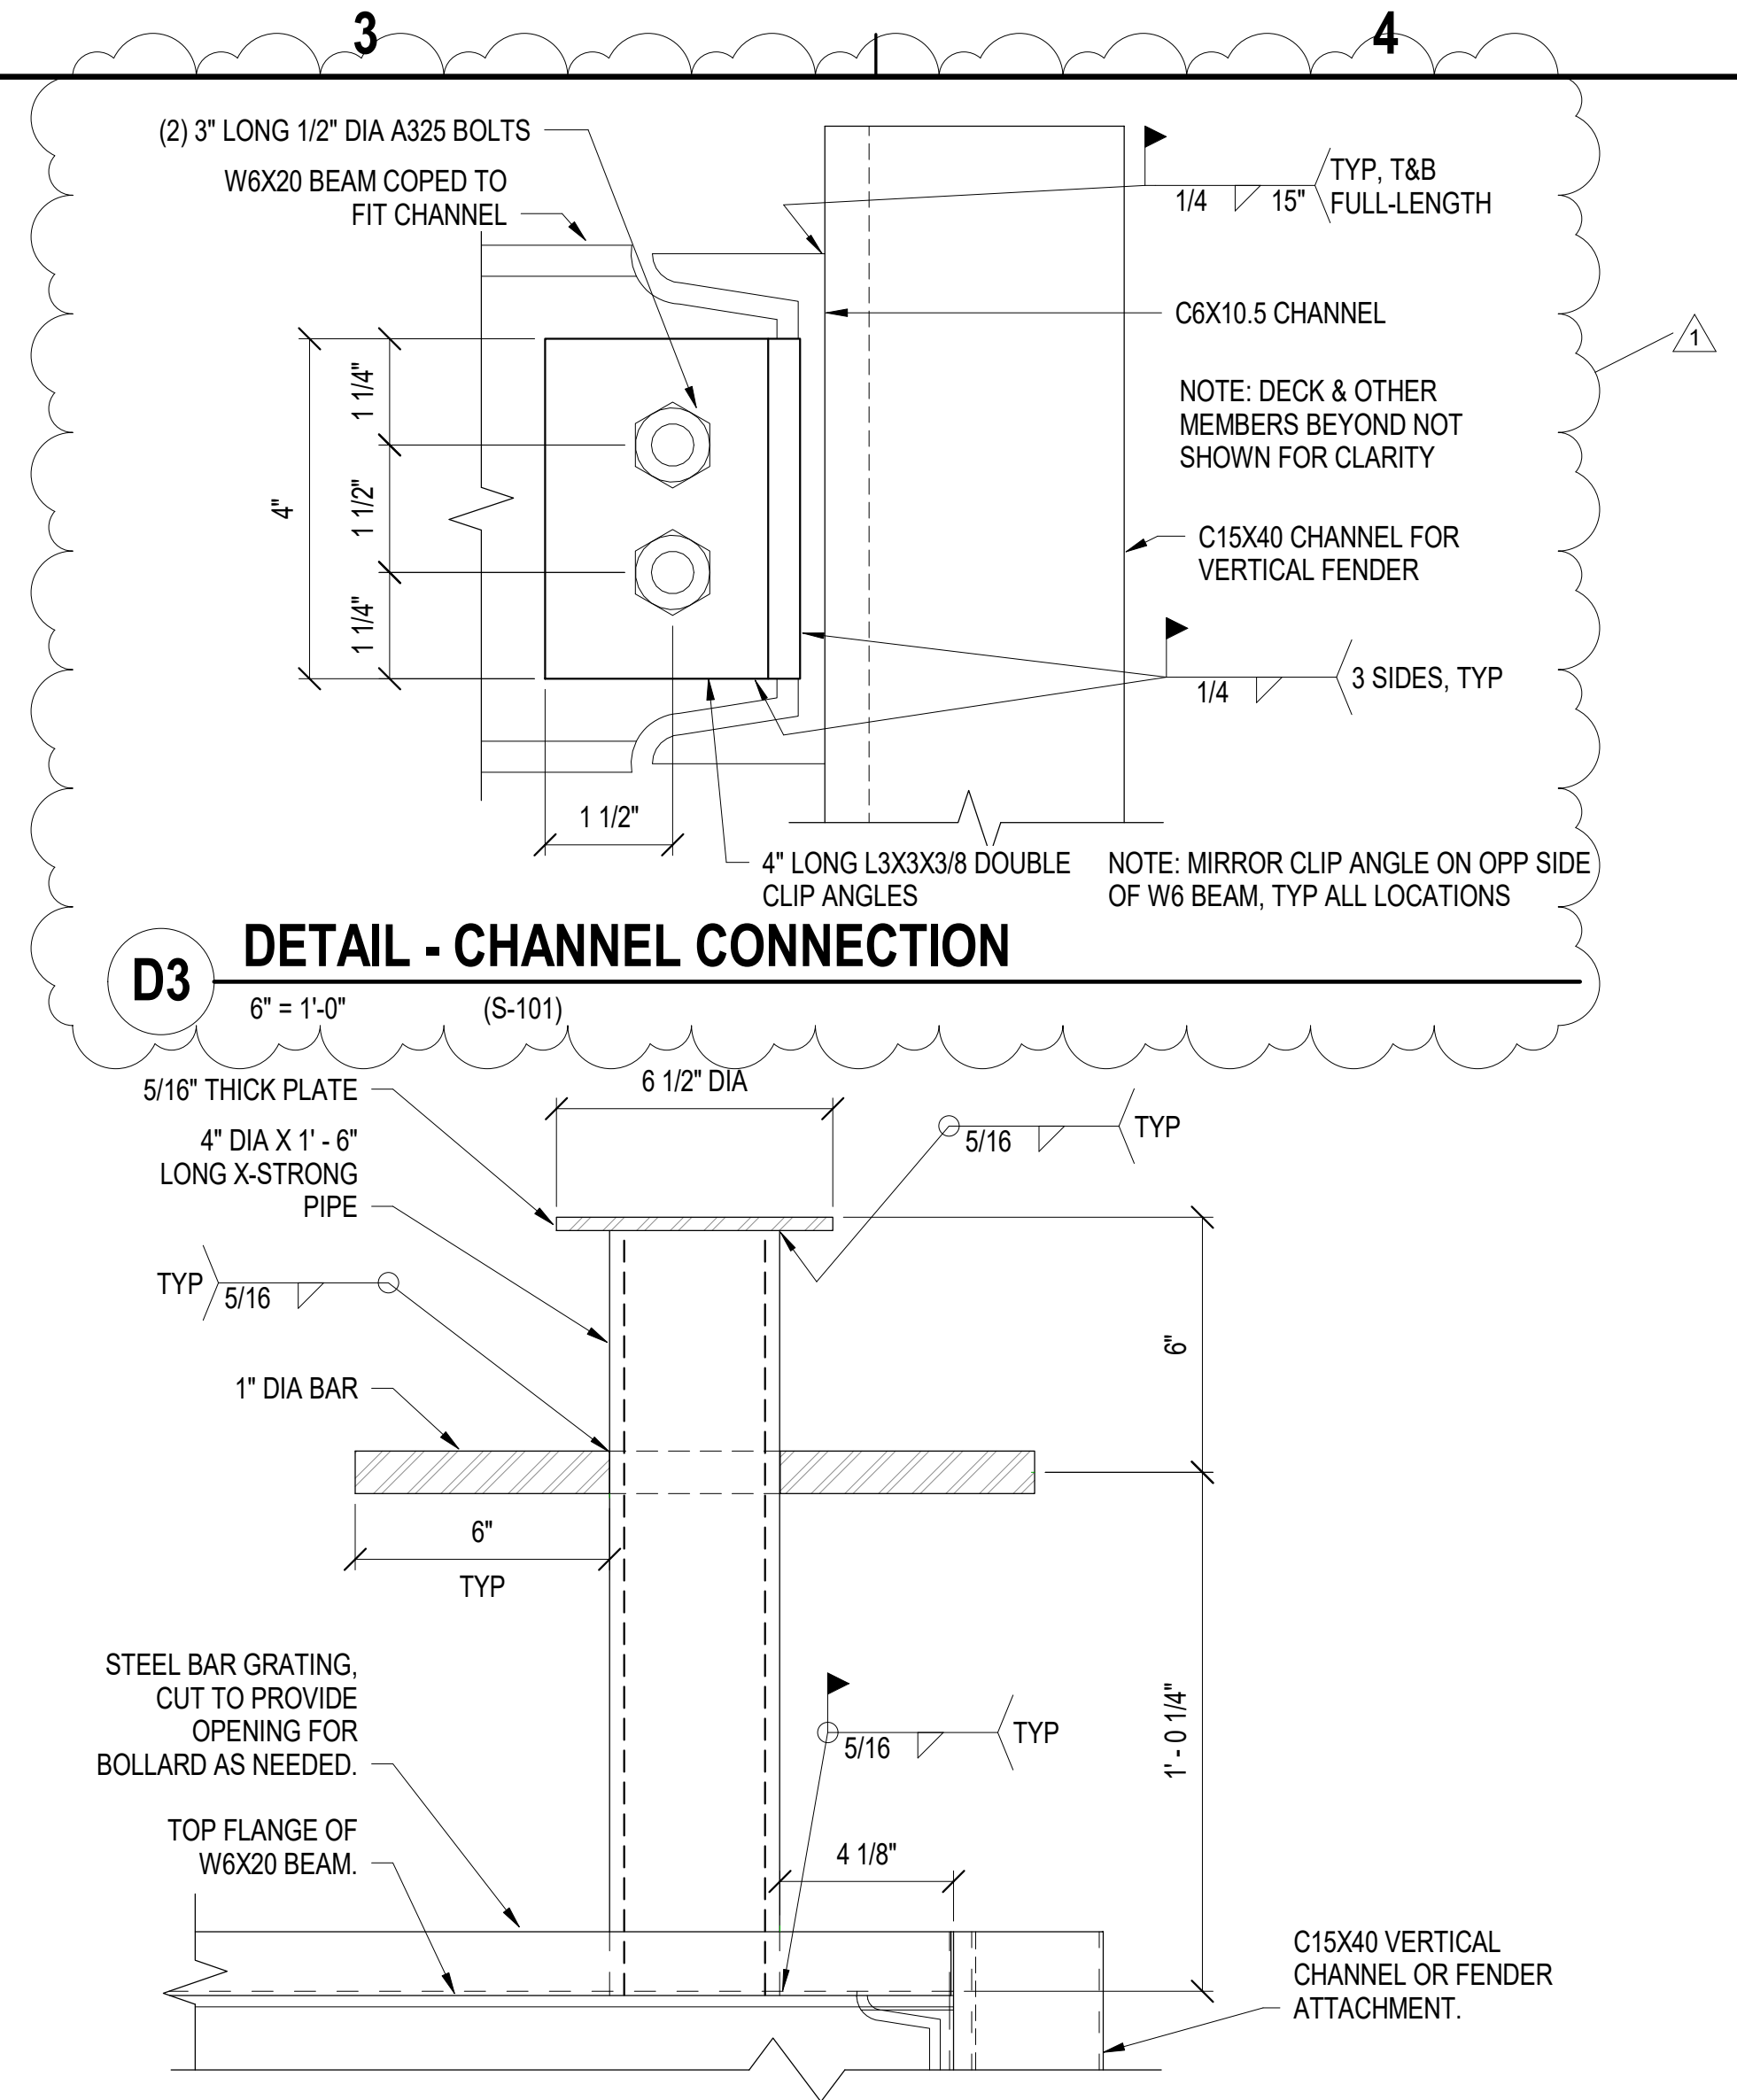

D3 DETAIL - CHANNEL CONNECTION
6" = 1'-0" (S-101)

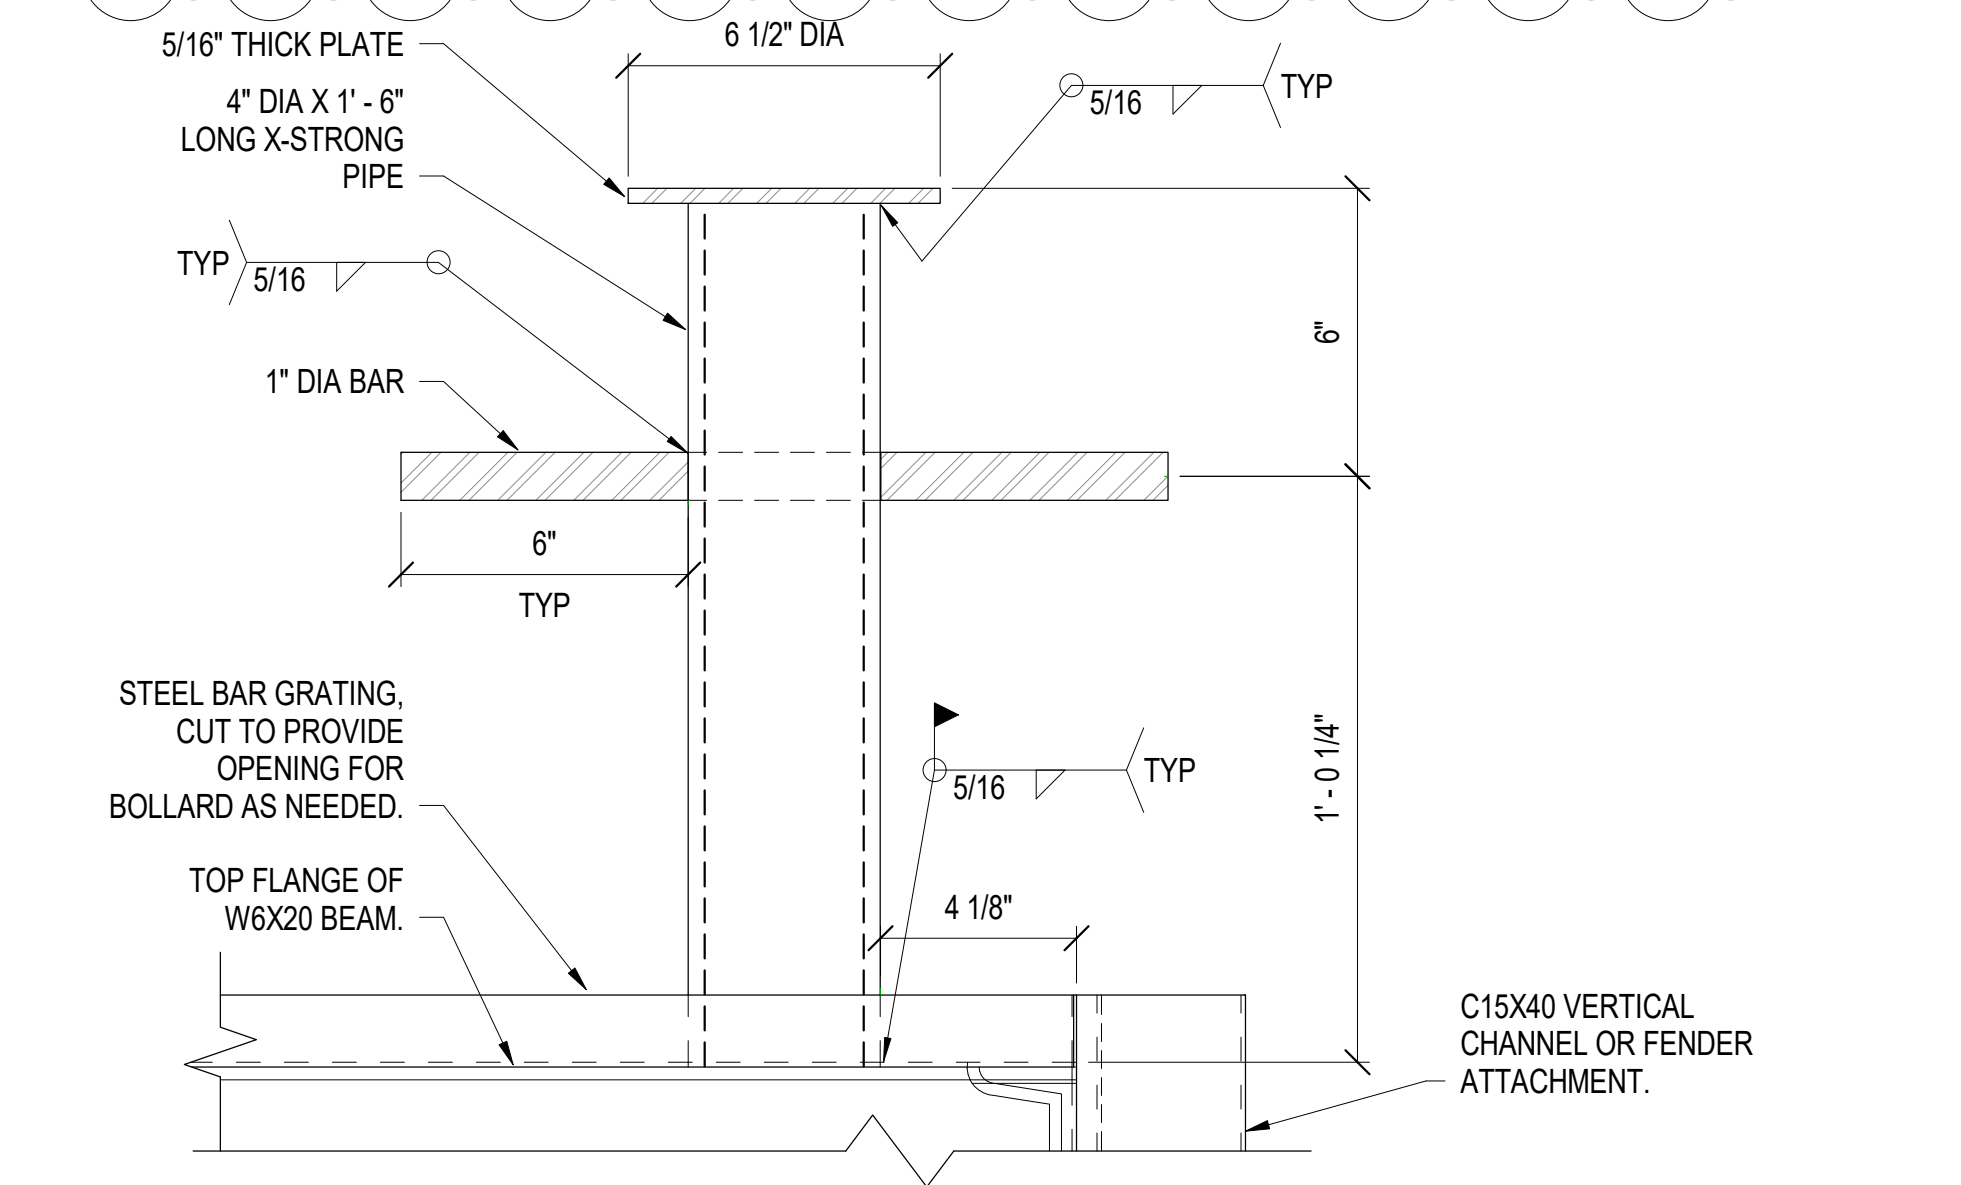

B3 DETAIL - BOLLARD CONNECTION
NOT TO SCALE (S-101)

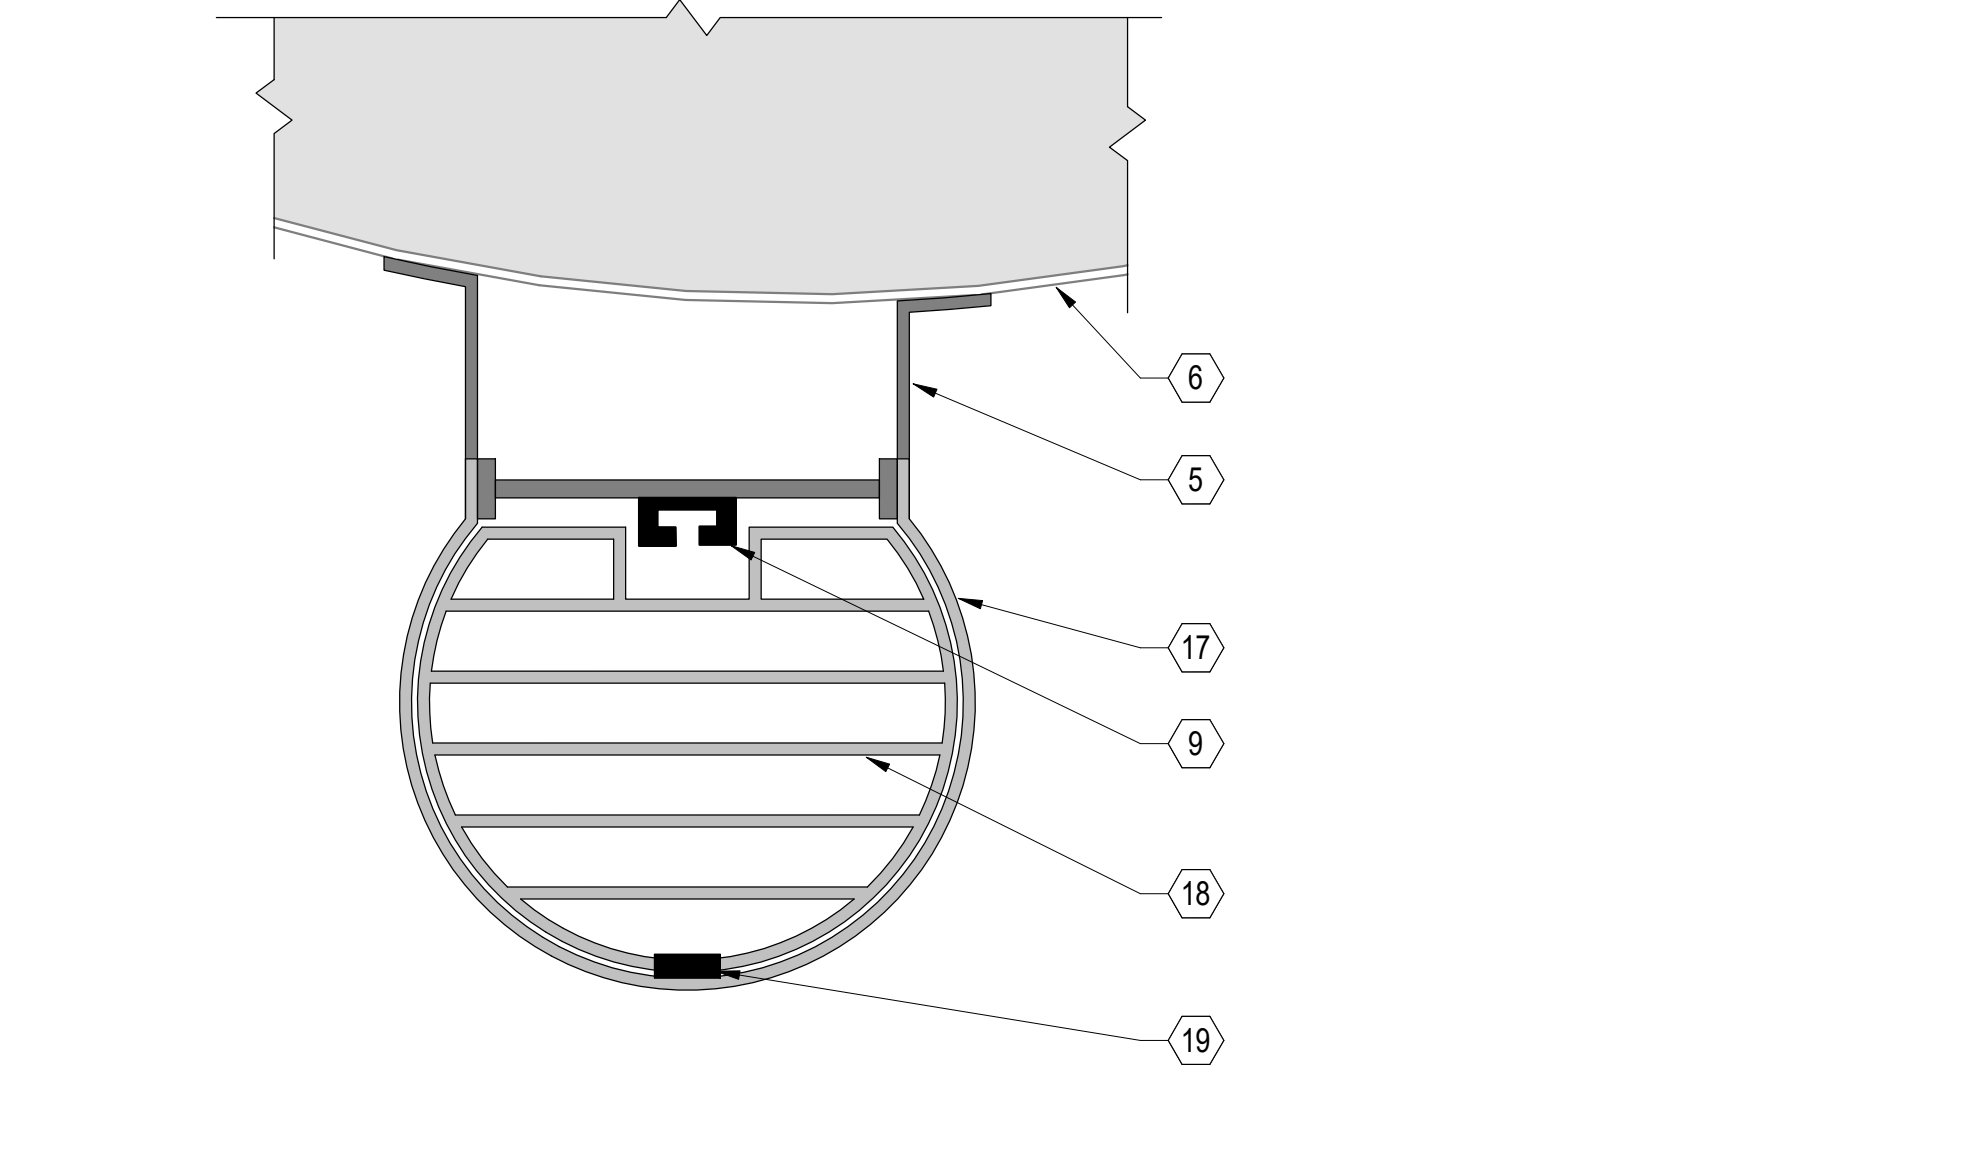

A3 STEEL SECURITY CAGE AND HATCH
NOT TO SCALE (S-301)

GENERAL SHEET NOTES

- 1 THE DATUM ELEVATION FOR THIS DRAWING IS REFERENCING FROM MLW = 0' - 0". THE VERTICAL DISTANCE ABOVE DATUM IS NOTED THUS: X' - X".

STRUCTURAL KEYNOTES

- 1 EXISTING STEEL PIPE GUARDRAIL, TYP, TO REMAIN.
- 2 PROVIDE HOT DIPPED GALVANIZED METAL SELF-CLOSING SWING GATE IN ACCORDANCE WITH THE 2024 EDITION OF THE DEPARTMENT OF THE NAVY FALL PROTECTION GUIDE. MOUNT TO EXISTING GUARDRAIL POST.
- 3 DEEP CLEAN ROOFTOP SURFACE OF DCS SHELL TO REMOVE BIRD GUANO, BIRD CARCASSES, AND OTHER WASTE MATERIAL. WASTE MUST BE CONSIDERED HAZARDOUS AS BIRD GUANO AND WASTE COULD CARRY DISEASE. COLLECT HAZARDOUS WASTE AND DISPOSE OF IN ACCORDANCE WITH FEDERAL AND LOCAL GUIDANCE. WASTE MUST NOT BE ALLOWED TO ENTER WATERWAY.
- 4 EXISTING STEEL BULKHEAD DOOR TO REMAIN.
- 5 PROVIDE STEEL CLIMBING LADDER IN ACCORDANCE WITH THE 2024 EDITION OF THE DEPARTMENT OF THE NAVY FALL PROTECTION GUIDE. FALL ARREST SYSTEM MUST BE PROVIDED PER LADDER MANUFACTURER.
- 6 EXISTING 3/8" STEEL PLATE SHELL TO REMAIN.
- 7 EXISTING STEEL GRATED AND STEEL FRAMED ACCESS PLATFORM TO REMAIN.
- 8 EXISTING STEEL ANGLE PLATFORM SUPPORT STRUTS, TYP, TO REMAIN.
- 9 PROVIDE FALL ARREST SYSTEM IN ACCORDANCE WITH THE 2024 EDITION OF THE DEPARTMENT OF THE NAVY FALL PROTECTION GUIDE. CONSIDER THE HIGHLY CORROSIVE ENVIRONMENT WHEN SELECTING FALL ARREST SYSTEM HARDWARE.
- 10 ANCHORAGE PER LADDER MANUFACTURER, TYP. FOR BID PURPOSES ASSUME L8X2X3/8" 5/16" FILLET WELDED TO LADDER RAIL AND 3/8" DCS SHELL PLATE, TYP.
- 11 EXISTING STEEL FRAMED PILE CAP. TYP, TO REMAIN.
- 12 EXISTING 18" DIAM., 1/2" THICK STEEL PIPE PILE TO REMAIN.
- 13 PROVIDE STEEL GRATING CAPABLE OF SUPPORTING 150 PSF OVER A 5-FT SPAN. ATTACH TO TOP FLANGE OF NEW CHANNEL BEAMS PER MANUFACTURER'S RECOMMENDATIONS.
- 14 PROVIDE C6X10.5 BEAM, TYP. ATTACH TO ENDS OF W6X20 BEAMS USING CLIP ANGLES AND BOLTS AS SPECIFIED. ENSURE TOS IS FLUSH.
- 15 PROVIDE C15X40 STEEL VERTICAL SUPPORTS FOR FENDER ATTACHMENT, TYP.
- 16 PROVIDE FOAM WING TYPE FENDER WITH MINIMUM OUTSIDE DIAMETER OF 8", TYP.. ATTACHMENT TO C15X40 CHANNEL SUPPORTS PER MANUFACTURER'S INSTRUCTIONS. FOR BIDDING PURPOSES ASSUME 1/2" THICK PLATE STRIP, 1 1/2" WIDE, THROUGH BOLTED INTO C15X40 EVERY 16" O.C.
- 17 PROVIDE PRE-MANUFACTURED STEEL SECURITY CAGE. ATTACH TO NEW LADDER SIDE RAILS.
- 18 PROVIDE PRE-MANUFACTURED STEEL SECURITY HATCH. ATTACH TO STEEL SECURITY CAGE PER MANUFACTURER'S INSTRUCTIONS. HATCH MUST NOT INTERFERE WITH FALL ARREST SYSTEM TRACK OR CABLE.
- 19 SECURITY HATCH HINGE PER MANUFACTURER.
- 20 PROVIDE 4" DIA X 1'-6" X-STRONG PIPE. REFER TO DETAIL B3/S-301 FOR MORE INFORMATION.

DES	ADB	DRW	ADB	CHK	DGS
S-301					
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND					
NAVAL STATION - NORFOLK					
NORFOLK, VIRGINIA					
Q-58 DATA CONCENTRATOR SHED RESTORATION					
SOUTH ELEVATION					
SCALE: AS NOTED					
PROJECT NO.: 1673784					
CONSTR. CONTR. NO. N/A					
NAVFAC DRAWING NO. 12.937.907					
SHEET 5 OF 5					
S-301					