



LOCATION MAP - U. S. MARINE CORPS BASE - CAMP LEJEUNE, N.C.

SCOPE OF WORK: The contractor shall provide all material, labor, equipment, and supervision required to accomplish the following:

General description - This scope of work is to be accomplished at Bldg. G560 located on "E" Street at Camp Geiger, North Carolina. The contractor shall complete a partial renovation to include but not limited to the following: flooring, suspended ceiling system, interior and exterior doors, bathroom fixtures, etc....

Detailed requirements and specifications - The contractor shall take his own field measurements in determining required materials and costs for the following:

SPECIAL SCHEDULING AND ACCESS:
1. Access and scheduling to the


work area shall be arranged through Contracting Officer's Representative for the OICC office, and Ms. Kim Davis, the tenant of the building. Ms. Kim Davis, (910) 451-4485.

HAZARDOUS MATERIALS:

1. Vinyl asbestos floor tile and asbestos mastic (under carpet) throughout the building has been identified.
2. All previously painted exterior surfaces tested positive for lead contaminants
3. The glazing compound surrounding entrances of 2602, 2603, 2604, 2605, 2607, 2609, 2611, & 2613 contains non friable asbestos.

SPECIAL CONDITIONS: None Identified
ENVIRONMENTAL REQUIREMENTS: None Identified

G560 PARTIAL RENOVATION	
T1	Title page
A1	DEMOLITION PLAN
A2	PARTIAL FLOOR PLAN/SCOPE: COUNTER WAINSCOTING
A3	PARTIAL FLOOR PLAN/SCOPE: PAINT
A4	PARTIAL FLOOR PLAN/SCOPE: THEATER
A5	PARTIAL FLOOR PLAN/SCOPE: BATHROOMS
A6	ELEVATIONS
A7	DETAILS COUNTER
A8	SUSPENDED CEILING PLAN
A9	FLOOR COVERING PLAN
A10	EXTERIOR DOORS/SCOPE: EXTERIOR DOORS
A11	INTERIOR DOORS/SCOPE: INT DOORS/DOOR SCHEDULE
M1	MECHANICAL PLAN
P1	PLUMBING DEMO
P2	PLUMBING NEW
E1	ELECTRICAL DEMO
E2	OVER HEAD LIGHTING
E3	RECEPTACLES: BEHIND THE SERVING LINE
E4	ELECTRICAL: MISC. THEATER

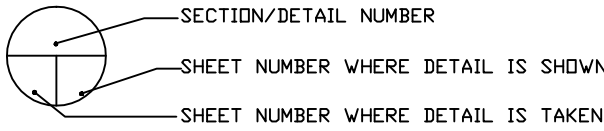


- NOTES:
1. The measurements and quantities furnished here are for reference only. The contractor is responsible for actual field verification prior to bidding, ordering materials and during every step of construction for existing surfaces, dimensions and conditions.
 2. Repair, refinish areas damaged or disturbed by new work to be provided under this contract.
 3. Properly remove, haul, and dispose of all debris. The Base Landfill may be utilized. The contractor shall not utilize the dumpster provided by Camp Lejeune for the occupants of the buildings.
 4. Prior to performing "Hot Work" (welding, cutting, etc.) or operating other flame-producing/spark producing

devices, a written permit shall be requested from the Fire Division. CONTRACTORS ARE REQUIRED TO MEET ALL CRITERIA BEFORE A PERMIT IS ISSUED. The Contractor will provide at least two (2) twenty (20) pound 4A:20 BC rated extinguishers for normal "Hot Work". All extinguishers shall be current inspection tagged, approved safety pin and tamper resistant seal. It is also mandatory to have a designated FIRE WATCH for any "Hot Work" done at this activity. The Fire Watch shall be trained in accordance with NFPA 51B and remain on-site for a minimum of 30 minutes after

As-Built


BLDG# G560	SHEET 1 OF 19
CONTRACT# N40085-13B-0433	
DWG. BY: DAVID DELEONARD	MACC# 13-0433
TITLE	USMC CAMP LEJEUNE
T-1	

- ① Demo existing tile carpet.
- ② Demo existing suspended ceiling system.
- ③ Demo existing wainscoting. To include baseboard and chair rail.
- ④ Black Board Paint to be covered and protected.
- ⑤ Demo built in wood cabinets
- ⑥ Demo wall.
- ⑦ Demo (3) doors and (4) windows for the installation of new glazed curtain wall assembly with door.
- ⑧ Demo folding wall assembly. To include partition walls.
- ⑨ Demo bar to include all plumbing and electrical.
- ⑩ Demo quarry tile flooring.
- ⑪ Demo paneling on wall
- ⑫ Demo all bathroom fixtures to include but not limited to, bathroom stalls, urinals, water closets, sinks, faucets and flush valves.
- ⑬ Demo bathroom complete to include but not limited to, all bathroom stalls, urinals, water closets, sinks, faucets and flush valves, and wall and floor tile.
- ⑭ Demo walk in refrigerator.
- ⑮ Demo all direct glue glass mirrors.

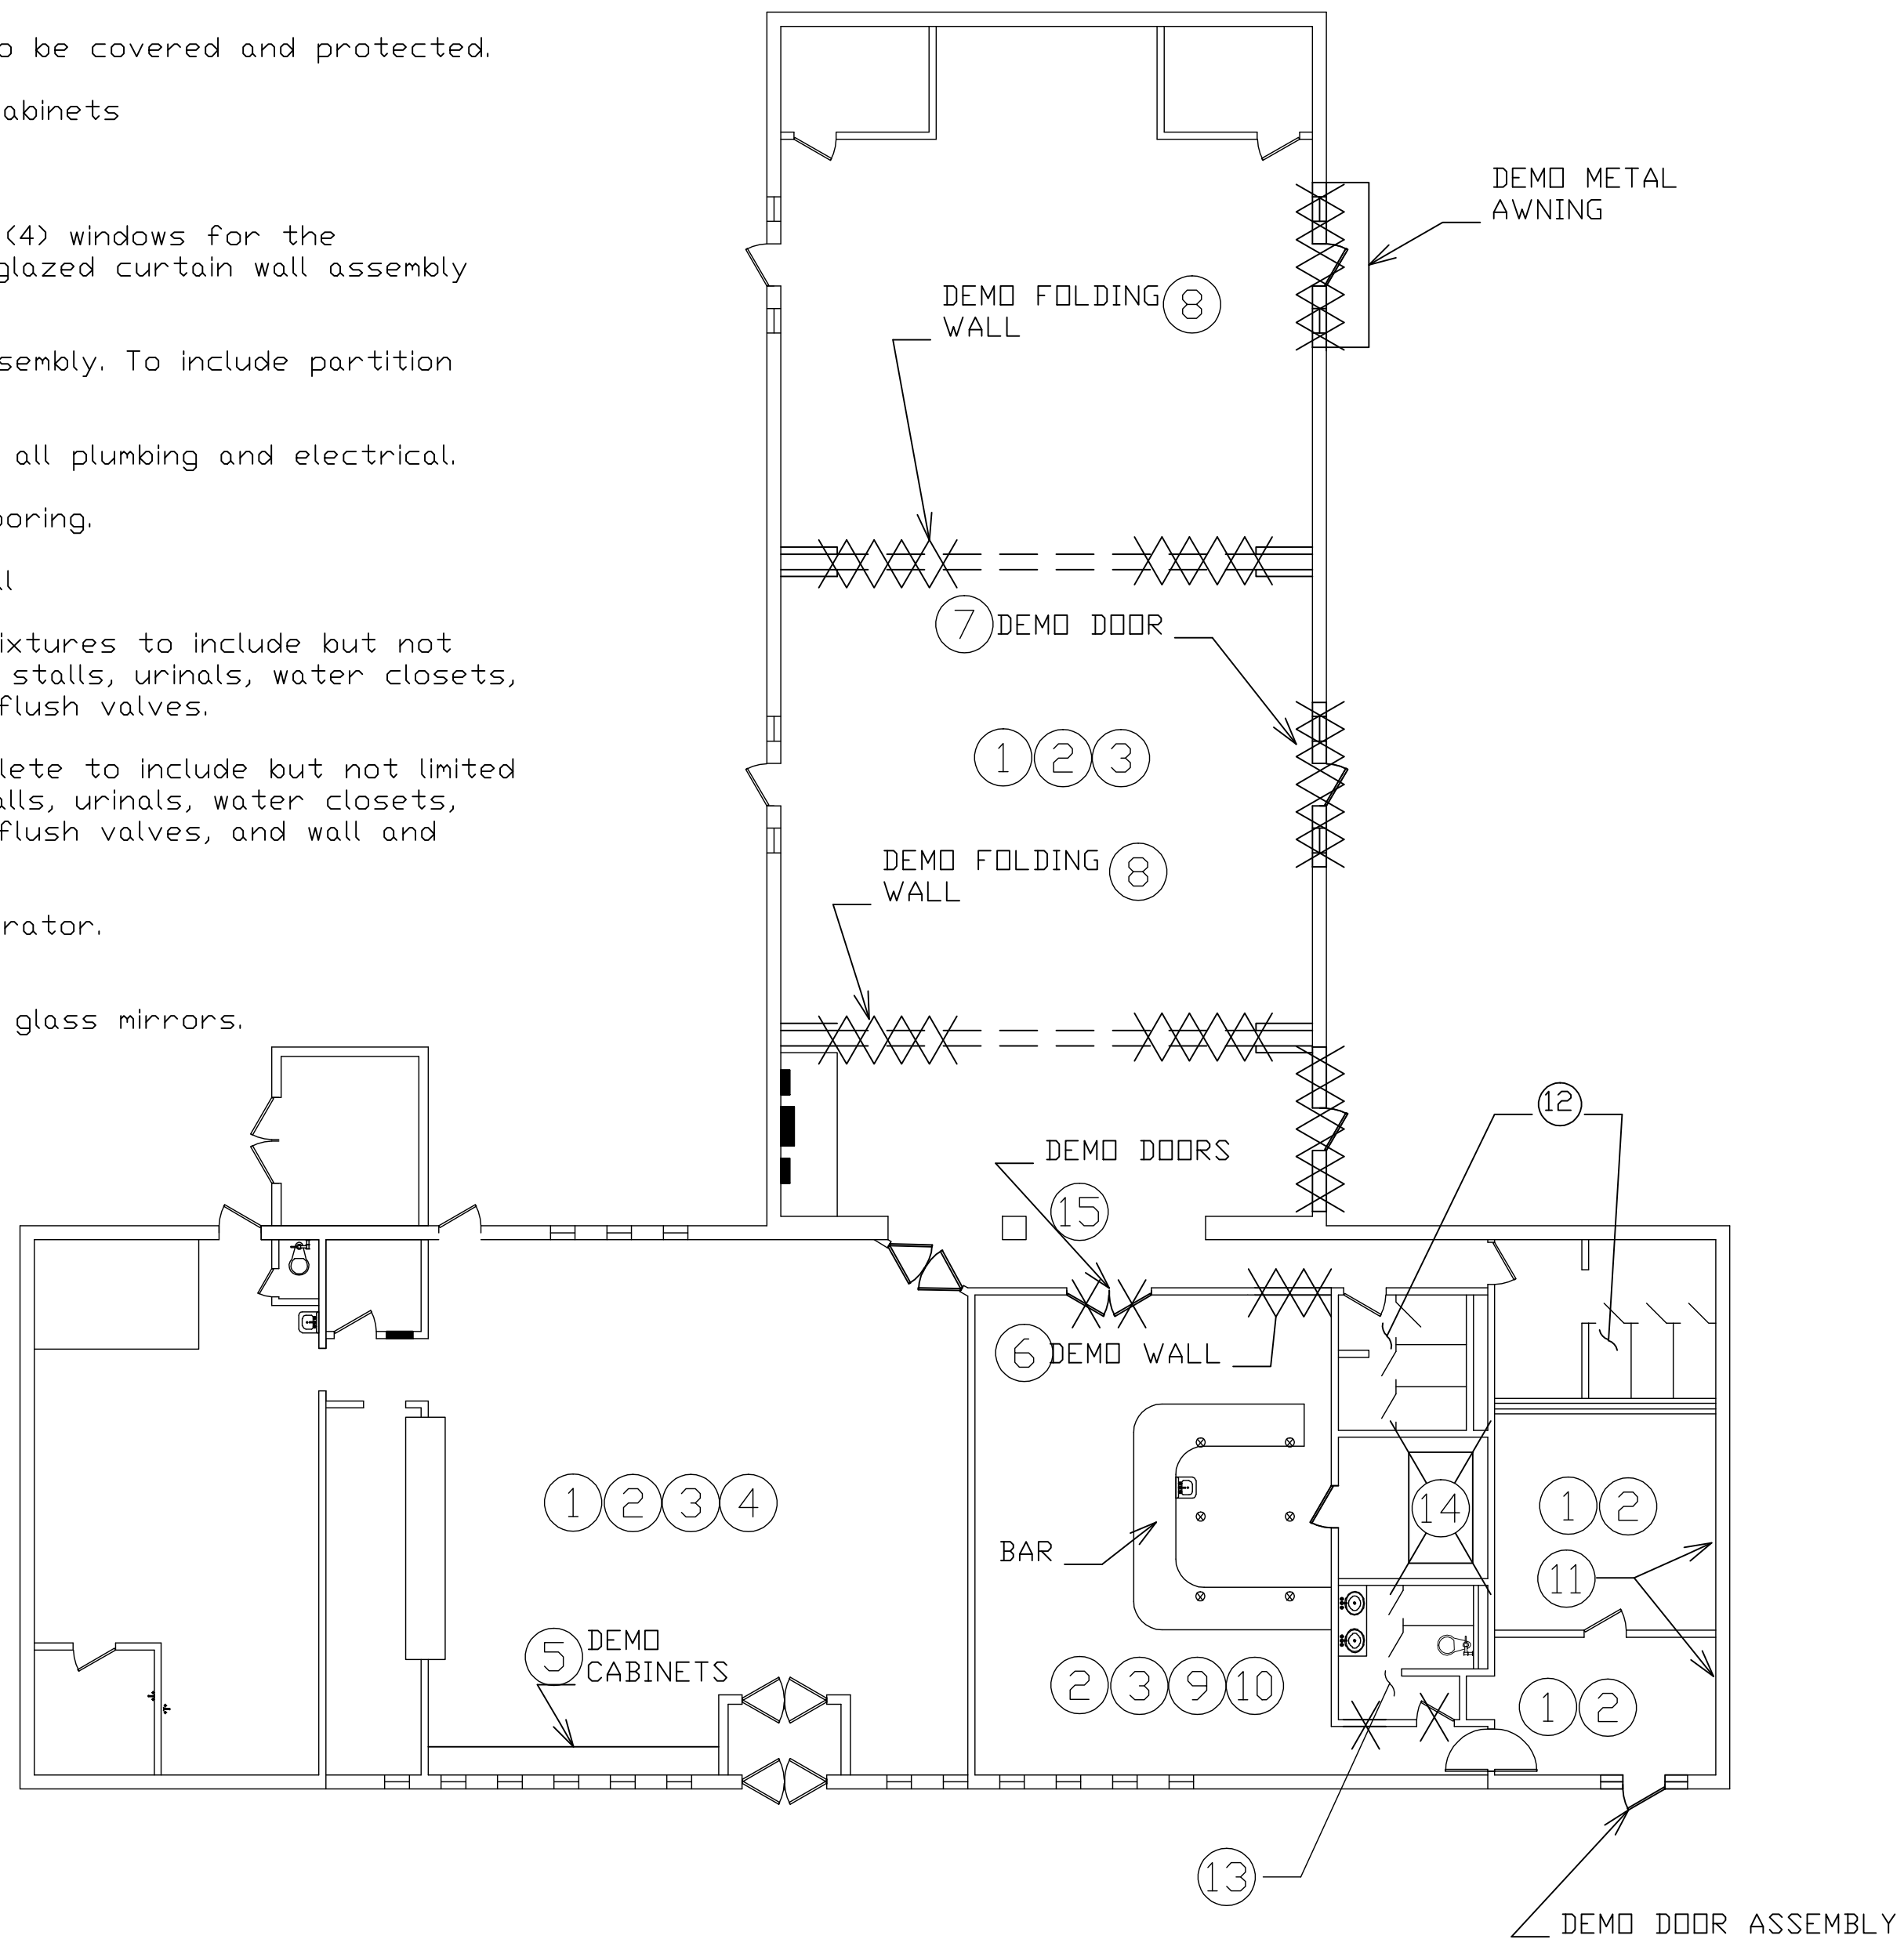

BLDG# G560	SHEET 2 OF 19
CONTRACT# N40085-13B-0433	
DWG: DAVID BELEDNARD	MACC# 13-0433
TITLE	USMC CAMP LIEBUNE
A-1	

Demo plan

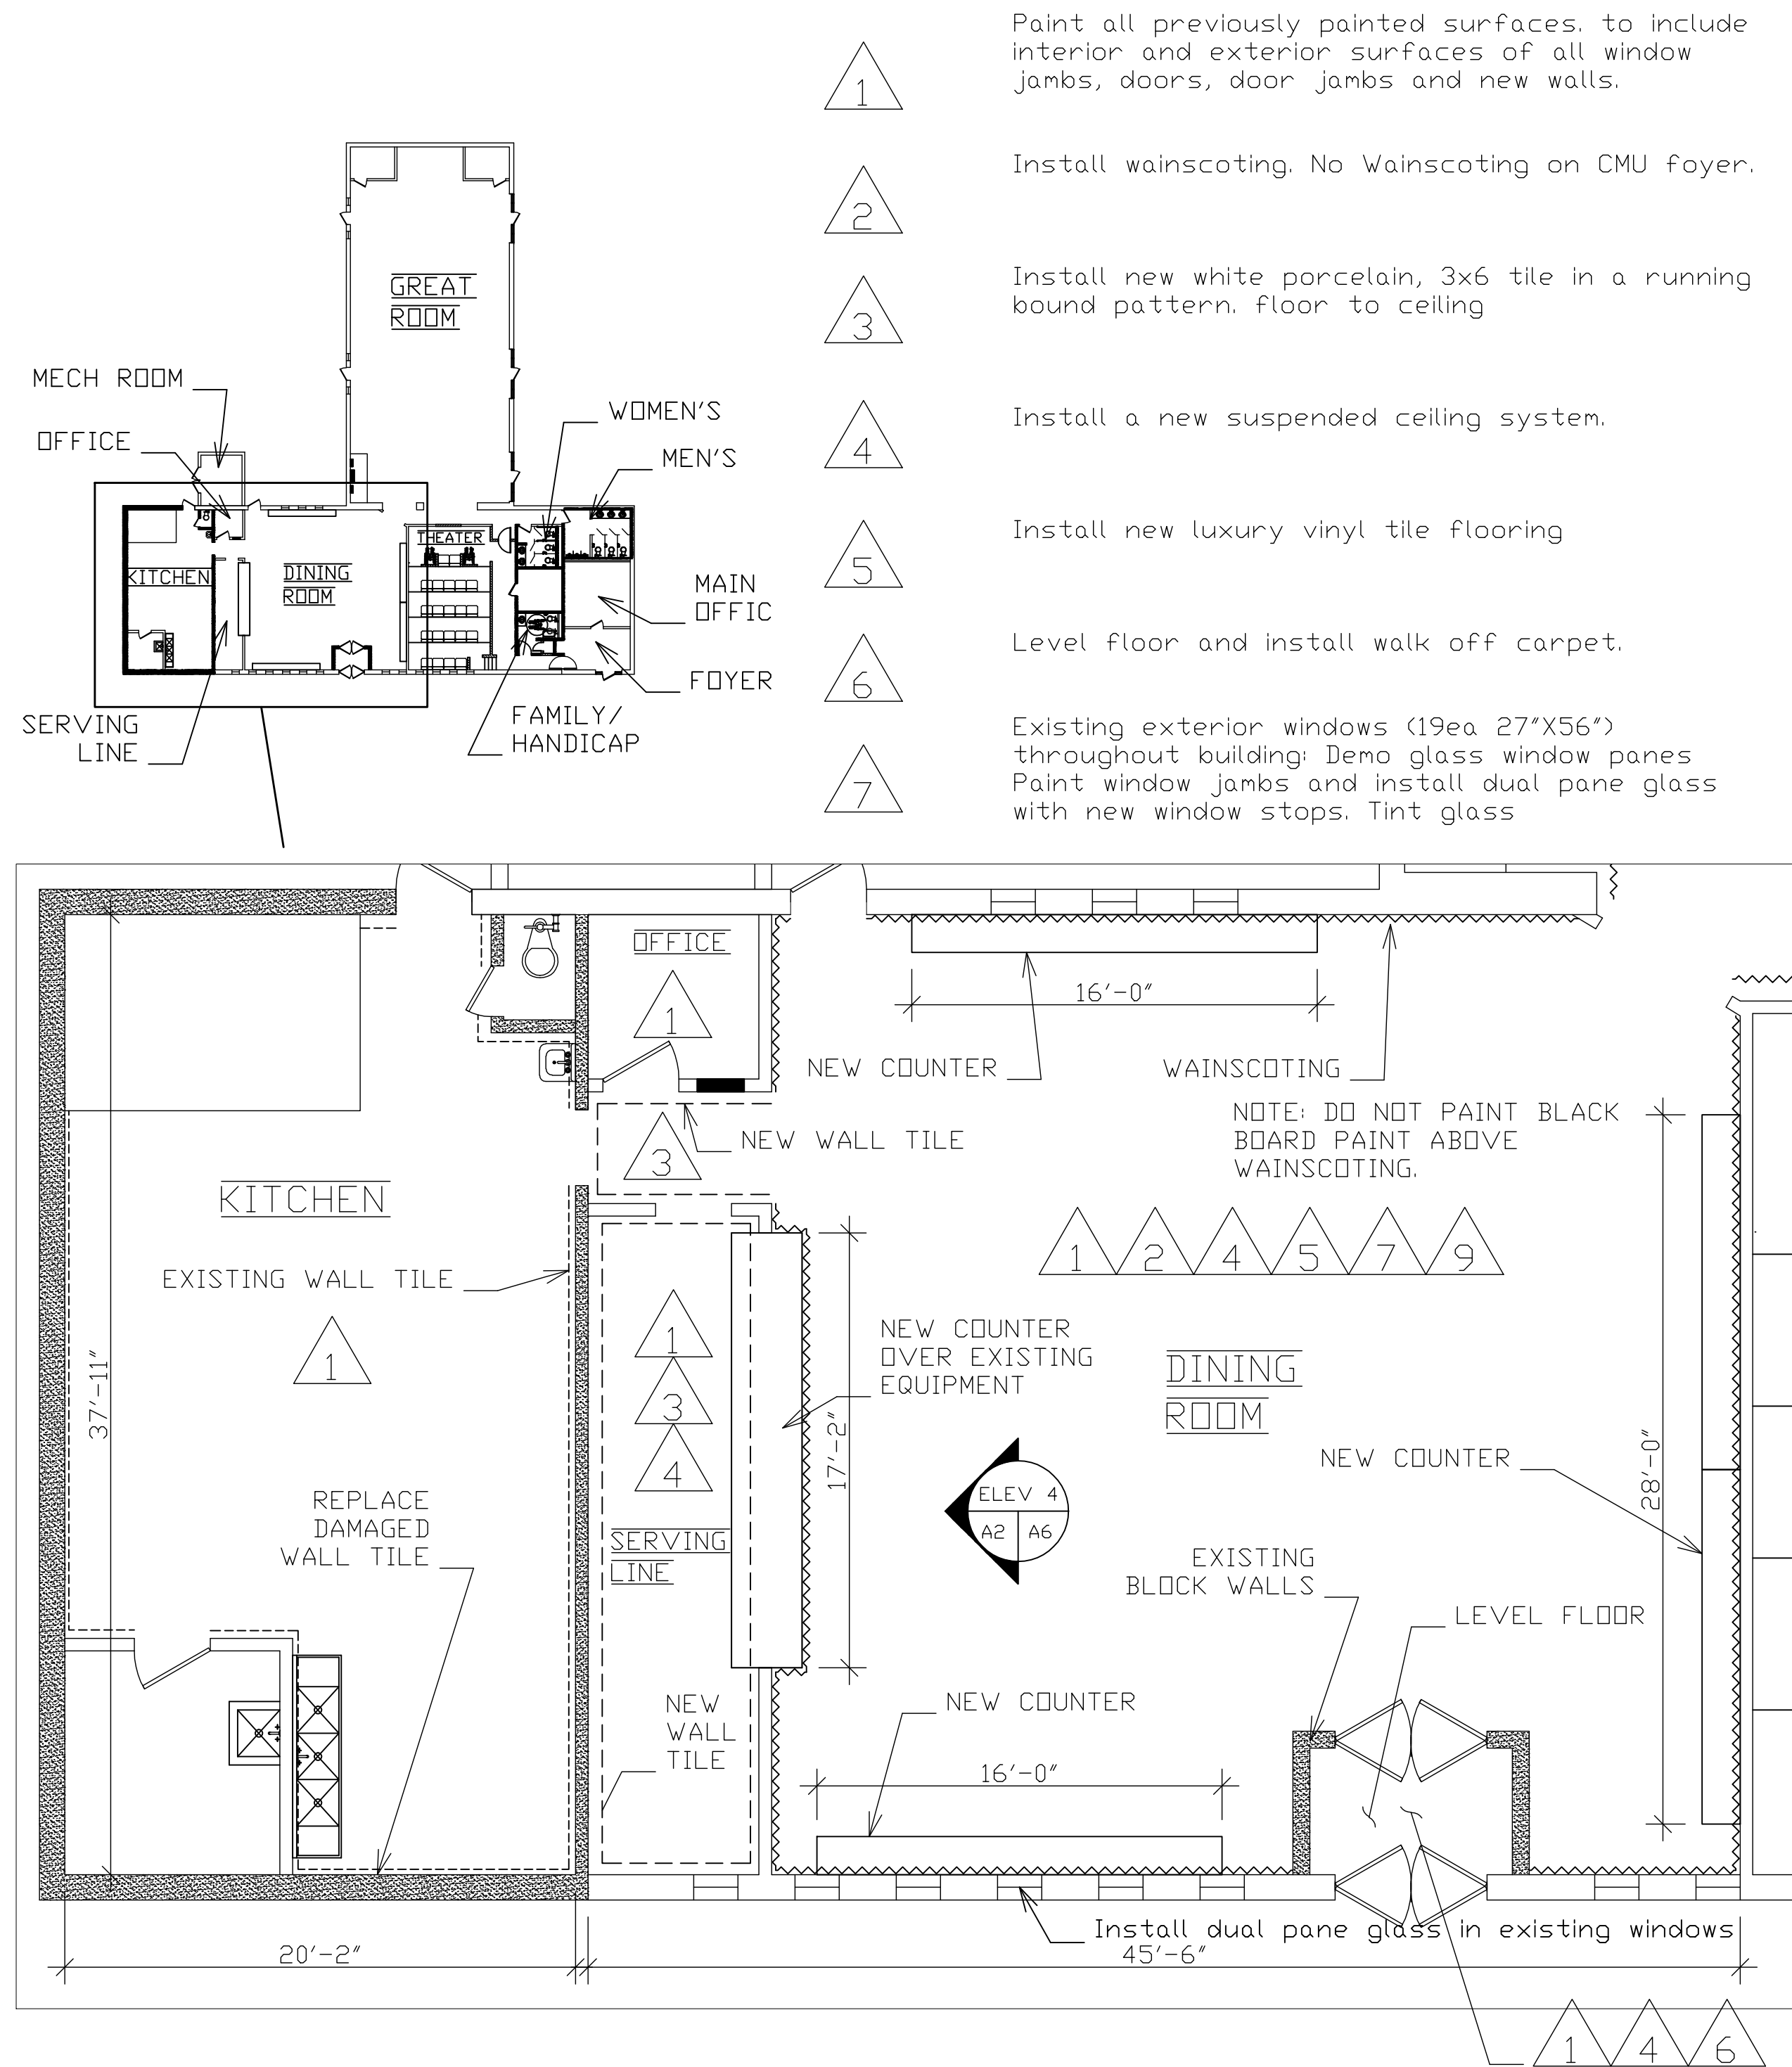

Paint all previously painted surfaces, to include interior and exterior surfaces of all window jambs, doors, door jambs and new walls.

Install wainscoting. No Wainscoting on CMU foyer.



Install new white porcelain, 3x6 tile in a running bound pattern, floor to ceiling

Install a new suspended ceiling system.

Install new luxury vinyl tile flooring


Level floor and install walk off carpet.

Existing exterior windows (19ea 27"X56") throughout building; Demo glass window panes Paint window jambs and install dual pane glass with new window stops. Tint glass

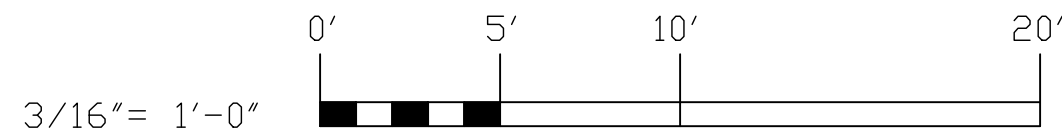


Serving line wall: straighten header and shear with cdx plywood. Fur wall if needed. Install gypsumboard with level 4 finish. Install wainscoting and paint gypsum board with the black board paint.

1. Counters:
 - 1.1. Frame: construct frame in accordance with A7.
 - 1.1.1. Cut out paneling and gypsum board for the installation of the 2 mounting brackets. Mount brackets to existing wall studs.
 - 1.1.2. Install new wainscoting, cut around tabs for mounting bracket.
 - 1.1.3. Install new frame and knee braces for counter tops. Prime and paint frames.
 - 1.2. Counters
 - 1.2.1. Install new solid surface with 1" thick profile. Mount counters on new frames and on existing stainless steel serving line equipment.
2. Wainscoting:
 - 2.1. Base 1x6 poplar
 - 2.2. Cap: 1x4 poplar with 1x2 poplar cap
 - 2.3. Basis of Design Fasade 4 ft. x 8 ft. Diamond Plate Bermuda Bronze Wall Panel
 - 2.1.1. Made of PVC, these panels are class A fire rated
 - 2.1.1.1. corrosion-resistant
 - 2.1.2. Install Matching edge trim, inside corner trim, divider trim and outside corner trims
 - 2.1.3. Install Matching peel and stick decorative laminate sheets to be used to cover outlet plates
 - 2.1.4. Overall Dimensions: 48-inches x 96.25-inches x .032-inch
 - 2.1.5. Color: Bermuda Bronze, color family metallics

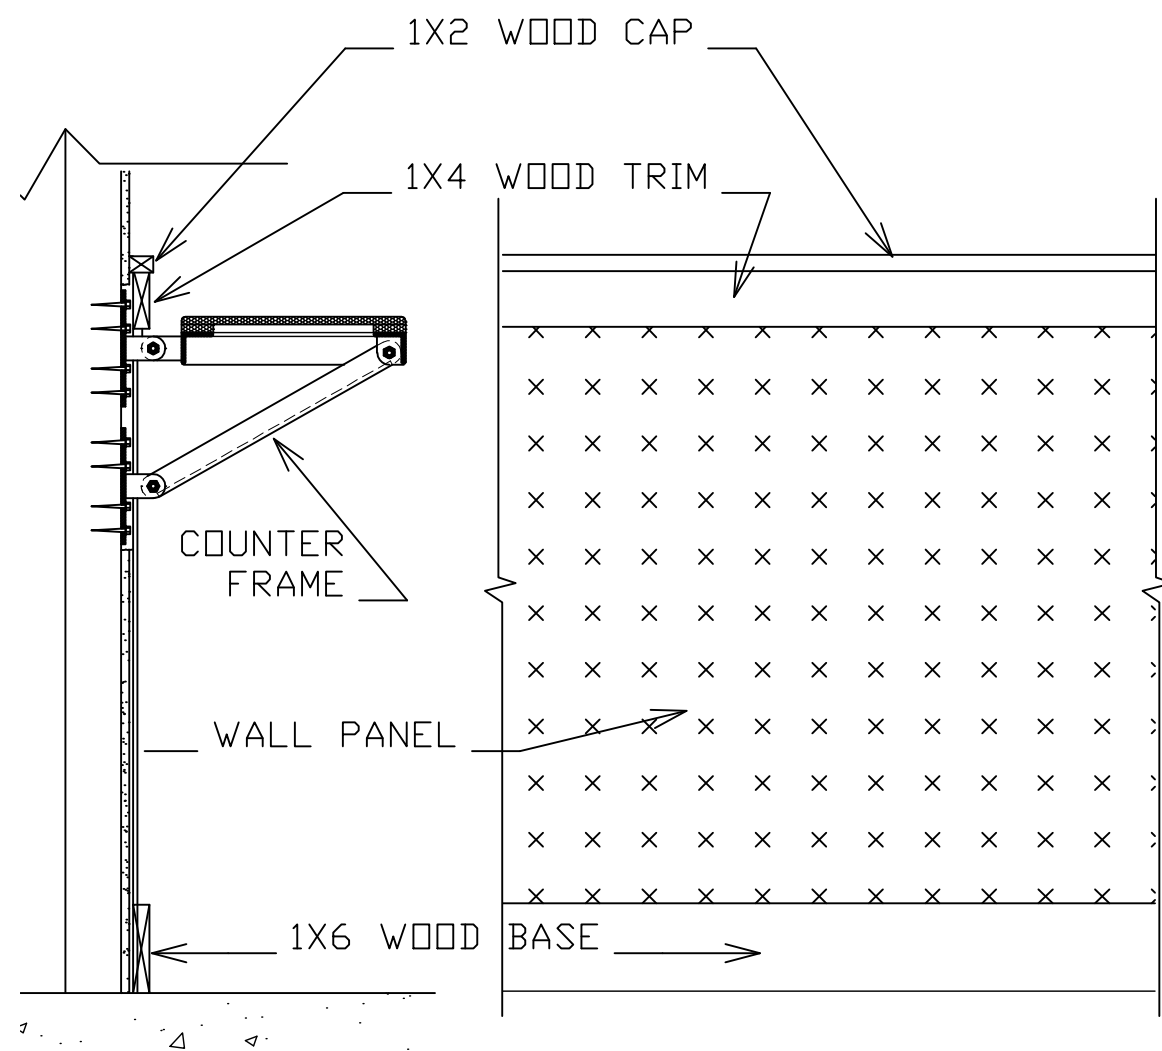

BLDG# G560	SHEET 3 OF 19
CONTRACT# N40085-13B-0433	
DWG: DAVID BELEDNARD	MACC# 13-0433
TITLE	
USMC CAMP LEBEUNE	
A-2	

PARTIAL FLOOR PLAN
Scope: Counter Wainscoting

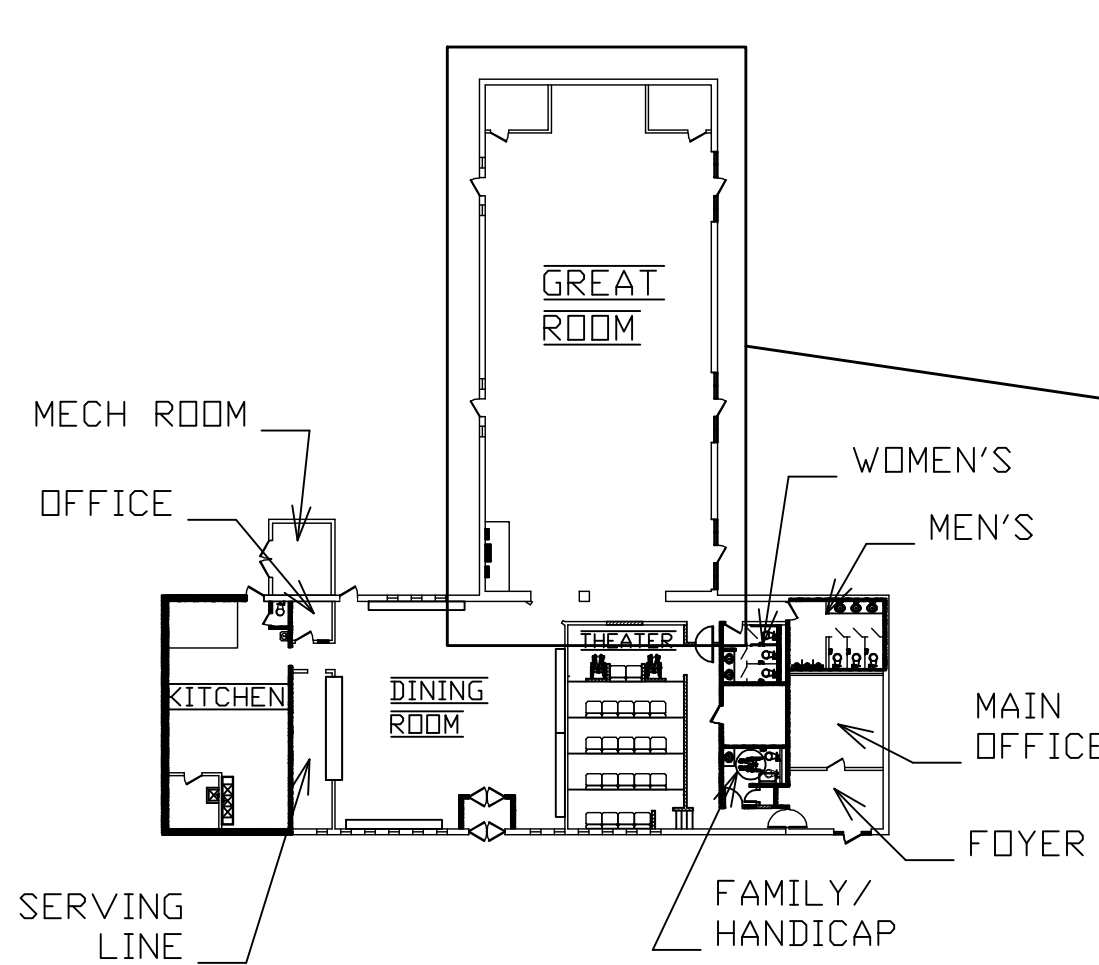

- 1 Paint all previously painted surfaces, to include interior and exterior surfaces of all window jambs, doors and door jambs.
- 2 Install wainscoting.
- 4 Install a new suspended ceiling system.
- 5 Install new luxury vinyl tile flooring. To include hallway to bathroom.
- 7 Existing exterior windows (19ea 27"X56") throughout building: Demo glass window panes Paint window jambs and install dual pane glass with new window stops. Tint glass



1. Preparation:

- 1.1. Repair all surfaces to provide a solid foundation for painting: Blistering, cracking, flaking and peeling or other deteriorated coatings shall be removed. Damaged areas such as, but not limited to, nail holes, cracks, chips, and spalls shall be repaired with suitable material to match adjacent undamaged areas. Edges of chipped paint shall be feather edged and sanded smooth.
- 1.2. All slick (enamel and other high gloss surfaces) surfaces shall be roughened and primed to ensure adhesion.
- 1.3. Remove all rust from metal surfaces.
- 1.4. Chemically remove and treat mold and mildew areas. Household bleach and water (one cup of water to one gallon of bleach) or a non-toxic, commercial cleaner designed to clean mold may be used. Not intended for mold remediation.
- 1.5. Apply interior / exterior finish surfacing compound as appropriate to any damaged surfaces to match surrounding finishes.
- 1.6. Secure any loose trim boards, siding, or moldings that are not damaged or rotten.
- 1.7. Replace any damaged or rotten trim boards, siding, or moldings, as quantified in the work area descriptions.
- 1.8. Replace any loose, damaged, cracked or missing caulking and glazing compound on windows, doors and other surfaces on the interior and exterior.
- 1.9. Paint all previously painted objects behind portable objects and surfaces mounted articles that can be readily detached by removal of fasteners, such as screws and bolts. All objects and articles shall be reinstalled.
- 1.10. Remove and reinstall all electrical/data switch and receptacle covers, to insure all previously painted surfaces are repainted.

2. Work Not Included

- 2.1. Do not include painting when factory-finishing or installer-finishing is specified for such items as (but not limited to) metal toilet enclosures, acoustic materials, finished mechanical and electrical equipment including light fixtures, switch-gear and distribution cabinets, and similar items of work.
- 2.2. Painting is not required on surfaces such as walls or ceilings in concealed spaces or inaccessible areas such as foundation spaces, furred areas, pipe chases, duct shafts and elevator shafts.

- 2.3. Finished metal surfaces, such as anodized aluminum, stainless steel, chromium plate, copper, bronze, and similar finishes shall not require painting unless otherwise indicated.
- 2.4. Do not paint any moving parts or fraying surfaces of operating units, equipment, valves, dampers, sensors, motor and fan shafts, sprinkler heads, or other similar items, unless otherwise indicated.
- 2.5. Do not paint over code-required labels, such as Underwriters' Laboratories or Factory Mutual, or any equipment identification, performance rating, name or nomenclature plates.
- 3. Prime:
 - 3.1. All new and repaired surfaces shall be primed with the appropriate primer per application.
- 4. Paint:
 - 4.1. All paints shall be factory-mixed and shall be ready for application directly from the manufacturer's original container. Mixing and thinning in the field shall be allowed only with prior approval of the OICC.
 - 4.2. Finished surfaces shall be free from runs, drops, ridges, waves laps brush marks and variations in colors.
 - 4.3. Apply additional coats when undercoats, stains or other conditions show through final paint or finish coat, until paint film is of uniform finish, color and appearance.
 - 4.3.1. Interior Walls: Apply (2) coats of egg-shell / satin finish acrylic latex paint.
 - 4.3.2. Trim and doors: Apply (2) coats of semi-gloss acrylic latex paint to all new and existing doors. Paint all interior and exterior surfaces on previously painted exterior doors.
 - 4.3.3. Metal: Apply (2) coats of an oil base semi gloss paint.
 - 4.3.4. Masonry: Apply (2) coats of elastomeric masonry paint.
 - 4.3.5. Paint all previously painted surfaces in the 3 existing stairwells, landings and safety rails. To include but not limited to metal stringers, metal balusters, metal nosing, metal risers and all wood trim.
 - 4.3.6. Sand and remove all scuff marks, stain and apply 3 coats of semi-gloss polyurethane to Oak caps on pony wall and oak handrails.

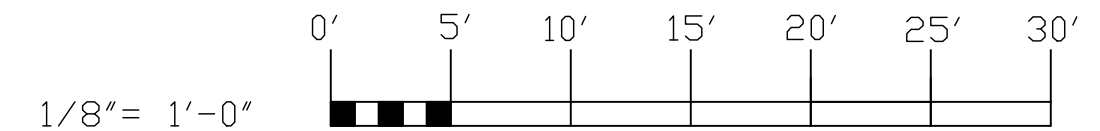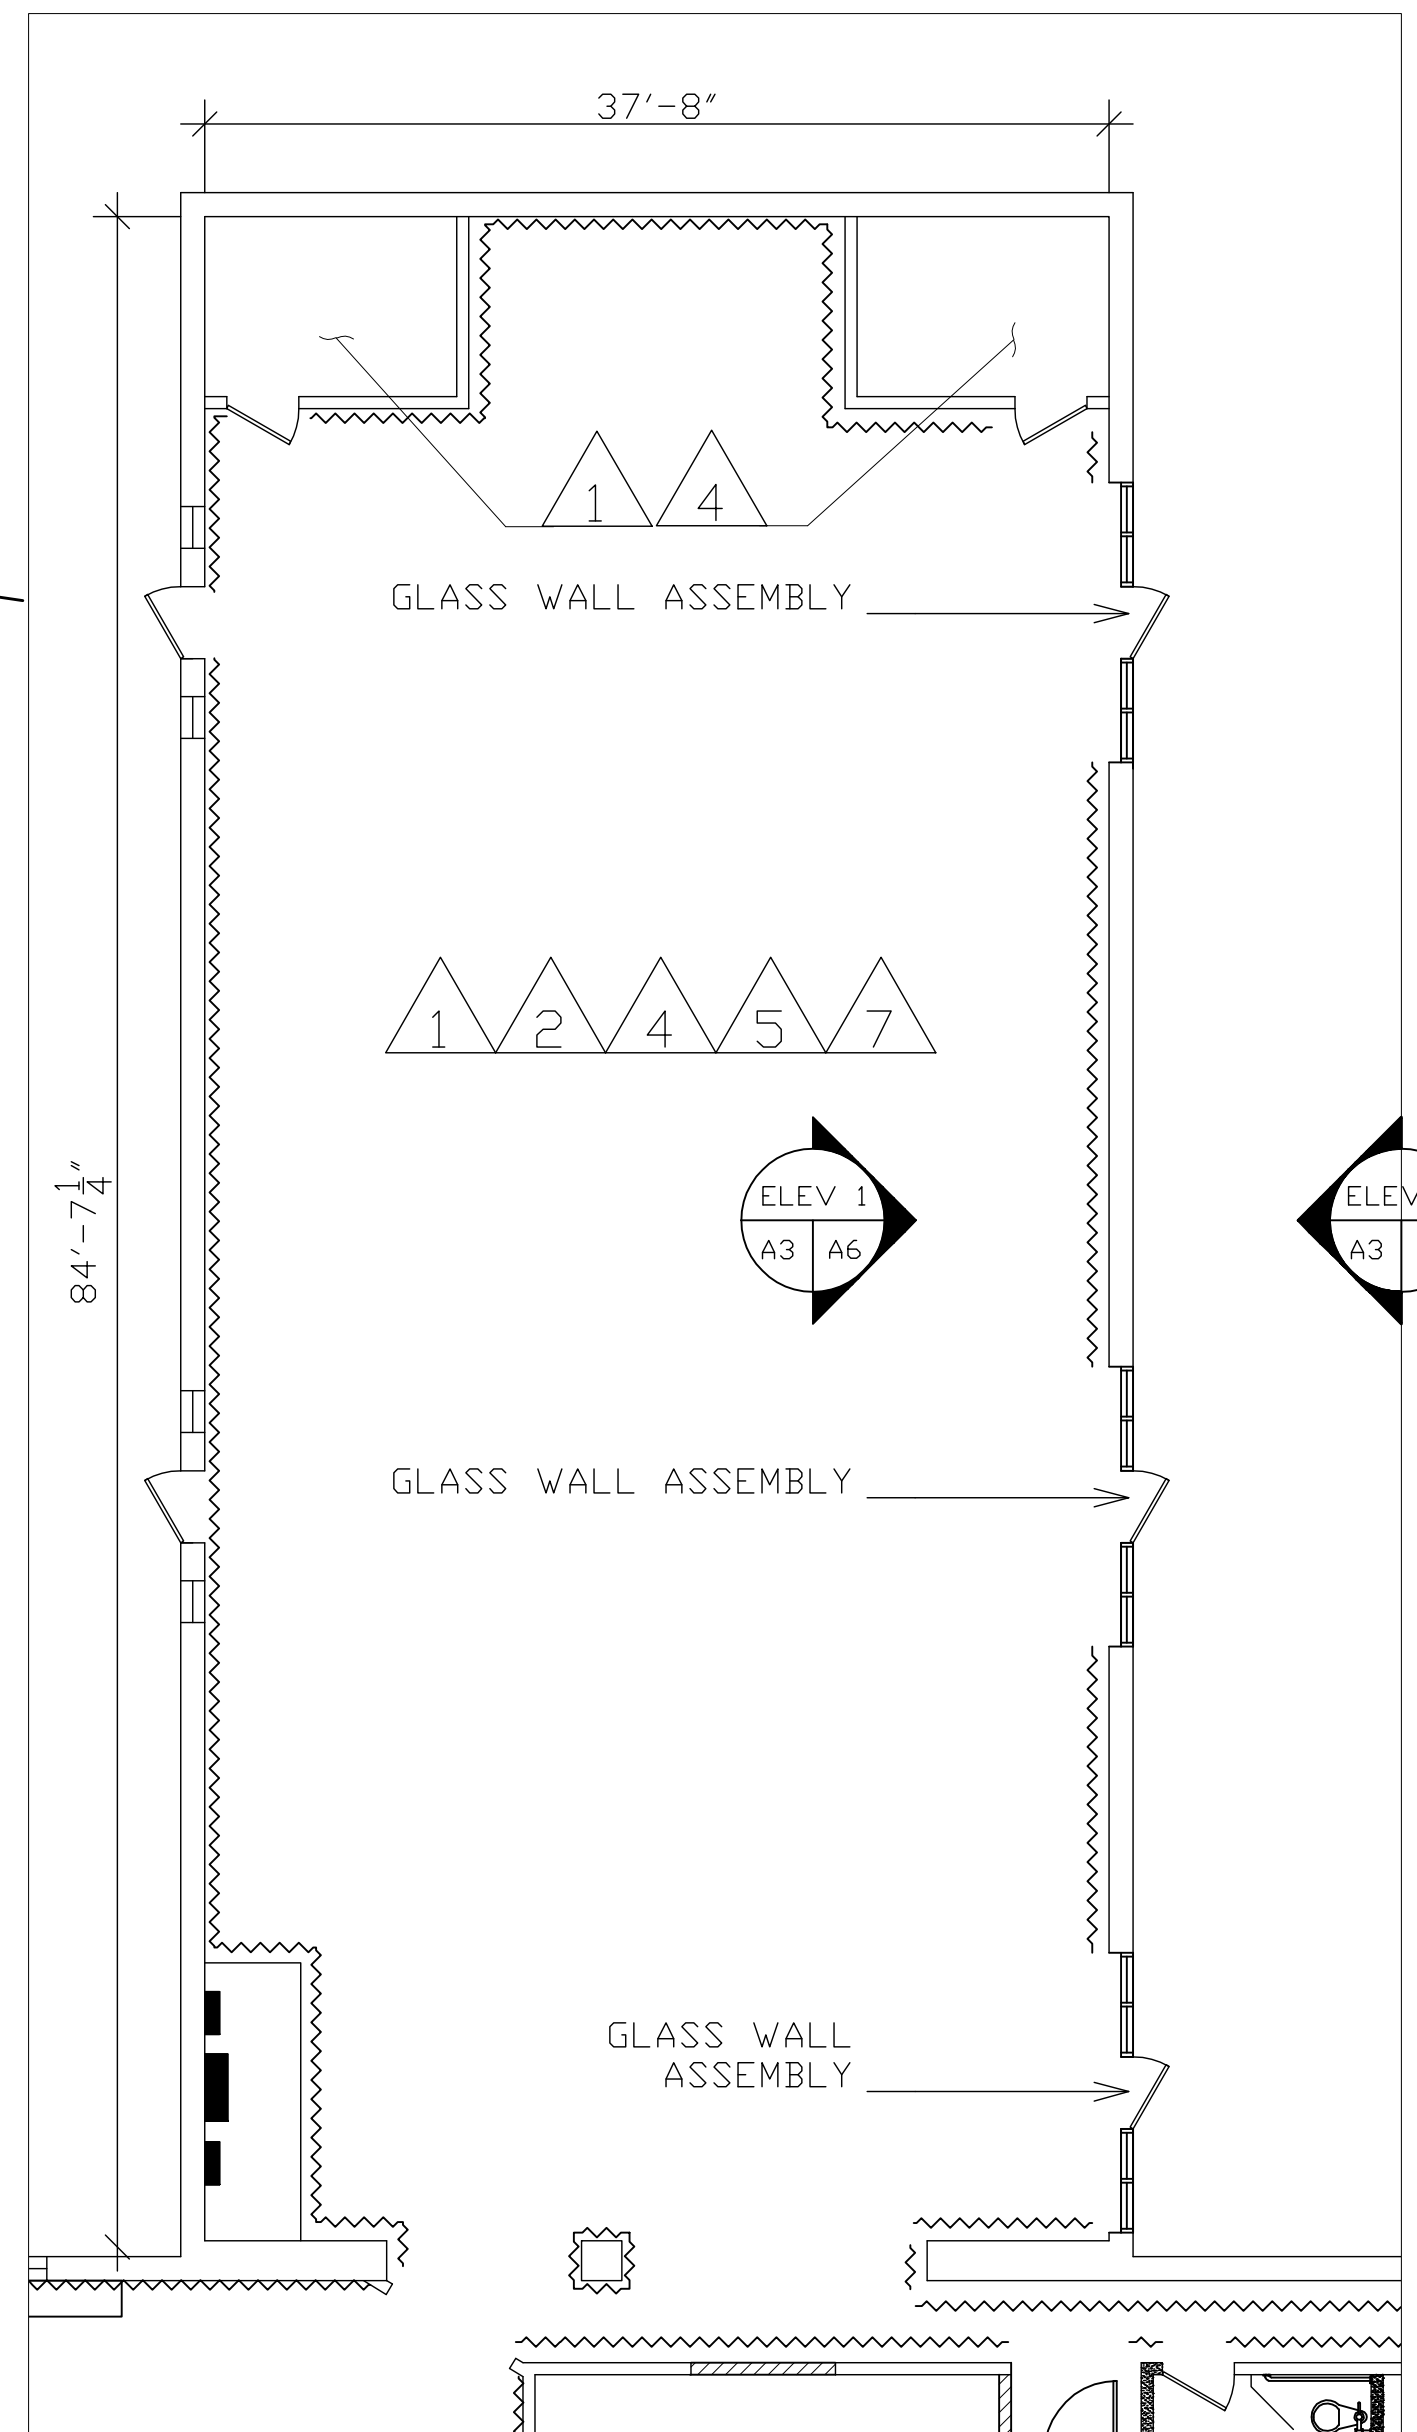





BLDG# G560	SHEET 4 OF 19
CONTRACT# N40085-13B-0433	
DWG: DAVID BELEDNARD	MACC# 13-0433

TITLE

USMC CAMP LEBEUNE

A-3

PARTIAL FLOOR PLAN
Scope: Paint

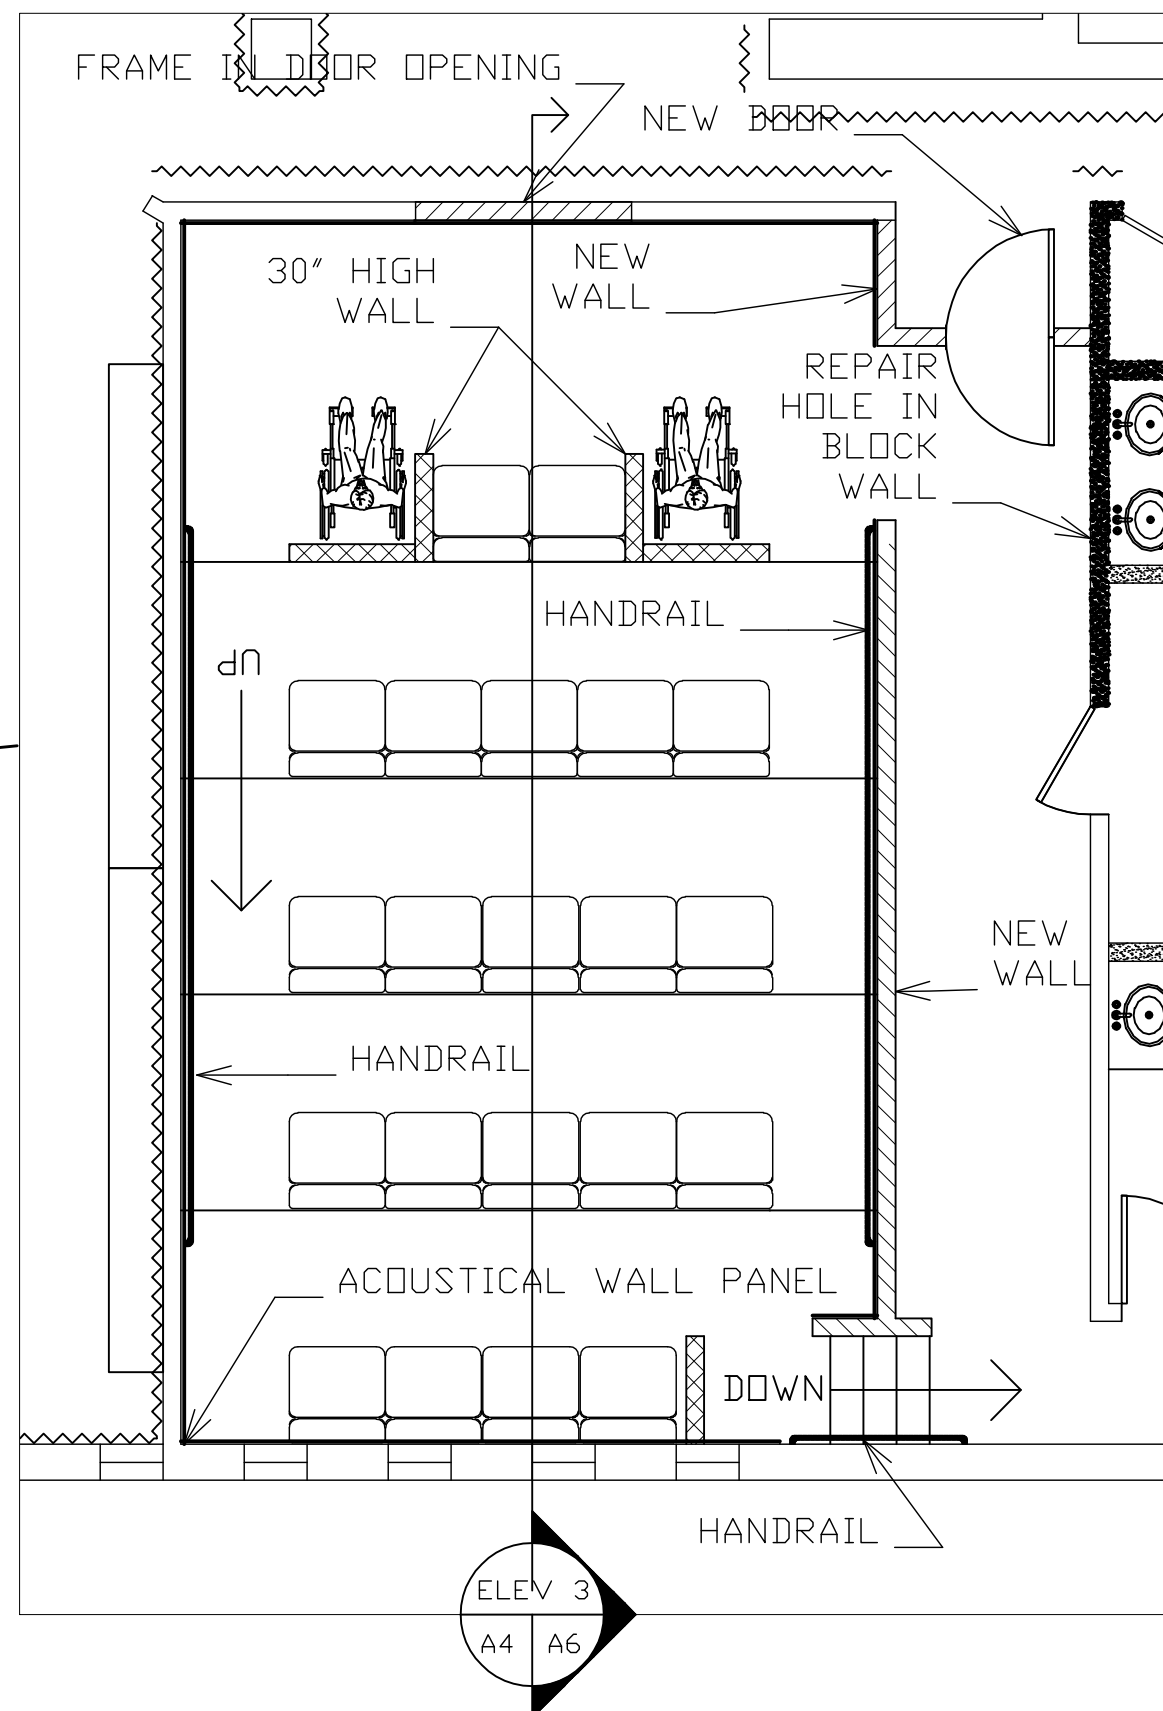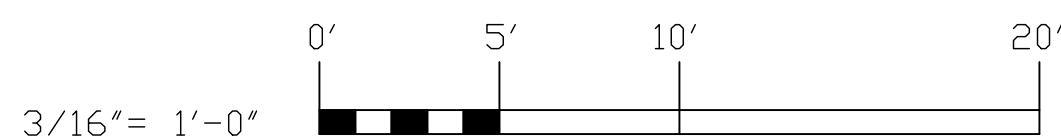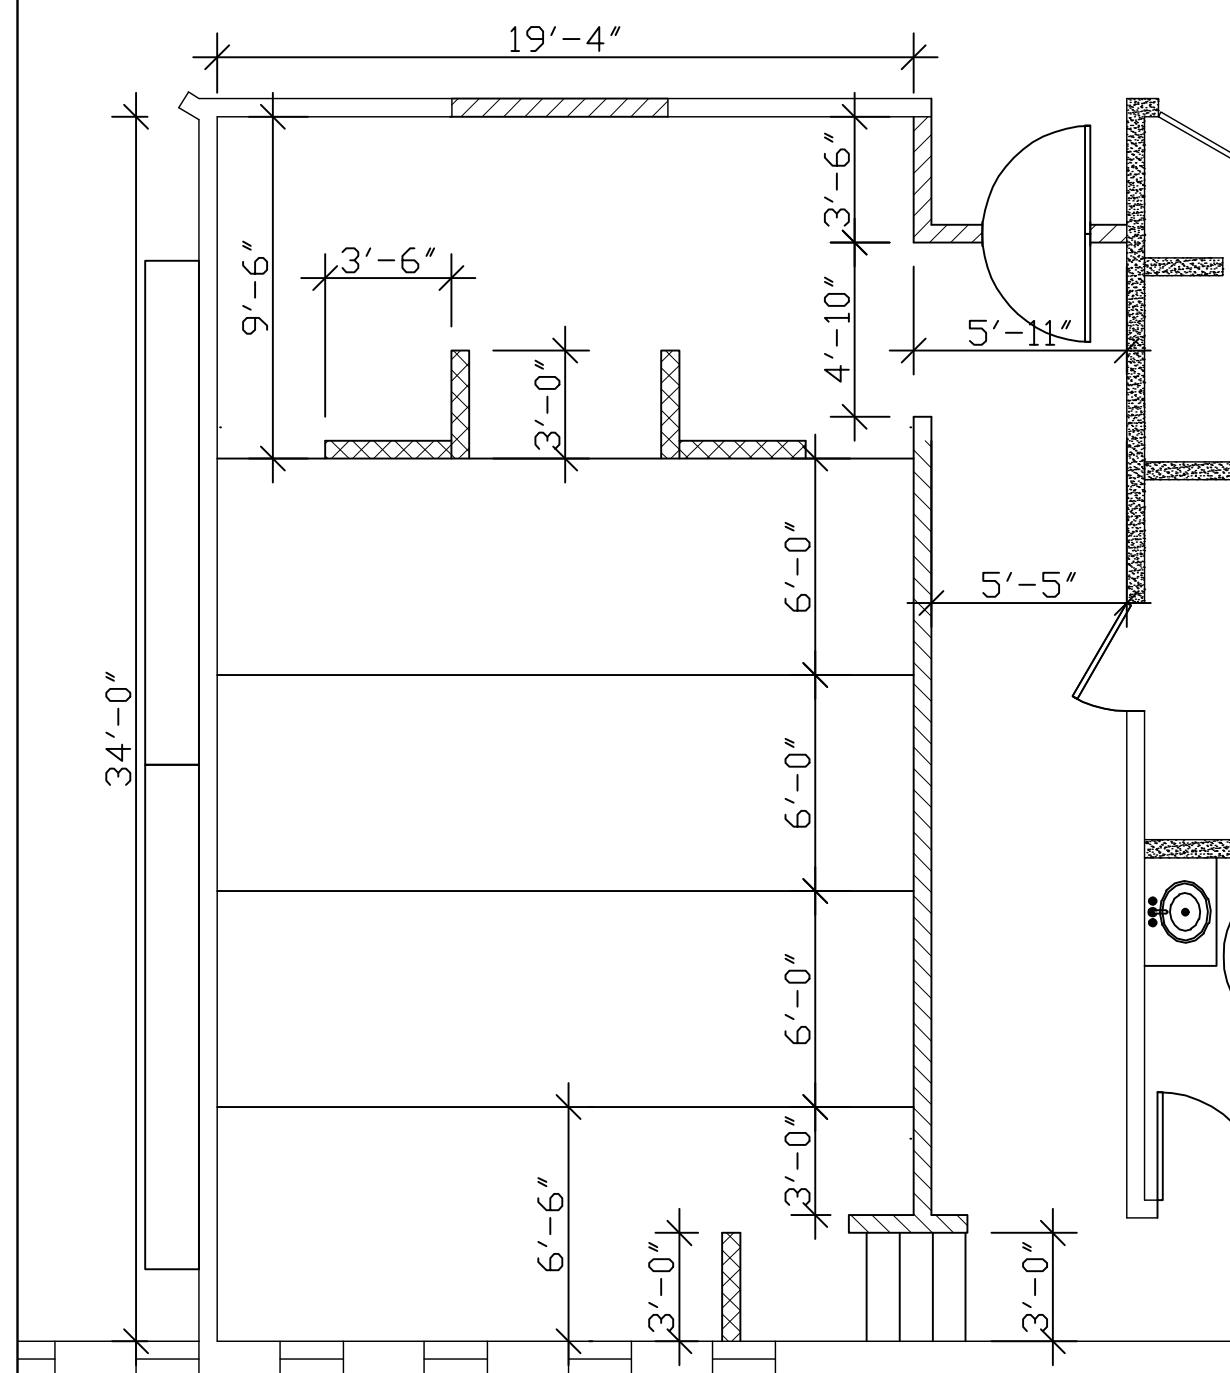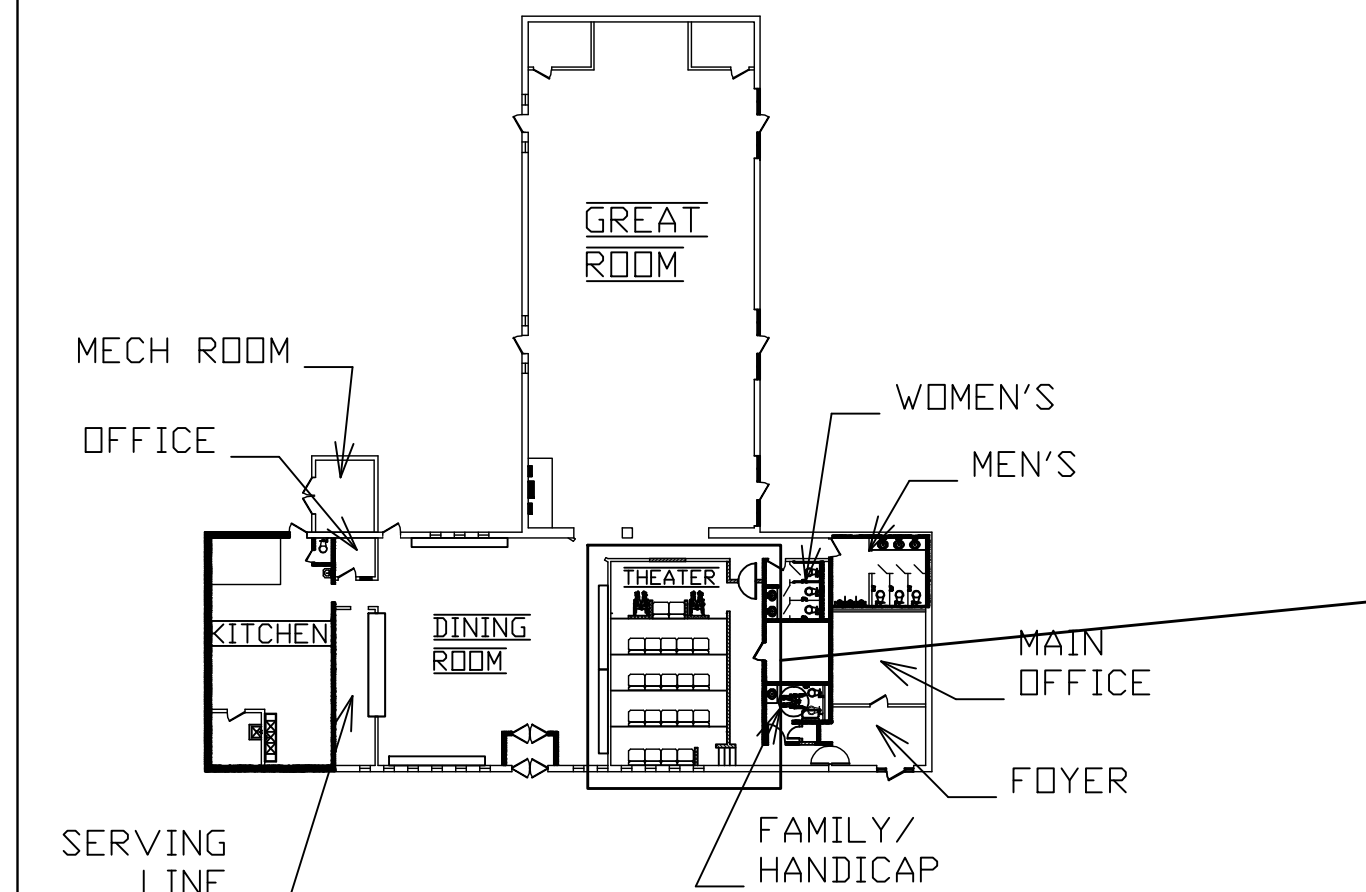

1. Construct of new partition wall:
 - 1.1. The new walls: 2x4 wood studs, 16" on center.
 - 1.1.1. Bottom Plate: pressure treated 2x4
 - 1.1.2. Top plate: doubled
 - 1.1.3. Secure wall to floor minimum 4'-0" oc.
 - 1.2. The new walls shall extend a minimum of 2" above existing ceiling.
 - 1.3. Pony Walls: 2'-6" high with an 1x6 oak trim cap.
 - 1.4. Install 5/8-inch fire retardant gypsum board.
 - 1.4.1. Tape and finish the gypsum board to a level 4 finish (smooth finish).
 - 1.4.2. All drywall sanding shall be done with a drywall dustless vacuum system to limit airborne dust.
2. Construct platform in the theater room.
 - 2.1. rise: 6.25
 - 2.2. run: 6'-0"
 - 2.3. top platform 6'-6"
 - 2.4. headers: (2) 2x6
 - 2.5. Posts: 4x4 4'-0" oc
 - 2.5.1. Notch post 1/2" for header to rest on.
 - 2.5.2. Fasteners: 1/2 x 8" bolts
 - 2.6. Joist: 2x6 16" oc
 - 2.6.1. Fasteners: H4 Simpson hurricane ties
 - 2.7. Sheathing: 3/4" BC plywood
3. Steps:
 - 3.1. Rise 6.25"
 - 3.2. Run: 11"
4. Handrails: aluminum, 1.5" dia. with turn backs.

1

4

6

7

10

Paint all previously painted surfaces, to include interior and exterior surfaces of all window jambs, doors, door jambs and new walls.

Install a new suspended ceiling system. Theater only; paint suspended ceiling system black.

Install new carpet


Existing exterior windows (19ea 27"X56") throughout building; Demo glass window panes. Paint window jambs and install dual pane glass with new window stops. Tint glass

1. High Abuse Acoustical Wall Panels


- 1.1. The contractor shall install high abuse acoustical wall panels on the (4) walls of the theater. Basis of design; Sound Quality® Architectural Acoustical Wall Panels by Sound Seal®, S-4000 wall panel.
 - 1.1.1. Panels shall run from floor to ceiling.
 - 1.1.2. All edges shall have a finished appearance.
- 1.2. 1-1/16" high abuse panels designed for use in gymnasiums, schools, prisons, and recreation centers.
- 1.3. High impact 1/16" thick perforated co polymer underlayment over a 1-inch thick 6-7 PCF fiberglass absorber core, wrapped in a fabric.
- 1.4. NRC Rating .80-.90
- 1.5. Class "A" fire rating per ASTM E-84
- 1.6. Secure to wall in accordance with manufacture's recommendations.

BLDG# G560	SHEET 5 OF 19
CONTRACT# N40085-13B-0433	
DWG. DAVID BELEDNARD	MACC# 13-0433
TITLE	USMC CAMP LIEBUNE
A-4	


PARTIAL FLOOR PLAN
Scope: Theater

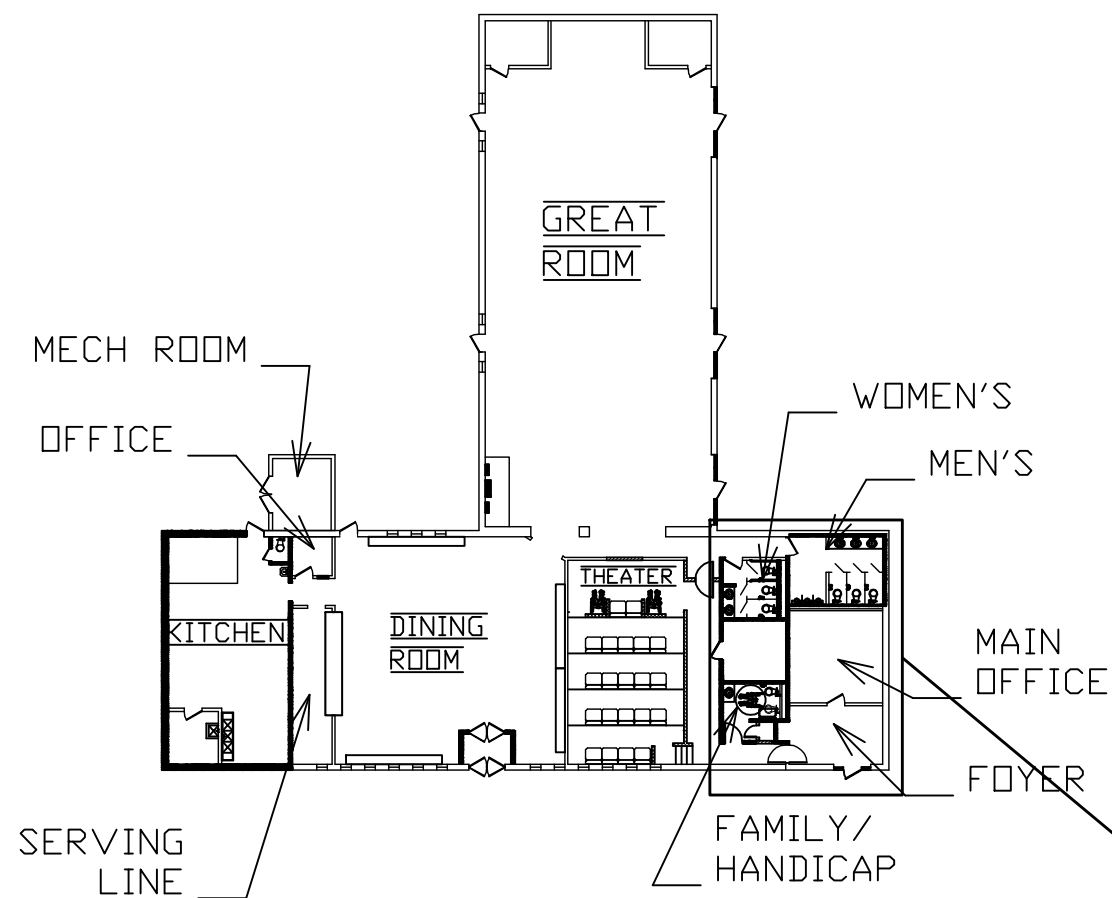

- 1 Paint all previously painted surfaces, to include interior and exterior surfaces of all window jambs, doors, door jambs and new walls.
- 3 Install new white porcelain, 3x6 wall tile in a running bound pattern, with 2x2 porcelain floor tile.
- 4 Install a new suspended ceiling system.
- 5 Install new luxury vinyl tile flooring.
- 6 Install new carpet
- 7 Install 12x12x $\frac{1}{8}$ vinyl tile.
- 8 Install new bathroom fixiuures.
- 9 Install new toilet partitions and unrial screens in the women's and men's restroom.

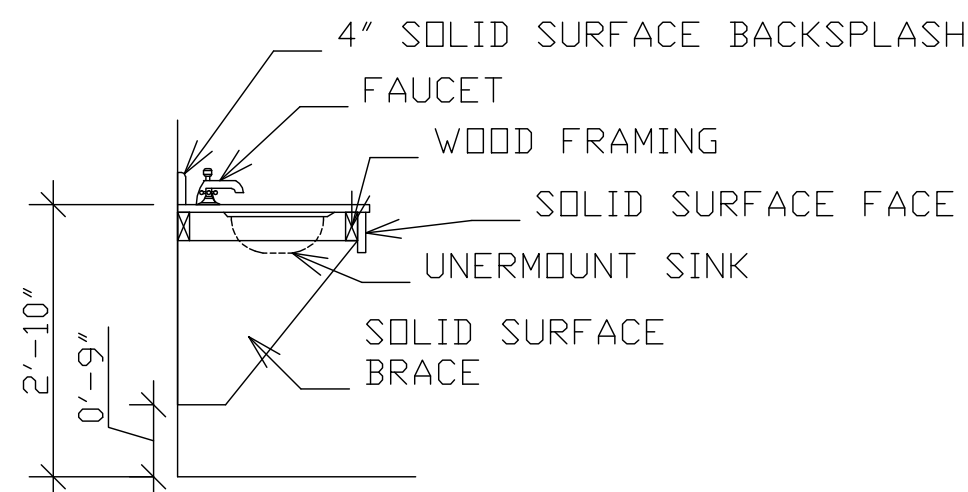

- Bathroom vanity
1. Solid surface counter top, supports and trim face
 - 1.1. Basis of design: Corian solid surface material

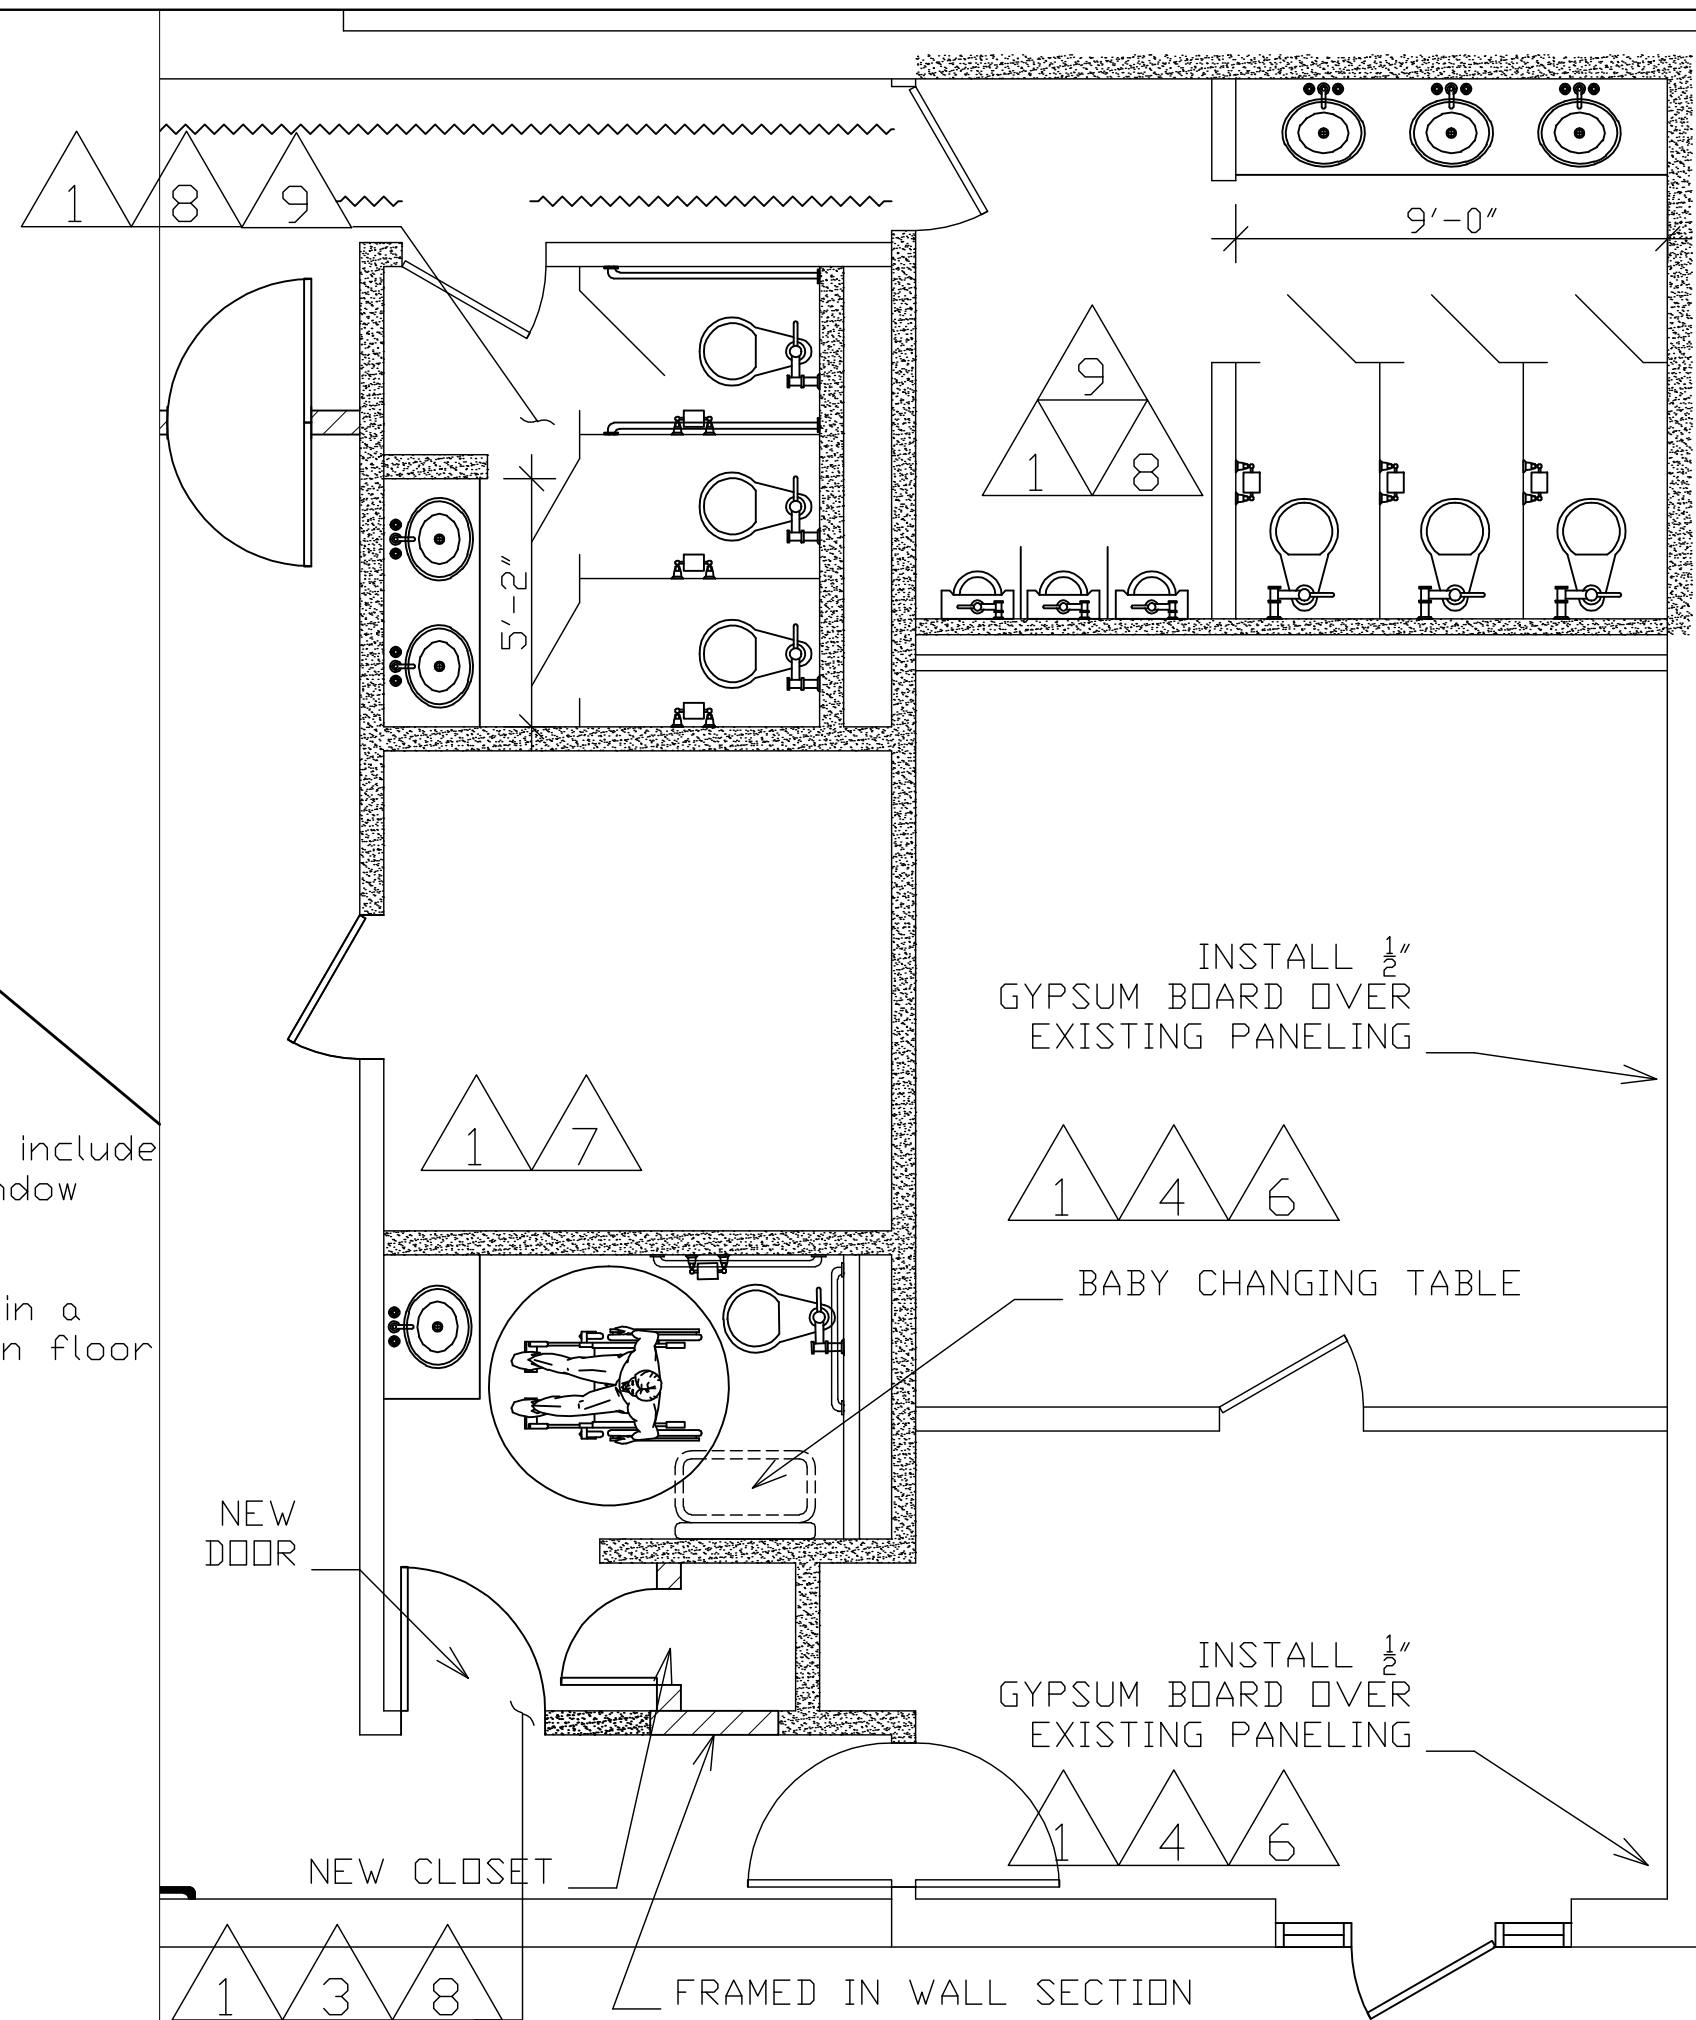

- Handicap/family bathroom only.
1. Bond Coat:
 - 1.1. Install bond coat to conform to TCA Handbook for Ceramic Tile Installation.
 - 1.2. Bond coat shall be a prepackaged dry-mortar mixture latex modified thin set.
 2. Floor Tile:
 - 2.1. Install 2"x 2 mosaic porcelain floor tile.
 - 2.2. Floor tiles shall be slip resistant with a coefficient friction, when tested in accordance with ASTM C1028, required level of performance. With a rating of not less than 0.6
 3. Wall Tile
 - 3.1. 3x6 ceramic wall tile
 - 3.2. 60" high wainscoting
 - 3.3. Running Bond pattern.
 - 3.4. External corners including edges: Use bullnose shapes.
 - 3.5. Internal corners: Use cove shapes.
 - 3.6. Base to floor internal corners: Use special shapes providing integral cove vertical and horizontal joint.

1. Toilet Partitions:
 - a. Partitions shall be fabricated from High Density Polyethylene (HDPE) resins; polymer resins compounded under high pressure forming a single component which is waterproof, nonabsorbent and have a self-lubricating surface that resists marks from pens, pencils, markers and other writing instruments.
 - b. Install partitions rigid, straight, plumb, and level manor, with plastic laid out in accordance with manufacturer's installation instructions.
 - c. All doors and panels to be mounted at 14" above finished floor.
 - d. Pilasters shall be 82" high (standard) and supported with heavy duty extruded aluminum headrail.
 - a. Clearance at vertical edges of doors shall be uniform top to bottom and shall not exceed 3/8".
 - b. No evidence of cutting, drilling, and/or patching shall be visible on the finished work.
 - c. Finished surfaces shall be cleaned after installation and be left free of all imperfections.
2. Bathrooms stall dispenser/receptacles:
 - a. All stalls shall have:
 - i. (2-roll) stainless steel toilet paper dispenser
 - ii. Stainless steel toilet seat cover dispenser
 - b. All Women's stalls shall have a stainless steel sanitary napkin waste receptacle.
3. Repair/ refinish all surfaces damaged by the removal of the existing partitions.




SPECIFICATIONS:

1. High Density Polyethylene (HDPE) resins. Partitions shall be fabricated from polymer resins compounded under high pressure, forming a single component which is waterproof, nonabsorbent and has a self-lubricating surface that resists marks from pens, pencils, markers and other writing instruments.
 - a. Fire Resistance: Partition materials shall comply with the following requirements, when tested in accordance with the ASTM E 84: Standard Test Method for Surface Burning Characteristics of Building Materials:
 - i. Smoke Developed Index: Not to exceed 450
 - ii. Flame Spread Index: Not to exceed 75
 - c. Material Fire Ratings:
 - i. National Fire Protection Association (NFPA): Class B
 - ii. International Code Council (ICC): Class B
2. Doors, panels, and pilasters shall be 1" thick High Density Polyethylene (HDPE) resins. All edges shall be rounded to a radius.
3. Door hardware shall be fabricated from heavy-duty extruded aluminum (6463-T5 alloy) with a bright dip anodized finish.
4. Fasteners shall be stainless s.


Restroom Schedule			
Women's	2	Mirrors	Bobrick b-165 1830
	1	Soap Dispenser	Bobrick B-4112
	2	Toilet Paper Holder	Bobrick B-4288
	2	54" SS Grab Bar	Match existing
		(3) stall bathroom partitions	High Density Polyethylene
Men's	3	Mirrors	Bobrick b-165 1830
	2	Soap Dispenser	Bobrick B-4112
	3	Toilet Paper Holder	Bobrick B-4288
		(3) stall bathroom partitions	High Density Polyethylene
Handicap/Family Bathroom	2	urinal partition	High Density Polyethylene
	1	Mirror	Bobrick b-165 1830
	1	Soap Dispenser	Bobrick B-4112
	1	Toilet Paper Holder	Bobrick B-4288
	1	42" SS Grab Bar	
	1	36" SS Grab Bar	
	1	Baby Changing Table	

BLDG# G560	SHEET 6 OF 19
CONTRACT# N40085-13B-0433	
DWG. DAVID BELEDNARD	MACC# 13-0433
TITLE	USMC CAMP LEBUENE
A-5	


PARTIAL FLOOR PLAN
Scope: Bathrooms

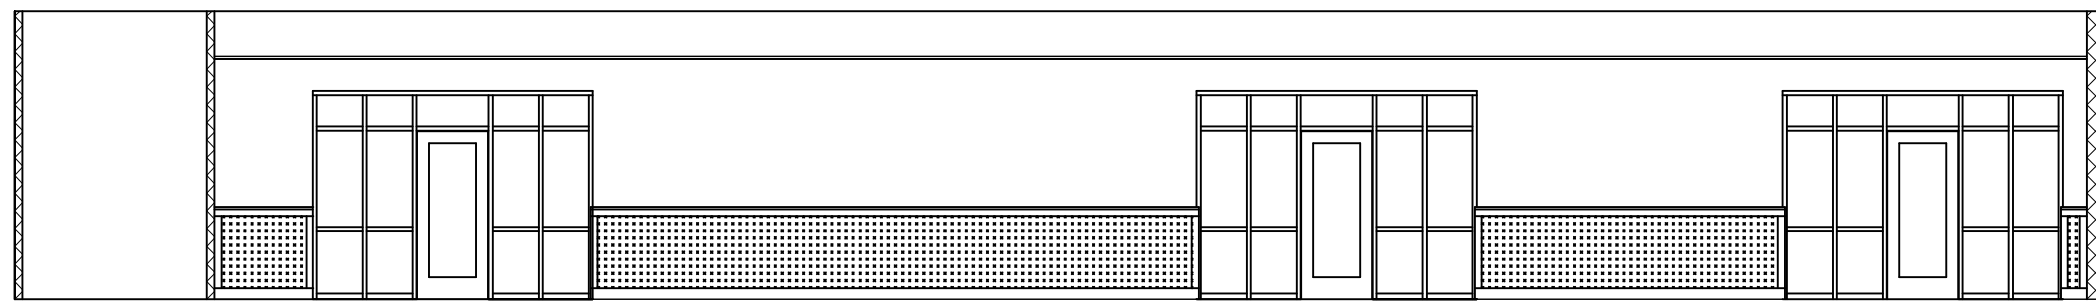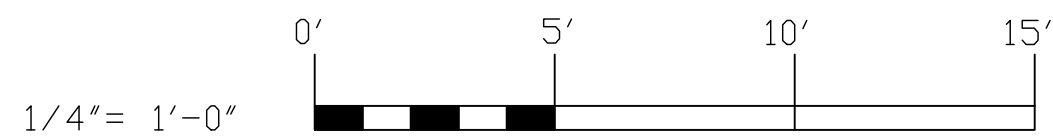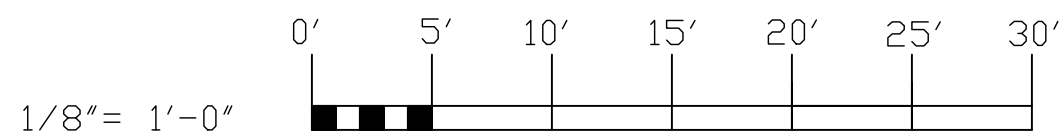


ELEV 1
A3 | A6 SCALE 1/8" = 1'-0"

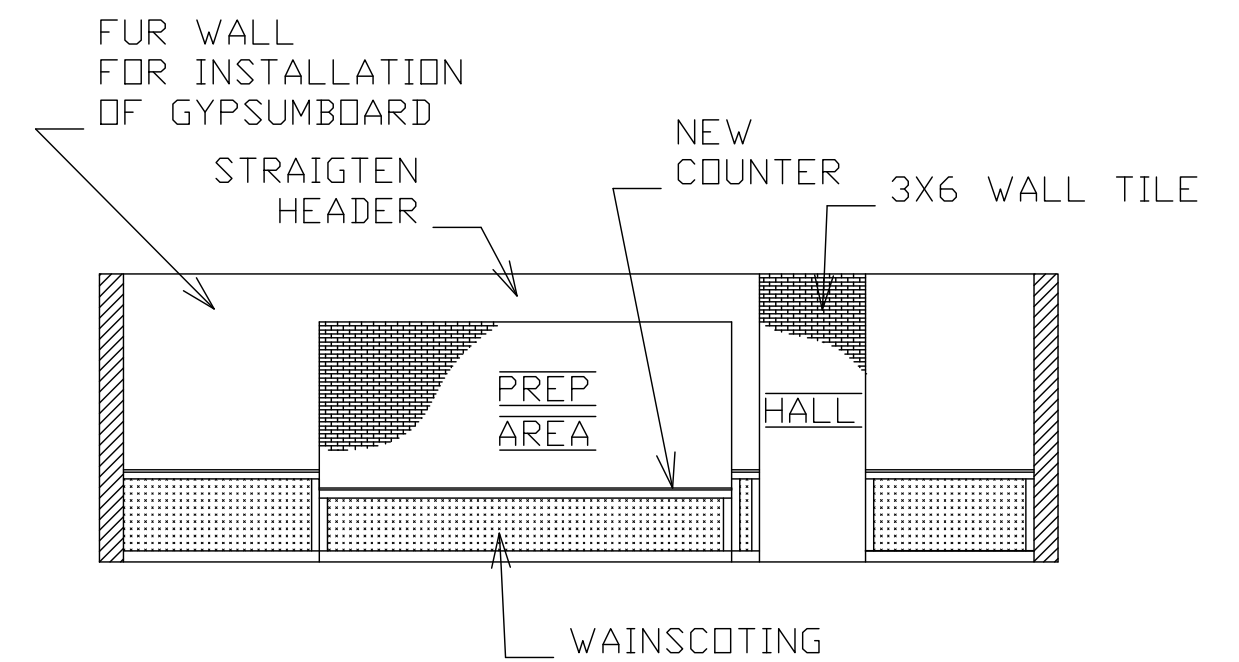

ELEV 4
A2 | A6 SCALE 1/8" = 1'-0"

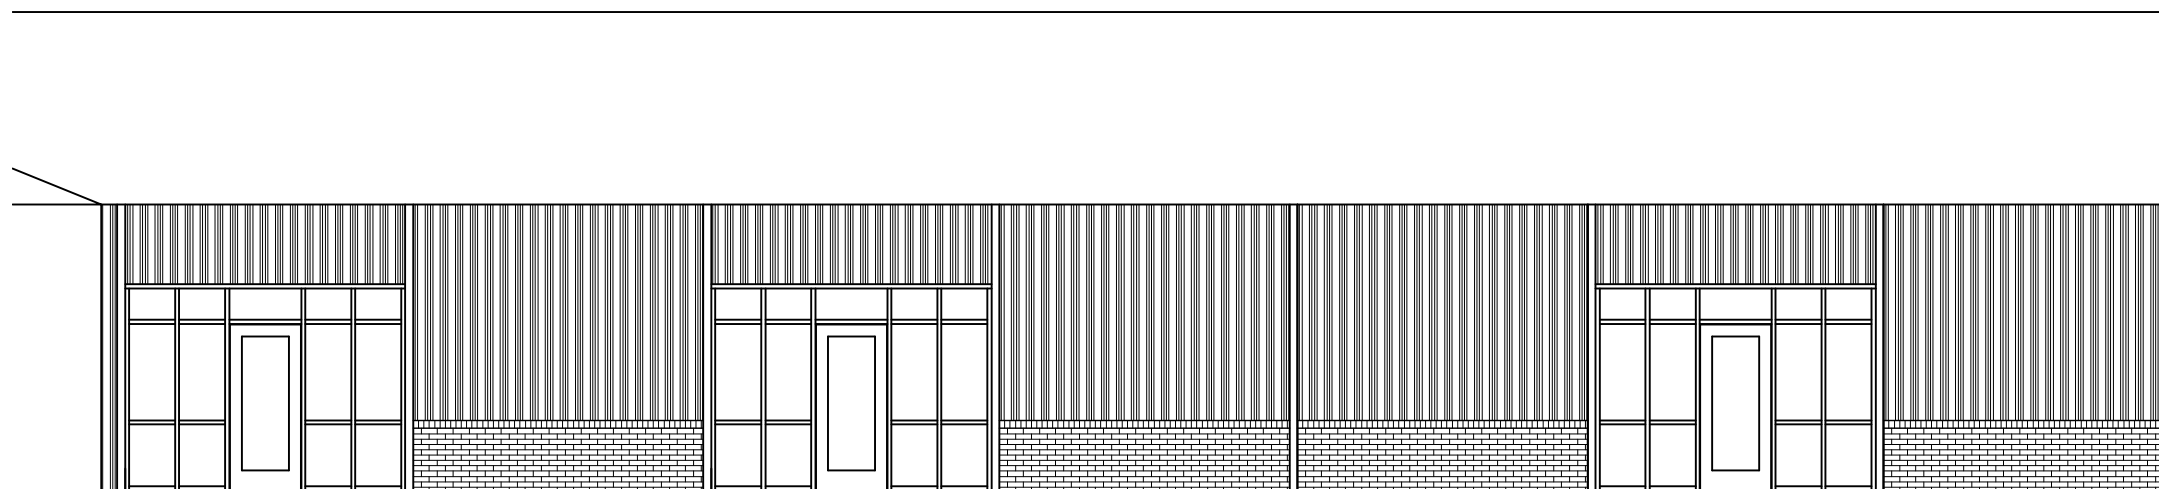







ELEV 2
A3 | A6 SCALE 1/8" = 1'-0"

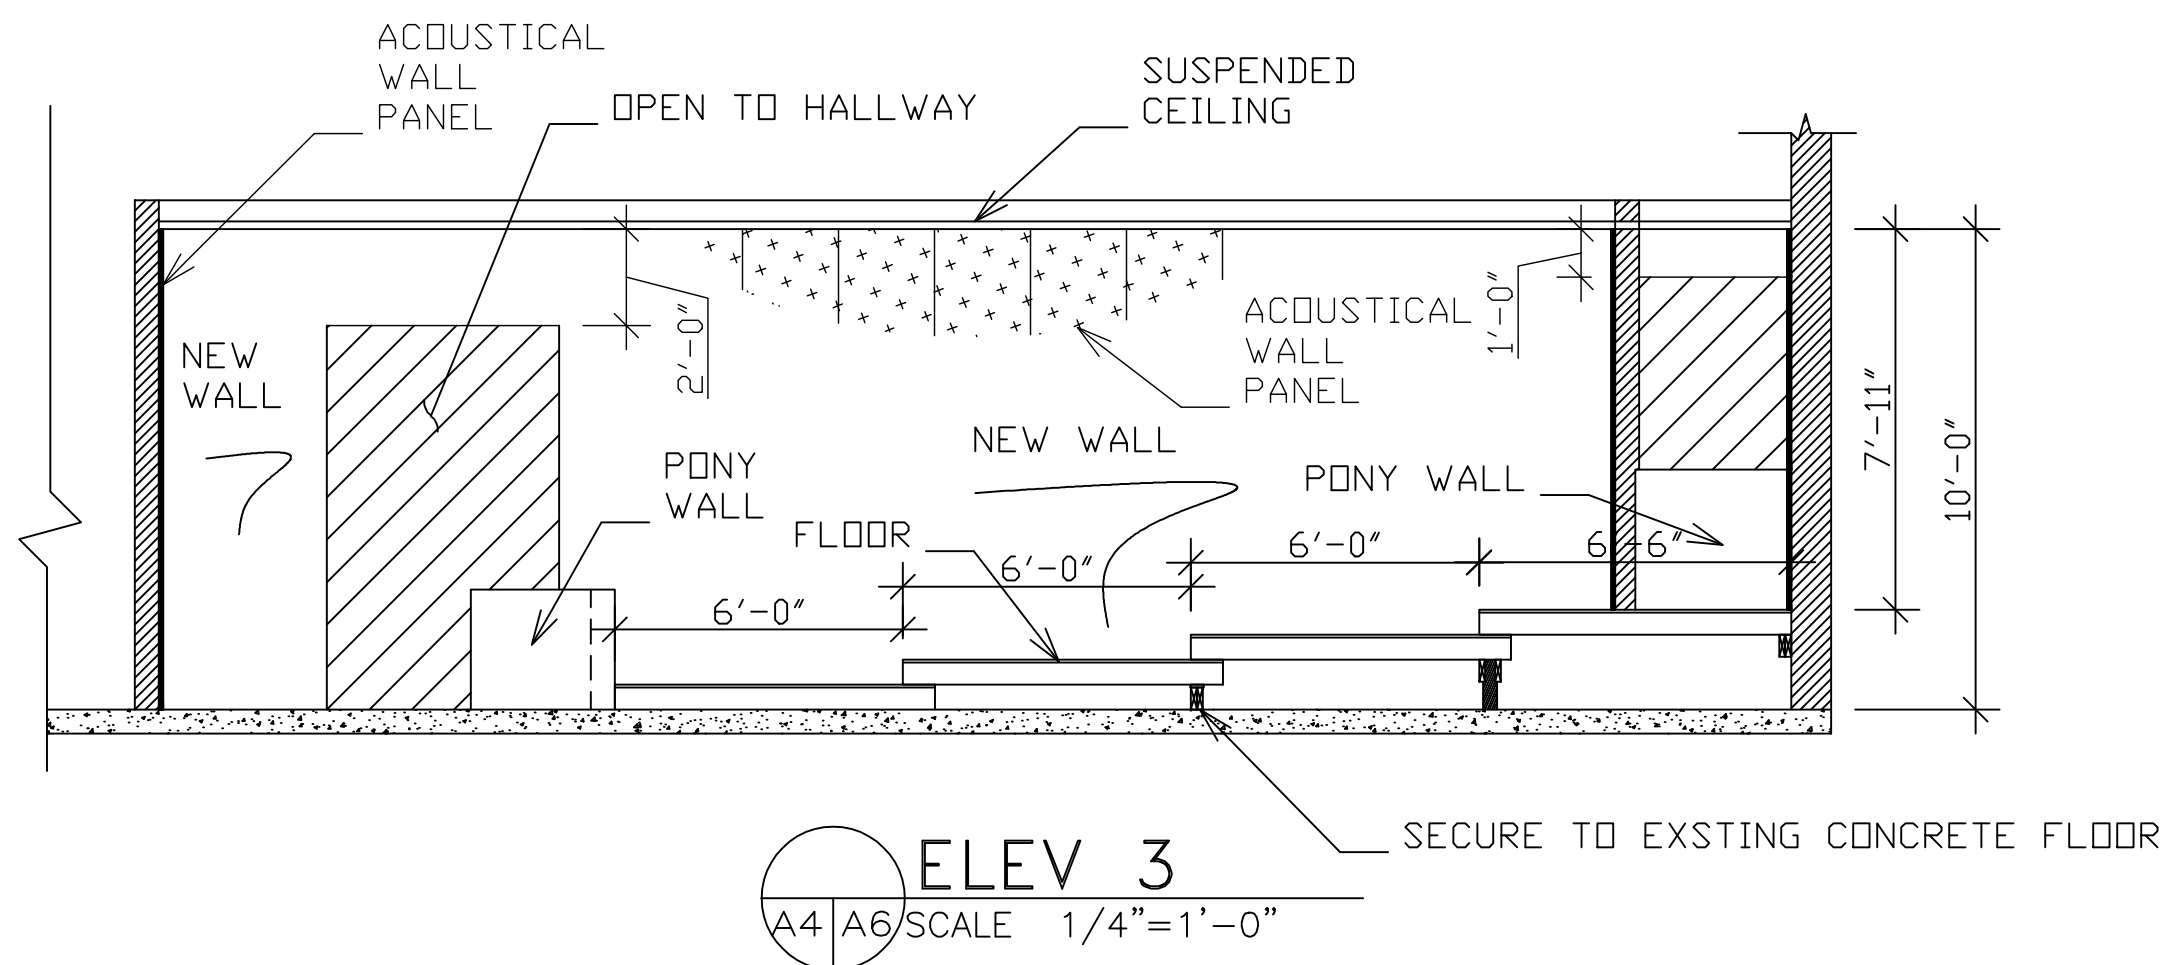

ELEV 3
A4 | A6 SCALE 1/4" = 1'-0"

BLDG# G560	SHEET 7 OF 19
CONTRACT# N40085-13B-0433	
DWG: DAVID BELEDNARD	MACC# 13-0433
TITLE	
USMC CAMP LEBUENE	
A-6	


ELEVATION

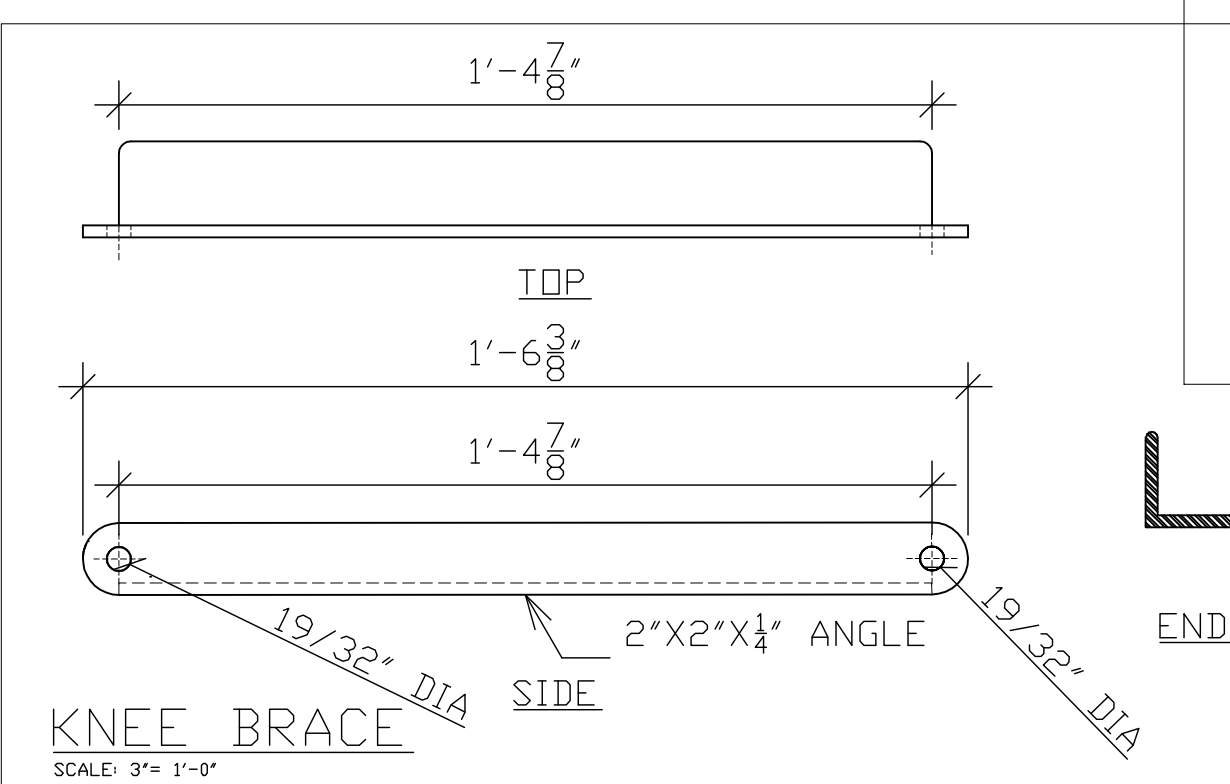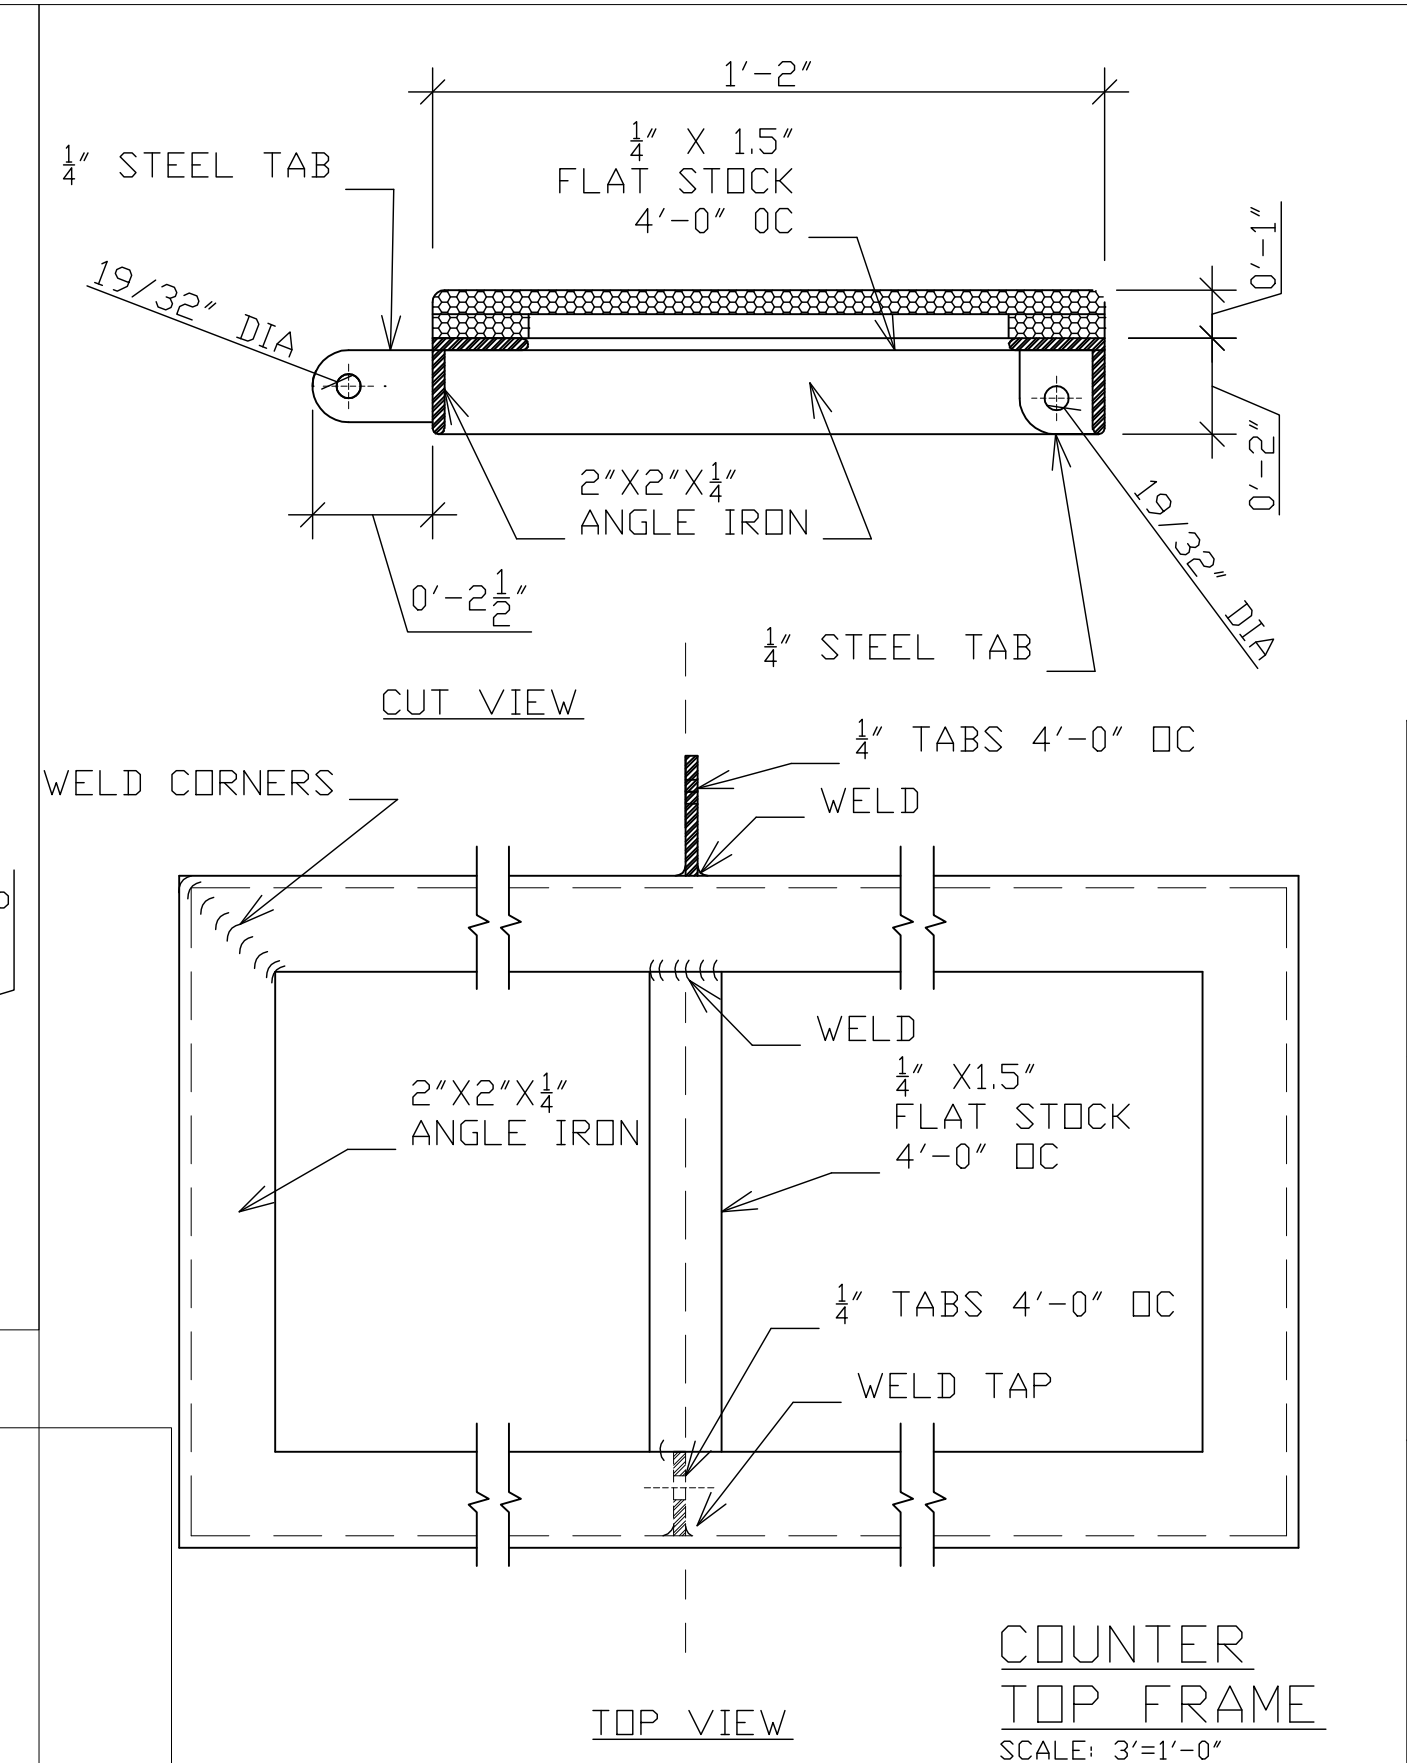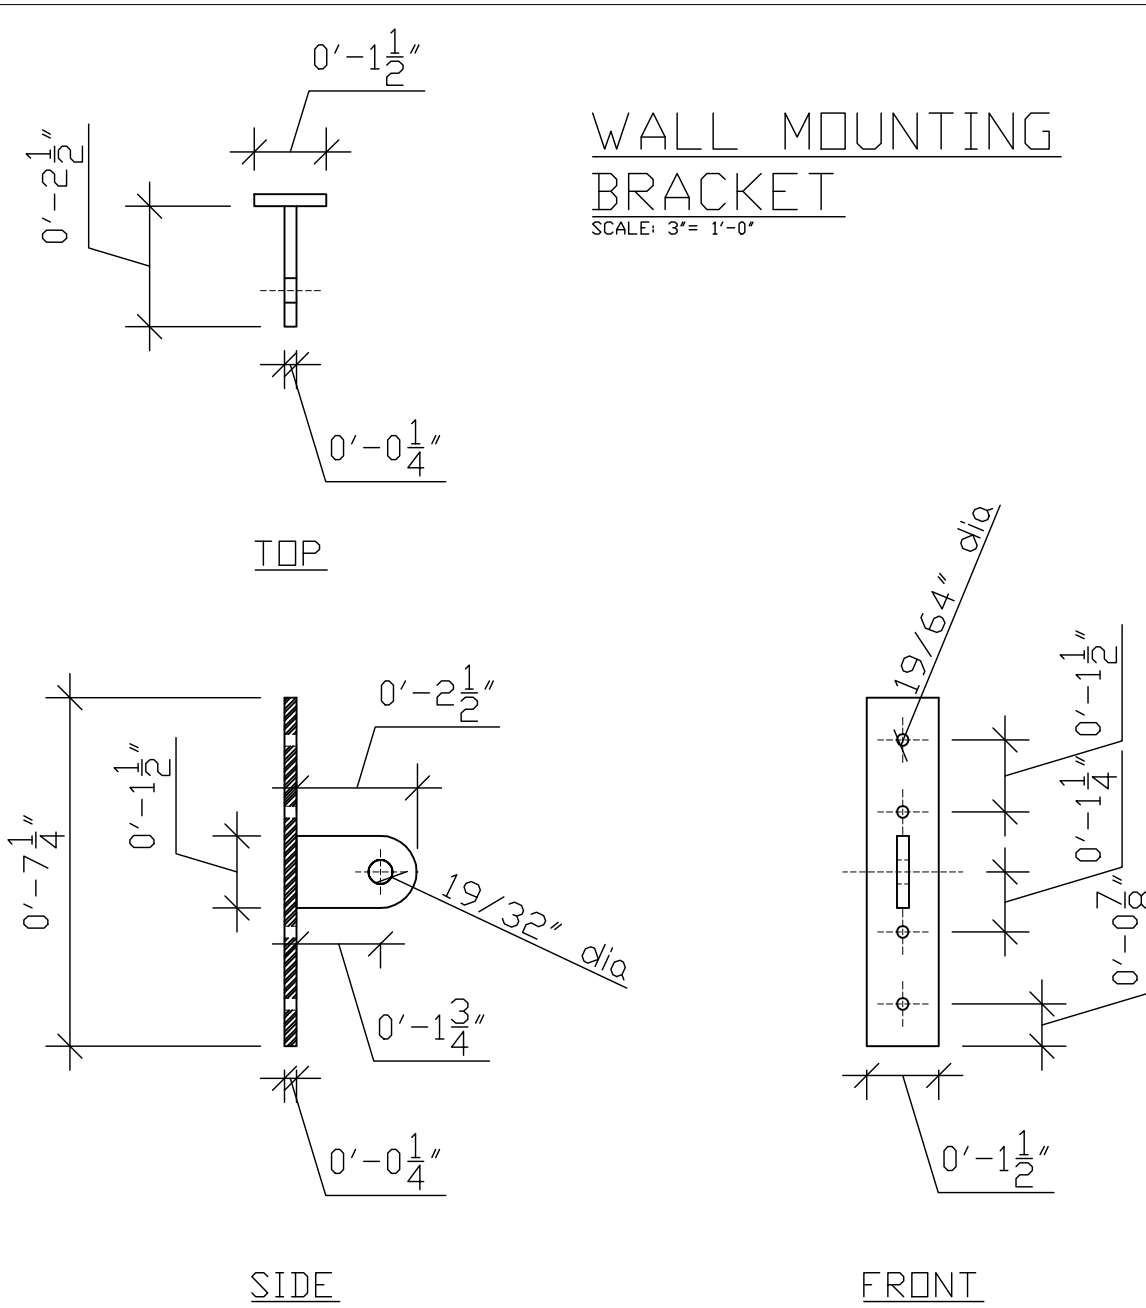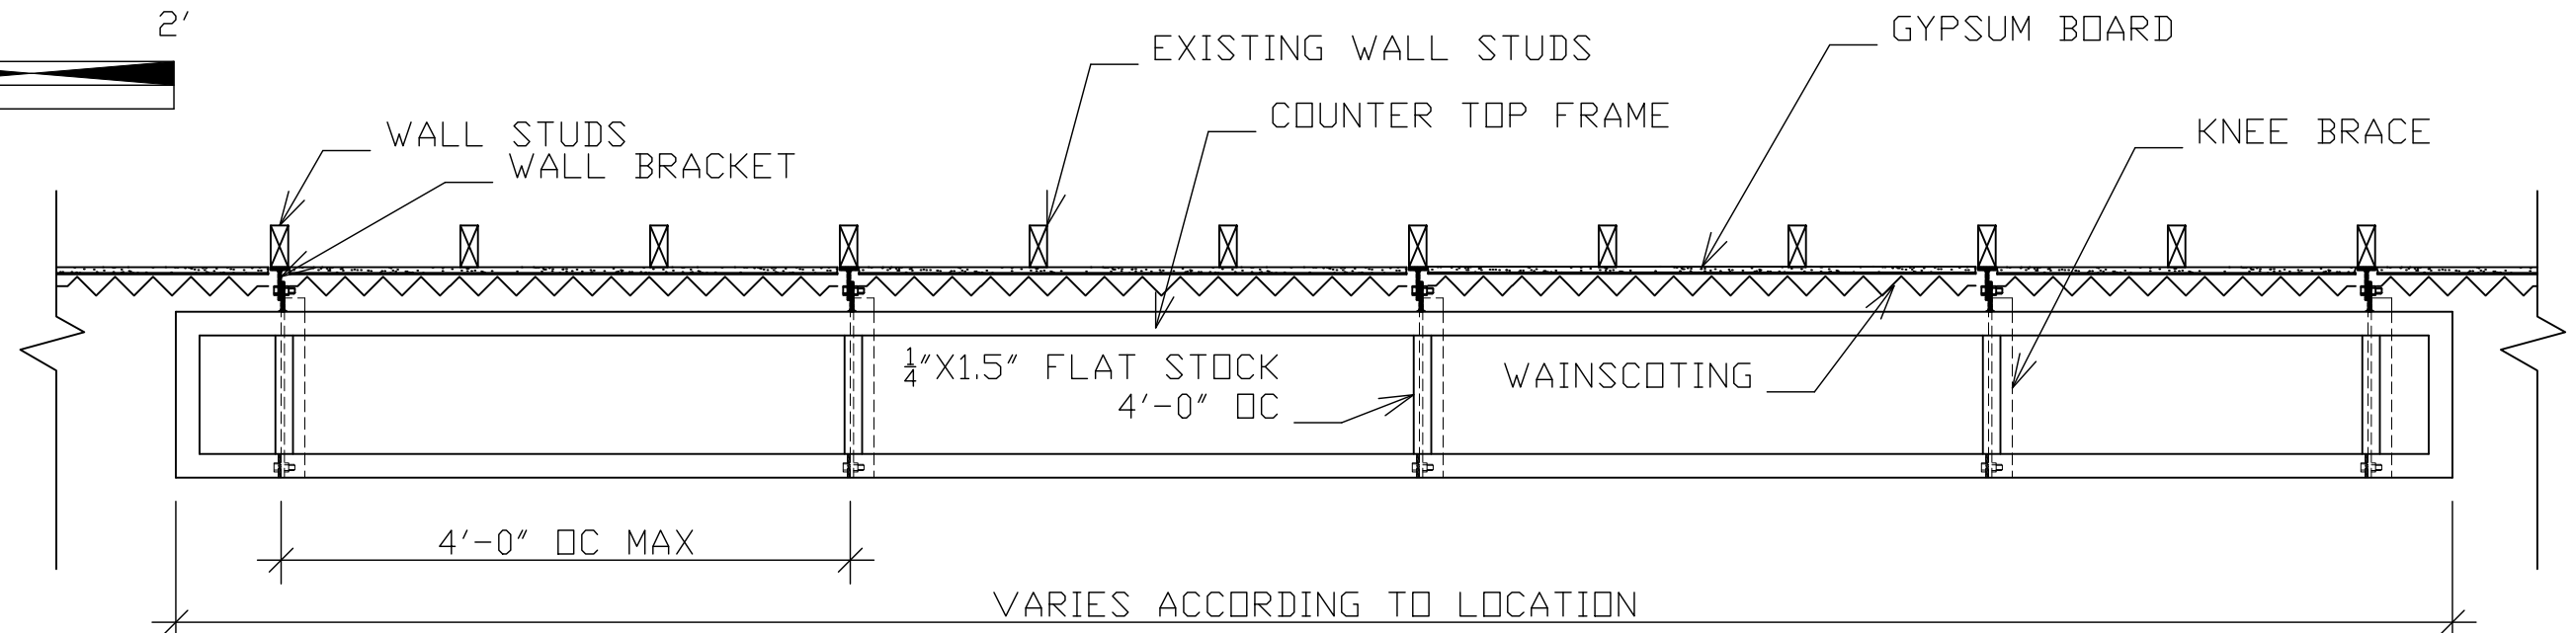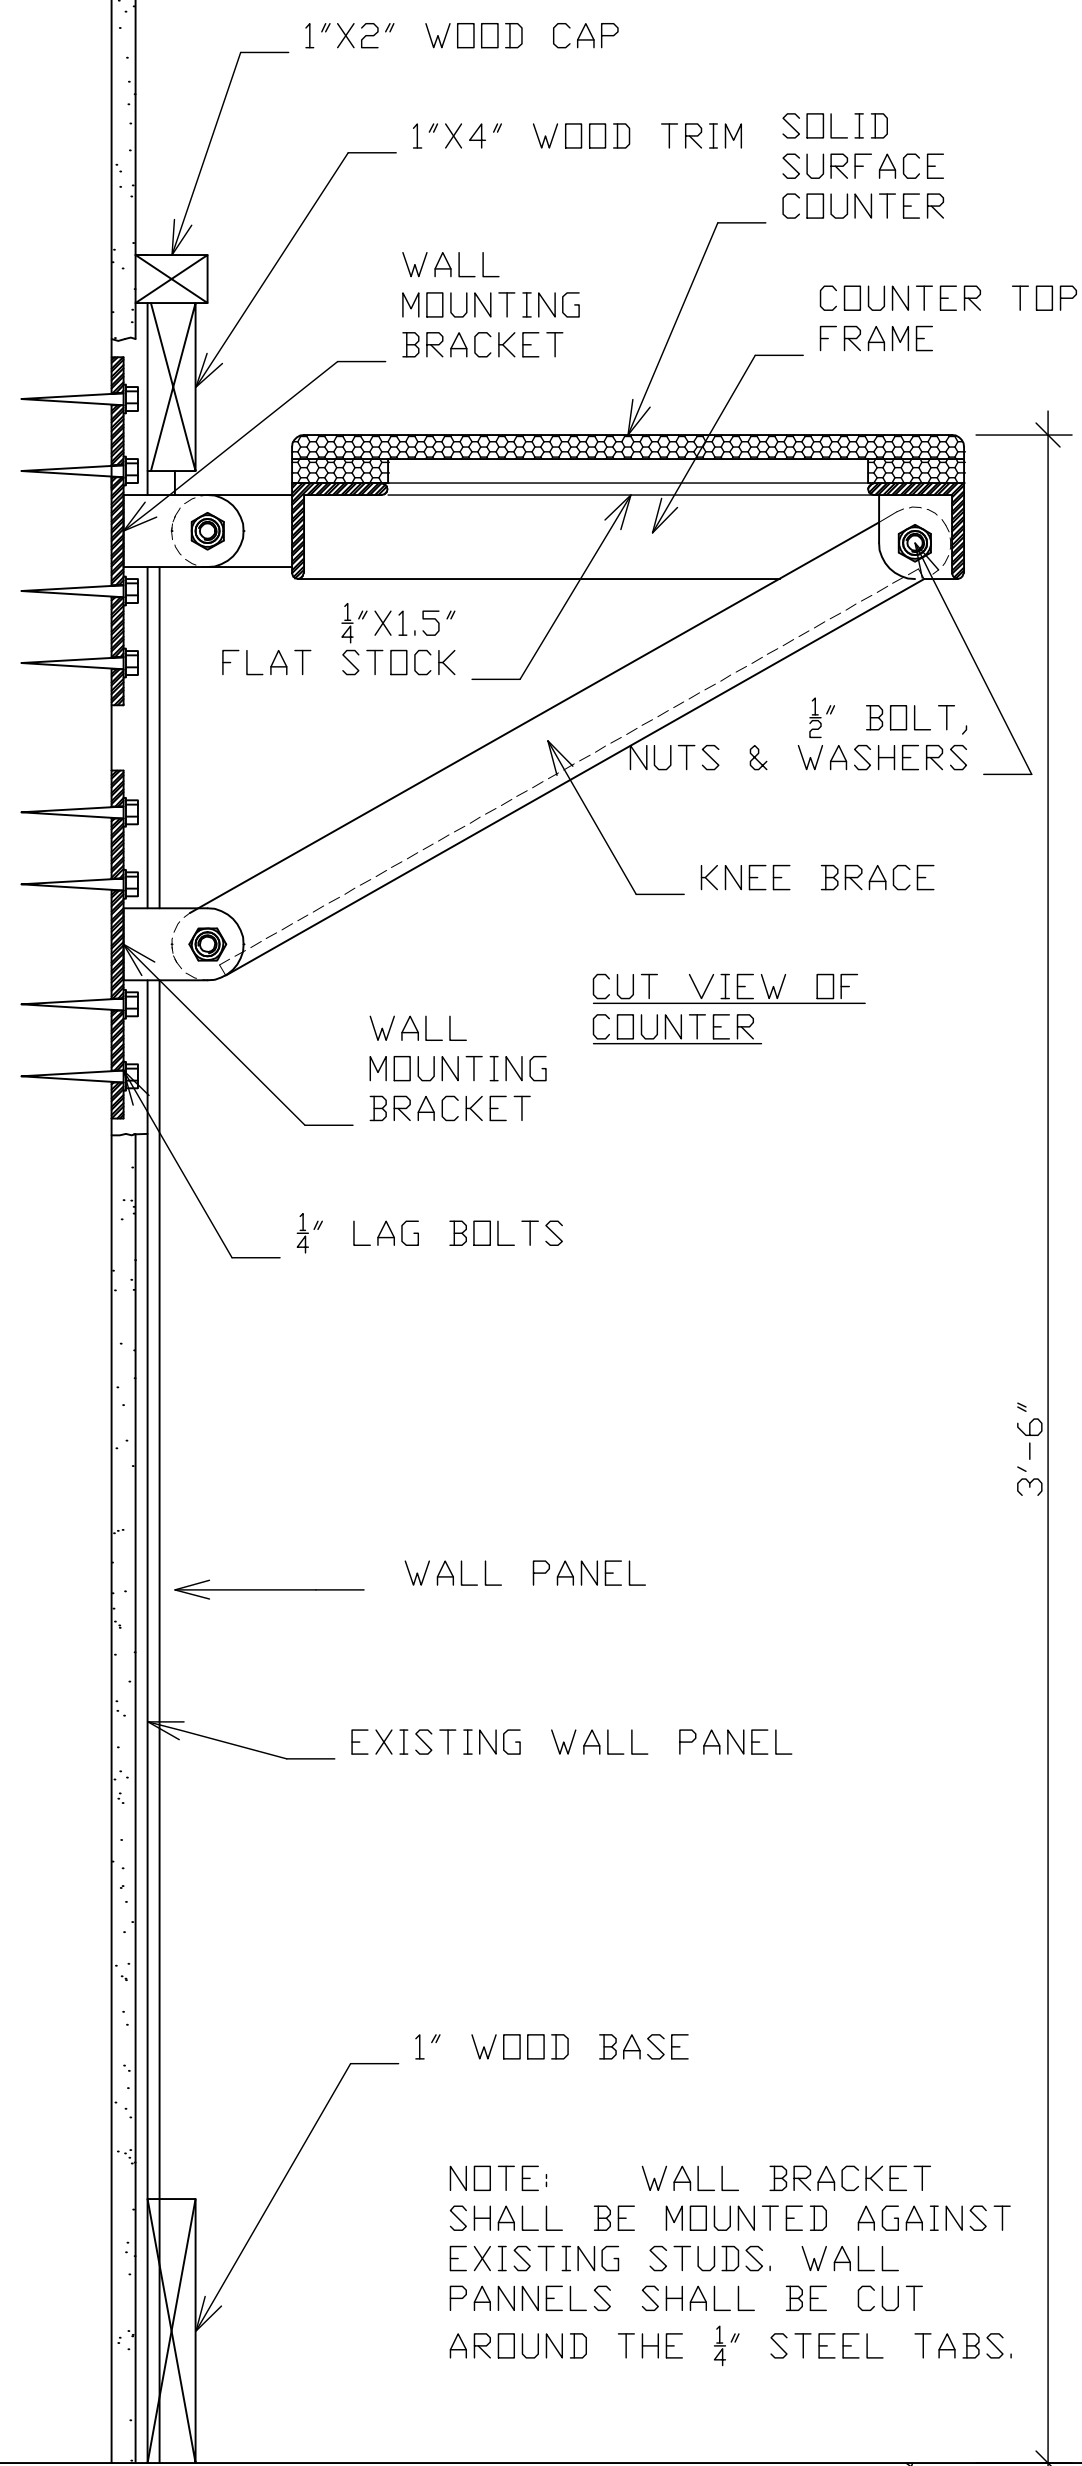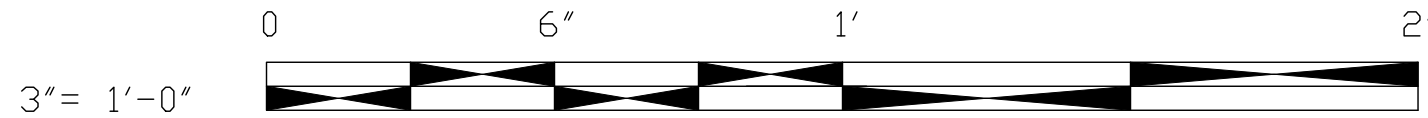

NOTE: ALL STEEL BE PAINTED BLACK. ALL FASTENERS SHALL BE GALVANIZED STEEL

BLDG# G560	SHEET 8 OF 19
CONTRACT# N40085-13B-0433	TITLE
DWG: DAVID BELEDNARD	USMC CAMP LEBEUNE
MACC# 13-0433	A-7

COUNTER DETAILS

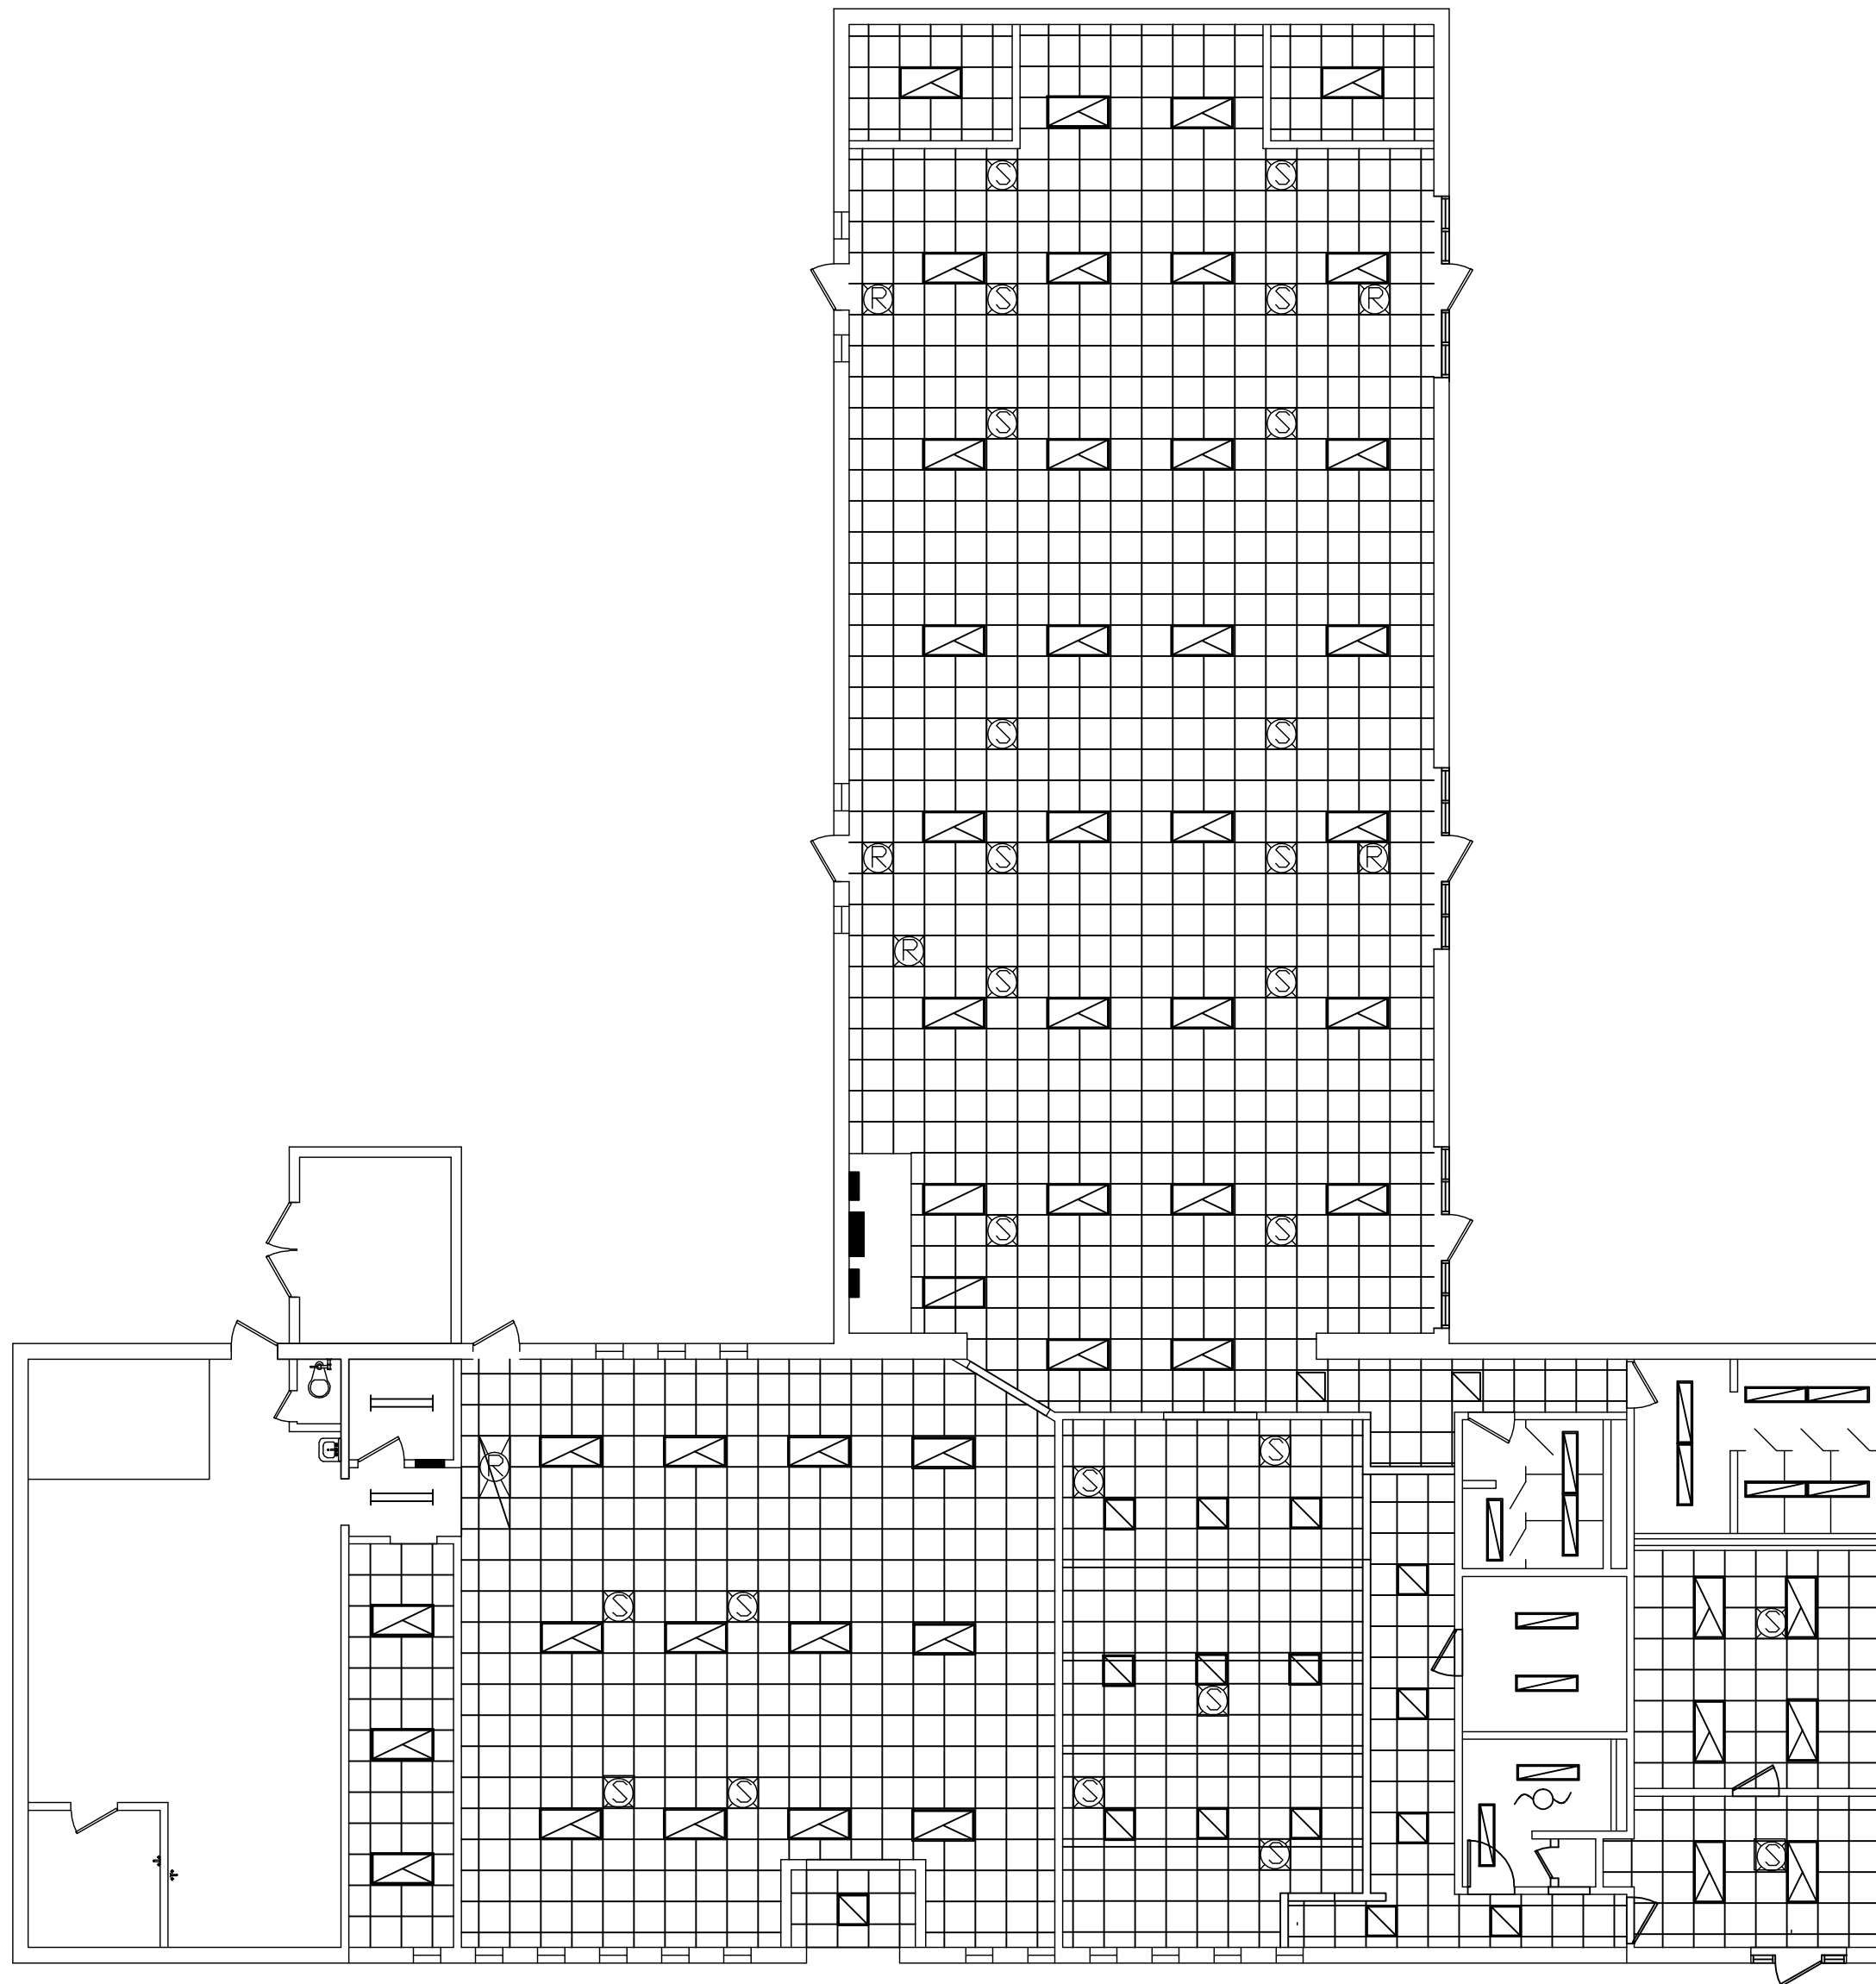

Suspended Ceiling

1. Install new suspended ceiling system.

1.1. The suspended ceiling system:

1.1.1. Ceiling hieght shall match existing ceiling hieght of approximately 10'-0"

1.1.1. Grid system; 15/16" tee grid

1.1.2. Ceiling panel; 24" x 24", Gyptone Base 31, manufactured by Certainteed

1.2. Provide acoustical work complete with necessary fastenings, hold down clips, and other accessories required for a complete installation. Do not expose mechanical fastenings in the finished work. Lay out 12 gage wire hangers 4-feet on center. Provide 8 gage wire hangers to support framing around beams, ducts, columns, grilles, and other penetrations through ceilings. Keep main runners and carrying channels clear of abutting walls and partitions. Provide at least two main runners for each ceiling span. Wherever required to bypass an object with the hanger wires, install a sub-suspension system so that all hanger wires will be plumb.

1.3. Install hangers plumb and not pressing against insulation covering ducts and pipes. Where lighting fixtures are supported from the suspended ceiling system, provide hangers at a minimum of four hangers per fixture and located not more than 6 inch from each corner of each fixture.

1.4. Provide wall molding where ceilings abut vertical surfaces. Miter corners where wall moldings intersect or install corner caps. Secure wall molding not more than 3 inch from ends of each length and not more than 16 inch on centers between end fastenings. Provide wall molding springs at each acoustical unit.

2. Install new escutcheons.

3. Install R19 fiber glass bat insulation above ceiling

4. Theater only: paint ceiling black.

BLDG# G560 SHEET 9 OF 19

CONTRACT# N40085-13B-0433

DWG: DAVID BELEDNARD


MACC# 13-0433

TITLE


USMC CAMP LEBEUNE

A-8


CEILING PLAN




LUXURY VINYL TILE




CARPET




12x12x1/8" VINYL FLOOR TILE



2X2 PORCELAIN FLOOR TILE




WALK OFF CARPET

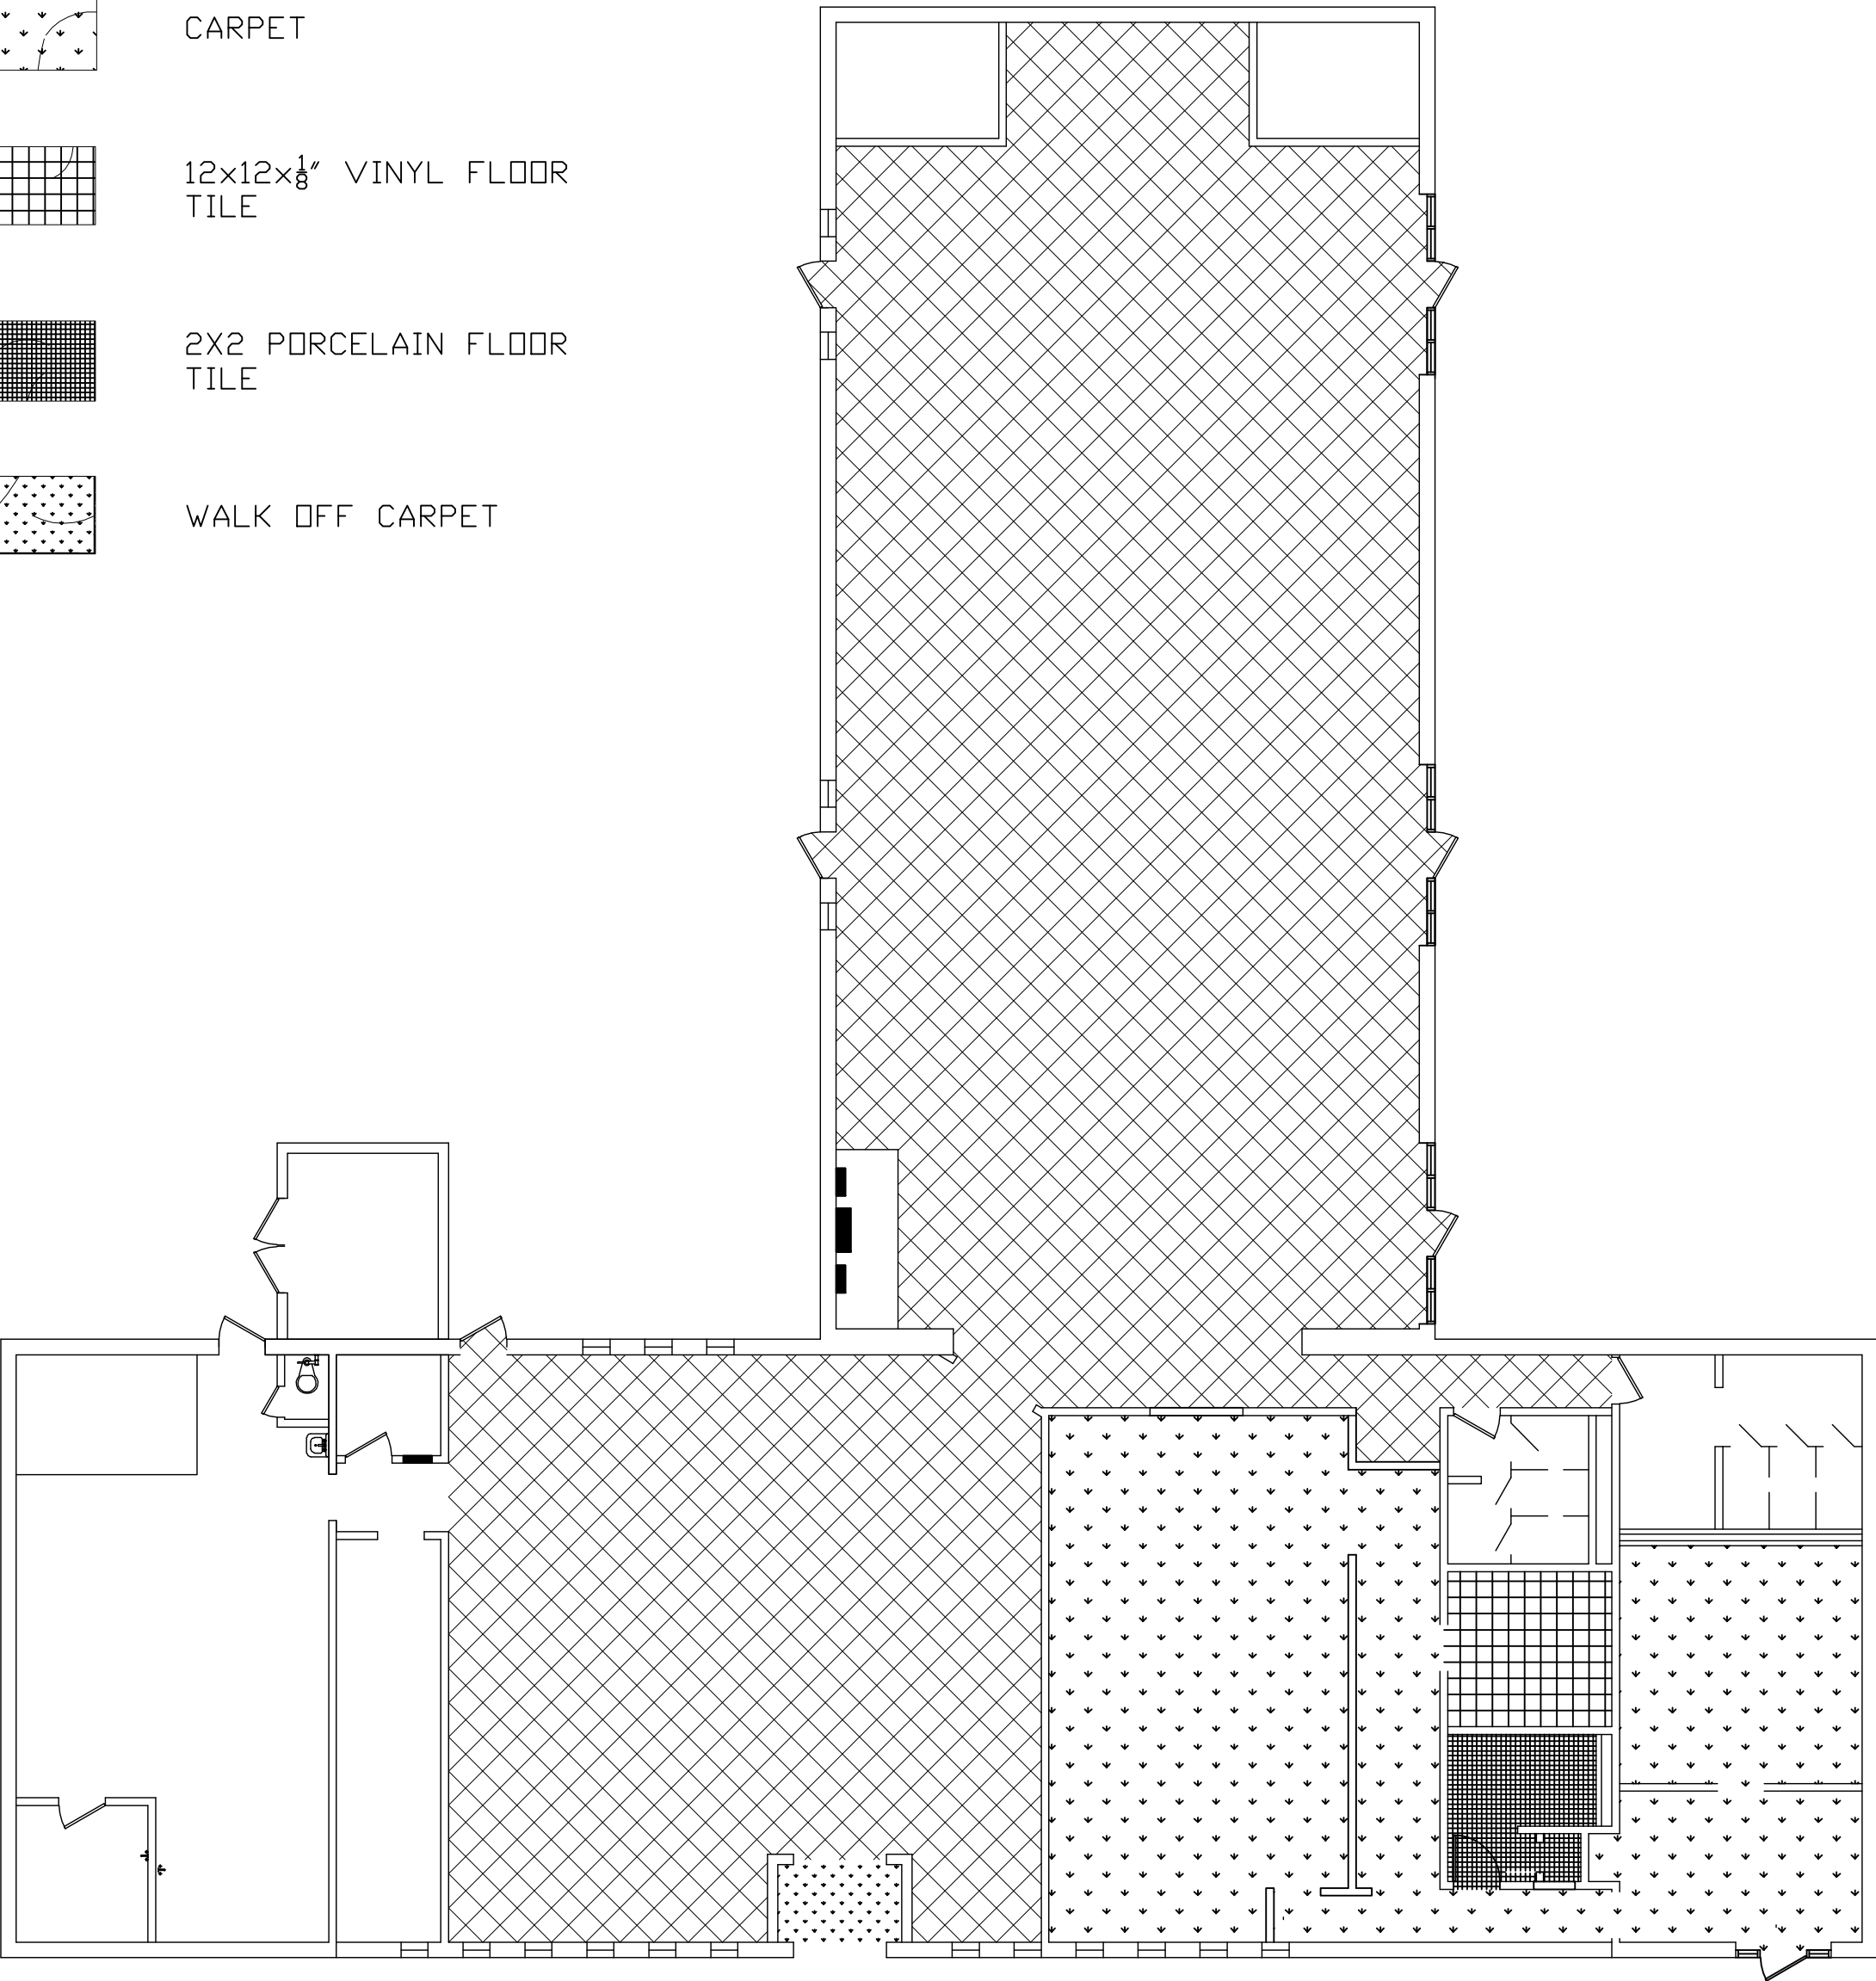

1. Testing
- 1.1. The contractor shall take a moisture test, PH test and a relative humidity test before installation of the new carpet. The contractor shall conduct all testing in accordance with the manufacturer's recommendations. All levels shall fall within the range of the manufacturer's requirements before installing.
2. Preparation for flooring installation:
- 2.1. Examine surfaces on which resilient flooring is to be installed to insure that the floor is clean and free of oil, waxy films, paint, dust and substances that prevent adhesion, leave floor dry and cured, free of residue from curing or cleaning agents.
- 2.2. Correct conditions which will impair proper installation, including trowel marks, pits, dents, protrusions, cracks or joints. Fill cracks, joints depressions, and other irregularities in substrate with leveling compound. Do not use adhesive for filling or leveling purposes.
- 2.3. The contractor shall vacuum all dust particles and foreign materials from substrate immediately prior to installation. Apply sealer to substrate in accordance to manufacturer's recommendation to prevent dusting.
3. Installation:
- 3.1. Secure carpet to sub-floor of spaces with adhesive applied as recommended by carpet manufacturer. Follow carpet manufacturer's recommendations for matching pattern and texture directions. Adjoining carpet of the same color shall be from the same manufacturing run to ensure color match.
- 3.2. Provide and install the vinyl/rubber transitions strips to protect the exposed edges of the new carpet. Transitions strips shall be placed under the doors where appropriate.
- 3.3. Cut door bottoms as needed to insure door is operating properly.
- 3.4. Remove waste, fasteners and other cuttings from carpet floors, vacuum carpet.
- 3.5. Install 4" vinyl cove base.
4. Install 1/8" thick 12"x12" commercial grade vinyl composite floor tile
- 4.1. Install in accordance with manufacturer's instructions for application and installation.
- 4.2. Tile Layout: No tile shall be less than (6 inches) and of equal width at walls. Place tile pattern in alternate direction.
- 4.3. Roll tile floor with a minimum (100 pound) roller.
- 4.4. Install 4" vinyl cove
- 4.5. Clean, seal, wax and buff all newly installed 12 inch VCT floor tile after tile has had ample curing time (per manufacture's specifications).
5. CARPET SPECIFICATIONS:
- 5.1. Surface Texture: Level or textured loop
- 5.2. Yarn content:
- 5.3. General: 6,6 Antron® Nylon, solution and/or yarn dyed.
- 5.4. Sheet Width: 12 feet (1.8m).
- 5.5. Yarn Weight: 20 oz. per sq. yd. minimum.
- 5.6. Primary Backing: Woven polypropylene.
- 5.7. Secondary Backing: Woven polypropylene.
- 5.8. Soil/Stain Protection
- 5.9. Bonding Agent: 100% thermoplastic composite (no latex or urethanes).
- 5.10. Adhesive System: Factory supplied or applied adhesive with no detectable VOC's.
- 5.11. Static Coefficient of Friction: ASTM C-1028: Passes ADA requirements
- 5.12. Static Propensity: AATCC 134: 3.0 KV or less
- 5.13. Flooring Radiant Panel: ASTM E-648 or NFPA 253: Class 1
- 5.14. Antimicrobials: Antimicrobials are an EPA registered pesticide. If antimicrobials are utilized in the product, the manufacturer must submit 3rd party certification seal indicating no health hazard to the end user or occupants. Test ASTM E 2471 - 05 should indicate NEGATIVE for antimicrobials. Adhesives are exempt from this section.
- 5.15. WARRANTY: Flooring contractor shall provide a 5-year warranty for defects in materials and workmanship. Flooring manufacturer shall provide a 25 year non-prorated limited warranty against excessive surface wear and static, de-lamination, edge ravel, zippering, and backing resiliency loss.
- 5.16. warranty against excessive surface wear and static, de-lamination, edge ravel, zippering, and backing resiliency loss.
6. Vinyl Plank Flooring: Basis of design is the Antico collections, by Mannington Commercial.
- 6.1. Abstract or Stone Collection
- 6.2. Construction: Luxury Vinyl Tile with Bevelled Edges
- 6.2.1. Wear Layer: Urethane Aluminum Oxide
- 6.2.2. Wear Layer Thickness: 40 mill (1mm)
- 6.2.3. Overall Thickness: .096
- 6.2.4. Tile Sizes: 18-inches x 18-inches
- 6.3. Testing:
- 6.3.1. Coefficient of Friction: Meets or exceeds ADA guidelines at 0.6
- 6.3.2. FLAMMABILITY/ SMOKE EMISSIONS (en 13501-01 astm e662), bFI -S1 Class 1, <450 (non flaming mode)
- 6.3.3. NBS Smoke Chamber Test (ASTM-E-662): <450 (non flaming mode)
- 6.3.4. Abrasion resistance (EN 660), Group "T"

BLDG# G560	SHEET 100F19
CONTRACT# N40085-13B-0433	
DWG: DAVID BELEDNARD	MACC# 13-0433
TITLE	USMC CAMP LEBEUNE
A-9	

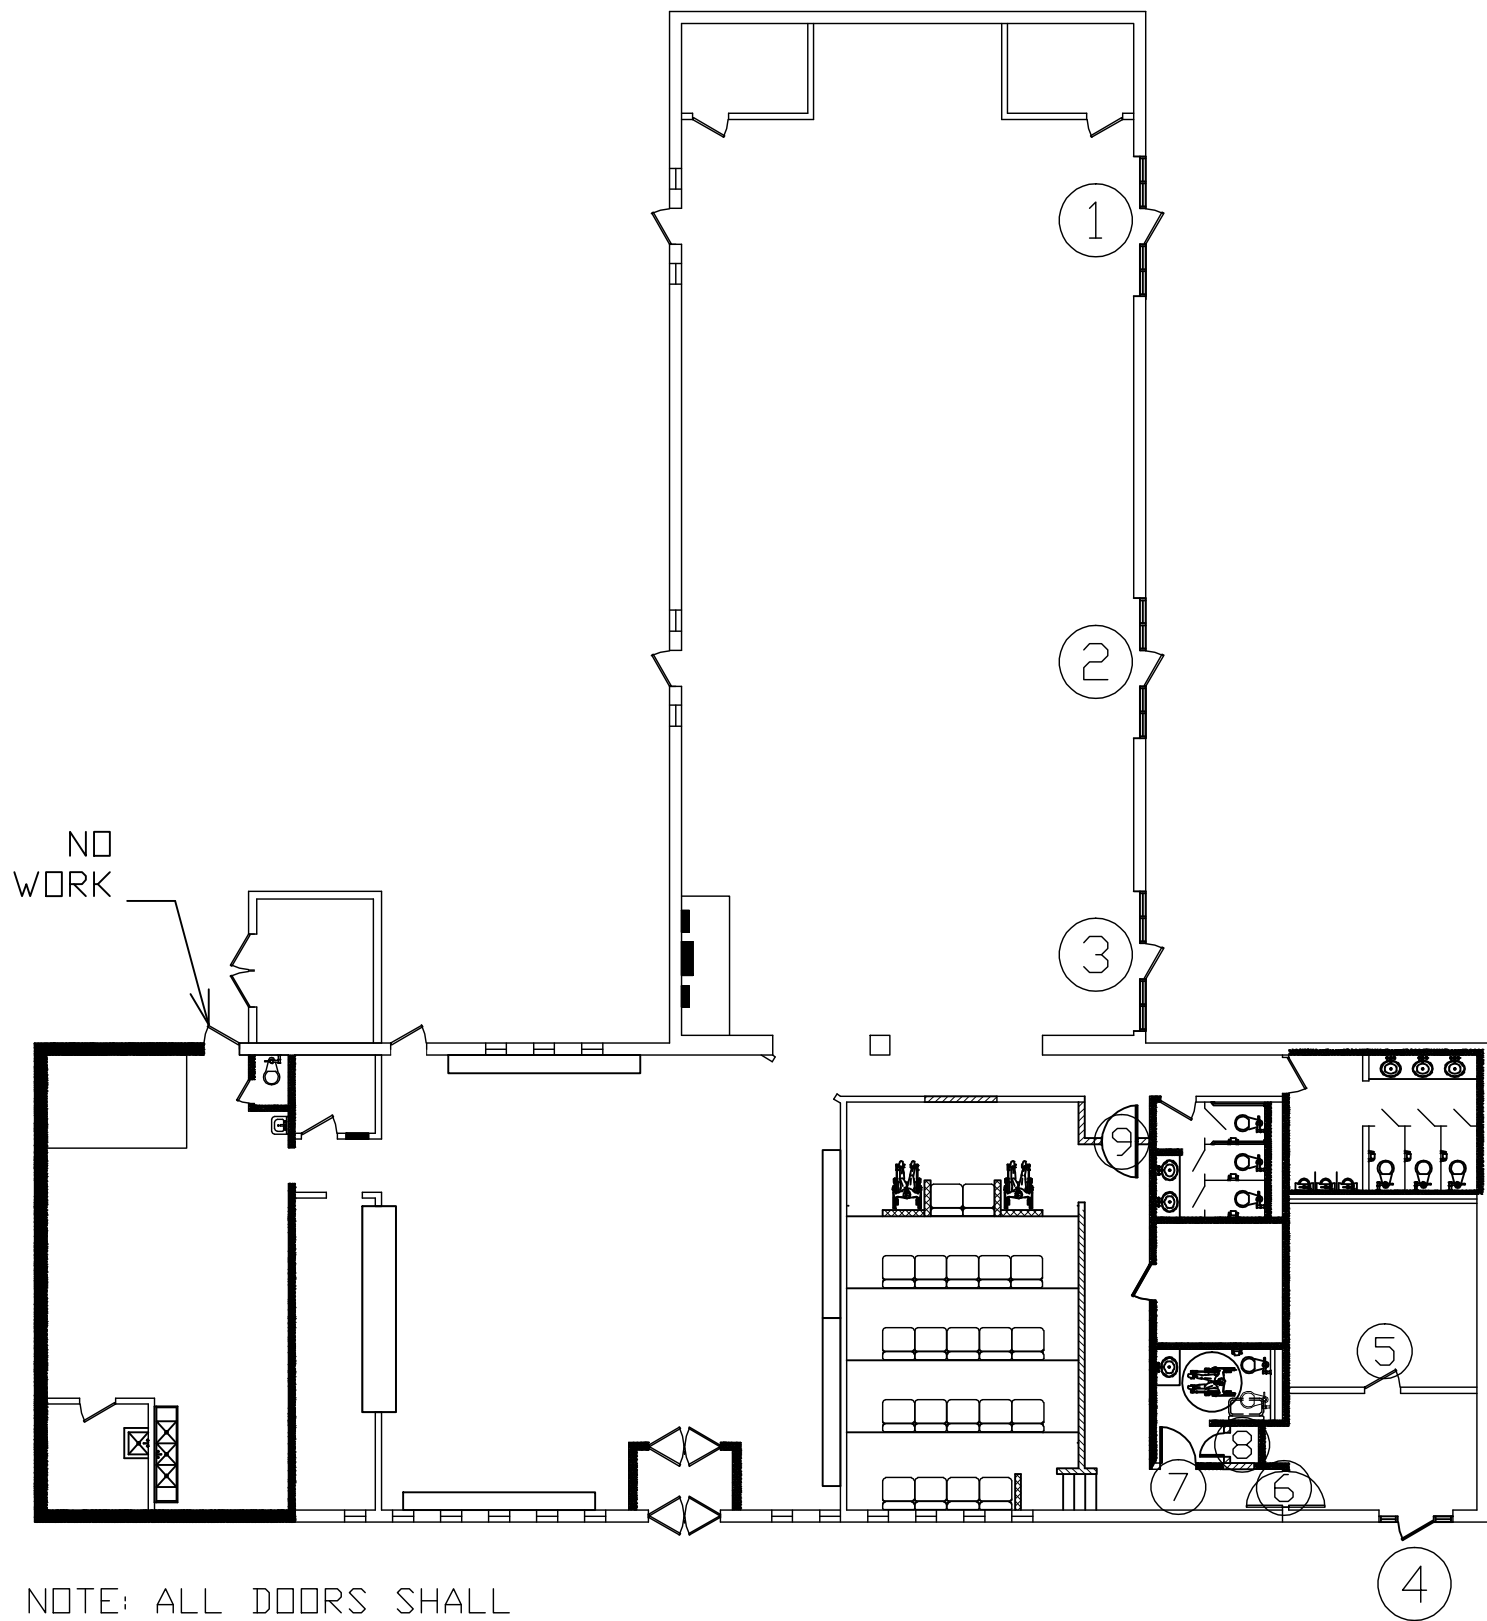

NOTE: ALL DOORS SHALL HAVE FLOOR MOUNTED DOOR STOPS.

STORE FRONT FRAMING SYSTEM


1. The contractor shall install aluminum framed, glass entrances complete with door hardware and all components in (4) openings.
2. Basis of design Kawneer 500 heavy wall wide stile doors with bronze iodized finish.
3. Install aluminum framed storefront system level, plumb, square, true to line, without distortion or impeding thermal movement, anchored securely in place to structural support, and in proper relation to wall flashing and other adjacent construction.
4. Separate aluminum and other corrodible surfaces from sources of corrosion or electrolytic action at points of contact with other materials.
5. Adjusting, Cleaning, and Protection:
 - 5.1. Clean aluminum surfaces immediately after installing aluminum framed storefronts. Avoid damaging protective coatings and finishes. Remove excess sealants, glazing materials, dirt, and other substances.
 - 5.2. Clean glass immediately after installation. Comply with glass manufacturer's written recommendations for final cleaning and maintenance. Remove nonpermanent labels, and clean surfaces.
 - 5.3. Remove and replace glass that has been broken, chipped, cracked, abraded, or damaged during construction period.

6. Specifications:

- 6.1. The aluminum framed, glass entrances & door hardware shall meet the following specifications.
 - 6.1.1. Storefront Framing System:
 - 6.1.2. Color dark bronze iodized. To include all exposed surfaces of the doors, framing and hardware.
 - 6.1.3. Aluminum Extrusions: Alloy and temper aluminum storefront manufactured for strength, corrosion resistance, and application of required finish and not less than 3/16" wall thickness at any location for the main frame
 - 6.1.4. Brackets and Reinforcements: Manufacturer's standard high-strength aluminum with non-staining, nonferrous shims for aligning system components.
 - 6.1.5. Fasteners and Accessories: Manufacturer's standard corrosion-resistant, non-staining, non-bleeding fasteners and accessories compatible with adjacent materials. Where exposed shall be stainless steel.
 - 6.1.6. Perimeter Anchors: When steel anchors are used, provide insulation between steel material and aluminum material to prevent galvanic action
 - 6.1.7. Sealant: For sealants required within fabricated storefront system, provide permanently elastic, non-shrinking, and non-migrating type sealant manufactured for joint size and movement.
- 6.2. Glazing System
 - 6.2.1. Glazing for all new, insulated windows shall contain at least 6-mm (1/4-in)

Hardware Courtyard & Front Entrance


1. Offset Pivots:
 - 1.1. Top offset Pivot
 - 1.2. Intermediate offset pivot:
 - 1.3. Bottom offset pivot:
2. Threshold: Mill finish extruded aluminum for use with and offset pivot and overhead closer.
3. Door Stops: Install floor or wall mounted door stops. The contractor shall choose the appropriate door stops to prevent damage to the doors.
4. Closer: Single Acting, Standard concealed overhead closer with 90 degree or 180 degree hold-open.
5. Panic Hardware (Paneline Exit device):
 - 4.1. Keyed Entry: Best style small format interchangeable core.
 - 4.2. All mechanical elements of the device shall be concealed in the cross rail.
 - 4.3. Concealed rod device.
 - 4.4. The "push" inlay strip and style.
4. Pull Bar: One inch round designed for single acting doors

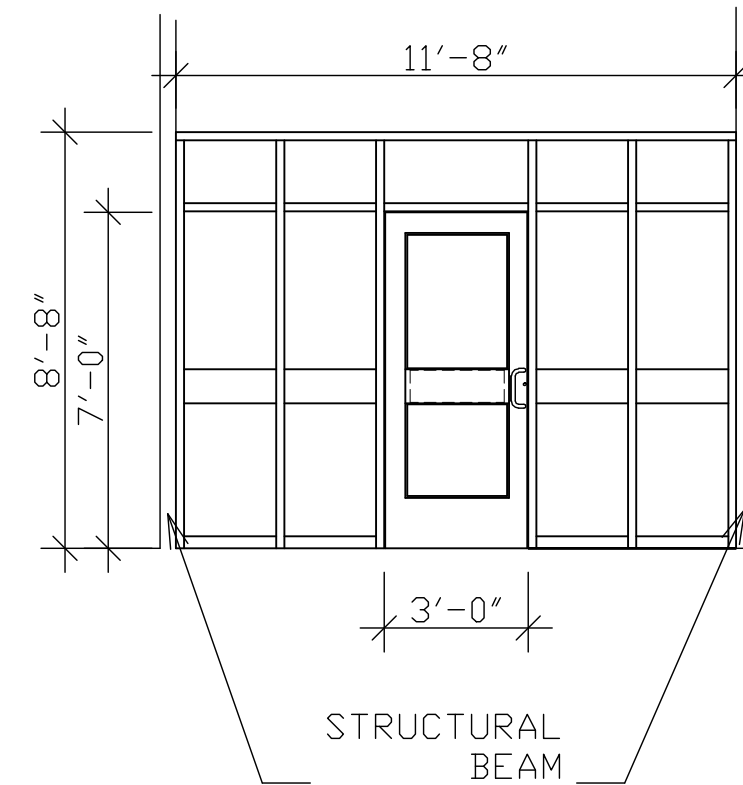

COURTYARD ENTRANCE

SCALE: 1/4" = 1'-0"

(1) (2) (3)

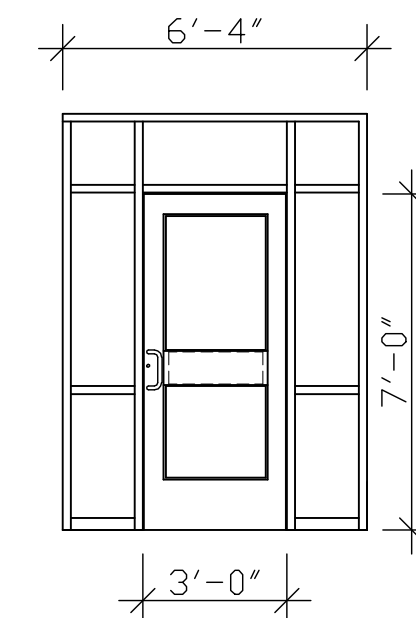

FRONT ENTRANCE



SCALE: 1/4" = 1'-0"

(4)

- 6.1.2. Glazing Gaskets: Manufacturer's standard compression types; replaceable, extruded EPDM rubber.
- 6.1.3. Spacers and Setting Blocks: Manufacturer's standard electrometric type.
- 6.1.4. Bond-Breaker Tape: Manufacturer's standard TFE-fluorocarbon or polyethylene material to which sealants will not develop adhesion.
- 6.1.5. Glazing Sealants: For structural-sealant-glazed systems, as recommended by manufacturer for joint type, and as follows:
- 6.1.6. Weatherseal Sealant: single-component neutral-curing formulation that is compatible with structural sealant and other system components with which it comes in contact.
- 6.2. Entrance Door System:
 - 6.2.1. Swing Door: Wide style, heavy wall, moderate traffic applications.
 - 6.2.2. Door Vertical: 5"
 - 6.2.3. Stile Top Rail: 5"
 - 6.2.4. Mid Rail: 8"
 - 6.2.5. Bottom Rail: 12"

BLDG# G560	SHEET 110F19
CONTRACT# N40085-13B-0433	
DWG. DAVID BELEDNARD	MACC# 13-0433
TITLE	USMC CAMP LEBUENE
A-10	

EXTERIOR DOORS

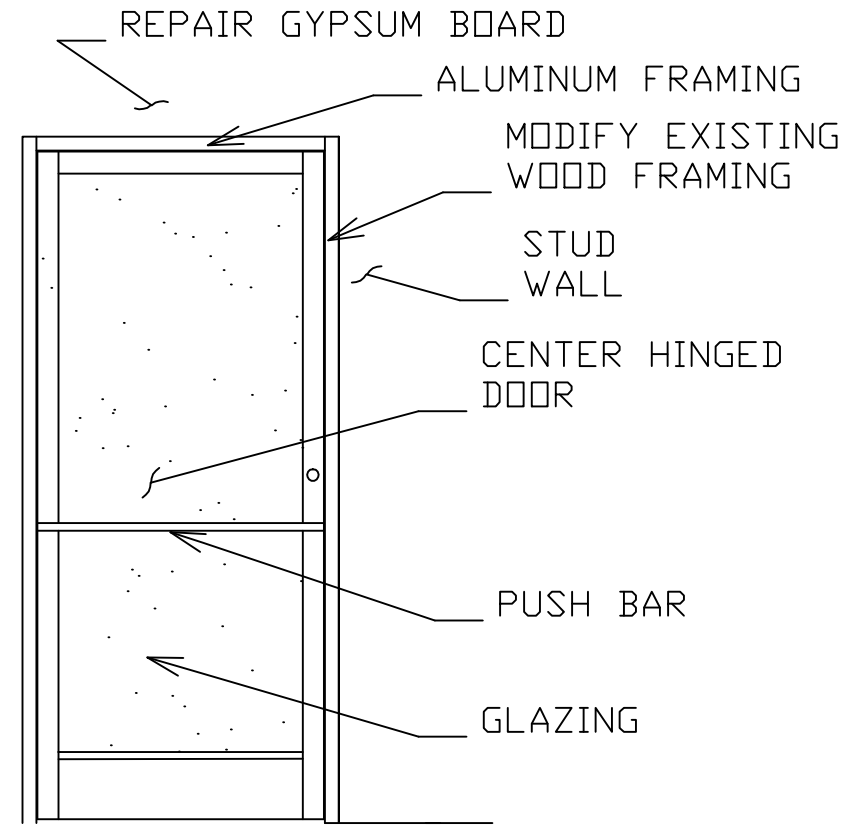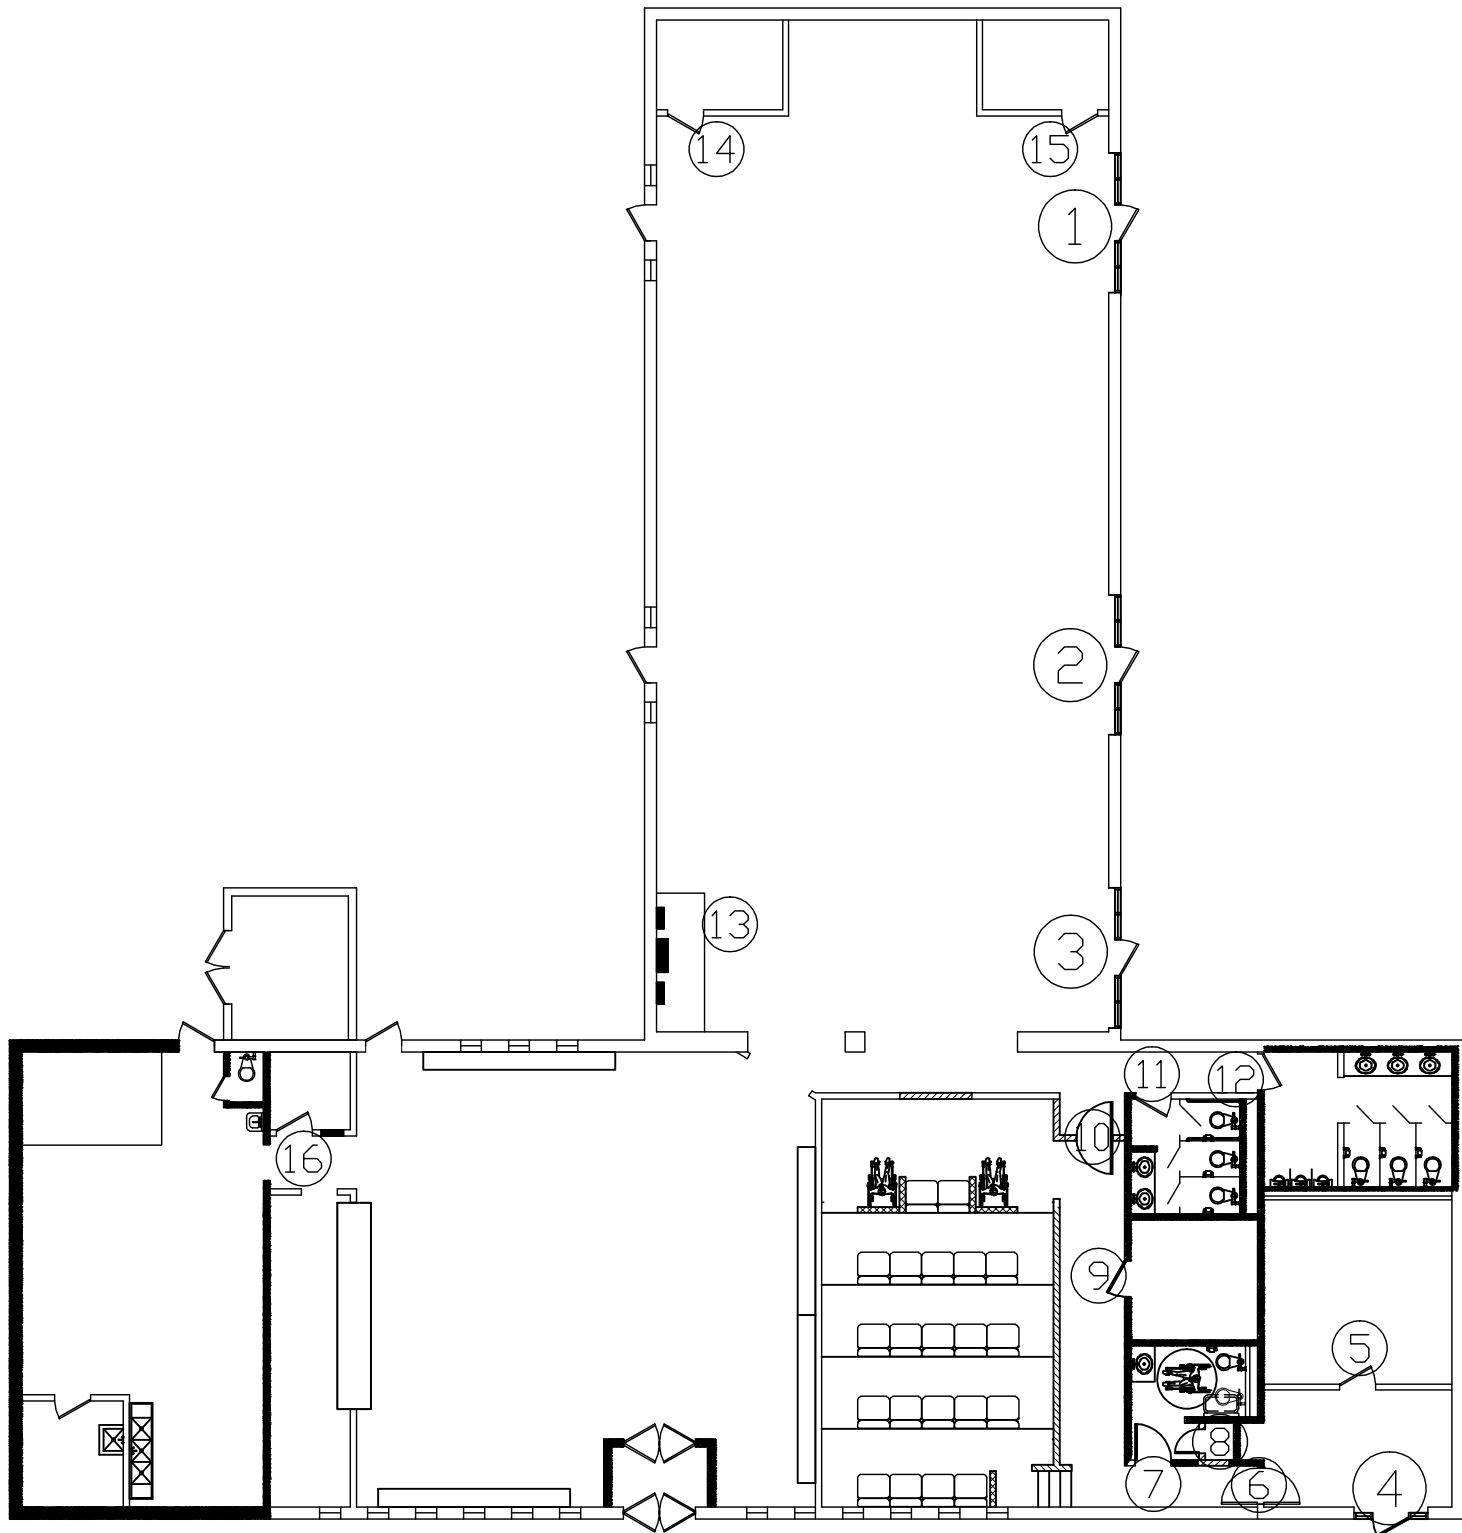

GLASS DOOR ASSEMBLY
SCALE: 1/4" = 1'-0" (6)(10)

Glass entrance door assembly

1. Modify existing framing to receive a 3'-0" door.
2. The contractor shall install aluminum framed, glass entrances complete with door hardware and all components in (2) openings. See attached drawings for details.
 - 2.1. Install aluminum framed storefront system level, plumb, square, true to line, without distortion or impeding thermal movement, anchored securely in place to structural support, and in proper relation to wall flashing and other adjacent construction.
 - 2.2. Separate aluminum and other corrodible surfaces from sources of corrosion or electrolytic action at points of contact with other materials.
3. Repair gypsum board and around the perimeter of the new doors. Install metal corner bead, tape, and finish. Prime and apply 2 coats of acrylic latex paint to match existing.
4. Adjusting, Cleaning, and Protection:
 - 4.1. Clean aluminum surfaces immediately after installing aluminum framed storefronts. Avoid damaging protective coatings and finishes. Remove excess sealants, glazing materials, dirt, and other substances.
 - 4.2. Clean glass immediately after installation. Comply with glass manufacturer's written recommendations for final cleaning and maintenance. Remove nonpermanent labels, and clean surfaces.
 - 4.3. Remove and replace glass that has been broken, chipped, cracked, abraded, or damaged during construction period.
5. Specifications:
6. The aluminum framed, glass entrances & door hardware shall meet the following specifications.
 - 6.1. Storefront Framing System:
 - 6.1.1. Color Bronze Iodized Coating
 - 6.1.2. Aluminum Extrusions: Alloy and temper aluminum storefront manufactured for strength, corrosion resistance, and application of required finish and not less than 0.070" wall thickness at any location for the main frame
 - 6.1.3. Brackets and Reinforcements: Manufacturer's standard high-strength aluminum with non-staining, nonferrous shims for aligning system components.
 - 6.1.4. Fasteners and Accessories: Manufacturer's standard corrosion-resistant, non-staining, non-bleeding fasteners and accessories compatible with adjacent materials. Where exposes shall be stainless steel.
 - 6.1.5. Perimeter Anchors: When steel anchors are used, provide insulation between steel material and aluminum material to prevent galvanic action
 - 6.1.6. Sealant: For sealants required within


fabricated storefront system, provide permanently elastic, non-shrinking, and non-migrating type sealant manufactured for joint size and movement.

- 6.2. Glazing System
 - 6.2.1. Glazing: The 6-mm (1/4-in) laminated glass consists of two nominal 3-mm (1/8-in) annealed glass bonded together with a minimum of a 0.75-mm (0.030-in) polyvinyl-butylal (PVB) inner layer.
 - 6.2.2. Glazing Gaskets: Manufacturer's standard compression types; replaceable, extruded EPDM rubber.
 - 6.2.3. Spacers and Setting Blocks: Manufacturer's standard elastomeric type.
 - 6.2.4. Bond-Breaker Tape: Manufacturer's standard TFE-fluorocarbon or polyethylene material to which sealants will not develop adhesion.
 - 6.2.5. Glazing Sealants: For structural-sealant-glazed systems, as recommended by manufacturer for joint type, and as follows:
 - 6.2.6. Weatherseal Sealant: single-component neutral-curing formulation that is compatible with structural sealant and other system components with which it comes in contact.
- 6.3. Entrance Door System:
 - 6.3.1. Swing Door; Narrow stile, 2-1/8" (54) vertical face dimension, 1-3/4" (44.5) depth, moderate traffic applications.
 - 6.3.1.1. Door Vertical: 2-1/8"
 - 6.3.1.2. Stile Top Rail: 2-1/4"
 - 6.3.1.3. Bottom Rail: 7-1/2"
 - 6.3.2. Center Pivots: Double Acting; center pivots for use with concealed overhead closer.
 - 6.3.2.1. Top Center Pivot: Cast aluminum with a hardened steel pivot pin. The pin is adjustable for additional extension through the transom bar/header. (Door Portion) Both door pivot portions are machined aluminum with oilite bronze self-lubricating bearings.
 - 6.3.2.2. Bottom Center Pivot: The center pivot for use without a threshold has a stainless steel pivot pin press fit into a stainless steel plate. The door portion is comprised of a roller bearing press fit into a cast aluminum pivot block.
 - 6.3.3. Push Bars: Back to back push bars.
 - 6.3.4. Closer: Double Acting, Standard concealed overhead closer with 90 degree or 105 degree hold-open. For heavy traffic & high. Grade 1 certification and comes with a 5-year warranty. Closing and latching speeds are separately adjustable with easy access.
 - 6.3.5. Dead Bolt shall accept the Best• style small format interchangeable core.

INTERIOR DOOR SCHEDULE			
#	DOOR SIZE	HARDWARE	
5	3'-0" X 6'-8" X 1-3/4"	KEYED ENTRY/DEADBOLT/ 4.5 SS, BALL BEARING HINGES	SOLID CORE, BIRCH VENEER DOOR WITH A STEEL JAMB
6	Glass Door Assembly	See scope	
7	3'-0" X 6'-8" X 1-3/4"	PRIVACY LOCK/ KEY TO KEY DEAD BOLT/ 4.5 SS, BALL BEARING HINGES	SOLID CORE, BIRCH VENEER DOOR WITH A STEEL JAMB
8	2'-0" X 6'-8" X 1-3/4"	KEYED ENTRY 4.5 SS BALL BEARING HINGES	SOLID CORE, BIRCH VENEER DOOR WITH A STEEL JAMB
9	Existing door	KEYED ENTRY 4.5 SS BALL BEARING HINGES	Existing
10	Glass Door Assembly	See Scope	
11	Existing Door	Push/Pull Plate/Door Closer (2) 12" SS kick Plate 4.5 SS BALL BEARING HINGES	Existing
12	Existing Door	Push/Pull Plate/Closer (2) 12" SS kick Plate 4.5 SS BALL BEARING HINGES	Existing
13	Existing Door	KEYED ENTRY 4.5 SS BALL BEARING HINGES	Existing
14	3'-0" X 6'-8" X 1-3/4"	KEYED ENTRY 4.5 SS BALL BEARING HINGES	SOLID CORE, BIRCH VENEER DOOR WITH A STEEL JAMB
15	3'-0" X 6'-8" X 1-3/4"	KEYED ENTRY 4.5 SS BALL BEARING HINGES	SOLID CORE, BIRCH VENEER DOOR WITH A STEEL JAMB
16	Fit New Door to Existing Jamb	KEYED ENTRY 4.5 SS BALL BEARING HINGES	SOLID CORE, BIRCH VENEER DOOR WITH EXISTING JAMB
Keyed Entry: Grade 1 Lock, Knob, Best• style small format interchangeable core, satin finish.			
Privacy Lock: Grade 1 Lock, Knob, satin finish.			
Dead bolt: stainless steel, 1" throw, ¾" throw latch-bolt. Best• style small format interchangeable core. Satin Chrome finish.			
Door Closer: Industrial Grade 1, Surface Closer with adjustable latch, closing speed, and back-check. Aluminum Finish			
All doors shall have floor mounted door stops			

BLDG# G560	SHEET 120F19
CONTRACT# N40085-13B-0433	
DWG. DAVID BELEDNARD	MACC# 13-0433
TITLE	
USMC CAMP LIEBUNE	
A11	

DOOR SCHEDULE
INTERIOR DOORS

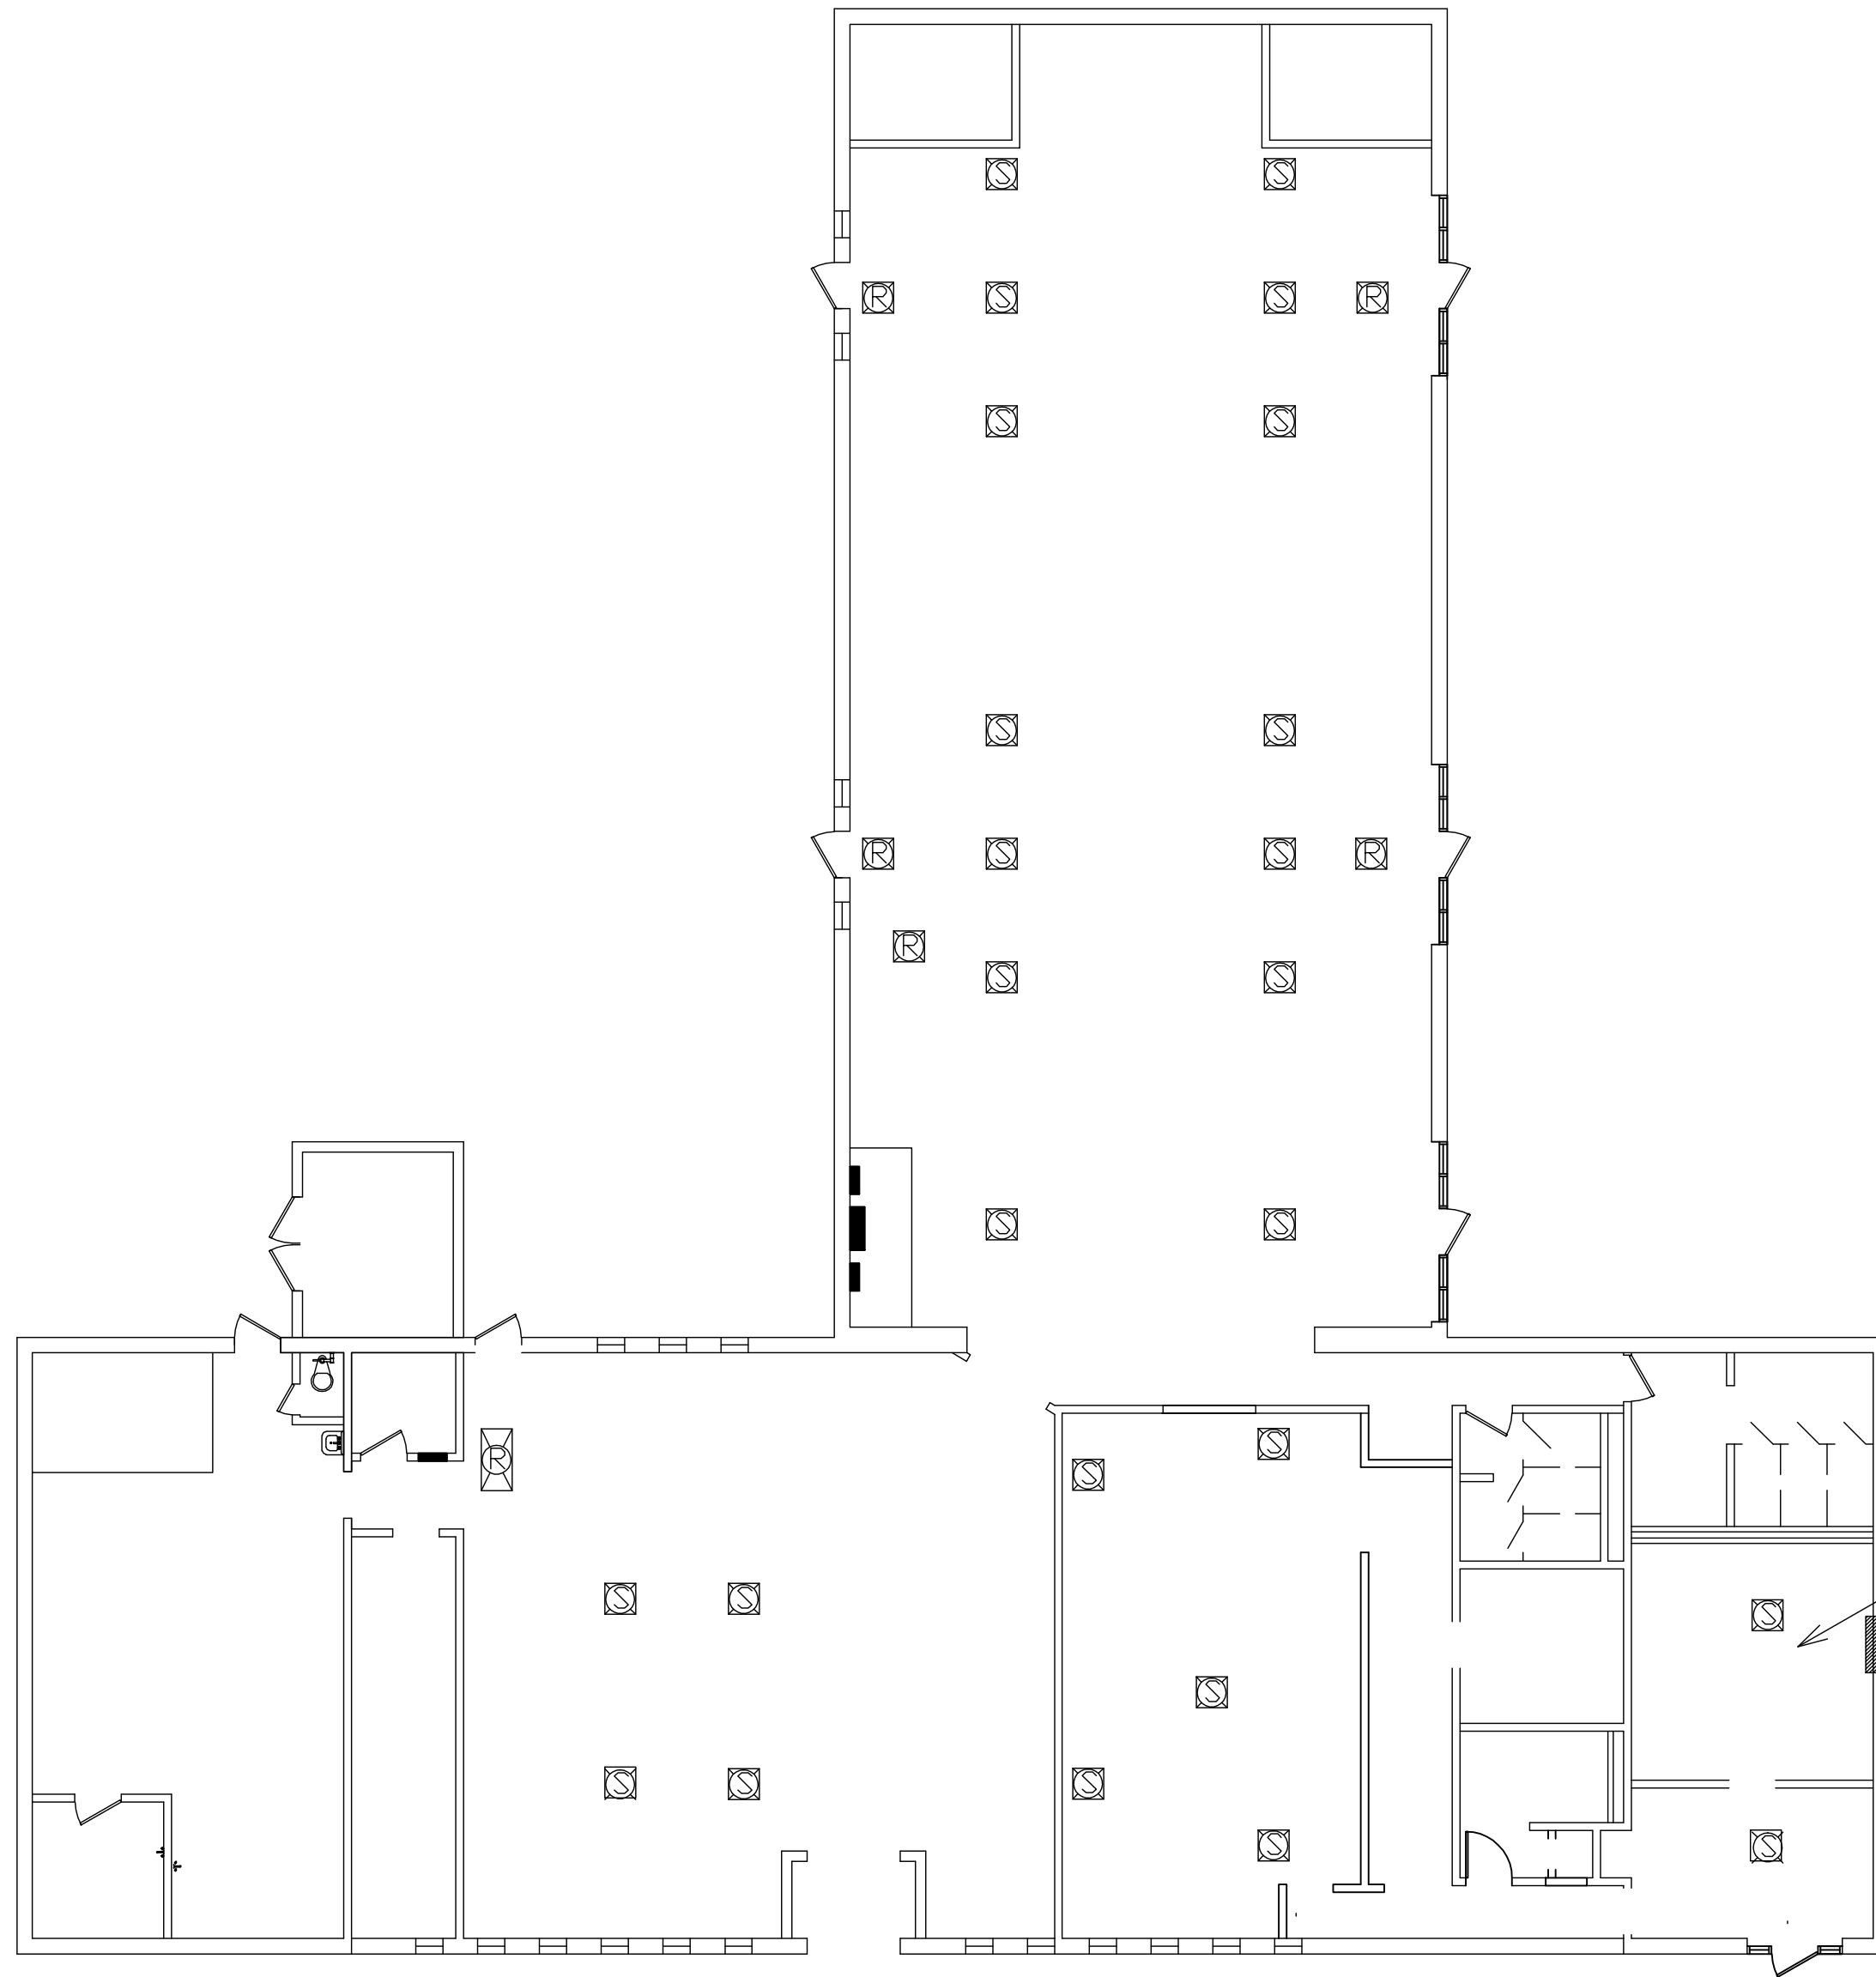

PA 18, 20


Mechanical-

- Demolish the existing supply and return grille complete.
- Procure and install "t" bar, lay-in supply grilles to the same specifications as those removed with the exception of color, which shall be white. The new return grilles shall also have similar specifications as previously demo'ed. Theater room shall be black.
- Procure a package terminal heat pump, 208/230v, 1 ph., approx. 7000 btuh cooling and 6300 btuh heating, + or - 10%. Such as GE Zoneline AZ61H07DAB or equivalent. Install the PTHP in the manager's office, exterior wall.


(Electrical Note- install a 20 amp circuit/wall receptacle to accommodate the PTHP.)

BLDG# G560	SHEET 13JF19
CONTRACT# N40085-13B-0433	
DWG. DAVID BELEDNARD	MACC# 13-0433
TITLE	
USMC CAMP LEBEUNE	
M-1	


MECHANICAL PLAN

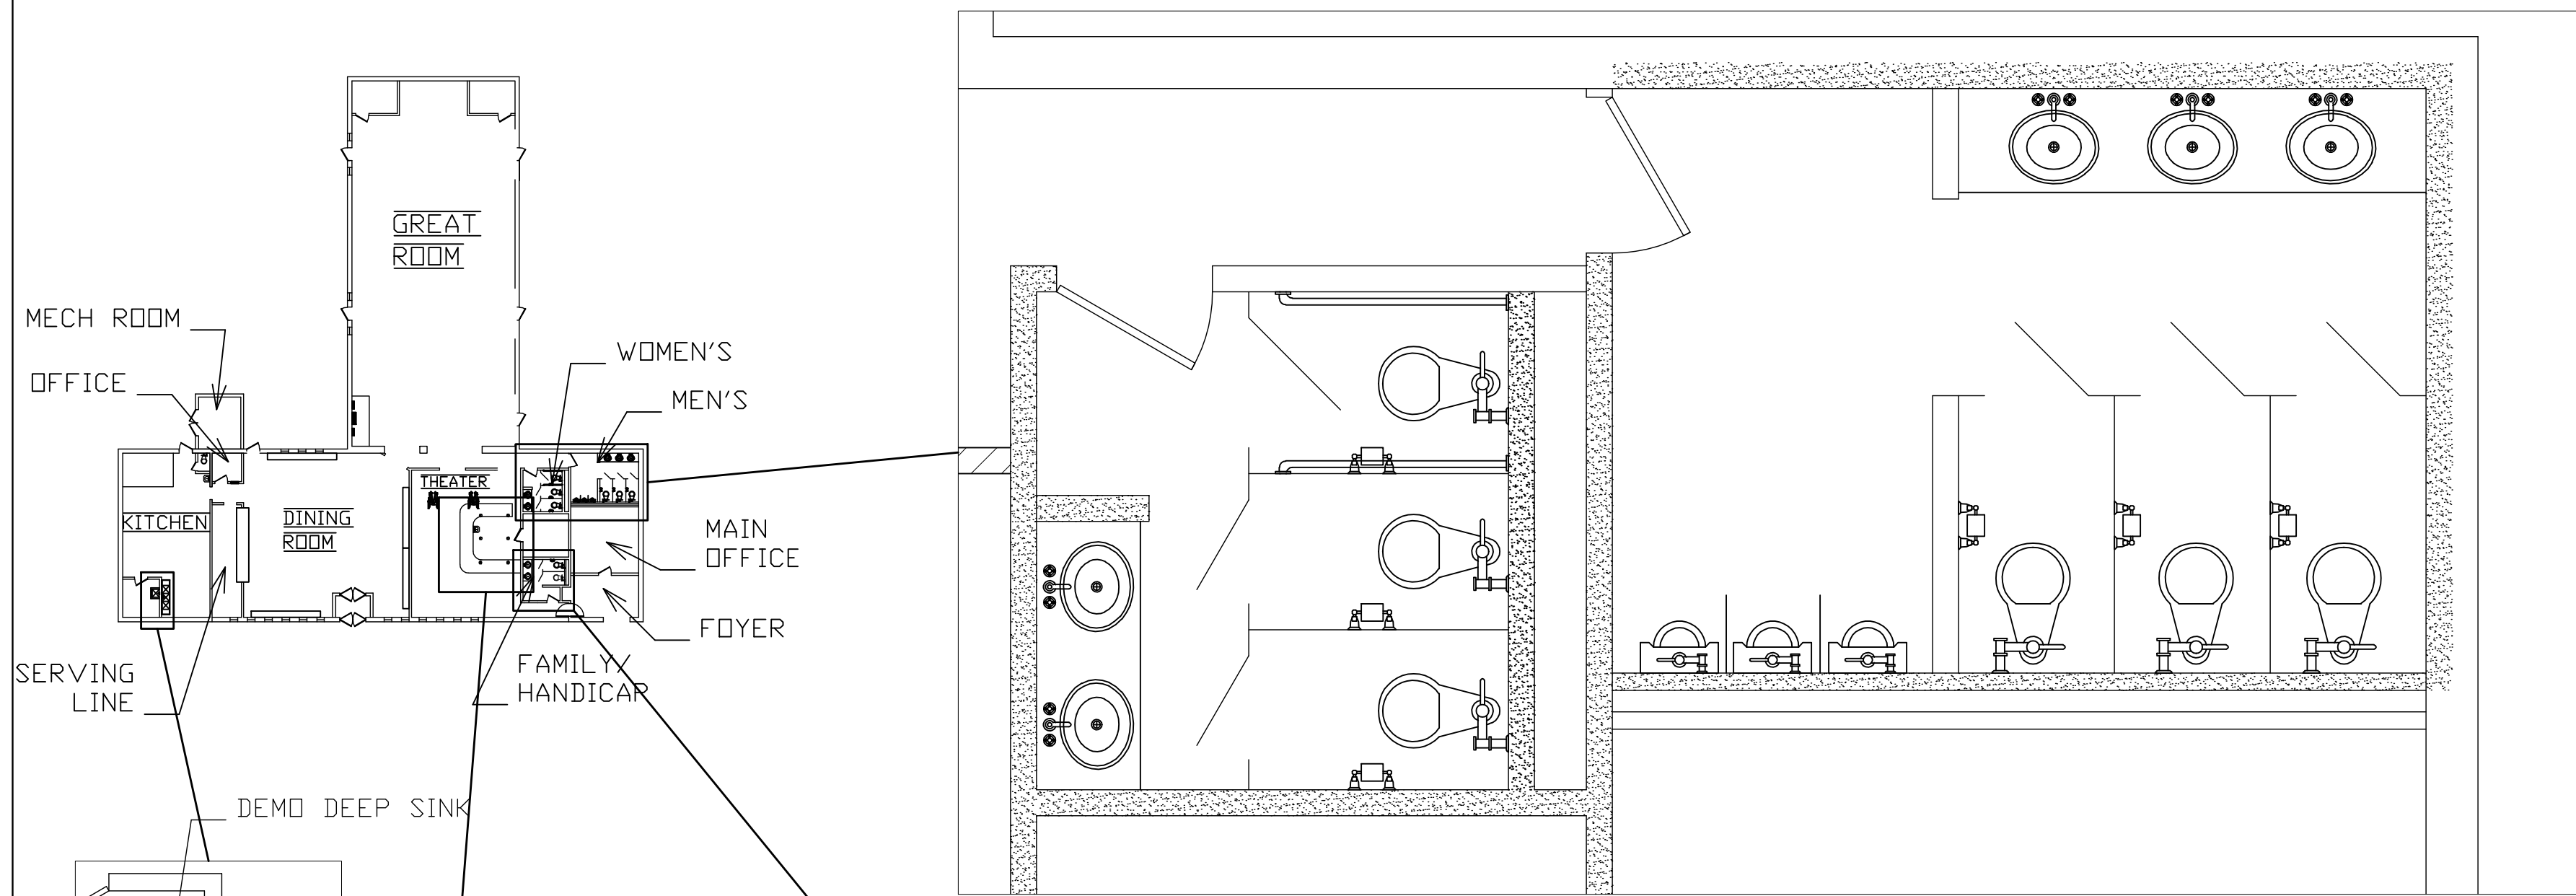


Women's Men's

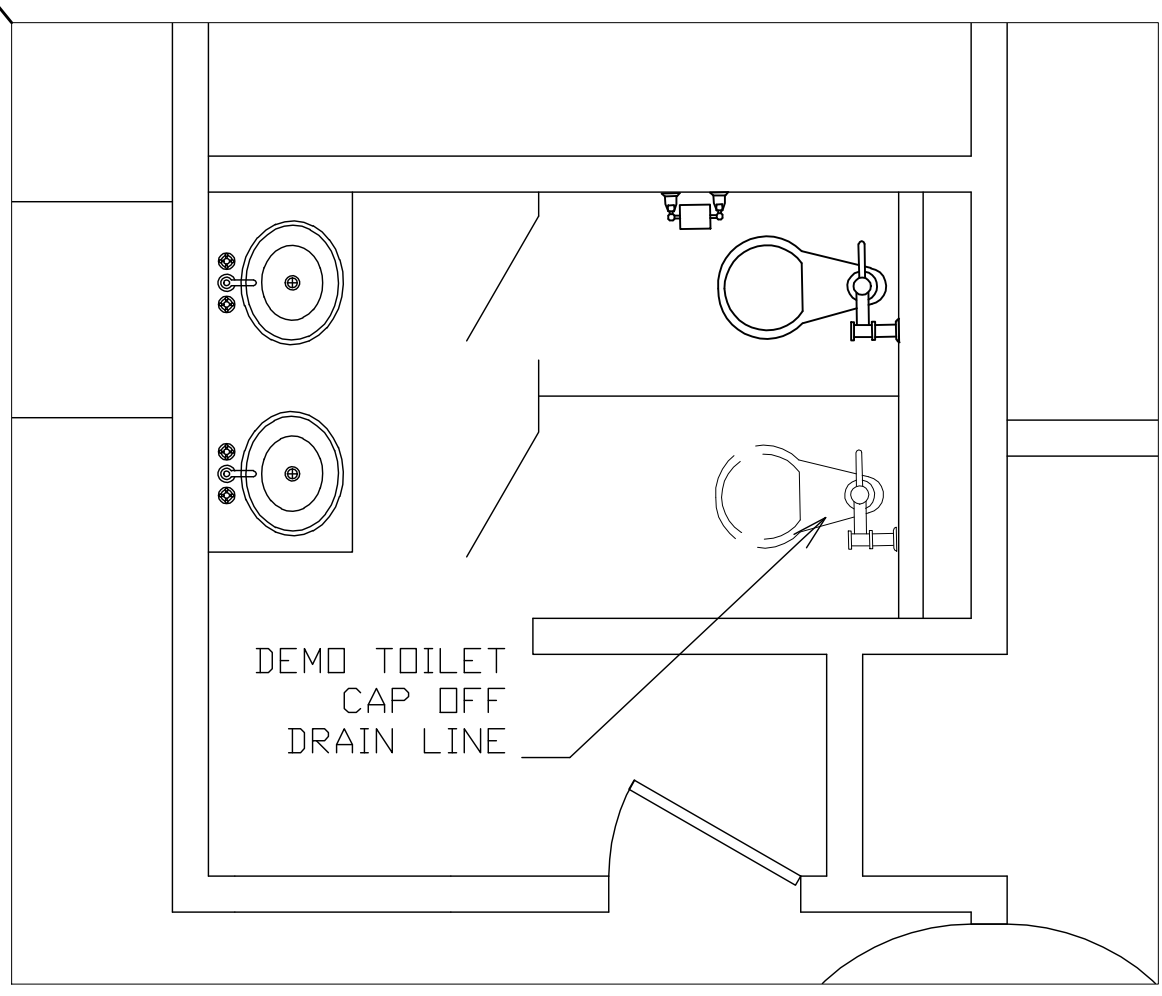

Family/Handicap Restroom

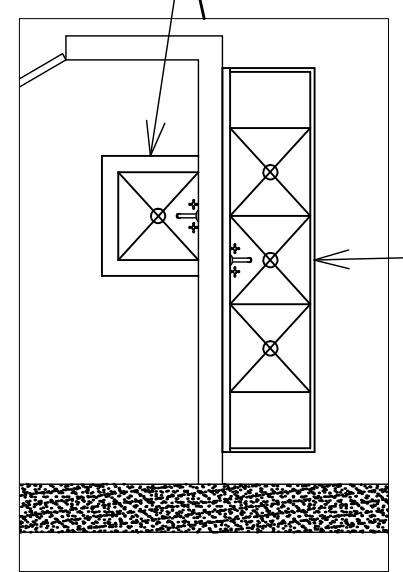


Kitchen

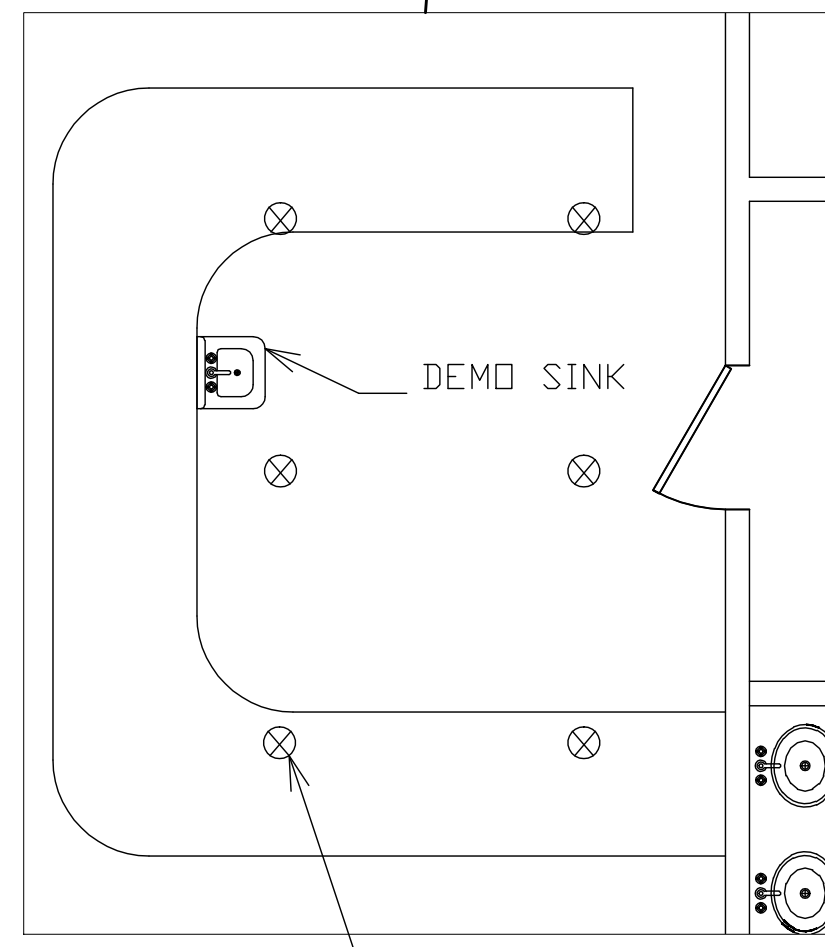


Bar

1. Remove old existing plumbing fixtures from the men, women and family/handicap bathrooms, consisting of eight commodes, seven sinks and three urinals.
2. Plug up and seal six existing floor drains in bar area.
3. Cap off water and drain lines below floor level and remove sink in bar area.
4. Demo existing drain line on three compartment sink in kitchen area consisting of three basket strainers, drain line and P-trap.
5. Demo plastic deep sink in kitchen area.
6. Properly remove, haul, and dispose of all debris

TITLE	BLDG# G560	SHEET 140F19
	CONTRACT# N40085-13B-0433	
	DWG: DAVID BELEDNARD	MACC# 13-0433
USMC CAMP LEBEUNE		
P-1		

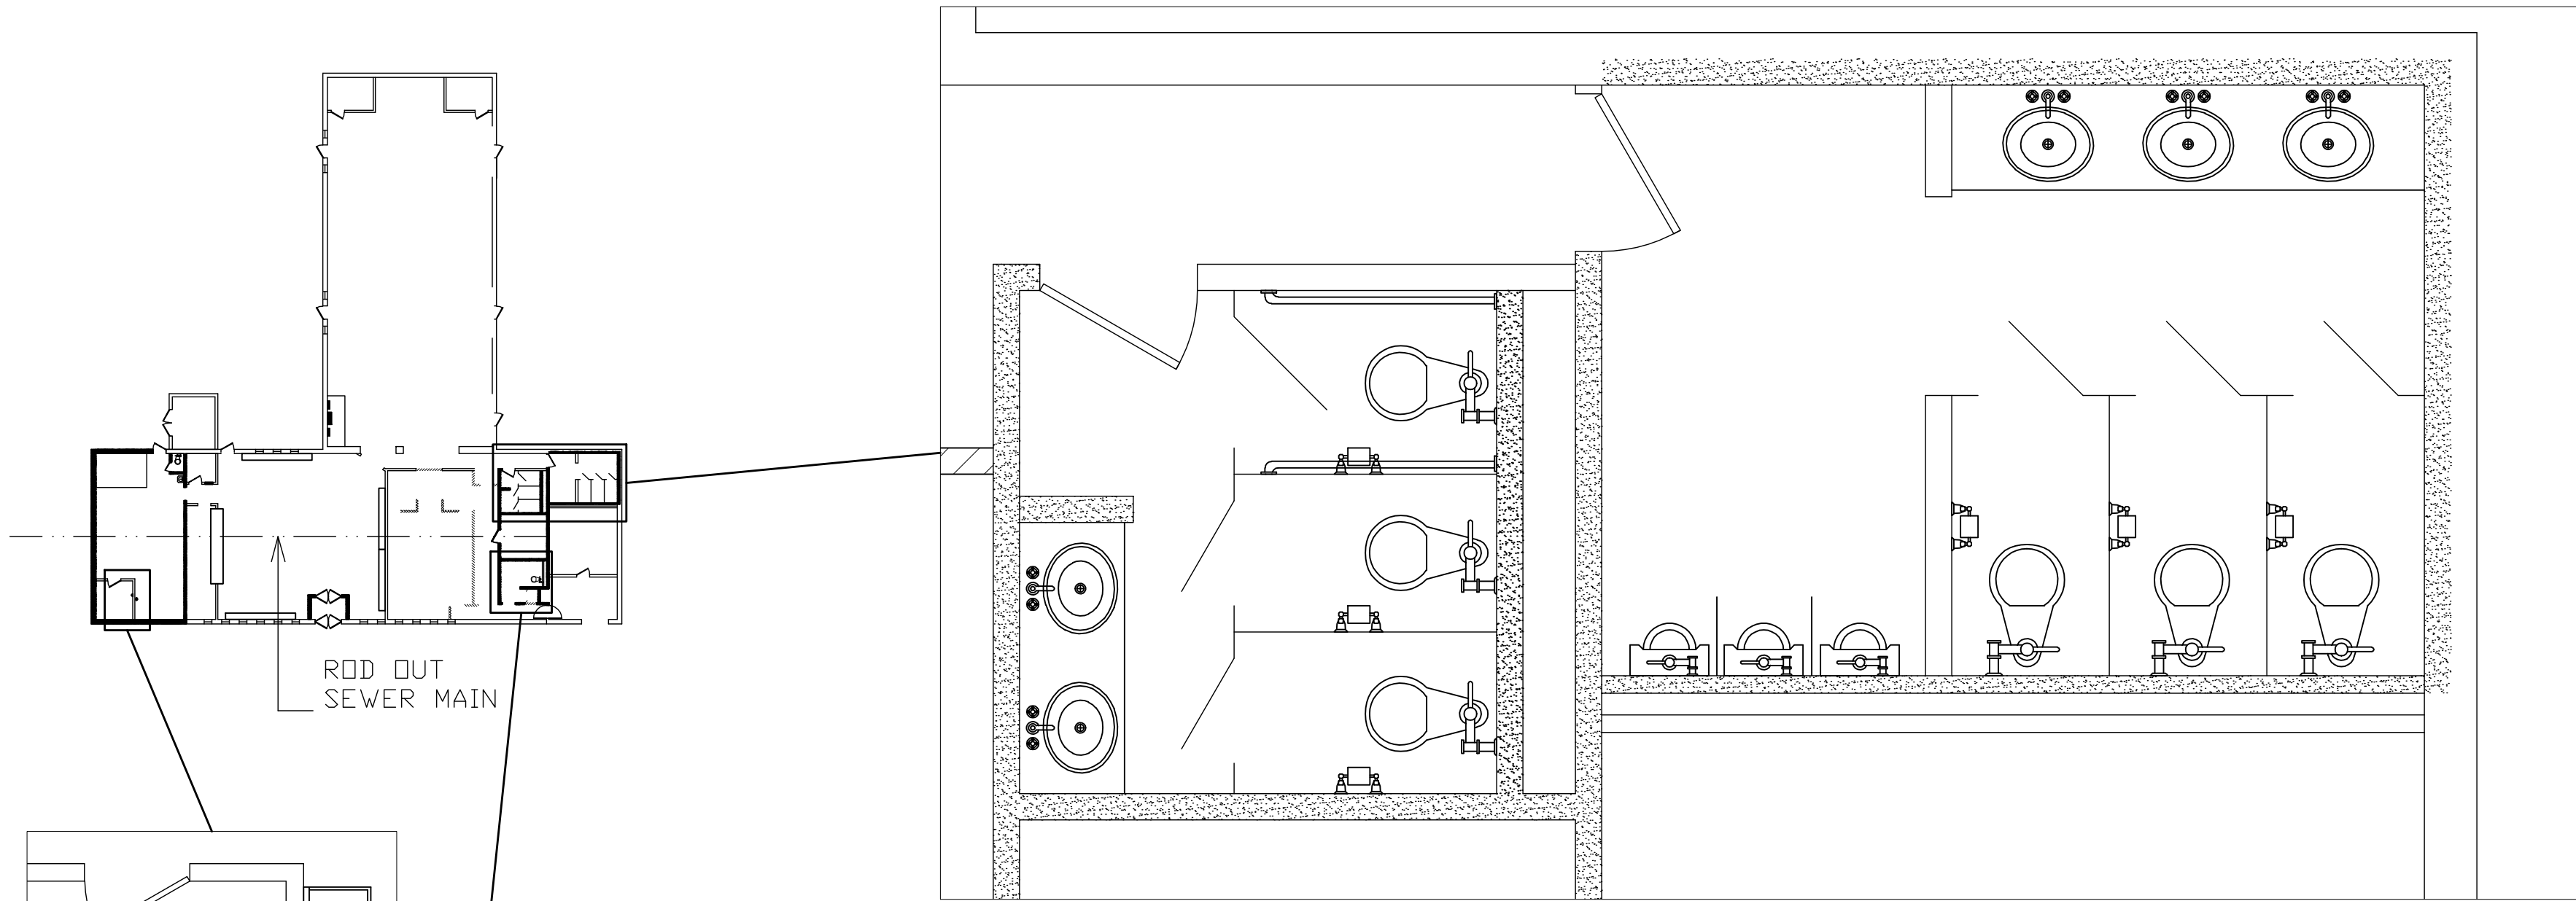

1. The contractor shall install six American Standard, or equal flush valve toilet, One Piece, Floor Mounting Style, Elongated Bowl, commode and seats.
2. Install one American Standard ADA compliant or equal flush valve toilet, One Piece, Floor Mounting Style, Elongated Bowl, commode and seats.
3. Install seven commode flush valves, 1.6 Gallons per Flush, Back Check Stop. 1 Inch, Rough In 11 1/2 Inches, Wall Flange 1 Inch, 1 1/2 Inch Spud Flange
4. Install three American Standard, or equal flush valve urinals, wall hung.
5. Install three Urinal Flush Valves, 1.5 Gallons per Flush, Back Check Stop 3/4 Inch, Rough In 11 1/2 Inches, Wall Flange 3/4 Inch, 3/4 Inch Spud Flange
6. Vanities: solid surface counters with w 4" backsplash and solid surface supports. Install under mount sink and all associated plumbing to insure proper operation.
7. Install three basket strainers, drain line and P-trap on three compartment sink in kitchen area.
8. Install new floor mop sink, rough in new drain line and P-trap and faucet in kitchen area.
9. Cut concrete floor, install P-trap and connect to existing drain line for the installation of the new floor mounted mop sink. Floor sink: Overall dimensions 24"x24"x10"
10. Rod out main sewer line from end of line clean out next to manager's office to man hole outside of building to insure all drains are open.

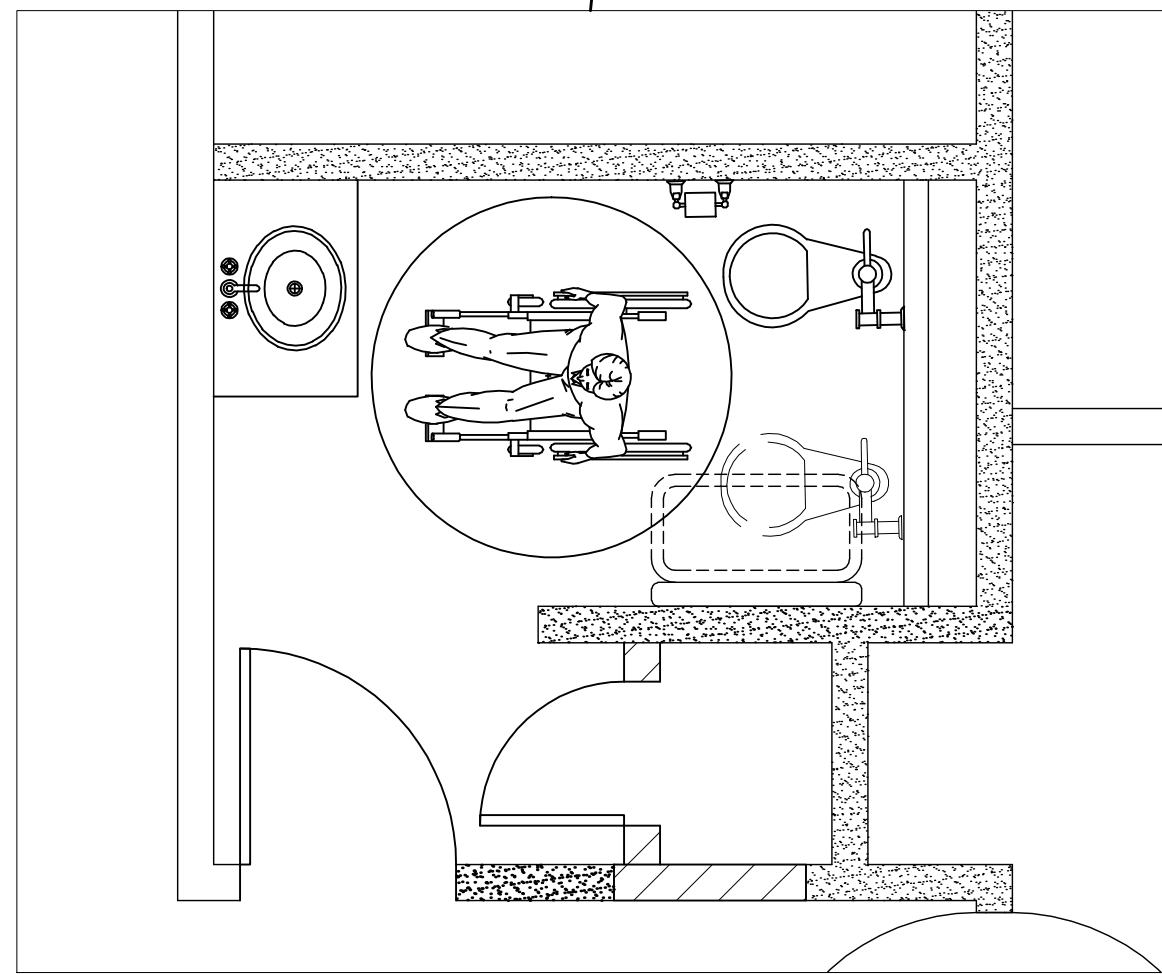

BLDG# G560	SHEET 15JF19
CONTRACT# N40085-13B-0433	
DWG. DAVID BELEDNARD	MACC# 13-0433
TITLE	USMC CAMP LIEBUNE

P-2

Plumbing Plan



- ① DEMO POWER BACK TO ELECTRICAL PANEL
- ② DEMO ALL SWITCHES, THROUGHOUT, BACK TO JUNCTION BOX. EXTERIOR LIGHTS TO BE PHOTO CELL CONTROLLED.
- ③ DEMO ALL LIGHT FIXTURES THROUGH OUT THE BUILDING. (EXCLUDING AREAS MARKED TO REMAIN)
- ④ RELOCATE FIRE ALARM PULL STATIONS TO ALLOW FOR NEW DOOR INSTALL
- ⑤ DEMO ALL POWER FOR BAR ASSOCIATED EQUIPMENT BACK TO PANEL.


NOTES:
1. REPLACE ALL 120V 15 : 20 AMP RECEPTACLES AND COVER PLATES. NEW DEVICES SHALL BE IVORY IN COLOR AND PLATES SHALL BE STAINLESS STEEL. DEVICE PLATES LOCATED WITHIN THE WAINSCOTING SHALL HAVE MATCHING COVER PLATES.
2. REPLACE ALL SWITCHES AND COVER PLATES. NEW DEVICES SHALL BE IVORY IN COLOR AND PLATES SHALL BE STAINLESS STEEL.



BLDG# G560	SHEET 160F19
CONTRACT# N40085-13B-0433	
DWG: DAVID BELEDNARD	MACC# 13-0433

TITLE	USMC CAMP LIEBUNE
F-1	

-  2x2 Troffer,
2 lamp T5
-  2x4 Troffer,
2 lamp T5
-  2x4 Troffer
3 lamp T5
-  1x4 Troffer,
W/overlapping
flange
2 lamp T5
-  Emergency
Exit light
-  Single Pole
Switch
-  Three way
switch
-  Fluorescent
Dimmer
-  Dual
technology
occupancy
sensor
-  Exhaust fan, 120
volt, 150 CFM
-  1x4 Surface
mount, 2
lamp T5
wraparound

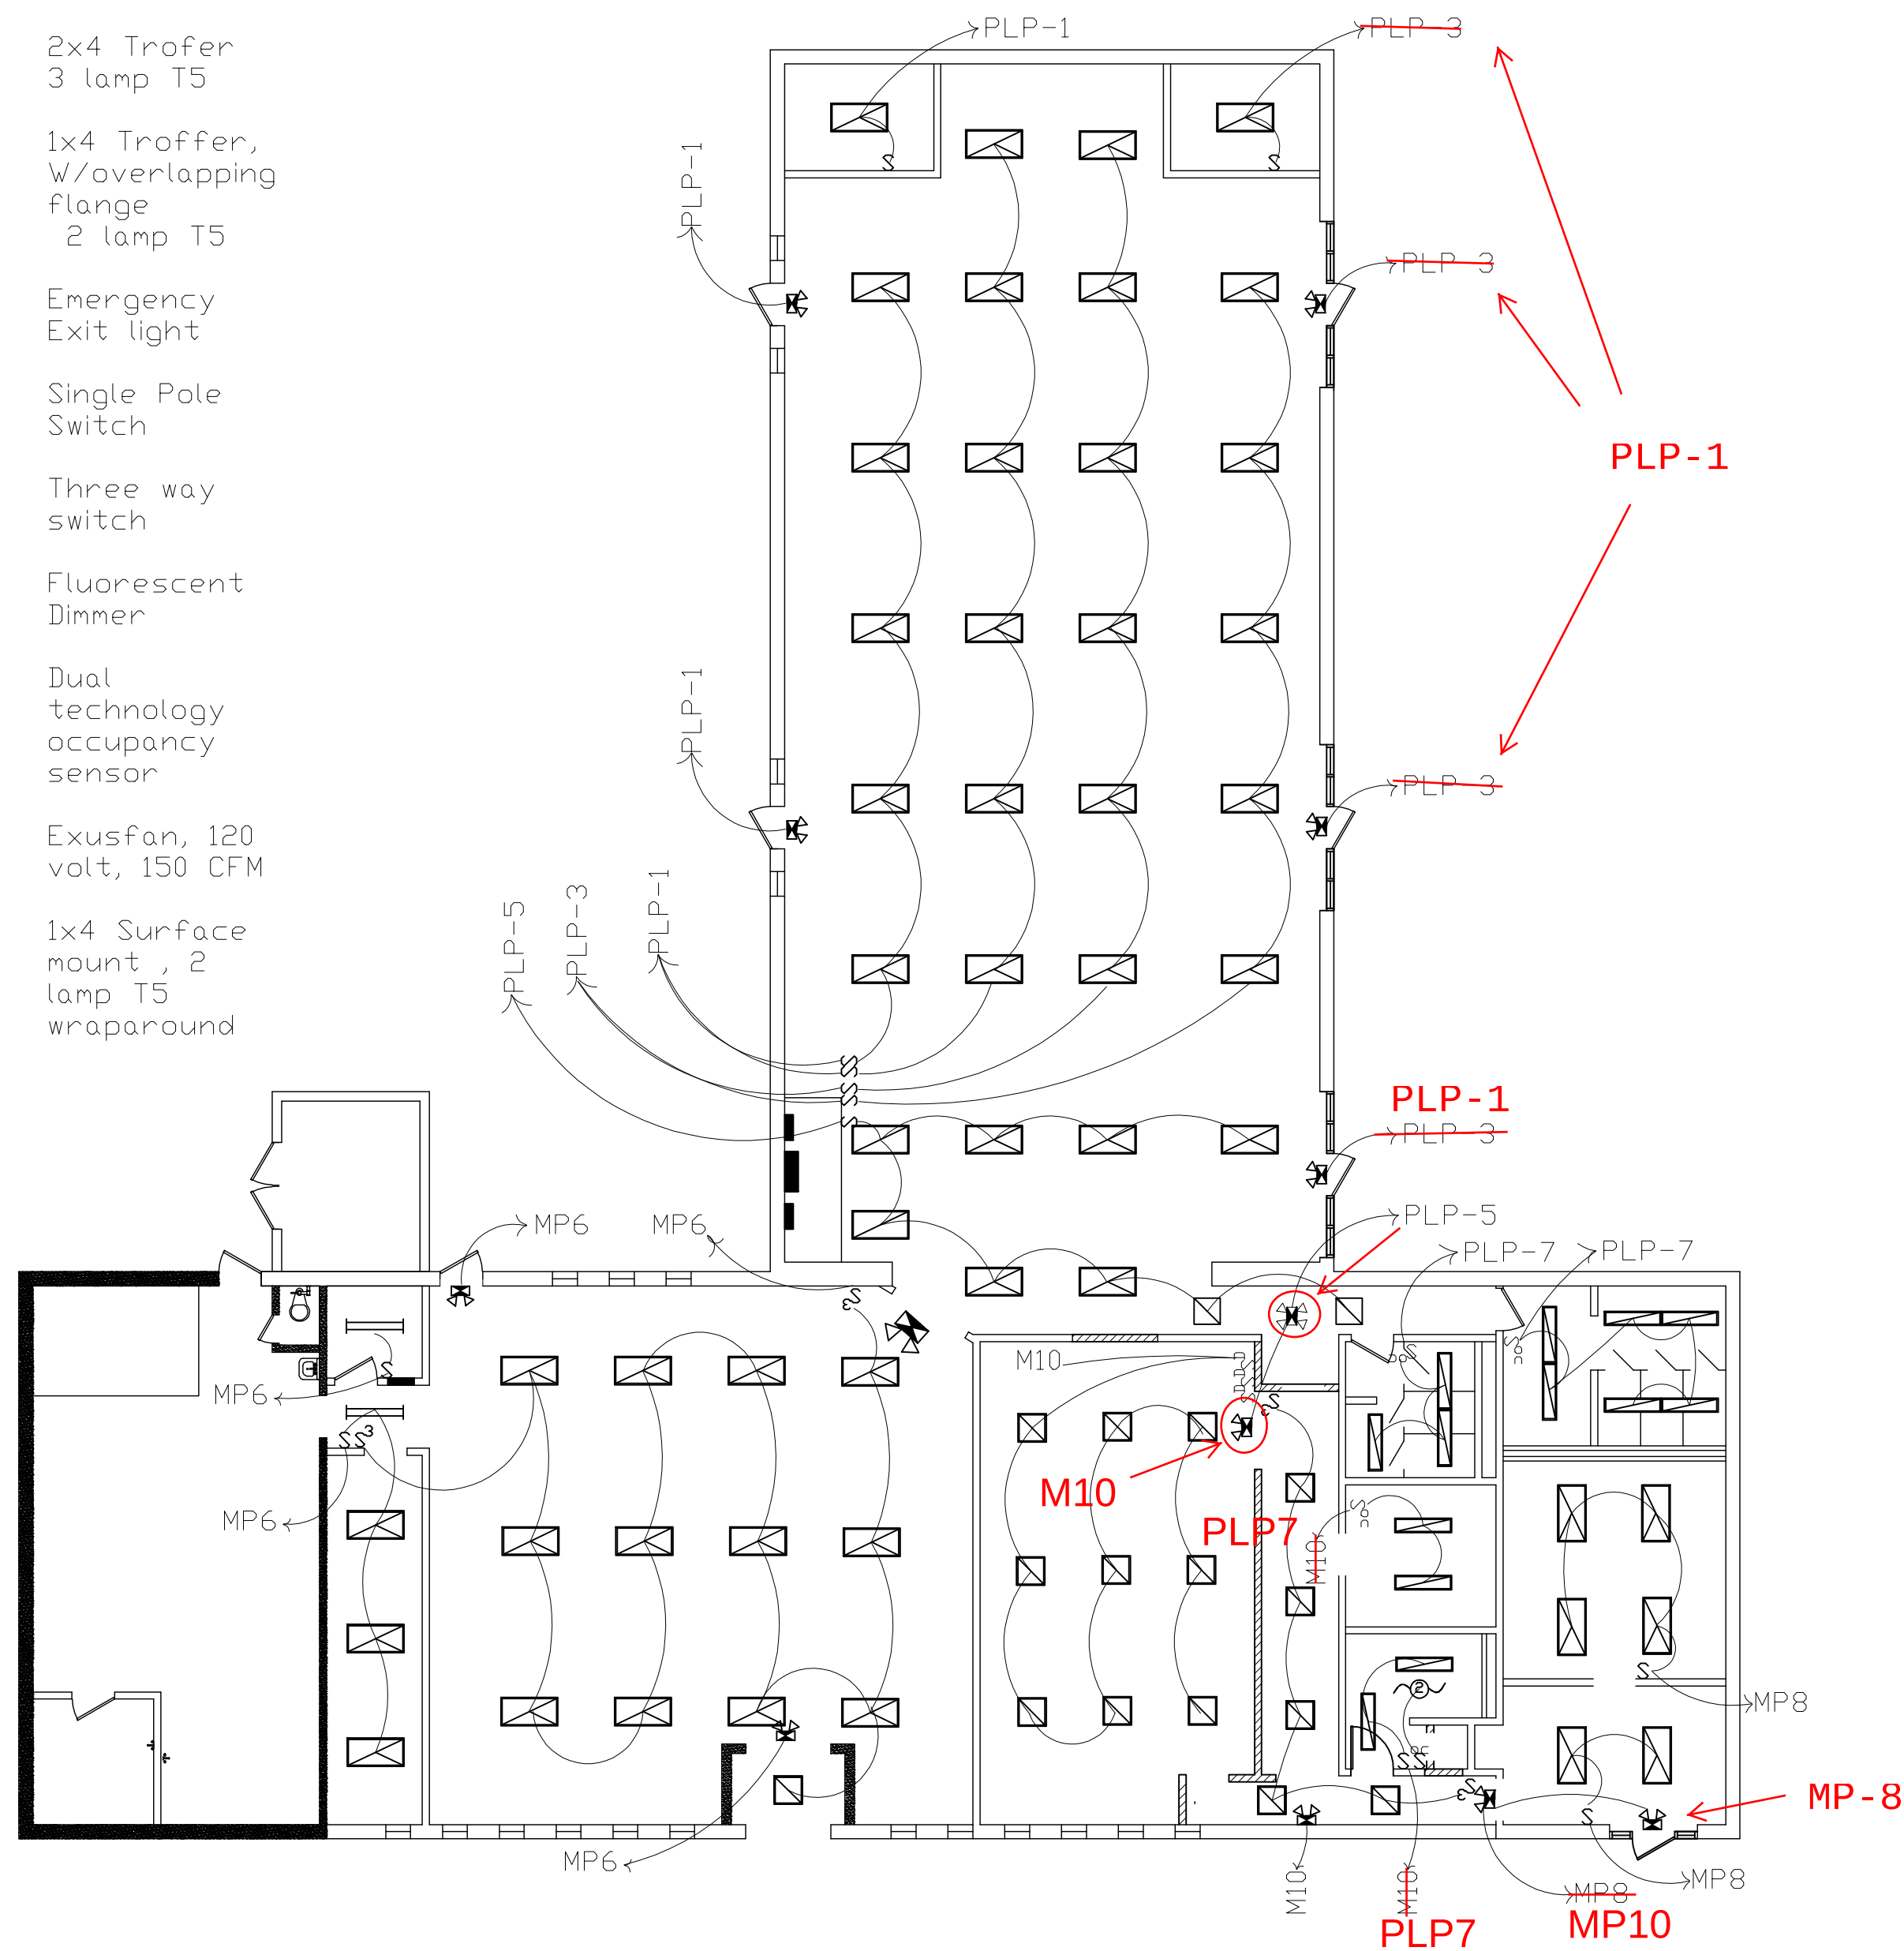

1

EXISTING TO REMAIN


2

REPLACE EXISTING EXHUAST FAN.

EXIT/ EMERGENCY LIGHTS SHALL BE FED
WITH UN SWITCHED POWER

BLDG# G560	SHEET 170F19
CONTRACT# N40085-13B-0433	
DWG. DAVID BELEDNARD	MACC# 13-0433
TITLE	USMC CAMP LEBEUNE
E2	


LIGHTING

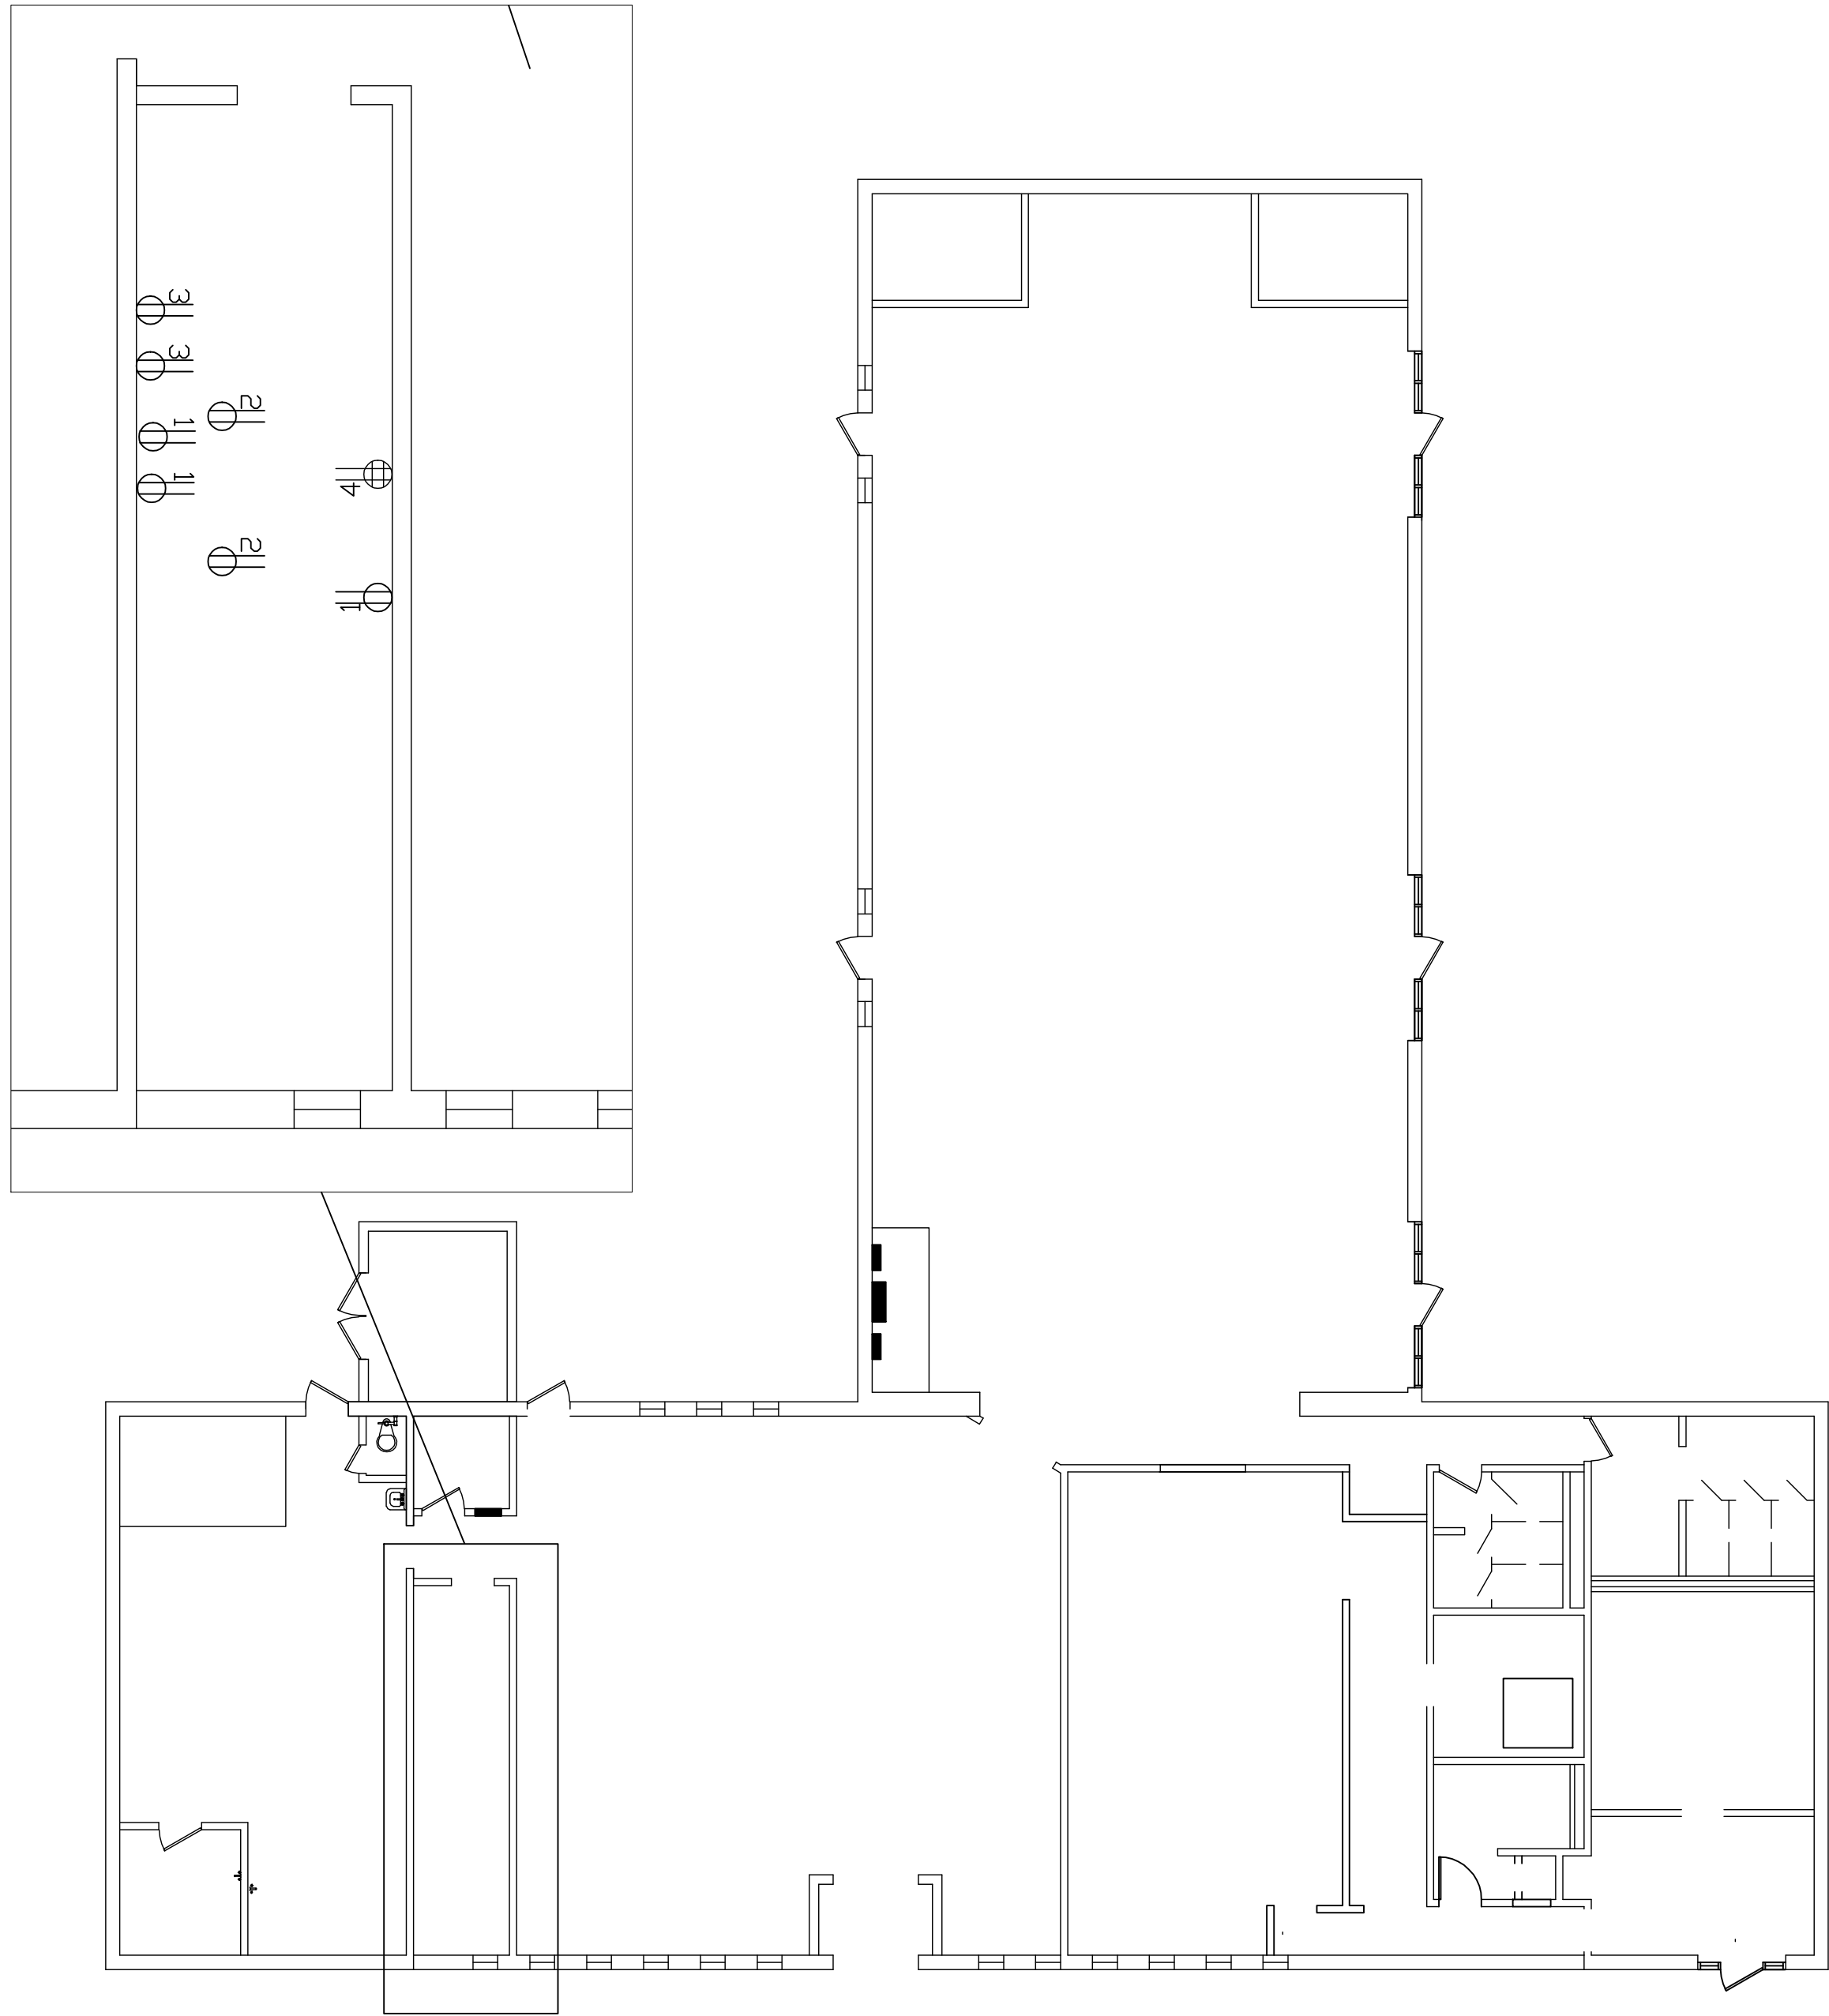


- 1 EXISTING TO REMAIN
- 2 RECEPTACLES 72" ABOVE FINISH FLOOR
- 3 MOUNT AT SAME HEIGHT AS EXISTING COUNTERTOP RECEPTACLES
- 4 QUAD RECEPTACLE TO BE MOUNTED UNDER THE COUNTER

RECT. SERVING LINE

E3	USMC CAMP LEBEUNE	TITLE		BLDG# G560	SHEET 18
				CONTRACT# N40085-13B-0433	
				DWG: DAVID BELEDNARD	MACC# 13-0433

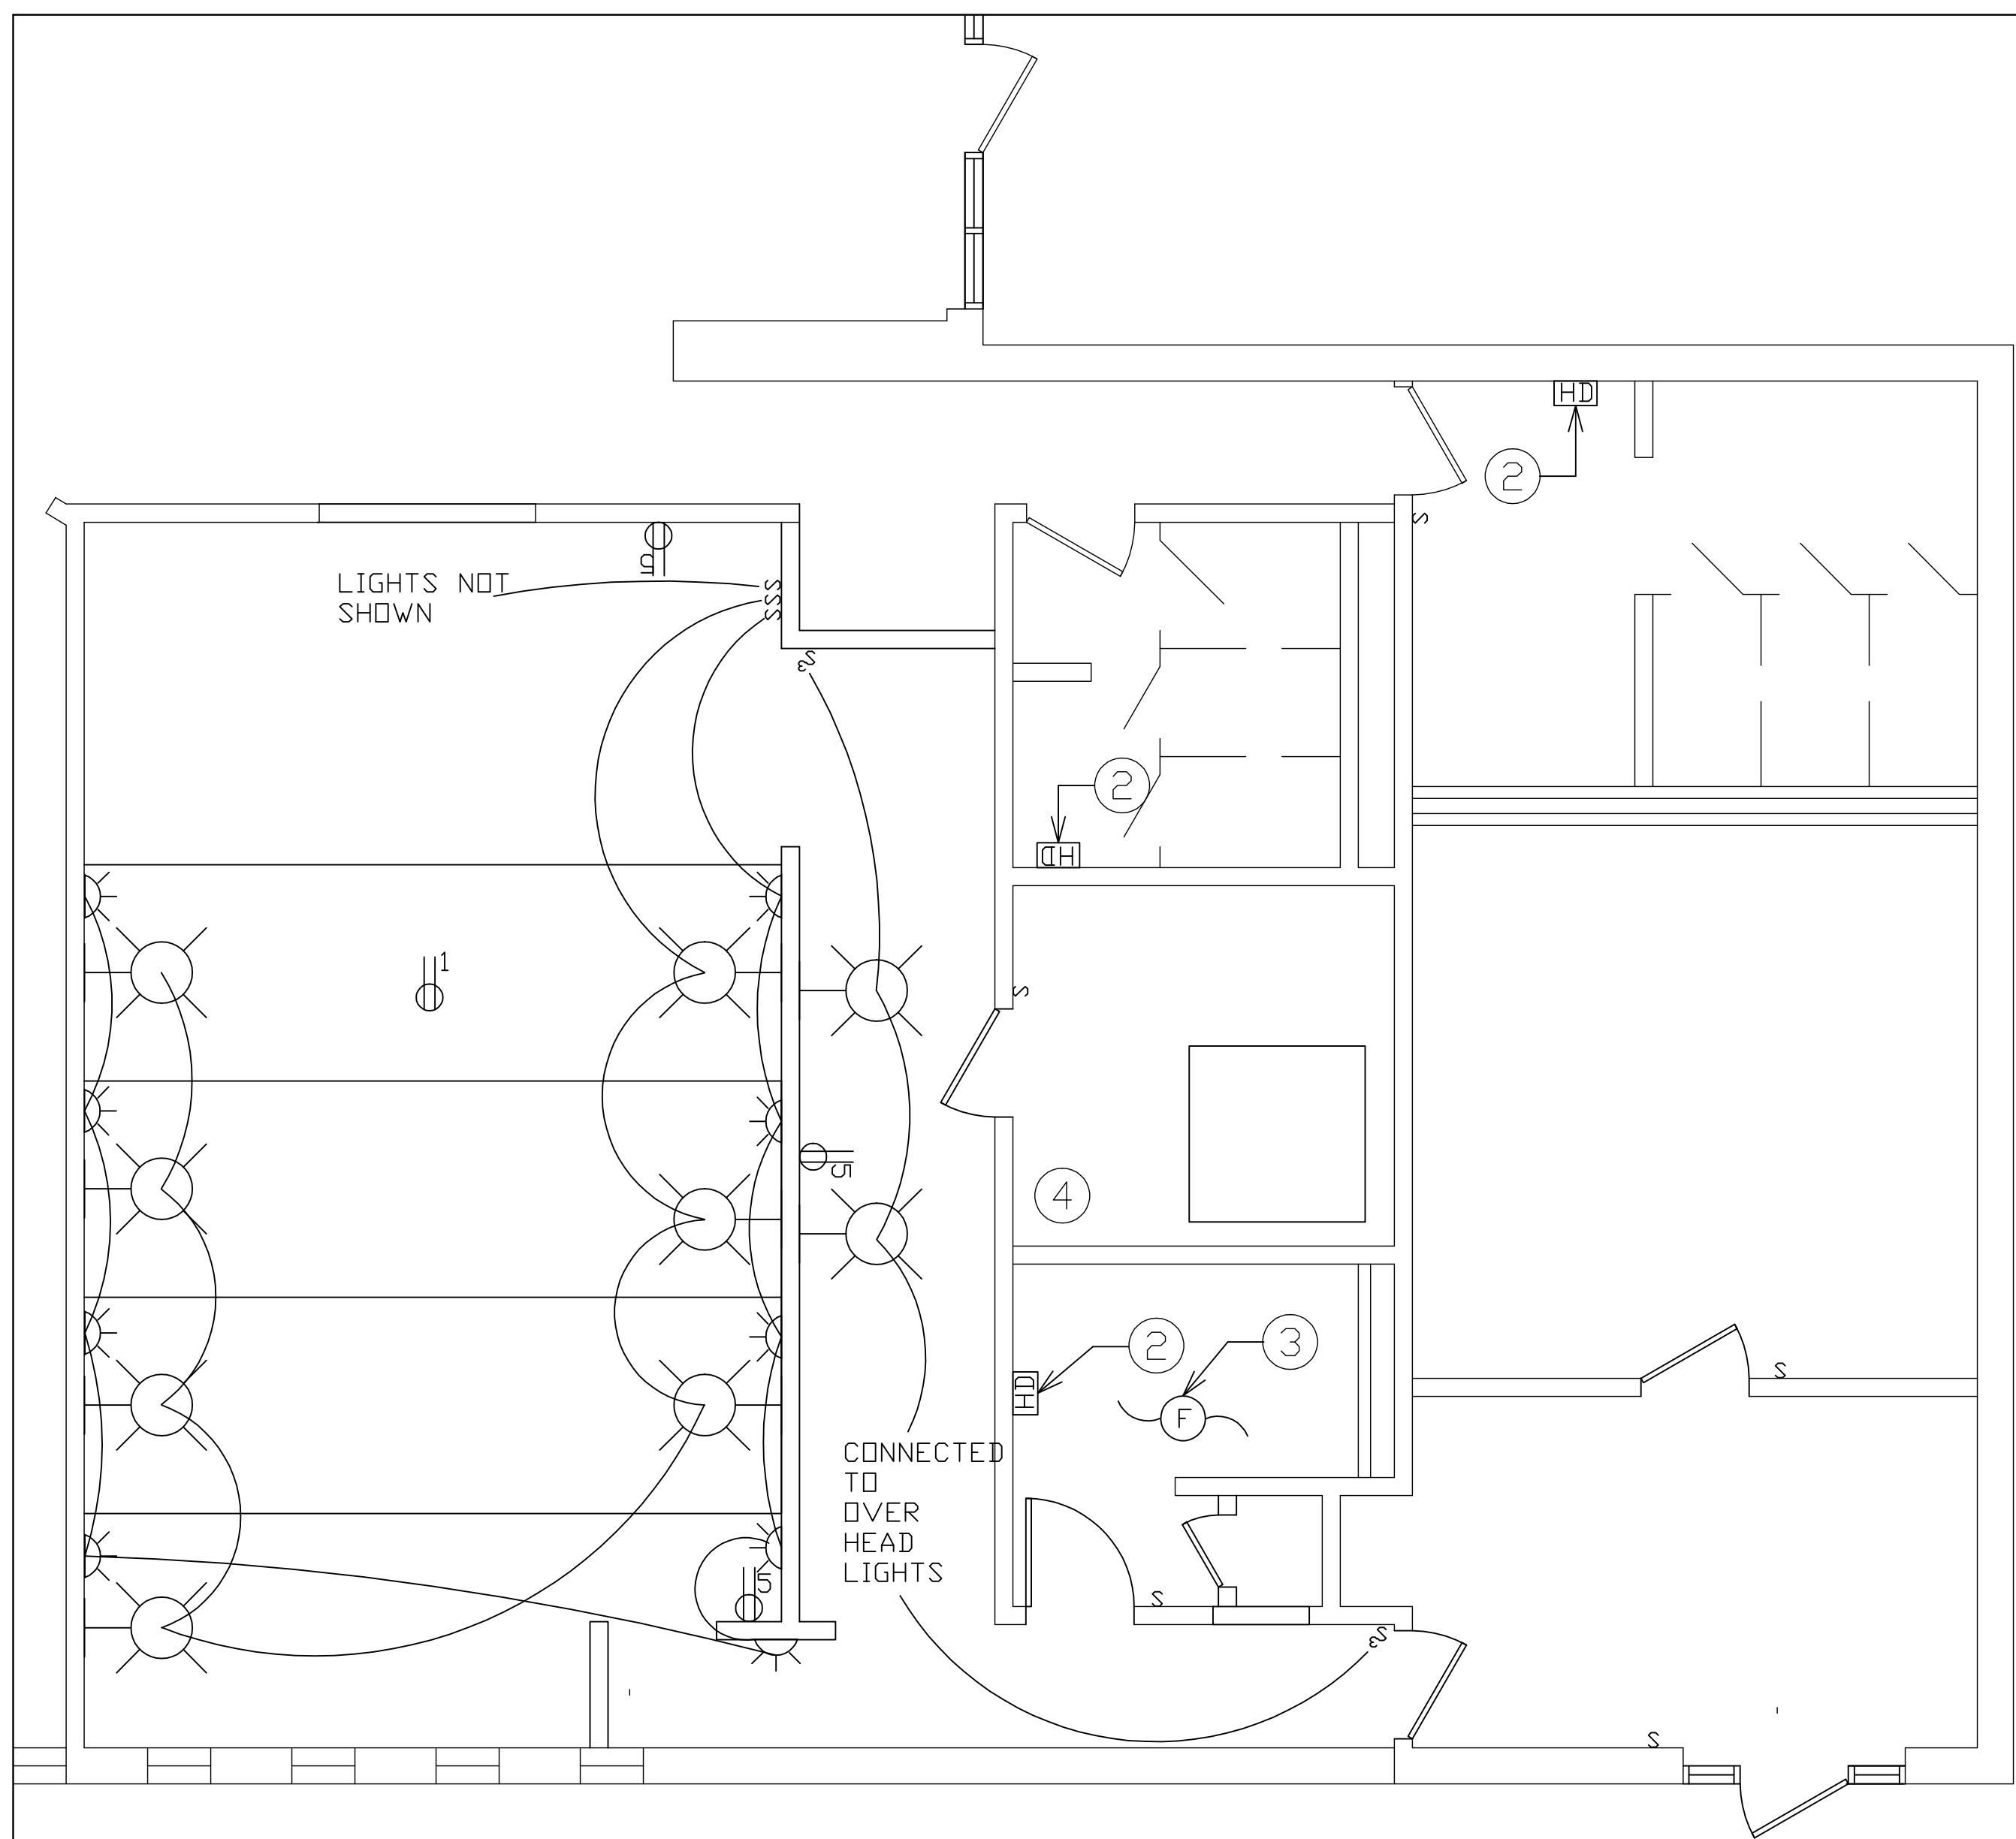

- ① Projector power from panel "M" coordinate exact location with tenant
- ② Provide power to hand dryer
- ③ Replace exhaust fan
- ④ Provide power to AV equipment for theater room in this location, coordinate with MCCA
- ⑤ provide power to convenience outlets from panel m **m7**

 LED wall sconce dimmable, 3000K cct
Basis of design Lithonis lighting
SWBLED series with cover DLSD8

 LED step light, cut-off typ (vertical orientation), dimmable, 3000k cct
Basis of design JUND mini led step light.

 Hand Dryer
Basis of design xlerator
model XL-W **MP40**

cct-correnlated color temperature

NOTE: TROFFER LIGHTS
NOT SHOWN

TITLE	BLDG# G560	SHEET 190F19
	CONTRACT# N40085-13B-0433	
	DWG: DAVID BELEDNARD	MACC# 13-0433
USMC CAMP LEBEUNE		
E4		
MISC ELEC THEATER		