



VICINITY MAP

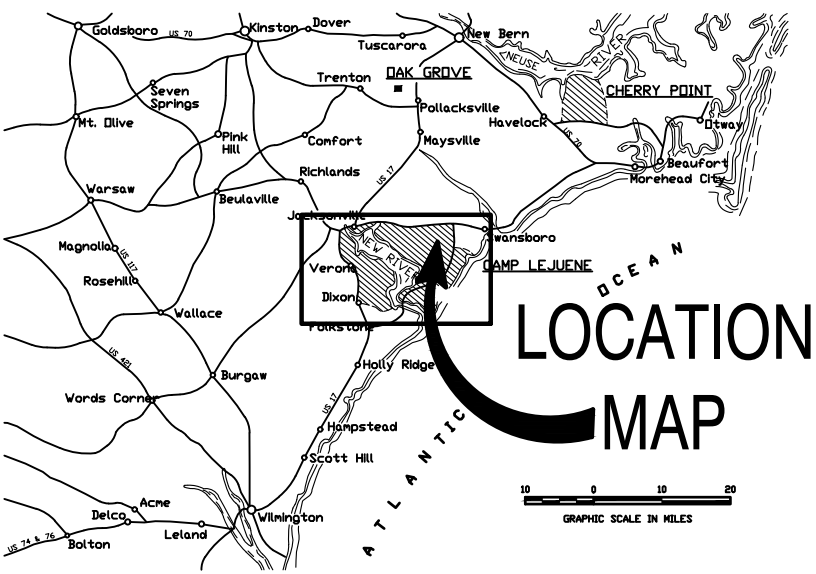


LOCATION MAP

LOCATION MAP

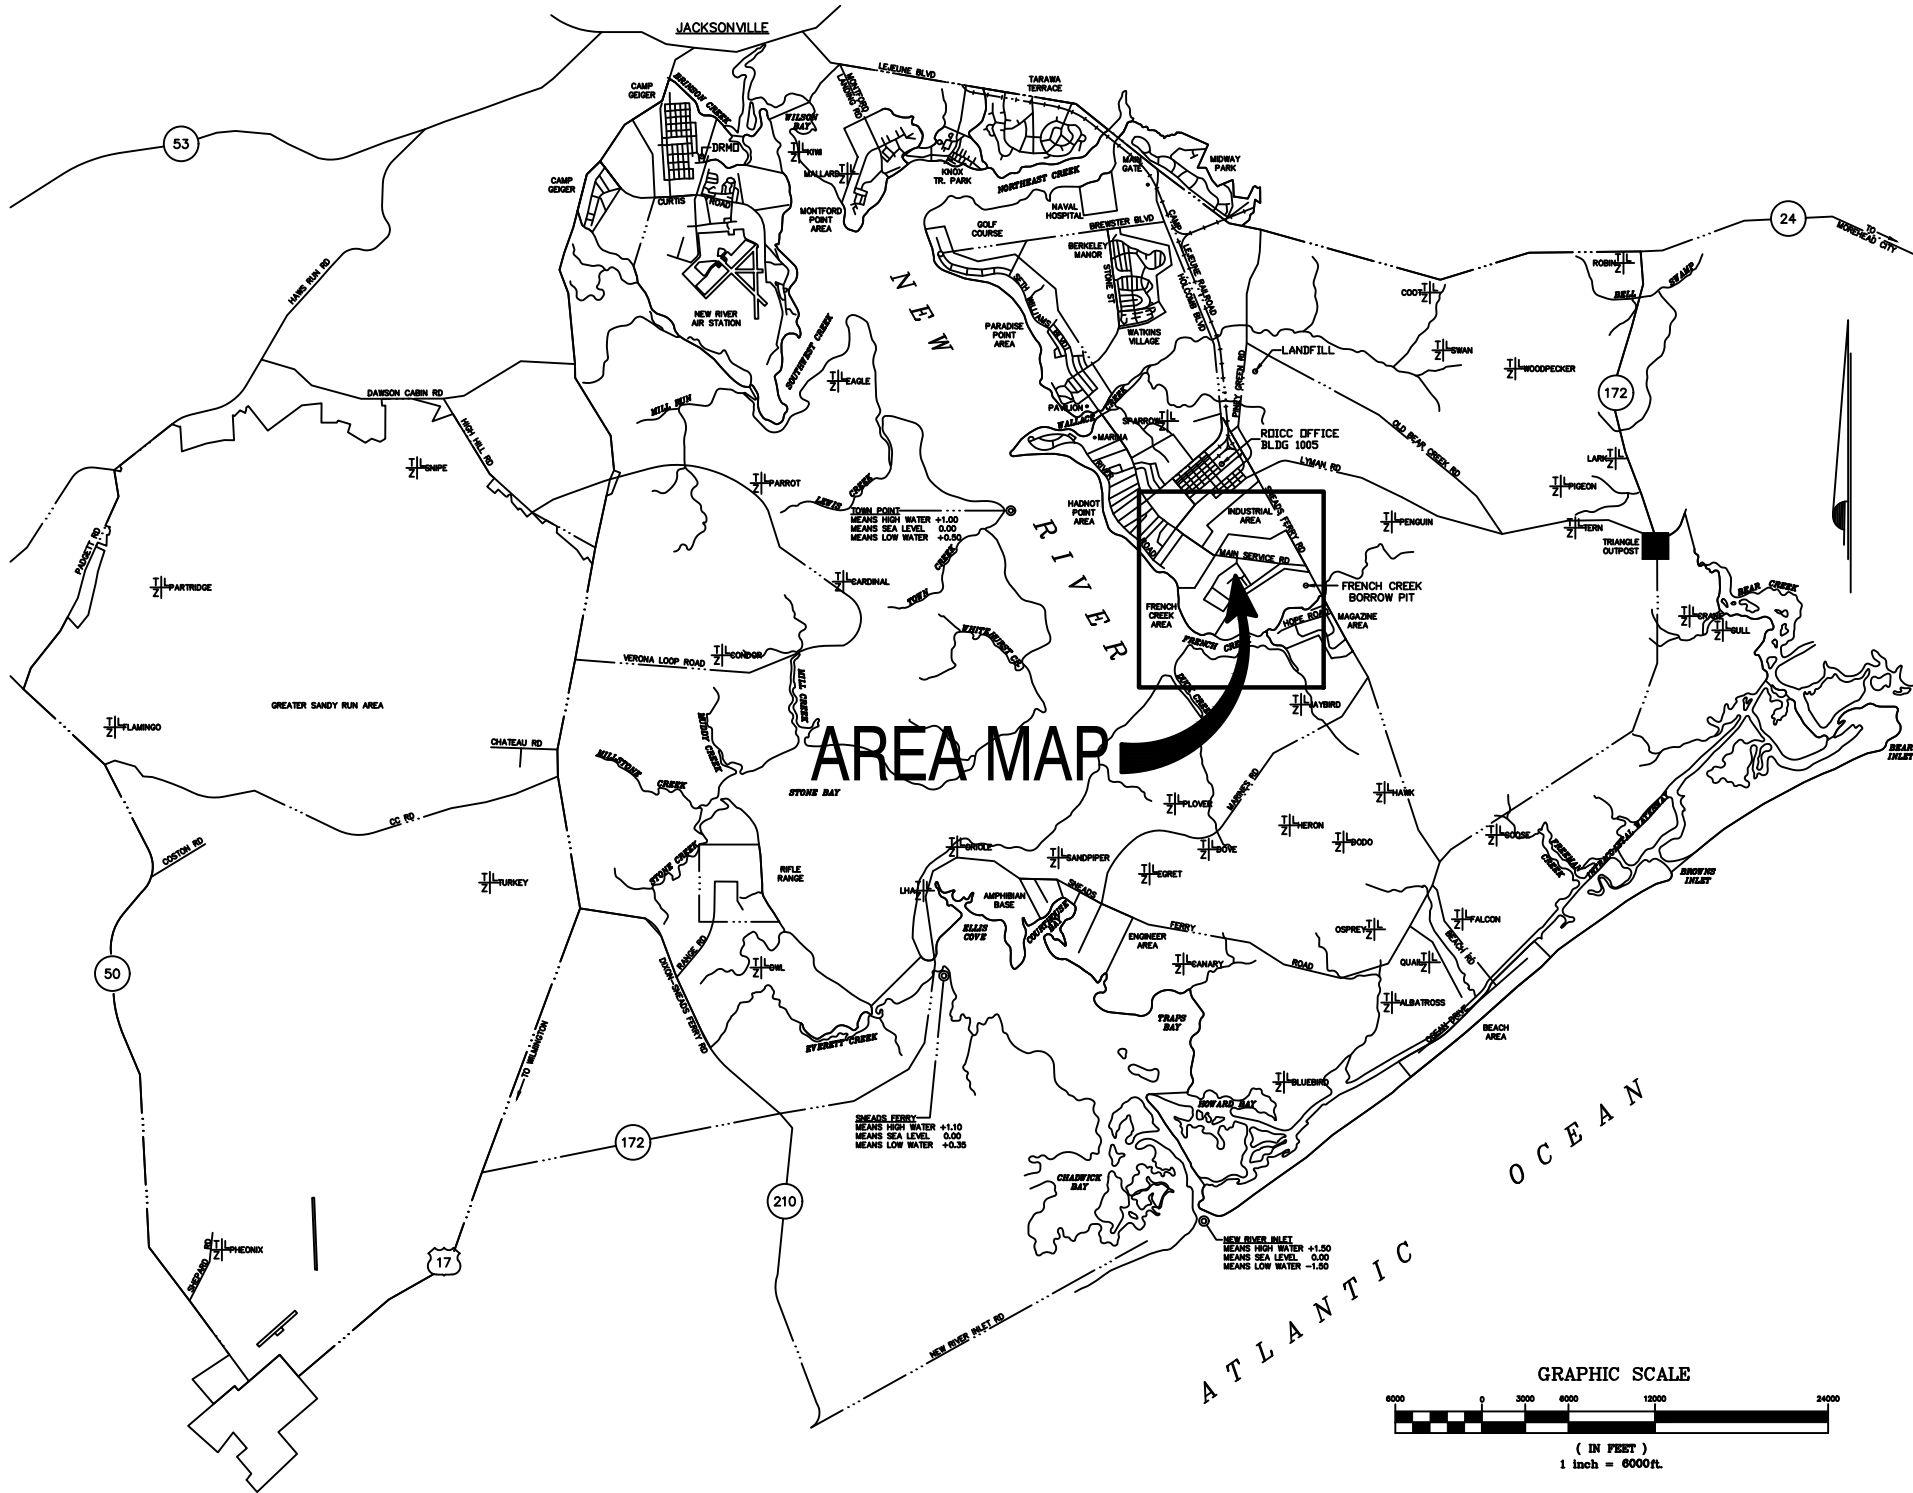

AREA MAP

AREA MAP

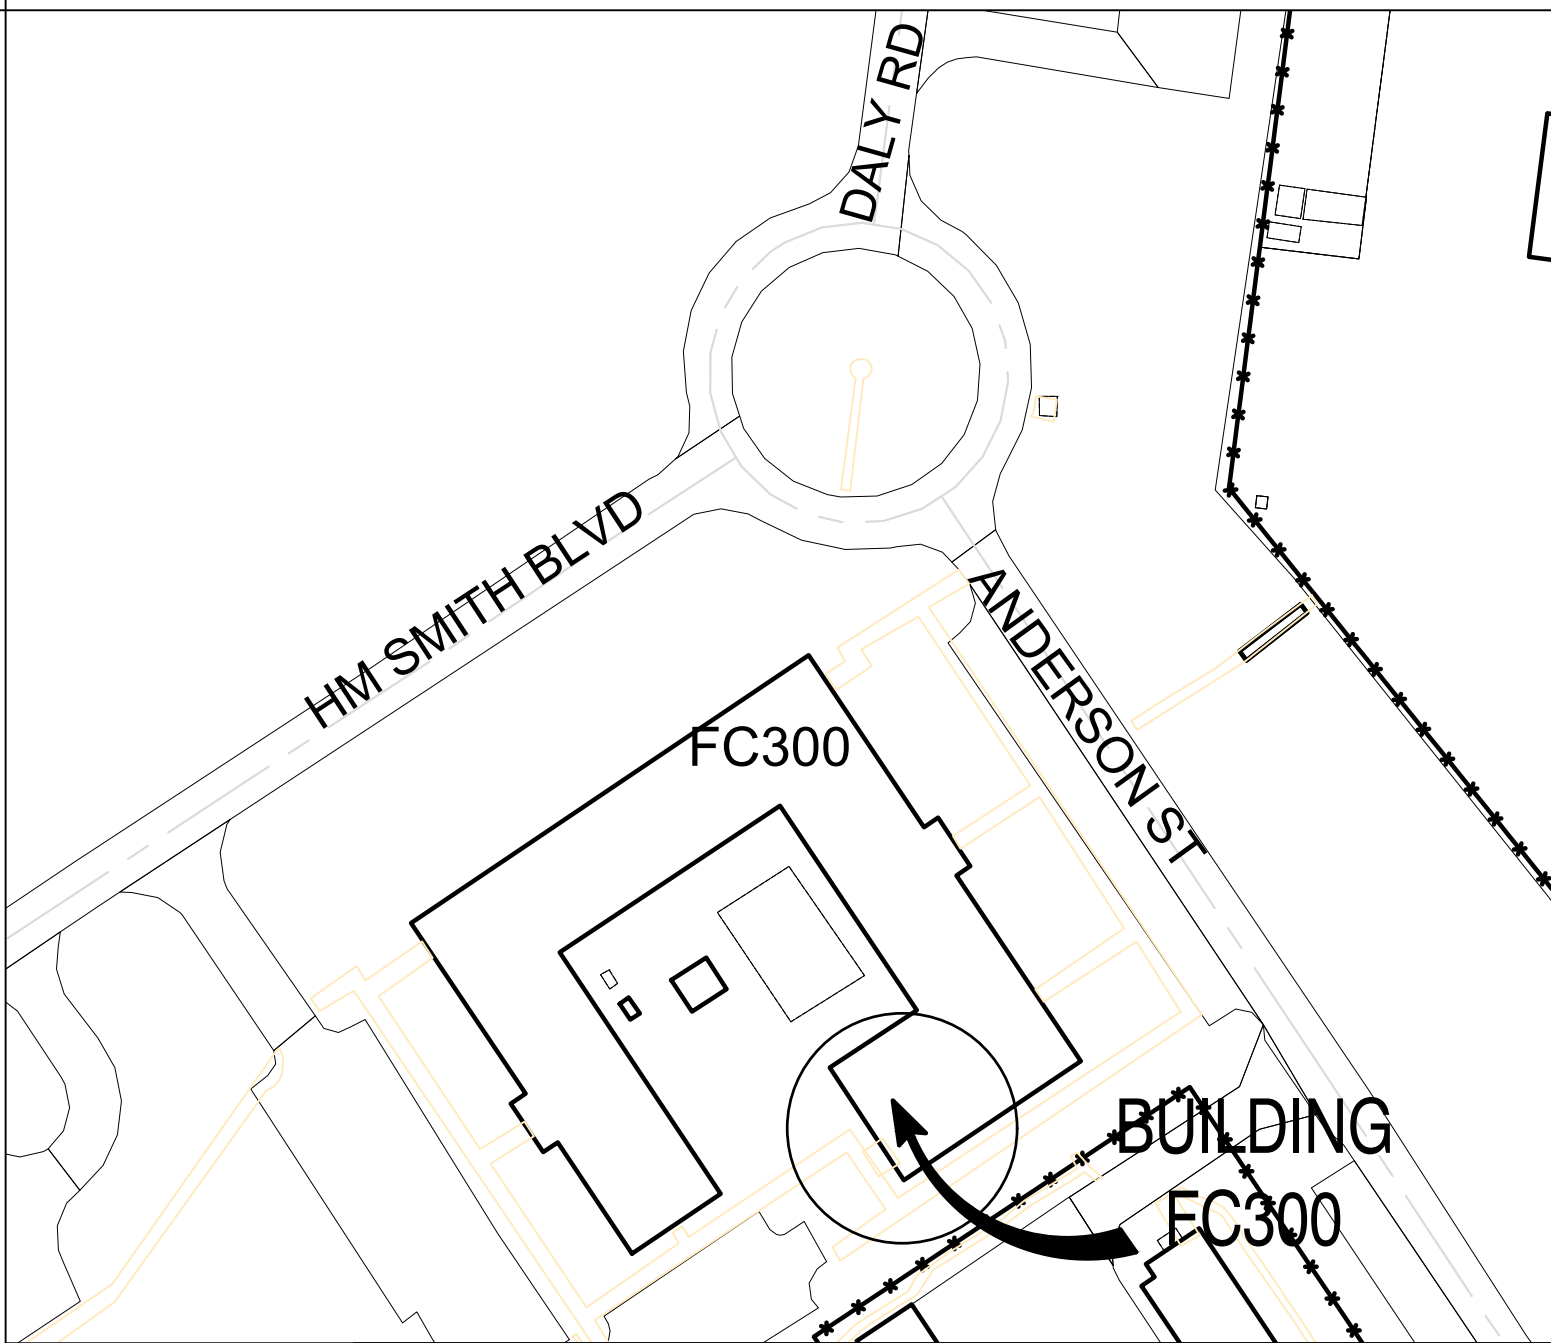

DRAWING INDEX

SHEET #	SHEET NAME
T1	TITLE SHEET, AREA MAPS
A1	NOTES
A2	SPECIFICATION
A3	SPECIFICATION
A4	EXISTING FLOOR PLAN
A5	RENOVATION FLOOR PLAN
A6	SECURITY SCREENS ELEVATION
E1	LIGHTING FLOOR PLAN
M1	MECHANICAL FLOOR & ELEVATION PLAN

SECTION/DETAIL NUMBER
SHEET NUMBER WHERE DETAIL IS SHOWN
SHEET NUMBER WHERE DETAIL IS TAKEN

BLDG. FC300	SHEET 1 OF 9
MACC # 25-0450	
DWG. DANA WHITMORE	PROJECT# 25M081CN
FC300 PHYSICAL SECURITY	
USMC CAMP LEJEUNE	
T1	

TITLE PAGE

SCOPE OF WORK: The contractor shall provide all material, labor, equipment, and supervision required to accomplish the following:

General description - This scope of work is to be accomplished at FC300 located on Anderson St. at Camp Lejeune, North Carolina. This project will consist of installing two new walls and doors, all hardware per scope of work. Demo a existing door and wall. Harden of duct and sealing all penetrations of pipe, cables, cable trays and duct. Work shall be accomplished outside of secure area. Contractor shall secure the area with the two new walls, door and harden of duct before demo existing door and wall. The Contractor shall provide material, equipment and labor as required to accomplish work specified.

DETAILED REQUIREMENTS AND SPECIFICATIONS: The contractor shall take his own field measurements in determining required materials and costs for the following.

SPECIAL SCHEDULING AND ACCESS: Access and scheduling to the work area shall be arranged through Contracting Officer's Representative for the OICC office and the tenant of the building. Point of Contact for access to building. Point of contact is SSgt. Werline. SSgt. Werline can be reached at 1-239-834-7503

NOTES:

1. The measurements and quantities furnished here are for reference only. The contractor is responsible for actual field verification prior to bidding, ordering material and during every step of construction for existing surfaces, dimensions and conditions.
2. Repair, refinish all areas damaged or disturbed by new work to be provided under this contract.
3. Contractor may ONLY use the Camp Lejeune Sanitary landfill for the disposal of asbestos containing materials, building products with tightly adhered lead containing paint, non-contaminated clean dirt and clean gravel. the hours of operations are 0730-1530 Monday- Thursday and 0730-1430 on Friday. delivery of acceptable materials (identified above) shall be by appointment only. Appointment made by phone at 1-910-457-5011 or 1-910-451-2946.
4. All other contractor generated material shall be weighed through the Base Landfill scales before being removed from the Base. Contractor utilizing the base scale will require Contracting Officers assisted per-registration with the Landfill manager.
5. The Contracting officer will register the contract via E-mail, with the base landfill. All haul vehicles will maintain a secure vehicle placed as a condition to utilize the scale. E-mail the contractors information to the Landfill Clerk, include the name on the Prime contractor, contract number, job name / description, completion date and whether or not any above material will be delivered to the Landfill.
6. Prior to performing "HOT WORK" (welding, cutting, etc.) or operating other flame -producing spark producing devices, a written permit shall be requested from the Fire Division. CONTRACTORS ARE REQUIRED TO MEET ALL CRITERIA BEFORE A PERMIT IS ISSUED. The contractor will provide at least two (2) twenty (20) pound 4A:20 BC rated extinguishers for normal "HOT WORK". All extinguishers shall be current inspection tagged, approved safety pin and tamper resistant seal. It is also mandatory to have a designated FIRE WATCH for any "HOT WORK" done at this activity. The Fire watch shall be trained in accordance with NFPA 51B and remain on site for a minimum of sixty (60) minutes after work is completed.
7. Contractor is to be aware of all rules, regulation and codes required for successful completion of project.

SUBMITTALS:

1. Contractor shall make electronic copies of all submittals, include the approved transmittal sheets and provide two (2) CD/DVD's containing all submittals for project. The CD/DVD's shall be marked "Complete Submittal package - "FC300 PHYSICAL SECURITY" with Contract # as issued by Contracting Officer.
2. AFTER AWARD: The Contractor shall furnish the Contracting Officer, material, specifications for selection and approval prior to the ordering and installation of said materials.
3. The contractor is required to submit a schedule detailing when they and or any subcontractor will be working. The schedule must be approved by Government before beginning work.
4. The contractor shall submit to the Contracting Officer, the manufacture's product specifications, complete with technical products data for all of the material being used in this process. The product specification shall as a minimum, provide the technical details on the following items.
5. Submit:
 - A. SHOP DRAWINGS.
 - B. INSTALLATION DRAWINGS /shop drawings
 - C. PRODUCT DATA
 - C.A. Manufactures technical data Sheet
 - C.B. Material Safety Data Sheets (MADA)
 - C.C. Maintenance Data
 - D. AS-BUILT DRAWINGS ADOBE PDF FORMATS
6. Qualifications:
 - 6.1. Fabricator Qualifications: Minimum of three years documented experience work similar in scope and complexity to this project..
 - 6.2. Installers Qualifications: Minimum of three years documented experience work similar in scope and complexity to this project.

FC300 PHYSICAL SECURITY	BLDG. FC300	SHEET 2 OF 9
	MACC # 25-0450	
	DWG. DANA WHITMORE	PROJECT# 25M081CN
USMC CAMP LEBEUNE		
A1		

NOTES

SPECIFICATIONS:

UFC 1-300-02	Unified Facilities Guide Specifications (UFGS)
ASCE 7 (2017)	Minimum Design Loads for Buildings and Other Structures
ASHRAE FUN IP	(2017) Fundamentals Handbook, I-P Edition
ASME B29.400	(2001;(R 2008) (R2013) (R 2018)) "H" Type Mill Chainsand Sprockets.
ASTM A153/A153M	(2016) Standard Specification for Zinc Coatings, Carbon, for General Application.
ASTM A27/A27M	(2017) Standard Specification for Steel casting, Carbon, for General Application.
ASTM A307	(2014; E 2017) Standard Specification for Carbon Steel Bolts, Studs, and Threaded Rod 60 000 PSI tensile Strength.
ASTM A36/A36M	(2014) Standard Specification for carbon Structural Steel.
ASTM A48/A48M	(2003; R 2012) Standard Specification for Gray Iron Casting.
ASTM A53/A53M	(2018) Standard Specification for pipe, Steel, Black and Hot-Dipped, Zinc-Coated, Welded and seamless.
ASTM A653/A653M	(2017) Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process.
ASTM A666	(2015) Standard Specification for Annealed or Cold-Worked Austenitic Stainless Steel Sheet, Strip, Plated and Flat bar.
ASTM A780/A780M	(2009; R 2015) Standard Practice for Repair of Damaged and Uncoated Areas of Hot-Dip Galvanized Coatings.
ASTM A924/A924M	(2017a) Standard Specification for General Requirements for Steel Sheet, metallic-Coated by hot-Dip process.
ASTM E84	(2018a) Standard Test Method for Surface Burning Characteristics of Building Material.
MCD P5530.14	MARINE CORPS PHYSICAL SECURITY MANUAL

SECURITY SCREENS:

1. SCREEN SHALL BE CONSTRUCTED FROM ONE AND ONE HALF (1½"X½")STEEL FLAT BAR AND NINE (9) GAUGE EXPANDED METAL. (BOLT THRU FRAME NO TABS)
2. WINDOW SHALL BE CONSTRUCTED FROM ONE AND ONE HALF (1½"X½")STEEL ANGLE AND NINE (9) GAUGE EXPANDED METAL
 - 2.1. WINDOW TABS SHALL BE 2" X2" X½".
3. EACH SCREEN SHALL HAVE A MINIMUM OF THREE (3) MOUNTING TABS WELDED, EVENLY SPACED TO EACH SIDE OF SECURITY SCREEN.
 - 3.1. MOUNTING TABS SHALL BE ONE QUARTER OF INCH (¼") BY TWO INCH(2") BY SIX(6") IN LENGTH MINIMUM, ⅜" HOLE DRILLED FOR MOUNTING BOLTS.
4. ALL SECURITY SCREENS AND MOUNTING TABS SHALL BE GALVANIZED BY HOT DIPPED PROCESS AFTER FABRICATION.
5. SECURITY SCREENS TO EXISTING BRICK WALLS OR METAL DOORS
 - 5.1. SLEEVE ANCHORS: THREE-EIGHTS (⅜") BY THREE INCH (3") MINIMUM, SHALL BE GALVANIZED LAG BOLTS WITH CONCRETE ANCHOR SHIELDS.
 - 5.1. SCREENS: GALVANIZED NUTS, WASHERS, BOLTS. SIZE: THREE-EIGHTS(⅜") X 2" MIN.
 - 5.2. CONTRACTOR SHALL WELD LAG & BOLTS TO SECURITY SCREENS TO INSURE THAT BOLTS CANNOT BE BACKED OUT FROM THE ANCHORED LOCATION.
6. CONTRACTOR SHALL APPLY COLD GALVANIZED PAINT OVER NEWLY WELDED BOLTS AND TABS.
 - 6.1. COVER BRICK TO PROTECT AS TO NOT SPRAY PAINT ON BRICK OR DOOR.

FC300 PHYSICAL SECURITY	BLDG. FC300	SHEET 3 OF 9
USMC CAMP LEBJUNE	MACC # 25-0450	PROJECT# 25M081CN
A2	DWG. DANA WHITMORE	

SPECIFICATIONS:

1. FRAME:

1.1. FOURTEEN(14ga.) GAUGE STEEL WITH REINFORCED CORNNERS.

1.2. PARALLEL ARM CLOSER REINFORCEMENT TWELVE(12ga.) GAUGE, SIXTEEN(16") INCHES.

1.3. REINFORCED HINGE PREPS.

1.4. COUNTERSUNK HOLES TO BE USED IN CONJUNCTION WITH EXISTING WALL ANCHOR.

1.4.1. PUNCHED AND OR COUNTERSUNK IN SOFFIT AREA FOR THREE/EIGHTS(3/8") INCH DIAMETERS FLATHEAD ANCHOR BOLT THREE(3) PLACES.

1.5. FRAME SHALL FIT IN NEWLY FRAMED OPENING, WITH THIRTY-SIX(36") INCH DOOR.

1.6. HINGES SHALL BE ON FRAME WITH DOOR OPENING OUT.

1.7. CONTRACTOR SHALL REINFORCE THE EXISTING WALLS TO SECURE THE NEW WALLS AND SECURING THE JAMBS. CROSS BRACING ABOVE CEILING TO SECURE NEW WALL IN PLACE. STANDARD METAL FRAMING TO NEAREST CROSS MEMBER OF EXITING FRAMING.

2. DOOR:

2.1. ODC CORE TYPE DUTY (BASES OF DESIGN OSHKOSH DOOR COMPANY)

2.2. TYPE: 1

2.3. SERIES: WOOD DOOR

2.3.1. Extra heavy duty

2.3.2. Five (5) PLY Structural Composite core, Formaldehyde free

2.1. SPICES: OAK

2.2. TYPE: FLUSH

2.3. THICKNESS: 1 3/4"

2.4. STAIN AND POLYURETHANE MATCH EXISTING

3. DOOR KNOB

3.1. MATCH EXISTING DOOR KNOB TO COMPLY WITH NEW SWING ACTION DOOR.

3.2. LOCKSET: Grade 1, lever, keyed entry-(best style) with interchangeable core, small format, keyed satin nickel finish

3.3. HINGES:

3.1. FIVE KNUCKLE, BALL BEARING HEAVY WEIGHT, GRADE ONE(1)

3.1.1. STAINLESS STEEL (ANSI-A511)

3.1.2. FOUR BALL BEARINGS

3.1.3. NON-RISING REMOVABLE PIN WITH TIP AND PLUG

3.1.4. SIZE: FOUR AND HALF (4 1/2") INCHES.

4. CLOSER:

4.1. H-EDA HEAVY DUTY ARM WITH HOLD OPEN, GRADE ONE(1)

4.2. THROUGH BOLTS AND HEX NUTS

4.3. FINISH: ALUMINUM

4.4. ALL SEASON FLUID, CLOSING POWER ADJUSTMENT, DELAYED ACTION, FORGED ARM, HIGH IMPACT COVER, LATCHING POWER ADJUSTMENT, NON-HANDED.

5. DIAL COMBINATION LOCK

5.1. CDX-10 COMBINATION LOCK

5.2. BASES OF DESIGN : KABA MAS CDX-10

5.3. GSA APPROVED COMBINATION LOCKING DEVICE

6. PANIC BAR:

6.1. FIRE PROOF LOCK WITH EXTERNAL LEVER

6.2. SATIN FINISH

6.3. EMERGENCY EXIT HARDWARE

7. DOOR STOP:

7.1. Floor mounted.

8. INSTALLATION OF NEW DOOR FRAME AND DOOR WITH HARDWARE.

1.1. EXTRA ANCHORS FOR EACH VERTICAL SIDE OF FRAME.

1.2. FRAME SHALL FIT THE NEW FRAME OPENING,

1.3. DOOR FRAME SECURED TO NEWLY INSTALLED WALL

9. SEALANTS:

1.1. ACRYLIC URETHANE ELASTOMERIC.

1.2. BARE SURFACES SHOULD BE PRIMED BEFORE CAULKING.

1.3. COLOR: GRAY.

10. WALL

1.4. NEW WALL TO EXTEND TO ROOF, (TRUE CEILING)

1.5. NEW WALLS SHALL HAVE THE GYPSUM BOARD TO THE TRUE CEILING.

1.6. THREE AND FIVE-EIGHTS(3 5/8") INCH, TWENTY-TWO(22ga.) METAL STUDS. EXTEND TO THE TRUE CEILING

1.7. FRAME METAL STUDS TO SIXTEEN(16" O.C.) INCH ON CENTER.

1.8. BRACE WALL WITH CROSS MEMBER OF METAL STUD TO NEAREST STRUCTURE FRAMING.

11. GYPSUM BOARD:

1.1. FIVE-EIGHTS(5/8") INCH GYPSUM BOARD

1.2. FIRE- RESISTANT

1.3. INSTALL 5/8" GYPSUM BOARD TO METAL STUDS WITH ONE AND QUARTER(1 1/4") INCH, TYPE: "S" SCREW, EIGHT(8) INCH ON CENTER.

1.4. FINISH TO LEVEL FOUR(4).

1.5. PAINT WALLS

12. PAINT:

1.1. WALLS: EGGSHELL LATEX PAINT. COLOR: MATCH EXISTING

1.2. CEILING: FLAT LATEX PAINT COLOR: WHITE

1.3. METAL: GLOSS LATEX PAINT. COLOR: MATCH EXISTING.

1.4. CONTRACTOR SHALL PAINT ALL SURFACES OF NEWLY INSTALLED ITEMS.

1.5. FINISH SURFACES SHALL BE FREE FROM RUNS, DRIPS, RIDGES, WAVES, BRUSH MARKS, LAPS AND VARIATION IN COLOR.

13. COVER BASE:

1.1. TYPE: VINYL

1.2. SIZE: FOUR(4") INCH

1.3. THICKNESS: .80

1.4. SURFACE: SMOOTH

1.5. COLOR: BLACK

14. MECHANICAL:

1.1. VENTS AND DUCTS

1.1.1. WALLS SURROUNDING DUCT PENETRATIONS SHALL BE FINISHED TO ELIMINATE ANY OPENING BETWEEN THE DUCT AND WALL.

1.1.2. ALL VENTS AND DUCTS OPENINGS THAT PENETRATE THE PERIMETER WALL AND EXCEEDS NINETY-SIX (96) SQUARE INCHES SHALL BE PROTECTED WITH PERMANENTLY AFFIXED BARS OR GRILLS.

1.1.2.1. IF ONE DIMENSION OF THE PENETRATION MEASURES LESS THAN SIX (6) INCHES, BATS OR GRILLS ARE NOT REQUIRED.

1.1.2.2. BARS SHALL BE MINIMUM OF HALF (1/2") INCH DIAMETER STEEL, WELDED VERTICALLY AND HORIZONTALLY SIX (6") ON CENTER,OUTSIDE PLATE TWO (2") INCH BY THREE-SIXTEEN (3/16") A DEVIATION OF HALF (1/2") INCH IN VERTICAL AND OR HORIZONTALITY SPACING IS PERMISSIBLE.

1.1.2.3. ALL DUCT PENETRATION SHALL BE SEALED WITH DUCT SEAL.

1.1.2.4. AN ACCESS PORT TWELVE BY TWELVE (12") INCH SHALL BE INSIDE THE SECURE PERIMETER TO ALLOW VISUAL INSPECTION OF BARS.


15. WALL PENETRATION

1.1. ALL CONDUIT, FIRE SPRINKLER PIPE, HVAC PIPE, COMMUNICATION PIPE, CABLES, CABLE TRAYS SHALL BE FRAMED AND FIVE-EIGHTS 5/8" GYPSUM BOARD WITH LEVEL ONE FINISH SHALL BE INSTALLED.


1.2. NO GAPS ALL PENETRATIONS SHALL BE LESS THAN HALF INCH (1/2") BETWEEN WALLS AND EXISTING PENETRATIONS.

FC300 PHYSICAL SECURITY	BLDG. FC300	SHEET	4 OF 9
	MACC # 25-0450		PROJECT# 25M081CN
	DWG. DANA WHITMORE		
USMC CAMP LEJEUNE			A3


SPECIFICATION SHEET

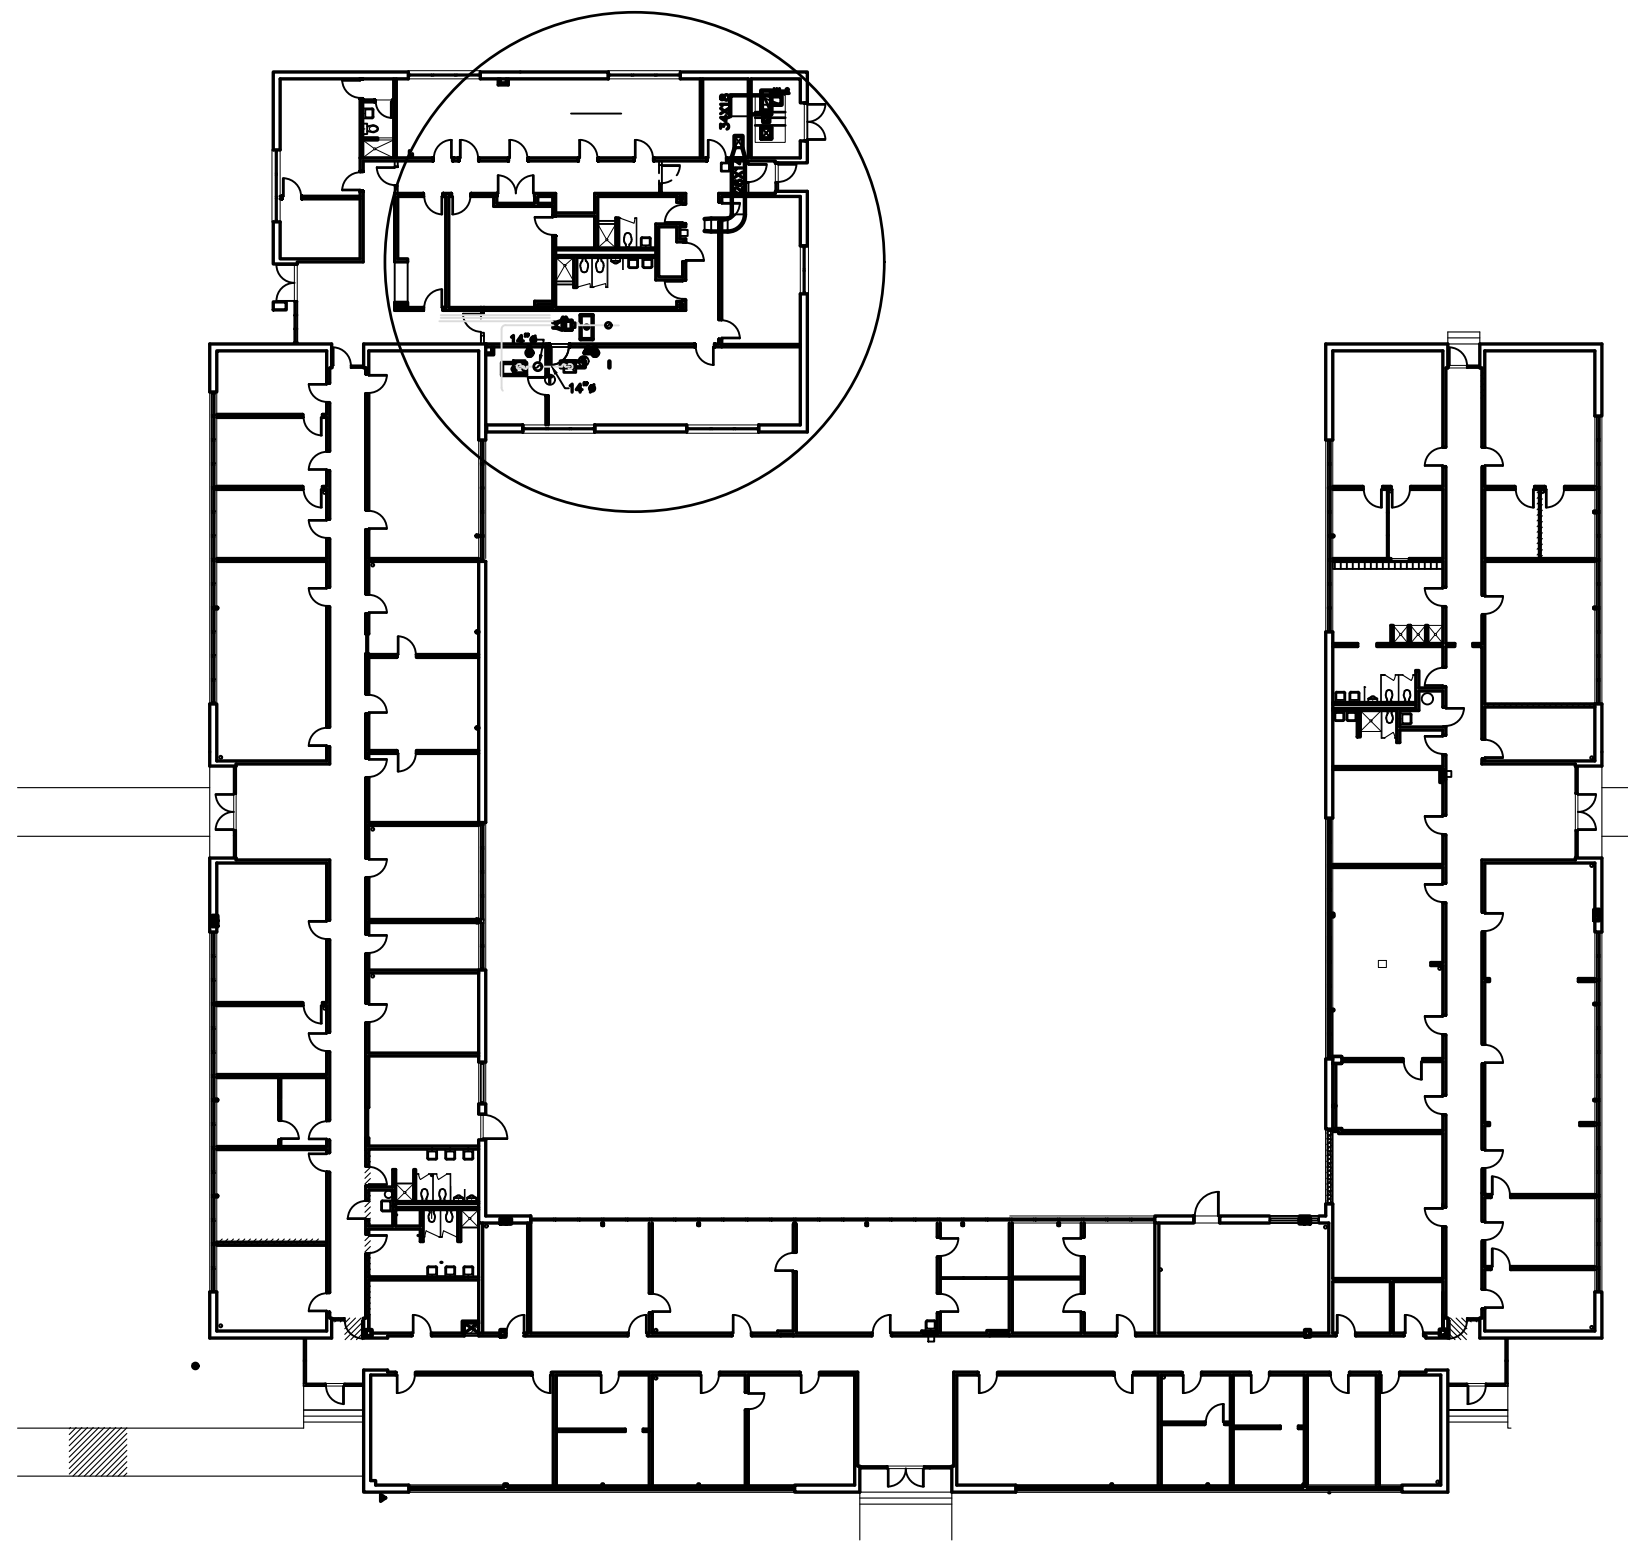


1 FC300 EXISTING FLOOR PLAN
A4 A4 1/32" = 1'-0" 0 10' 20' 40'

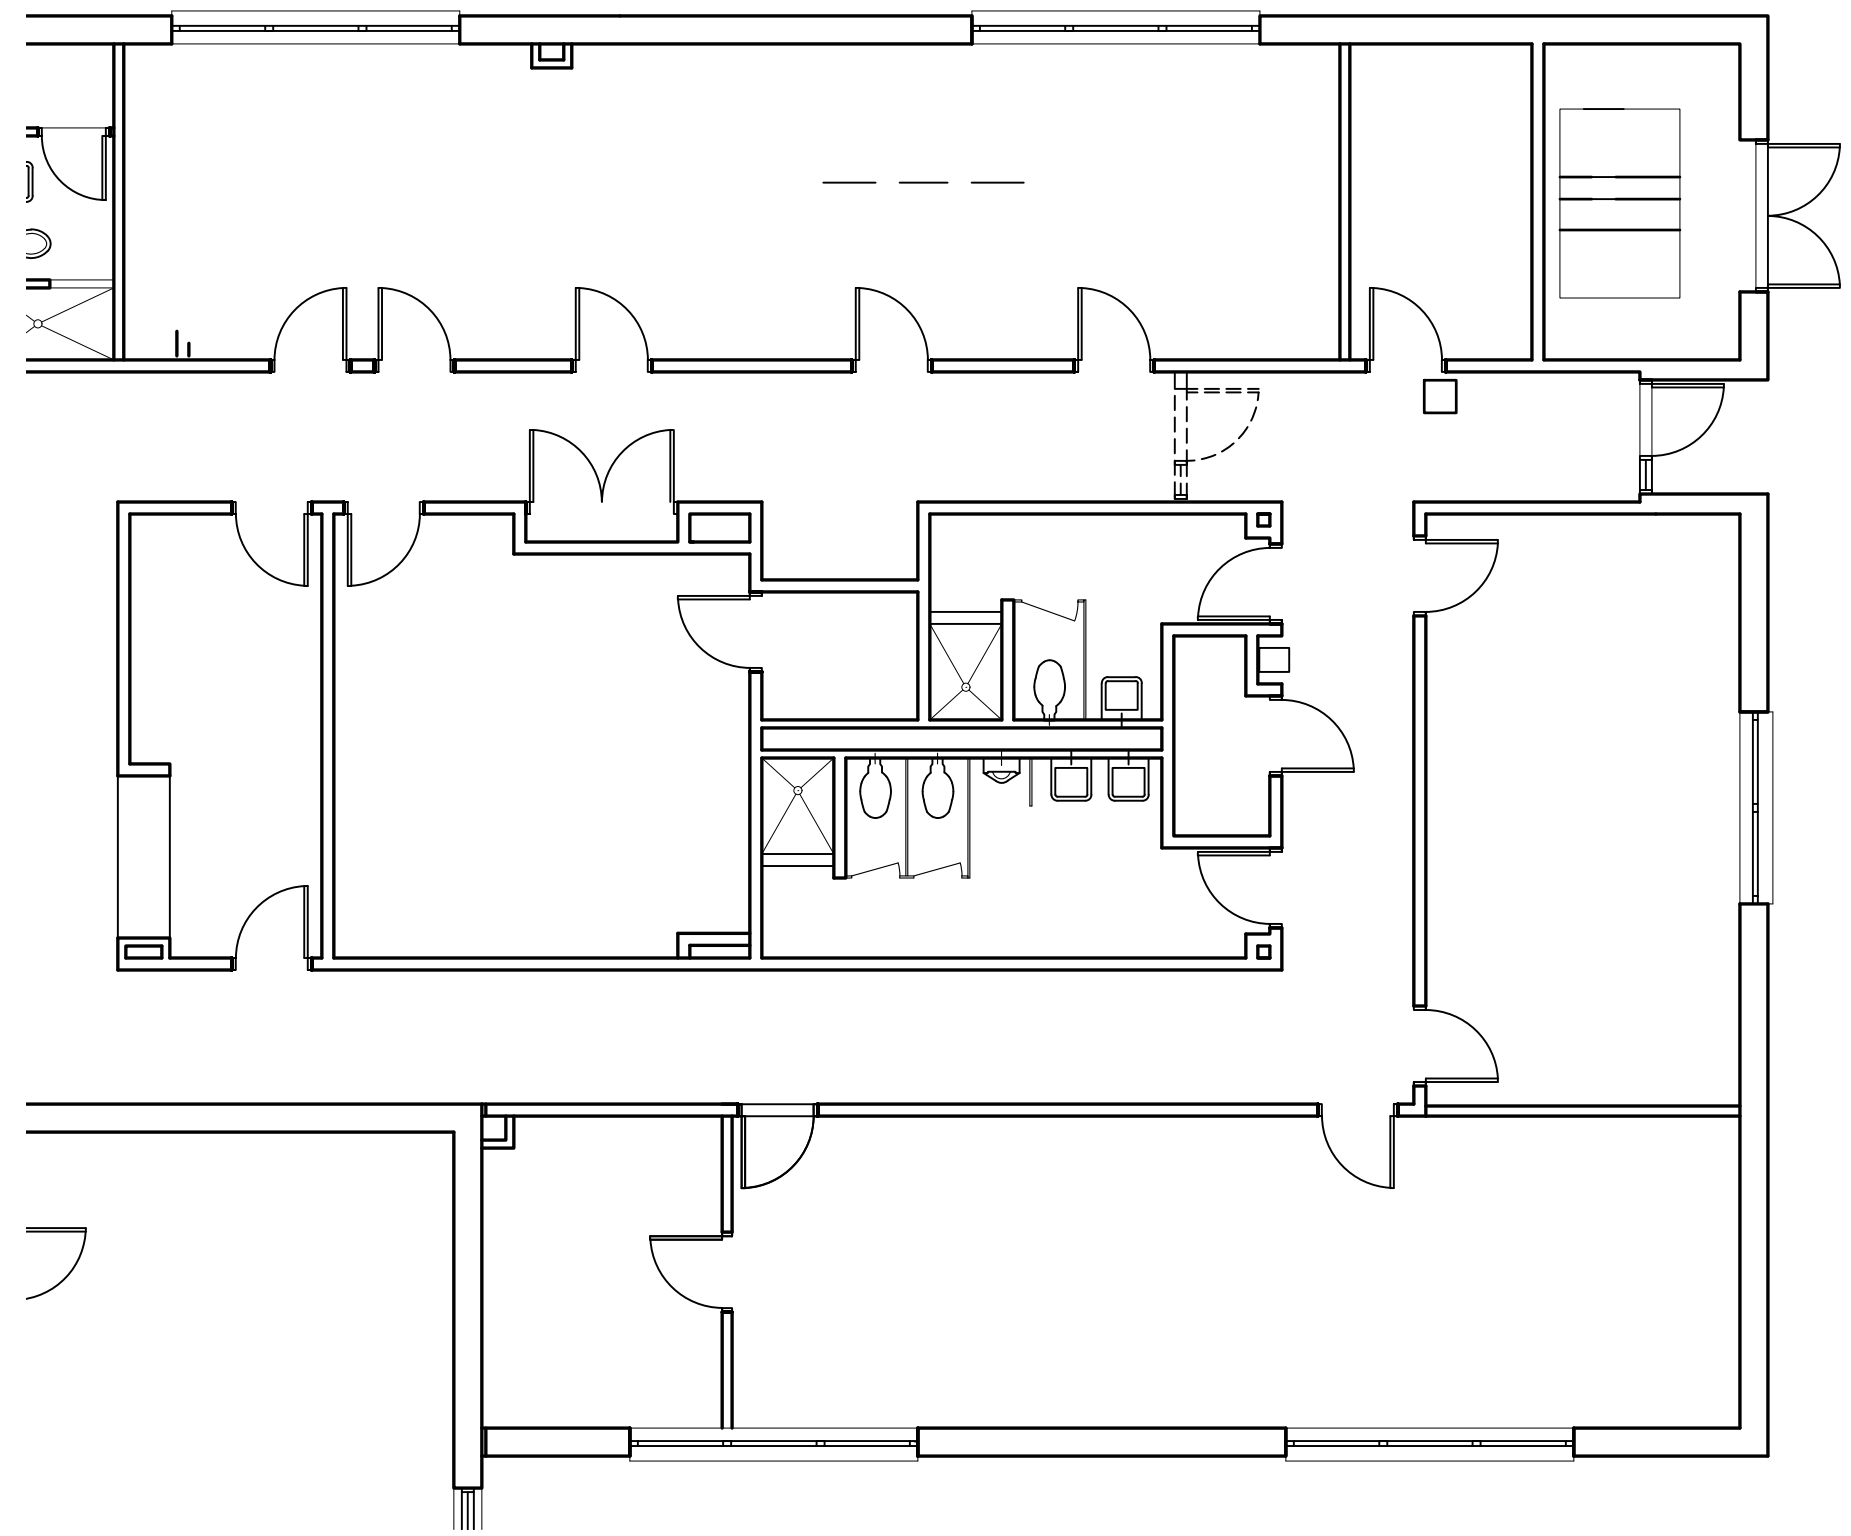

2 ENLARGED EXISTING FLOOR PLAN
A4 A4 1/8" = 1'-0" 0 5' 10' 20'

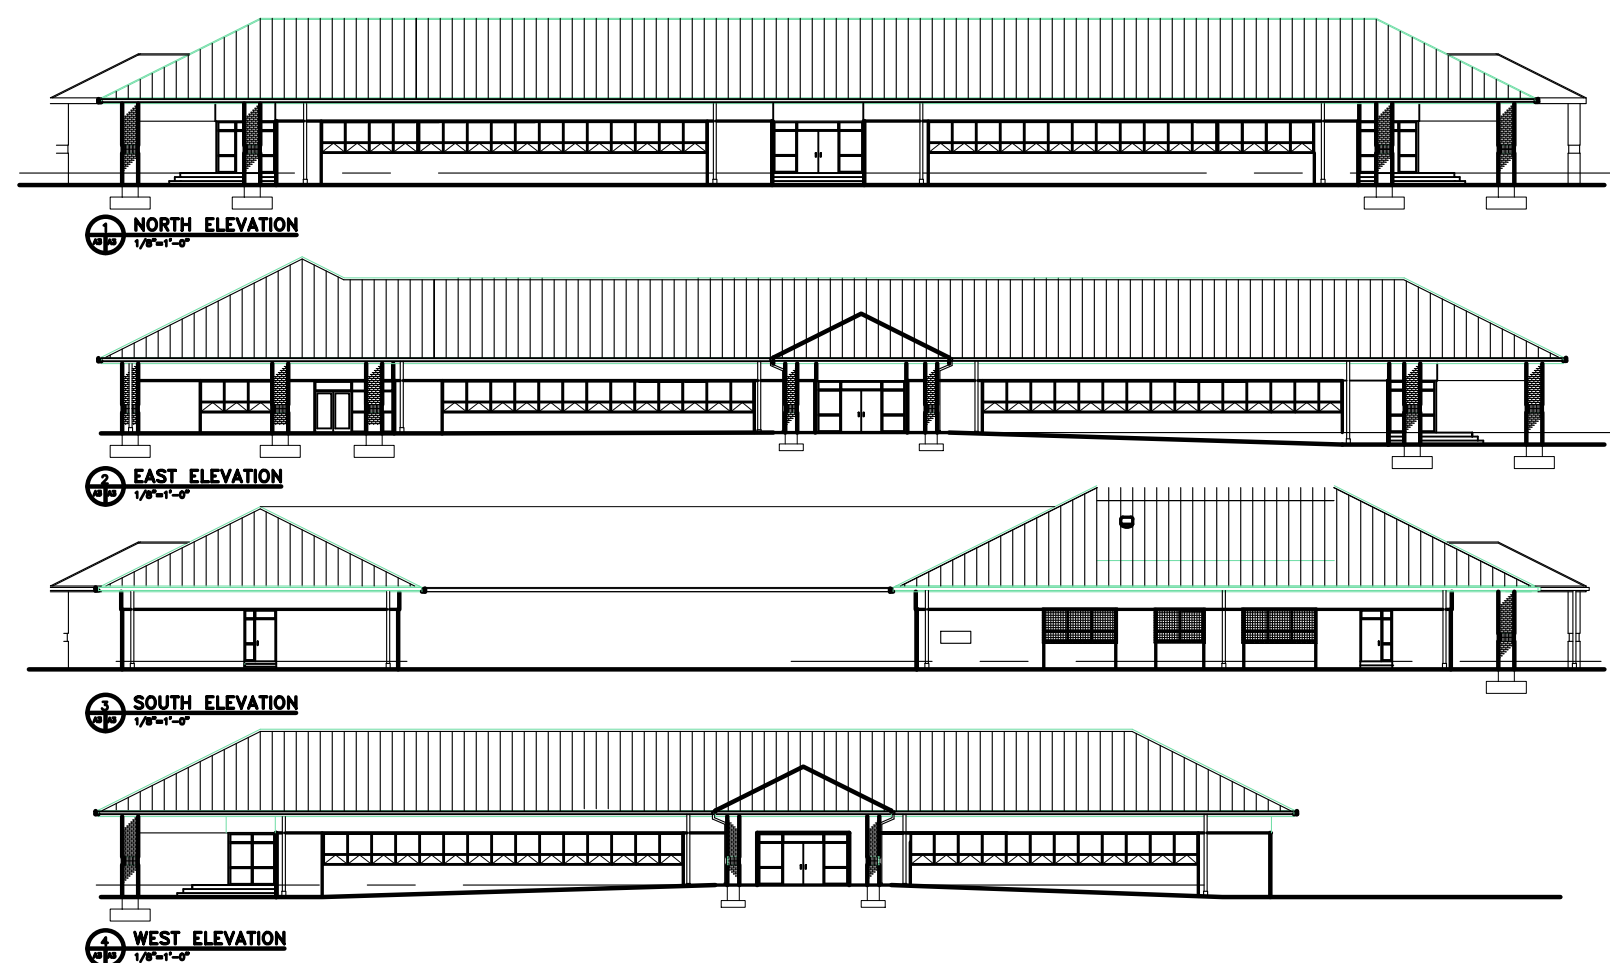


3 EXISTING ELEVATION
A4 A4 1/32" = 1'-0" 0 10' 20' 40'

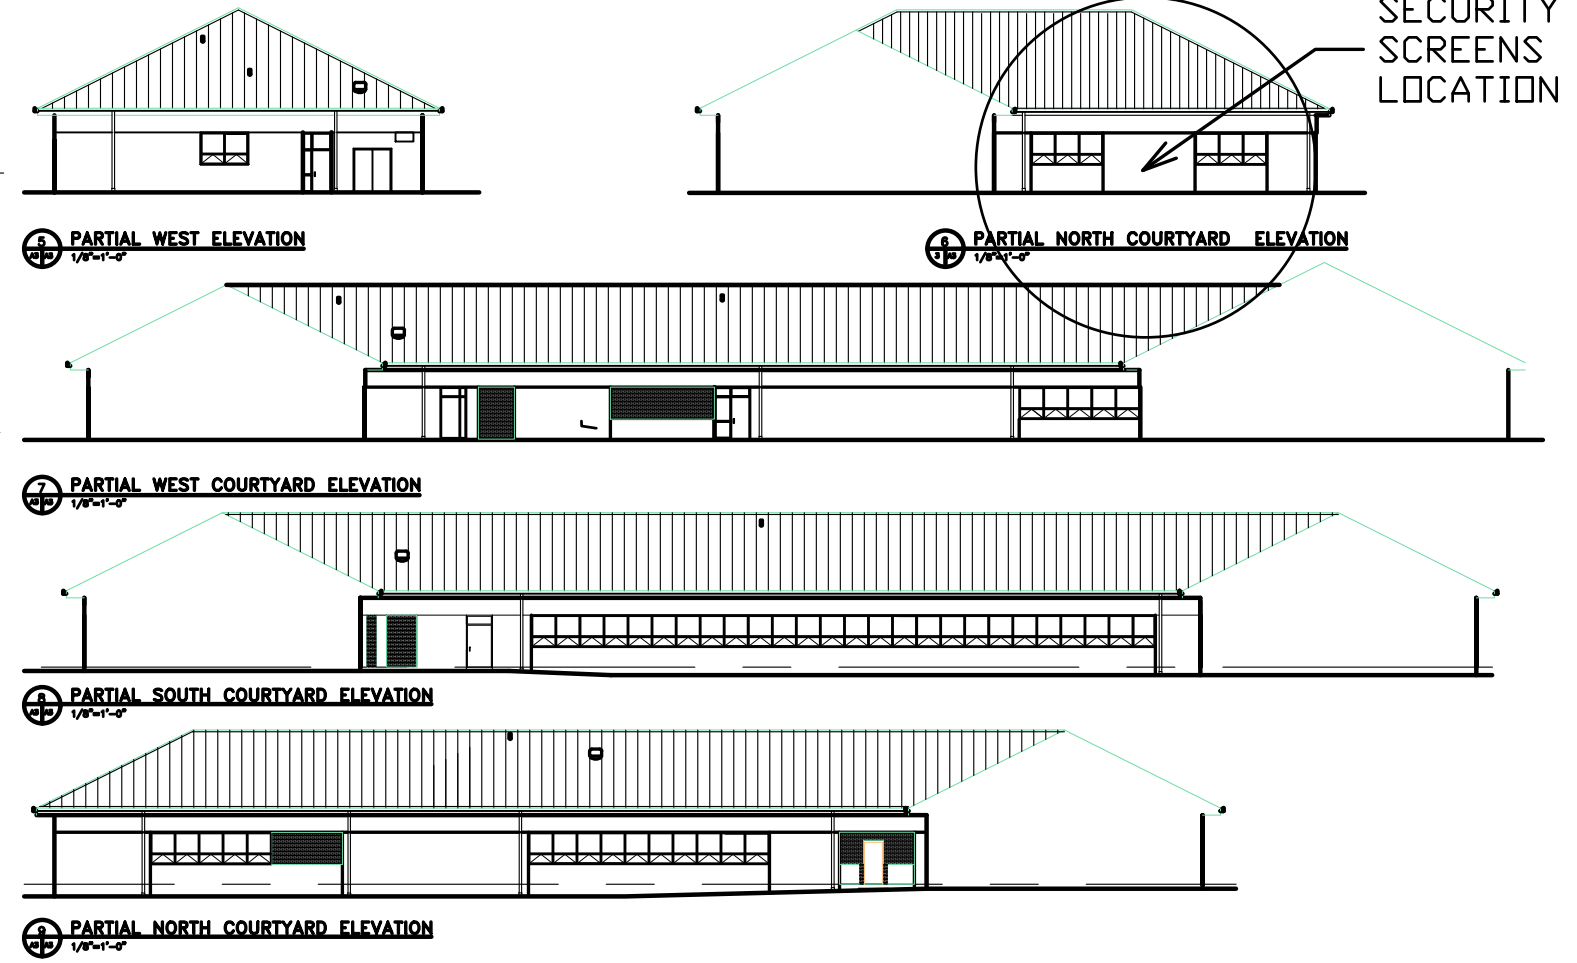


SEE SPECIFICATION SHEET A2 & A3
REFERENCE ONLY. FIELD VERIFY
FIELD VERIFY ALL WORK AND DIMENSIONS.

ALL MEASUREMENTS ARE FOR
REFERENCE ONLY

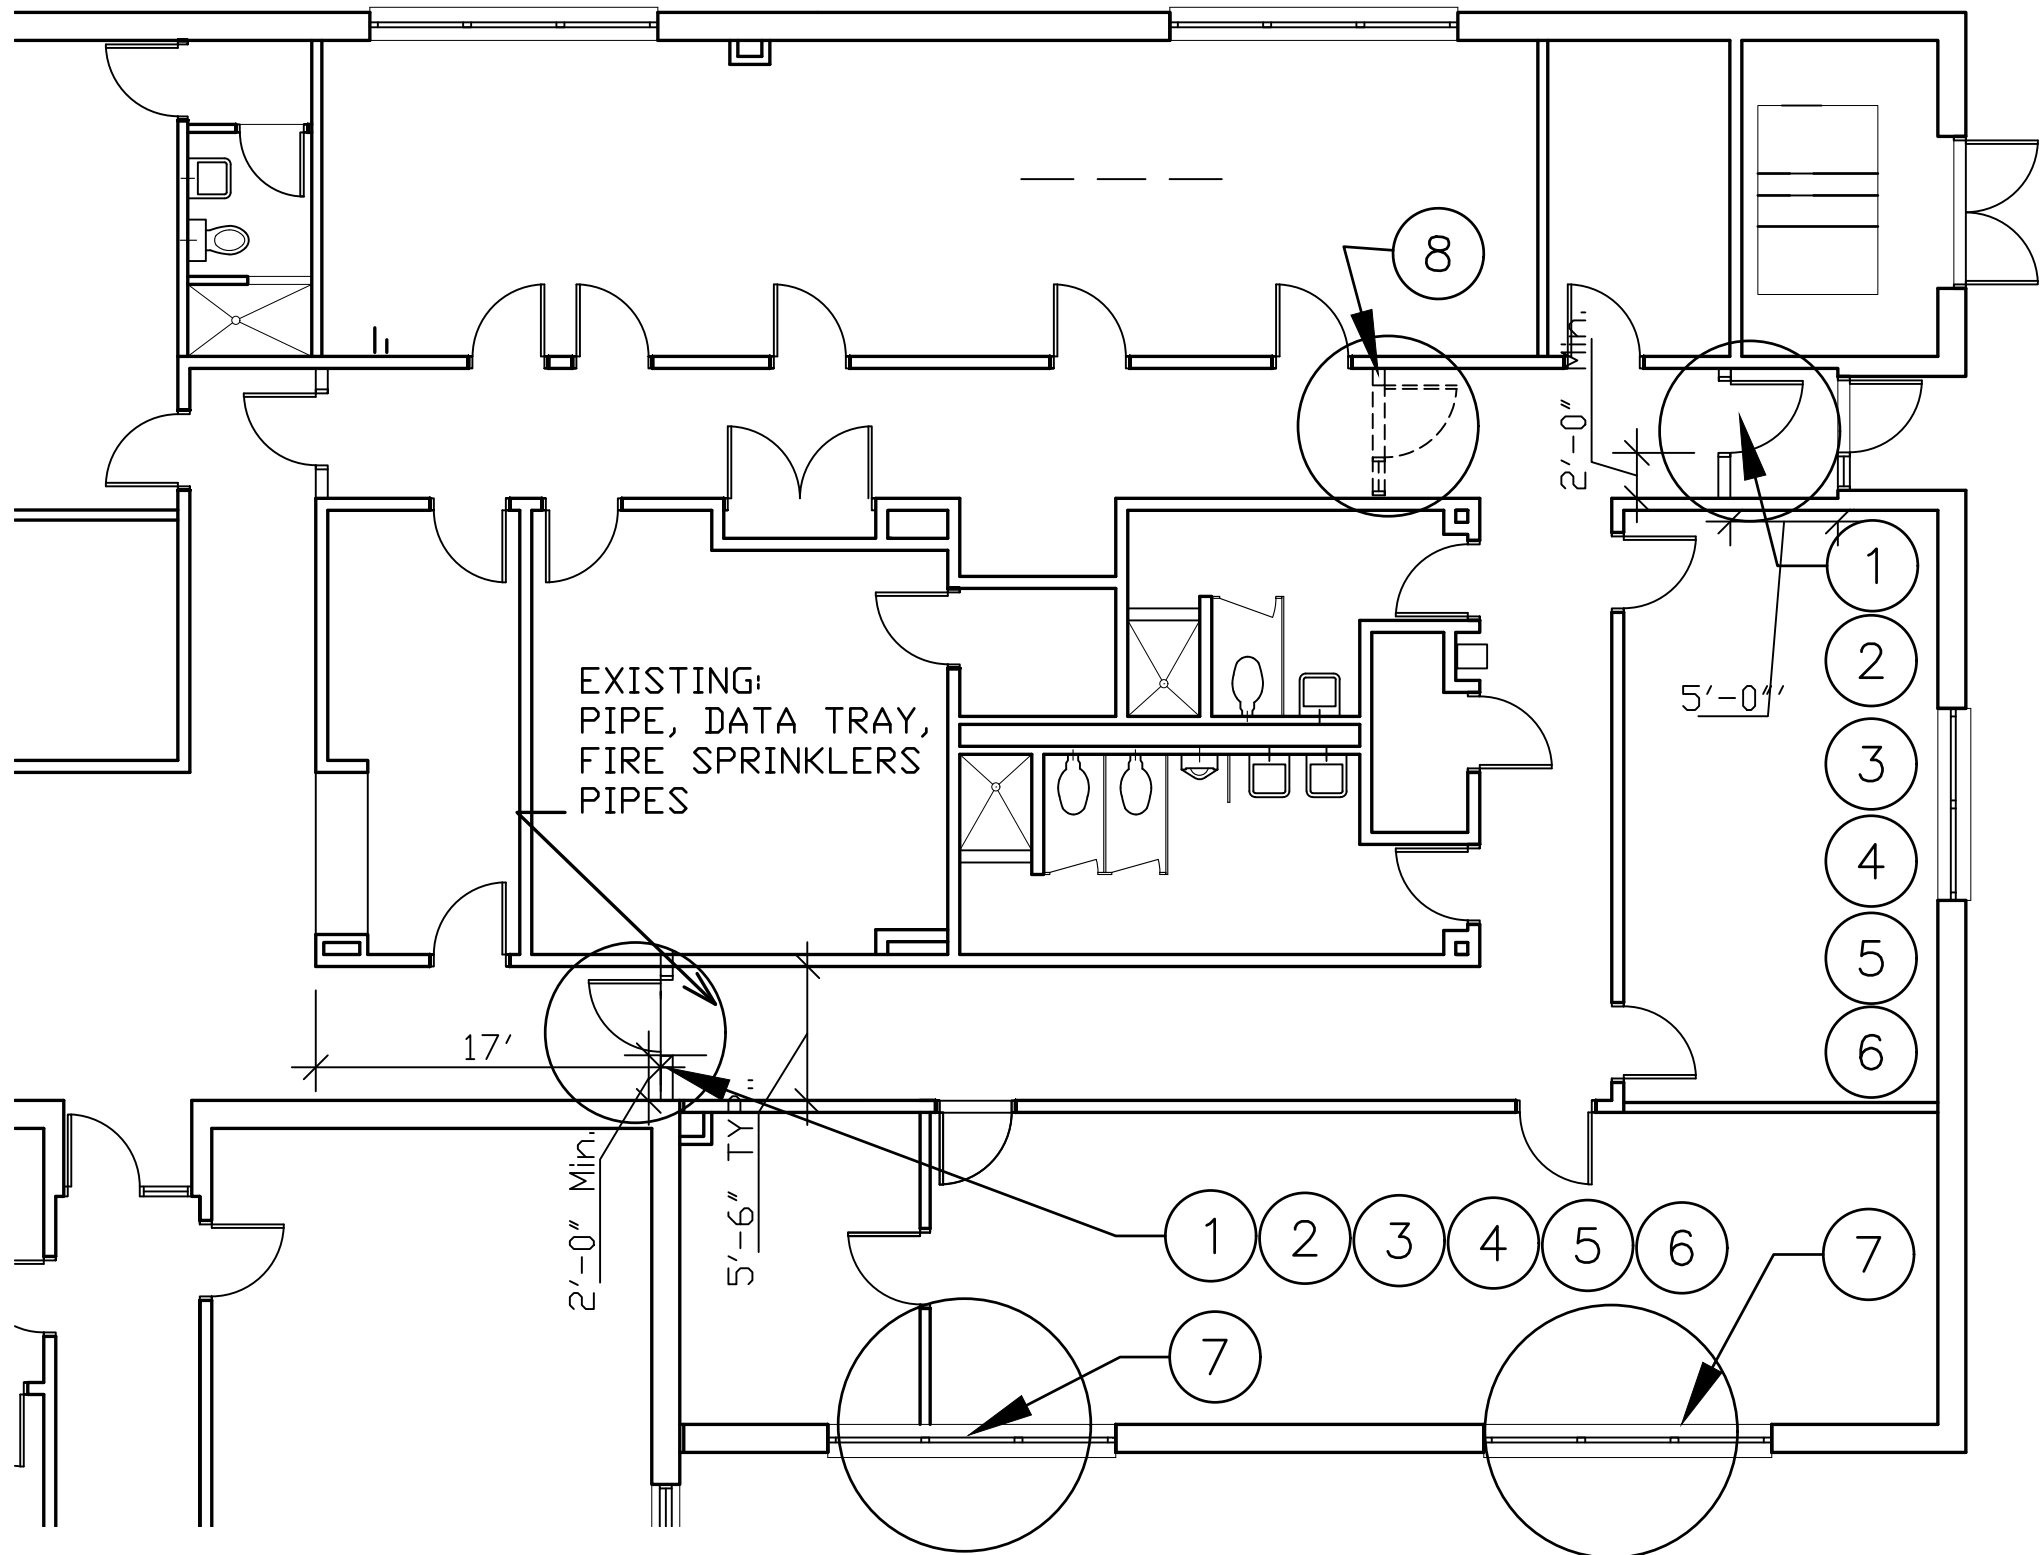


1 RENOVATION FLOOR PLAN
A5 A5
1/8" = 1'-0"
0 5' 10' 20'

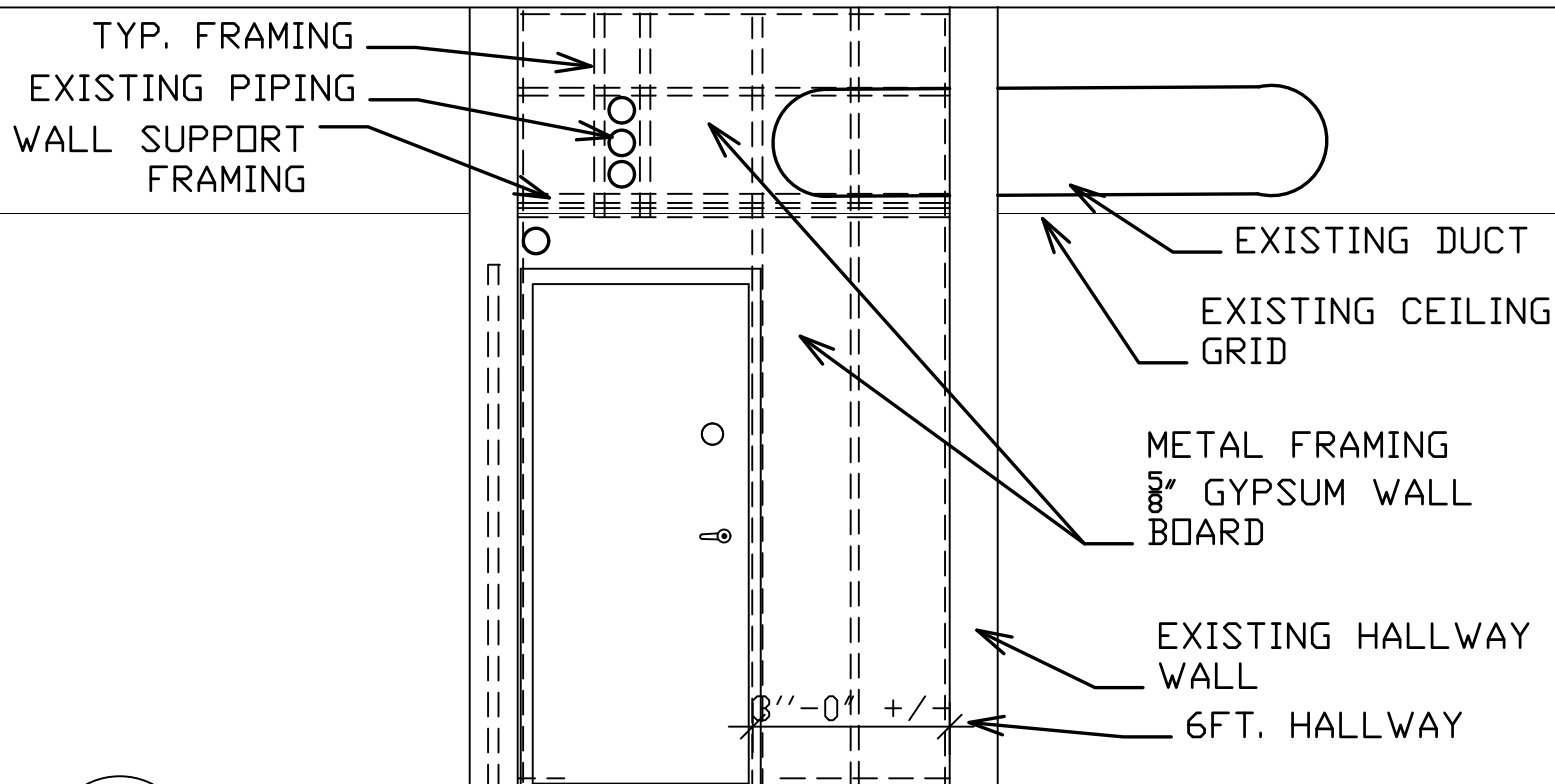

2 WALL FRAMING TYP.
A5 A5
3/8" = 1'-0"
0 1' 5'

RENOVATION NOTES

1	NEW CASED OPENING WITH 14 GAGE STEEL FRAME. SECURE NEW WALL TO EXISTING WALL FRAMING AND ABOVE CEILING TO EXISTING TOP PLATE, GIRDERS, AND OR FRAMING. SEE A3 RENO SPECIFICATION.
2	NEW 3'-0" X 7'-0" DOOR AND FRAME. SEE A3 RENO SPECIFICATION.
3	EXISTING CEILING: ALIGN CEILING GRID & TILES WITH NEW WALL, MATCH EXISTING CEILING GRID. MATCH EXISTING CEILING TILES.
4	NEW 3 5/8" MTL STUD WALL @ 16" O.C. W/ 5/8" GWB-PTD. PAINT GWB TO MATCH EXISTING COLOR WALLS. BASE BOARD TO RECEIVE NEW 4" VINYL COVE BASE. TOP OF WALL TO TERMINATE AT EXISTING TRUE<INTERIOR ROOF> CEILING. SEE NOTES A3.
5	LEVER ACTION KNOB WITH SMALL FORMAT INTERCHANGEABLE CORE. EMERGENCY EXIT DEVICE. SEE A3 RENO SPECIFICATION.
6	DIAL COMBINATION SAFE LOCK CDX-10 BACKLIT LCD DISPLAY TYPE I ELECTRONIC LOCKS MEET FF-L-2740B / FF-L-2890C SEE A3 RENO SPECIFICATION.
7	SECURITY SCREENS, SECURE TO EXISTING WALL, MATCH EXISTING ON EXTERIOR OF BUILDING. SEE A2 SPECIFICATION SECURITY SCREENS
8	DEMO EXISTING WALL & DOOR. PATCH GYPSUM WALL LEVEL THREE FINISH AND PAINT TO MATCH EXISTING WALLS. REPAIR CEILING GRID AND CEILING TILES TO MATCH EXISTING CEILING.


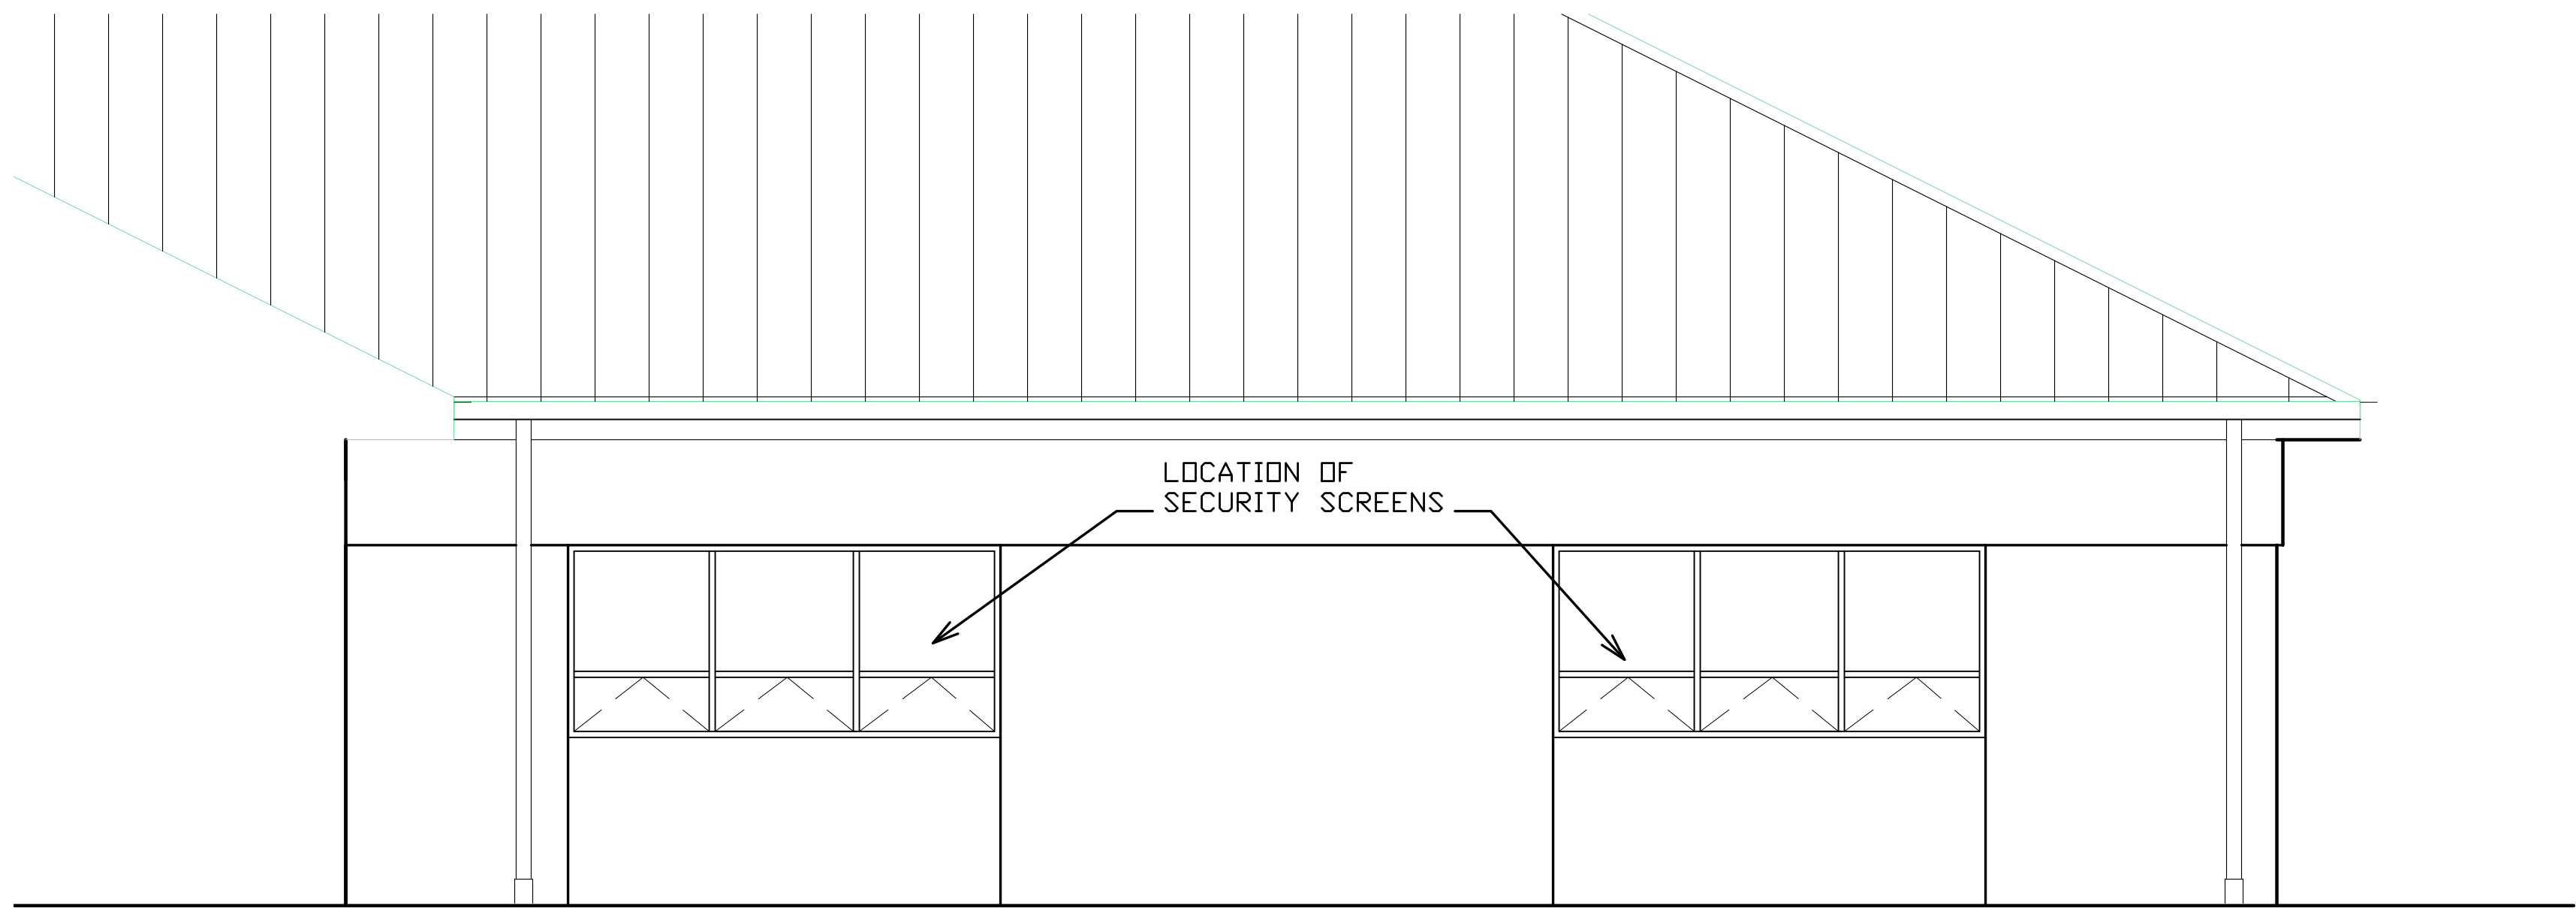


1
A6 A6

SECURITY SCREENS ELEVATION PLAN

1/4" = 1'-0"

0 5' 10'

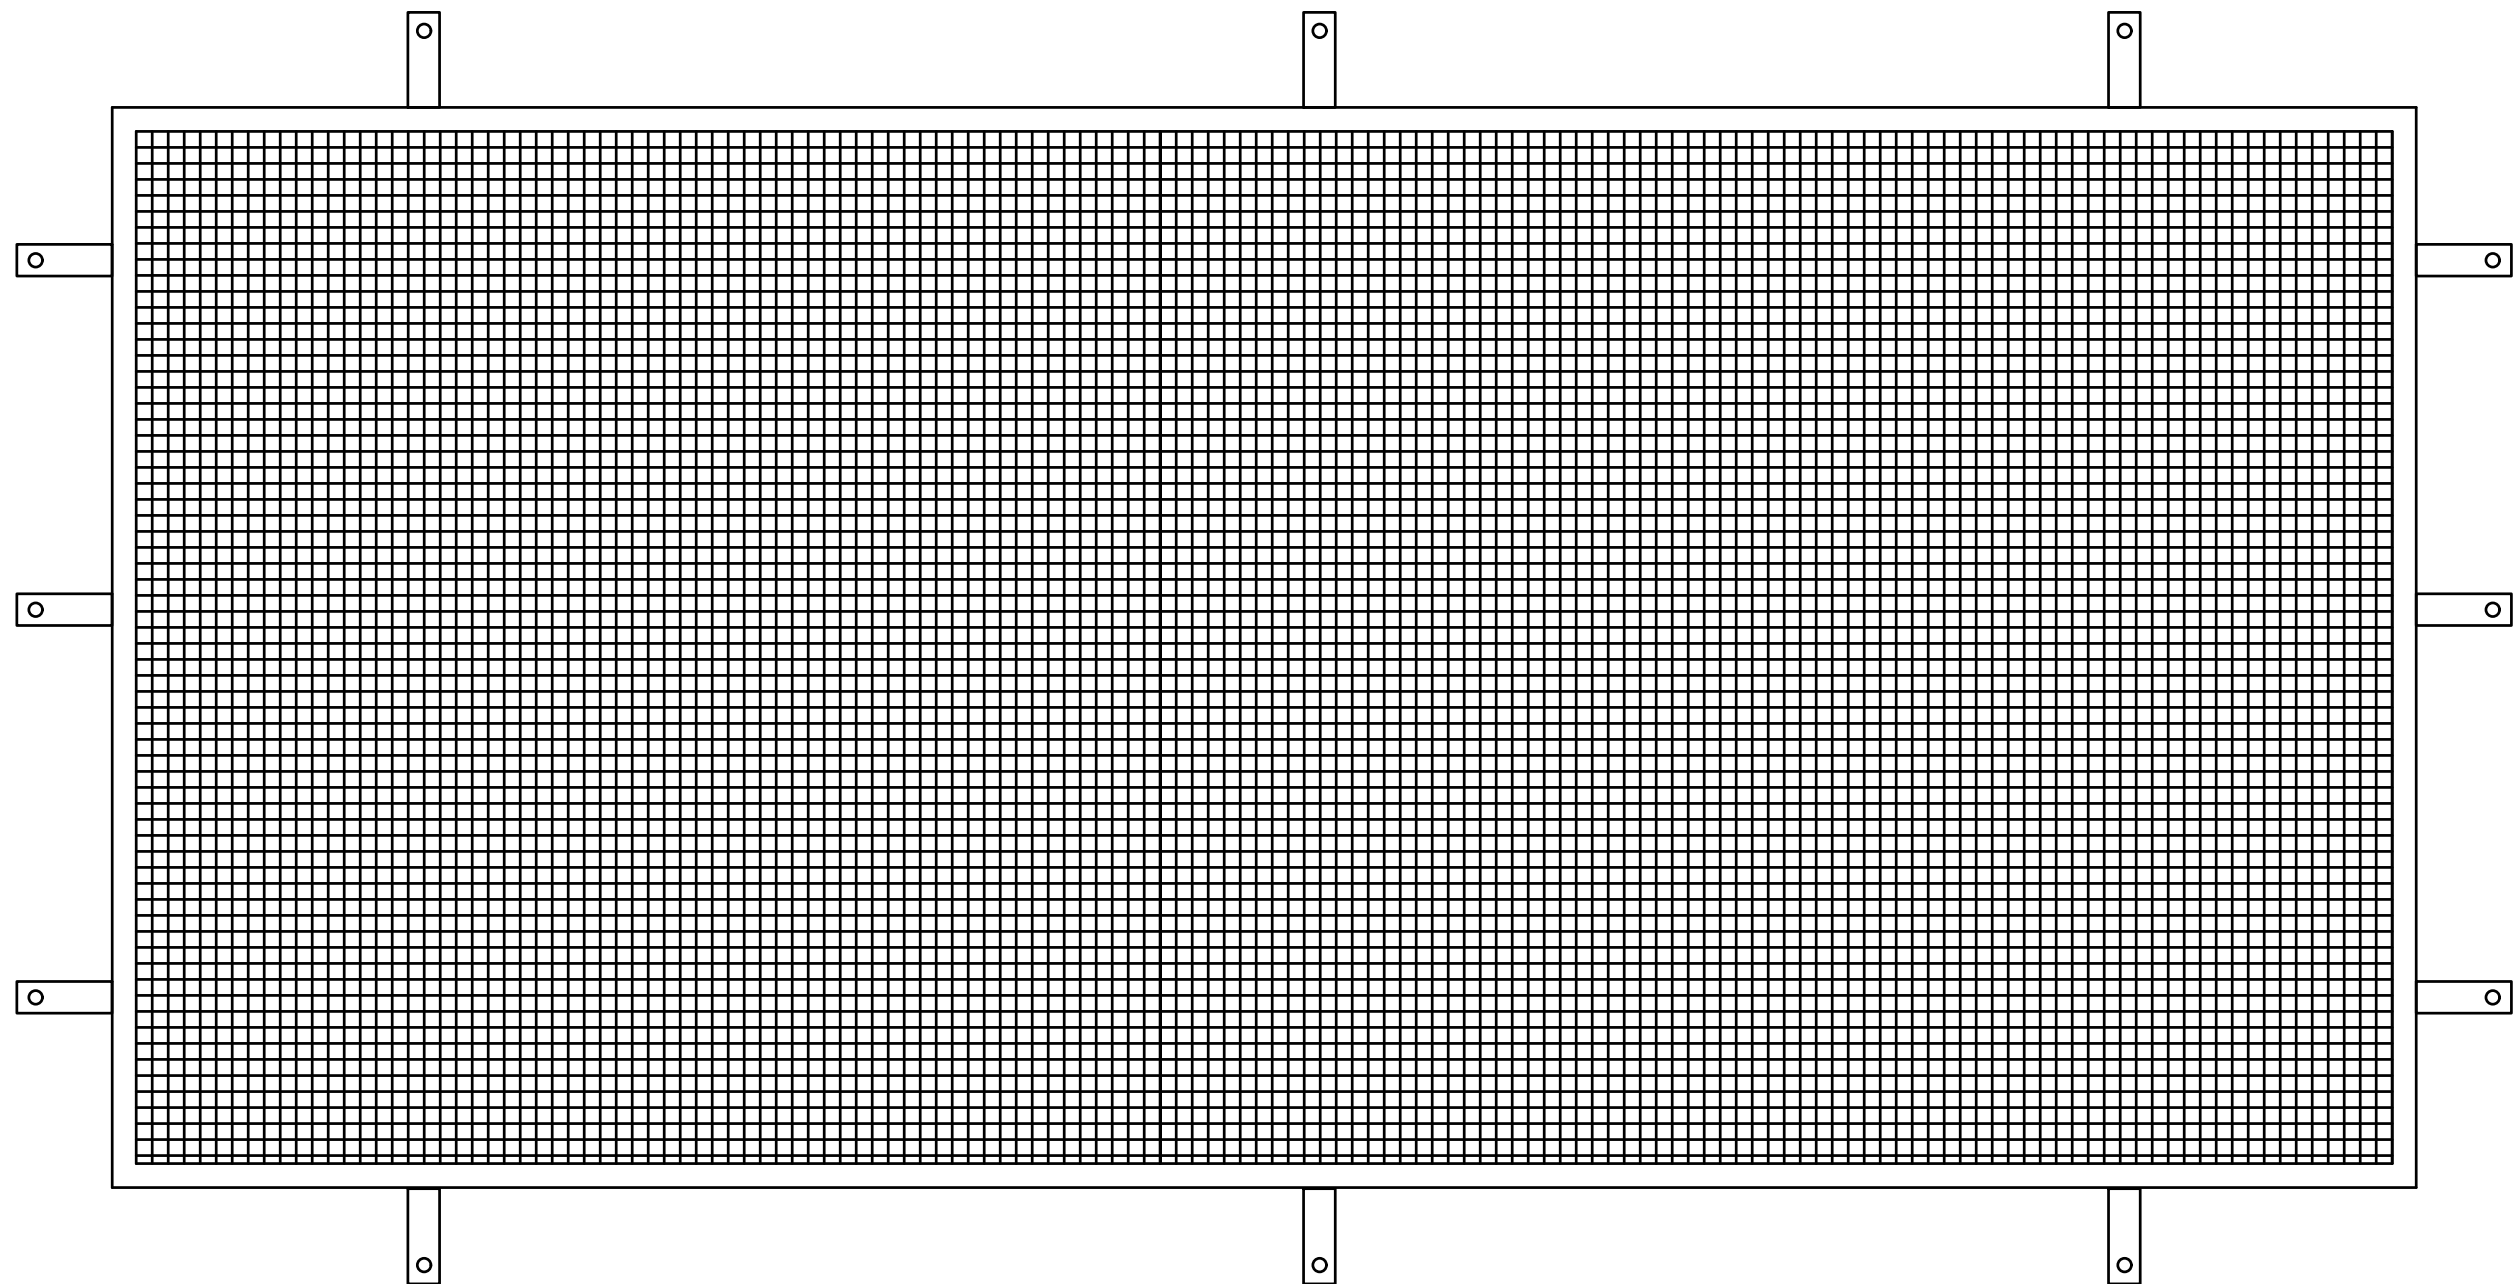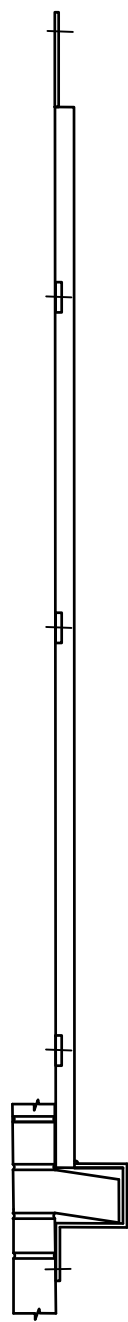

2
A6 A6

INTERIOR ELEVATION

1" = 1'-0"


0 6" 1' 2'

SECURITY SCREENS
ELEVATION PLAN

FC300 PHYSICAL SECURITY	BLDG. FC300	SHEET 7 OF 9
	MACC # 25-0450	
USMC CAMP LEBEUNE	DWG. DANA WHITMORE	PROJECT# 25M081CN

A6


REALIGN EXISTING
LIGHT FIXTURE

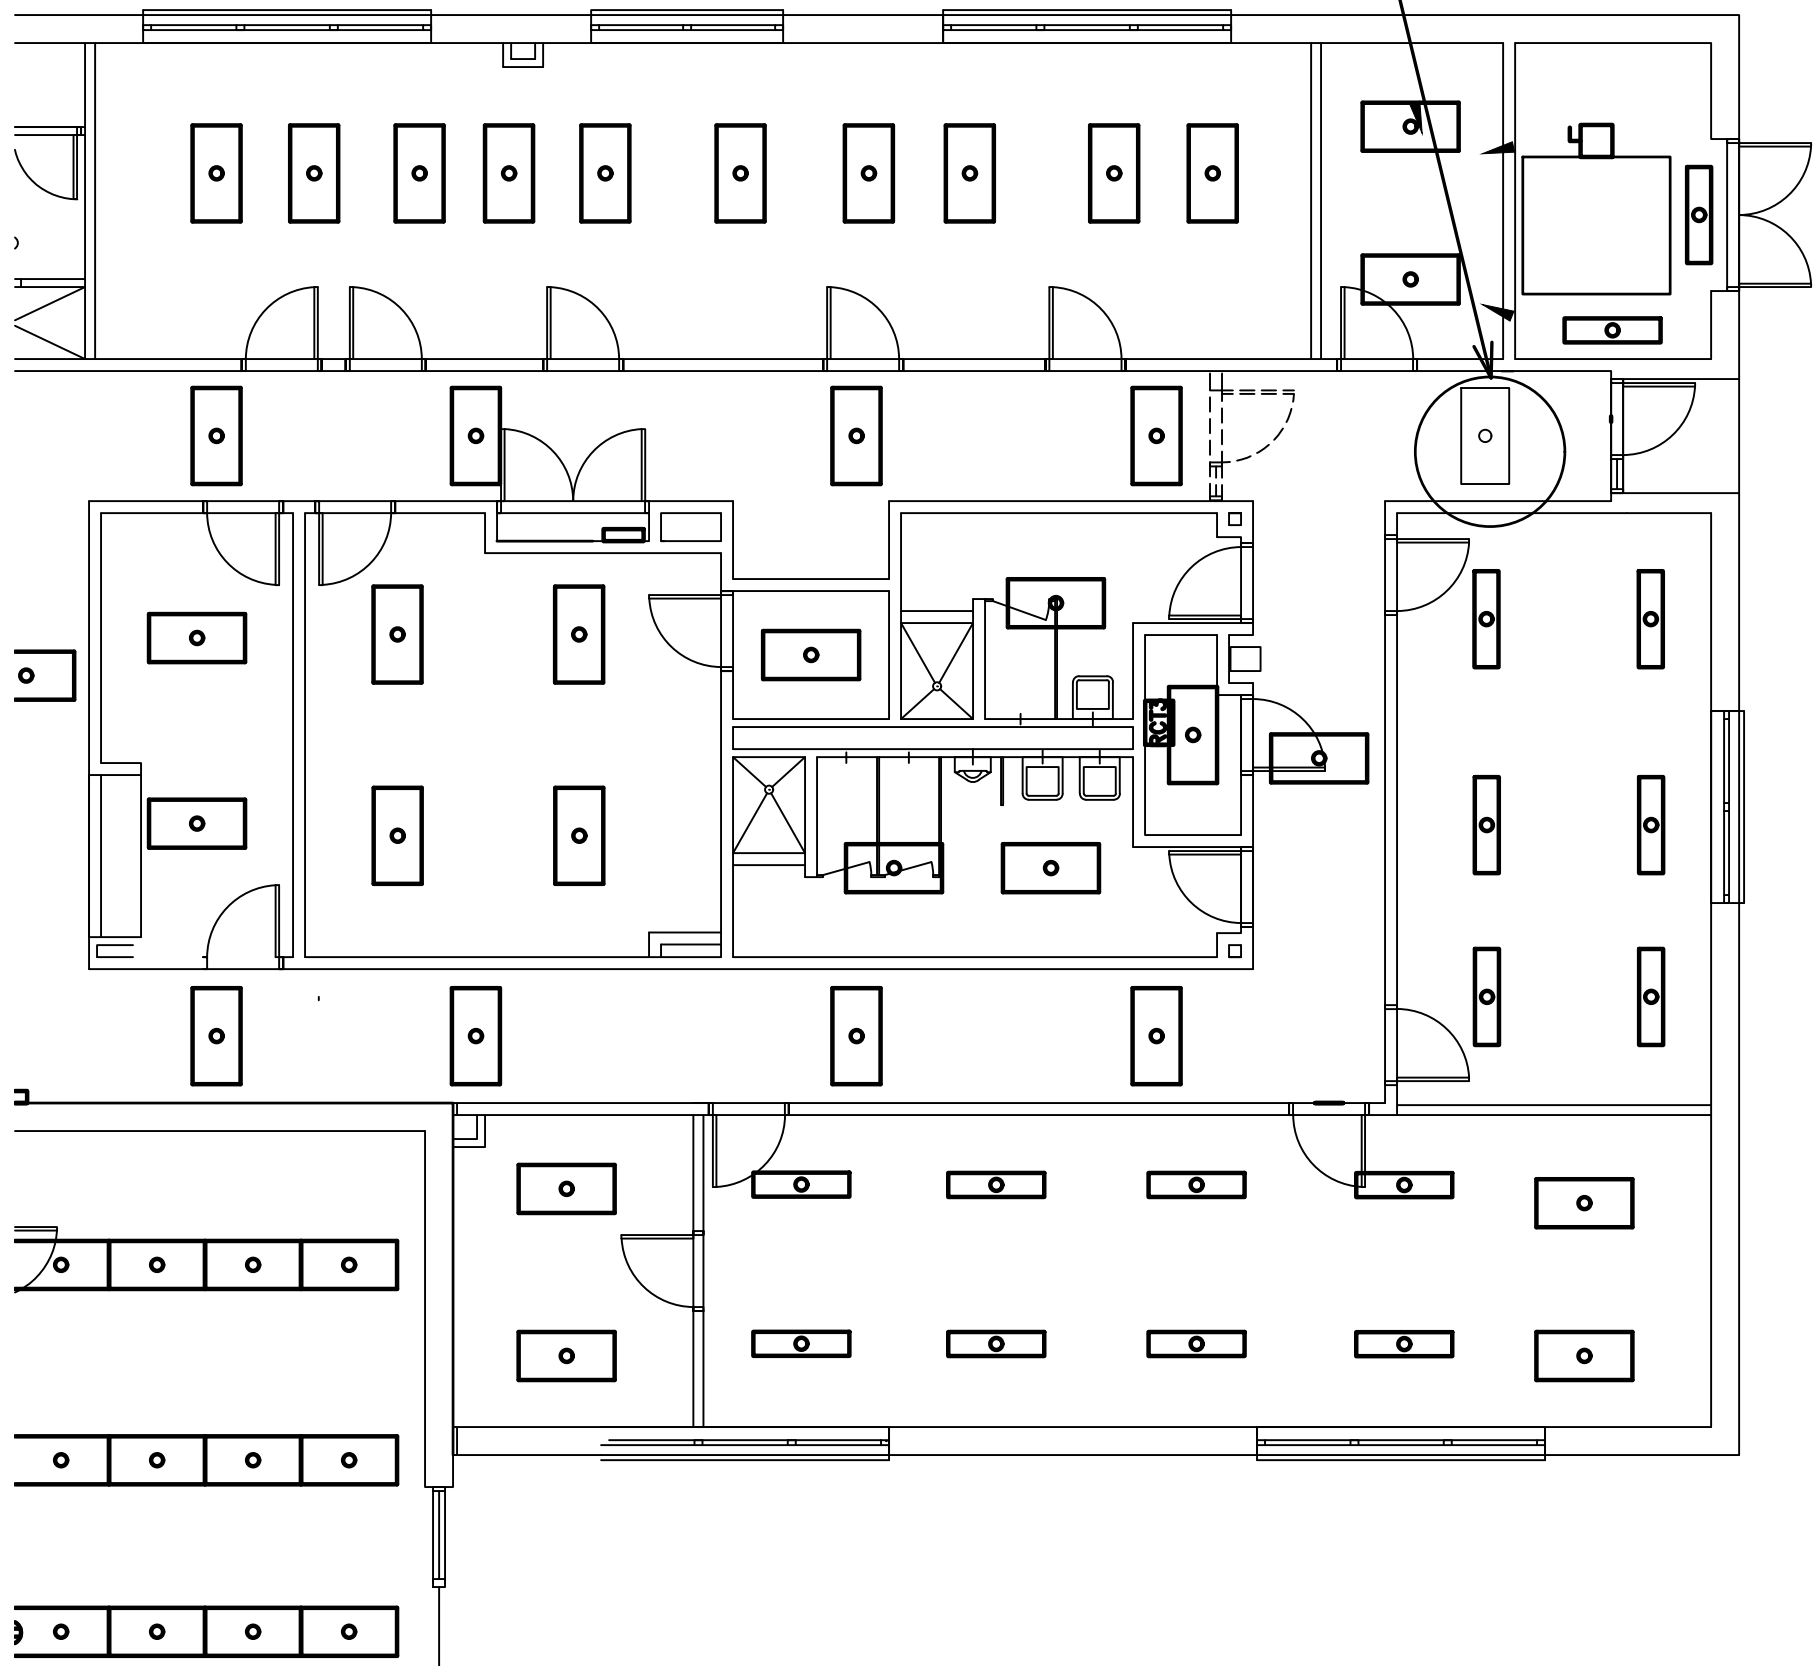


1
E1 E1

EXISTING LIGHTING FLOOR PLAN

1/8" = 1'-0"



NEW LOCATION
OF EXISTING LIGHT
FIXTURE

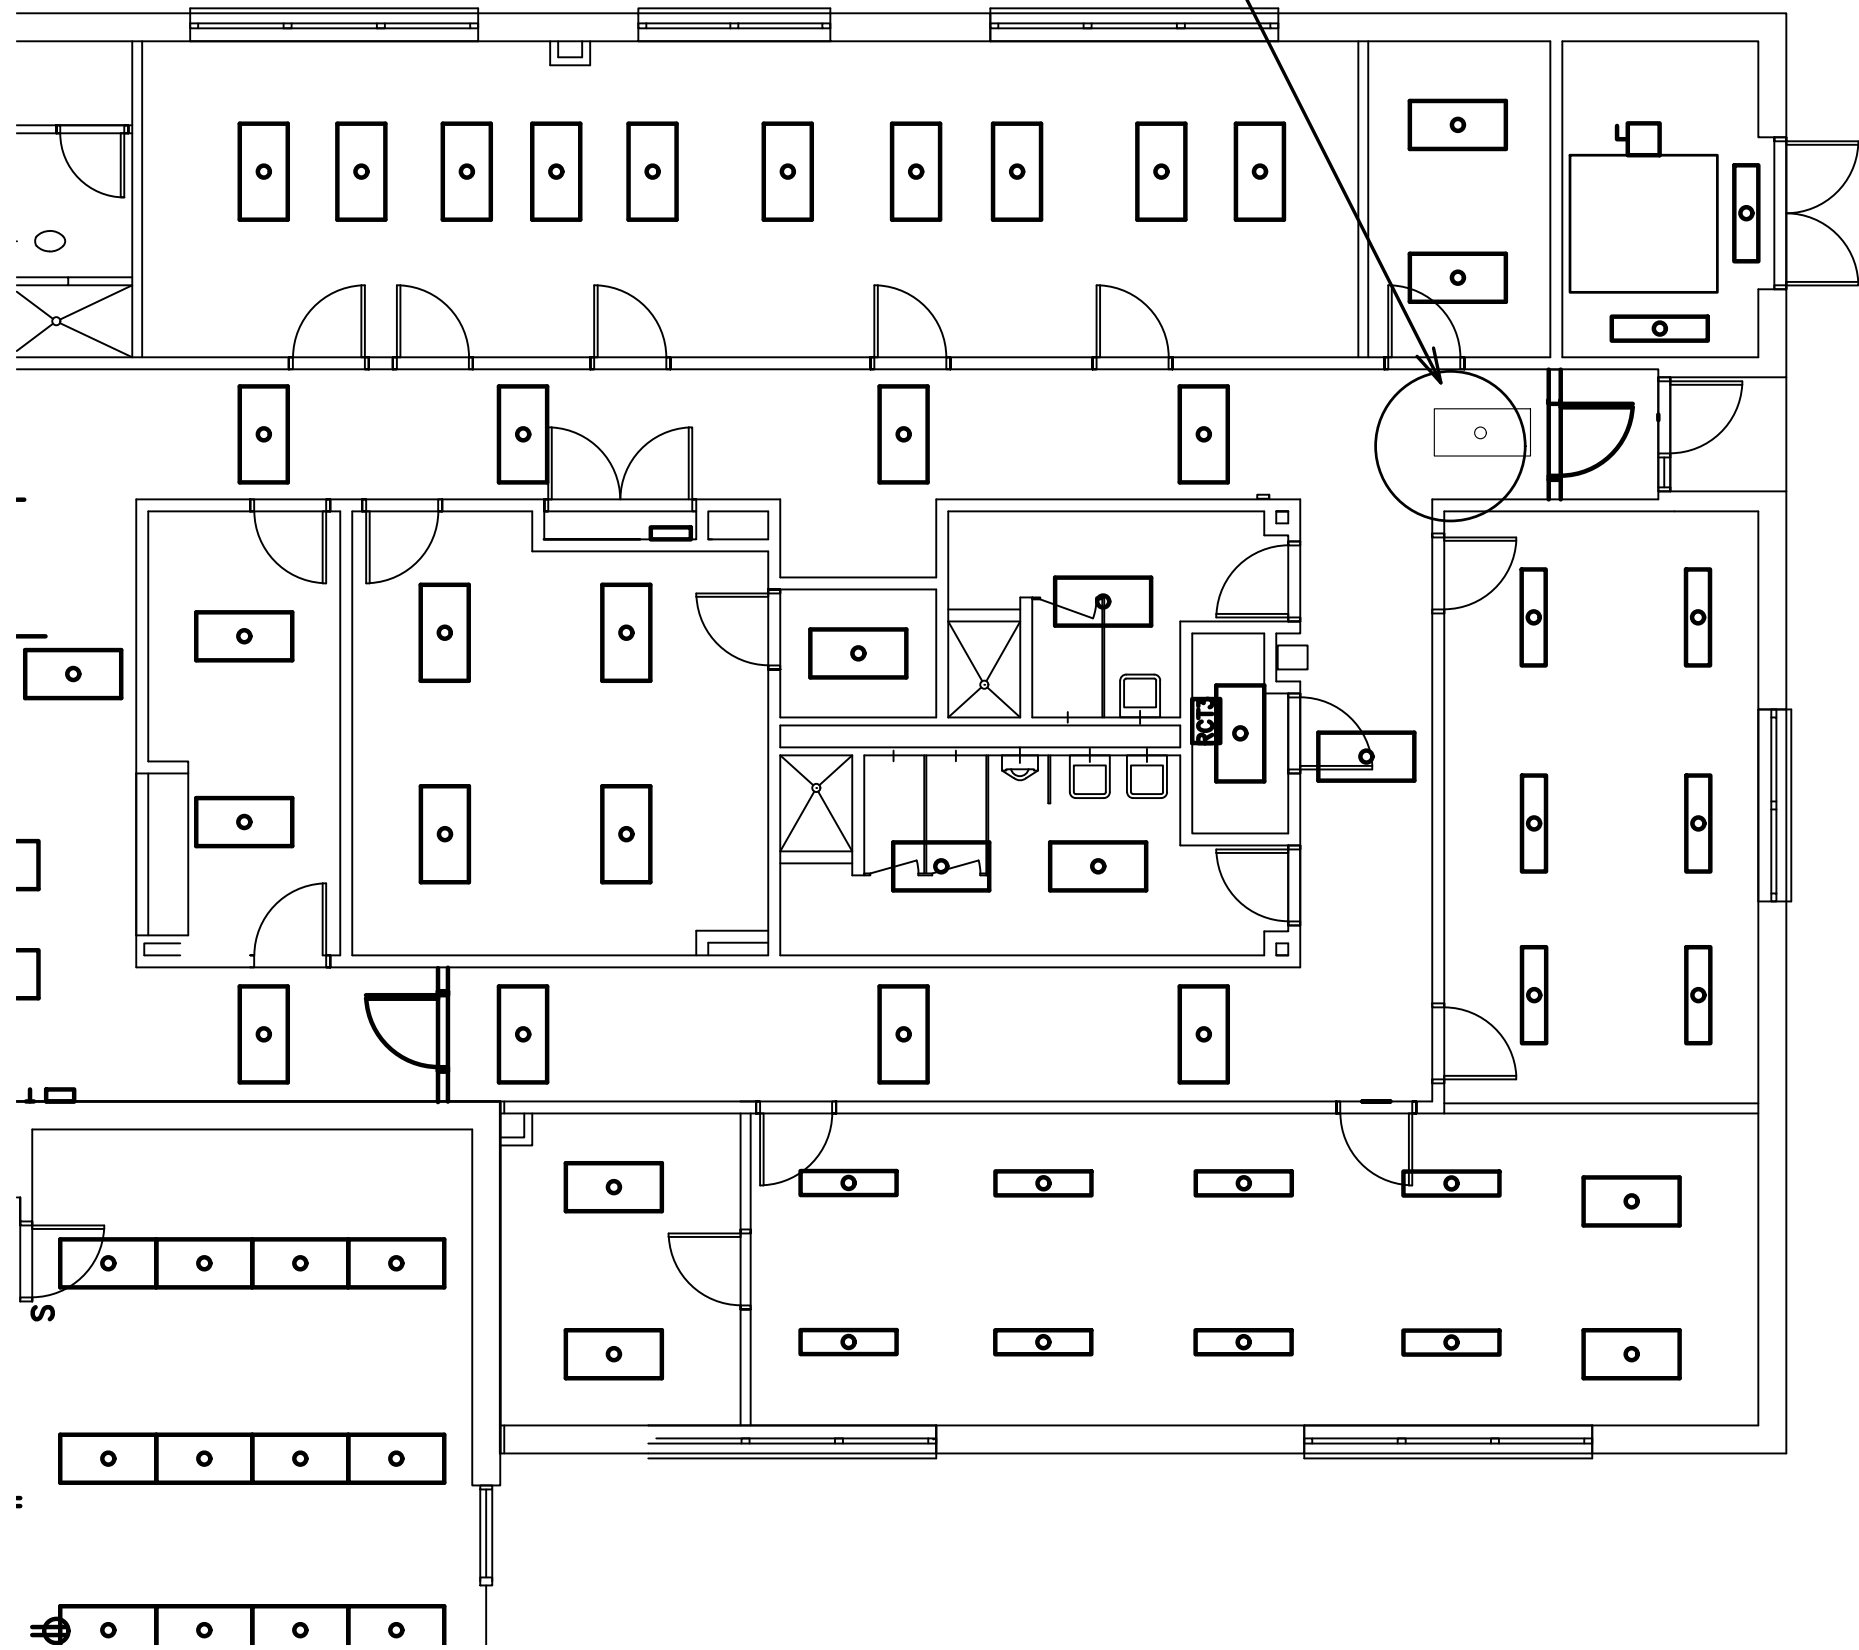

2
E1 E1

NEW LIGHTING FLOOR PLAN

1/8" = 1'-0"

