

Project #7: Repair HVAC McChord Field Air Traffic Control Tower

Project Overview

The project involves the complete replacement of the existing Variable Refrigerant Flow (VRF) HVAC system with a new, redundant, 4-pipe hydronic system utilizing high-efficiency heat pump chillers. The work includes the demolition of the existing system, installation of new mechanical and electrical equipment, and associated architectural and structural modifications. The Air Traffic Control Tower must remain fully operational 24/7 throughout the entire duration of the project, which will necessitate a carefully phased construction approach.

General Contractor Responsibilities

The contractor is responsible for all supervision, labor, materials, and equipment required to complete the work as described in the contract documents. Key responsibilities include:

- **Compliance and Permitting:** Adherence to all applicable local, state, and federal laws, regulations, and standards, including OSHA, and obtaining all necessary permits for construction.
- **Site Management:** Ensuring site safety and security, including providing temporary fencing and barriers as needed. The contractor must also coordinate all site access, staging areas, and potential road or walkway closures with the Contracting Officer's Representative (COR).
- **Field Verification:** Verifying all existing site conditions and dimensions prior to fabrication or construction and reporting any discrepancies to the COR.
- **Phasing and Coordination:** Developing and executing a detailed phasing plan to ensure the facility remains continuously operational. This includes coordinating all work and any utility shutdowns with the COR and other trades.
- **Environmental Protection:** Developing and implementing an Environmental Protection Plan (EPP) and a Stormwater Pollution Prevention Plan (SWPPP) to manage waste, control erosion, and prevent pollution.
- **Submittals and Documentation:** Providing all required project submittals, including shop drawings, product data, and a final set of "as-built" record drawings in both digital (CAD/PDF) and hard copy formats upon project completion.
- **Materials:** All materials used must be new and must comply with the Buy American Act.

Construction Phasing

To ensure uninterrupted cooling and operations, the project will be executed in the following major phases:

1. Phase 1: Temporary System Installation & New Equipment Staging

- Install one of the new permanent heat pump chillers (HPC-01) and a separate temporary heat pump chiller (HPC-TEMP).
- Install new pumps, expansion tanks, and air/dirt separators in the first-floor mechanical room.
- Run temporary insulated hydronic piping up the exterior of the tower, using existing louver and window openings to access each floor.
- Install new 4-pipe fan coil units on all floors and connect them to the temporary piping system to make them operational. The existing VRF system will continue to operate during this time.

2. Phase 2: VRF System Demolition

- Once the new temporary hydronic system is fully functional, decommission and demolish the existing VRF system. This includes the outdoor condensing unit, all indoor fan coil units, branch selector boxes, and associated refrigerant piping and controls.
- All refrigerant must be recovered by an EPA-certified technician in accordance with regulations.
- Remove all existing refrigerant lines from the main vertical utility chase.

3. Phase 3: Permanent System Installation

- Install the new permanent hot and chilled water hydronic piping inside the now-empty vertical chase.
- After removing the old VRF outdoor unit, install the second new permanent heat pump chiller (HPC-02) in its final designated location.

4. Phase 4: Final Connections and Demobilization

- Disconnect and remove the temporary exterior piping and the temporary heat pump chiller (HPC-TEMP).
- Connect the fan coil units to the new permanent interior piping and commission the complete system.
- Reinstall salvaged windows and louvers, and complete all remaining architectural finishes.

Detailed Scope of Work by Discipline

Architectural

- Demolish existing windows on floors 3 and 7, and other windows/louvers as required to route temporary piping. Salvage designated units for reinstallation.
- Install new blast-resistant windows that match existing units in size, profile, and performance.
- Patch, repair, and paint all walls, floors, and ceilings disturbed by demolition and construction to match existing adjacent finishes.
- Where ceilings are disturbed, install new acoustical ceiling tiles or patch gypsum board to match existing conditions.

Civil and Structural

- Demolish existing concrete equipment pads as indicated in the drawings.
- Form and pour new concrete housekeeping pads and foundations for the new exterior equipment, including the heat pump chillers, generator, transfer switches, and transformer.
- Provide new structural steel supports for all new piping runs as detailed in the structural drawings.
- Perform all necessary trenching, backfilling, and compaction for any new underground utilities, and restore all surfaces to their original condition.


Mechanical

- Demolition: Completely demolish the existing VRF system and other designated equipment, including unit heaters, exhaust fans, and pumps.
- New Equipment:
 - Furnish and install two (2) new York YMAE0035 (or approved equal) heat pump chillers.
 - Furnish and install new 4-pipe fan coil units (ceiling cassette, vertical, and wall-mounted types) on each floor as specified in the schedules.
 - Furnish and install new primary and secondary pumps for both the heating and chilled water loops.
 - Furnish and install a new Energy Recovery Ventilator (ERV-01) on Floor 8.


- Furnish and install all hydronic system accessories, including expansion tanks, air/dirt separators, and chemical feed systems.
- Piping and Ductwork:
 - Install a complete new 4-pipe hydronic distribution system, including all temporary and permanent piping, valves, and fittings.
 - Install new condensate drain piping for all new fan coil units.
 - Install new ductwork associated with the new ERV and fan coil units.
- Controls: Install a new, complete, and functional Direct Digital Control (DDC) system for the entire HVAC system, utilizing the BACnet protocol, and ensure it can be integrated into the base-wide control network. Provide all controllers, sensors, and actuators as shown on the control drawings.

Electrical

- Demolition: Demolish the existing Main Switchboard (MSB), generator, Automatic Transfer Switch (ATS), Manual Transfer Switch (MTS), and all associated feeders, conduits, and wiring.
- New Power System:
 - Furnish and install a new 800A, 208/120V Main Switchboard.
 - Furnish and install a new 200kW diesel generator.
 - Furnish and install a new 800A Automatic Transfer Switch (ATS-1) with bypass isolation and a new Manual Transfer Switch (MTS-1) with provisions for a temporary generator connection.
 - Furnish and install a new 75kVA step-up transformer and a new 480/277V panelboard (MC) to power the new chillers.
- Equipment Connections: Provide all final power connections, including disconnects and starters, for all new mechanical equipment (chillers, pumps, fan coils, ERV, etc.).
- Heat Trace: Install a heat trace system with a control panel for all new exterior piping to provide freeze protection.
- Relocation: Relocate existing electrical equipment, including the DPW panel and fire alarm junction boxes, to accommodate the new mechanical layout.

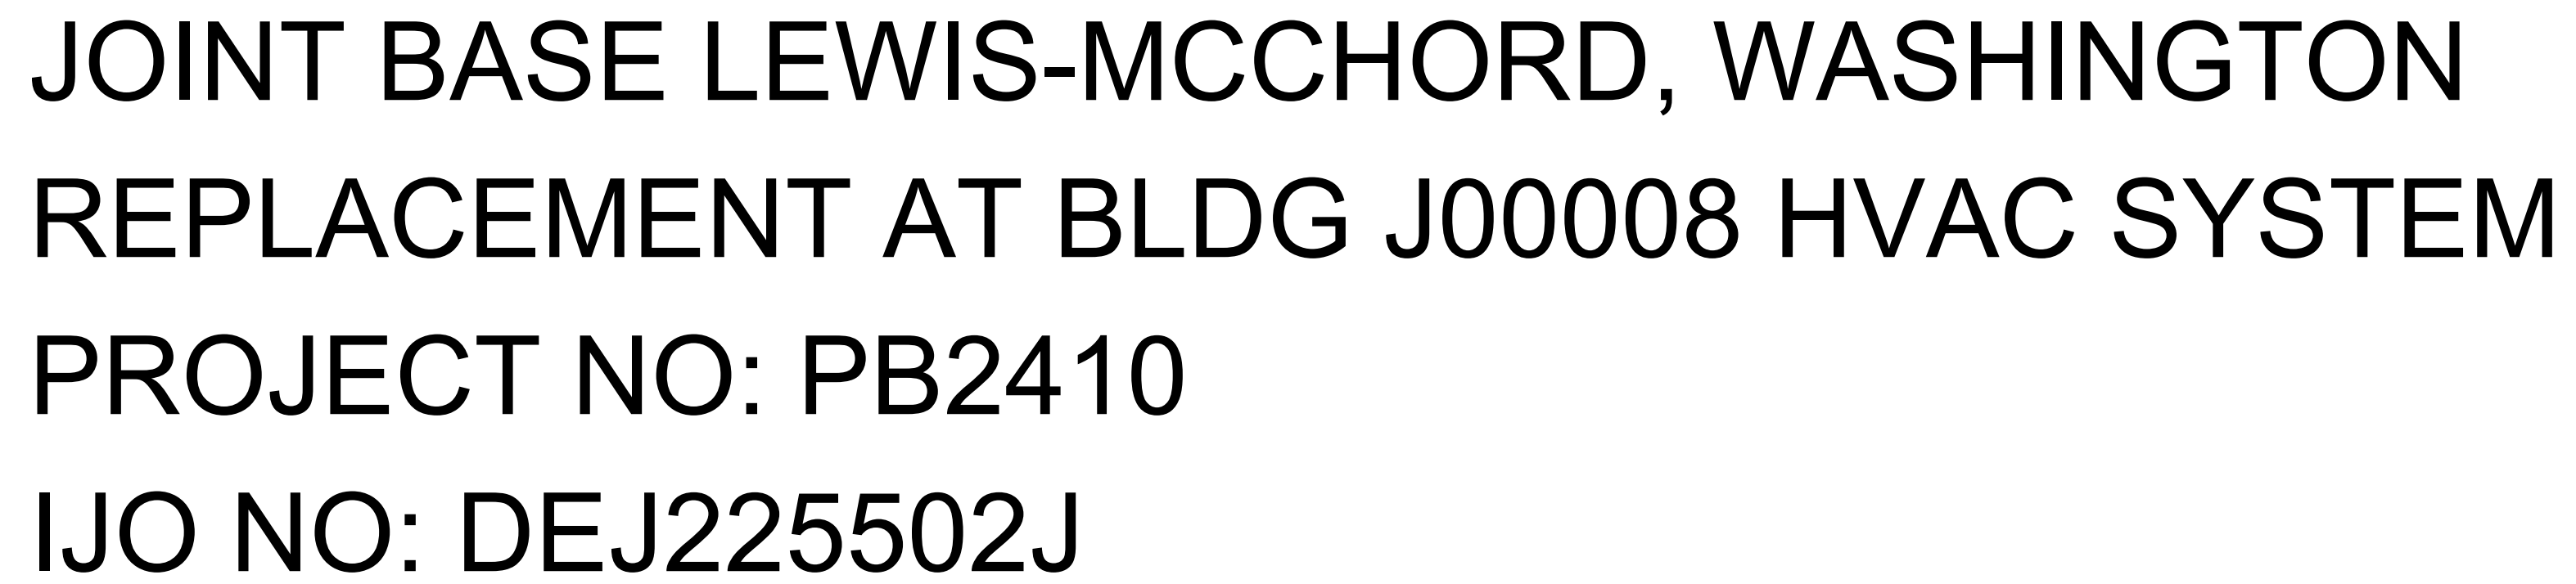

10000 REGISTERED ARCHITECT
JAMES M. KING
STATE OF WASHINGTON
9/26/2025

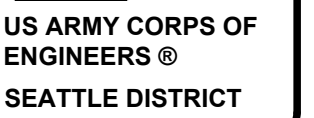[illegible]

U.S. ARMY CORPS OF ENGINEERS SEATTLE DISTRICT SEATTLE, WASHINGTON	DATE RECEIVED BY: M. KINGS 09/26/2023	SOLICITATION NO.: FA462024F0092
	DRAWN BY: A. JAMES	CONTRACT NO.:
	CHECKED BY:	PROJECT NO.:
	DATE CHECKED:	SUBMITTED BY:
	REVISIONS:	R. SUBBES
	SIZE:	I/J.O. DEJ25502J
	ANSI D	
SPECS DESIGN BUILD 23830 PACIFIC HWY S SEATTLE, WA 98148 P. (206) 990-2118		

COVER SHEET

JOINT BASE LEWIS-MCCORD, WASHINGTON
JBLM ATCT HVAC REPAIRS
DEJ225502J

SHEET ID
J00008
G-001

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
---	---	---	---	---	---	---	---	---	----	----	----	----	----	----	----	----	----	----	----

J00008 CIVIL SHEET INDEX:

DRAWING NO.	DRAWING TITLE
C-001	CIVIL SHEET INDEX AND GENERAL NOTES
C-002	CIVIL GENERAL NOTES AND LEGEND
CS100	CIVIL SITE PLAN

CIVIL ABBREVIATIONS

AF	AIR ASSISTED FIBER	N	NORTH
ABAN	ABANDONED	NAD	NORTH AMERICAN DATUM
APROX	APPROXIMATELY	NAVD	NORTH AMERICAN VERTICAL
APWA	AMERICAN PUBLIC WORKS		DATUM
	ASSOCIATION	NE	NORTHEAST
ASPH	ASPHALT CONCRETE	NOM	NOMINAL
AVE	AVENUE	NTS	NOT TO SCALE
AWWA	AMERICAN WATER WORKS	NW	NORTHWEST
	ASSOCIATION		
		OC	ON CENTER
BLDG	BUILDING	OD	OUTSIDE DIAMETER
BMP	BEST MANAGEMENT	OSP	OUTSIDE PLANT
	PRACTICES	OS1	OPTICAL SINGLEMODE
BOT	BOTTOM		FIBER (LEGACY STANDARD)
BVC	BEGIN VERTICAL CURVE	OS2	OPTICAL SINGLEMODE
			FIBER (LATEST STANDARD)
			OVERHEAD
CL or ϵ	CENTERLINE	OVHD	
CDF	CONTROLLED DENSITY FILL		
CFS	CUBIC FEET PER SECOND	PC	POINT OF CURVATURE
CLR	CLEAR	PE	PROJECT ENGINEER
CM	CENTIMETER	PI	POINT OF HORIZONTAL
CMP	CORRUGATED METAL PIPE		INTERSECTION
COMM	COMMUNICATION(S)	PHH	PHYSICAL HAND HOLE
CONC	PORTLAND CONCRETE	POC	POINT ON CURVE
COR	CONTRACTING OFFICER'S	POB	POINT OF BEGINNING
	REPRESENTATIVE	POP	POINT OF PRESENCE
CPEP	CORRUGATED	PPM	PARTS PER MILLION
	POLYETHELENE PIPE (N-12)	PROP	PROPOSED
CSBC	CRUSHED SURFACING BASE	PT	POINT OR POINT OF
	COURSE		TANGENCY
CSTC	CRUSHED SURFACING TOP	PVC	POLYVINYL CHLORIDE PIPE
	COURSE	PVI	POINT OF VERTICAL
CTR	CENTER		INTERSECTION
CY	CUBIC YARDS		
		R	RADIUS
DDCV	DOUBLE DETECTOR CHECK	RJ	RESTRAINED JOINT
	VALVE	RT	RIGHT
DI	DUCTILE IRON		
DIA or $\varnothing$	DIAMETER	S	SOUTH
DWG	DRAWING	SD	STORM DRAIN
		SDCB	STORM DRAIN CATCH BASIN
E	EAST	SDCO	STORM DRAIN CLEANOUT
EA	EACH	SDMH	STORM DRAIN MANHOLE
EG	EXISTING GROUND	SE	SOUTHEAST
ELEC	ELECTRICAL	SEC	SECTION
ELEV	ELEVATION	SF	SQUARE FOOT
EP	EDGE OF PAVEMENT	SMFO	SINGLE MODE FIBER
ESMT	EASEMENT		OPTICS
EVC	END VERTICAL CURVE	SPEC	SPECIFICATION
EXIST	EXISTING	SS	SANITARY SEWER
		SSFM	SANITARY SEWER FORCE
FG	FINISH GRADE		
FL	FLANGE	SSMH	SANITARY SEWER MANHOLE
FM	FORCE MAIN	ST	STREET
FT	FEET	STA	STATION
		STD	STANDARD
HDPE	HIGH DENSITY	SW	SOUTHWEST
	POLYETHYLENE PIPE	SWPPP	STORMWATER POLLUTION
HP	HIGH POINT		PREVENTION PLAN
HMA	HOT MIX ASPHALT		
HORIZ	HORIZONTAL	TAN	TANGENT POINT
HWY	HIGHWAY	TDR	TELECOMMUNICATIONS
			DISTRIBUTION ROOM
ID	INSIDE DIAMETER	TDU	TUBE CABLE DISTRIBUTION
IE	INVERT ELEVATION		UNIT
IN	INCH(ES)	TESC	TEMPORARY EROSION &
ISP	INTERNET SERVICE		SEDIMENT CONTROL
	PROVIDER	TOC	TOP OF CURB
		TR	TELECOMMUNICATIONS
LBS	POUNDS	ROOM	
LF	LINEAR FEET	TYP	TYPICAL
LT	LEFT		
LP	LOW POINT	UGC	UNIFIED FACILITIES CRITERIA
		UG	UNDERGROUND
MAX	MAXIMUM		
MH	MANHOLE	VC	VERTICAL CURVE
MIN	MINIMUM	VERT	VERTICAL
MISC	MISCELLANEOUS		
MJ	MECHANICAL JOINT	W	WEST or WATER

GENERAL NOTES:

- CONTRACTOR SHALL COMPLY WITH ALL LOCAL, STATE AND FEDERAL LAWS PERTINENT TO THE WORK, AND AS DESCRIBED IN THE SPECIFICATIONS AND ON THESE DESIGN DRAWINGS. ALL WORKMANSHIP AND MATERIALS SHALL BE IN ACCORDANCE WITH THE CONTRACT DOCUMENTS.
- THE CONTRACTOR IS RESPONSIBLE FOR BECOMING FAMILIARIZED WITH THE EXISTING CONDITIONS AND VERIFYING CONSISTENCY WITH DESIGN DRAWINGS AND SPECIFICATIONS. THE CONTRACTOR SHALL REPORT ANY DISCREPANCY TO THE CONTRACTING OFFICER IMMEDIATELY AND AWAIT FURTHER INSTRUCTIONS.
- IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO OBTAIN ALL APPLICABLE PERMITS, LICENSES AND CERTIFICATES, AND MAKE ALL REQUIRED AGENCY NOTIFICATIONS TO COMPLETE THE PROJECT. COMPLIANCE SHALL BE AT ALL LEVELS: FEDERAL, STATE, AND LOCAL RELATING TO THE PERFORMANCE OF THE WORK.
- PRIOR TO BEGINNING WORK AND PROCURING MATERIALS THAT COULD BE IMPACTED, CONTRACTOR SHALL INSPECT AND CONFIRM ALL POINTS OF CONNECTIONS TO EXISTING UTILITIES OR SYSTEMS. POTHOLE WHERE NECESSARY TO VERIFY THE DRAWINGS AGAINST ALL APPLICABLE EXISTING CONDITIONS. NOTIFY THE CONTRACTING OFFICER IMMEDIATELY UPON DISCOVERY OF UNFORESEEN SITE CONDITIONS OR DISCREPANCIES.
- CALL THE UNDERGROUND LOCATE LINE (811) A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATIONS, AND HIRE PRIVATE UTILITY LOCATE COMPANY TO CONFIRM PRESENCE OF EXISTING BURIED UTILITIES PRIOR TO EXCAVATION. LOCATIONS OF EXISTING UTILITIES SHOWN HEREIN HAVE BEEN ESTABLISHED BY FIELD SURVEY OR OBTAINED FROM AVAILABLE RECORDS AND SHOULD BE CONSIDERED APPROXIMATE ONLY AND NOT NECESSARILY COMPLETE. IT IS THE SOLE RESPONSIBILITY OF THE CONTRACTOR TO INDEPENDENTLY VERIFY THE ACCURACY OF ALL UTILITY LOCATIONS SHOWN, AND TO FURTHER DISCOVER AND AVOID ANY OTHER UTILITIES NOT SHOWN HEREON WHICH MAY BE AFFECTED BY THE IMPLEMENTATION OF THESE PLANS.
- UTILITY SYSTEMS SHALL BE CONSTRUCTED ACCORDING TO APPROVED PLANS. ANY DEVIATION FROM THE APPROVED PLANS WILL REQUIRE WRITTEN APPROVAL FROM THE CONTRACTING OFFICER.
- CONTRACTOR SHALL PREPARE CONSTRUCTION STORM WATER POLLUTION PREVENTION PLAN (SWPPP) IN ACCORDANCE WITH ALL APPLICABLE FEDERAL AND STATE REQUIREMENTS AND OBTAIN PERMIT FOR PROPOSED WORK. CONTRACTOR SHALL MAINTAIN AND UPDATE SWPPP AS REQUIRED THROUGHOUT CONSTRUCTION. A COPY OF THE APPROVED CONSTRUCTION SWPPP SHALL BE ON THE JOB SITE WHENEVER CONSTRUCTION IS IN PROGRESS.
- CONTRACTOR SHALL TAKE ALL POSSIBLE CARE TO PROTECT PERSONAL AND ADJACENT PROPERTY AND TO ENSURE THE SAFETY OF THOSE INVOLVED DIRECTLY OR INDIRECTLY WITH THE WORK.
- THE CONTRACTOR SHALL PERFORM ANY AND ALL CUTTING, PATCHING, REPAIRING, RESTORING AND THE LIKE NECESSARY TO RETURN ALL SURFACES AFFECTED BY THE WORK TO THEIR ORIGINAL CONDITION.
- DEMOLITION SHALL BE TO THE LIMITS SHOWN ON THE PLANS. THE DEMOLITION LIMITS DEPICTED IN THE PLANS ARE BASED ON THE AVAILABLE INFORMATION OR SURVEY. DEMOLITION LIMITS MAY VARY DEPENDING ON CHANGED SITE CONDITIONS AT THE TIME OF CONSTRUCTION.
- EXISTING PAVEMENT, LANDSCAPING, SURFACE OR SUBSURFACE FACILITIES, WITHIN OR ADJACENT TO THE CONTRACTOR'S WORK AREA OR INDICATED ON THE PLANS TO REMAIN SHALL BE PROTECTED FROM DAMAGE. ANY FACILITIES DAMAGED BY THE CONTRACTOR'S ACTIVITIES SHALL BE IMMEDIATELY REPAIRED TO MATCH ITS ORIGINAL CONDITION AND THE SATISFACTION OF THE CONTRACTING OFFICER AT NO ADDITIONAL COST TO THE GOVERNMENT.
- ALL MATERIALS SHALL BE NEW MATERIALS AND PURCHASED IN ACCORDANCE WITH THE BUY AMERICAN ACT.
- WRITTEN DIMENSIONS IN SCHEDULES AND DRAWINGS TAKE PRECEDENCE OVER SCALED DRAWINGS. DO NOT SCALE DRAWINGS, AND BRING ALL DISCREPANCIES TO THE ATTENTION OF THE CONTRACTING OFFICER AND AWAIT FURTHER INSTRUCTIONS.
- IT IS THE CONTRACTOR'S RESPONSIBILITY TO COORDINATE THE CONSTRUCTION PHASING AND STAGING. NO ADDITIONAL COST TO THE OWNER WILL BE PERMITTED FOR THE RELOCATION OF TRAILERS, STORED MATERIAL, REMOVAL AND REINSTALLATION OF BARRICADES, FENCING, OR ANY OTHER INCIDENTAL ITEMS THAT ARE REQUIRED AND NECESSARY TO ACCOMPLISH THE WORK UNDER THIS CONTRACT. COMPLETE RESTORATION BETWEEN CONSTRUCTION PHASES IS REQUIRED, UNLESS OTHERWISE DIRECTED BY THE CONTRACTING OFFICER.
- THE CONTRACTOR SHALL NOTIFY THE COR (CONTRACTING OFFICERS REPRESENTATIVE) OF ANY WORK TO BE PERFORMED IN CONFINED SPACE. CONTRACTOR SHALL CREATE AND SUBMIT INDIVIDUAL CONFINED SPACE WORK PLAN. CONTRACTOR SHALL RECEIVE APPROVAL PRIOR TO BEGINNING WORK.

EXISTING DATA NOTES:

1. THE EXISTING INFORMATION SHOWN ON THESE DRAWINGS HAVE BEEN PREPARED BASED UPON INFORMATION FURNISHED BY OTHERS. WHILE THIS INFORMATION IS BELIEVED TO BE RELIABLE, GOVERNMENT CANNOT ENSURE ACCURACY AND THUS IS NOT RESPONSIBLE FOR THE ACCURACY OF THAT INFORMATION OR FOR ANY ERRORS OR OMISSIONS WHICH MAY HAVE BEEN INCORPORATED INTO THESE DRAWINGS AS A RESULT.
2. THE ENGINEER ASSUMES NO LIABILITY FOR DAMAGES TO ANY UTILITIES DURING CONSTRUCTION. THE CONTRACTOR SHALL BE SOLELY RESPONSIBLE TO REPAIR ANY DAMAGES THAT MAY OCCUR DURING CONSTRUCTION.
3. THE CONTRACTOR MAY CONDUCT TEST PITS (POTHOLE) TO VERIFY EXISTING CONDITIONS. THE CONTRACTOR SHALL COORDINATE ALL TEST PITS WITH THE COR.

RESTORATION NOTES:

1. RESTORATION SHALL BE IN ACCORDANCE WITH JBLM AND UFC REQUIREMENTS.
2. RESTORE ALL DISTURBED AREAS AS SHOWN ON PLANS OR AS DIRECTED BY THE CONTRACTING OFFICER.
3. REPAIR ALL UTILITIES DAMAGED BY CONSTRUCTION IN ACCORDANCE WITH CONTRACTING OFFICER'S REQUIREMENTS.
4. CONTRACTOR SHALL RESTORE THE SITE AND ALL OTHER PHYSICAL FEATURES TO MATCH EXISTING CONDITIONS WHERE CONSTRUCTION WORK IS PERFORMED.
5. CONTRACTOR TO RETURN DISTURBED SOIL AND LANDSCAPING TO ITS ORIGINAL CONDITION.

DEMOLITION NOTES:

3. PERFORM DEMOLITION IN SUCH MANNER AS TO ELIMINATE HAZARDS TO PERSONS AND PROPERTY; TO MINIMIZE INTERFERENCE WITH USE OF ADJACENT AREAS, UTILITIES AND STRUCTURES OR INTERRUPTION OF USE OF SUCH UTILITIES; AND TO PROVIDE FREE PASSAGE TO AND FROM SUCH ADJACENT AREAS OR STRUCTURES.
2. PROVIDE SAFEGUARDS, INCLUDING WARNING SIGNS, BARRICADES, TEMPORARY FENCES, WARNING LIGHTS, AND OTHER SIMILAR ITEMS THAT ARE REQUIRED FOR PROTECTION OF ALL PERSONNEL DURING DEMOLITION AND REMOVAL OPERATIONS.
3. MAINTAIN FENCES, BARRICADES, LIGHTS AND OTHER SIMILAR ITEMS AROUND EXPOSED EXCAVATIONS UNTIL SUCH EXCAVATIONS HAVE BEEN COMPLETELY FILLED.
4. PREVENT SPREAD OF FLYING PARTICLES AND DUST. SPRINKLE RUBBISH AND DEBRIS WITH WATER TO KEEP DUST TO A MINIMUM. DO NOT USE WATER IF IT RESULTS IN HAZARDOUS OR OBJECTIONABLE CONDITIONS SUCH AS, BUT NOT LIMITED TO; ICE, FLOODING OR POLLUTION. VACUUM, SWEEP, AND DUST THE WORK AREA DAILY.
5. BEFORE BEGINNING ANY DEMOLITION WORK, THE CONTRACTOR SHALL SURVEY THE SITE AND EXAMINE THE DRAWINGS AND SPECIFICATIONS TO DETERMINE THE EXTENT OF THE WORK. THE CONTRACTOR SHALL TAKE NECESSARY PRECAUTIONS TO AVOID DAMAGES TO EXISTING ITEMS TO REMAIN IN PLACE, TO BE REUSED, OR TO REMAIN THE PROPERTY OF JBLM; AND DAMAGED ITEMS SHALL BE REPAIRED OR REPLACED AS APPROVED BY THE CONTRACTING OFFICER REPRESENTATIVE (COR). THE CONTRACTOR SHALL COORDINATE THE WORK WITH ALL OTHER WORK AND SHALL CONSTRUCT AND MAINTAIN SHORING, BRACING, AND SUPPORTS AS REQUIRED. THE CONTRACTOR SHALL ENSURE THAT STRUCTURAL ELEMENTS ARE NOT OVERLOADED AND SHALL BE RESPONSIBLE FOR INCREASING STRUCTURAL SUPPORTS OR ADDING NEW SUPPORTS AS MAY BE REQUIRED AS A RESULT OF ANY CUTTING, REMOVAL, OR DEMOLITION WORK PERFORMED.
6. DEMOLISH AND REMOVE OUTSIDE UTILITY SERVICE LINES SHOWN TO BE REMOVED.
7. REMOVE ABANDONED OUTSIDE UTILITY LINES THAT WOULD INTERFERE WITH INSTALLATION OF NEW UTILITY LINES AND NEW CONSTRUCTION.
8. COMPLETELY DEMOLISH AND REMOVE BUILDINGS AND STRUCTURES, INCLUDING ALL APPURTENANCES RELATED OR CONNECTED THERETO, AS NOTED BELOW:
 - 8.A. AS REQUIRED FOR INSTALLATION OF NEW UTILITY SERVICE LINES.
 - 8.B. TO FULL DEPTH WITHIN AN AREA DEFINED BY HYPOTHETICAL LINES LOCATED 5 FT (1500 MM) OUTSIDE BUILDING LINES OF NEW STRUCTURES.
9. ALL WASTE DEBRIS, UNSUITABLE, AND EXCESS MATERIAL SHALL BE REMOVED FROM THE SITE AND LAWFULLY DISPOSED OF. DEBRIS, INCLUDING BRICK, CONCRETE STONE, METALS AND SIMILAR MATERIALS SHALL BECOME PROPERTY OF THE CONTRACTOR AND SHALL BE DISPOSED OF BY THE CONTRACTOR DAILY. OFF THE BASE TO AVOID ACCUMULATION AT THE DEMOLITION SITE. MATERIALS THAT CANNOT BE REMOVED DAILY SHALL BE STORED IN AREAS SPECIFIED BY THE CONTRACTING OFFICERS REPRESENTATIVE. CONTRACTOR SHALL NOTIFY ENGINEER IMMEDIATELY IF MATERIALS UNCOVERED DURING ANY PART OF THE WORK APPEAR TO BE CONTAMINATED. ALL LOCAL, STATE AND FEDERAL LAWS SHALL PREVAIL IN THE EVENT OF CONTAMINATED MATERIALS.
10. BREAK UP CONCRETE SLABS BELOW GRADE THAT DO NOT REQUIRE REMOVAL FROM PRESENT LOCATION INTO PIECES NOT EXCEEDING 24 INCHES (600 MM) SQUARE TO PERMIT DRAINAGE. CONTRACTOR SHALL DISPOSE OF DEBRIS IN COMPLIANCE WITH APPLICABLE FEDERAL, STATE AND LOCAL PERMITS, RULES AND/OR REGULATIONS.

TRAFFIC MANAGEMENT NOTES:

1. ALL ROADWAYS SHALL REMAIN OPEN DURING CONSTRUCTION, UNLESS OTHERWISE APPROVED BY THE CONTRACTING OFFICER. ROADWAY CLOSURE DURING CONSTRUCTION REQUIRES THE CONTRACTOR SUBMIT A TRAFFIC CONTROL PLAN FOR REVIEW AND APPROVAL IN ADVANCE. IF REQUIRED, ALL TEMPORARY TRAFFIC CONTROL DEVICES SHALL BE IN ACCORDANCE WITH THE MOST CURRENT EDITION OF "MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES FOR STREETS AND HIGHWAYS".
2. THE CONTRACTOR SHALL MAINTAIN A MINIMUM OF ONE MOVING LANE ALONG ROADWAYS AT ALL TIMES, EXCEPT WHERE GIVEN PERMISSION BY JBLM AND THE CONTRACTING OFFICERS REPRESENTATIVE.
3. THE CONTRACTOR SHALL PROVIDE ALL SIGNAGE, BARRICADES, CAUTION TAPE, CONES AND BARRELS REQUIRED TO FACILITATE A SAFE LANE OR SIDEWALK CLOSURE.
4. PEDESTRIAN ACCESS SHALL BE MAINTAINED AND MANAGED DURING SIDEWALK AND CROSSWALK CLOSURES.
5. ACCESS TO ALL ROADWAYS, DRIVEWAYS AND LOADING RAMPS SHALL BE MAINTAINED DAILY AFTER CONSTRUCTION ACTIVITIES HAVE CONCLUDED.
6. THE CONTRACTOR SHALL COORDINATE ANY ROADWAY, DRIVEWAY, LOADING RAMP AND/OR SIDEWALK CLOSURES WITH THE COR PRIOR TO PERFORMING WORK.
7. ALL ROAD CLOSURES SHALL BE OUTSIDE NORMAL WORKING HOURS OF 8:00 AM TO 5:00 PM MONDAY THROUGH FRIDAY. ROAD CLOSURES AND TRAFFIC CONTROL PLAN SHALL BE APPROVED BY COR PRIOR TO CONSTRUCTION.

GENERAL UTILITY NOTES:


- PRIOR TO THE COMMENCEMENT OF CONSTRUCTION, THE CONTRACTOR SHALL VERTICALLY AND HORIZONTALLY FIELD LOCATE BY POT-HOLING AND SURVEY ALL PROPOSED UTILITY CONFLICTS AND CROSSINGS. IF THE EXISTING UTILITY LOCATION DIFFERS FROM WHAT IS SHOWN ON THE PLANS, THE CONTRACTOR SHALL NOTIFY THE CONTRACTING OFFICER AND/OR CONTRACTING OFFICER'S REPRESENTATIVE IMMEDIATELY AND AWAIT FURTHER INSTRUCTIONS.
2. THE CONTRACTOR IS ADVISED THAT ALL EXISTING UNDERGROUND UTILITIES, CABLES, DUCTS, MANHOLES, ETC. (UNDERGROUND FACILITIES) SHOWN ON PLANS WERE LOCATED USING THE BEST INFORMATION AVAILABLE. INFORMATION SHOWN ON THE DRAWING CONCERNING TYPE, SIZE AND LOCATION OF UNDERGROUND UTILITIES IS NOT GUARANTEED TO BE ACCURATE OR ALL-INCLUSIVE, AND IS PROVIDED FOR INFORMATIONAL PURPOSES ONLY. THE CONTRACTOR IS SOLELY RESPONSIBLE FOR LOCATING AND PROTECTING ALL UTILITIES. CONTRACTOR SHALL BE RESPONSIBLE FOR CONTACTING GOVERNMENT UTILITY OWNERS TO IDENTIFY UNDERGROUND UTILITIES AND/OR CABLES WITHIN THE PROJECT LIMITS AND STAGING AREAS. THE CONTRACTOR SHALL ASSIST UTILITY OWNERS IN EFFORTS TO FIELD VERIFY UNDERGROUND UTILITIES. CONTRACTOR SHALL ALSO REVIEW ALL UTILITIES WITH JBLM MAINTENANCE STAFF PRIOR TO BEGINNING WORK. PRIOR TO THE COMMENCEMENT OF ANY CONSTRUCTION ACTIVITY, THE CONTRACTOR SHALL CONDUCT A FIELD UTILITY LOCATION SURVEY USING ELECTRONIC, MAGNETIC OR OTHER UNDERGROUND UTILITY LOCATING PRACTICES. UTILITY OWNERS SHALL BE NOTIFIED AND SHALL HAVE THE OPTION TO ACCOMPANY THIS FIELD INVESTIGATION. EXPLORATORY EXCAVATIONS IN THE VICINITY OF EXISTING UNDERGROUND UTILITIES, PARTICULARLY THOSE ASSOCIATED WITH OPERATING NAVIGATIONAL AIDS, SHALL BE CARRIED OUT WITH HAND TOOLS UNTIL THE EXACT CHARACTER AND LOCATION OF SUCH FACILITIES ARE DETERMINED. ALL INFORMATION SO OBTAINED FROM THIS UTILITY LOCATION SURVEY SHALL BE FURNISHED TO THE CONTRACTING OFFICER AND CONTRACTING OFFICER'S REPRESENTATIVE AND THE A/E PRIOR TO CONSTRUCTION.
3. ALL UNDERGROUND CABLE, UTILITIES, AND ASSOCIATED STRUCTURES SHALL BE PROTECTED FROM DAMAGE BY THE CONTRACTOR. ANY DAMAGE TO EXISTING UNDERGROUND CABLES AND/OR UTILITIES CAUSED BY THE CONTRACTOR (REGARDLESS OF WHETHER THEY WERE LOCATED OR NOT BY THE COMPUS, UTILITY COMPANY, ETC.) SHALL BE REPAIRED BY THE CONTRACTOR AT THE CONTRACTOR'S OWN EXPENSE AND TO THE SATISFACTION OF THE UTILITY OWNER'S AUTHORIZED REPRESENTATIVES. ALL EXISTING UTILITIES, CABLE, DUCTS, EQUIPMENT, DEVICES, ETC. OUTSIDE THE AREA OF DEMOLITION OR CONSTRUCTION LIMITS WHICH ARE DAMAGED OR DISRUPTED AS A RESULT OF THE CONTRACTOR'S OPERATIONS, SHALL BE IMMEDIATELY REPAIRED AT THE EXPENSE OF THE CONTRACTOR AND TO THE SATISFACTION OF THE UTILITY OWNER'S AUTHORIZED REPRESENTATIVE.
4. ALL UTILITY OUTAGES SHALL BE SCHEDULED AND APPROVED THROUGH THE COR (CONTRACTING OFFICERS REPRESENTATIVE) PER THE APPLICABLE OUTAGE NOTIFICATION REQUIREMENTS.
5. UNLESS ALREADY SPECIFIED IN THE CONTRACT DRAWINGS, CONTRACTOR SHALL RETROFIT ALL EXISTING UTILITY ACCESS POINTS TO BRING FLUSH WITH FINISHED SURFACE WITHIN AREAS OF WORK IN WHICH THE EXISTING GRADE IS MODIFIED BY CONSTRUCTION. THIS WORK IS CONSIDERED PART OF THE CONTRACTED SCOPE, AND APPLIES TO EXISTING UTILITIES THAT ARE NOT TO BE DEMOLISHED OR ABANDONED WITHIN THE PROJECT LIMITS.
6. ALL MATERIALS, WORKMANSHIP, AND TESTING SHALL BE IN ACCORDANCE WITH THE REQUIREMENTS OF THE CONTRACT SPECIFICATIONS.
7. FIELD VERIFY LOCATION (INCLUDING POT HOLING FOR VERTICAL DEPTH) OF EXISTING UTILITIES AND INVERT ELEVATIONS OF THE POINT OF CONNECTION PRIOR TO CONSTRUCTION.
8. COMPRESSIBLE MATERIALS:
FOR USE IN AREAS ABOVE BURIED PIPES WHERE OTHER PIPES ARE CROSSING WITH LESS THAN 1'-0" VERTICAL SEPARATION OR WHERE CALLED OUT ON DRAWINGS: POLYETHYLENE PLASTIC FOAM IN ACCORDANCE WITH FEDERAL SPECIFICATION PPP-C-1752C, TYPE 1, CLASS 2, SUCH AS "ETHAFOAM", AT PIPE CROSSINGS. MATERIAL SHALL BE A MIN OF 2-INCH THICK, 2-FT MIN, 4-FT LONG, BUT SHALL BE A MINIMUM OF 6-IN WIDER THAT OUTSIDE DIAMETER OF PIPE ON EACH SIDE.
9. GATE VALVES INSTALLED UNDER PAVEMENT SHALL HAVE A 2-INCH OPERATING NUT AND VALVE BOX W/ COVER FLUSH WITH ASPHALT SURFACE. GATE VALVES INSTALLED IN AREAS WHERE THE SURFACE IS OTHER THAN ASPHALT OR CONCRETE, TOP OF VALVE BOX SHALL BE EMBEDDED IN A CAST-IN-PLACE COLLAR THAT IS 3'-0" MIN SQUARE BY 8-INCHES THICK PLACED ON 4-INCH THICK (MIN) COMPACTED BASE COURSE WITH SURFACE FLUSH WITH EXISTING GRADE
10. TESTING OF ALL INSTALLED UTILITY LINES AND STRUCTURES SHALL BE IN ACCORDANCE WITH CONTRACT SPECIFICATIONS.
11. ANY REVISIONS TO THESE PLANS, ONCE APPROVED BY THE ENGINEER OF RECORD, SHALL BE REVIEWED AND RE-APPROVED BY THE CONTRACTING OFFICER.

GRADING & BACKFILL NOTES:

1. BACKFILL MATERIAL SHALL NOT CONTAIN PETROLEUM PRODUCTS, OR SUBSTANCES WHICH ARE HAZARDOUS, DANGEROUS, TOXIC, OR WHICH OTHERWISE VIOLATE ANY STATE, FEDERAL, OR LOCAL LAW, ORDINANCE, CODE, REGULATION, RULE, ORDER, OR STANDARD.
2. GENERAL SITE BACKFILL MATERIAL SHALL MEET JBLM REQUIREMENTS FOR EARTHWORK AND BE IN ACCORDANCE WITH THE RECOMMENDATIONS IN THE ORIGINAL GEOTECHNICAL REPORT FOR THIS PROJECT.
3. SLOPE FINISH GRADE SURFACES UNIFORMLY BETWEEN ELEVATIONS SHOWN ON DRAWINGS UNLESS SPECIFIED OTHERWISE. GRADE AREAS TO ELIMINATE LOW SPOTS AND MAINTAIN POSITIVE DRAINAGE AWAY FROM BUILDING AND STRUCTURES.

SECURITY:

1. THE CONTRACTOR SHALL COMPLY WITH ALL REQUIREMENTS OF THE JBLM SECURITY PROGRAM.
2. THE CONTRACTOR SHALL BE RESPONSIBLE FOR BRIEFING ALL CONTRACTOR'S PERSONNEL OF THE JBLM SECURITY REQUIREMENTS. ALL NEW CONTRACTOR EMPLOYEES SHALL BE BRIEFED ON THESE REQUIREMENTS PRIOR TO WORKING IN THE CONSTRUCTION AREA.
3. CONTRACTOR IS SOLELY RESPONSIBLE FOR SECURING JOBSITE AT ALL TIMES THROUGHOUT CONSTRUCTION.

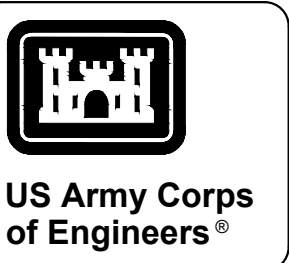[illegible]

U.S. ARMY CORPS OF ENGINEERS		DESIGNED BY:		ISSUE DATE:	
SEATTLE DISTRICT		PB		9/26/25	
SEATTLE, WASHINGTON		OWN BY:		ATTENTION NO.:	
		ROOM:		F442024040002	
		CONTRACT NO.:		F442023030002	
		DATE:		I/O:	
		DATE:		DEJ/2525021	
		FILE NAME:		J000000_C-001.DWG	
		SIZE:		A	
		ISSUED:		C	
		DATE:		FAX: (206) 431-2250	

JOINT BASE LEWIS-McCHORD, WASHINGTON
JBLM ATCT HVAC REPAIRS
DEJ225502J

SHEET ID
J00008
C-001



1. THE CONTRACTOR SHALL BE RESPONSIBLE FOR SITE SECURITY AND JOB SAFETY. CONSTRUCTION ACTIVITIES SHALL BE IN ACCORDANCE WITH OSHA STANDARDS, STATE AND LOCAL REQUIREMENTS. THE CONTRACTOR SHALL PROVIDE FENCING OR BARRIERS WHEN CONSTRUCTION IS BEING PERFORMED ADJACENT TO BUILDING ENTRANCES/WALKWAYS.
2. THE CONTRACTOR SHALL NOT COMMENCE CONSTRUCTION NOR CLOSE OR OBSTRUCT ROADWAYS, SIDEWALKS AND/OR FIRE HYDRANTS WITHOUT APPROPRIATE PERMITS AND/OR PERMISSIONS.
3. AREAS OUTSIDE THE LIMITS OF PROPOSED WORK THAT BECOME DISTURBED BY THE CONTRACTOR'S OPERATIONS SHALL BE RESTORED BY THE CONTRACTOR TO ITS ORIGINAL CONDITION AT THE CONTRACTOR'S EXPENSE.
4. VEGETATED AREAS DISTURBED DURING CONSTRUCTION SHALL RECEIVE A MINIMUM OF FOUR (4) INCHES OF TOPSOIL. THESE AREAS SHALL BE IMMEDIATELY SEEDED AND STABILIZED.
5. DAMAGE TO SURFACE FEATURES, SUBSURFACE FEATURES AND SUBSURFACE INFRASTRUCTURE RESULTING FROM CONSTRUCTION LOADS SHALL BE REPAIRED BY THE CONTRACTOR AT NO ADDITIONAL COST TO THE OWNER.
6. THE CONTRACTOR SHALL CONTROL STORMWATER RUNOFF DURING CONSTRUCTION TO PREVENT ADVERSE IMPACTS TO OFF-SITE AREAS, AND SHALL BE RESPONSIBLE TO REPAIR RESULTING DAMAGES, IF ANY, AT NO COST TO OWNER.
7. THE CONTRACTOR IS REQUIRED TO BACKFILL TRENCHES OR SECURE WITH METAL PLATES OR CONSTRUCTION FENCE DAILY. NO OPEN TRENCHES SHALL BE LEFT UNATTENDED.
8. THE CONTRACTOR IS RESPONSIBLE FOR ALL FIELD MEASUREMENTS. THE GOVERNMENT WILL NOT BE HELD RESPONSIBLE FOR BIDDING ERRORS MADE OR FOR THE FAILURE TO ADEQUATELY INSPECT THE JOB SITE FOR EXISTING CONDITIONS, DIMENSIONS, AND GRADES.
9. THE CONTRACTOR SHALL VERIFY THE PROPOSED LAYOUT WITH ITS RELATIONSHIP TO THE EXISTING SITE. THE CONTRACTOR SHALL ALSO VERIFY ALL DIMENSIONS, SITE CONDITIONS, AND MATERIAL SPECIFICATIONS AND SHALL NOTIFY THE OWNER AND ENGINEER OF ANY DISCREPANCIES BEFORE COMMENCING OR PROCEEDING WITH WORK.
10. THE CONTRACTOR SHALL NOTIFY OPERATORS WHO MAINTAIN UNDERGROUND UTILITY LINES IN THE AREA OF PROPOSED EXCAVATION AT LEAST TWO WORKING DAYS, BUT NOT MORE THAN TEN WORKING DAYS, PRIOR TO COMMENCEMENT OF EXCAVATION OR DEMOLITION. ALL WATER, GAS, SEWER, ELECTRIC AND OTHER UTILITIES SHALL BE MAINTAINED AT ALL TIMES DURING CONSTRUCTION.
11. THE CONTRACTOR SHALL BE RESPONSIBLE FOR REPLACING, WITH MATCHING MATERIALS, ANY PAVEMENT, WALKS, CURBS, ETC. THAT SHALL BE CUT OR THAT ARE DAMAGED DURING CONSTRUCTION.
12. CONSTRUCTION ACTIVITIES SHALL NOT CONFLICT WITH THE JBLM OPERATIONS AND EMPLOYEE/STAFF PARKING. THE CONTRACTOR SHALL COORDINATE ALL WORK WITH THE COR. WORK AFFECTING BUILDING ENTRANCES, WALKWAYS, LOADING AREAS, PARKING, ETC. SHALL BE COORDINATED AND SCHEDULED WITH THE COR.
13. THE CONTRACTOR SHALL MAINTAIN RECORD DOCUMENTS OF CONSTRUCTION CHANGES ("AS-BUILT DRAWINGS") AND SHALL PROVIDE SAID DOCUMENTATION TO THE ENGINEER UPON COMPLETION OF CONSTRUCTION IN BOTH DIGITAL AND HARD COPY FORMATS. RECORD DOCUMENTS SHALL ARTICULATE WHERE ACTUAL INSTALLATION OF WORK, PRODUCTS AND/OR SYSTEMS VARY FROM THE DESIGN INTENT EXPRESSED/SPECIFIED IN THE CONTRACTOR DOCUMENTS. ****NO EXCEPTION ALLOWED****
14. ANY EXISTING PROPERTY LINE MONUMENTATION DISTURBED DURING CONSTRUCTION SHALL BE RESET BY A PROFESSIONAL LICENSED SURVEYOR AT THE CONTRACTOR'S EXPENSE.
15. THE CONTRACTOR SHALL PROTECT THE PROPERTY FROM DUST AND DAMAGE AT ALL TIMES. ANY RESULTING DAMAGE TO THE PROPERTY SHALL BE IMMEDIATELY CORRECTED BY THE CONTRACTOR AT THE CONTRACTOR'S EXPENSE.

1. THE CONTRACTOR SHALL COORDINATE WITH THE COR FOR EXACT LOCATION OF STAGING AREA(S) TO BE USED DURING CONSTRUCTION FOR STORAGE / STOCKPIILING OF MATERIALS. CONTRACTOR SHALL NOTIFY THE COR PRIOR TO OCCUPYING STAGING AREA. THE CONTRACTOR SHALL VERIFY WITH THE CONTRACTING OFFICER'S REPRESENTATIVE OF ANY CHANGES IN STAGING / LAYDOWN AREAS THAT MAY HAVE OCCURRED AFTER PLANS WERE ISSUED.
2. UPON COMPLETION OF THE WORK, THE STAGING AREAS SHALL BE CLEANED AND RESTORED TO THEIR ORIGINAL CONDITION.
3. CONTRACTOR SHALL PROVIDE TEMPORARY SECURITY FENCING AROUND THE CONSTRUCTION STAGING AREAS WHERE REQUIRED BY COR. CONTRACTOR TO COORDINATE PRIVACY FABRIC REQUIREMENTS WITH COR. CONTRACTOR SHALL BE AWARE OF THE VERTICAL HEIGHTS OF OBJECTS NEAR FENCE LINES. NO EQUIPMENT OR MATERIAL SHALL BE PLACED NEAR FENCE LINES THAT WOULD ALLOW THE FENCE TO BE SCALED. MAINTAIN A 10 FOOT MINIMUM SEPARATION FROM ALL FENCES FROM STOCKPILES, PARKED VEHICLES, OR OTHER MATERIALS WHICH COULD BE CLIMBED. POST A METALLIC SIGN DISPLAYING THE CONTRACTOR'S 24 HOUR EMERGENCY CONTACT NUMBER.
4. ALL CONTRACTOR'S MATERIAL ORDERS FOR DELIVERY TO THE SITE SHALL USE THE ACCESS POINT AS DETERMINED BY THE COR. ALL ASSOCIATED FEES AND COSTS SHALL BE PAID BY CONTRACTOR AND ARE CONSIDERED INCIDENTAL TO THE VARIOUS BID ITEMS.
5. CONTRACTOR SHALL BE RESPONSIBLE FOR TRAFFIC CONTROL TO AND FROM THE CONSTRUCTION AND STAGING AREAS. THE TRAFFIC CONTROL MEASURES SHALL BE DIRECTED AND APPROVED BY THE CONTRACTING OFFICER AND/OR CONTRACTING OFFICER'S REPRESENTATIVE.
6. CONTRACTOR SHALL COORDINATE LOCATION(S) OF SOIL STOCKPILE AREAS WITH THE CONTRACTING OFFICER IN ADVANCE OF CONSTRUCTION START. AT A MINIMUM, SOIL STOCKPILES WILL CONSIST OF CLEAN IMPORTED FILL, AND EXCAVATED SOILS WAITING FOR REUSE OR OFF-SITE DISPOSAL, AND STOCKPILES SHALL BE ADEQUATELY SEPARATED FROM EACH OTHER WITHIN THE STOCKPILE AREA(S).

1. CONTRACTOR'S VEHICLES SHALL BE IN GOOD WORKING ORDER. CONTRACTOR'S PERSONNEL SHALL PARK WITHIN THE CONTRACTOR'S STAGING AREA OR AREAS APPROVED BY THE COR.
2. ALL TRUCKS AND/OR ASSOCIATED VEHICLE HAULING TOOLS, LABOR, EQUIPMENT, MATERIAL OR DEBRIS ON JBLM SHALL BE EQUIPPED AND PREPARED TO PREVENT SPILLAGE OF DEBRIS DURING TRANSPORTATION. TRUCK BEDS SHALL BE SWEEPED CLEAN BEFORE LEAVING THE WORK AREA. SIDEBOARDS SHALL BE KEPT IN GOOD REPAIR. UNDER NO CIRCUMSTANCES SHALL A VEHICLE BE LOADED BEYOND ITS LEGAL LIMITS OR HIGHER THAN THE SIDEBOARDS.

	POWER LINE
	POWER POLE
	LIGHT POLE
	WATER LINE
	WATER VALVE
	FIRE SUPPRESSION LINE
	FIRE HYDRANT
	SANITARY SEWER LINE
	SANITARY SEWER MANHOLE
	STORM DRAIN LINE
	STORM DRAIN INLET
	STORM DRAIN MANHOLE
	BOLLARD
	FENCE
	ASPHALT PAVEMENT
	CONCRETE PAVEMENT

	CHILLER AND ELECTRICAL LINES
	CHAIN LINK FENCE
	CONCRETE PAVEMENT
	CLEARING LIMITS W/ SILTY FENCE
	CLEARING LIMITS W/ FIBER ROLLS
	STORM DRAIN INLET PROTECTION




1. THE CONTRACTOR SHALL PROVIDE AND MAINTAIN TEMPORARY EROSION AND SEDIMENT CONTROL (TESC) FACILITIES. REFER TO THE APPLICABLE DRAWINGS AND THE SPECIFICATIONS FOR PLANS AND DETAILS THAT DESCRIBE THE MINIMUM TESC FEATURES REQUIRED. AS CONSTRUCTION PROGRESSES AND SEASONAL CONDITIONS DICTATE, THE CONTRACTOR SHALL REVISE TESC FACILITIES AND CONFIGURATIONS AS NECESSARY TO ENSURE COMPLETE SILTATION CONTROL AND THAT NO SEDIMENT LADEN WATER ENTERS THE DOWNSTREAM NATURAL OR PIPED DRAINAGE SYSTEM.
2. DURING THE COURSE OF CONSTRUCTION, IT SHALL BE THE OBLIGATION AND RESPONSIBILITY OF THE CONTRACTOR TO ADDRESS ANY NEW CONDITIONS THAT MAY BE CREATED BY ITS ACTIVITIES AND TO PROVIDE ADDITIONAL TESC FACILITIES THAT MAY BE NEEDED TO PROTECT THE SITE, ADJACENT LAND AND EXISTING DRAINAGE FEATURES.
3. TEMPORARY EROSION/WATER POLLUTION PREVENTION MEASURES MUST BE REQUIRED IN ACCORDANCE WITH THE CURRENT ENVIRONMENTAL PROTECTION AGENCY'S (EPA) CONSTRUCTION STORMWATER GENERAL PERMIT AND THE APPLICABLE STATE STANDARDS OR MANUAL. DURING THE COURSE OF CONSTRUCTION, IT MUST BE THE OBLIGATION AND RESPONSIBILITY OF THE CONTRACTOR TO ADDRESS ANY NEW CONDITIONS THAT MAY BE CREATED BY ITS ACTIVITIES AND TO PROVIDE ADDITIONAL TESC FACILITIES THAT MAY BE NEEDED TO PROTECT THE SITE, ADJACENT LAND, AND EXISTING DRAINAGE FEATURES.
4. THE CONTRACTOR SHALL ENSURE THE TEMPORARY EROSION AND SEDIMENTATION CONTROL MEASURES AS SHOWN ON THESE DRAWINGS PROVIDE ADEQUATE CONTROL SO THAT NO SEDIMENT LADEN WATER LEAVES THE SITE. THE CONTRACTOR MUST INSTALL ADDITIONAL FACILITIES AS NECESSARY TO PROTECT ADJACENT PROPERTIES, SENSITIVE AREAS, NATURAL WATER COURSES, AND/OR STORM DRAINAGE SYSTEMS TO ENSURE COMPLETE SILTATION CONTROL.
5. PRIOR TO STARTING ANY WORK ON THE SITE, THE CONTRACTOR SHALL NOTIFY THE OWNER AND SHALL INSTALL ALL EROSION AND SEDIMENT CONTROL MEASURES AS SHOWN ON THE APPROVED PLANS. ALL TEMPORARY EROSION CONTROL MEASURES MUST BE MAINTAINED FOR THE DURATION OF PROJECT CONSTRUCTION.
6. THE BMP FACILITIES SHOWN ON THIS PLAN MUST BE CONSTRUCTED IN CONJUNCTION WITH ALL CLEARING AND GRADING ACTIVITIES, AND IN SUCH A MANNER AS TO ENSURE THAT SEDIMENT AND SEDIMENT LADEN WATER DO NOT ENTER THE DRAINAGE SYSTEM, ROADWAYS, OR VIOLATE APPLICABLE WATER STANDARDS.
7. PROVIDE STRAW WATTLE AND COMPOST FILTER SOCK SEDIMENT CONTROL MEASURES OR OTHER APPROVED PERIMETER PROTECTION SEDIMENT CONTROL MEASURES FOR EXISTING DRAINAGE CHANNELS NEARBY OR ADJACENT TO THE PROJECT SITE.
8. PROVIDE INLET PROTECTION AT ALL AREA STORM DRAIN STRUCTURES IN THE AREA OF CONSTRUCTION.
9. THE BMP FACILITIES MUST BE INSPECTED DAILY AND AFTER STORM EVENTS BY THE APPLICANT/CONTRACTOR AND MAINTAINED AS NECESSARY TO ENSURE THEIR CONTINUED FUNCTIONING. WRITTEN RECORDS MUST BE KEPT OF MONTHLY REVIEWS.
10. THE CONTRACTOR MUST BE RESPONSIBLE FOR CLEANING DIRT, MUD, AND OTHER CONSTRUCTION DEBRIS, WHICH MAY ACCUMULATE ON PAVED STREETS ADJACENT TO THE SITE AS A RESULT OF THE CONSTRUCTION ACTIVITY. AS A MINIMUM, DIRT, MUD AND OTHER DEBRIS MUST BE REMOVED FROM PAVEMENT AT THE CLOSE OF EACH CONSTRUCTION DAY.
11. EXPOSED SLOPES AND SURFACES MUST BE STABILIZED FROM SEDIMENT TRANSPORT USING APPROVED BMPS UNTIL THE SITE HAS BEEN STABILIZED AND THE CONTRACTING OFFICER APPROVES THE REMOVAL OF SLOPE STABILIZATION MEASURES.
12. THE CONTRACTOR MUST BE RESPONSIBLE TO ENSURE THAT NO SEDIMENT LADEN RUNOFF LEAVES THE CONSTRUCTION SITE, WORK AREA, OR HAUL ROUTES. THE CONTRACTOR MUST SUBMIT A SEDIMENT AND WATER POLLUTION PREVENTION PLAN TO THE CONTRACTING OFFICER FOR APPROVAL PRIOR TO BEGINNING ANY WORK.
13. THE CONTRACTOR MUST BE RESPONSIBLE FOR DEWATERING OF ANY EXCAVATION DURING INCLEMENT WEATHER. DEWATERING WATER MUST BE TESTED AND DISPOSED OF IN ACCORDANCE WITH STATE ENVIRONMENTAL REQUIREMENTS ACCORDING TO THE APPROVED SWPPP PLAN.
14. REMOVE ALL TEMPORARY EROSION AND SEDIMENT CONTROL MEASURES ONCE THE SITE IS STABILIZED AFTER CONSTRUCTION COMPLETION.

[illegible]


U.S. ARMY CORPS OF ENGINEERS		DESIGNED BY:	PB	ISSUE DATE:	9/26/25
SEATTLE DISTRICT		WIN BY:	PB	NOTATION NO.:	FA42024E0082
SEATTLE, WASHINGTON		CHECKED BY:	PB	CONTRACT NO.:	FA42024E0082
		SUBMITTED BY:	PB	I/O:	FA42023D0002
				FILENAME:	DEJ255602J
				ANSI D	C-002.DWG
				SIZE:	

JOINT BASE LEWIS-McCHORD, WASHINGTON
JBLM ATCT HVAC REPAIRS
DEJ225502J

SHEET ID
J00008
C-002

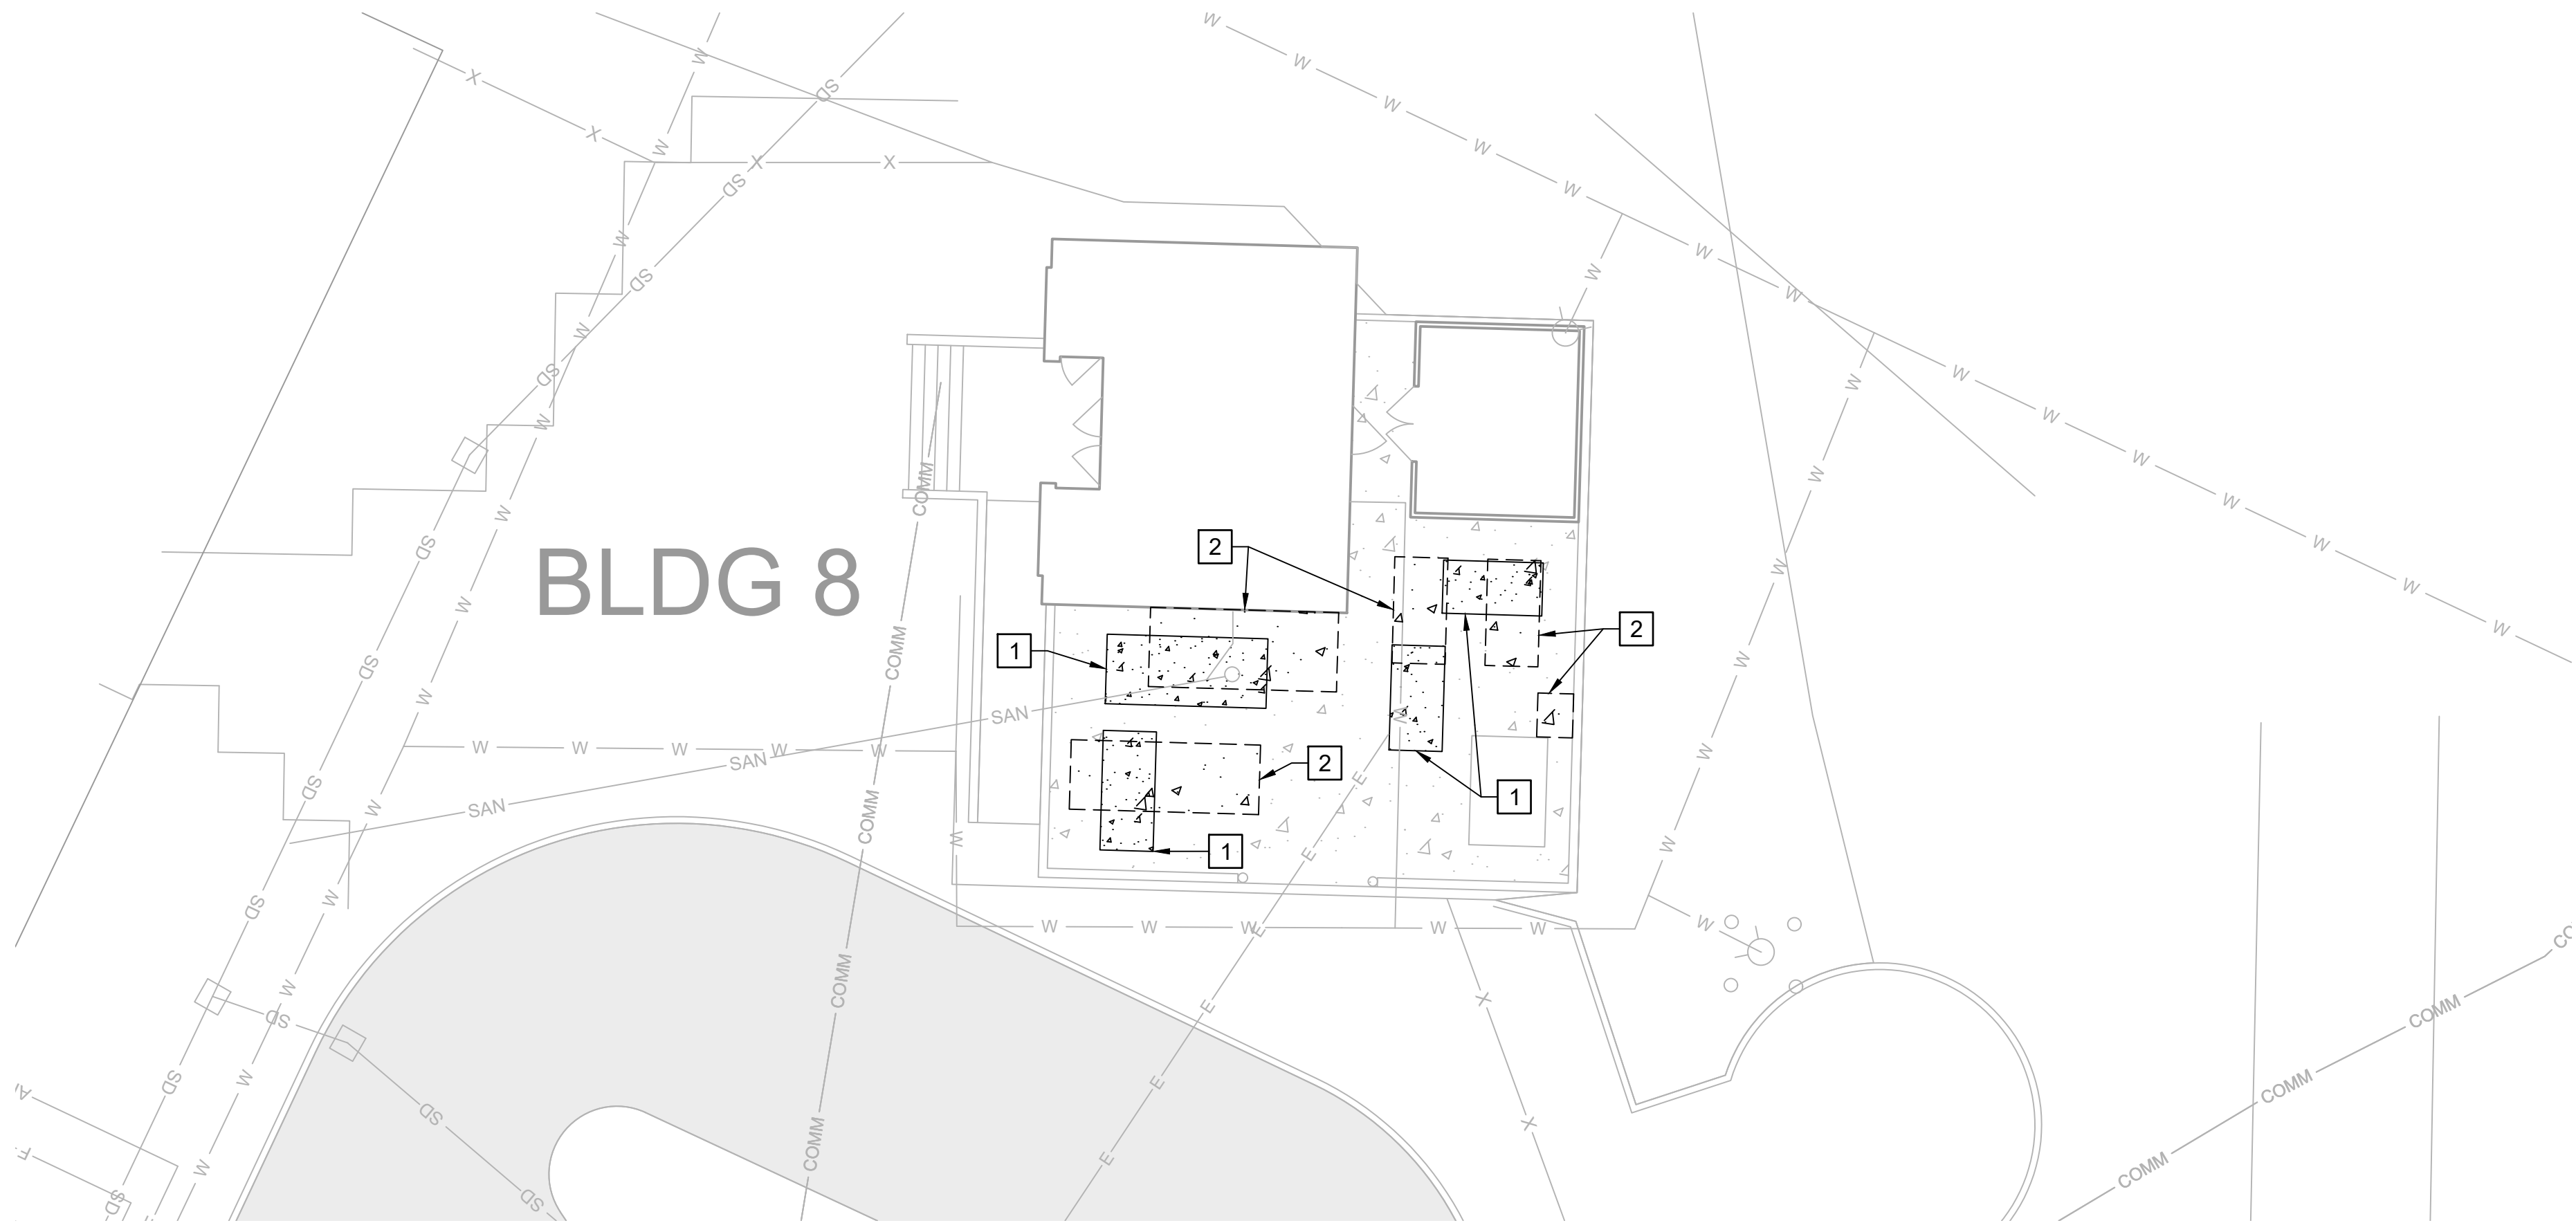




J00008 MECHANICAL YARD - DEMOLITION PLAN
SCALE: 1" = 10'

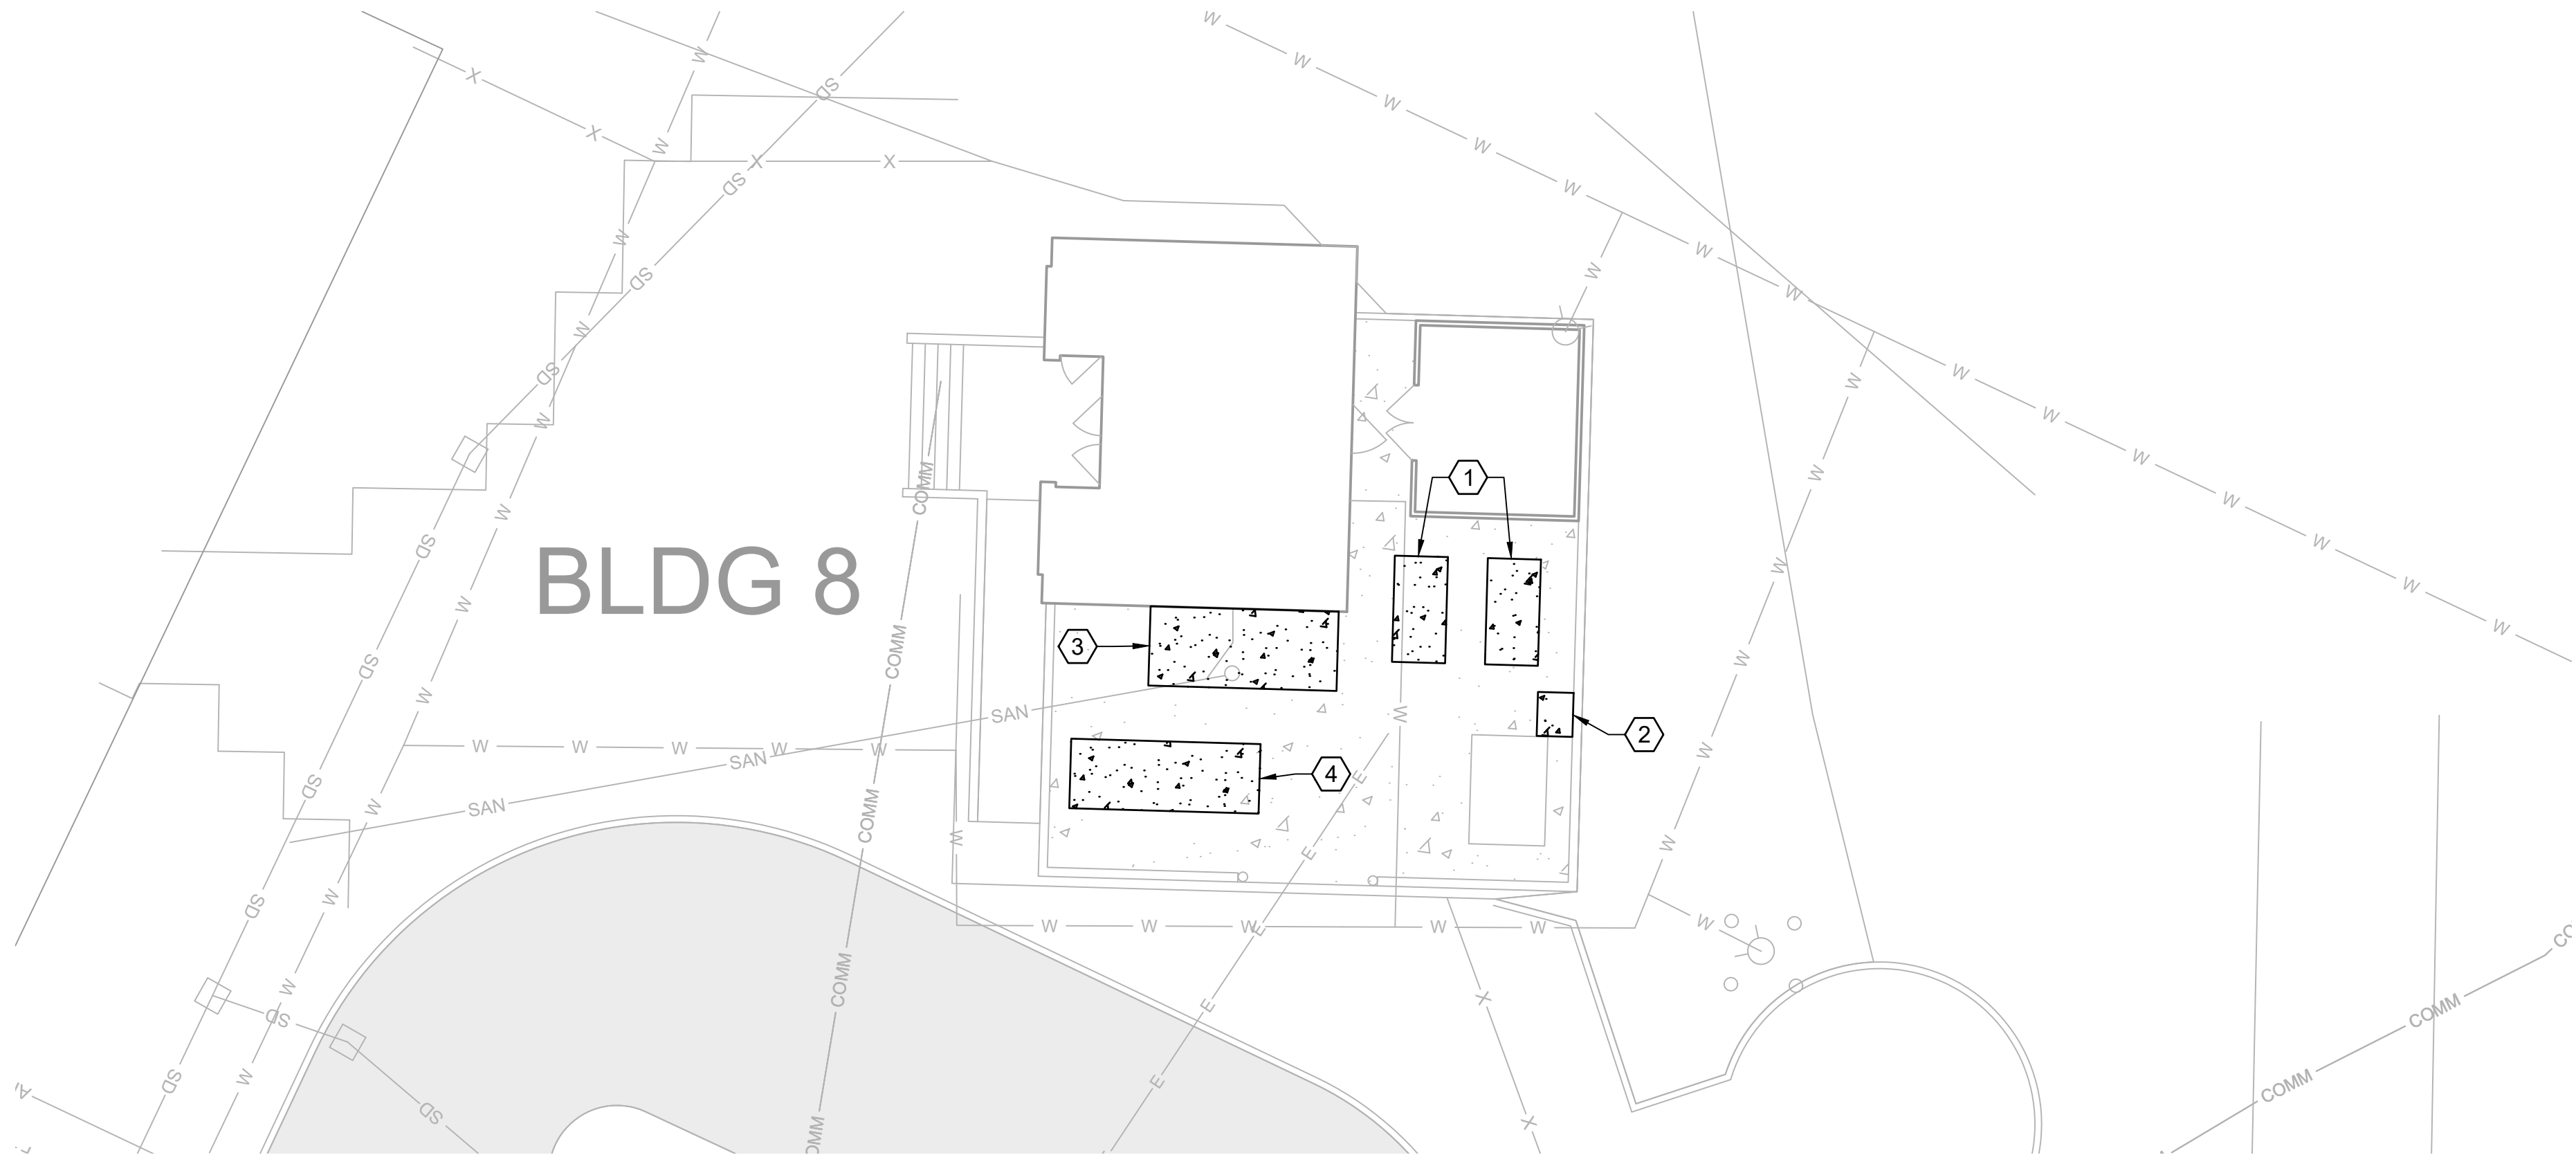

J00008 MECHANICAL YARD - SITE PLAN
SCALE: 1" = 10'

#	DEMOLITION KEYNOTES
1	EXISTING CONCRETE PAD TO BE DEMOLISHED
2	SAWCUT AND DEMOLISH EXISTING CONCRETE FOR NEW CONCRETE PADS

#	SITE KEYNOTES
1	CHILLER CONCRETE PAD, SEE STRUCTURAL PLANS
2	TRANSFORMER CONCRETE PAD, SEE STRUCTURAL PLANS
3	TRANSFER SWITCHES CONCRETE HOUSEKEEPING PAD, SEE STRUCTURAL PLANS
4	GENERATOR CONCRETE HOUSEKEEPING PAD, SEE STRUCTURAL PLANS

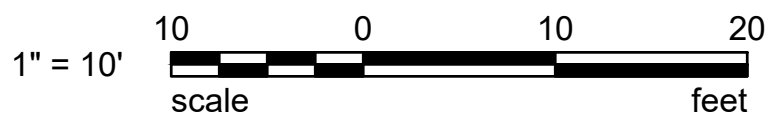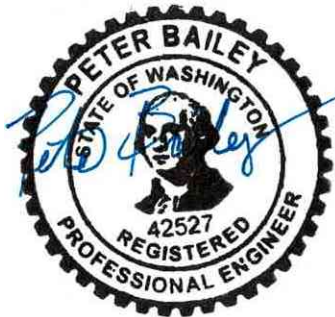

**US Army Corps
of Engineers®**

[illegible]

DESIGNED BY:	PB	ISSUE DATE:	9/26/25
DRAWN BY:	RDH	SOLICITATION NO.:	FA462024F0092
CHECKED BY:	PB	CONTRACT NO.:	FA462023D0002
SUBMITTED BY:	TBD	I/O:	DE1225502J
SIZE:	ANSI D	FILENAME:	J00008_CS100.DWG

U.S. ARMY CORPS OF ENGINEERS

SEATTLE DISTRICT
SEATTLE WASHINGTONJOINT BASE LEWIS-McCHORD, WASHINGTON
JBLM ATCT HVAC REPAIRS
DE 1225502 1

CIVIL SITE PLAN

SHEET ID
J00008
CS100

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

20

CODES AND STANDARDS

1. UFC 1–200–01 DOD BUILDING CODE, DATED 17 DECEMBER 2024.
2. UFC 3–301–01 STRUCTURAL ENGINEERING WITH CHANGE 1, DATED 3 FEBRUARY 2025.

DESIGN LOADS

REFERENCES:
ASCE 7–16 MINIMUM DESIGN LOADS FOR BUILDINGS AND OTHER STRUCTURES .

DEAD LOADS

WEIGHT OF STRUCTURAL ELEMENTS AND PERMANENT FIXED EQUIPMENT.

WIND LOADS:

DESIGN PARAMETER	VALUE
BASIC WIND SPEED (3–SEC GUST), V	108 MPH
WIND EXPOSURE CATEGORY	C

SEISMIC LOADS

DESIGN PARAMETER	VALUE	
SEISMIC IMPORTANCE FACTOR, Ie	1.5	
SITE LOCATION	LATITUDE LONGITUDE	47.134944° N –122.524809° E
SOIL SITE CLASS	D	
MAPPED SPECTRAL ACCELERATION	SHORT PERIOD, Ss 1–SECOND PERIOD, S1	1.341 0.469
DESIGN SPECTRAL ACCELERATION	SHORT PERIOD, Sds 1–SECOND PERIOD, Sd1	1.073 0.555
SEISMIC DESIGN CATEGORY	D	

TRANS AXIS

LONG AXIS

PRINCIPLE BUILDING AXES (NTS)

STRUCTURAL GENERAL CONDITIONS

1. CONFLICTS BETWEEN THE DRAWINGS AND SPECIFICATIONS SHALL BE BROUGHT TO THE ATTENTION OF THE CONTRACTING OFFICER, COR, AND STRUCTURAL ENGINEER OF RECORD (SER) IN WRITTEN FORM AND RESOLVED BEFORE PROCEEDING WITH AFFECTED WORK.

2. STRUCTURAL DRAWINGS REPRESENT THE COMPLETED STRUCTURE. THE CONTRACTOR IS RESPONSIBLE FOR THE MEANS AND METHODS NECESSARY TO COMPLETE THE WORK, FOR JOB SITE SAFETY AND FOR COORDINATING WITH OTHER DISCIPLINES AS REQUIRED.

3. THE CONTRACTOR IS RESPONSIBLE FOR THE ERECTION PROCEDURE AND SEQUENCING TO ENSURE STABILITY OF THE STRUCTURE DURING CONSTRUCTION. PROVIDE SHORING, BRACING, AND FALSEWORK AS NEEDED TO PROTECT THE STRUCTURE THROUGHOUT CONSTRUCTION.

4. ERECTION AIDS FOR FACILITATING CONSTRUCTION NOT SHOWN IN THESE DRAWINGS SHALL BE REMOVED AND ELEMENTS RESTORED TO ITS ORIGINAL DESIGN INTENT SHOWN PER THESE DRAWINGS.

5. STRUCTURAL DRAWINGS SHOW GENERAL AND TYPICAL DETAILS OF CONSTRUCTION. WHERE SPECIFIC CONDITIONS ARE NOT SHOWN, DETAILS OF SIMILAR TYPE AND CHARACTER MAY BE USED BUT REQUIRE APPROVAL FROM THE SER.

6. TYPICAL DETAILS MAY NOT BE REFERENCED FROM THE PLANS BUT APPLY FOR THE CONDITIONS AS DESCRIBED BY THE DETAIL.

7. CONTRACTOR–INITIATED CHANGES REQUIRE APPROVAL FROM THE SER, CO, AND THE GOVERNMENT.

8. FOR A CONTRACTOR REQUESTED DESIGN REVISION, THE PROPOSED ALTERNATIVE SHALL BE SUBMITTED TO THE CONTRACTING OFFICER AND COR FOR REVIEW AND APPROVAL BY THE SER. THE SUBMITTAL SHALL INCLUDE DRAWINGS, STRUCTURAL DETAILS AND RELATED CALCULATIONS, STAMPED AND SIGNED BY A LICENSED PROFESSIONAL ENGINEER. CALCULATIONS SHALL DEMONSTRATE COMPLIANCE WITH THE CODES AND DESIGN REQUIREMENTS LISTED PER THESE DRAWINGS; AND THAT THE ALTERNATIVE DESIGN DOES NOT ADVERSELY AFFECT THE STRUCTURE SHOWN IN THESE DRAWINGS.

9. CONTRACTOR SHALL COORDINATE THESE DRAWINGS WITH THE DRAWINGS OF THE OTHER DISCIPLINES AND SPECIFICATIONS FOR ADDITIONAL INFORMATION NOT SHOWN ON THE STRUCTURAL DRAWINGS. EXAMPLES INCLUDE EMBEDDED ANCHORS, SLEEVES AND INSERTS, MISCELLANEOUS ATTACHMENT DETAILS, FLOOR FINISHES, DOOR THRESHOLDS, SLOPES TO DRAINS, OPENINGS IN STRUCTURAL ELEMENTS, ETC.

10. VERIFY DIMENSIONS AND DETAILS PRIOR TO FABRICATION AND CONSTRUCTION. THIS INCLUDES COORDINATING THE SIZE AND LOCATION OF OPENINGS THROUGH STRUCTURAL ELEMENTS WITH THE RESPECTIVE SUBCONTRACTOR, AS WELL AS COORDINATING INSERTS AND ATTACHMENTS FOR USE BY OTHER TRADES.

CAST IN PLACE CONCRETE

1. REFERENCES:

A. ACI 301–20 SPECIFICATIONS FOR CONCRETE CONSTRUCTION
B. ACI 315R–18 DETAILS AND DETAILING CONCRETE CONSTRUCTION
C. ACI 318–19 BUILDING CODE REQUIREMENTS FOR STRUCTURAL CONCRETE
D. ACI 347–14 GUIDE TO FORMWORK FOR CONCRETE

1. CONCRETE WORK SHALL CONFORM TO ACI 301. FORMWORK SHALL CONFORM TO ACI 347.

2. MINIMUM CONCRETE PROPERTIES AT 28–DAYS PER THE FOLLOWING TABLE.

LOCATION	MIN 28–DAY COMPRESSIVE STRENGTH (PSI)	ACI 318, CH. 19 EXPOSURE CATEGORIES						
		FREEZING & THAWING	SULFATE	WATER CONTACT	CORROSION PROTECTION	MAX WATER/CEMENT RATIO	CEMENT TYPE	NOMINAL MAX AGGREGATE SIZE
FOUNDATIONS	4,000	F1	S1	W1	C1	0.45	II	1"
SLAB–ON–GROUND (EXTERIOR)	4,500	F2	S1	W2	C2	0.45	II	1"

3. FLEXURAL STRENGTH FOR SLAB–ON–GRADE CONCRETE 650 PSI AT 90 DAYS

4. CONCRETE EXPOSED TO THE ENVIRONMENT SHALL HAVE 6% +/- 1% AIR ENTRAINMENT BY VOLUME PER ASTM C260.

5. PROVIDE A MUD SLAB (MINIMUM 2 INCHES OF CONCRETE, LEVELED AT THE TOP SURFACE) UNDER SLABS AND FOOTINGS AT WET OR MUDDY GROUND SURFACES WHICH ARE UNSUITABLE FOR SUPPORTING REBAR CHAIRS, CONSTRUCTION WORKERS AND EQUIPMENT. PROVIDE WATERPROOF MEMBRANE TO TOP OF MUD SLAB AS REQUIRED.

6. HORIZONTAL CONSTRUCTION JOINTS IN SPREAD FOOTINGS, STRIP FOOTINGS, PILE CAPS, BEAMS AND SLABS ARE PROHIBITED UNLESS SHOWN ON THE DRAWINGS OR APPROVED BY THE SER.

7. THE EXTENT OF CONCRETE PLACEMENTS SHALL BE LIMITED AS FOLLOWS, UNLESS NOTED OTHERWISE:

A. STRIP FOOTINGS AND WALLS: 60 FT (UNLESS INTERMEDIATE CONTROL JOINTS ARE PROVIDED)
B. SLABS–ON GROUND: 30 FT MAXIMUM LENGTH AND 900 SQ FT MAXIMUM AREA (UNLESS INTERMEDIATE CONTROL JOINTS ARE PROVIDED)

8. BEFORE CASTING THE SECOND SIDE OF A CONSTRUCTION JOINT, ROUGHEN SURFACE OF CONCRETE ELEMENTS AT CONSTRUCTION JOINTS TO A MINIMUM AMPLITUDE OF 1/4 INCH, UNLESS NOTED OTHERWISE. CLEAN AND APPLY BONDING AGENT TO THE HARDENED CONCRETE SURFACE RECEIVING FRESH CONCRETE.

9. SECTIONS AND DETAILS MAY NOT SHOW ALL REQUIRED DEFORMED BAR REINFORCEMENT FOR CLARITY. ADDITIONAL REINFORCEMENT MAY BE DESCRIBED IN PLANS, SCHEDULES, NOTES, OR OTHER DETAILS, AS APPLICABLE.

10. COORDINATE FLOOR FINISHES, SLAB SLOPES & DEPRESSIONS, FLOOR DRAINS, CURBS, CONCRETE PADS, AND OTHER CONCRETE FEATURES IDENTIFIED IN THE CONTRACT DOCUMENTS.

11. THE STRUCTURAL DRAWINGS DO NOT NECESSARILY SHOW ALL ITEMS EMBEDDED IN THE CONCRETE. COORDINATE AND PROVIDE EMBEDDED ITEMS AS SHOWN IN THE CONTRACT DOCUMENTS AND AS REQUIRED BY THE EQUIPMENT MANUFACTURERS, AS NEEDED.

12. NON–STRUCTURAL STEEL MEMBERS EMBEDDED IN CONCRETE SHALL BE HOT–DIP GALVANIZED OR PAINTED. DAMAGED COATINGS OF EMBEDDED ITEMS SHALL BE REPAIRED PRIOR TO CASTING CONCRETE.

13. PENETRATIONS THROUGH CONCRETE WALLS OR SLABS SHALL CONFORM TO STANDARD DETAIL DRAWINGS.

14. PROVIDE 3/4" CHAMFER ON EXPOSED CONCRETE EDGES UNLESS NOTED OTHERWISE.

REINFORCING STEEL

1. REFERENCES:

A. ACI 301–20 SPECIFICATIONS FOR CONCRETE CONSTRUCTION
B. ACI SP–66–04 ACI DETAILING MANUAL
C. ACI 315R–18 DETAILS AND DETAILING CONCRETE CONSTRUCTION
D. AWS D1.4 2018 STRUCTURAL WELDING CODE – REINFORCING STEEL

2. STEEL REINFORCEMENT SHALL CONFORM TO:

CONDITION	STANDARD AND GRADE	MIN YIELD (KSI)
TYPICAL DEFORMED BAR	ASTM A615 GR 60	60
WELDABLE DEFORMED BAR,	ASTM A706 GR 60	60

3. PROVIDE BAR SUPPORTS AND SPACERS PER ACI 315 UNLESS NOTED OTHERWISE. DEFORMED BAR REINFORCEMENT AND INSERTS SHALL BE SECURED IN–PLACE PRIOR TO PLACING CONCRETE. DO NOT PLACE REBAR MATS DIRECTLY AGAINST SOIL; REBAR MATS ADJACENT TO SOIL OR OVER MUD SLABS SHALL BE SUPPORTED BY CHAIRS, DO NOT LIFT INTO PLACE DURING POURING.

4. UNLESS INDICATED OTHERWISE, REINFORCEMENT BARS ARE CONTINUOUS AND SHALL BE LAP SPICED OR COUPLED WITH MECHANICAL CONNECTORS. LAP LENGTH NOTES:

A. SEE DEVELOPMENT AND LAP SPlice LENGTH SCHEDULES FOR REINFORCEMENT DETAILS.

B. LAP SPlice LENGTH SHALL BE USED FOR THE LARGER BAR SIZE WHEN BAR SIZE TRANSITIONS AT LAP.

C. OVERLAP WELDED WIRE LAYER REINFORCEMENT A LENGTH OF 1.5X WIRE DEVELOPMENT LENGTH OR ONE CROSSWIRE SPACING PLUS 2 INCHES, WHICHEVER IS LARGER.

D. MECHANICAL CONNECTORS SHALL HAVE A MINIMUM CAPACITY OF 1.25 X YIELD STRENGTH OF THE BAR.

E. MECHANICAL CONNECTORS IN MEMBERS DESIGNATED AS PART OF THE SEISMIC–FORCE–RESISTING SYSTEM SHALL HAVE A MINIMUM CAPACITY EQUAL TO THE TENSILE STRENGTH OF THE BAR.

5. TYPE 1 MECHANICAL CONNECTORS SHALL DEVELOP 125% OF THE YIELD STRENGTH (FY) OF THE STRONGER OF THE TWO BAR BEING SPICED. TYPE 2 MECHANICAL CONNECTORS SHALL DEVELOP THE FULL TENSILE STRENGTH OF THE STRONGER OF THE TWO BARS BEING SPICED. WHERE MECHANICAL CONNECTORS ARE USED IN LIEU OF LAP SPICES, PROVIDE TYPE 2 MECHANICAL CONNECTORS EXCEPT WHERE TYPE 1 ARE PERMITTED AS INDICATED.

6. UNLESS NOTED OTHERWISE ON THE DRAWINGS:

A. DEFORMED BAR COVER SHALL CONFORM TO SPECIFIED CONCRETE COVER REQUIREMENTS OF ACI 318.

B. REINFORCEMENT SHALL BE CONTINUOUS THROUGH CONSTRUCTION JOINTS

C. APPROVAL FROM SER REQUIRED BEFORE WELDING NON–ASTM A706 GR. 60 REINFORCEMENT

D. APPROVAL FROM SER REQUIRED BEFORE FIELD BENDING REINFORCEMENT PARTIALLY EMBEDDED CONCRETE

E. MATCH DOWELS TO THE LARGER OF MULTIPLE BAR SIZES

8. DOWELS SHALL BE SECURED WITH A RIGID TEMPLATE TO ENSURE SPlice IS LOCATED INSIDE THE CONFINED REGION (REGION ENCLOSED BY SHEAR OR HORIZONTAL REINFORCEMENT) OF CROSS–SECTION.


PRASHANT B. WAGH


STATE OF WASHINGTON

58056

REGISTERED

PROFESSIONAL ENGINEER

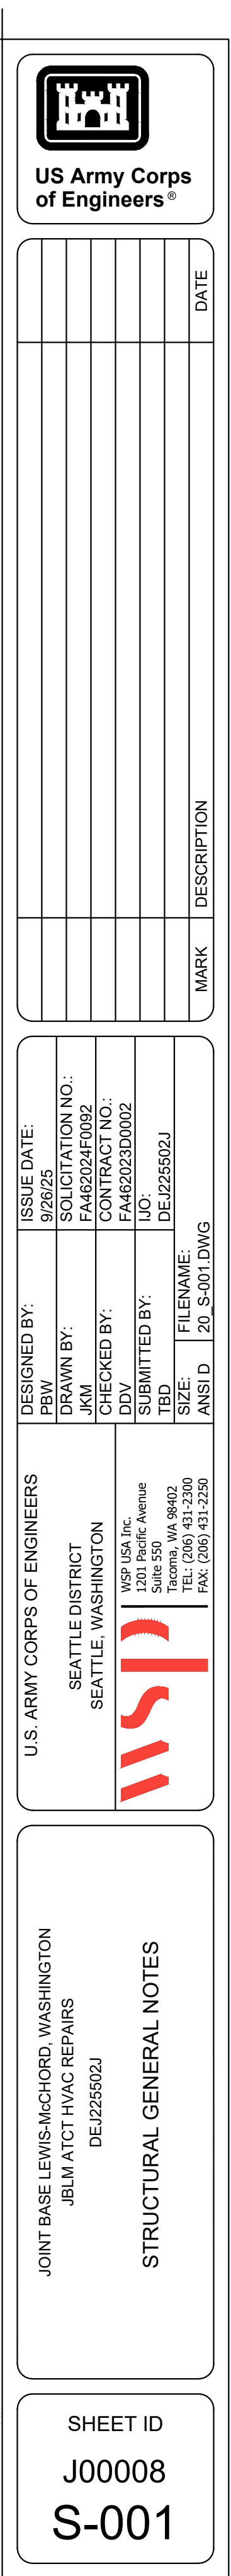

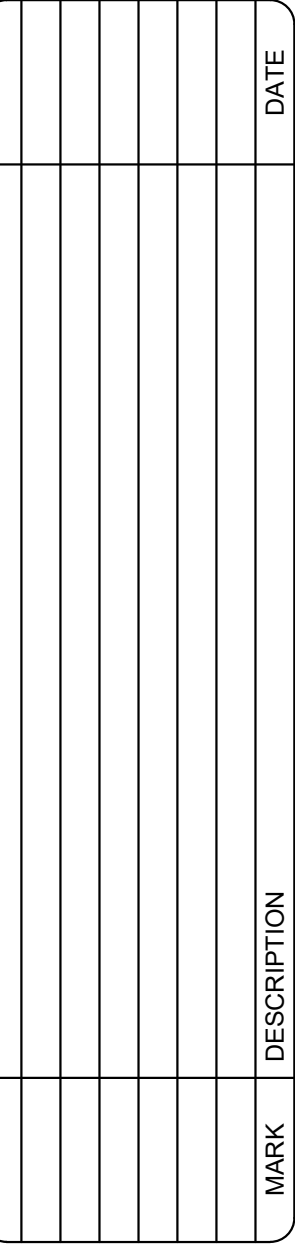

	SEATTLE DISTRICT SEATTLE, WASHINGTON		DRAWN BY: PRW	SOLICITATION NO.: 926925	DATE: 02/25/02
			CHECKED BY: JKM	CONTRACT NO.: F4620204F0092	
			DDV	CONTRACT NO.: F4620203D0002	
			DATE: 02/25/02	FILE NAME: DE125502J	
			SIZE: 20	S-002 DWG	

JOINT BASE LEWIS-McHORD, WASHINGTON
JBLM ATCT HVAC REPAIRS
DEJ225502J

SHEET ID
J00008
S-002







PLAN NOTES	
1.	FOR FOUNDATION DETAILS SEE SHEET S-501.
2.	FOR SLAB-ON-GRADE DESIGN SEE B1/S-501

[illegible]

U.S. ARMY CORPS OF ENGINEERS		ISSUE DATE: 9/26/95	
DESIGNED BY:		DRAWN BY:	
PBW		SOLICITATION NO.: JKM	
SEATTLE DISTRICT SEATTLE, WASHINGTON		FAM82024F0092	
		CONTRACT NO.: FAM8203D0002	
		CHECKED BY:	
		DDV	
		SUBMITTED BY:	
		TBD	
		L/O:	
		DE:J25502J	
		FILENAME:	
		SIZE:	
		20 S-110 DWG	
		ANSI D	
		20 S-110 DWG	


JOINT BASE LEWIS-McCHORD, WASHINGTON
JBLM ATCT HVAC REPAIRS
DE423502J

SHEET ID
J00008
S-110

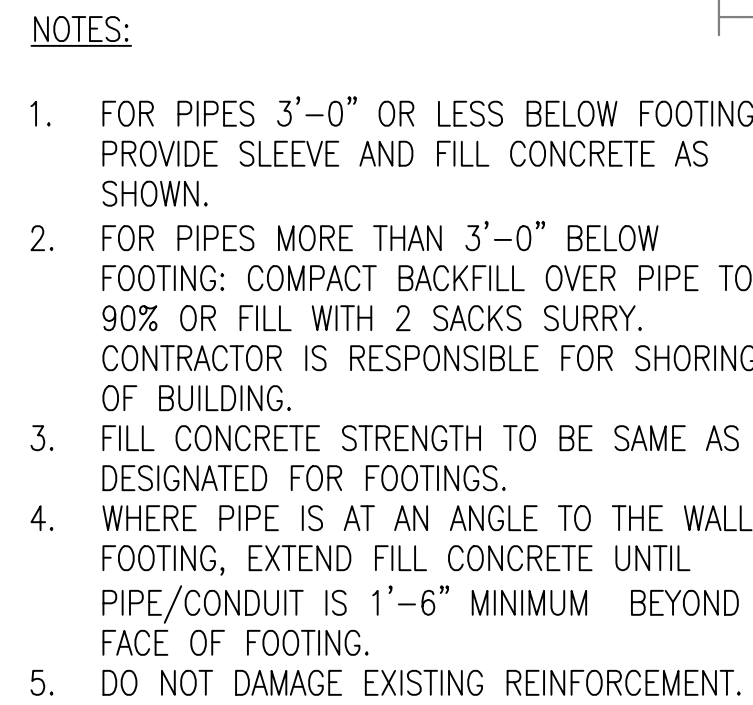

- ## PIPING & CONDUIT THROUGH EXSITING SLAB OR WALLNG

SCALE: 1" = 1'-0"

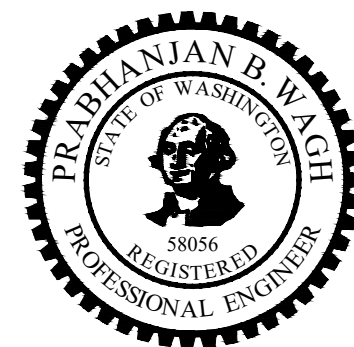

U.S. ARMY CORPS OF ENGINEERS		ISSUE DATE: 9/26/95
DESIGNED BY:		DESIGNED BY:
DRAWN BY:		DRAWN BY:
CHECKED BY:		CHECKED BY:
SUBMITTED BY:		SUBMITTED BY:
TBD		TBD
FILENAME:		FILENAME:
SIZE:		SIZE:
A3		A3
20 2500 DWG		20 2500 DWG

JOINT BASE LEWIS-McCHORD, WASHINGTON
JBLM ATCT HVAC REPAIRS
DEJ225502J

CONCRETE FOUNDATION DETAILS

SHEET ID
J00008
S-502



- J1** VERTICAL PIPE SUPPORT AT EXISTING CONCRETE WALL
SCALE: NTS



- A1** TYPICAL PIPE SUPPORT ABOVE EXISTING SLAB-ON-GRADE
SCALE: NTS




- NOTE:

- NOTE:

SECTION

A15 **ATTAC**
SCALE: NTS

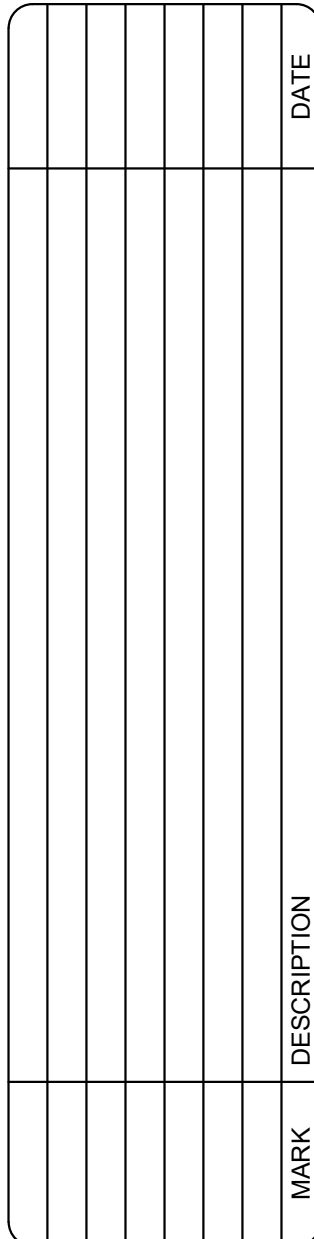

DESIGNED BY:	ISSUE DATE:
PSW	9/26/25
DRAWN BY:	SOLICITATION NO.:
JKM	FA462024F0092
CHECKED BY:	CONTRACT NO.:
DDV	FA462023D0002
SUBMITTED BY:	IJO:
TBD	DEJ225502J
FILENAME:	
SIZE:	
ANSI D	20 S-511 DWG


U.S. ARMY CORPS OF ENGINEERS

SEATTLE DISTRICT
SEATTLE WASHINGTON


WSP USA Inc.
1201 Pacific Avenue
Suite 550
Tacoma, WA 98402
TEL: (206) 431-2300



PIPE SUPPORT DETAILS

SHEET ID
J00008
S-511

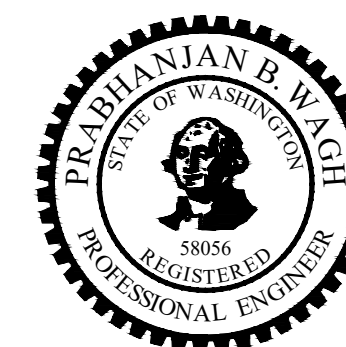

	1	2	3	4	5	6	7	8
	ARCHITECTURAL SYMBOLS							
P		EXTERIOR ELEVATION		EXISTING TO REMAIN				
N		INTERIOR ELEVATION		NEW CONSTRUCTION		TO DEMOLISH (DEMO SHEET(S) ONLY)		
M		BUILDING SECTION FLAG		EXISTING DOOR TO REMAIN		EXISTING DOOR TO DEMOLISH (DEMO SHEET(S) ONLY)		
L		WALL SECTION FLAG		NEW DOOR		DIFFUSER PER MECHANICAL (SIZE & PROPORTION MAY VARY)		
		CALLOUT FLAG		LIGHT FIXTURE PER ELECTRICAL (SIZE & PROPORTION MAY VARY)				
K		VERTICAL GRID LINE		2-HOUR FIRE BARRIER				
J		HORIZONTAL GRID LINE		1-HOUR FIRE BARRIER		SMOKE PARTITION		
H		TRUE NORTH ARROW						
		PROJECT NORTH ARROW (TRUE NORTH DASHED)						
G		ELEVATION / LEVEL MARKER						
F		KEY NOTE						
E	TOILET 	ROOM TAG (SF OPTIONAL)						
D	150 SF 	CEILING HEIGHT TAG						
C		WALL TAG						
B		FLOOR TAG						
A		ROOF TAG						
		DOOR TAG						
		WINDOW TAG						
	SOAP DISH	SPECIALTY EQUIPMENT TAG						
		SIGNAGE TAG						
		SIGNAGE KEY NOTE (AW SHEETS ONLY)						
		SIGNAGE MATERIAL TAG (AW SHEETS ONLY)						
	MATERIALS							
		EARTH		STEEL		RIGID INSULATION		
		GYPSUM BOARD		ACOUSTICAL CEILING TILE, 2' x 2'		CONCRETE		
		BATT INSULATION		ACOUSTICAL CEILING TILE, 2' x 4'				

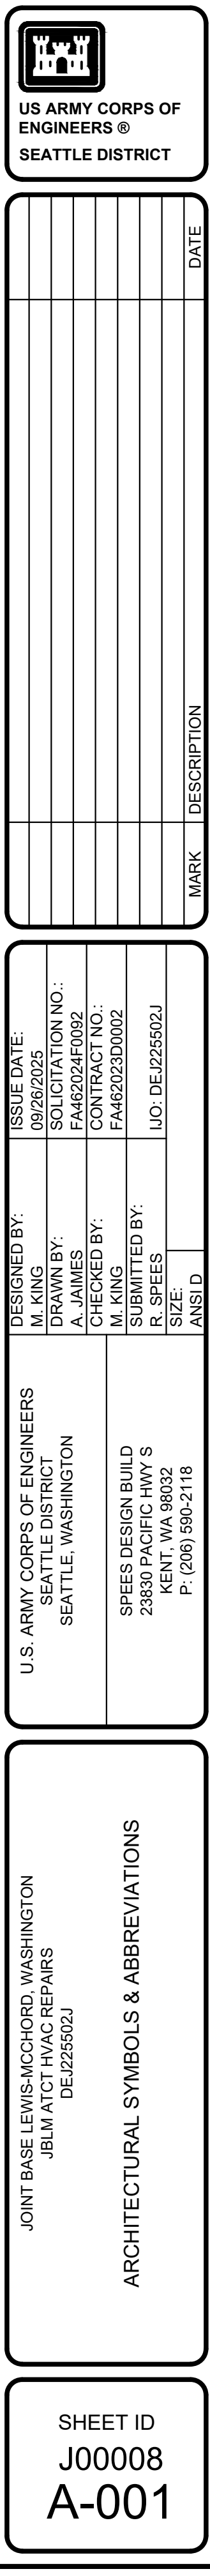[illegible]

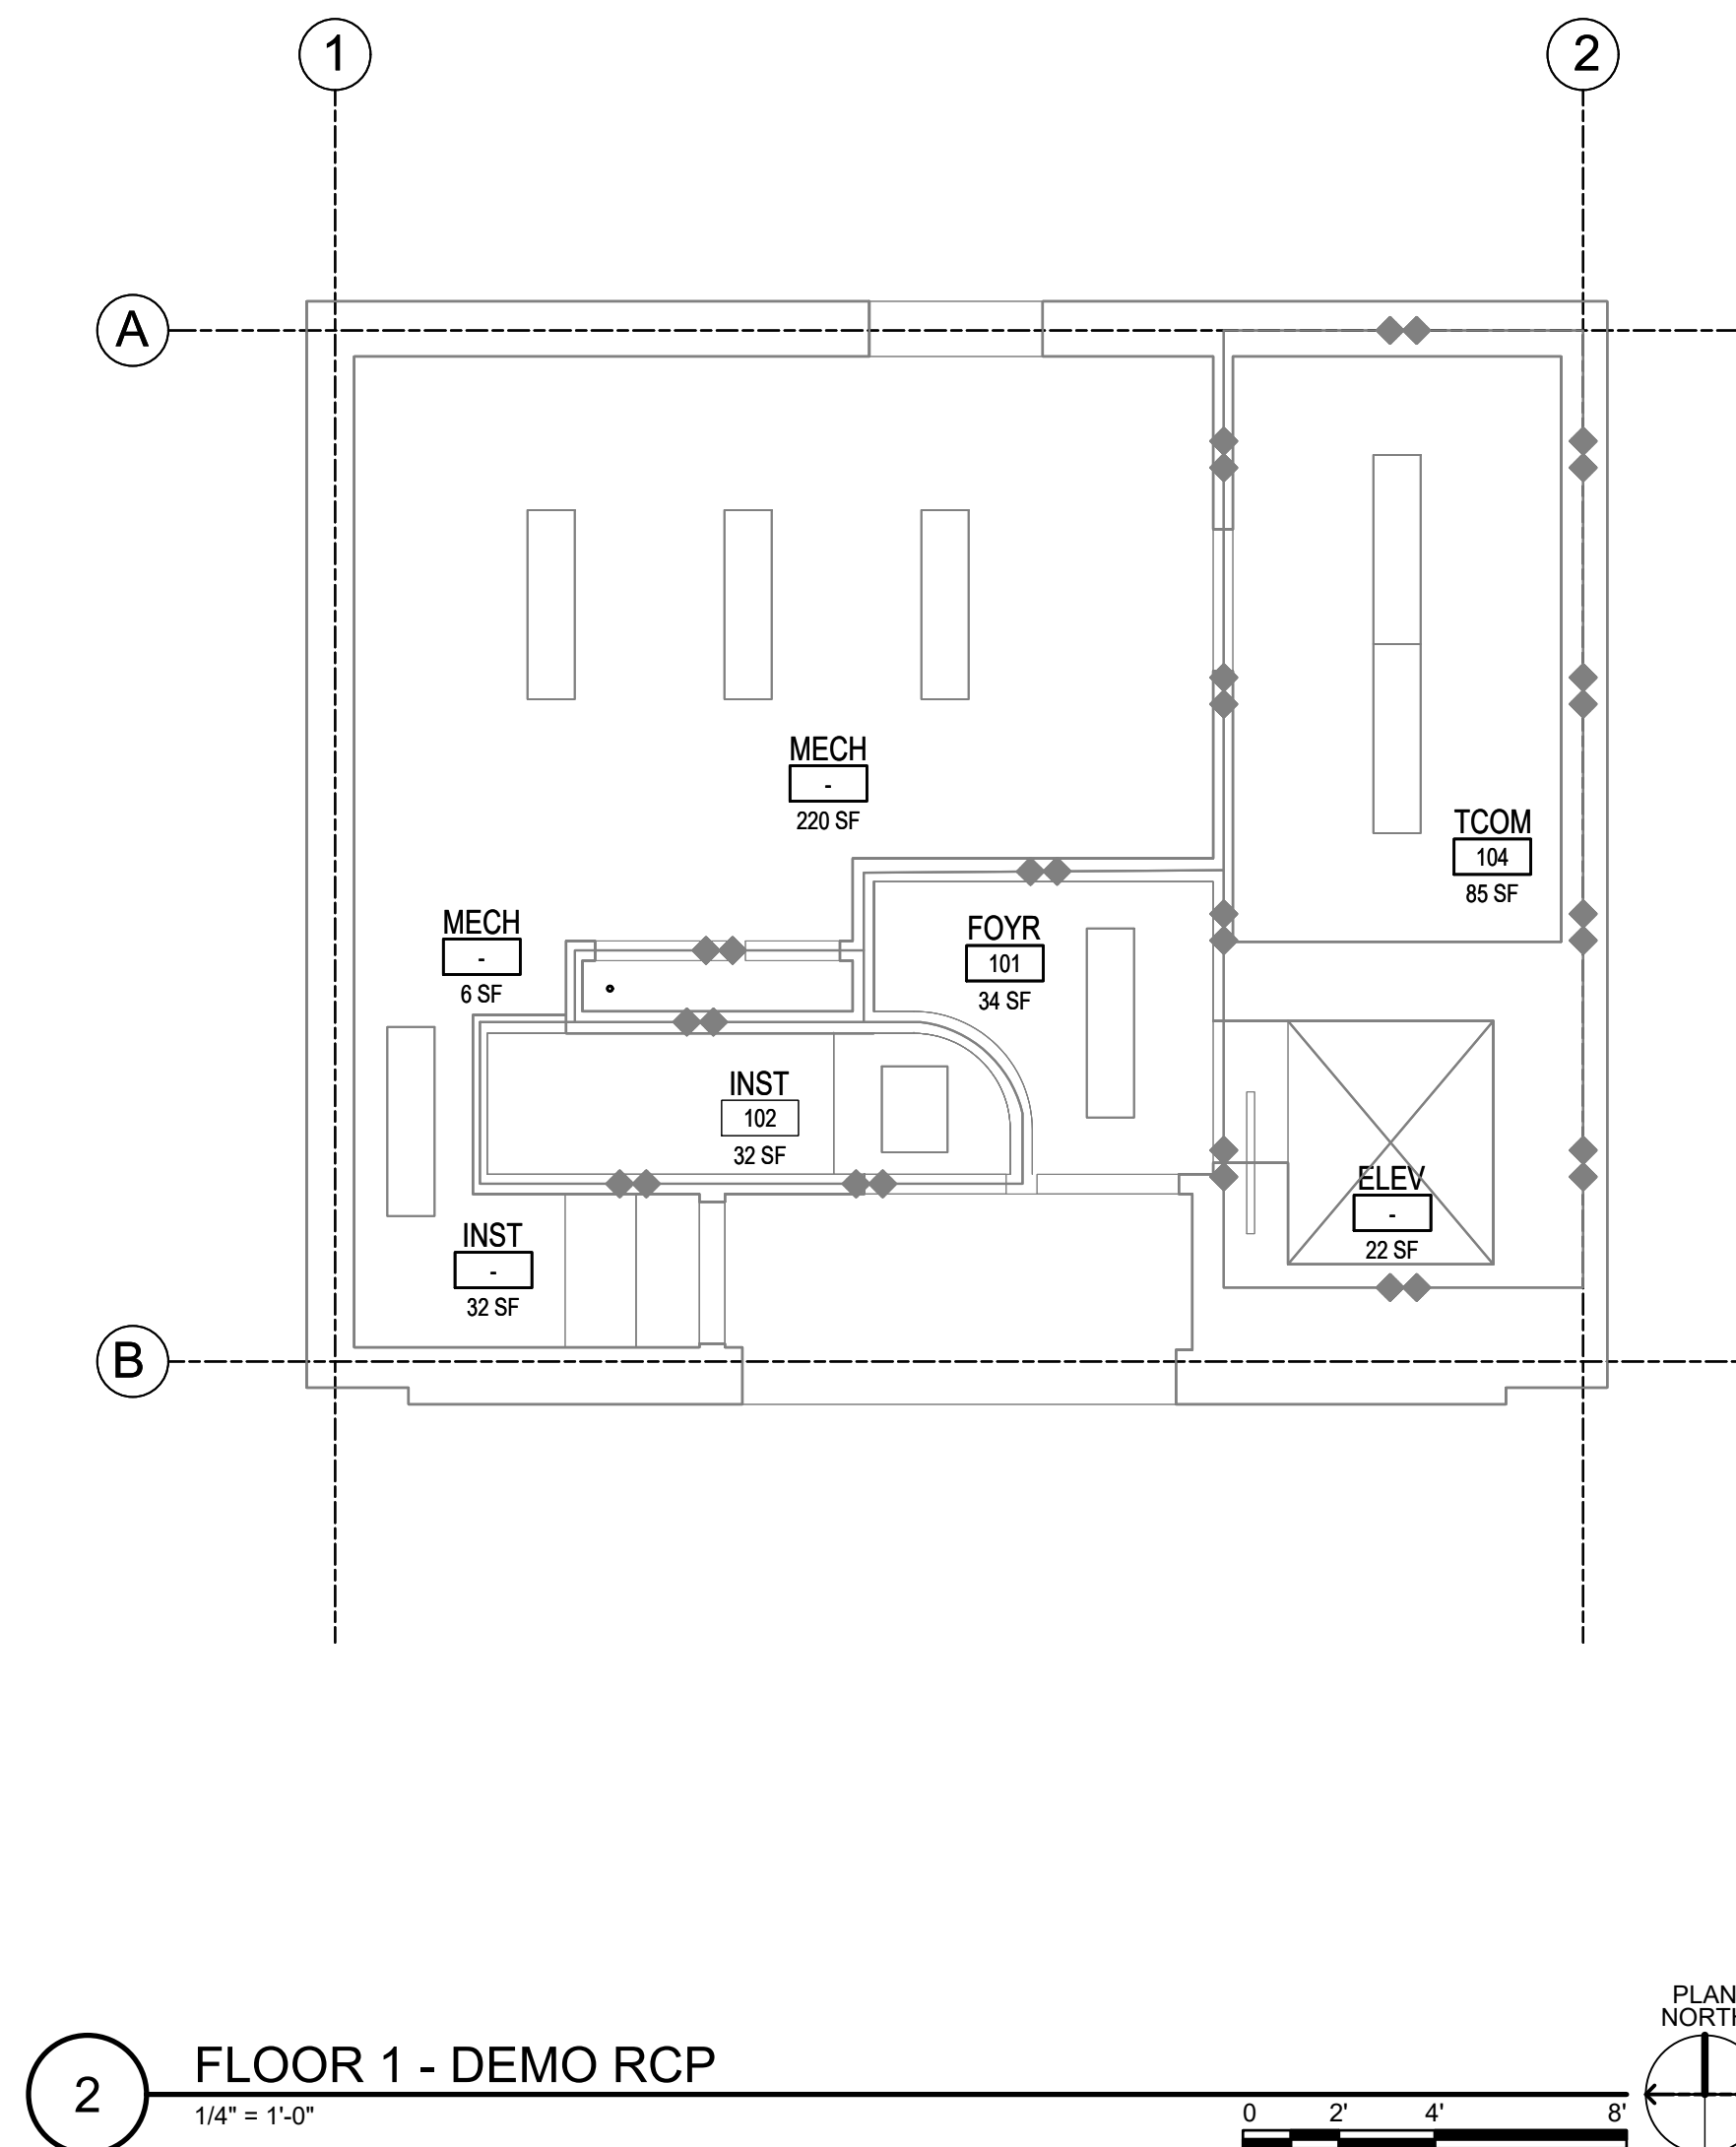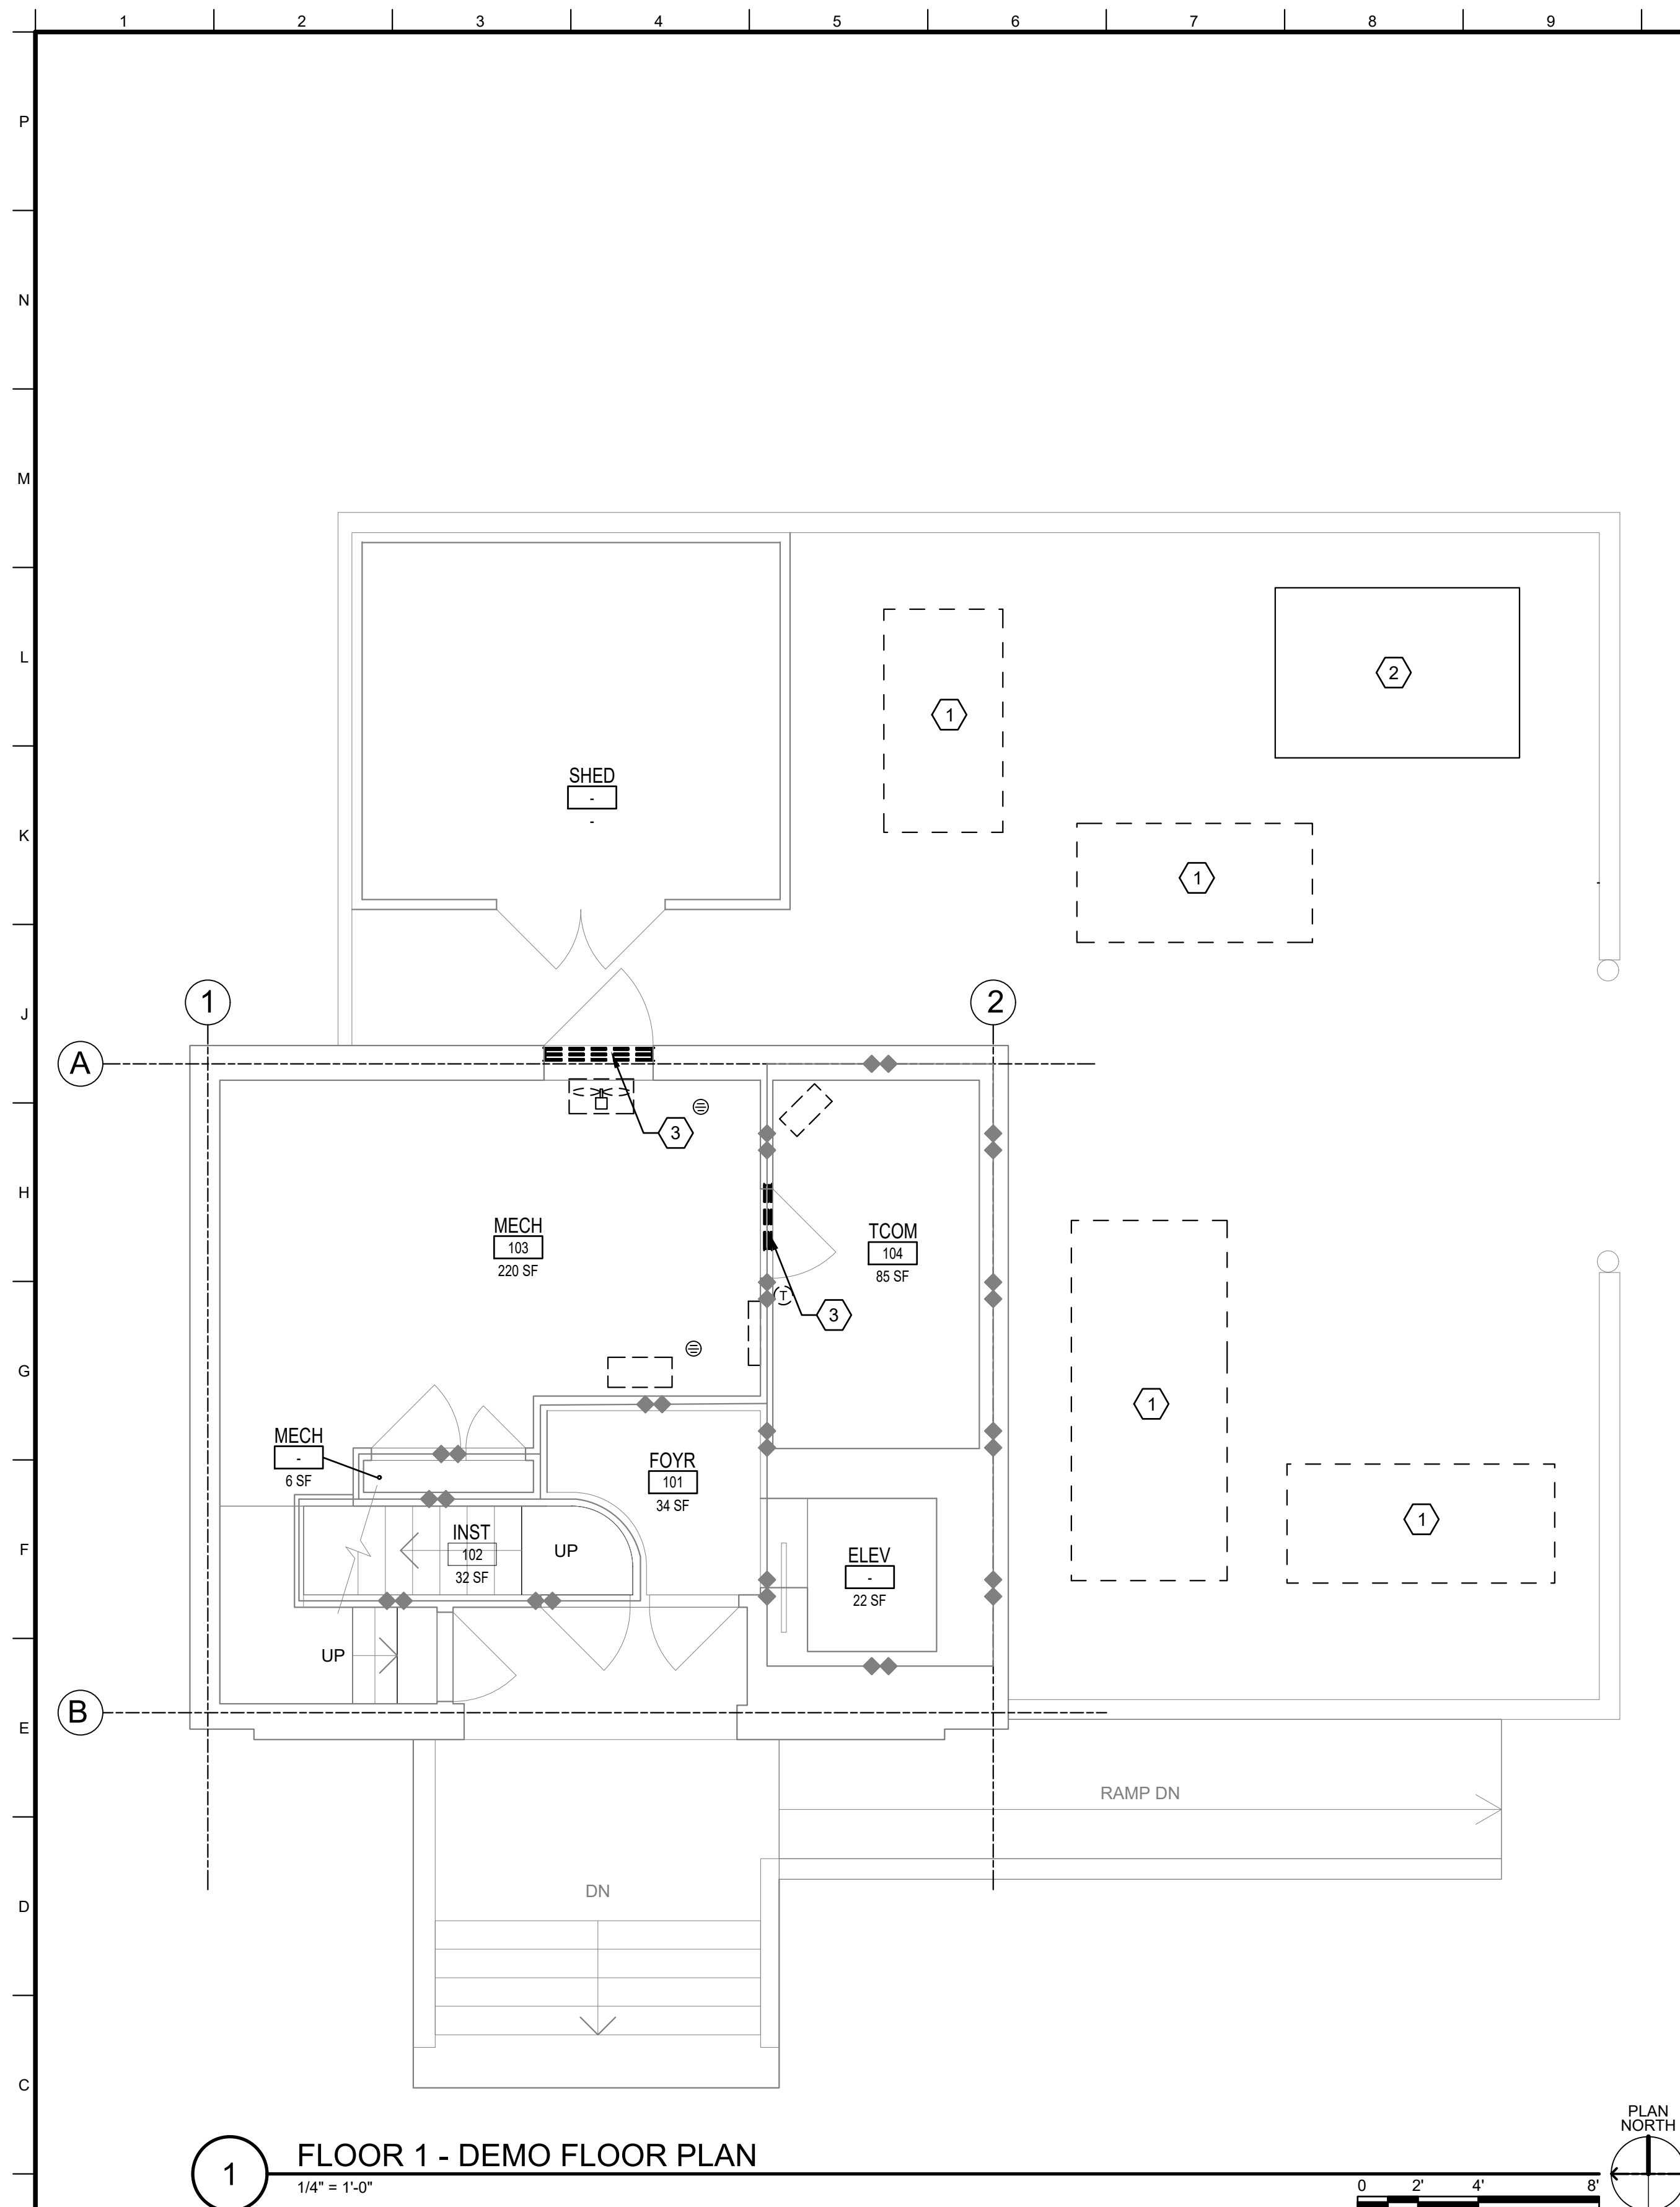

GENERAL SHEET NOTES

1. PATCH AND REPAIR WALLS, FLOORS, & CEILINGS TO MATCH EXISTING ADJACENT WHERE MECHANICAL EQUIPMENT IS TO BE DEMOLISHED.
2. ALL EXISTING CEILINGS TO REMAIN. CONTRACTOR TO DEMO ANY EXISTING ACOUSTICAL CEILING TILES OR GYPSUM BOARD CEILING AS REQUIRED FOR NEW MECHANICAL EQUIPMENT INSTALLATION.
3. CONTRACTOR SALVAGE ANY WALL MOUNTED EQUIPMENT REQUIRED TO COMPLETE A CONSTRUCTION TASK.

PHASING NOTES

PHASE 1: DEMO LOUVERS / WINDOW AS NEEDED FOR TEMPORARY PIPING. SEE MECHANICAL DRAWINGS FOR LOCATIONS.


PHASE 2: TEMP PIPING TO BE INSTALLED AND DEMOLISHED, SEE MECHANICAL.

PHASE 3: REINSTALL SALVAGED LOUVERS / WINDOWS.

 SHEET KEYNOTES

1. DEMO EXISTING CONCRETE PADS.
2. EXISTING CONCRETE PAD TO REMAIN.
3. DEMO EXISTING LOUVER ABOVE DOOR.


LEGEND




EXISTING DOOR TO REMAIN



EXISTING 2-HR FIRE RATED WALL



TO DEMOLISH



EXISTING GWB CEILING



EXISTING ACOUSTICAL TILE CEILING



EXISTING LIGHT FIXTURE



9/26/2025

U.S. ARMY CORPS OF
ENGINEERS®
SEATTLE DISTRICT

[illegible]


U.S. ARMY CORPS OF ENGINEERS SEATTLE DISTRICT SEATTLE, WASHINGTON	DATE: 09/26/2002 SOLICITATION NO.: F4620204F0092 CONTRACT NO.: F4620204D0002 I/O: DEJ22502J
RECEIVED BY: M. KING	
DRAWN BY: A. JAMES	
CHECKED BY:	
SUBMITTED BY: R. SPEEDS	
SIZE:	
ANSI D	
SPECS DESIGN BUILD 23830 PACIFIC HWY S KENT, WA 98032 P. (206) 586-2116	

JOINT BASE LEWIS-MCCORD, WASHINGTON
JBLM ATCT HVAC REPAIRS
DEJ225502J

FLOOR 1
DEMO FLOOR PLAN & RCP

SHEET ID
J00008
AD101



100% ELECTRONIC BID SET

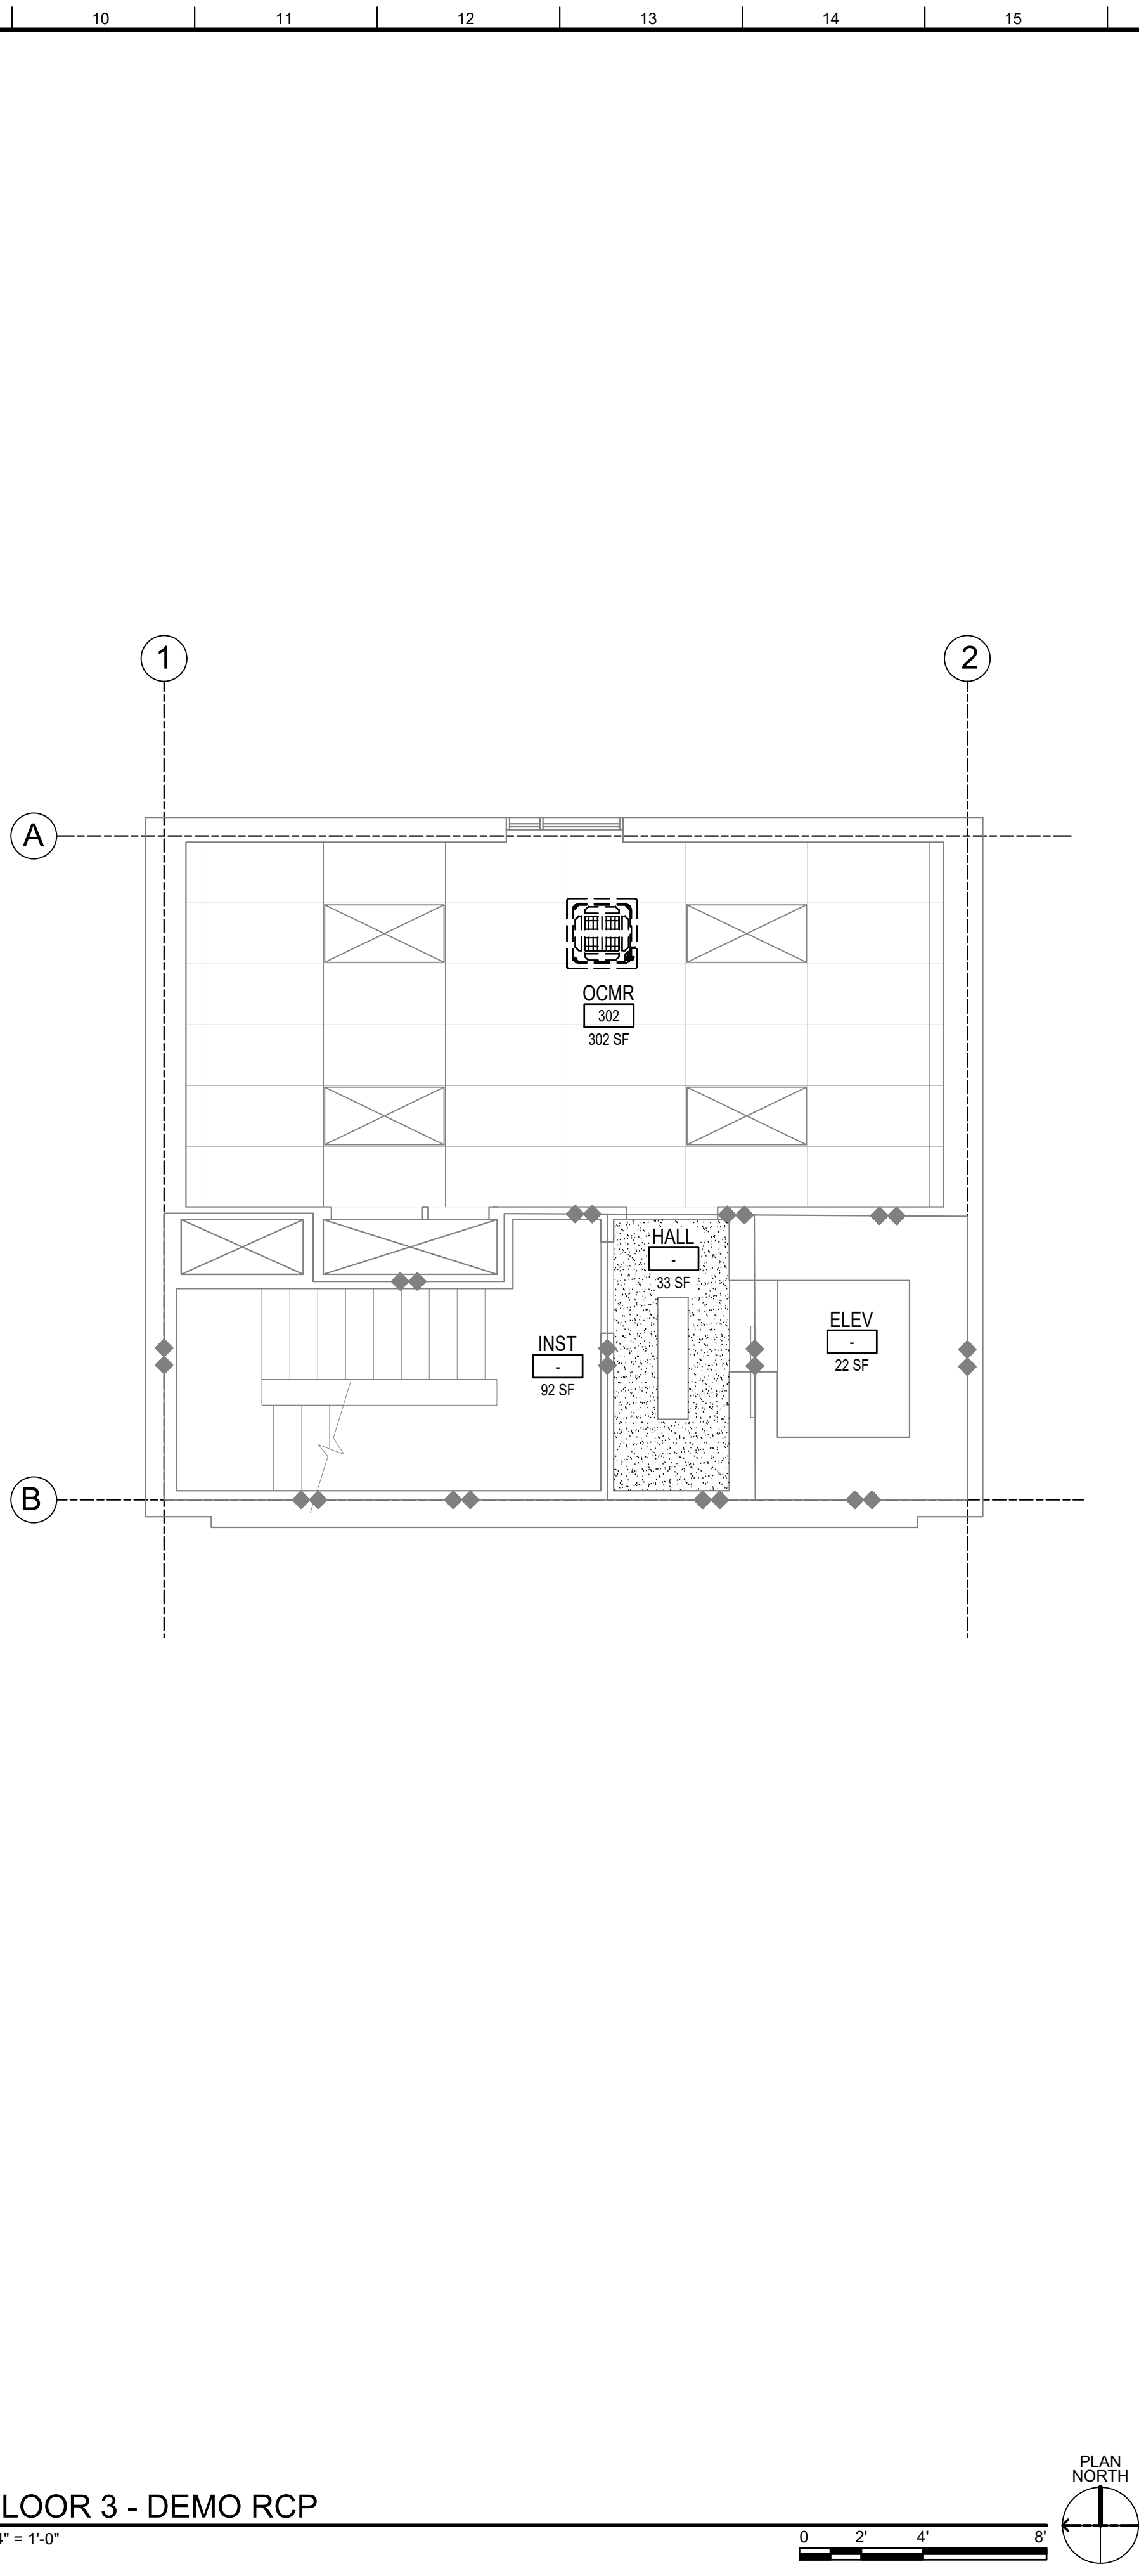

10000 REGISTERED ARCHITECT
JAMES M. KING
STATE OF WASHINGTON
9/26/2025

SHEET ID
J00008
AD103

100% ELECTRONIC BID SET

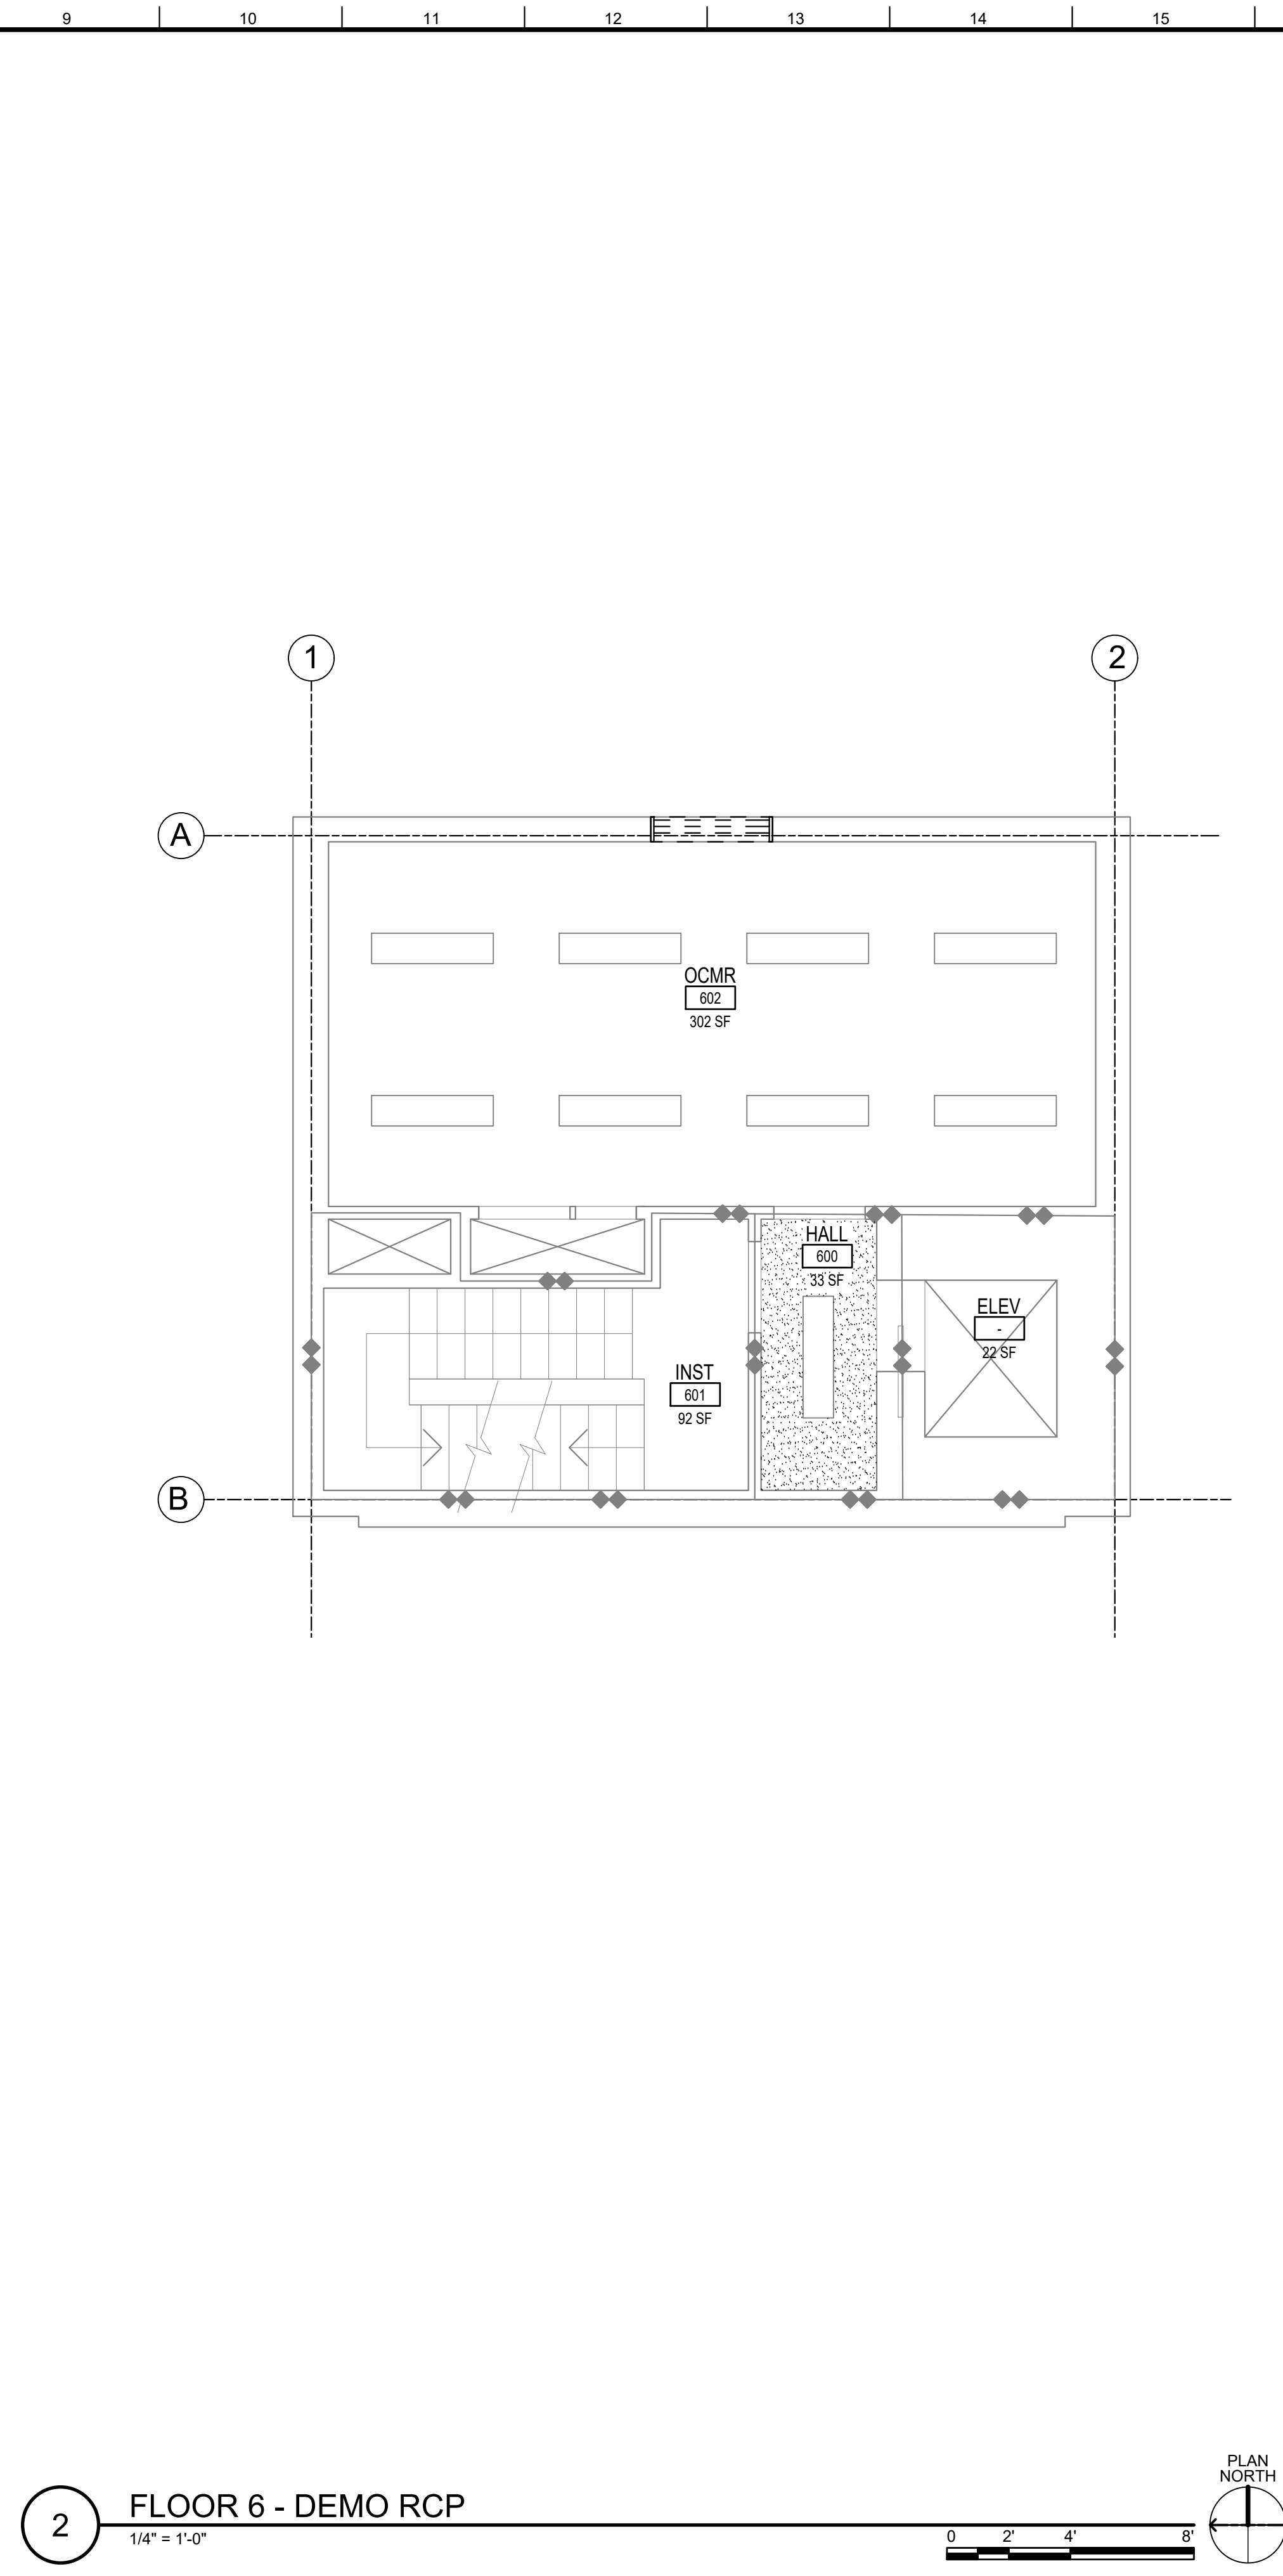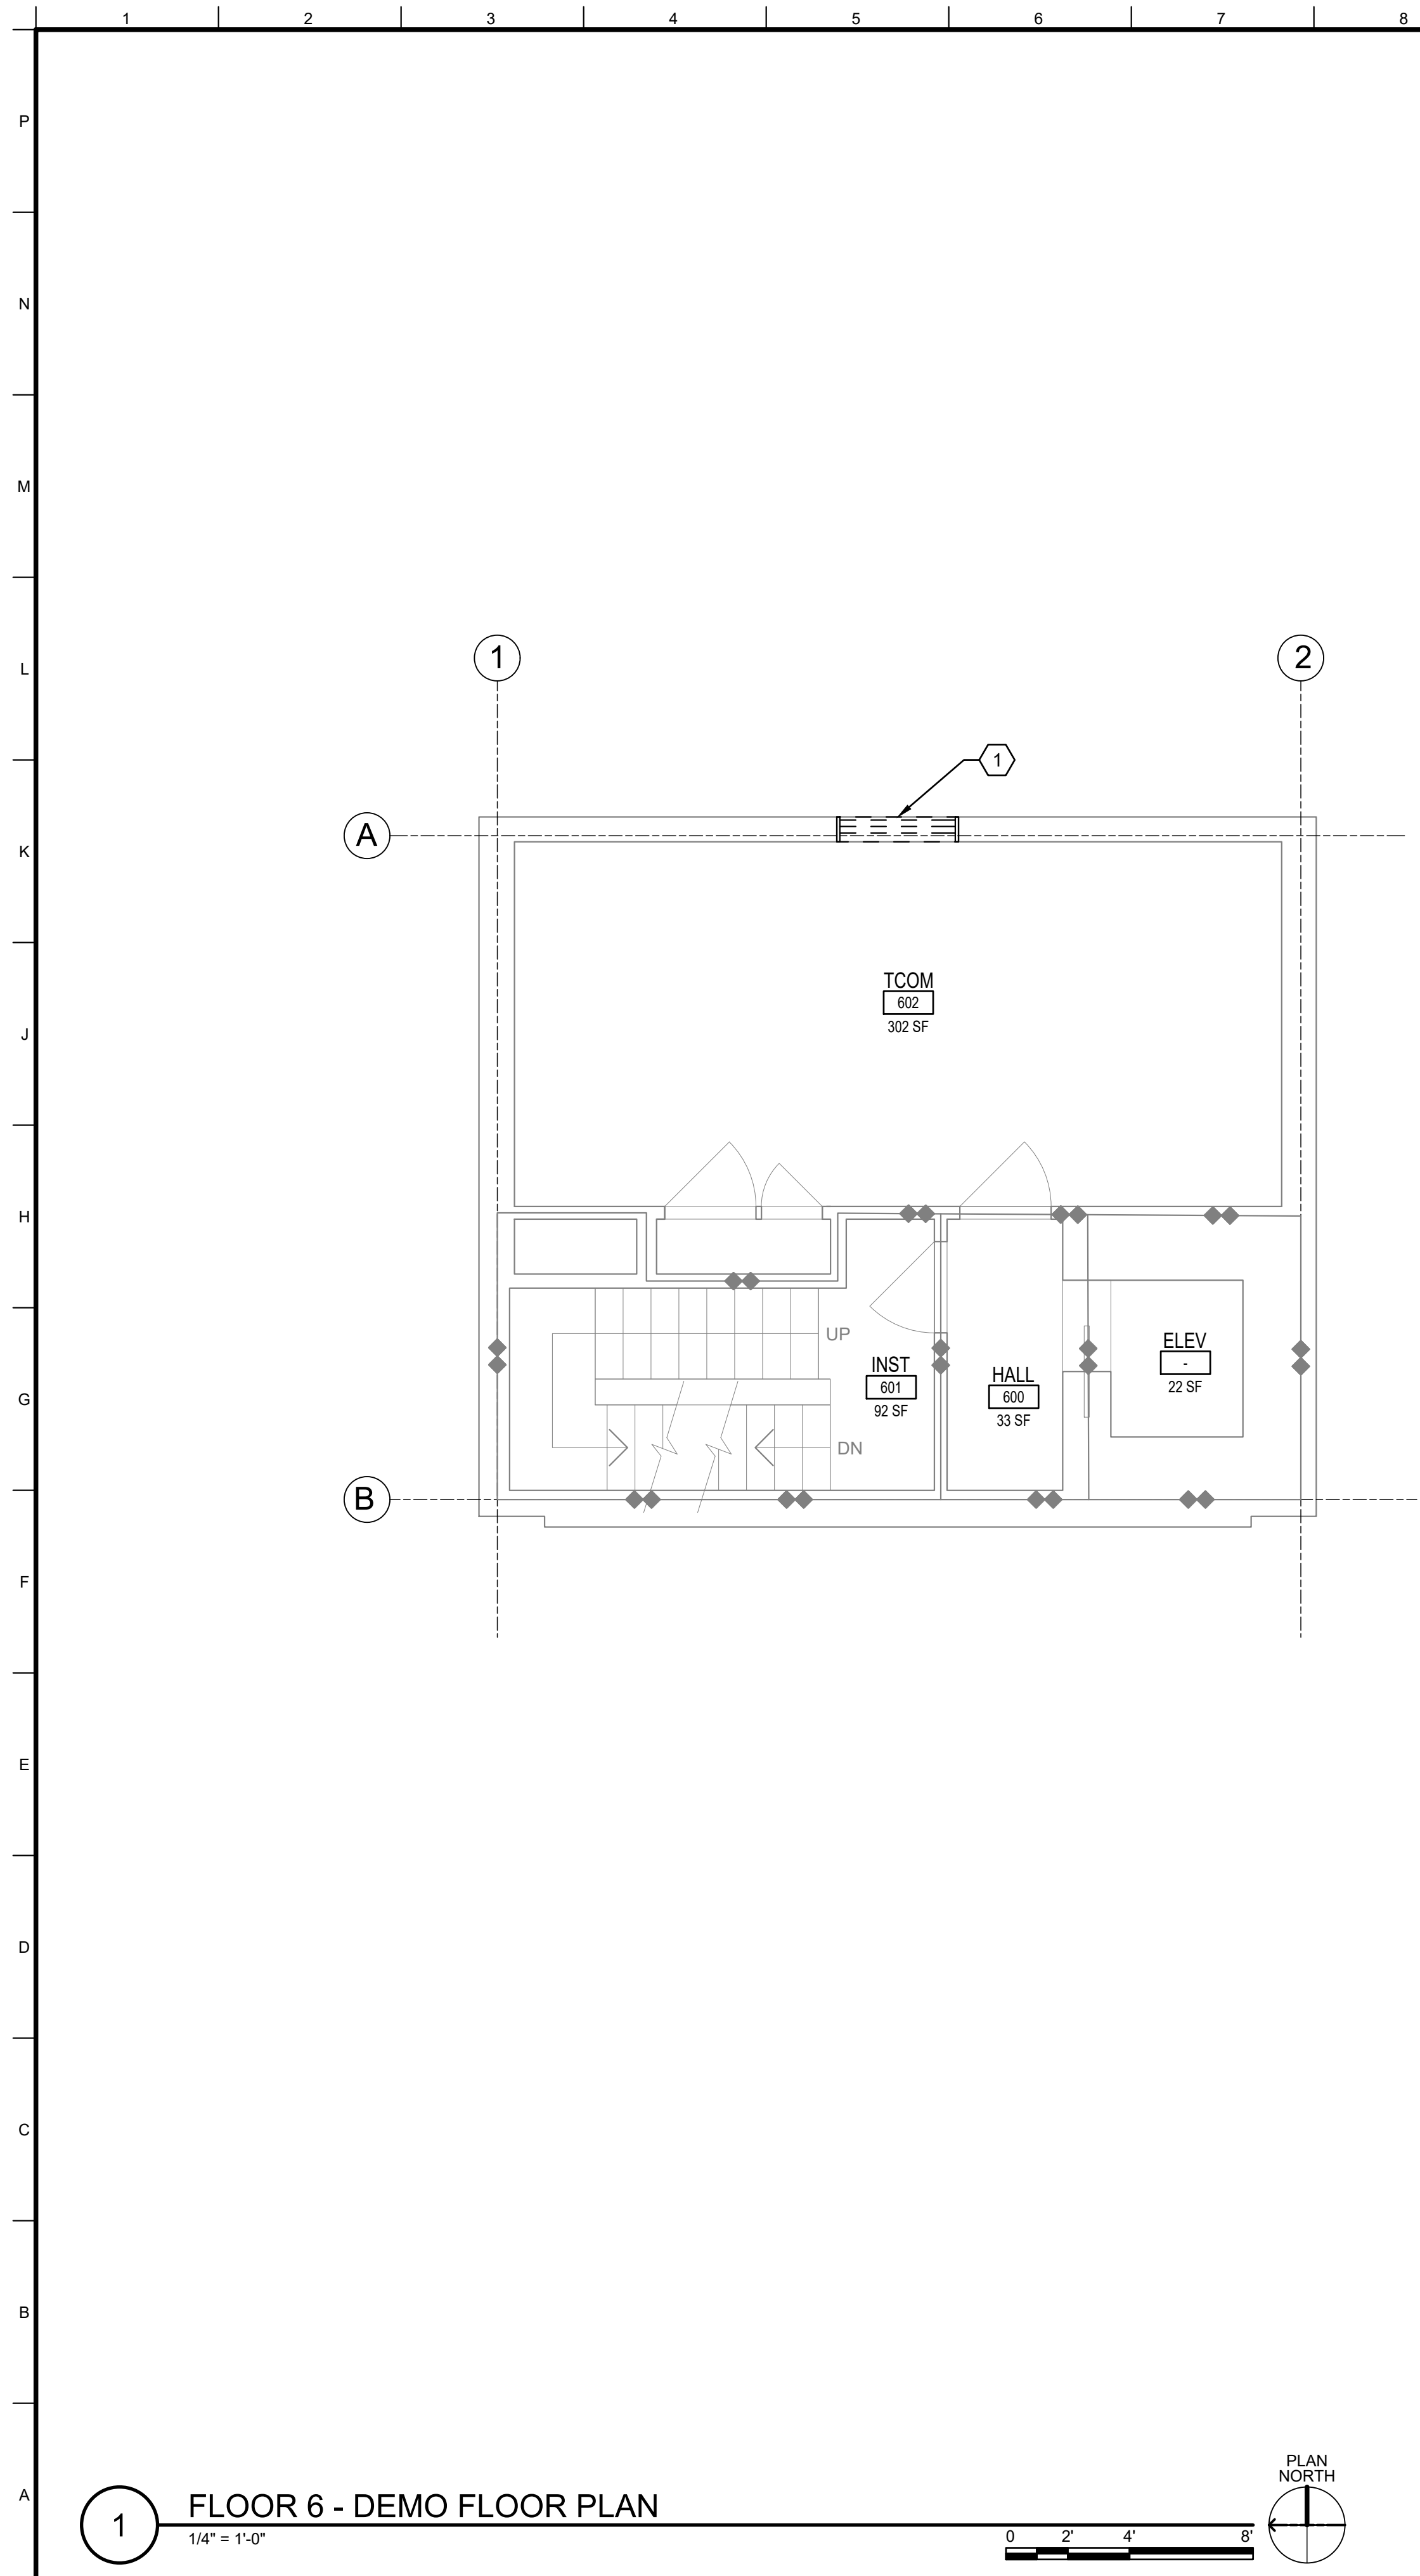

GENERAL SHEET NOTES

1. PATCH AND REPAIR WALLS, FLOORS, & CEILINGS TO MATCH EXISTING ADJACENT WHERE MECHANICAL EQUIPMENT IS TO BE DEMOLISHED.
2. ALL EXISTING CEILINGS TO REMAIN. CONTRACTOR TO DEMO ANY EXISTING ACOUSTICAL CEILING TILES OR GYPSUM BOARD CEILING AS REQUIRED FOR NEW MECHANICAL EQUIPMENT INSTALLATION.
3. CONTRACTOR SALVAGE ANY WALL MOUNTED EQUIPMENT REQUIRED TO COMPLETE A CONSTRUCTION TASK.

PHASING NOTES

PHASE 1: DEMO LOUVERS / WINDOW AS NEEDED FOR TEMPORARY PIPING. SEE MECHANICAL DRAWINGS FOR LOCATIONS.





PHASE 2: TEMP PIPING TO BE INSTALLED AND DEMOLISHED, SEE MECHANICAL.

PHASE 3: REINSTALL SALVAGED LOUVERS / WINDOWS.

SHEET KEYNOTES

1. REMOVE AND REINSTALL LOUVER AS REQUIRED TO ACCOMMODATE TEMPORARY MECH PIPING. SEE PHASING NOTES.

LEGEND



EXISTING DOOR TO REMAIN

EXISTING 2-HR FIRE RATED WALL

TO DEMOLISH


EXISTING GWB CEILING

EXISTING ACOUSTICAL TILE CEILING

EXISTING LIGHT FIXTURES



	
US ARMY CORPS OF ENGINEERS ® SEATTLE DISTRICT	
ISSUE DATE:	
SOLICITATION NO.:	
DRAWN BY:	
CHECKED BY:	
CONTRACT NO.:	
SUBMITTED BY:	
R. SPEEDS	
SIZE:	
I.U.O. DE/J225502J	
ANSI D	
U.S. ARMY CORPS OF ENGINEERS SEATTLE DISTRICT SEATTLE, WASHINGTON	
SPEEDS DESIGN BUILD 23830 PACIFIC HWY S KENT, WA 98032 P: (206) 990-2118	
JOINT BASE LEWIS-MCHORD, WASHINGTON JBLM ATCT HVAC REPAIRS DE/J225502J	
FLOOR 6 DEMO FLOOR PLAN & RCP	
SHEET ID J00008 AD106	

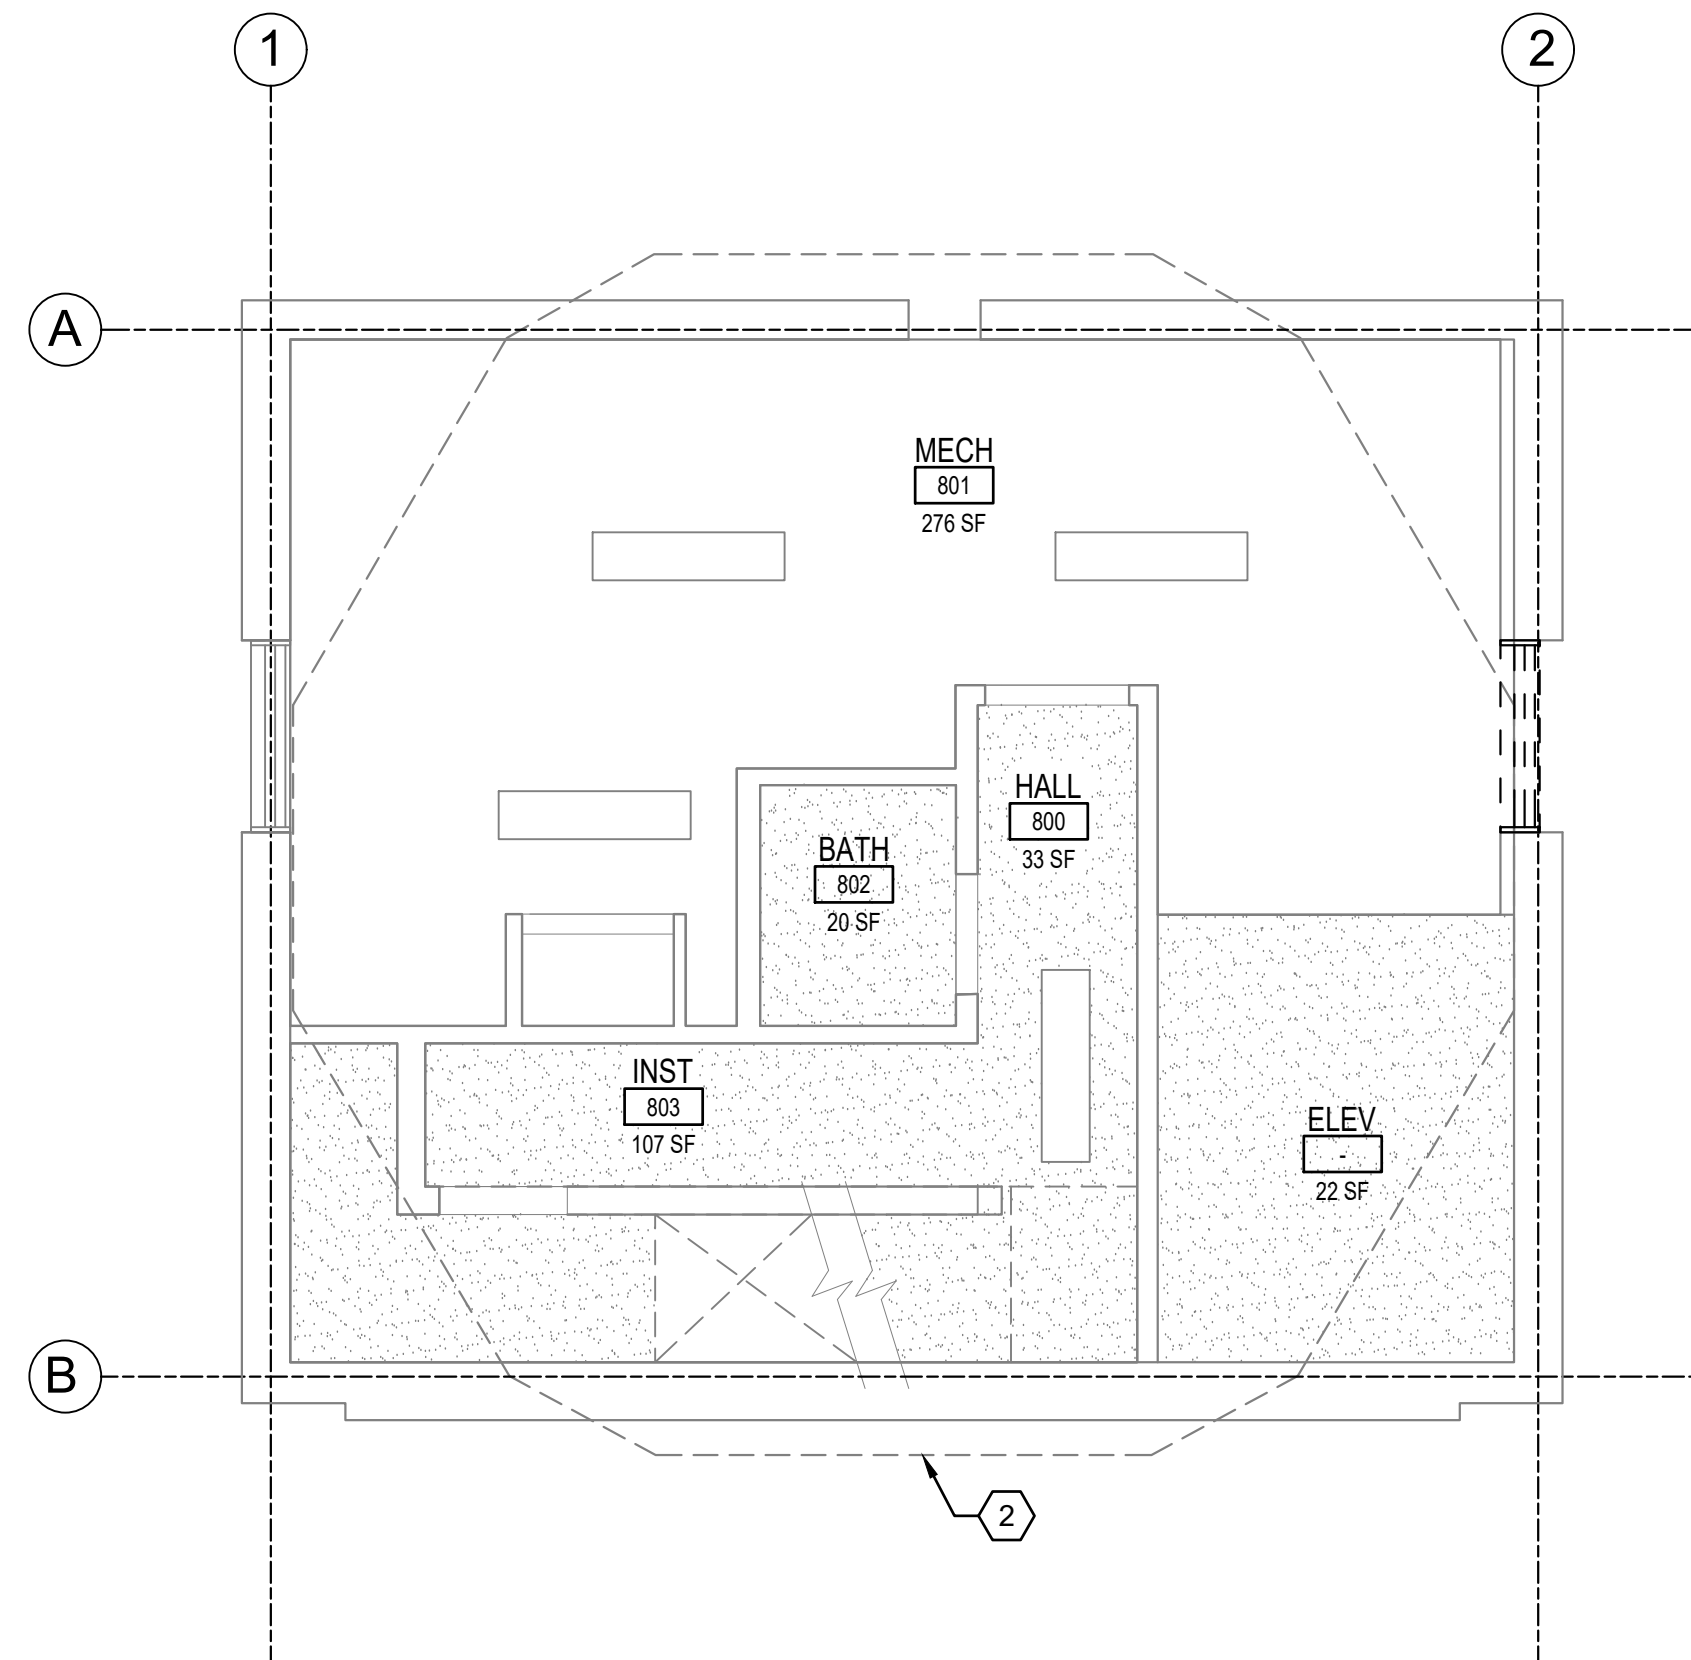

2 FLOOR 8 - DEMO RCP
1/4" = 1'-0"

LEGEND

-
- EXISTING DOOR TO REMAIN
- EXISTING 2-HR FIRE RATED WALL
- TO DEMOLISH
- EXISTING GWB CEILING
- EXISTING ACOUSTICAL TILE CEILING
- EXISTING LIGHT FIXTURE



U.S. ARMY CORPS OF
ENGINEERS®
SEATTLE DISTRICT

[illegible]


SEATTLE DISTRICT SEATTLE, WASHINGTON	SPEEDS DESIGN BUILD 23800 1 ST AVE. S KENT, WA 98032 P: (206) 590-2118		DRAWN BY: A. JAMES	SOLICITATION NO.: FA#20224F0092
			CHECKED BY:	CONTRACT NO.: FA#20223D0002
			SUBMITTED BY: R. SPEES	I.U.: DEJ25592J
			ANSI D	

JBLM ATCT HVAC REPAIRS
DEJ225502J

DEMO FLOOR PLAN & RCP

SHEET ID
J00008
AD108

100% ELECTRONIC BID SET

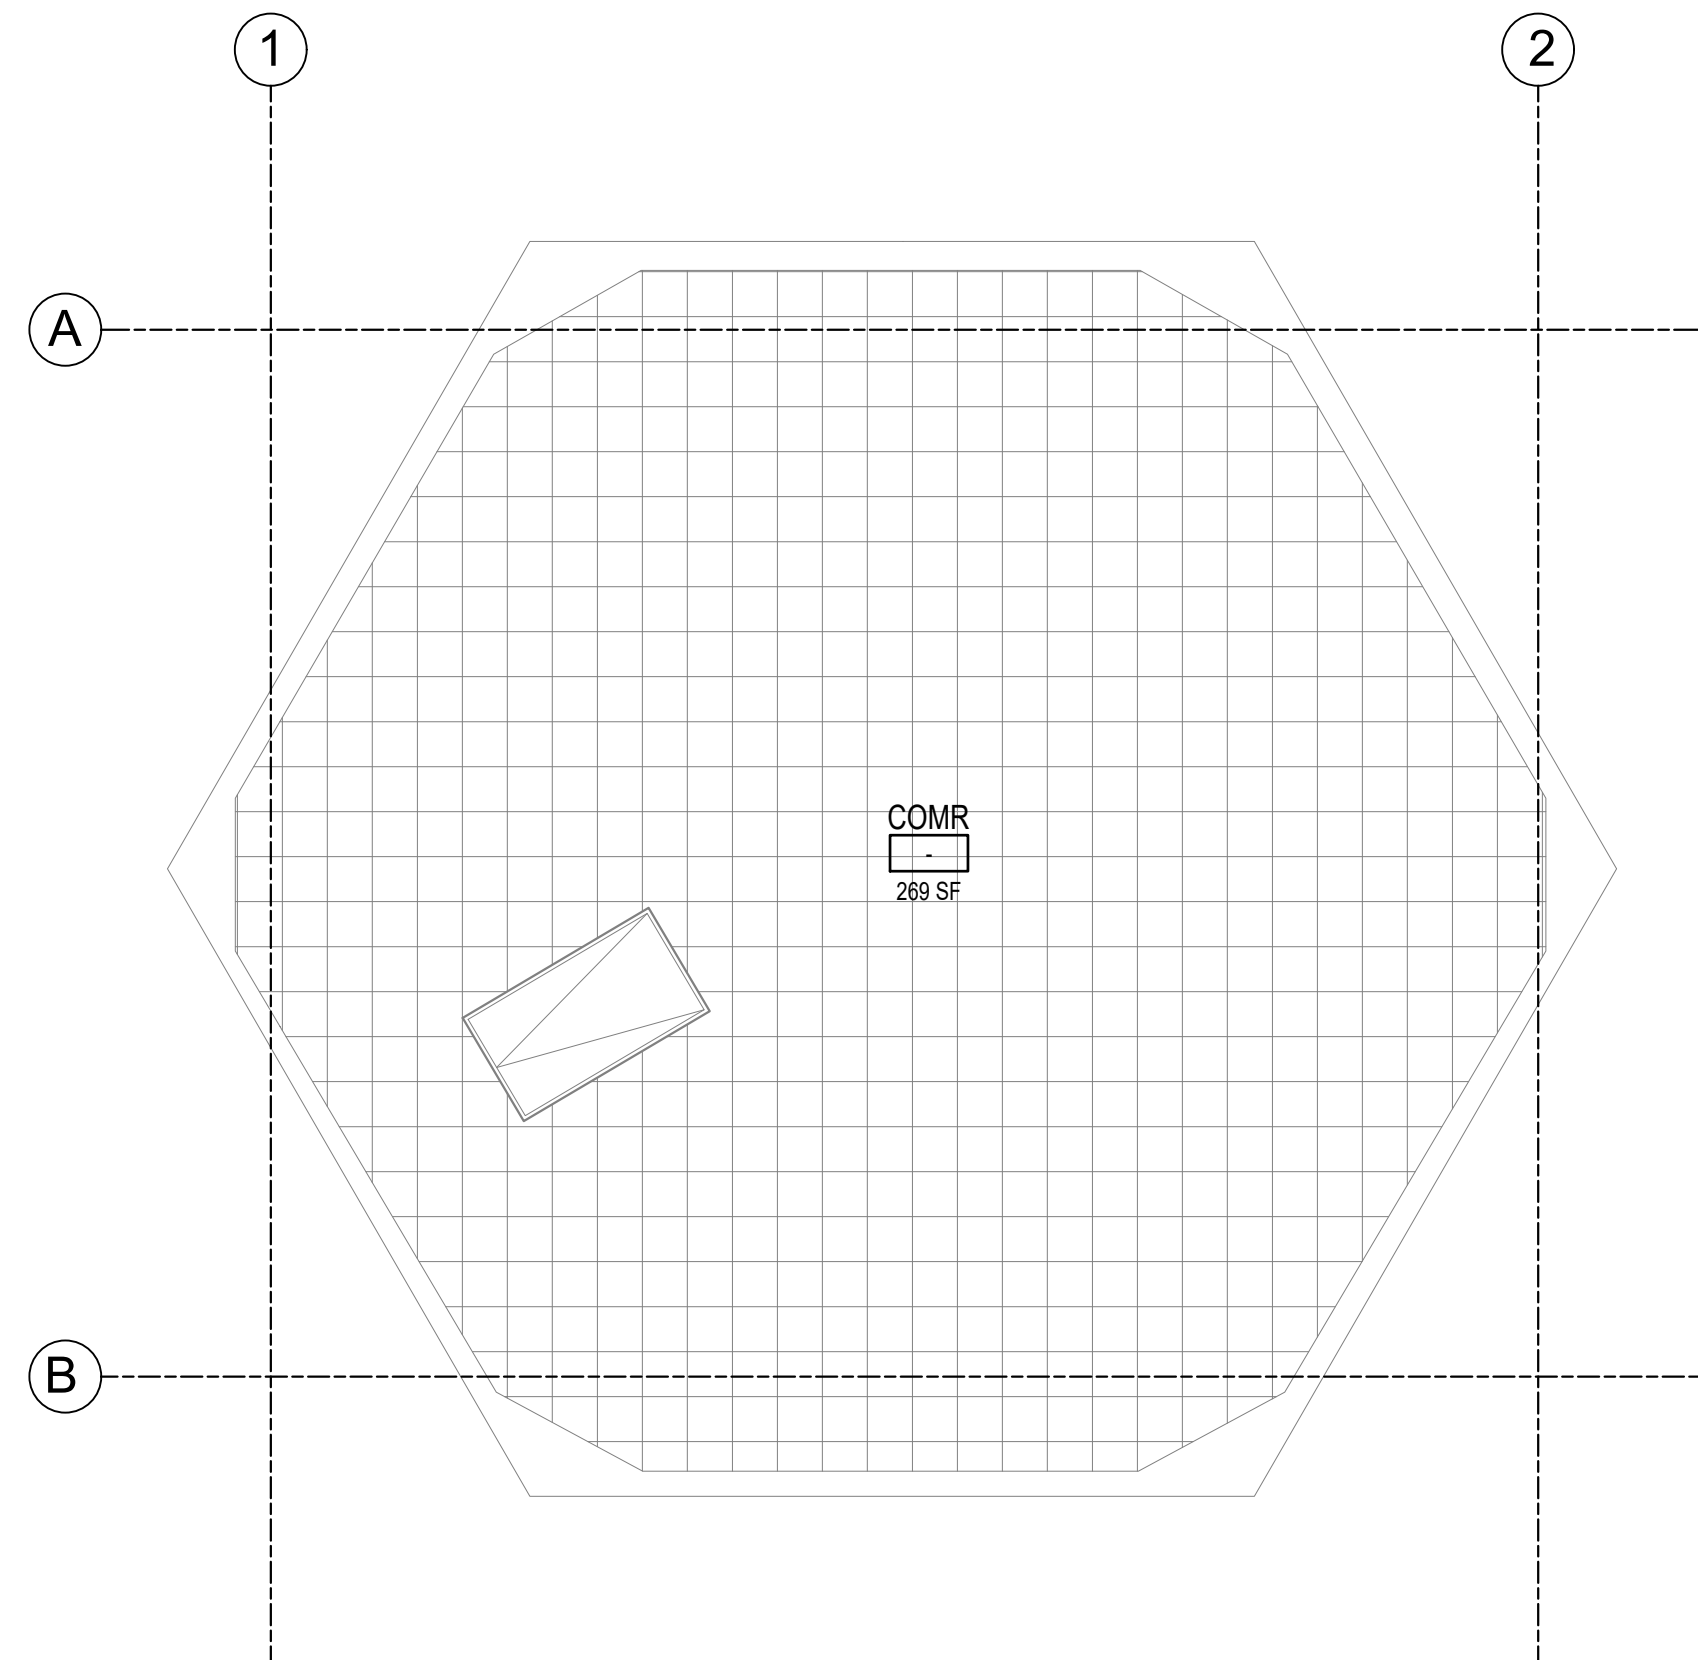

2 FLOOR 9 - DEMO RCP
1/4" = 1'-0"

SHEET KEYNOTES

[illegible]


U.S. ARMY CORPS OF ENGINEERS SEATTLE DISTRICT SEATTLE, WASHINGTON	DESIGNED BY: DRAWN BY: A. JAMES CHECKED BY: M. KING SUBMITTED BY: R. SPEERS	ISSUE DATE: SOLICITATION NO.: FA662024AF0092 CONTRACT NO.: FA662023D00002 LIC# DE025502J
SPEES DESIGN BUILD 23630 PACIFIC HWY S KENT, WA 98032 P: (206) 590-2118	SIZE: ANSI D	

JOINT BASE LEWIS-MCCORD, WASHINGTON
JBLM ATCT HVAC REPAIRS
DE/J22502J


FLOOR 9
DEMO FLOOR PLAN

SHEET ID
J00008
AD109

100% ELECTRONIC BID SET

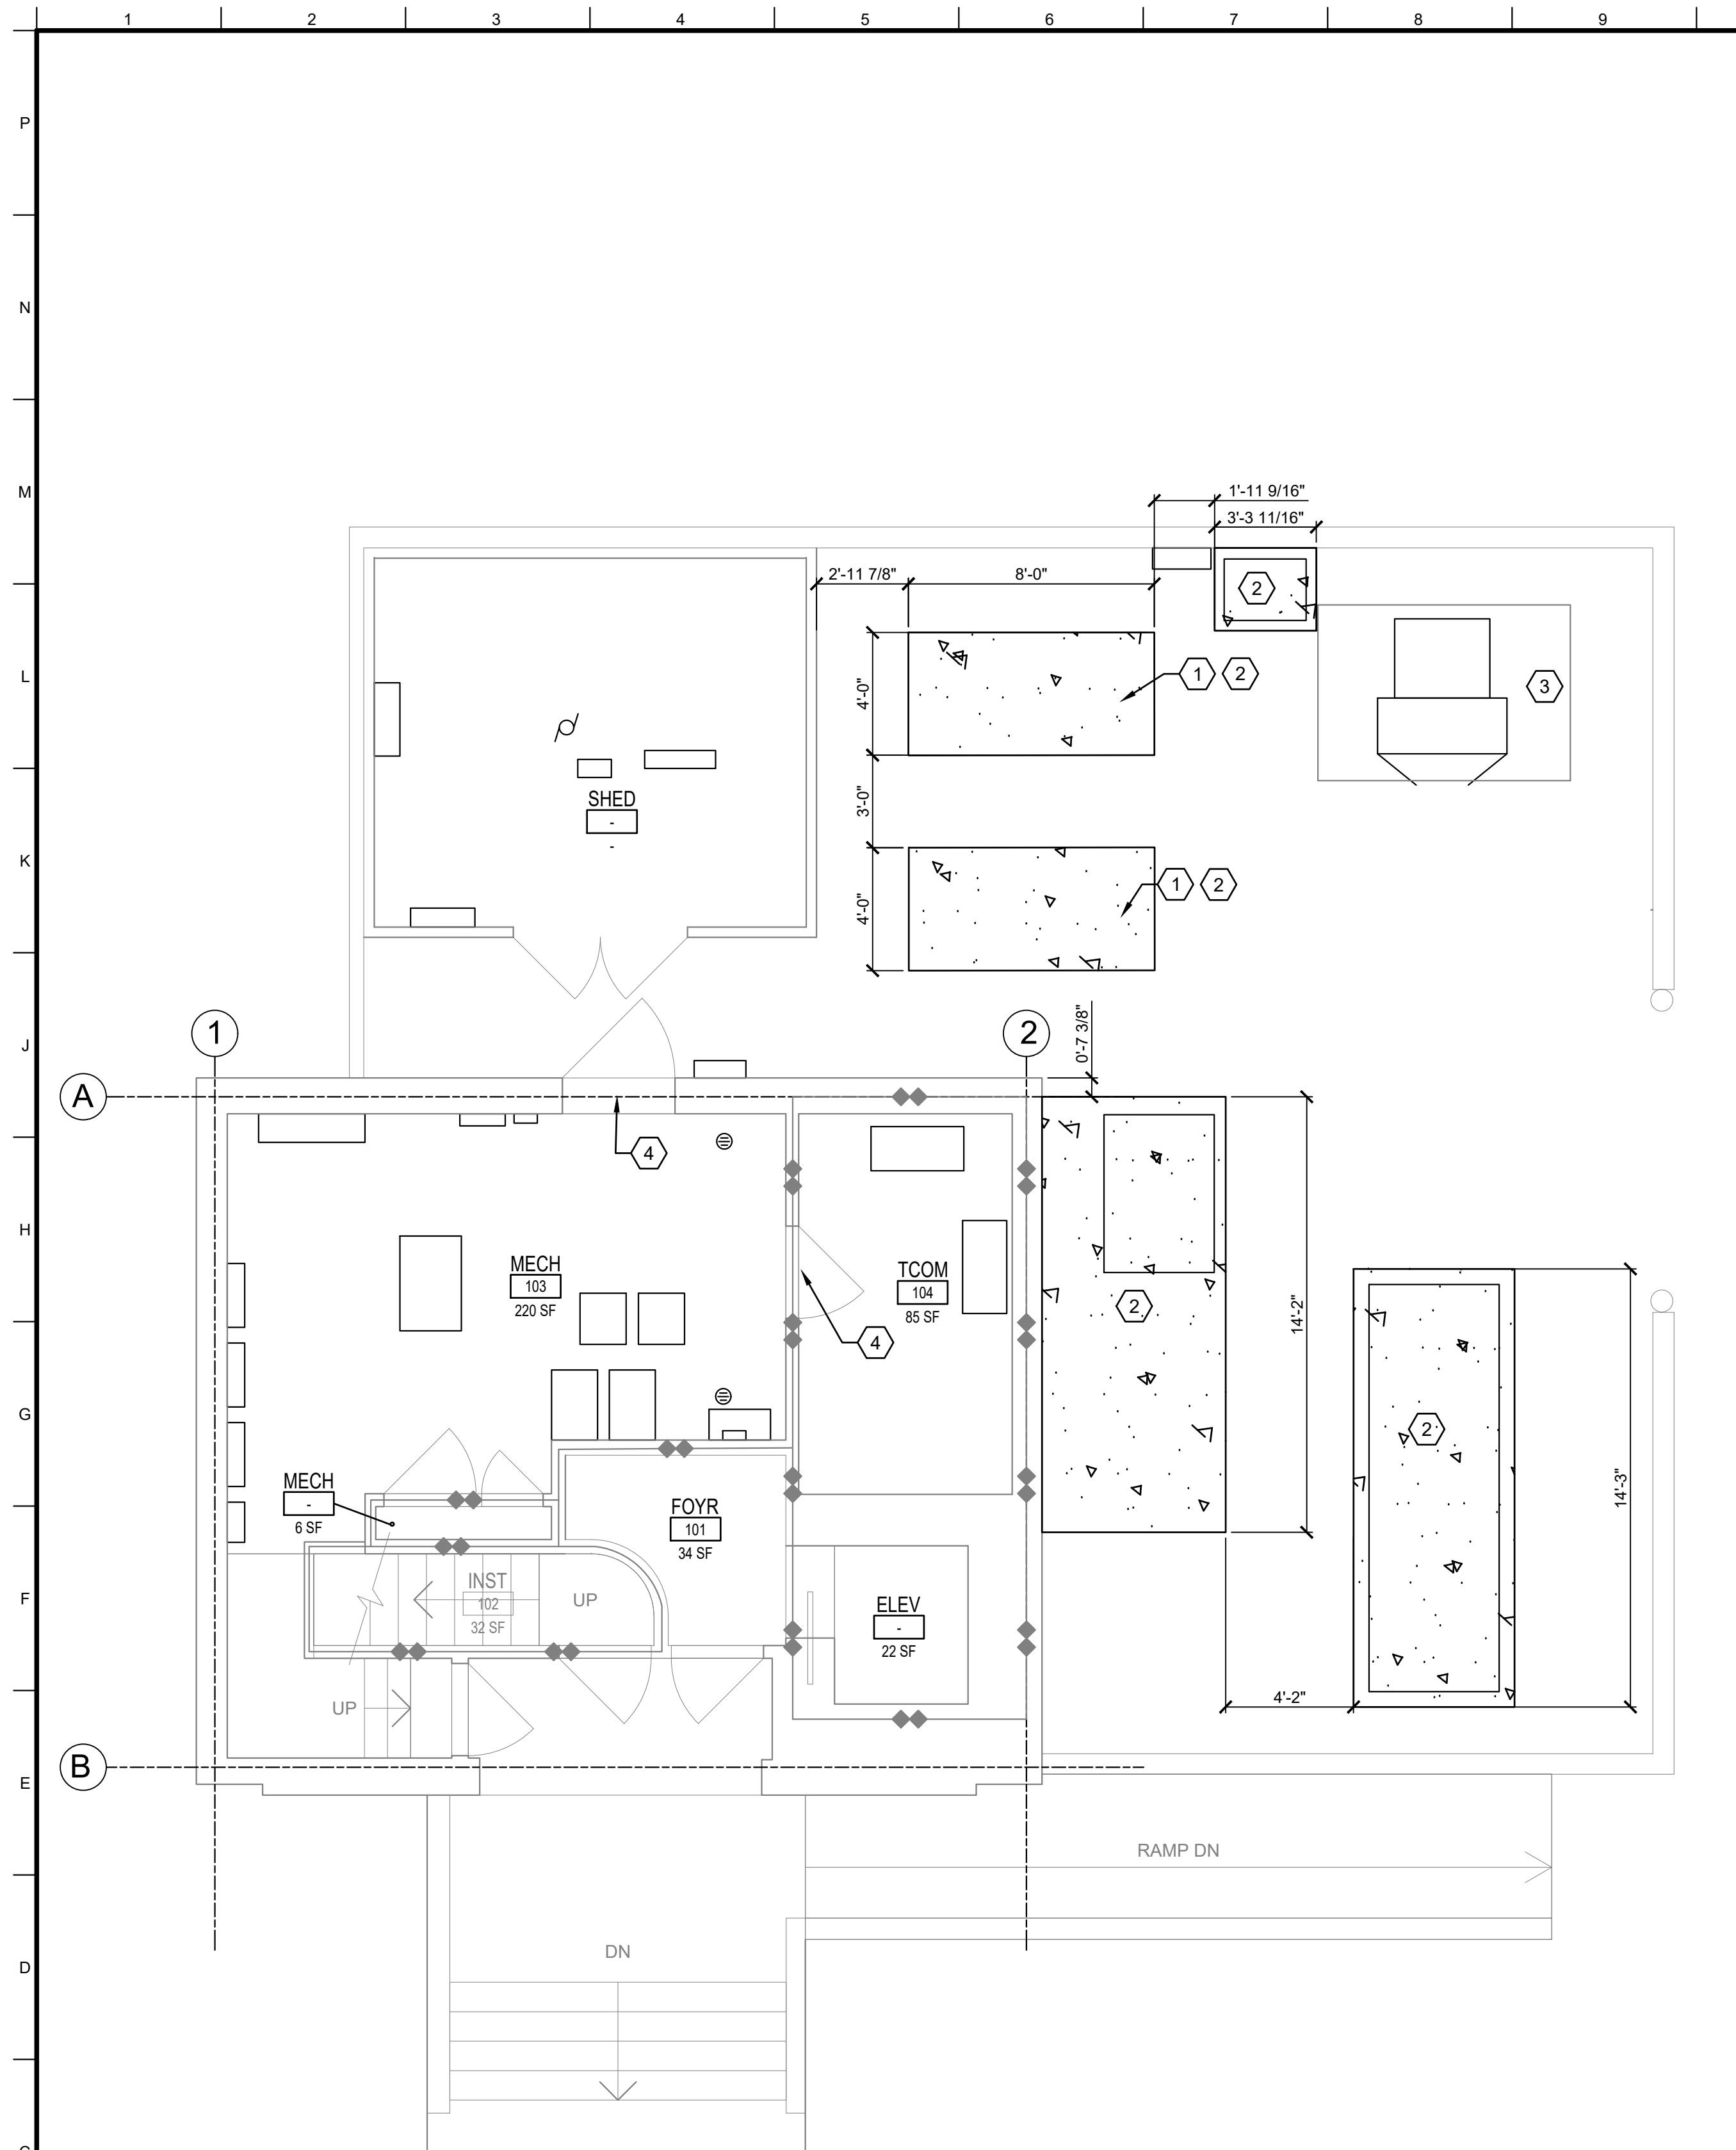

1 FLOOR 1 - FLOOR PLAN
1/4" = 1'-0"

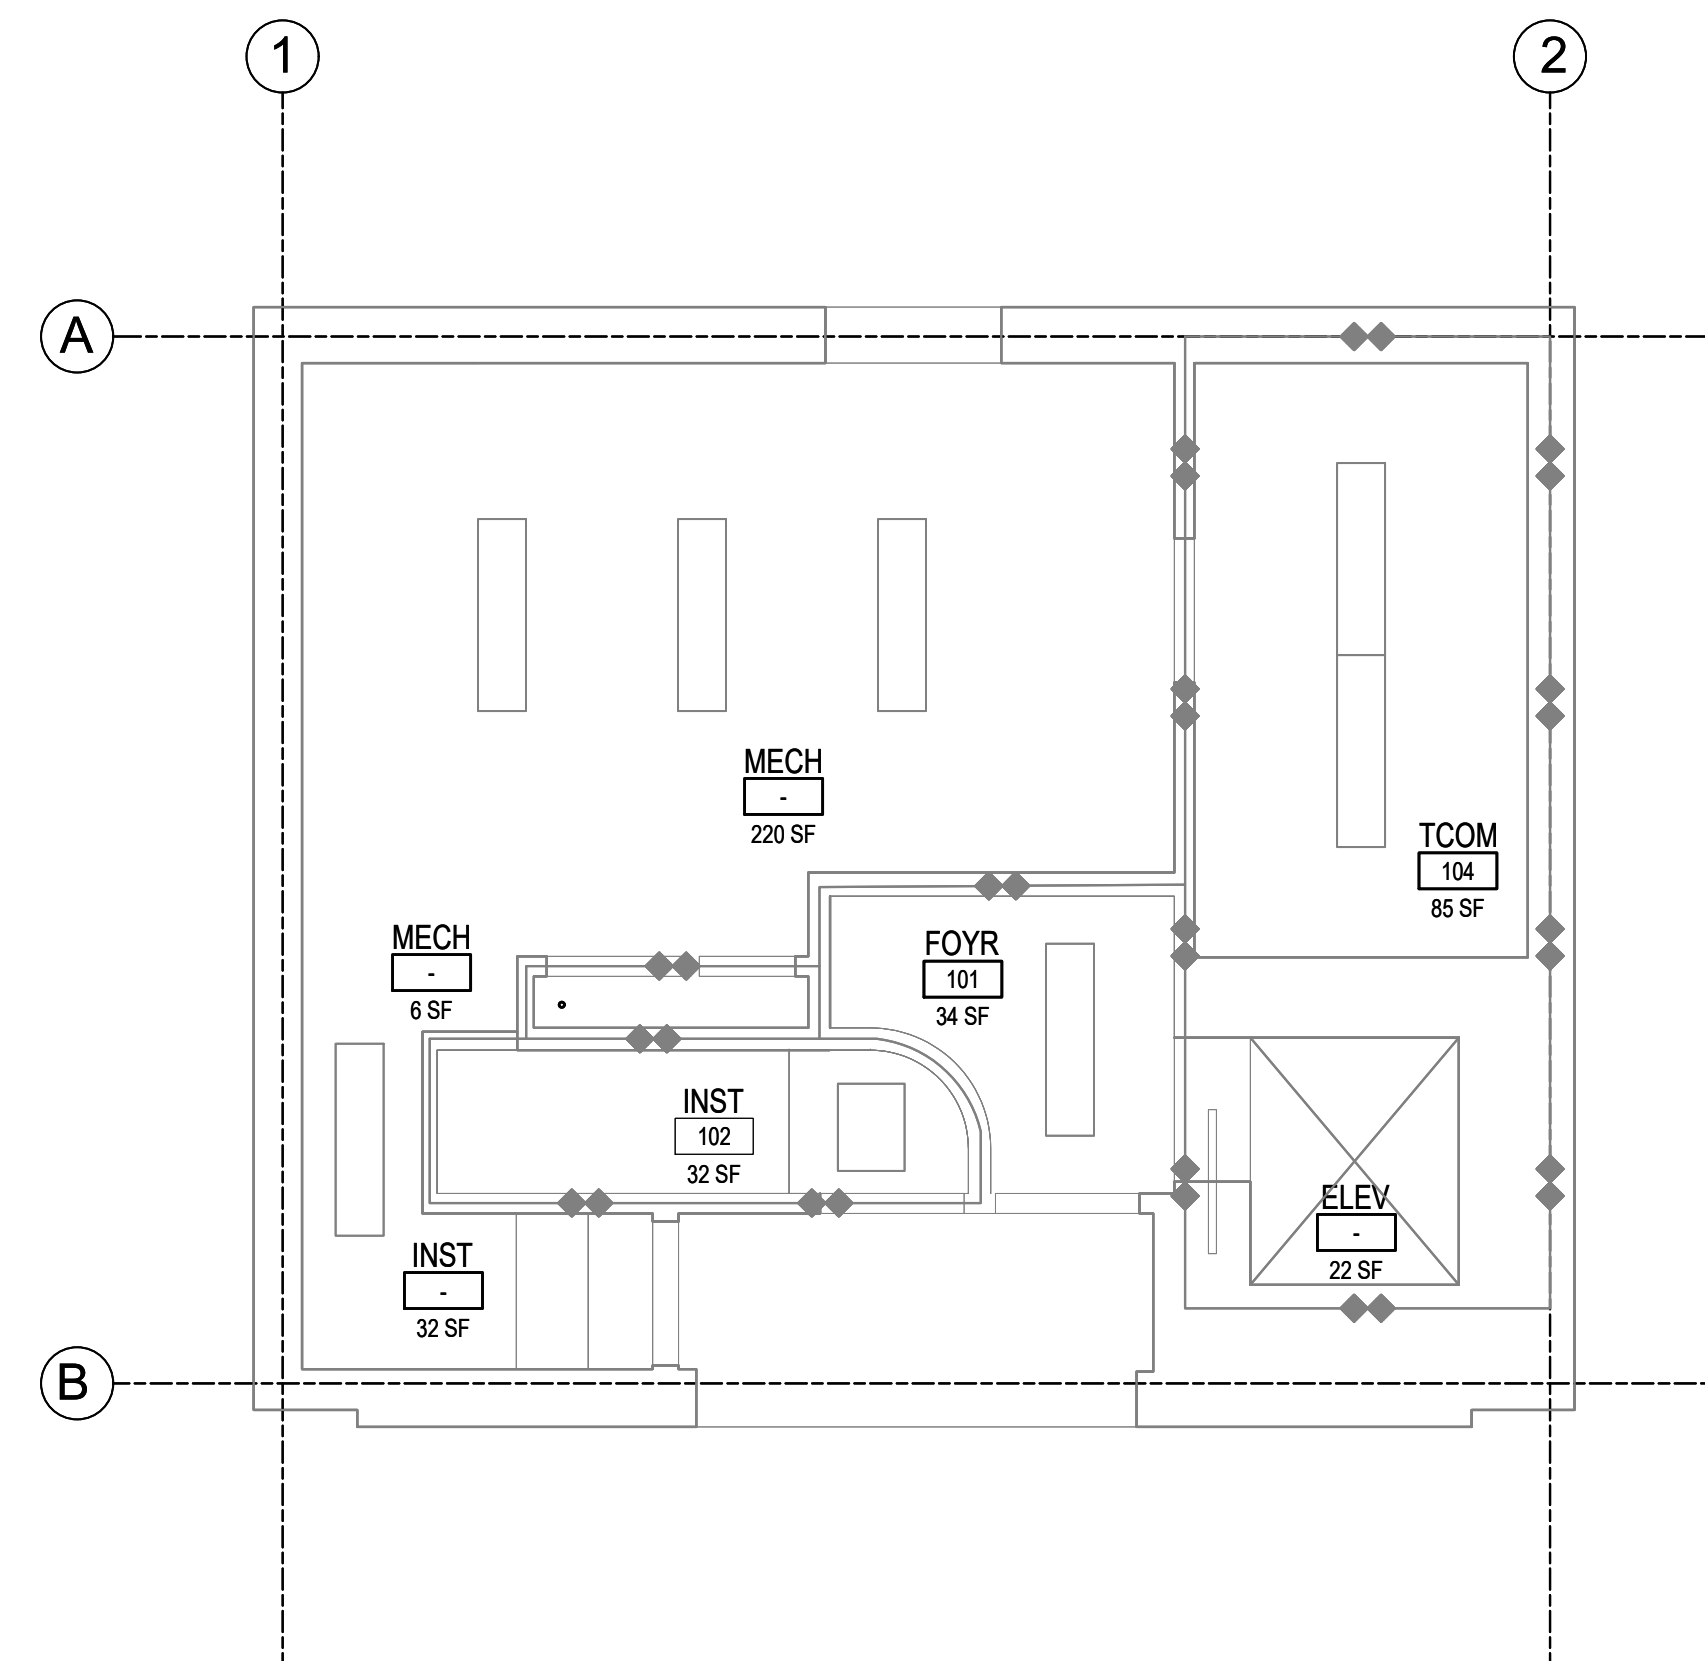

2 FLOOR 1 - RCP
1/4" = 1'-0"

GENERAL SHEET NOTES

1. PATCH AND REPAIR WALL TO MATCH EXISTING WHERE DISTURBED.
2. CONTRACTOR TO REINSTALL ANY SALVAGED WALL MOUNTED EQUIPMENT FOR REUSE.
3. CONTRACTOR TO INSTALL NEW CEILING TILES OR PATCH GYPSUM BOARD CEILINGS WHERE DISTURBED TO MATCH EXISTING CONDITIONS.
4. IF FLOOR OR RATED WALL PENETRATIONS CANNOT BE FIRE STOPPED AT THE END OF THE WORK SHIFT, TEMPORARY FIRE STOPPING COMPOSED OF MINERAL WOOL SHALL BE INSTALLED IN THE PENETRATION TO PROVIDE PROTECTION AGAINST FIRE/SMOKE SPREAD THROUGH THE UNSEALED PENETRATION.



US ARMY CORPS OF
ENGINEERS ®
SEATTLE DISTRICT


[illegible]

 SHEET KEYNOTES

1. NEW MECHANICAL UNIT.
2. NEW CONCRETE PAD, SEE STRUCTURAL.
3. EXISTING CONCRETE PAD TO REMAIN.
4. PATCH AND PAINT WALL ABOVE DOOR WHERE LOUVER WAS DEMOLISHED.
WALL TO MATCH EXISTING CONSTRUCTION.

U.S. ARMY CORPS OF ENGINEERS SEATTLE DISTRICT SEATTLE, WASHINGTON	DESIGNED BY: M. KING	ISSUE DATE: 09/26/2025
	DRAWN BY: J. L. JONES	SOLICITATION NO.: F4620223D00002
	CHECKED BY: M. KING	CONTRACT NO.: F4620223D00002
	SUBMITTED BY: R. SPEES	UO DE:225502J
SPECS DESIGN BUILD 23830 PACIFIC HWY S KENT, WA 98032 P: (206) 590-2118	ANSI D.	

LEGEND



EXISTING DOOR TO REMAIN



EXISTING 2-HR FIRE RATED WALL



EXISTING GWB CEILING



EXISTING ACOUSTICAL TILE CEILING





EXISTING LIGHT FIXTURE



SHEET ID
J00008
A-101

100% ELECTRONIC BID SET

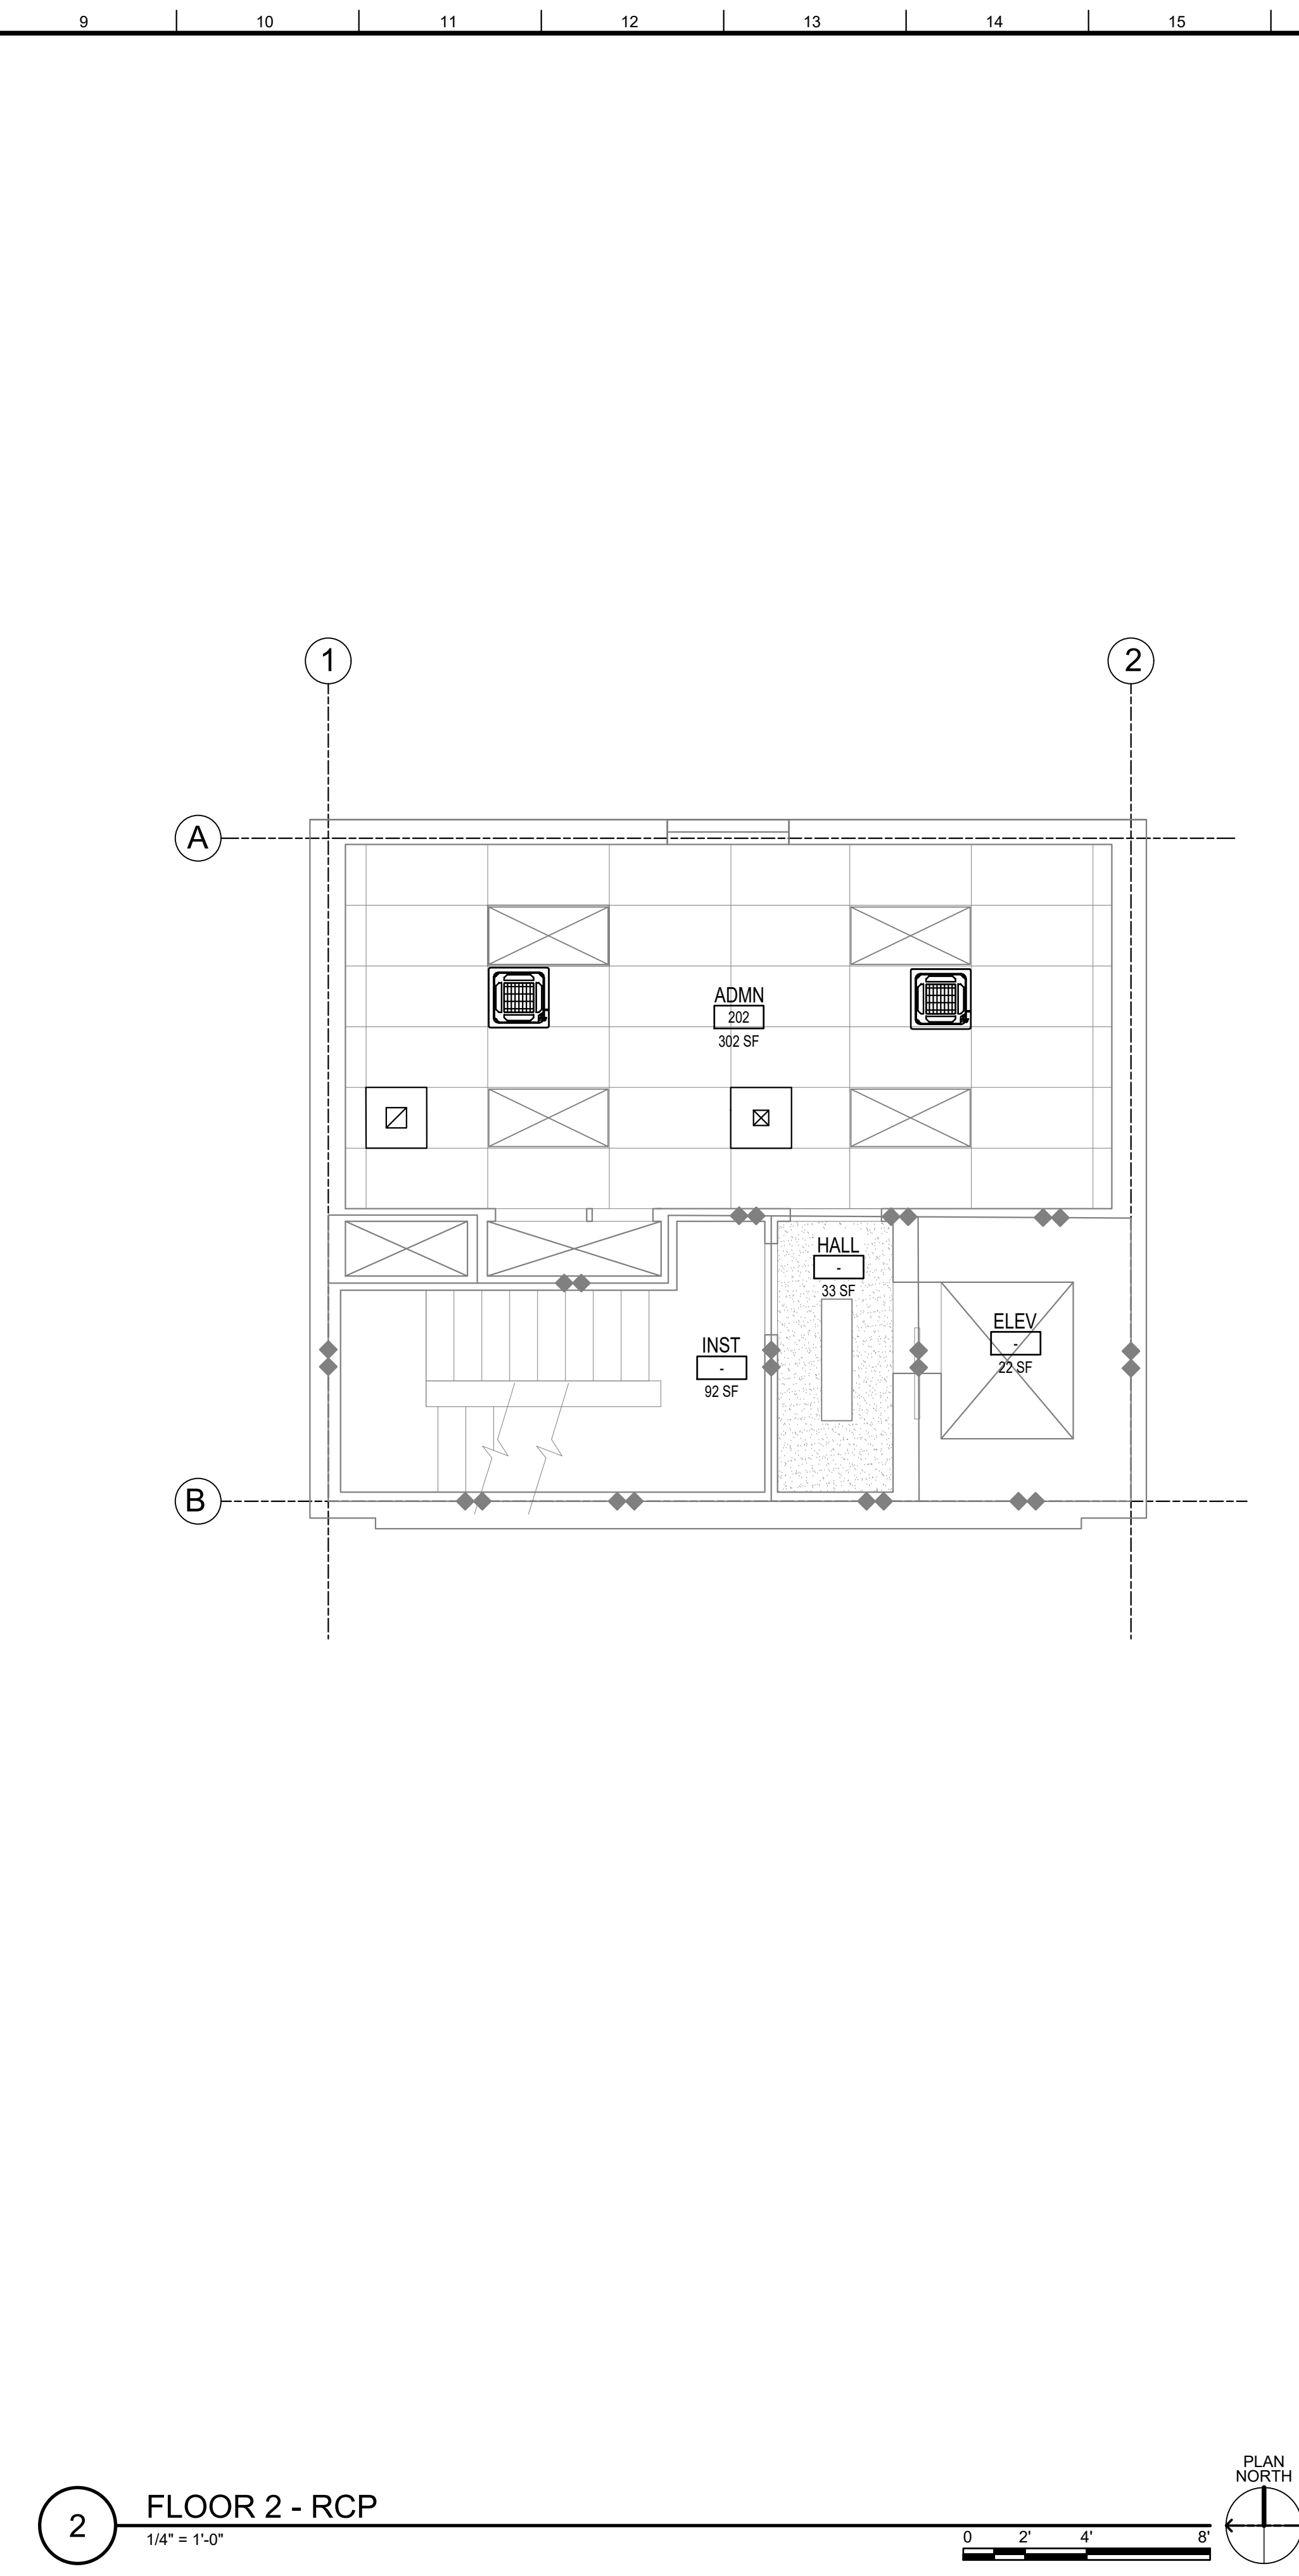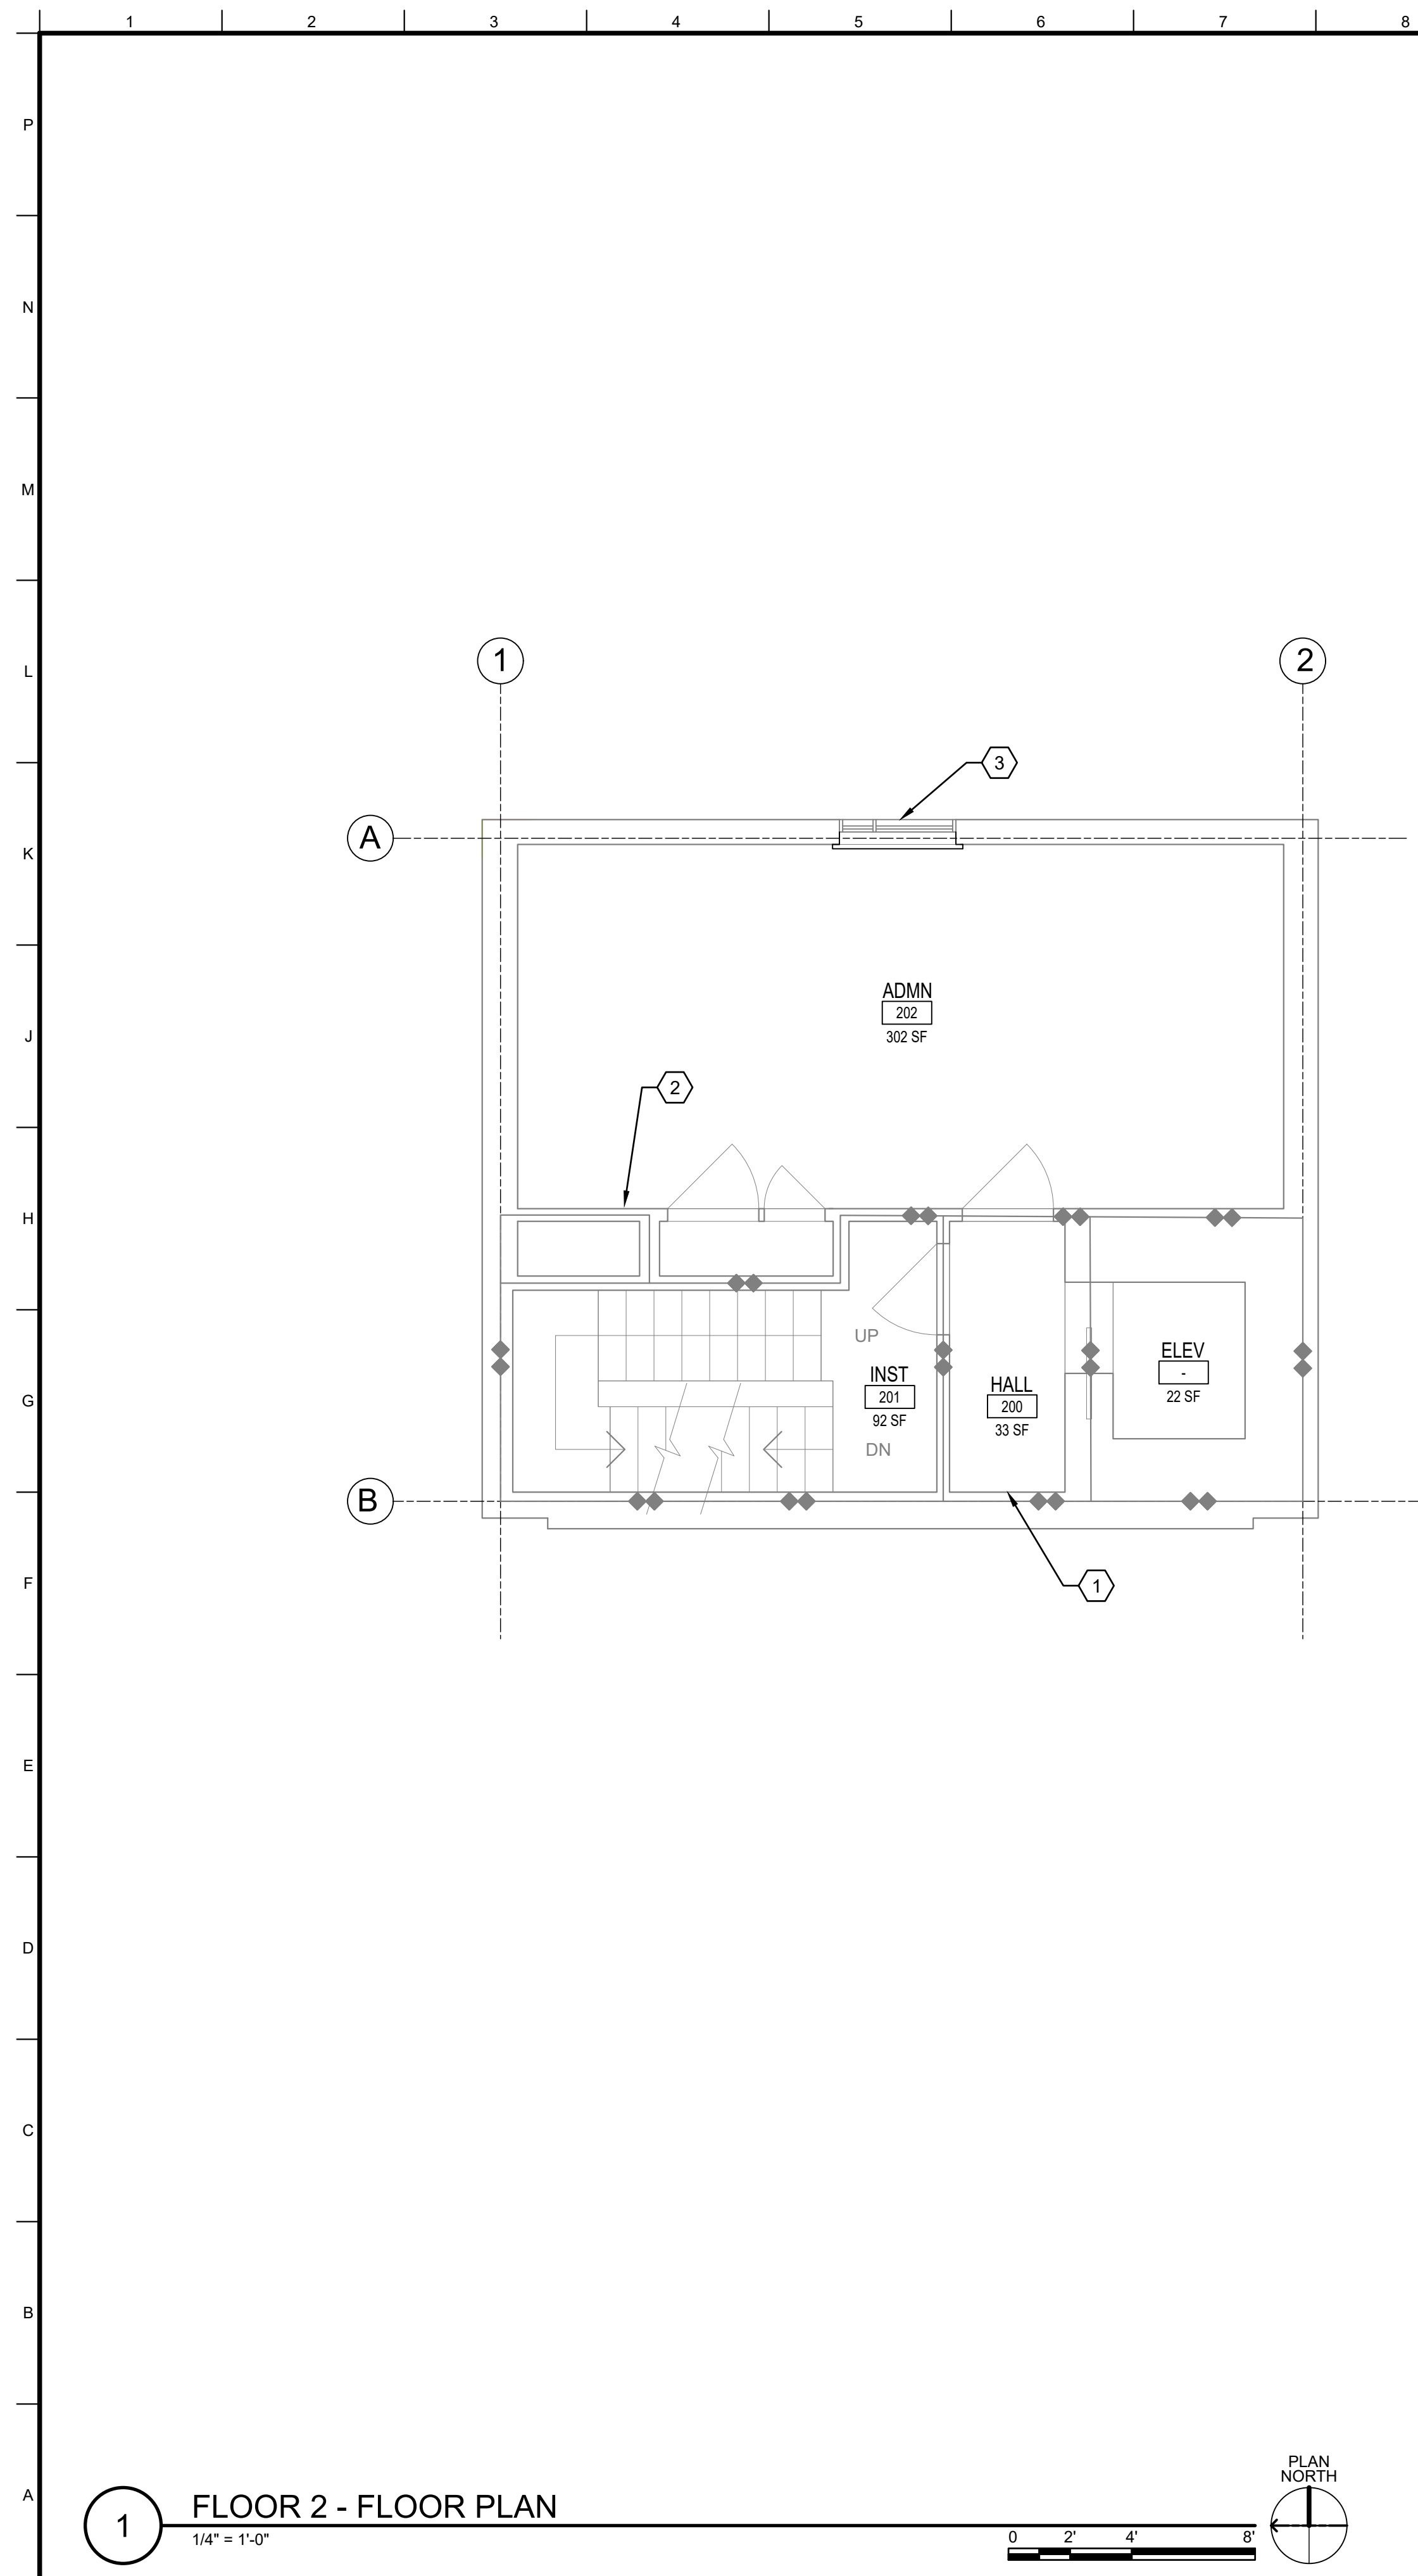

GENERAL SHEET NOTES

1. PATCH AND REPAIR WALL TO MATCH EXISTING WHERE DISTURBED.
2. CONTRACTOR TO REINSTALL ANY SALVAGED WALL MOUNTED EQUIPMENT FOR REUSE.
3. CONTRACTOR TO INSTALL NEW CEILING TILES OR PATCH GYPSUM BOARD CEILINGS WHERE DISTURBED TO MATCH EXISTING CONDITIONS.
4. IF FLOOR OR RATED WALL PENETRATIONS CANNOT BE FIRE STOPPED AT THE END OF THE WORK SHIFT, TEMPORARY FIRE STOPPING COMPOSED OF WOOL SHALL BE INSTALLED IN THE PENETRATION TO PROVIDE PROTECTION AGAINST FIRE/SMOKE SPREAD THROUGH THE UNSEALED PENETRATION.



US ARMY CORPS OF
ENGINEERS ®
SEATTLE DISTRICT

[illegible]

SHEET KEYNOTES

1. PATCH AND REPAIR WALL TO MATCH EXISTING WHERE ELECTRIC WALL HEATER WAS DEMOLISHED.
2. PATCH AND REPAIR WALL TO MATCH EXISTING WHERE WALL DIFFUSER AND GRILL WERE DEMOLISHED.
3. EXISTING WINDOW TO REMAIN.

U.S. ARMY CORPS OF ENGINEERS SEATTLE DISTRICT SEATTLE, WASHINGTON	DRAWN BY: M. JAMES	CHECKED BY: M. JAMES	SPECS DESIGN BUILT		SUBMITTED BY: M. JAMES	I.U.O. DE-1225502J
			23330 PACIFIC HWY S KENT, WA 98032 P. (206) 990-2118			
DATE: 09/26/2002		SLOTIGATION NO.: FA42024F0092		CONTRACT NO.: FA42023D0002		
DATE: 09/26/2002		SLOTIGATION NO.: FA42024F0092		CONTRACT NO.: FA42023D0002		
DATE: 09/26/2002		SLOTIGATION NO.: FA42024F0092		CONTRACT NO.: FA42023D0002		

LEGEND


Legend for existing conditions:

- EXISTING DOOR TO REMAIN
- EXISTING 2-HR FIRE RATED WALL
- EXISTING GWB CEILING
- EXISTING ACOUSTICAL TILE CEILING
- EXISTING LIGHT FIXTURE




SHEET ID
J00008
A-102


100% ELECTRONIC BID SET

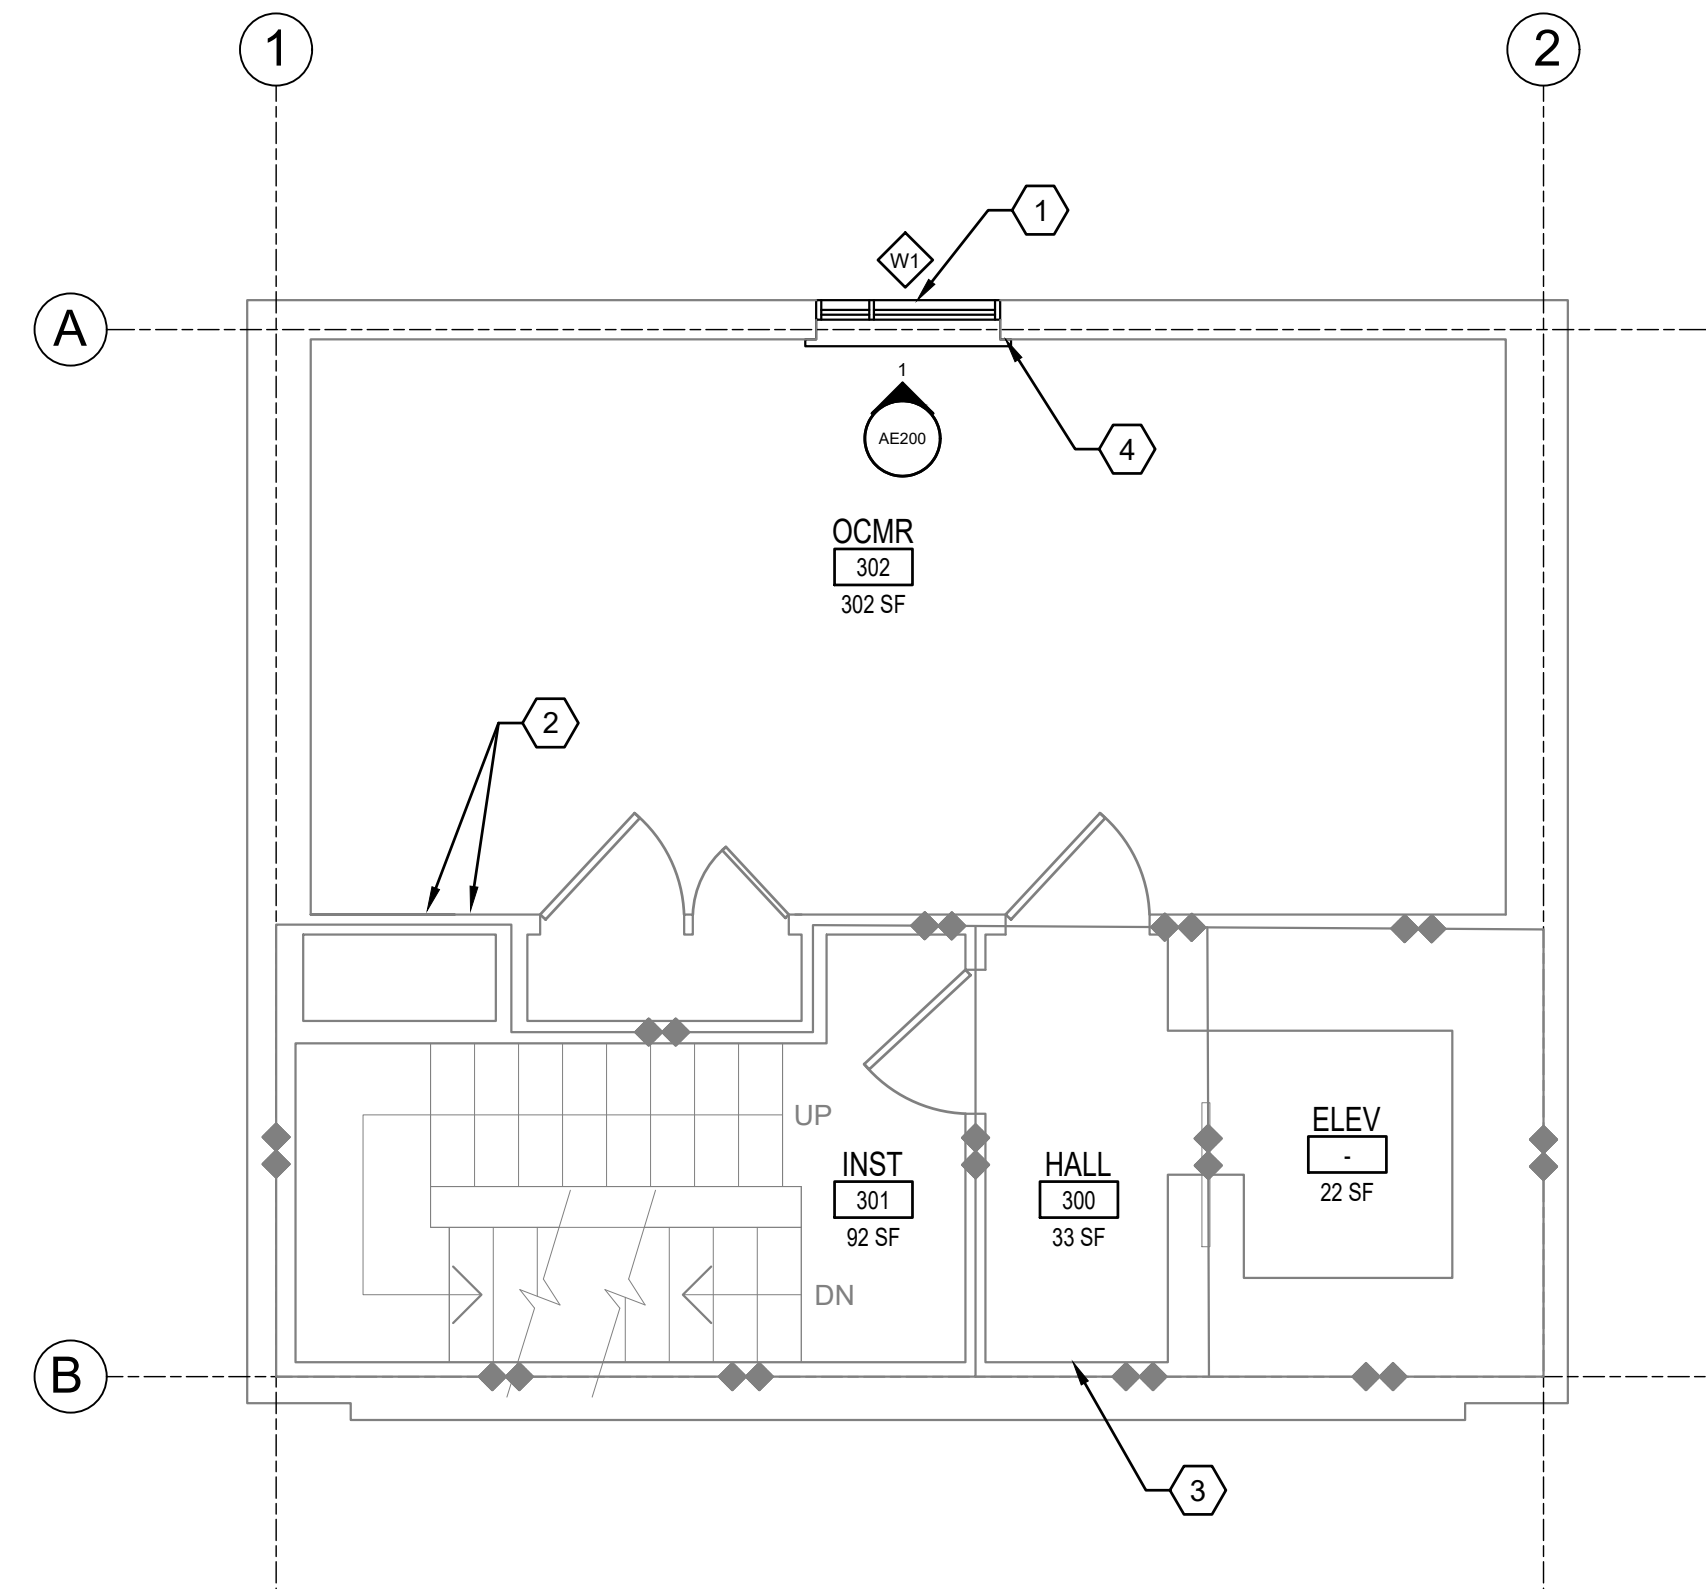

1 FLOOR 3 - FLOOR PLAN
1/4" = 1'-0"

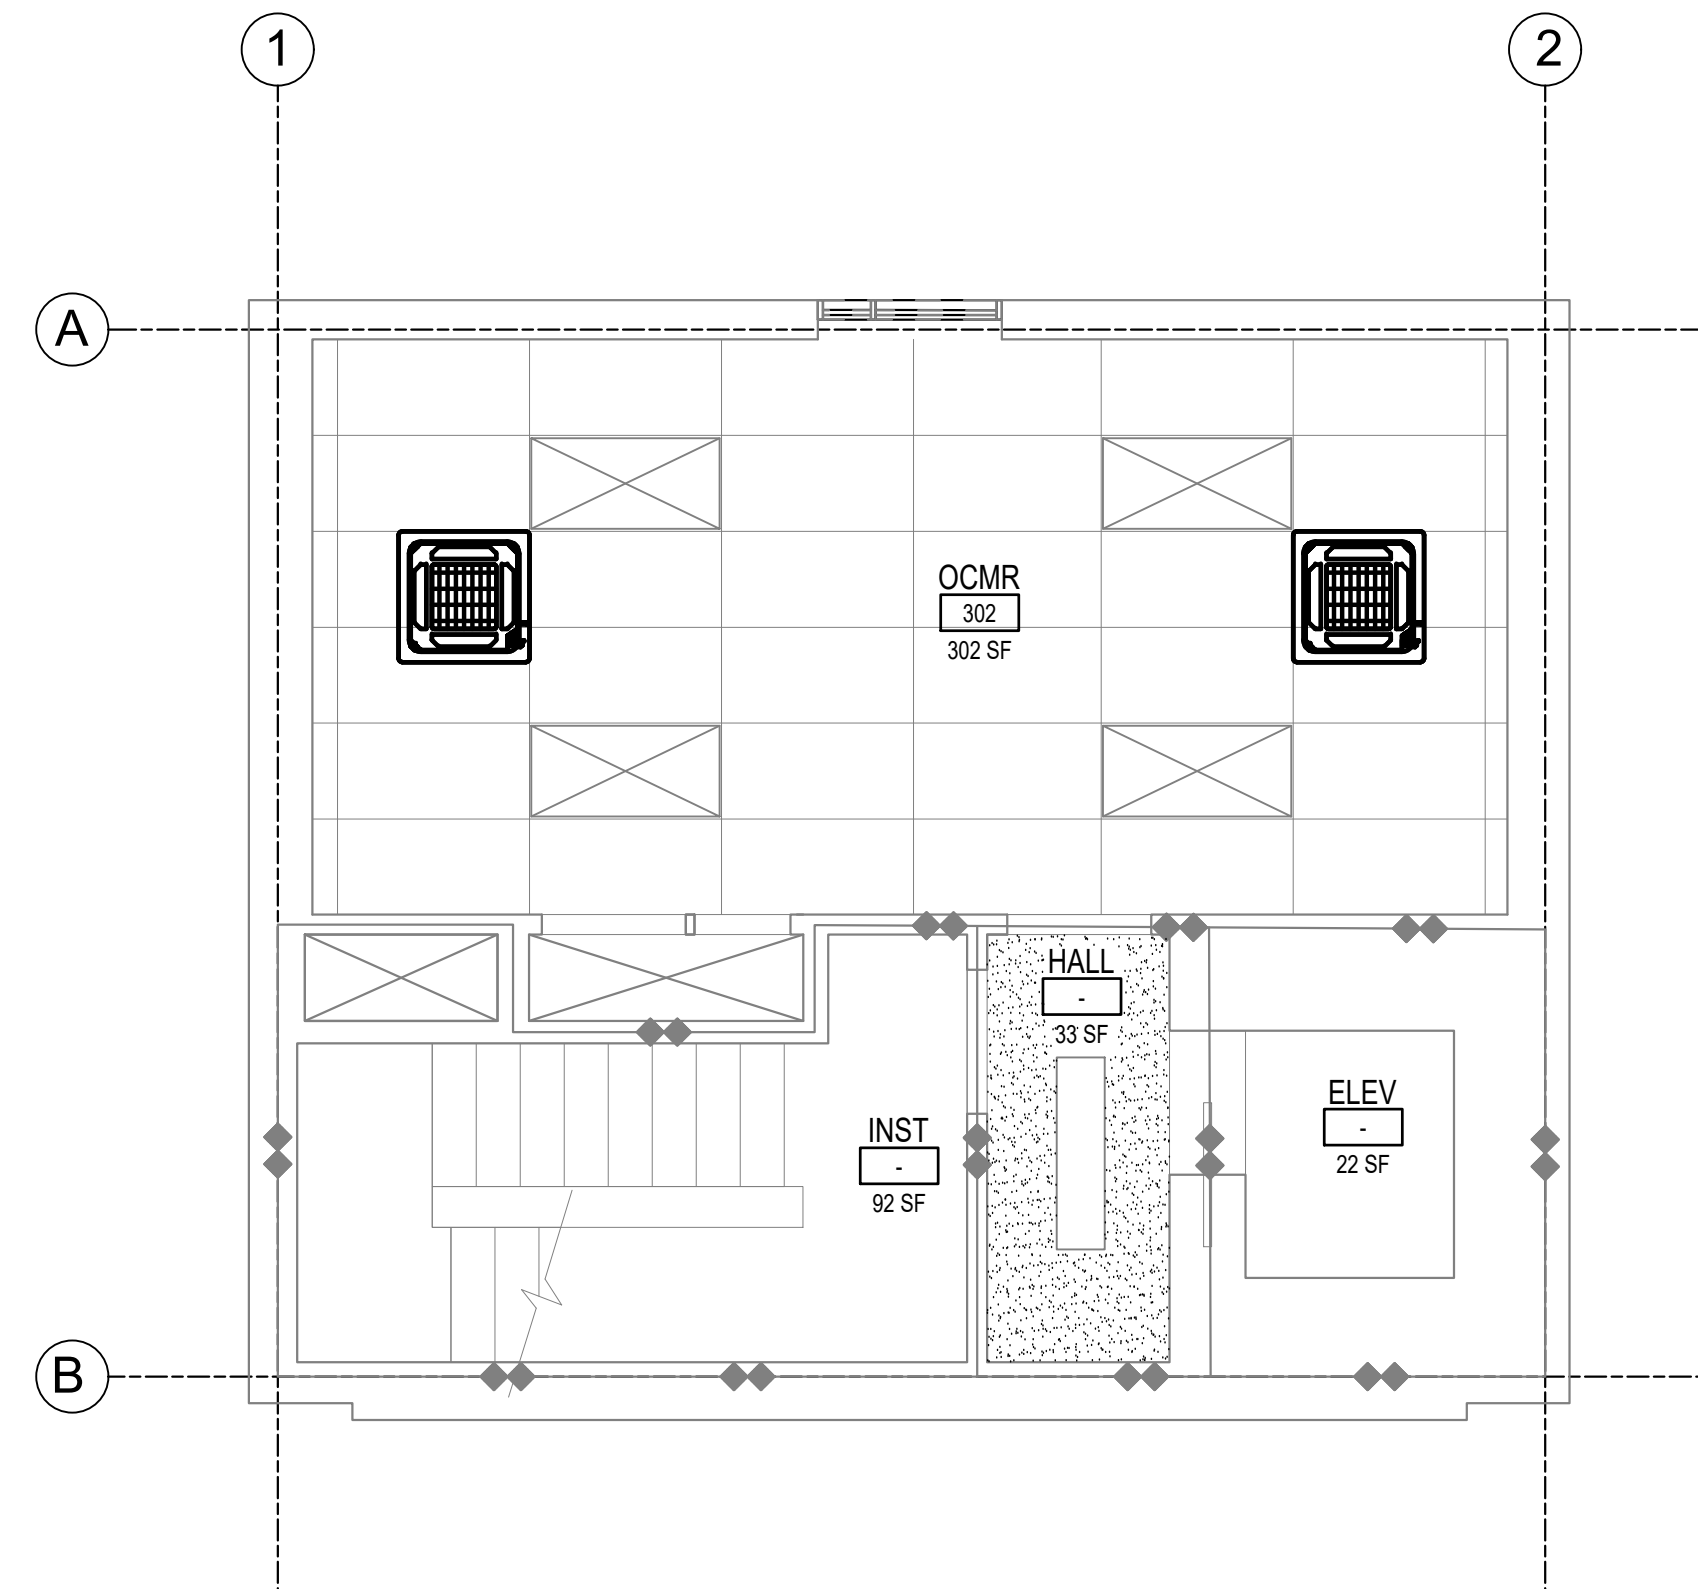

2 FLOOR 3 - RCP
1/4" = 1'-0"

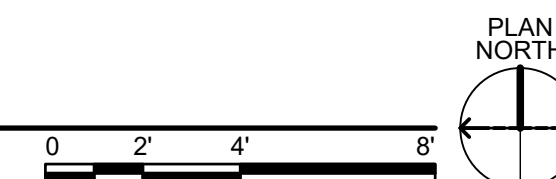


GENERAL SHEET NOTES

1. CONTRACTOR TO INSTALL NEW WINDOW WHERE EXISTING WINDOW WAS LOCATED.
2. PATCH AND REPAIR WALL TO MATCH EXISTING WHERE DISTURBED.
3. MATCH ALL EXISTING BLAST/SECURITY REQUIREMENTS FOR NEW WINDOW.
4. CONTRACTOR TO REINSTALL ANY SALVAGED WALL MOUNTED EQUIPMENT FOR REUSE.
5. CONTRACTOR TO INSTALL NEW CEILING TILES OR PATCH GYPSUM BOARD CEILINGS WHERE DISTURBED TO MATCH EXISTING CONDITIONS.
6. IF FLOOR OR RATED WALL PENETRATIONS CANNOT BE FIRE STOPPED AT THE END OF THE WORK SHIFT, TEMPORARY FIRE STOPPING COMPOSED OF MINERAL WOOL SHALL BE INSTALLED IN THE PENETRATION TO PROVIDE PROTECTION AGAINST FIRE/SMOKE SPREAD THROUGH THE UNSEALED PENETRATION.

 SHEET KEYNOTES

1. INSTALL NEW WINDOW AND SILL AT EXISTING OPENING. PATCH AND PAINT AROUND NEW WINDOWS, FINISHES TO MATCH EXISTING.
2. PATCH AND REPAIR WALL TO MATCH EXISTING WHERE ELECTRIC WALL HEATER WAS DEMOLISHED.
3. PATCH AND REPAIR WALL TO MATCH EXISTING WHERE WALL DIFFUSER AND GRILL WERE DEMOLISHED.
4. REINSTALL SALVAGED WINDOW BLINDS.

LEGEND

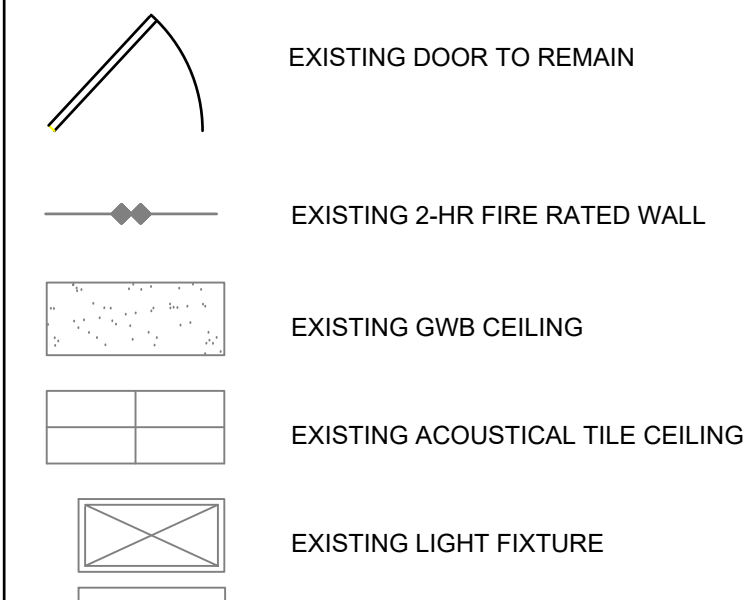

**US ARMY CORPS OF
ENGINEERS®
SEATTLE DISTRICT**



[illegible]

U.S. ARMY CORPS OF ENGINEERS SPECIAL DISTRICT SEATTLE, WASHINGTON	DESIGNED BY: M. KING	ISSUE DATE: 09/26/2025
SPEED DESIGN BUILD 27830 PACIFIC HWY S KENT, WA 98032 (206) 590-2118	DRAWN BY: J. HARRIS	SOLICITATION NO.: FA42022300002
	CHECKED BY: M. KING	CONTRACT NO.: FA42022300002
	SUBMITTED BY: R. SPEEDS	
	AS/CD: N/A	IJO: DEJ25502J

JOINT BASE LEWIS-MCCHORD, WASHINGTON
JBLM ATCT HVAC REPAIRS
DEJ225502J

FLOOR 3
FLOOR PLAN & RCP

SHEET ID
J00008
A-103

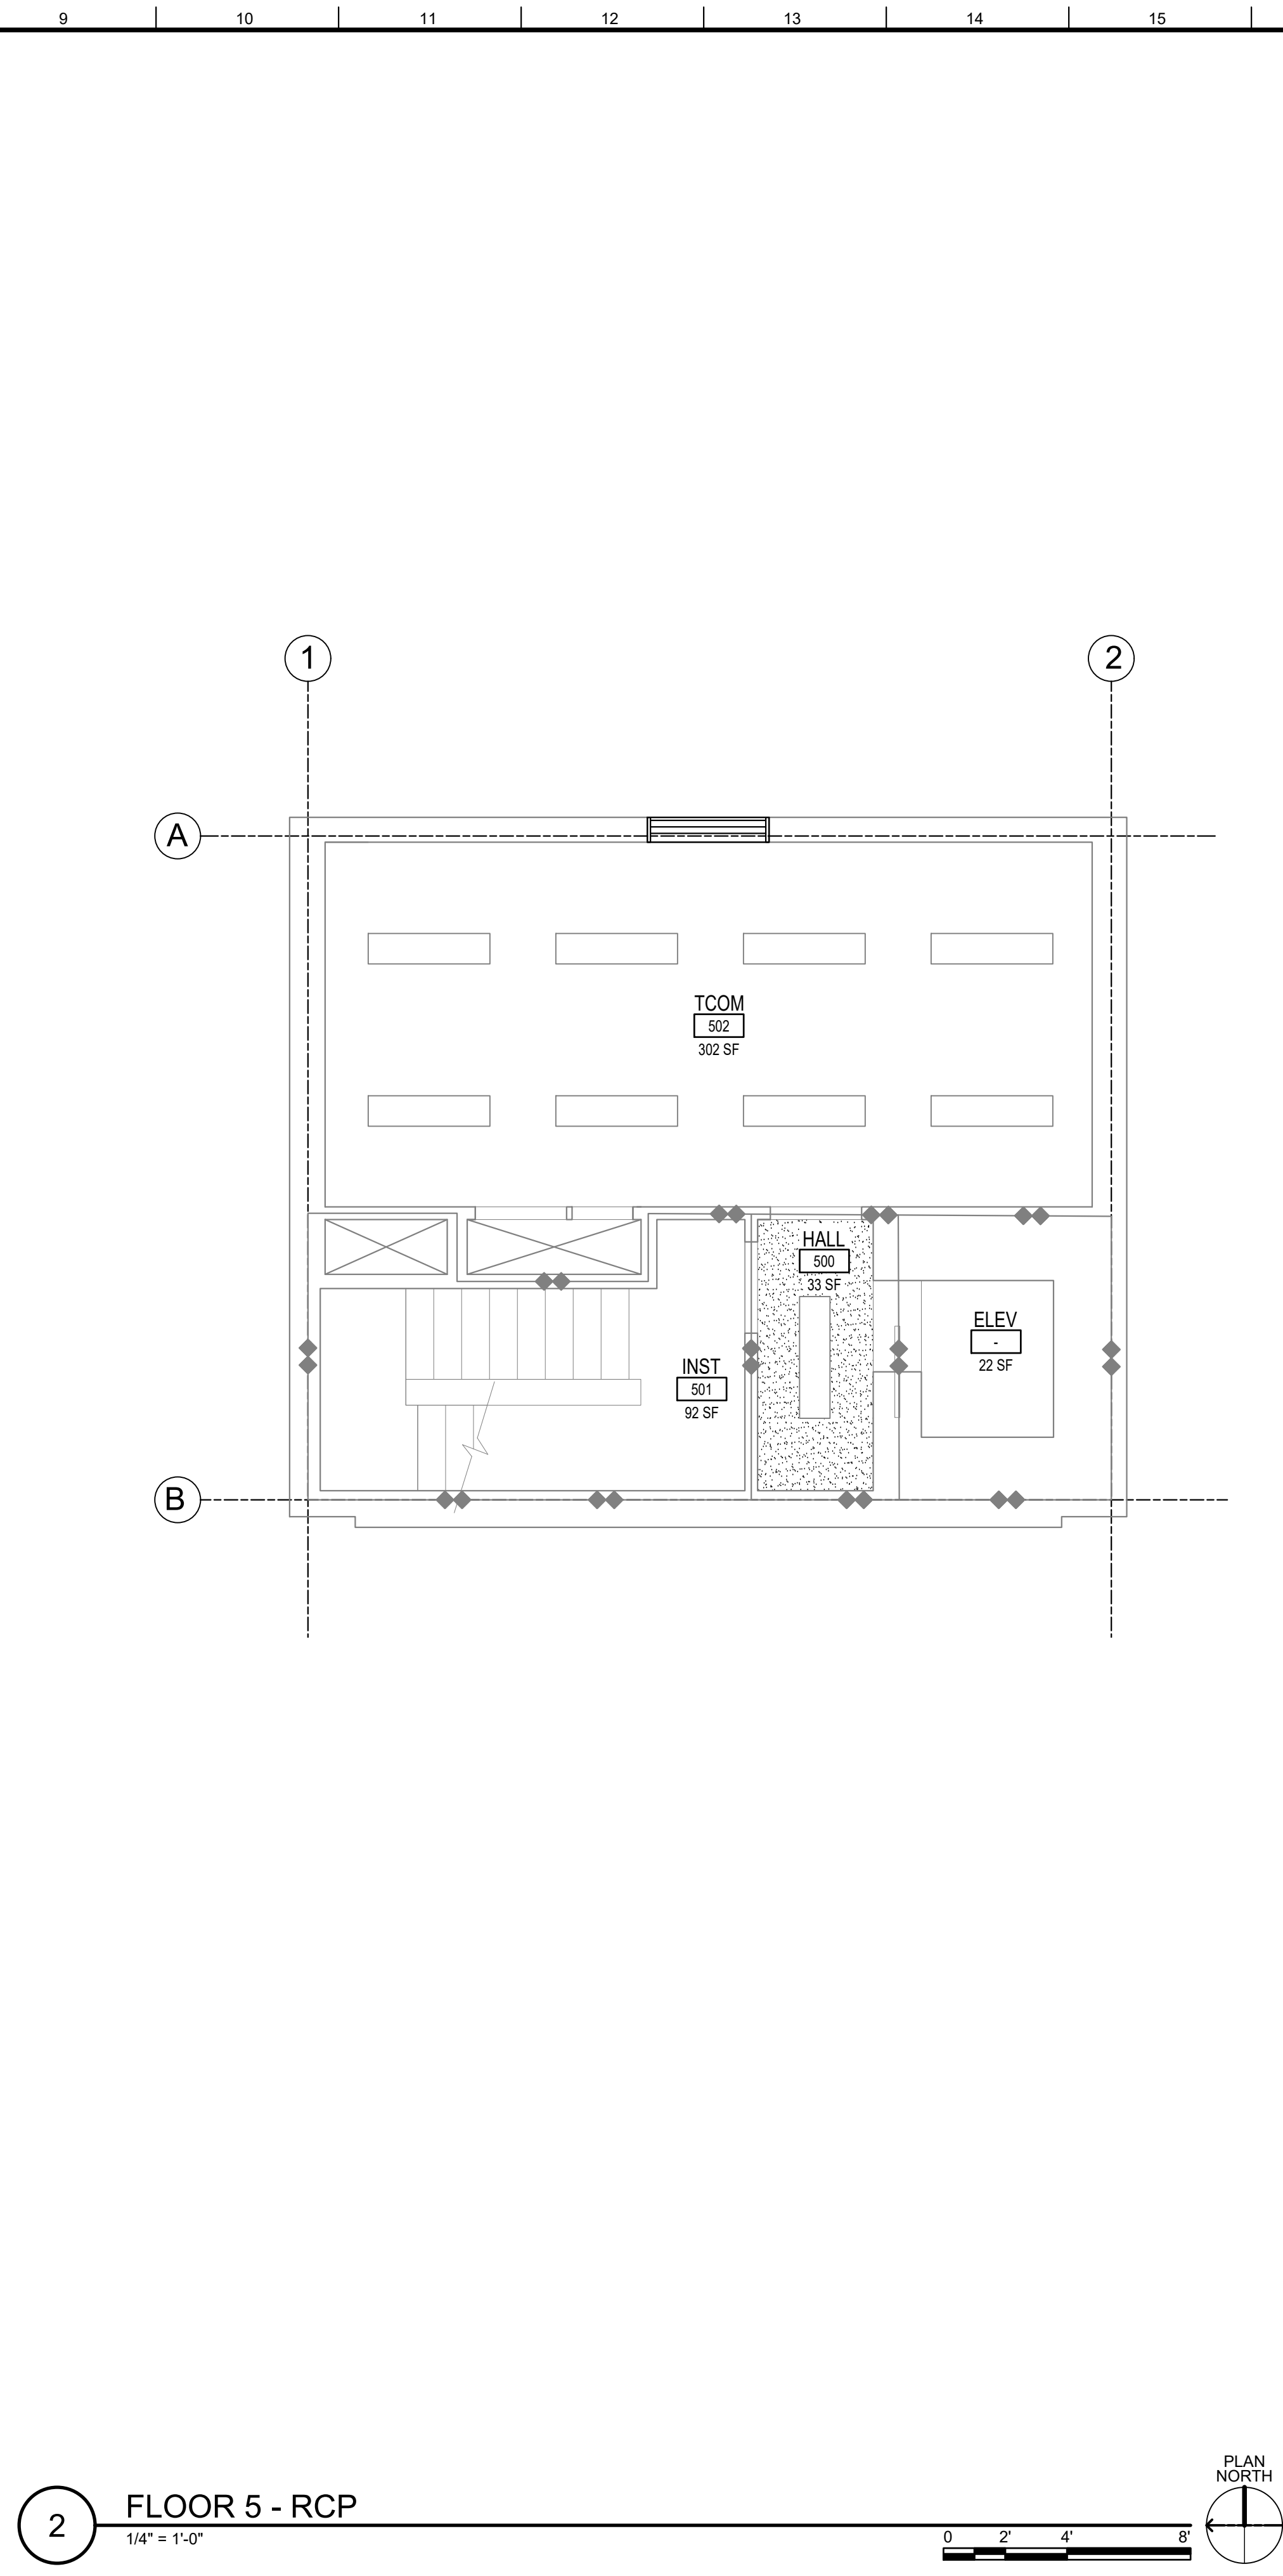
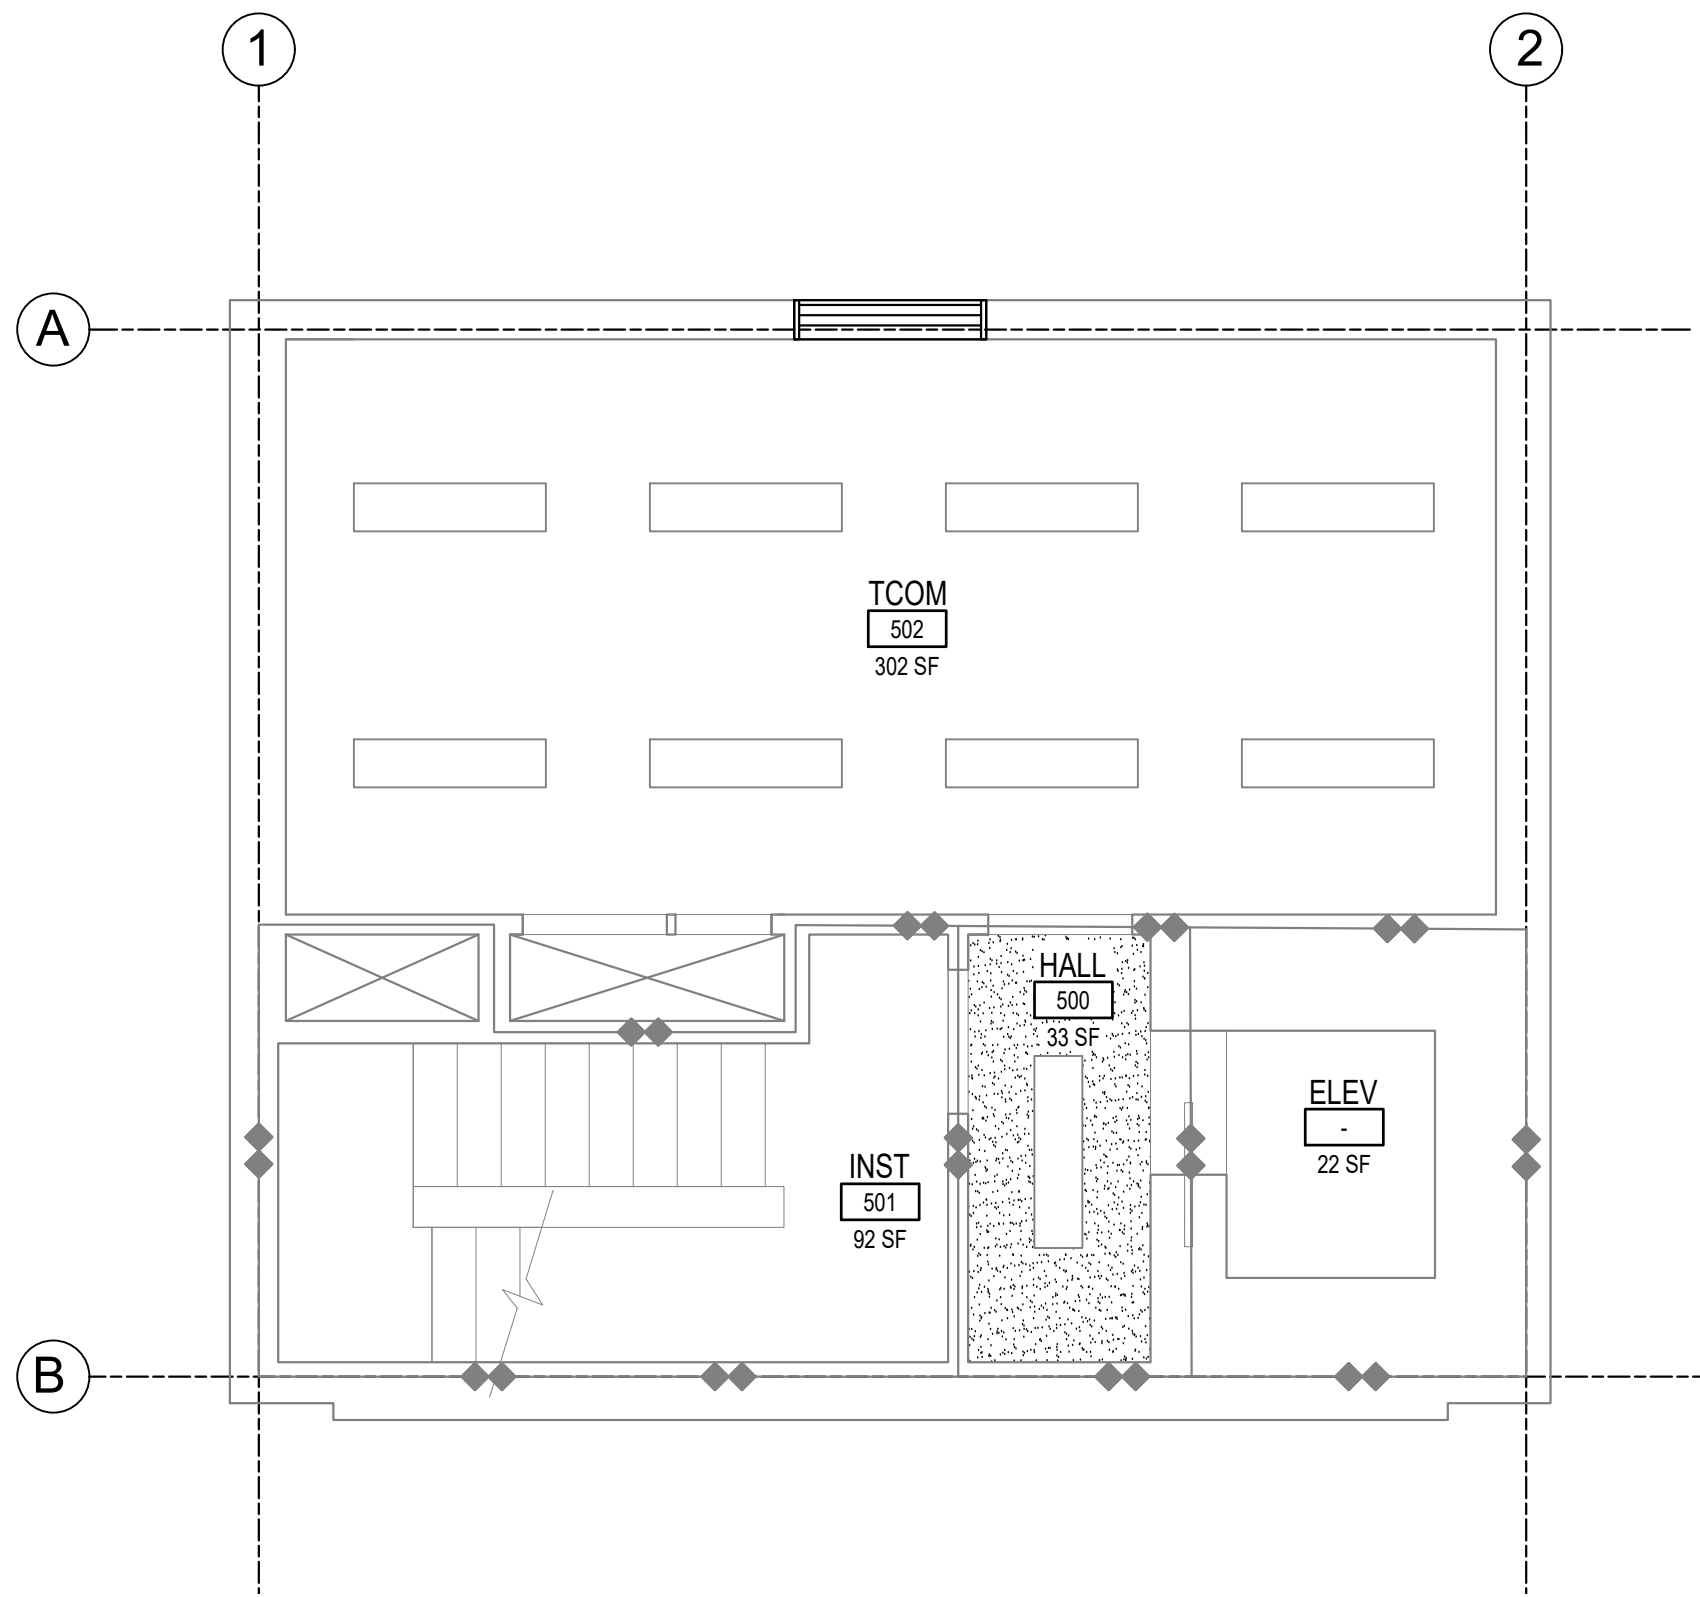




-
- EXISTING DOOR TO REMAIN
- EXISTING 2-HR FIRE RATED WALL
- EXISTING GWB CEILING
- EXISTING ACOUSTICAL TILE CEILING
- EXISTING LIGHT FIXTURE



SHEET ID
J00008
A-105

100% ELECTRONIC BID SET

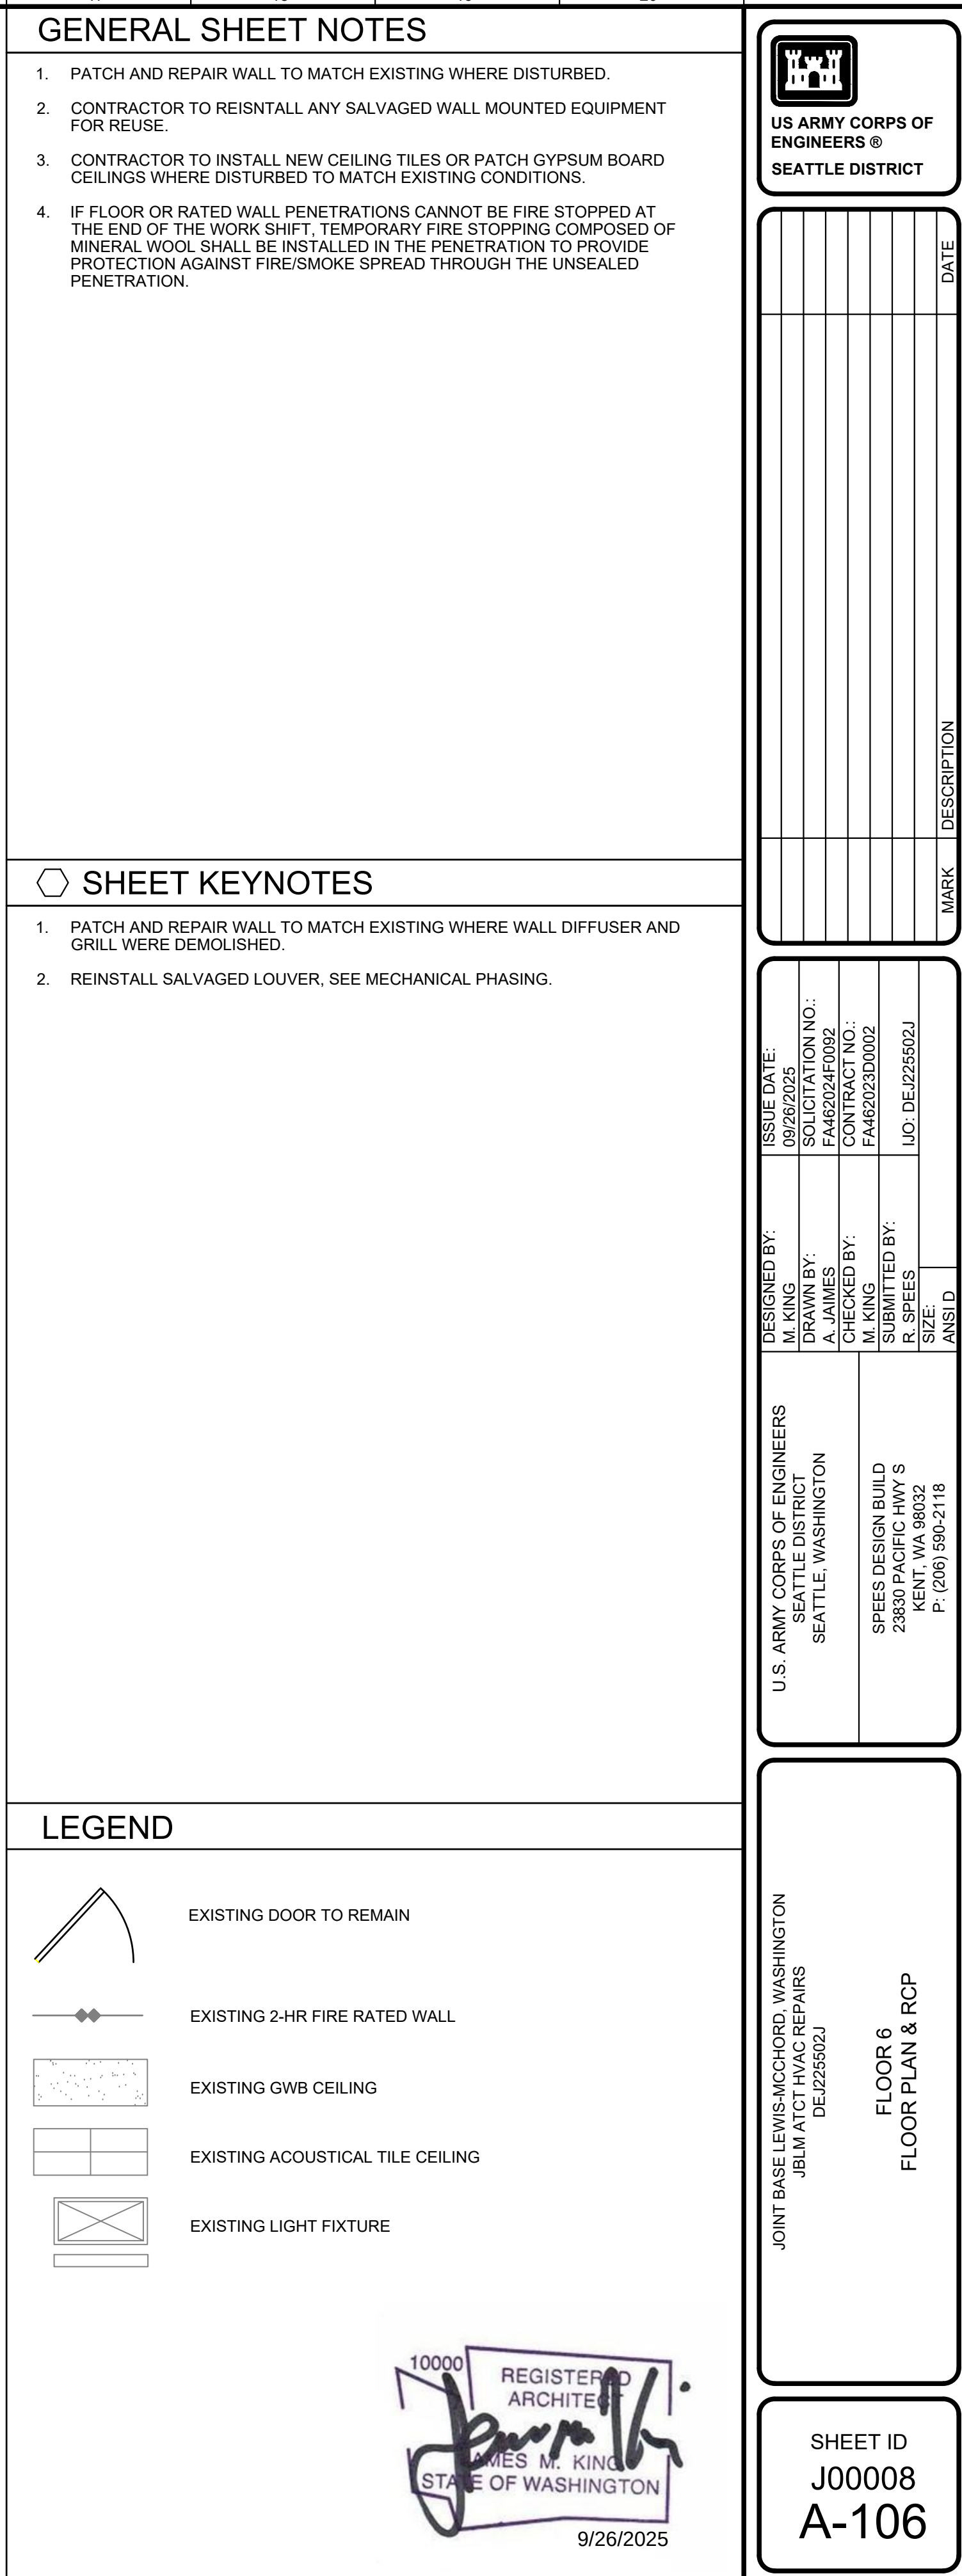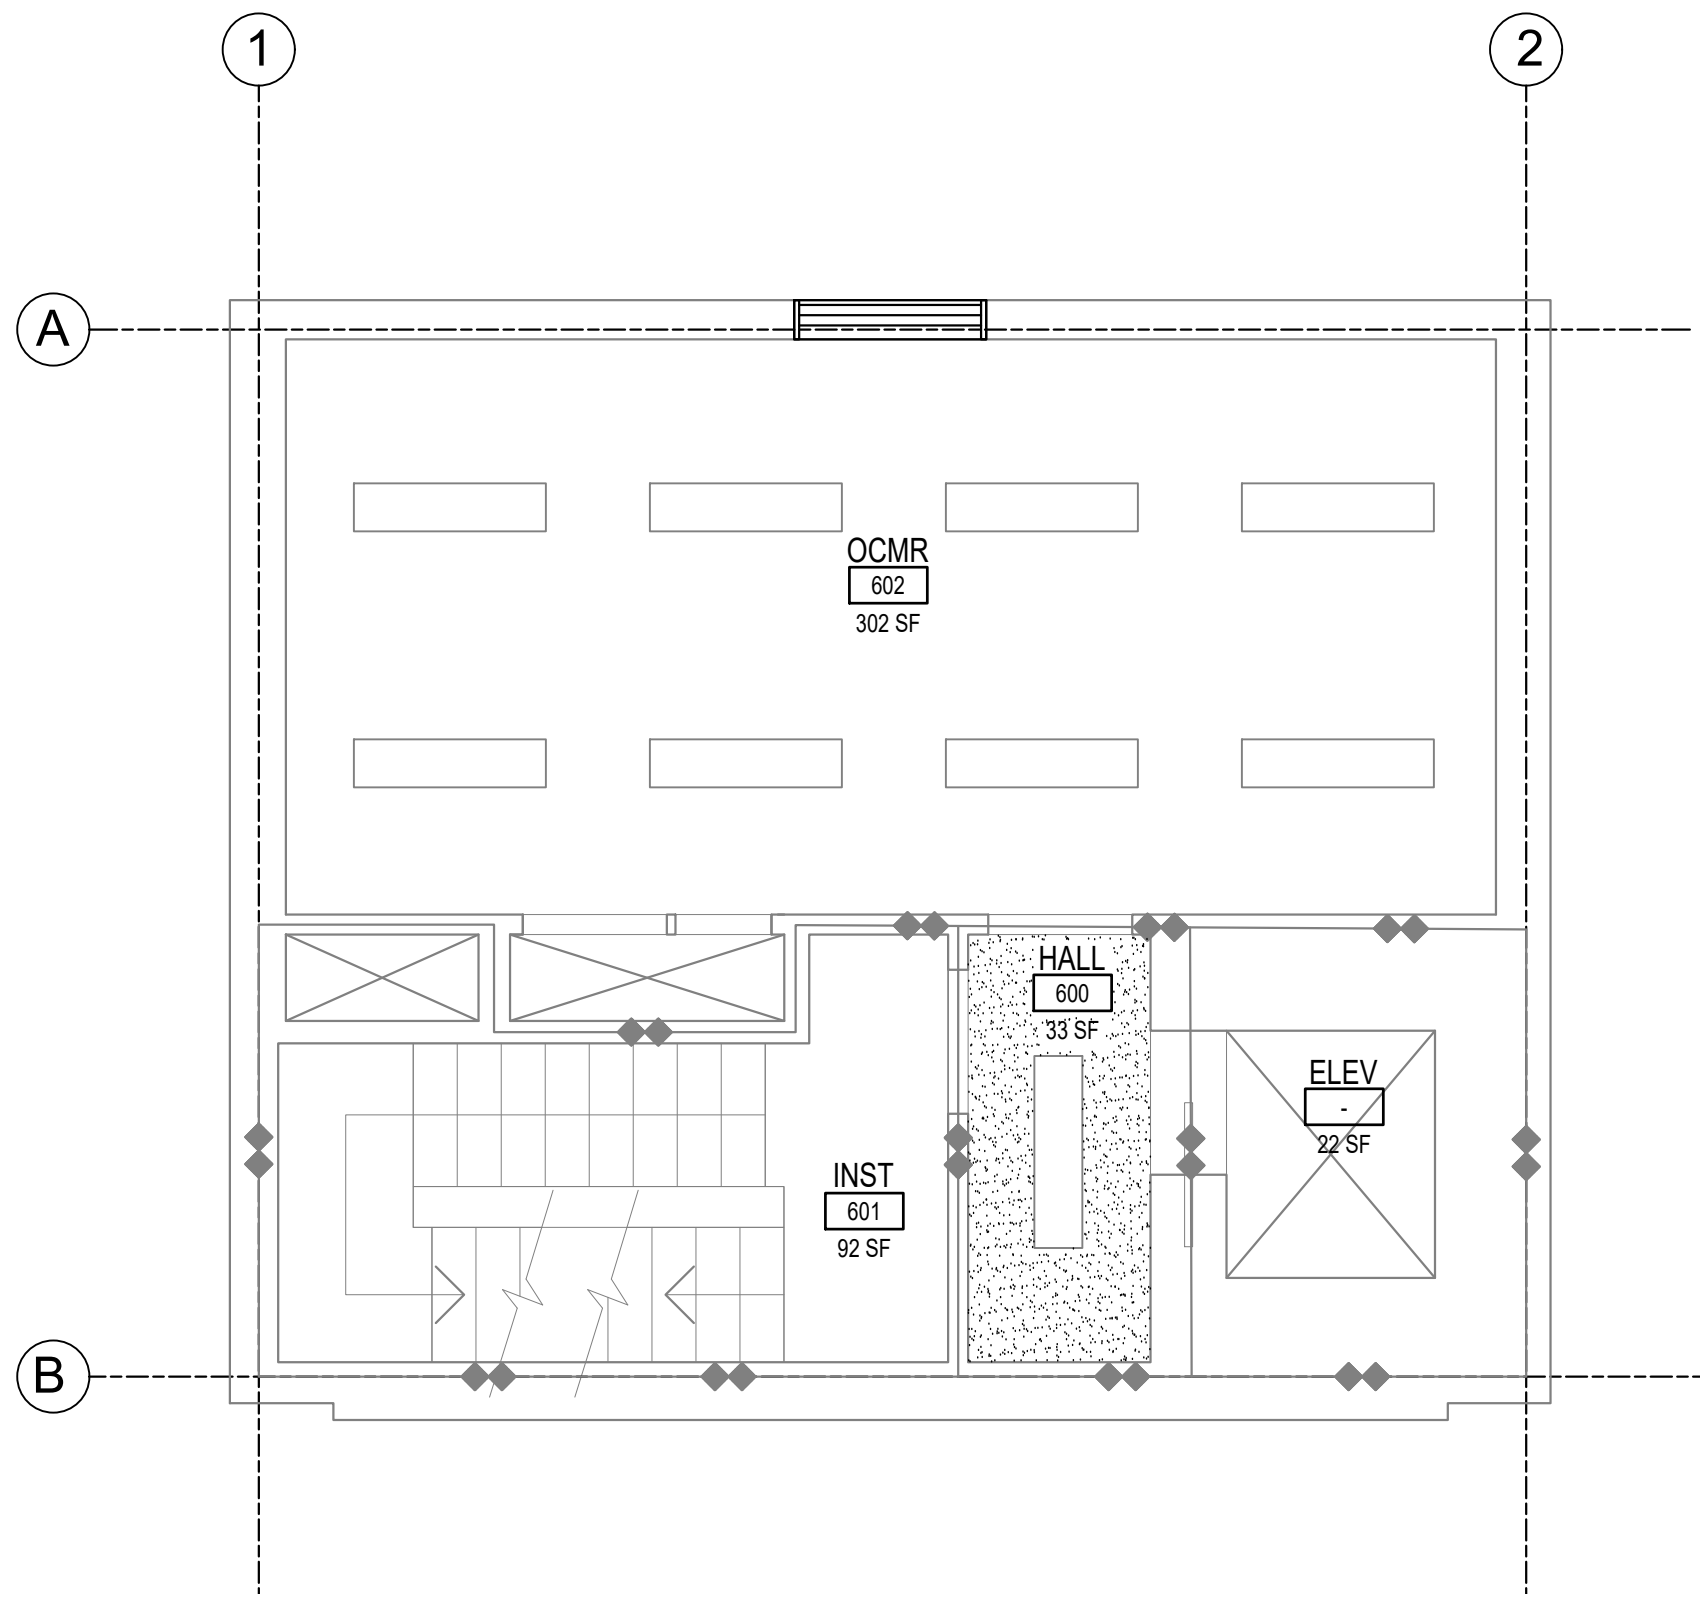

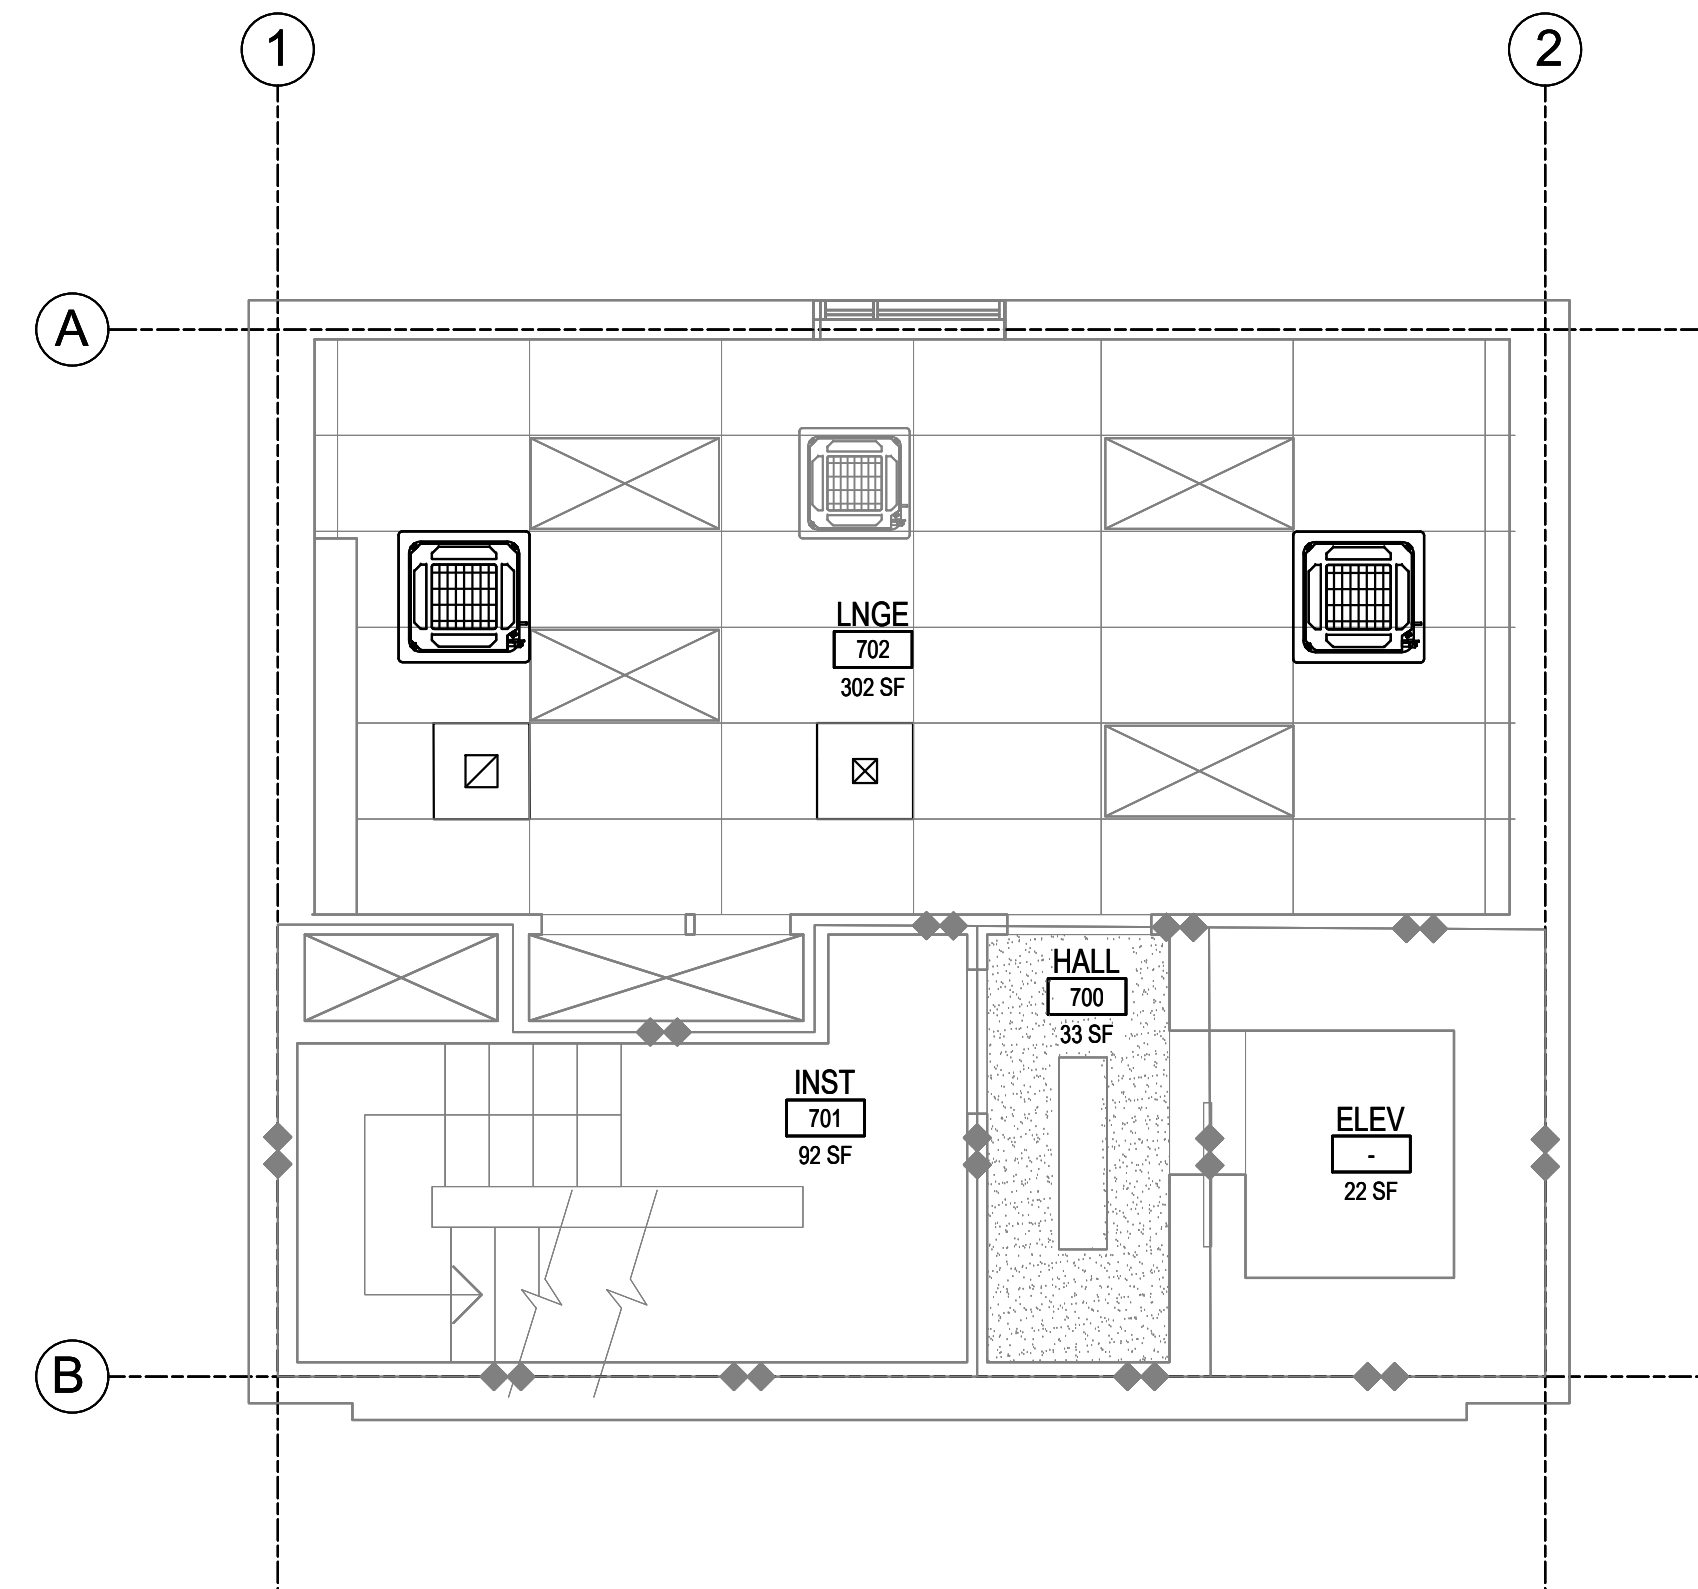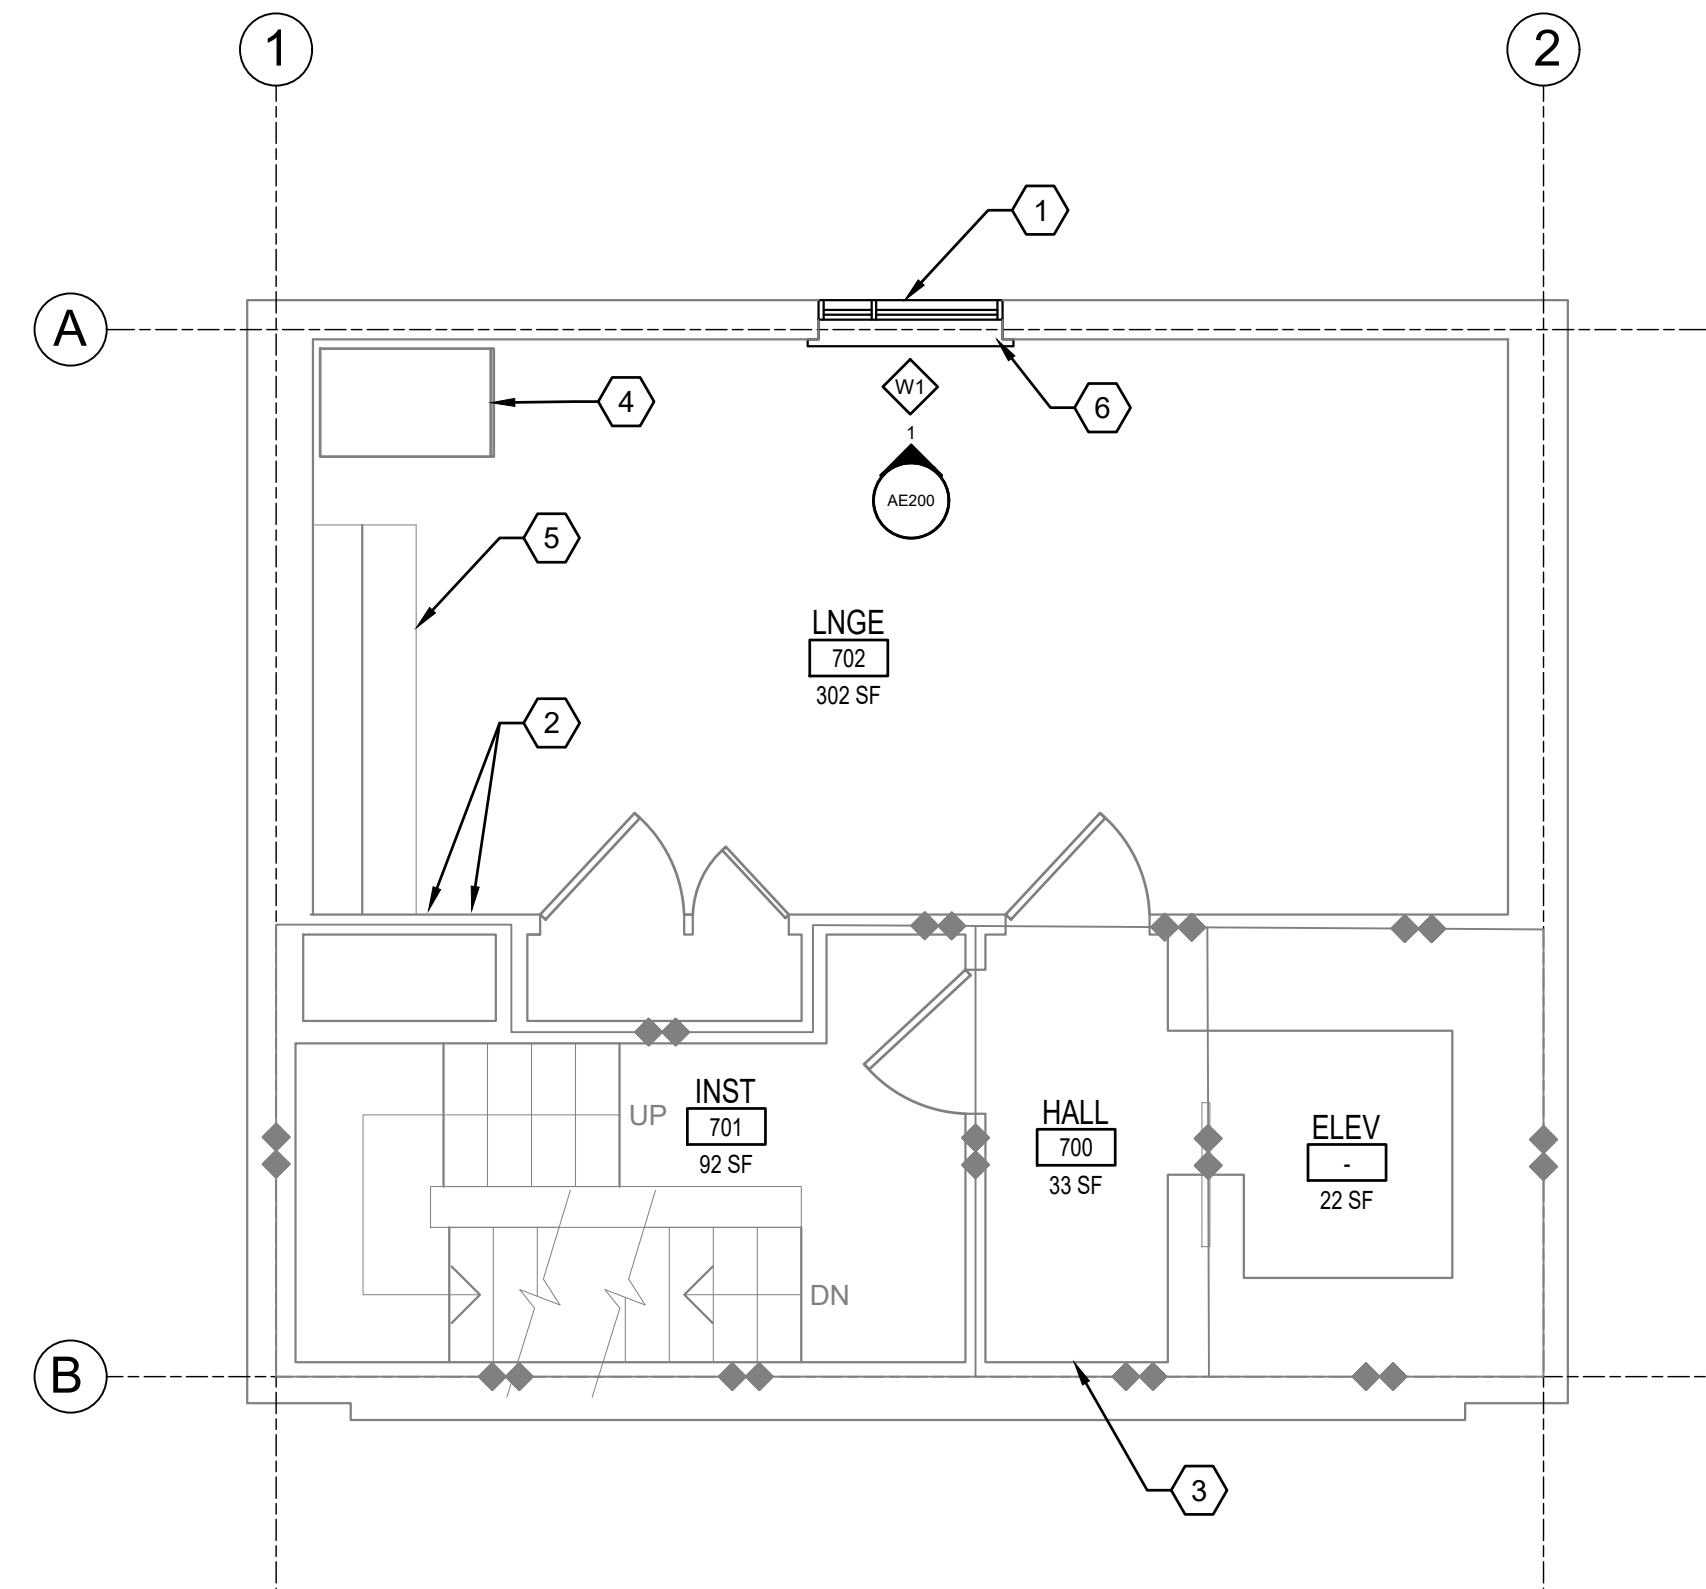


GENERAL SHEET NOTES	
---------------------	--

1. CONTRACTOR TO INSTALL NEW WINDOW WHERE EXISTING WINDOW WAS LOCATED.
2. PATCH AND REPAIR WALL TO MATCH EXISTING WHERE DISTURBED.
3. MATCH ALL EXISTING BLAST/SECURITY REQUIREMENTS FOR NEW WINDOW.
4. CONTRACTOR TO REINSTALL ANY SALVAGED WALL MOUNTED EQUIPMENT FOR REUSE.
5. CONTRACTOR TO INSTALL NEW CEILING TILES OR PATCH GYPSUM BOARD CEILINGS WHERE DISTURBED TO MATCH EXISTING CONDITIONS.
6. IF FLOOR OR RATED WALL PENETRATIONS CANNOT BE FIRE STOPPED AT THE END OF THE WORK SHIFT, TEMPORARY FIRE STOPPING COMPOSED OF MINERAL WOOL SHALL BE INSTALLED IN THE PENETRATION TO PROVIDE PROTECTION AGAINST FIRE/SMOKE SPREAD THROUGH THE UNSEALED PENETRATION.

 SHEET KEYNOTES

1. INSTALL NEW WINDOW AND SILL AT EXISTING OPENING. PATCH AND PAINT AROUND NEW WINDOWS. FINISHES TO MATCH EXISTING.
2. PATCH AND REPAIR WALL TO MATCH EXISTING WHERE ELECTRIC WALL HEATER WAS DEMOLISHED.
3. PATCH AND REPAIR WALL TO MATCH EXISTING WHERE WALL DIFFUSER AND GRILL WERE DEMOLISHED.
4. EXISTING REFRIGERATOR TO REMAIN.
5. EXISTING COUNTERTOP AND CASEWORK TO REMAIN.
6. REINSTALL SALVAGED WINDOW BLINDS.

LEGEND

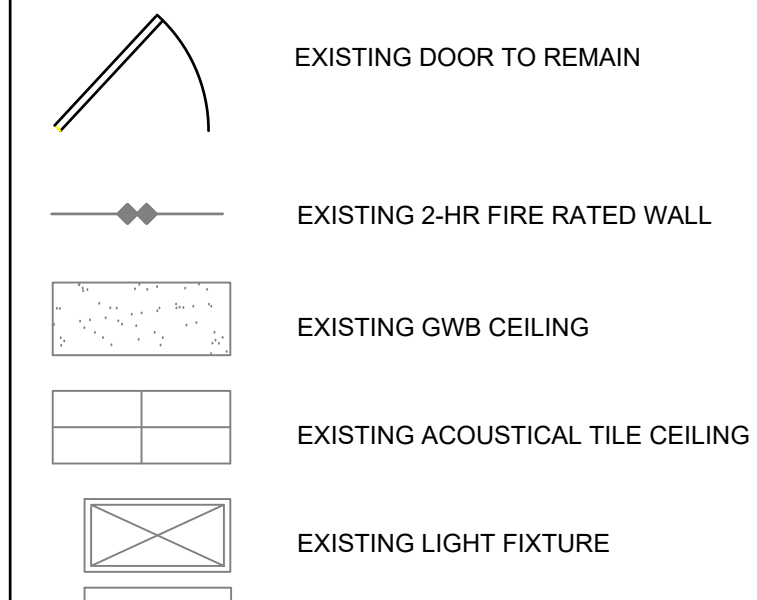

U.S. ARMY CORPS OF
ENGINEERS®
SEATTLE DISTRICT

[illegible]



SPECS DESIGN BUILD 2000 1ST AVENUE, S SEATTLE, WA 98102 P: (206) 590-2118	M. KING 09/25/2025	
	DATE: 09/25/2025 DRAWN BY: J. JAMES F44020240002	
	CHECKED BY: M. KING F4402023D0002	CONTRACT NO: F4402023D0002
	SUBMITTED BY: R. SPEES	I.UO: DEJ225502J
	SIZE: A	ANSID

JBLM ATCT HVAC REPAIRS
DEJ225502J

FLOOR PLAN & RCP

SHEET ID
J00008
A-107

100% ELECTRONIC BID SET

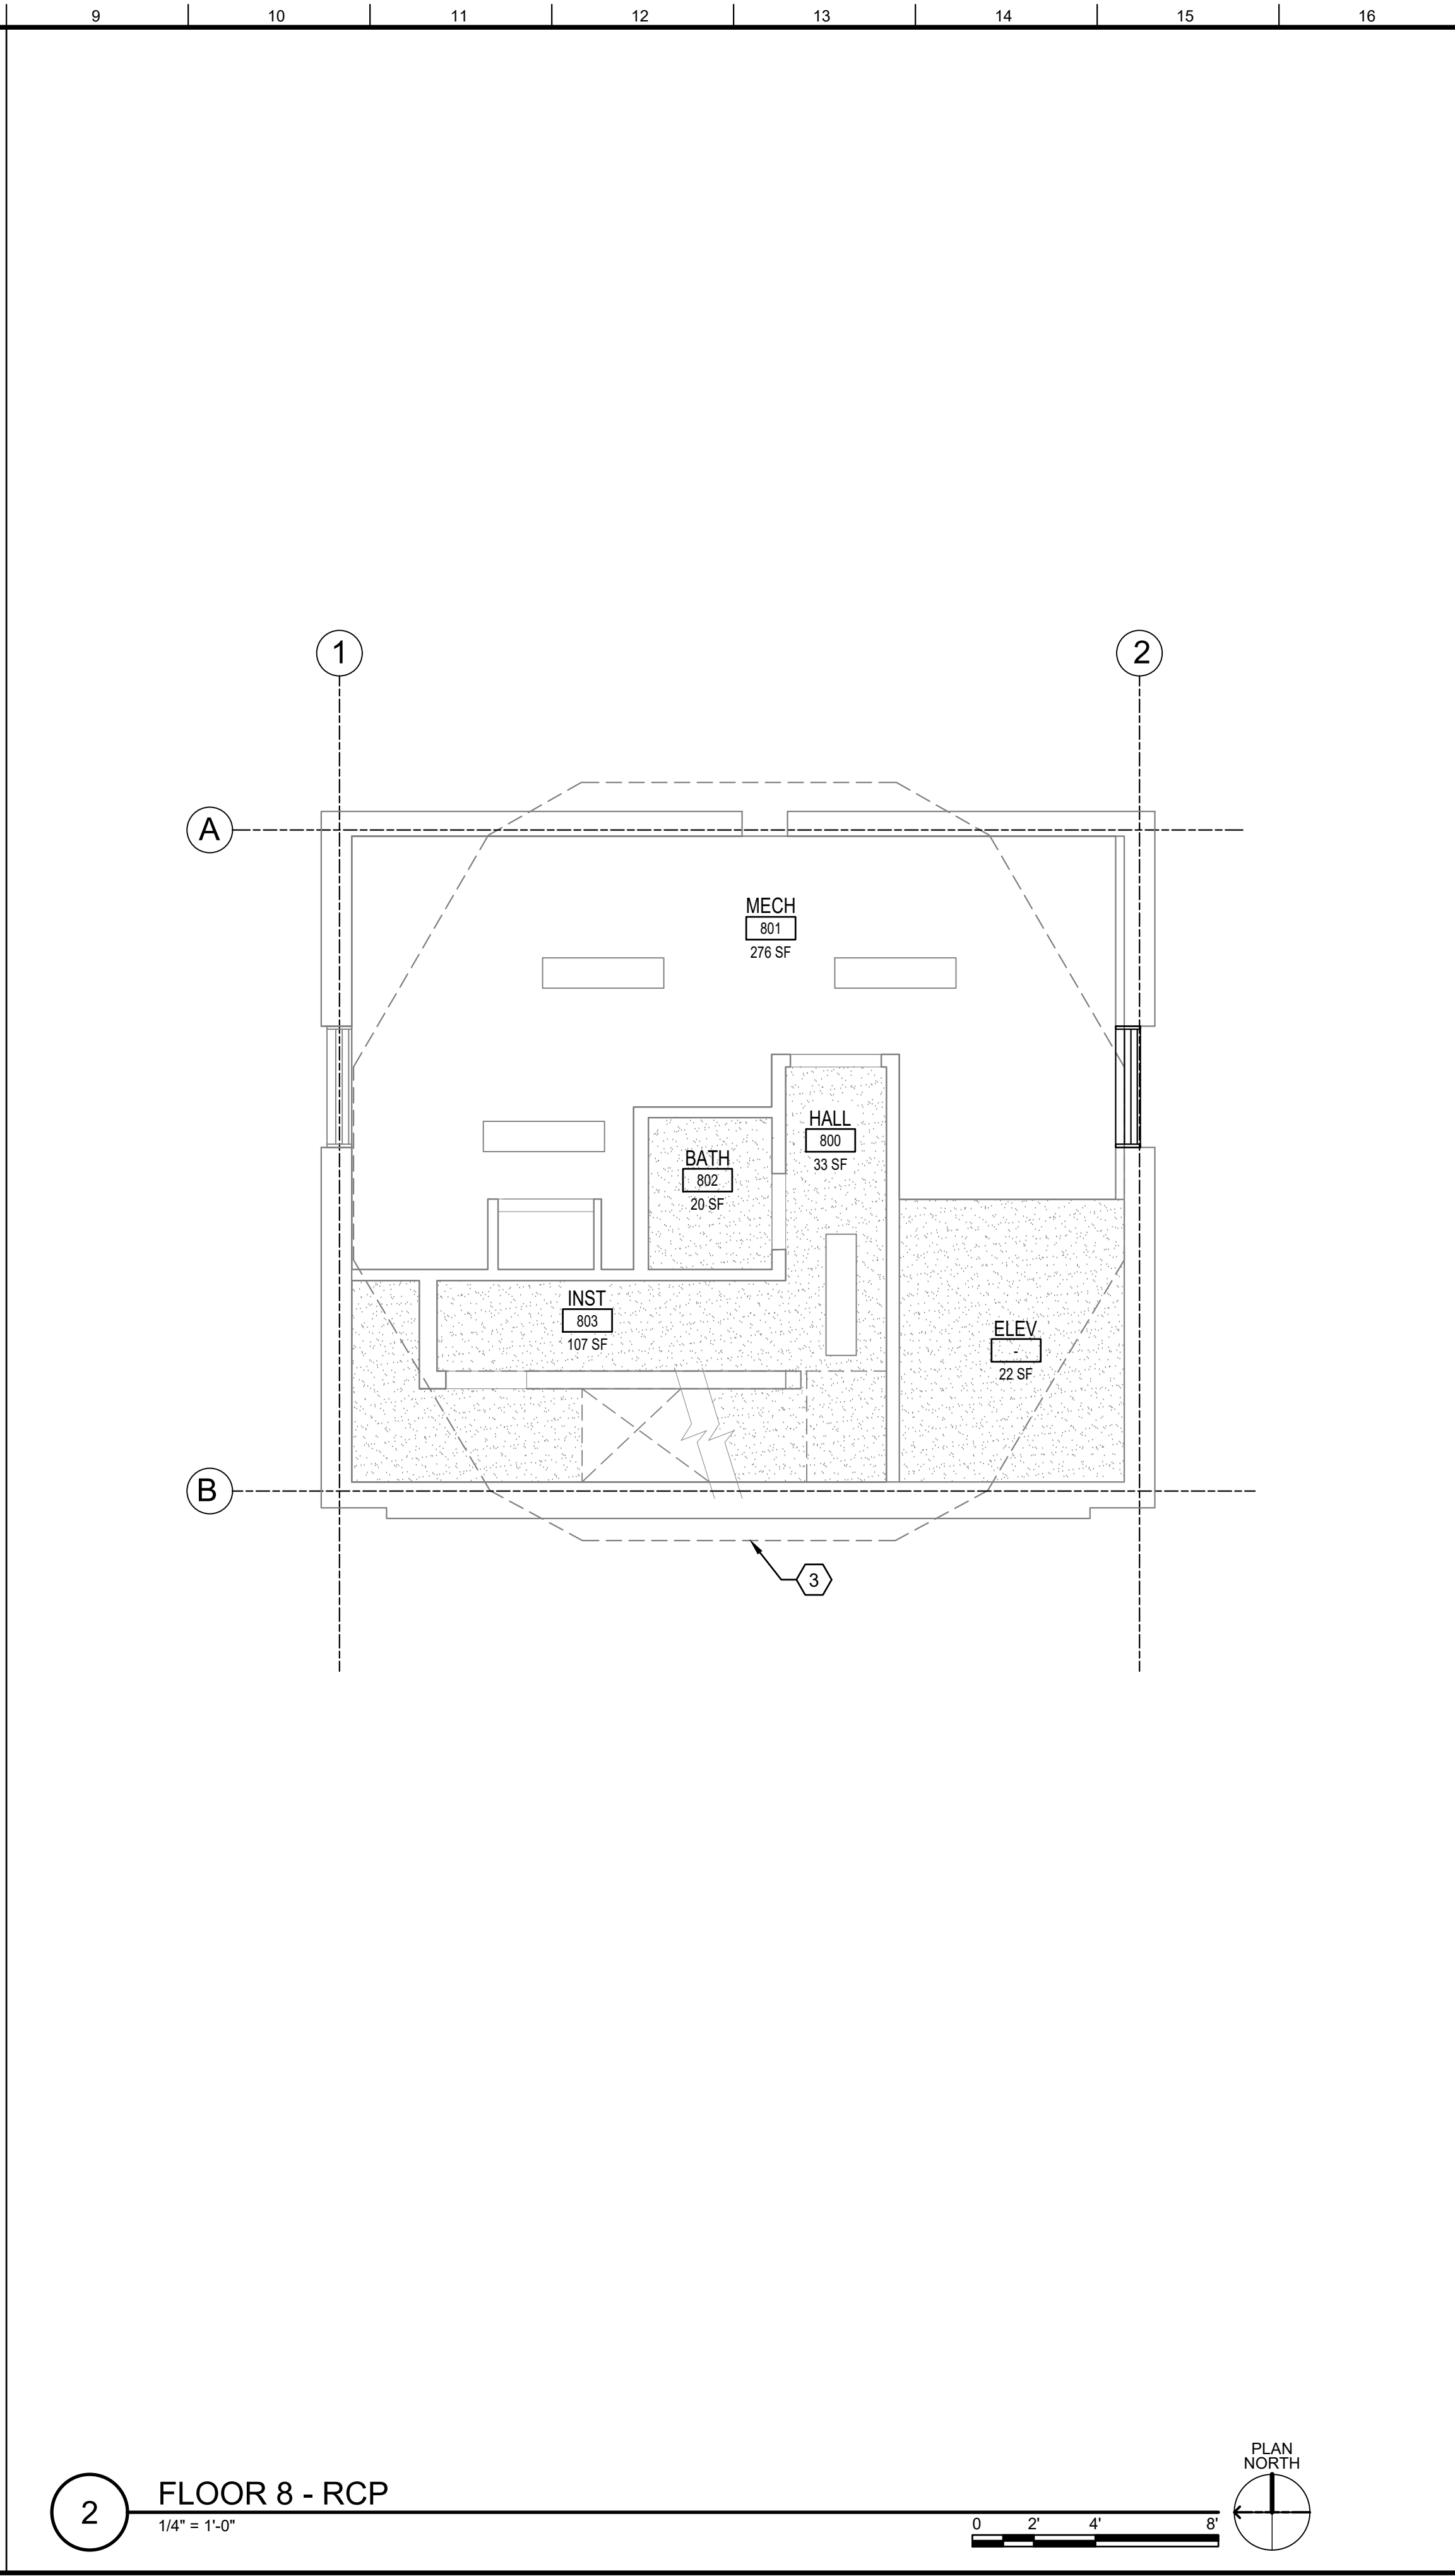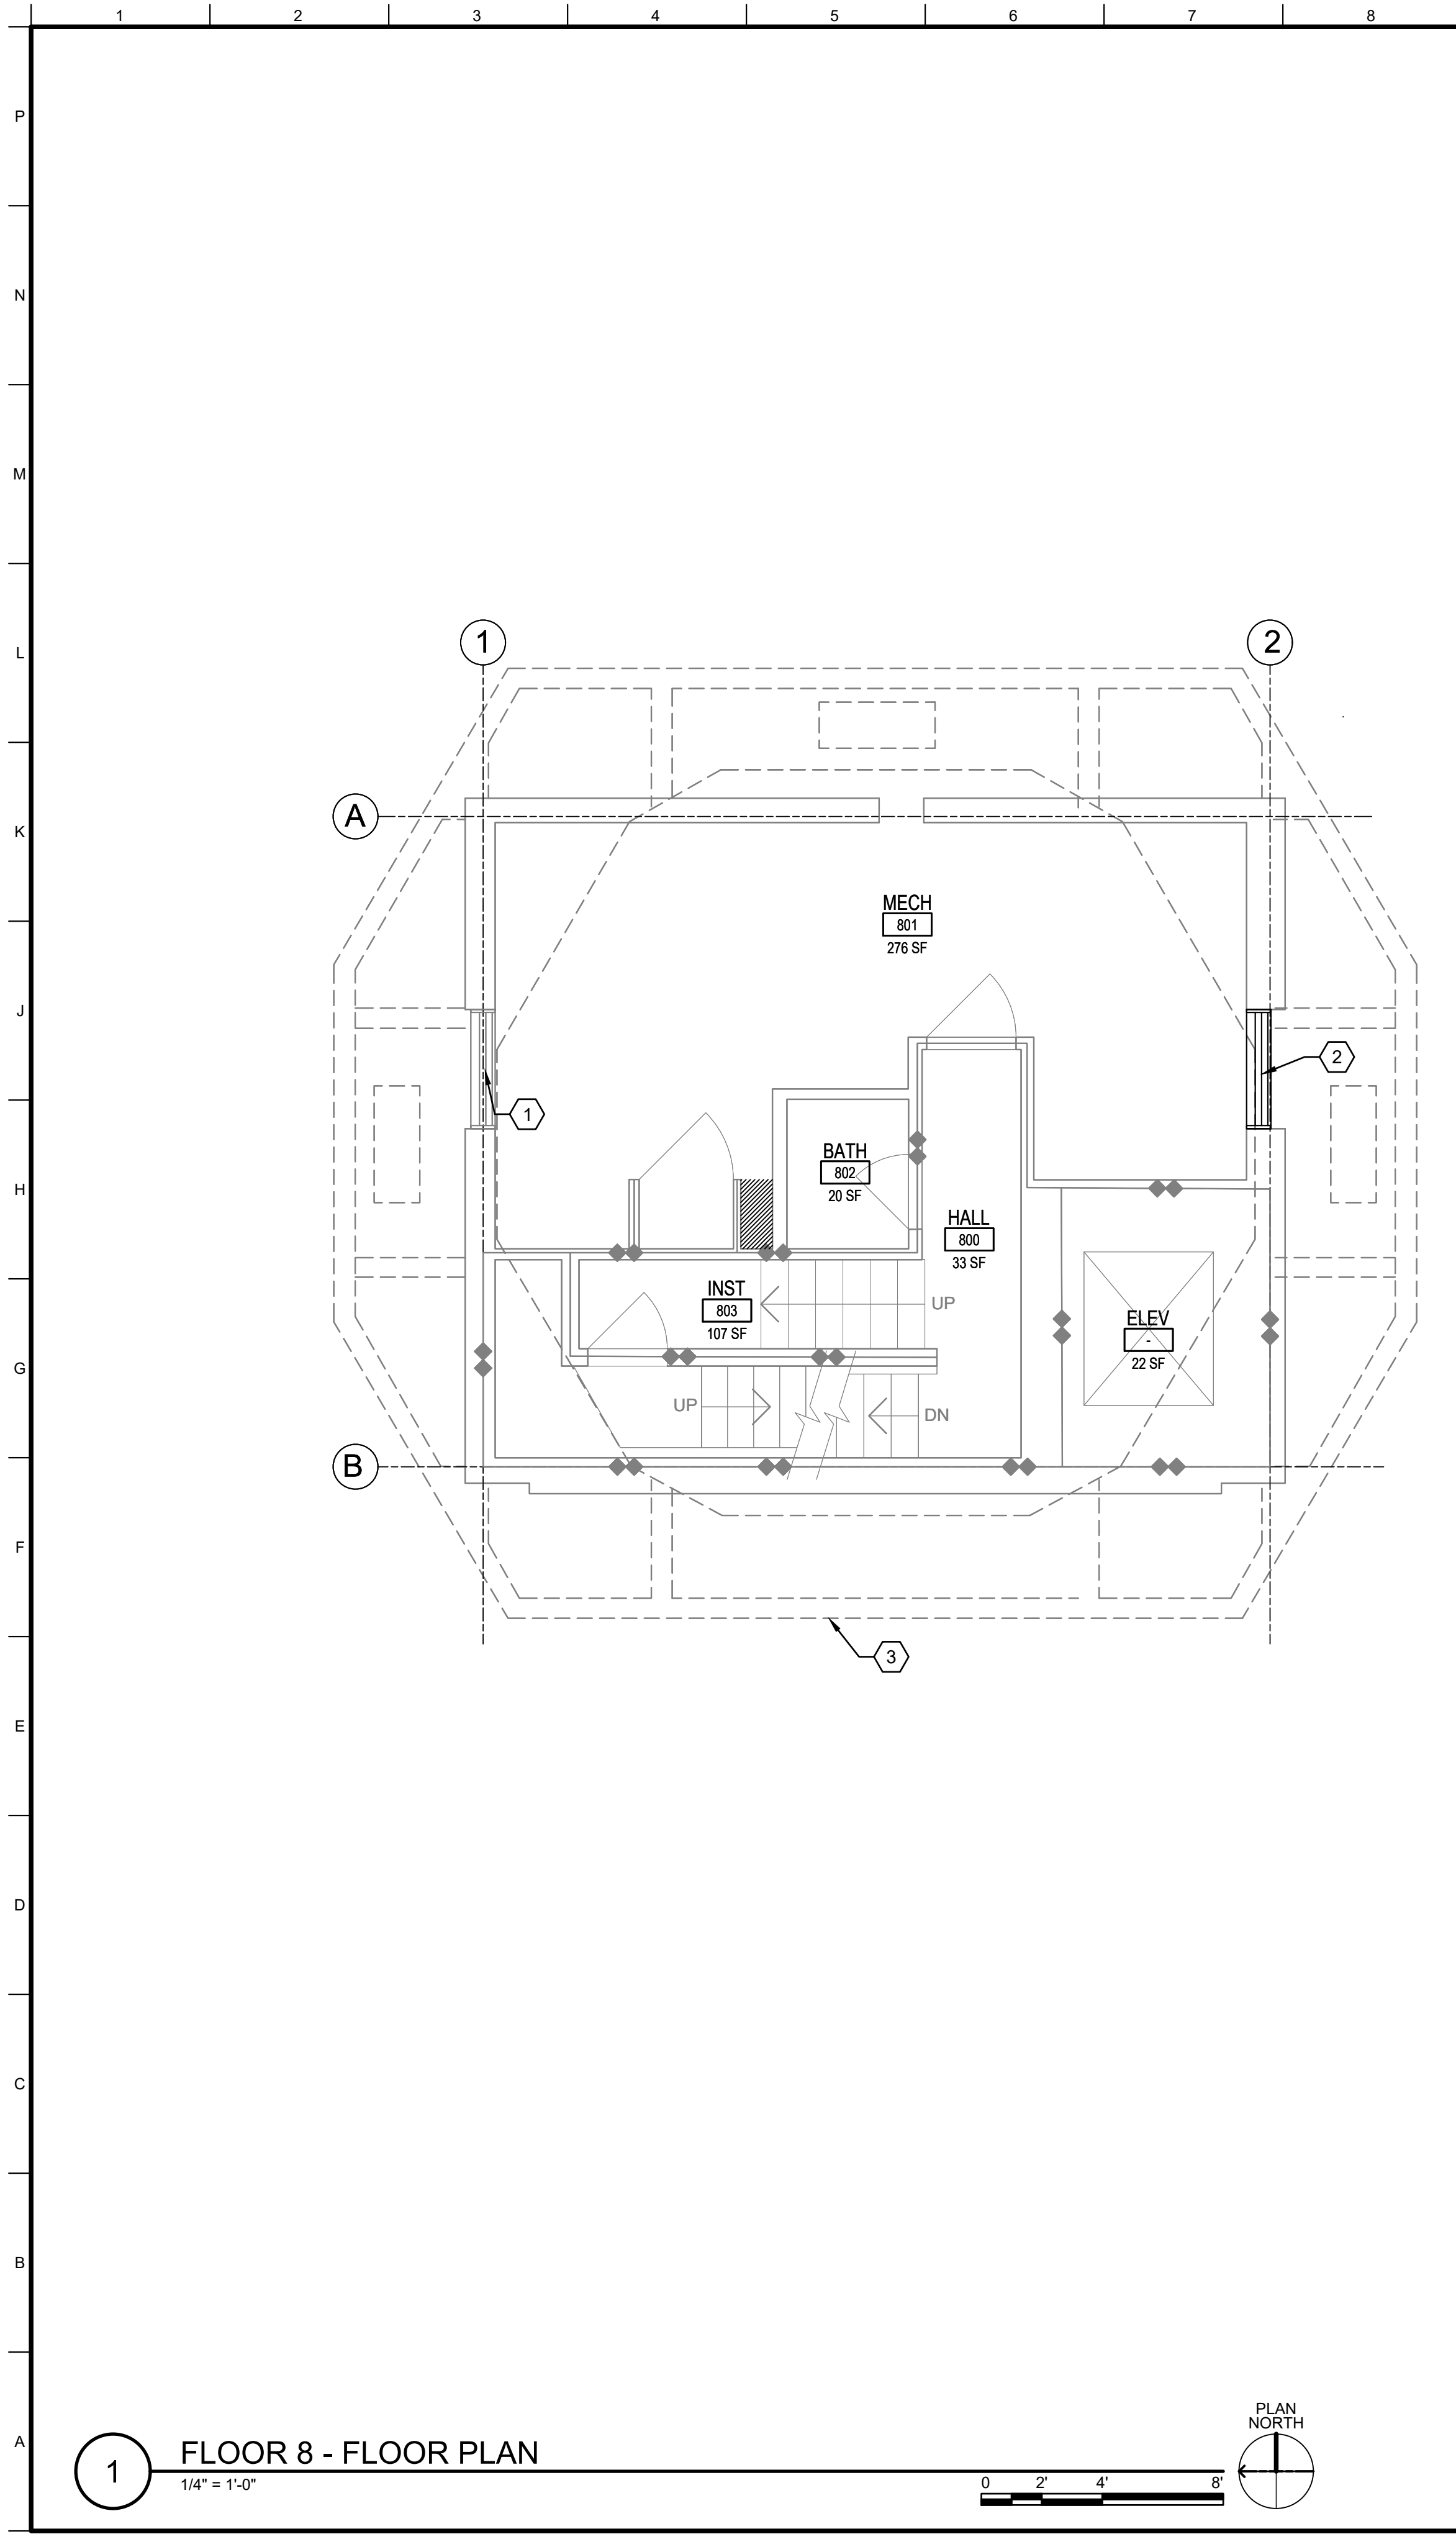

1. PATCH AND REPAIR WALL TO MATCH EXISTING WHERE DISTURBED.
2. CONTRACTOR TO REISNTALL ANY SALVAGED WALL MOUNTED EQUIPMENT FOR REUSE.
3. CONTRACTOR TO INSTALL NEW CEILING TILES OR PATCH GYPSUM BOARD CEILINGS WHERE DISTURBED TO MATCH EXISTING CONDITIONS.
4. IF FLOOR OR RATED WALL PENETRATIONS CANNOT BE FIRE STOPPED AT THE END OF THE WORK SHIFT, TEMPORARY FIRE STOPPING COMPOSED OF MINERAL WOOL SHALL BE INSTALLED IN THE PENETRATION TO PROVIDE PROTECTION AGAINST FIRE/SMOKE SPREAD THROUGH THE UNSEALED PENETRATION.

- 

EXISTING DOOR TO REMAIN

EXISTING 2-HR FIRE RATED WALL


EXISTING GWB CEILING


EXISTING ACOUSTICAL TILE CEILING


EXISTING LIGHT FIXTURE

10000

REGISTERED ARCHITECT

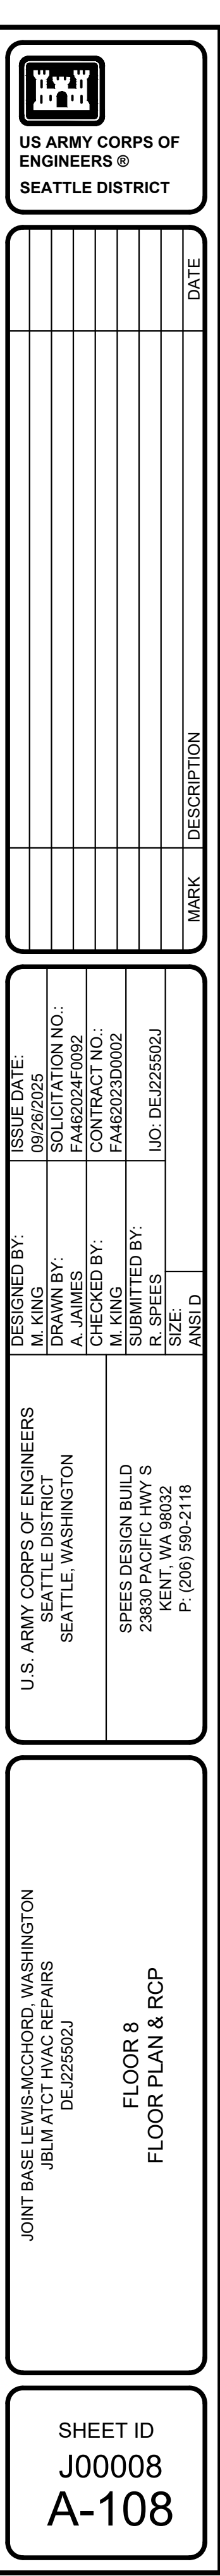

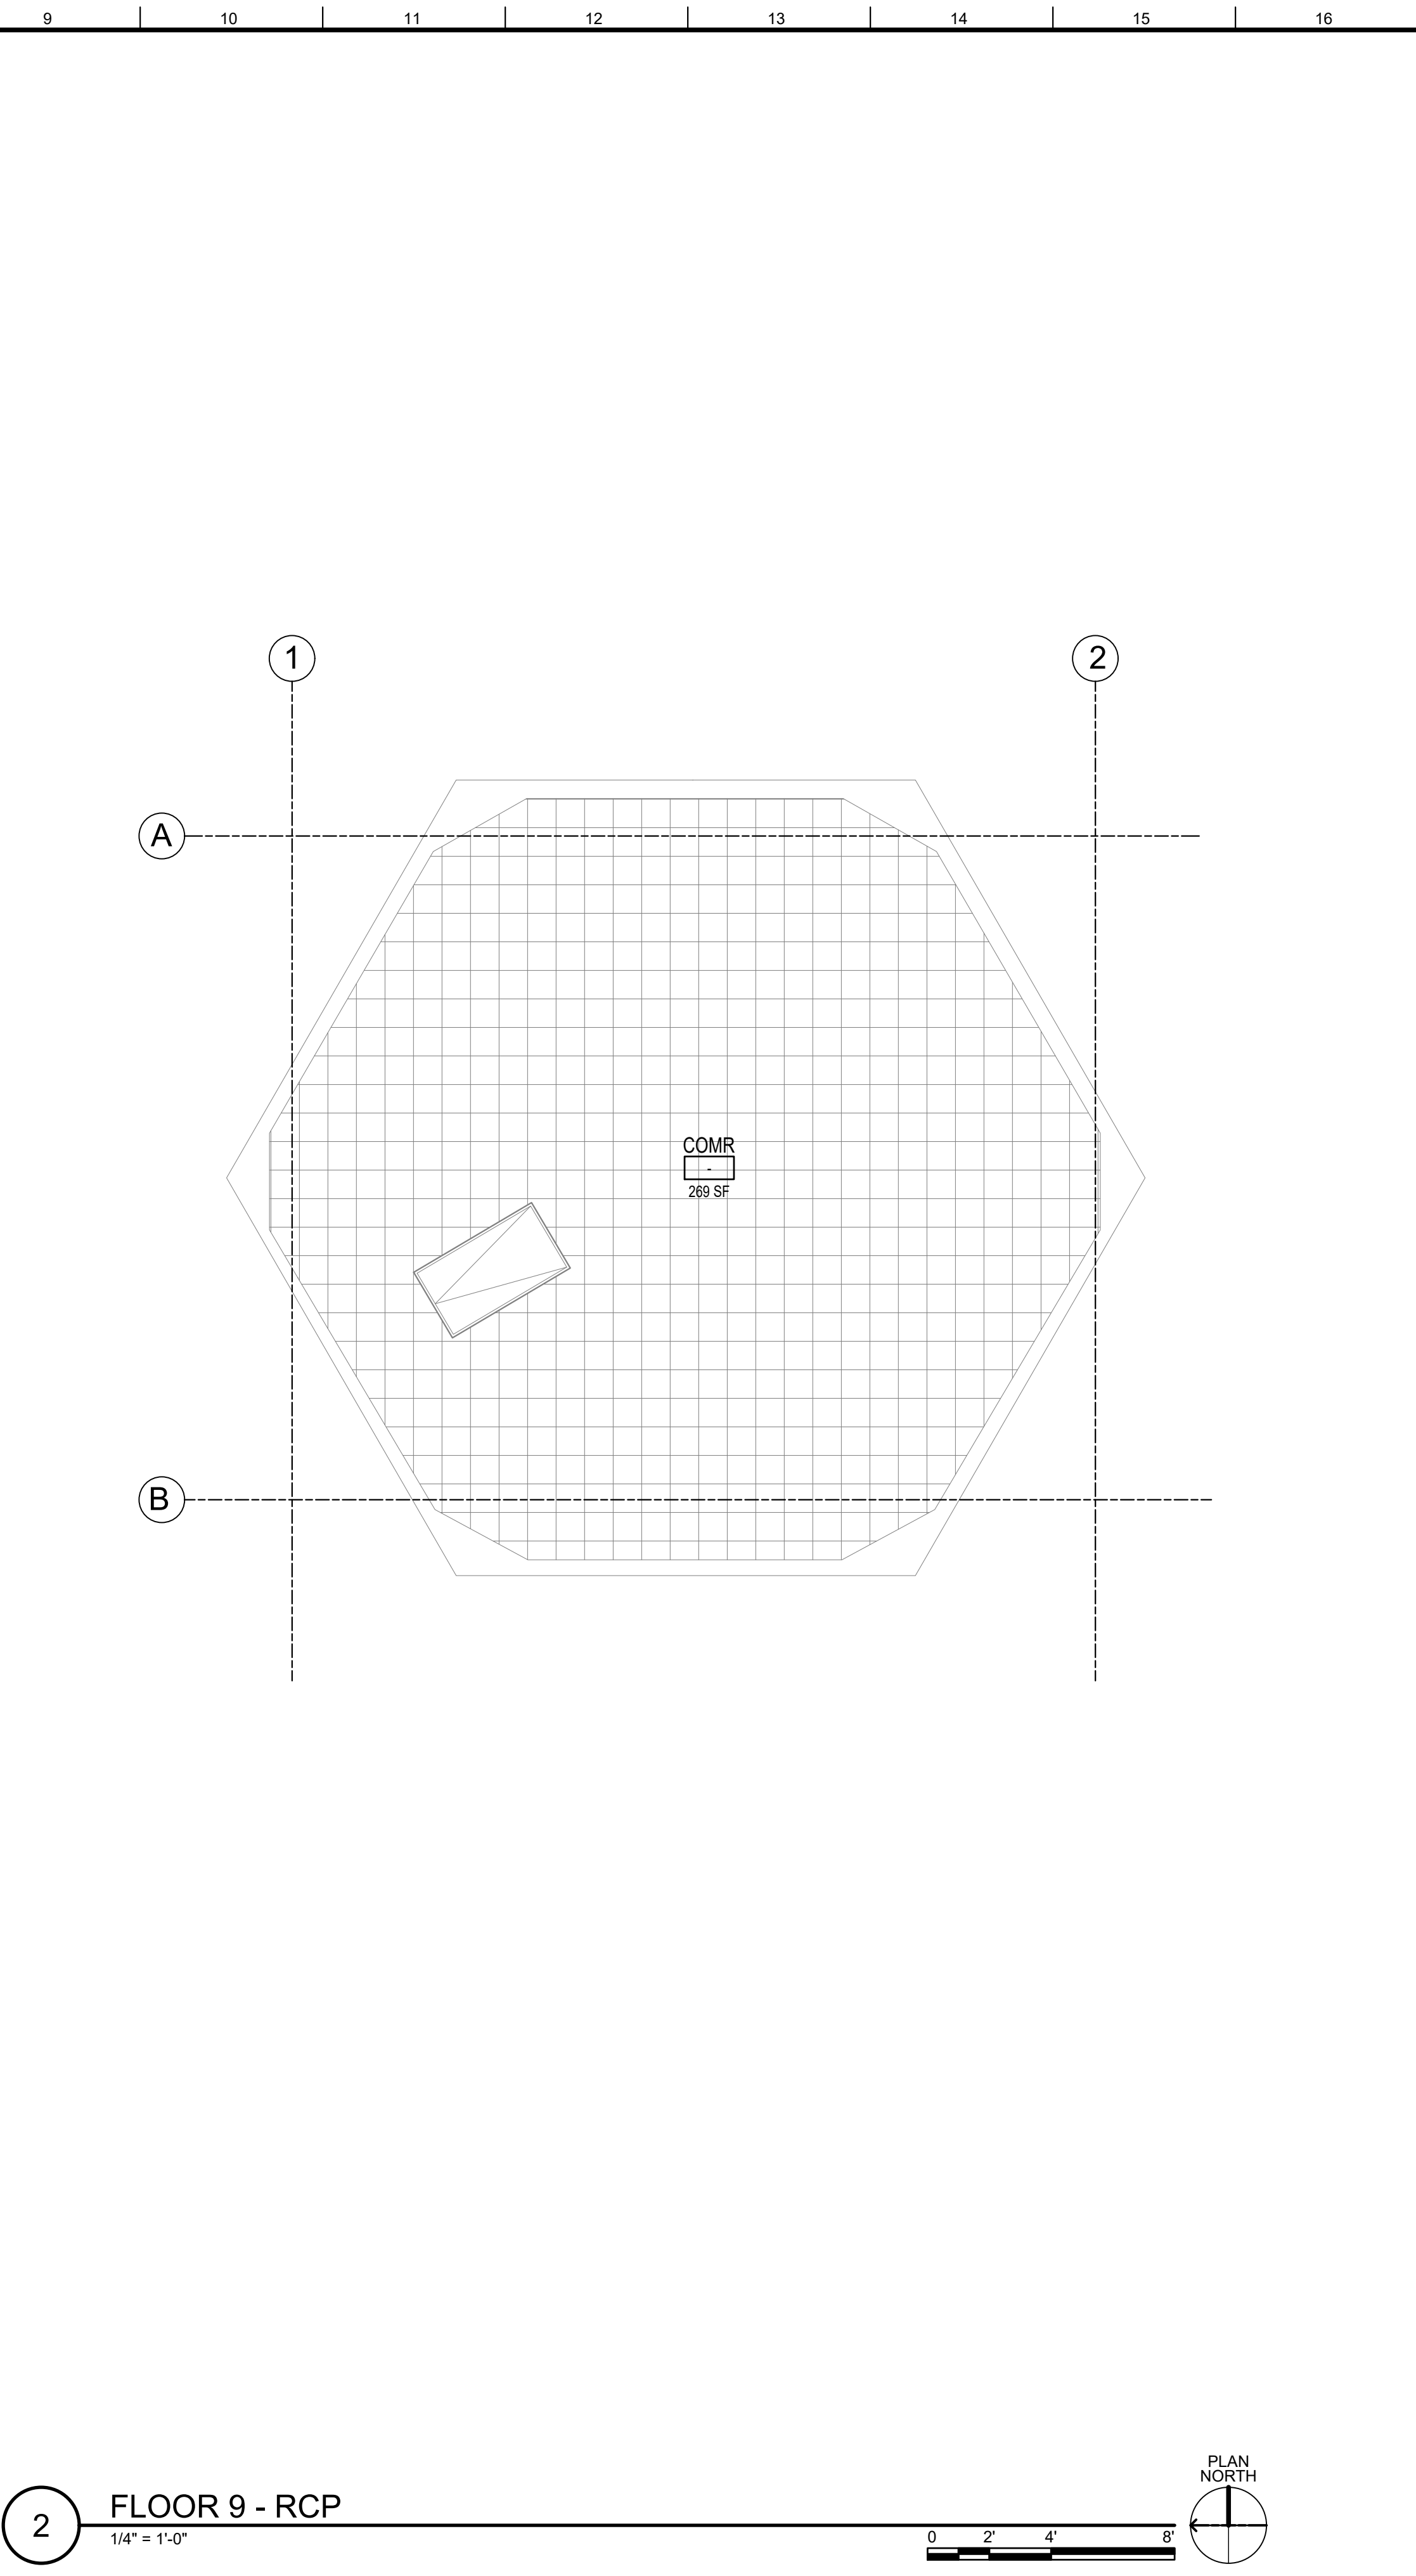

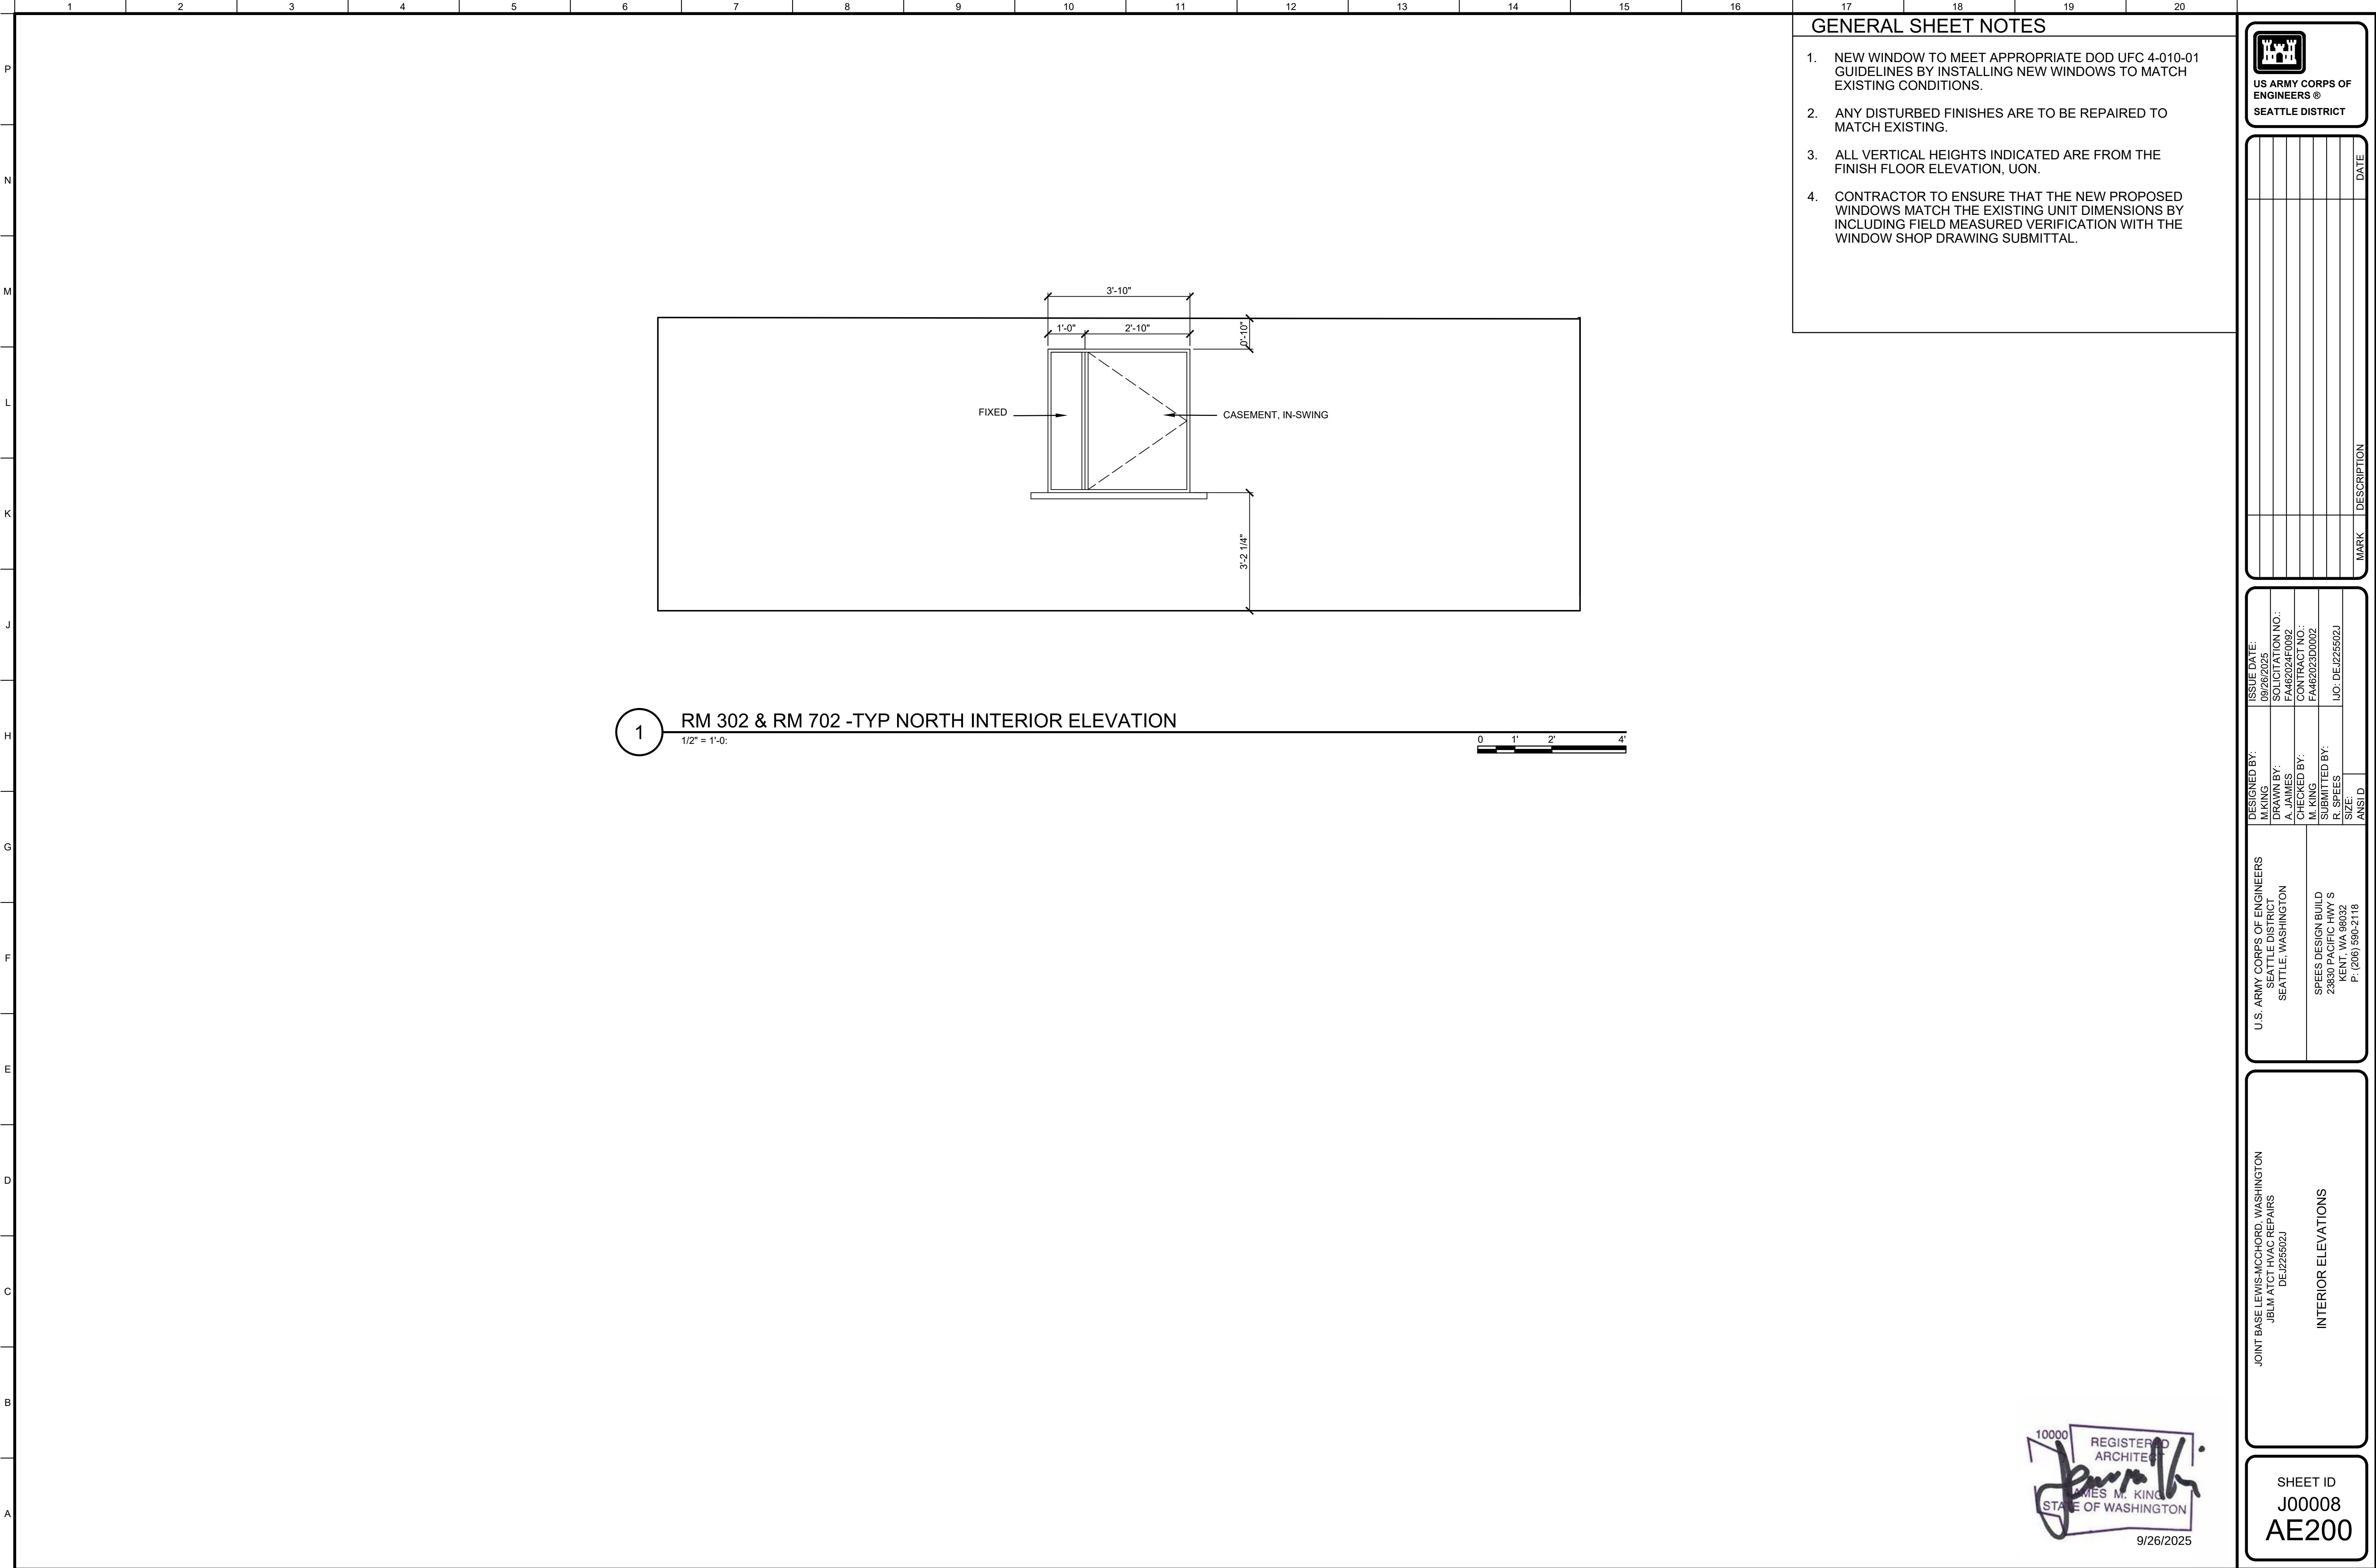

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

20

P

N

M

L

K

J

H

G

F

E

D

C

B

A

WINDOW SCHEDULE

MARK	WINDOW TYPE	WIDTH	HEIGHT	FRAME		GLAZING TYPE	SOUND RATING	COMMENTS
				MAT	FIN			
W1	B	46"	46.5"	ALUM	MTL-1	MATCH EXST	NA	CASEMENT, INSWING

FINISH LEGEND

NAME	COLOR
MTL-1	MATCH EXISTING

1

WINDOW SILL AT EXISTING CONCRETE WALL

SCALE: 3" = 1'-0"

INTERIOR

SEALANT

PLASTIC LAM SILL ON 1/2" PLYWOOD

1/2" GAP FOR CAULK

CONCRETE WALL (E)

3-5/8" STUDS W/ BATT (E)

1/2" GWB, FOIL BACKED (E)

EXISTING WALL

EXTERIOR

SHIM / CAULK GAP 1/2"

SEALANT AND 5/8" BACKER ROD BOTH SIDES

4

LOUVER JAMB

SCALE: 3" = 1'-0"

PRECAST CONC WALL PANEL

BACKER ROD AND SEALANT BOTH SIDES

2

WINDOW HEAD AT EXISTING CONC WALL

SCALE: 3" = 1'-0"

INTERIOR

CONCRETE WALL (E)

3-5/8" STUDS W/ BATT (E)

1/2" GWB, FOIL BACKED (E)

1/2" FR PLYWOOD

5/8" BACKER ROD AND SEALANT BOTH SIDES

SEALANT

EXISTING WALL

EXTERIOR

SHIM / CAULK GAP 1/2"

5

WINDOW SEAL TEMP PIPING

NOT TO SCALE

FIXED

EXISTING WINDOW (CASEMENT, IN-SWING) OPEN TO INSTALL PLYWOOD AND PIPING

FR PLYWOOD, SEAL ALL AROUND WINDOW OPENING TO SEAL SPACE WHILE TEMPORARY PIPING IS INSTALLED

TEMPORARY PIPING, SEAL PERIMETER TO KEEP ROOM SEALED WHILE INSTALLED

3

WINDOW JAMB AT EXISTING CONC WALL

SCALE: 3" = 1'-0"

INTERIOR

PLASTIC LAM SILL

1/2" FR PLYWOOD

CONCRETE WALL (E)

3-5/8" STUDS W/ BATT (E)

1/2" GWB, FOIL BACKED (E)

EXISTING WALL

EXTERIOR

SHIM / CAULK GAP 1/2"

SEALANT AND 5/8" BACKER ROD BOTH SIDES

6

LOUVER OPENING SEAL TEMP PIPING

NOT TO SCALE

EXISTING OPENING

FR PLYWOOD, SEAL ALL AROUND WINDOW OPENING TO SEAL SPACE WHILE TEMPORARY PIPING IS INSTALLED

TEMPORARY PIPING, SEAL PERIMETER TO KEEP ROOM SEALED WHILE INSTALLED

7

WINDOW TYPES

SCALE: 1/2" = 1'-0"

PER SCHEDULE

PER SCHED

PER ELEV

B

GENERAL SHEET NOTES

1. REPLACEMENT WINDOW TO COMPLY WITH DOD UFC 4-010-01, INCLUDING STANDARD 12, FOR MINIMUM ANTITERRORISM/FORCE PROTECTION REQUIREMENTS. BLAST RESISTANT GLAZING AND ANCHORAGE SYSTEM TO BE PROVIDED AS REQUIRED.

2. ALL FINISHES FOR NEW EXPANSION ELECTRICAL ROOM ARE TO MATCH EXISTING CONDITIONS.

3. CONTRACTOR TO ENSURE THAT THE NEW PROPOSED WINDOWS MATCH THE EXISTING UNIT DIMENSIONS BY INCLUDING FIELD MEASURED VERIFICATION WITH THE WINDOW SHOP DRAWING SUBMITTAL.

4. REPLACEMENT WINDOW SHALL MATCH EXISTING IN SIZE, OPERATION, FRAME PROFILE, GLAZING TYPE, FINISH, AND THERMAL PERFORMANCE. MINIMUM PERFORMANCE CRITERIA TO MATCH OR EXCEED EXISTING WINDOW U-VALUE AND STC RATING.

5. ALL INTERIOR FINISHES AFFECTED BY WINDOW INSTALLATION ARE TO BE PATCHED, REPAIRED, OR REPLACED TO MATCH EXISTING CONDITIONS.

6. EXTERIOR WINDOW SYSTEM SHALL BE INSTALLED TO MATCH EXISTING CONSTRUCTION DETAILS AND WATERPROOFING INTEGRITY. FLASHING, SEALANT, AND FASTENERS TO BE COMPATIBLE WITH EXISTING WALL ASSEMBLY.

US ARMY CORPS OF ENGINEERS®

SEATTLE DISTRICT

ISSUE DATE: 09/26/2025

SOLICITATION NO: 23300 PACIFIC HWY S

DESIGNED BY: M. KING

DRAWN BY: M. KING

CHECKED BY: M. KING

SUBMITTED BY: R. SPEES

SIZE: ANS/D

U.S. ARMY CORPS OF ENGINEERS

SEATTLE DISTRICT

SEATTLE, WASHINGTON

SPEES DESIGN BUILD

23300 PACIFIC HWY S

KENT, WA 98032

P: (206) 590-2118

JOINT BASE LEWIS-MCCHORD, WASHINGTON

JB LM ATCT HVAC REPAIRS

DE:J225502J

WINDOW DETAILS, SCHEDULES & TYPES

SHEET ID

J00008

A-500

10000

REGISTERED ARCHITECT

JAMES M. KING

STATE OF WASHINGTON

9/26/2025


100% ELECTRONIC BID SET

<



1. CONTRACTOR MUST VERIFY ALL DIMENSIONS BY FIELD MEASUREMENT BEFORE BEGINNING ANY FABRICATION OR CONSTRUCTION.
2. ALL WORK SHALL BE IN ACCORDANCE WITH APPLICABLE CODES, UFC STANDARD SPECIFICATIONS AND ALL OTHER APPLICABLE REQUIREMENTS.
3. CONTRACTOR SHALL INSTALL ALL EQUIPMENT IN STRICT ACCORDANCE WITH MANUFACTURER'S RECOMMENDATIONS.
4. COORDINATE INSTALLATION OF EQUIPMENT AND MATERIALS WITH OTHER TRADES.
5. CONTRACTOR SHALL COORDINATE WITH GENERAL CONTRACTOR AND OWNER PRIOR TO ANY CUTTING OF WALLS AND ROOF.
6. IF FLOOR OR RATED WALL PENETRATIONS CANNOT BE FIRE STOPPED AT THE END OF THE WORK SHIFT, TEMPORARY FIRESTOPPING COMPOSED OF MINERAL WOOL SHALL BE INSTALLED IN THE PENETRATION TO PROVIDE PROTECTION AGAINST FIRESMOKE SPREAD THROUGH THE UNSEALED PENETRATION.
7. ALL WORK SHALL BE SHOWN DARK, EXISTING WORK SHOWN LIGHT.
8. ALL PIPING AND DUCTWORK IS SHOWN OFFSET AND DIAGRAMMATIC FOR CLARITY.

1. EXISTING UNIT HEATER TO REMAIN.
2. EXISTING STAIR PRESSURIZATION SYSTEM TO REMAIN.
3. EXISTING VRF SYSTEM TO REMAIN IN PHASE 0.
4. DEMOLISH EXISTING DOMESTIC WATER BOOSTER PUMP AND ASSOCIATE PRESSURE TANK.
5. DEMOLISH UNIT HEATER AND ASSOCIATED TSTAT.
6. EXISTING BASEBOARD HEATER TO REMAIN.
7. DEMOLISH EXISTING EXHAUST FAN, LOUVER, AND GRILLE.
8. DEMOLISH EXISTING BACKFLOW PREVENTER AND ASSOCIATED PIPING BELOW BACKFLOW PREVENTER.
9. LOCATION OF EMERGENCY POWER OFF SWITCH IS APPROXIMATE. COORDINATE FINAL SWITCH LOCATION IN FOYR 101 WITH GOVERNMENT.

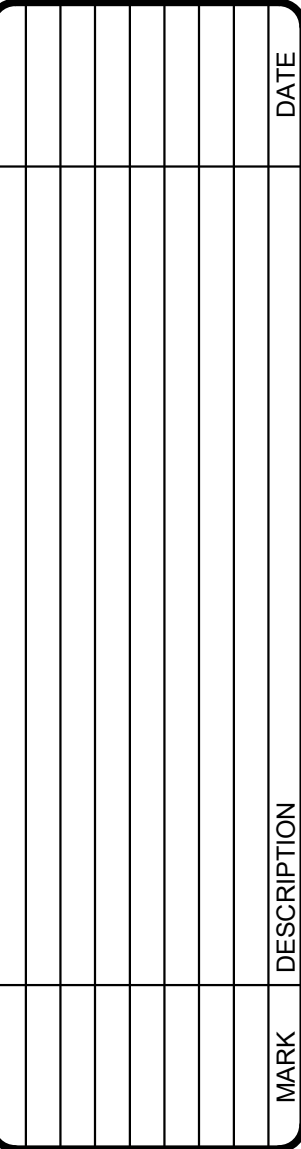

U.S. ARMY CORPS OF ENGINEERS SEATTLE DISTRICT SEATTLE, WASHINGTON	ISSUE DATE: DESIGNED BY: DRAWN BY: SOLUTION/INQ. NO.: F/A62024F-0092 L. BEACHY CHECKED BY: M. HUBBARD, J. WOOD SUBMITTED BY: SPEECS SIZE: ANSI/D
SPEECS DESIGNATION 23830 PACIFIC HWY S KENT, WA 98032 P. (206) 590-2118	U.O. DE1225502J

JOINT BASE LEWIS-MCHORD, WASHINGTON
JBLM ATCT HVAC REPAIRS
DEJ25502J


SHEET ID
J00008
MH101





1. CONTRACTOR MUST VERIFY ALL DIMENSIONS BY FIELD MEASUREMENT BEFORE BEGINNING ANY FABRICATION OR CONSTRUCTION.
2. ALL WORK SHALL BE IN ACCORDANCE WITH APPLICABLE CODES, UFC STANDARDS AND SPECIFICATIONS.
3. CONTRACTOR SHALL INSTALL ALL EQUIPMENT IN STRICT ACCORDANCE WITH MANUFACTURER'S RECOMMENDATIONS.
4. COORDINATE INSTALLATION OF EQUIPMENT AND MATERIALS WITH OTHER TRADES.
5. CONTRACTOR SHALL COORDINATE WITH GENERAL CONTRACTOR AND OWNER PRIOR TO ANY CUTTING OF WALLS AND ROOF.
6. IF FLOOR OR RATED WALL PENETRATIONS CANNOT BE FIRE STOPPED AT THE END OF THE WORK SHIFT, TEMPORARY FIRESTOPPING COMPOSED OF MINERAL WOOL SHALL BE INSTALLED IN THE PENETRATION TO PROVIDE PROTECTION AGAINST FIRE AND SMOKE UP THE UNSEALED PENETRATION.
7. NEW WORK SHOWN DARK, EXISTING WORK SHOWN LIGHT.
8. ALL PIPING AND DUCTWORK IS SHOWN OFFSET AND DIAGRAMMATIC FOR CLARITY.
9. ONLY HYDRONIC, DOMESTIC WATER AND CONDENSATE PIPING IS SHOWN ON THIS PLAN FOR CLARITY. SEE SHEET MP102 FOR EXISTING REFRIGERANT PIPING DEMOLITION SCOPE.

1. CAP AND SEAL PIPING AND PROVIDE SHUT OFF VALVES FOR TIE IN AT LATER PHASE.
2. TEMPORARY PIPING TO RUN UP THE EXTERIOR OF THE BUILDING. PROVIDE SHUT OFF VALVE.
3. INSTALL NEW DOMESTIC WATER BOOSTER PUMP AND PRESSURE TANK.
4. ROUTE TEMPORARY PIPING OVER EXISTING WALL.
5. EXISTING VRF CONDENSING UNIT TO REMAIN IN PLACE UNTIL ALL ASSOCIATED INDOOR UNITS ON ALL FLOORS ARE FULLY DECOMMISSIONED AND NEW HYDRONIC SYSTEM IS OPERATIONAL. DO NOT DEMOLISH UNTIL VRF SYSTEM IS CONFIRMED INACTIVE.
6. CONDENSATE PIPE SHALL BE ROUTED INSIDE MECHANICAL ROOM. PIPE IS SHOWN OFFSET IN FOYER SPACE FOR CLARITY.
7. SUSPEND NEW EXPANSION TANKS FROM CEILING. AVOID LOCATING TANKS OR ASSOCIATED PIPING ABOVE ELECTRICAL PANELS, SWITCHGEAR OR OTHER ELECTRICAL EQUIPMENT. HANG EXPANSION TANK AS HIGH AS POSSIBLE IN SPACE.
8. SUSPEND AIR / DIRT SEPARATORS AS HIGH AS POSSIBLE. MAINTAIN PERSONNEL ACCESS FROM EXTERIOR DOOR TO ELEVATOR MACHINE ROOM AND FROM EXTERIOR DOOR ACROSS SPACE TO INTERIOR STAIRWELL.
9. FURNISH AND INSTALL REDUCED PRESSURE BACKFLOW PREVENTER AND DOUBLE CHECK BACKFLOW PREVENTERS. SEE SHEET M-701 FOR ADDITIONAL DETAIL.
10. DOMESTIC COLD WATER PIPE CONTINUES BETWEEN THE TWO CONTINUATION LINES BUT IS NOT SHOWN FOR CLARITY.
11. SYSTEM FILL PIPING CONTINUES BETWEEN THE TWO CONTINUATION LINES BUT IS NOT SHOWN FOR CLARITY. SEE SHEET M-701 FOR PIPE CONNECTIONS AND SIZES.
12. DOMESTIC COLD WATER PIPE TO TIE INTO EXISTING VERTICAL PIPING.
13. PROVIDE PIPE SUPPORTS AT THESE LOCATIONS. SEE STRUCTURAL DETAILS. SEE PIPE SUPPORT DETAIL ON M-504.
14. HYDRONIC PIPING SERVING FCU-01A AND FCU-01B SHALL BE ROUTED TIGHT TO WALL BEHIND EXISTING ELEVATOR BUSBAR.
15. THIS SECTION OF PIPING IS EXPOSED TO OUTDOOR AMBIENT CONDITIONS. SEE SPECIFICATION SECTION 23 07 00 FOR ADDITIONAL INSULATION REQUIREMENTS FOR OUTDOOR PIPING.
16. TO FLOOR ABOVE. FOR CONTINUATION SEE SHEET MP103.
17. LOCATE VALVES AS CLOSE AS POSSIBLE TO TEES SERVING HPC-02. VALVES SHOWN OFFSET IN THIS LOCATION FOR CLARITY.
18. REFER TO SHEET M-701 FOR CHEMICAL FEED POT PIPING.
19. REFER TO SHEET M-701 FOR EXPANSION TANK PIPING TIE IN LOCATIONS.

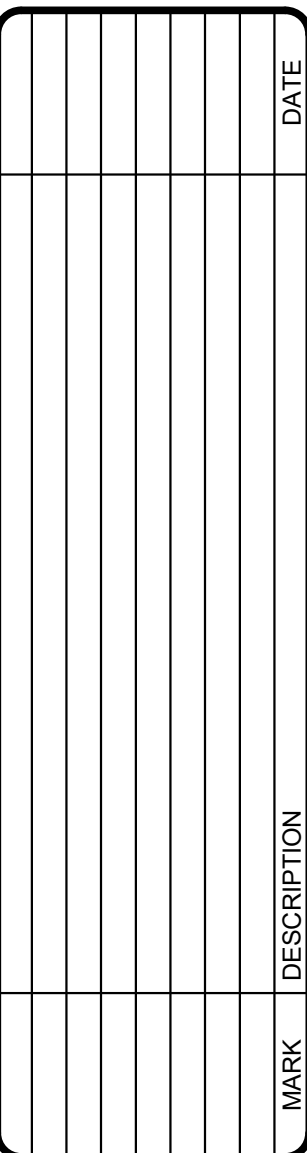

U.S. ARMY CORPS OF ENGINEERS SEATTLE DISTRICT SEATTLE, WASHINGTON	DESIGNED BY: SPEES DESIGN BUILD ATTN: J. L. BEACHY	ISSUE DATE: 06/29/2028 CONTRACT NO.: FA42024F0002
	CHECKED BY: M. HUBBARD, J. WOOD	CONTRACT NO.: FA42023D0002
SPEES DESIGN BUILD 23830 PACIFIC HWY S KENT, WA 98032 P. (206) 990-2118	SUBMITTED BY: SPEES SIZE: ANSI D	I.U.O. DEJ225502J DATE:

FLOOR 1 - MECHANICAL PIPING PLAN - PHASE 1

MP101







100% ELECTRONIC BID SET







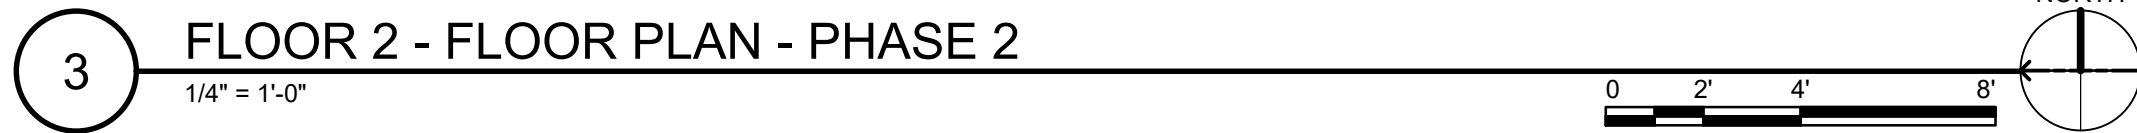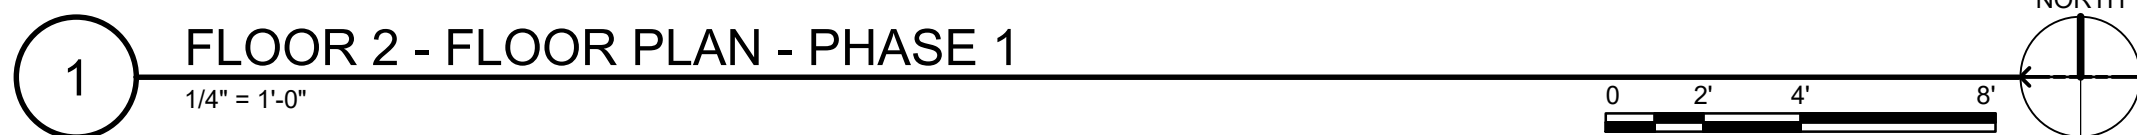

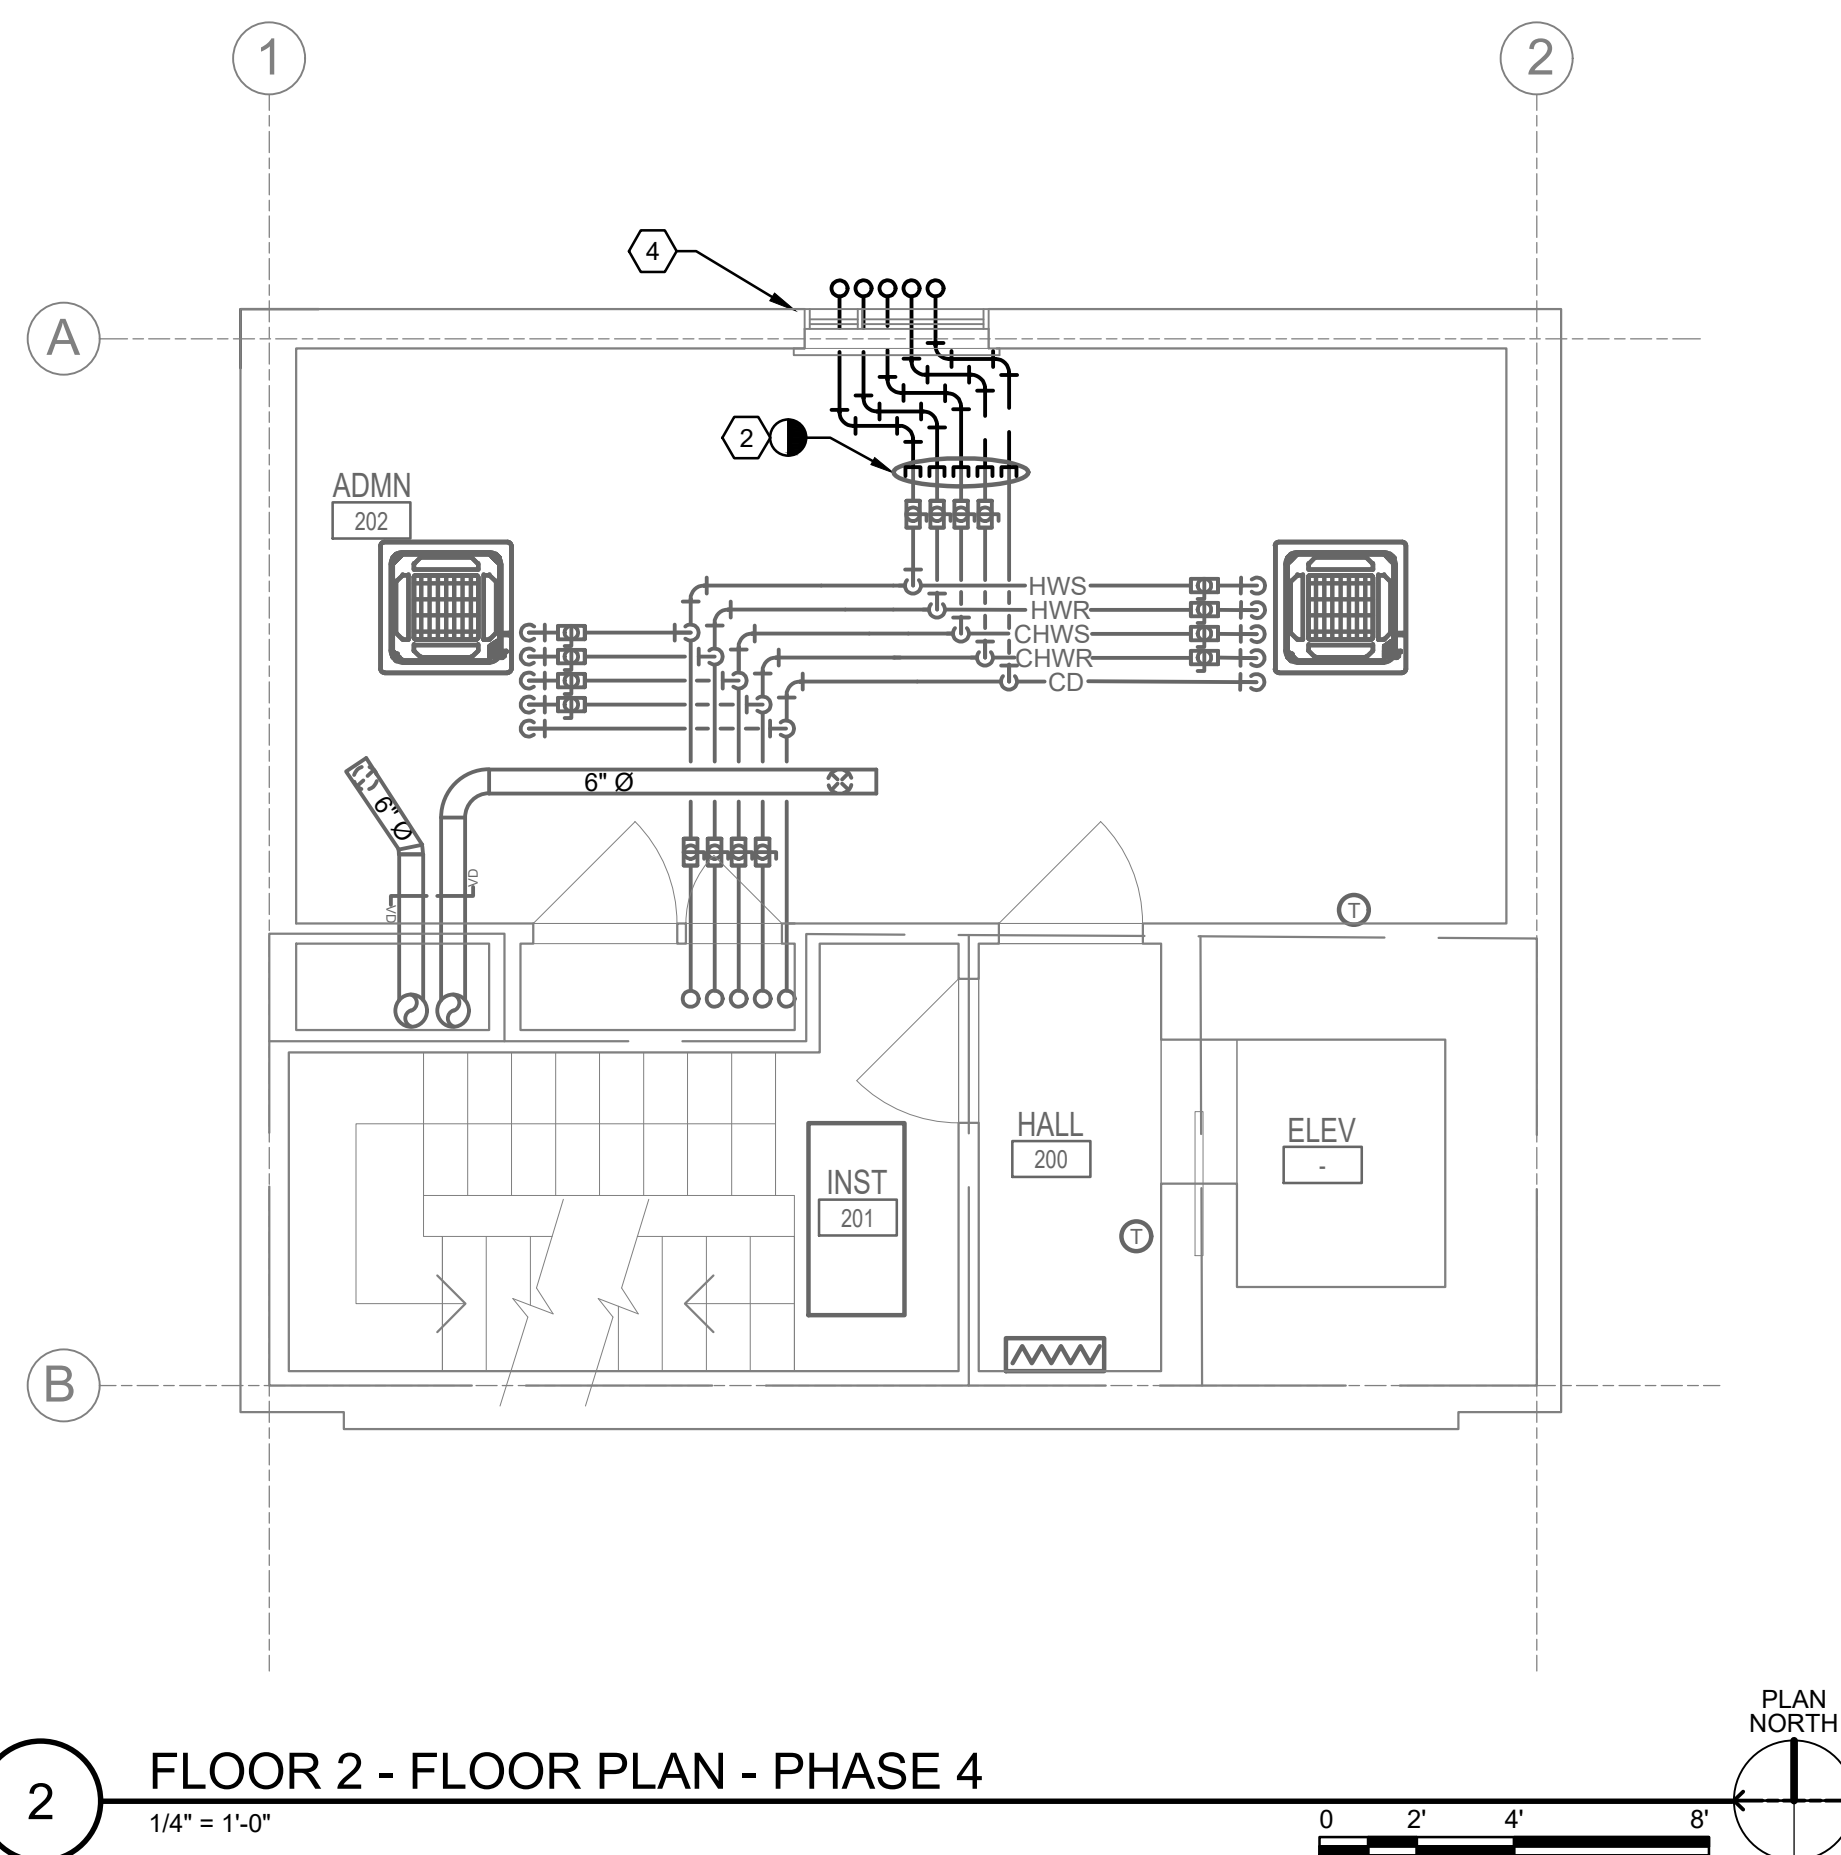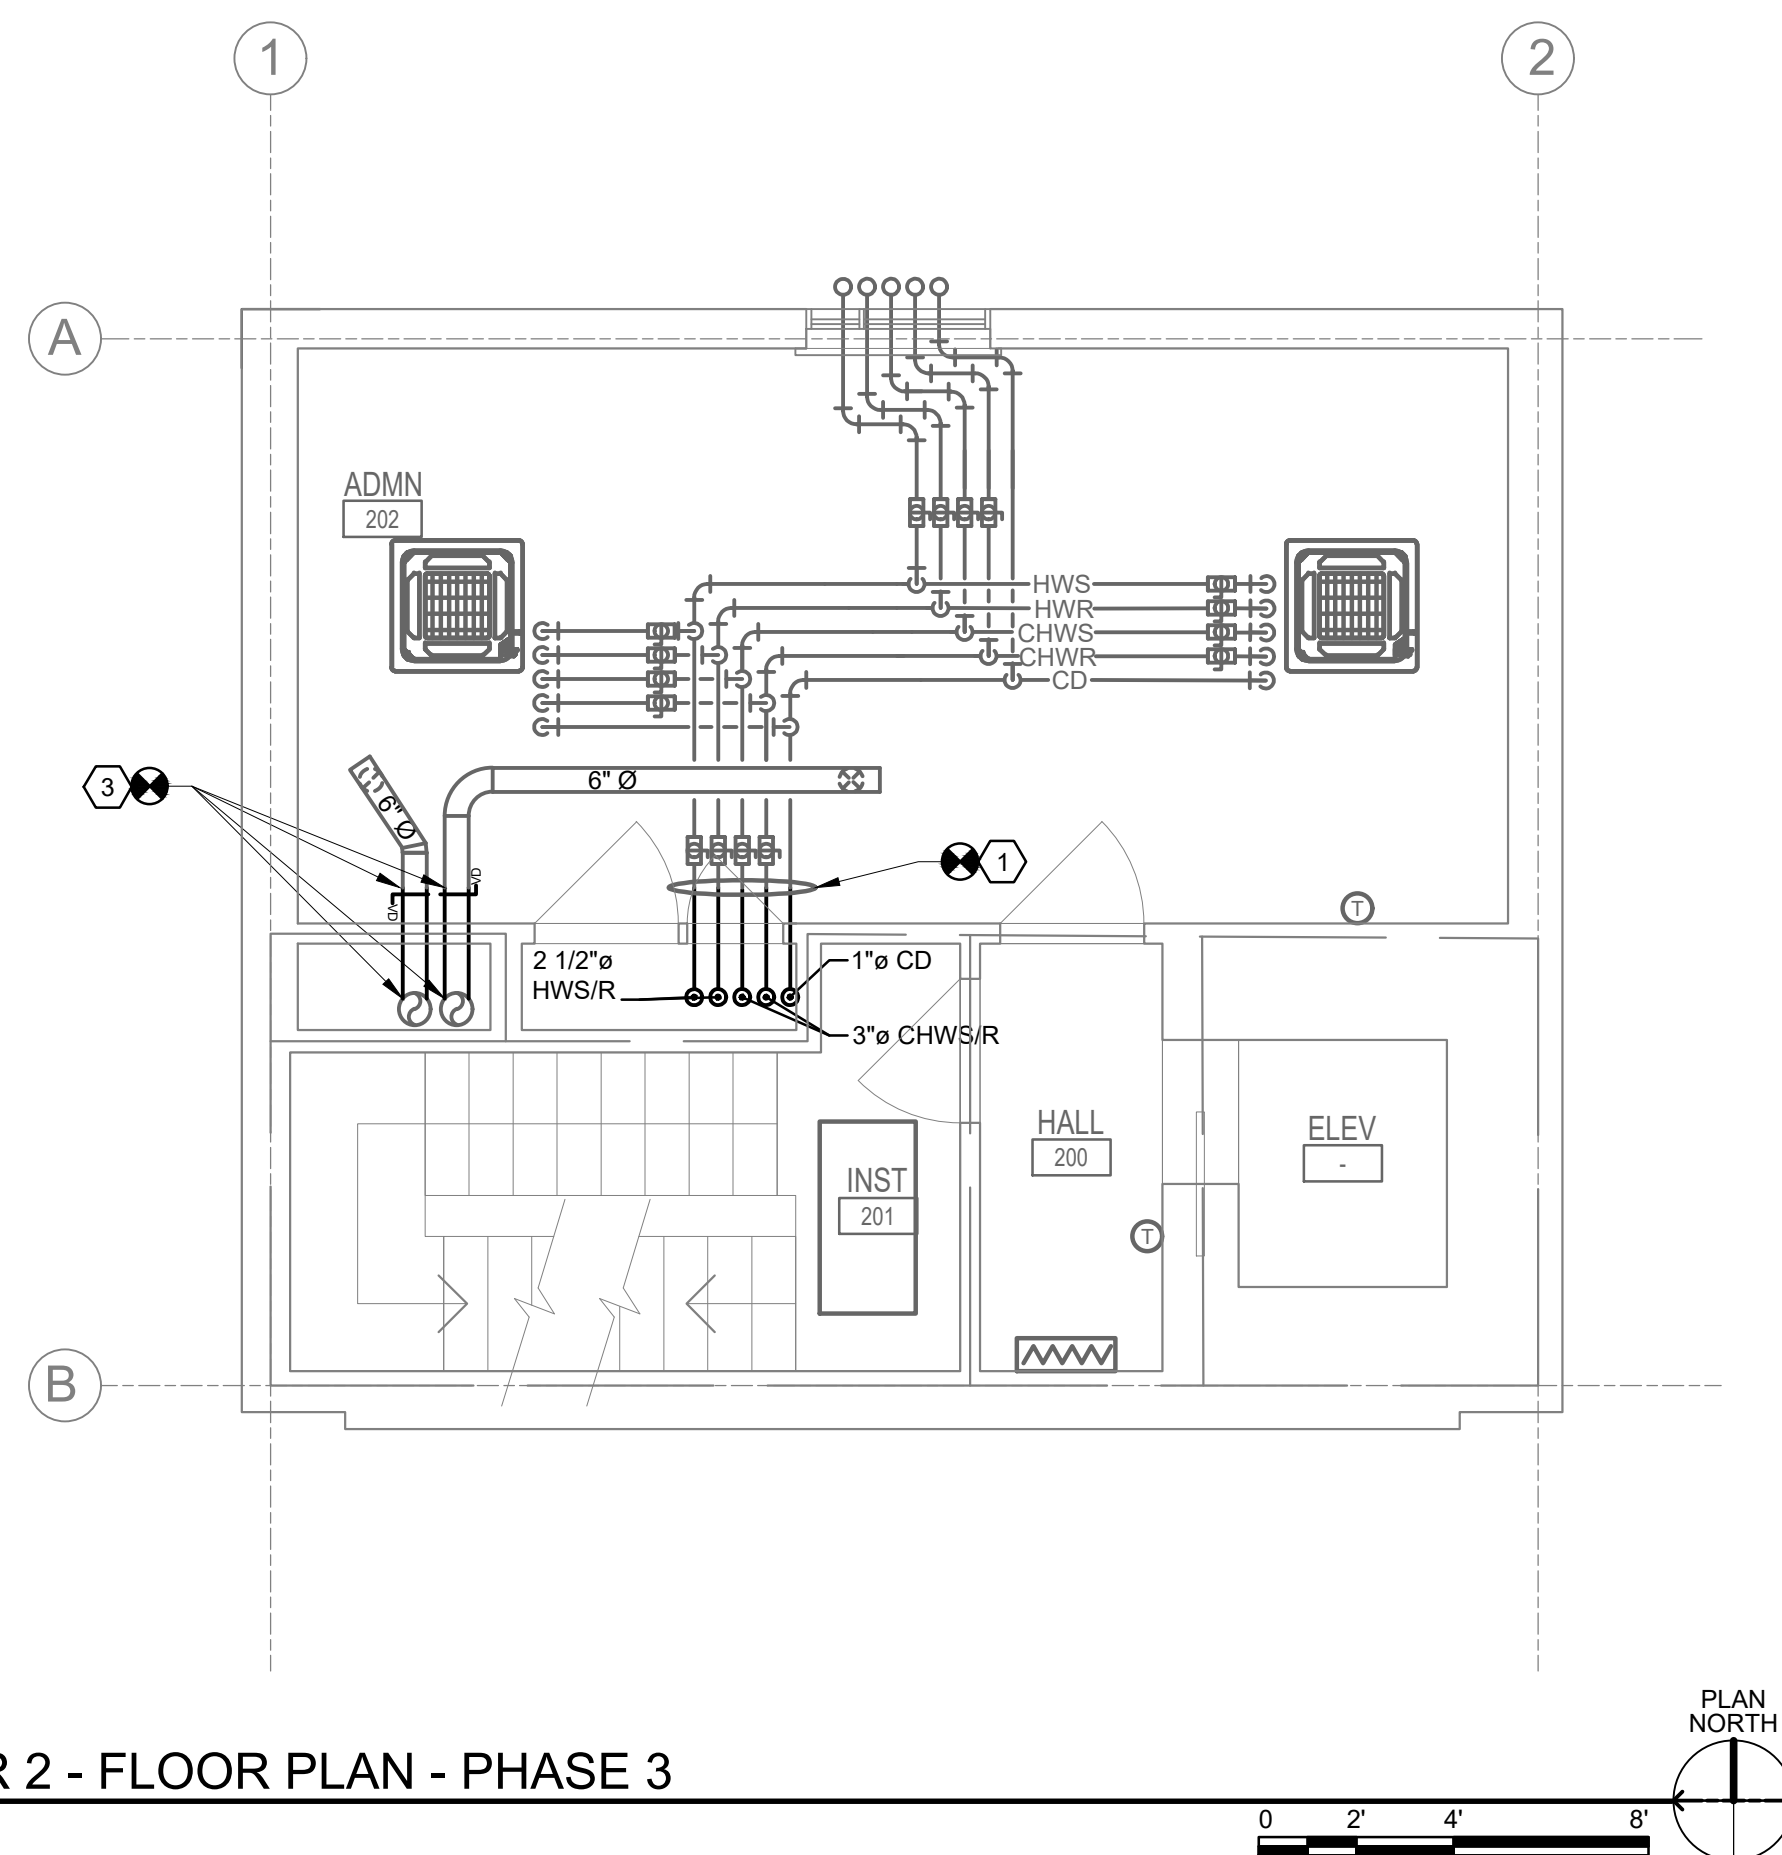

GENERAL SHEET NOTES

1. CONTRACTOR MUST VERIFY ALL DIMENSIONS BY FIELD MEASUREMENT BEFORE BEGINNING ANY FABRICATION OR CONSTRUCTION.
2. ALL WORK SHALL BE IN ACCORDANCE WITH APPLICABLE CODES, UFC STANDARDS AND SPECIFICATIONS.
3. CONTRACTOR SHALL INSTALL CHASE EQUIPMENT IN STRICT ACCORDANCE WITH MANUFACTURER'S RECOMMENDATIONS.
4. COORDINATE INSTALLATION OF EQUIPMENT AND MATERIALS WITH OTHER TRADES.
5. CONTRACTOR SHALL COORDINATE WITH GENERAL CONTRACTOR AND OWNER PRIOR TO ANY CUTTING OF WALLS AND ROOF.
6. IF FLOOR OR RATED WALL PENETRATIONS CANNOT BE FIRE STOPPED AT THE END OF THE WORK SHIFT, TEMPORARY FIRESTOPPING COMPOSED OF MINERAL WOOL SHALL BE INSTALLED IN THE PENETRATION TO PROVIDE PROTECTION AGAINST FIRE/SMOKE SPREAD THROUGH THE UNSEALED PENETRATION.
7. ALL WORK SHOULD BE DARK, EXCEPT WORK SHOWING LIGHT.
8. ALL PIPING AND DUCTWORK IS SHOWN OFFSET AND DIAGRAMMATIC FOR CLARITY.

SHEET KEYNOTES

1. INSTALL NEW 2" DRONIC PIPING IN CHASE EXTENDING TO FLOOR ABOVE AND FLOOR BELOW.
2. DEMOLISH TEMPORARY EXTERIOR PIPING. VALVES SHOWN OFFSET FOR CLARITY. CAP AND SEAL PIPING WITHIN 4" OF VALVES.
3. TIE DUCTWORK INTO EXISTING DUCTWORK IN THE CHASE.
4. AFTER PIPING IS DEMOLISHED, RESEAL WINDOW AS DETAILED ON ARCHITECTURAL SHEETS.



US ARMY CORPS OF
ENGINEERS®
SEATTLE DISTRICT

[illegible]

U.S. ARMY CORPS OF ENGINEERS SEATTLE DISTRICT SEATTLE, WASHINGTON	DESIGNED BY: SPEEDS DESIGN BUILD	ISSUE DATE: 09/26/2025
	DRAWN BY: REMARKS: 10/2/2025	SOLICITATION NO.: FA46202300002
	CHECKED BY: M. HUBBARD, J. WOOD	CONTRACT NO.: FA46202300002
	SUBMITTED BY: SPEEDS	
	SIZE: A3	
	SIZE: P: (200) 590-2118	I.U. DEJ225502J



JOINT BASE LEWIS-MCCORD, WASHINGTON
JBLM ATCT HVAC REPAIRS
DEJ225502J

SHEET ID
J00008

M-122




100% ELECTRONIC BID SET

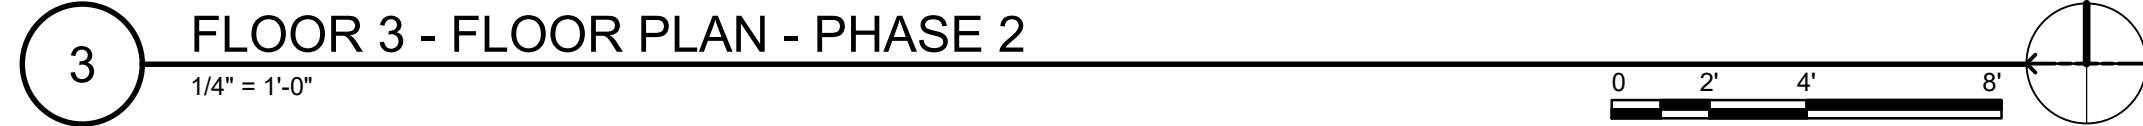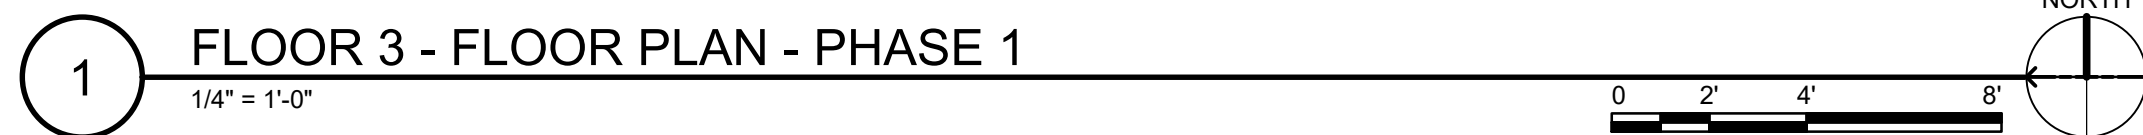

1. CONTRACTOR MUST VERIFY ALL DIMENSIONS BY FIELD MEASUREMENT BEFORE BEGINNING ANY FABRICATION OR CONSTRUCTION.
2. ALL WORK SHALL BE IN ACCORDANCE WITH APPLICABLE CODES, UFC STANDARDS AND SPECIFICATIONS.
3. CONTRACTOR SHALL INSTALL ALL EQUIPMENT IN STRICT ACCORDANCE WITH MANUFACTURER'S RECOMMENDATIONS.
4. COORDINATE INSTALLATION OF EQUIPMENT AND MATERIALS WITH OTHER TRADES.
5. CONTRACTOR SHALL COORDINATE WITH GENERAL CONTRACTOR AND OWNER PRIOR TO ANY CUTTING OF WALLS AND ROOF.
6. IF FLOOR OR RATED WALL PENETRATIONS CANNOT BE FIRE STOPPED AT THE END OF THE WORK SHIFT, TEMPORARY FIRESTOPPING COMPOSED OF MINERAL WOOL SHALL BE INSTALLED IN THE PENETRATION TO PROVIDE PROTECTION AGAINST FIRE/SMOKE SPREAD THROUGH THE UNSEALED PENETRATION.
7. NEW WORK SHOWN DARK, EXISTING WORK SHOWN LIGHT.
8. ALL PIPING AND DUCTWORK IS SHOWN OFFSET AND DIAGRAMMATIC FOR CLARITY.

1. EXISTING VRF UNIT AND ASSOCIATED PIPING TO REMAIN IN PHASE 1.
2. CAP AND SEAL PIPING FOR TIE IN IN LATER PHASE.
3. CAP DUCTWORK FOR TIE IN IN LATER PHASE.
4. TEMPORARY PIPING TO RUN UP THE EXTERIOR OF THE BUILDING. PIPING SHALL GO THROUGH OPENING LEFT BY REMOVAL OF EXISTING WINDOW. SEE ARCHITECTURAL PLANS FOR WINDOW OPENING DETAILS.
5. DEMOLISH EXISTING VRF UNIT AND ASSOCIATED REFRIGERANT AND CONDENSATE PIPING. EVACUATE AND CAPTURE REFRIGERANT PRIOR TO REMOVING SYSTEM.
6. DEMOLISH TSTAT SERVING EXISTING VRF UNIT.
7. DEMOLISH OUT DIFFUSERS, GRILLES, AND ASSOCIATED DUCTWORK.
8. REFRIGERANT PIPING CONTINUES BETWEEN THE TWO CONTINUATION LINES BUT IS NOT SHOWN FOR CLARITY.
9. EXISTING ELECTRIC WALL HEATER TO REMAIN.
10. LOCATE VALVES AS CLOSE AS POSSIBLE TO TEES SERVING FAN COIL UNITS. VALVES SHOWN OFFSET IN THIS LOCATION FOR CLARITY.

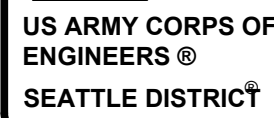
[illegible]

U.S. ARMY CORPS OF ENGINEERS SEATTLE DISTRICT SEATTLE, WASHINGTON	DESIGNED BY: SPEES DESIGN BUILD	ISSUE DATE: 09/26/2025
	DRAWN BY: N. HUBBARD	SOLICITATION NO.: FA42023D0002
	CHECKED BY: M. HUBBARD, J. WOOD	CONTRACT NO.: FA42023D0002
	SUBMITTED BY: R. SPEES	IJO: DEJ25502J
	ANSI/D.	
	SPEES DESIGN BUILD 23830 PACIFIC HWY S KENT, WA 98032 P. (206) 590-2118	



JOINT BASE LEWIS-MCCORD, WASHINGTON
JBLM ATCT HVAC REPAIRS
DEJ225502J


SHEET ID
J00008

M-123

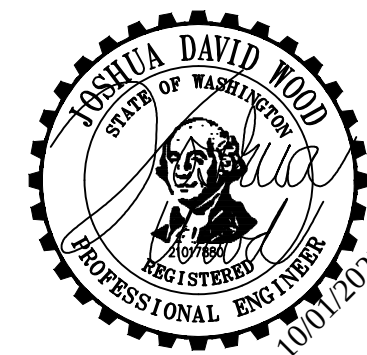


100% ELECTRONIC BID SET

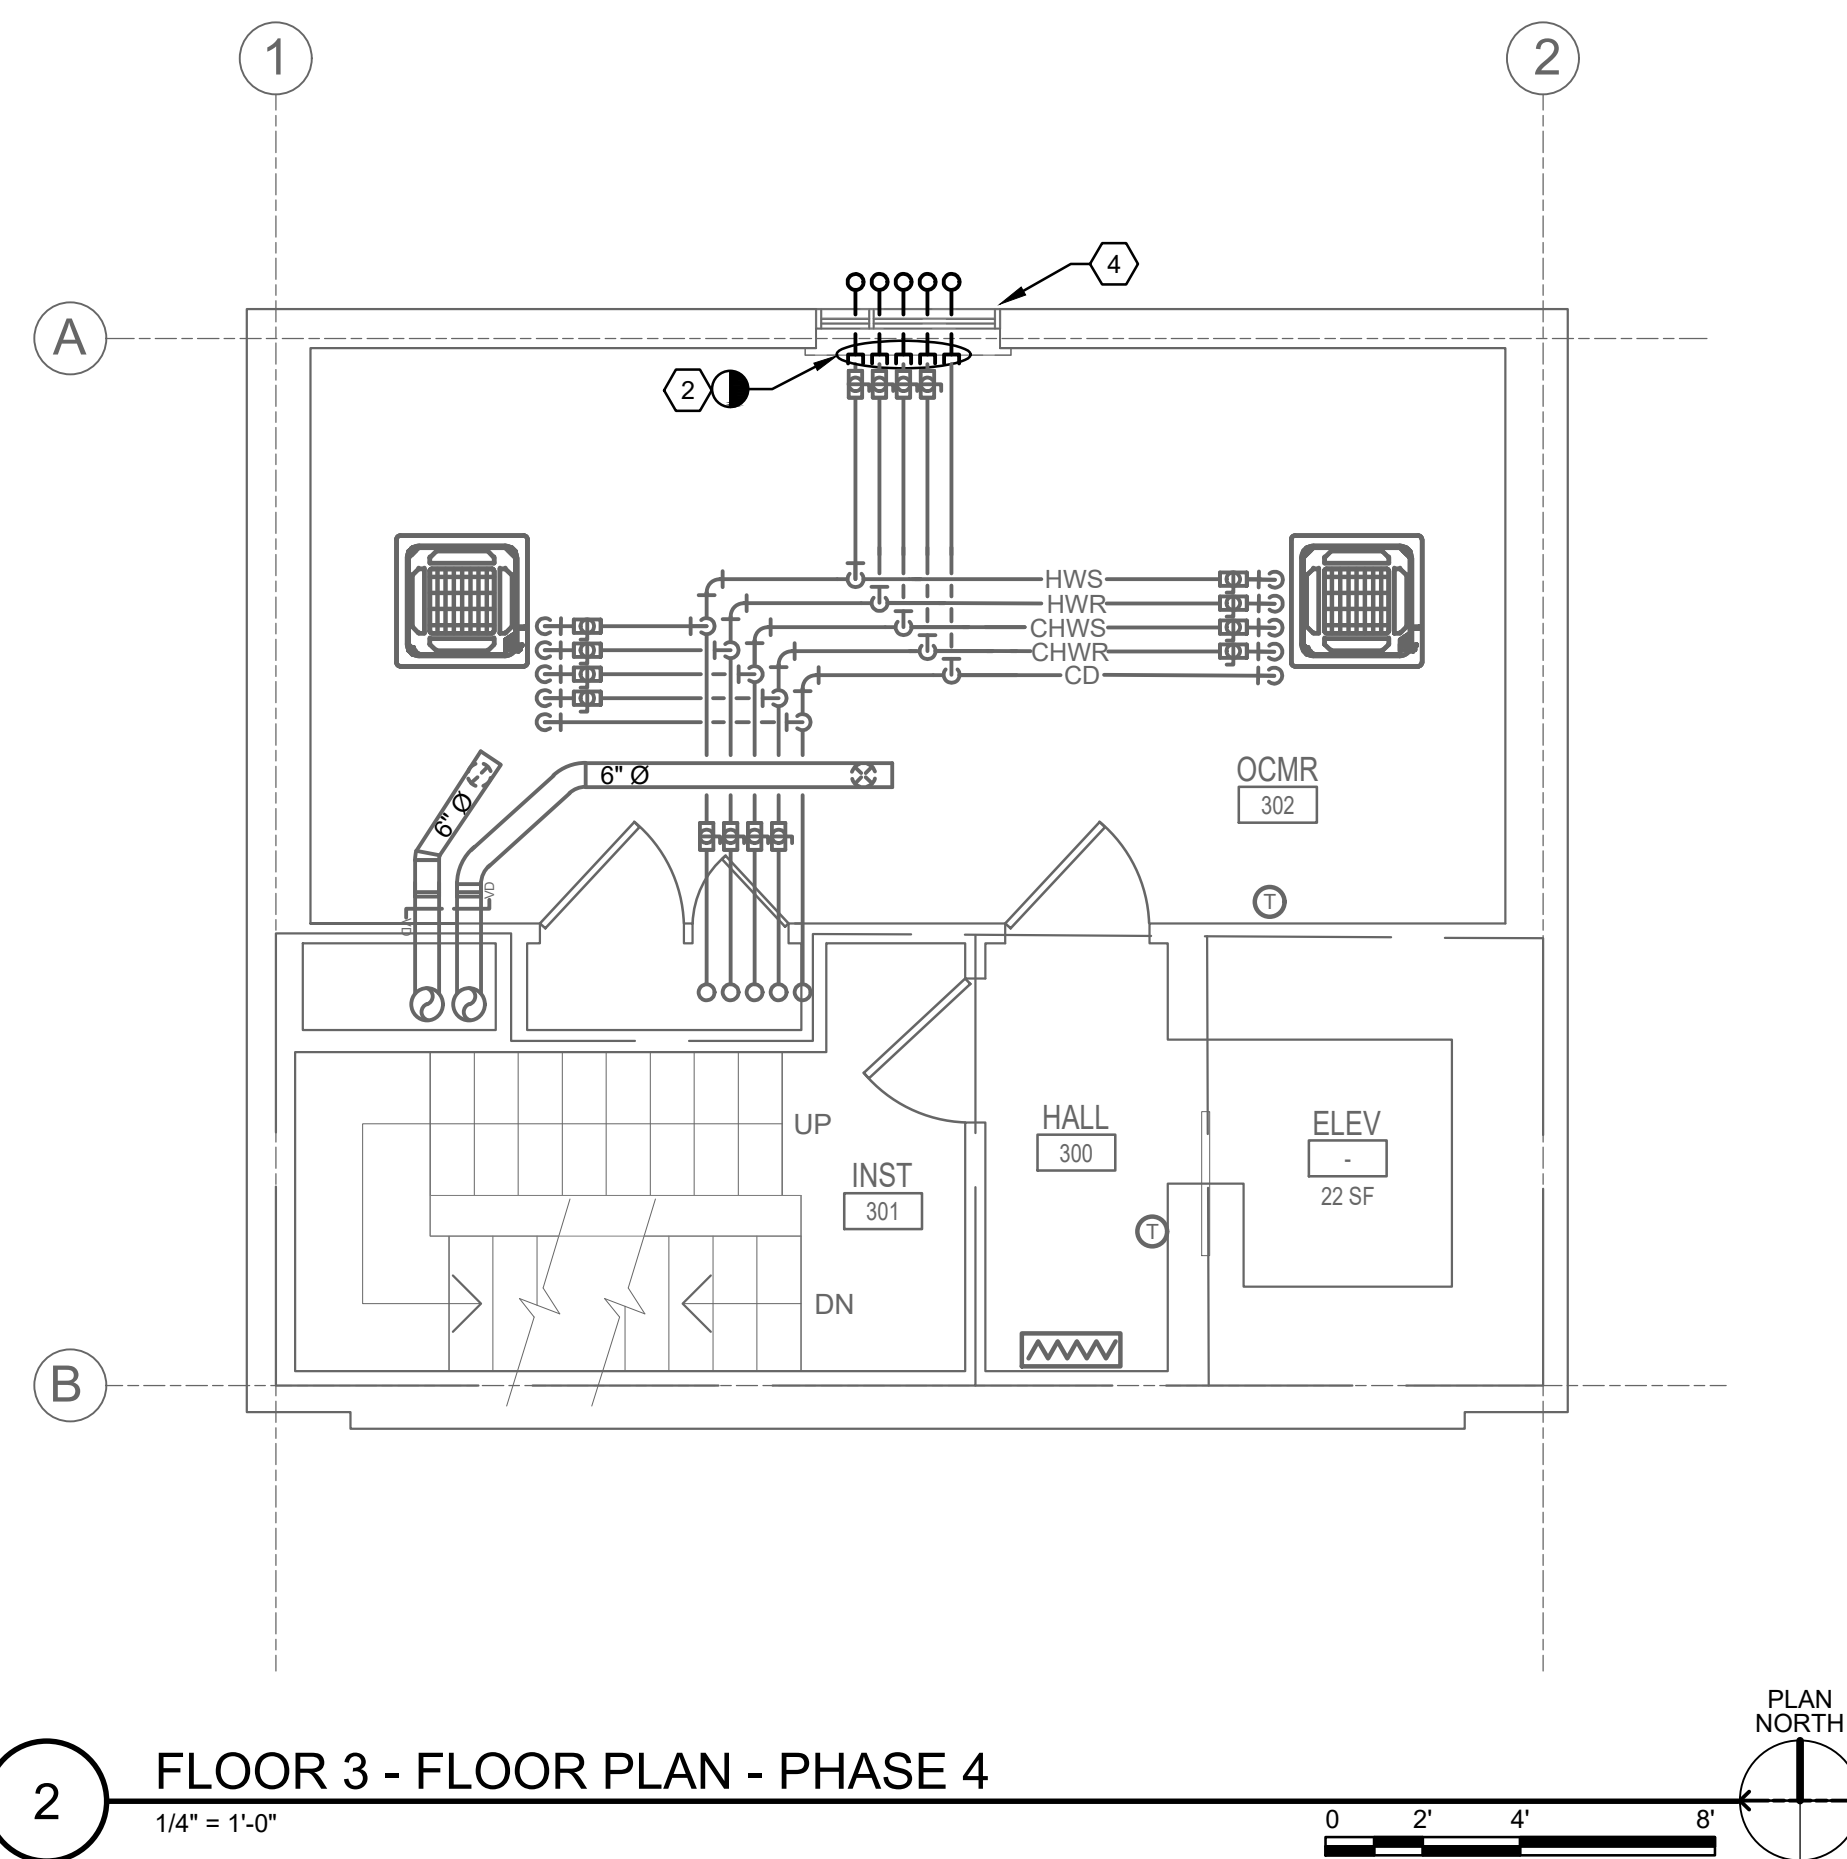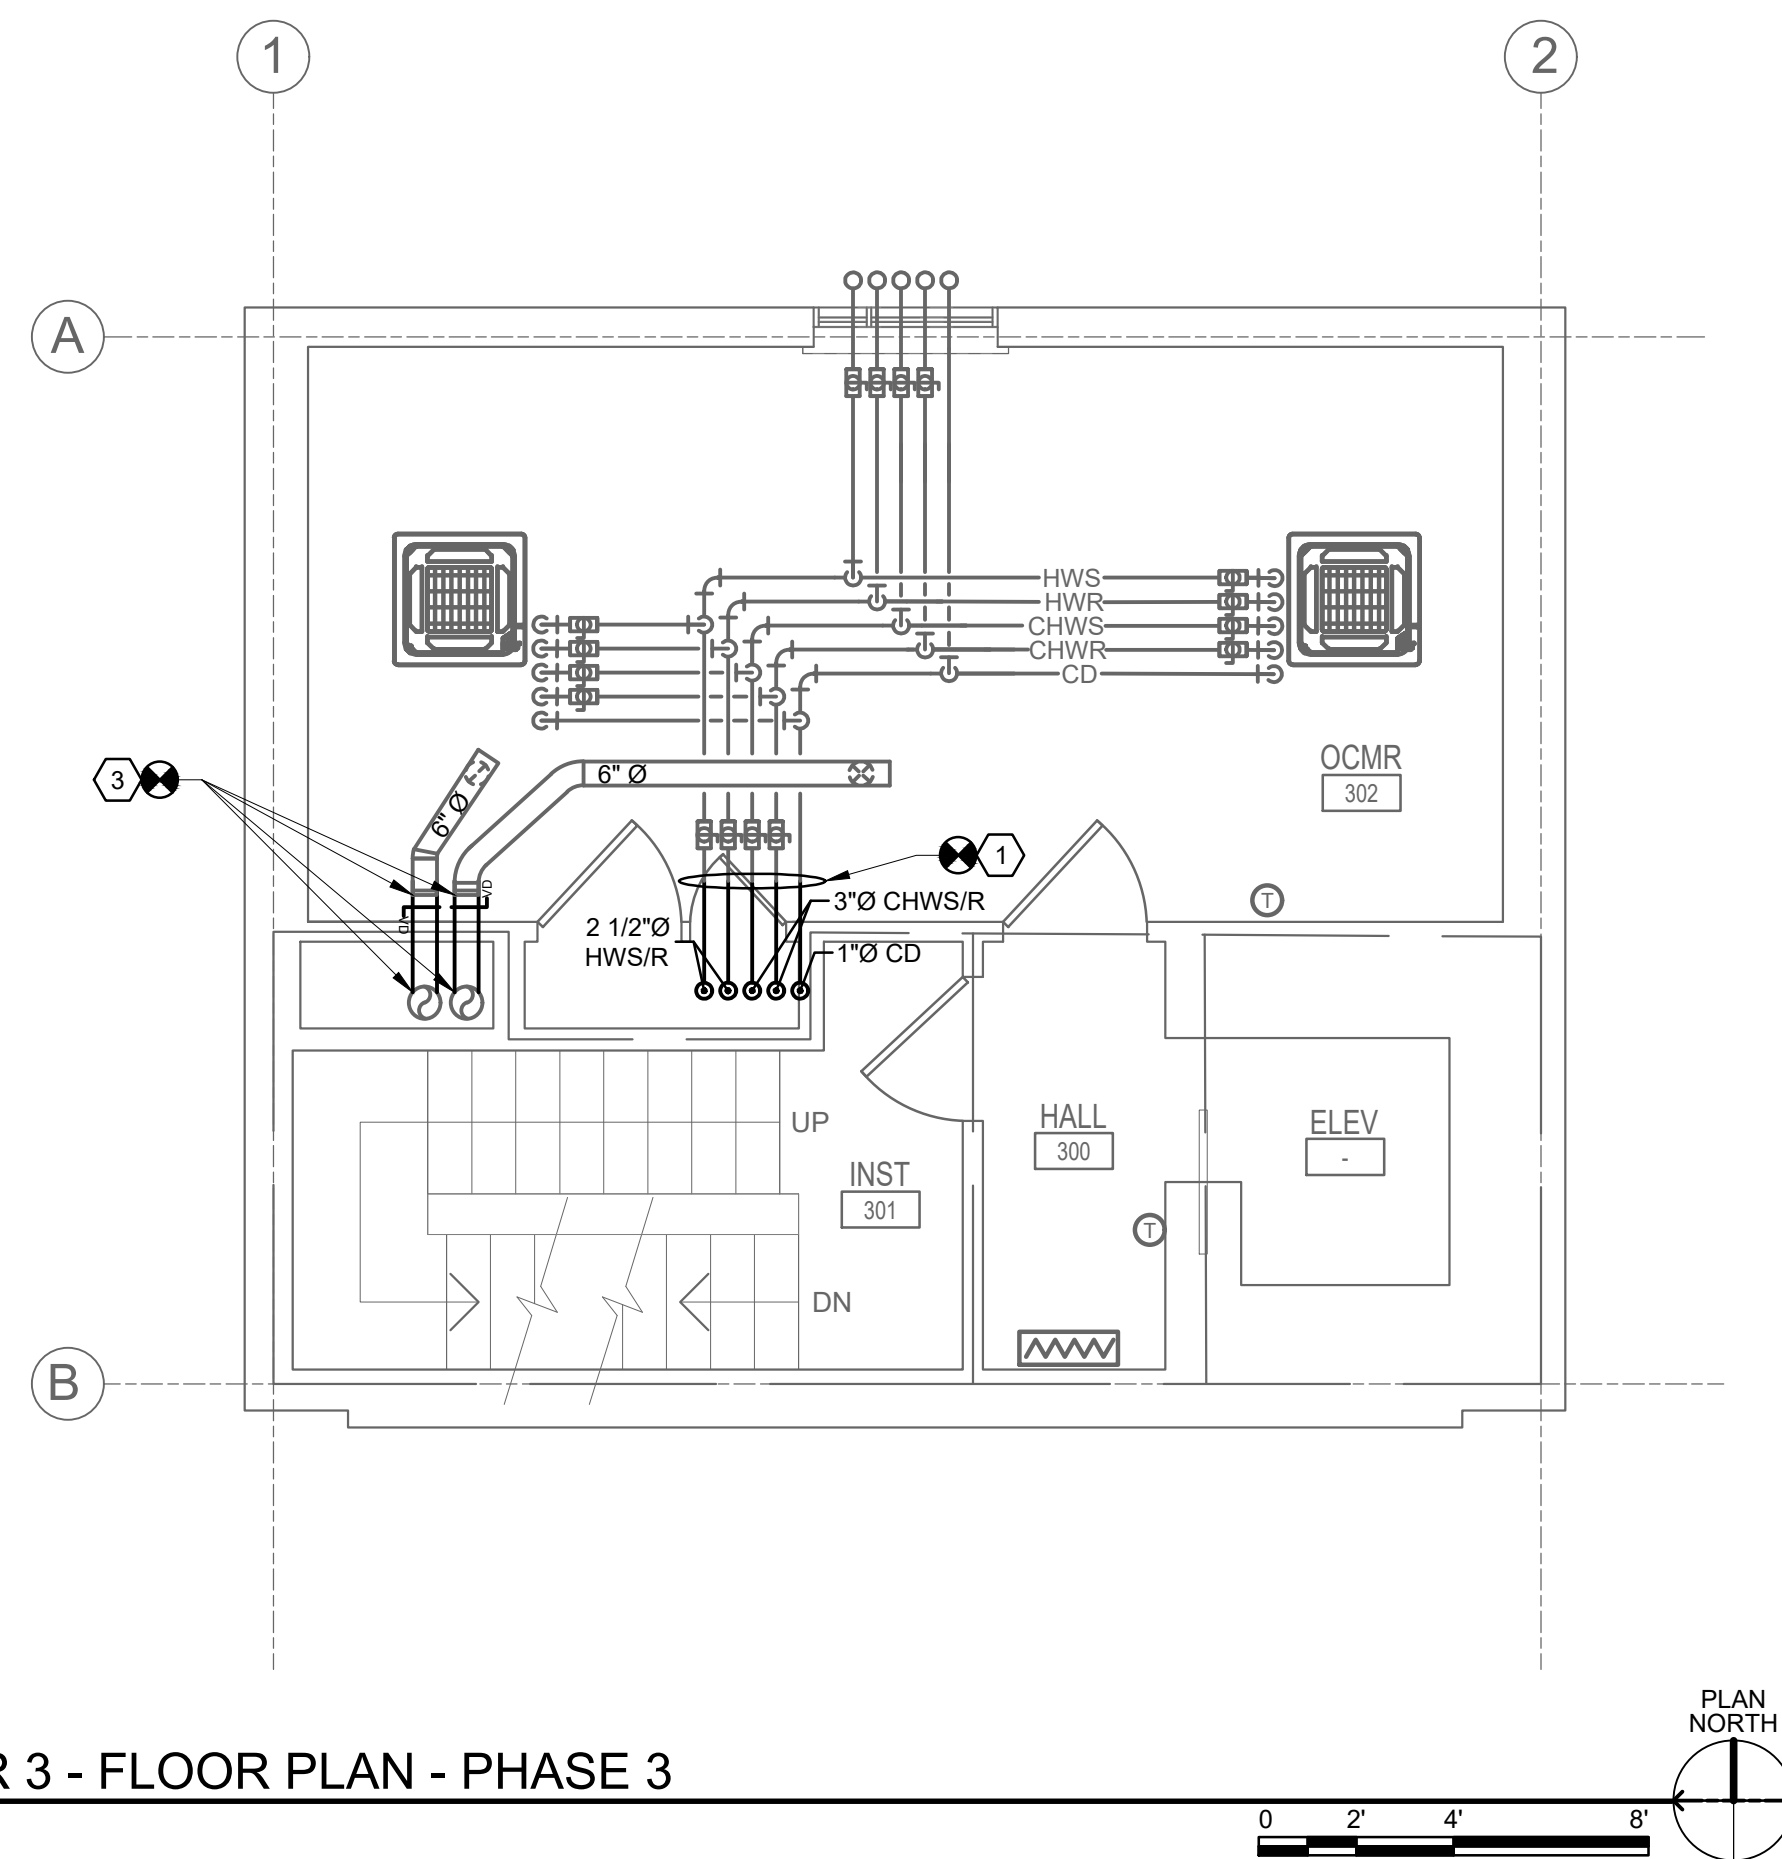


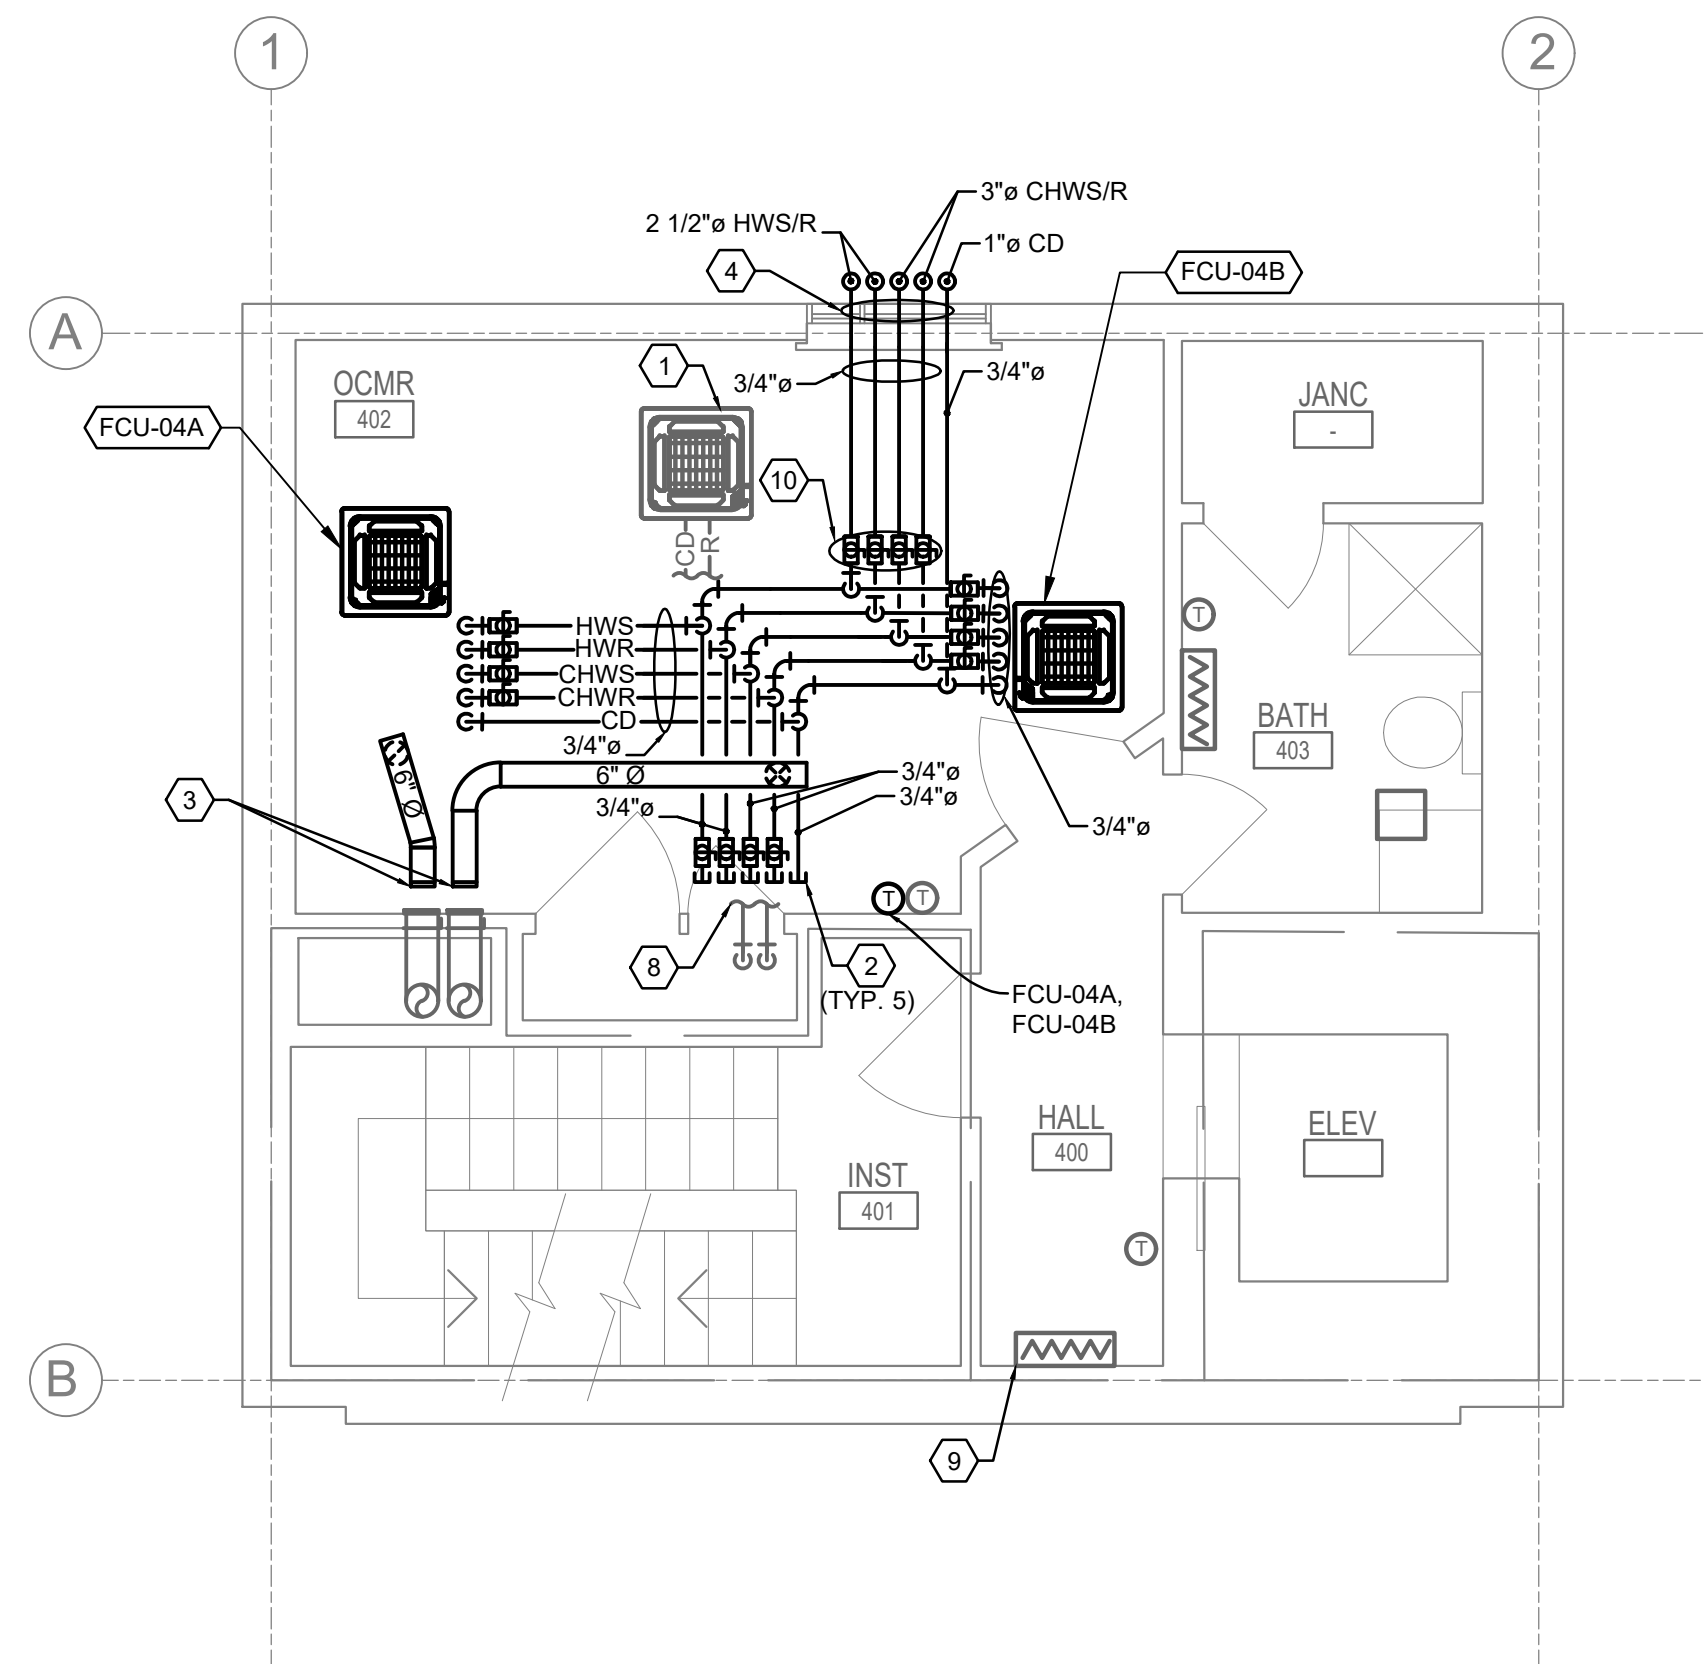


1 FLOOR 4 - FLOOR PLAN - PHASE 1
1/4" = 1'-0"

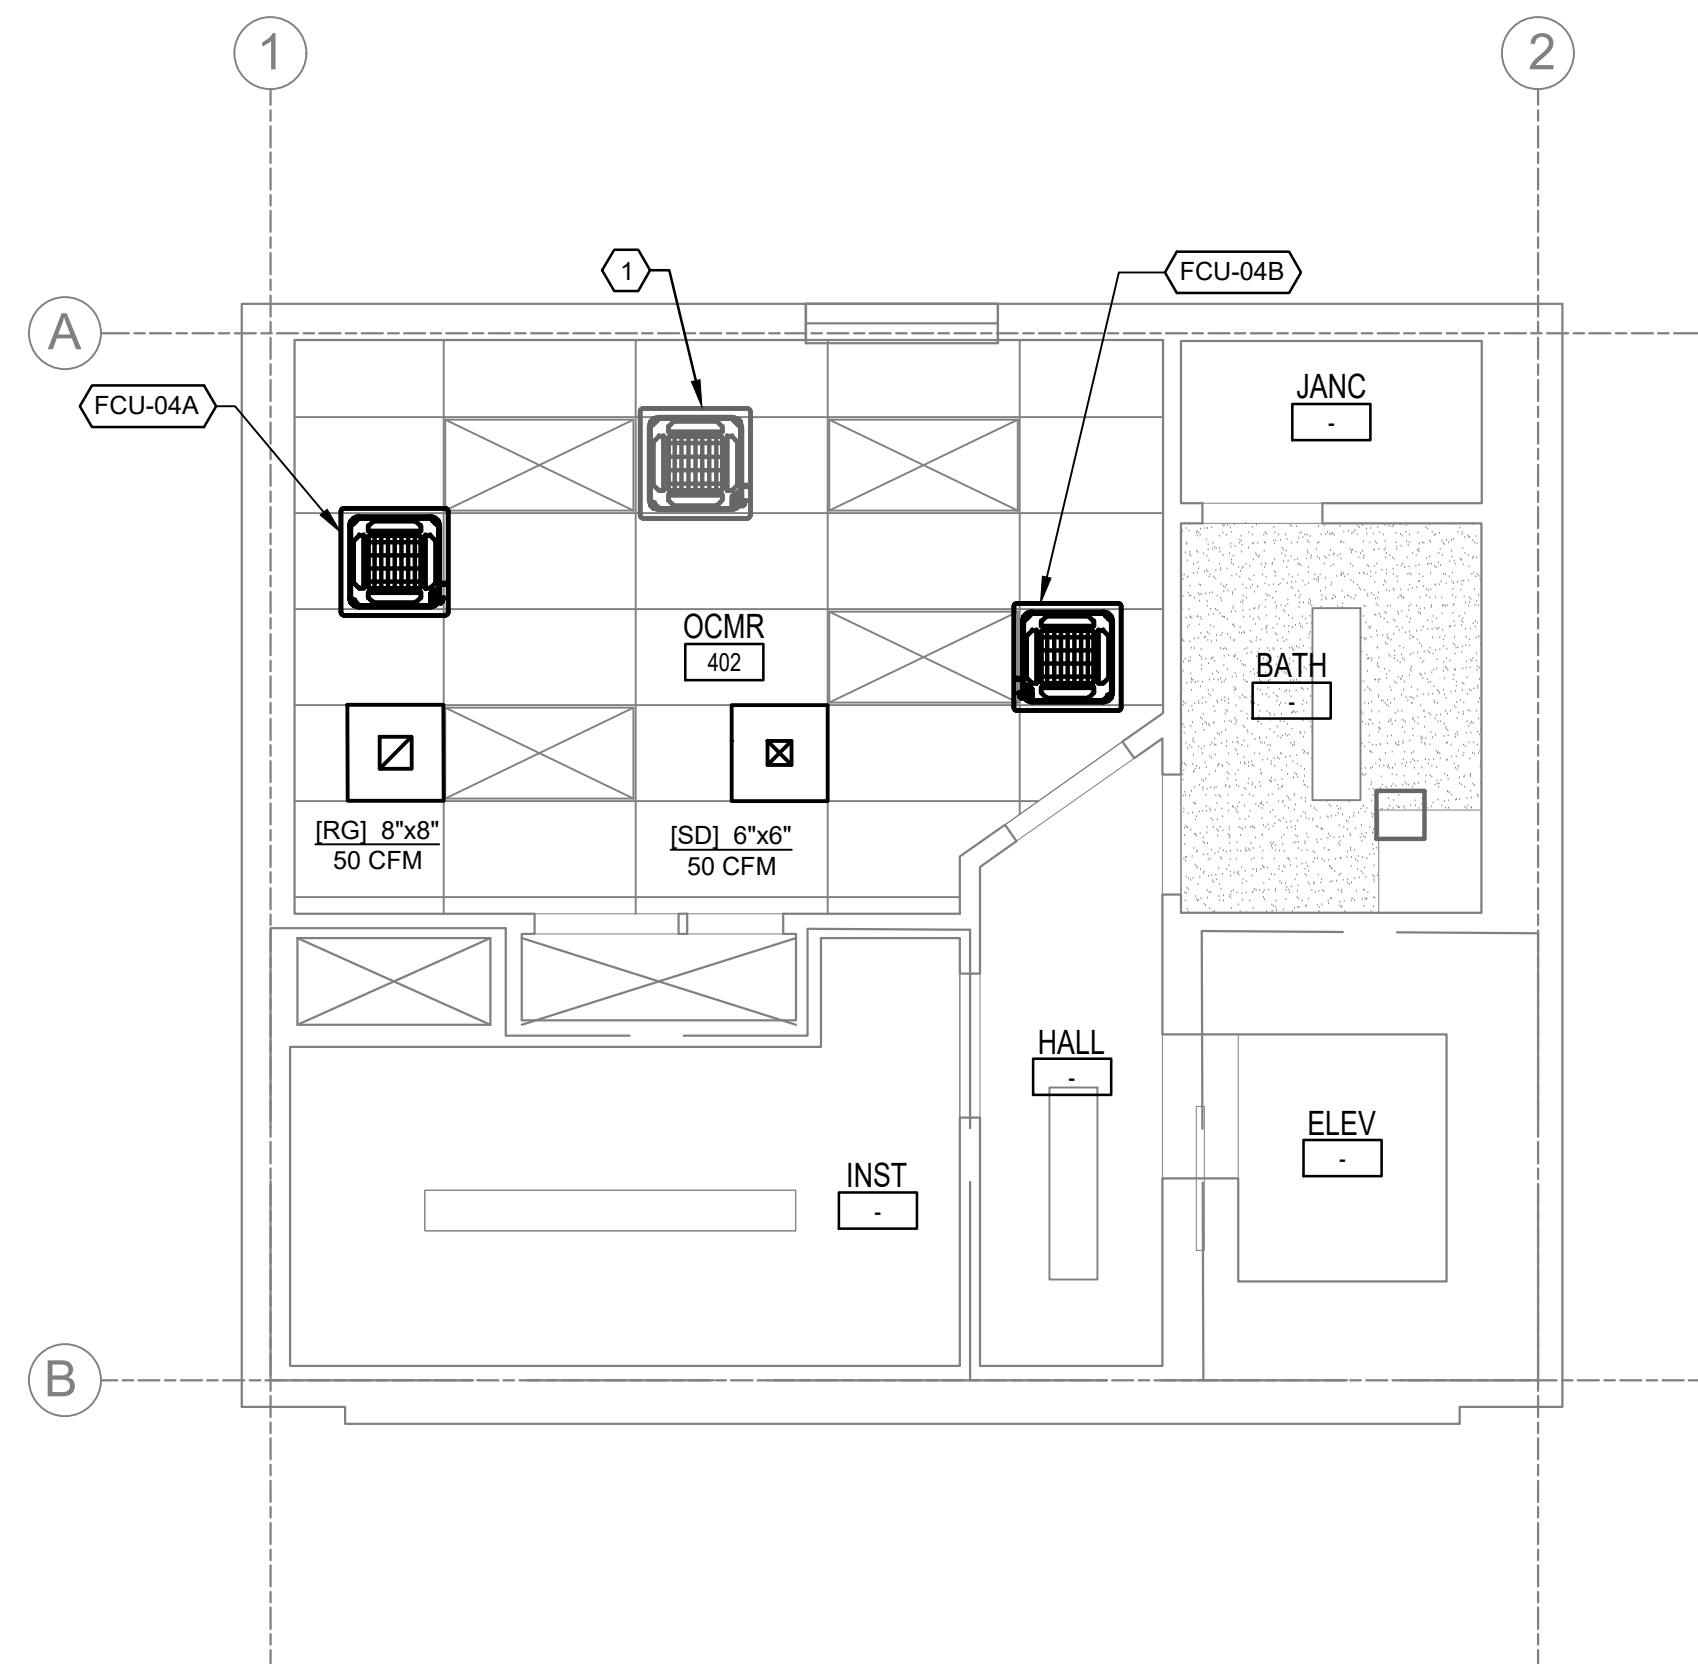

2 FLOOR 4 - REFLECTED CEILING PLAN - PHASE 1
1/4" = 1'-0"

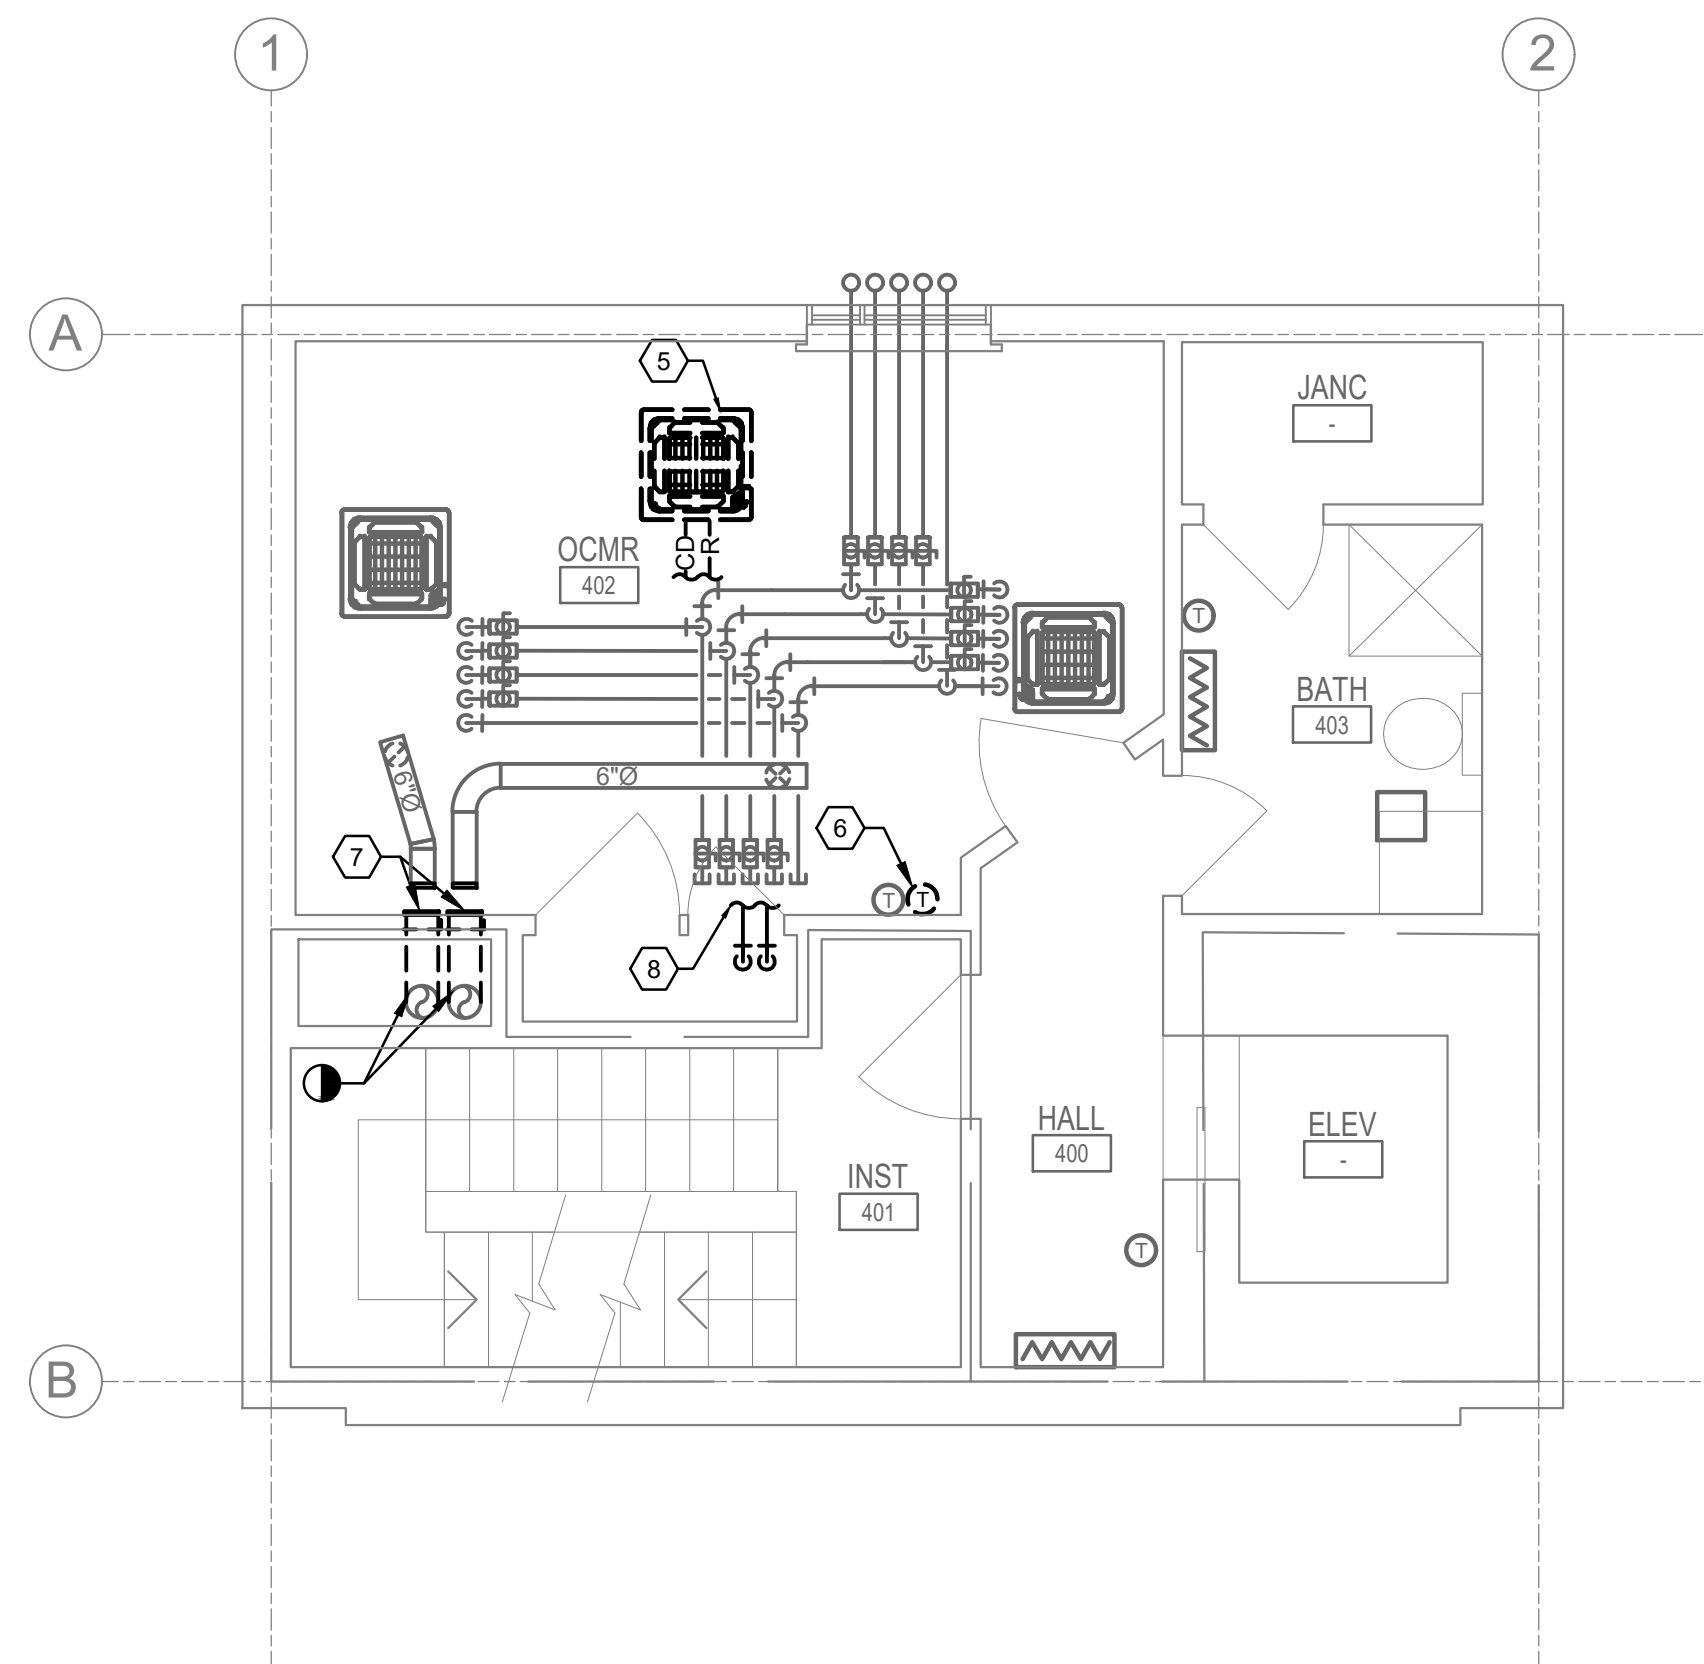

3 FLOOR 4 - FLOOR PLAN - PHASE 2
1/4" = 1'-0"

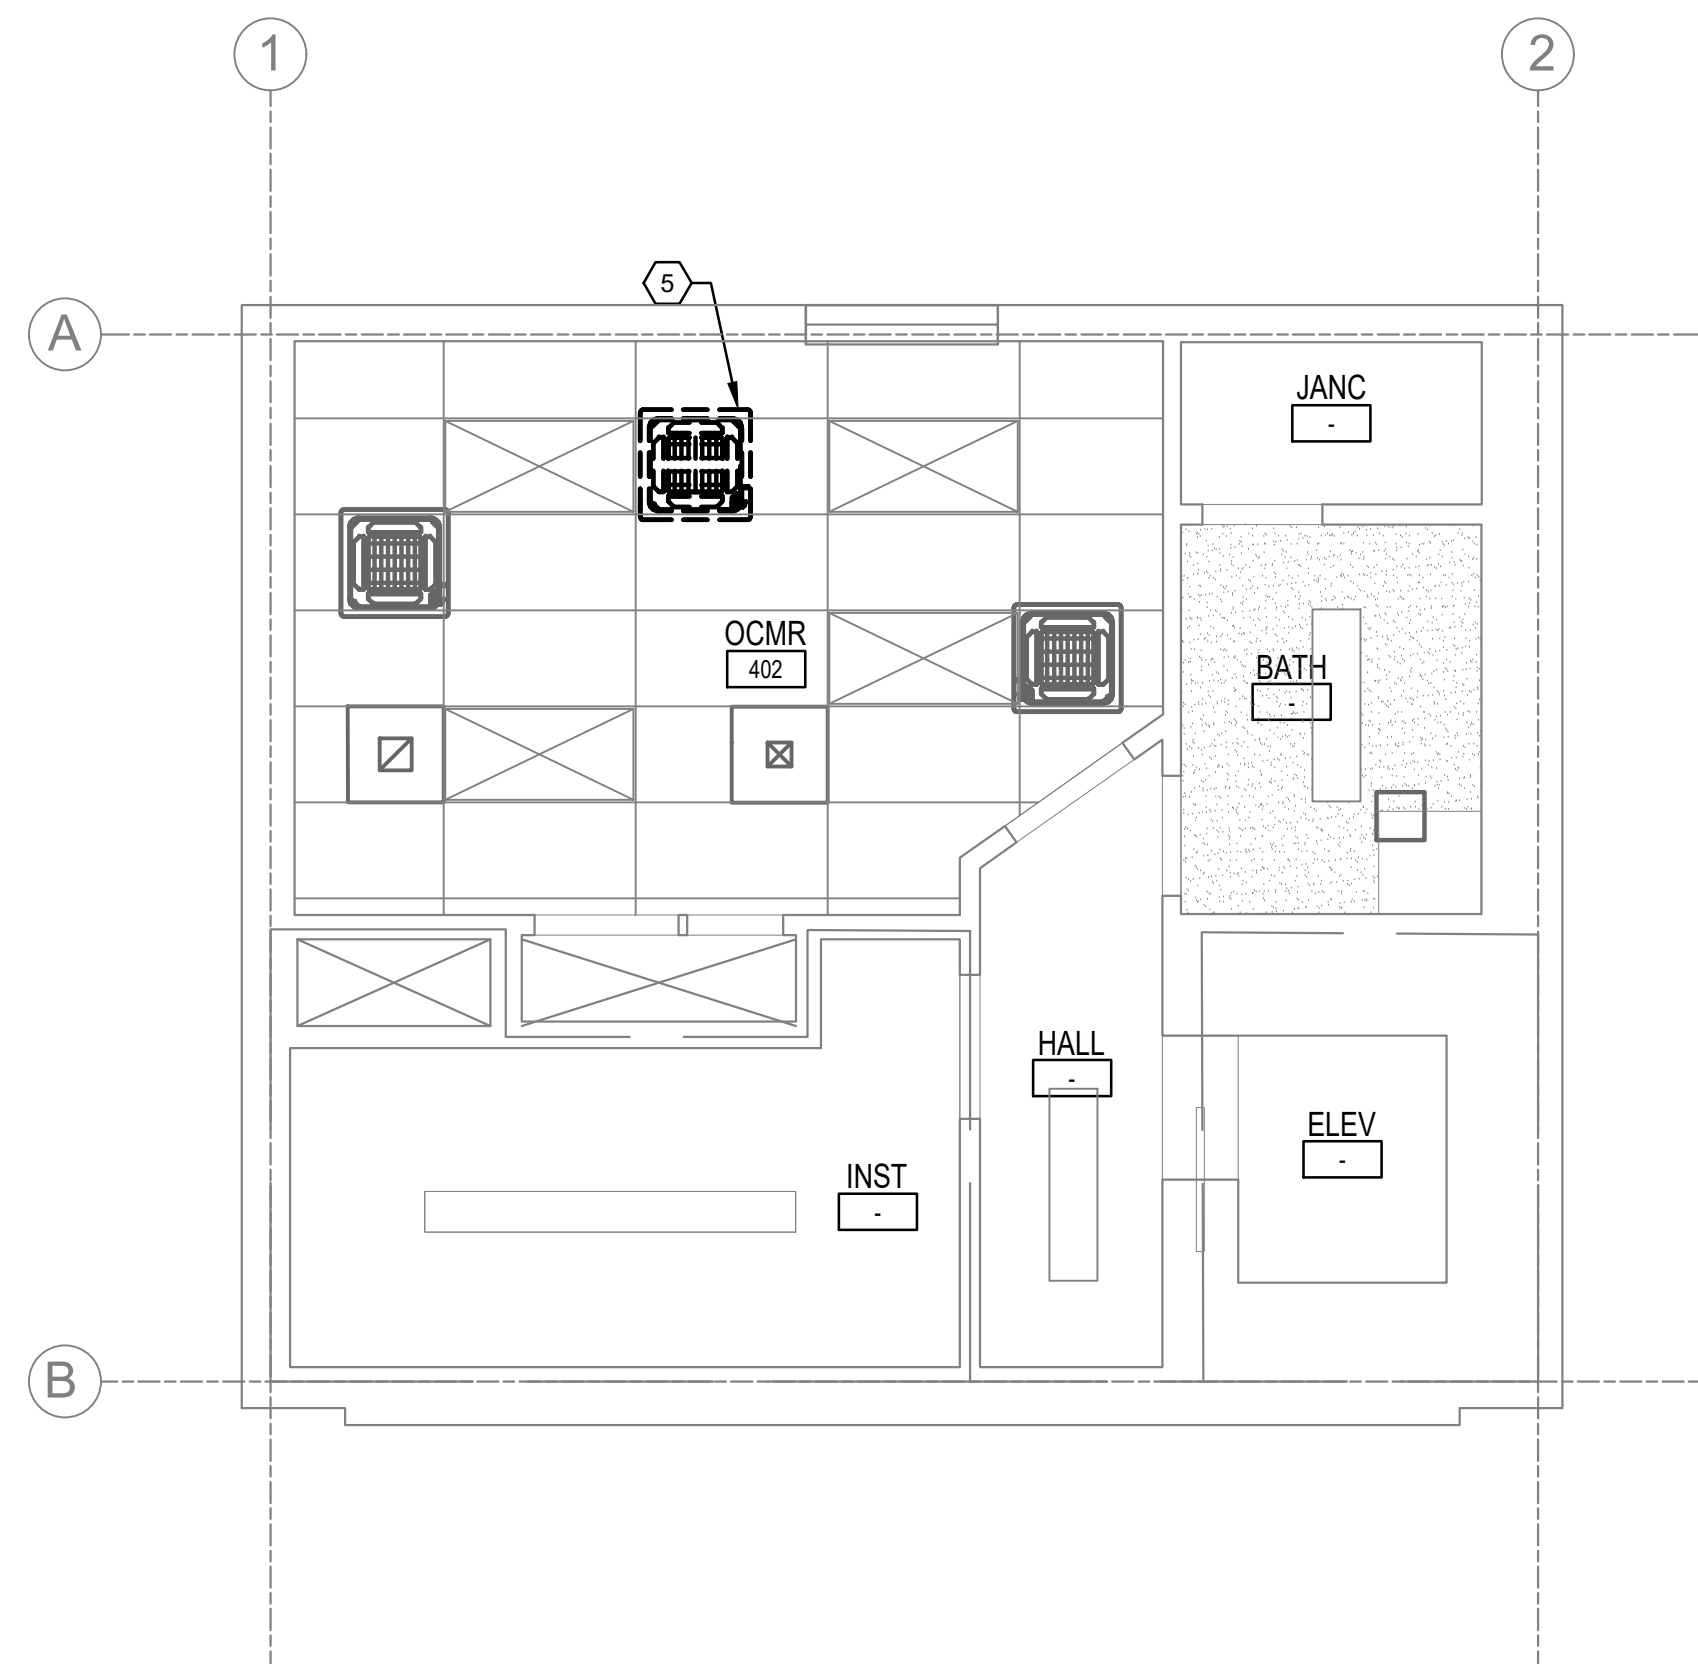

4 FLOOR 4 - REFLECTED CEILING PLAN - PHASE 2
1/4" = 1'-0"

GENERAL SHEET NOTES

1. CONTRACTOR MUST VERIFY ALL DIMENSIONS BY FIELD MEASUREMENT BEFORE BEGINNING ANY FABRICATION OR CONSTRUCTION.
2. ALL WORK SHALL BE IN ACCORDANCE WITH APPLICABLE CODES, UFC STANDARDS AND SPECIFICATIONS.
3. CONTRACTOR SHALL INSTALL ALL EQUIPMENT IN STRICT ACCORDANCE WITH MANUFACTURER'S RECOMMENDATIONS.
4. COORDINATE INSTALLATION OF EQUIPMENT AND MATERIALS WITH OTHER TRADES.
5. CONTRACTOR SHALL COORDINATE WITH GENERAL CONTRACTOR AND OWNER PRIOR TO ANY CUTTING OF WALLS AND ROOF.
6. IF FLOOR OR RATED WALL PENETRATIONS CANNOT BE FIRE STOPPED AT THE END OF THE WORK SHIFT, TEMPORARY FIRESTOPPING COMPOSED OF MINERAL WOOL SHALL BE INSTALLED IN THE PENETRATION TO PROVIDE PROTECTION AGAINST FIRE/SMOKE SPREAD THROUGH THE UNSEALED PENETRATION.
7. NEW WORK SHOWN DARK, EXISTING WORK SHOWN LIGHT.
8. ALL PIPING AND DUCTWORK IS SHOWN OFFSET AND DIAGRAMMATIC FOR CLARITY.

SHEET KEYNOTES

1. EXISTING VRF UNIT AND ASSOCIATED PIPING TO REMAIN IN PHASE 1.
2. CAP AND SEAL PIPING FOR TIE IN IN LATER PHASE.
3. CAP DUCTWORK FOR TIE IN IN LATER PHASE.
4. TEMPORARY PIPING TO RUN UP THE EXTERIOR OF THE BUILDING. PIPING SHALL GO THROUGH OPENING LEFT BY REMOVAL OF EXISTING WINDOW. SEE ARCHITECTURAL PLANS FOR WINDOW OPENING DETAILS.
5. DEMOLISH EXISTING VRF UNIT AND ASSOCIATED REFRIGERANT AND CONDENSATE PIPING. EVACUATE AND CAPTURE REFRIGERANT PRIOR TO REMOVING SYSTEM.
6. DEMOLISH TSTAT SERVING EXISTING VRF UNIT.
7. DEMOLISH OUT DIFFUSERS, GRILLES, AND ASSOCIATED DUCTWORK.
8. REFRIGERANT PIPING CONTINUES BETWEEN THE TWO CONTINUATION LINES BUT IS NOT SHOWN FOR CLARITY.
9. EXISTING ELECTRIC WALL HEATER TO REMAIN.
10. LOCATE VALVES AS CLOSE AS POSSIBLE TO TEES SERVING FAN COIL UNITS. VALVES SHOWN OFFSET IN THIS LOCATION FOR CLARITY.



U.S. ARMY CORPS OF
ENGINEERS®
SEATTLE DISTRICT

[illegible]

U.S. ARMY CORP. OF ENGINEERS SEATTLE, WASHINGTON	SPEEDS DESIGN BUILD	09/26/2025
	DRAWN BY: L. BEACHY	SOLICITATION NO.: FA62024F0092
	DESIGNED BY: M. HUBERD, J. WOOD	CONTRACT NO.: FA62024F0092
	SUBMITTED BY: R. SPEEDS	I/O: DEJ225502J
	SIZE: ANSI D	



FLOOR 4 - MECHANICAL FLOOR PLAN - PHASE 1 & 2

SHEET ID
J00008

M-125



100% ELECTRONIC BID SET

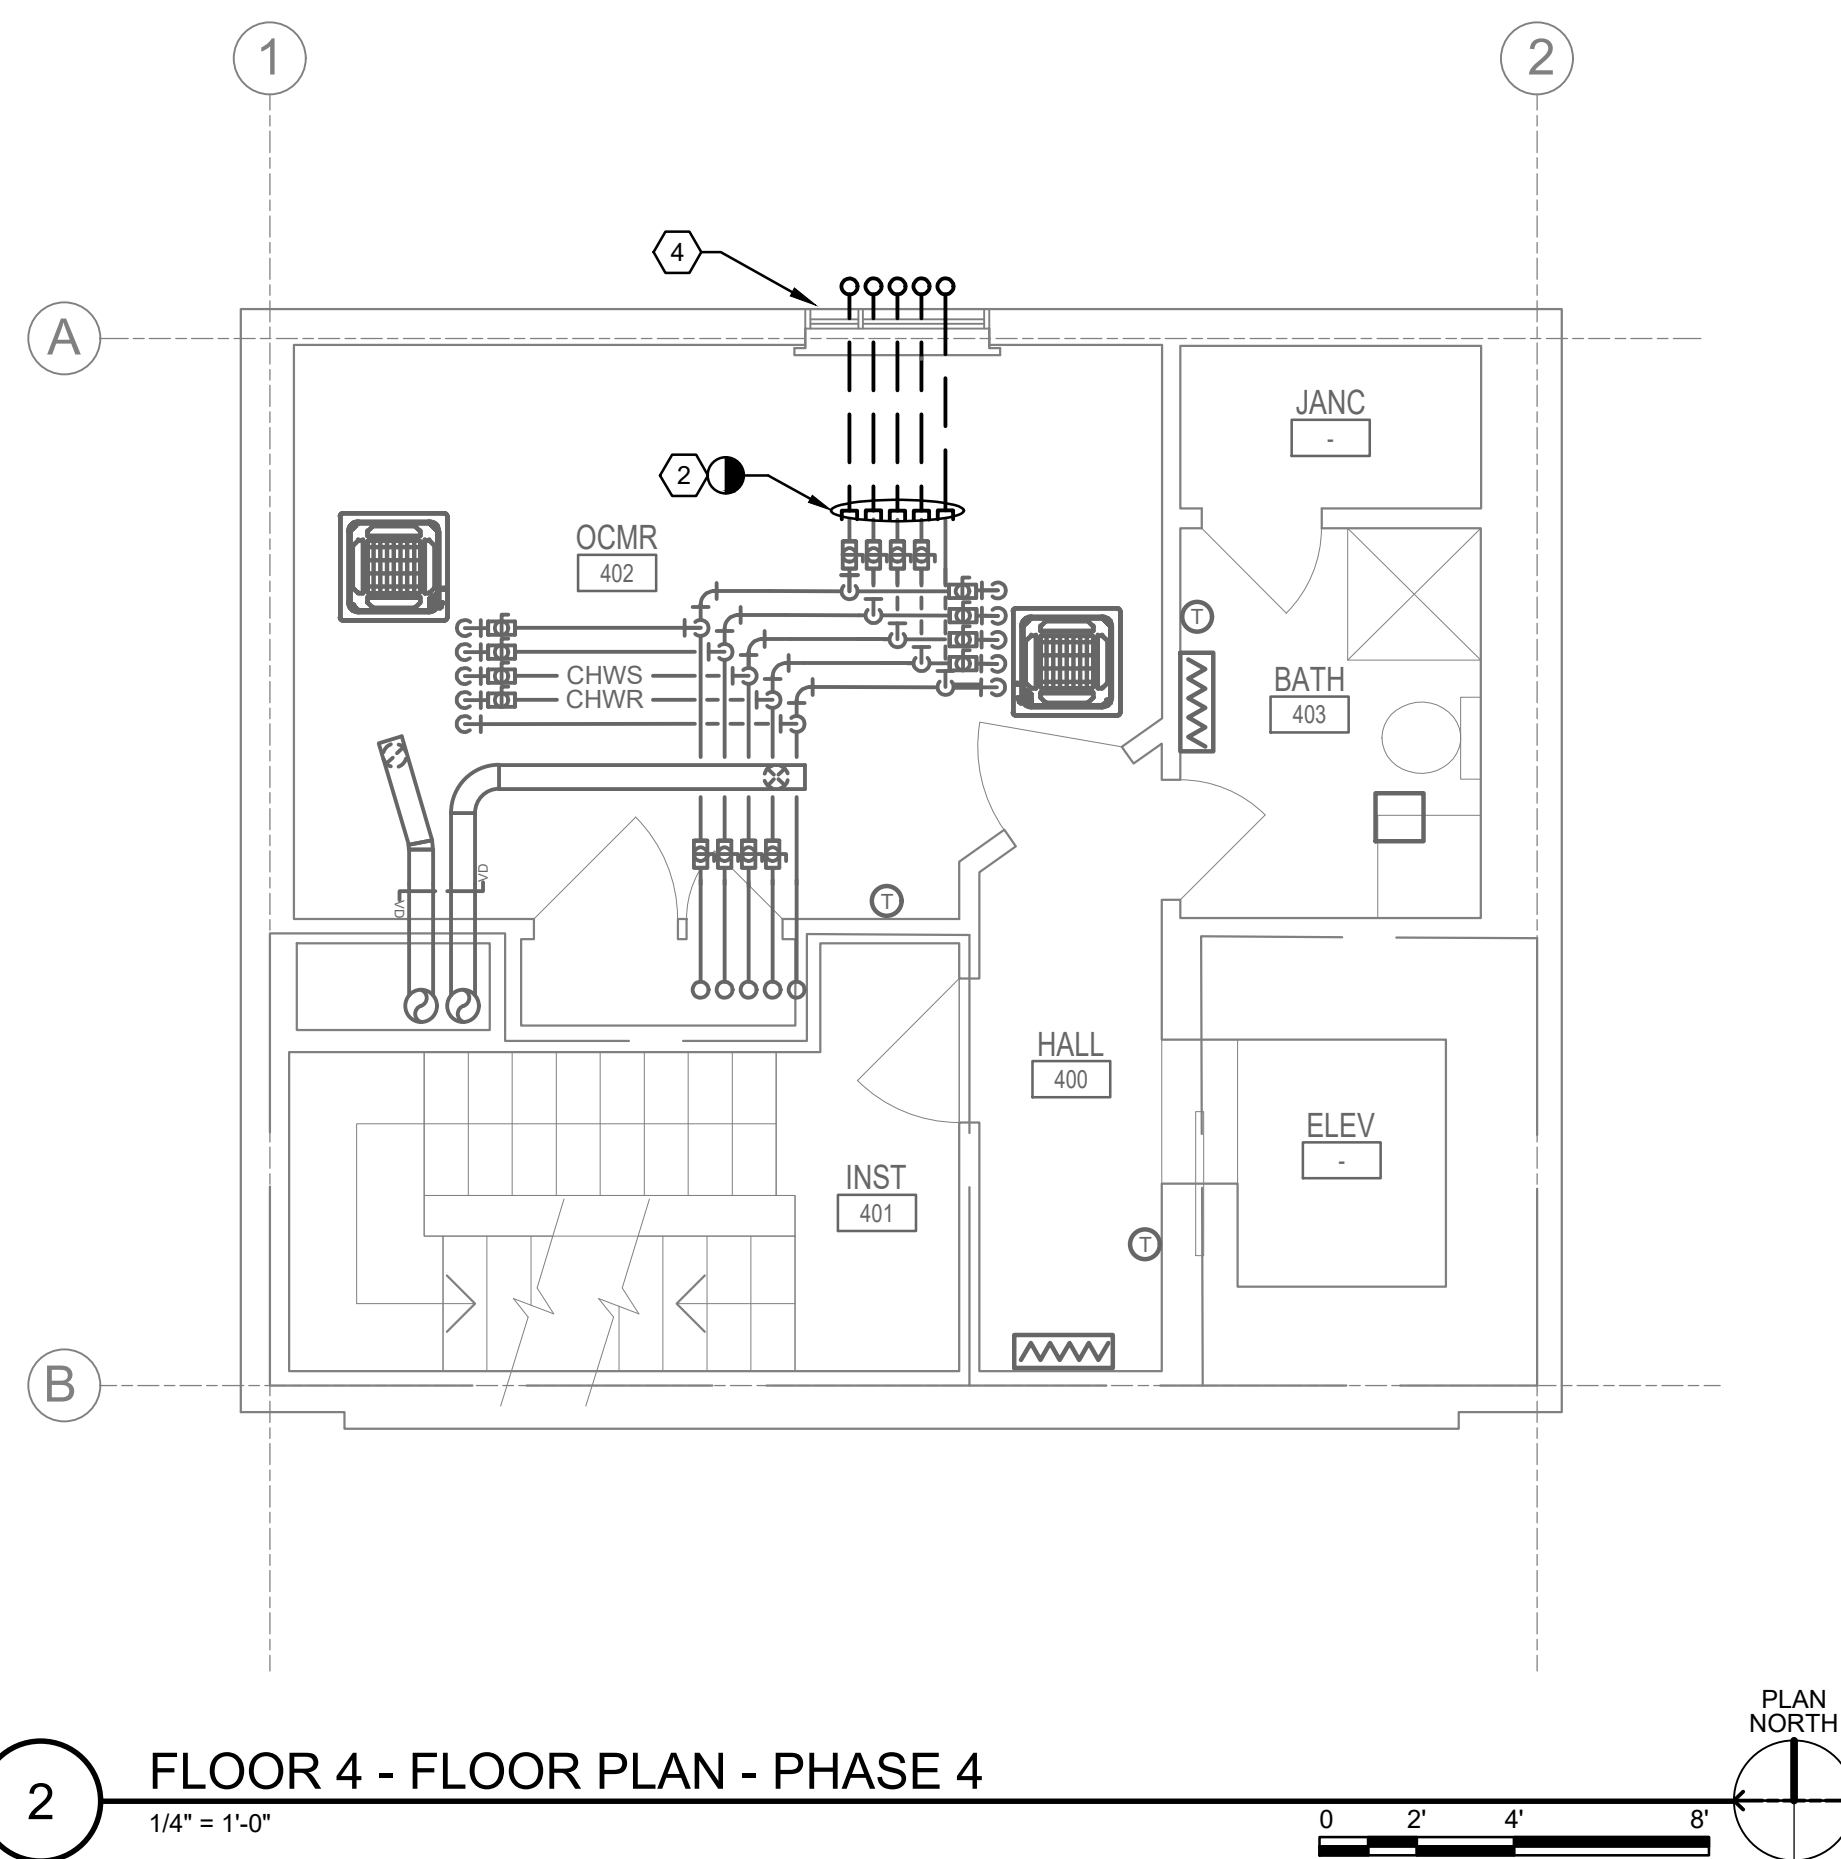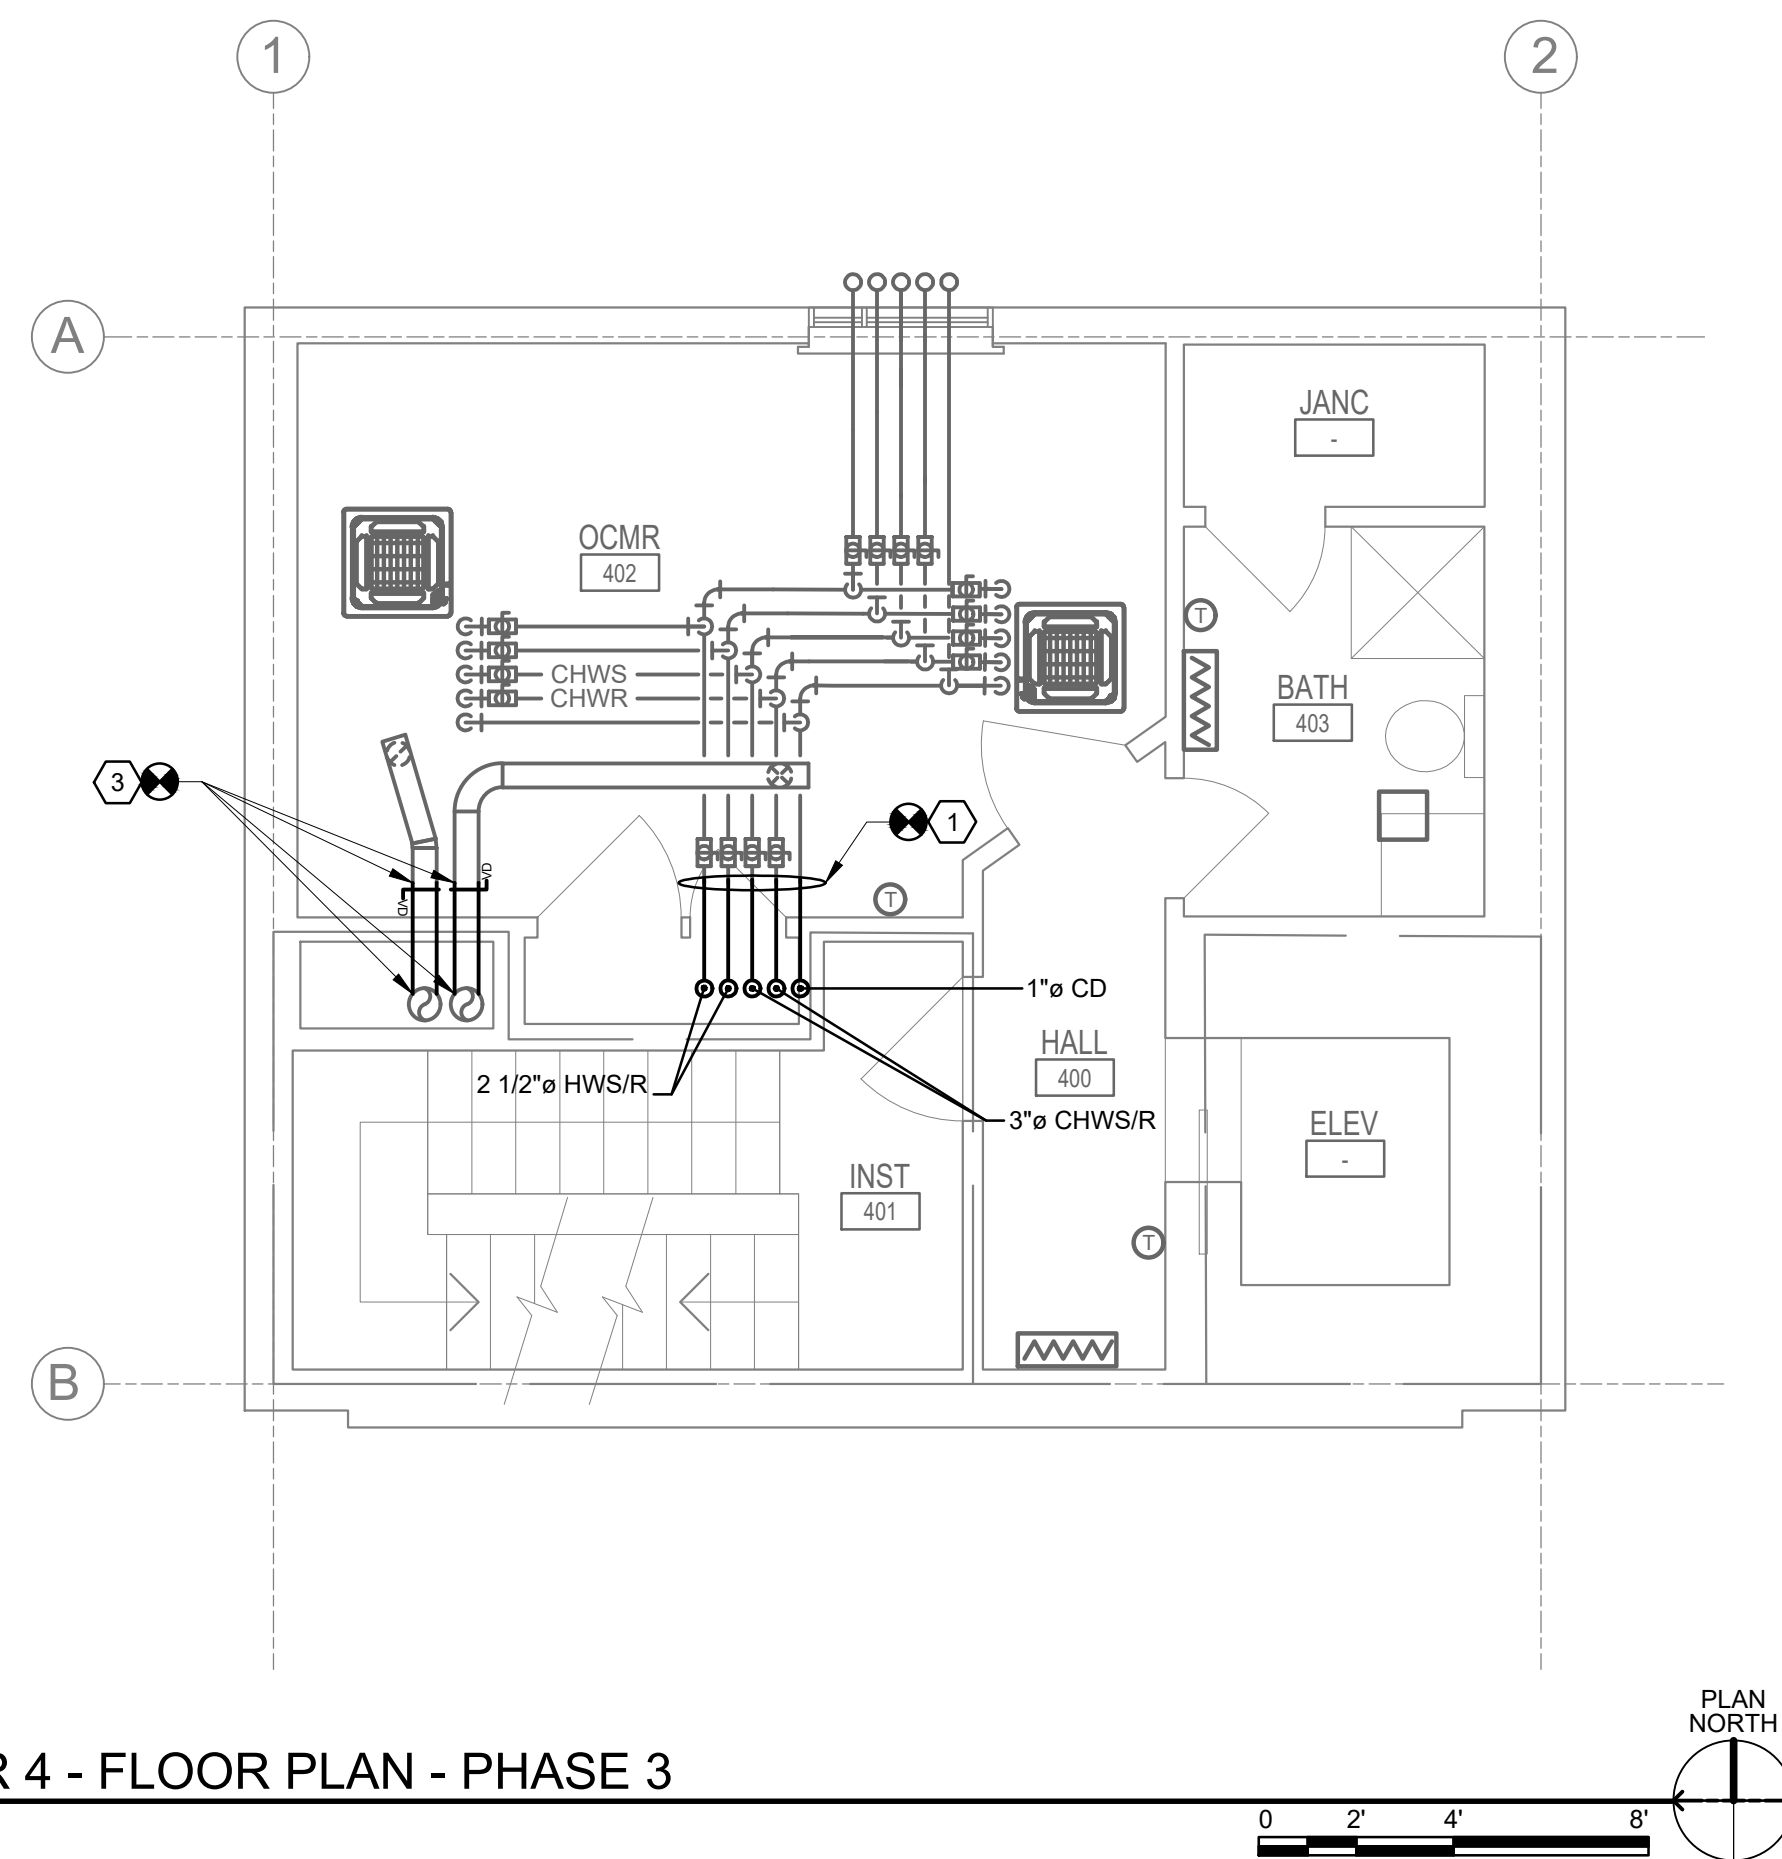

GENERAL SHEET NOTES

1. CONTRACTOR MUST VERIFY ALL DIMENSIONS BY FIELD MEASUREMENT BEFORE BEGINNING ANY FABRICATION OR CONSTRUCTION.
2. ALL WORK SHALL BE IN ACCORDANCE WITH APPLICABLE CODES, UFC STANDARDS AND SPECIFICATIONS.
3. CONTRACTOR SHALL INSTALL ALL EQUIPMENT IN STRICT ACCORDANCE WITH MANUFACTURER'S RECOMMENDATIONS.
4. COORDINATE INSTALLATION OF EQUIPMENT AND MATERIALS WITH OTHER TRADES.
5. CONTRACTOR SHALL COORDINATE WITH GENERAL CONTRACTOR AND OWNER PRIOR TO ANY CUTTING OF WALLS AND ROOF.
6. IF FLOOR OR RATED WALL PENETRATIONS CANNOT BE FIRE STOPPED AT THE END OF THE WORK SHIFT, TEMPORARY FIRESTOPPING COMPOSED OF MINERAL WOOL SHALL BE INSTALLED IN THE PENETRATION TO PROVIDE PROTECTION AGAINST FIRE/SMOKE SPREAD THROUGH THE UNSEALED PENETRATION.
7. NETWORK SHOWN DARK, EXISTING WORK SHOWN LIGHT.
8. ALL PIPING AND DUCTWORK IS SHOWN OFFSET AND DIAGRAMMATIC FOR CLARITY.

SHEET KEYNOTES

1. INSTALL NEW HYDRONIC PIPING IN CHASE EXTENDING TO BOTH FLOOR ABOVE AND BELOW.
2. DEMOLISH TEMPORARY EXTERIOR PIPING. VALVES SHOWN OFFSET FOR CLARITY. CAP AND SEAL PIPING WITHIN 4" OF VALVES.
3. TIE DUCTWORK INTO EXISTING DUCTWORK IN THE CHASE.
4. AFTER PIPING IS DEMOLISHED, RESEAL WINDOW AS DETAILED IN ARCHITECTURAL SHEETS.



US ARMY CORPS OF
ENGINEERS ®
SEATTLE DISTRICT

[illegible]


U.S. ARMY CORPS OF ENGINEERS SEATTLE DISTRICT SEATTLE, WASHINGTON	DESIGNED BY: M. HUBBARD J. WOOD	ISSUE DATE:
	DRAWN BY: L. BEACHY	SOLUTION NO.:
	CHECKED BY:	F4462024F092
	SUBMITTED BY:	CONTRACT NO.:
	R. SPEICES	F4462023D002
	ANSLD	I.UO. DE-12/25602J
SPECS DESIGN HWY S 28330 PACIFIC HWY S KENT, WA 98032 P. (206) 590-2118		

JOINT BASE LEWIS-MCCORD, WASHINGTON
JBLM ATCT HVAC REPAIRS
DEJ22502J



FLOOR 4 - MECHANICAL FLOOR PLAN - PHASE 3 & 4


SHEET ID
J00008

M-126

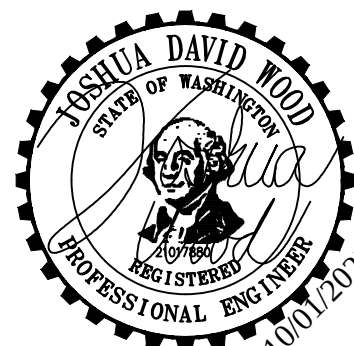


100% ELECTRONIC BID SET

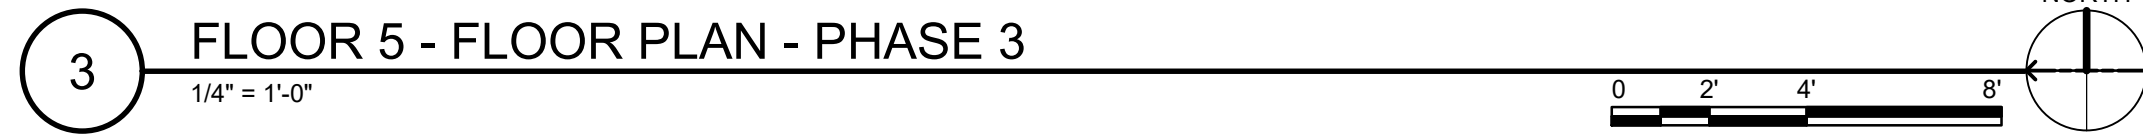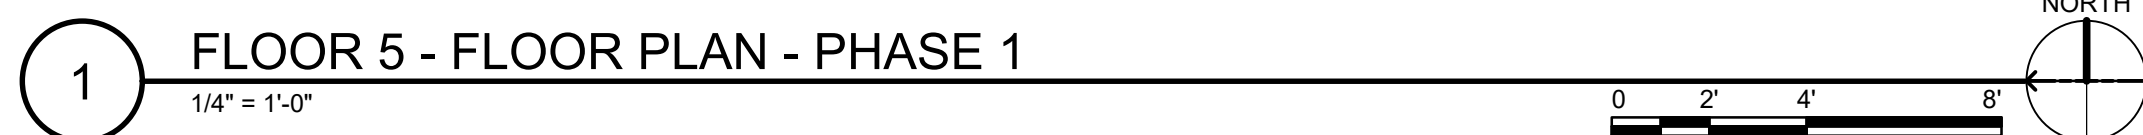


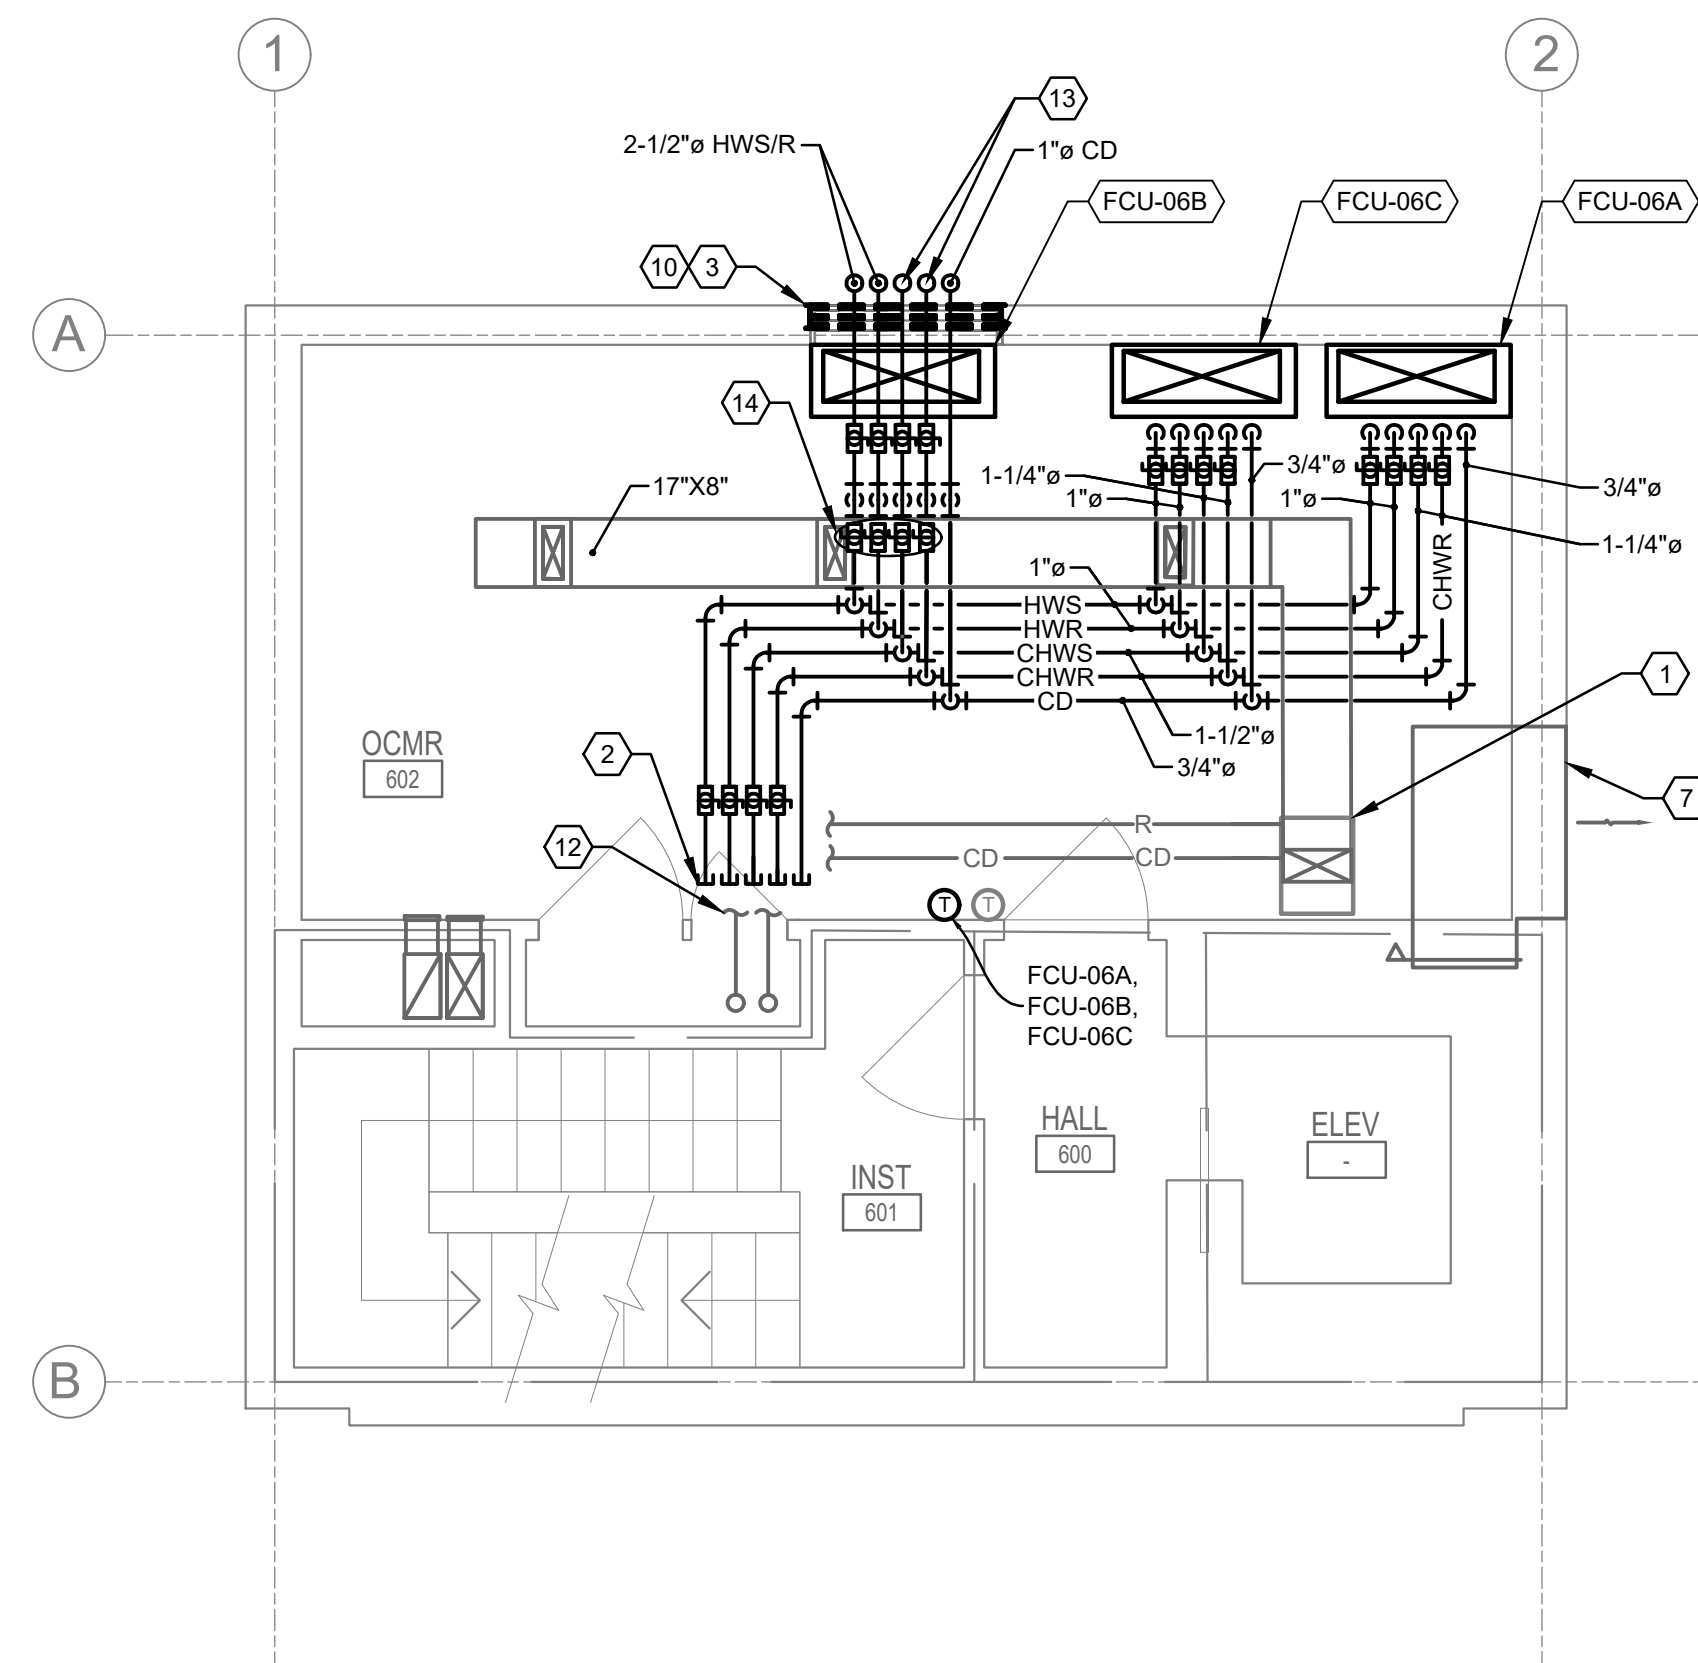


1 FLOOR 6 - FLOOR PLAN - PHASE 1
1/4" = 1'-0"

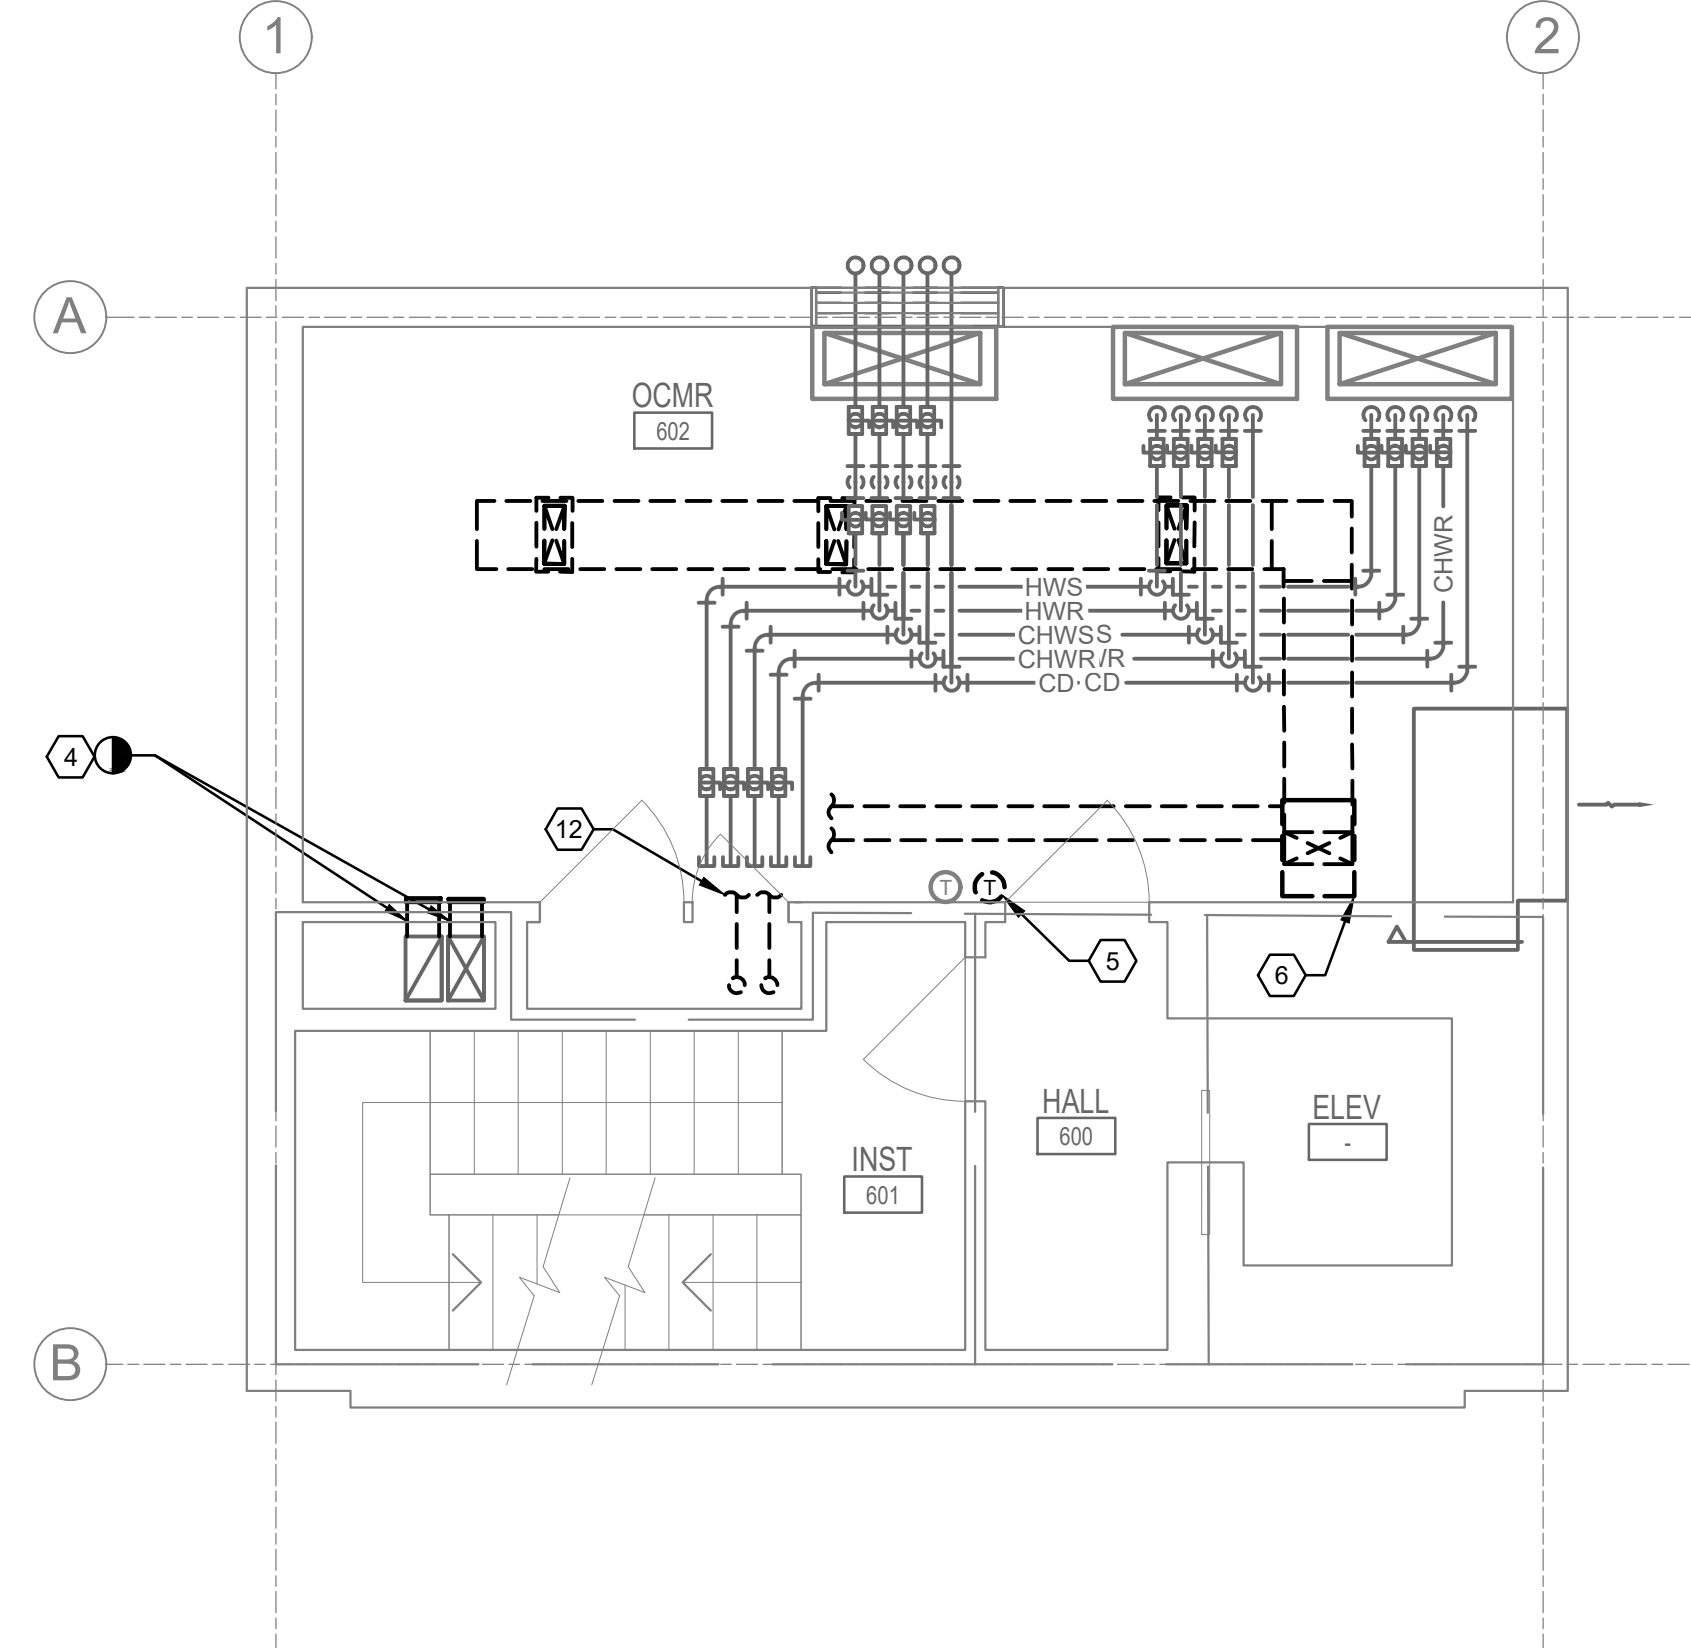

2 FLOOR 6 - FLOOR PLAN - PHASE 2
1/4" = 1'-0"

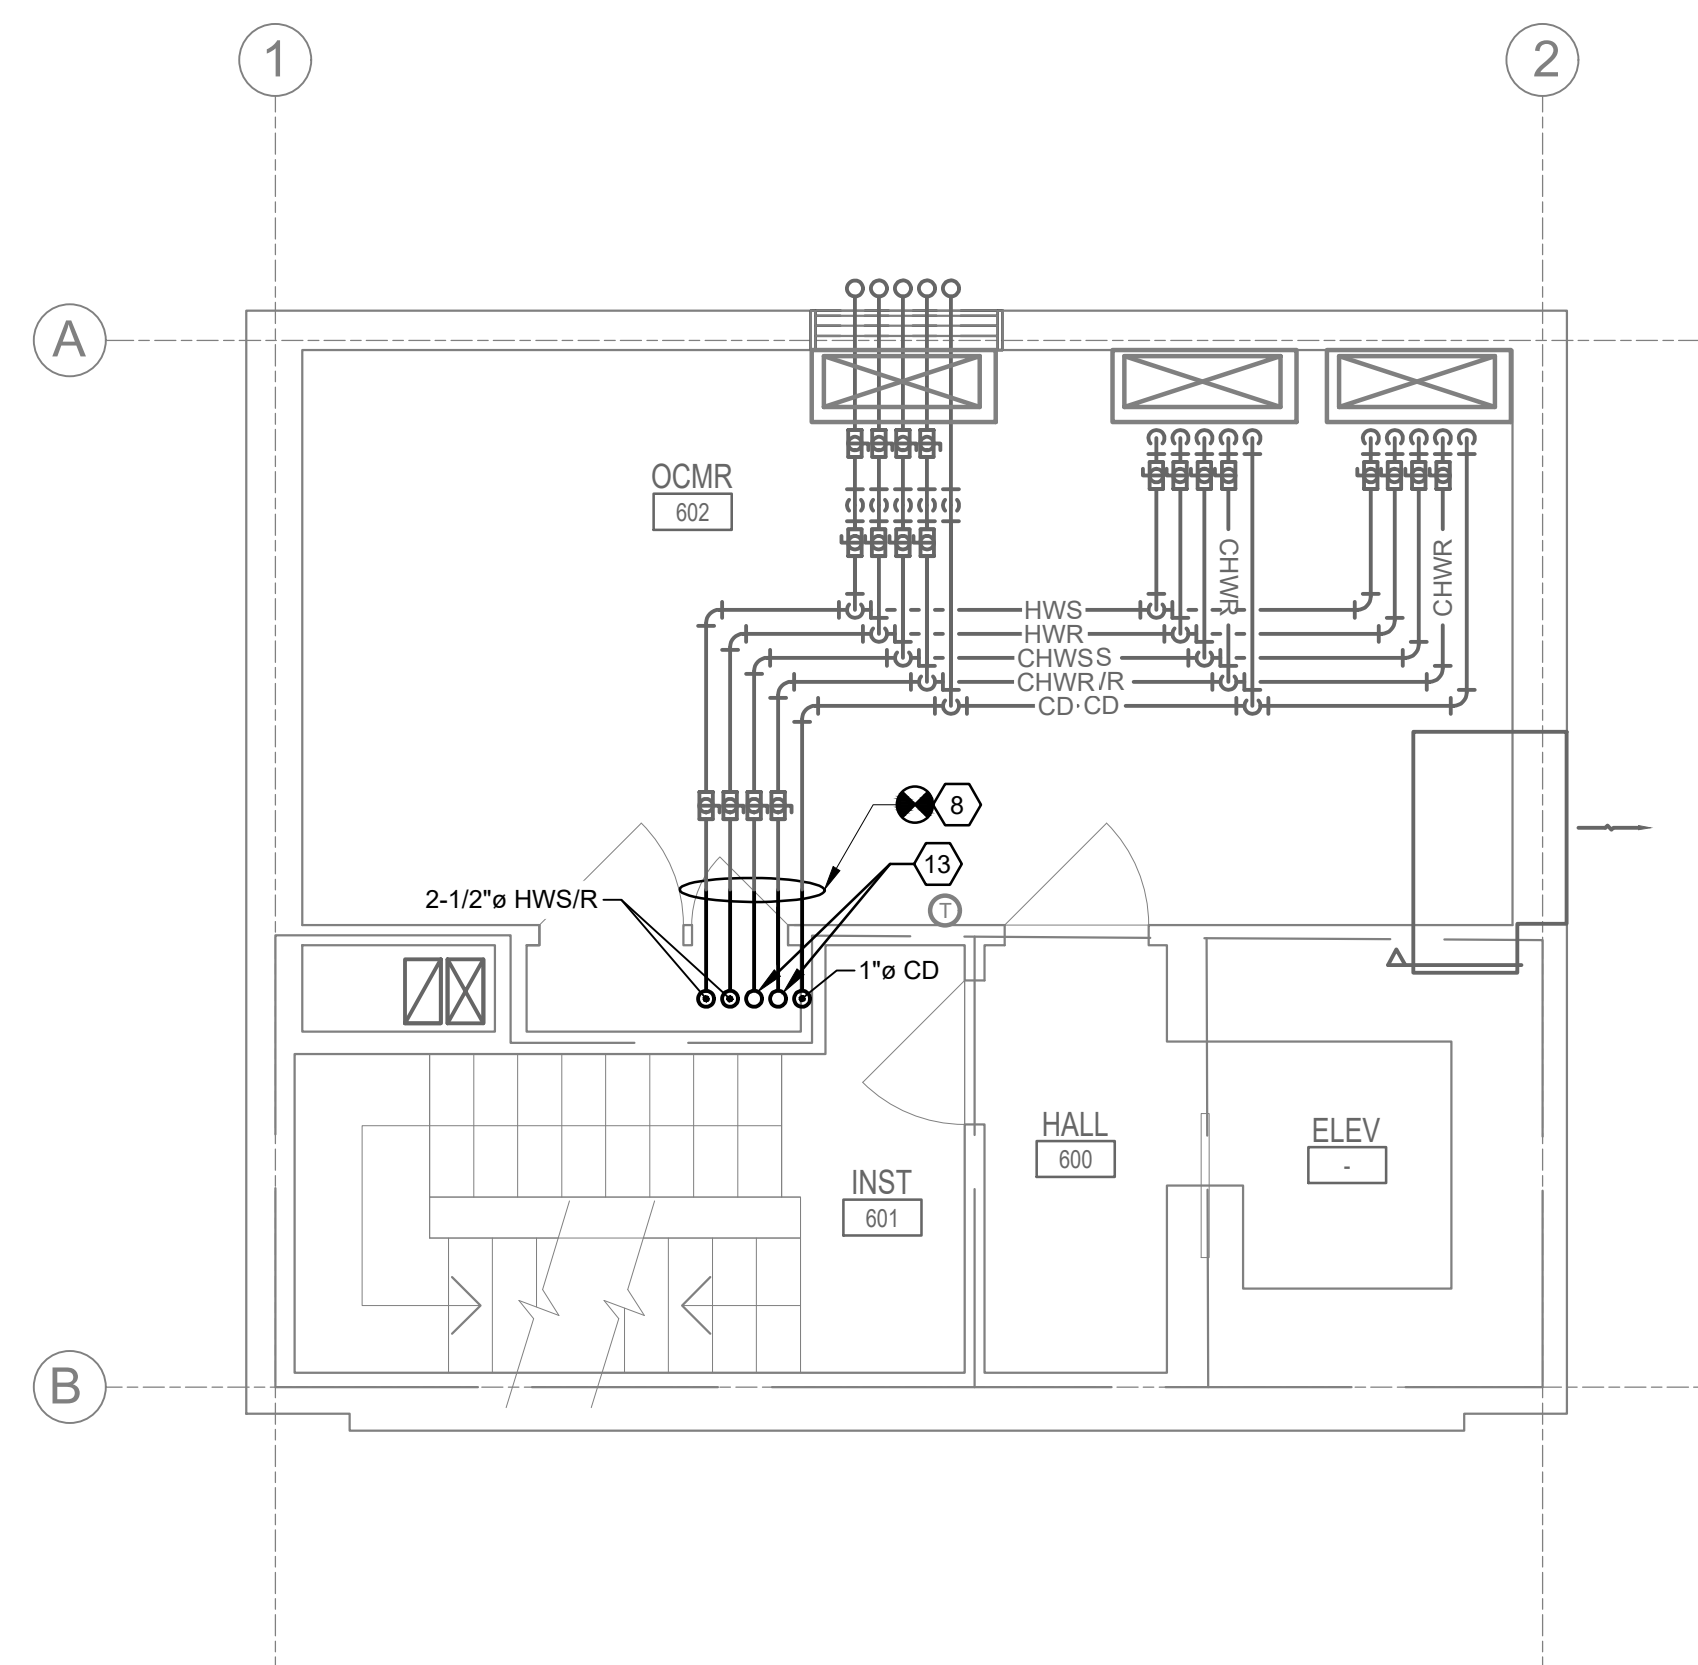

3 FLOOR 6 - FLOOR PLAN - PHASE 3
1/4" = 1'-0"

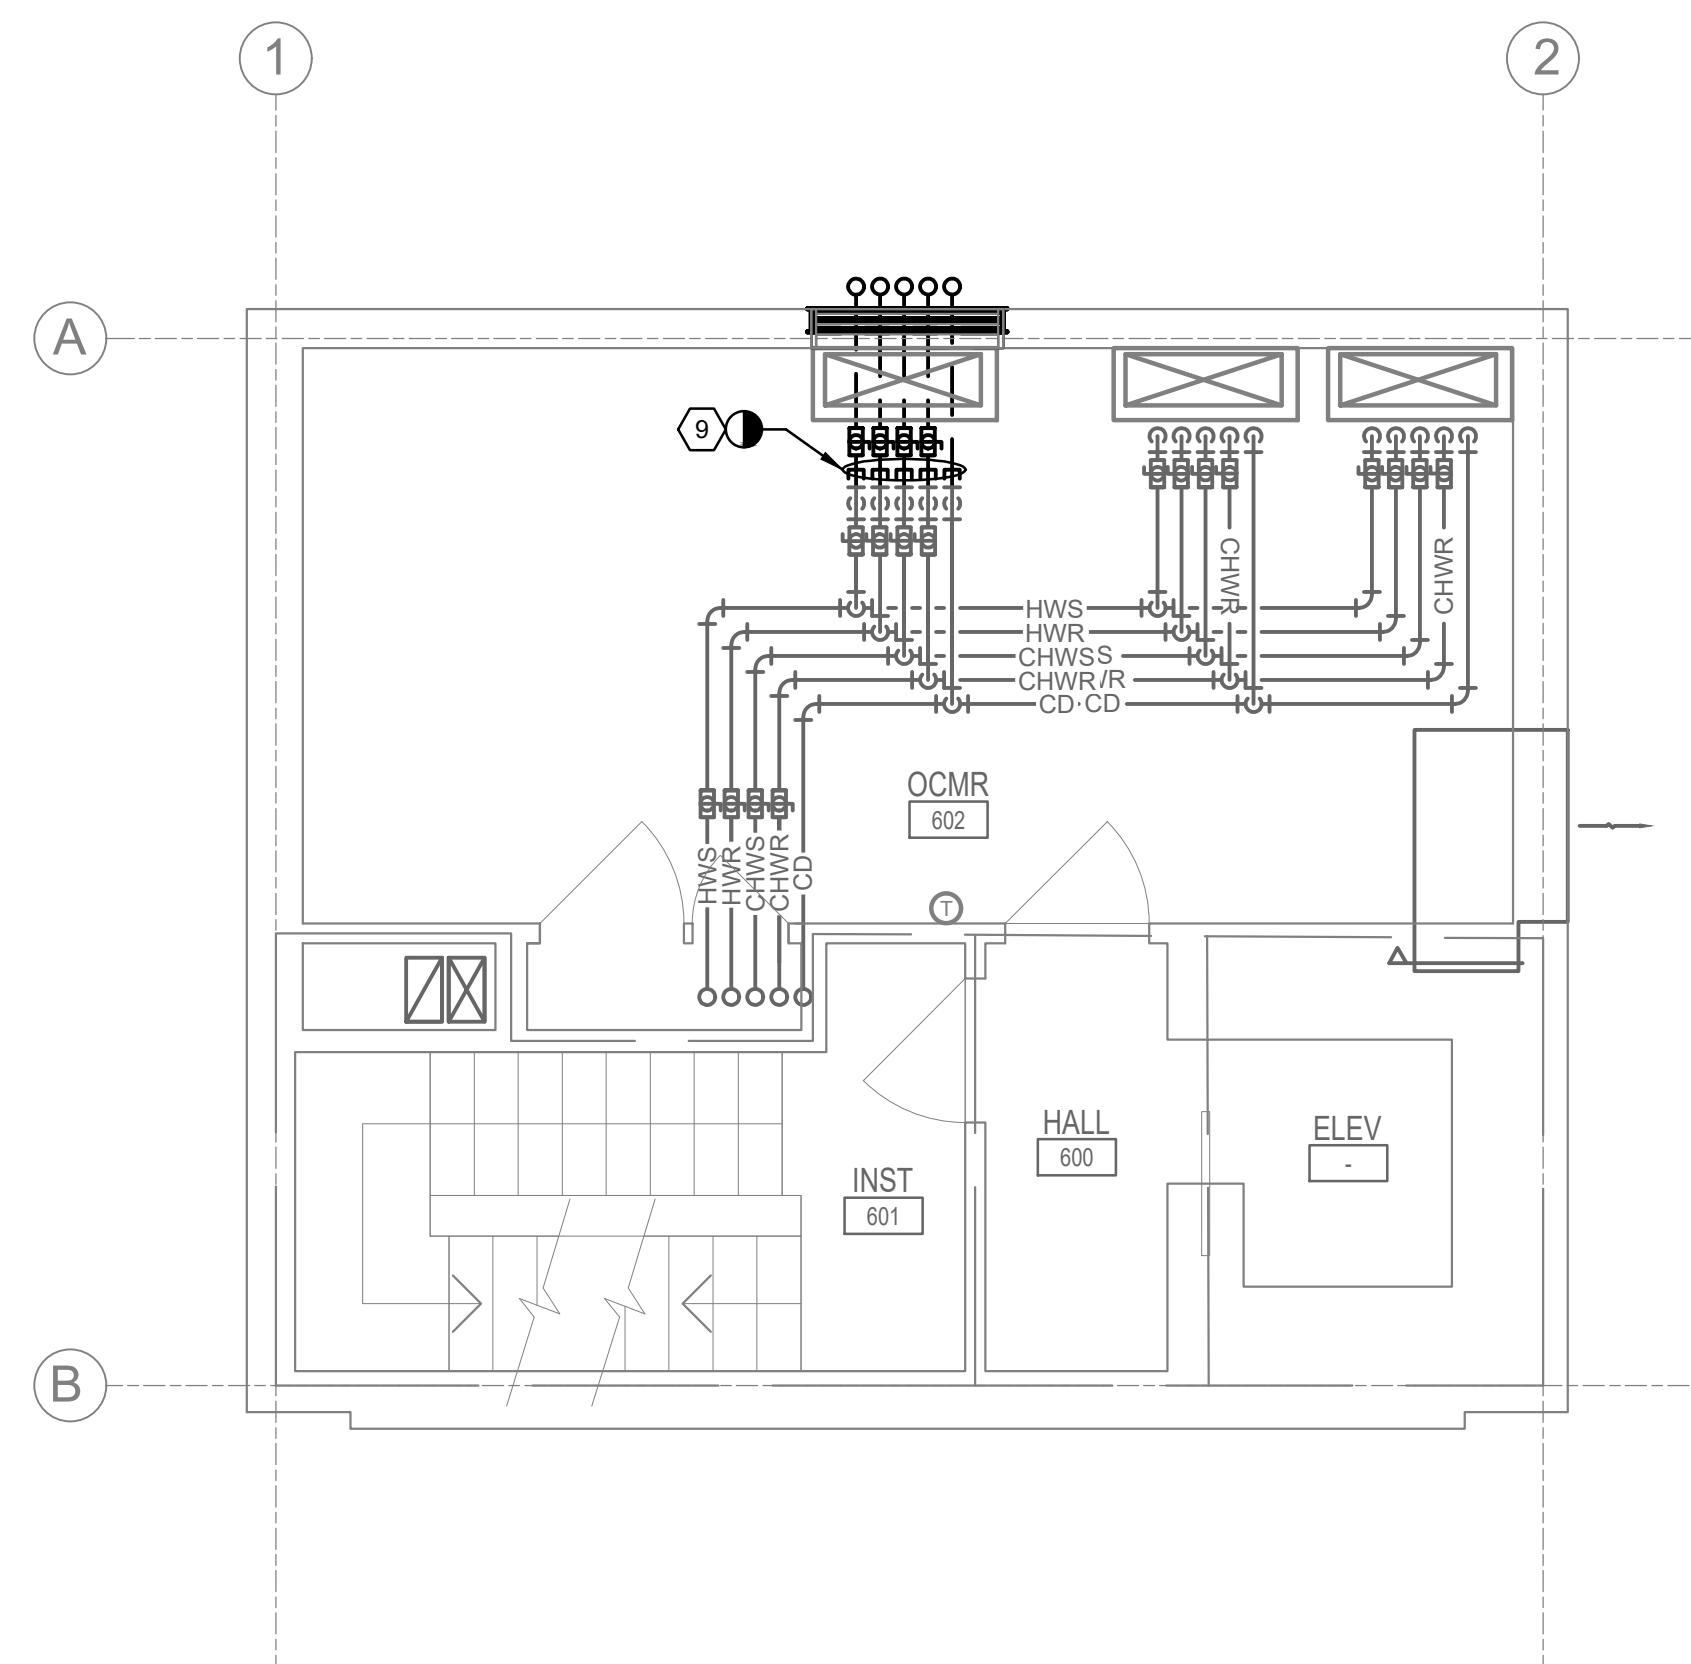

4 FLOOR 6 - FLOOR PLAN - PHASE 4
1/4" = 1'-0"

GENERAL SHEET NOTES

1. CONTRACTOR MUST VERIFY ALL DIMENSIONS BY FIELD MEASUREMENT BEFORE BEGINNING ANY FABRICATION OR CONSTRUCTION.
2. ALL WORK SHALL BE IN ACCORDANCE WITH APPLICABLE CODES, UFC STANDARDS AND SPECIFICATIONS.
3. CONTRACTOR SHALL INSTALL ALL EQUIPMENT IN STRICT ACCORDANCE WITH MANUFACTURER'S RECOMMENDATIONS.
4. COORDINATE INSTALLATION OF EQUIPMENT AND MATERIALS WITH OTHER TRADES.
5. CONTRACTOR SHALL COORDINATE WITH GENERAL CONTRACTOR AND OWNER PRIOR TO ANY CUTTING OF WALLS AND ROOF.
6. IF FLOOR OR RATED WALL PENETRATIONS CANNOT BE FIRE STOPPED AT THE END OF THE WORK SCHEDULE, TEMPORARY FIRESTOPPING COMPOSED OF MINERAL WOOL SHALL BE INSTALLED IN THE PENETRATION TO PROVIDE PROTECTION AGAINST FIRE/SMOKE SPREAD THROUGH THE UNSEALED PENETRATION.
7. NEW WORK SHOWN DARK, EXISTING WORK SHOWN LIGHT.
8. ALL PIPING AND DUCTWORK IS SHOWN OFFSET AND DIAGRAMMATIC FOR CLARITY.

 SHEET KEYNOTES

1. EXISTING VRF UNIT AND ASSOCIATED DUCTWORK AND PIPING TO REMAIN IN PHASE 1.
2. CAP AND SEAL PIPING FOR TIE IN IN LATER PHASE.
3. TEMPORARY PIPING TO RUN UP THE EXTERIOR OF THE BUILDING. PIPING SHALL GO THROUGH OPENING LEFT BY LOUVER.
4. DEMOLISH DIFFUSERS, GRILLES, AND ASSOCIATED DUCTWORK. PATCH AND SEAL VERTICAL MAIN DUCTWORK.
5. DEMOLISH TSTAT SERVING EXISTING VRF UNIT.
6. DEMOLISH EXISTING VRF UNIT AND ASSOCIATED REFRIGERANT AND CONDENSATE PIPING. EVACUATE AND CAPTURE REFRIGERANT PRIOR TO REMOVING SYSTEM.
7. EXISTING ELEVATOR RELIEF TO REMAIN.
8. INSTALL NEW HYDRONIC PIPING IN CHASE.
9. DEMOLISH TEMPORARY EXTERIOR PIPING. VALVES SHOWN OFFSET FOR CLARITY. CAP AND SEAL PIPING WITHIN 4" OF VALVES.
10. REMOVE EXISTING LOUVER. RETAIN FOR REINSTALLATION IN LATER PHASE. CONTRACTOR IS RESPONSIBLE FOR STORING LOUVER AND PREVENTING DAMAGE. SEE ARCHITECTURAL SHEETS FOR DETAILS.
11. AFTER PIPING IS DEMOLISHED, REINSTALL LOUVER RETAINED IN PHASE 1. SEE ARCHITECTURAL SHEETS FOR DETAILS.
12. REFRIGERANT PIPING CONTINUES BETWEEN THE CONTINUATION LINES BUT IS NOT SHOWN FOR CLARITY.
13. 3" CHWS/R FROM FLOOR BELOW, 2 1/2" CHWS/R TO FLOOR ABOVE.
14. LOCATE VALVES AS CLOSE AS POSSIBLE TO TEES SERVING FAN COIL UNITS. VALVES SHOWN OFFSET IN THIS LOCATION FOR CLARITY.



U.S. ARMY CORPS OF
ENGINEERS®
SEATTLE DISTRICT

[illegible]



U.S. AIR FORCE HALLS	SEATTLE, WASHINGTON	09/26/2025
SPEES DESIGN BUILD		SOLICITATION NO.: F482032D0002
DRAWN BY:		CONTRACT NO.:
CHECKED BY:		F482032D0002
M. HUBBARD, J. WOOD		
SUBMITTED BY:		I/J: DEJ25502J
R. SPEES		
SIZE:		
ANSI D		



JOINT DRAINAGE
JBLM ATCT HVAC REPAIRS
DEJZ2502J







SHEET ID
J00008
M-128


100% ELECTRONIC BID SET

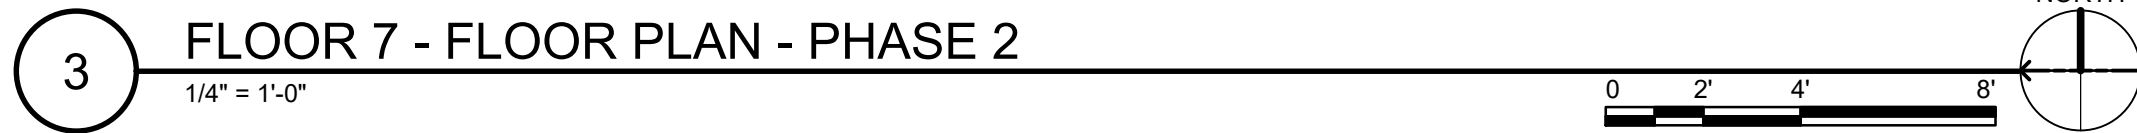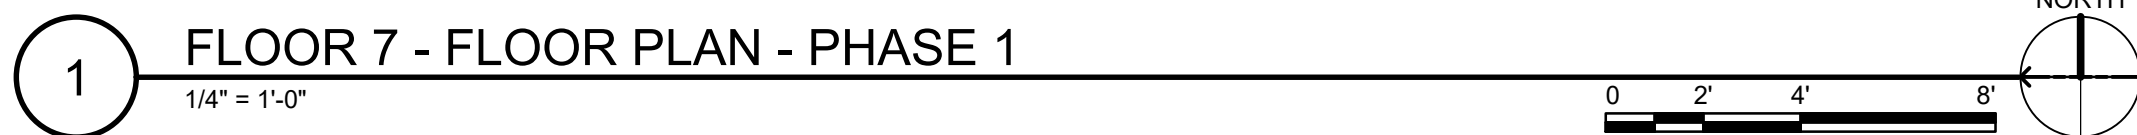


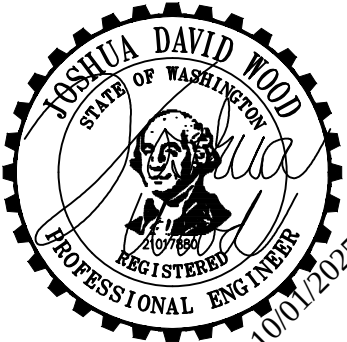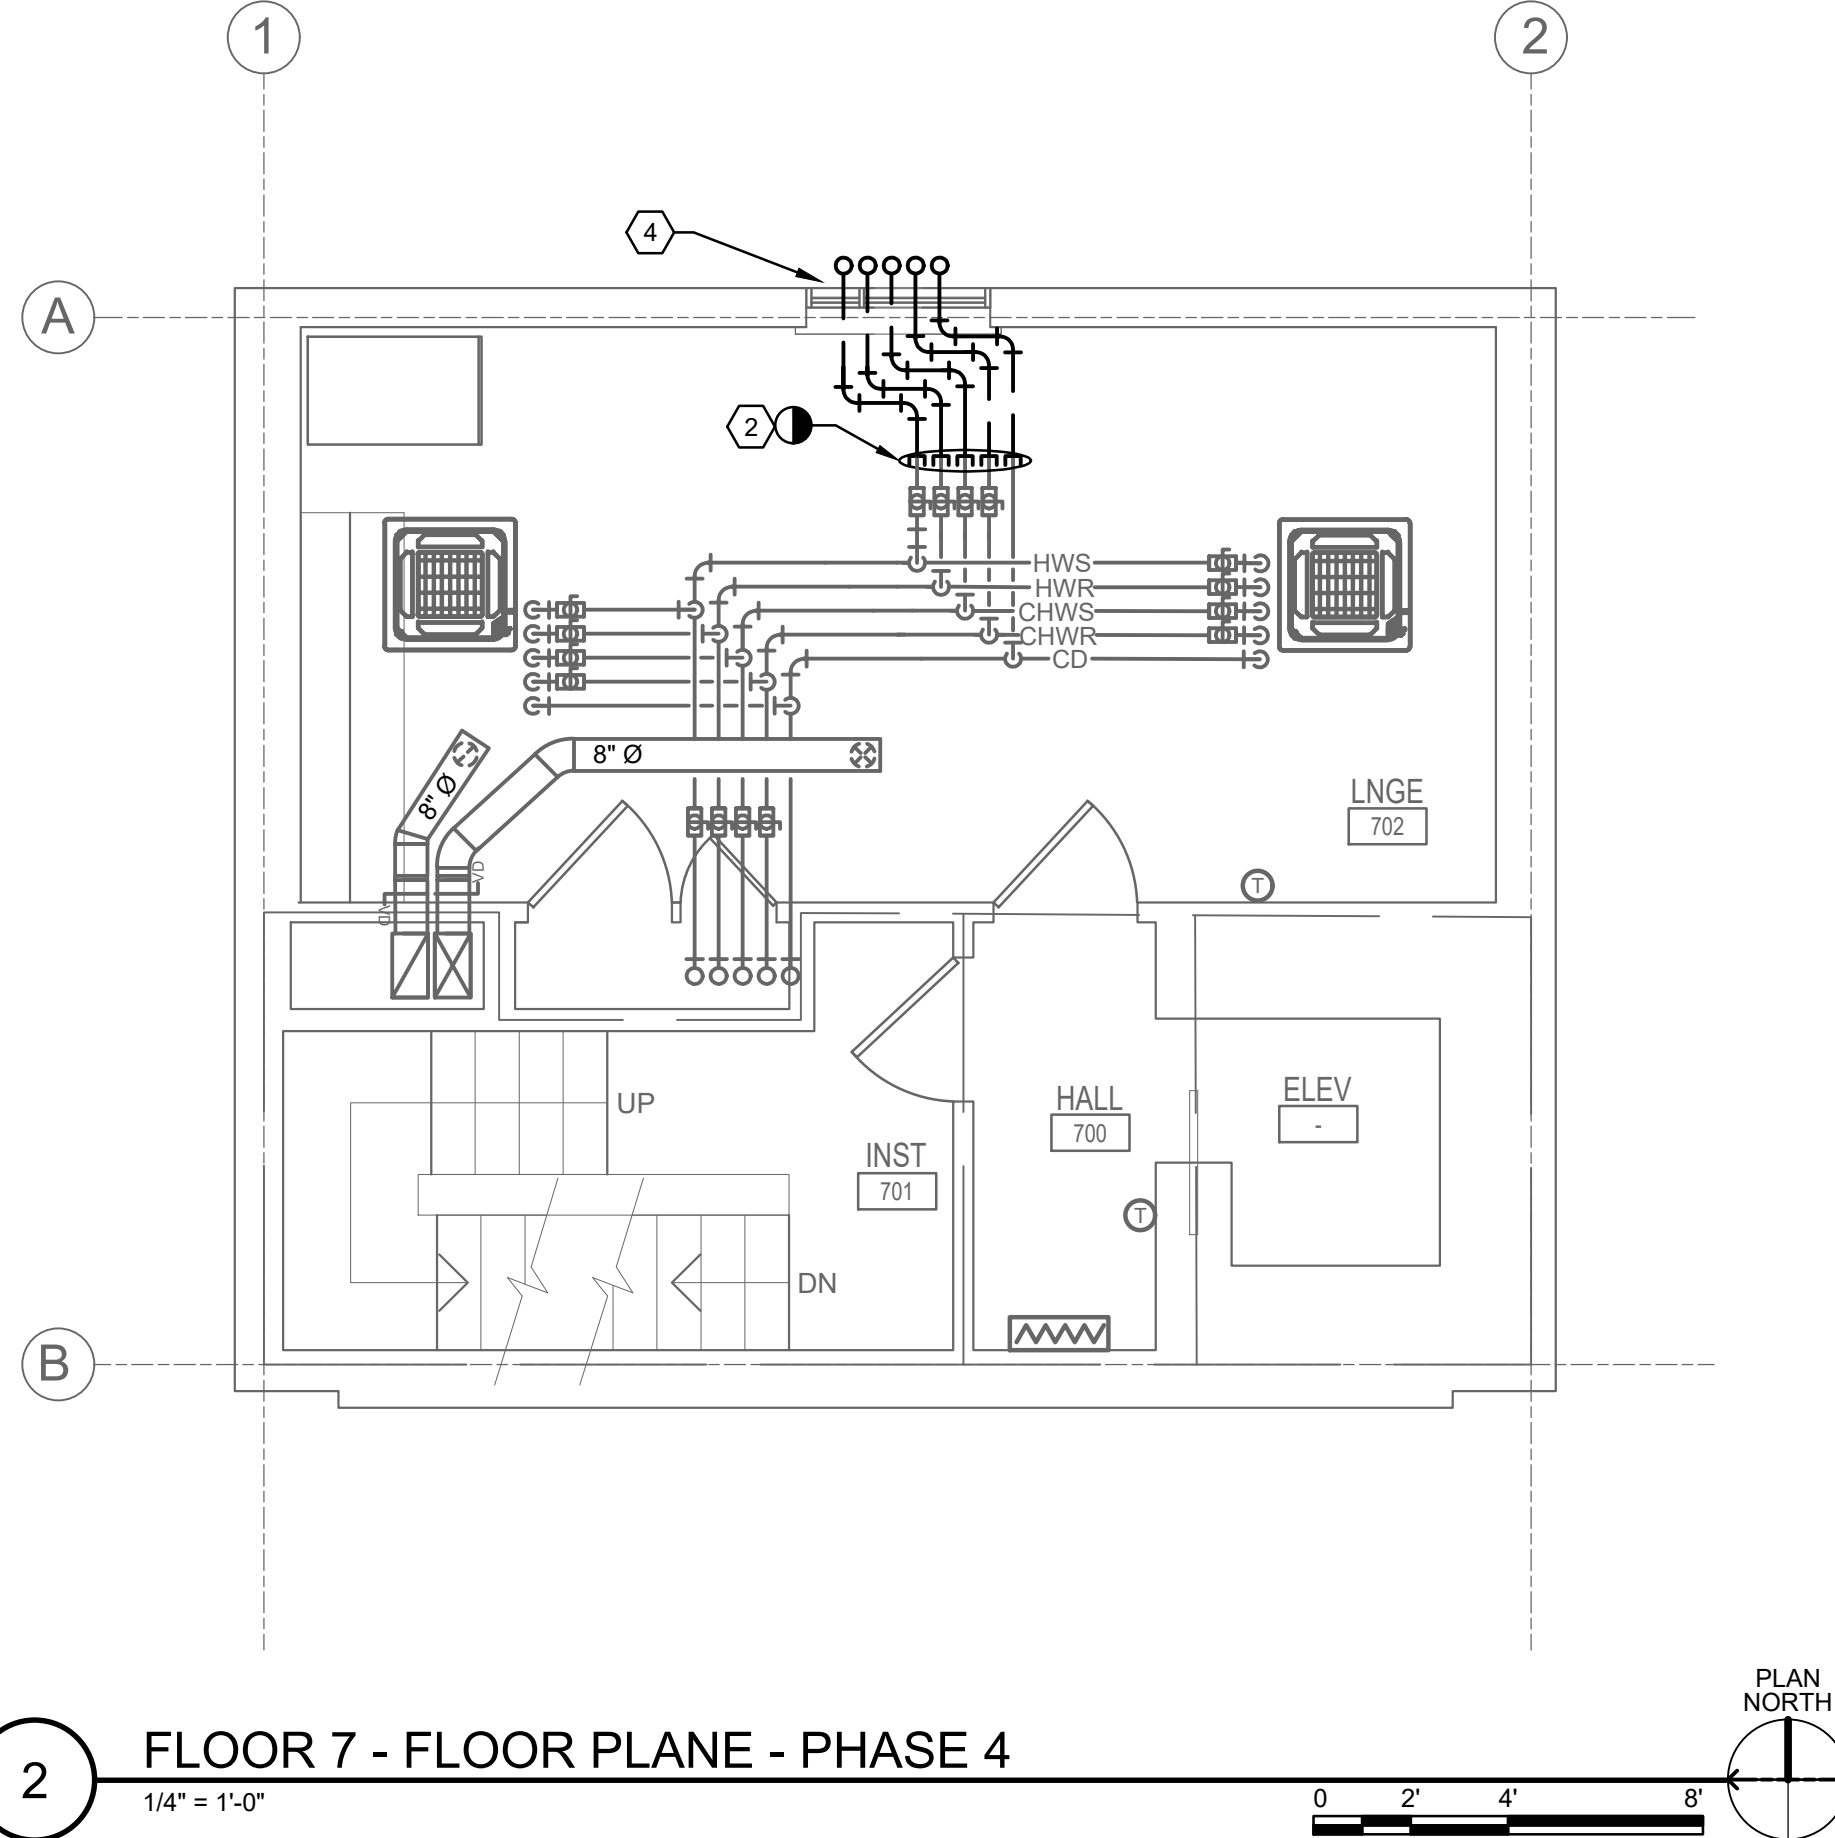

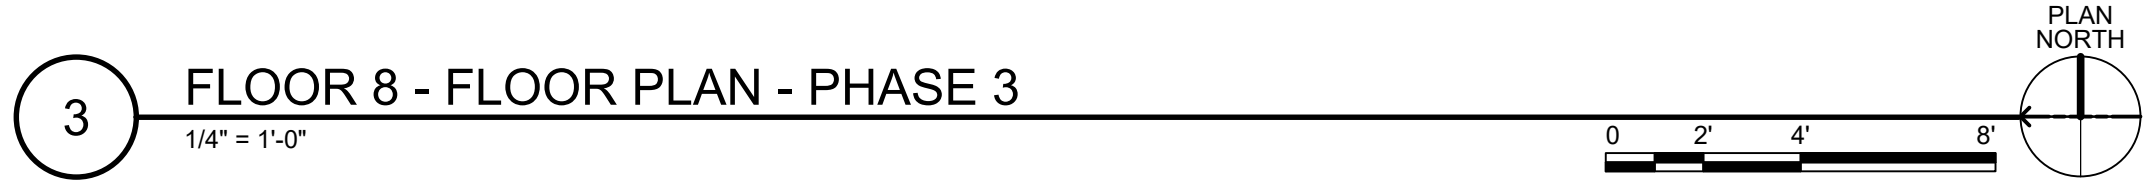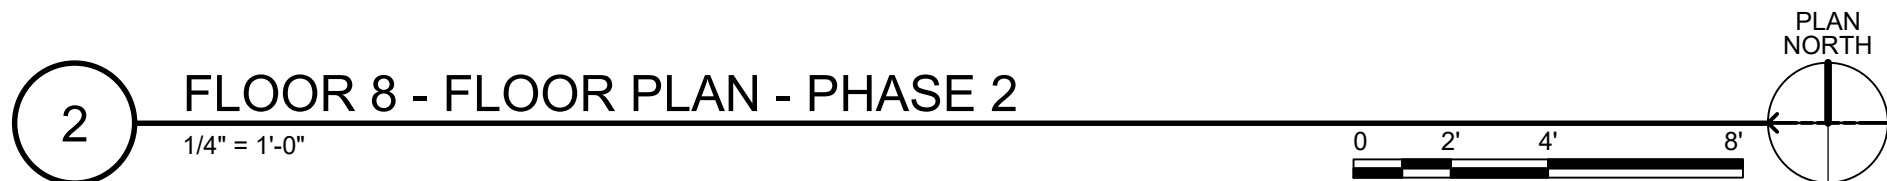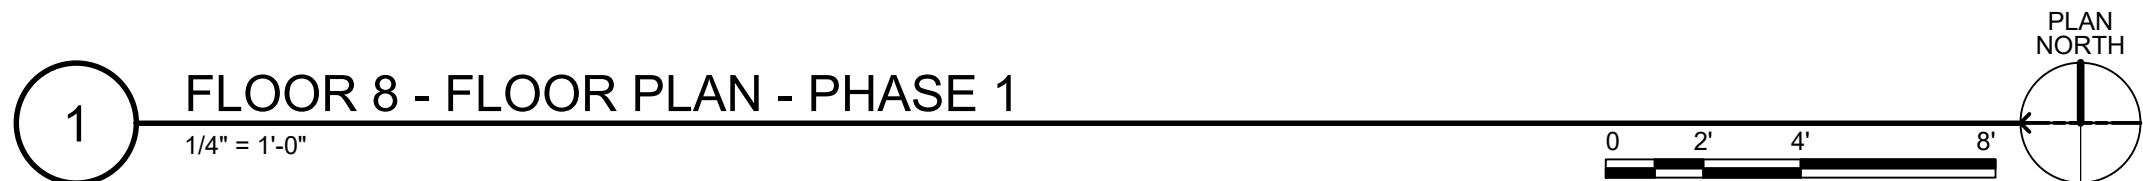


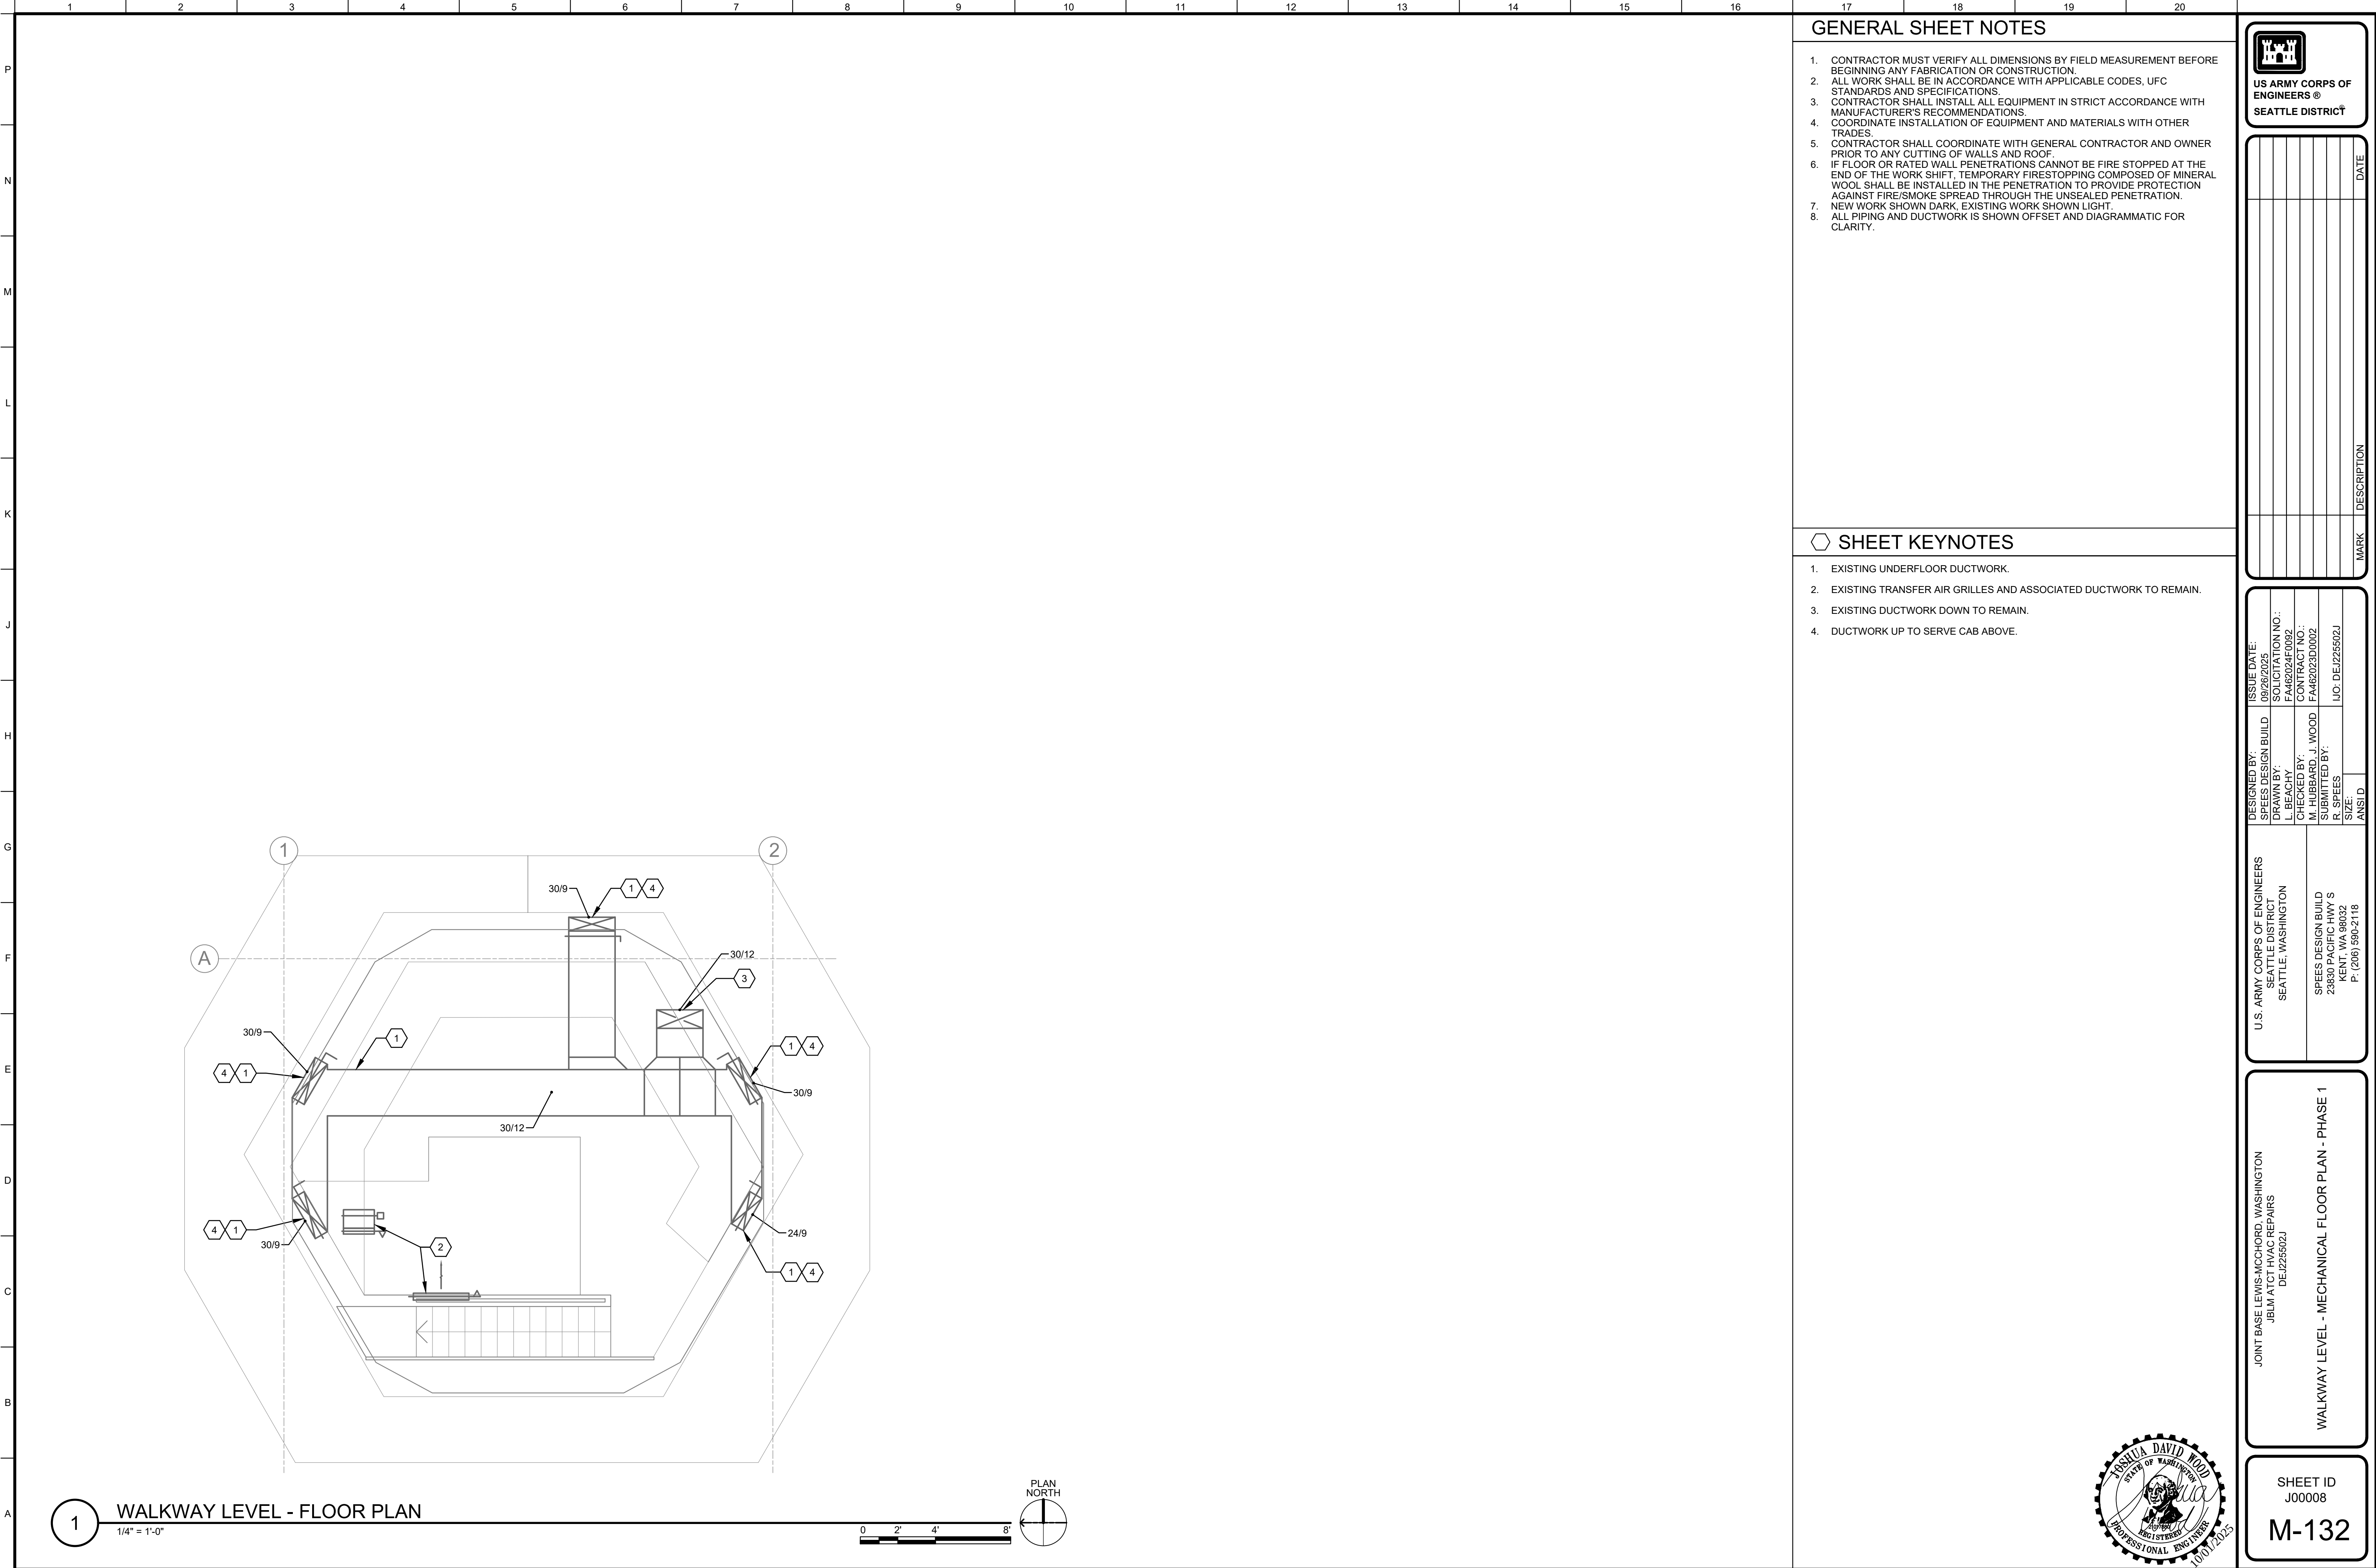

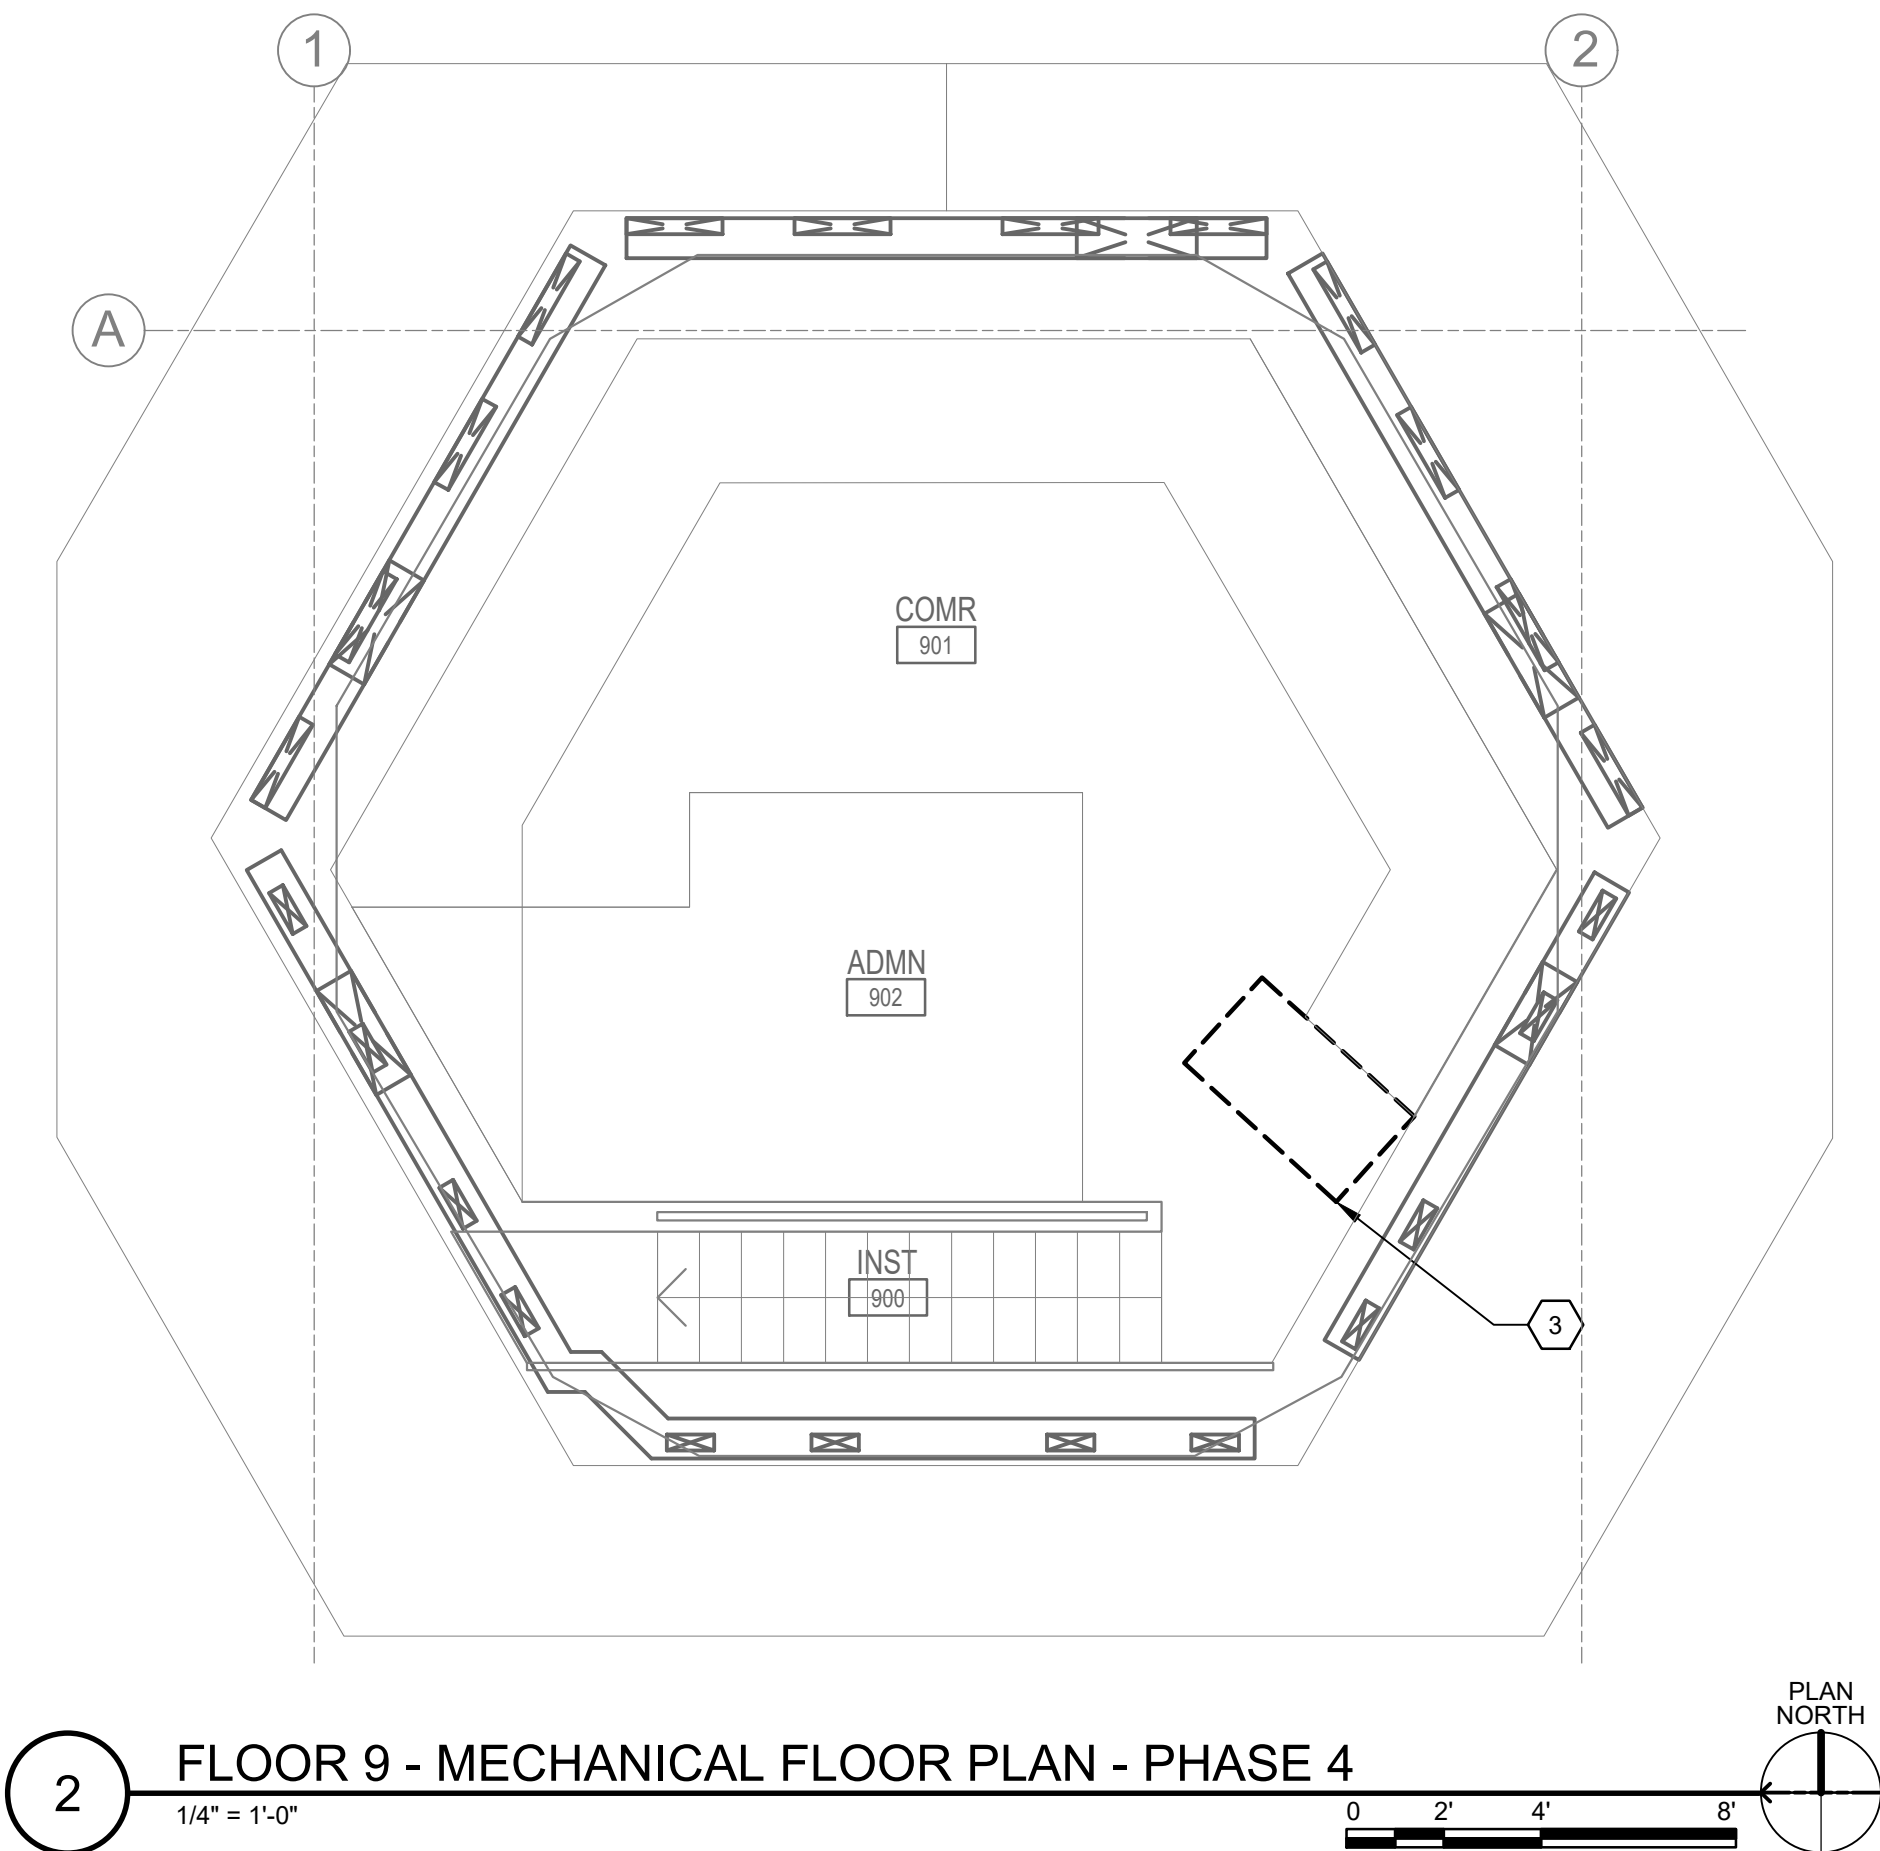


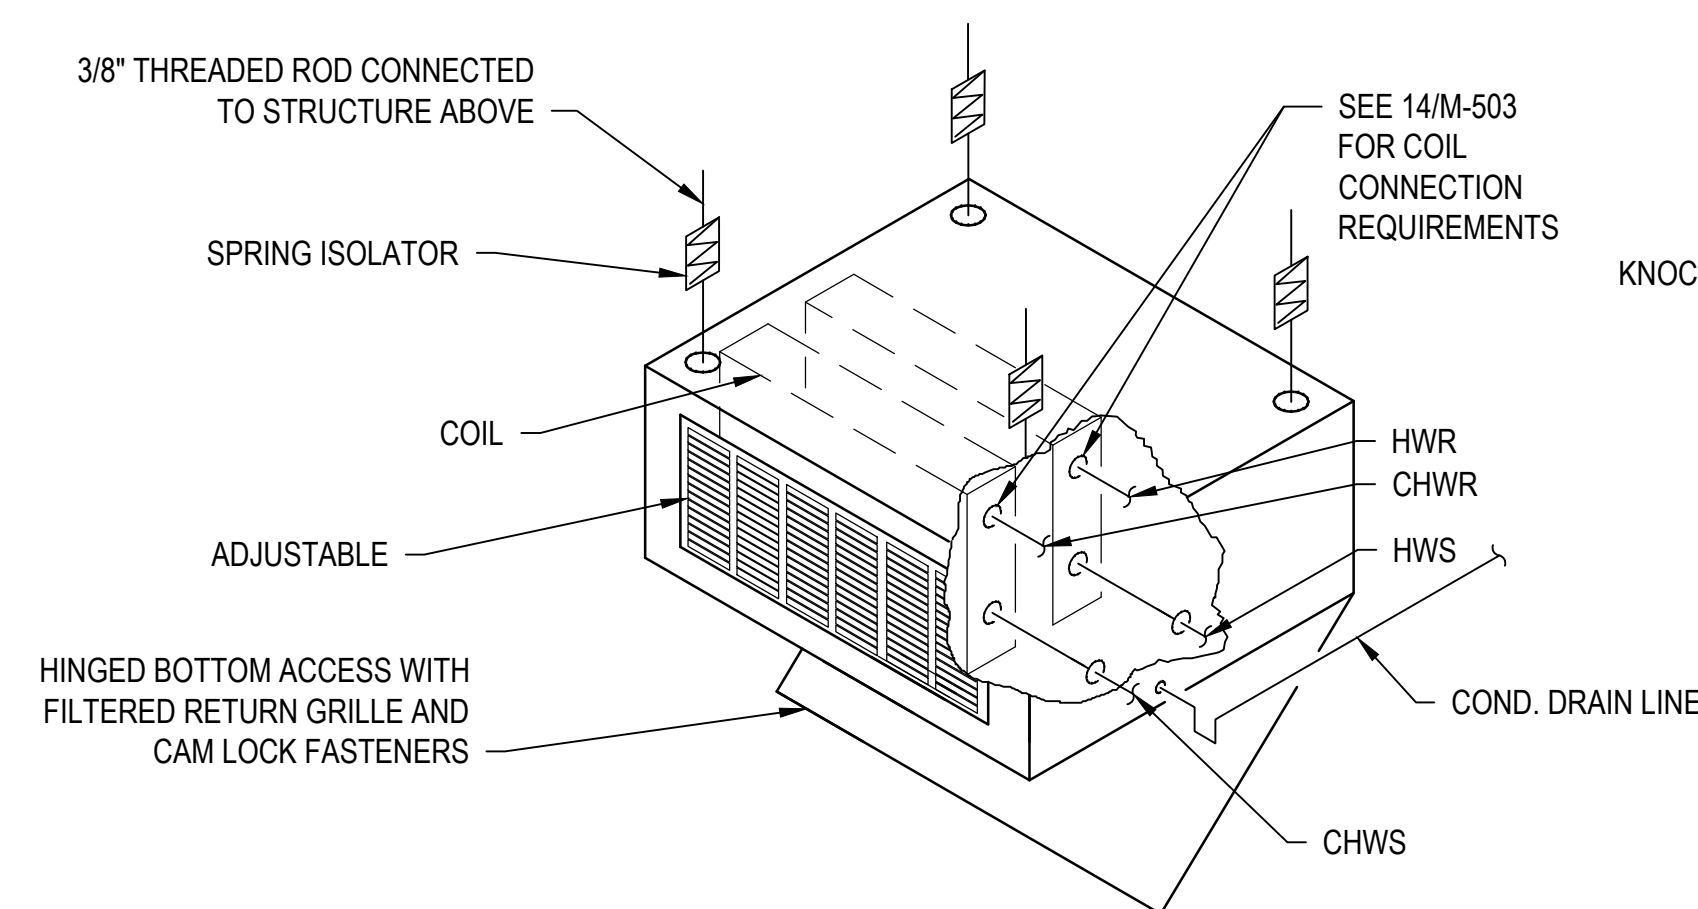


1 EXPOSED HORIZONTAL FAN COIL UNIT DETAIL
N.T.S.

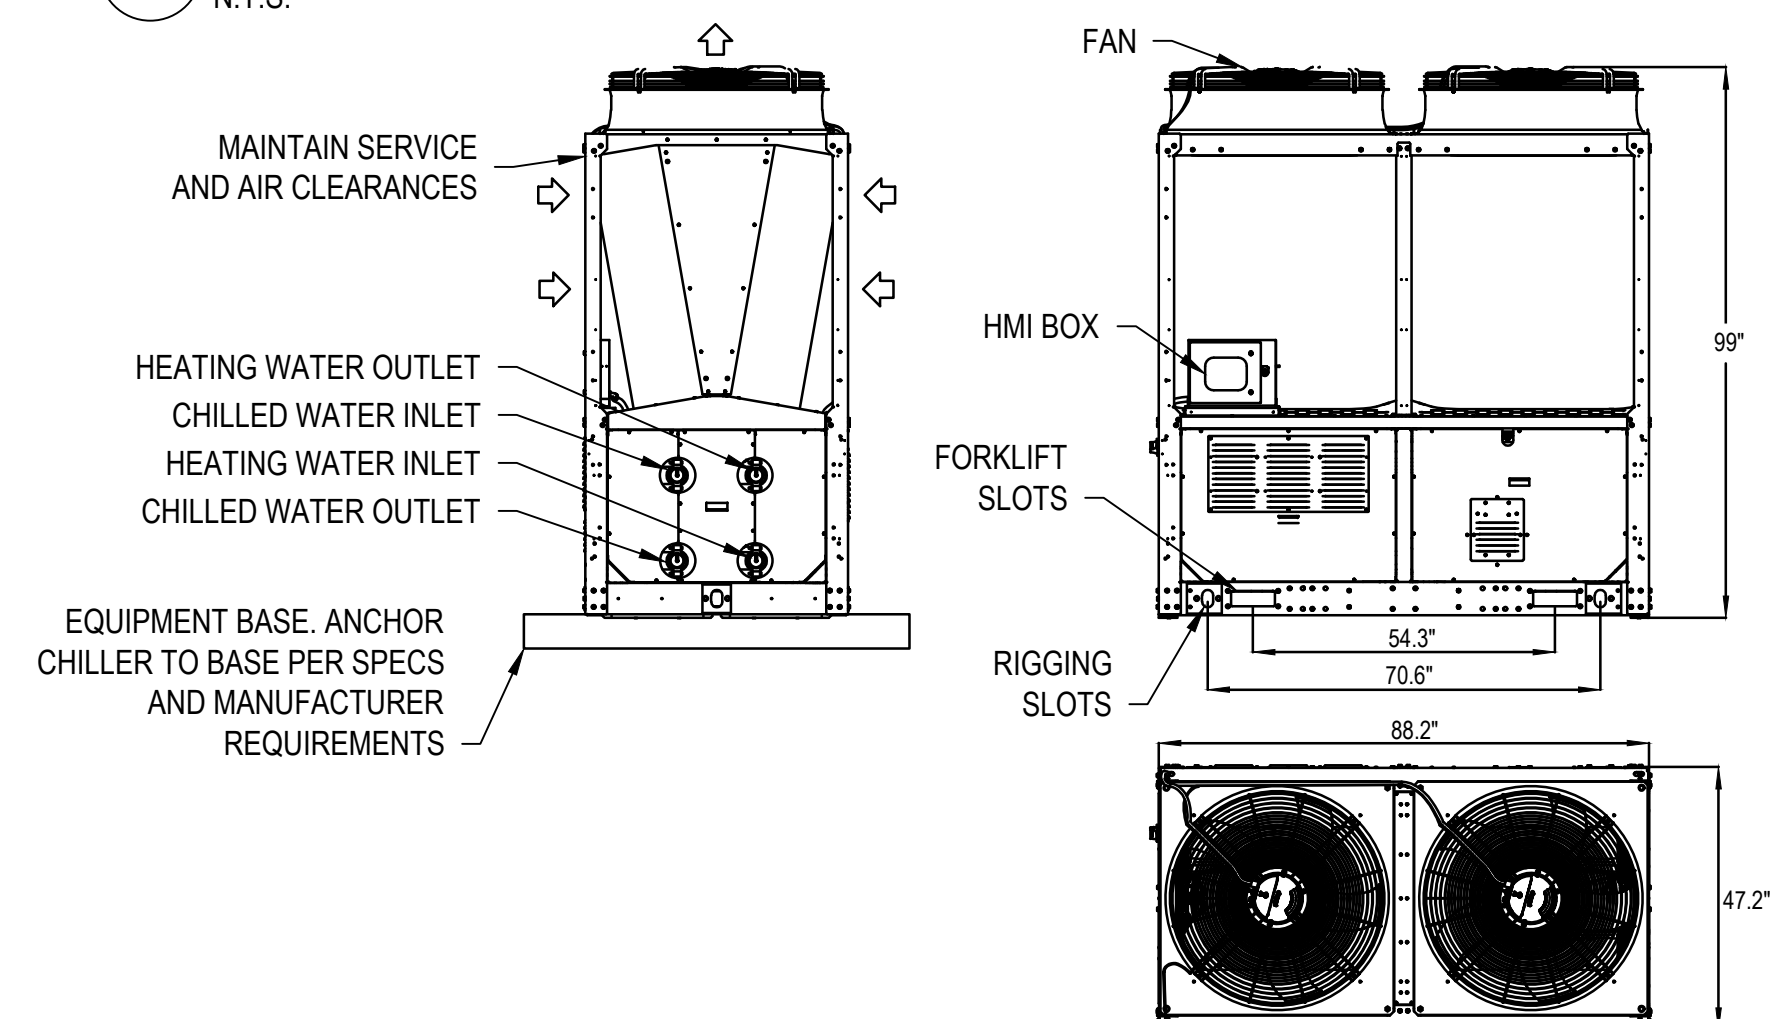


4 OUTDOOR HEAT PUMP CHILLER DETAIL
N.T.S.

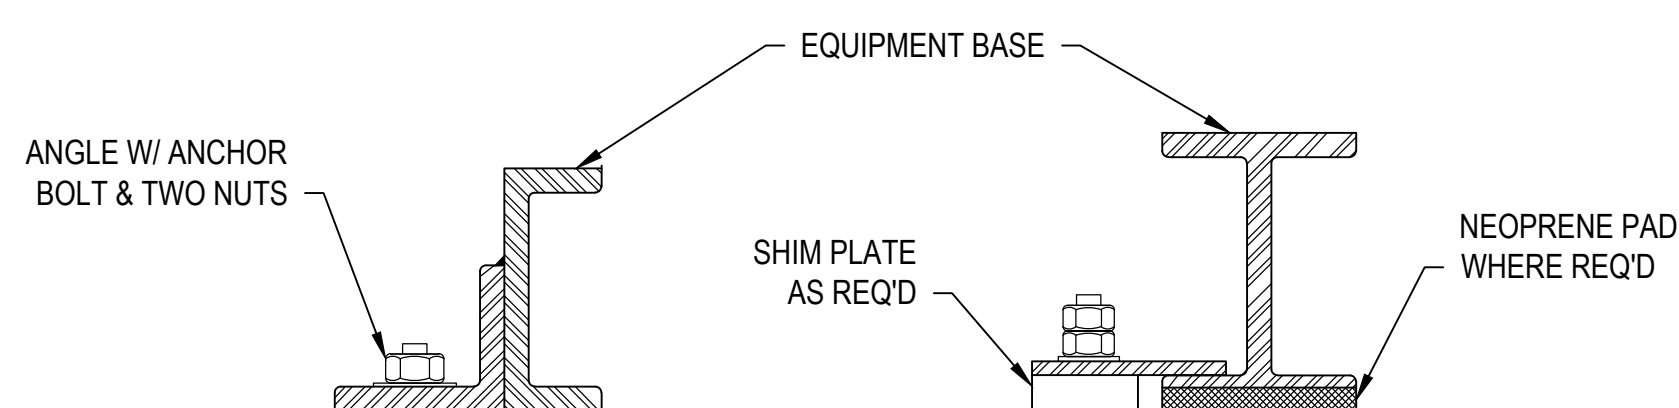


7 RESTRAINTS OF RIGIDLY MOUNTED MECHANICAL EQUIPMENT

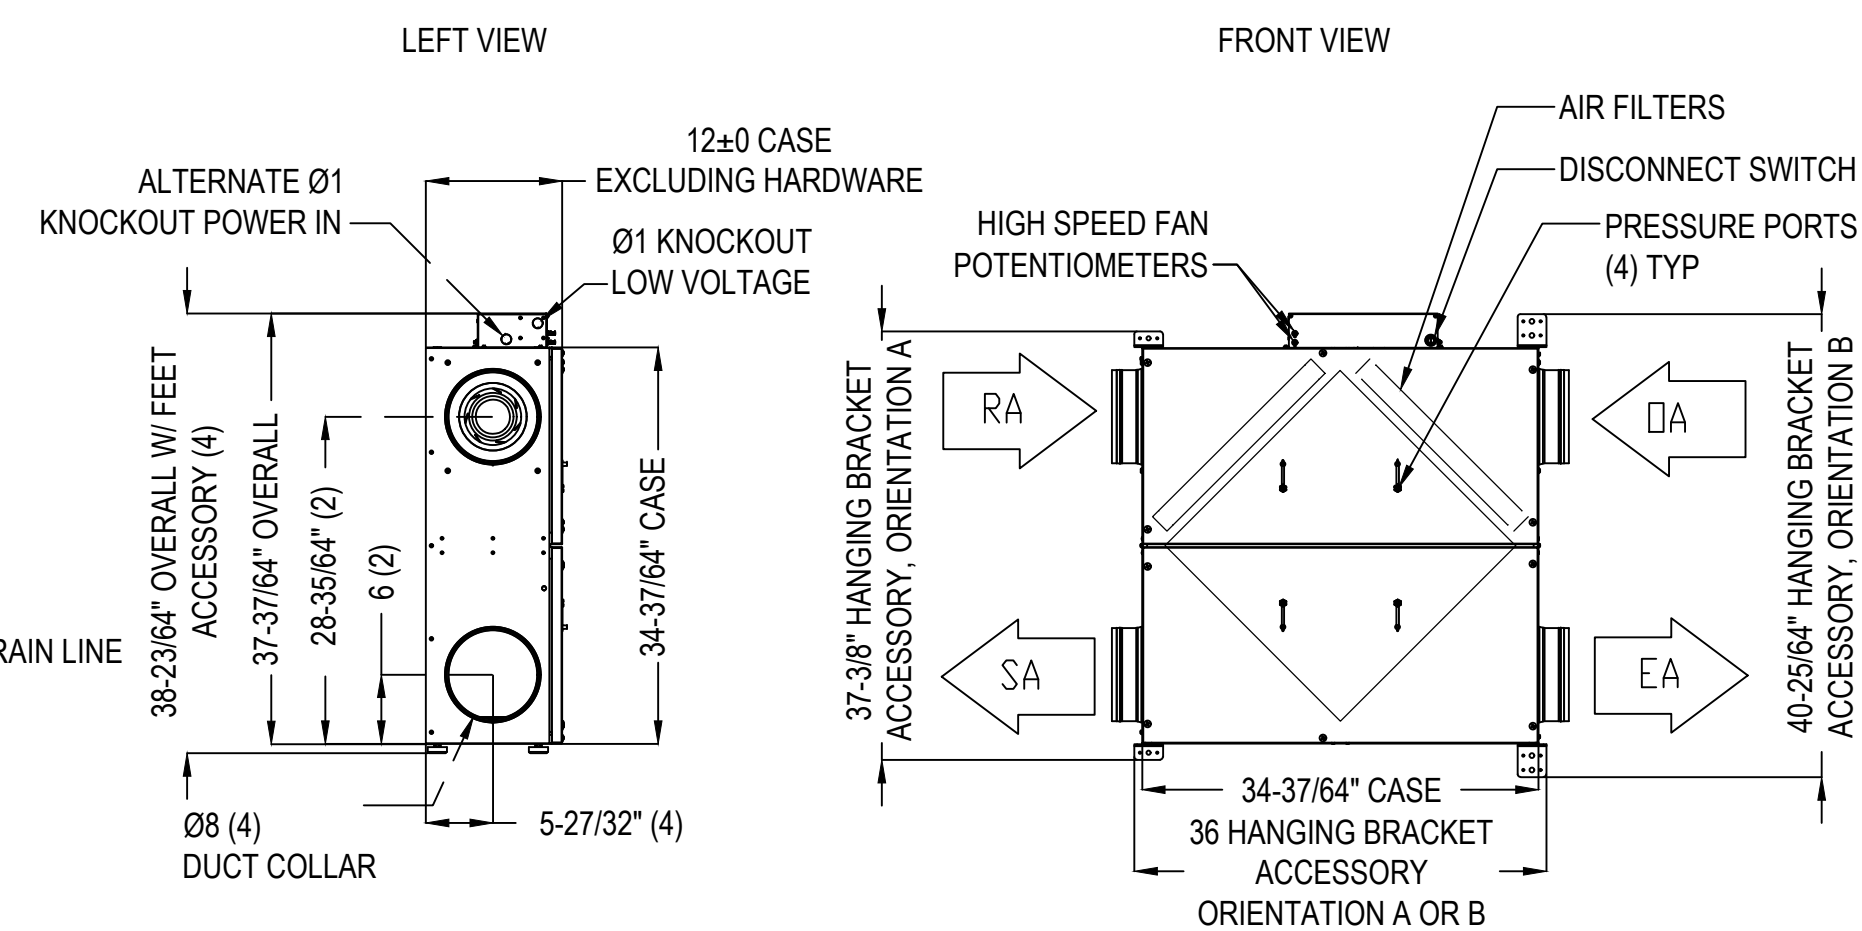


2 ENERGY RECOVERY UNIT DETAIL

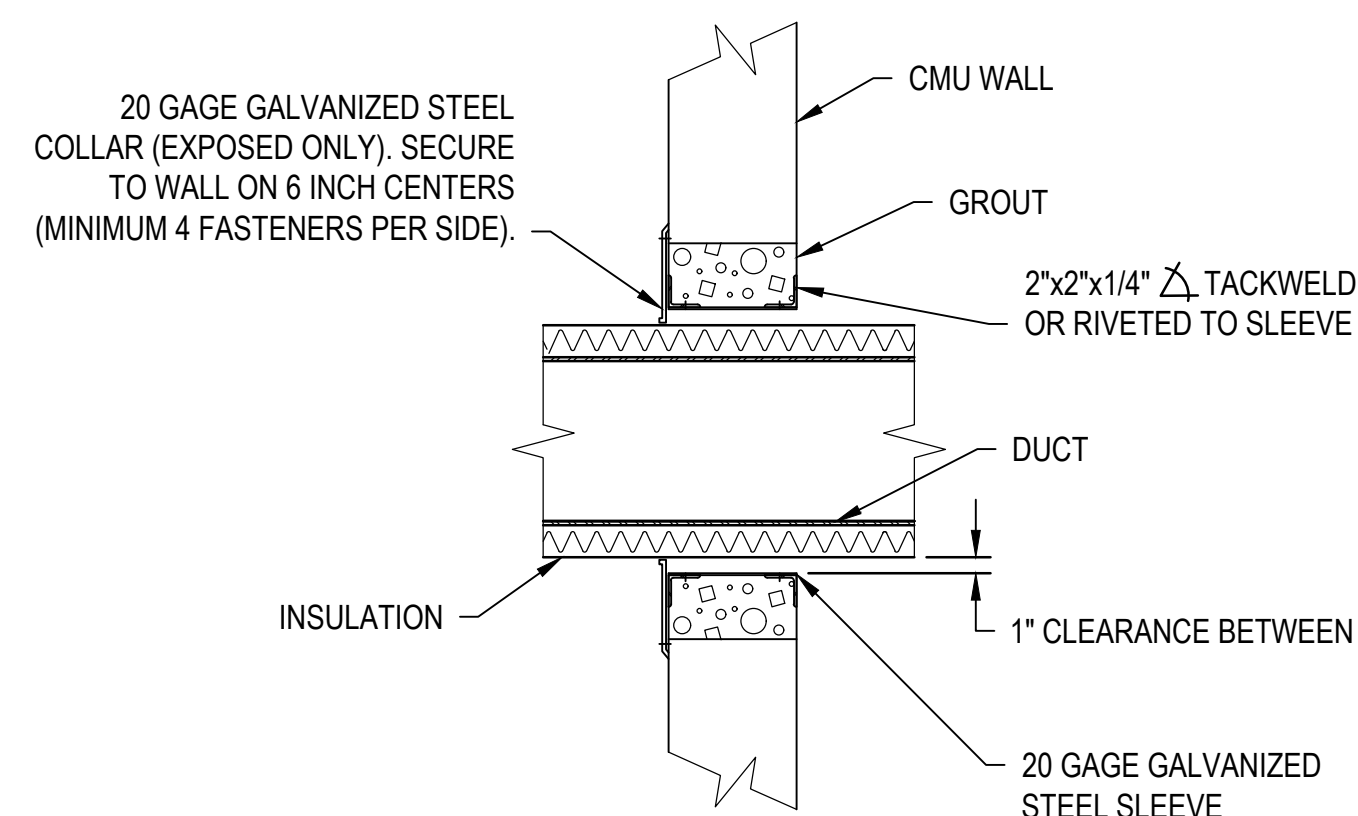


5 DUCT PENETRATION THROUGH WALL
(NOT APPLICABLE TO FIRE-RATED WALLS)
N.T.S.

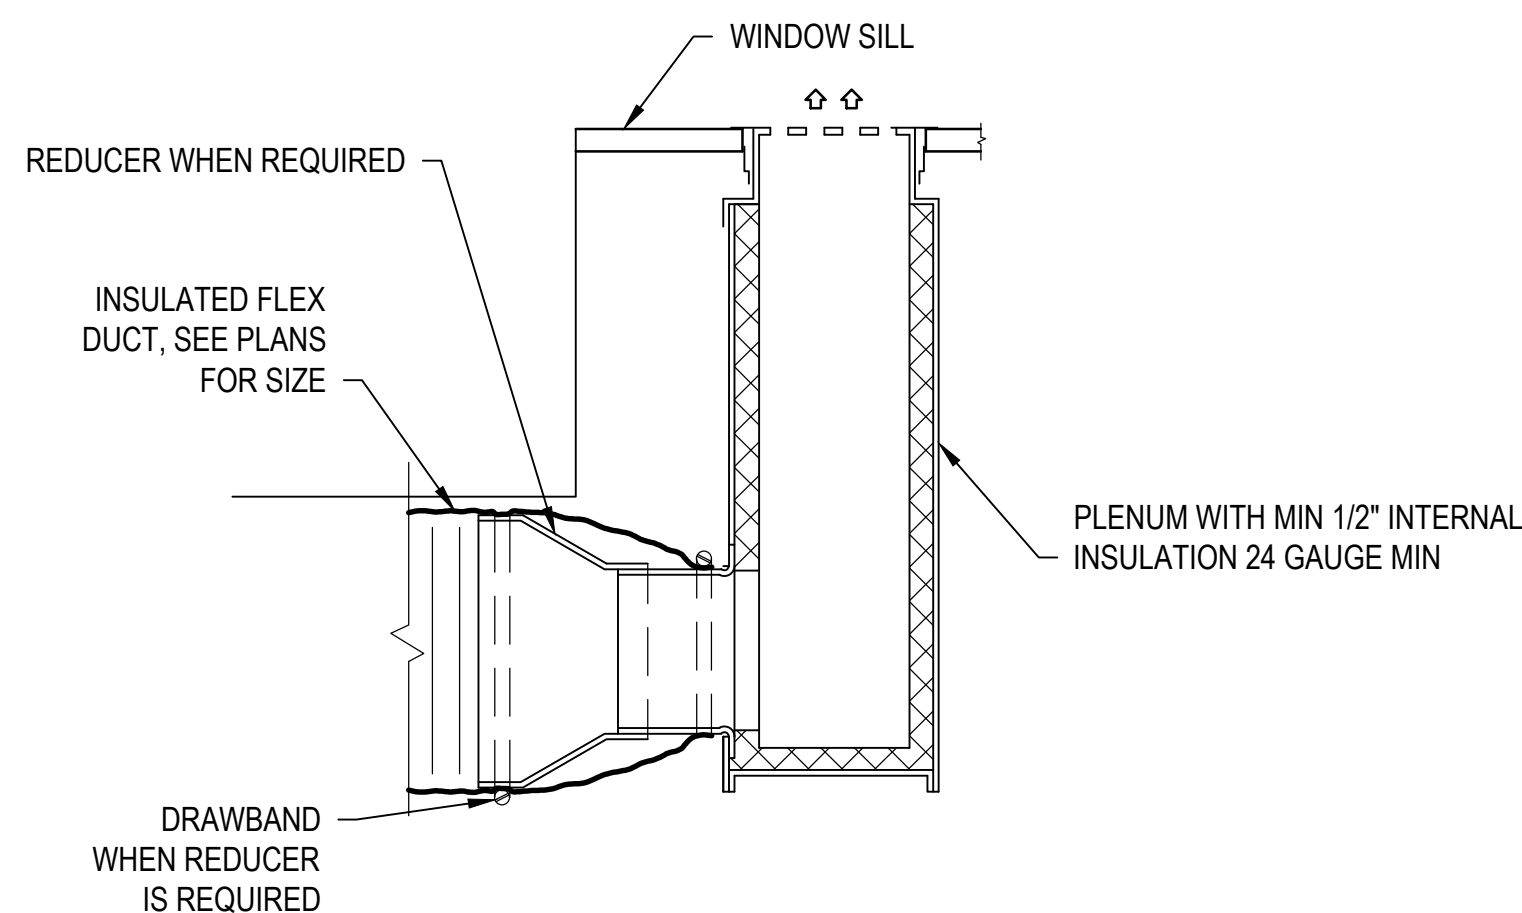


8 LINEAR BAR GRILLE DETAIL
N.T.S.

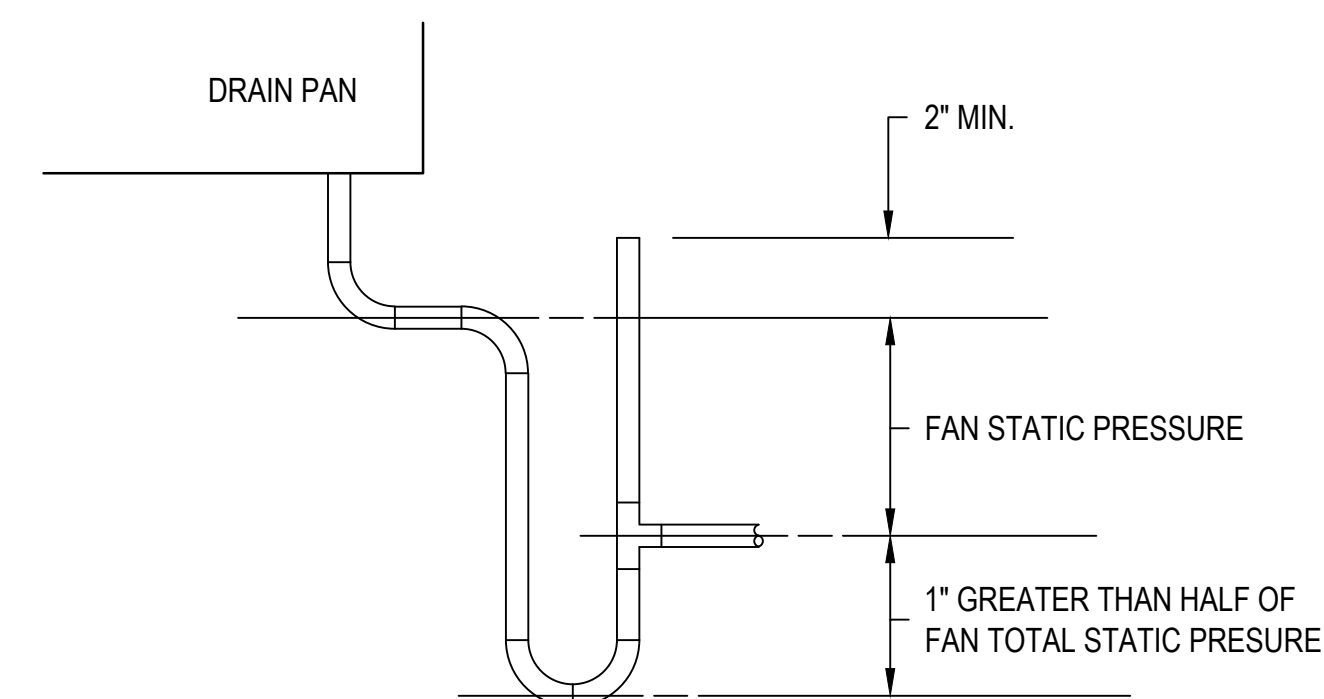

3 CONDENSATE DRAIN TRAP DETAIL

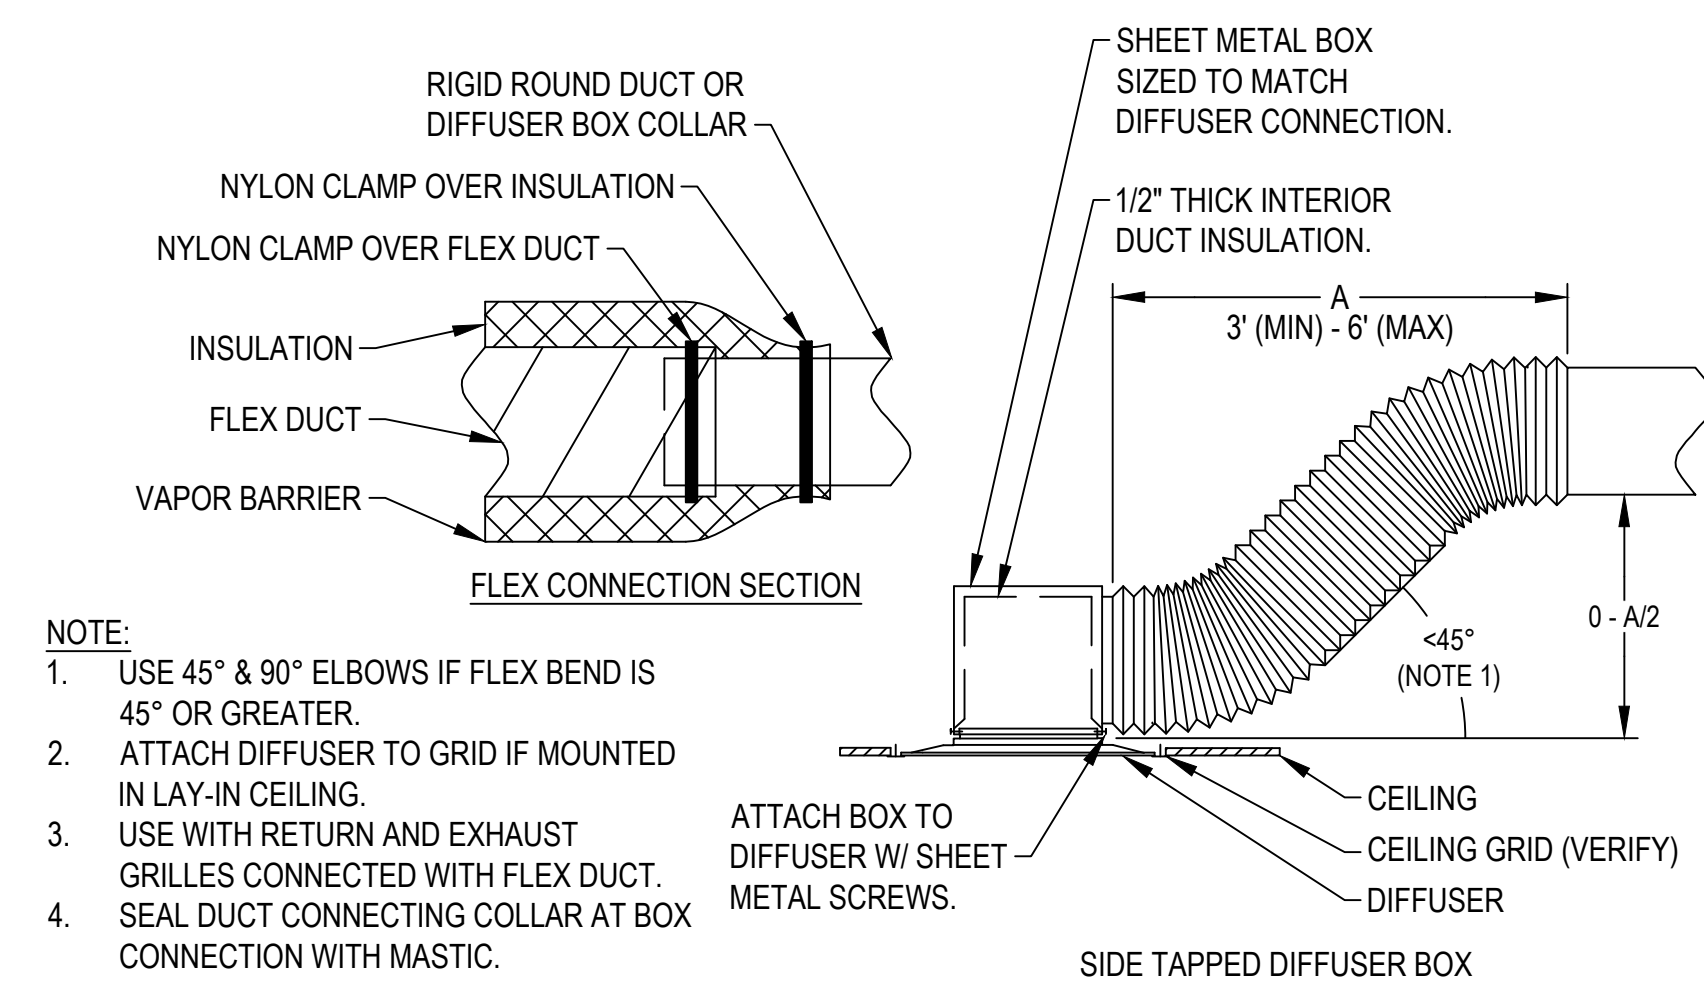

6 CEILING DIFFUSER CONNECTION DETAIL

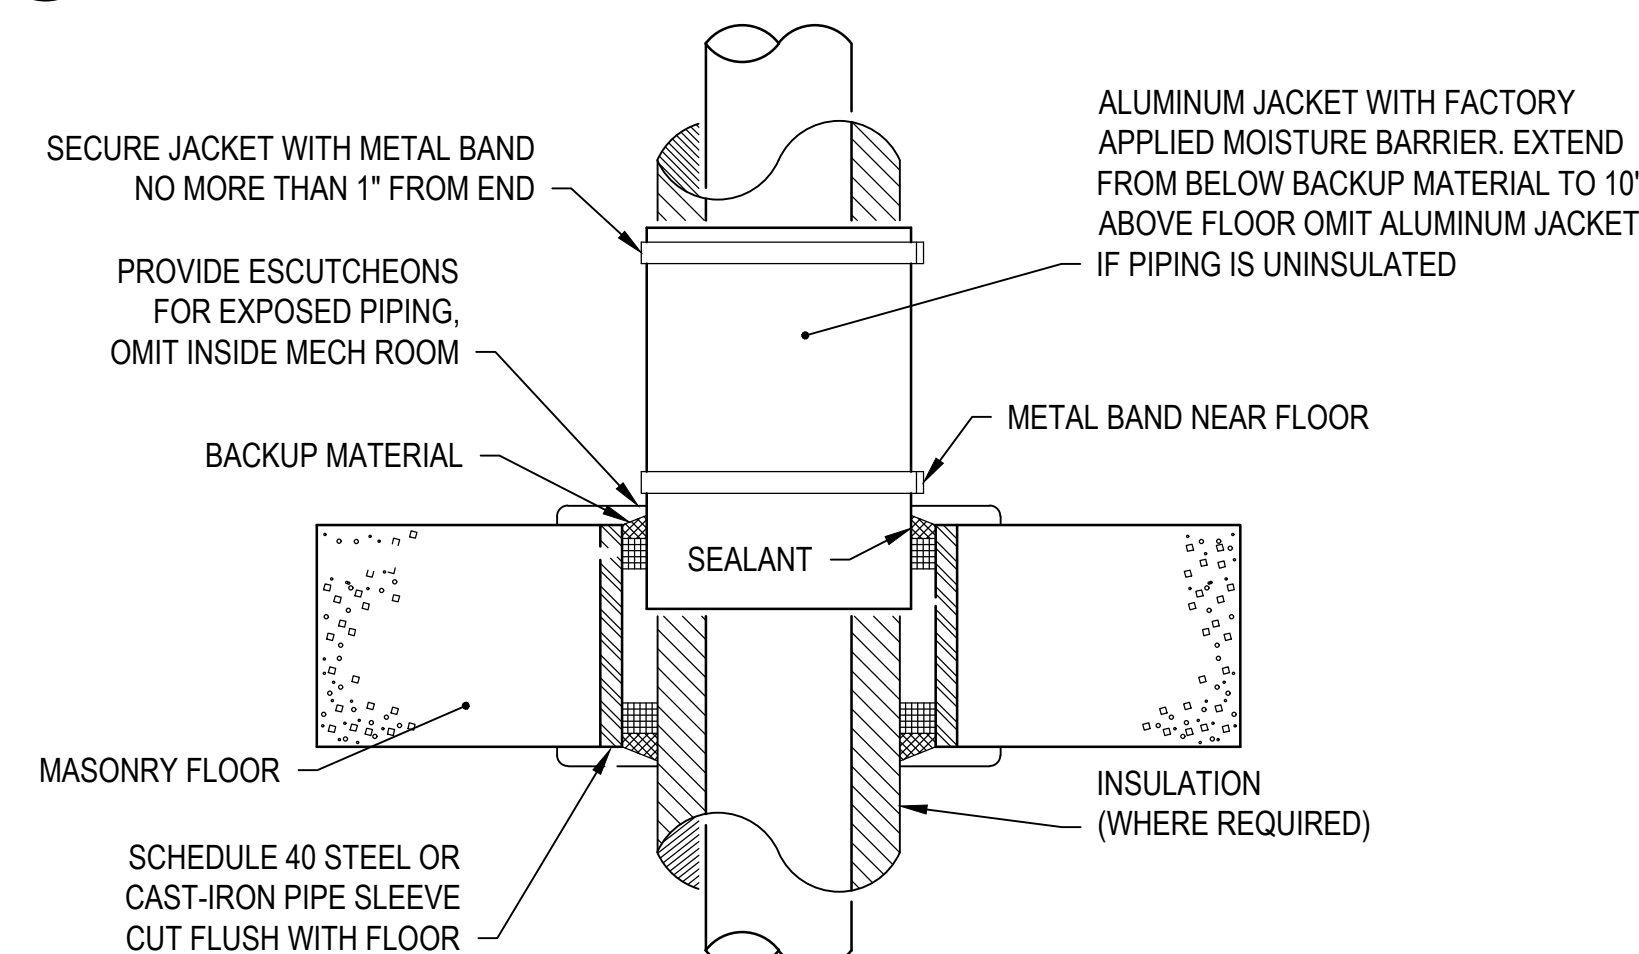


9 FLOOR PIPE PENETRATION DETAIL
N.T.S.

[illegible]

U.S. ARMY CORPS OF ENGINEERS SEATTLE DISTRICT SEATTLE, WASHINGTON	DESIGNED BY:	ISSUE DATE:
	DRAWN BY:	SOLICITATION NO.:
	CHECKED BY:	CONTRACT NO.:
	DATE:	PROJECT NO.:
SPEES DESIGN BUILD 23830 PACIFIC HWY S KENT, WA 98032	L. BEACHY	F462024F0092
	M. HUBBARD, J. WOOD	F462023D0002
	REVISED BY:	I.U.O. DEJ25502J
	R. SPEES	

JOINT BASE LEWIS-MCHORD, WASHINGTON
JBLM A TCT HYAC REPAIRS
DEJ23502J

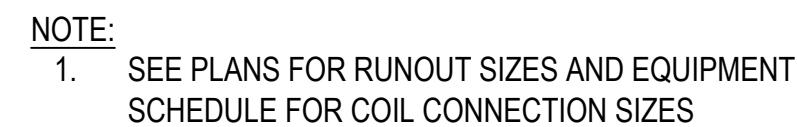

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

20

P

N

M

L

K

J

H

G

F

E

D

C

B

A

HEAT PUMP CHILLER SCHEDULE

EQUIPMENT TAG	BASIS OF DESIGN		LOCATION	QUANTITY OF COMPRESSORS	QUANTITY OF FANS	COOLING									HEATING							MAXIMUM SOUND POWER LEVEL (dB(A))	ELECTRICAL					WEIGHT (LBS)	REMARKS		
	MANUFACTURER	MODEL				GLYCOL (%)	CAPACITY (TONS)	FLOW (GPM)	EWI (°F)	LWT (°F)	WPD (FT HEAD)	AMBIENT OA TEMP (°F)	EER	IPLV	GLYCOL (%)	CAPACITY (MBH)	FLOW (GPM)	EWI (°F)	LWT (°F)	WPD (FT HEAD)	AMBIENT OA TEMP (°F)		HEATING COP	V	PH	HZ	MCA			DISCONNECT FURNISHED BY	STARTER FURNISHED BY
HPC-01	YORK	YMAE0035	OUTDOOR	2	2	40	33.9	75	54	44	19	86.9	10.69	20.17	40	242.2	37	117	130	4	-1	1.8	53	460	3	60	74	MFR	MFR	2,646	1,2,3,4,5
HPC-02	YORK	YMAE0035	OUTDOOR	2	2	40	33.9	75	54	44	19	86.9	10.69	20.17	40	242.2	37	117	130	4	-1	1.8	53	460	3	60	74	MFR	MFR	2,646	1,2,3,4,5
HPC-TEMP	YORK	YMAE0035	OUTDOOR	2	2	40	33.9	75	54	44	19	86.9	10.69	20.17	40	242.2	37	117	130	4	-1	1.8	53	460	3	60	74	MFR	MFR	2,646	1,2,3,4,5

REMARKS:
1. PROVIDE SINGLE POINT POWER CONNECTION.
2. PROVIDE WITH BMS COMMUNICATION CONNECTION OPTION.
3. HEAT PUMP CHILLER SHALL BE CAPABLE OF SIMULTANEOUSLY PROVIDING CHILLED AND HEATING HOT WATER.
4. PROVIDE 8 HOURS OF TRAINING ON MAINTENANCE, TROUBLESHOOTING AND OPERATION OF HEAT PUMP CHILLER. FURNISH OWNER WITH TROUBLESHOOTING GUIDE AND TOOLS.
5. PROVIDE WITH MANUFACTURERS FLOW SWITCH ON COOLING AND HEATING SIDES FOR 37 GPM MINIMUM FLOW.

ENERGY RECOVERY VENTILATOR SCHEDULE

EQUIPMENT TAG	BASIS OF DESIGN		LOCATION	SUPPLY		EXHAUST		HEAT EXCHANGER			AMBIENT OA TEMPERATURE (°F)	SUMMER SUPPLY TEMPERATURE (°F)	WINTER SUPPLY TEMPERATURE (°F)	DISCONNECT FURNISHED BY	ELECTRICAL DATA					INDOOR UNIT WEIGHT (LBS)	REMARKS				
	MANUFACTURER	MODEL		AIRFLOW (CFM)	ESP (IN W.C.)	AIRFLOW (CFM)	ESP (IN W.C.)	TYPE	SENSIBLE EFFECTIVENESS	SUMMER TOTAL EFFECTIVENESS					WINTER TOTAL EFFECTIVENESS	VOLTS	PH	MCA	MOPD			SUPPLY FAN		EXHAUST FAN	
																						W	FLA	W	FLA
ERV-01	RENEWAIRE	HE05	FLOOR 8	240	0.41	240	0.41	FIXED PLATE	76%	69%	74.1%	86.9	77.9	55.6	EC	120	1	6.1	15	70	1.55	68	1.55	94	1,2,3,4

REMARKS:
1. PROVIDE BACKDRAFT DAMPER ON EXHAUST AND INTAKE.
2. PROVIDE MERV 8 FILTERS.
3. PROVIDE CEILING MOUNTING HARDWARE.
4. ALL VOLUME DAMPER LOCATIONS SHOWN ON FLOOR PLANS

HOT WATER PUMP SCHEDULE

EQUIPMENT TAG	BASIS OF DESIGN		STYLE	LOCATION	INLET SIZE (IN)	OUTLET SIZE (IN)	SHUTOFF HEAD (FT H2O)	EFFICIENCY (%)	OPERATING POINT		MOTOR SPEED (RPM)	POWER (BHP)	ELECTRICAL					WEIGHT (LBS)	REMARKS	
	MANUFACTURER	MODEL							FLOW (GPM)	HEAD (FT H2O)			POWER (HP)	V	PH	HZ	DISCONNECT FURNISHED BY			STARTER FURNISHED BY
HWP-02	ARMSTRONG	4280	END SUCTION	MECH - 103	1.5	1	22	43	37	60	2,670	1.35	5	208	3	60	EC	VFD	148	1,2

REMARKS:
1. FLUID IS 40% PROPYLENE GLYCOL
2. FURNISH WITH VFD.

CHILLED WATER PUMP SCHEDULE

EQUIPMENT TAG	BASIS OF DESIGN		STYLE	LOCATION	INLET SIZE (IN)	OUTLET SIZE (IN)	SHUTOFF HEAD (FT H2O)	EFFICIENCY (%)	OPERATING POINT		MOTOR SPEED (RPM)	POWER (BHP)	ELECTRICAL					WEIGHT (LBS)	REMARKS	
	MANUFACTURER	MODEL							FLOW (GPM)	HEAD (FT H2O)			POWER (HP)	V	PH	HZ	DISCONNECT FURNISHED BY			STARTER FURNISHED BY
CWP-02	ARMSTRONG	4280	END SUCTION	MECH - 103	1.5	1	42	60.3	75	116	3,216	3.78	7.5	208	3	60	EC	VFD	158	1,2

REMARKS:
1. FLUID IS 40% PROPYLENE GLYCOL
2. FURNISH WITH VFD.

GRILLE AND DIFFUSER SCHEDULE

EQUIPMENT TAG	BASIS OF DESIGN		SERVICE	TYPE	MATERIAL	AIR PATTERN	COLOR	REMARKS
	MANUFACTURER	MODEL						
RG	TITUS	50F	EXHAUST	GRILLE	ALUMINUM	FIXED	WHITE	1,2
SD	TITUS	TDC	SUPPLY	DIFFUSER	STEEL	4-WAY	WHITE	1,2
SD2	NAILOR	LBG	SUPPLY	LINEAR BAR PENCIL PROOF	ALUMINUM	0 DEG. DEFLECTION	WHITE	-

REMARKS:
1. PROVIDE SQUARE TO ROUND ADAPTER AS REQUIRED.
2. PROVIDE BALANCING DAMPER IN BRANCH DUCT SERVING AIR OUTLET AT TAKEOFF FROM TRUNK DUCT.

HYDRONIC EXPANSION TANK

EQUIPMENT TAG	BASIS OF DESIGN		AREA SERVED	SYSTEM SERVED	GLYCOL (%)	MAX TEMP (°F)	MIN TEMP (°F)	WORKING MAX PRESSURE (PSI)	FILL PRESSURE (PSI)	SYSTEM VOLUME (GAL)	TYPE	ACCEPTANCE VOLUME (GAL)	TANK VOLUME (GAL)	WEIGHT (LBS)	REMARKS
	MFR	MODEL													
ET-01	AMTROL	AX-20-DD	BUILDING	HYDRONIC HOT WATER	40	140	30	80	50	290	HORIZONTAL	11.3	16.5	46	1,2
ET-02	AMTROL	AX-80	BUILDING	CHILLED WATER	40	80	0	80	50	360	HORIZONTAL	22.6	44.4	160	1,2

REMARKS:
1. FURNISH WITH PRECHARGE PRESSURE OF 50 PSI.
2. TANK SHALL BE ASME RATED FOR 125 PSI.

TEMPORARY PORTABLE AIR CONDITIONER

EQUIPMENT TAG	BASIS OF DESIGN		TOTAL COOLING CAPACITY (BTU)	ELECTRICAL					WEIGHT (LBS)	REMARKS
	MANUFACTURER	MODEL		V	PH	HZ	FLA	FUSE SIZE		
SC-01	AMERICOOOL	WPC-15000	60,000	208	1	60	32	50	661	1

REMARKS:
1. PLUG IN CONNECTION.

CHEMICAL FEED POT SCHEDULE

EQUIPMENT TAG	BASIS OF DESIGN		SYSTEM SERVED	FILL CAPACITY (GALLON)	MAX PRESSURE (PSI)	MAX TEMP (°F)	DIMENSIONS (IN)			WEIGHT (LBS)	REMARKS
	MANUFACTURER	MODEL					HEIGHT (IN)	WIDTH (IN)	DEPTH (IN)		
CF-01	J.L. WINGERT CO.	DB-2HD	HEATING HOT WATER	2	200	200	30	6	6	22	-
CF-02	J.L. WINGERT CO.	DB-2HD	CHILLED WATER	2	200	200	30	6	6	22	-

AIR / DIRT SEPARATOR SCHEDULE

EQUIPMENT TAG	BASIS OF DESIGN		SYSTEM SERVED	TYPE	FLOW (GPM)	PRESSURE DROP (FT H2O)	WEIGHT (LBS)	REMARKS
	MANUFACTURER	MODEL						
ADS-01	SPIROTHERM	VDN250FA	HEATING HOT WATER	COMBINATION AIR DIRT SEPARATOR	37	1	150	1,2
ADS-02	SPIROTHERM	VDN300FA	CHILLED WATER	COMBINATION AIR DIRT SEPARATOR	75	1	202	1,2

REMARKS:
1. PIPE BLOW-DOWN TO FLOOR DRAIN WITH 1" COPPER PIPE.
2. FLANGED CONNECTIONS.

HEAT TRACE SCHEDULE

EQUIPMENT TAG	BASIS OF DESIGN		EQUIPMENT ASSOCIATED WITH PIPING TO BE PROTECTED	TEMPERATURE		DESIGN LENGTH (FT)	ELECTRICAL					REMARKS
	MANUFACTURER	MODEL		MIN OUTDOOR TEMP (°F)	DESIGN TEMP (°F)		W/FT	V	HZ	PH	TOTAL WATTAGE	
HT-01	RAYCHEM	3BTV1-CT	GF-01	-30	-1	6	3	120	60	1	18	1,2

REMARKS:
1. DESIGN LENGTH IS AN ESTIMATE OF LENGTH OF PIPING TO BE PROTECTED BY HEAT TRACE FOR BIDDING PURPOSES. CONTRACTOR TO PROVIDE HEAT TRACE AS REQUIRED TO PROTECT ALL EXTERIOR PIPING ASSOCIATED WITH EQUIPMENT TO BE PROTECTED.
2. MECHANICAL CONTRACTOR TO COORDINATE WITH ELECTRICAL CONTRACTOR TO ENSURE THAT APPROPRIATE ELECTRICAL CIRCUIT IS USED IF LENGTH AND WATTAGE EXCEEDS THAT SHOWN ON THIS SCHEDULE.

US ARMY CORPS OF ENGINEERS®

SEATTLE DISTRICT†

ISSUE DATE:
09/26/2025

SOLICITATION NO.:
JBLM ATCT HVAC REPAIRS
DEJ225502J

DESIGNED BY:
SPEEDS DESIGN BUILD

DRAWN BY:
J. WINGERT

CHECKED BY:
M. HUBBARD

SUBMITTED BY:
R. SPEEDS

SIZE:
ANSI D

U.S. ARMY CORPS OF ENGINEERS

SEATTLE DISTRICT

SEATTLE, WASHINGTON

SPEEDS DESIGN BUILD

23830 PACIFIC HWY S

KENT, WA 98032

P: (206) 590-2118

JOINT BASE LEWIS-MCCHORD, WASHINGTON

JBLM ATCT HVAC REPAIRS

DEJ225502J

MECHANICAL SCHEDULES I

SHEET ID

J00008

M-601

100% ELECTRONIC BID SET

DAVID WOOD

STATE OF WASHINGTON

REGISTERED PROFESSIONAL ENGINEER

100172025

	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20												
CEILING CASSETTE STYLE FAN COIL UNIT SCHEDULE																															
EQUIPMENT TAG	BASIS OF DESIGN		AREA SERVED	AIR FLOW (CFM)	COOLING										HEATING								ELECTRICAL						UNIT OPERATING WEIGHT (LBS)	REMARKS	
					EWT (°F)	LWT (°F)	TOTAL CAPACITY (MBH)	SENSIBLE CAPACITY (MBH)	ENTERING AIR		LEAVING AIR		WATER FLOW RATE (GPM)	WATER PRESSURE DROP (FT. H2O)	VALVE TYPE	EWT (°F)	LWT (°F)	CAPACITY (MBH)	ENTERING AIR DB (°F)	LEAVING AIR DB (°F)	WATER FLOW RATE (GPM)	WATER PRESSURE DROP (FT. H2O)									VALVE TYPE
	DB (°F)	WB (°F)							DB (°F)	WB (°F)	V	PH											HZ	FLA	MCA	MOCP					
FCU-02A	MULTI-AQUA	MHCF4W-8	ADMN 202	550	44	48.8	11.6	11	73	60.9	55.5	53.8	5.5	18.5	2-WAY	130	120	12.5	73	93.4	2.6	1.6	2-WAY	208	1	60	0.65	.8	1	72	1.2,3,4
FCU-02B	MULTI-AQUA	MHCF4W-8	ADMN 202	550	44	48.8	11.6	11	73	60.9	55.5	53.8	5.5	18.5	2-WAY	130	120	12.5	73	93.4	2.6	1.6	2-WAY	208	1	60	0.65	.8	1	72	1.2,3,4
FCU-03A	MULTI-AQUA	MHCF4W-12	OCMR 302	575	44	49.2	13.3	12.3	73	61	55	53.4	6	24.2	2-WAY	130	120	15.9	73	97.8	3.2	3	2-WAY	208	1	60	1.5	1.9	3	88	1.2,3,4
FCU-03B	MULTI-AQUA	MHCF4W-12	OCMR 302	575	44	49.2	13.3	12.3	73	61	55	53.4	6	24.2	2-WAY	130	120	15.9	73	97.8	3.2	3	2-WAY	208	1	60	1.5	1.9	3	88	1.2,3,4
FCU-04A	MULTI-AQUA	MHCF4W-12	OCMR 402	575	44	49.2	13.3	12.3	73	61	55	53.4	6	24.2	2-WAY	130	120	15.9	73	97.8	3.2	3	2-WAY	208	1	60	1.5	1.9	3	88	1.2,3,4
FCU-04B	MULTI-AQUA	MHCF4W-12	OCMR 402	575	44	49.2	13.3	12.3	73	61	55	53.4	6	24.2	2-WAY	130	120	15.9	73	97.8	3.2	3	2-WAY	208	1	60	1.5	1.9	3	88	1.2,3,4
FCU-07A	MULTI-AQUA	MHCF4W-8	LNGE 702	860	44	53.4	15.7	15.4	73	61	58.3	55.3	4	12	2-WAY	130	120	24.1	73	98.1	4.9	4.7	2-WAY	208	1	60	2.25	2.8	5	126	1.2,3,4
FCU-07B	MULTI-AQUA	MHCF4W-8	LNGE 702	860	44	53.4	15.7	15.4	73	61	58.3	55.3	4	12	2-WAY	130	120	24.1	73	98.1	4.9	4.7	2-WAY	208	1	60	2.25	2.8	5	126	1.2,3,4
REMARKS: 1. BASIS OF DESIGN - OTHER EQUIVALENT UNITS THAT MEET SPECIFICATIONS AND COMPLY WITH THE REQUIREMENTS OF THE BUY AMERICAN ACT MAY BE SUBMITTED FOR REVIEW. 2. PROVIDE WITH BAGNET CONTROL INTERFACE. SEE SPECIFICATIONS AND CONTROL DIAGRAM FOR ADDITIONAL INFORMATION. PROVIDE WITH TEMPERATURE AND HUMIDITY SENSOR. 3. CONTRACTOR TO FIELD FABRICATE CONNECTIONS BETWEEN OUTDOOR AIR DUCTWORK AND CASSETTE. 4. PROVIDE WITH CONDENSATE PUMP LITTLE GIANT VCMA-15 OR EQUIVALENT.																															


VERTICAL FAN COIL UNIT SCHEDULE																																
EQUIPMENT TAG	BASIS OF DESIGN		AREA SERVED	AIR FLOW (CFM)	ESP (IN W.C.)	COOLING										HEATING								ELECTRICAL						UNIT OPERATING WEIGHT (LBS)	REMARKS	
						EWT (°F)	LWT (°F)	TOTAL CAPACITY (MBH)	SENSIBLE CAPACITY (MBH)	ENTERING AIR		LEAVING AIR		WATER FLOW RATE (GPM)	WATER PRESSURE DROP (FT. H2O)	VALVE TYPE	EWT (°F)	LWT (°F)	CAPACITY (MBH)	ENTERING AIR DB (°F)	LEAVING AIR DB (°F)	WATER FLOW RATE (GPM)	WATER PRESSURE DROP (FT. H2O)									VALVE TYPE
	DB (°F)	WB (°F)								DB (°F)	WB (°F)	V	PH											HZ	FLA	MCA	MOC					
FCU-05A	ENVIRO-TEC	CDV20	TCOM 502	1800	0.1	44	53	31.6	29.5	73	63	59.6	57.8	7.6	16.9	2-WAY	130	110	30.8	73	87.1	3.3	1.1	2-WAY	208	1	60	10	11.25	15	242	1.2,3,4
FCU-05B	ENVIRO-TEC	CDV20	TCOM 502	1800	0.1	44	53	31.6	29.5	73	63	59.6	57.8	7.6	16.9	2-WAY	130	110	30.8	73	87.1	3.3	1.1	2-WAY	208	1	60	10	11.25	15	242	1.2,3,4
FCU-05C	ENVIRO-TEC	CDV20	TCOM 502	1800	0.1	44	53	31.6	29.5	73	63	59.6	57.8	7.6	16.9	2-WAY	130	110	30.8	73	87.1	3.3	1.1	2-WAY	208	1	60	10	11.25	15	242	1.2,3,4
FCU-06A	ENVIRO-TEC	CDV20	OCMR 602	1800	0.1	44	53	31.6	29.5	73	63	59.6	57.8	7.6	16.8	2-WAY	130	110	30.8	73	87.1	3.3	1.1	2-WAY	208	1	60	10	11.25	20	242	1.2,3,4
FCU-06B	ENVIRO-TEC	CDV20	OCMR 602	1800	0.1	44	53	31.6	29.5	73	63	59.6	57.8	7.6	16.8	2-WAY	130	110	30.8	73	87.1	3.3	1.1	2-WAY	208	1	60	10	11.25	20	242	1.2,3,4
FCU-06C	ENVIRO-TEC	CDV20	OCMR 602	1800	0.1	44	53	31.6	29.5	73	63	59.6	57.8	7.6	16.8	2-WAY	130	110	30.8	73	87.1	3.3	1.1	2-WAY	208	1	60	10	11.25	20	242	1.2,3,4
FCU-08A	ENVIRO-TEC	VDD30	CAB	1,730	0.8	44	55	51.9	43.5	73	60.9	55.2	55.1	10.2	6.8	2-WAY	130	110	28.7	73	83.3	3.1	4.49	2-WAY	208	1	60	9.4	11.75	20	507	1.2,3
FCU-08B	ENVIRO-TEC	VDD30	CAB	1,730	0.8	44	55	51.9	43.5	73	60.9	55.2	55.1	10.2	6.8	2-WAY	130	110	28.7	73	83.3	3.1	4.49	2-WAY	208	1	60	9.4	11.75	20	507	1.2,3
FCU-08C	ENVIRO-TEC	VDD30	CAB	1,730	0.8	44	55	51.9	43.5	73	60.9	55.2	55.1	10.2	6.8	2-WAY	130	110	28.7	73	83.3	3.1	4.49	2-WAY	208	1	60	9.4	11.75	20	507	1.2,3
REMARKS: 1. BASIS OF DESIGN - OTHER EQUIVALENT UNITS THAT MEET SPECIFICATIONS AND COMPLY WITH THE REQUIREMENTS OF THE BUY AMERICAN ACT MAY BE SUBMITTED FOR REVIEW. 2. PROVIDE WITH BAGNET CONTROL INTERFACE. SEE SPECIFICATIONS AND CONTROL DIAGRAM FOR ADDITIONAL INFORMATION. PROVIDE WITH TEMPERATURE AND HUMIDITY SENSOR. 3. PROVIDE WITH CONDENSATE PUMP LITTLE GIANT VDMA-15 OR EQUIVALENT. PROVIDE HARDWIRED POWER CONNECTION. SEE ELECTRICAL SHEETS. 4. PROVIDE WITH MANUFACTURERS SUPPLY PLENUM AND SUPPLY GRILLE.																																


WALL MOUNTED FAN COIL UNIT SCHEDULE																															
EQUIPMENT TAG	BASIS OF DESIGN		AREA SERVED	AIR FLOW (CFM)	COOLING									HEATING									ELECTRICAL						UNIT OPERATING WEIGHT (LBS)	REMARKS	
					EWT (°F)	LWT (°F)	TOTAL CAPACITY (MBH)	SENSIBLE CAPACITY (MBH)	ENTERING AIR		LEAVING AIR		WATER FLOW RATE (GPM)	WATER PRESSURE DROP (FT. H2O)	VALVE TYPE	EWT (°F)	LWT (°F)	CAPACITY (MBH)	ENTERING AIR DB (°F)	LEAVING AIR DB (°F)	WATER FLOW RATE (GPM)	WATER PRESSURE DROP (FT. H2O)									VALVE TYPE
	DB (°F)	WB (°F)							DB (°F)	WB (°F)	V	PH											HZ	FLA	MCA	MOCP					
FCU-01A	ENVIRO-TEC	HPP-D-06	TCOM -	531	44	54	5.65	5.65	73	61	63.3	57.3	1.35	2.09	2-WAY	130	110	6.04	73	82.5	0.59	0.28	2-WAY	208	1	60	3	3.75	15	108	1,2,3
FCU-01B	ENVIRO-TEC	HPP-D-06	TCOM -	531	44	54	5.65	5.65	73	61	63.3	57.3	1.35	2.09	2-WAY	130	110	6.04	73	82.5	0.59	0.28	2-WAY	208	1	60	3	3.75	15	108	1,2,3
REMARKS: 1. BASIS OF DESIGN - OTHER EQUIVALENT UNITS THAT MEET SPECIFICATIONS AND COMPLY WITH THE REQUIREMENTS OF THE BUY AMERICAN ACT MAY BE SUBMITTED FOR REVIEW. 2. PROVIDE WITH BAGNET CONTROL INTERFACE. SEE SPECIFICATIONS AND CONTROL DIAGRAM FOR ADDITIONAL INFORMATION. PROVIDE WITH TEMPERATURE AND HUMIDITY SENSOR. 3. PROVIDE WITH CONDENSATE PUMP LITTLE GIANT VCMA-15 OR EQUIVALENT.																															

GLYCOL FEEDER SCHEDULE																	
EQUIPMENT TAG	BASIS OF DESIGN		LOCATION	PRESSURE TO ENABLE PUMP (PSI)	PRESSURE TO DISABLE (PSI)	MAX PRESSURE (PSIG)	FLUID	MAX FLUID TEMPERATURE (°F)	DIMENSIONS		ELECTRICAL						REMARKS
	MANUFACTURER	MODEL							HEIGHT (IN)	DIAMETER(IN)	NUMBER OF PUMPS	V	PH	HZ	FLA	HP	
GF-01	J.L. WINGERT CO.	GL50-2H	MECH - 124	80	83	150	40% PROPYLENE GLYCOL	200	54	24	2	200	1	60	3.4	1/2	1,2,3
REMARKS: 1. PROVIDE WITH MANUFACTURER'S HIGH LEVEL FLOAT SWITCH. 2. FEEDS BOTH HEATING WATER AND CHILLED WATER SYSTEMS. 3. PROVIDE WITH BMS INTERFACE.																	

DOMESTIC WATER PUMP													
EQUIPMENT TAG	BASIS OF DESIGN		STYLE	LOCATION	OPERATING POINT		ELECTRICAL						WEIGHT (LBS)
	MANUFACTURER	MODEL			FLOW (GPM)	HEAD (FT H2O)	POWER (HP)	V	PH	HZ	DISCONNECT FURNISHED BY	STARTER FURNISHED BY	
DWP-01	GRUNDFOS	CR3-7-3PH	VERTICAL IN-LINE	MECH-103	18	120	1.5	208	3	60	EC	EC	78

REDUCED PRESSURE BACKFLOW PREVENTER SCHEDULE					
EQUIPMENT TAG	BASIS OF DESIGN MANUFACTURER	BASIS OF DESIGN MODEL	MAXIMUM DIFFERENTIAL PRESSURE DROP (PSI)	MODEL SIZE	ISOLATION VALVES
BFP-01	ZURN/WILKINS	975XL	10	3/4"	BALL

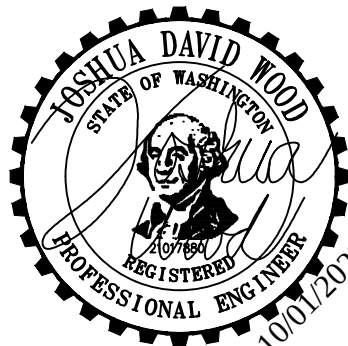

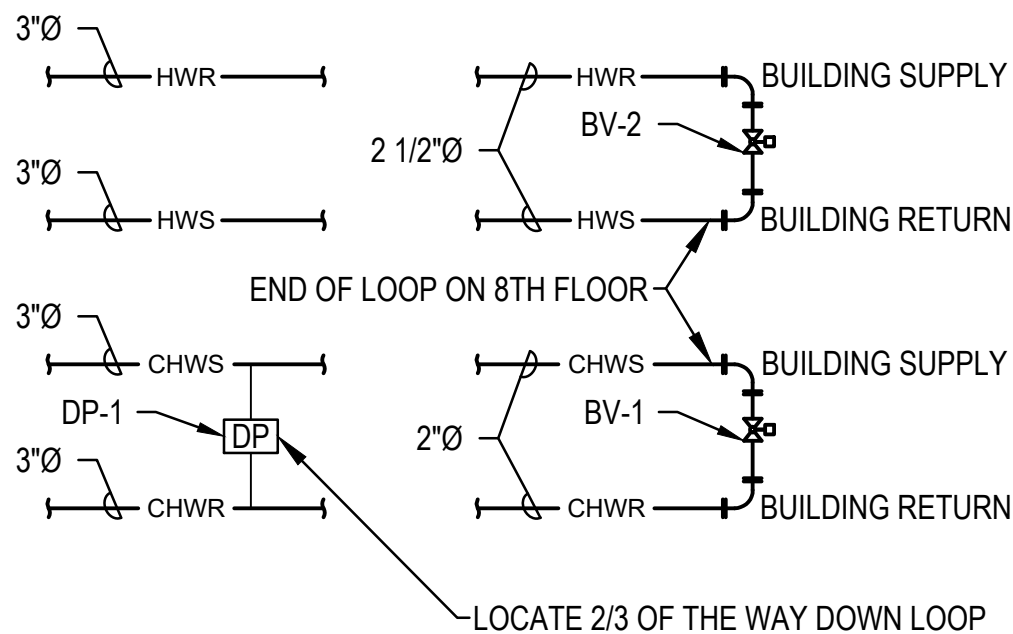

1 — HY
NTS

1. ALL PIPING SHOWN ON DIAGRAM IS FULL LOOP SIZE of 2 1/2" FOR HWS/HWR AND 3" FOR CHWS/CHWR UNLESS OTHERWISE SHOWN.
2. CHWR, CHWS, HWS AND HWR ARE DEFINED AT THE SYSTEM CIRCULATION PUMPS.
3. ALL GAUGES SHALL BE PROVIDED WITH ISOLATION VALVES.
4. ALL DIFFERENTIAL PRESSURE SENSORS SHALL HAVE PETES PLUGS.
5. HEATING AND CHILLED WATER LOOPS SHALL BE FURNISHED WITH 40% PROPYLENE GLYCOL FILL.
6. PIPING ON THIS SHEET IS DIAGRAMMATIC AND IS INTENDED TO SHOW THE CONNECTIONS BETWEEN SYSTEM COMPONENTS. FOR ACTUAL ROUTING REFER TO CIVIL SITE AND MECHANICAL FLOOR PLAN SHEETS.

- |  | SHEET KEYNOTES |
|---|---|
| 1. | REDUCED PRESSURE BACKFLOW PREVENTER. |
| 2. | 3/4" TO BUILDING CW SERVICE. SEE SHEET MP101 FOR CONTINUATION |
| 3. | 1/4" STAINLESS STEEL TUBING. |
| 4. | RUN DRAIN LINE TO NEAREST FLOOR DRAIN. |
| 5. | 4" CONCRETE HOUSE KEEPING PAD. |
| 6. | SET PRESSURE RELIEF VALVE TO 78 PSig. |

[illegible]

U.S. ARMY CORPS OF ENGINEERS SEATTLE DISTRICT SEATTLE, WASHINGTON	DESIGNED BY: SPEDES DESIGN BUILD	ISSUE DATE: 09/26/2025
	DRAWN BY: D. HUBBARD	WORK NO.: F0462023D0002
	CHECKED BY: M. HUBBARD, J. WOOD	CONTRACT NO.: F0462023D0002
	SUBMITTED BY: SPEDES	IJO_DE/2565021
	ANSI D	

JOINT BASE LEWIS-MCCHORD, WASHINGTON
JBLM AT CT HVAC REPAIRS
DEJ225502J

SHEET ID
J00008
M-701



100% ELECTRONIC BID SET

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
---	---	---	---	---	---	---	---	---	----	----	----	----	----	----	----	----	----	----	----

[illegible]

1 HEATING HOT WATER PUMP POINTS LIST

[illegible]

2 CHILLED WATER PUMP POINTS LIST

HWP-01 AND HWP-02 SEQUENCE OF OPERATIONS

1. GENERAL

1.1 HWP-01 AND HWP-02 SHALL BE STARTED AND STOPPED BY THE BMS

1.2 PUMP IS PART OF A CONSTANT VOLUME SYSTEM

1.3 PUMP INLET TEMPERATURE, OUTLET TEMPERATURE AND FLOW SHALL BE MONITORED AND TRENDED THROUGH BMS.

2. OPERATION

- 2.1 IF HPC-01 IS THE LEAD THEN V-1 SHALL BE PROVED OPEN AS SENSED BY ACTUATOR END SWITCH PRIOR TO LEAD PUMP START. IF HPC-02 IS THE LEAD THEN V-2 SHALL BE PROVED OPEN AS SENSED BY ACTUATOR END SWITCH PRIOR TO LEAD PUMP START.
- 2.2 LEAD PUMP SHALL OPERATE TO MAINTAIN DESIGN FLOW (ADJ)
- 2.3 ON A CALL FOR HEATING FROM ANY ZONE THE LEAD PUMP SHALL START.
- 2.4 IF NO ZONES HAVE A CALL FOR HEATING LEAD PUMP SHALL STOP.
- 2.5 A FLOW OF 37 GPM SHALL BE MAINTAINED BY MODULATING THE BYPASS VALVE.

3. SCHEDULE

3.1 HWP-1 AND HWP-2 SHALL BE LEAD LAG IN OPERATION. LEAD PUMP SHALL SWITCH IN INTERVALS OF 2 WEEKS (ADJ)

4. ALARM

- 4.1 IF LEAD PUMP IS COMMANDED ON AND THE RESPECTIVE CURRENT SENSOR DOES NOT SENSE ANY CURRENT, LAG PUMP SHALL BE COMMANDED ON, ALARM AT OPERATOR WORK STATION.
- 4.2 IF PUMP HWP-01/HWP-02 IS COMMANDED ON AND FS-1 SENSES A FLOW LESS THAN 50% (VAR) OF PUMP SCHEDULED FLOW, ALARM AT OPERATOR WORK STATION.
- 4.3 IF V-1 OR V-2 IS COMMANDED OPEN AND PROVING SIGNAL IS NOT RECEIVED, PUMP SHALL NOT START, ALARM AT OPERATOR WORK STATION.

CHWP-01 AND CHWP-02 SEQUENCE OF OPERATIONS

1. GENERAL

1.1 CHWP-01 AND CHWP-02 SHALL BE STARTED AND STOPPED BY THE BMS

1.2 PUMP IS PART OF A VARIABLE VOLUME SYSTEM

1.3 PUMP INLET TEMPERATURE, OUTLET TEMPERATURE AND FLOW SHALL BE MONITORED AND TRENDED THROUGH BMS.

2. OPERATION

- 2.1 IF HPC-01 IS THE LEAD THEN V-3 SHALL BE PROVED OPEN AS SENSED BY ACTUATOR END SWITCH PRIOR TO LEAD PUMP START. IF HPC-02 IS THE LEAD THEN V-4 SHALL BE PROVED OPEN AS SENSED BY ACTUATOR END SWITCH PRIOR TO LEAD PUMP START.
- 2.2 LEAD PUMP SHALL MODULATE TO MAINTAIN A CONSTANT DIFFERENTIAL PRESSURE AS SENSED BY DIFFERENTIAL PRESSURE SENSOR DP-1. THE INITIAL DIFFERENTIAL SETPOINT SHALL BE 10 PSI(ADJ). FINAL SETPOINT TO BE DETERMINED BY TAB CONTRACTOR.
- 2.3 A MINIMUM FLOW OF 37 GPM AS SENSED BY FS-2 SHALL BE MAINTAINED BY MODULATING THE BYPASS VALVE.
- 2.3 ON A CALL FOR COOLING FROM ANY ZONE THE LEAD PUMP SHALL START.
- 2.4 IF NO ZONES HAVE A CALL FOR COOLING LEAD PUMP SHALL STOP.

3. SCHEDULE

3.1 CHWP-1 AND CHWP-2 SHALL BE LEAD LAG IN OPERATION. LEAD PUMP SHALL SWITCH IN INTERVALS OF 2 WEEKS (ADJ)

4. ALARMS

4.1 IF LEAD PUMP IS COMMANDED ON AND THE RESPECTIVE CURRENT SENSOR DOES NOT SENSE ANY CURRENT, LAG PUMP SHALL BE COMMANDED ON, ALARM AT OPERATOR WORK STATION.

4.2 IF PUMP CHWP-01/CHWP-02 IS COMMANDED ON AND FS-2 SENSES A FLOW LESS THAN 50% (VAR) OF PUMP SCHEDULED FLOW, ALARM AT OPERATOR WORK STATION.

4.3 IF V-3 OR V-4 IS COMMANDED OPEN AND PROVING SIGNAL IS NOT RECEIVED, PUMP SHALL NOT START, ALARM AT OPERATOR WORK STATION.



US ARMY CORPS OF
ENGINEERS ®
SEATTLE DISTRICT

[illegible]

U.S. ARMY CORPS OF ENGINEERS SEATTLE DISTRICT SEATTLE, WASHINGTON	DESIGNED BY: DESIGN BUILD DRAWN BY: CHECKED BY: M. HUBBARD, J. WOOD SUBMITTED BY: SPEES SIZE ANSI D	SOLICITATION NO.: FA462024F0092 CONTRACT NO.: FA462023D0002 UO_DE/2256021	ISSUE DATE:
---	---	---	-------------

JOINT BASE LEWIS-MCCHORD, WASHINGTON
JBLM ATCT HVAC REPAIRS
DEJ225502J

SHEET ID
J00008
M-702



100% ELECTRONIC BID SET

JOB: BUILDING:	DEJ215971J J00008	POINT LEGEND	SYSTEM OUTPUTS		SYSTEM INPUTS		SYSTEM SOFTWARE/CONTROL		PAGE:
			BINARY	ANA- LOG	BINARY	ANALOG	ALARM PROCESSING	APPLICATION/FUNCTION	
SYSTEM: FAN COIL UNIT									
SYSTEM COMPONENT:	POINT ID	ABBREVIATION	PRIORITY/ADD-ALTERNATE/NO	ELECTRIC DEVICE START/STOP OPEN/CLOSE	SPEED COMMAND VALVE POSITION STATUS ALARM	PRESSURE HIGH/LOW HIGH HUMIDITY LOW HUMIDITY TEMPERATURE PRESSURE (T) FLOW	PERCENT STATIC PRESSURE CARBON MONOXIDE HUMIDITY LOCAL ALARM AREA ALARM PANEL HIGH ALARM PANEL LOW ALARM PANEL	SCHEDULE START/STOP FUNCTION TEMPERATURE TEMPERATURE ECONOMIZER TEMPERATURE ECONOMIZER TEMPERATURE RESET STATIC PRESSURE PRESSURE OVERRIDE PRESSURE RESET FAILURE MODE SPACE VOLUME CONTROL FULL COMMUNICATION TRENDING	REMARKS
FAN COIL START/STOP	DO-1	SS-1		●	●				●
CHILLED WATER VALVE	AO-1	CHWV-1		●					●
HOT WATER VALVE	AO-2	HWV-2		●					●
ROOM TEMPERATURE SENSOR	AI-1	T-1		●	●			●	●
FAN SPEED	AO-3	FS-1		●					
CURRENT SENSOR	DI-1	CS-1			●				

1

FAN COIL POINTS LIST

NTS

JOB: BUILDING:	DEJ215971J J00008	POINT LEGEND	SYSTEM OUTPUTS		SYSTEM INPUTS		SYSTEM SOFTWARE/CONTROL		PAGE:
			BINARY	ANA- LOG	BINARY	ANALOG	ALARM PROCESSING	APPLICATION/FUNCTION	
SYSTEM: ENERGY RECOVERING VENTILATOR									
SYSTEM COMPONENT:	POINT ID	ABBREVIATION	PRIORITY/ADD-ALTERNATE/NO	ELECTRIC DEVICE START/STOP OPEN/CLOSE	SPEED COMMAND VALVE POSITION STATUS ALARM	PRESSURE HIGH/LOW HIGH HUMIDITY LOW HUMIDITY TEMPERATURE PRESSURE (T) FLOW	PERCENT STATIC PRESSURE CARBON MONOXIDE HUMIDITY LOCAL ALARM AREA ALARM PANEL HIGH ALARM PANEL LOW ALARM PANEL	SCHEDULE START/STOP FUNCTION TEMPERATURE TEMPERATURE ECONOMIZER TEMPERATURE ECONOMIZER TEMPERATURE RESET STATIC PRESSURE PRESSURE OVERRIDE PRESSURE RESET FAILURE MODE SPACE VOLUME CONTROL FULL COMMUNICATION TRENDING	REMARKS
SUPPLY FAN CURRENT SENSOR	DI-1	SF-CS			●				
EXHAUST FAN CURRENT SENSOR	DI-2	EF-CS							
OUTSIDE AIR PRESSURE SENS	AI-2	PT-1			●	●			●
EXHAUST AIR PRESSURE SENS	AI-2	PT-2			●	●			●
OA DUCT TEMPERATURE SENSOR	AI-3	T-1			●				●
ERV START / STOP	DI-3	SS-1		●					


2

ERV POINTS LIST

NTS


TYPICAL FAN COIL SEQUENCE OF OPERATIONS

1. GENERAL
- 1.1 FAN COILS ARE NORMALLY STARTED AND STOPPED REMOTELY VIA THE BMS BASED ON A SCHEDULE.
- 1.2 WHERE TWO FAN COIL UNITS SERVE A SINGLE SPACE OR ZONE, UNITS ARE FULLY REDUNDANT.
- 1.3 ONE OF THE UNITS SHALL BE DESIGNATED THE LEAD FAN COIL UNIT. THE OTHER SHALL BE DESIGNATED STANDBY.
- 1.4 FAN COILS SHALL BE LEAD LAG IN OPERATION. LEAD FAN COIL SHALL SWITCH IN INTERVALS OF 2 WEEKS (ADJ)
- 1.5 HEATING HOT WATER VALVE AND CHILLED WATER VALVE SHALL NOT BE OPEN AT THE SAME TIME.
2. FAN
- 2.1 FAN SHALL OPERATE CONTINUOUSLY IN OCCUPIED MODE.
- 2.2 MODULATE FAN SPEED FROM MINIMUM TO MAXIMUM AS THE SECOND STAGE OF COOLING OR HEATING.
- 2.3 FAN SHALL CYCLE WITH LOAD AS REQUIRED IN UNOCCUPIED MODE.
3. HEATING AND COOLING
- 3.1 ON A CALL FOR HEATING THE HOT WATER VALVE SHALL MODULATE TO MEET SET POINT.
- 3.2 ON A CALL FOR COOLING THE CHILLED WATER VALVE SHALL MODULATE TO MEET SET POINT.
4. SETPOINTS
- 4.1 SPACE HEATING SETPOINT SHALL BE 73 DEGREES (ADJ), SPACE COOLING SETPOINT SHALL BE 73 DEGREES (ADJ).
5. ALARMS
- 5.1 IF FAN IS COMMANDED ON AND CURRENT SENSOR SENSES NO CURRENT, ALARM AT OPERATOR WORKSTATION.
- 5.2 IF UNIT IS COMMANDED ON AND SPACE SETPOINT IS NOT MET FOR MORE THAN 30 MINUTES (VAR) SWITCH LEAD FAN COIL AND STANDBY UNIT AND ALARM AT OPERATOR WORKSTATION THROUGH BMS.

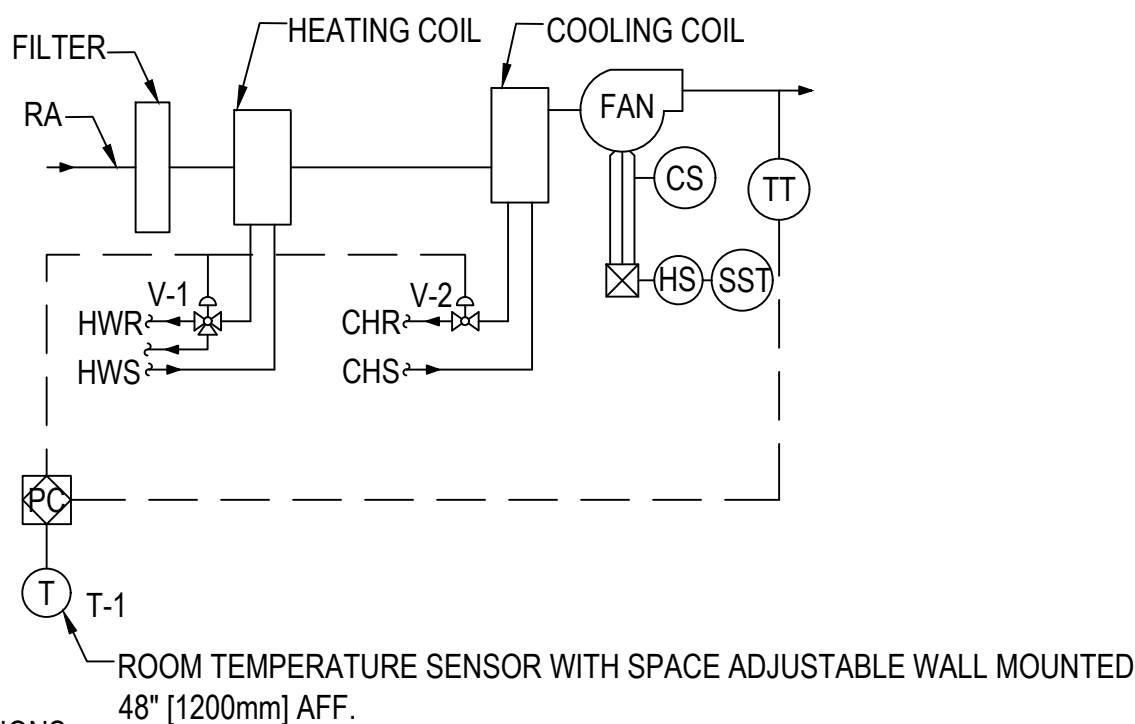

ERV SEQUENCE OF OPERATIONS

1. GENERAL
- 1.1 ERV TO RUN CONTINUOUSLY.
- 1.2 ERV SHALL BE STARTED AND STOPPED BY THE BMS.
- 1.3 ERV DISCHARGE AIR TEMPERATURE SHALL BE MONITORED AND TRENDED THROUGH BMS.
2. OPERATION
- 2.1 SF-01 AND EF-01 SHALL RUN TO MAINTAIN DESIGN AIRFLOW.
3. ALARM
- 3.1 IF ERV IS COMMANDED ON AND CURRENT IS NOT SENSED BY SUPPLY AND/OR EXHAUST MOTOR , ALARM AT OPERATOR WORK STATION.
- 3.2 IF ERV IS COMMANDED ON AND PT-1 OR PT-2 SENSES A STATIC PRESSURE GREATER THAN 1" WC (ADJ), ALARM AT OPERATOR WORKSTATION
- 3.3 IF DISCHARGE AIR TEMPERATURE FALLS BELOW 50(ADJ), ALARM AT OPERATOR WORKSTATION
4. EMERGENCY SHUTOFF
- 4.1 ERV POWER SHALL BE INTERLOCKED WITH EMERGENCY POWER OFF (EPO) SWITCH SHOWN ON SHEET MH101 VIA LINE VOLTAGE RELAY. IF EPO BUTTON IS ENABLED, ERV SHALL SHUTDOWN.
- 4.2 MOTORIZED DAMPER M-01 SHALL BE INTERLOCKED WITH EPO SWITCH. IF EPO BUTTON IS ENABLED, M-01 SHALL BE CLOSED. DAMPER SHALL BE FAIL CLOSED.
- 4.3 REOPENING M-01 AND ENABLING ERV SHLL REQUIRE A HARD RESET.

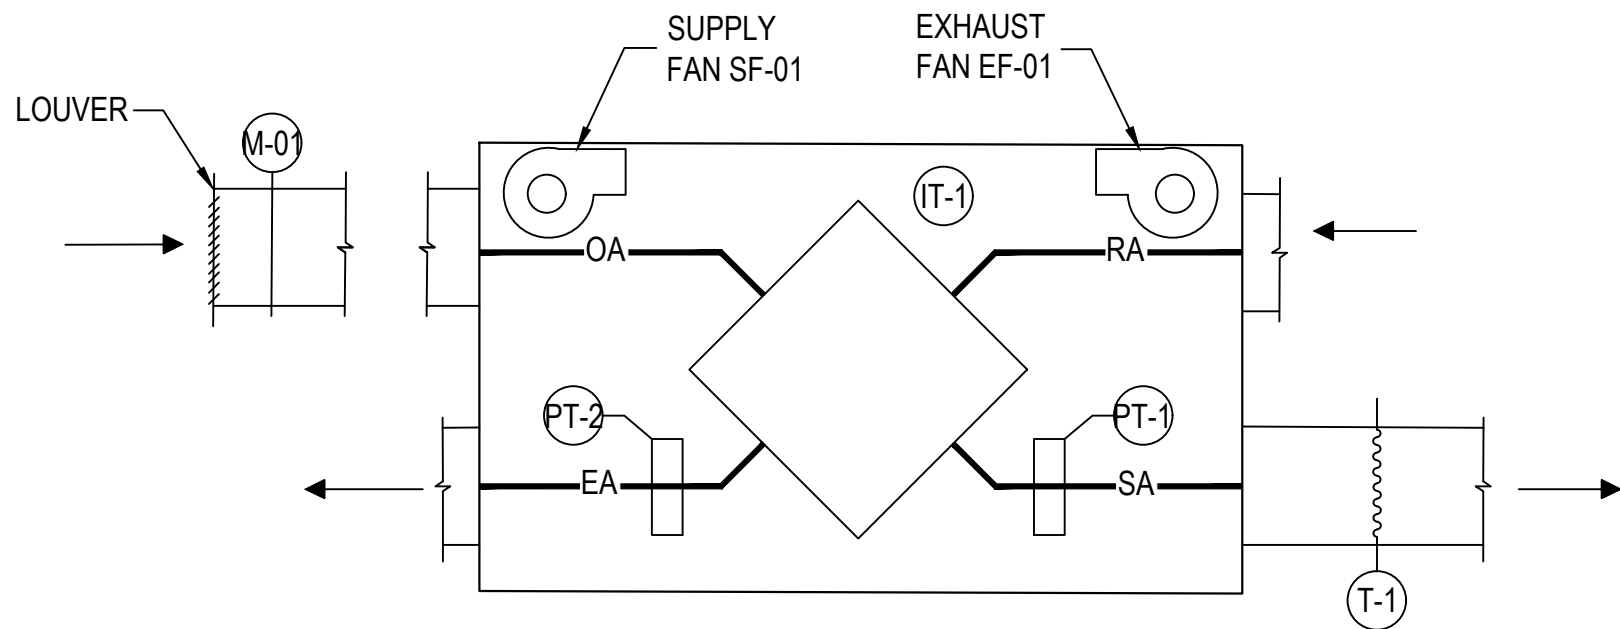

DESIGNED BY: SPEES DESIGN BUILD	ISSUE DATE: 09/26/2025
DRAWN BY: J. HUBBARD	SOLICITATION NO.: SEATTLE DISTRICT
CHECKED BY: M. HUBBARD	CONTRACT NO.: FA42023D002
SUBMITTED BY: R. SPEES	I/O: DEJ225502J
SIZE: ANSI D	
U.S. ARMY CORPS OF ENGINEERS SEATTLE DISTRICT SEATTLE, WASHINGTON	SPEES DESIGN BUILD 23830 PACIFIC HWY S KENT, WA 98032 P: (206) 590-2118

JOINT BASE LEWIS-MCCHORD, WASHINGTON JBLM ATCT HVAC REPAIRS DEJ225502J	MECHANICAL CONTROLS III
--	-------------------------

SHEET ID J00008
M-703


NTS


5.2 IF HEAT PUMP CHILLER HPC-01 OR HPC-02 IS COMMANDED ON AND TT-1 OR TT-2 SENSES A TEMPERATURE +/- 5 DEGREES OF THE SETPOINT FOR MORE THAN 30 MINUTES(ADJ), ALARM AT OPERATOR WORK STATION.



	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
	ELECTRICAL ABBREVIATIONS										ELECTRICAL GENERAL NOTES						ELECTRICAL SHEET INDEX			
P	1PH 1P 2/C 3/C 3PH 4/C 4W A/C A/E AAP AC ACC ADDL ADJ AF AFC	SINGLE-PHASE SINGLE POLE TWO-CONDUCTOR THREE-CONDUCTOR THREE-PHASE FOUR-CONDUCTOR FOUR-WIRE AIR CONDITIONING UNIT ARCHITECT/ENGINEER ALARM ANNUNCIATOR PANEL ALTERNATING CURRENT OR ARMORED CABLE ACCESSIBLE ADDITIONAL ADJACENT, ADJOINING AMPERE FRAME OR AMP FUSE ABOVE FINISHED COUNTER, AUTOMATIC FREQUENCY CONTROL, OR AVAILABLE FAULT CURRENT	EPRF ER ESMT EWC EWH EXIST(E) FA FAAP FACP FC FCIO FOIC FIXT FLA FLUOR FP FT FU SW FVNR FVR G GEN GFCI	EXPLOSION PROOF EXISTING TO REMAIN EASEMENT ELECTRIC WATER COOLER ELECTRIC WATER HEATER EXISTING FIRE ALARM FIRE ALARM ANNUNCIATOR PANEL FIRE ALARM CONTROL PANEL FOOTCANDLE FURNISHED BY CONTRACTOR, FURNISHED BY OWNER, INSTALLED BY CONTRACTOR	PF PH PNL PS PT PVC PWR R RCP REC RECPT RM RMC RMS REQD SAC SCC SD SF SHT SI SM SPD SPEC SPST SURF SW SWBD OR SB SWG R OR SG TEL TR TV TYP UFD UGND UL UON UPS	POWER FACTOR PHASE PANEL POWER SUPPLY POTENTIAL TRANSFORMER POLYVINYL CHLORIDE (PLASTIC) POWER EXISTING TO BE REMOVED REFLECTED CEILING PLAN RECESSED RECEPTACLE ROOM RIGID METAL CONDUIT ROOT MEAN SQUARE REQUIRED SMALL APPLIANCE CIRCUIT SHORT CIRCUIT CAPACITY SMOKE DETECTOR SQUARE FOOT (FEET) SHEET INTERNATIONAL SYSTEM OF UNITS SMART METER SURGE PROTECTIVE DEVICE SPECIFICATION SINGLE POLE, SINGLE THROW SURFACE SWITCH SWITCHBOARD SWITCHGEAR TELEPHONE TAMPER RESISTANT TELEVISION TYPICAL UNDERFLOOR DUCT UNDERGROUND UNDERWRITERS LABORATORY UNLESS OTHERWISE NOTED UNINTERRUPTIBLE POWER POWER SUPPLY	1. THESE "GENERAL NOTES" SHALL APPLY TO ALL DRAWINGS WITHIN THIS DRAWING SET. 2. PROTECT ALL EXISTING WORK FROM DAMAGE DURING CONSTRUCTION. ANY DAMAGED MATERIALS, SYSTEMS, COMPONENTS, FINISHES AND THE LIKE, SHALL BE REPAIRED OR REPLACED AT THE EXPENSE OF THE CONTRACTOR TO THE ACCEPTANCE OF THE OWNER. 3. BLACKENED OR BOLD ED EQUIPMENT INDICATES THE EQUIPMENT SHALL BE PROVIDED AND INSTALLED BY THE CONTRACTOR. ITEMS NOT DIRECTLY FURNISHED BY THE CONTRACTOR SHALL HAVE A DESIGNATION SUCH AS OFCI (OWNER FURNISHED CONTRACTOR INSTALLED), OFOI (OWNER FURNISHED OWNER INSTALLED), OR NIC (NOT IN CONTRACT. GRAY OR GRAY-SCALED EQUIPMENT SHALL BE ASSUMED TO BE EXISTING OR SHOWN FOR EQUIPMENT LOCATION COORDINATION). 4. EXISTING CIRCUITS ASSOCIATED WITH THE PROJECT AREA OF WORK ARE TO BE DE-ENERGIZED DURING CONSTRUCTION. 5. ALL ELECTRICAL WORK SHALL BE COMPLETED WITH ALL PROXIMATE ELECTRICAL CIRCUITS DE-ENERGIZED (i.e. A NEW BREAKER OR CIRCUIT CANNOT BE ADDED TO A PANEL UNLESS THE PANEL IS COMPLETELY DE-ENERGIZED), OR THE CONTRACTOR MUST COMPLY WITH NFPA 70E FOR WORK ON ENERGIZED SERVICE. THE DOD WILL DETERMINE IF THE ELECTRICAL SERVICE CAN BE SHUT DOWN OR IT WILL HAVE TO BE WORKED HOT DEPENDING ON THE CRITICALITY OF THE AREA BEING AFFECTED. IF THE WORK MUST BE DONE WITH THE SERVICE LIVE, THE CONTRACTOR IS RESPONSIBLE FOR PROVIDING ALL REQUIRED PROTECTIVE TOOLS, EQUIPMENT, AND CLOTHING, AND MUST FOLLOW THE JOB SPECIFIC WORK PLAN PREPARED BY THE CONTRACTOR AND APPROVED BY THE GOVERNMENT. WORK THAT REQUIRES SHUTTING DOWN ELECTRICAL SERVICE MAY HAVE TO BE ACCOMPLISHED DURING OTHER THAN NORMAL DUTY HOURS. 6. WHERE NOT SPECIFICALLY INDICATED ON DRAWINGS, BRANCH CIRCUIT CONDUCTORS SHALL BE 12 AWG MINIMUM FOR RUNS EQUAL TO OR LESS THAN 65 FEET AND 10 AWG MINIMUM FOR RUNS GREATER THAN 65 FEET. RACEWAYS AND CONDUCTORS SHALL BE SIZED AND QUANTIFIED TO SERVE AND CONTROL APPLICABLE EQUIPMENT WITH VOLTAGE DROP NO GREATER THAN THREE PERCENT. CONDUCTOR SIZE SHALL BE INCREASED TO COMPENSATE FOR DERATING REQUIRED PER NEC 310.15 WHERE MORE THAN THREE CURRENT CARRYING CONDUCTORS WITHIN ONE RACEWAY; CONDUCTOR AMPACITIES SHALL BE TAKEN FROM THE 75°C COLUMN. INDIVIDUAL CIRCUITS SHALL NOT SHARE NEUTRAL CONDUCTORS. 7. MINIMUM CONDUIT SIZE SHALL BE 1" FOR EXTERIOR AND UNDERGROUND CONDUIT. MINIMUM CONDUIT SIZE SHALL BE 3/4" FOR INTERIOR CONDUIT. ADDITIONAL CONDUCTORS FOR UNSWITCHED HOT CONDUCTOR TO LUMINAIRES WITH EMERGENCY BATTERY POWERED BACKUP UNITS OR TRANSFER DEVICES SHALL BE PROVIDED. ALL CONDUIT SHALL BE CONCEALED. THE ABOVE COMMENTS SHALL BE ADHERED TO UNLESS OTHERWISE NOTED ON THE DRAWINGS. 8. PROVIDE ALL CONDUIT AND WIRE FOR ALL CIRCUITS INDICATED AND/OR NOTED ON THE DRAWINGS AND/OR SPECIFICATIONS. ALL AUXILIARY OR REQUIRED APPURTENANCES FOR PROVIDED EQUIPMENT SHALL BE PROVIDED WITH ALL CONNECTIONS AS REQUIRED. 9. ALL EQUIPMENT AND DEVICES INCLUDING, BUT NOT LIMITED TO, ELECTRICAL DISTRIBUTION EQUIPMENT AND RECEPTACLES SHALL HAVE THEIR EXACT LOCATION COORDINATED WITH ARCHITECTURAL DRAWINGS AND ALL TRADES PRIOR TO COMMENCING WORK. 10. ALL CONDUIT/SLEEVE FLOOR AND WALL PENETRATIONS SHALL BE SEALED WITH FIRE RATED ASSEMBLIES, CAULKING, AND APPURTENANCES. ELECTRICAL BOXES LOCATED IN FIRE RATED WALLS SHALL BE RATED FOR USE IN FIRE RATED WALLS. 11. ALL EQUIPMENT AND INSTALLATION METHODS SHALL BE LISTED AND LABELED PER NEC, UL LISTED, OR REVIEWED EQUAL. 12. FOR ALL EQUIPMENT, COORDINATE WITH ALL TRADES (ARCHITECTURAL, MECHANICAL, PLUMBING, ETC) FOR ELECTRICAL REQUIREMENTS AND INSTALLATION LOCATIONS PRIOR TO INSTALLATION. 13. ALL LOW-VOLTAGE SYSTEM CABLING NOT RAN IN CONDUIT TO WALL MOUNTED DEVICE SHALL HAVE A MINIMUM 1"C ROUTED FROM DEVICE THROUGH WALL INTO THE ACCESSIBLE CEILING SPACE; CABLING SHALL NOT BE ROUTED IN WALLS OR IN AN INACCESSIBLE LOCATION WITHOUT CONDUIT. 14. NO STRUCTURAL MEMBERS SHALL BE CUT, DRILLED, OR NOTCHED WITHOUT PRIOR WRITTEN CONSENT FROM THE STRUCTURAL ENGINEER OR ARCHITECT. 15. EACH BRANCH CIRCUIT HOMERUN SHALL HAVE NO MORE THAN THREE CIRCUITS. EACH BRANCH CIRCUIT HOMERUN SHALL HAVE A SEPARATE GREEN INSULATED EQUIPMENT GROUNDING CONDUCTOR SIZED PER NEC TABLE 250.122. ALL WIRING IS BASED ON Cu COPPER PER NEC TABLE 310.15(B)(16), USING 75°C AMPACITIES FOR FEEDERS. 16. MULTI-GANG BACKBOXES FOR DIFFERENT VOLTAGES AND TYPES OF EMERGENCY AND NORMAL BRANCH WIRING DEVICES SHALL HAVE DIVIDERS BETWEEN DEVICES. 17. FOR EXISTING EQUIPMENT, SUCH AS LIGHTING FIXTURES, WIRING DEVICES, CONDUITS, ETC., SHOWN ON PLANS TO BE REMOVED, COMPLETELY CUT/CAP CONDUITS AT THE AREA OF WORK PERIMETER AND REMOVE CONDUIT WITHIN THE WORK AREA, DISCONNECT WIRING AT THE OVERCURRENT PROTECTIVE DEVICE AND REMOVE WIRING COMPLETELY FROM THE ABANDONED CONDUITS. 18. DISCONNECT ALL ABANDONED WIRING OF ALL TYPES AT THE OVERCURRENT PROTECTIVE DEVICE. COMPLETELY REMOVE ALL ABANDONED WIRING. 19. MAINTAIN AND RESTORE, IF INTERRUPTED, ALL CONDUITS AND CONDUCTORS PASSING THROUGH RENOVATED AREAS AND SERVICING UNDISTURBED AREAS. 20. PRIOR TO EQUIPMENT PROCUREMENT, CONTRACTOR SHALL PROVIDE DETAILED AND DIMENSIONED SHOP DRAWINGS INDICATING PROPOSED ELECTRICAL EQUIPMENT LAYOUT FOR ALL ELECTRICAL EQUIPMENT INSTALLATIONS DURING THE SUBMITTAL PROCESS FOR DOD AND ENGINEER REVIEW AND APPROVAL. LAYOUT SHALL INCLUDE COORDINATION WITH ALL EXISTING/RELOCATED EQUIPMENT, ARCHITECTURAL FEATURES, ETC. 21. CONTRACTOR SHALL DISPOSE OF REMOVED DEVICES UNLESS INDICATED OTHERWISE. DISPOSAL OF DEVICES SHALL COMPLY WITH ALL APPROPRIATE CODES. REUSE EXISTING CONDUITS AND JUNCTION BOXES AS PRACTICAL.	EG001 - ABBREVIATIONS, GENERAL NOTES, AND SHEET INDEX EG002 - ELECTRICAL LEGENDS ED401 - FLOOR 1 - ELECTRICAL PLAN - DEMOLITION EP401 - FLOOR 1 - ELECTRICAL PLAN E-402 - FLOOR 2 - ELECTRICAL PLANS E-403 - FLOOR 3 - ELECTRICAL PLANS E-404 - FLOOR 4 - ELECTRICAL PLANS E-405 - FLOOR 5 - ELECTRICAL PLANS E-406 - FLOOR 6 - ELECTRICAL PLANS E-407 - FLOOR 7 - ELECTRICAL PLANS E-408 - FLOOR 8 - ELECTRICAL PLANS E-409 - FLOOR 9 - ELECTRICAL PLANS E-501 - ELECTRICAL DETAILS E-502 - ELECTRICAL DETAILS ED601 - ELECTRICAL ONE-LINE DIAGRAM - DEMOLITION EP601 - ELECTRICAL ONE-LINE DIAGRAM - REVISED E-701 - ELECTRICAL SCHEDULES E-702 - ELECTRICAL SCHEDULES E-703 - ELECTRICAL SCHEDULES E-704 - ELECTRICAL SCHEDULES E-705 - ELECTRICAL SCHEDULES E-706 - ELECTRICAL SCHEDULES												
N	A/C A/E AAP AC ACC ADDL ADJ AF AFC	AIR CONDITIONING UNIT ARCHITECT/ENGINEER ALARM ANNUNCIATOR PANEL ALTERNATING CURRENT OR ARMORED CABLE ACCESSIBLE ADDITIONAL ADJACENT, ADJOINING AMPERE FRAME OR AMP FUSE ABOVE FINISHED COUNTER, AUTOMATIC FREQUENCY CONTROL, OR AVAILABLE FAULT CURRENT	EPRF ER ESMT EWC EWH EXIST(E) FA FAAP FACP FC FCIO FOIC FIXT FLA FLUOR FP FT FU SW FVNR FVR G GEN GFCI	EXPLOSION PROOF EXISTING TO REMAIN EASEMENT ELECTRIC WATER COOLER ELECTRIC WATER HEATER EXISTING FIRE ALARM FIRE ALARM ANNUNCIATOR PANEL FIRE ALARM CONTROL PANEL FOOTCANDLE FURNISHED BY CONTRACTOR, FURNISHED BY OWNER, INSTALLED BY CONTRACTOR	PF PH PNL PS PT PVC PWR R RCP REC RECPT RM RMC RMS REQD SAC SCC SD SF SHT SI SM SPD SPEC SPST SURF SW SWBD OR SB SWG R OR SG TEL TR TV TYP UFD UGND UL UON UPS	POWER FACTOR PHASE PANEL POWER SUPPLY POTENTIAL TRANSFORMER POLYVINYL CHLORIDE (PLASTIC) POWER EXISTING TO BE REMOVED REFLECTED CEILING PLAN RECESSED RECEPTACLE ROOM RIGID METAL CONDUIT ROOT MEAN SQUARE REQUIRED SMALL APPLIANCE CIRCUIT SHORT CIRCUIT CAPACITY SMOKE DETECTOR SQUARE FOOT (FEET) SHEET INTERNATIONAL SYSTEM OF UNITS SMART METER SURGE PROTECTIVE DEVICE SPECIFICATION SINGLE POLE, SINGLE THROW SURFACE SWITCH SWITCHBOARD SWITCHGEAR TELEPHONE TAMPER RESISTANT TELEVISION TYPICAL UNDERFLOOR DUCT UNDERGROUND UNDERWRITERS LABORATORY UNLESS OTHERWISE NOTED UNINTERRUPTIBLE POWER POWER SUPPLY	1. THESE "GENERAL NOTES" SHALL APPLY TO ALL DRAWINGS WITHIN THIS DRAWING SET. 2. PROTECT ALL EXISTING WORK FROM DAMAGE DURING CONSTRUCTION. ANY DAMAGED MATERIALS, SYSTEMS, COMPONENTS, FINISHES AND THE LIKE, SHALL BE REPAIRED OR REPLACED AT THE EXPENSE OF THE CONTRACTOR TO THE ACCEPTANCE OF THE OWNER. 3. BLACKENED OR BOLD ED EQUIPMENT INDICATES THE EQUIPMENT SHALL BE PROVIDED AND INSTALLED BY THE CONTRACTOR. ITEMS NOT DIRECTLY FURNISHED BY THE CONTRACTOR SHALL HAVE A DESIGNATION SUCH AS OFCI (OWNER FURNISHED CONTRACTOR INSTALLED), OFOI (OWNER FURNISHED OWNER INSTALLED), OR NIC (NOT IN CONTRACT. GRAY OR GRAY-SCALED EQUIPMENT SHALL BE ASSUMED TO BE EXISTING OR SHOWN FOR EQUIPMENT LOCATION COORDINATION). 4. EXISTING CIRCUITS ASSOCIATED WITH THE PROJECT AREA OF WORK ARE TO BE DE-ENERGIZED DURING CONSTRUCTION. 5. ALL ELECTRICAL WORK SHALL BE COMPLETED WITH ALL PROXIMATE ELECTRICAL CIRCUITS DE-ENERGIZED (i.e. A NEW BREAKER OR CIRCUIT CANNOT BE ADDED TO A PANEL UNLESS THE PANEL IS COMPLETELY DE-ENERGIZED), OR THE CONTRACTOR MUST COMPLY WITH NFPA 70E FOR WORK ON ENERGIZED SERVICE. THE DOD WILL DETERMINE IF THE ELECTRICAL SERVICE CAN BE SHUT DOWN OR IT WILL HAVE TO BE WORKED HOT DEPENDING ON THE CRITICALITY OF THE AREA BEING AFFECTED. IF THE WORK MUST BE DONE WITH THE SERVICE LIVE, THE CONTRACTOR IS RESPONSIBLE FOR PROVIDING ALL REQUIRED PROTECTIVE TOOLS, EQUIPMENT, AND CLOTHING, AND MUST FOLLOW THE JOB SPECIFIC WORK PLAN PREPARED BY THE CONTRACTOR AND APPROVED BY THE GOVERNMENT. WORK THAT REQUIRES SH													

		1	2	3	4	5	6	7	8	9	10						
		ELECTRICAL LEGEND															
P	POWER		DELTA CONNECTION		CONDUIT TURNED UP OR TOWARD												
			MOTOR, SINGLE-PHASE		CONDUIT TURNED DOWN OR AWAY												
			MOTOR, THREE-PHASE		CONDUIT CAPPED												
N			TRANSFORMER		CONDUIT 3/4" C, 3 #12 PHASE, 1 #12 N, & 1 #12 GND UNLESS SHOWN OTHERWISE. (EXAMPLE SHOWN: TO PANEL P1, CIRCUIT 1,3,5). LONG TICK FOR NEUTRAL WIRE; ONE SHORT TICK FOR EACH PHASE WIRE; GROUND SIZED PER NEC. NOTE THAT A SECOND SHORT TICK FOR LUMINAIRES IS FOR A TRAVELER WIRE.												
			WYE CONNECTION		CONDUIT HOME RUN - SEE CONDUIT AND WIRE SCHEDULE												
M			EARTH GROUND														
			X = DESCRIPTION E = EMERGENCY POWER OFF (OFF)														
			PUSHBUTTON (NO, NC)		RECEPTACLE, SPECIAL PURPOSE A = 120V, 20A, 1 PHASE, 2-POLE, 3W, NEMA 5-20R. B = 208V, 20A, 1 PHASE, 2-POLE, 3W, NEMA 6-20R. C = 120V, 30A, 1 PHASE, 2-POLE, 3W, NEMA 5-30R. D = 208V, 50A, 1 PHASE, 2-POLE, 3W, NEMA 6-50R. E = 208V, 60A, 1 PHASE, 3-POLE, 4W, NEMA 14-60R. F = 208V, 30A, 3 PHASE, 3-POLE 4W, NEMA 15-30R. G = 208V, 50A, 3 PHASE, 3 POLE, 4W, NEMA 15-30R. H = 208V, 60A, 3 PHASE, 3 POLE, 4W, NEMA 15-60R.												
			SWITCH, MULTIPPOSITION														
L			SWITCH, SINGLE BREAK														
			NORMALLY CLOSED RELAY CONTACT		RECEPTACLE, SINGLE WITH SWITCH												
K			NORMALLY OPEN RELAY CONTACT		HARDWIRED RECEPTACLE, SWITCHED DUPLEX												
			FUSE WITH RATING														
			CIRCUIT BREAKER		DROP CORD, SINGLE CONVENIENCE OUTLET, 3-WIRE, GROUNDING TYPE, 20A, W/#12 CONDUCTORS IN FLEXIBLE CORD (CENTER LINE OF OUTLET: 6'-6" [1981mm] AFF. MINIMUM).												
			DRAWOUT AIR CIRCUIT BREAKER		ELECTRICAL STRIP MOLD (OUTLETS ON 2'-0" [610mm] CENTERS OR AS DESIGNATED ON DRAWINGS), MTD 3'-6" [1067mm] AFF OR AS INDICATED.												
J			RELAY; NUMBER INDICATES RELAY TYPE 50 = INSTANTANEOUS OVER CURRENT OR RATE-OF-RISE 51 = AC-TIME OVER CURRENT 67 = AC-DIRECTIONAL OVER CURRENT 86 = LOCKING OUT		F = FUSED SWITCH												
			DISCONNECT SWITCH, FUSED		L = LOCK												
H			DISCONNECT SWITCH, UNFUSED		M = MANUAL MOTOR STARTING												
			STARTER, COMBINATION WITH DISCONNECT SWITCH		MP= MOTOR SNAP WITH PILOT LIGHT (THERMAL TYPE)												
			STARTER OR MOTOR CONTROLLER		PB= PUSH BUTTON STATION												
			GENERATOR, POWER		WP= WEATHER PROOF												
G			BATTERY		METERING POINT												

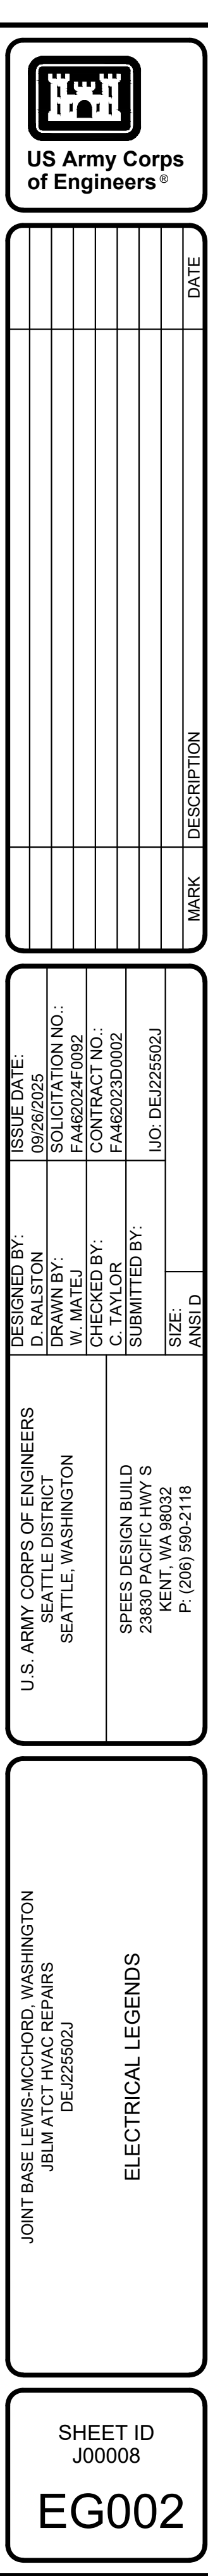[illegible]

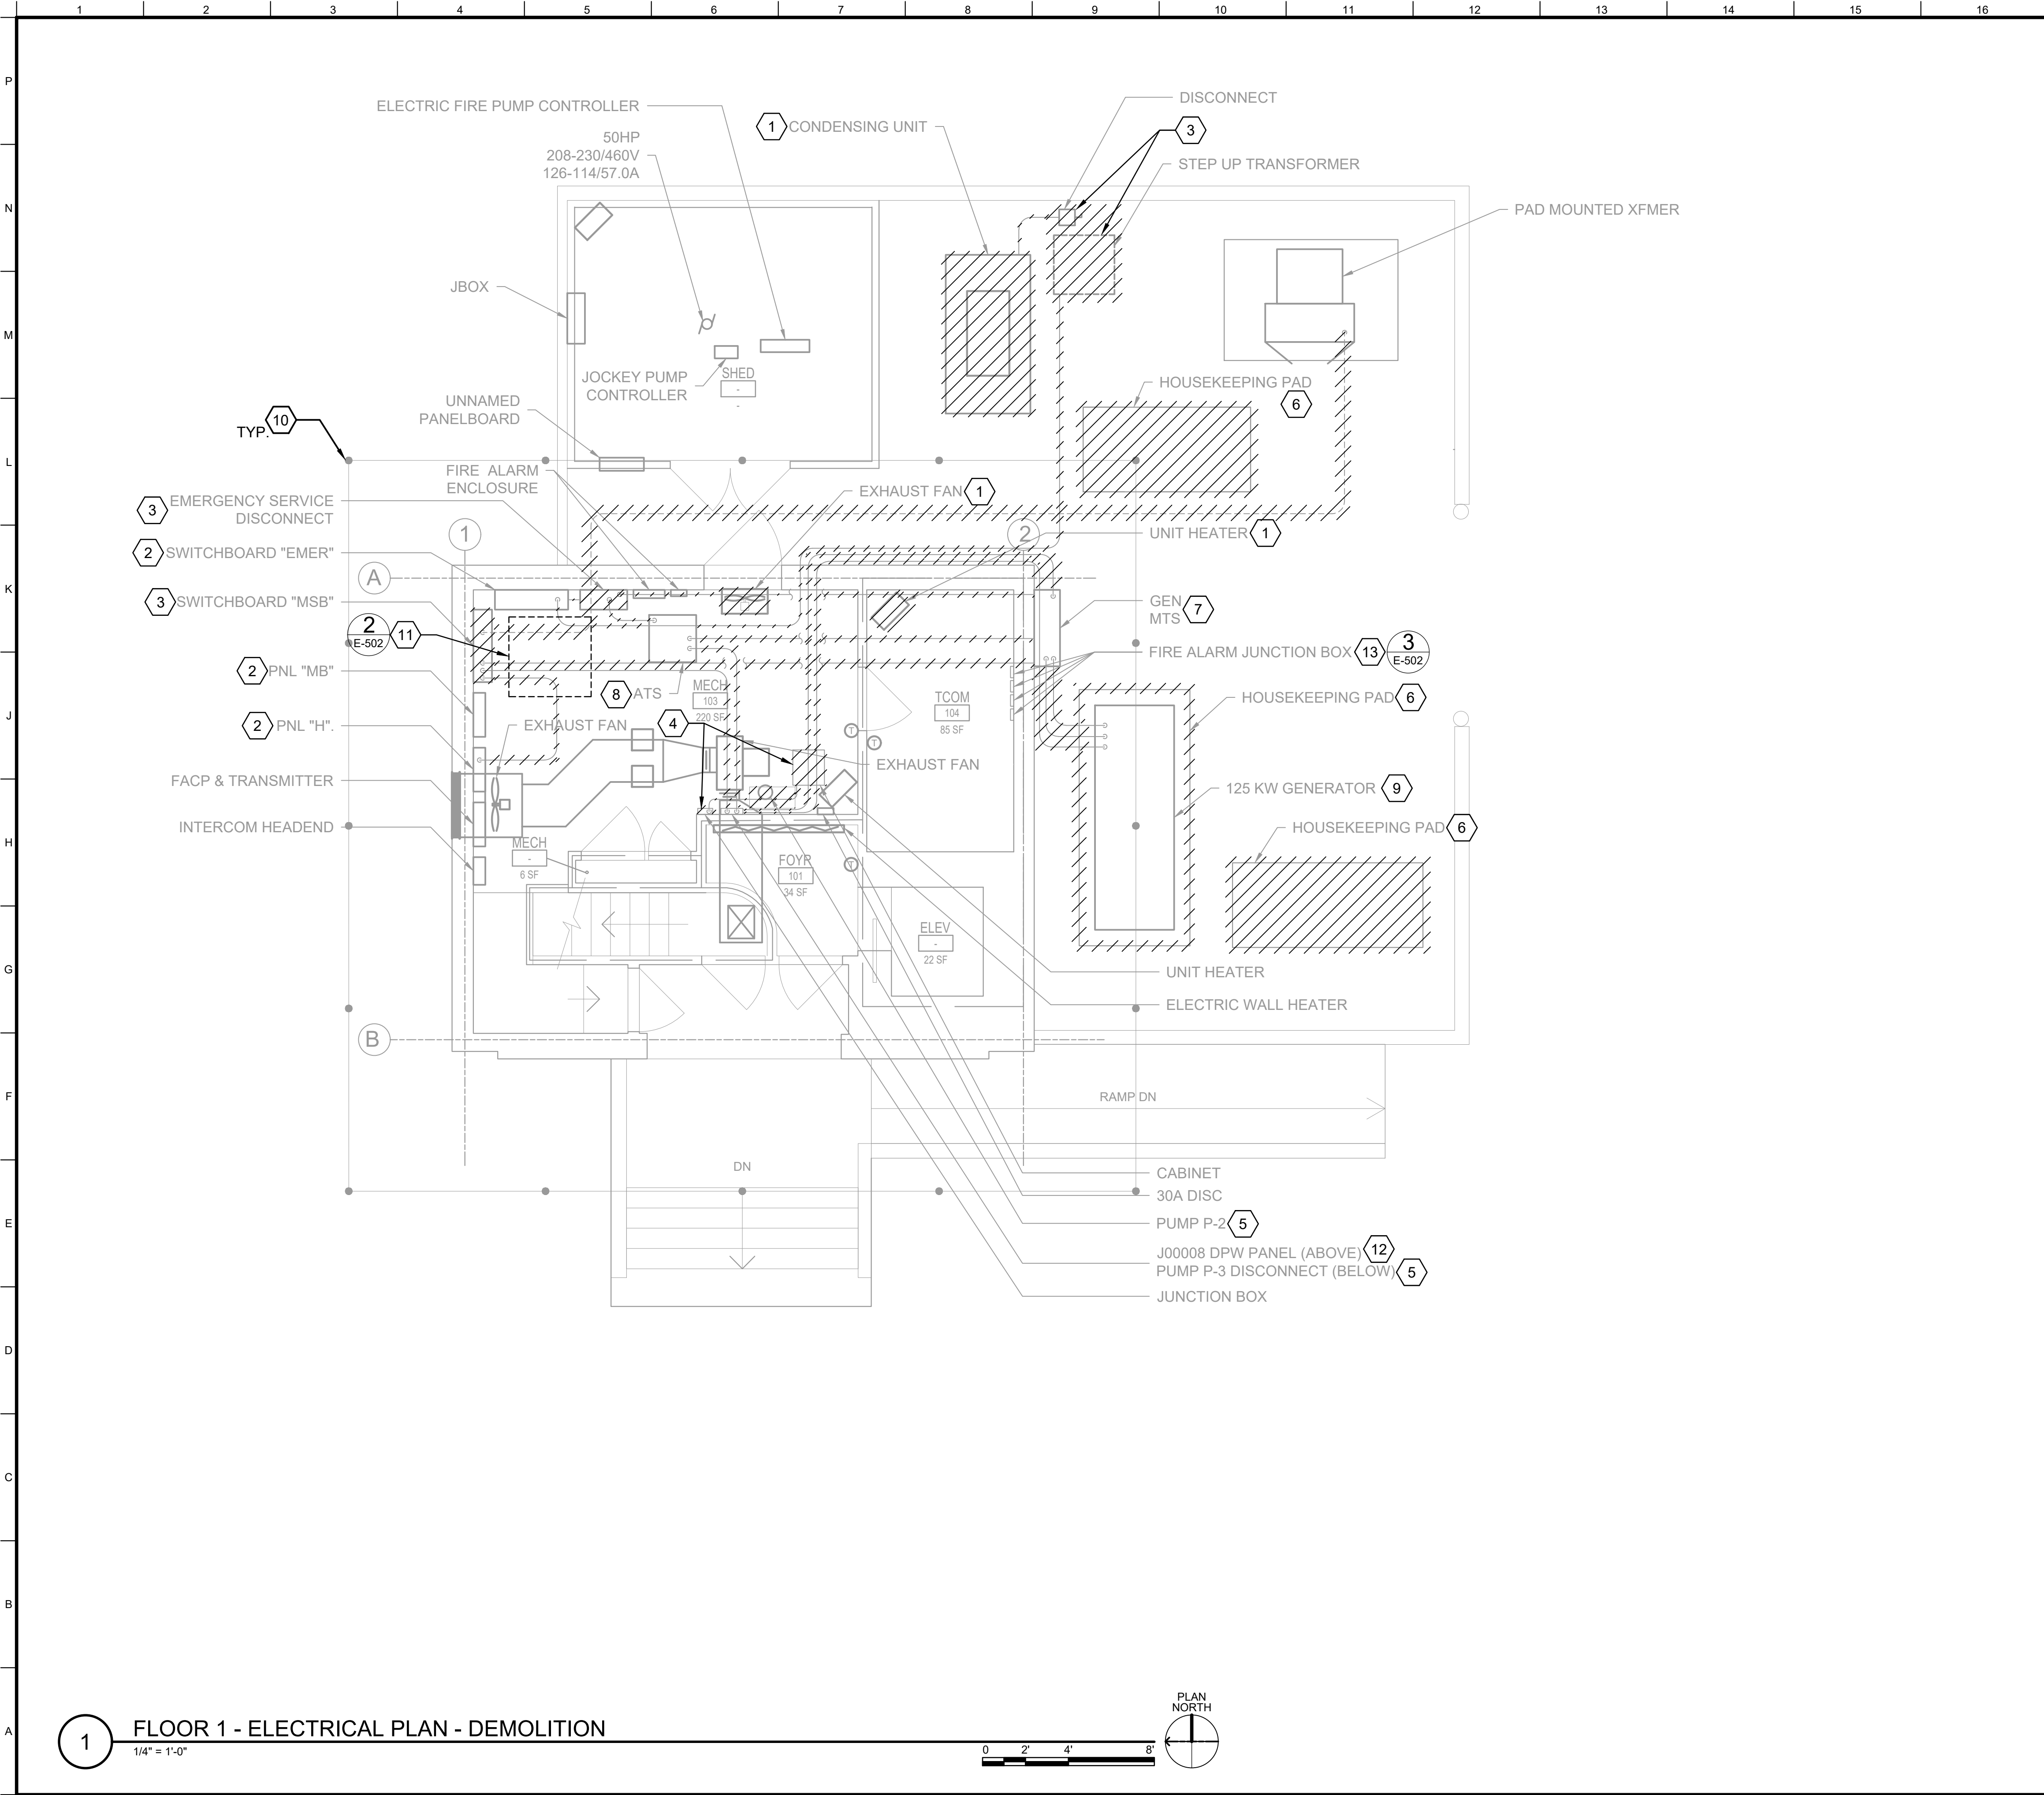

- ### GENERAL NOTES
- ALL EXISTING EQUIPMENT MAY NOT BE SHOWN FOR CLARITY. CONTRACTOR SHALL FIELD VERIFY ALL POWER AND ASSOCIATED CIRCUITRY AS REQUIRED. ALL RACEWAYS AND CONDUCTORS ASSOCIATED WITH EQUIPMENT TO BE DEMOLISHED SHALL BE DEMOLISHED BACK TO THEIR SOURCE, UNLESS OTHERWISE NOTED.
 - ALL ELECTRICAL WORK SHALL BE CLOSELY COORDINATED WITH THE CONTRACTORS PHASING OF THE PROJECT. COORDINATE ALL ELECTRICAL WORK WITH ALL OTHER TRADES
 - PROTECT ALL EXISTING WORK FROM DAMAGE DURING CONSTRUCTION. ANY DAMAGED MATERIALS, SYSTEMS, COMPONENTS, FINISHES AND THE LIKE, SHALL BE REPAIRED OR REPLACED AT THE EXPENSE OF THE CONTRACTOR TO THE ACCEPTANCE OF THE OWNER.
 - ALL CIRCUITS AND RELATED DEVICES THAT ARE TO REMAIN ARE TO STAY "ENERGIZED" IN THE DEMOLITION AND NEW CONSTRUCTION PHASES UNTIL THE COMPLETION OF THE WORK INDICATED ON THESE PLANS.
 - CONTRACTOR SHALL PROVIDE UPDATED CIRCUIT PANEL DIRECTORIES FOR ALL PANELS THAT CONTAIN CIRCUITS IMPACTED BY THIS PROJECT.
 - REFERENCE ONE-LINE DIAGRAMS ON SHEETS ED601 AND EP601 FOR ADDITIONAL INFORMATION.

- ### KEY NOTES
- EXISTING MECHANICAL EQUIPMENT SHALL BE DEMOLISHED. DEMOLISH ASSOCIATED CONDUIT AND WIRING BACK TO SOURCE. COORDINATE WITH MECHANICAL DRAWINGS FOR ADDITIONAL INFORMATION.
 - EXISTING PANELBOARD SHALL BE MODIFIED. REFERENCE ONE-LINE DIAGRAMS AND ASSOCIATED PANEL SCHEDULE FOR ADDITIONAL INFORMATION.
 - EXISTING ELECTRICAL EQUIPMENT SHALL BE DEMOLISHED. ASSOCIATED CONDUIT AND WIRE SHALL BE DEMOLISHED BACK TO SOURCE.
 - COORDINATE WITH GOVERNMENT FOR DISCONNECTION AND REMOVAL OF CABINET AND ASSOCIATED JUNCTION BOX.
 - PUMP, DISCONNECT, AND ALL ASSOCIATED CONDUIT AND WIRE SHALL BE DEMOLISHED BACK TO SOURCE. COORDINATE WITH MECHANICAL FOR ADDITIONAL INFORMATION.
 - EXISTING HOUSEKEEPING PADS SHALL BE DEMOLISHED. COORDINATE WITH ARCHITECTURAL FOR ADDITIONAL INFORMATION.
 - EXISTING MTS TO REMAIN FOR TEMP GENERATOR CONNECTION UNTIL NEW ATS-1/MTS-1 AND GENERATOR ARE INSTALLED. MTS SHALL BE SALVAGED TO GOVERNMENT. REFERENCE PHASING NOTES ON SHEET EG002 FOR ADDITIONAL INFORMATION.
 - EXISTING ATS SHALL BE SALVAGED. DEMOLISH EXISTING CONDUIT AND WIRE BACK TO SOURCE.
 - EXISTING GENERATOR SHALL BE SALVAGED TO GOVERNMENT. ASSOCIATED CONDUIT AND WIRE SHALL BE DEMOLISHED BACK TO SOURCE.
 - EXISTING GROUND RING SURROUNDING BUILDING. GROUND RING SHALL BE MAINTAINED AT ALL TIMES.
 - CONDUIT ROUTING LOCATED WITHIN APPROXIMATE AREA SHALL BE RELOCATED TO MAKE ROOM FOR NEW MECHANICAL HYDRONIC EXPANSION TANKS.
 - BUILDING DPW PANEL SHALL BE RELOCATED. EXTEND ALL RACEWAY AND CONDUCTORS TO REVISED LOCATION. SEE SHEET EP401 FOR ADDITIONAL INFORMATION.
 - FIRE ALARM JUNCTION BOXES SHALL BE RELOCATED TO MAKE ROOM FOR NEW MECHANICAL EQUIPMENT. REFERENCE SHEET EP401 FOR ADDITIONAL INFORMATION. EXISTING FIRE ALARM PANEL IS SIMPLEX, LOCATED IN MECHANICAL ROOM 103.



US Army Corps of Engineers®

MARK		DESCRIPTION
1		
2		
3		
4		
5		
6		
7		
8		
9		
10		
11		
12		
13		

ISSUE DATE:	SOLICITATION NO.:	CONTRACT NO.:	I/O:
09/26/2025	FA482023D002	FA482023D002	DEJ25502J

DESIGNED BY:	DRAWN BY:	CHECKED BY:	SUBMITTED BY:	SIZE:
D. RAUSTON	C. TAYLOR	C. TAYLOR	C. TAYLOR	ANSI D

U.S. ARMY CORPS OF ENGINEERS	SEATTLE DISTRICT	SEATTLE, WASHINGTON
SPECS DESIGN BUILD 23830 PACIFIC HWY S KENT, WA 98032 P: (206) 590-2118		

JOINT BASE LEWIS-MCCHORD, WASHINGTON	JBLM ATCT HVAC REPAIRS	DEJ25502J
FLOOR 1 - ELECTRICAL PLAN - DEMOLITION		

SHEET ID	J00008
ED401	



100% ELECTRONIC BID SET




- ## KEY NOTES
- | | |
|---|---|
| 1 | EXISTING MECHANICAL EQUIPMENT SHALL BE DEMOLISHED. DEMOLISH ASSOCIATED CONDUIT AND WIRING BACK TO SOURCE. COORDINATE WITH MECHANICAL DRAWINGS FOR ADDITIONAL INFORMATION. |
| 2 | PROVIDE ELECTRICAL CONNECTIONS TO MECHANICAL UNIT; PROVIDE RACEWAYS, CONDUCTORS, AND LOCAL STARTER / DISCONNECT. |
| 3 | PROVIDE CONNECTION FOR CONDENSATE PUMP. PROVIDE MOTOR RATED SINGLE POLE DISCONNECT SWITCH. |

JOINT BASE LEWIS-MCCORD, WASHINGTON
JBLM ATCT HVAC REPAIRS
DEJ25502J

SHEET ID
J00008

E-402




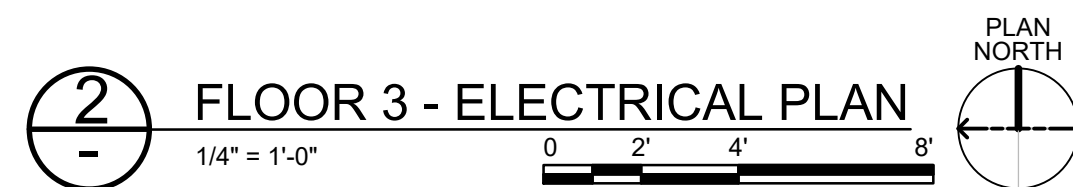

- ## KEY NOTES
- | | |
|---|---|
| 1 | EXISTING MECHANICAL EQUIPMENT SHALL BE DEMOLISHED. DEMOLISH ASSOCIATED CONDUIT AND WIRING BACK TO SOURCE. COORDINATE WITH MECHANICAL DRAWINGS FOR ADDITIONAL INFORMATION. |
| 2 | PROVIDE ELECTRICAL CONNECTIONS TO MECHANICAL UNIT; PROVIDE RACEWAYS, CONDUCTORS, AND LOCAL STARTER / DISCONNECT. |
| 3 | PROVIDE CONNECTION FOR CONDENSATE PUMP. PROVIDE MOTOR RATED SINGLE POLE DISCONNECT SWITCH. |


SHEET ID
J00008
E-403



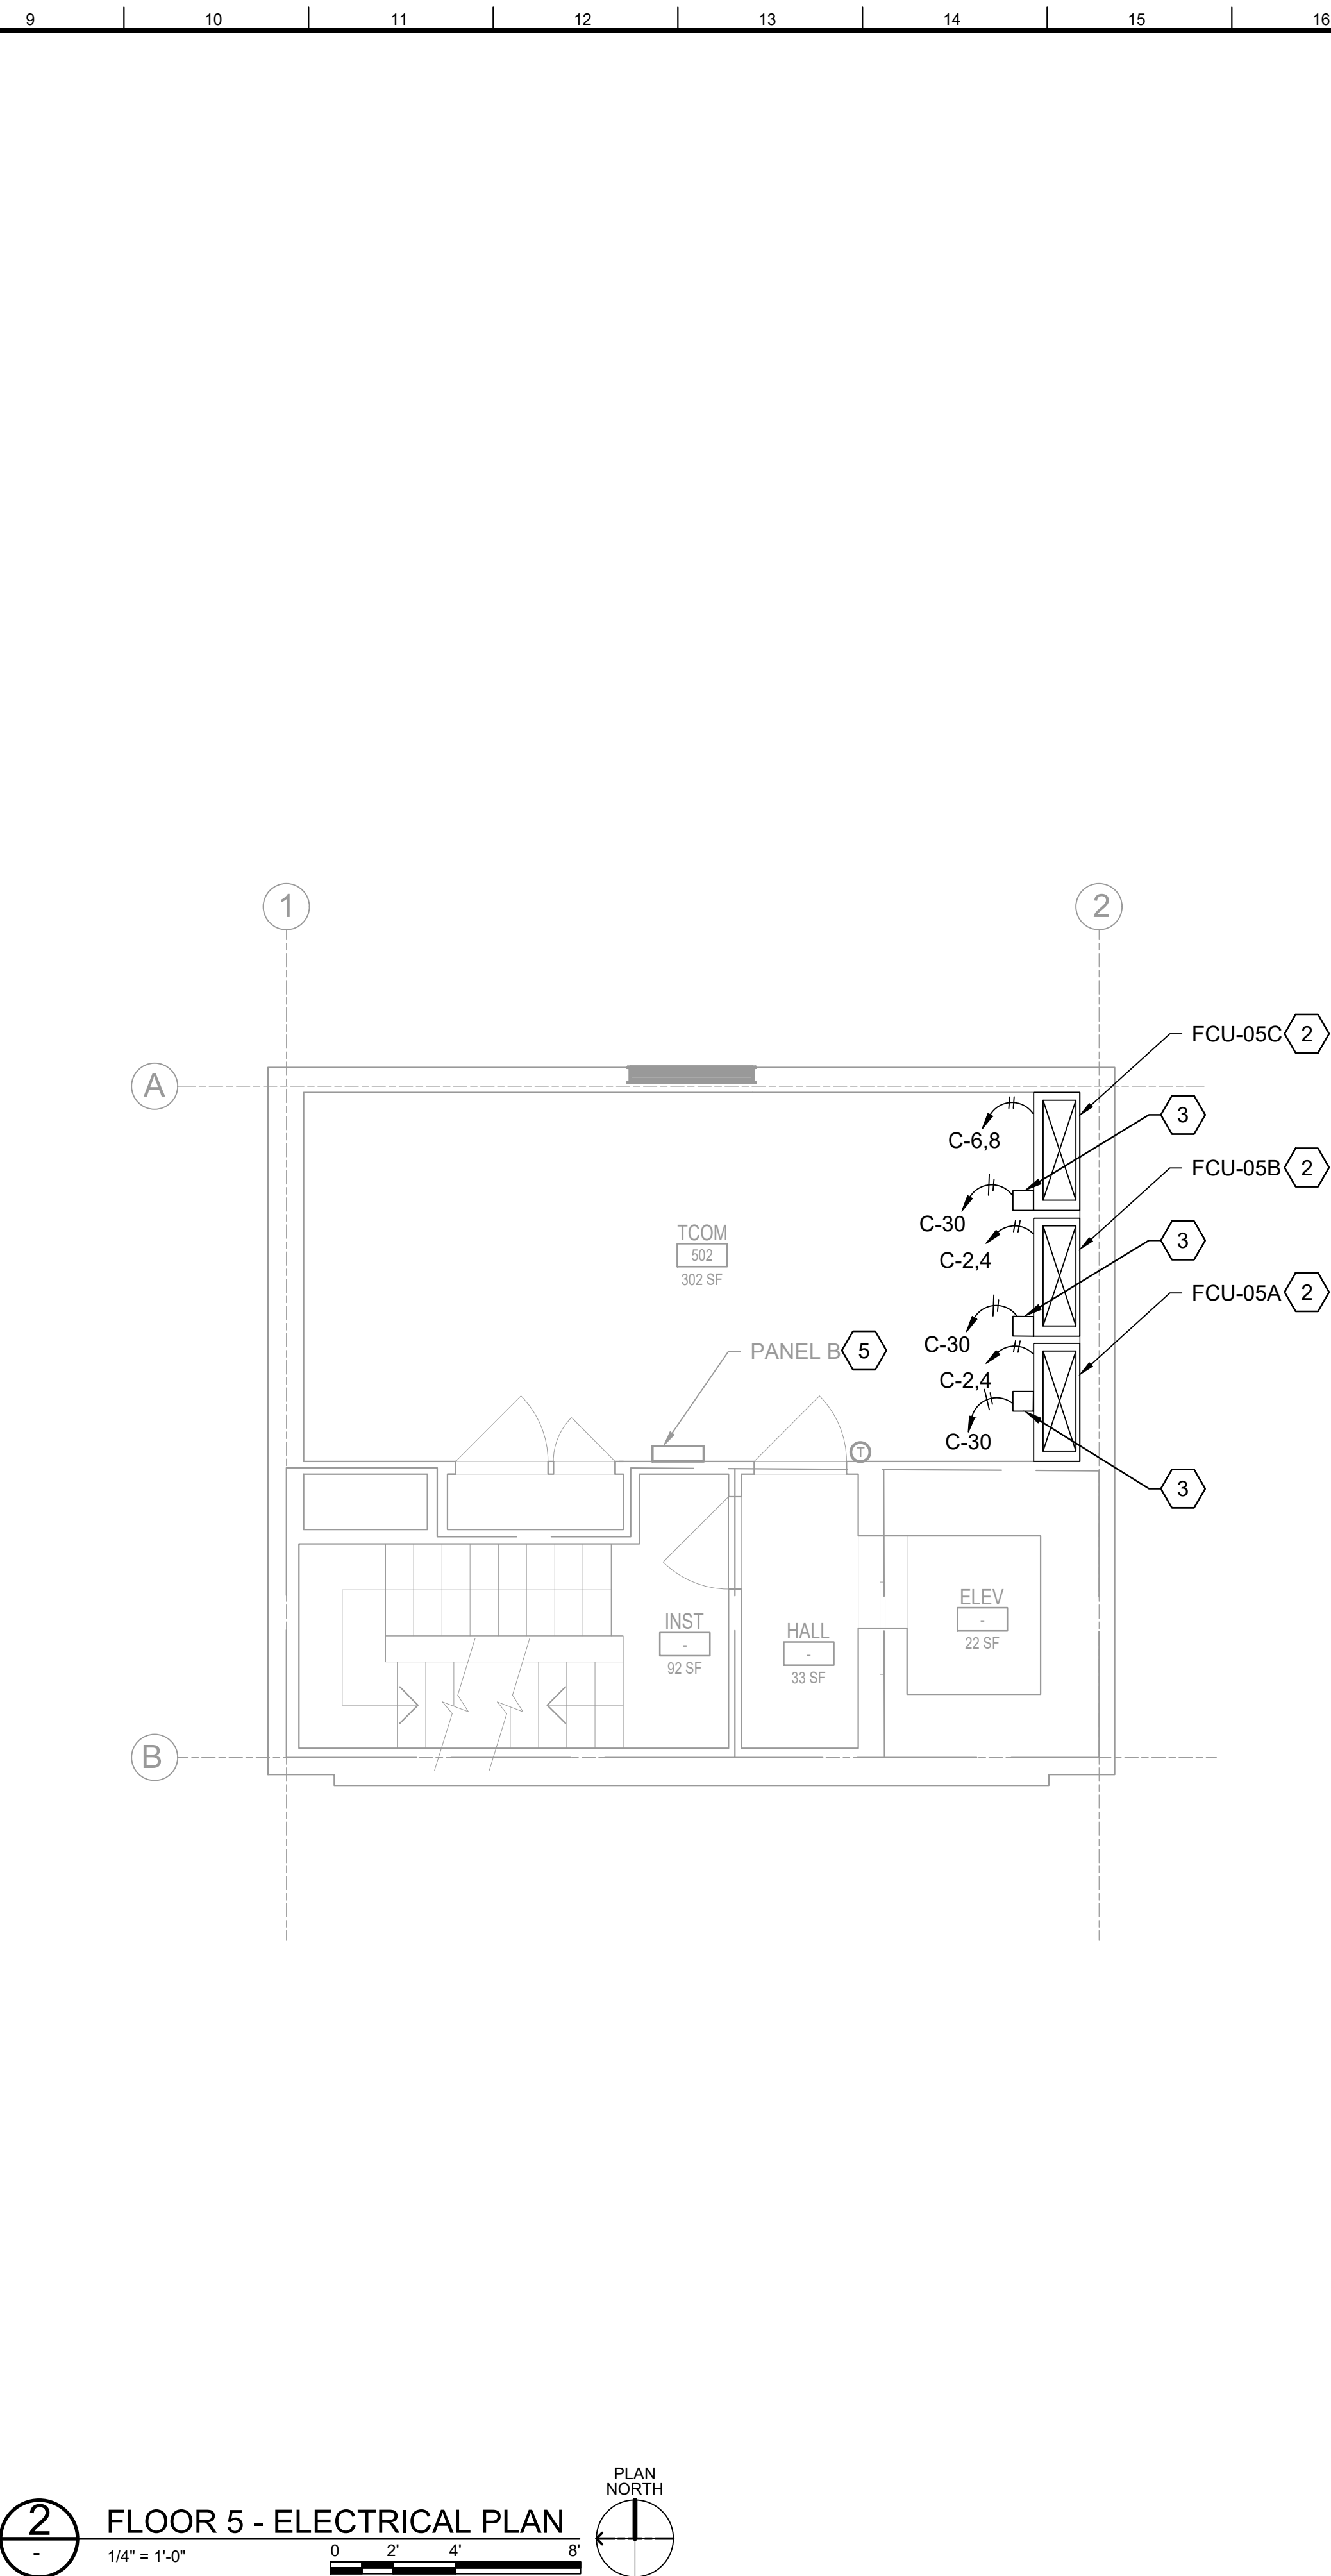


1. ALL EXISTING EQUIPMENT MAY NOT BE SHOWN FOR CLARITY. CONTRACTOR SHALL FIELD VERIFY ALL POWER AND ASSOCIATED CIRCUITRY AS REQUIRED. ALL RACEWAYS AND CONDUCTORS ASSOCIATED WITH EQUIPMENT TO BE DEMOLISHED SHALL BE DEMOLISHED BACK TO THEIR SOURCE, UNLESS OTHERWISE NOTED.
2. ALL ELECTRICAL WORK SHALL BE CLOSELY COORDINATED WITH THE CONTRACTORS PHASING OF THE PROJECT. COORDINATE ALL ELECTRICAL WORK WITH ALL OTHER TRADES.
3. PROTECT ALL EXISTING WORK FROM DAMAGE DURING CONSTRUCTION. ANY DAMAGED MATERIALS, SYSTEMS, COMPONENTS, FINISHES AND THE LIKE, SHALL BE REPAIRED OR REPLACED AT THE EXPENSE OF THE CONTRACTOR TO THE ACCEPTANCE OF THE OWNER.
4. ALL CIRCUITS AND RELATED DEVICES THAT ARE TO REMAIN ARE TO STAY "ENERGIZED" IN THE DEMOLITION AND NEW CONSTRUCTION PHASES UNTIL THE COMPLETION OF THE WORK INDICATED ON THESE PLANS.
5. CONTRACTOR SHALL PROVIDE UPDATED CIRCUIT PANEL DIRECTORIES FOR ALL PANELS THAT CONTAIN CIRCUITS IMPACTED BY THIS PROJECT.
6. MAKE ALL CONNECTIONS TO EQUIPMENT PER MANUFACTURER'S REQUIREMENTS.
7. CONTRACTOR SHALL PROVIDE PULL BOXES FOR ALL FEEDERS WHERE FEEDER RUNS EXCEED 250FT OR HAVE MORE THAN 270 DEGREES OF TOTAL BEND. PULL BOX PLACEMENT AND SIZING BY CONTRACTOR. COORDINATE PULL BOX LOCATIONS WITH ALL OBSTRUCTIONS, TRADES, AND DOD AS REQUIRED.

- ## KEY NOTES
- 1 EXISTING MECHANICAL EQUIPMENT SHALL BE DEMOLISHED. DEMOLISH ASSOCIATED CONDUIT AND WIRING BACK TO SOURCE, COORDINATE WITH MECHANICAL DRAWINGS FOR ADDITIONAL INFORMATION.
 - 2 PROVIDE ELECTRICAL CONNECTIONS TO MECHANICAL UNIT; PROVIDE RACEWAYS, CONDUCTORS, AND LOCAL STARTER / DISCONNECT.
 - 3 PROVIDE CONNECTION FOR CONDENSATE PUMP. PROVIDE MOTOR RATED SINGLE POLE DISCONNECT SWITCH.
 - 4 EXISTING PANELBOARD TO BE MODIFIED. REFERENCE ASSOCIATED PANEL SCHEDULE FOR ADDITIONAL INFORMATION.
 - 5 MODIFIED PANELBOARD. REFERENCE ASSOCIATED PANEL SCHEDULE FOR ADDITIONAL INFORMATION.

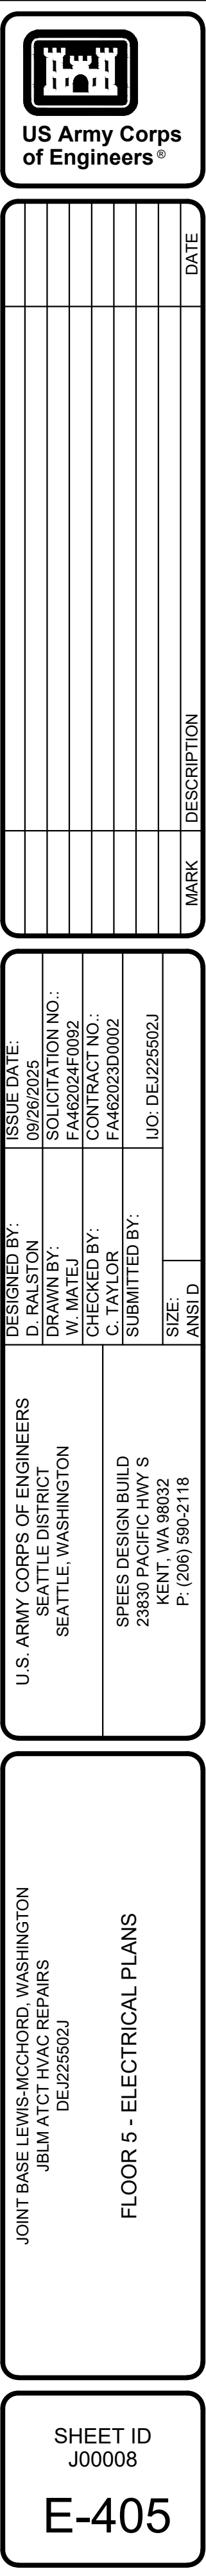

100% ELECTRONIC BID SET

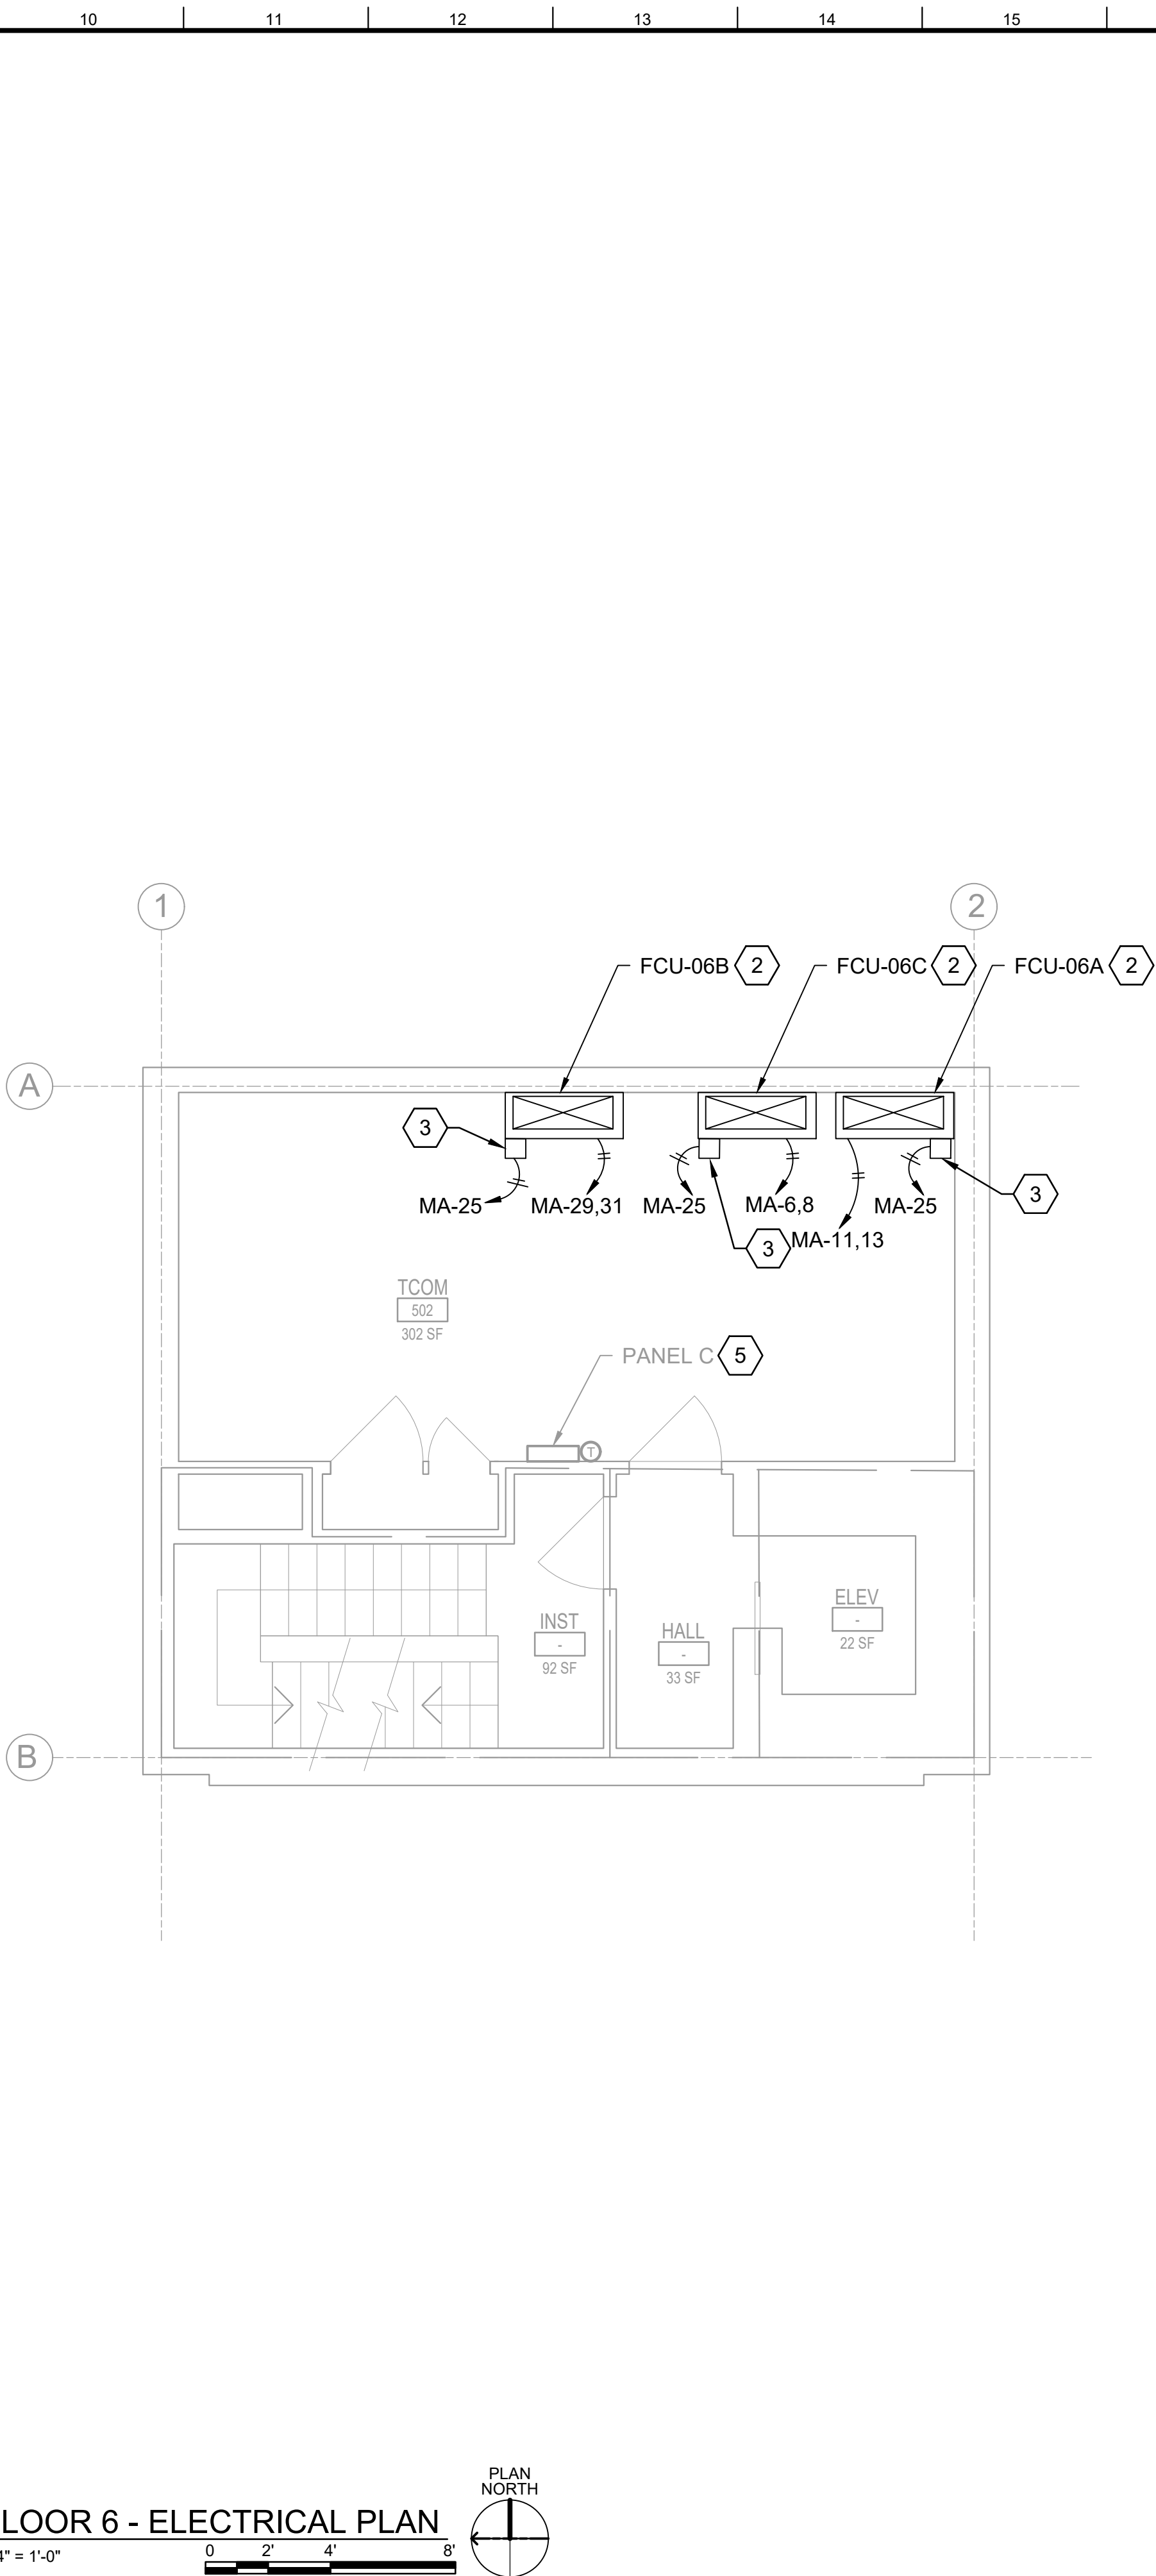

1. ALL EXISTING EQUIPMENT MAY NOT BE SHOWN FOR CLARITY. CONTRACTOR SHALL FIELD VERIFY ALL POWER AND ASSOCIATED CIRCUITRY AS REQUIRED. ALL RACEWAYS AND CONDUCTORS ASSOCIATED WITH EQUIPMENT TO BE DEMOLISHED SHALL BE DEMOLISHED BACK TO THEIR SOURCE, UNLESS OTHERWISE NOTED.
2. ALL ELECTRICAL WORK SHALL BE CLOSELY COORDINATED WITH THE CONTRACTORS PHASING OF THE PROJECT. COORDINATE ALL ELECTRICAL WORK WITH ALL OTHER TRADES.
3. PROTECT ALL EXISTING WORK FROM DAMAGE DURING CONSTRUCTION. ANY DAMAGED MATERIALS, SYSTEMS, COMPONENTS, FINISHES AND THE LIKE, SHALL BE REPAIRED OR REPLACED AT THE EXPENSE OF THE CONTRACTOR TO THE ACCEPTANCE OF THE OWNER.
4. ALL CIRCUITS AND RELATED DEVICES THAT ARE TO REMAIN ARE TO STAY "ENERGIZED" IN THE DEMOLITION AND NEW CONSTRUCTION PHASES UNTIL THE COMPLETION OF THE WORK INDICATED ON THESE PLANS.
5. CONTRACTOR SHALL PROVIDE UPDATED CIRCUIT PANEL DIRECTORIES FOR ALL PANELS THAT CONTAIN CIRCUITS IMPACTED BY THIS PROJECT.
6. MAKE ALL CONNECTIONS TO EQUIPMENT PER MANUFACTURER'S REQUIREMENTS.
7. CONTRACTOR SHALL PROVIDE PULL BOXES FOR ALL FEEDERS WHERE FEEDER RUNS EXCEED 250FT OR HAVE MORE THAN 270 DEGREES OF TOTAL BEND. PULL BOX PLACEMENT AND SIZING BY CONTRACTOR. COORDINATE PULL BOX LOCATIONS WITH ALL OBSTRUCTIONS, TRADES, AND DOD AS REQUIRED.

KEY NOTES

- 1 EXISTING MECHANICAL EQUIPMENT SHALL BE DEMOLISHED DEMOLISH ASSOCIATED CONDUIT AND WIRING BACK TO SOURCE. COORDINATE WITH MECHANICAL DRAWINGS FOR ADDITIONAL INFORMATION.
- 2 PROVIDE ELECTRICAL CONNECTIONS TO MECHANICAL UNIT; PROVIDE RACEWAYS, CONDUCTORS, AND LOCAL STARTER / DISCONNECT.
- 3 PROVIDE CONNECTION FOR CONDENSATE PUMP. PROVIDE MOTOR RATED SINGLE POLE DISCONNECT SWITCH.
- 4 EXISTING PANELBOARD TO BE MODIFIED. REFERENCE ASSOCIATED PANEL SCHEDULE FOR ADDITIONAL INFORMATION.
- 5 MODIFIED PANELBOARD. REFERENCE ASSOCIATED PANEL SCHEDULE FOR ADDITIONAL INFORMATION.

U.S. ARMY CORPS OF ENGINEERS SEATTLE DISTRICT SEATTLE, WASHINGTON	DESIGNED BY: D. RAISON	ISSUE DATE: 06/26/2028
SPEEDS DESIGN BUILD 23830 PACIFIC HWY S KENT, WA 98032 P: (206) 590-2118	DRAWN BY: W. MATEU	PROJECT NO.: F462024F0092
	CHECKED BY:	CONTRACT NO.: F462023D0002
	C. TAYLOR	SUBMITTED BY:
		I.U.O. DE:225502J
	SIZE: A	ANSI/D



JOINT BASE LEWIS-MCCHORD, WASHINGTON
JBLM ATCT HVAC REPAIRS
DEJ225502J

FLOOR 6 - ELECTRICAL PLANS

SHEET ID
J00008

E-406



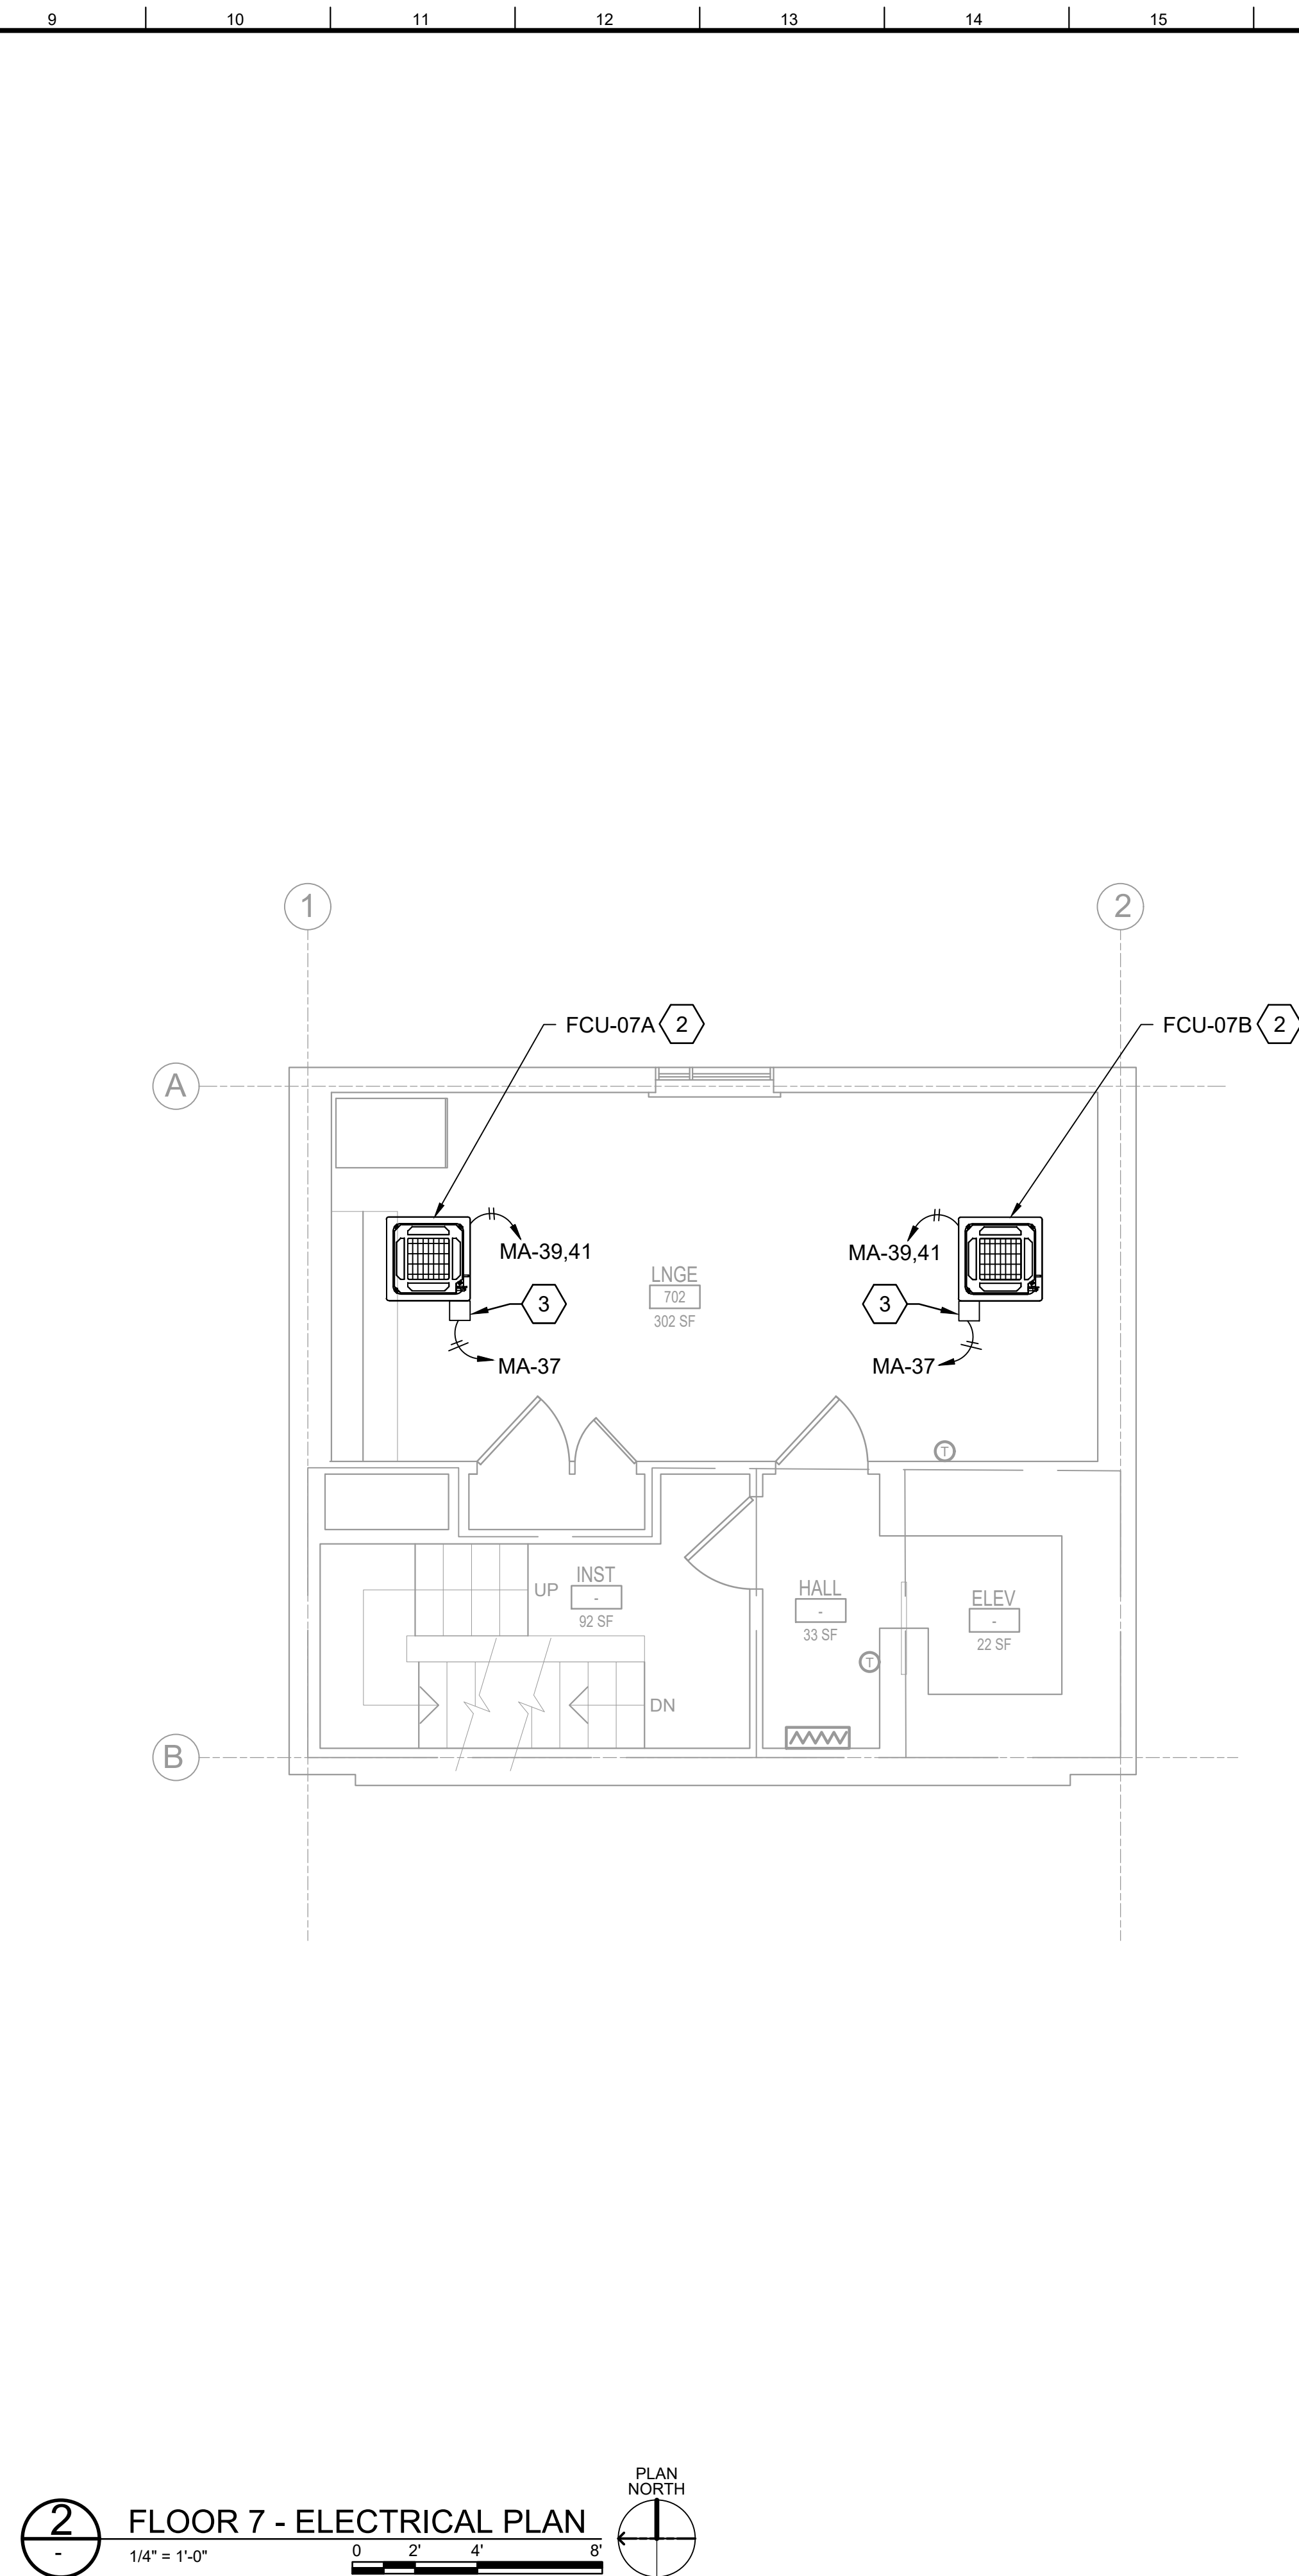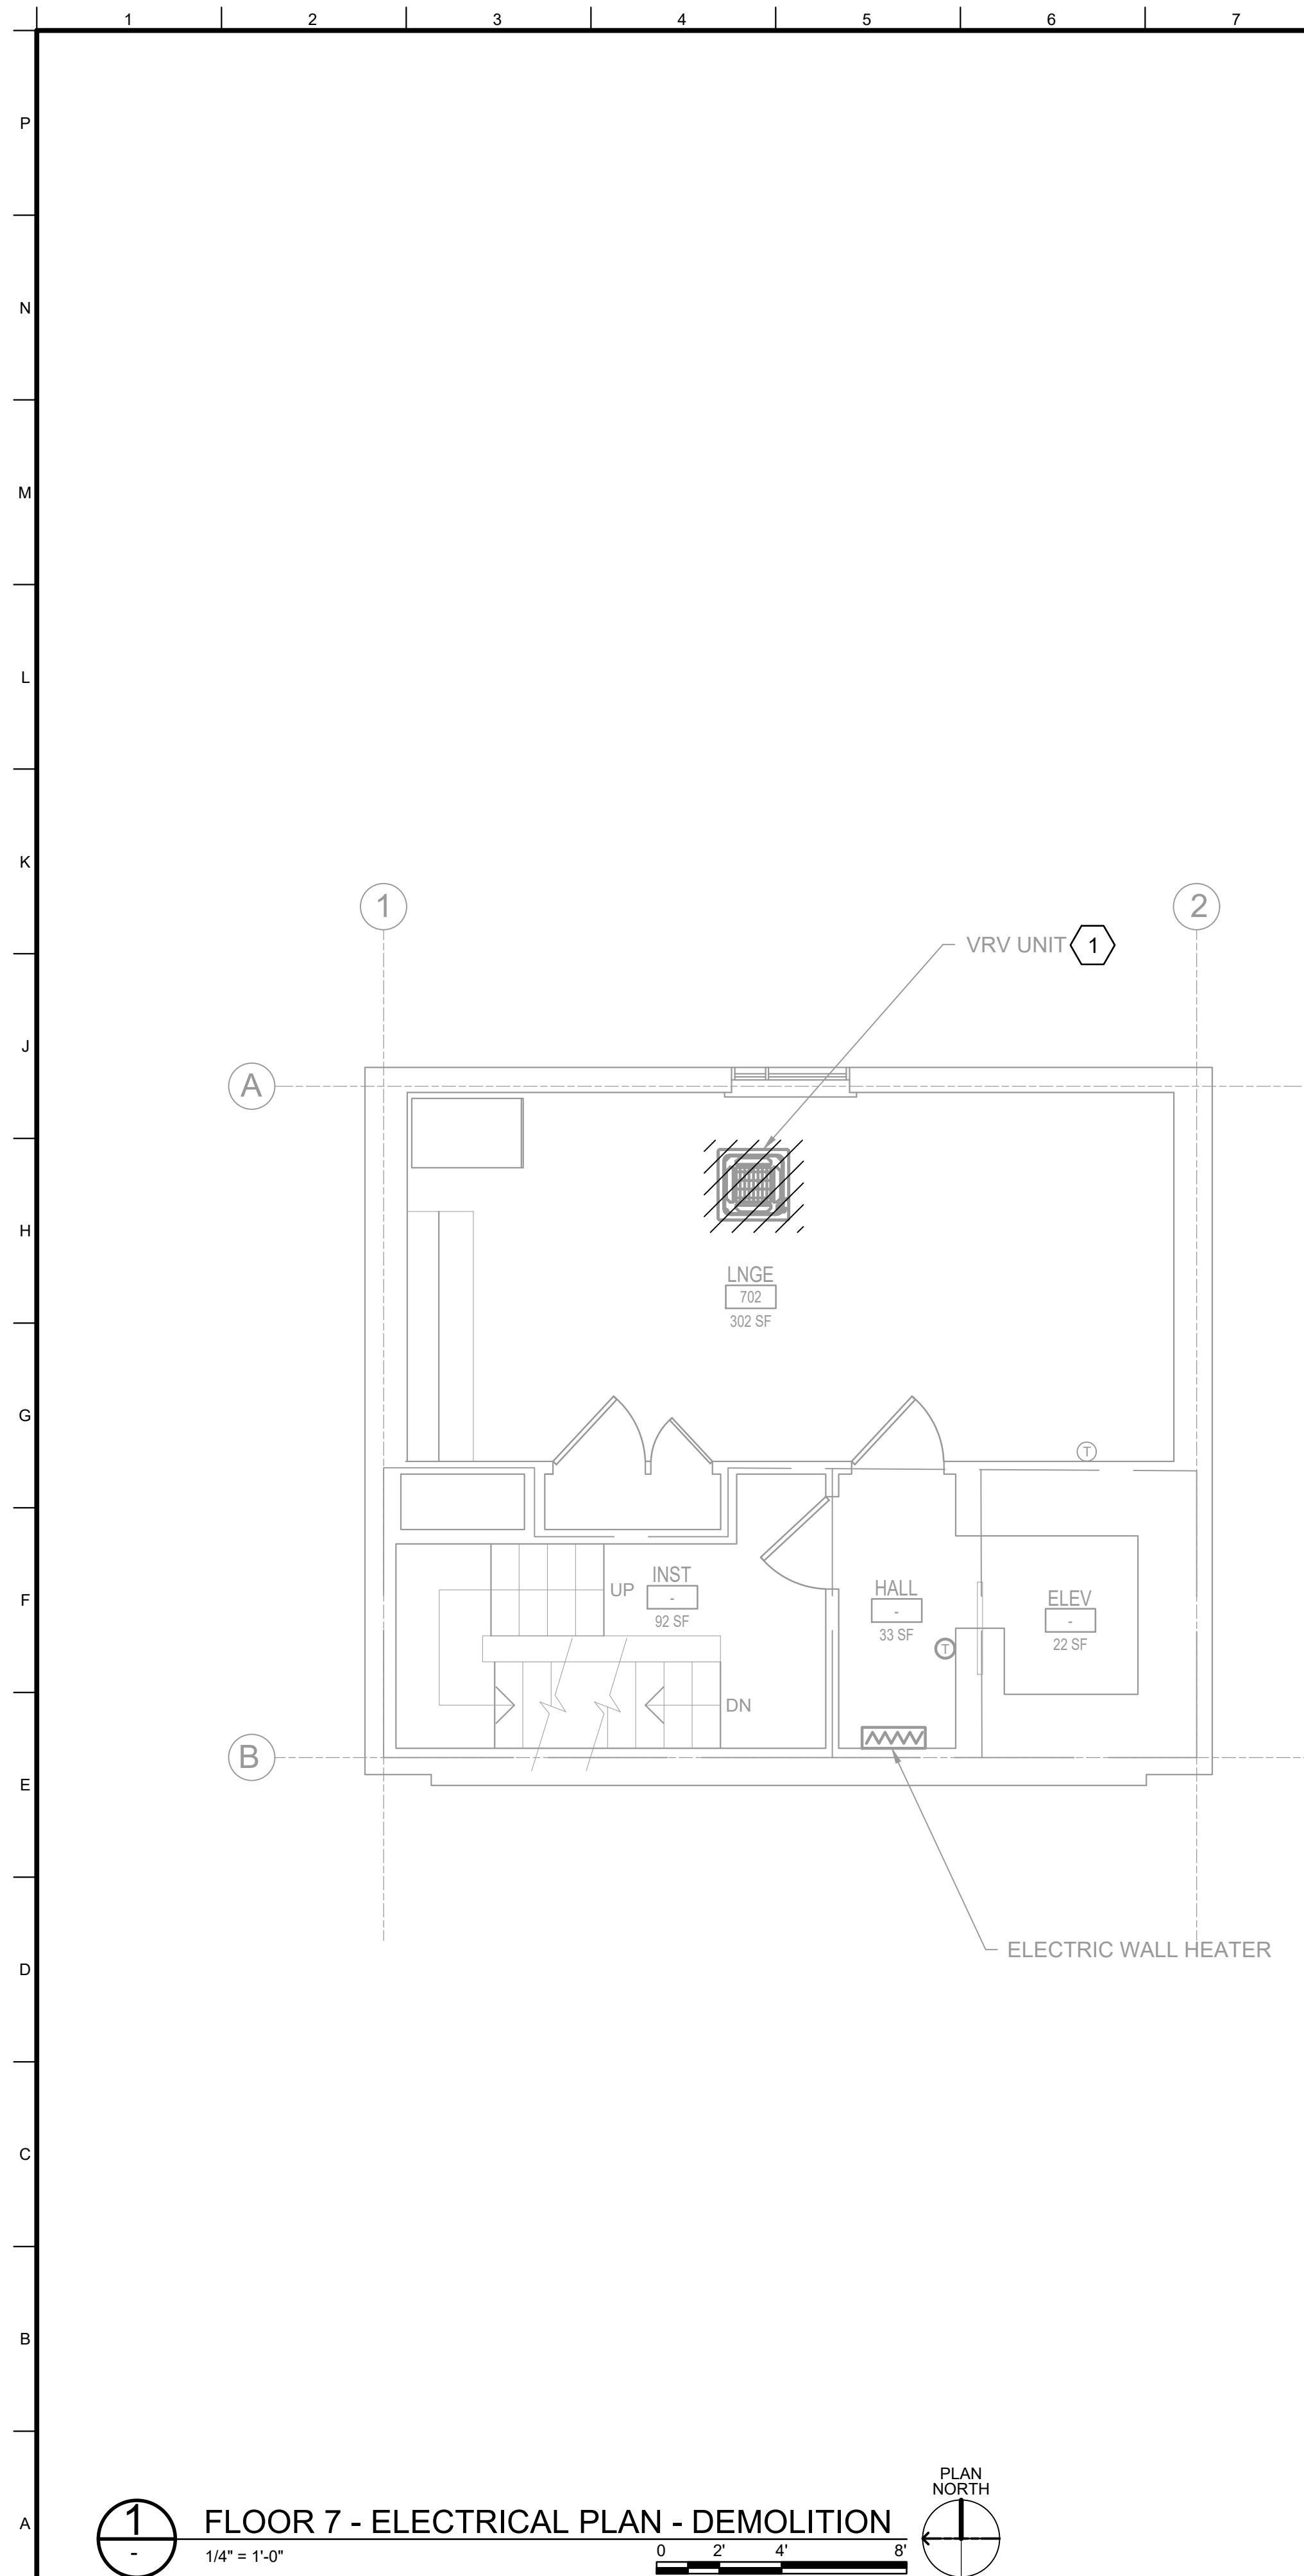

- ## GENERAL NOTES
1. ALL EXISTING EQUIPMENT MAY NOT BE SHOWN FOR CLARITY. CONTRACTOR SHALL FIELD VERIFY ALL POWER AND ASSOCIATED CIRCUITRY AS REQUIRED. ALL RACEWAYS AND CONDUCTORS ASSOCIATED WITH EQUIPMENT TO BE DEMOLISHED SHALL BE DEMOLISHED BACK TO THEIR SOURCE, UNLESS OTHERWISE NOTED.
 2. ALL ELECTRICAL WORK SHALL BE CLOSELY COORDINATED WITH THE CONTRACTORS PHASING OF THE PROJECT. COORDINATE ALL ELECTRICAL WORK WITH ALL OTHER TRADES.
 3. PROTECT ALL EXISTING WORK FROM DAMAGE DURING CONSTRUCTION. ANY DAMAGED MATERIALS, SYSTEMS, COMPONENTS, FINISHES AND THE LIKE, SHALL BE REPAIRED OR REPLACED AT THE EXPENSE OF THE CONTRACTOR TO THE ACCEPTANCE OF THE OWNER.
 4. ALL CIRCUITS AND RELATED DEVICES THAT ARE TO REMAIN ARE TO STAY "ENERGIZED" IN THE DEMOLITION AND NEW CONSTRUCTION PHASES UNTIL THE COMPLETION OF THE WORK INDICATED ON THESE PLANS.
 5. CONTRACTOR SHALL PROVIDE UPDATED CIRCUIT PANEL DIRECTORIES FOR ALL PANELS THAT CONTAIN CIRCUITS IMPACTED BY THIS PROJECT.
 6. MAKE ALL CONNECTIONS TO EQUIPMENT PER MANUFACTURER'S REQUIREMENTS.
 7. CONTRACTOR SHALL PROVIDE PULL BOXES FOR ALL FEEDERS WHERE FEEDER RUNS EXCEED 250FT OR HAVE MORE THAN 270 DEGREES OF TOTAL BEND. PULL BOX PLACEMENT AND SIZING BY CONTRACTOR. COORDINATE PULL BOX LOCATIONS WITH ALL OBSTRUCTIONS, TRADES, AND DOD AS REQUIRED.

- | KEY NOTES | |
|-----------|---|
| 1 | EXISTING MECHANICAL EQUIPMENT SHALL BE DEMOLISHED. DEMOLISH ASSOCIATED CONDUIT AND WIRING BACK TO SOURCE. COORDINATE WITH MECHANICAL DRAWINGS FOR ADDITIONAL INFORMATION. |
| 2 | PROVIDE ELECTRICAL CONNECTIONS TO MECHANICAL UNIT; PROVIDE RACEWAYS, CONDUCTORS, AND LOCAL STARTER / DISCONNECT. |
| 3 | PROVIDE CONNECTION FOR CONDENSATE PUMP. PROVIDE MOTOR RATED SINGLE POLE DISCONNECT SWITCH. |

U.S. ARMY CORPS OF ENGINEERS SEATTLE DISTRICT SEATTLE, WASHINGTON	DESIGNED BY: D. RALSTON	ISSUE DATE: 09/26/2025
	DRAWN BY: W. MATEJ	SOLICITATION NO.: FA66202AF0092
	CHECKED BY: J. T. CLARK	CONTRACT NO.: FA66202JD0002
SPEEDS DESIGN BUILD 23830 PACIFIC HWY S KENT, WA 98032 P. (206) 590-2118	SUBMITTED BY:	JUC DEJ2255021
	SIZE: ANSI D	



JOINT BASE LEWIS-MCHORD, WASHINGTON
JBLM ATCT HVAC REPAIRS
DEJ225502J

FLOOR 7 - ELECTRICAL PLANS

SHEET ID
J00008

E-407



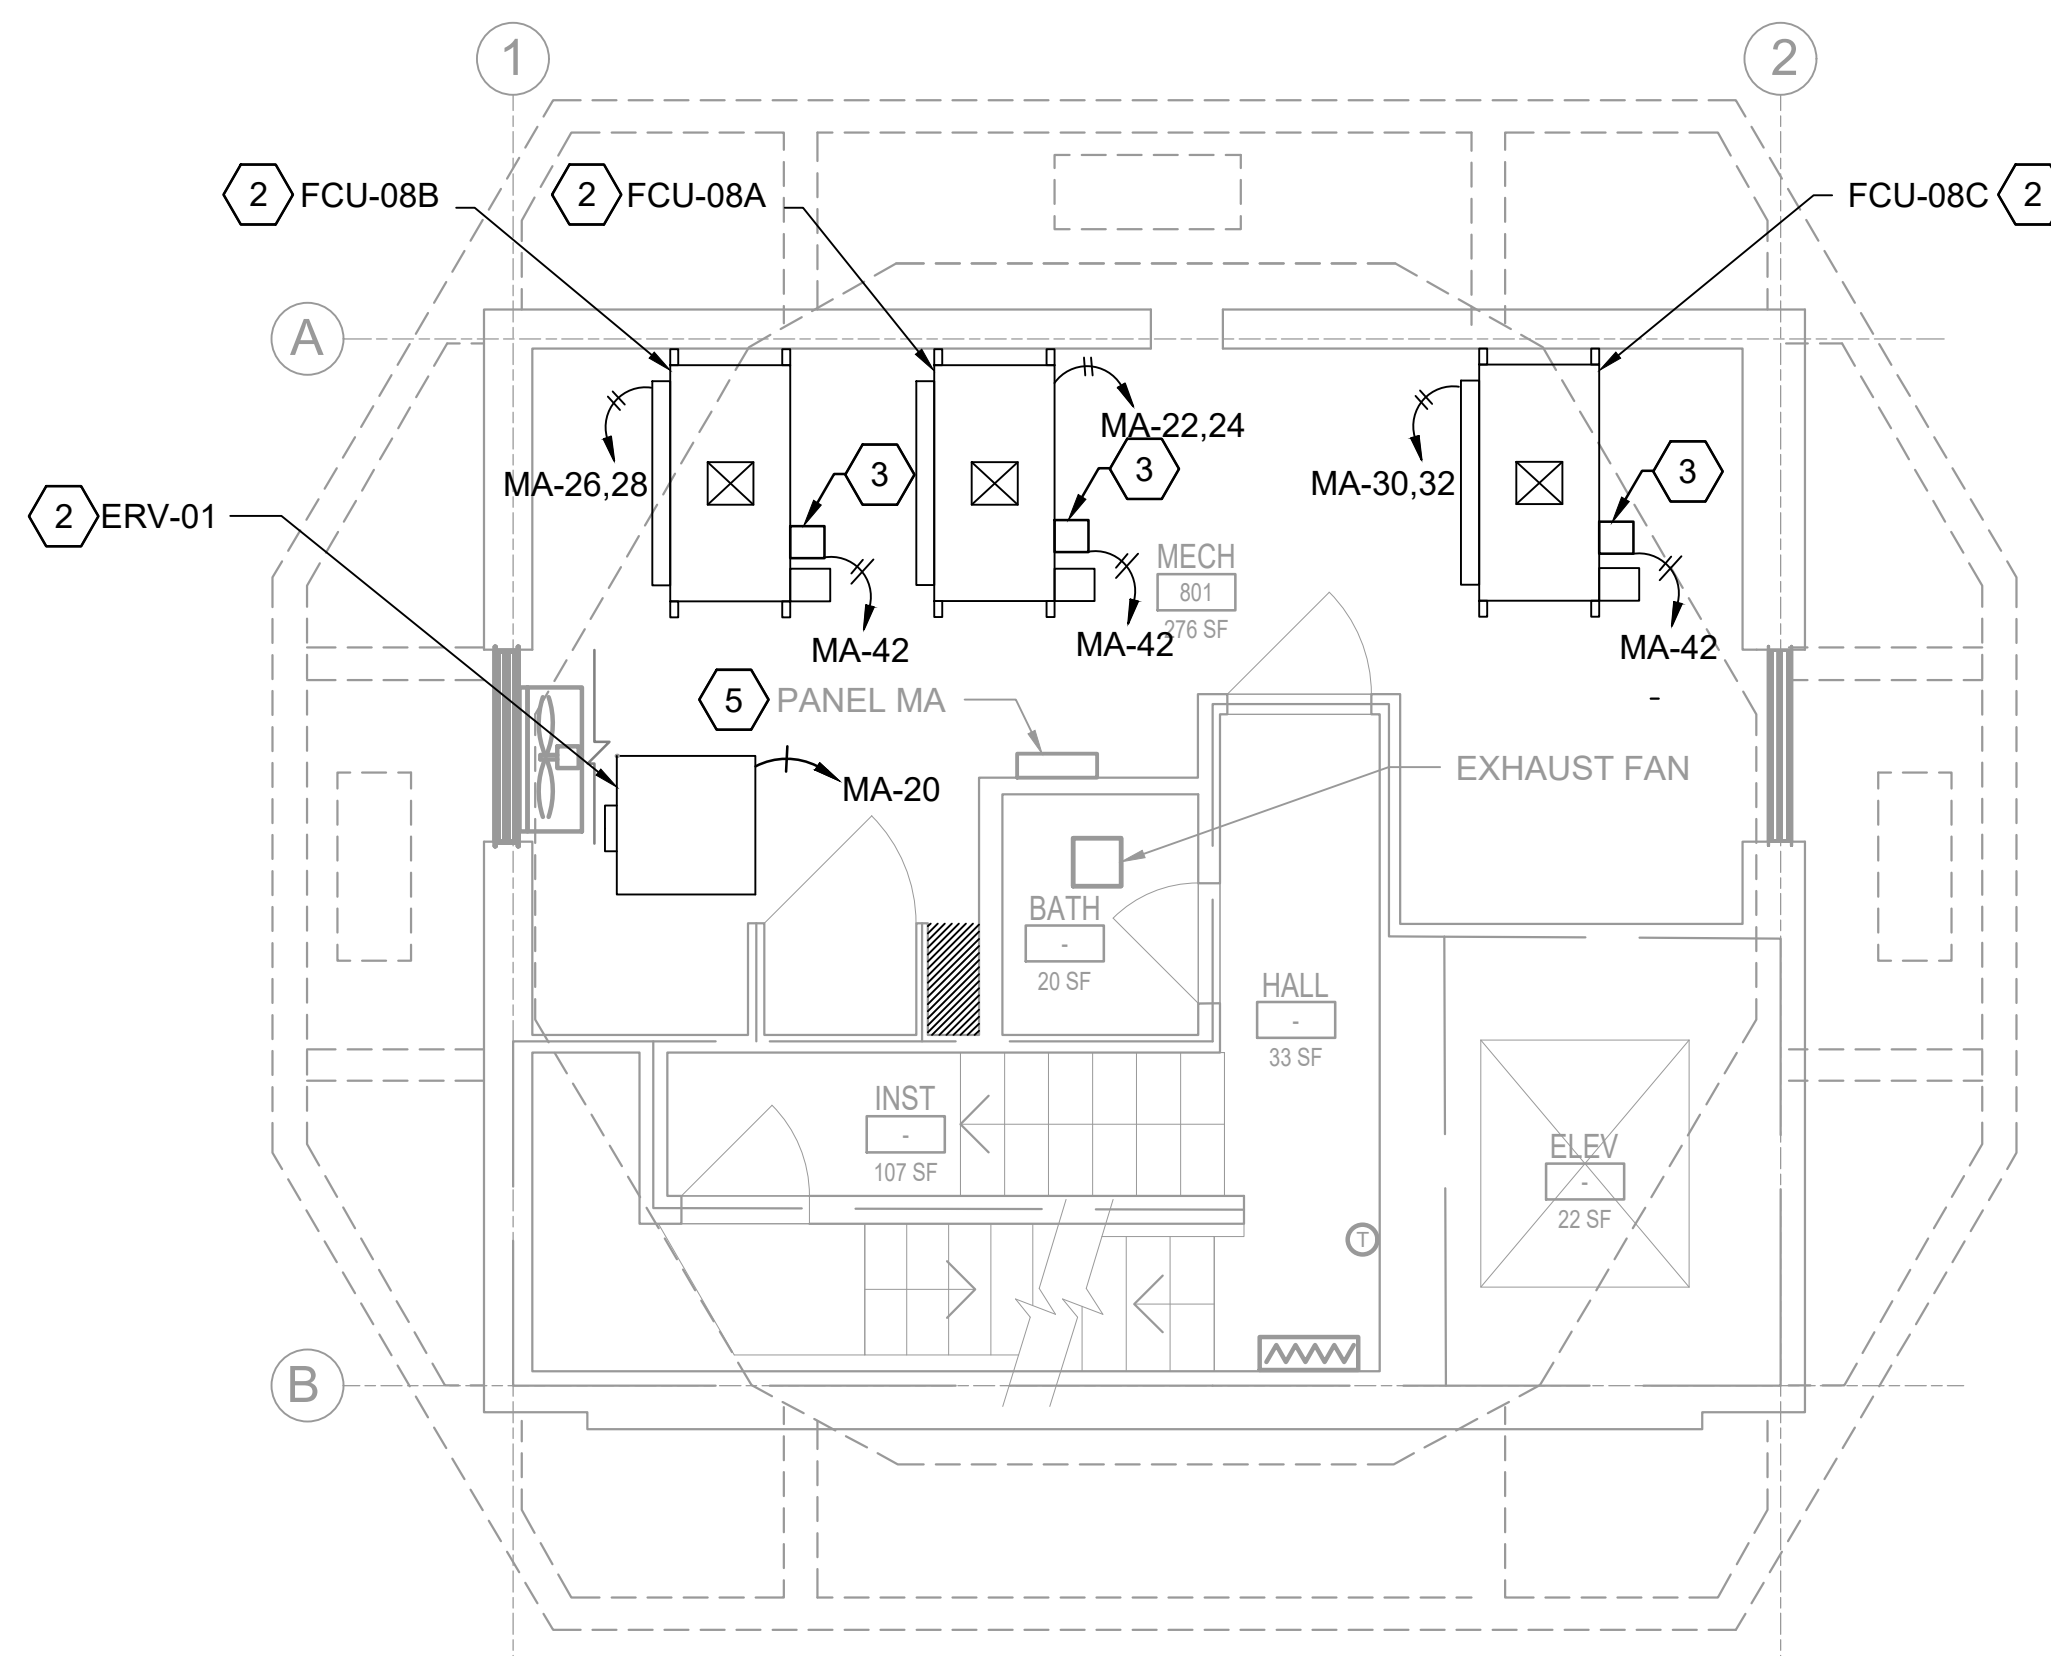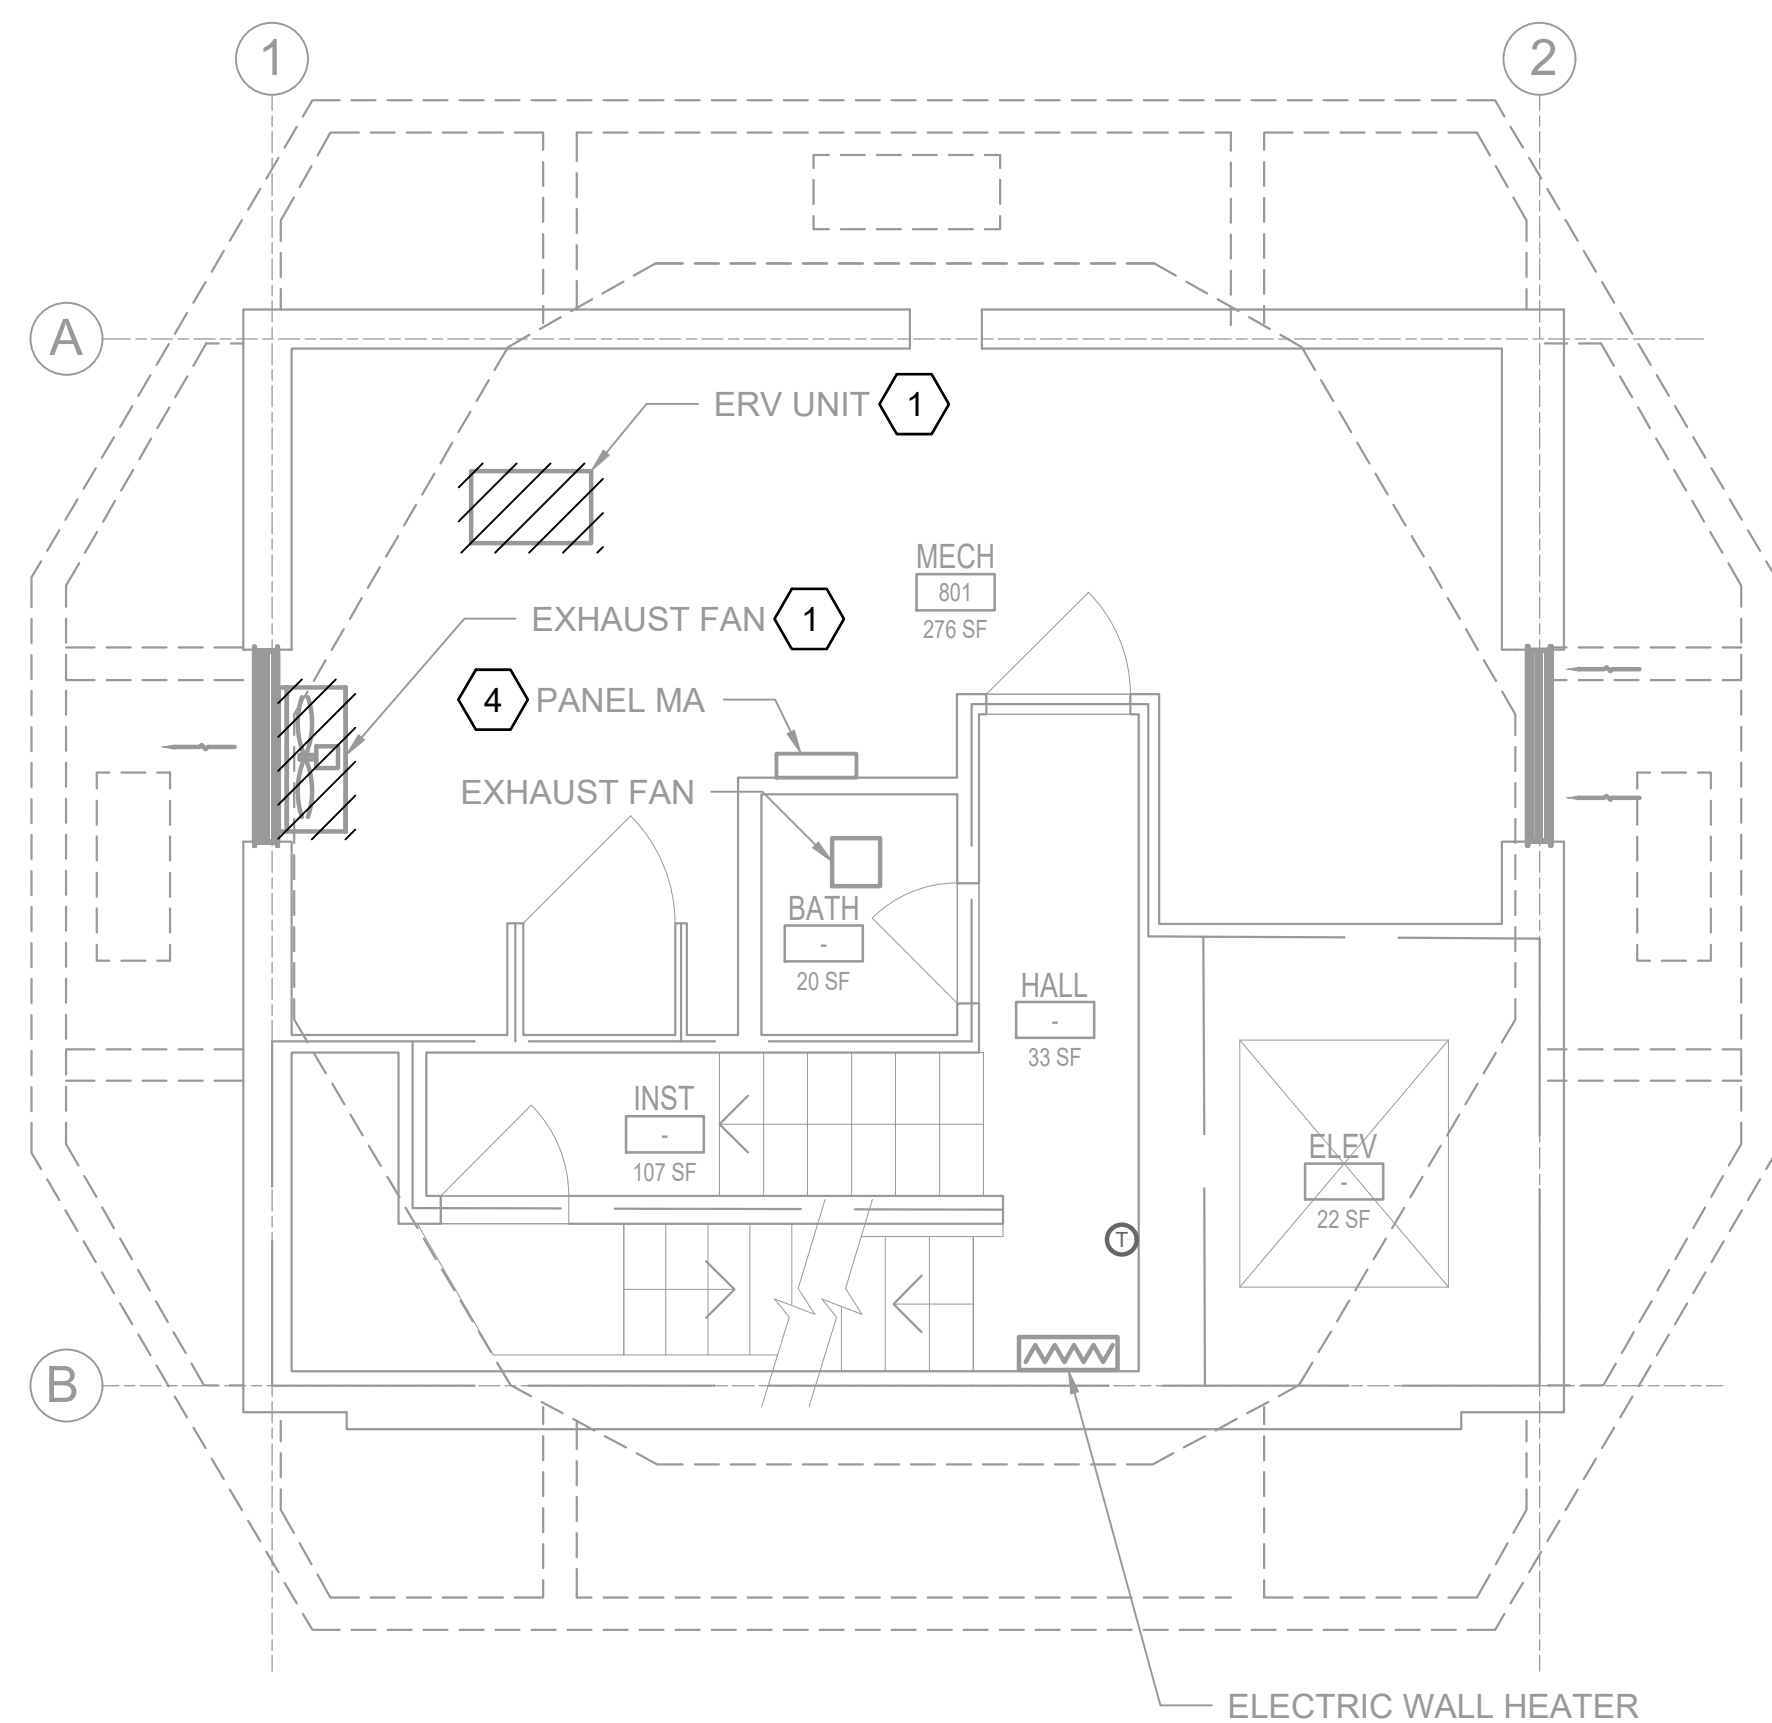

1. ALL EXISTING EQUIPMENT MAY NOT BE SHOWN FOR CLARITY. CONTRACTOR SHALL VERIFY ALL POWER AND ASSOCIATED CIRCUITRY AS REQUIRED. ALL RACEWAYS AND CONDUCTORS ASSOCIATED WITH EQUIPMENT TO BE DEMOLISHED SHALL BE DEMOLISHED BACK TO THEIR SOURCE, UNLESS OTHERWISE NOTED.
2. ALL ELECTRICAL WORK SHALL BE CLOSELY COORDINATED WITH THE CONTRACTOR'S PHASING OF THE PROJECT. COORDINATE ALL ELECTRICAL WORK WITH ALL OTHER TRADES.
3. PROTECT ALL EXISTING WORK FROM DAMAGE DURING CONSTRUCTION. ANY DAMAGED MATERIALS, SYSTEMS, COMPONENTS, FINISHES AND THE LIKE, SHALL BE REPAIRED OR REPLACED AT THE EXPENSE OF THE CONTRACTOR TO THE ACCEPTANCE OF THE OWNER.
4. ALL CIRCUITS AND RELATED DEVICES THAT ARE TO REMAIN ARE TO STAY "ENERGIZED" IN THE DEMOLITION AND NEW CONSTRUCTION PHASES UNTIL THE COMPLETION OF THE WORK INDICATED ON THESE PLANS.
5. CONTRACTOR SHALL PROVIDE UPDATED CIRCUIT PANEL DIRECTORIES FOR ALL PANELS THAT CONTAIN CIRCUITS IMPACTED BY THIS PROJECT.
6. MAKE ALL CONNECTIONS TO EQUIPMENT PER MANUFACTURER'S REQUIREMENTS.
7. CONTRACTOR SHALL PROVIDE PULL BOXES FOR ALL FEEDERS WHERE FEEDER RUNS EXCEED 250FT OR HAVE MORE THAN 270 DEGREES OF TOTAL BEND. PULL BOX PLACEMENT AND SIZING BY CONTRACTOR. COORDINATE PULL BOX LOCATIONS WITH ALL OBSTRUCTIONS, TRADES, AND DOD AS REQUIRED.

- ## KEY NOTES
- 1 EXISTING MECHANICAL EQUIPMENT SHALL BE DEMOLISHED. DEMOLISH ASSOCIATED CONDUIT AND WIRING BACK TO SOURCE. COORDINATE WITH MECHANICAL DRAWINGS FOR ADDITIONAL INFORMATION.
 - 2 PROVIDE ELECTRICAL CONNECTIONS TO MECHANICAL UNIT; PROVIDE RACEWAYS, CONDUCTORS, AND LOCAL STARTER / DISCONNECT.
 - 3 PROVIDE CONNECTION FOR CONDENSATE PUMP. PROVIDE MOTOR RATED SINGLE POLE DISCONNECT SWITCH.
 - 4 EXISTING PANELBOARD TO BE MODIFIED. REFERENCE ASSOCIATED PANEL SCHEDULE FOR ADDITIONAL INFORMATION.
 - 5 MODIFIED PANELBOARD. REFERENCE ASSOCIATED PANEL SCHEDULE FOR ADDITIONAL INFORMATION.

[illegible]

SEATTLE, WASHINGTON	SPEES DESIGN BUILD 23830 PACIFIC HWY S KENT, WA 98032		DRAWN BY: W. MATEJ	SOLICITATION NO.: FA62029470092
	P. (206) 590-2118		CHECKED BY: C. TAYLOR	CONTRACT NO.: FA62023300002
			SUBMITTED BY:	I/O: DEJ225502J
			SIZE:	
			ANSI D	

DEJ225502J

DEJ225502J


DEJ225502J

DEJ225502J


SHEET ID
J00008

SHEET ID
J00008

E-408

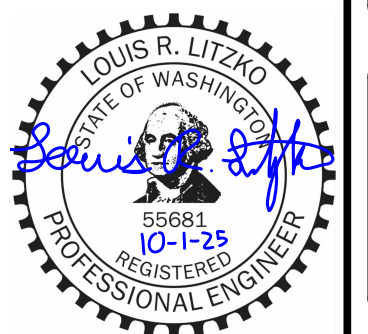

100% ELECTRONIC BID SET

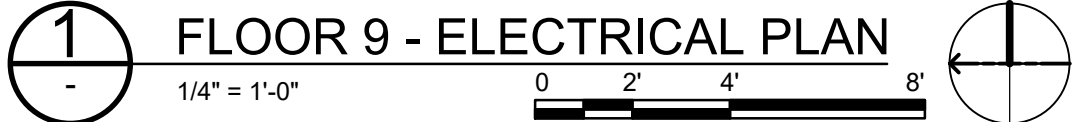

1. ALL EXISTING EQUIPMENT MAY NOT BE SHOWN FOR CLARITY. CONTRACTOR SHALL FIELD VERIFY ALL POWER AND ASSOCIATED CIRCUITRY AS REQUIRED. ALL RACEWAYS AND CONDUCTORS ASSOCIATED WITH EQUIPMENT TO BE DEMOLISHED SHALL BE DEMOLISHED BACK TO THEIR SOURCE, UNLESS OTHERWISE NOTED.
2. ALL ELECTRICAL WORK SHALL BE CLOSELY COORDINATED WITH THE CONTRACTORS PHASING OF THE PROJECT. COORDINATE ALL ELECTRICAL WORK WITH ALL OTHER TRADES.
3. PROTECT ALL EXISTING WORK FROM DAMAGE DURING CONSTRUCTION. ANY DAMAGED MATERIALS, SYSTEMS, COMPONENTS, FINISHES AND THE LIKE, SHALL BE REPAIRED OR REPLACED AT THE EXPENSE OF THE CONTRACTOR TO THE ACCEPTANCE OF THE OWNER.
4. ALL CIRCUITS AND RELATED DEVICES THAT ARE TO REMAIN ARE TO STAY "ENERGIZED" IN THE DEMOLITION AND NEW CONSTRUCTION PHASES UNTIL THE COMPLETION OF THE WORK INDICATED ON THESE PLANS.
5. CONTRACTOR SHALL PROVIDE UPDATED CIRCUIT PANEL DIRECTORIES FOR ALL PANELS THAT CONTAIN CIRCUITS IMPACTED BY THIS PROJECT.
6. MAKE ALL CONNECTIONS TO EQUIPMENT PER MANUFACTURER'S REQUIREMENTS.
7. CONTRACTOR SHALL PROVIDE PULL BOXES FOR ALL FEEDERS WHERE FEEDER RUNS EXCEED 250FT OR HAVE MORE THAN 270 DEGREES OF TOTAL BEND. PULL BOX PLACEMENT AND SIZING BY CONTRACTOR. COORDINATE PULL BOX LOCATIONS WITH ALL OBSTRUCTIONS, TRADES, AND DOD AS REQUIRED.


1) 50A RECEPTACLE FEEDS TEMPORARY MECHANICAL UNIT "SC-01". COORDINATE WITH MECHANICAL CONTRACTOR FOR EXACT RECEPTACLE AND CONNECTION TYPE.


[illegible]

U.S. ARMY CORPS OF ENGINEERS SEATTLE DISTRICT SEATTLE, WASHINGTON	DESIGNED BY:	ISSUE DATE:
	DRAWN BY:	DATE:
	BY WATER:	CONTRACT NO.:
	CHECKED BY:	CONTRACT NO. 2:
	C TAYLOR	F462023D0002
	SUBMITTED BY:	
SPEEDS DESIGN BUILD 23630 PACIFIC HWY S KENT, WA 98032 P: (206) 990-2118	SIZE:	UO: DEJ25502J
	ANSI D	


JOINT BASE LEWIS-McCHORD, WASHINGTON
JBLM ATCT HVAC REPAIRS
DE1225502J

SHEET ID
J00008
E-409

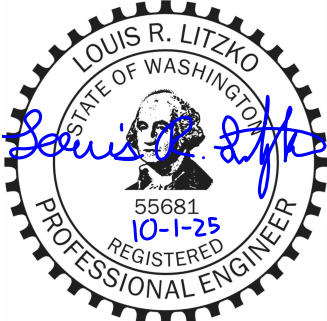


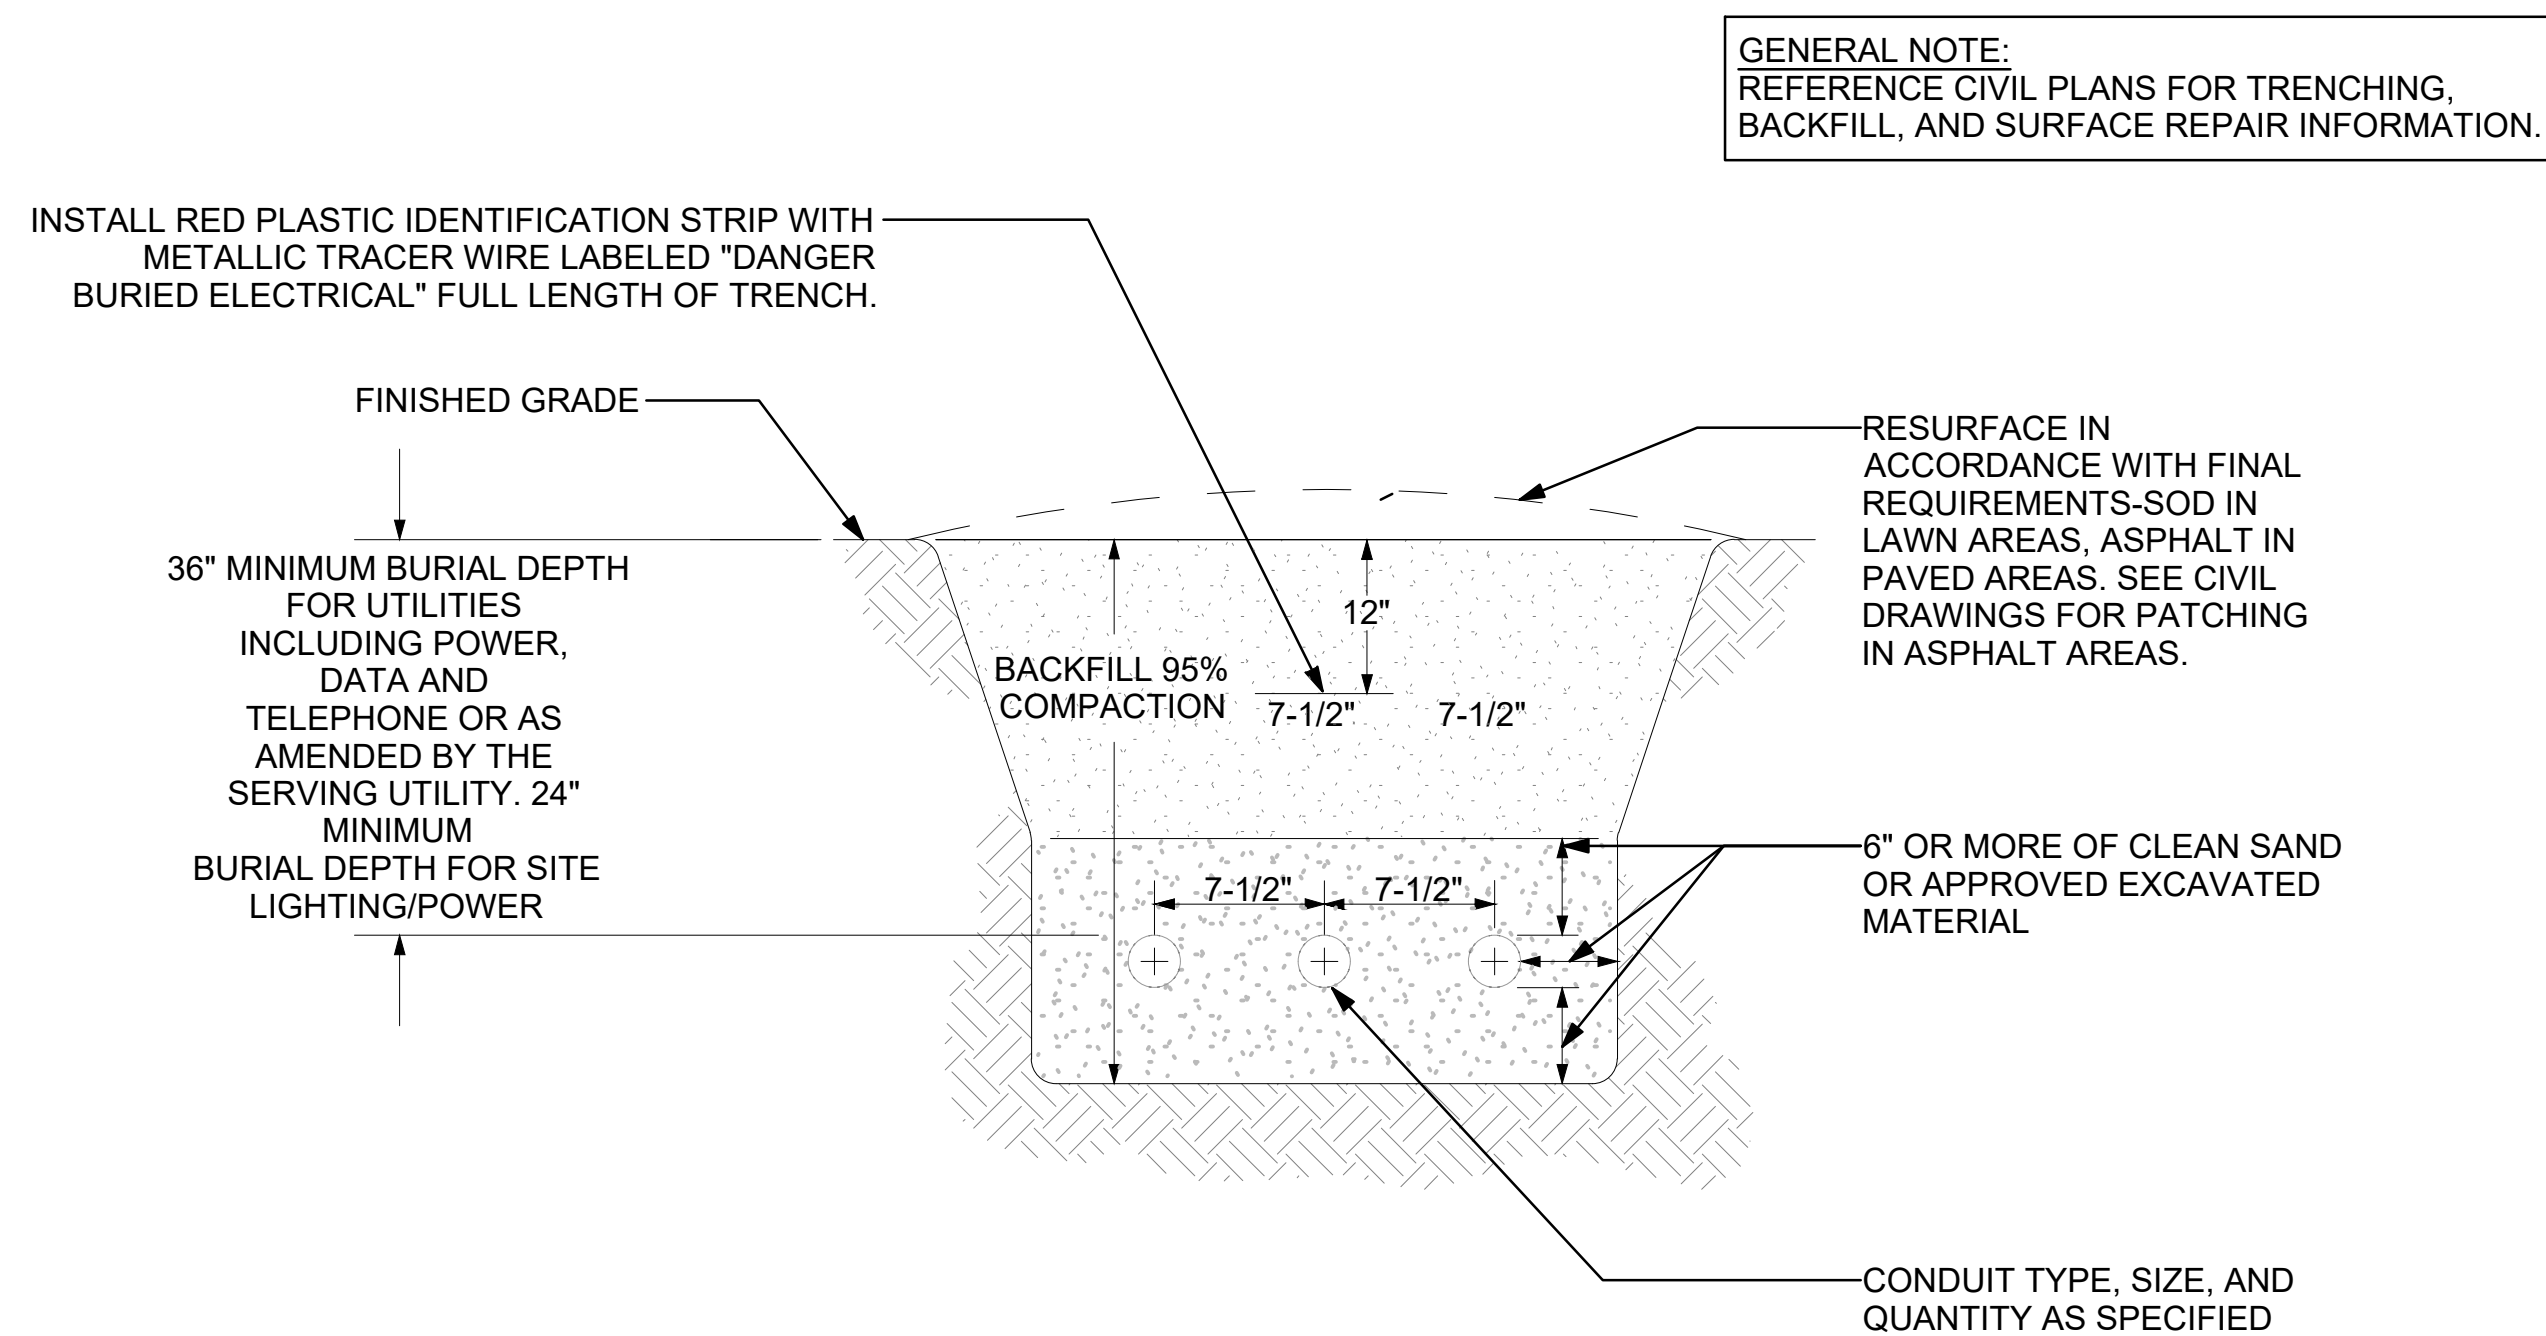


1 TYPICAL TRENCHING SECTION
EP401 NTS

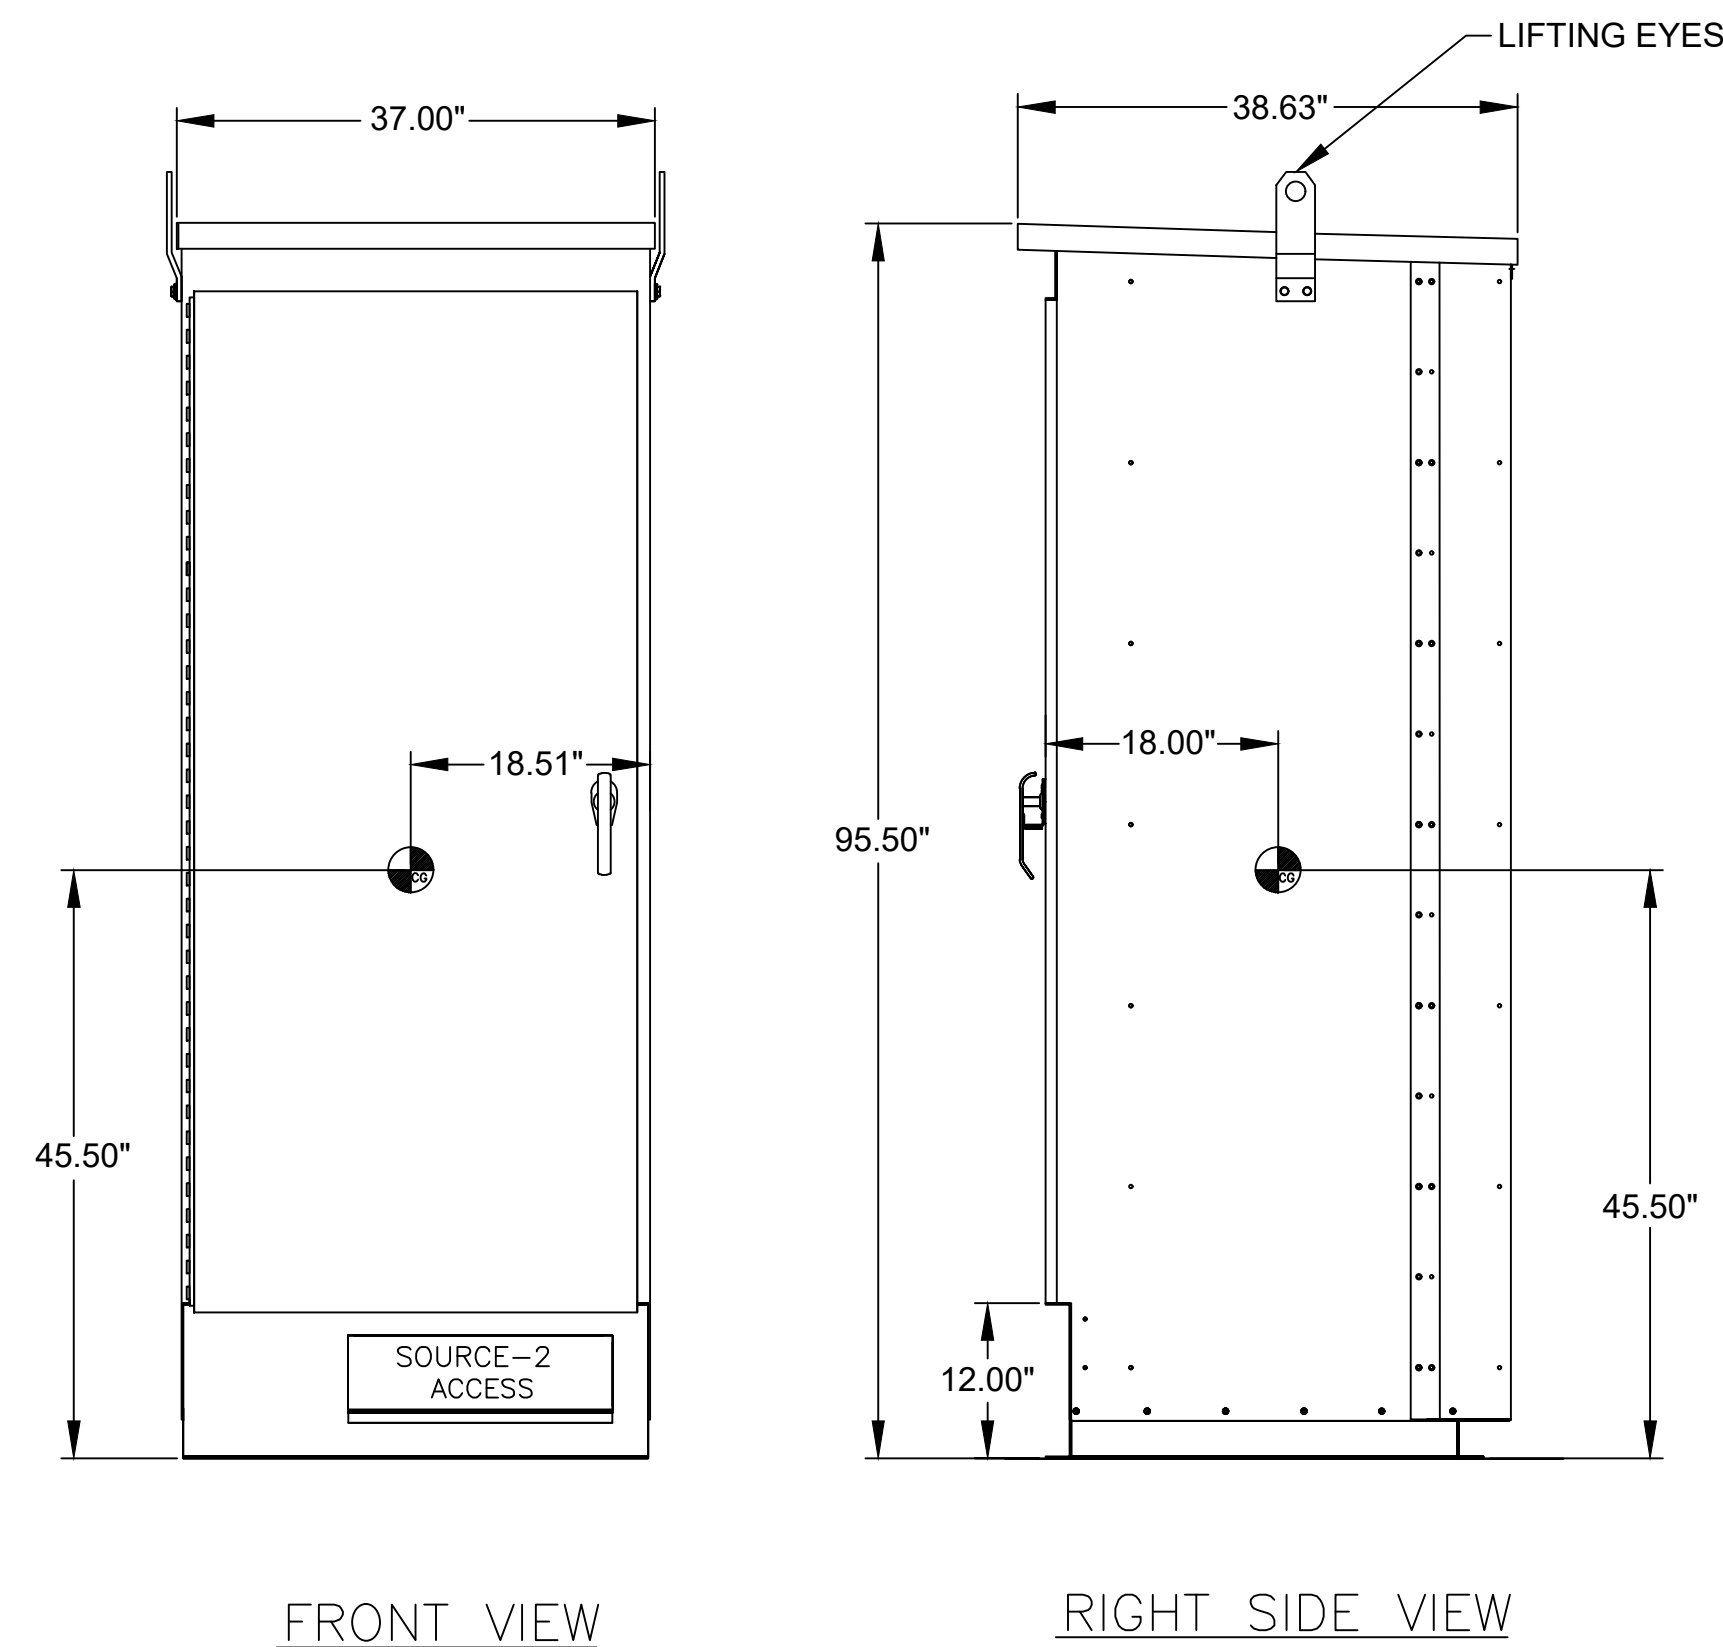

3 MANUAL TRANSFER SWITCH "MTS-1" ELEVATION

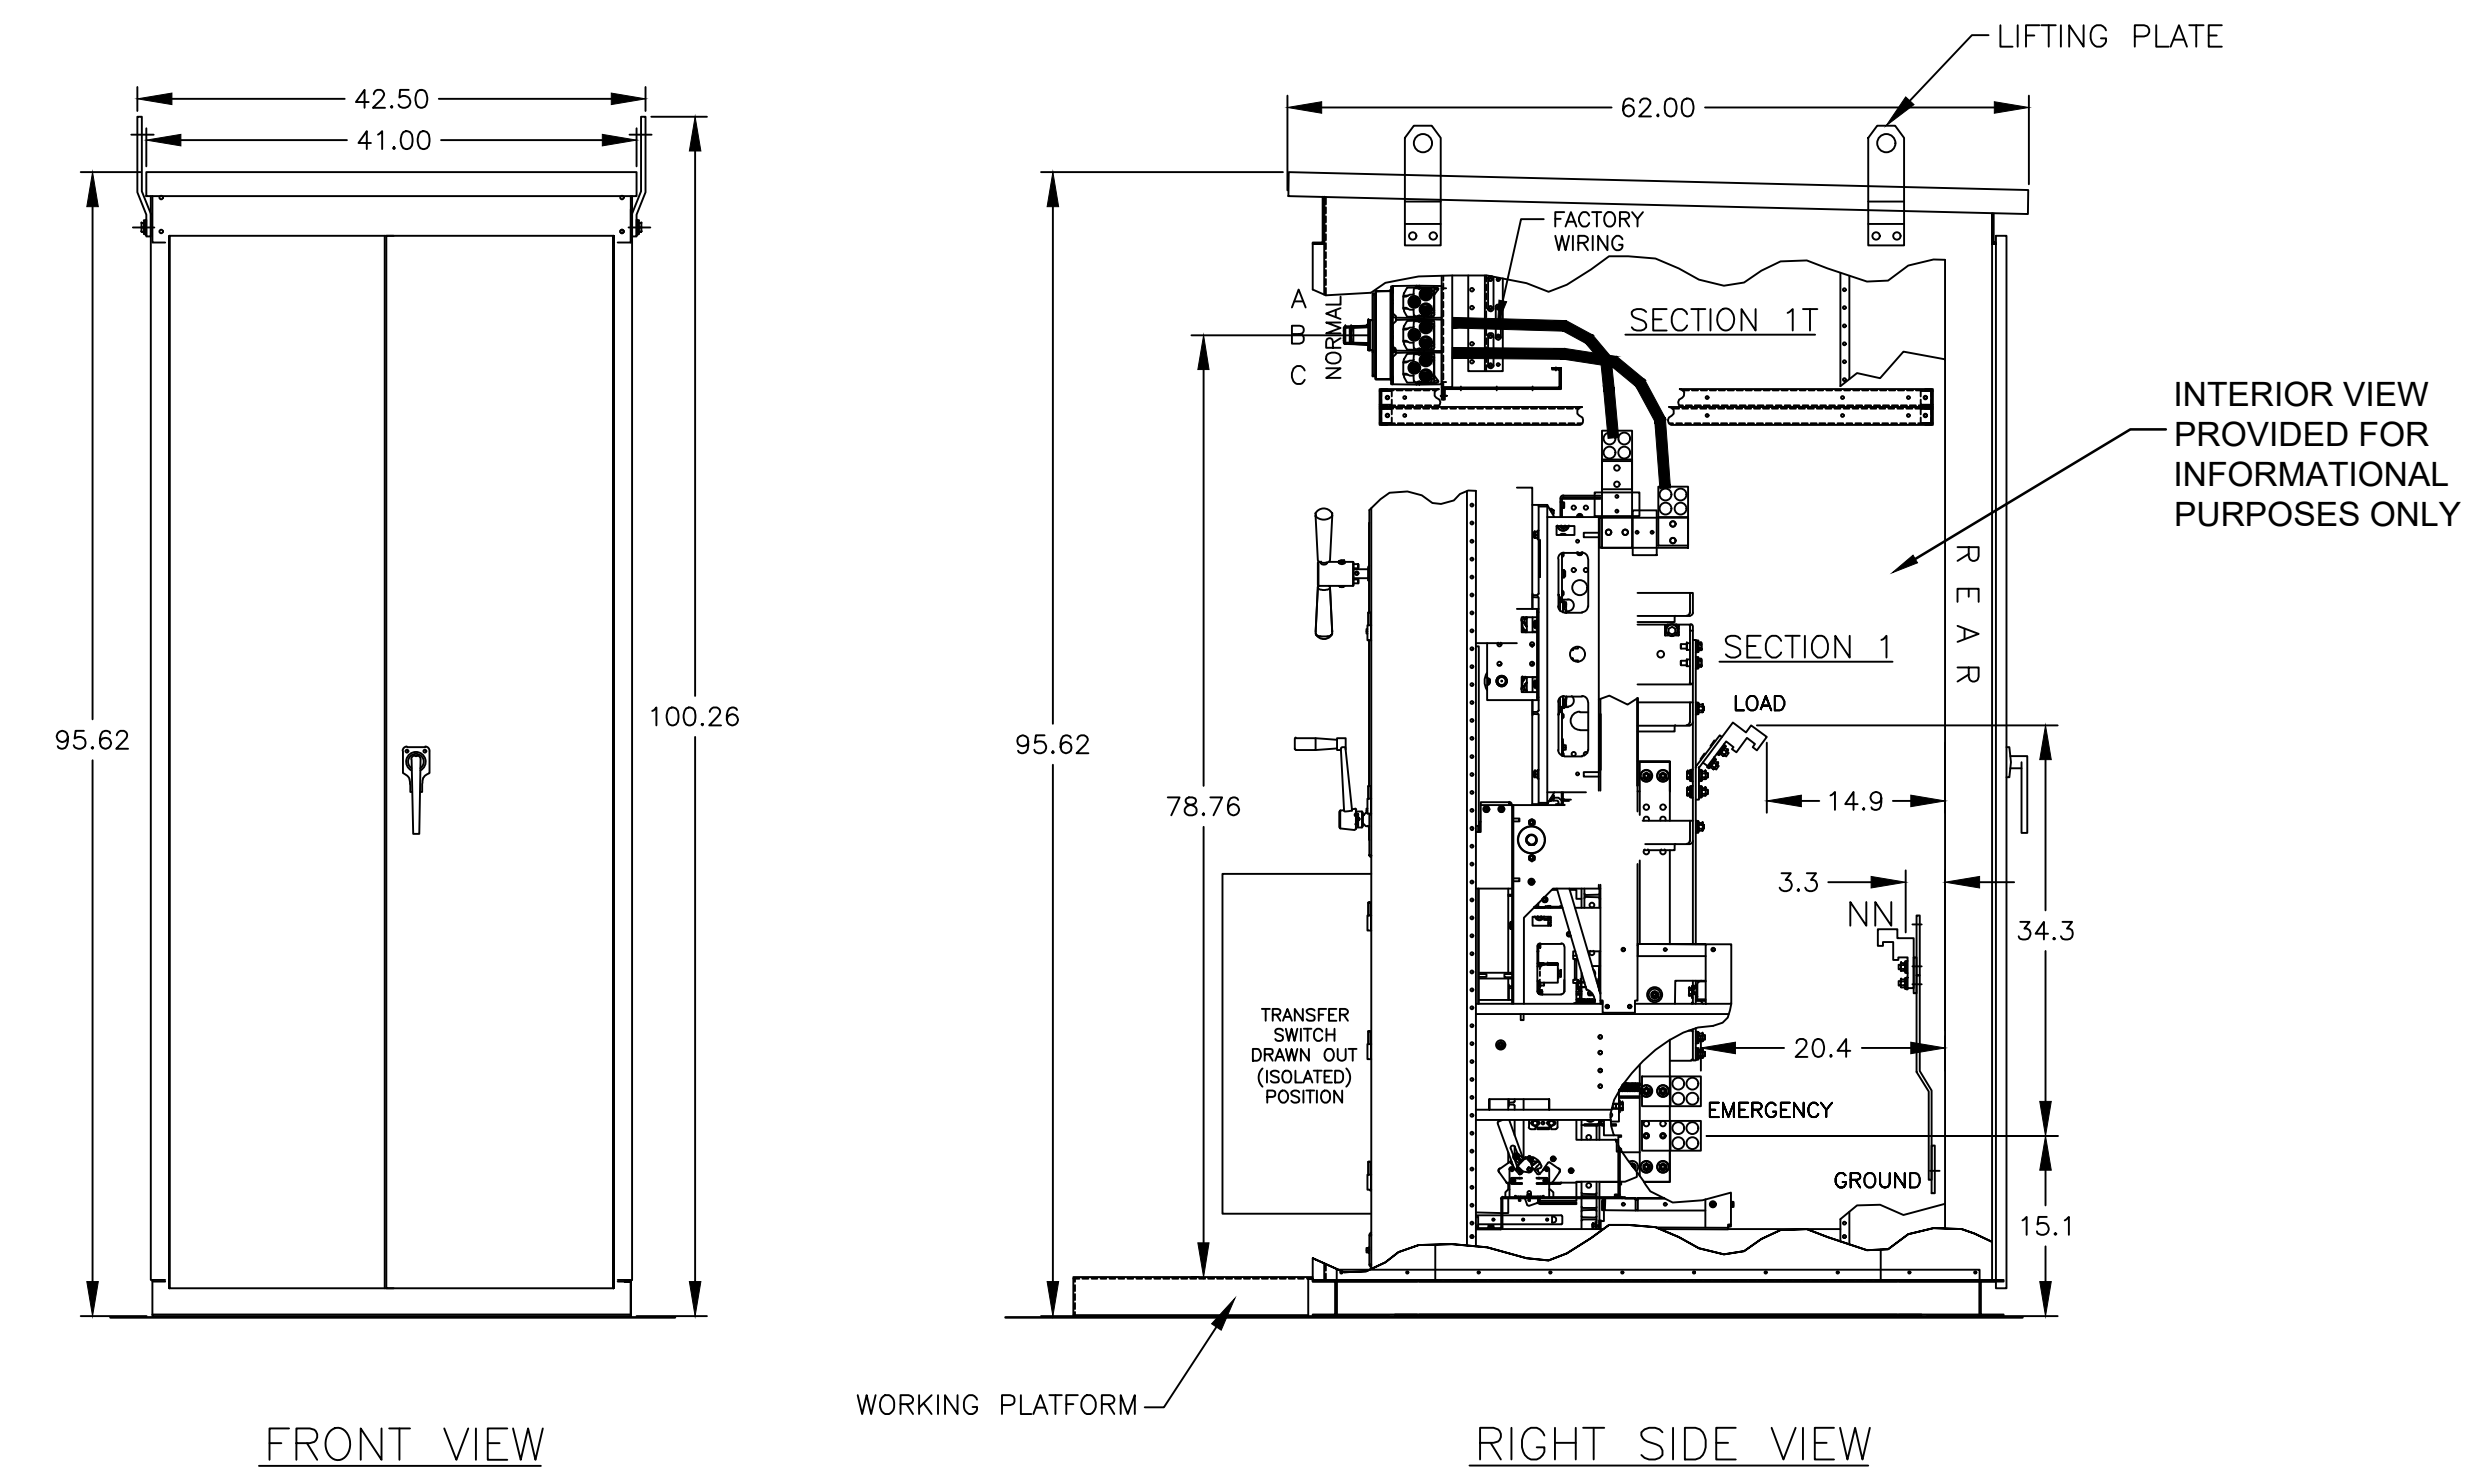

2 AUTOMATIC TRANSFER SWITCH "ATS-1" ELEVATION
- 3/4" = 1'

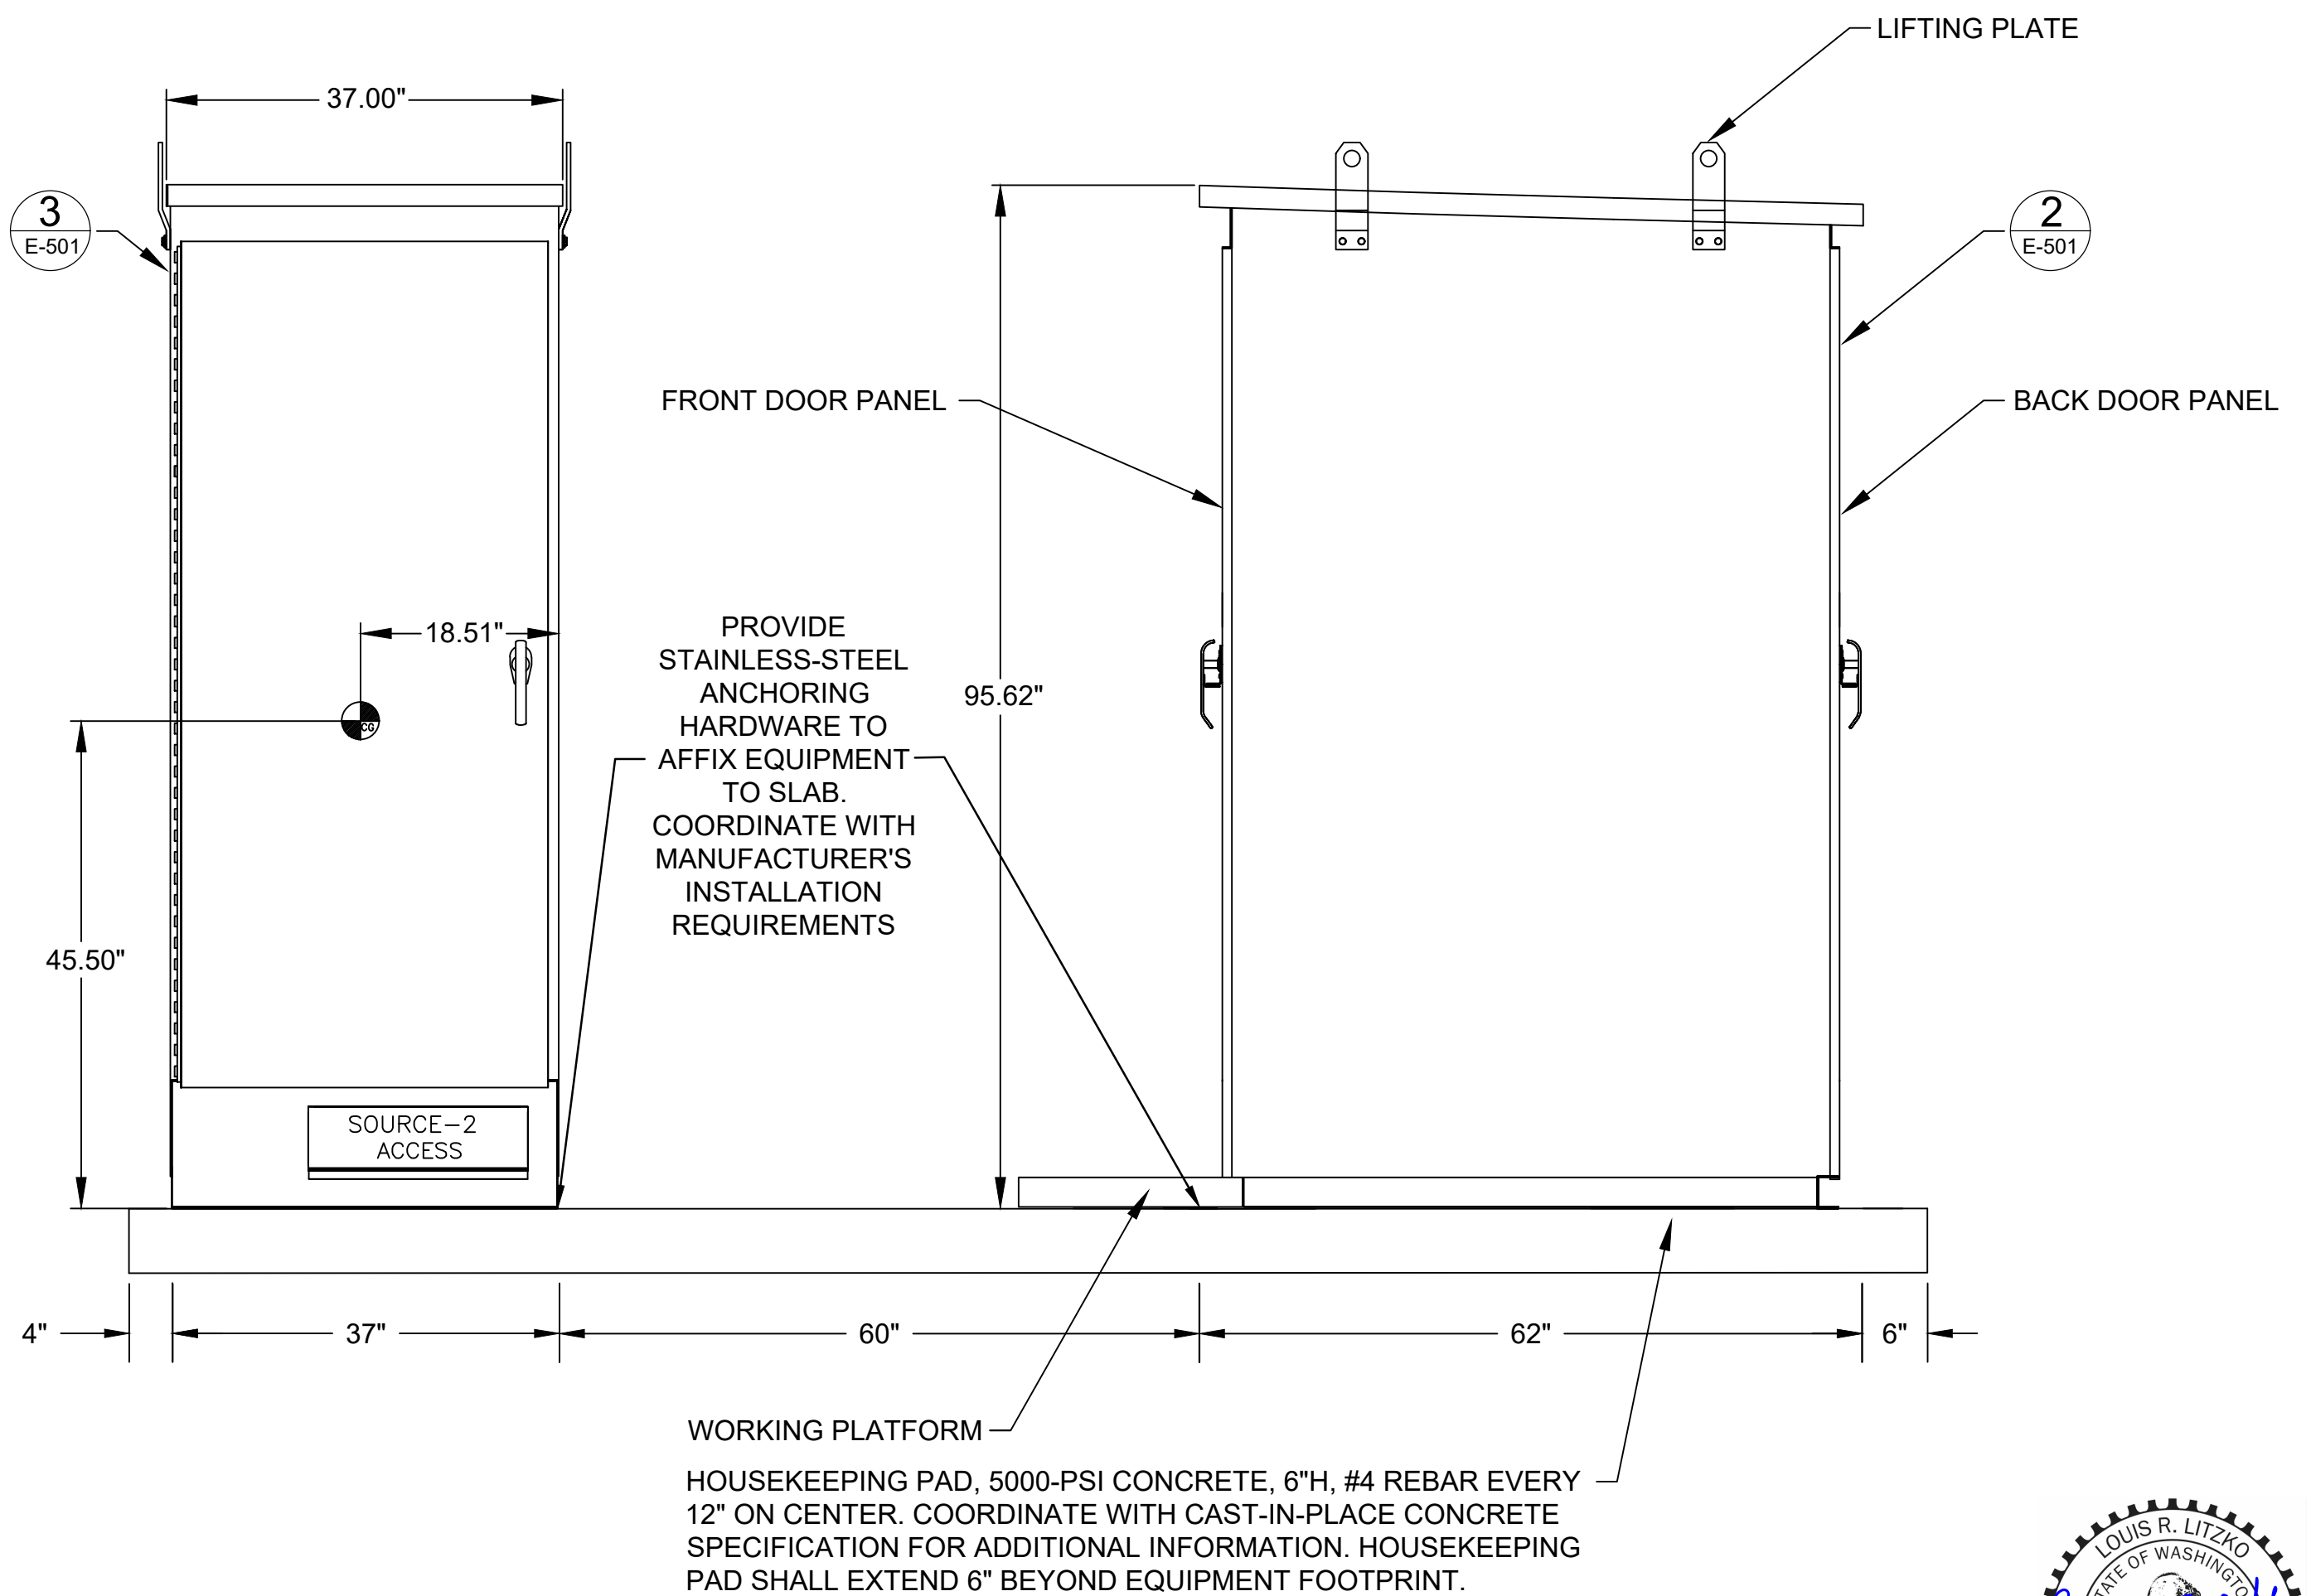

4 ELEVATION INSTALLATION DETAIL FOR MTS-1 AND ATS-1
EP401 NTS

[illegible]

DRAWN BY:	W. MATEJ	SOLICITATION NO.:	FA462024F0092
CHECKED BY:	C. TAYLOR	CONTRACT NO.:	FA462023D0002
SUBMITTED BY:		IJO:	DEJ25502J
SIZE:	ANSI D		

SEATTLE, WASHINGTON

SPEEDS DESIGN BUILD
23830 PACIFIC HWY S
KENT, WA 98032
P: (206) 590-2118

DEJ225502J

ELECTRICAL DETAILS

SHEET ID
J00008

E-501





1. CONTRACTOR SHALL FIELD VERIFY ALL EXISTING CONDITIONS, ANY DISCREPANCIES FOUND SHALL BE REPORTED TO THE COR AND EOR.
2. CONTRACTOR SHALL PROVIDE ALL SHUTDOWN PLANS, TEMPORARY POWER PLANS, AND PHASING PLANS FOR GOVERNMENT AND ENGINEER REVIEW AND APPROVAL PRIOR TO IMPLEMENTATION.

[illegible]

- 1 EXISTING PANELBOARD SHALL BE MODIFIED. REFERENCE REVISED ONE-LINE DIAGRAM AND ASSOCIATED PANEL SCHEDULE FOR ADDITIONAL INFORMATION.
- 2 EXISTING ELECTRICAL EQUIPMENT AND ASSOCIATED RACEWAYS AND CONDUCTORS SHALL BE DEMOLISHED AS INDICATED.
- 3 DISCONNECT EXISTING GENERATOR AND SALVAGE TO GOVERNMENT FOR RE-PURPOSING. CONTRACTOR SHALL COORDINATE WITH OWNER FOR TRANSPORTATION AND RELOCATION OF GENERATOR. CONTRACTOR SHALL NOT DAMAGE GENERATOR DURING REMOVAL AND RELOCATION; ANY DAMAGES SHALL BE REPAIRED AT CONTRACTOR'S EXPENSE.
- 4 EXISTING ATS AND MTS SHALL BE SALVAGED TO GOVERNMENT. ALL ASSOCIATED RACEWAYS AND CONDUCTORS SHALL BE DEMOLISHED BACK TO SOURCE.
- 5 EXISTING GROUNDING ELECTRODE SYSTEM SHALL BE PRESERVED FOR RE-TERMINATION.


U.S. ARMY CORPS OF ENGINEERS SEATTLE DISTRICT SEATTLE, WASHINGTON	DESIGNED BY:	D. RALSTON	ISSUE DATE:	09/26/2025
	DRAWN BY:	W. MATEJ	SOLICITATION NO.:	FA462024F0092
	CHECKED BY:	C. TAYLOR	CONTRACT NO.:	FA462023D0002
	SUBMITTED BY:		IJO:	DEJ25502J
	SIZE:			
	ANSI D			
	SPECS DESIGN BUILD 23650 PACIFIC HWY S SEATTLE 98106-32 P: (206) 560-2116			

ELECTRICAL ONE-LINE DIAGRAM - DEMOLITION

SHEET ID
J00008

ED601



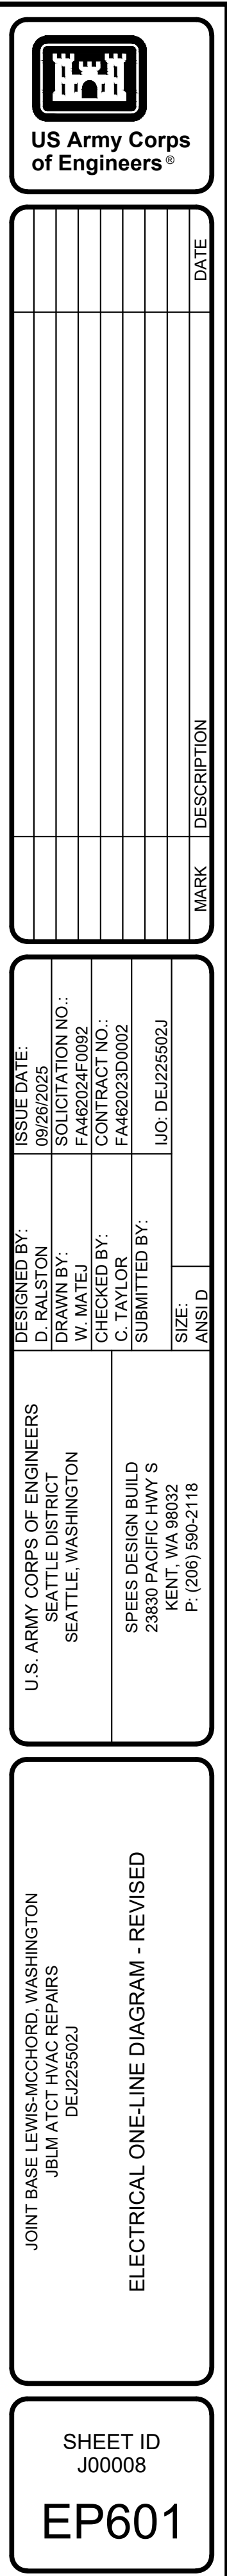

PANELBOARD: J00008-H (REVISED)

Location: BLDG J00008, RM-103

Supply From: "MSB"

Mounting: Surface

Enclosure: Type 1

Volts: 120/208 Wye

Phases: 3

Wires 4

A.I.C Rating: 35k

Bus Rating: 225 A

Main Circuit Breaker: N/A

CKT	CIRCUIT DESCRIPTION	Trip	Poles	VA PER PHASE						Poles	Trip	CIRCUIT DESCRIPTION	CKT
				A		B		C					
1	UNIT HEATER UH-1	30 A	2	0	0					2	20 A	BASEBRD HTRS MAIN LEVEL	2
3	"	"	"			0	0			"	"	"	4
5	UNIT HEATER UH-2	30 A	2					0	0	2	30 A	SPARE	6
7	"	"	"	0	0					"	"	"	8
9	SPARE	20 A	1			0	0			2	15 A	SPARE	10
11	SPARE	20 A	1					0	0	"	"	"	12
13	SPARE	20 A	1	0	0					2	15 A	SPARE	14
15	CUH-1	30 A	2			0	0			"	"	"	16
17	"	"	"					0	0	2	30 A	SPARE	18
19	BASEBRD HTRS 2ND, 3RD, 4TH LEVEL	20 A	2	0	0					"	"	"	20
21	"	"	"			0	0			2	15 A	SPARE	22
23	GLYCOL FEEDER "GF-01"	20 A	2					576	0	"	"	"	24
25	"	"	"	576	0					2	30 A	SPARE	26
27	OUTDOOR GFCI CONVENIENCE RECEPT.	20 A	1			180	0			"	"	"	28
29	ERV-01 EMERGENCY SHUT-OFF	20 A	1					100	0	3	30 A	SPARE	30
31	HEAT TRACE "HT-01"	20 A	1	18	0					"	"	"	32
33	SPARE	20 A	1			0	0			"	"	"	34
35	SPARE	20 A	1					0	0	-	-	SPACE	36
37	SPARE	20 A	1	0	0					-	-	SPACE	38
39	SPARE	20 A	1			0	0			-	-	SPACE	40
41	SPARE	20 A	1					0	0	-	-	SPACE	42
Total Load:				594		180		676					
Total Amps:				5		1		6					
Largest Motor		0		125.00%		0				Total Conn. Power Load:		1450 VA	
Other		118		100.00%		118				Total Est. Power Demand:		1450 VA	
Receptacle		180		100.00%		180				Total Conn. Amperage:		4 A	
Lighting		0		125.00%		0				Total Est. Amperage Demand:		4 A	
All other Motor		1152		100.00%		1152							
Telecom Rack		0		100.00%		0							
Notes:													
1. GREY TEXT INDICATES EXISTING EQUIPMENT AND BLACK BOLD TEXT INDICATES NEW ADDITIONS AND CHANGES.													
2. REVISED PANEL HAS A NET LOAD DECREASE AS MORE LOAD IS BEING REMOVED THAN ADDED.													

PANEL SCHEDULE: J00008-B (REVISED)

Location: BLDG J00008, RM-502

Supply From: "EMER"

Mounting: Surface

Enclosure: Type 1

Volts: 120/208 Wye

Phases: 3

Wires 4

A.I.C Rating: 35k

Bus Rating: 225 A

Main Circuit Breaker: N/A

CKT	CIRCUIT DESCRIPTION	Trip	Poles	VA PER PHASE						Poles	Trip	CIRCUIT DESCRIPTION	CKT
				A		B		C					
1	LTG 5TH LEVEL	20 A	1	0	156					2	15 A	FCU 04A & 04B (NOTE 2)	2
3	REC 5TH LEVEL	20 A	1			0	156			"	"	"	4
5	REC 5TH LEVEL	20 A	1					0	0	1	30 A	BITI CAB FPI-5	6
7	REC IN 5TH TELECOM CABINET	20 A	1	0	120					1	20 A	FCU-03A & 03B - CONDENSATE PUMPS	8
9	SCCS 1 TECHNICAL FPI-5	20 A	1			0	120			1	20 A	FCU-04A & 04B - CONDENSATE PUMPS	10
11	SCCS 1 NON-TECHNICAL FPI-5	20 A	1					0	0	-	-	SPACE	12
13	SCCS 2 MCI 1 WHITE FPI-4	20 A	1	0	0					1	30 A	UPS	14
15	SCCS 3 MCI 2 GREY FPI-3	30 A	1			0	0			1	15 A	ACE - IDS	16
17	FTI PRI PWR	20 A	1					0	0	1	20 A	TI CONV OUTLET	18
19	FCU-02A & 02B (NOTE 2)	20 A	2	68	0					1	30 A	FTI ALD PER	20
21	"	"	"			68	0			1	20 A	GROUND BASED RADAR	22
23	DMN CONV. OUTLET	20 A	1					0	0	1	20 A	BITI CAB FPI-5	24
25	UPS RECEP	20 A	1	0	0					1	30 A	UPS	26
27	UPS RECEP	20 A	1			0	156			2	20A	FCU-03A & 03B (NOTE 2)	28
29	FCU-02A & 02B - CONDENSATE PUMPS	20 A	1					120	156	"	"	"	30
Total Load:				344		500		276					
Total Amps:				3		4		2					
Largest Motor		312		125.00%		390				Total Conn. Power Load:		1120 VA	
Other		0		100.00%		0				Total Est. Power Demand:		1198 VA	
Receptacle		0		100.00%		0				Total Conn. Amperage:		3 A	
Lighting		0		125.00%		0				Total Est. Amperage Demand:		3 A	
All other Motor		808		100.00%		808							
Telecom Rack		0		100.00%		0							
Notes:													
1. GREY TEXT INDICATES EXISTING EQUIPMENT AND BLACK BOLD TEXT INDICATES NEW ADDITIONS AND CHANGES.													
2. (1) FAN COIL UNIT OPERATES REDUNDANTLY. LOAD EXCLUDED FROM CALCULATION.													
3. PANEL SCHEDULE IS PROVIDED FOR BRANCH CIRCUITING INFORMATION ONLY FOR ADDED LOAD. BASED 30-DAY METERING FOR ENTIRE FACULTY (72A @208V), PANELBOARD HAS CAPACITY TO SUPPORT ADDITONAL LOAD.													

E-703



1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
---	---	---	---	---	---	---	---	---	----	----	----	----	----	----	----	----	----	----	----

PANELBOARD: J00008-C (EXISTING)

Location: BLDG J00008, RM-602

Supply From: "EMER"

Mounting: Surface

Enclosure: Type 1

Volts: 120/208 Wye

Phases: 3

Wires 4

A.I.C Rating: 35k

Bus Rating: 225 A

Main Circuit Breaker: N/A

CKT	CIRCUIT DESCRIPTION	Trip	Poles	VA PER PHASE						Poles	Trip	CIRCUIT DESCRIPTION	CKT
				A		B		C					
1	LTG 6TH LEVEL	20 A	1	0	0					2	15 A	AC-6	2
3	REC 6TH LEVEL	20 A	1			0	0			--	--	"	4
5	REC 6TH LEVEL	20 A	1					0	0	--	--	SPACE	6
7	REC IN 6TH TELECOM CABINET	20 A	1	0	0					3	20 A	SPARE	8
9	ARCALS RACK	20 A	1			0	0			--	--	"	10
11	SPARE	20 A	1					0	0	--	--	"	12
13	RADIO RACK	20 A	1	0	0					1	20 A	TML DEHYDRATOR	14
15	DALR	30 A	1			0	0			1	20 A	DALR	16
17	D-BRITE LCN	20 A	1					0	0	1	20 A	TOUCH - UPS	18
19	UNKNOWN LOAD	20 A	1	0	0					1	20 A	AIRFIELD LIGHTING CONTROL	20
21	UNKNOWN LOAD	20 A	1			0	0			2	30 A	ETVS PS1	22
23	UNKNOWN LOAD	20 A	1					0	0	--	--	"	24
25	UNKNOWN LOAD	20 A	1	0	0					2	30 A	ETVS PS2	26
27	FAA LINES	20 A	1			0	0			--	--	"	28
29	FAA LINES	20 A	1					0	0	--	--	SPACE	30
Total Load:				0		0		0					
Total Amps:				0		0		0					
Largest Motor	0			125.00%		0		0		Total Conn. Power Load: 0 VA			
Other	0			100.00%		0		0		Total Est. Power Demand: 0 VA			
Receptacle	0			100.00%		0		0		Total Conn. Amperage: 0 A			
Lighting	0			125.00%		0		0		Total Est. Amperage Demand: 0 A			
All other Motor	0			100.00%		0		0					
Telecom Rack	0			100.00%		0		0					
Notes:													
1. EXISTING PANELBOARD SCHEDULE IS PROVIDED FOR REFERENCE ONLY.													

[illegible]

PANELBOARD: J00008-MA (EXISTING)

Location: BLDG J00008, RM-803

Supply From: "EMER"

Mounting: Surface

Enclosure: Type 1

Volts: 120/208 Wye

Phases: 3

Wires 4

A.I.C Rating: 35k

Bus Rating: 225 A

Main Circuit Breaker: N/A

CKT	CIRCUIT DESCRIPTION	Trip	Poles	VA PER PHASE						Poles	Trip	CIRCUIT DESCRIPTION	CKT
				A		B		C					
1	LTG 8TH LEVEL	20 A	1	0	0					1	20 A	REC 8TH LEVEL	2
3	LTG 7TH LEVEL	20 A	1			0	0			1	20 A	REC 7TH LEVEL	4
5	BB HEAT 7TH & 8TH LEVEL	20 A	2					0	0	1	20 A	REC 7TH LEVEL	6
7	"	"	"	0	0					1	20 A	REC 7TH LEVEL	8
9	SPARE	20 A	1			0	0			1	20 A	REC 7TH LEVEL	10
11	SPARE	20 A	1					0	0	1	20 A	REF	12
13	SPARE	20 A	1	0	0					2	50 A	RANGE	14
15	SPARE	20 A	1			0	0			"	"	RANGE	16
17	SPARE	20 A	1					0	0	1	20 A	REC & DISPOSER	18
19	EF-4	20 A	3	0	0					1	30 A	SPARE	20
21	"	"	"			0	0			-	-	SPACE	22
23	"	"	"					0	0	-	-	SPACE	24
25	SPACE	-	-	0	0					-	-	SPACE	26
27	EWB-2	30 A	1			0	0			-	-	SPACE	28
29	AC-5 FAN	20 A	3					0	0	2	15 A	HRV-3	30
31	"	"	"	0	0					"	"	"	32
33	"	"	"			0	0			"	"	"	34
35	AC-7	15 A	2					0	0	3	30 A	UNKNOWN LOAD	36
37	"	"	"	0	0					"	"	"	38
39	7TH FLOOR AC	15 A	2			0	0			"	"	"	40
41	"	"	"					0	0	-	-	SPACE	42
Total Load:				0		0		0					
Total Amps:				0		0		0					
Largest Motor		0		125.00%		0				Total Conn. Power Load:		0 VA	
Other		0		100.00%		0				Total Est. Power Demand:		0 VA	
Receptacle		0		100.00%		0				Total Conn. Amperage:		0 A	
Lighting		0		125.00%		0				Total Est. Amperage Demand:		0 A	
All other Motor		0		100.00%		0							
Telecom Rack		0		100.00%		0							

Notes:

1. EXISTING PANELBOARD SCHEDULE IS PROVIDED FOR REFERENCE ONLY.

PANELBOARD: J00008-MA (REVISED)													
Location: BLDG J00008, RM-803				Volts: 120/208 Wye				A.I.C Rating: 35k					
Supply From: "EMER"				Phases: 3				Bus Rating: 225 A					
Mounting: Surface				Wires 4				Main Circuit Breaker: N/A					
Enclosure: Type 1													
CKT	CIRCUIT DESCRIPTION	Trip	Poles	VA PER PHASE						Poles	Trip	CIRCUIT DESCRIPTION	CKT
				A		B		C					
1	LTG 8TH LEVEL	20 A	1	0	0					1	20 A	REC 8TH LEVEL	2
3	LTG 7TH LEVEL	20 A	1			0	0			1	20 A	REC 7TH LEVEL	4
5	BB HEAT 7TH & 8TH LEVEL	20 A	2					0	0	1	20 A	REC 7TH LEVEL	6
7	"	"	"	0	0					1	20 A	REC 7TH LEVEL	8
9	SPARE	20 A	1			0	0			1	20 A	REC 7TH LEVEL	10
11	FCU-08C	30 A	2					1040	0	1	20 A	REF	12
13	"	"	"	1040	0					2	50 A	RANGE	14
15	SPARE	20 A	2			0	0			"	"	RANGE	16
17	"	"	"					0	0	1	20 A	REC & DISPOSER	18
19	EF-4	20 A	3	0	586					1	30 A	ERV-01	20
21	"	"	"			0	978			2	30 A	FCU-08A	22
23	"	"	"					0	978	"	"	"	24
25	FCU-06A, 06B, & 06C - CONDENSATE PUMPS	20 A	1	240	978					2	30 A	FCU-08B	26
27	EWH-2	30 A	1			0	978			"	"	"	28
29	FCU-06A & 06B (NOTE 2)	30 A	2					1040	0	2	30 A	FCU-08C (NOTE 2)	30
31	"	"	"	1040	0					"	"	"	32
33	50A RECEPT FOR "SC-01" 9TH FLOOR (NOTE 3)	50 A	2			0	0			-	-	SPACE	34
35	"	"	"					0	0	3	30 A	UNKNOWN LOAD	36
37	FCU-07A & 07B - CONDENSATE PUMPS	20 A	1	120	0					"	"	"	38
39	FCU 07A & 07B (NOTE 2)	15 A	2			234	0			"	"	"	40
41	"	"	"					234	240	1	20 A	FCU-08A, 08B, & 08C - CONDENSATE PUMPS	42
Total Load:				4004		2190		3532					
Total Amps:				33		18		29					
Largest Motor		1956		125.00%		2445				Total Conn. Power Load:		9726 VA	
Other		0		100.00%		0				Total Est. Power Demand:		10215 VA	
Receptacle		0		100.00%		0				Total Conn. Amperage:		27 A	
Lighting		0		125.00%		0				Total Est. Amperage Demand:		28 A	
All other Motor		7770		100.00%		7770							
Telecom Rack		0		100.00%		0							
Notes:													
1. GREY TEXT INDICATES EXISTING EQUIPMENT AND BLACK BOLD TEXT INDICATES NEW ADDITIONS AND CHANGES.													
2. (1) FAN COIL UNIT OPERATES REDUNDANTLY. LOAD EXCLUDED FROM CALCULATION.													
3. LOAD SHALL NOT BE INCLUDED. RECEPTACLE FEEDS TEMPORARY MECH UNIT.													
4. PANEL SCHEDULE IS PROVIDED FOR BRANCH CIRCUITTING INFORMATION ONLY FOR ADDED LOAD. BASED 30-DAY METERING FOR ENTIRE FACILITY (72A @208V), PANELBOARD HAS CAPACITY TO SUPPORT ADDITIOINAL LOAD.													



**US Army Corps
of Engineers®**

[illegible]

U.S. ARMY CORPS OF ENGINEERS SEATTLE DISTRICT SEATTLE, WASHINGTON	SPEEDS DESIGN BUILD 23830 PACIFIC HWY S KENT, WA 98032 P. (206) 590-2118	DRAWN BY:	D. RALSTON	DATE:	09/26/2002
		CHECKED BY:	W. MATEJ	SOLICITATION NO.:	FA42024F0092
		SUBMITTED BY:	C. TAYLOR	CONTRACT NO.:	FA42023D0002
		SIZE:	ANSI/D	U.O.:	DE-1225502J

JOINT BASE LEWIS-MCHORD, WASHINGTON
JBLM ATCT HVAC REPAIRS
DEJ225502J

SHEET ID
J00008

E-704



100% ELECTRONIC BID SET

PANELBOARD: J00008-MB (REVISED)

Location: BLDG J00008, RM-103

Supply From: "EMER"

Mounting: Surface

Enclosure: Type 1

Volts: 120/208 Wye

Phases: 3

Wires 4

A.I.C Rating: 35k

Bus Rating: 225 A

Main Circuit Breaker: N/A

CKT	CIRCUIT DESCRIPTION	Trip	Poles	VA PER PHASE						Poles	Trip	CIRCUIT DESCRIPTION	CKT
				A		B		C					
1	FIRE ALARM SYSTEM	20 A	1	0	0					1	20 A	REC MAIN LEVEL PIT LIGHTS	2
3	LTG EMERGENCY	20 A	1			0	0			1	20 A	REC MAIN LEVEL	4
5	LTG MAIN LEVEL	20 A	1					0	0	1	20 A	REC 2ND LEVEL	6
7	LTG 2ND,3RD,4TH LEVEL	20 A	1	0	0					1	20 A	REC 2ND LEVEL	8
9	LTG STAIRWELL	20 A	1			0	0			1	20 A	WATER COOLER	10
11	LTG EXTERIOR	20 A	1					0	0	1	20 A	REC 3RD LEVEL	12
13	EF-2	20 A	1	0	0					1	20 A	REC 3RD LEVEL	14
15	ECMS	20 A	1			0	0			1	20 A	REC 4TH LEVEL	16
17	EWI-1	20 A	1					0	0	1	20 A	REC 4TH LEVEL	18
19	VENT FAN VF-1	20 A	3	0	0					1	20 A	ELEVATOR LTS	20
21	"	"	"			0	0			1	20 A	EF-1	22
23	"	"	"					0	0	1	20 A	EEDRS BPOC	24
25	HRVS	15 A	2	0	0					1	20 A	GENERATOR HEATER	26
27	"	"	"			0	0			1	20 A	BATTERY CHARGER	28
29	FOX FAB	30 A	1					0	0	1	20 A	INTERCOM	30
31	DOMESTIC WATER PUMP - DPW-01 (NOTE 1)	20 A	3	0	0					1	20 A	SHUNT TRIP ELEVATOR	32
33	"	"	"			0	0			1	20 A	SPARE	34
35	"	"	"					0	0	1	20 A	FOX FAB GFCI RECEP	36
37	PUMP P-3	20 A	3	0	0					3	20 A	PRESSURE FAN PF-1	38
39	"	"	"			0	0			"	"	"	40
41	"	"	"					0	0	"	"	"	42
Total Load:				0		0		0					
Total Amps:				0		0		0					
Largest Motor		0		125.00%		0				Total Conn. Power Load:		0 VA	
Other		0		100.00%		0				Total Est. Power Demand:		0 VA	
Receptacle		0		100.00%		0				Total Conn. Amperage:		0 A	
Lighting		0		125.00%		0				Total Est. Amperage Demand:		0 A	
All other Motor		0		100.00%		0							
Telecom Rack		0		100.00%		0							

Notes:

1. REMOVED LOAD EQUALS LOAD OF REPLACEMENT MECHANICAL PUMP. NO ELECTRICAL LOAD CHANGE.

2. GREY TEXT INDICATES EXISTING EQUIPMENT AND BLACK BOLD TEXT INDICATES NEW ADDITIONS AND CHANGES.



120/208 Wye

35k

225 A

N/A

Location: BLDG J00008, FLOOR 9

Volts: 120/208 Wye

A.I.C Rating: 35k

Bus Rating: 225 A

Main Circuit Breaker: N/A

Supply From: "EMER"

Phases: 3

Mounting: Surface

Wires 4

Enclosure: Type 1

CKT	CIRCUIT DESCRIPTION	Trip	Poles	VA PER PHASE						Poles	Trip	CIRCUIT DESCRIPTION	CKT					
				A		B		C										
1	CAB LTG FOOT LTS	20 A	1	0	0					1	20 A	REC CAB LEVEL	2					
3	CAB LTG SPOTS	20 A	1			0	0			1	20 A	REC CAB LEVEL	4					
5	LIGHT GUN	20 A	1					0	0	1	20 A	REC CAB LEVEL	6					
7	OBSTRUCTION LTS ON ROOF	20 A	1	0	0					1	20 A	REC CAB LEVEL MICROWAVE	8					
9	UNDER COUNTER RECEPTACLE	20 A	1			0	0			1	20 A	REC CAB LEVEL BACK WALL	10					
11	UNDER COUNTER RECEPTACLE	20 A	1					0	0	1	20 A	UNKNOWN LOAD	12					
13	MICROWAVE OVEN	20 A	1	0	0					1	20 A	DOOR SECURITY	14					
15	POWER STRIP	20 A	1			0	0			1	20 A	INTERCOM SYSTEM	16					
17	ELVS SYSTEM COUNTER	20 A	1					0	0	1	20 A	U.C. REF.	18					
19	STARS RECEPTACLE	20 A	1	0	0					1	20 A	RECEP WATCH DESK	20					
21	UNKNOWN LOAD	20 A	1			0	0			1	20 A	RECEP WATCH DESK	22					
23	UNKNOWN LOAD	20 A	1					0	0	1	20 A	RECEP WATCH DESK	24					
25	UNKNOWN LOAD	20 A	1	0	0					1	20 A	RECEP WATCH DESK	26					
27	UNKNOWN LOAD	20 A	2			0	0			2	20 A	UNKNOWN LOAD	28					
29	*	*	*			0	0	0	0	*	*	*	30					
Total Load:				0		0		0										
Total Amps:				0		0		0										
Largest Motor														0	125.00%	0	Total Conn. Power Load:	0 VA
Other														0	100.00%	0	Total Est. Power Demand:	0 VA
Receptacle														0	100.00%	0	Total Conn. Amperage:	0 A
Lighting														0	125.00%	0	Total Est. Amperage Demand:	0 A
All other Motor														0	100.00%	0		
Telecom Rack														0	100.00%	0		
Notes:																		
1. EXISTING PANELBOARD SCHEDULE IS PROVIDED FOR REFERENCE ONLY.																		

U.S. ARMY CORPS OF ENGINEERS

SEATTLE DISTRICT

SEATTLE, WASHINGTON

SPEES DESIGN BUILD

23830 PACIFIC HWY S

KENT, WA 98032

P: (206) 590-2118

JOINT BASE LEWIS-MCCHORD, WASHINGTON

JBLM ATCT HVAC REPAIRS

DEJ225502J

ELECTRICAL SCHEDULES

DESIGNED BY: D. RALSTON

DRAWN BY: J. B. LITZAO

CHECKED BY: C. TAYLOR

SUBMITTED BY:

ISSUE DATE: 09/26/2025

SOLICITATION NO.: 10-1-25

CONTRACT NO.: FA442023D0002

I/O: DEJ225502J

SIZE: ANS/D

U.S. ARMY CORPS OF ENGINEERS®

of Engineers®

100% ELECTRONIC BID SET

LOUIS R. LITZAO

STATE OF WASHINGTON

55681

REGISTERED

PROFESSIONAL ENGINEER

10-1-25

SHEET ID

J00008

E-706