



TT113 Mechanical Repairs
Marine Corps Base, Camp Lejeune, NC

Structural Interior Design Package
Final Submittal
June 2025

Table of Contents

1. Point of Contact List
2. Narrative of Interior Design Objectives
3. Meeting Minutes
4. Finish Plans & Schedules
5. Finish Boards

Point of Contact List

Architect Supervisor

Kelly E. Root, RA, NCARB
Architectural Supervisor, Design Branch
Public Works Division
Marine Corps Base Camp Lejeune
(910) 238-6476
kelly.root@usmc.mil

A&E Project Manager

John Schmied
MBF Architects
317-C Pollock Street
New Bern, NC 28560
(252) 637-6373
schmied@mbfarchitects.com

Facilities Management

Beth P. Weinbrenner
Construction Project Manager
Facilities & Maintenance Division
MCCS Lejeune-New River
(910) 451-1310
beth.weinbrenner@USMC-MCCS.org

A&E Interior Designer

Jamie Kissel, NCIDQ, CID
Within Interior Design, Inc.
1008 Granby Street
Norfolk, VA 23510
(757) 224-0489
jkissel@withindesigns.com

Project Manager

Steven Mcneill
Mechanical Engineering
Bldg 1005, Public Works Division,
Design Branch
Marine Corps Base, Camp Lejeune
(580) 458-7516
steven.mcneill@usmc.mil

SID Narrative

INTERIOR DESIGN CRITERIA

Interior Design work will comply with the latest edition of the following codes and standards:

FC 1-300-09N Navy & Marine Corps Design Procedures
UFC 1-200-01 DoD Building Code
UFC 1-200-02 High Performance and Sustainable Building Requirements
UFC 1-300-09N Design Procedures
UFC 3-120-01 Design: Sign Standards
UFC 3-120-10 Interior Design
UFC 4-740-06 Youth Centers

STRUCTURAL INTERIOR DESIGN

The TT113 Child Development Center Renovation an Camp Lejeune, NC requires interior finishes that have a balance between aesthetics and sustainability, as well as durability that can withstand the inherent day to day operating environment for staff and patrons utilizing the facility. To meet these objectives, the SID package will use all the general requirements for interior finishes that have been applied in similar facilities, as well as best practices recommended by manufacturers for areas requiring enhanced durability. Standard SID finishes will be used as requested by the activity.

The SID package will provide a variety of floor finishes throughout including attached cushion carpet tile and luxury vinyl tile.

Interior partitions will primarily be painted drywall.

Acoustical ceiling tiles on a suspended grid will provide high quality sound absorption in designated areas with easy access to mechanical and plumbing above. The square edge lay-in tiles are a moisture resistant mineral fiber and have a minimum NRC of 0.85, CAC of 35, and a light reflectance of 0.86. Restrooms will have painted gypsum ceiling.

Interior signage will be provided throughout the facility to form a well-organized, comprehensive interior environment that guides users and visitors through the building.

Meeting Minutes

MEETING MINUTES

Project: TT113 Mechanical Repairs
Meeting: 35% Review Meeting
Date: December 19th, 2024
Location: Public Works at MCB Camp Lejeune, NC

PROJECT TEAM IN ATTENDANCE:

Architecture	MBF Architects	(252) 637-6373
Civil Engineer	Avolis Engineering	(252) 633-0068
Structural Engineer	Kaydos-Daniels Engineers	(919) 828-4966
Mechanical/Electrical/Plumbing	Crenshaw Consulting	(919) 871-1070
Fire Protection	Jensen Hughes	(757) 213-6856
Geotechnical	ECS Southeast	(757) 366-5100
Cost Estimating	Aiken Cost Consultants	(864) 232-9342
Interior Design	Within Interior Design	(757) 224-0489

Below are the Interior Design items that were addressed during the 35% Review Meeting.

35% REVIEW COMMENTS

REVIEWER: KELLY ROOT

Item #8 I-111: I suggest keeping 1 carpet type, 1 LVT type, and 1 or two tile types depending on use. Makes it easier for replacement later on and cost savings.

Response: Concur.

REVIEWER: BETH WEINBRENNER

Item #17 I-111: The Family Care Program Team felt that LVT-1 and LVT-2 would ALL be the same, not 2 styles/looks.

Whether or not combined, could Rm 123 Storage LVT be the same as corridor LVT

Response: Concur. LVT will be the same throughout

Item #18 I-111: They thought the front Vestibule and Rm 117 Resource/Referral would also be LVT (not CPT-1).

Response: Concur on Rm 117. However, the entry vestibule is actually showing CPT2 which is a walk-off carpet. Please confirm if you'd still like us to change Vestibule 115 to LVT.

Activity confirmed walk-off carpet is acceptable in Vestibule 115.

Item #19 I-602: I didn't see "Finger Pinch" guards for doors listed anywhere. Maybe they're already in place.

Response: Concur. Finger pinch guards will be added to the finish legend and the Wall & Door Protection spec (10 26 00).

REVIEWER: TIM VANNOY / MATT SATOR

Item #17 I-601: If rm 122 COMM/CCTV RM is painted or sanded all telecom must be covered, do not paint backboard

Response: Concur. We will add a GENERAL NOTE detailing these instructions.

Item #18 I-601: If faceplates removed from walls for painting, then contractor must mark/tape each cable with designated jack number. All cabling will be required to re-tested (per 27 10 00) from faceplate to patch panel.

Response: Concur. This statement will be added to our GENERAL NOTES.

ACTION ITEMS

1. 65% Submittal due 2/13/25.

MEETING MINUTES

Project: TT113 Mechanical Repairs
Meeting: 65% Review Meeting
Date: March 11th, 2025
Location: Public Works at MCB Camp Lejeune, NC

PROJECT TEAM IN ATTENDANCE:

Architecture	MBF Architects	(252) 637-6373
Civil Engineer	Avolis Engineering	(252) 633-0068
Structural Engineer	Kaydos-Daniels Engineers	(919) 828-4966
Mechanical/Electrical/Plumbing	Crenshaw Consulting	(919) 871-1070
Fire Protection	Jensen Hughes	(757) 213-6856
Geotechnical	ECS Southeast	(757) 366-5100
Cost Estimating	Aiken Cost Consultants	(864) 232-9342
Interior Design	Within Interior Design	(757) 224-0489

Below are the Interior Design items that were addressed during the 65% Review Meeting.

35% REVIEW COMMENTS

REVIEWER: KELLY ROOT

Item #1 I-111: Wondering if we should show the finishes by phases so the contractor expects the installers to come back for each phase.

Response: Discuss during review meeting.

MBF agreed this can be sorted out separately – Will discuss in more detail during SID finishes presentation to the Activity.

REVIEWER: MATT SATOR / TIM VANNOY

Item #2 Interior Design, finish plan (multiple sheets): Note J and K – I thought there was some discussion that Comm rm (122) did not need to be painted.

Response: Concur. Paint finish will be removed from finish schedule for Comm Rm 112.

REVIEWER: BETH WEINBRENNER

Item #7 I-111 & I-601: Is it LVT-1 (Tile) or LVP-(Plank/wood look)? CDC says it looks like wood, so shouldn't it say "LVP-1"?

Response: Concur.

Item #8 I-601: I didn't see "Finger Pinch" guards for doors listed anywhere. Maybe they're already in place.

Response: Concur. This has been added to the finish legend as "HW-2".

ACTION ITEMS

1. Pre-Final Submittal due 4/21/25.
2. WID & MBF to schedule finish scheme presentation to the activity prior to Pre-Final submittal.

MEETING MINUTES

Project: TT113 Mechanical Repairs
Meeting: SID Finishes Review Meeting
Date: April 3rd, 2025 (Thursday)
Location: Public Works at MCB Camp Lejeune, NC

PROJECT TEAM IN ATTENDANCE:

Facilities Management (Beth W.)	MCCS Camp Lejeune	(910) 381-4895
Project Manager (Steve Mcneill)	Public Works Division	(580) 458-7516
Arch Supervisor (Kelly Root)	Public Works Division	(910) 238-6476
Activity (Kim Gipson)	-	-
Interior Design	Within Interior Design	(757) 224-0489


FINISHES REVIEW COMMENTS

- Two schemes prepared by Within were not presented due to existing standardized finishes.
- Within team was asked to populate finish legend with standardized finishes.
- The following items were sent to Within team by the activity. All finishes are standardized (PNT-1, PNT-4, RB-1, LVT-1, CPT-1, SS-1 and PLAM-1).
- PNT-1 (Primary Walls) – Sherwin Williams - Ecru SW 6135 (208-C2) – standardized finish.
- PNT-4 (Door Frames) – Sherwin Williams - Utterly Beige SW 6080 (198-C3) - standardized finish.
- RB-1 (Rubber Base) – Tarkett/Johnsonite - TA8 Welsh Castle CB - standardized finish.
- LVT-1 (Luxury Vinyl Tile) – Tarkett - Antique Cimarron PEHP GW29 TG 6"x36" (Heritage Plank).
- CPT-1 (Carpet Tile) – Tarkett - 03026 Aftermath II, 23510 Potpourri.
- SS-1 (Solid Surface) – Countertops – LX Hausys – HIMACS - Wallowa G157, Classic, Solid surface with 4" backsplash.
- PLAM-1 (Plastic Laminate) – Ishoprugby - Shaker Sand (SS), Premier Series.
- A walk-off carpet will not be needed.
- Activity suggested a need for Blackout Roller Shades with the lowering system that is accessible to adults only. Chain operated shades are not acceptable. The activity preferred lighter blackout roller shades (matching to standard rubber base - Tarkett/Johnsonite - TA8 Welsh Castle CB). If the light option is difficult to obtain due to custom color price, matching it to window trim (dark bronze) works well.
- Activity shared that Blackout Roller Shades could not be used at any time unless an emergency occurs. Within team will select the requested item.
- No Ceramic/Porcelain tile needed. Activity shared there is existing FRP on bathroom walls, toilet areas in children's classrooms, scullery, kitchen and janitor's closet walls. Luxury Vinyl tile on restroom/classroom restroom floors.
- General bathrooms' finishes will remain the same.
- Due to accreditation regulations, walls cannot receive wall coverings or accent walls.


- Child accessible cabinetry should not receive knobs instead it should have integrated cabinet pulls.
- Activity might need toilet partitions. Once clarified, Within will provide toilet partition options.

Finish Plans & Schedules

W:\32422 TT113 Mechanical Repairs\Revit\2406_TT113 WID_R23.rvt
6/12/2025 6:09:46 PM
File Path:
Print Date:

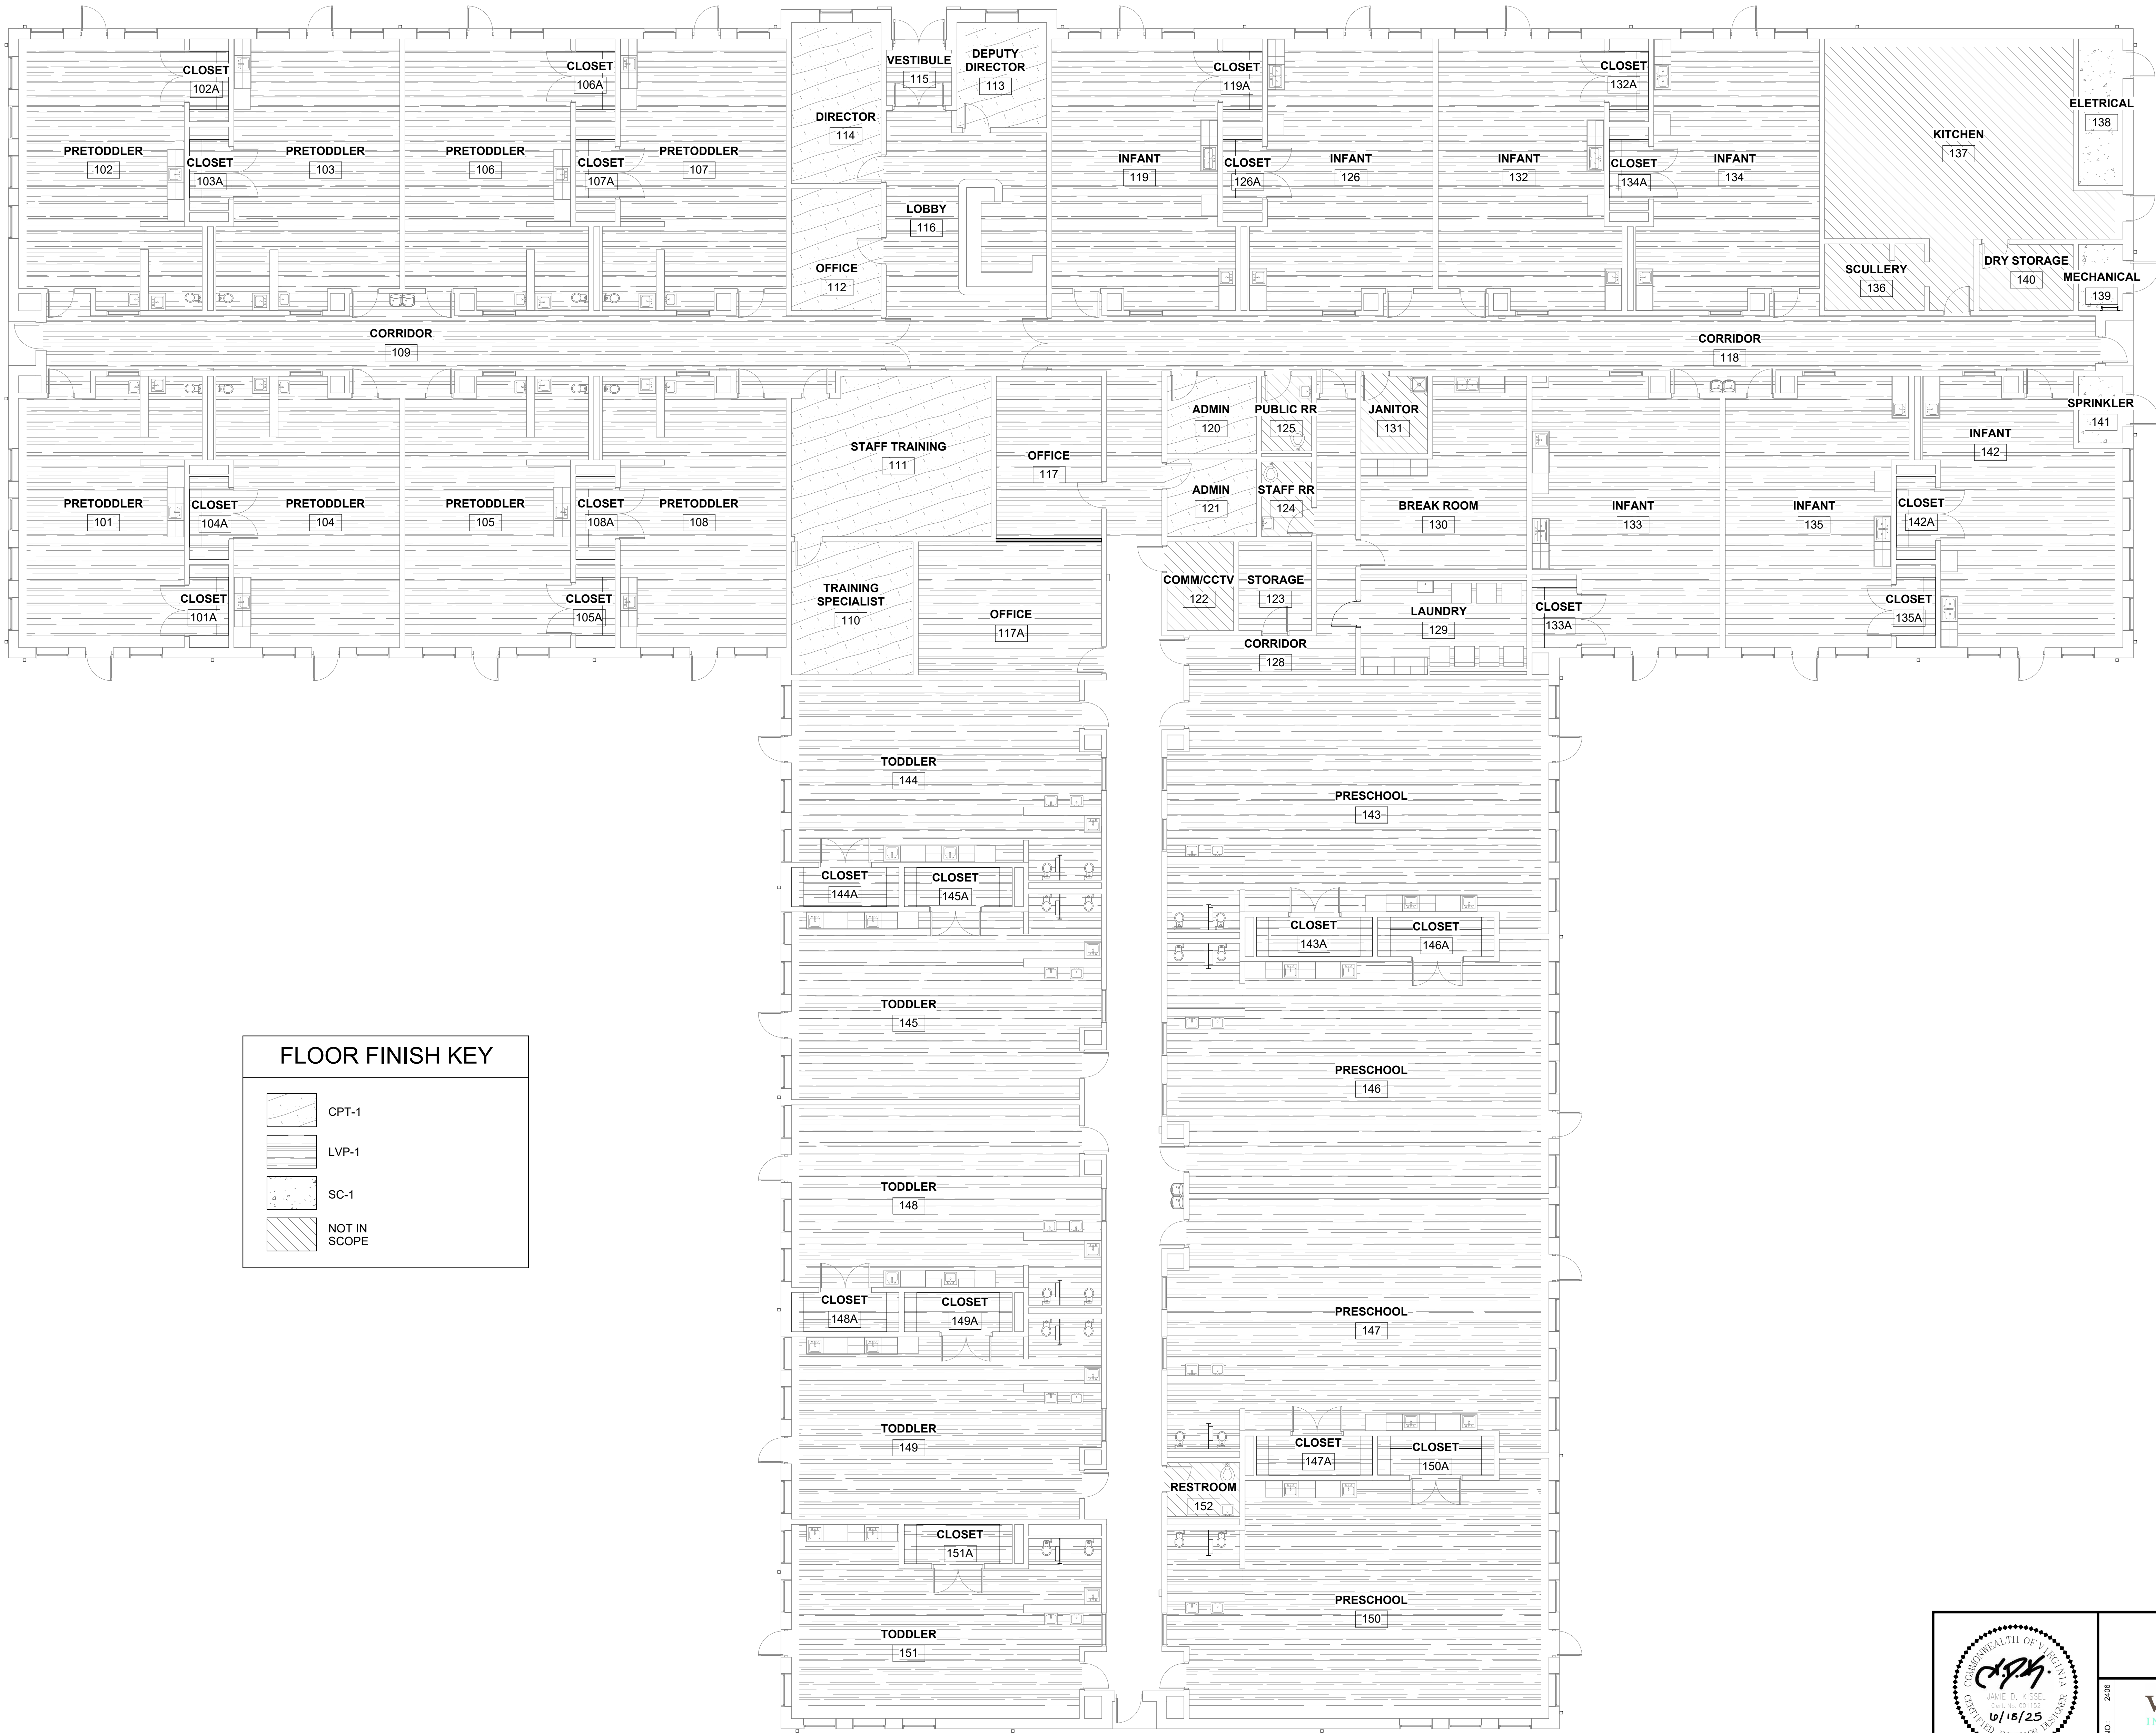

FLOOR FINISH KEY

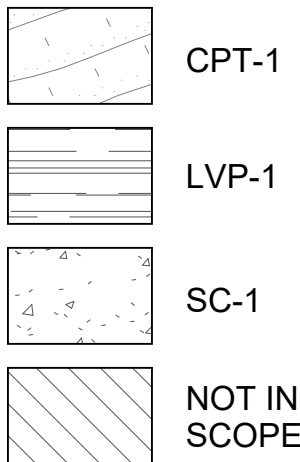

A1 FINISH PLAN

SCALE: 1/8" = 1'-0"

GRAPHIC SCALE:

1/8" = 1'-0" 0' 4' 8' 16'

REVISIONS

SYM.	DESCRIPTION	DATE	APP.

GENERAL NOTES

- FINISHES INDICATED ARE THE APPROVED BASIS OF DESIGN TO CONVEY COLOR, PATTERN, TEXTURE AND SALIENT CHARACTERISTICS ONLY. THE LISTING OF MANUFACTURER INFORMATION IS NOT INTENDED TO LIMIT THE SELECTION OF PRODUCTS PROVIDED BY OTHER MANUFACTURERS. PRODUCTS MEETING THESE CRITERIA WILL BE CONSIDERED AND MUST BE REVIEWED BY THE INTERIOR DESIGNER OF RECORD (IDOR) AND THE NAVFAC INTERIOR DESIGNER AND APPROVED BY THE CONTRACTING OFFICER.
- FINISH ITEMS ARE NOT TO BE SUBSTITUTED DUE TO ORDERING LEAD TIMES. IT IS THE CONTRACTOR'S RESPONSIBILITY TO ORDER ALL MATERIALS IN TIME TO AVOID DELAYS.
- COORDINATE THERMOSTAT LOCATIONS WITH MECHANICAL DRAWINGS AND CONSTRUCTION MANAGER. INSTALL THERMOSTATS NEAR A CORNER OF THE ROOM OR BY LIGHT SWITCHES. DO NOT INSTALL THERMOSTATS IN THE CENTER OF A WALL.
- ALL INTERIOR FINISHES IN VERTICAL EXIT WAYS, EXIT LOBBIES, AND EXIT CORRIDORS MUST MEET MINIMUM CLASS A RATING.
- ALL MATERIALS/PRODUCTS ARE TO BE INSTALLED PER MANUFACTURER'S INSTALLATION REQUIREMENTS.
- SPRAY PAINT ELECTRICAL PANELS, ACCESS PANELS, AND EXPANSION JOINTS TO MATCH THE ADJACENT WALL COLOR. PANELS PAINTED BY BRUSH ARE NOT ACCEPTABLE.
- ALL FLOORING TRANSITIONS MUST MEET ABA GUIDELINES. FLOORING TRANSITIONS OCCURRING UNDER DOORS MUST BE CENTERED UNDER DOOR.
- CONTRACTOR MUST MARK/TAPE ALL CABLES WITH THEIR DESIGNATED JACK NUMBER WHEN FACEPLATES ARE REMOVED FOR PAINTING. ALL CABLING IS REQUIRED TO BE RETESTED (PER 27 10 00) FROM FACEPLATE TO PANEL.
- ALL TELECOM MUST BE COVERED WHEN THE COMM/CCTV ROOM IS PAINTED.
- BACKBOARD MUST NOT BE PAINTED IN THE COMM/CCTV ROOM.
- ALL AREAS TO RECEIVE RESILIENT BASE (RB-1).
- ALL WALLS TO BE PAINTED (PNT-1) UNLESS OTHERWISE INDICATED. ALL HOLLOW METAL DOORS AND DOOR FRAMES TO BE PAINTED (PNT-4). ALL GWB CEILINGS TO BE PAINTED (PNT-5).
- ALL TOILET PARTITION TO BE HDPE FINISH (HDPE-1).
- ALL INTERIOR WOOD DOORS TO BE (WD-1).
- SEE I-601 & I-602 FOR ROOM FINISH SCHEDULE AND FINISH LEGEND.



within
INTERIOR DESIGN
1008 GRANBY STREET
NOVATO, CA 94945
707.994.0689

DEPARTMENT OF THE NAVY NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND

MARINE CORPS BASE

CAMP LEJEUNE, NORTH CAROLINA

MECHANICAL REPAIRS BUILDING TT113

FINISH PLAN

DES. JDK
DR. DMR
CHK. JDK
SUBMITTED BY:
DESIGN DR:
APPROVED: PWO OR OICC
DATE
SATISFACTORY TO:
DATE

SIZE CODE IDENT. NO.
NAVFAC DRAWING NO.
60042047
CONSTR. CONTR. NO. N40085-23-B-0044
SCALE AS NOTED SPEC. SHEET 40 OF 110


I-111

W:\32422\TT113 Mechanical Repairs\Revit\2406_TT113 WID_R23.rvt
6/12/2025 6:09:46 PM
File Path:
Print Date:


REVISIONS			
SYM.	DESCRIPTION	DATE	APP.

GENERAL NOTES


- A. FINISHES INDICATED ARE THE APPROVED BASIS OF DESIGN TO CONVEY COLOR, PATTERN, TEXTURE AND SALIENT CHARACTERISTICS ONLY. THE LISTING OF MANUFACTURER INFORMATION IS NOT INTENDED TO LIMIT THE SELECTION OF PRODUCTS PROVIDED BY OTHER MANUFACTURERS. PRODUCTS MEETING THESE CRITERIA WILL BE CONSIDERED AND MUST BE REVIEWED BY THE INTERIOR DESIGNER OF RECORD (IDOR) AND THE NAVFAC INTERIOR DESIGNER AND APPROVED BY THE CONTRACTING OFFICER.
- B. FINISH ITEMS ARE NOT TO BE SUBSTITUTED DUE TO ORDERING LEAD TIMES. IT IS THE CONTRACTOR'S RESPONSIBILITY TO ORDER ALL MATERIALS IN TIME TO AVOID DELAYS.
- C. COORDINATE THERMOSTAT LOCATIONS WITH MECHANICAL DRAWINGS AND CONSTRUCTION MANAGER. INSTALL THERMOSTATS NEAR A CORNER OF THE ROOM OR BY LIGHT SWITCHES. DO NOT INSTALL THERMOSTATS IN THE CENTER OF A WALL.
- D. ALL INTERIOR FINISHES IN VERTICAL EXIT WAYS, EXIT LOBBIES, AND EXIT CORRIDORS MUST MEET MINIMUM CLASS A RATING.
- E. ALL MATERIALS/PRODUCTS ARE TO BE INSTALLED PER MANUFACTURER'S INSTALLATION REQUIREMENTS.
- F. SPRAY PAINT ELECTRICAL PANELS, ACCESS PANELS, AND EXPANSION JOINTS TO MATCH THE ADJACENT WALL COLOR. PANELS PAINTED BY BRUSH ARE NOT ACCEPTABLE.
- G. ALL FLOORING TRANSITIONS MUST MEET ABA GUIDELINES. FLOORING TRANSITIONS OCCURRING UNDER DOORS MUST BE CENTERED UNDER DOOR.
- H. CONTRACTOR MUST MARK/TAPE ALL CABLES WITH THEIR DESIGNATED JACK NUMBER WHEN FACEPLATES ARE REMOVED FOR PAINTING. ALL CABLING IS REQUIRED TO BE RETESTED (PER 27 10 00) FROM FACEPLATE TO PANEL.
- I. ALL TELECOM MUST BE COVERED WHEN THE COMM/CCTV ROOM IS PAINTED.
- J. BACKBOARD MUST NOT BE PAINTED IN THE COMM/CCTV ROOM.
- K. ALL AREAS TO RECEIVE RESILIENT BASE (RB-1).
- L. ALL WALLS TO BE PAINTED (PNT-1) UNLESS OTHERWISE INDICATED. ALL HOLLOW METAL DOORS AND DOOR FRAMES TO BE PAINTED (PNT-4). ALL GWB CEILINGS TO BE PAINTED (PNT-5).
- M. ALL TOILET PARTITION TO BE HDPE FINISH (HDPE-1).
- N. ALL INTERIOR WOOD DOORS TO BE (WD-1).
- O. SEE I-601 & I-602 FOR ROOM FINISH SCHEDULE AND FINISH LEGEND.

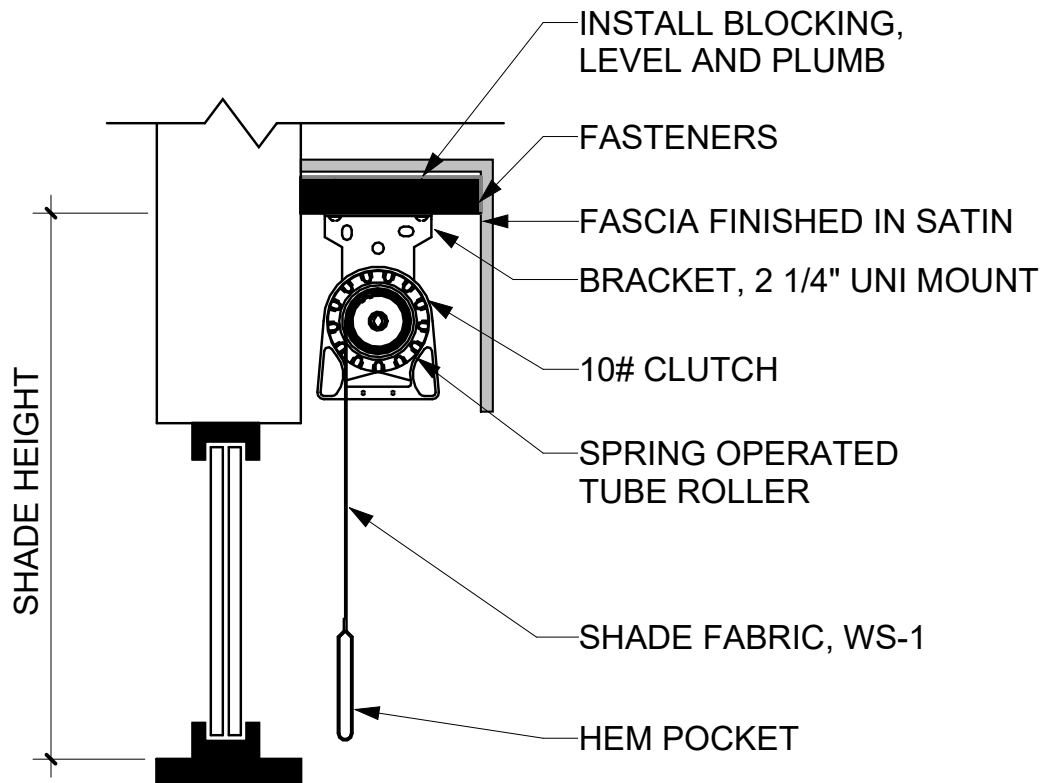


C1 SINGLE ROLLER SHADE DETAIL
SCALE: 3" = 1'-0"

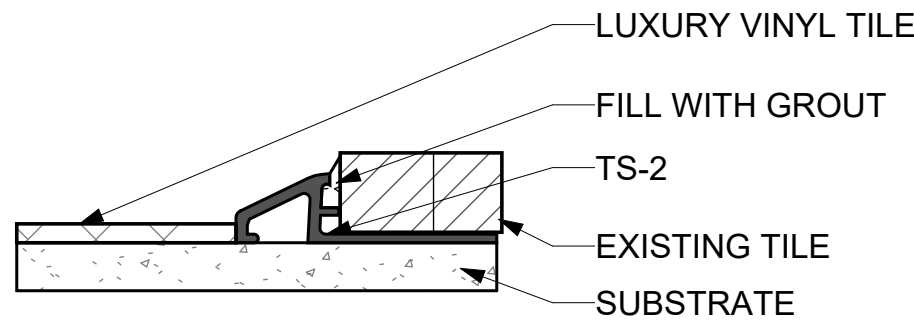


C3 LVT TO TILE DETAIL
SCALE: 12" = 1'-0"

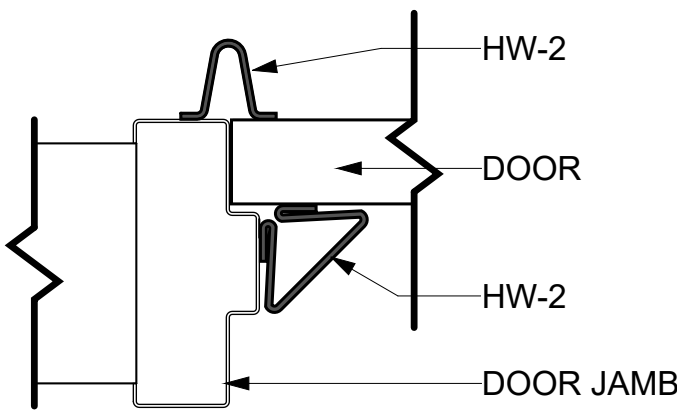

B1 FINGER PINCH GUARD DETAIL
SCALE: 3" = 1'-0"

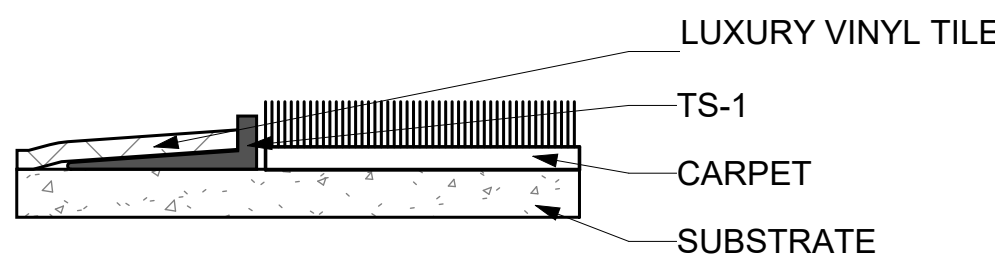

B3 LVT TO CARPET DETAIL
SCALE: 12" = 1'-0"

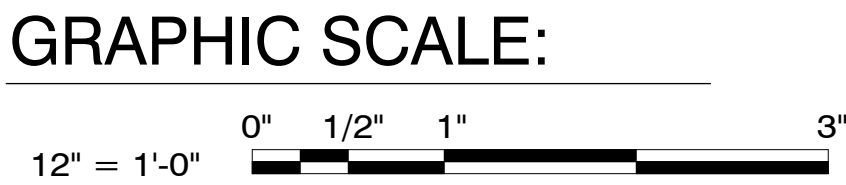

		I-501	
		2406  1008 GRANBY STREET NORFOLK, VA 23510 757.794.0689	DEPARTMENT OF THE NAVY NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND MARINE CORPS BASE CAMP LEJEUNE, NORTH CAROLINA
DES. <u>JDK</u> DR. <u>DMR</u> CHK. <u>JDK</u> SUBMITTED BY: DESIGN DR: APPROVED: PWO OR OICC DATE		MECHANICAL REPAIRS BUILDING TT113	
		SIZE E1 80091	NAVIFAC DRAWING NO. 60042048 CONSTR. CONTR. NO. N40085-23-B-0044
SATISFACTORY TO:		DATE	SCALE: AS NOTED SPEC: SHEET 41 OF 110

File Path: W:\2022 TT113 Mechanical Repairs\Revit\2406_TT113 WID_R23.rvt
Print Date: 6/12/2025 6:09:46 PM

REVISIONS			
SYM.	DESCRIPTION	DATE	APP.

GENERAL NOTES

- A. FINISHES INDICATED ARE THE APPROVED BASIS OF DESIGN TO CONVEY COLOR, PATTERN, TEXTURE AND SALIENT CHARACTERISTICS ONLY. THE LISTING OF MANUFACTURER INFORMATION IS NOT INTENDED TO LIMIT THE SELECTION OF PRODUCTS PROVIDED BY OTHER MANUFACTURERS. PRODUCTS MEETING THESE CRITERIA WILL BE CONSIDERED AND MUST BE REVIEWED BY THE INTERIOR DESIGNER OF RECORD (IDOR) AND THE NAVFAC INTERIOR DESIGNER AND APPROVED BY THE CONTRACTING OFFICER.
- B. FINISH ITEMS ARE NOT TO BE SUBSTITUTED DUE TO ORDERING LEAD TIMES. IT IS THE CONTRACTOR'S RESPONSIBILITY TO ORDER ALL MATERIALS IN TIME TO AVOID DELAYS.
- C. COORDINATE THERMOSTAT LOCATIONS WITH MECHANICAL DRAWINGS AND CONSTRUCTION MANAGER. INSTALL THERMOSTATS NEAR A CORNER OF THE ROOM OR BY LIGHT SWITCHES. DO NOT INSTALL THERMOSTATS IN THE CENTER OF A WALL.
- D. ALL INTERIOR FINISHES IN VERTICAL EXIT WAYS, EXIT LOBBIES, AND EXIT CORRIDORS MUST MEET MINIMUM CLASS A RATING.
- E. ALL MATERIALS/PRODUCTS ARE TO BE INSTALLED PER MANUFACTURER'S INSTALLATION REQUIREMENTS.
- F. SPRAY PAINT ELECTRICAL PANELS, ACCESS PANELS, AND EXPANSION JOINTS TO MATCH THE ADJACENT WALL COLOR. PANELS PAINTED BY BRUSH ARE NOT ACCEPTABLE.
- G. ALL FLOORING TRANSITIONS MUST MEET ABA GUIDELINES. FLOORING TRANSITIONS OCCURRING UNDER DOORS MUST BE CENTERED UNDER DOOR.
- H. CONTRACTOR MUST MARK/TAPE ALL CABLES WITH THEIR DESIGNATED JACK NUMBER WHEN FACEPLATES ARE REMOVED FOR PAINTING. ALL CABLING IS REQUIRED TO BE RETESTED (PER 27 10 00) FROM FACEPLATE TO PANEL.
- I. ALL TELECOM MUST BE COVERED WHEN THE COMM/CCTV ROOM IS PAINTED.
- J. BACKBOARD MUST NOT BE PAINTED IN THE COMM/CCTV ROOM.
- K. ALL AREAS TO RECEIVE RESILIENT BASE (RB-1).
- L. ALL WALLS TO BE PAINTED (PNT-1) UNLESS OTHERWISE INDICATED. ALL HOLLOW METAL DOORS AND DOOR FRAMES TO BE PAINTED (PNT-4). ALL GWB CEILINGS TO BE PAINTED (PNT-5).
- M. ALL TOILET PARTITION TO BE HDPE FINISH (HDPE-1).
- N. ALL INTERIOR WOOD DOORS TO BE (WD-1).
- O. SEE I-601 & I-602 FOR ROOM FINISH SCHEDULE AND FINISH LEGEND.

FINISH SCHEDULE KEY NOTES

1. CARPET TILE INSTALLATION TO BE VERTICAL ASHLAR PATTERN.
2. WINDOWS TO RECEIVE SINGLE LAYER ROLLER SHADE (WS-1). SEE DETAIL C1/I-502.

ROOM FINISH SCHEDULE						
ROOM		FLOOR FINISH	BASE FINISH	WALL FINISH	CEILING FINISH	NOTES
NO.	NAME					
101	PRETODDLER	LVP-1	RB-1	PNT-1	ACT-1	2
101A	CLOSET	LVP-1	RB-1	PNT-1	ACT-1	
102	PRETODDLER	LVP-1	RB-1	PNT-1	ACT-1	2
102A	CLOSET	LVP-1	RB-1	PNT-1	ACT-1	
103	PRETODDLER	LVP-1	RB-1	PNT-1	ACT-1	2
103A	CLOSET	LVP-1	RB-1	PNT-1	ACT-1	
104	PRETODDLER	LVP-1	RB-1	PNT-1	ACT-1	2
104A	CLOSET	LVP-1	RB-1	PNT-1	ACT-1	
105	PRETODDLER	LVP-1	RB-1	PNT-1	ACT-1	2
105A	CLOSET	LVP-1	RB-1	PNT-1	ACT-1	
106	PRETODDLER	LVP-1	RB-1	PNT-1	ACT-1	2
106A	CLOSET	LVP-1	RB-1	PNT-1	ACT-1	
107	PRETODDLER	LVP-1	RB-1	PNT-1	ACT-1	2
107A	CLOSET	LVP-1	RB-1	PNT-1	ACT-1	
108	PRETODDLER	LVP-1	RB-1	PNT-1	ACT-1	2
108A	CLOSET	LVP-1	RB-1	PNT-1	ACT-1	
109	CORRIDOR	LVP-1	RB-1	PNT-1	ACT-1	
110	TRAINING SPECIALIST	CPT-1	RB-1	PNT-1	ACT-1	1
111	STAFF TRAINING	CPT-1	RB-1	PNT-1	ACT-1	1
112	OFFICE	CPT-1	RB-1	PNT-1	ACT-1	1
113	DEPUTY DIRECTOR	CPT-1	RB-1	PNT-1	ACT-1	1,2
114	DIRECTOR	CPT-1	RB-1	PNT-1	ACT-1	1,2
115	VESTIBULE	LVP-1	RB-1	PNT-1	ACT-1	
116	LOBBY	LVP-1	RB-1	PNT-1	ACT-1	
117	OFFICE	LVP-1	RB-1	PNT-1	ACT-1	
117A	OFFICE	LVP-1	RB-1	PNT-1	ACT-1	
118	CORRIDOR	LVP-1	RB-1	PNT-1	ACT-1	
119	INFANT	LVP-1	RB-1	PNT-1	ACT-1	2
119A	CLOSET	LVP-1	RB-1	PNT-1	ACT-1	
120	ADMIN	CPT-1	RB-1	PNT-1	ACT-1	1
121	ADMIN	CPT-1	RB-1	PNT-1	ACT-1	1
122	COMM/CCTV	EXISTING	EXISTING	EXISTING	EXISTING	
123	STORAGE	LVP-1	RB-1	PNT-1	ACT-1	
124	STAFF RR	EXISTING	-	EXISTING	PNT-5	
125	PUBLIC RR	EXISTING	-	EXISTING	PNT-5	
126	INFANT	LVP-1	RB-1	PNT-1	ACT-1	2
126A	CLOSET	LVP-1	RB-1	PNT-1	ACT-1	
128	CORRIDOR	LVP-1	RB-1	PNT-1	ACT-1	
129	LAUNDRY	LVP-1	RB-1	PNT-1	ACT-1	
130	BREAK ROOM	LVP-1	RB-1	PNT-1	ACT-1	
131	JANITOR	EXISTING	-	EXISTING	PNT-5	
132	INFANT	LVP-1	RB-1	PNT-1	ACT-1	2
132A	CLOSET	LVP-1	RB-1	PNT-1	ACT-1	
133	INFANT	LVP-1	RB-1	PNT-1	ACT-1	2
133A	CLOSET	LVP-1	RB-1	PNT-1	ACT-1	
134	INFANT	LVP-1	RB-1	PNT-1	ACT-1	2
134A	CLOSET	LVP-1	RB-1	PNT-1	ACT-1	
135	INFANT	LVP-1	RB-1	PNT-1	ACT-1	2
135A	CLOSET	LVP-1	RB-1	PNT-1	ACT-1	
136	SCULLERY	EXISTING	-	PNT-1	PNT-5	
137	KITCHEN	EXISTING	-	PNT-1	PNT-5	
138	ELETRICAL	SC-1	-	PNT-1	PNT-5	
139	MECHANICAL	SC-1	-	PNT-1	PNT-5	
140	DRY STORAGE	EXISTING	-	PNT-1	PNT-5	
141	SPRINKLER	SC-1	-	PNT-1	PNT-5	
142	INFANT	LVP-1	RB-1	PNT-1	ACT-1	2
142A	CLOSET	LVP-1	RB-1	PNT-1	ACT-1	
143	PRESCHOOL	LVP-1	RB-1	PNT-1	ACT-1	2
143A	CLOSET	LVP-1	RB-1	PNT-1	ACT-1	
144	TODDLER	LVP-1	RB-1	PNT-1	ACT-1	2
144A	CLOSET	LVP-1	RB-1	PNT-1	ACT-1	
145	TODDLER	LVP-1	RB-1	PNT-1	ACT-1	2
145A	CLOSET	LVP-1	RB-1	PNT-1	ACT-1	
146	PRESCHOOL	LVP-1	RB-1	PNT-1	ACT-1	2
146A	CLOSET	LVP-1	RB-1	PNT-1	ACT-1	
147	PRESCHOOL	LVP-1	RB-1	PNT-1	ACT-1	2
147A	CLOSET	LVP-1	RB-1	PNT-1	ACT-1	
148	TODDLER	LVP-1	RB-1	PNT-1	ACT-1	2
148A	CLOSET	LVP-1	RB-1	PNT-1	ACT-1	
149	TODDLER	LVP-1	RB-1	PNT-1	ACT-1	2
149A	CLOSET	LVP-1	RB-1	PNT-1	ACT-1	
150	PRESCHOOL	LVP-1	RB-1	PNT-1	ACT-1	2
150A	CLOSET	LVP-1	RB-1	PNT-1	ACT-1	
151	TODDLER	LVP-1	RB-1	PNT-1	ACT-1	2
151A	CLOSET	LVP-1	RB-1	PNT-1	ACT-1	
152	RESTROOM	EXISTING	-	EXISTING	PNT-5	

COMMONWEALTH OF VIRGINIA CDPH JAMIE D. KISSEL 06/18/25 CERTIFIED INTERIOR DESIGNER	2406		I-601	
within INTERIOR DESIGN 1008 GRANBY STREET NOBERTS, VA 22070 757-894-0689	DEPARTMENT OF THE NAVY NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND		MARINE CORPS BASE	
		CAMP LEJEUNE, NORTH CAROLINA		
		MECHANICAL REPAIRS BUILDING TT113		
		SCHEDULES & LEGENDS		
DES. JDK		NAVFAC DRAWING NO.		
DR. DMR		60042049		
CHK. JDK		CONSTR. CONTR. NO. N40085-23-B-0044		
SUBMITTED BY:				
DESIGN DR.				
APPROVED: PWO OR OICC		DATE		
SATISFACTORY TO:		DATE		
SCALE AS NOTED		SHEET 42 OF 110		

REVISIONS			
SYM.	DESCRIPTION	DATE	APP.

GENERAL NOTES

- A. FINISHES INDICATED ARE THE APPROVED BASIS OF DESIGN TO CONVEY COLOR, PATTERN, TEXTURE AND SALIENT CHARACTERISTICS ONLY. THE LISTING OF MANUFACTURER INFORMATION IS NOT INTENDED TO LIMIT THE SELECTION OF PRODUCTS PROVIDED BY OTHER MANUFACTURERS. PRODUCTS MEETING THESE CRITERIA WILL BE CONSIDERED AND MUST BE REVIEWED BY THE INTERIOR DESIGNER OF RECORD (IDOR) AND THE NAVFAC INTERIOR DESIGNER AND APPROVED BY THE CONTRACTING OFFICER.
- B. FINISH ITEMS ARE NOT TO BE SUBSTITUTED DUE TO ORDERING LEAD TIMES. IT IS THE CONTRACTOR'S RESPONSIBILITY TO ORDER ALL MATERIALS IN TIME TO AVOID DELAYS.
- C. COORDINATE THERMOSTAT LOCATIONS WITH MECHANICAL DRAWINGS AND CONSTRUCTION MANAGER. INSTALL THERMOSTATS NEAR A CORNER OF THE ROOM OR BY LIGHT SWITCHES. DO NOT INSTALL THERMOSTATS IN THE CENTER OF A WALL.
- D. ALL INTERIOR FINISHES IN VERTICAL EXIT WAYS, EXIT LOBBIES, AND EXIT CORRIDORS MUST MEET MINIMUM CLASS A RATING.
- E. ALL MATERIALS/PRODUCTS ARE TO BE INSTALLED PER MANUFACTURER'S INSTALLATION REQUIREMENTS.
- F. SPRAY PAINT ELECTRICAL PANELS, ACCESS PANELS, AND EXPANSION JOINTS TO MATCH THE ADJACENT WALL COLOR. PANELS PAINTED BY BRUSH ARE NOT ACCEPTABLE.
- G. ALL FLOORING TRANSITIONS MUST MEET ABA GUIDELINES. FLOORING TRANSITIONS OCCURRING UNDER DOORS MUST BE CENTERED UNDER DOOR.
- H. CONTRACTOR MUST MARK/TAPE ALL CABLES WITH THEIR DESIGNATED JACK NUMBER WHEN FACEPLATES ARE REMOVED FOR PAINTING. ALL CABLING IS REQUIRED TO BE RETESTED (PER 27 10 00) FROM FACEPLATE TO PANEL.
- I. ALL TELECOM MUST BE COVERED WHEN THE COMM/CCTV ROOM IS PAINTED.
- J. BACKBOARD MUST NOT BE PAINTED IN THE COMM/CCTV ROOM.
- K. ALL AREAS TO RECEIVE RESILIENT BASE (RB-1).
- L. ALL WALLS TO BE PAINTED (PNT-1) UNLESS OTHERWISE INDICATED. ALL HOLLOW METAL DOORS AND DOOR FRAMES TO BE PAINTED (PNT-4). ALL GWB CEILINGS TO BE PAINTED (PNT-5).
- M. ALL TOILET PARTITION TO BE HDPE FINISH (HDPE-1).
- N. ALL INTERIOR WOOD DOORS TO BE (WD-1).
- O. SEE I-601 & I-602 FOR ROOM FINISH SCHEDULE AND FINISH LEGEND.

FINISH LEGEND						
NO.	NAME	LOCATION	MANUFACTURER	MODEL	COLOR	SIZE
ACG-1	ACOUSTICAL CEILING GRID	SUSPENDED CEILING (ACT-1)	ARMSTRONG CEILINGS	INTERLUDE XL HRC	WHITE	9/16"
ACT-1	ACOUSTICAL CEILING TILE	NON-GWB OR EXPOSED CEILINGS	ARMSTRONG CEILINGS	FINE FISSURED SQUARE LAY-IN	WHITE	24" X 24"
CPT-1	CARPET TILE W/ ATTACHED PAD	OFFICES	TARKETT	AFTERMATH II 03026	POTPOURRI 23510	24" x 24", VERTICAL ASHLAR
HDPE-1	HIGH DENSITY POLYETHYLENE	CLASSROOM TOILET AREAS	SCRANTON PRODUCTS	HINY HIDERS	ORANGE PEEL CHARCOAL	-
HW-2	FINGER PINCH GUARD	HINGE AND STOP SIDE OF INTERIOR DOORS	FINGER GUARD USA	FINGER KEEPER	GREY	LONG - FULL HEIGHT OF DOOR
LVP-1	LUXURY VINYL PLANK	CLASSROOMS & CORRIDORS	TARKETT	HERITAGE PLANK	ANTIQUE CIMARRON PEHP GW29 TG	6" X 36"
PLAM-1	PLASTIC LAMINATE	CASEWORK	RUGBY	PREMIER SERIES	SHAKER SAND	-
PNT-1	PAINT	PRIMARY WALLS	SHERWIN WILLIAMS	SW 6135	ECU	-
PNT-4	PAINT	DOOR FRAMES	SHERWIN WILLIAMS	SW 6080	UTTERLY BEIGE	-
PNT-5	PAINT	GWB CEILINGS	SHERWIN WILLIAMS	SW 7757	HIGH REFLECTIVE WHITE	-
RB-1	RUBBER BASE	PRIMARY BASE	TARKETT	COVE	TA8 WELSH CASTLE CB	4"H
SS-1	SOLID SURFACE	COUNTERTOPS	LG HIMACS	CLASSIC	WALLOWA G157	-
TS-1	TRANSITION STRIP	LVT TO CARPET	SCHLUTER	VINPRO-S	SATIN ANODIZED	-
TS-2	TRANSITION STRIP	LVT TO EXISTING TILE	SCHLUTER	RENO-U	SATIN ANODIZED	-
WS-1	BLACKOUT WINDOW SHADE	EXTERIOR WINDOWS	DRAPER	FLOCKE	LOUTRE/WHITE (BLACKOUT)	-

		I-602	
2406 within INTERIOR DESIGN 1008 GRANBY STREET NORFOLK, VA 23504 757.894.0689		DEPARTMENT OF THE NAVY NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND	
MARINE CORPS BASE		CAMP LEJEUNE, NORTH CAROLINA	
DES. JDK DR. DMR CHK. JDK SUBMITTED BY: DESIGN DR: APPROVED: PWO OR OICC DATE		MECHANICAL REPAIRS BUILDING TT113	
SATISFACTORY TO: DATE		SCHEDULES & LEGENDS	
E1 80091		NAVIFAC DRAWING NO. 60042050	
SCALE AS NOTED SPEC.		CONSTR. CONTR. NO. N40085-23-B-0044	
		SHEET 43 OF 110	

Finish Boards



ACT-1

Armstrong
Fine Fissured 24X24 Square Lay-In, White
*Image similar to finish



PNT-1 - Primary Wall Paint

Sherwin Williams
SW6135, Ecru



WS-1- Blackout

Draper
Flocke, Loutre/White



PNT-4 - Door Frame Paint

Sherwin Williams
SW 6080, Utterly Beige



CPT-1 - Carpet Tile - Private Offices - 24" x 24"

Tarkett


Aftermath II, Potpourii



LVT-1 - Luxury Vinyl Tile - Classrooms - 6" x 36"

Tarkett

Heritage Plank, Antique Cimarron

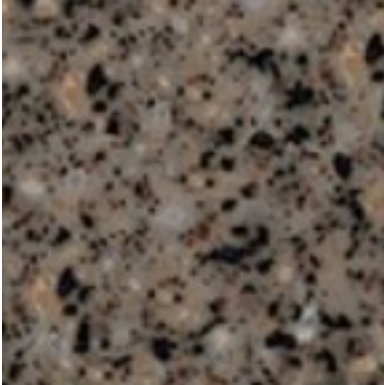

SS-1 - Solid Surface - Countertops

LX Hausys/HIMACS


Wallowa G157



PLAM-1 - Plastic Laminate - Casework

iShopRugby

Standard Laminate, Shaker Sand



RB-1 - Rubber Base - Primary Base

Johnsonite

Welsh Castle