


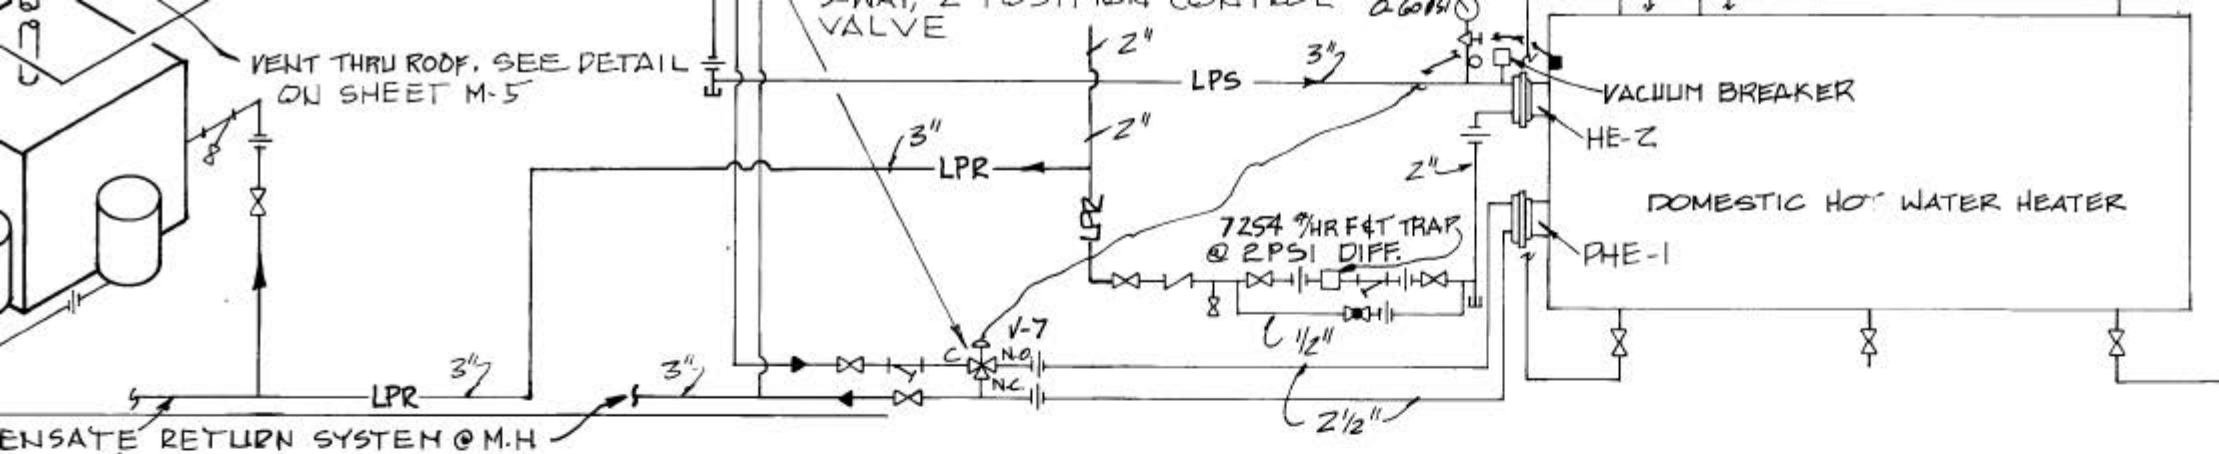

PRE-HEAT EXCH		
MARK	TEMP. ENT. COND. °F (APPROX.)	TEMP. LVG. COND. °F (APPROX.)
PHE-1	200°	125°

1. MINIMUM COIL LENGTH
2. DATA FOR PHE-1, TYPICAL

PIPING CONTROL SCHEMATIC FOR DOMESTIC HOT WATER

NO SCALE

Ⓟ	Ⓢ
1	2
1000	200
1000	200
7.3	.4
17,383	1350
31,423	1800
80.9	78
69.0	65
44	44
41040	1500
57.2	68
120	120
240	0
1"	3/4"
1/8 H.P.	95 WATTS
7.3	.4

CAPACITY @ HIGH FAN SPEED.
T. OF WATER
T. OF WATER
2 BOTH UNITS = 120/1/60

AIR COOLED CHILLER SELECTION		
UNIT DESIGNATION	ACC-1	ACC-2
BUILDING SERVED	ALL	ALL
MINIMUM TOTAL CAPACITY TONS	112	112
ENTERING WATER TEMP °F	54	54
LEAVING WATER TEMP °F	40	40
WATER FLOW, GPM	192	192
AMBIENT AIR TEMP., DB °F	95	95
MAXIMUM WATER PRESSURE DROP FT. WG	6.0	6.0
MAXIMUM UNIT KW	142.8	142.8
VOLTS/PHASE/HERTZ	460/3/60	460/3/60

1. CHILLER SHALL HAVE MINIMUM OF 4 STEPS OF CAPACITY REDUCTION
2. PROVIDE STARTER IN CHILLER ENCLOSURE

PUMP SCHEDULE								
UNIT DESIGNATION	P-1	P-2	P-3	P-4	P-5	P-6	P-7	P-8
TYPE SERVICE	CHILLED WATER	HEATING WATER	DOM. HW	SUMP	SUMP	CHW	CHW	CHW
BLDG SERVED	6	6	6	MECH.	6	2	1	4
WATER FLOW GPM	384	384	63	30	30	142	129	63
TOTAL HEAD, FT. W.G.	160	160	70	20	20	27	25	25
R. P. M.	3500	3500	1750	1750	1750	1750	1750	1750
MAX MOTOR H.P.	15	15	5	1/3	1/3	3	3	1
VOLTS/PHASE/HERTZ	208/3/60	208/3/60	208/3/60	120/1/60	120/1/60	208/3/60	208/3/60	208/3/60
PUMP TYPE	BASE MTD.	BASE MTD.	IN LINE	SUB.	SUB.	IN LINE	IN LINE	IN LINE
NEMA STARTER	SIZE 3	SIZE 3	SIZE 1	SIZE 0	SIZE 0	SIZE 0	SIZE 0	SIZE 0

EXHAUST FAN SCHEDULE		
UNIT DESIGNATION	EF-6	EF-1
NOTES	1,8	1,8
AIR FLOW, CFM	240	120
TOTAL STATIC PRES	.125 IN. WG.	.125 IN. WG.
LOCATION	IN-LINE	ROOF
AREA SERVED	LOUNGE	JAN. CLOSET
MAX. MOTOR H.P.	25 MHP	35 MHP
VOLTS/PHASE/HERTZ	120/1/60	120/1/60
FAN TYPE	CENTRIFUGAL	CENTRIFUGAL