

USNS ARCTIC			
(TAOE 8)			
HULL AND STRUCTURAL		CONTRACT NO. 2026 VRA	
ITEM NO. 0135	CATEGORY "A"	2026-02-05	
TAOE8 01 DECK GUARDRAIL RENEWAL		Bolan, John	

1.0 ABSTRACT

1.1 This item describes the renewal of 01 level deck guardrails and deteriorated posts.

2.0 REFERENCES/ENCLOSURE:

2.1 REFERENCE:

2.1.1 NAVSEA Drawing No. 570-6361019 Guardrails and Protective Guards
(T-AOE 6-8)

2.2 ENCLOSURE:

2.2.1 USNS Arctic Guardrails Exterior power point

3.0 ITEM LOCATION/DESCRIPTION

3.1 Location/Quantity

3.1.1 Located: On 01 Level Weather deck

3.2 Quantity/Description:

3.1.1 Twenty (20) 8' 12 Ga. Galv. W-Beam Guardrail without holes or equal.

3.1.2 Seventeen (17) 16' 12 Ga Galv. W-Beam Guardrail without holes or equal.

3.1.3 Forty four (44) 12 Ga. Galv. W-Beam Flared Ends.

3.1.4 175' linear feet of "T" steel beam, (5 1/4" x 4")

4.0 GOVERNMENT FURNISHED EQUIPMENT/MATERIAL/SERVICES:

4.1 Government Furnished Equipment (GFE): None

4.2 Government Furnished Material (GFM) None

4.3 Government Furnished Services (GFS): None

USNS ARCTIC			
(TAOE 8)			
HULL AND STRUCTURAL		CONTRACT NO. 2026 VRA	
ITEM NO. 0135	CATEGORY "A"	2026-02-05	
TAOE8_01 DECK GUARDRAIL RENEWAL		Bolan, John	

5.0 NOTES:

5.1 Contractor is to verify all dimensions and material requirements.

6.0 QUALITY ASSURANCE REQUIREMENTS:

6.1 None.

7.0 STATEMENT OF WORK REQUIRED

7.1 Contractor or provide new material as identified in Paragraph 3.0.

7.2 Remove, convey to shop, and replace with new W-beam guardrail indicated in paragraph 3.2. Use reference 2.1.1 and Enclosure 2.2.1 as guidance.

7.2.1 Misc hardware and interconnection pieces to be renewed with new CRES hardware.

7.3 Provide and install new support frames, approximately one hundred seventy five (175) linear feet of frames. Frame deck pad shall remain in place. Clad weld and grind smooth pitted pads, assume 100 linear feet of clad welding.

7.4 Align and drill new mounting holes in guardrails and frames.

7.5 New guard rails, frames, and brackets shall be ~~blasted and~~ painted with 2 coats of primer followed by one topcoat of safety yellow prior to installation.

7.5.1 Paint touch-ups to be completed following installation.

7.6 Paint all exterior surfaces, both new and disturbed, to match original. Contractor to utilize PPG Paint system requirements for exterior painting under supervision of MSC Paint Tech Representative.


8.0 GENERAL REQUIREMENTS:

8.1 None additional.

USNS ARCTIC			
(TAOE 8)			
HULL AND STRUCTURAL		CONTRACT NO. 2026 VRA	
ITEM NO. 0135	CATEGORY "A"	2026-02-05	
TAOE8_01 DECK GUARDRAIL RENEWAL		Bolan, John	



USNS ARCTIC			
(TAOE 8)			
HULL AND STRUCTURAL		CONTRACT NO. 2026 VRA	
ITEM NO. 0135	CATEGORY "A"		2026-02-05
TAOE8_01 DECK GUARDRAIL RENEWAL		Bolan, John	

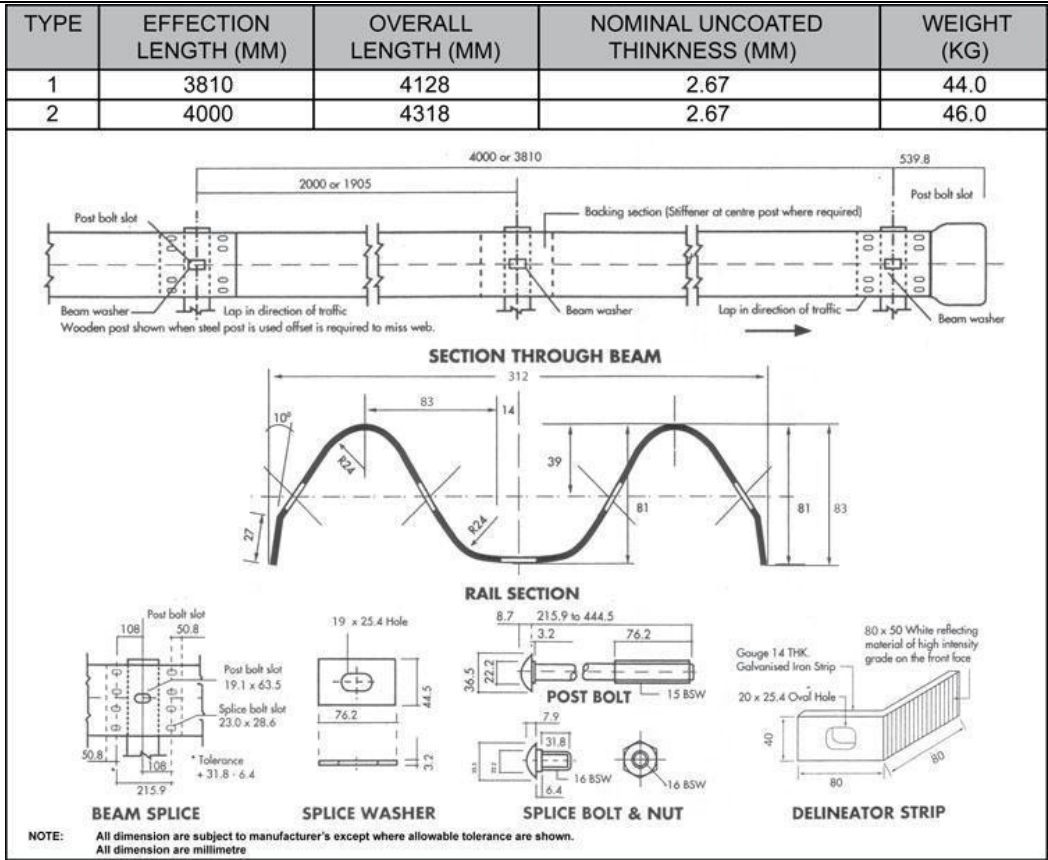

USNS ARCTIC
(TAOE 8)

0000

CONTRACT NO. N332205XXXX

ITEM NO. 0001

CATEGORY "NSP"

02/24/2026

TAOE-
SCOPE_GENERAL_REQUIREMENTS_AND_DEFINITIONS_VR_Package

TBD

1.0 ABSTRACT

This item describes the intent, scope, general requirements, and definitions that apply to this work package.

2.0 REFERENCES: None

3.0 ITEM LOCATION/DESCRIPTION

3.1 Aspects of the ship and shore support facilities as described in the work package.

4.0 GOVERNMENT FURNISHED EQUIPMENT/MATERIAL/SERVICES: None

5.0 NOTES: None

6.0 QUALITY ASSURANCE REQUIREMENTS: None additional

7.0 STATEMENT OF WORK REQUIRED

7.1 Scope

7.1.1 This work package, the accompanying contract, and contract guidance drawings define the scope of work to be performed.

7.1.2 In case of a difference or conflict between the referenced contract guidance drawings and the work items, the work items shall govern. Any omissions from the drawings, or from this work package, of details or work that is necessary to fulfill the intent of this work package or that is customarily performed in the industry, do not relieve the contractor from his/her obligation to perform such work. Notify the Administrative Contracting Officer (ACO) of any such issues as soon as the work package is reviewed, or such conflict is identified.

7.1.3 Provide labor and materials necessary to complete work items in the work package. Tag-out, (rearrange

USNS ARCTIC
(TAOE 8)

0000

CONTRACT NO. N332205XXXX

ITEM NO. 0001

CATEGORY "NSP"

02/24/2026

TAOE-
SCOPE_GENERAL_REQUIREMENTS_AND_DEFINITIONS_VR_Package

TBD

for order of activity) rig and unrig, connect and disconnect stage and un-stage, and remove, replace, and relocate any interference necessary to accomplish each work item in the work package. Unless specifically identified as government-furnished equipment or material (GFE/GFM), provide all equipment, material, and labor necessary to perform the contract.

7.1.4 Perform inspections, tests, and trials to demonstrate total compliance with the work package requirements.

7.2 General Requirements

7.2.1 Within the scope of this work package, complete each work item in accordance with appropriate GTRs as found in reference 2.1.

7.2.2 Where a work item has special requirements that differ from the GTRs, the requirements of the work item shall govern. Where there are no special requirements invoked, then the GTRs shall govern.

7.2.3 Work items and contract guidance drawings provided by the Government to the contractor do not fully describe all work required to meet regulatory requirements. Ensure that work complies with regulatory requirements in accordance with reference 2.1, GTR No. 1. The cost of meeting regulatory requirements shall be borne by the contractor. Provide the scheduling of American Bureau of Shipping (ABS) surveys and the cost and scheduling of all other regulatory services. The Government shall bear the costs of ABS ship surveys. Where a work item requires the contractor to develop working drawings and obtain ABS review and approval of those working drawings, the contractor shall bear these costs.

7.2.4 Where a work item does not cite any particular GTR, identify and perform in accordance with relevant GTRs. If any question arises as to the applicability, notify the on-site OMT REP and request further guidance.

USNS ARCTIC
(TAOE 8)

0000

CONTRACT NO. N332205XXXX

ITEM NO. 0001

CATEGORY "NSP"

02/24/2026

TAOE-
SCOPE_GENERAL_REQUIREMENTS_AND_DEFINITIONS_VR_Package

TBD

7.2.5 Provide all necessary compliance and approval certificates and documents and submit them to the OMT REP. This includes but is not limited to:

- a. Original stamped documents of each approved drawing for work performed during the availability.
- b. Original stamped documents of each regulatory test and inspection performed during the availability.
- c. A chronological file of all correspondence between the contractor (or sub-contractor) and all regulatory bodies.
- d. Prepare and submit reports, drawings, and other documents required per the above paragraphs in accordance with the Contract Data Requirements List (CDRL).

7.3 Definitions: The following terms in alphabetical order shall have meanings as indicated below:

7.3.1 Administrative Contracting Officer (ACO) - Means the MSC designated contracting officer.

7.3.2 Article - means a separately lettered part of a work item of the work package. Articles in different items may bear the same number; hence, to identify an article completely, the item of which it is a part must be specified.

7.3.3 As-designed - means a condition meeting the original system and manufacturer's design.

7.3.4 As-found - means the condition which was found upon close inspection by the contractor. The resulting report will discuss all major components and sub-components as functional or degraded and needing specified repairs. When

USNS ARCTIC
(TAOE 8)

0000

CONTRACT NO. N332205XXXX

ITEM NO. 0001

CATEGORY "NSP"

02/24/2026

TAOE-
SCOPE_GENERAL_REQUIREMENTS_AND_DEFINITIONS_VR_Package

TBD

reporting an as-found condition, the information shall be stated clearly, concisely, and with enough detail so as to allow for preparation of a work statement and estimate. Include annotated sketches, graphs, and photographs when necessary to make a report clearly understandable to the OMT REP. Identify actual readings/dimensions taken. When a work item does not require a report, and one is determined to be necessary in order to produce a reliable or complete repair, submit one legible copy, in hard copy or electronic media, of a report with supporting data as early as possible in the contract period, so as to have the additional work completed within the original contract period.

7.3.5 As-released - means the condition of the item that exists at the time it is returned to the government. Include annotated sketches, graphs, and photographs when necessary to make a report clearly understandable to the OMT REP. Identify actual readings/dimensions taken. It shall include a summary of corrective actions made by the contractor and list any known remaining degraded conditions.

7.3.6 Category A - means a work item for which a firm fixed price has been established in the base contract, which will be executed during the period of performance.

7.3.7 Category B - means a work item which identifies additional optional repairs, labor, and materials or for which a firm fixed price has been established in the base contract, which may, or may not be invoked by the ACO during the period of performance.

7.3.8 Contractor furnished equipment (CFE) and contractor furnished material (CFM) - means the contractor provides the specified equipment or material used in the work item. Anything not identified as GFE/GFM shall be considered contractor furnished. This includes, for example, items alternatively described as installing activity furnished or vendor furnished.

USNS ARCTIC
(TAOE 8)

0000

CONTRACT NO. N332205XXXX

ITEM NO. 0001

CATEGORY "NSP"

02/24/2026

TAOE-
SCOPE_GENERAL_REQUIREMENTS_AND_DEFINITIONS_VR_Package

TBD

7.3.9 COMSC - means the Commander, Military Sealift Command.

7.3.10 Contracting Officer's Representative (COR) - is an individual designated in accordance with DFARS subsection 201.602-2 and authorized in writing by the Contracting Officer to perform specific technical or administrative functions.

7.3.11 Contracting Officer - identifies the Contracting Officer as identified in the award or as otherwise designated by the government or MSC.

7.3.12 Contractor - identifies the shipyard holding the prime contract for the work specified in this work package.

7.3.13 Delivery - means the time when the contractor accepts the ship into their custody. The point where the ship is delivered is stated in the "DELIVERY AND REDELIVERY" Standard Work Item - 018.

7.3.14 Detach or disconnect - means to disconnect all attachments to the unit prior to moving it. Attachment points shall be tagged, identified, blanked, and protected to facilitate reinstallation. Work items do not necessarily identify interferences, and the contractor is responsible for the identification and resolution of interferences affecting a detachment and subsequent movement.

7.3.15 Extend - See install definition.

7.3.16 General Technical Requirements (GTRs) - defines the standards of performance for work being performed by contractors, see reference 2.1.

7.3.17 Government furnished equipment (GFE) and Government furnished materials (GFM) - means the government provides the specified equipment or material used in the work item.

USNS ARCTIC
(TAOE 8)

0000

CONTRACT NO. N332205XXXX

ITEM NO. 0001

CATEGORY "NSP"

02/24/2026

TAOE-
SCOPE_GENERAL_REQUIREMENTS_AND_DEFINITIONS_VR_Package

TBD

7.3.18 Hazwaste - means hazardous wastes that the Conservation and Recovery Act (RCRA) identifies in one of four hazardous waste lists (F-list - 40 Code of Federal Regulations (CFR) 261.31; K-list - 40 CFR 261.32; P-list 40 CFR 262.32; or U-list 40 CFR 261.32; or exhibit at least one of four characteristics - ignitability, corrosivity, reactivity or toxicity, as defined in 40 CFR Part 261, Subpart C.

7.3.19 Inspect - means to examine and assess the condition of a particular item or system and provide report with recommendation for repair and material.

7.3.20 Install, extend, and modify - means provide the piece of equipment, material, or system to be installed, extended or modified and provide the materials, structural supports, and labor to attach, connect, and test the equipment or system to effect a finished fully operational installation. In addition:

- a. When new material or equipment is not specified by type, the material or equipment shall be identical to the existing material or equipment. When install is used with reference to GFE, conditions of the above definition are applicable, except the requirement to provide the piece of equipment.
- b. Work items do not necessarily identify interferences and the contractor shall identify and resolve interferences affecting the installation by temporarily removing, reinstalling, or relocating interferences upon approval of OMT REP. Temporarily remove, relocate, alter, and reroute all interferences, including but not limited to, ductwork, piping, wire-ways, fixtures, insulation, joiner linings, equipment, furniture, etc., to facilitate finished fully operational installations and

USNS ARCTIC
(TAOE 8)

0000

CONTRACT NO. N332205XXXX

ITEM NO. 0001

CATEGORY "NSP"

02/24/2026

TAOE-
SCOPE_GENERAL_REQUIREMENTS_AND_DEFINITIONS_VR_Package

TBD

modifications covered by this work package. In the event that piping, ductwork, equipment, linings, etc., must be temporarily removed to facilitate installation of new or modified work, subsequently reinstall same in an as original condition. This includes but is not limited to; preservation systems, restoring floor coverings and joiner work, replacing items and equipment removed for access, plugging wiring and pipe penetrations, and restoring all other disturbed areas to match the surrounding areas. Disturbed coating shall be repaired.

7.3.21 Interference - means any object(s), equipment(s), system(s), or component(s) that must be removed and reinstalled, relocated, modified or designed around to facilitate the installation of new, repaired or modified equipment or systems.

7.3.22 Labor and Materials - means labor, materials, parts, plant facilities, supervision, services, tools, equipment, and any other resources required to accomplish the specified work.

7.3.23 Manifests - are the official shipping document forms originated and signed by the generators, transporters, and operators of the hazardous waste disposal facility, as required by federal, state, or local regulations.

7.3.24 MSC drawing - means contract guidance drawing.

7.3.25 MSC representative (MSCREP) - means the principal port engineer (PPE) for the period of performance and may be delegated to an assistant port engineer (APE) or a ship's officer assigned to work with the ACO.

7.3.26 OMT REP approval - means OMT REP written concurrence with the general method of construction and detailing as presented by the contractor and does not relieve

USNS ARCTIC
(TAOE 8)

0000

CONTRACT NO. N332205XXXX

ITEM NO. 0001

CATEGORY "NSP"

02/24/2026

TAOE-
SCOPE_GENERAL_REQUIREMENTS_AND_DEFINITIONS_VR_Package

TBD

contractor responsibility for any error.

7.3.27 OMT REP, OMTREP - For MSC ships where ship is run by an Operating Company (OPCO) OMT REP means; OPCO Senior Management Team consisting of OPCO Program Manager, OPCO Port Engineer and OPCO Contracting Officer. OPCO Contracts often have a Government Port Engineer (GPE) assigned who is a full time MSC representative whose function is to provide MSC Program Manager (PM) real time status of availability progress, and firsthand information on issues, change order requirements, work quality and work completion. The GPE does not have contractual authority but they are the primary liaison between OPCO and MSC PM whose purpose is to expedite decision making in the SY environment. For Ships operated by United States Government Employees, OMT REP is synonymous with MSC representative (MSCREP), see definition for MSC representative.

7.3.28 Non-destructive testing (NDT) - means analyzing the properties and condition of a material, component or system without causing damage and is employed to determine acceptability. Testing shall utilize currently calibrated equipment and certified testing personnel and procedures in accordance with applicable classification society and regulatory bodies requirements.

7.3.29 None additional or none - means that there are no additional requirements beyond those contained in the GTRs and work items that make up the work package. Where specific requirements are set forth in articles 6.0, 7.0 or 8.0 of a work item, such requirements are in addition to those requirements listed in the GTRs and work items that make up the work package.

7.3.30 Not separately priced (NSP) - means a work item which defines the general requirements, standards and conditions the contractor shall meet during the period of performance. NSP work items are not biddable items and do not represent a cost to the government.

USNS ARCTIC
(TAOE 8)

0000

CONTRACT NO. N332205XXXX

ITEM NO. 0001

CATEGORY "NSP"

02/24/2026

TAOE-
SCOPE_GENERAL_REQUIREMENTS_AND_DEFINITIONS_VR_Package

TBD

7.3.31 Or equal - means that components, materials or equipment shall be equal or equivalent in terms of quality, performance (flow rate, pressure, heat transfer characteristics, etc.), services required (power, cooling water, HVAC, etc.), compatibility with interrelated systems and arrangements, and supportability over the service life of the components, material or equipment. In the case of components, materials, or equipment substitution for those items noted in the contract guidance drawings or work package, the contractor shall submit a written request delineating the design and performance data on both the specified and substituted piece of equipment for OMT REP approval, and if approved, the contractor shall take full contractual and technical responsibility for ensuring installation of the components, materials or equipment are compatible with the interrelated systems.

7.3.32 Qualified welders - means welders, whether contractor or subcontractor provided, shall hold qualification documentation from ABS and USCG for the material to be welded. Welding procedures shall be approved by the ABS Surveyor for the work specified in the work items. Qualifications and procedures shall be provided to the OMT REP upon request.

7.3.33 Redelivery - means the time that the OMT REP accepts the ship back from the contractor.

7.3.34 Refurbish - means to temporarily remove, disassemble, clean, inspect, a unit, part, equipment, or system, and then submit an as-found condition report to the OMT REP if the refurbishment is recommended. If the OMT REP concurs, the contractor shall lubricate, reassemble the unit, equipment or system, set and adjust in accordance with manufacturer's specifications, test the unit, equipment, or system to demonstrate proper function to the manufacturer's specifications, and submit an as-released condition report to the OMT REP. The reinstalled refurbished unit, equipment, or system shall be fully operational and complete in all aspects. New screws, bolts, nuts, washers, gaskets, packing bearings, O-

USNS ARCTIC
(TAOE 8)

0000

CONTRACT NO. N332205XXXX

ITEM NO. 0001

CATEGORY "NSP"

02/24/2026

TAOE-
SCOPE_GENERAL_REQUIREMENTS_AND_DEFINITIONS_VR_Package

TBD

rings, and shims shall be used when reassembling and reinstalling the unit, equipment, or system. Additional information concerning the location of equipment refurbishment, special processes to be used in the refurbishment, and additional parts to be replaced during refurbishment shall be as specified in the individual work items.

7.3.35 Reinstall - means that the contractor shall provide labor and material to install a unit, part, equipment, material, or system after the unit, part, equipment, material, or system was temporarily removed, relocated, modified, or refurbished. The requirements of an installation as set forth in paragraphs 7.3.20, 7.3.20.a, and 7.3.20.b above with regard to completeness, operation, testing, the identification and resolution of interferences, etc. also these requirements apply to a reinstallation.

7.3.36 Relocate - means to provide labor and materials to detach the unit, part, equipment, or system and to reinstall the same unit, equipment, or system at a new or modified location. The requirements of an installation as set forth in paragraphs 7.3.20, 7.3.20.a, and 7.3.20.b above with regard to completeness, operation, testing, the identification and resolution of interferences, etc. also apply to relocation.

7.3.37 Remove or rip out - means to provide labor and materials to disconnect, detach, and transfer the unit, part, equipment, materials, or system in its entirety off the ship as specified in the GTR. Supports, stuffing tubes, collars, and other appurtenances shall be removed by burning, chipping, or cutting when a work item requires machinery, piping, wiring, ducting, structure, outfitting, joiner, or equipment removal. Areas affected by removals/rip outs shall be restored as set forth in paragraph 7.3.20.b:

- a. When the work package requires the removal of machinery, piping, wiring, ducting, structure, outfitting, joiner, or equipment removal,

USNS ARCTIC
(TAOE 8)

0000

CONTRACT NO. N332205XXXX

ITEM NO. 0001

CATEGORY "NSP"

02/24/2026

TAOE-
SCOPE_GENERAL_REQUIREMENTS_AND_DEFINITIONS_VR_Package

TBD

supports, stuffing tubes, collars, and other appurtenances shall be removed by burning, chipping, or cutting, stubs, rough spots, and other surface irregularities shall be ground smooth and flush with adjacent surfaces. Once tasked work in the affected area is complete, the areas affected by the removal shall be restored to their original condition. This includes, but is not limited to, preservation system, restoring floor coverings and joiner work, painting, replacing items and equipment removed for access, plugging wiring and pipe penetrations, and restoring all other disturbed areas to match the surrounding areas. Disturbed coatings shall be repaired to match the surrounding area.

- b. After removing the machinery, piping, wiring, ducting, structure, outfitting, joiner, or equipment removal, supports, stuffing tubes, collars, or other appurtenances, watertight or fire zone boundaries shall be reestablished. Holes in oil tight, watertight, and gas tight boundaries and structural bulkheads shall be blanked with flush inserts providing structural integrity and tightness equal to that which they replace. Holes in non-structural steel and steel joiner bulkheads may be blanked with lapped plates.
- c. When the electrical wiring requiring removal joins a circuit that is not being removed (i.e. at a junction box), the electrical wiring or cable shall be entirely removed to the junction point. All other attachments including, but not limited to, fasteners, supports, and brackets shall be entirely removed. When electric cable is designated for removal, it shall be

USNS ARCTIC
(TAOE 8)

0000

CONTRACT NO. N332205XXXX

ITEM NO. 0001

CATEGORY "NSP"

02/24/2026

TAOE-
SCOPE_GENERAL_REQUIREMENTS_AND_DEFINITIONS_VR_Package

TBD

physically and electrically traced to the power source and the circuit de-energized before removing the cable. When cable is removed from multiple cable runs, the remaining cables shall be bound and strapped.

7.3.38 Replace or renew - means to remove the unit, equipment, or systems including interferences, and to install a new unit, equipment, or system which is either identical to or equal to that which was removed; the installation shall include, but not be limited to, any hook-ups, supports, and adapters, which are required to effect a finished fully operational installation complete in all aspects.

7.3.39 Restore - means to perform those processes (including, but not limited to, weld build-up, chrome plate, machine, grind, lap, NDT, etc.) which are required to return a component to the manufacturer's specifications regarding dimensions, tolerances, angles, surface finish and clearances.

7.3.40 Section - means a major part of the work package and shall include a group of related work items.

7.3.41 Specification - means either a single work item or a complete set of work items.

7.3.42 Tag out - means a procedure to both notify personnel that tagged-out equipment, components, or systems are either isolated or not in a normal operating condition and to prevent injury to personnel, improper operation, or damage to the tagged-out equipment, components, or systems.

7.3.43 Temporary installation or temporarily install - means to provide labor and materials to install the unit, material, equipment or system to completely provide the function described in the individual work item, and to remove the same unit, material, equipment or system prior to redelivery of vessel or to satisfactorily meet the requirements of the individual work item(s). All the requirements of an

USNS ARCTIC
(TAOE 8)

0000

CONTRACT NO. N332205XXXX

ITEM NO. 0001

CATEGORY "NSP"

02/24/2026

TAOE-
SCOPE_GENERAL_REQUIREMENTS_AND_DEFINITIONS_VR_Package

TBD

installation and removal set forth in paragraphs 7.3.20, 7.3.20.a, 7.3.20.b and 7.3.37 with regard to completeness, operation, testing, the identification and resolution of interferences, disconnection, detachment and transfer of the unit, material, equipment, or system in its entirety off the ship as specified in the GTR apply to a temporary installation and subsequent removal.

7.3.44 Temporary removal or temporarily remove - means to provide labor and material to disconnect and move the unit, equipment, or system from its initial location, and to reinstall the same unit, equipment, or system either in the same location or elsewhere on the ship as described in the work package. All the requirements of an installation as set forth in paragraphs 7.3.20, 7.3.20.a, and 7.3.20.b with regard to completeness, operation, testing, the identification and resolution of interferences, etc. also apply to a temporary removal and reinstallation.

7.3.45 Work item or item - means a separately numbered part of the work package describing a discrete portion of the work to be accomplished.

7.3.46 Work package - means the entire written portion of the contract including the Master Ship Repair Agreement, the contract provisions, work items, and the GTRs.

8.0 GENERAL CONDITIONS

8.1 The following conditions apply to each work item in this work package and are intended to outline the minimum acceptable quality of material, workmanship, and practice.

8.1.1 Where laws, regulations, requirements, or commercial standards are referred to herein, the latest revision that is in effect on the date of the solicitation shall be applicable.

8.1.2 The contractor shall be held responsible for

USNS ARCTIC
(TAOE 8)

0000

CONTRACT NO. N332205XXXX

ITEM NO. 0001

CATEGORY "NSP"

02/24/2026

TAOE-
SCOPE_GENERAL_REQUIREMENTS_AND_DEFINITIONS_VR_Package

TBD

the protection of existing and newly installed equipment and materials and the storage and preservation of GFM/GFE. Any equipment that is damaged by the contractor and determined unusable by the OMT REP due to improper storage and preservation shall be replaced, repaired, or restored at the contractor's expense as directed by the OMT REP.

8.1.3 Materials and workmanship shall be subject to the OMT REP's inspection and approval at all times. Workmanship and materials found to be defective or not in conformity with regulatory requirements, or this work package and its associated approved drawings shall be cause for rejection and removal at the contractor's expense.

8.1.4 Prepare and submit reports, drawings, and other documents required by the work package in accordance with the contract data requirements list (CDRL).

8.1.5 Equipment, furnishings, and materials removed, including scrap, except those specified for relocation or otherwise designated by OMT REP, are to be disposed of by the contractor at the contractor's expense, except for material requiring disposal as a hazardous waste, which shall be disposed of in accordance with work item titled, Hazardous Waste Disposal at a Contractor's Facility.

8.1.6 Install suitable protective devices on equipment, which presents a hazard to personnel. These may be carrier guards or other approved devices and shall preclude personnel injury. Examples of equipment which require protective devices are those which contain exposed rotating parts, fan blades, belts, pulleys, flywheels, wire rope reels, etc.

8.1.7 Design, workmanship, equipment, and materials must conform to commercial maritime standards such as USCG regulations, the International Regulations for Preventing Collisions at Sea (COLREGS), Navigation and Vessel Inspection

USNS ARCTIC
(TAOE 8)

0000

CONTRACT NO. N332205XXXX

ITEM NO. 0001

CATEGORY "NSP"

02/24/2026

TAOE-
SCOPE_GENERAL_REQUIREMENTS_AND_DEFINITIONS_VR_Package

TBD

Circulars (NVIC), and associated documents incorporated by reference in the aforementioned for marine inspection, and rules set forth by the ABS, U.S. Public Health Service (USPHS) regulations, International Maritime Organization (IMO), Safety and Life at Sea (SOLAS), Institute of Electrical and Electronics Engineers (IEEE) 45 and American National Standards Institute (ANSI) A17.1 (for elevators) and other applicable standards. The references required for conformance are either publicly or commercially available. Contractors are expected to have on hand any required commercially available reference which cannot be provided due to copyright restrictions.

8.1.8 Unless specifically approved by the OMT REP, contractor furnished equipment and materials shall be new. New materials and contractor furnished equipment must have traceable material documentation. The costs of ABS ship survey will be borne by the Government. The cost of other regulatory service expenses shall be borne by the contractor.

8.1.9 Conduct megger insulation resistance test (phase to phase and phase to ground) on new power cable installations and on existing disconnected and reused power cables.

8.1.10 Bond/ground equipment which is modified or installed by this work package. All bonding and bonding straps shall be in compliance with procedures and practices delineated by regulatory and professional agencies and organizations to include ABS Rules for Shipbuilding, and IEEE requirements.

8.1.11 Where rip outs leave openings in structures, decks, or shell plating, suitable insert plates or reinforced structures of equal material shall be installed to close the openings.

8.2 Hazardous Material

8.2.1 All material shall be asbestos and PCB free. If material that contains asbestos or PCB is inadvertently

USNS ARCTIC
(TAOE 8)

0000

CONTRACT NO. N332205XXXX

ITEM NO. 0001

CATEGORY "NSP"

02/24/2026

TAOE-
SCOPE_GENERAL_REQUIREMENTS_AND_DEFINITIONS_VR_Package

TBD

specified on a contract guidance drawing or other document, the contractor shall substitute an equivalent non-asbestos or non-PCB material and notify the OMT REP in writing prior to making any changes. This will not result in any adjustments to the contract.

8.2.2 All paint and coatings shall be lead free. Coal tar and coatings containing organic tin or zinc chromate shall not be used. If these materials have been inadvertently specified, the contractor shall substitute an equivalent lead free, tar free, etc. paint or coating and notify the OMT REP without any adjustment of the contract.

8.2.3 The contractor may find materials aboard the ship which are hazardous to health. These include, but are not limited to, asbestos, coatings containing lead compounds and zinc chromate, and ventilation gaskets and electrical cable containing PCBs. In the event that hazardous materials are identified, the contractor shall notify the OMT REP immediately and in writing.

USNS WILLIAM MCLEAN		
(T-AKE 12)		
GENERAL SERVICES AND REQUIREMENTS	CONTRACT NO. XXXX	
ITEM NO. 0002	CATEGORY "N"	2024-02-26
TAKE-SWI-TECHNICAL AND MANUFACTURERS REPRESENTATIVE	Maksimowicz, Andrew, J	

1.0 ABSTRACT

This item sets general requirements for Technical and Manufacturer's Representatives.

2.0 REFERENCES: None

3.0 ITEM LOCATION/DESCRIPTION: None

4.0 GOVERNMENT FURNISHED EQUIPMENT/MATERIAL/SERVICES: None

5.0 NOTES

5.1 The contractor and all subcontractors regardless of tier shall consult the General Technical Requirements (GTR) item 024, to determine applicability to this item. In performance of work items in this package, the contractor and all subcontractors regardless of tier must comply with the requirements of GTR 024, where specified in an individual work item.

6.0 QUALITY ASSURANCE REQUIREMENTS: None additional

7.0 STATEMENT OF WORK REQUIRED

7.1 The work item(s) specification(s) contained in the solicitation may require the contractor to furnish technical representatives or may indicate or may not indicate that Government furnished technical representative(s) will be on site. When any such instances are indicated in the work item(s) specification(s), the following shall apply:

7.2 Contractor furnished technical representatives:

7.2.1 The contractor shall furnish the services of a qualified technical representative that is:

- a. An employee of the original equipment

USNS WILLIAM MCLEAN		
(T-AKE 12)		
GENERAL SERVICES AND REQUIREMENTS	CONTRACT NO. XXXX	
ITEM NO. 0002	CATEGORY "N"	2024-02-26
TAKE-SWI-TECHNICAL AND MANUFACTURERS REPRESENTATIVE	Maksimowicz, Andrew, J	

manufacturer (OEM)

- b. Authorized by the OEM; or
- c. Approved by MSC

7.2.2 The contractor, in order to obtain MSC approval for an OEM authorized technical representative shall provide a copy of a valid manufacturer's authorization letter, with date of issue, name, address, and telephone number for verification.

7.2.3 The technical representative shall be on site at all times whenever the following evolutions are performed to specified equipment or systems: disconnection; removal; opening; disassembly inspection; taking of clearance readings; static and dynamic balancing tests and adjustments; reassembly; shop tests; reinstallation; pre-repair and post-repair operating tests; dock trials; and sea trials.

a. The technical representative shall witness all of the above identified tasks related to the specific work hired for and shall prepare all reports of design, as-found, and final reassembly dimensions and clearances, shop test, operational test, dock trial, and sea trial results.

b. The technical representative shall witness and sign all reports attesting to his presence and witnessing of the test and concurring with the results for all tests performed by the contractor or other sub-contractors.

7.2.4 The contractor shall be prepared to submit a list of all technical representatives (by manufacturer name), intended to be employed during the contract performance period to MSC as part of the proposal submitted in response to this solicitation.

7.3 Government furnished technical representatives:

USNS WILLIAM MCLEAN		
(T-AKE 12)		
GENERAL SERVICES AND REQUIREMENTS	CONTRACT NO. XXXX	
ITEM NO. 0002	CATEGORY "N"	2024-02-26
TAKE-SWI-TECHNICAL AND MANUFACTURERS REPRESENTATIVE	Maksimowicz, Andrew, J	

7.3.1 The Government may furnish the services of a technical representative to be on site at the ship repair facility at required times during repairs to the specified equipment of systems.

7.3.2 In the event that the contractor indicates either through written correspondence or the contractor's production schedule that the Government's technical representative is required to be on-site to support a production element, and subsequently fails to start the subject work item on time, the OMT REP will issue a Production Schedule Delinquent Progress Notice (PSDPN) in accordance with work item 013 of this work package. PSDPNs found to be the result of contractor delinquencies that affect the presence of a Government-furnished technical representative will result in actions to recoup the additional costs for the subject Government-furnished technical representative.

7.3.3 The Contractor shall coordinate and reiterate the production schedule dates for when the Government technical representative is to be on site. Such coordination shall be in writing to the OMT REP seven calendar days in advance of the work item's start.

8.0 GENERAL REQUIREMENTS: None additional

USNS WILLIAM MCLEAN		
(T-AKE 12)		
GENERAL SERVICES AND REQUIREMENTS	CONTRACT NO. XXXX	
ITEM NO. 0004	CATEGORY "N"	2024-02-26
TAKE-SWI-TESTING AND QUALITY ASSURANCE	Maksimowicz, Andrew, J	

1.0 ABSTRACT

This item describes the requirements for the contractor to have in place an effective quality assurance program and that such program be implemented in the planning and performance of this contract.

2.0 REFERENCES: None

3.0 ITEM LOCATION/DESCRIPTION

3.1 Performance of quality assurance at the contractor's facility.

4.0 GOVERNMENT FURNISHED EQUIPMENT/MATERIAL/SERVICES: None

5.0 NOTES

5.1 The Government or Operating Company may at any time without prior notification to the contractor elect to obtain the services of Government or Operating Company furnished technical representative(s) who will be on site at the contractor's facility acting as the Government or Operating Company's quality assurance observer and consultant. The presence of Government or Operating Company furnished technical representative(s) does not relieve the contractor from performing any part of this work item.

5.2 The contractor and all subcontractors regardless of tier shall consult the General Technical Requirements (GTR) to determine applicability to this work item. In performance of this work item, the contractor and all subcontractors regardless of tier must comply with the requirements of all applicable GTRs including but not limited to GTRs (1) through (7).

6.0 QUALITY ASSURANCE REQUIREMENTS

6.1 The Government or Operating Company reserves the right

USNS WILLIAM MCLEAN		
(T-AKE 12)		
GENERAL SERVICES AND REQUIREMENTS	CONTRACT NO. XXXX	
ITEM NO. 0004	CATEGORY "N"	2024-02-26
TAKE-SWI-TESTING AND QUALITY ASSURANCE	Maksimowicz, Andrew, J	

to perform a pre-award survey of the apparently successful contractor's facility, during which survey an inspection of the in-place quality assurance system's performance attributes in all areas may be subject to examination and review.

6.2 The successful contractor is herewith notified that regulatory body and **MSC or Operating Company** inspections are independent of the contractor's function of quality assurance. The contractor is not to rely upon **MSC or Operating Company** or regulatory bodies or their agents to perform its quality assurance inspections or tests.

7.0 STATEMENT OF WORK REQUIRED

7.1 Contractor inspection system requirements

7.1.1 Quality assurance plan/manual

a. The contractor shall document his inspection system, identifying the method of implementing the requirements contained herein. Implementation of the contractor's system shall be through a quality assurance plan or manual. The quality assurance plan or manual will be approved for use by the senior shipyard official and shall be available for review by the **Government or Operating Company** prior to the initiation of productive work. It shall meet the following minimum requirements:

1. A functional organization chart showing overall company management
2. The quality assurance organization
3. A description of the contractor's quality control system
4. The assignment of specific responsibility for the following elements of quality control including written

USNS WILLIAM MCLEAN		
(T-AKE 12)		
GENERAL SERVICES AND REQUIREMENTS	CONTRACT NO. XXXX	
ITEM NO. 0004	CATEGORY "N"	2024-02-26
TAKE-SWI-TESTING AND QUALITY ASSURANCE	Maksimowicz, Andrew, J	

procedures specifying the methods of implementation;

inspections

- (i) Performance and witnessing of tests and
- (ii) Preparation and maintenance of records
- (iii) Control of non-conforming material
- (iv) Corrective action system
- (v) Receipt inspection
- (vi) Subcontractor control

7.1.2 Test and inspections

a. Inspection personnel shall be qualified to perform the duties assigned and authorized to make an accept/reject determination for the contractor.

1. Submit a list of contractor personnel authorized to witness and accept the sign off inspection and tests listed on contractor's test and inspection records (TIR's). Include personnel title/position in corporate structure.

2. Submit a list of subcontractor firms which are authorized to independently witness, accept and sign off inspections and tests listed on TIR's on behalf of the contractor. Identify each authorized subcontractor firm by name and address, by work item number, paragraph(s), and sub paragraph(s) which the subcontractors are to accomplish. The identification shall be as broken down in the statement of work for that work item and the production planning document prepared for the contractor's offer and this contract.

3. Lists of contractor and subcontractor

USNS WILLIAM MCLEAN		
(T-AKE 12)		
GENERAL SERVICES AND REQUIREMENTS	CONTRACT NO. XXXX	
ITEM NO. 0004	CATEGORY "N"	2024-02-26
TAKE-SWI-TESTING AND QUALITY ASSURANCE	Maksimowicz, Andrew, J	

personnel shall be submitted as part of the offered solicitation's technical proposal. Lists shall be amended as changes in personnel or subcontractors occur. Changes shall be subject to approval of the Contracting Officer or Operating Company (PCO prior to award or ship delivery/ACO (COR) after delivery) in accordance the Clause H-11 "substitution of personnel."

4. The contractor shall verify that all tests, inspections and work conform to contract requirements prior to presentation to the OMT REP for acceptance. In the event that specific criteria are not provided in the work item, the contractor shall verify that the tests, inspections or work meet regulatory body requirements (ABS, USCG etc.,) prior to presentation to the OMT REP for acceptance.

b. Final determination of acceptability shall be made by the OMT REP.

7.2 Documentation

7.2.1 Contractor inspection records

a. The contractor shall prepare a test and inspection record (TIR) for each specification item in the contract which requires productive work. TIR's shall be developed for each specification work item or change prior to productive work being accomplished for that item. TIR's at a minimum shall, include the following:

1. Identification by solicitation/contract number, ship name and Government or Operating Company work item number

2. Identification of each unit to be inspected by name, number, and location (e.g. Number 2 SSTG, Port Condenser, Cargo Winch Number 12, etc.). Where multiple units are contained within a work item, an entry on the TIR shall be

USNS WILLIAM MCLEAN		
(T-AKE 12)		
GENERAL SERVICES AND REQUIREMENTS	CONTRACT NO. XXXX	
ITEM NO. 0004	CATEGORY "N"	2024-02-26
TAKE-SWI-TESTING AND QUALITY ASSURANCE	Maksimowicz, Andrew, J	

made for each unit.

3. The listing of each specific inspection attribute, method of inspection or test and the acceptance/rejection criteria

4. Acceptability or rejection of each inspection attribute shall be indicated and shall be signed and dated by authorized personnel.

5. All TIR's shall be updated as work progresses and maintained current to within twenty-four (24) hours.

b. Test and inspection records (TIR's) are also required for all work associated with:

1. All Pre-priced option items

2. All change orders issued

3. The price for all QA required by option items shall be contained within the lowest line item level prices

4. The price for all QA required by the clause entitled "Additional Requirements" shall be considered, to be contained within the hourly labor price

5. Inspection attributes: The contractor shall list, on the TIR, all tests and inspections contained in each work item. In addition, the contractor shall include the following types of inspection required by the work item:

(i) All pertinent tolerances, clearances and conditions found upon disassembly/opening of equipment, machinery components or spaces

USNS WILLIAM MCLEAN		
(T-AKE 12)		
GENERAL SERVICES AND REQUIREMENTS	CONTRACT NO. XXXX	
ITEM NO. 0004	CATEGORY "N"	2024-02-26
TAKE-SWI-TESTING AND QUALITY ASSURANCE	Maksimowicz, Andrew, J	

(ii) All in process verification, including refit/final tolerances, clearances, alignment, tests, cleanliness and internal condition prior to closure, fit-up and welding

(iii) All verification of item completion including prerequisite for operational testing (i.e., lubrication, continuity checks, rotation) and final supporting data

7.2.2 Maintenance of records

a. The contractor shall maintain records of completed TIR's, including inspection records generated by all subcontractors for a period of ninety (90) days after contract completion.

b. The records shall document the specific inspection actions or tests and provide objective quality evidence of completed work and form the basis for acceptance of the work.

c. The records shall include documentation of contractor rejected work, corrective action taken and objective quality evidence which the contractor offers as assurance of the conformance to the work item specifications.

d. The records shall include documentation of contractor inspection/test failures, corrective action taken and objective quality evidence which the contractor offers as assurance of the conformance to the work item specifications.

e. Records provided by subcontractors may be incorporated in the inspection and test documentation, or if maintained as separate documentation, shall be referenced therein and be readily available for review by the Government or Operating Company.

USNS WILLIAM MCLEAN		
(T-AKE 12)		
GENERAL SERVICES AND REQUIREMENTS	CONTRACT NO. XXXX	
ITEM NO. 0004	CATEGORY "N"	2024-02-26
TAKE-SWI-TESTING AND QUALITY ASSURANCE	Maksimowicz, Andrew, J	

f. The inspection record shall, for each work item, reference any quality deficiency reports (QDRs) issued by the OMT REP. All QDRs require a written response from the contractor to the **Government or Operating Company**.

g. During the performance period of the contract, records shall be maintained at a location accessible to the site of the work. The records shall be available for review by the **Government or Operating Company** during weekday and weekend hours consistent with regular day shift, (approximately 0630-1800). Records shall also be available for **Government or Operating Company's** review during the 90 days following contract completion.

h. Contractor's inspection records are an integral part of the work. Therefore, the ACO and OMT REP will consider the work item incomplete if the contractor's documentation and records are not complete. Records shall include all TIR's subcontractor inspection reports, material certificates and receipt inspection records.

7.3 Corrective action

7.3.1 The contractor's corrective action shall provide for prompt correction of defects whether found by the **Government or Operating Company** or by the contractor's or subcontractor's personnel. When such defects are reported by the **Government or Operating Company** and require a written response, the contractor shall provide prompt written response indicating corrective action taken or the date by which a specific corrective action will be complete. The contractor's corrective action shall provide for the correction of the cause of defects in work or procedures reported by **Government or Operating Company** to contractor by quality deficiency report (QDRs) or by letter.

7.4 Subcontractor control and evaluation

USNS WILLIAM MCLEAN		
(T-AKE 12)		
GENERAL SERVICES AND REQUIREMENTS	CONTRACT NO. XXXX	
ITEM NO. 0004	CATEGORY "N"	2024-02-26
TAKE-SWI-TESTING AND QUALITY ASSURANCE	Maksimowicz, Andrew, J	

7.4.1 The contractor shall establish procedures for selection of subcontractors and control of subcontractor quality, including:

a. Procedures for selection of qualified subcontractors, based on evaluation and assessment of the subcontractor's quality control, facilities and available resources, as appropriate, to perform the specific type of work.

b. Procedures for transmittal of all technical, design and quality requirements to the subcontractor. Quality requirements shall include the inspection and tests required by the work item as well as contractor inspection at the subcontractor's plant when such action is necessary to assure product conformance.

7.4.2 Subcontractors listed within the contractor's technical proposal as having been selected to perform individual work items or parts thereof, shall be considered key personnel as defined in Clause for "Substitution of Personnel." As key personnel they are considered during the technical evaluation process. As such any changes in subcontractors shall be subject to approval of the OMT REP.

7.5 Regulatory inspections

7.5.1 The contractor shall ensure all regulatory body mandated inspections are arranged for and conducted.

a. The contractor shall reproduce and provide copies of the contract specifications to the cognizant American Bureau of Shipping (ABS) and United States Coast Guard (USCG) area representatives.

b. The contractor shall prepare a written request for review of the specifications to identify the specific attributes for which regulatory body inspection is deemed mandatory. The contractor shall incorporate these inspections in

USNS WILLIAM MCLEAN		
(T-AKE 12)		
GENERAL SERVICES AND REQUIREMENTS	CONTRACT NO. XXXX	
ITEM NO. 0004	CATEGORY "N"	2024-02-26
TAKE-SWI-TESTING AND QUALITY ASSURANCE	Maksimowicz, Andrew, J	

the TIR's.

c. During the performance of the contract the contractor shall be responsible for notifying both ABS and USCG and coordinating and scheduling their inspections. Timely arrangements for the attendance of regulatory body representatives are a mandatory requirement of this item. The contractor shall be responsible for maintaining weekly contact with regulatory agencies, obtaining a written prediction of their weekly workload, their advance notification requirements, keep abreast of notification requirement changes to ensure timely contact. Copies shall be furnished to the OMT REP.

7.6 MSC or Operating Company inspections

7.6.1 The contractor shall provide for notification to the OMT REP or his duly authorized representative for all tests requiring MSC or Operating Company attendance.

a. When specification items require that a OMT REP or his representative (i.e., Port Engineer, Chief Engineer and others that may be designated by the item) accept and/or witness in process work, completed work, testing or inspections, the contractor shall provide notification to the designated personnel at least four (4) but not more than twenty four (24) hours in advance of the work sequence to be witnessed or approved.

b. When work to be witnessed or approved is to occur after normal day shift working hours the OMT REP shall be notified at least four (4) hours before the end of the last preceding regular work shift.

c. When work to be witnessed or approved is to occur on a weekend or holiday, the OMT REP shall be notified at least four (4) hours before the end of the last preceding regular work shift.

USNS WILLIAM MCLEAN		
(T-AKE 12)		
GENERAL SERVICES AND REQUIREMENTS		CONTRACT NO. XXXX
ITEM NO. 0004	CATEGORY "N"	2024-02-26
TAKE-SWI-TESTING AND QUALITY ASSURANCE		Maksimowicz, Andrew, J

d. Notification of tests/inspections is a mandatory requirement. Identification of tests/inspections on the contractor's production schedule(s), etc., does not relieve the contractor of the requirement.

e. The OMT REP may designate checkpoints, in addition to those identified by the specification item, that are to be observed or inspected by the OMT REP or regulatory body. The notification requirements of above shall also apply to those designated checkpoints.

f. Regulatory body inspectors may also elect to designate additional checkpoint(s) tests/inspections which will require their attendance. (These are in addition to those incorporated into the TIR after specification review per 7.5 above.) This is beyond the ability or control of the OMT REP. The contractor shall provide adequate timely notification to ensure the requiring inspector's attendance at these added tests/inspections.

g. **MSC or Operating Company** inspection is an independent function of the **Government or Operating Company** and does not relieve the contractor of the responsibility for performing the tests and inspections required by the specification or those considered necessary to ensure product conformance. All inspections specified within the specification work item are mandatory inspections. The contractor shall not proceed beyond this point without prior approval from the OMT REP.

7.7 Submission of records

7.7.1 A copy of all records as defined by 7.2 shall be submitted to the **Contracting Officer or Operating Company** within ten (10) days of contract completion. The contractor shall maintain original copies in accordance with 7.2.

USNS WILLIAM MCLEAN		
(T-AKE 12)		
GENERAL SERVICES AND REQUIREMENTS	CONTRACT NO. XXXX	
ITEM NO. 0004	CATEGORY "N"	2024-02-26
TAKE-SWI-TESTING AND QUALITY ASSURANCE	Maksimowicz, Andrew, J	

7.8 Quality deficiency reports (QDRs)

7.8.1 During the course of the contract it may be determined by the OMT REP that the contractor's workmanship is defective or that the quality assurance (QA) program (inspectors or inspection processes) has failed to perform in a manner consistent with the contractor's proposal as evaluated prior to award. Should such occur, the OMT REP may issue to the contractor a quality deficiency report (QDR).

7.8.2 The contractor is required to address the specific subject of the QDR and to advise the **Government or Operating Company** of how it proposes to perform permanent corrective action of the defective work or process which caused the QDR to be issued.

7.8.3 For a QDR issued in connection with a work item, the contractor is explicitly required to provide a satisfactory answer within the time frame indicated thereon for a reply. Normally, this is within two (2) calendar days from the date of issue. The contractor shall reply in the allotted time indicated on the QDR.

7.8.4 Additional reply time may be requested if needed by the contractor. A request shall be submitted in writing to the **Contracting Officer or Operating Company** for an extension to the reply date. The request letter shall give a specific, valid justification and date for submittal. In no case shall the extension requested be longer than a total of five (5) calendar additional days.

7.8.5 When the contractor's failure to submit a timely reply, (or a written request for an extension to the **Contracting Officer or Operating Company**), necessitates issuance of a letter addressing the lateness of the response, (or extension request), the contractor shall lose all further work progress for payment purposes upon the work item the QDR is

USNS WILLIAM MCLEAN		
(T-AKE 12)		
GENERAL SERVICES AND REQUIREMENTS	CONTRACT NO. XXXX	
ITEM NO. 0004	CATEGORY "N"	2024-02-26
TAKE-SWI-TESTING AND QUALITY ASSURANCE	Maksimowicz, Andrew, J	

issued against. This may be for the duration of the contract, or until such time as an acceptable response is furnished.

7.9 Schedule for key inspection events

7.9.1 Contractors shall prepare and submit within two (2) weeks after award a Schedule for key inspection events. The schedule for key inspection events shall show the dates for key inspections as contained in the production schedule, and the parties whose required attendance is necessary to conduct and witness a successful test. At a minimum the following inspections are to be identified:

- a. Preliminary test for each final acceptance test.
- b. Final acceptance tests.
- c. Regulatory agency (ABS/USCG) required tests.
- d. Tests indicated by work items as requiring mandatory OMT REP presence.

7.9.2 The schedule for key inspection events shall be updated weekly to show tests that have been added, deleted, completed, and all test failures. It is to reflect changes to the production plan resulting from new work items added or work items canceled. All test changes are to be reflected in the updated production schedule and test and inspection record.

7.9.3 Changes to the schedule for key inspection events for items not impacted by added/deleted work must be requested via written notification to the **Contracting Officer or Operating Company**, giving justification for the proposed change. **Contracting Officer or Operating Company** acknowledgment and concurrence is required before the change can be made. Notifications should be submitted at the weekly production meeting. For exceptional cases this may be later but not less

USNS WILLIAM MCLEAN		
(T-AKE 12)		
GENERAL SERVICES AND REQUIREMENTS		CONTRACT NO. XXXX
ITEM NO. 0004	CATEGORY "N"	2024-02-26
TAKE-SWI-TESTING AND QUALITY ASSURANCE		Maksimowicz, Andrew, J

than twenty-four (24) hours prior to the test's scheduled performance.

7.10 Inspection unpreparedness/unnecessary inspections

7.10.1 The contractor is responsible to control the number of unnecessary inspection call outs issued due to unpreparedness. The contractor may choose to accomplish pre-inspections to assure readiness. Unnecessary inspection call outs due to unpreparedness will be considered an indication of an ineffective quality assurance program and system and will be the subject of a QDR.

8.0 GENERAL REQUIREMENTS: None additional

USNS ARCTIC
(TAOE 8)

0000

CONTRACT NO. N2190750024006

ITEM NO. 0005

CATEGORY "NSP"

02/24/2026

TAOE_SWI_ELECTRICAL_SAFETY_PROCEDURE_REQUIREMENT

TBD

S

1.0 ABSTRACT

This work item establishes shipboard electrical safety requirements for both low voltage and high voltage applications. These requirements and procedures shall be followed by all contractors and subcontractors in the accomplishment of all work requirements.

2.0 REFERENCES

- 2.1 MSC Safety Management System Procedure 2.1-004-ALL, Lock-out/Tag-out
- 2.2 29CFR 1910.335 Electrical Safety Related Work Practices; Safeguards for Personnel Protection
- 2.3 NFPA 70E Standard for Electrical Safety Requirements for Employee Workplaces

3.0 ITEM LOCATION/DESCRIPTION

- 3.1 Location: Throughout the ship

4.0 GOVERNMENT FURNISHED EQUIPMENT/MATERIAL/SERVICES: None

5.0 NOTES

5.1 The contractor and all subcontractors, regardless of tier must consult the General Technical Requirements (GTR) to determine applicability to this work item. In performance of this work item, the contractor and all subcontractors regardless of tier must comply with all applicable GTR requirements.

5.2 The contractor and all subcontractors, regardless of tier are advised to review other work items under this contract to determine their effect on the work required under this work item.

- 5.3 The definitions of many terms used in this work item

USNS ARCTIC
(TAOE 8)

0000

CONTRACT NO. N2190750024006

ITEM NO. 0005

CATEGORY "NSP"

02/24/2026

TAOE_SWI_ELECTRICAL_SAFETY_PROCEDURE_REQUIREMENT

TBD

S

are found in Work Item 001.

6.0 QUALITY ASSURANCE REQUIREMENTS: None additional

7.0 STATEMENT OF WORK REQUIRED

7.1 Electrical Safety - Lock-out/Tag-out Procedures

7.1.1 The contractor shall have an established electrical safety lock-out/tag-out program in place to provide adequate protection against electrical hazards in the accomplishment of the work specified in this work package. A written description of the contractor's electrical safety lock-out/tag-out procedures shall be provided to the OMT REP, ship's Master and Chief Engineer upon vessel arrival at the contractor's facility, along with a discussion on the procedures.

7.1.2 Ship's force shall maintain their existing lock-out/tag-out procedures, in accordance with Reference 2.1 for low voltage applications, in addition to the contractor's procedures, to provide a redundant safety measure for these systems. The contractor shall co-ordinate electrical safety lock-out/tag-out procedures with the OMT REP and the ship's Chief Engineer to ensure the plans complement each other and provide maximum electrical safety for ship's crew and contractor personnel.

7.1.3 Do not accomplish work on any piece of mechanical, electrical or electronic equipment, circuit, or system that has not been isolated from its energy source (electrical, mechanical, hydraulic, pneumatic, chemical, or thermal) and tagged-out in accordance with the shipyard's electrical safety plan and References 2.1 and 2.2.

7.1.4 Do not attempt to operate any piece of mechanical, electrical or electronic equipment, circuit, or system that is tagged-out by either the contractor, ship or both. Tags must be properly cleared through both the

USNS ARCTIC
(TAOE 8)

0000

CONTRACT NO. N2190750024006

ITEM NO. 0005

CATEGORY "NSP"

02/24/2026

TAOE_SWI_ELECTRICAL_SAFETY_PROCEDURE_REQUIREMENT

TBD

S

contractor's procedures and the ship's procedures before systems and equipment can be safely energized and operated.

7.1.5 All contractor and subcontractor personnel intended to work on electrical circuits and equipment onboard MSC vessels shall provide and utilize proper personnel protective equipment (PPE) and tools in accordance with References 2.2 and 2.3. Contractor and subcontractor personnel will not be permitted to perform electrical systems work onboard if they are found to not possess the proper tools and PPE.

8.0 GENERAL REQUIREMENTS: None additional

USNS WILLIAM MCLEAN		
(T-AKE 12)		
GENERAL SERVICES AND REQUIREMENTS	CONTRACT NO. XXXX	
ITEM NO. 0020	CATEGORY "A"	2024-02-26
TAKE-SWI-GAS FREE CERTIFICATES	Maksimowicz, Andrew, J	

1.0 ABSTRACT

This item describes the requirements for the contractor to provide and maintain Marine Chemist gas free certificates to certify spaces and systems as gas free safe for personnel entry and safe for hotwork on the ship where work will be accomplished on a daily basis.

2.0 REFERENCES: None

3.0 ITEM LOCATION/DESCRIPTION

3.1 Location/Quantity

3.1.1 Machinery rooms, pump rooms, and tanks and spaces as noted in paragraph 7.2.2.

3.1.2 Areas throughout the vessel where hot work is being performed by the contractor.

4.0 GOVERNMENT FURNISHED EQUIPMENT/MATERIAL/SERVICES: None

5.0 NOTES

5.1 The contractor and all subcontractors, regardless of tier must consult the General Technical Requirements (GTR) to determine applicability to this work item. In performance of this work item, the contractor and all subcontractors regardless of tier must comply with all applicable GTR requirements.

5.2 The contractor and all subcontractors, regardless of tier are advised to review other work items under this contract to determine their effect on the work required under this work item.

5.3 The definitions of many terms used in this work item are found in Work Item 001.

6.0 QUALITY ASSURANCE REQUIREMENTS: None additional

USNS WILLIAM MCLEAN		
(T-AKE 12)		
GENERAL SERVICES AND REQUIREMENTS	CONTRACT NO. XXXX	
ITEM NO. 0020	CATEGORY "A"	2024-02-26
TAKE-SWI-GAS FREE CERTIFICATES	Maksimowicz, Andrew, J	

7.0 STATEMENT OF WORK REQUIRED

7.1 In the United States or its territories and possessions, a national fire protection association (NFPA) Certified Marine Chemist shall be used to certify spaces gas free safe for personnel entry and safe for hot work (46 CFR 115.710 (a)). Outside of the United States, a Marine Chemist or Industrial Hygienist, certified in the country or locale where the work is to be accomplished, shall be utilized.

7.1.1 Contractor actions to prepare tanks and spaces to attain gas free certification shall be accomplished in accordance with USCG, OSHA (Subparts 1915.11, 1915.12, and 1915.13) and OCONUS specific locale requirements.

7.2 Test and prove gas free "Safe for Men" and "Safe for Hot Work" as applicable for all areas as listed in 3.1, including all other spaces where work requiring gas free condition is required by the work items of these specifications:

7.2.1 Cleaning required to attain gas free status is covered under individual work items.

7.2.2 For bidding purposes, estimate that the requirements of gas free certificates apply to 3 Tanks/Voids and 3 Machinery Spaces. Gas free certificates only to be utilized with written authorization via MSC REP.

7.3 Furnish the OMT REP with two copies of the gas free certificates signed by a NFPA certified Marine Chemist (or equivalent OCONUS Marine Chemist or Industrial Hygienist) prior to start of any confined space entry and/or hot work. Furnish a new gas free certificate, signed by a NFPA certified Marine Chemist (or equivalent OCONUS Marine Chemist or Industrial Hygienist), daily thereafter for the duration of the particular work necessitating gas freeing of spaces safe for men and hot work. One copy of said certificate is also to be posted near the gangway(s).

USNS WILLIAM MCLEAN		
(T-AKE 12)		
GENERAL SERVICES AND REQUIREMENTS	CONTRACT NO. XXXX	
ITEM NO. 0020	CATEGORY "A"	2024-02-26
TAKE-SWI-GAS FREE CERTIFICATES	Maksimowicz, Andrew, J	

7.3.1 Gas free certificates shall be maintained on a daily basis. This may be accomplished by a shipyard competent person, provided same competent person is acceptable to all regulatory agency (e.g. USCG, ABS) inspection personnel during inspections. Should regulatory agency inspectors require NFPA certified Marine Chemist (or equivalent OCONUS Marine Chemist or Industrial Hygienist) certificates, the additional costs of contracting a Marine Chemist shall be borne by the contractor.

7.3.2 Shipyard competent persons shall be trained by a NFPA certified Marine Chemist (or equivalent OCONUS Marine Chemist or Industrial Hygienist), and credentials demonstrating this training shall be provided to the OMT REP prior to any confined space entries.

7.4 Any variation of originally certified conditions such as shifting vessel, changing ballast, and transport of any other fluids, etc., must be immediately brought to the attention of the OMT REP. A new Marine Chemist gas free certificate shall also be issued.

7.5 Burning or other hot work shall not be done by the contractor on any part of the vessel, including piping systems unless permission to do so is specifically granted by the NFPA certified Marine Chemist (or equivalent OCONUS Marine Chemist or Industrial Hygienist), documented with issued certificates.

7.6 Preparation of Drawings: None

7.7 Manufacturer's Representative: None

8.0 GENERAL REQUIREMENTS: None additional