



VICINITY MAP

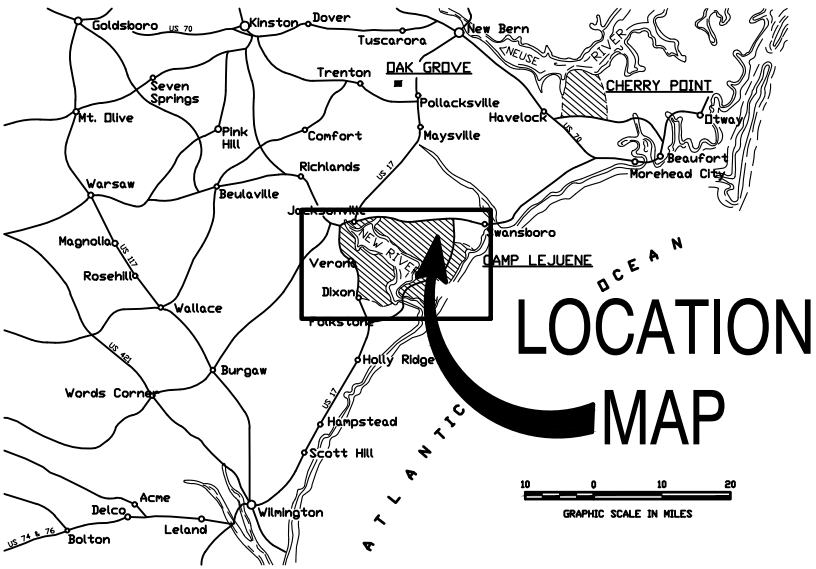


LOCATION MAP

LOCATION MAP

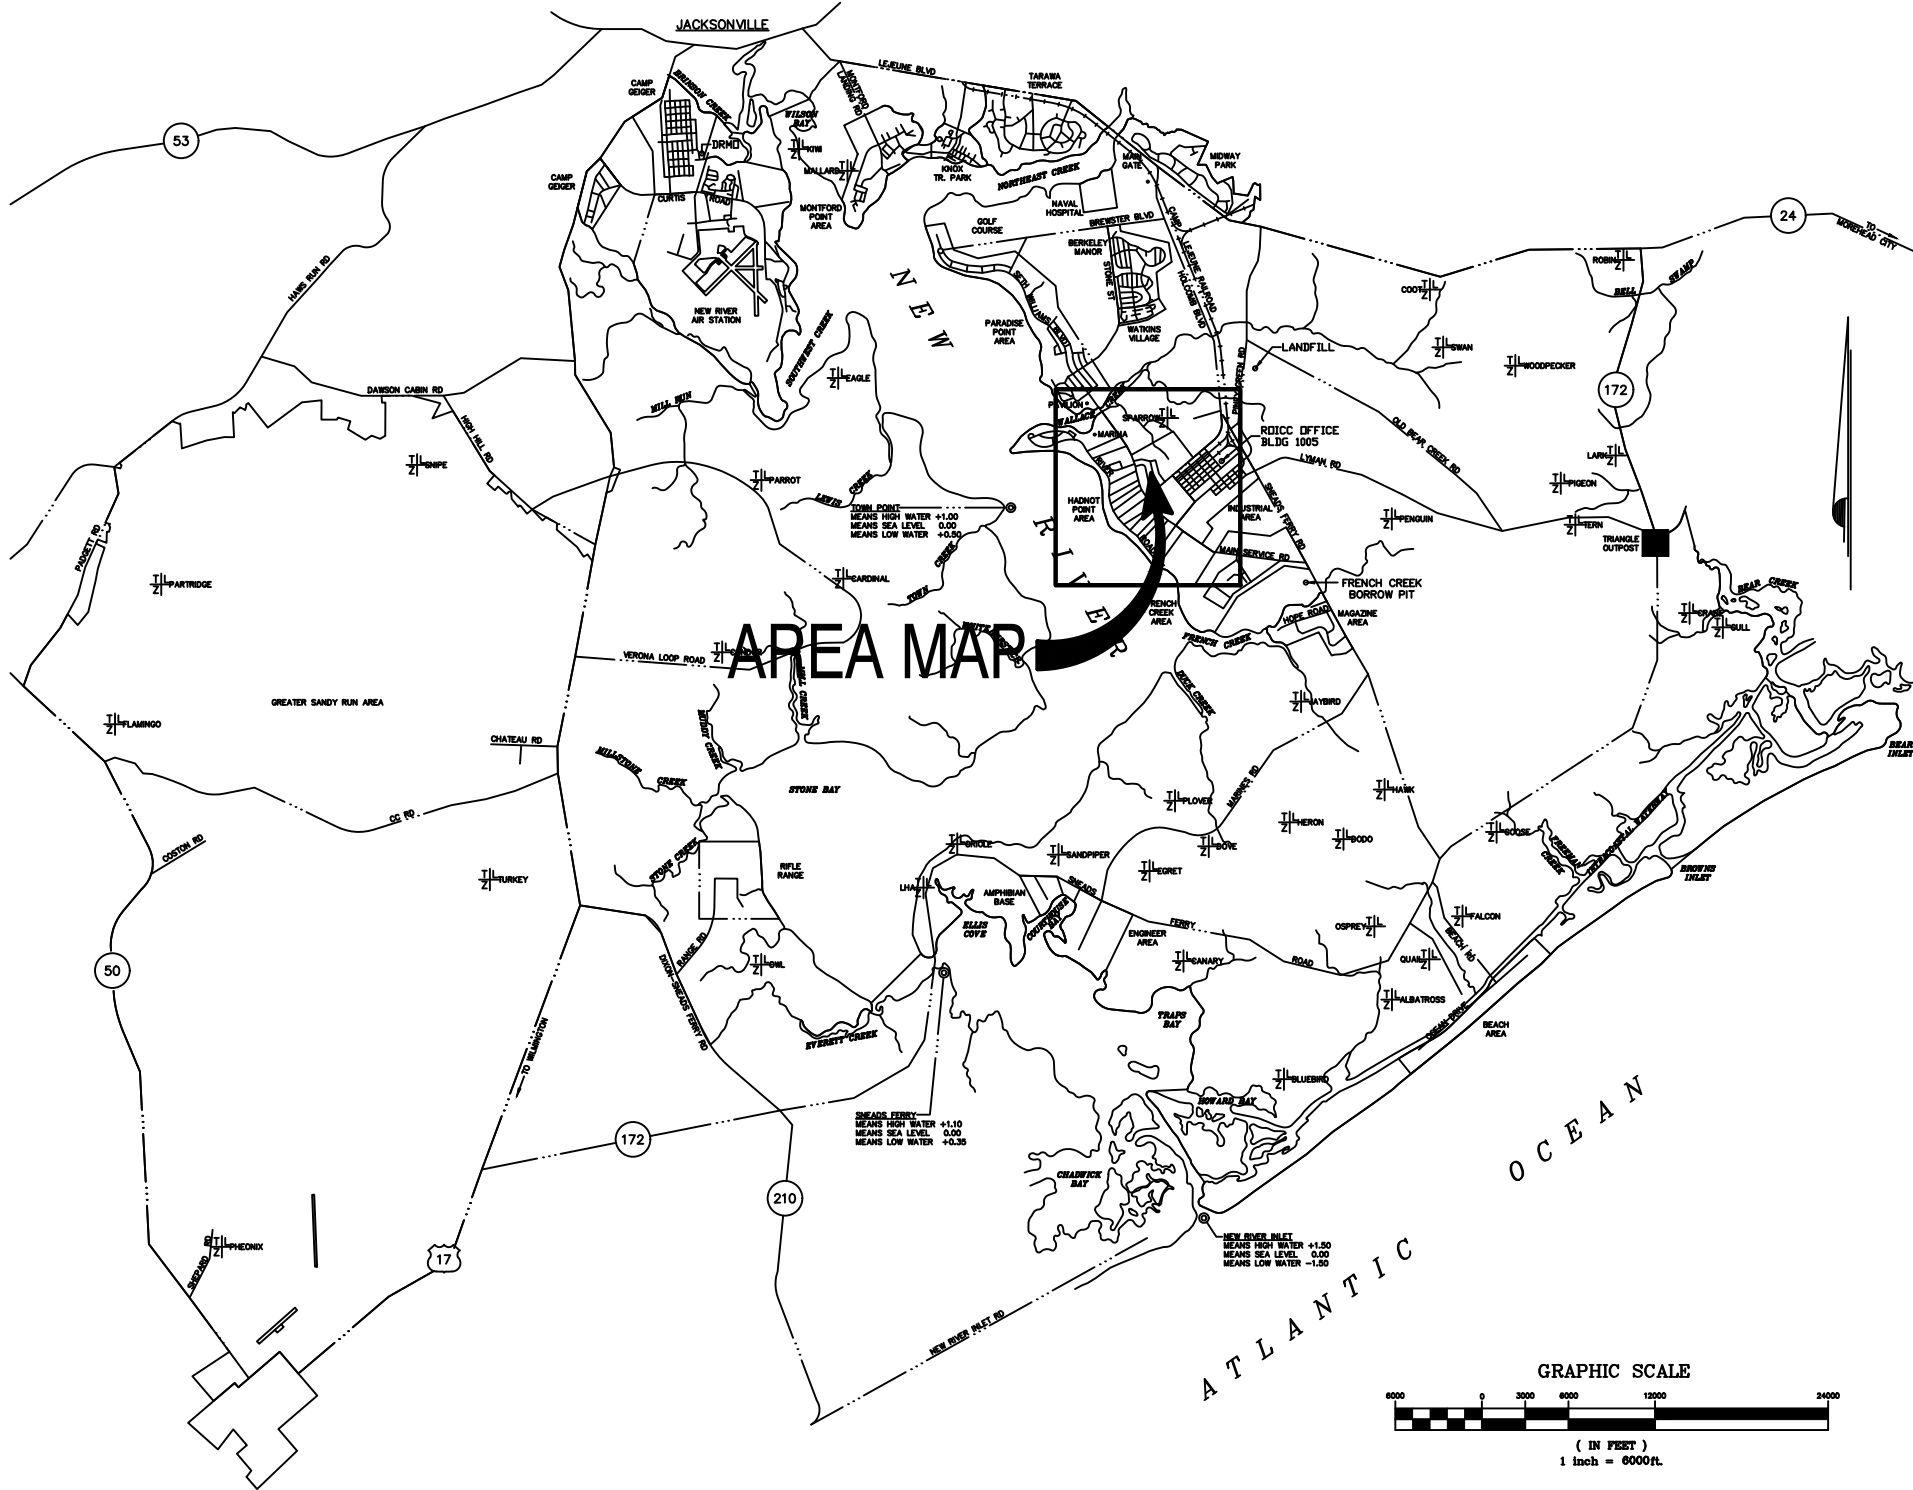

AREA MAP

AREA MAP

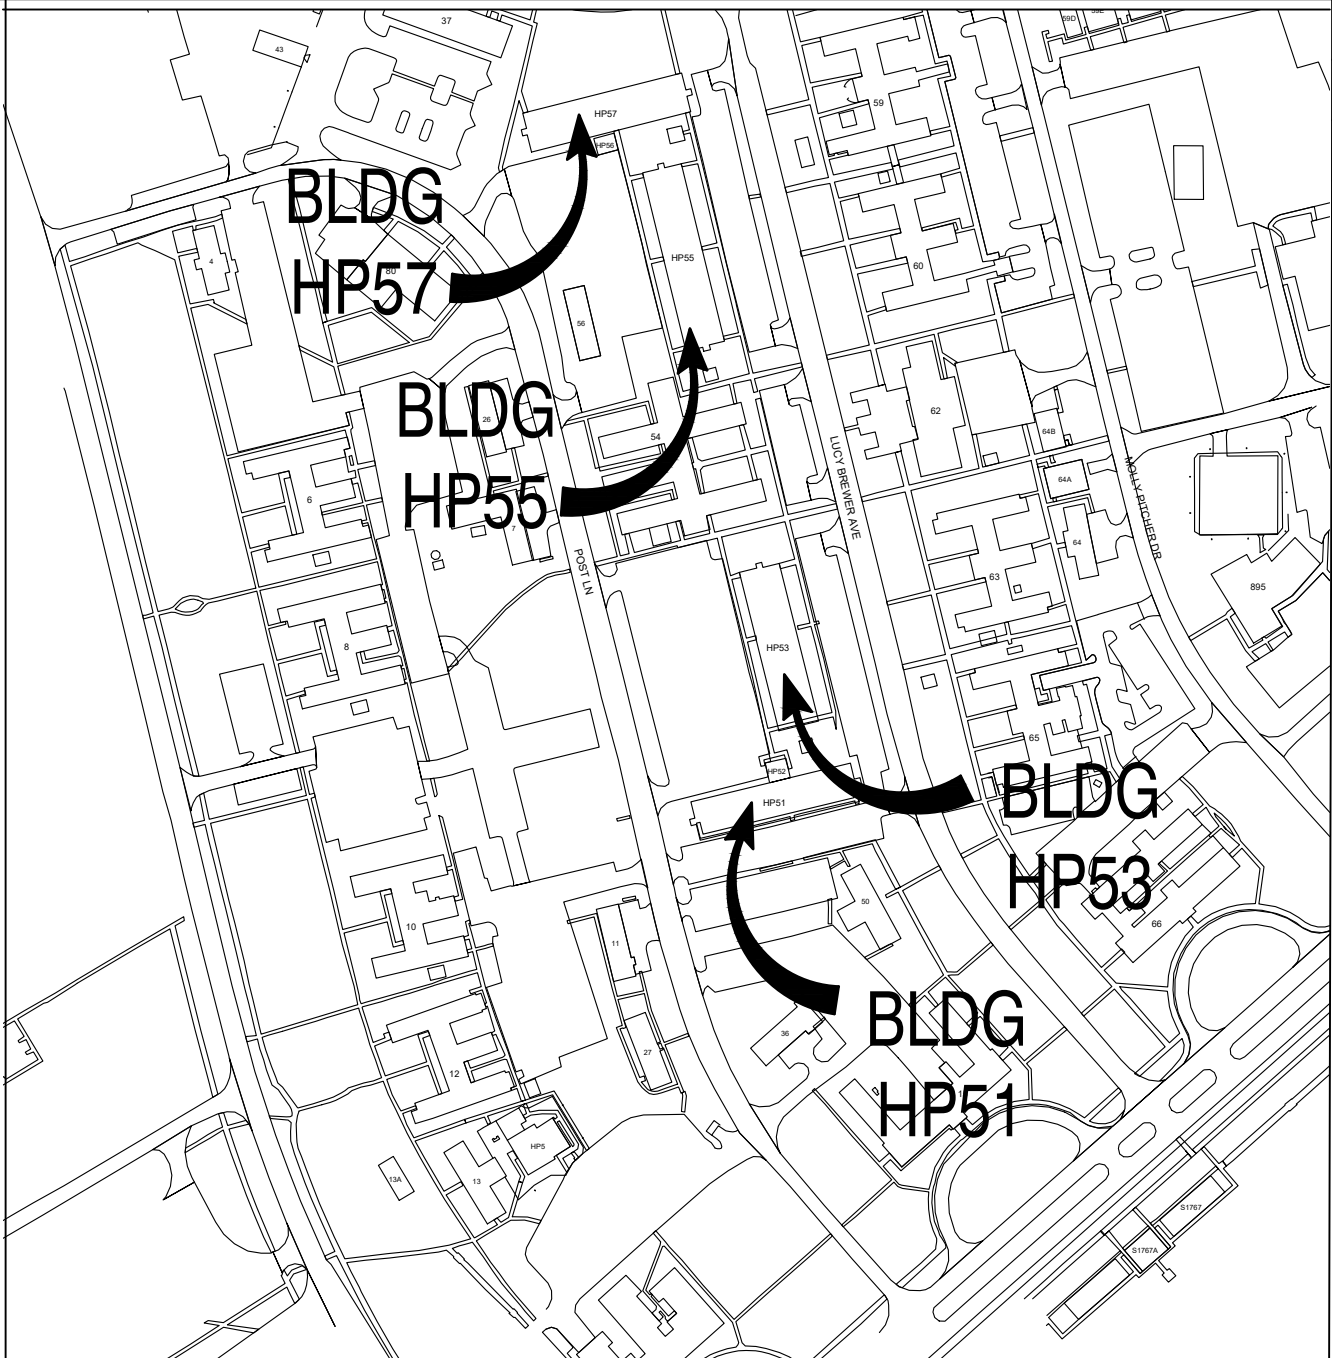

DRAWING INDEX

SHEET #	SHEET NAME
T-1	TITLE SHEET, AREA MAPS
A1	GENERAL NOTES
A2	HP51 PLAN, ELEVATION
A3	HP53 PLAN, ELEVATION
A4	HP55 PLAN, ELEVATION
A5	HP57 PLAN, ELEVATION
A6	DETAILS
A7	DETAILS

HP51,HP53,HP55,HP57 SHEET 1 OF 8
CONTRACT # 26-0400
DVG: MARK RANSIELL PROJECT # 26M002CN

HP51 HP53 HP55 HP57
ROOF REPAIRS
USMC CAMP LEJEUNE

T1

TITLE PAGE

HP BARRACKS ROOF REPAIRS:

SCOPE OF WORK: The contractor shall provide all material, labor, equipment and supervision required to accomplish the following.

GENERAL DESCRIPTION: This scope of work is to be accomplished at Buildings HP51 HP53 HP55 HP57 on Post Ln, Camp Lejeune, North Carolina. The work includes installation of new asphalt shingle roof on buildings.

DETAILED REQUIREMENTS AND SPECIFICATIONS: The contractor shall take his own field measurements in determining required materials and costs for the following.

SPECIAL SCHEDULING AND ACCESS: Access and scheduling to the work area shall be arranged through Contracting Officer's Representative for the DICC office and the tenant of the building.

GENERAL NOTES/ENVIRONMENTAL NOTES:

- TO ACCESS SITE CONTACT MCBL CONSTRUCTION MANAGER.
- THESE DRAWINGS INDICATES GENERAL CONDITIONS WITH INFORMATION COMPILED FROM FIELD OBSERVATION. CONTRACTOR SHALL BE RESPONSIBLE FOR ACTUAL FIELD VERIFICATION PRIOR TO BIDDING, ORDERING MATERIALS AND DURING EVERY STEP OF CONSTRUCTION FOR EXISTING SURFACES, DIMENSIONS AND CONDITIONS. NUMBER OF ITEMS AND LOCATIONS SHOWN ARE APPROXIMATE, CONTRACTOR MUST VERIFY ALL CONDITIONS AND INCLUDE IN SCOPE OF WORK ACCORDINGLY.
- CONSTRUCTION MATERIALS INDICATED ARE GENERAL IN NATURE AND ARE NOT INTENDED TO FULLY DESCRIBE THE EXISTING CONSTRUCTION PRESENT.
- REPAIR AND REFINISH AREAS DAMAGED OR DISTURBED BY NEW WORK TO BE PROVIDED UNDER THIS CONTRACT.
- DIMENSIONS PROVIDED ON EXISTING ITEMS ARE PROVIDED TO AID THE CONTRACTOR TO UNDERSTAND THE SCOPE OF WORK. FIELD VERIFY ALL CONDITIONS.
- CLEAN ALL ITEMS AS NECESSARY TO RECEIVE NEW FINISHES. FILL ALL HOLES TO MATCH EXISTING CONDITIONS.
- CONTRACTOR SHALL INSURE THAT THE BUILDING REMAINS WATERTIGHT THROUGH OUT THE CONSTRUCTION OPERATIONS AND AT THE END OF EACH DAY.
- SUBMITTALS SHALL BE SUBMITTED TO THE CONTRACTING OFFICER CONTRACTING REPRESENTATIVE FOR APPROVAL.
- REMOVE ALL DAMAGED OR LOOSE BUILDING COMPONENTS ASSOCIATED WITH THIS PROJECT, PATCH TO MATCH EXISTING, PREPARE TO RECEIVE NEW FINISHES.
- METHOD OF REMOVAL OF ANY BUILDING COMPONENT SHALL BE APPROVED BY THE CD CONTRACTING REPRESENTATIVE. THE CONTRACTOR SHALL BE RESPONSIBLE FOR ENSURING THAT REMOVAL OF EXISTING COMPONENTS DOES NOT AFFECT ADJACENT OCCUPIED AREAS.
- THIS AREA OF WORK IS LOCATED WITHIN RESTRICTED AREAS. ACCESS TO THIS AREA SHALL BE COORDINATED WITH THE CONTRACTING OFFICER.
- THE NOTATION <TYP> INDICATES THAT THE CONDITION OCCURS IN MORE THAN ONE PLACE INCLUDING ALL SIMILAR CONDITIONS NOT INDIVIDUALLY NOTED.
- COORDINATE STAGING AREA, SITE ACCESS, AND TOILET USE WITH THE CD CONTRACTING REPRESENTATIVE.
- CONTRACTOR SHALL BE RESPONSIBLE FOR SITE SECURITY AND JOB SAFETY.
- CONSTRUCTION ACTIVITIES SHALL BE IN ACCORDANCE WITH OSHA STANDARDS AND GOVERNMENT REQUIREMENTS.
- AREAS OUTSIDE THE LIMITS OF PROPOSED WORK DISTURBED BY THE CONTRACTOR'S OPERATIONS SHALL BE RESTORED BY THE CONTRACTOR TO THEIR ORIGINAL CONDITION AT THE CONTRACTOR'S EXPENSE AS SOON AS PRACTICABLE.
- CONTRACTOR SHALL PREVENT DUST, SEDIMENT AND DEBRIS FROM EXITING THE CONSTRUCTION SITE AND SHALL BE RESPONSIBLE FOR CLEANUP, REPAIRS AND CORRECTIVE ACTION IF SUCH OCCURS. CONTRACTOR SHALL DISPOSE OF DEBRIS IN ACCORDANCE WITH APPLICABLE FEDERAL, STATE, AND LOCAL REGULATIONS, ORDINANCE AND STATUTES.
- BURNING WILL NOT BE ALLOWED ON THE PROJECT SITE UNLESS AUTHORIZED IN WRITING BY THE CONTRACTING OFFICER.
- CONTRACTOR IS RESPONSIBLE FOR PLACING BARRICADES USING FLAG MEN, FENCE, ETC AS NECESSARY TO INSURE SAFETY TO PUBLIC AND BUILDING OCCUPANTS.
- CONTRACTOR'S PERSONNEL MUST WEAR IDENTIFICATION AT ALL TIMES.
- ALL UTILITIES AND EXISTING FEATURES ARE TO BE FIELD VERIFIED PRIOR TO CONSTRUCTION. CONTRACTOR SHALL BE RESPONSIBLE FOR ANY DAMAGE TO EXISTING UTILITIES.
- IF CONTAMINANTS ARE SUSPECTED THROUGH ODDS OR VISUAL ACTIVITIES, IMMEDIATELY STOP WORK. CALL 911 AND CONTACT EMD AT <910> 451-9017 FOR INSTRUCTIONS.
- CONTRACTOR SHALL REVIEW ASBESTOS INSPECTION SURVEY BEFORE COMMENCING WORK.

MISCELLANEOUS INFORMATION:

- FACILITY ACCESS AND SCHEDULING TO THE WORK AREA SHALL BE ARRANGED THRU THE CONTRACTING OFFICER'S REPRESENTATIVE FOR THE ROICC'S OFFICE. THE CONTRACTOR SHALL NOT CONTACT THE FACILITY REPRESENTATIVE DIRECTLY UNDER ANY CIRCUMSTANCES. ALL COORDINATION SHALL BE DONE WITH THE CONSTRUCTION MANAGER ONLY.
- THIS FACILITY IS OPERATIONAL ALL YEAR ROUND DURING ALL HOURS. CONTRACTOR SHALL NOT DISRUPT THE BUILDING FUNCTIONS UNLESS COORDINATED WITH AND AGREED WITH THE FACILITY MANAGER.
- IF THE CONTRACTOR IS UNABLE TO COMPLETE CERTAIN CONSTRUCTION ASPECTS WITHOUT AFFECTING THE BUILDING OPERATION, THE CONTRACTOR SHALL REQUEST PERMISSION TO SCHEDULE ANY SHUTDOWN TEN (10) WORKING DAYS PRIOR TO THE COMMENCEMENT OF ANY CONSTRUCTION ACTIVITY. COORDINATE WITH THE CONSTRUCTION MANAGER.
- ANY ITEM SCHEDULED TO BE REMOVED, PROTECTED AND RE-INSTALLED, CONTRACTOR SHALL NOTIFY C.O. IMMEDIATELY IF DAMAGED.

GENERAL NOTES - ROOFING:

- REFERENCE MANUFACTURER'S TECHNICAL SPECIFICATIONS FOR INSTALLATION INSTRUCTIONS.
- UNLESS OTHERWISE NOTED, ALL ROOF PENETRATIONS AND PLUMBING VENTS CURRENTLY LOCATED ON THE ROOF ARE TO REMAIN IN PLACE SUBSEQUENT TO NEW ROOF INSTALLATION. REMOVE AND REPLACE ALL EXISTING FLASHING ELEMENTS AT ALL PENETRATIONS PRIOR TO NEW ROOFING SYSTEM INSTALLATION.
- THE CONTRACTOR SHALL COORDINATE ALL UTILITY CONNECTIONS <PLUMBING, ELECTRICAL, HVAC, ETC.> WITH DEMOLITION AND RENOVATION PHASING. COORDINATE ALL SHUTDOWNS AND/OR MODIFICATIONS OF EXISTING SYSTEMS WITH THE CONSTRUCTION MANAGER.
- THE CONTRACTOR SHALL DE-ENERGIZE ALL ELECTRIC CIRCUITS PRIOR TO DEMOLITION OF AFFECTED EQUIPMENT, RE-CONNECT, AND RE-ENERGIZE ALL AFFECTED EQUIPMENT AND ELECTRICAL DEVICES AS NECESSARY TO RETURN THEM TO WORKING CONDITIONS.
- FOR BIDDING PURPOSES, THE ROOFING CONTRACTOR SHALL INCLUDE IN THEIR BID THE REPLACEMENT OF A MINIMUM OF 15% OF THE EXISTING PLYWOOD WOOD DECK SUBSTRATE. THE NEW SUBSTRATE MUST MATCH EXISTING CONDITIONS <WOOD TYPE, WIDTH AND THICKNESS> AND MAINTAIN A SMOOTH AND EVEN TRANSITION.
- PROPERLY REMOVE, HAUL AND DISPOSE OF ALL DEBRIS. THE CONTRACTOR SHALL NOT UTILIZE THE DUMPSTER PROVIDED BY CAMP LEJEUNE FOR THE OCCUPANTS OF THE BUILDINGS.
- THE CONTRACTORS MAY ONLY USE THE CAMP LEJEUNE LANDFILL FOR THE DISPOSAL OF ASBESTOS CONTAINING MATERIALS AND BUILDING PRODUCTS WITH TIGHTLY ADHERED LEAD CONTAINING PAINT. THE HOURS OF OPERATION ARE 0730-1530. DELIVERY OF ACCEPTABLE MATERIALS <LEAD AND ASBESTOS> SHALL BE BY APPOINTMENT ONLY. APPOINTMENTS MADE BY PHONE AT 910-451-5011 OR 910-451-2946.
- NON-CONTAMINATED MATERIALS: ALL OTHER CONTRACTOR GENERATED MATERIAL SHALL BE WEIGHED THROUGH THE BASE LANDFILL SCALES BEFORE BEING REMOVED FROM THE BASE. CONTRACTORS UTILIZING THE BASE SCALES WILL REQUIRE CONTRACTING OFFICER ASSISTED PRE-REGISTRATION WITH THE LANDFILL MANAGER. THE CONTRACTING OFFICER WILL REGISTER THE CONTRACT VIA E-MAIL, WITH THE BASE LANDFILL. ALL HAUL VEHICLES WILL MAINTAIN A SECURE VEHICLE PLACARD AS A CONDITION TO UTILIZE THE SCALE-MAIL THE CONTRACT INFORMATION TO THE LANDFILL CLERK, INCLUDING THE NAME ON THE PRIME CONTRACTOR, CONTRACT NUMBER, JOB NAME/DESCRIPTION, COMPLETION DATE AND WHETHER OR NOT ANY OF THE ABOVE MATERIALS WILL BE DELIVERED TO THE LANDFILL. HAULING AND OFF-BASE LANDFILL COSTS SHALL BE INCLUDED IN THE CONTRACT.
- TELECOMMUNICATION RISER REDESTALS ARE WITHIN 50FT OF EACH BUILDING. PRESERVE AND PROTECT PEDESTALS. ANY DAMAGE OCCURING TO THEM DUE TO CONSTRUCTION TO BE REPAIRED AT THE COST OF CONTRACTOR.

HAZARDOUS MATERIALS:

- CAMP LEJEUNE ASBESTOS PROGRAM MANAGER IS KEN HENSLEY, 910-451-7018.
- THE CONTRACTOR MUST SURVEY THE EXISTING CONDITIONS AFFECTED BY THIS PROJECT. IF ASBESTOS MATERIALS ARE FOUND THE CONTRACTOR MUST ABATE ALL SUCH MATERIALS.

UFC CRITERIA:

INCLUDING BUT NOT LIMITED TO THE FOLLOWING:

- UFC 1-200-01 DOD, GENERAL BUILDING REQUIREMENTS.
- UFC 4-010-01 DOD, MINIMUM ANTITERRORISM STANDARDS FOR BUILDINGS.
- INTERNATIONAL BUILDING CODE (IBC).
- LIFE SAFETY CODE, NATIONAL FIRE PROTECTION ASSOCIATION (NFPA 101)
- ARCHITECTURAL BARRIERS ACT (ABA).
- AMERICANS WITH DISABILITIES ACT (ADA).
- ICC/ANSI A117.1.
- ALL APPLICABLE DESIGN CRITERIA (DOD).
- NFPA 10 PORTABLE FIRE EXTINGUISHERS.
- NFPA 72 FIRE ALARM AND SIGNALING CODE.
- NFPA FIRE DOORS AND OTHER OPENINGS PROTECTIVES.

HP51,HP53,HP55,HP57 SHEET 2 OF 8

CONTRACT # 26-0400

DWG. MARK RANSIELL PROJECT # 26M002CN

HP51 HP53 HP55 HP57

ROOF REPAIRS


USMC CAMP LEJEUNE

A1


NOTES/OVERALL PLAN

ROOF KEY NOTES

01	REMOVE AND DISPOSE OF ALL EXISTING SHINGLES, FELT PAPER, METAL DRIP EDGE AND OTHER RELATED ROOF COMPONENTS. REMOVE ANY ROTTED OR DAMAGED DECKING AND REPLACE WITH NEW 1/2" CDX PLYWOOD SHEATHING (FOR BIDDING PURPOSES ASSUME UP TO 2,825S.F. THIS BUILDING). INSTALL NEW ICE AND WATERSHIELD OVER ENTIRE ROOF SURFACE. INSTALL NEW ARCHITECTURAL ROOF SHINGLES AND METAL DRIP EDGE. SEE DETAIL 1/A6. SISTER ANY ROTTEN TRUSS FRAMING MEMBERS, MIN. 8' LONG (FOR BIDDING PURPOSES ASSUME UP TO 231 L.F. THIS BUILDING).
02	REMOVE EXISTING FASCIA AND SOFFIT. INSTALL NEW PTD ALUM FASCIA. INSTALL NEW VENTED VINYL SOFFIT.
03	INSTALL NEW RIDGE CAP (VENTED) TO MATCH NEW SHINGLES.
04	INSTALL NEW GUTTERS AND DOWNSPOUT W/ CONCRETE SPLASHBLOCK. NEW DOWNSPOUTS TO HAVE MIN. (3) STRAPS. SEE 3/A6.
05	REMOVE EXISTING EXPANSION JOINT. INSTALL NEW EXPANSION JOINT AS PER DETAIL 2/A6. LOCATION OF EXISTING EXPANSION JOINT SHOWN ARE APPROXIMATE. FIELD VERIFY EXACT LOCATION.
06	REMOVE EXISTING VENT BOOT. REPLACE WITH NEW LEAD BOOT. SEE DETAIL SHEET 2/A7. LOCATION AND QUANTITY SHOWN ARE APPROXIMATE, CONTRACTOR TO VERIFY PRIOR TO SUBMITTING BID.
07	REMOVE EXISTING EXHAUST FAN. REPLACE WITH NEW EXHAUST FAN. SEE DETAIL SHEET 1/A7. LOCATION AND QUANTITY SHOWN ARE APPROXIMATE, CONTRACTOR TO VERIFY PRIOR TO SUBMITTING
08	REMOVE EXISTING ROOF HATCH. REPLACE WITH NEW ROOF HATCH. SEE DETAIL SHEET 1/A7.
09	REMOVE EXISTING DORMERS DOWN TO EXISTING ROOF DECK. INSTALL NEW ASPHALT SHINGLES. SEE DETAIL 1/A6.

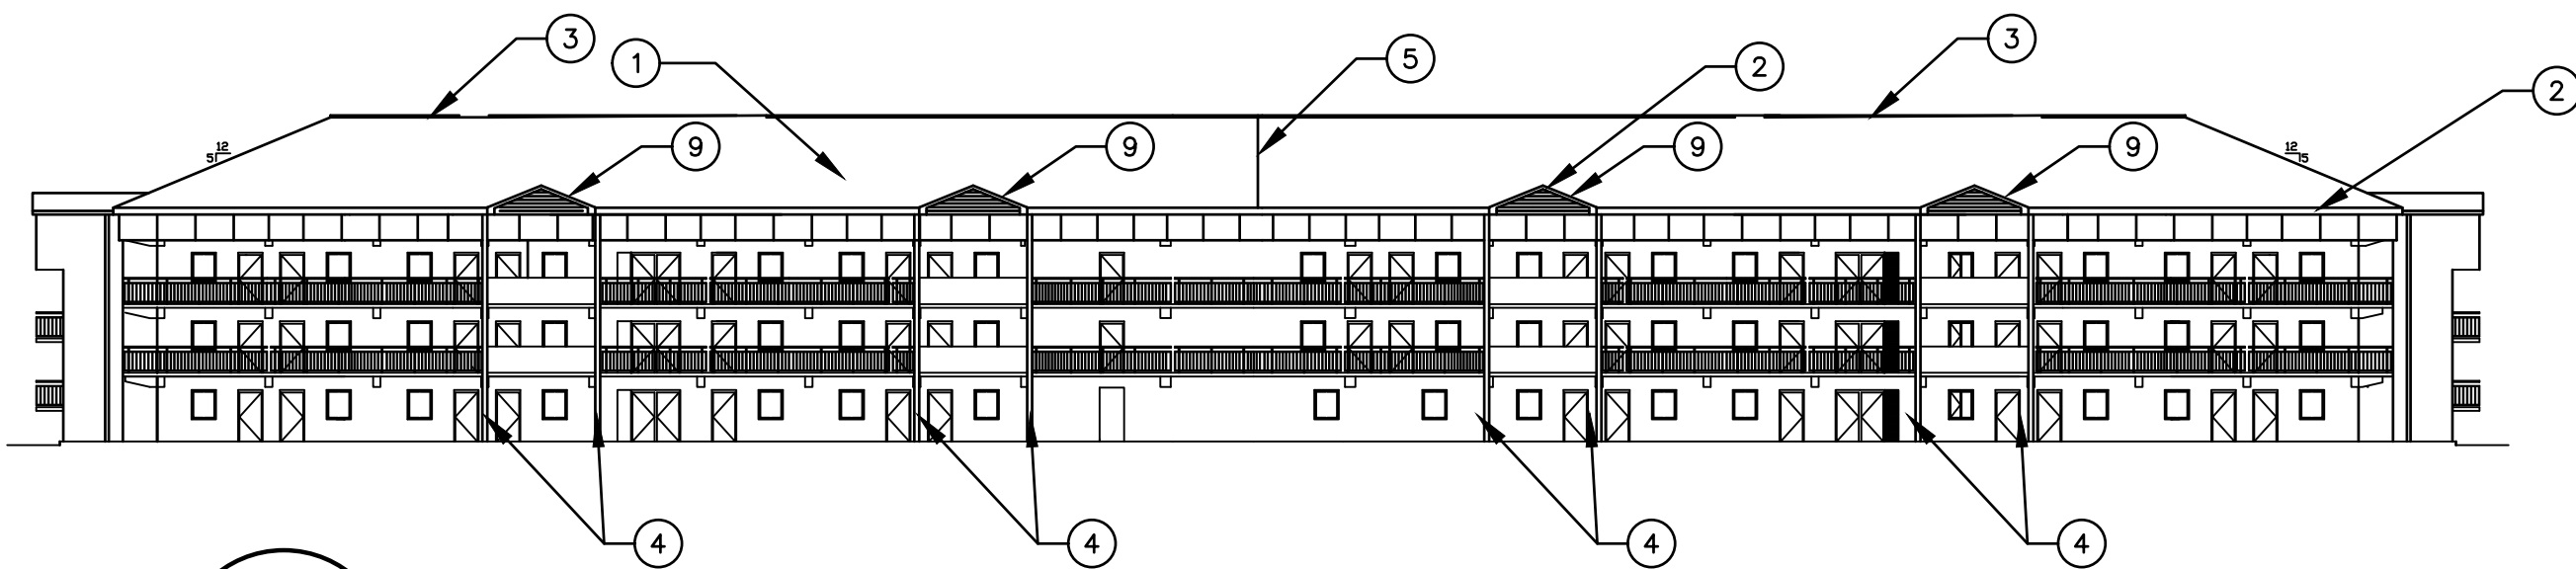


2 HP51 ELEVATION
A2 NOT TO SCALE

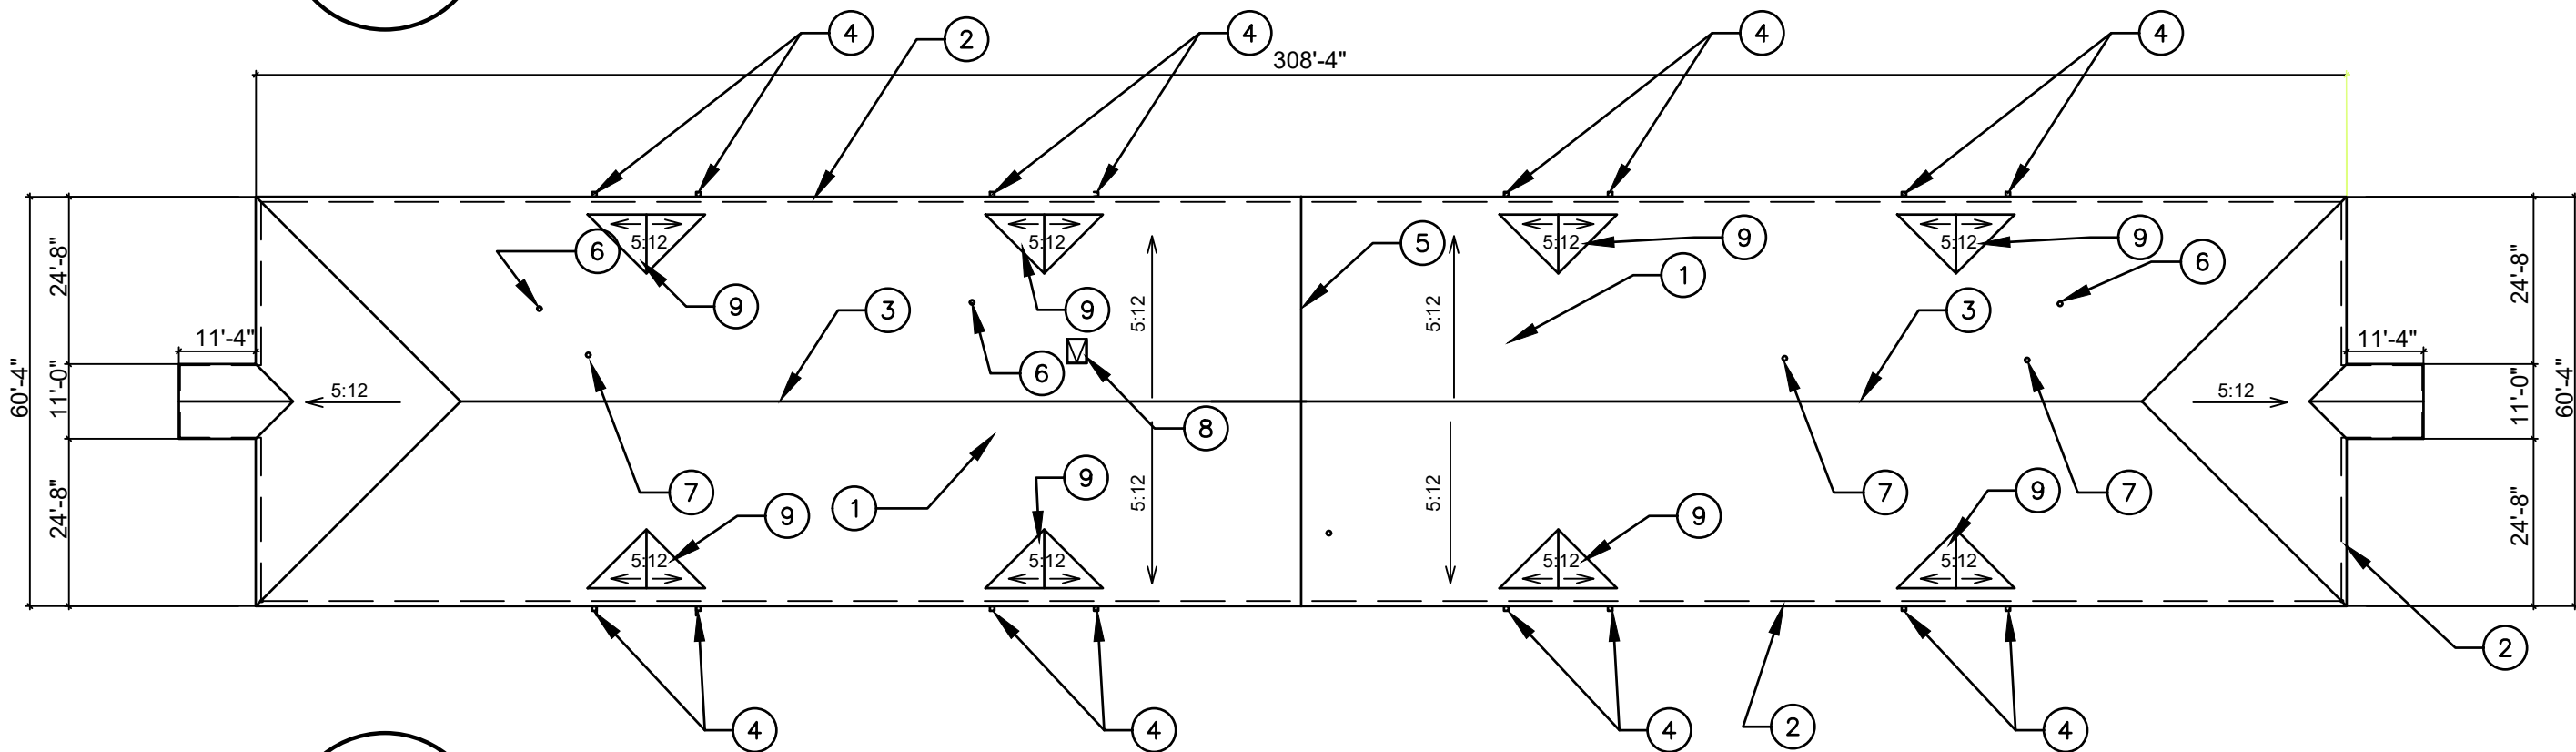


1 HP51 ROOF PLAN
A2 NOT TO SCALE

ROOF KEY NOTES

01	REMOVE AND DISPOSE OF ALL EXISTING SHINGLES, FELT PAPER, METAL DRIP EDGE AND OTHER RELATED ROOF COMPONENTS. REMOVE ANY ROTTED OR DAMAGED DECKING AND REPLACE WITH NEW 1/2" CDX PLYWOOD SHEATHING (FOR BIDDING PURPOSES ASSUME UP TO 2,825S.F. THIS BUILDING). INSTALL NEW ICE AND WATERSHIELD OVER ENTIRE ROOF SURFACE. INSTALL NEW ARCHITECTURAL ROOF SHINGLES AND METAL DRIP EDGE. SEE DETAIL 1/A6. SISTER ANY ROTTEN TRUSS FRAMING MEMBERS, MIN. 8' LONG (FOR BIDDING PURPOSES ASSUME UP TO 231 L.F. THIS BUILDING).
02	REMOVE EXISTING FASCIA AND SOFFIT. INSTALL NEW PTD ALUM FASCIA. INSTALL NEW VENTED VINYL SOFFIT.
03	INSTALL NEW RIDGE CAP (VENTED) TO MATCH NEW SHINGLES.
04	INSTALL NEW GUTTERS AND DOWNSPOUT. TIE NEW DOWNSPOUT INTO EXISTING PIPING. NEW DOWNSPOUTS TO HAVE MIN. (3) STRAPS. SEE 3/A6.
05	REMOVE EXISTING EXPANSION JOINT. INSTALL NEW EXPANSION JOINT AS PER DETAIL 2/A6. LOCATION OF EXISTING EXPANSION JOINT SHOWN ARE APPROXIMATE. FIELD VERIFY EXACT LOCATION.
06	REMOVE EXISTING VENT BOOT. REPLACE WITH NEW LEAD BOOT. SEE DETAIL SHEET 2/A7. LOCATION AND QUANTITY SHOWN ARE APPROXIMATE, CONTRACTOR TO VERIFY PRIOR TO SUBMITTING BID.
07	REMOVE EXISTING EXHAUST FAN. REPLACE WITH NEW EXHAUST FAN. SEE DETAIL SHEET 1/A7. LOCATION AND QUANTITY SHOWN ARE APPROXIMATE, CONTRACTOR TO VERIFY PRIOR TO SUBMITTING
08	REMOVE EXISTING ROOF HATCH. REPLACE WITH NEW ROOF HATCH. SEE DETAIL SHEET 1/A7.
09	REMOVE EXISTING DORMERS DOWN TO EXISTING ROOF DECK. INSTALL NEW ASPHALT SHINGLES. SEE DETAIL 1/A6.
10	REMOVE EXISTING ANTENNA. PREPARE FOR NEW ROOF AS PER DETAIL 1/A6.

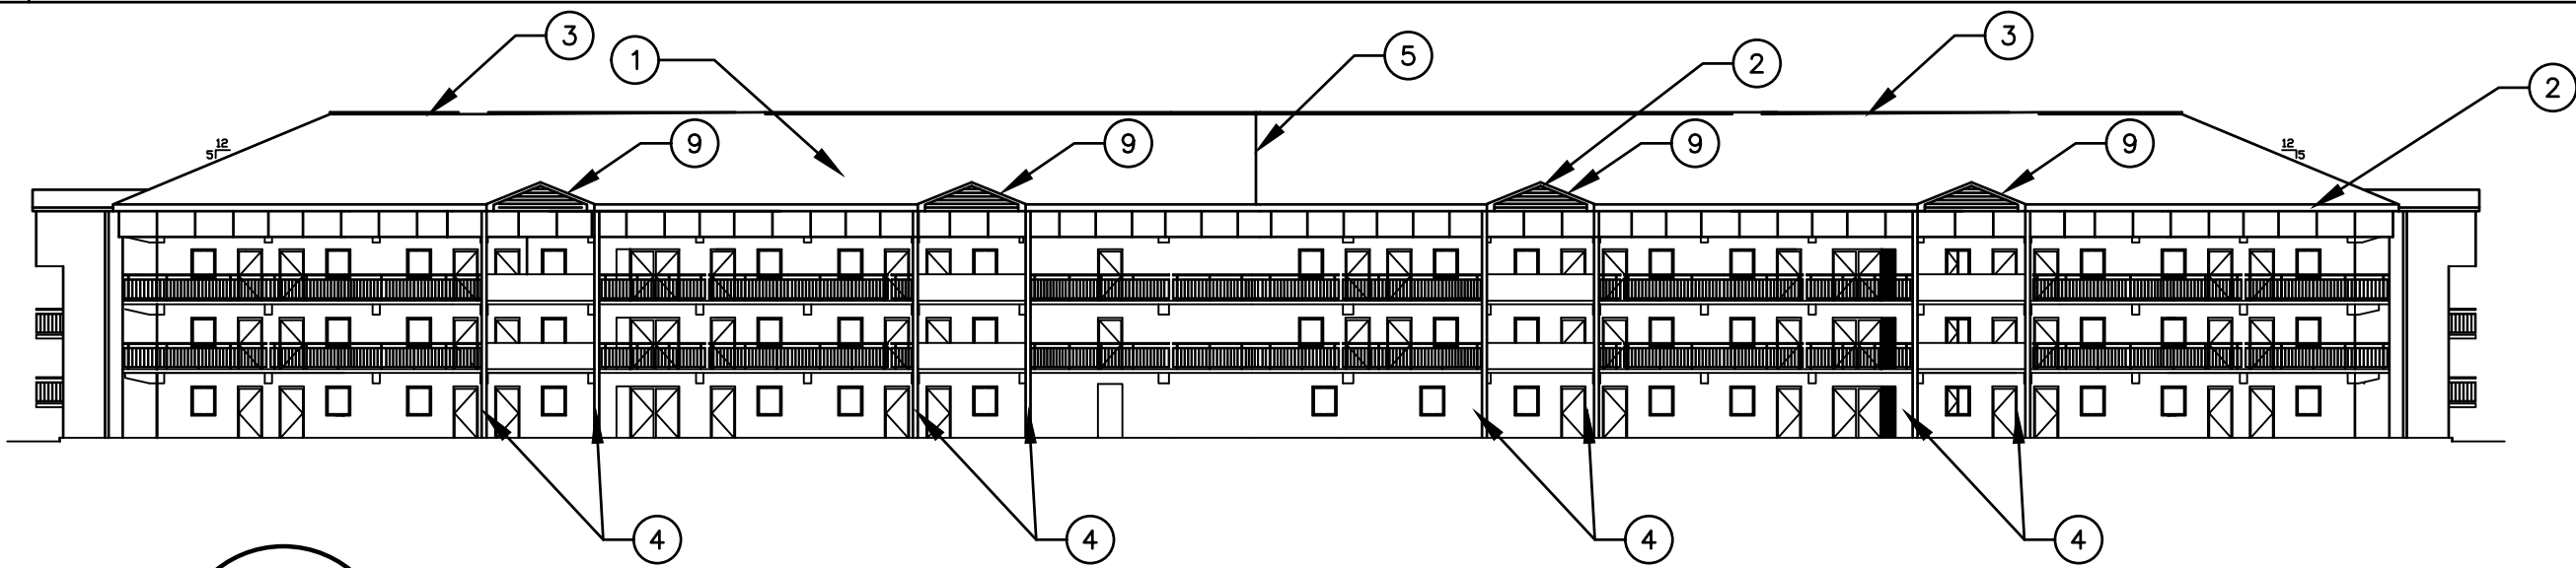

2 HP53 ELEVATION
A3 NOT TO SCALE

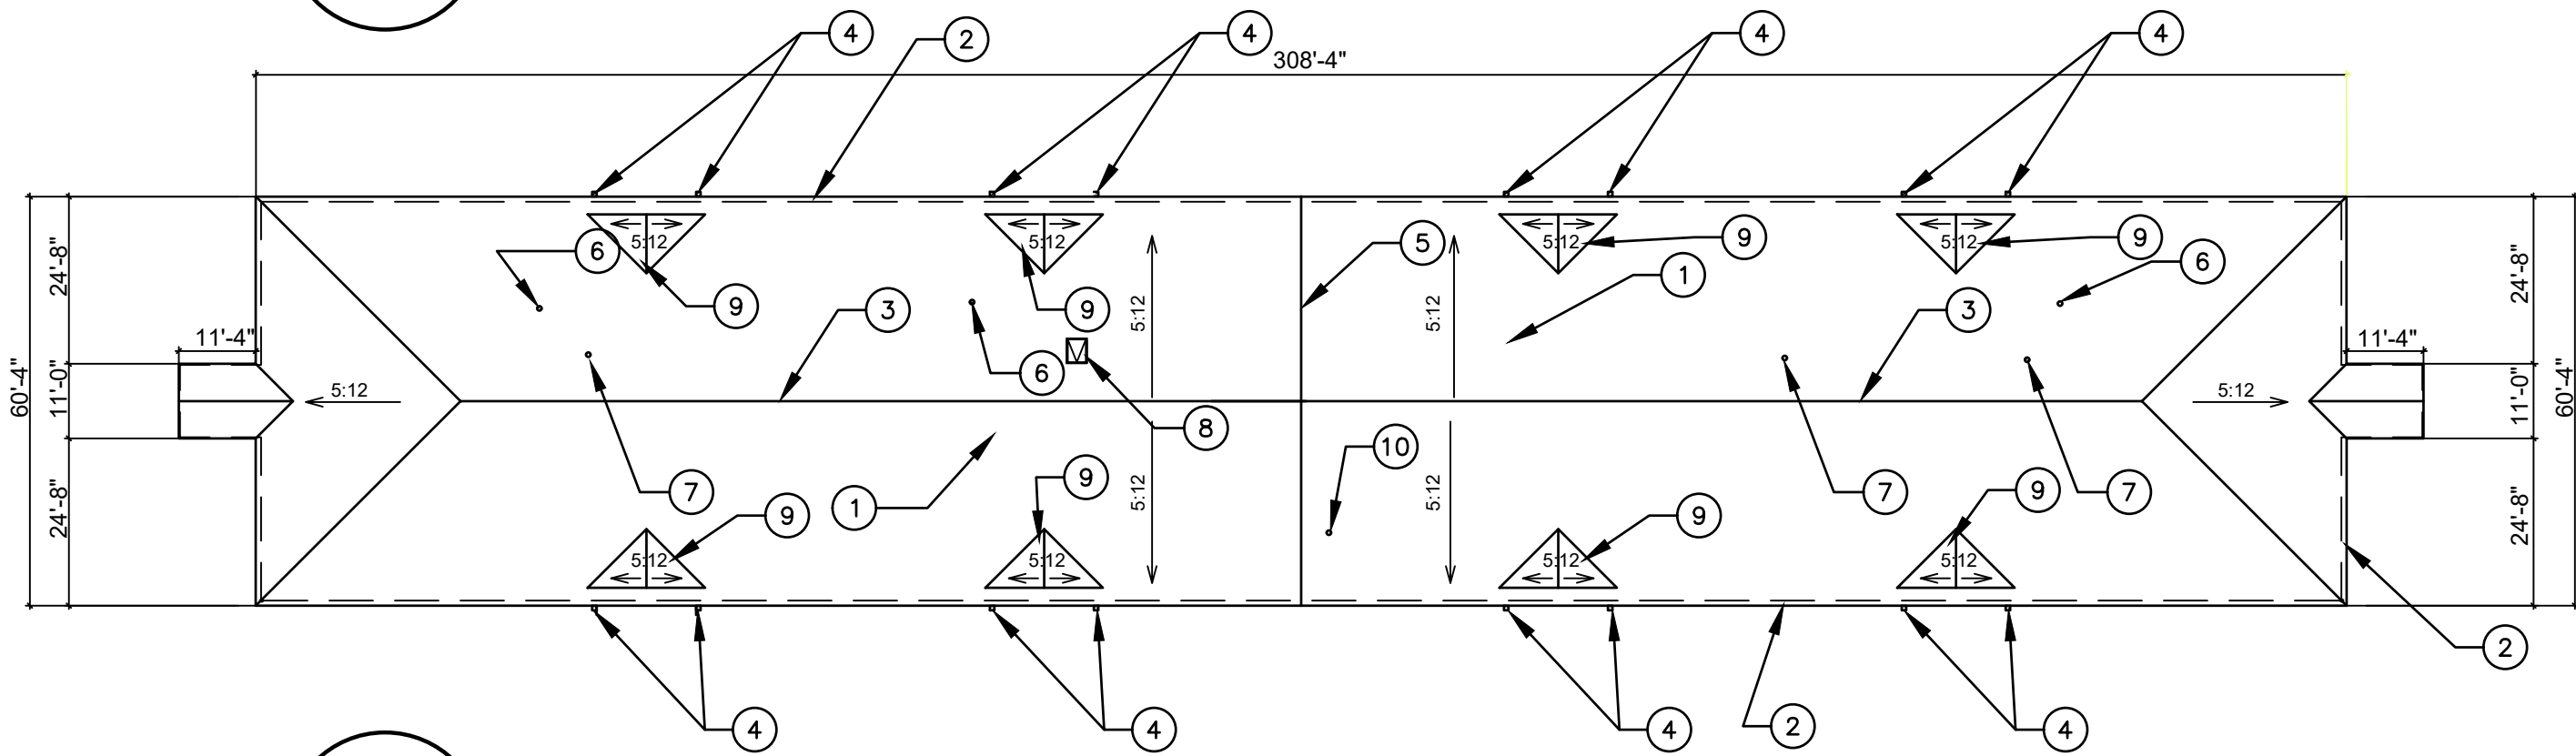


1 HP53 ROOF PLAN
A3 NOT TO SCALE


HP51,HP53,HP55,HP57	SHEET 4 OF 8
HP51 HP53 HP55 HP57	CONTRACT # 26-0400
ROOF REPAIRS	DWG. MARK RAMSDELL
USMC CAMP LEBJUNE	PROJECT # 26M002CN
A3	

ROOF KEY NOTES

01	REMOVE AND DISPOSE OF ALL EXISTING SHINGLES, FELT PAPER, METAL DRIP EDGE AND OTHER RELATED ROOF COMPONENTS. REMOVE ANY ROTTED OR DAMAGED DECKING AND REPLACE WITH NEW $\frac{1}{2}$ " CDX PLYWOOD SHEATHING (FOR BIDDING PURPOSES ASSUME UP TO 2,825S.F. THIS BUILDING). INSTALL NEW ICE AND WATERSHIELD OVER ENTIRE ROOF SURFACE. INSTALL NEW ARCHITECTURAL ROOF SHINGLES AND METAL DRIP EDGE. SEE DETAIL 1/A6. SISTER ANY ROTTEN TRUSS FRAMING MEMBERS, MIN. 8' LONG (FOR BIDDING PURPOSES ASSUME UP TO 231 L.F. THIS BUILDING).
02	REMOVE EXISTING FASCIA AND SOFFIT. INSTALL NEW PTD ALUM FASCIA. INSTALL NEW VENTED VINYL SOFFIT.
03	INSTALL NEW RIDGE CAP (VENTED) TO MATCH NEW SHINGLES.
04	INSTALL NEW GUTTERS AND DOWNSPOUT W/ CONCRETE SPLASHBLOCK. NEW DOWNSPOUTS TO HAVE MIN. (3) STRAPS. SEE 3/A6.
05	REMOVE EXISTING EXPANSION JOINT. INSTALL NEW EXPANSION JOINT AS PER DETAIL 2/A6. LOCATION OF EXISTING EXPANSION JOINT SHOWN ARE APPROXIMATE. FIELD VERIFY EXACT LOCATION.
06	REMOVE EXISTING VENT BOOT. REPLACE WITH NEW LEAD BOOT. SEE DETAIL SHEET 2/A7. LOCATION AND QUANTITY SHOWN ARE APPROXIMATE, CONTRACTOR TO VERIFY PRIOR TO SUBMITTING BID.
07	REMOVE EXISTING EXHAUST FAN. REPLACE WITH NEW EXHAUST FAN. SEE DETAIL SHEET 1/A7. LOCATION AND QUANTITY SHOWN ARE APPROXIMATE, CONTRACTOR TO VERIFY PRIOR TO SUBMITTING
08	REMOVE EXISTING ROOF HATCH. REPLACE WITH NEW ROOF HATCH. SEE DETAIL SHEET 1/A7.
09	REMOVE EXISTING DORMERS DOWN TO EXISTING ROOF DECK. INSTALL NEW ASPHALT SHINGLES. SEE DETAIL 1/A6.

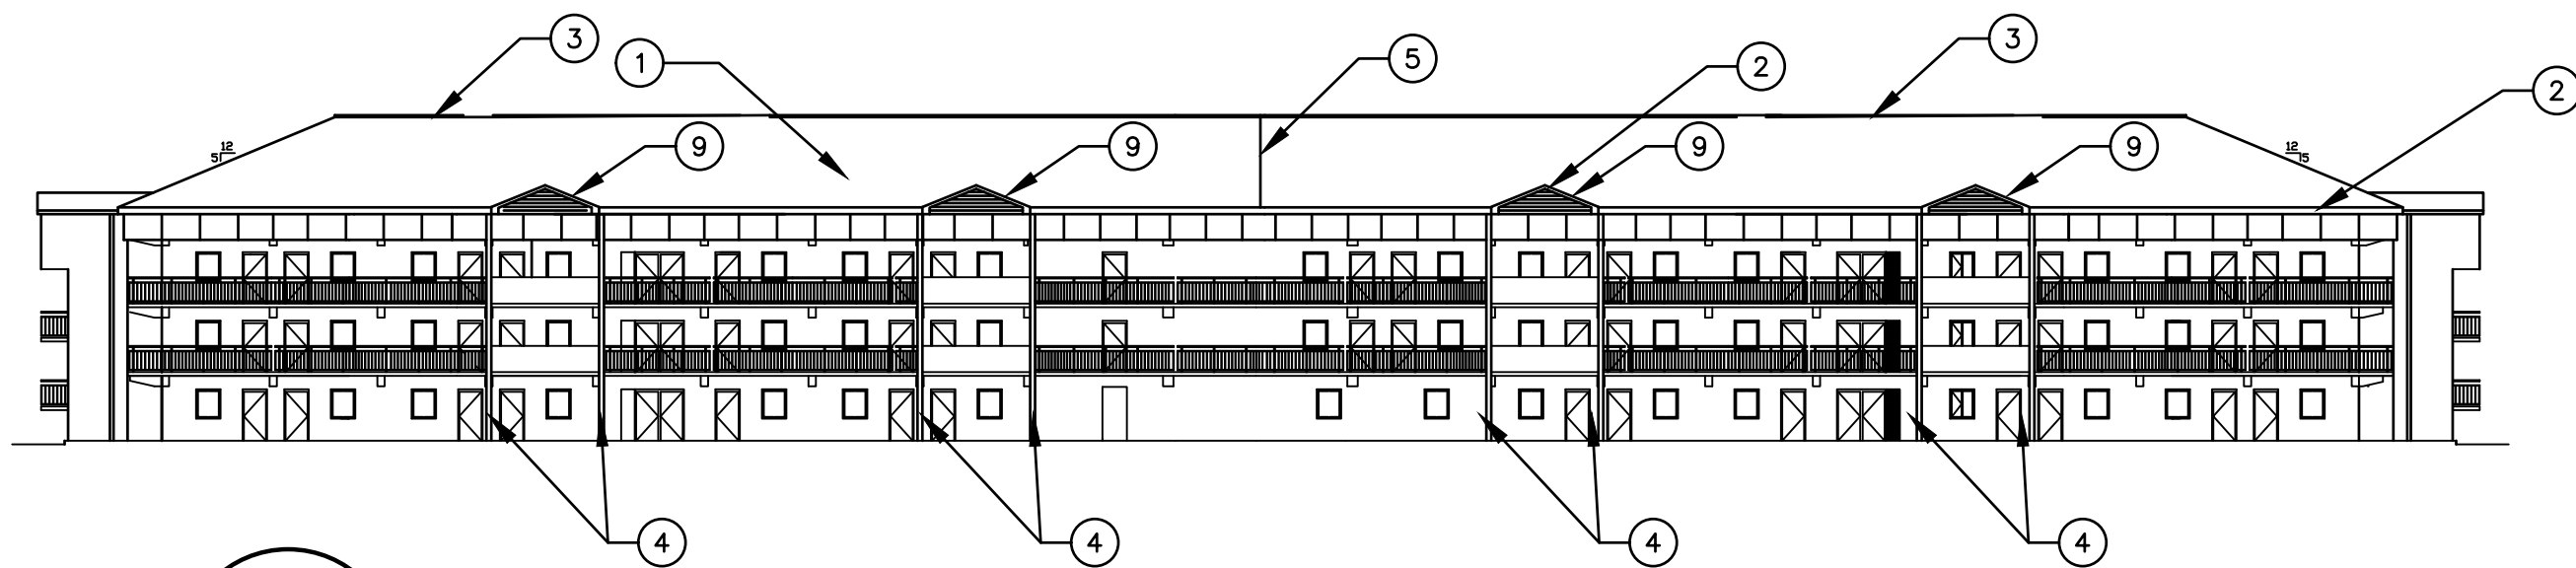

2 HP55 ELEVATION
A4 NOT TO SCALE

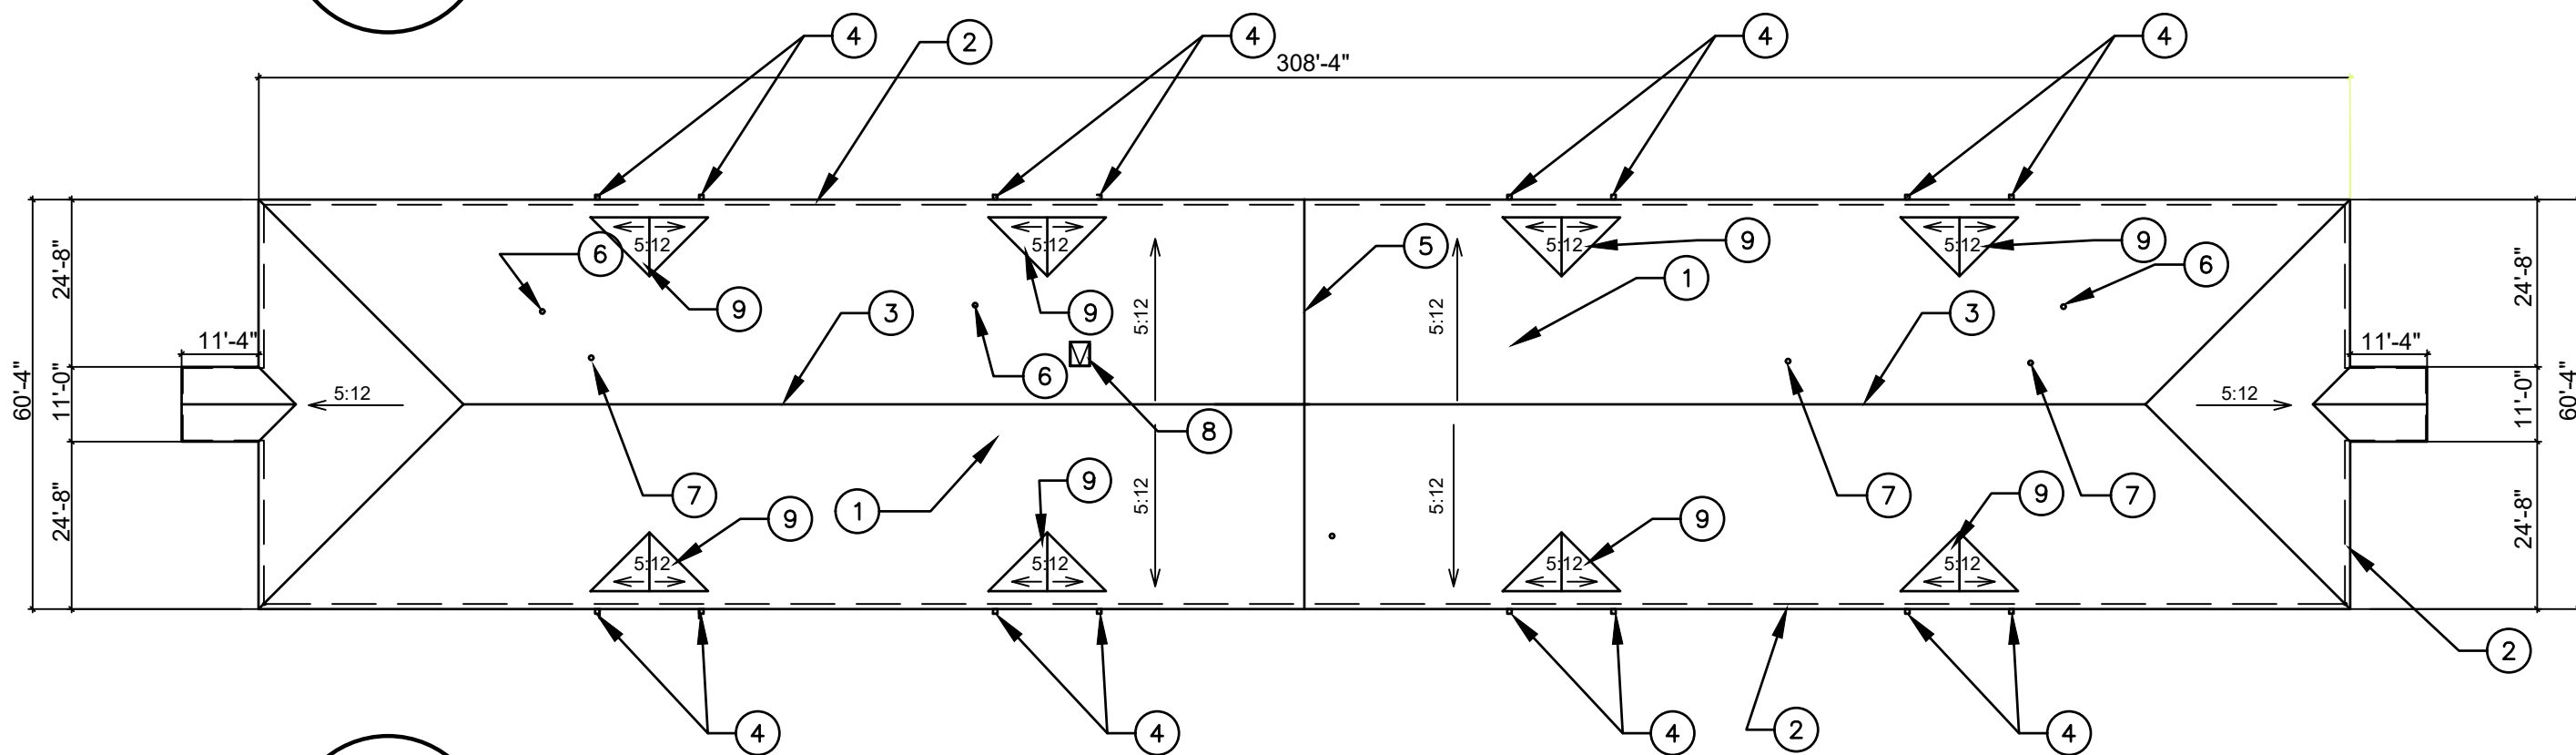


1 HP55 ROOF PLAN
A4 NOT TO SCALE


HP51,HP53,HP55,HP57	SHEET 5 OF 8
HP51 HP53 HP55 HP57	CONTRACT # 26-0400
ROOF REPAIRS	DWG. MARK RAMSDELL
USMC CAMP LEBJUNE	PROJECT # 26M002CN
A4	

ROOF KEY NOTES

01	REMOVE AND DISPOSE OF ALL EXISTING SHINGLES, FELT PAPER, METAL DRIP EDGE AND OTHER RELATED ROOF COMPONENTS. REMOVE ANY ROTTED OR DAMAGED DECKING AND REPLACE WITH NEW 1/2" CDX PLYWOOD SHEATHING (FOR BIDDING PURPOSES ASSUME UP TO 2,825S.F. THIS BUILDING). INSTALL NEW ICE AND WATERSHIELD OVER ENTIRE ROOF SURFACE. INSTALL NEW ARCHITECTURAL ROOF SHINGLES AND METAL DRIP EDGE. SEE DETAIL 1/A6. SISTER ANY ROTTEN TRUSS FRAMING MEMBERS, MIN. 8' LONG (FOR BIDDING PURPOSES ASSUME UP TO 231 L.F. THIS BUILDING).
02	REMOVE EXISTING FASCIA AND SOFFIT. INSTALL NEW PTD ALUM FASCIA. INSTALL NEW VENTED VINYL SOFFIT.
03	INSTALL NEW RIDGE CAP (VENTED) TO MATCH NEW SHINGLES.
04	INSTALL NEW GUTTERS AND DOWNSPOUT. TIE NEW DOWNSPOUT INTO EXISTING PIPING. NEW DOWNSPOUTS TO HAVE MIN. (3) STRAPS. SEE 3/A6.
05	REMOVE EXISTING EXPANSION JOINT. INSTALL NEW EXPANSION JOINT AS PER DETAIL 2/A6. LOCATION OF EXISTING EXPANSION JOINT SHOWN ARE APPROXIMATE. FIELD VERIFY EXACT LOCATION.
06	REMOVE EXISTING VENT BOOT. REPLACE WITH NEW LEAD BOOT. SEE DETAIL SHEET 2/A7. LOCATION AND QUANTITY SHOWN ARE APPROXIMATE, CONTRACTOR TO VERIFY PRIOR TO SUBMITTING BID.
07	REMOVE EXISTING EXHAUST FAN. REPLACE WITH NEW EXHAUST FAN. SEE DETAIL SHEET 1/A7. LOCATION AND QUANTITY SHOWN ARE APPROXIMATE, CONTRACTOR TO VERIFY PRIOR TO SUBMITTING
08	REMOVE EXISTING ROOF HATCH. REPLACE WITH NEW ROOF HATCH. SEE DETAIL SHEET 1/A7.
09	REMOVE EXISTING DORMERS DOWN TO EXISTING ROOF DECK. INSTALL NEW ASPHALT SHINGLES. SEE DETAIL 1/A6.

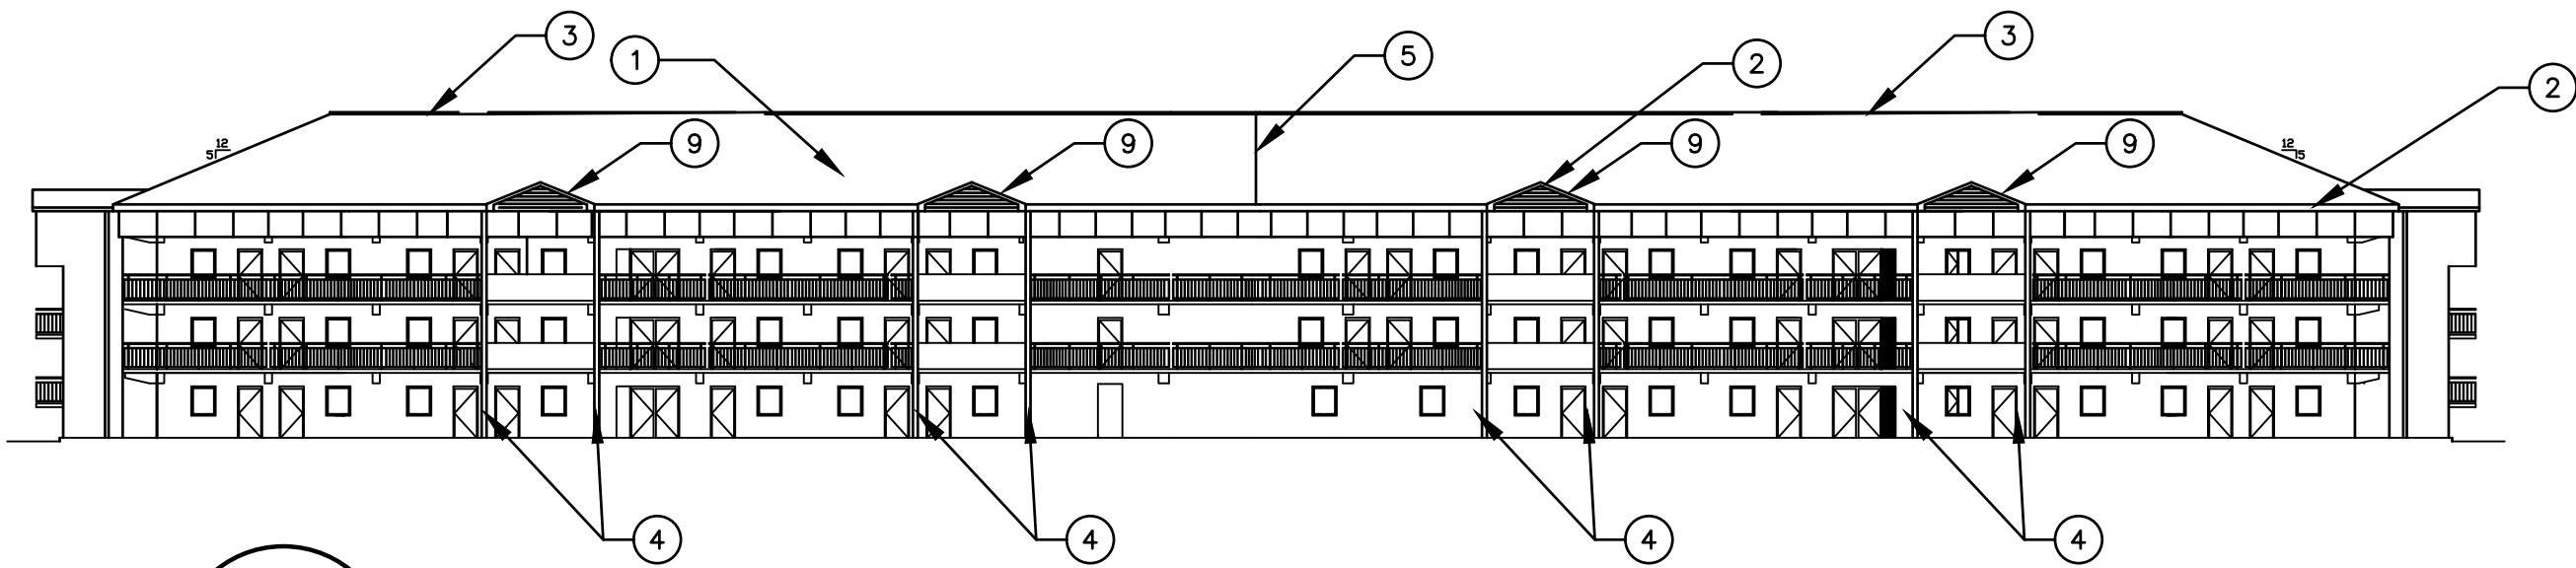


2 HP57 ELEVATION
A5 NOT TO SCALE

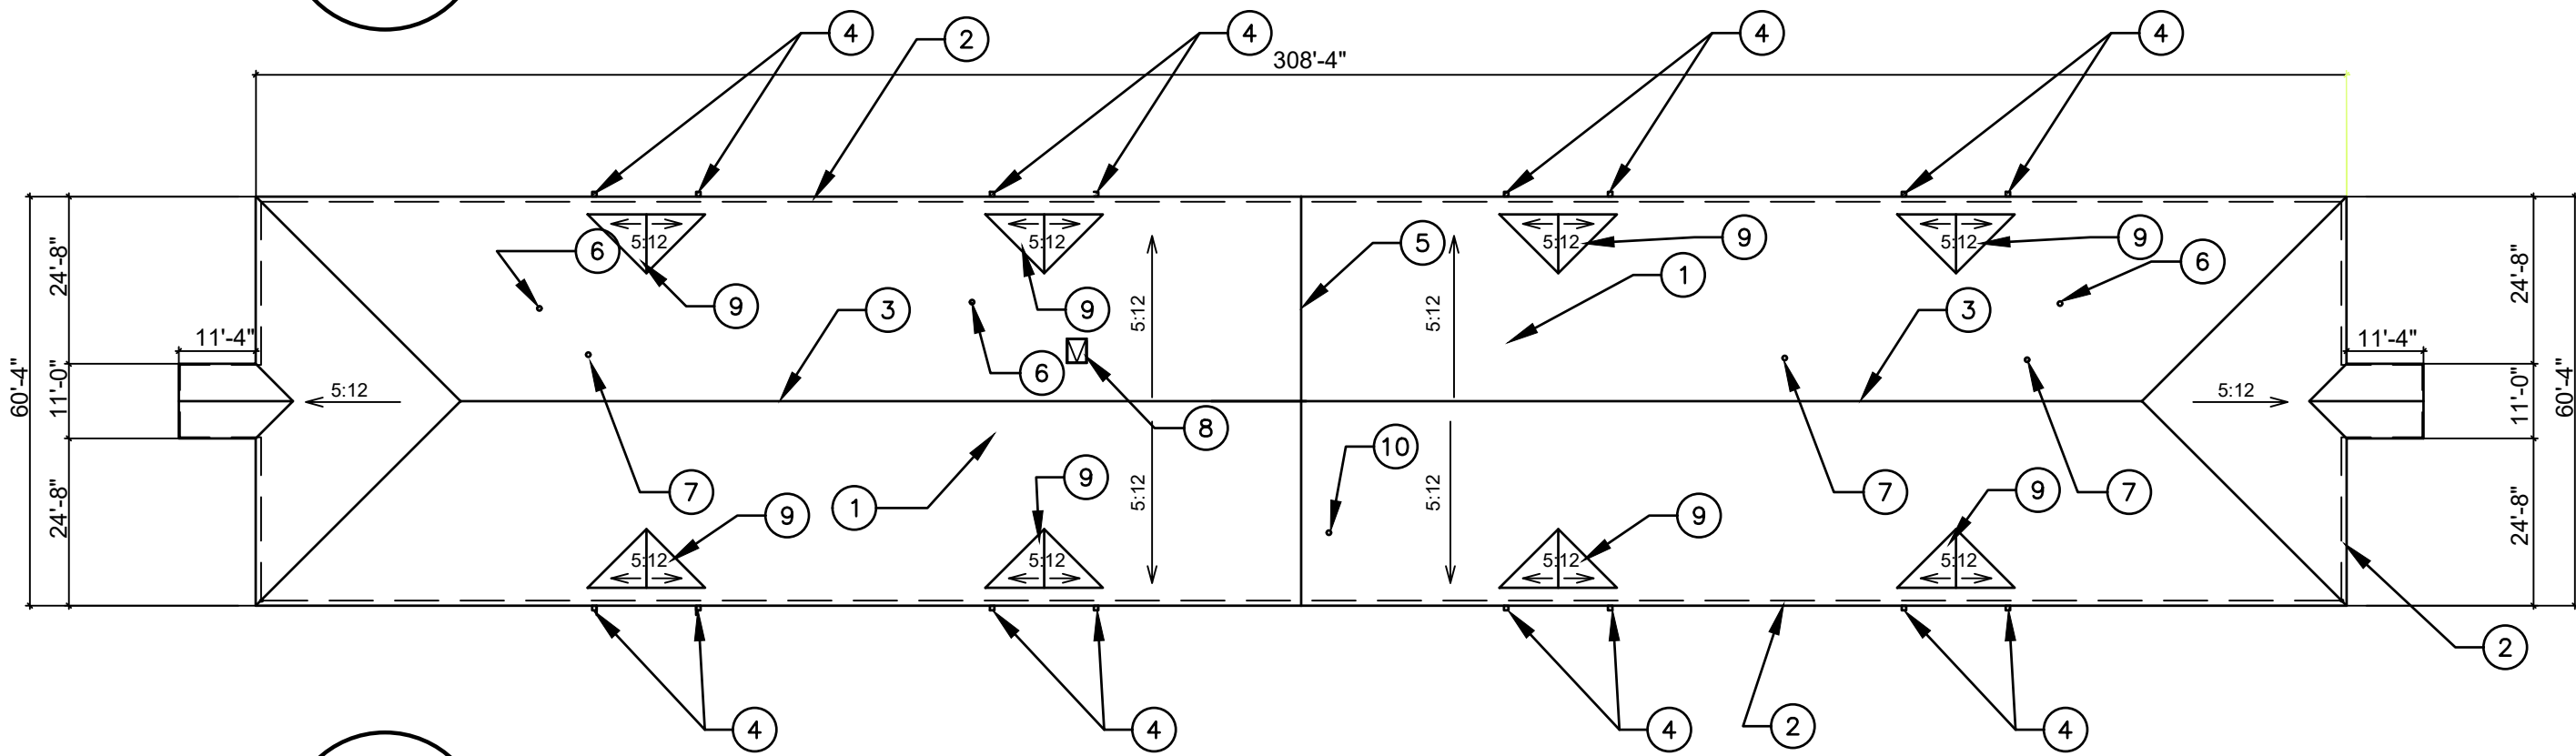


1 HP57 ROOF PLAN
A5 NOT TO SCALE


HP51,HP53,HP55,HP57	SHEET 6 OF 8
HP51 HP53 HP55 HP57	CONTRACT # 26-0400
ROOF REPAIRS	DWG. MARK RAMSDELL
USMC CAMP LEBJUNE	PROJECT # 26M002CN
A5	

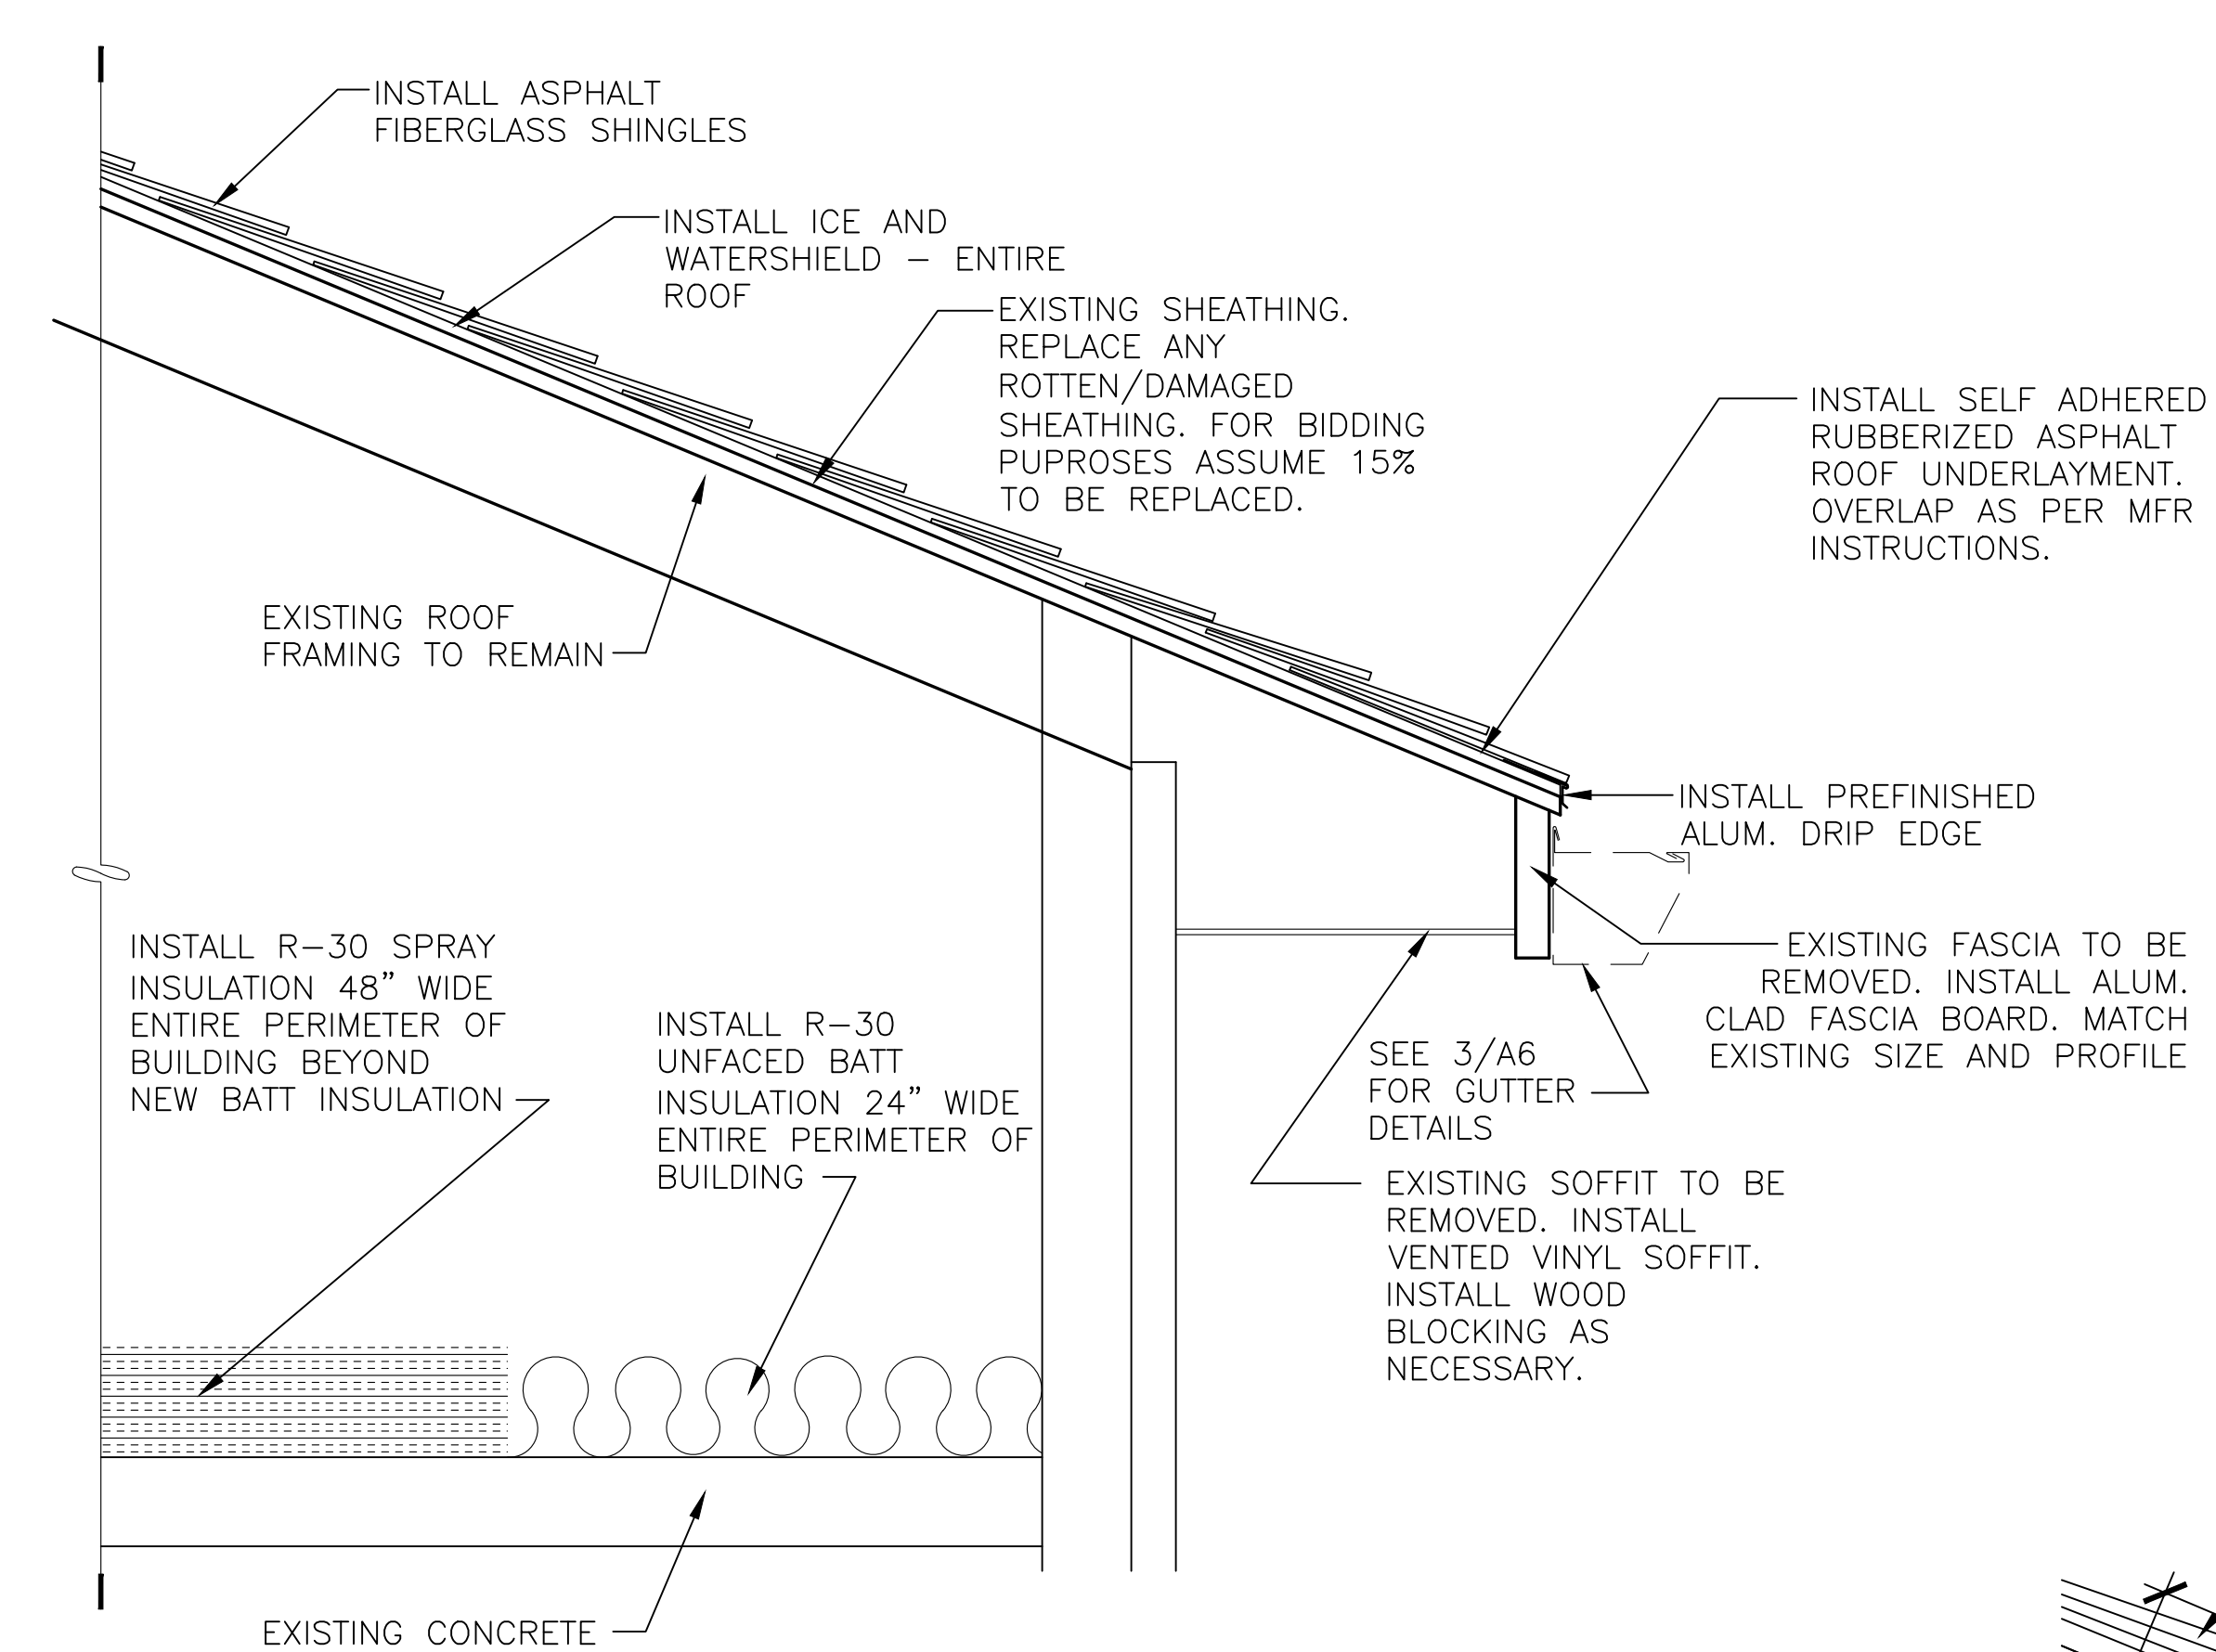

1
A6
TYPICAL ROOF DETAIL
1-1/2" = 1'-0"
0 6" 1' 2'

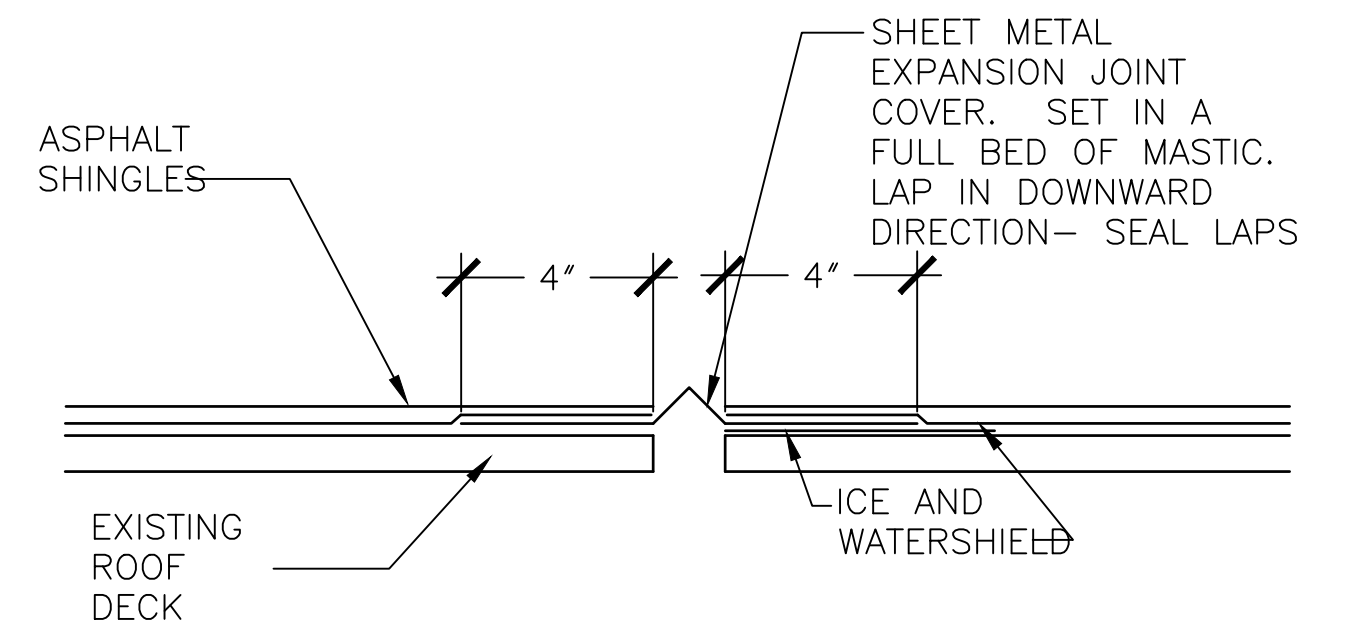


2
A6
TYPICAL VENT THROUGH ROOF DETAIL
3" = 1'-0"
0 3" 6" 1'

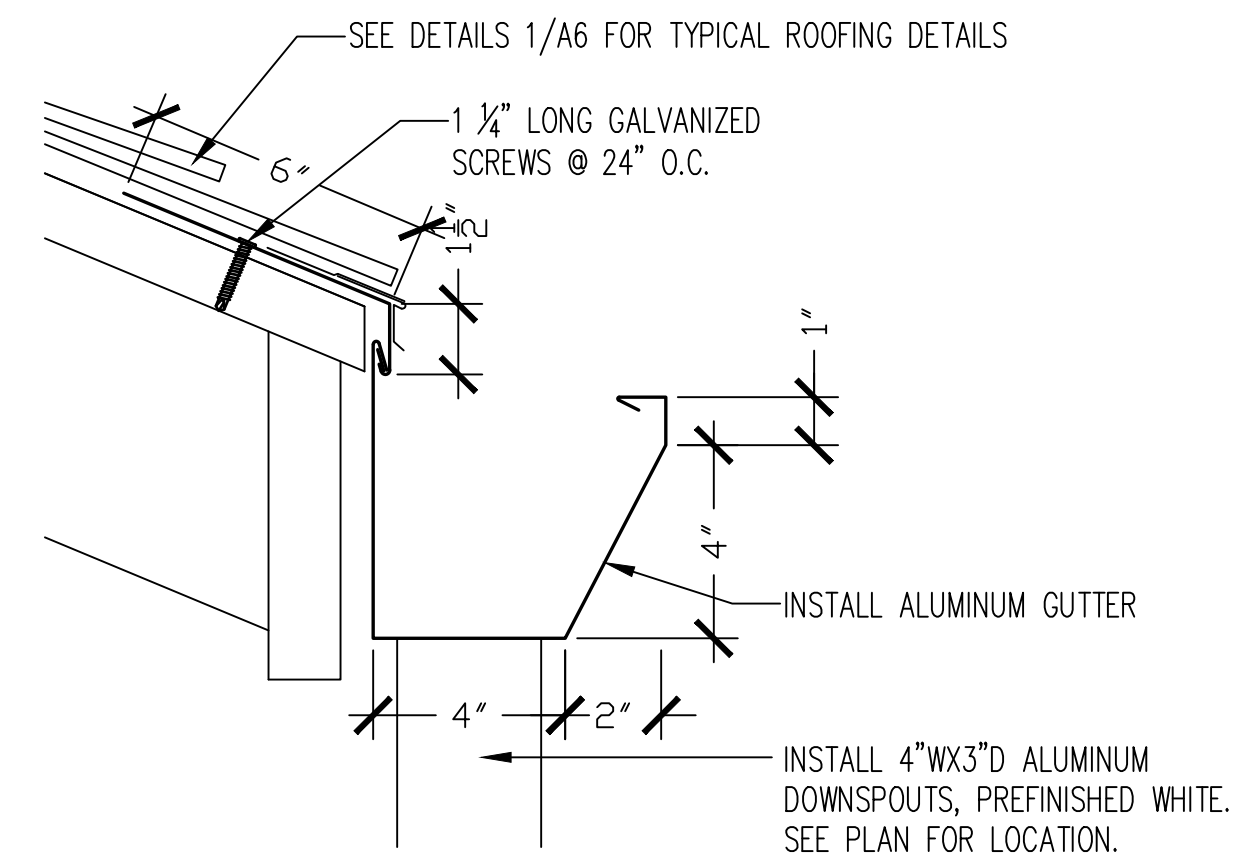


3
A6
TYPICAL GUTTER DETAIL
3" = 1'-0"
0 3" 6" 1'

HP51,HP53,HP55,HP57	SHEET 7 OF 8
CONTRACT # 26-0400	
DWG. MARK RANSIELL	PROJECT # 26M002CN
HP51 HP53 HP55 HP57	ROOF REPAIRS
USMC CAMP LEBJUNE	
A6	

DETAILS

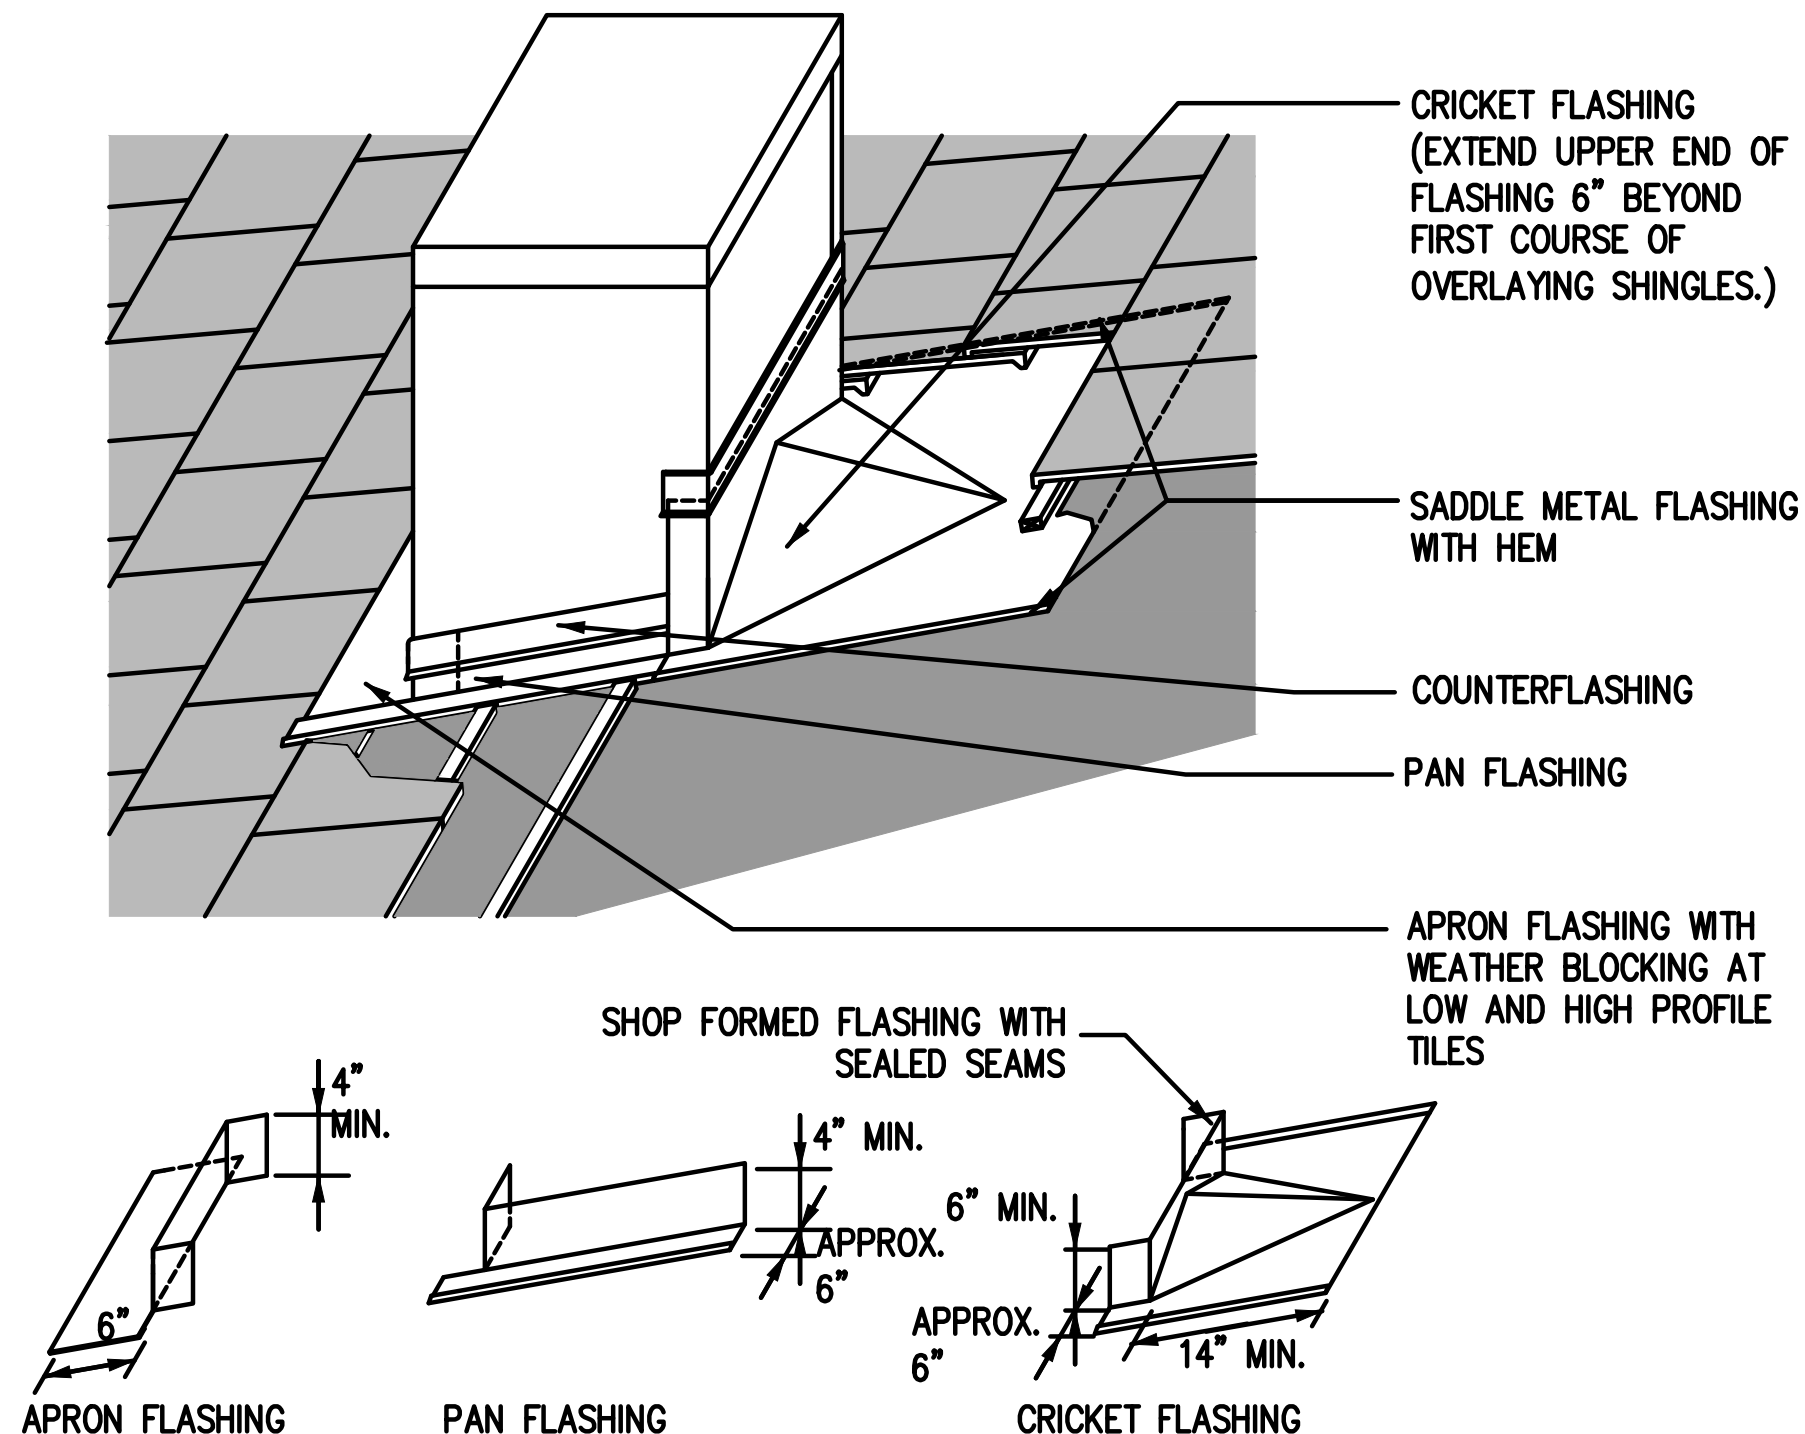

1 ROOF CURB FLASHING DETAIL
A7 NOT TO SCALE

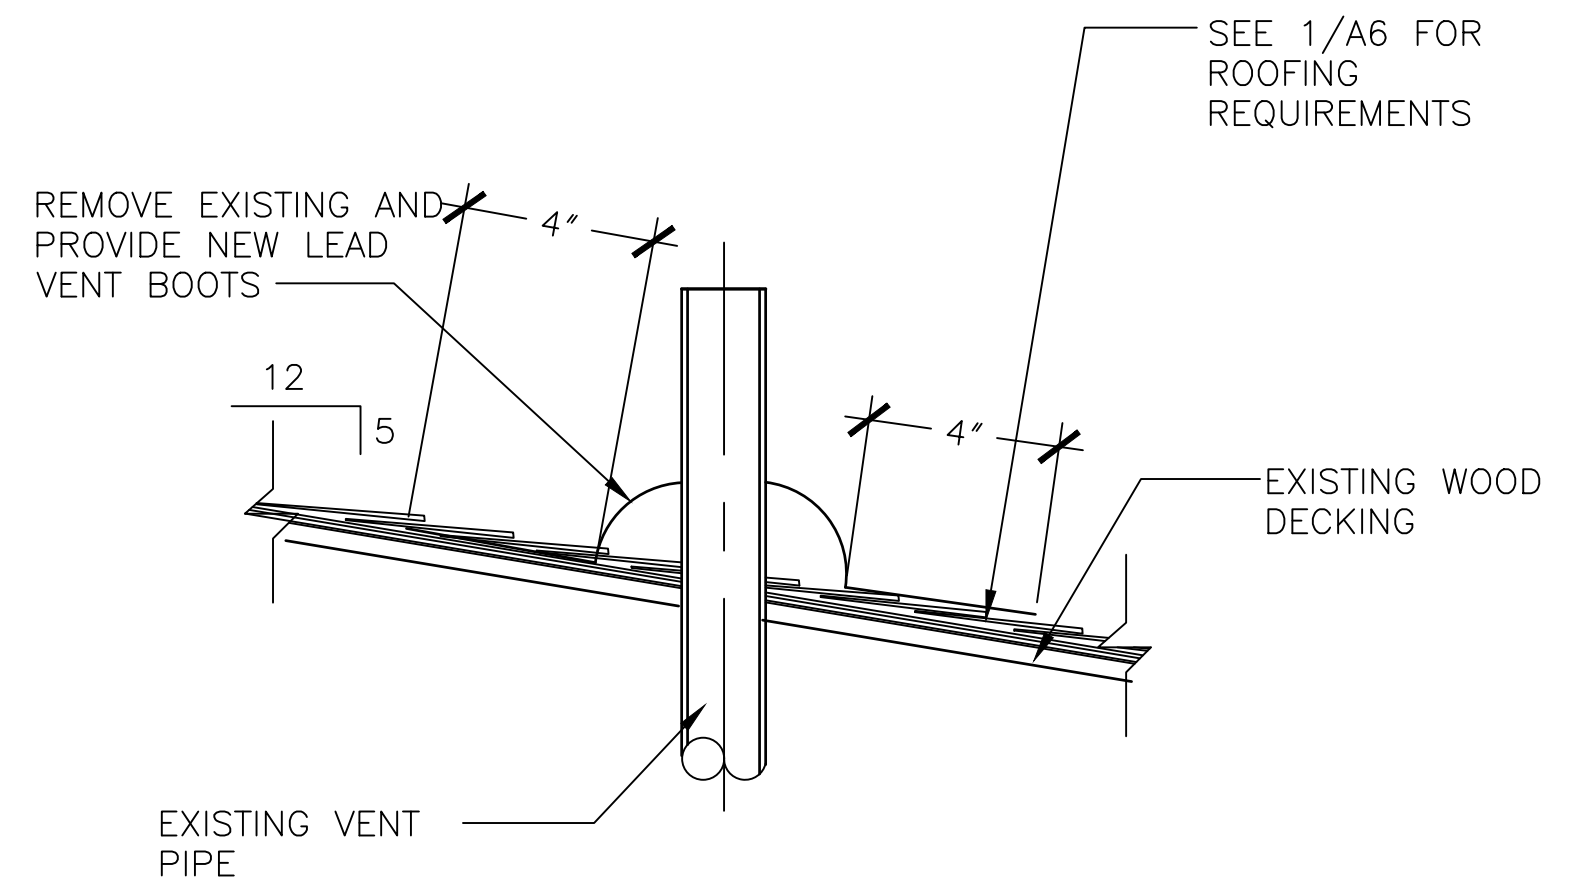

2 TYPICAL EXPANSION JOINT DETAIL
A7 3" = 1'-0" 0 3" 6" 1'

ALUMINUM FLASHING AND SHEET GOODS:

1. USE ONLY ALUMINUM MANUFACTURED FOR THE PURPOSE OF FLASHING.
2. ALL EXPOSED SHEET METAL GUTTERS, INCLUDING HANGERS; DOWNSPOUTS; GRAVEL STOPS AND FASCIAS; CAP, VALLEY, STEPPED, BASE, AND EAVE FLASHING, EXPANSION JOINTS, AND RELATED ACCESSORIES MUST BE OF THE SAME MATERIAL.
3. FURNISH SHEET METAL ITEMS IN 8 TO 10 FOOT LENGTHS. SINGLE PIECES LESS THAN 8 FEET LONG MAY BE USED TO CONNECT TO FACTORY-FABRICATED INSIDE AND OUTSIDE CORNERS, AND AT ENDS OF RUNS. FACTORY FABRICATE CORNER PIECES WITH MINIMUM 12 INCH LEGS. PROVIDE ALL ACCESSORIES AND OTHER ITEMS ESSENTIAL TO COMPLETE THE SHEET METAL INSTALLATION. PROVIDE ACCESSORIES MADE OF THE SAME OR COMPATIBLE MATERIALS AS THE ITEMS TO WHICH THEY ARE APPLIED.
4. ALUMINUM ALLOY SHEET AND PLATE: ASTM B209M ASTM B209 ANODIZED COLOR FORM ALLOY, AND TEMPER APPROPRIATE FOR USE. ALCLAD3003, ALCLAD3004, ALCLAD3005, CLAD ON BOTH SIDES.
5. EXPOSED EXTERIOR FINISH: BAKED-ON, FACTORY-APPLIED COLOR COATING OF POLYVINYLIDENE FLUORIDE (PVF2) OR OTHER EQUIVALENT FLUOROCARBON COATING APPLIED AFTER METAL SUBSTRATES HAVE BEEN CLEANED AND PRETREATED. PROVIDE FINISH COATING DRY-FILM THICKNESS OF 0.020 TO 0.033 MM 0.8 TO 1.3 MILS. COLOR AS SELECTED FROM STANDARD COLOR WHEEL.
6. ALUMINUM ALLOY, EXTRUDED BARS, RODS, SHAPES, AND TUBES: ASTM B221M ASTM B221.
7. FASTENERS: USE THE SAME METAL OR A METAL COMPATIBLE WITH THE ITEM FASTENED. USE STAINLESS STEEL FASTENERS TO FASTEN DISSIMILAR MATERIALS (ASTMA480/A480M, TYPE 302 OR 304, 2D FINISH, FULLY ANNEALED)
8. MINIMUM THICKNESS OF 0.019" FOR: BASE COURSE; WALL OPENINGS HEAD AND SILL; THROUGH WALL AND SPANDREL; CAP AND BASE FLASHING; VERTICAL AND HORIZONTAL SURFACES; ROOF EDGE RIDGES; AND HIPS; CRICKETS VALLEY OR GUTTER; CHIMNEY PAN; AND LEDGE FLASHING.
9. MINIMUM THICKNESS OF 0.032" FOR: COPING WIDTH UP TO 12".
10. MINIMUM THICKNESS OF 0.040" FOR: ROOF PENETRATIONS, AND COPING WIDTH ABOVE 12".

HP51,HP53,HP55,HP57 SHEET 8 OF 8
CONTRACT # 26-0400
DWG. MARK RANSIELL PROJECT # 26M002CN

HP51 HP53 HP55 HP57
ROOF REPAIRS
USMC CAMP LEBJUNE

A7

DETAILS