
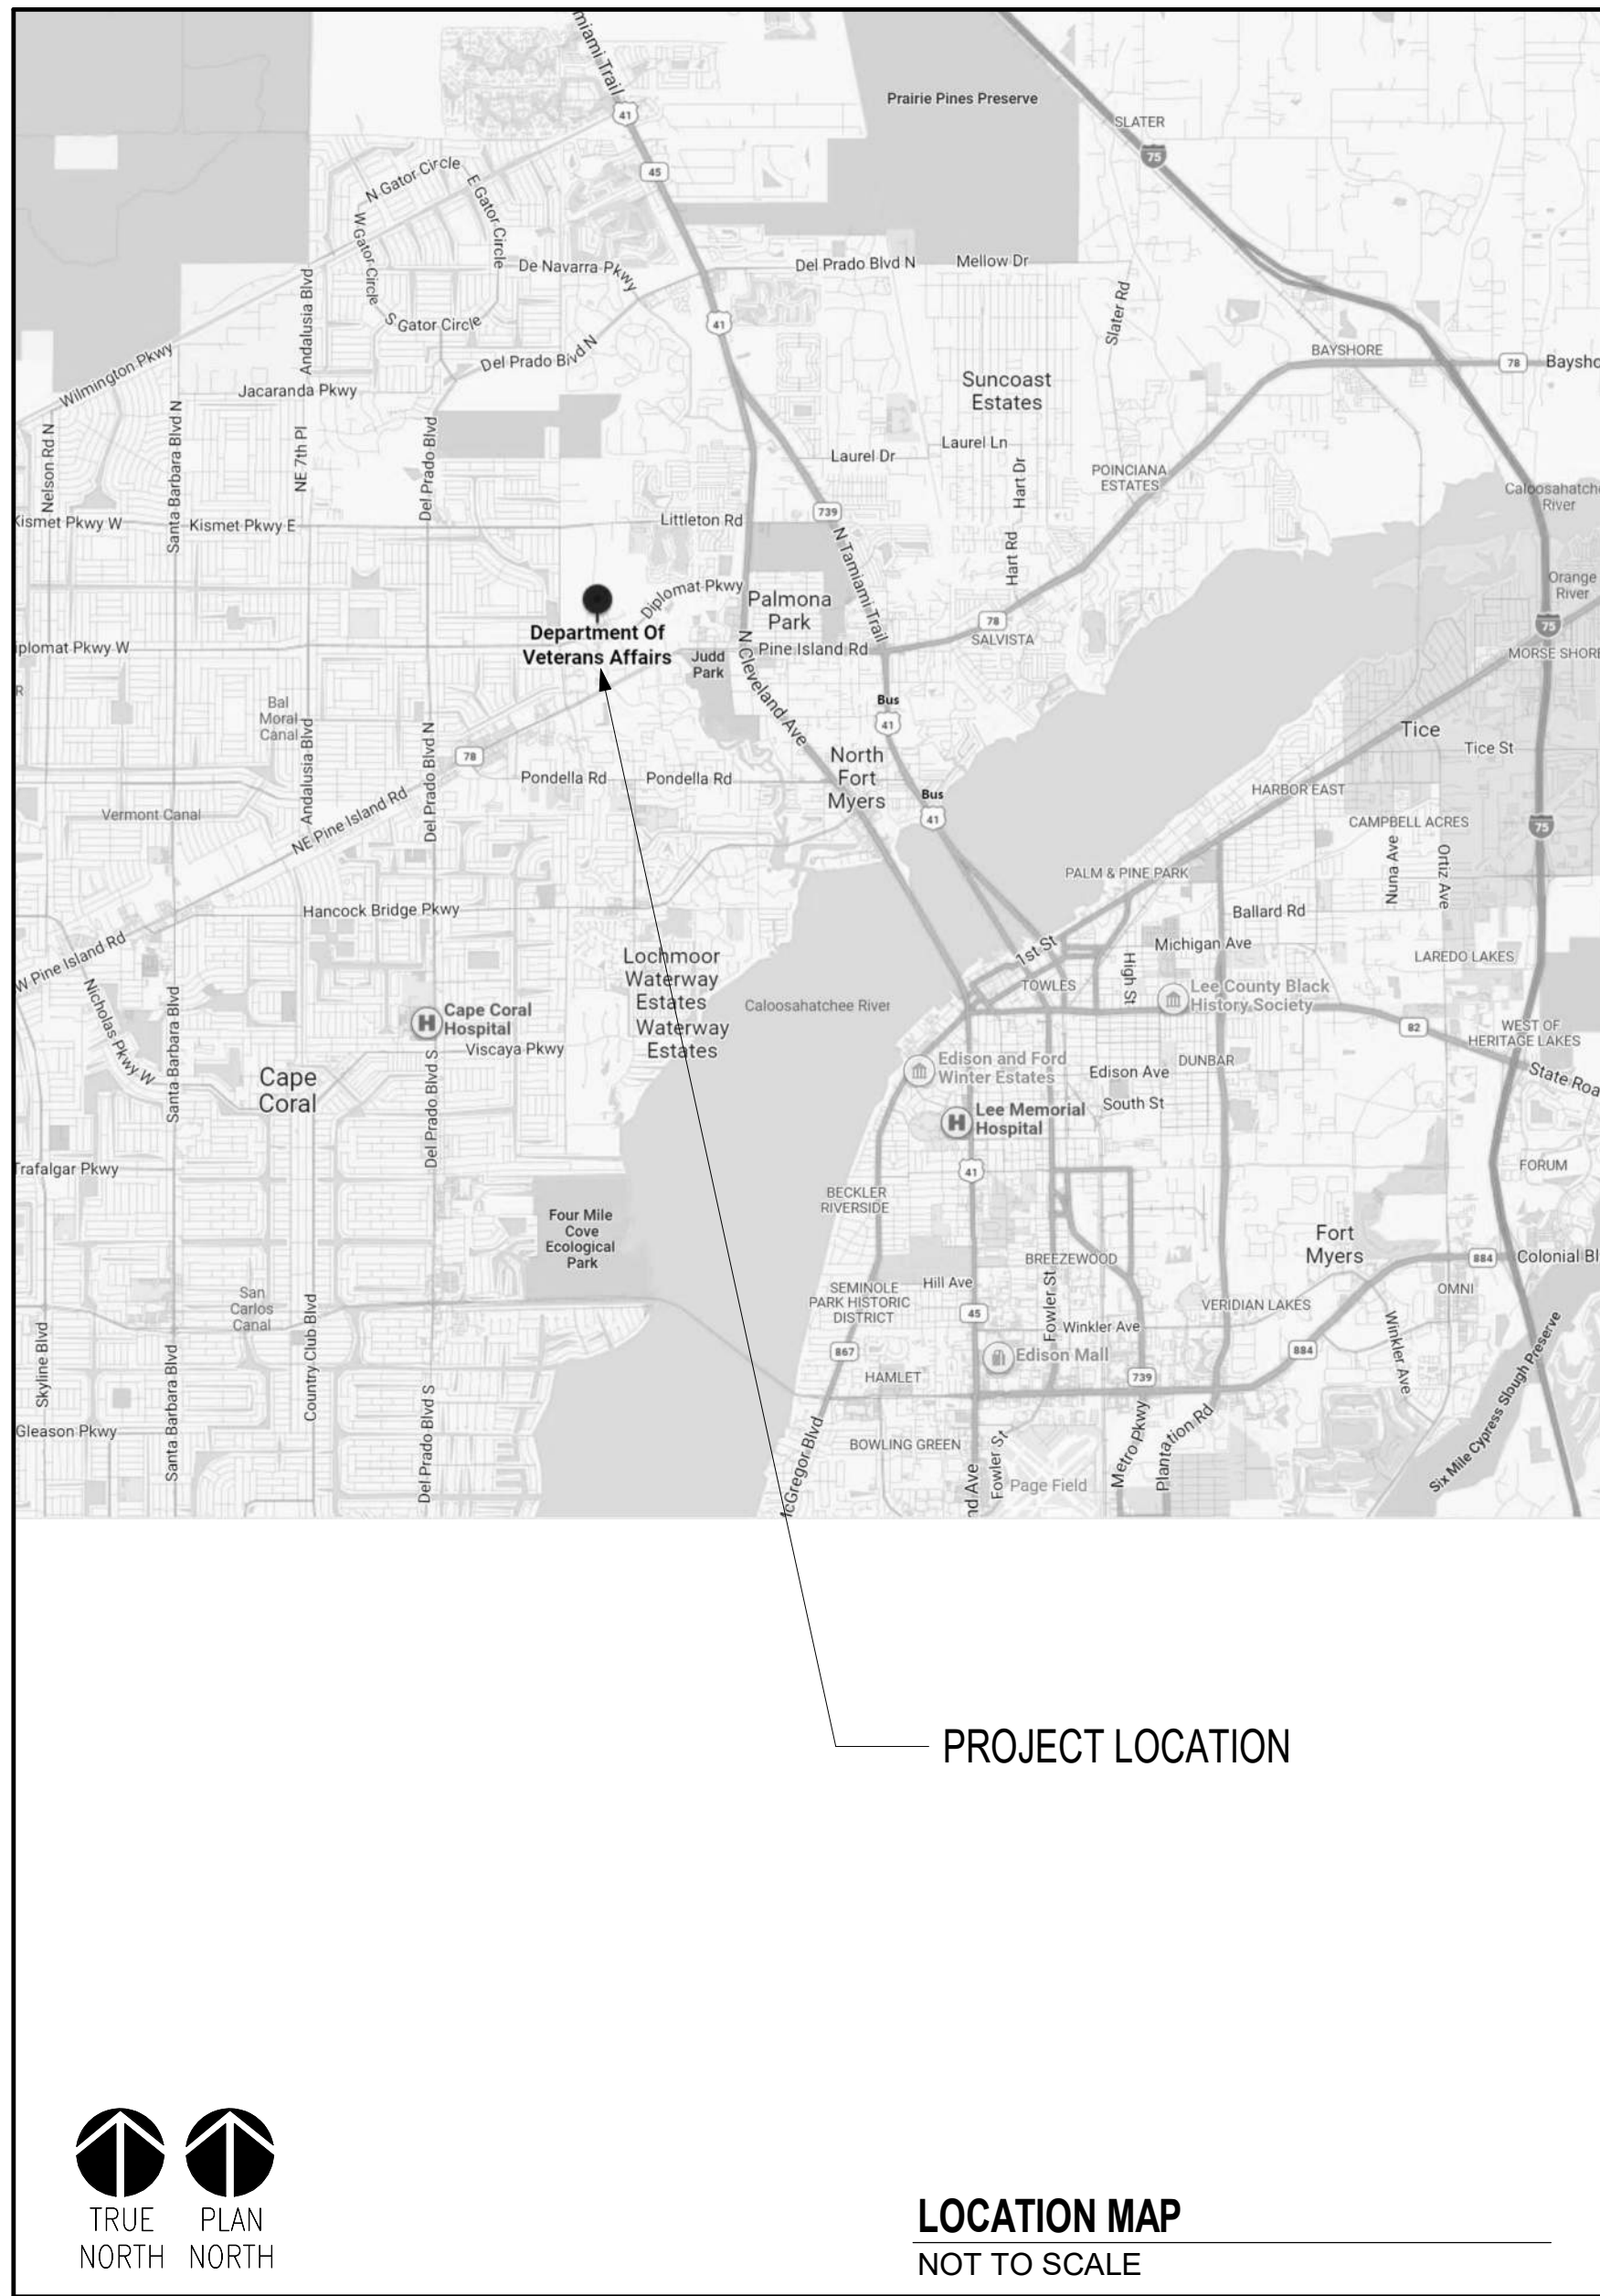


UPGRADE PHARMACY IV MIXING
ROOM USP 797/800
LEE COUNTY VA CLINIC
2489 DIPLOMAT PARKWAY EAST
CAPE CORAL, FL 33909
PROJECT NUMBER: 516-22-112
BID DOCUMENTS

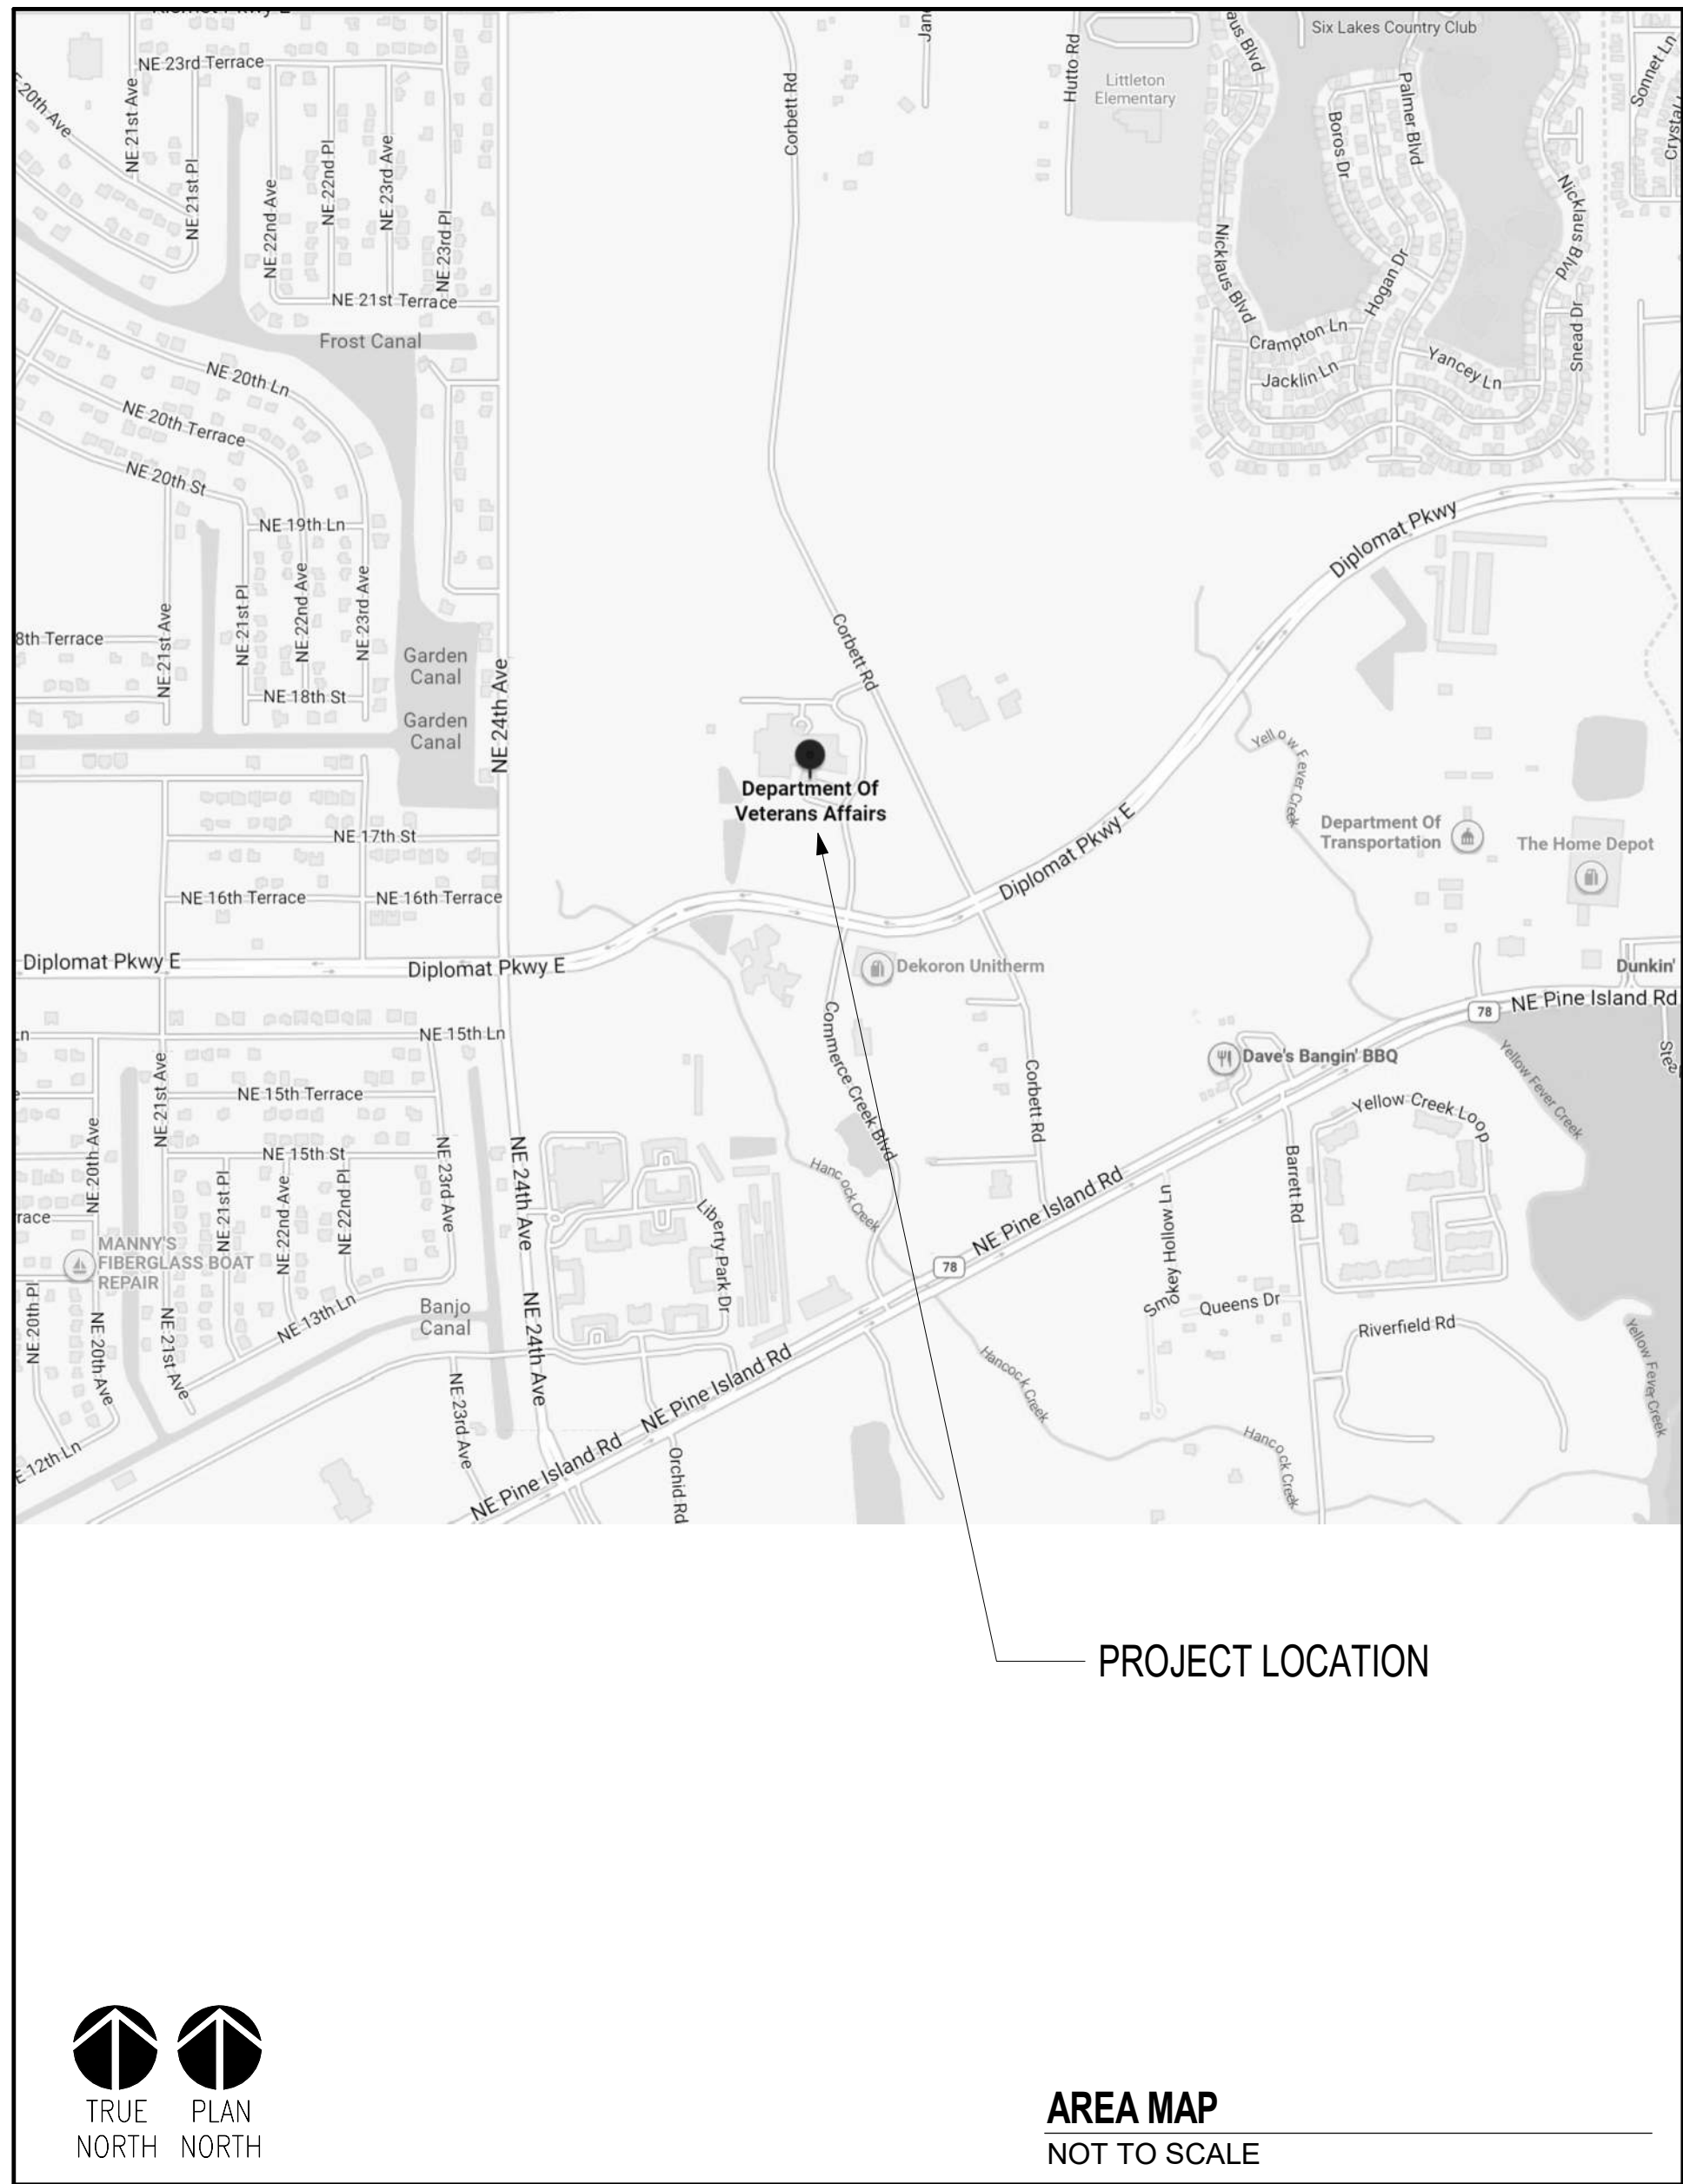


SHEET INDEX			
SHEET NO.	DRAWING TITLE	SHEET NO.	
GENERAL		MECHANICAL	
GI001	COVER SHEET	M001	MECHANICAL LEGEND, ABBREVIATIONS, AND NOTES
GI002	NOTES, ABBREVIATIONS AND LEGENDS	M002	MECHANICAL NOTES
GI003	PARTIAL FIRST FLOOR AND SECOND FLOOR ICRA PLANS	MD101	PARTIAL FIRST FLOOR AND ENLARGED HVAC DEMOLITION PLAN
STRUCTURAL		MD102	PARTIAL FIRST FLOOR AND ENLARGED PIPING DEMOLITION PLAN
S001	STRUCTURAL NOTES	M101	PARTIAL FIRST FLOOR AND ENLARGED HVAC NEW WORK PLAN
S101	DEMOLITION AND FRAMING PLANS	M102	PARTIAL FIRST FLOOR AND ENLARGED PIPING NEW WORK PLAN
S501	STEEL DETAILS	M501	HVAC DETAILS
ARCHITECTURAL		M502	MECHANICAL PIPING DETAILS
LS101	PARTIAL FIRST FLOOR AND THIRD FLOOR LIFE SAFETY PLANS	M503	MECHANICAL PIPING AND EQUIPMENT DETAILS
AD101	PARTIAL FIRST FLOOR AND ENLARGED PLANS - DEMOLITION	M601	MECHANICAL SCHEDULES
AD102	PARTIAL SECOND FLOOR AND ENLARGED PLANS - DEMOLITION	M800	VA STATION GENERAL CONTROL NOTES AND LEGEND
AD111	PARTIAL FIRST FLOOR REFLECTED CEILING PLANS - DEMOLITION	M801	CONTROL SCHEMATIC, SEQUENCE OF CONTROL, AND CONTROL POINT - MECHANICAL
ELECTRICAL			
AE101	PARTIAL FIRST FLOOR PLANS AND ELEVATIONS	E-001	ELECTRICAL GENERAL NOTES AND ABBREVIATIONS
AE102	PARTIAL SECOND FLOOR PLAN AND THIRD FLOOR PLAN - LOW PENTHOUSE	E-002	ELECTRICAL LEGEND
AE111	PARTIAL FIRST FLOOR REFLECTED CEILING PLANS	ED101	ELECTRICAL DEMOLITION PLAN
AE501	FRAMING DETAILS	EP101	ELECTRICAL NEW WORK PLAN
AE601	ROOM FINISH, DOOR AND FRAME SCHEDULES AND DETAILS	E-501	ELECTRICAL DETAILS
PLUMBING		E-621	ELECTRICAL SCHEDULES
P001	PLUMBING ABBREVIATIONS, SCHEDULE AND NOTES		
P101	1ST FLOOR PHARMACY PLAN - PLUMBING		


REVISIONS:	DATE:	CONSULTANT	ARCHITECT/ENGINEER OF RECORD	STAMP	Office of Construction and Facilities Management	Drawing Title: COVER SHEET	Phase BID DOCUMENTS	Project Title: UPGRADE PHARMACY IV MIXING ROOM USP 797/800	Project Number 516-22-112
			TOLAND MIZELL MOLNAR 590 MEANS ST NW STE. 200 ATLANTA, GA 30318		VA U.S. Department of Veterans Affairs	Approved Project Director	FULLY SPRINKLERED	Location CAPE CORAL, FLORIDA	Building Number 01
								Issue Date 12-23-2025	Drawing Number GI001
								Checked SV	
								Drawn SJKB	

ACCESSIBILITY REQUIREMENTS


ALL DOOR ASSEMBLIES SHALL BE CONSTRUCTED TO MEET THE INDICATED MINIMUM CLEARANCES AS APPLICABLE.

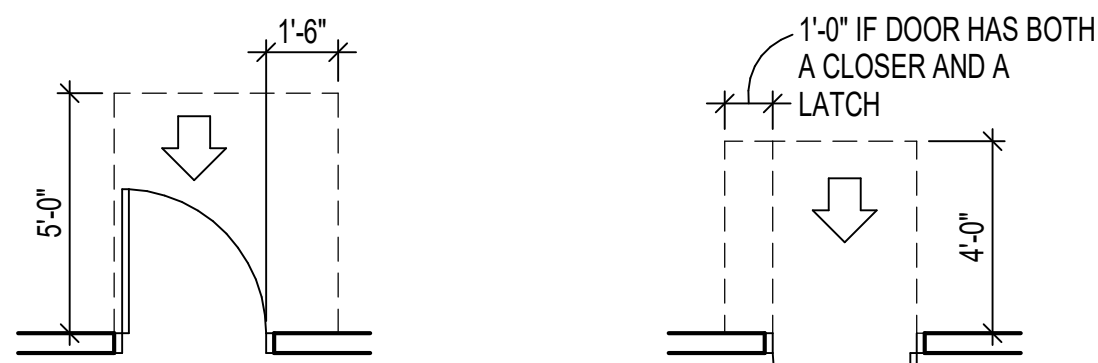

FRONT APPROACHES

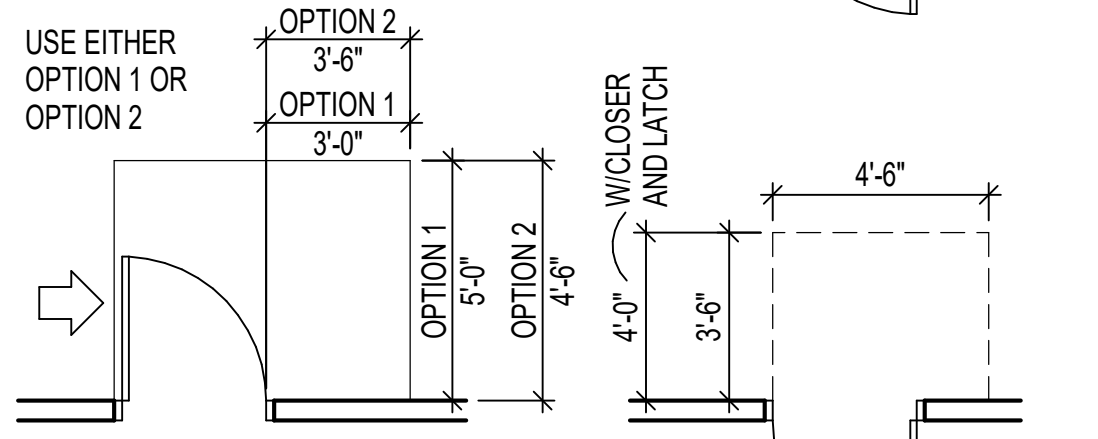


HINGE-SIDE APPROACHES

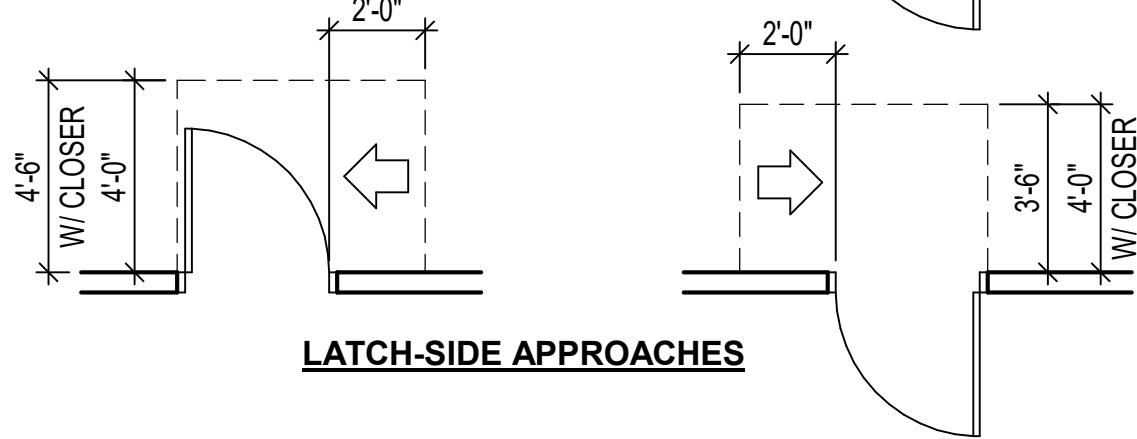


LATCH-SIDE APPROACHES

TYPICAL DETAILS

DOOR LOCATIONS


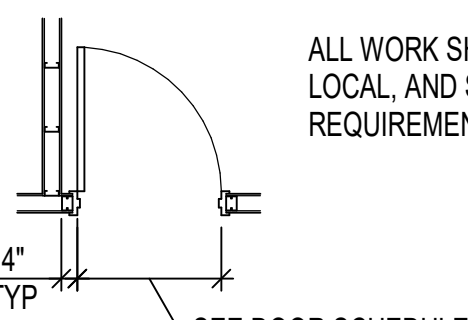


TYPICAL SIGNAGE MOUNTING HEIGHTS

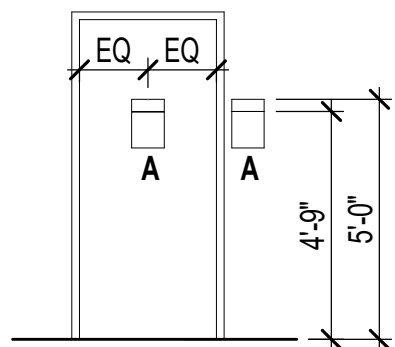

MOUNTING HEIGHTS

PROVIDE BLOCKING AT ALL WALL MOUNTED EQUIPMENT AND ACCESSORIES

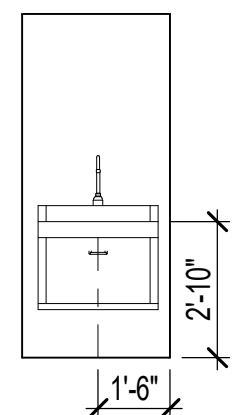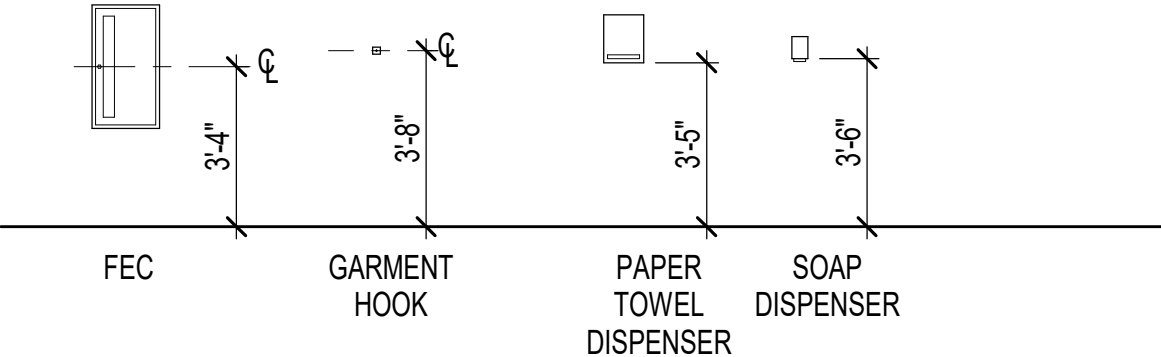

TYPICAL SCRUB SINK

GENERAL PROJECT NOTES

- A. THE CONTRACTOR SHALL BE PREPARED TO STOP ANY WORK AND CLEAN UP THE WORK AREA AS DIRECTED IN MEDICAL SITUATIONS REQUIRING SUCH ACTION.
- B. THE CONTRACTOR SHALL NOT ORDER OR INSTALL ANY MATERIALS OR EQUIPMENT UNTIL SUBMITTALS FOR SUCH HAVE BEEN APPROVED.
- C. ALL TOOLS AND MATERIALS USED IN THIS PROJECT SHALL BE PROPERLY SECURED AT ALL TIMES BY THE CONTRACTOR TO REDUCE THE POSSIBILITY OF ANY OF THESE TOOLS BEING A HAZARD TO PATIENTS, VISITORS AND STAFF.
- D. THE CONTRACTOR WILL BE RESPONSIBLE FOR ACQUIRING I.D. BADGES FOR EACH MEMBER OF HIS WORK FORCE. VALID FORMS OF I.D. ARE REQUIRED TO RECEIVE BADGES. COORDINATE WITH COR.
- E. THE CONTRACTOR, AT HIS EXPENSE, WILL BE RESPONSIBLE FOR TRAINING EACH MEMBER OF HIS WORK FORCE ON VA POLICIES FOR ON-SITE WORK BEFORE ANY MEMBER WILL BE ALLOWED TO PERFORM WORK ON VA PREMISES.
- F. ABSOLUTELY NO VA TOOLS, MATERIALS OR EQUIPMENT WILL BE LOANED OR GIVEN BY THE VA TO ANY MEMBER OF THE CONTRACTOR'S WORK FORCE AT ANY TIME.
- G. ANY SMOKE DETECTORS HAVING ANY POTENTIAL FOR EXPOSURE TO CONSTRUCTION SMOKE, DUST AND DEBRIS SHALL BE SUITABLY PROTECTED TO PREVENT ACCIDENTAL ALARM DURING CONSTRUCTION. ALL SUCH ACTION MUST BE FIRST COORDINATED AND CLEARED WITH THE COR AND THE VA SAFETY OFFICER. ALL FUNCTIONAL FIRE ALARM DEVICES SHALL BE ACTIVE WHENEVER THE CONTRACTOR'S FORCES ARE NOT PRESENT IN THE WORK AREA.
- H. THE CONTRACTOR MUST PROVIDE WRITTEN FIRE SAFETY CHECKLIST AT THE END OF EVERY WORK DAY TO THE COR CERTIFYING THAT ALL WORK AREAS HAVE BEEN SURVEYED AND FOUND TO BE SECURE, SAFE AND FREE OF ANY FLAMMABLE LIQUIDS.
- I. CONTRACTOR SHALL COORDINATE ONLY WITH THE COR AND CONTRACTING OFFICER.
- J. SEE SPECIFICATIONS SECTIONS 01 00 00 AND 01 35 28 FOR INTERIM LIFE SAFETY MEASURES.
- K. ALL FINISH COLORS TO BE SELECTED BY COR/VA INTERIOR DESIGNER WHERE NOT OTHERWISE INDICATED. CONTRACTOR SHALL SUBMIT COLORS FROM THE MANUFACTURER'S FULL RANGE OF COLORS.
- L. PROVIDE 24"x24" ACCESS PANELS IN HARD CEILINGS WHERE DUCTS AND DAMPERS OR OTHER PIPES REQUIRE ACCESS AS REQUIRED. COORDINATE EXACT LOCATIONS WITH THE COR.
- M. THE CONTRACTOR SHALL NOT OPERATE ANY EXISTING VA EQUIPMENT WITHOUT AUTHORIZATION FROM VAMC ENGINEERING SERVICE UNLESS AN EMERGENCY SITUATION OCCURS.
- N. CONTRACTOR SHALL MAINTAIN ALL FIRE-RATED ASSEMBLIES WITHIN THE PROJECT AREA DURING PERFORMANCE OF THE WORK.
- O. CONTRACTOR SHALL PROVIDE AND MAINTAIN ALL REQUIRED EXIT LIGHTING AND SIGNAGE REQUIRED FOR EGRESS WITHIN AND ADJACENT TO THE PROJECT AREA DURING PERFORMANCE OF THE WORK.
- P. INDICATED EXISTING CONDITIONS ARE BASED UPON LIMITED FIELD INVESTIGATION THAT DID NOT INCLUDE DESTRUCTIVE INVESTIGATION OR TESTING. CONTRACTOR SHALL VERIFY ALL EXISTING CONDITIONS INCLUDING DIMENSIONS OF THE EXISTING CONSTRUCTION PRIOR TO COMMENCING WITH THE WORK. IF DISCREPANCIES ARE DISCOVERED, THE CONTRACTOR SHALL NOTIFY THE COR FOR INTERPRETATION AND DIRECTION PRIOR TO PROCEEDING WITH THE WORK.

ARCHITECTURAL LEGEND

	FIRE EXTINGUISHER CABINET
	ROOM NAME AND NUMBER
	EQUIPMENT JSN NUMBER
	DOOR NUMBER
	DEMOLITION KEY NOTE
	KEY NOTE
	WINDOW TYPE
	PARTITION TYPE
	ACCESSORY TYPE
	DETAIL CALLOUT DETAIL NUMBER SHEET WHERE DETAIL IS DRAWN
	SECTION CALLOUT DETAIL NUMBER SHEET WHERE DETAIL IS DRAWN
	SECTION CUT HEAD/JAMB/SILL DETAIL NUMBER
	VERTICAL ELEVATION
	COLUMN CENTERLINE DESIGNATION
	INTERIOR ELEVATION CALLOUT DETAIL NUMBER SHEET WHERE DETAIL IS DRAWN

GENERAL ARCHITECTURAL NOTES

- A. DIMENSIONS, UNLESS OTHERWISE INDICATED, ARE TO:
- FACE OF EXISTING WALL SURFACE
 - FACE OF MASONRY
 - FACE OF WALL STUDS
 - TOP OF SLAB
 - TOP OF MASONRY
 - ALIGN WALLS WITH EXISTING WHERE NOT OTHERWISE INDICATED.
- B. COORDINATE WITH ALL DISCIPLINE DRAWINGS FOR ADDITIONAL REQUIREMENTS. COORDINATE OPENINGS IN SLABS, ROOF, AND WALLS. WHERE HOLES IN EXISTING WALLS AND SLABS ARE CREATED FOR PENETRATIONS, COORDINATE SIZE AND LOCATION. PATCH HOLES CAUSED BY THE REMOVAL OF EQUIPMENT, PIPING, CONDUIT, DUCT, GRILLES, ETC. WITH MATERIALS MATCHING EXISTING SLAB OR WALL IN STRUCTURE, MATERIAL, THICKNESS, ALIGNMENT, GRADES, AND QUALITY.
- C. COORDINATE AND PROVIDE GALVANIZED METAL BACKER PLATE OR SOLID FIRE RETARDANT TREATED WOOD BLOCKING FOR WALL-MOUNTED ITEMS. COORDINATE LOCATIONS WITH COR FOR GOVERNMENT PROVIDED/CONTRACTOR INSTALLED EQUIPMENT.
- D. "PROVIDE" IS DEFINED AS PROVIDING MATERIALS, DELIVERY, STORAGE, HANDLING, INSTALLATION, ADJUSTMENT, AND CLEANING FOR THE ITEM INDICATED.
- E. SEAL PIPE PENETRATIONS THROUGH SLABS, MASONRY, SMOKE PARTITIONS, SMOKE BARRIERS, AND FIRE BARRIERS WITH THE APPROPRIATE FIRESTOP TO MAINTAIN THE RATING OF THE WALL OR SLAB. SUBMIT CUT SHEETS AND SPECIFICATIONS TO THE COR FOR APPROVAL PRIOR TO INSTALLATION. PROVIDE UL LISTED ASSEMBLIES.
- F. SKIM COAT ALL DAMAGED EXISTING WALL SURFACES THAT REQUIRE PAINTING.
- G. REMOVED MATERIALS WHICH ARE INDICATED TO BE TURNED OVER TO THE COR SHALL BE DELIVERED BY THE CONTRACTOR TO A LOCATION INDICATED BY THE COR.
- H. REMOVE COMPLETELY ALL MATERIALS AS INDICATED ON THE DRAWINGS AND AS REQUIRED FOR NEW CONSTRUCTION. EDGES AND FACES OF REMOVED AREAS SHALL BE REPAIRED TO ACCEPT NEAT INSTALLATION OF CONSTRUCTION OR FINISHES. WHERE EXISTING MATERIALS ARE TO BE REPLACED (WALLS, INSULATION, FLOORING, ETC.) EXISTING MATERIALS, ADHESIVES, ETC. SHALL BE REMOVED AND EXPOSED SURFACES SHALL BE PREPARED AS INDICATED OR SPECIFIED PRIOR TO INSTALLATION OF MATERIALS.
- I. PREVENT DAMAGE TO MATERIALS AND FINISHES TO REMAIN. REPAIR DAMAGES FROM CONSTRUCTION ACTIVITIES TO EXISTING ITEMS TO REMAIN, AT NO ADDITIONAL COST WHERE SUCH EXPOSED MATERIALS OR FINISHES TO REMAIN ARE DAMAGED.
- J. SEAL ALL PLATES, COVERS, DEVICES, AND GENERAL FLOOR, WALL AND CEILING PENETRATIONS IN ALL SPACES, TYPICAL.

ARCHITECTURAL ABBREVIATIONS


AC	AIR CONDITIONING
ACMP	ALUMINUM COMPOSITE METAL PANELS
AT	ACOUSTICAL CEILING TILE
AFF	ABOVE FINISH FLOOR
AL	ALUMINUM
BATT	BATT INSULATION
BO	BOTTOM OF
CBB	CEMENTITIOUS BACKER BOARD
CCW	CEMENTITIOUS CRYSTALLINE WATERPROOFING
CFMF	COLD-FORMED METAL FRAMING
CG	CORNER GUARD
CJ	CONTROL JOINT
CL	CENTERLINE
CMU	CONCRETE MASONRY UNIT
CO	CASED OPENING
COMM	COMMUNICATION
CONC	CONCRETE
SCONC	SEALED CONCRETE
CONT	CONTINUOUS
COR	CONTRACTING OFFICER'S REPRESENTATIVE
CR	CARD READER
CT	CERAMIC TILE
CTB	CERAMIC TILE BASE
CP	CARPET
CPT	CARPET TILE
DIA	DIAMETER
DS	DOWNSPOUT
OF	DRINKING FOUNTAIN
EIFS	EXTERIOR INSULATION FINISHING SYSTEM
EJ	EXPANSION JOINT
ELEC	ELECTRICAL
EOD	EDGE OF DECK
EPY	EPOXY FLOORING
EQ	EQUAL
ES	EXPOSED STRUCTURE
ET	ET CETERA
EXIST	EXISTING
EXP	EXPOSED
FAC FIN	FACTORY FINISH
FD	FLOOR DRAIN
FEC	FIRE EXTINGUISHER CABINET
FHC	FIRE HOSE CABINET
FF	FINISHED FLOOR
FIN	FINISH
FLR	FLOOR
FO	FACE OF
FRT	FIRE RETARDANT TREATED
FV	FIELD VERIFY
FWC	FABRIC WALLCOVERING
GA	GAGE
GRA	GRANITE
GYP BD/GWB	GYPSUM (WALL) BOARD
HC	HANDICAPPED
HM	HOLLOW METAL
HR	HANDRAIL
HPL	HIGH-PRESSURE LAMINATE
HVAC	HEATING VENTILATION AND AIR-CONDITIONING
LVT	LUXURY VINYL TILE
MATL	MATERIAL
MAX	MAXIMUM
MECH	MECHANICAL
MFR	MANUFACTURER
MIN	MINIMUM
MO	MASONRY OPENING
MTL	METAL
NIC	NOT IN CONTRACT
NTS	NOT TO SCALE
OC	ON CENTER
OH	OPPOSITE HAND
PLS	PLASTER
PL	PLASTIC LAMINATE
PT	PORCELAIN TILE
PAIR	PAIR
PR	PAINT
QT	QUARRY TILE
RB	RESILIENT BASE
RCP	REFLECTED CEILING PLAN
REF	REFRIGERATOR
REQ'D	REQUIRED
RES	RESINOUS FLOORING
RES-W	RESINOUS EPOXY WALL-CEILING
RO	ROUGH OPENING
RF	RUBBER FLOORING
RPH	RECESSED PAPER HOLDER
SC	SEALED HIGH BUILD GLAZED COATING
SCW	SOLID CORE WOOD
SIM	SIMILAR
SP	SPECIAL FACED
SS	STAINLESS STEEL
SSM	SOLID SURFACE MATERIAL
STL	STEEL
SUBS	SUBSTRATE
SV	SHEET VINYL
SVT	SOLID VINYL TILE
TELE	TELEPHONE
TO	TOP OF
TYP	TYPICAL
UNO	UNLESS NOTED OTHERWISE
VCT	VINYL COMPOSITION TILE
VWC	VINYL WALL COVERING
WC	WALL COVERING
WP	WALL PROTECTION
WR	WATER RESISTANT
WD	WOOD
WSF	WELDED SEAM SHEET FLOORING

CONSULTANT

ARCHITECT/ENGINEER OF RECORD



STAMP

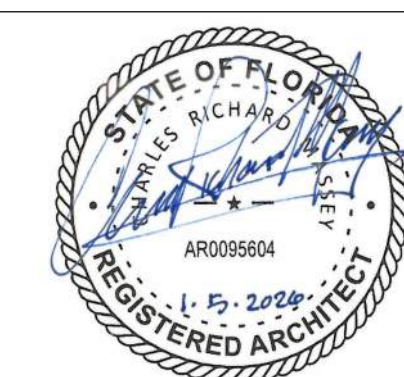

Office of
Construction and
Facilities
Management

VA U.S. Department of
Veterans Affairs

Drawing Title:
NOTES, ABBREVIATIONS AND LEGENDS

Approved Project Director

Phase

BID DOCUMENTS

FULLY SPRINKLERED

Project Title:
UPGRADE PHARMACY IV MIXING ROOM
USP 797/800

Location
CAPE CORAL, FLORIDA

Issue Date
12-23-2025

Checked
SV


Drawn
S/JKB

Project Number
516-22-112


Building Number
01

Drawing Number

G1002

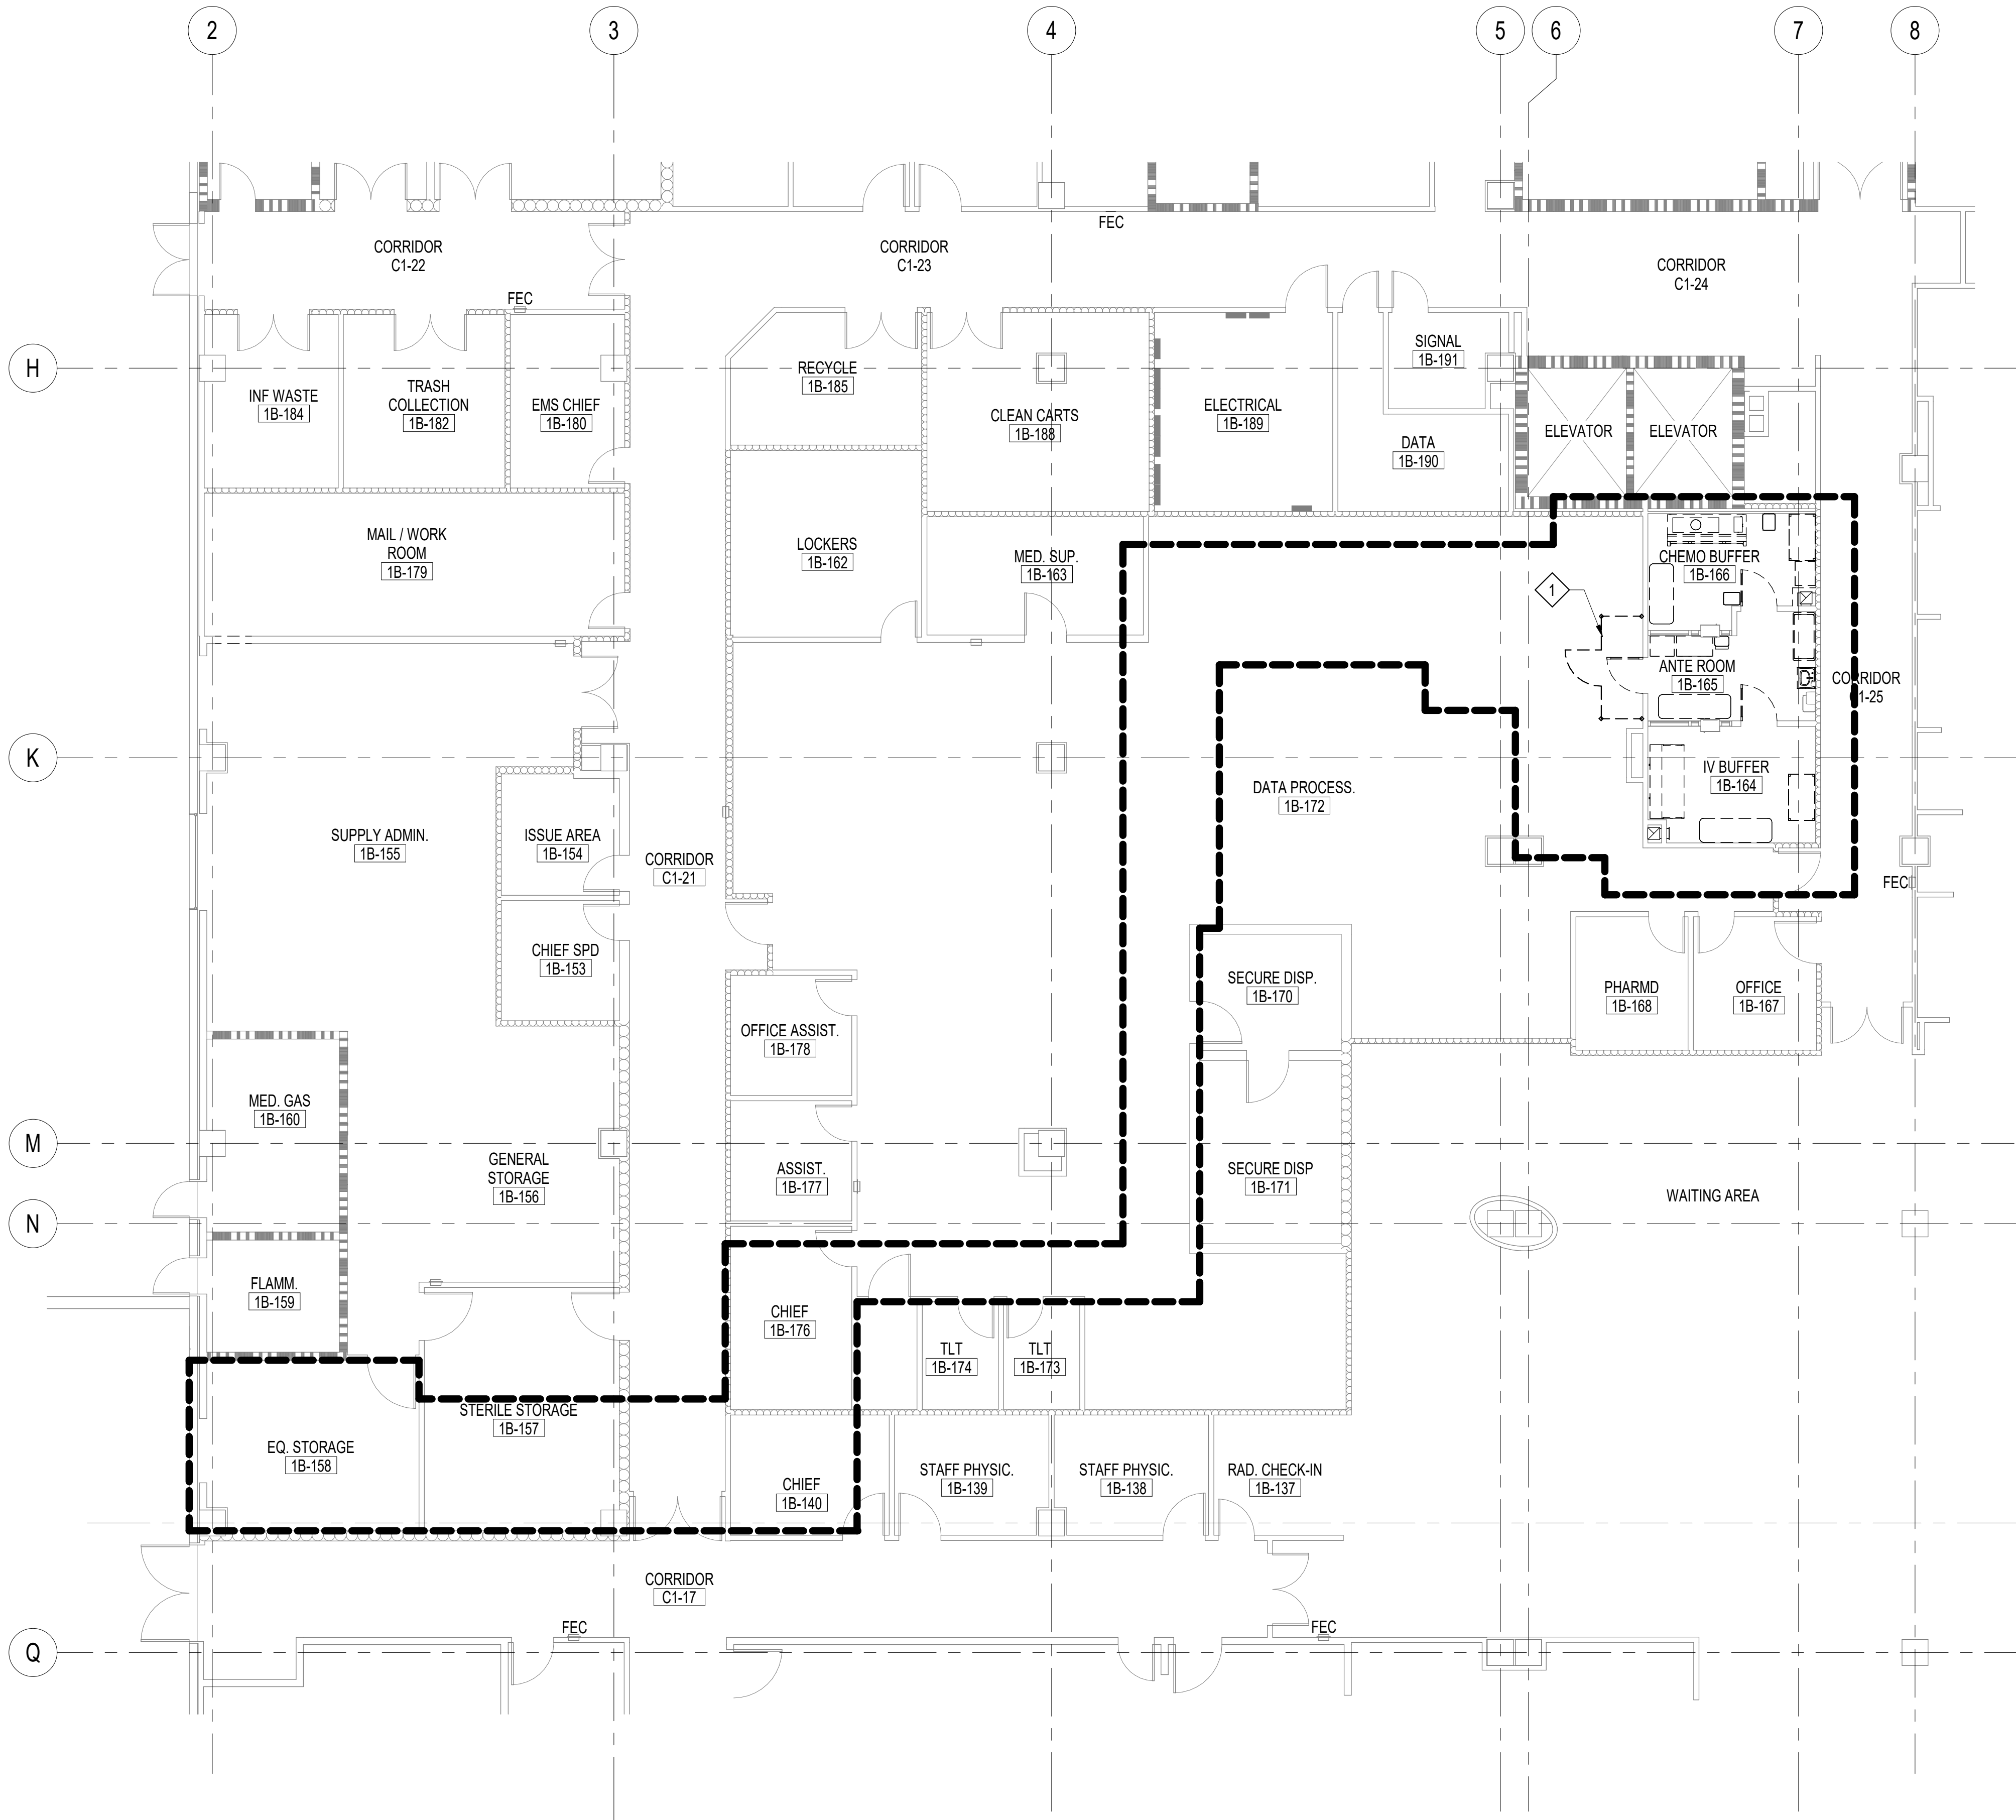

1 PARTIAL FIRST FLOOR ICRA PLAN
GI003 1/8" = 1'-0"

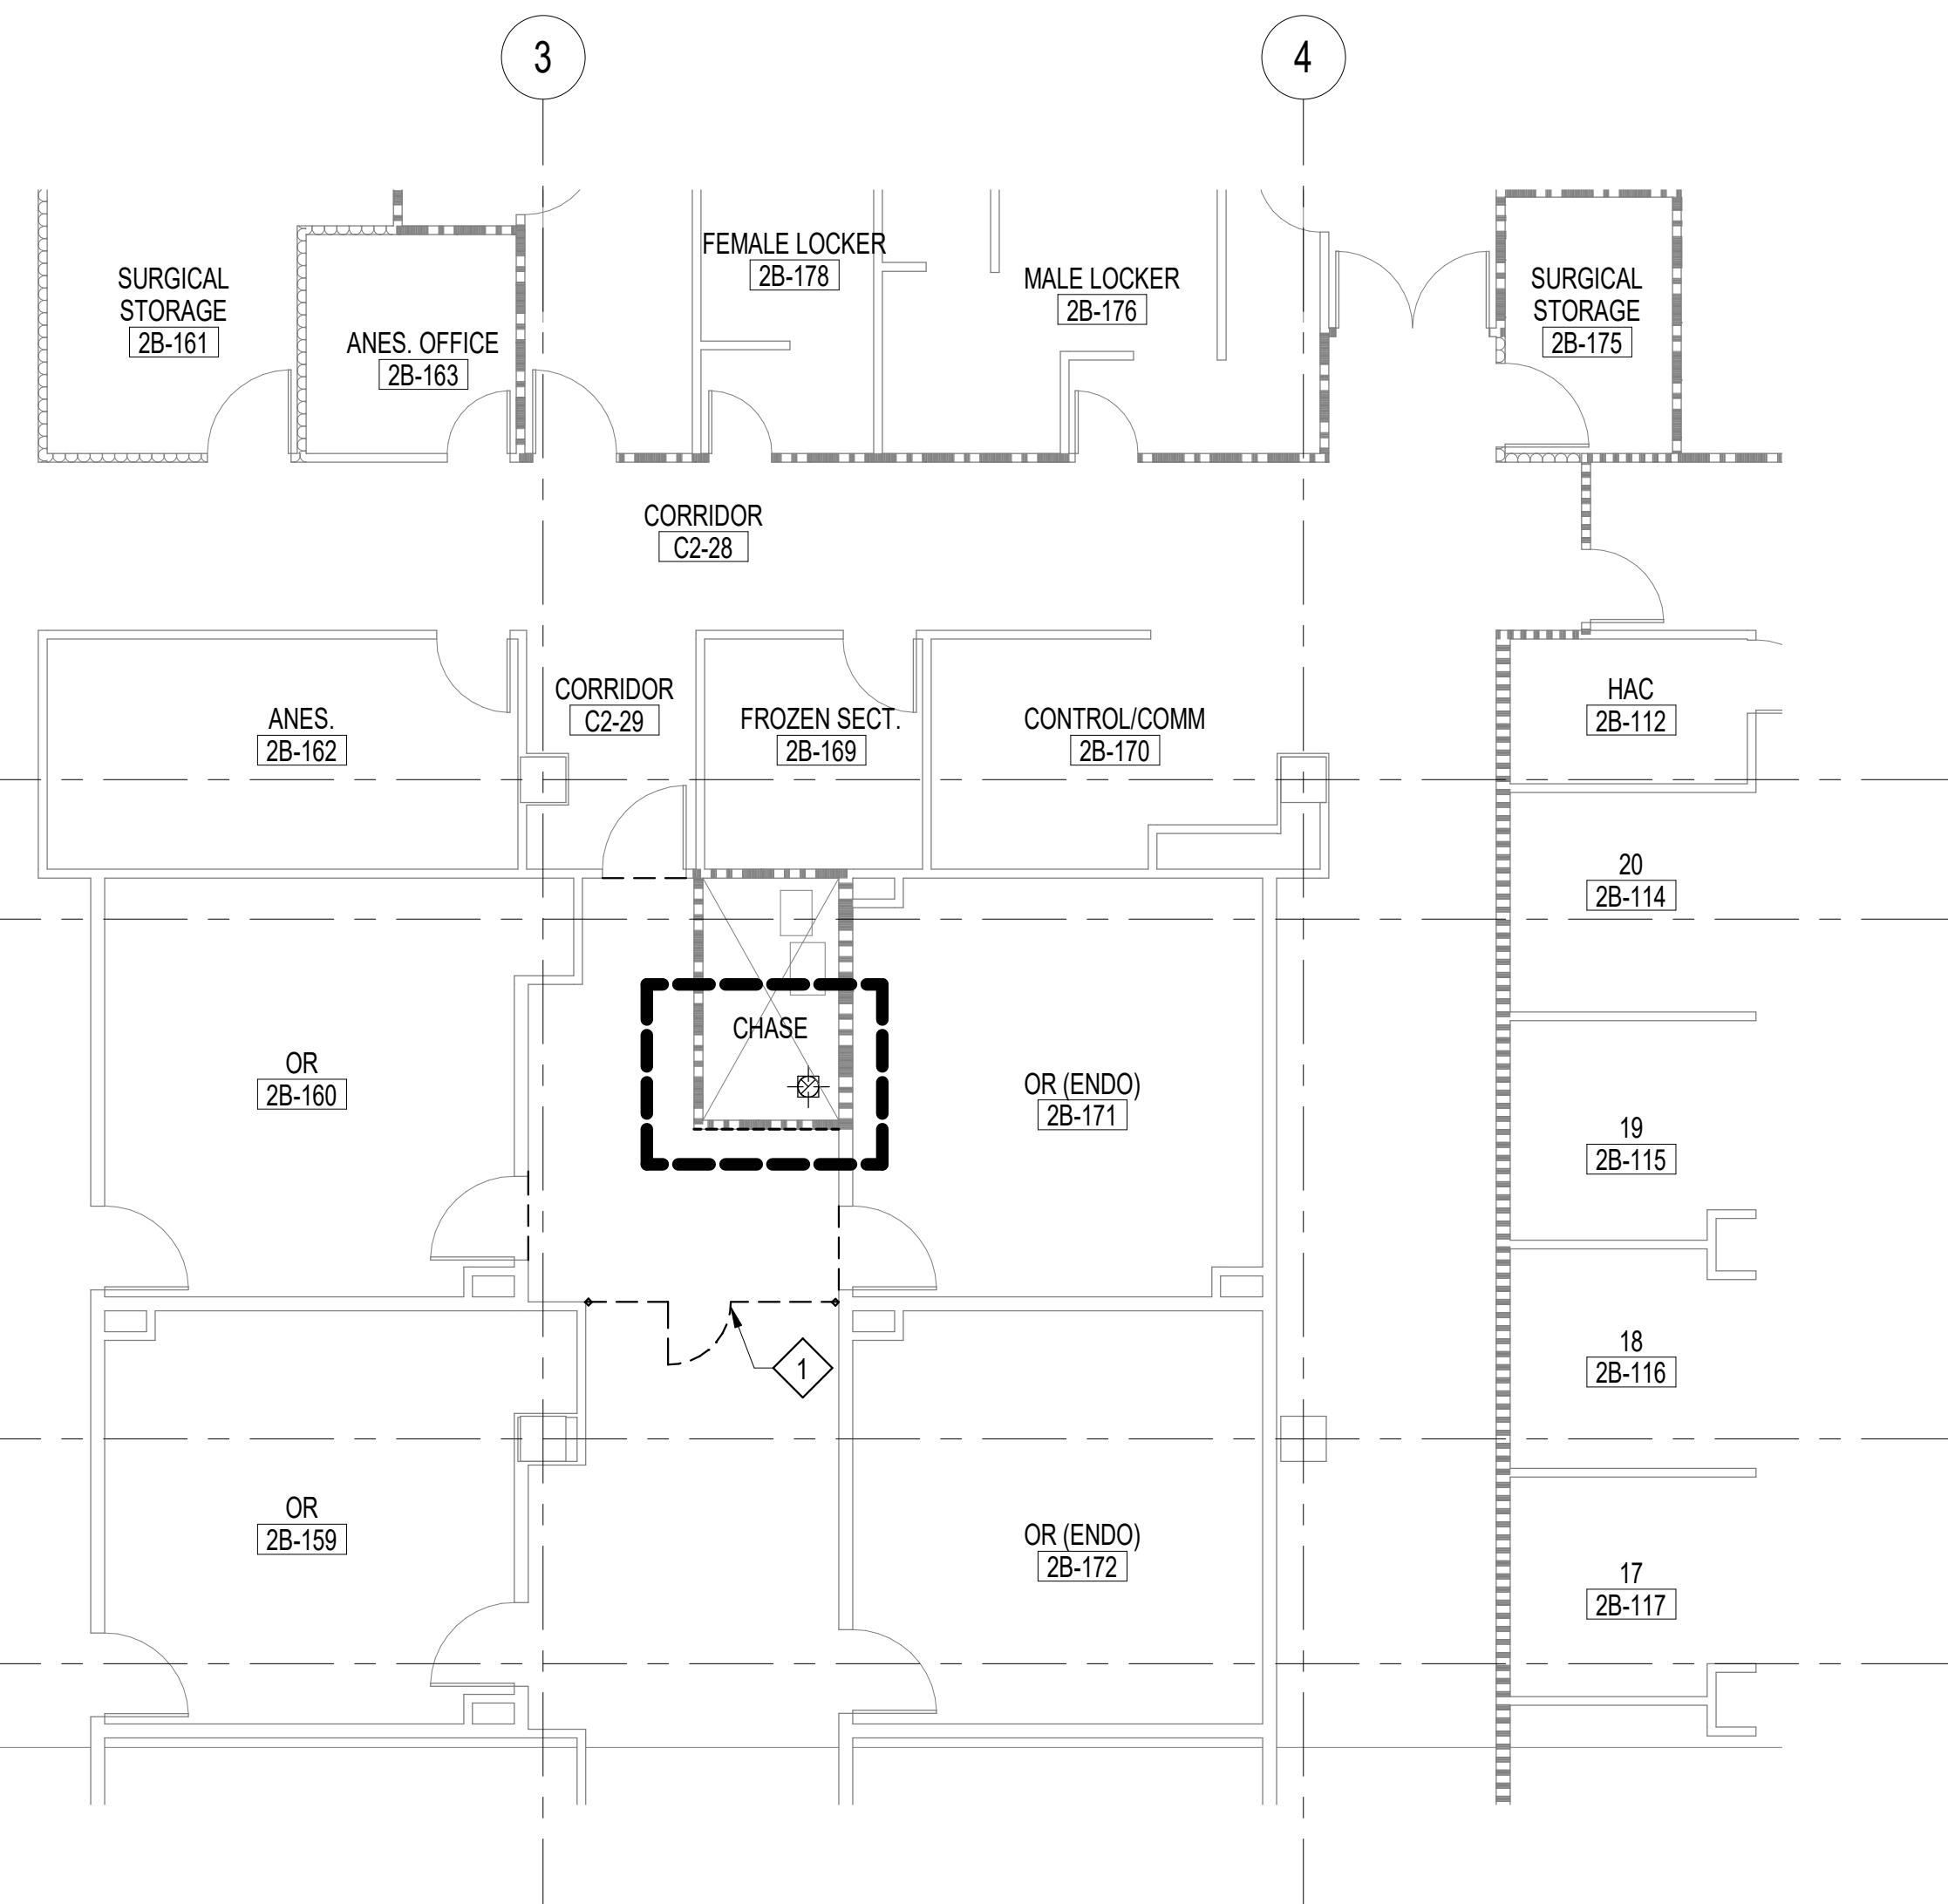


2 PARTIAL SECOND FLOOR ICRA PLAN
GI003 1/8" = 1'-0"


- ICRA BARRIER PLAN GENERAL NOTES:**
- COORDINATE LOCATION OF TEMPORARY INFECTION CONTROL BARRIER WALL CONSTRUCTION AND INFECTION CONTROL MEASURES WITH COR AND PATIENT SAFETY/INFECTION CONTROL REPRESENTATIVE. TEMPORARY IC BARRIER WALL CONSTRUCTION LOCATIONS IN DRAWINGS ARE APPROXIMATE. CONTRACTOR SHALL PROVIDE MEASURED DRAWINGS TO COR AND PATIENT SAFETY/INFECTION CONTROL REPRESENTATIVE ONCE ICRA PROTOCOLS AND SCHEDULE IS APPROVED.
 - EXIT/ACCESS FOR ADJACENT OPERATIONAL AREAS SHALL BE MAINTAINED DURING NORMAL BUSINESS HOURS. ANY INTERRUPTIONS MUST BE REQUESTED AHEAD OF TIME AND APPROVED. SEE SPECIFICATION 013526 AND MEMO 001S-08-18 FOR PROCEDURES AND HOURS OF OPERATION.
 - PROVIDE THE FOLLOWING INFECTION CONTROL MEASURES: A 24"x36" STICKY WALK OFF MAT AND HAND SANITIZER AT EACH TEMPORARY DOOR LOCATION. MAT SHALL BE REPLACED OR CLEANED AS NECESSARY.
 - PROVIDE VA AND OSHA REQUIRED TEMPORARY SIGNAGE AT EACH TEMPORARY ICRA ENTRANCE DOOR.
 - PROVIDE ICRA BARRIERS AND ENTRANCE DOORS AS REQUIRED AND INDICATED ON FLOOR PLANS. COORDINATE LOCATIONS WITH COR. BASIS OF DESIGN: STARC SYSTEMS. CONTACT: MAX DANKSY; OFFICE : 207-844-2789; CELL: 978-502-9689; EMAIL: MDANKSY@STARCSTYSTEMS.COM.
 - CONTRACTOR SHALL MAINTAIN 4'-0" CLEAR WIDTH IN THE CORRIDOR FROM THE ICRA BARRIER FOR CIRCULATION THROUGHOUT THE CONSTRUCTION.
 - PLANS PROVIDED ARE FOR GUIDANCE, CONTRACTOR TO PROVIDE SUBMITTAL PACKAGE SHOWING ACTUAL LAYOUT AND CONSTRUCTION OF BARRIERS FOR REVIEW AND APPROVAL OF COR.

- ICRA BARRIER PLAN KEY NOTES:**
- PRIOR TO COMMENCING THE WORK, CONTRACTOR TO INSTALL INFECTION CONTROL BARRIERS AND ENTRANCES. WORK SHALL BE PERFORMED ON WEEKENDS AS DIRECTED BY THE COR. PROVIDE KEYPAD LOCKSET AT ICRA BARRIER ENTRANCE DOORS.

- ICRA BARRIER PLAN LEGEND**
- INFECTION CONTROL BARRIER AND ENTRANCE DOOR
 - LIMITS OF CONSTRUCTION UNLESS NOTED OTHERWISE



0' 4' 8' 16' 24'
SCALE: 1/8" = 1' - 0"

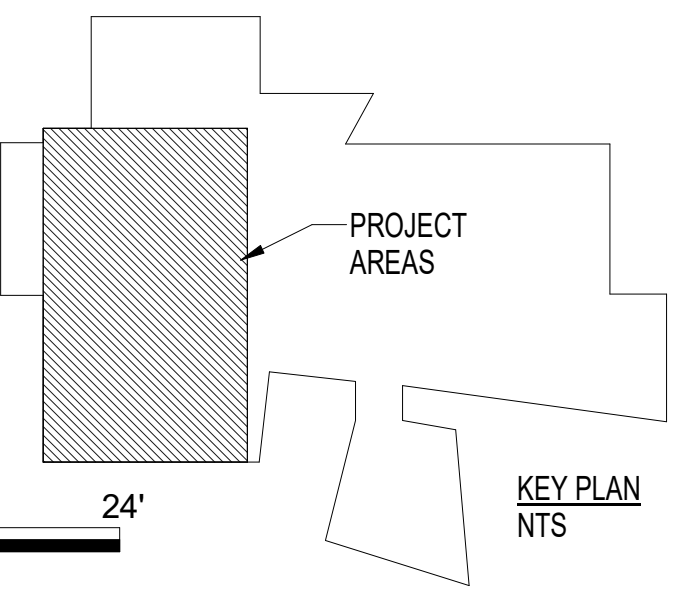

CONSULTANT		ARCHITECT/ENGINEER OF RECORD		STAMP		Office of Construction and Facilities Management		Drawing Title: PARTIAL FIRST FLOOR AND SECOND FLOOR ICRA PLANS		Phase		Project Title: UPGRADE PHARMACY IV MIXING ROOM USP 797/800		Project Number 516-22-112	
		TOLAND MIZELL MOLNAR		590 MEANS ST NW STE. 200 ATLANTA, GA 30318		VA U.S. Department of Veterans Affairs		Approved Project Director		FULLY SPRINKLERED		Location CAPE CORAL, FLORIDA		Building Number 01	
REVISIONS:		DATE:										Issue Date 12-23-2025		Drawing Number GI003	
												Checked SV			
												Drawn SJKB			

STRUCTURAL DRAWING ABBREVIATIONS

- | | |
|-------|------------------------------------|
| BOT | BOTTOM |
| BISTL | BOTTOM OF STEEL |
| CJT | CONSTRUCTION OR CONTROL JOINT |
| C.J. | CORNER JACK TRUSS |
| CMU | COMMON MASONRY UNIT |
| CONN | CONNECTION |
| DBA | DEFORMED BAR ANCHOR |
| DIAG | DIRECTIONAL |
| EACH | EACH |
| EF | EACH FACE |
| EL | ELEVATION |
| EMBED | EMBEDMENT |
| EOD | EDGE OF DECK |
| EOS | EDGE OF SLAB |
| EW | EACH WAY |
| EXF | EXISTING FOOTING |
| FOB | FACE OF BRICK |
| FF | FACE OF PANEL |
| FWC | FOR WOOD CONSTRUCTION |
| FXX | FOOTING MARK NUMBER (SEE SCHEDULE) |
| | GIRDER TRUSS |
| HORIZ | HORIZONTAL |
| IFW | INSIDE FACE OF WALL |
| JB | JOIST BEARING |
| JT | JACK TRUSS |
| LLH | LONG LEG HORIZONTAL |
| LLV | LONG LEG VERTICAL |
| LSH | LONG SIDE HORIZONTAL |
| LSV | LONG SIDE VERTICAL |
| MAX | MAXIMUM |
| MIN | MINIMUM |
| NDS | NATIONAL DESIGN STANDARD |
| NC | NEAR FACE |
| OC | ON CENTER |
| OFW | OUTSIDE FACE OF WALL |
| PAF | PANEL ACTUATED FASTENER |
| PC | PREFABRICATED |
| PDF | PNEUMATIC DRIVEN FASTENER |
| PJD | PREMOLDED JOINT FILLER |
| PLF | POUNDS PER LINEAR FOOT |
| PTC | POST TENSIONED CONCRETE |
| PTW | PRESSURE TREATED WOOD |
| PXX | PIER MARK NUMBER (SEE SCHEDULE) |
| REF | REFERENCE |
| REQ'D | REQUIRED |
| RRS | REBAR REINFORCING STEEL |
| SOG | SLAB-ON-GROUND |
| STD | STANDARD |
| T&B | TOP AND BOTTOM |
| TFTG | TOP OF FOOTING |
| TISTL | TOP OF STEEL |
| TU | TILT-UP |
| TYP | TYPICAL |
| UN O | UNLESS NOTED OTHERWISE |
| VERT | VERTICAL |
| WWR | WELDED WIRE REINFORCEMENT |

POST-INSTALLED ANCHORS:

- 1.01 POST-INSTALLED ANCHORS SHALL ONLY BE USED WHERE SPECIFIED ON THE CONSTRUCTION DOCUMENTS. THE CONTRACTOR SHALL OBTAIN APPROVAL FROM THE ENGINEER-OF-RECORD PRIOR TO INSTALLING POST-INSTALLED ANCHORS IN PLACE OF MISSING OR MISPLACED CAST-IN-PLACE ANCHORS. CARE SHALL BE TAKEN IN PLACING POST-INSTALLED ANCHORS TO AVOID COLLISION WITH EXISTING REBAR. HOLES SHALL BE DRILLED AND CLEANED IN ACCORDANCE WITH THE MANUFACTURER'S WRITTEN INSTRUCTIONS. SUBSTITUTION REQUESTS FOR PRODUCTS OTHER THAN THOSE SPECIFIED BELOW, SHALL BE SUBMITTED BY THE CONTRACTOR TO THE ENGINEER-OF-RECORD ALONG WITH CALCULATIONS THAT ARE PREPARED & SEALED BY A REGISTERED PROFESSIONAL ENGINEER. THE CALCULATIONS SHALL DEMONSTRATE THAT THE SUBSTITUTED PRODUCT IS CAPABLE OF ACHIEVING THE PERTINENT EQUIVALENT PERFORMANCE VALUES (MINIMUM) OF THE SPECIFIED PRODUCT USING THE APPROPRIATE DESIGN PROCEDURE AND/OR STANDARD(S) AS REQUIRED BY THE BUILDING CODE.
- 1.02 CONCRETE ANCHORS
- A. MECHANICAL ANCHORS FOR USE IN CRACKED AND UNCRACKED CONCRETE SHALL HAVE BEEN TESTED AND QUALIFIED FOR USE IN ACCORDANCE WITH ACI 308.2 AND ICC-ES AC109. PRE-APPROVED MECHANICAL ANCHOR MANUFACTURERS:
- 1. SIMPSON STRONG-TIE ANCHORING SYSTEMS
 - 2. HILTI
 - 3. POWERS
- B. ADHESIVE ANCHORS FOR USE IN CRACKED AND UNCRACKED CONCRETE SHALL HAVE BEEN TESTED AND QUALIFIED FOR USE IN ACCORDANCE WITH ICC-ES AC308. PRE-APPROVED ADHESIVE ANCHOR MANUFACTURERS
- 1. SIMPSON STRONG-TIE ANCHORING SYSTEMS
 - 2. HILTI
 - 3. POWERS

D

- ## 1.02 CONCRETE ANCHORS

- 1.02 CONCRETE ANCHORS
- A. MECHANICAL ANCHORS FOR USE IN CRACKED AND UNCRACKED CONCRETE SHALL HAVE BEEN TESTED AND QUALIFIED FOR USE IN ACCORDANCE WITH ACI 308.2 AND ICC-ES AC108. PRE-APPROVED MECHANICAL ANCHOR MANUFACTURERS:
- 1. SIMPSON STRONG-TIE ANCHORING SYSTEMS
 - 2. HILTI
 - 3. POWERS
- B. ADHESIVE ANCHORS FOR USE IN CRACKED AND UNCRACKED CONCRETE SHALL HAVE BEEN TESTED AND QUALIFIED FOR USE IN ACCORDANCE WITH ICC-ES AC308. PRE-APPROVED ADHESIVE ANCHOR MANUFACTURERS
- 1. SIMPSON STRONG-TIE ANCHORING SYSTEMS
 - 2. HILTI
 - 3. POWERS

F

Project Number
516-22-112
Building Number
01
Drawing Number
S001

1 PARTIAL FIRST FLOOR DEMOLITION PLAN
S101 3/16" = 1'-0" 1' 2' 4' 8' 12'
Scale: 3/16"=1'-0"

DEMOLITION PLAN NOTES

1. REF. DENOTES FOR REFERENCE ONLY, CONTRACTOR SHALL FIELD VERIFY
2. FIELD VERIFY EXISTING CONDITIONS AND DIMENSIONS PRIOR TO SUBMISSION OF SHOP DRAWINGS

DEMOLITION PLAN LEGEND

-  INDICATES LOCATION OF WALL DEMOLITION
 HIDDEN EDGE OF EXISTING FOOTING
 EDGE OF SLAB / FOOTING

3 PARTIAL 2ND FLOOR FRAMING PLAN
S101 3/16" = 1'-0"
1' 2' 4' 8' 12'
Scale: 3/16"=1'-0"

2nd FLOOR FRAMING PLAN NOTES

1. REF. DENOTES FOR REFERENCE ONLY, CONTRACTOR SHALL FIELD VERIFY
2. FIELD VERIFY EXISTING CONDITIONS AND DIMENSIONS PRIOR TO SUBMISSION OF SHOP DRAWINGS

2nd FLOOR FRAMING PLAN LEGEND

- — — DENOTES EXISTING CONCRETE BEAM
————— DENOTES EXISTING CONCRETE BEAM

2 PARTIAL 1ST FLOOR FRAMING PLAN
S101 $3/16" = 1'-0"$
1' 2' 4' 8' 12'
Scale: $3/16" = 1'-0"$

1ST FLOOR FRAMING PLAN NOTES

1. REF. DENOTES FOR REFERENCE ONLY, CONTRACTOR SHALL FIELD VERIFY
2. FIELD VERIFY EXISTING CONDITIONS AND DIMENSIONS PRIOR TO SUBMISSION OF SHOP DRAWINGS

1ST FLOOR FRAMING PLAN

- - - - - HIDDEN EDGE OF EXISTING FOOTING
 _____ EDGE OF SLAB / FOOTING

4 ROOF DUCT FRAMING PLAN
S101 3/16" = 1'-0"
1' 2' 4' 8' 12'
Scale: 3/16" = 1'-0"

ROOF DUCT FRAMING PLAN

- S101 3/16" = 1'-0"
- 1' 2' 4' 8' 12'
- Scale: 3/16" = 1'-0"

5 DUCT SUPPORT FRAMING ELEVATION
S101 3/4" = 1'-0"

1' 2' 4' 8'

Scale: 3/4"=1'-0"

DUCT SUPPORT FRAMING ELEVATION

- S101 $3/4" = 1'-0"$
- 1' 2' 4' 8'
- Scale: $3/4" = 1'-0"$

6 DUCT SUPPORT FRAMING ELEVATION
S101 3/4" = 1'-0" 1' 2' 4' 8'
Scale: 3/4"=1'-0"

DUCT SUPPORT FRAMING ELEVATION

- S101 3/4" = 1'-0"
- 1' 2' 4' 8'
- Scale: 3/4"=1'-0"

[illegible]

ARCHITECT/ENGINEER OF RECORD

STAMP



Professional Engineer Seal for the State of Florida, No. 51146. The seal is circular with "STATE OF FLORIDA" and "PROFESSIONAL ENGINEER" around the perimeter. The center contains "COMMISSION ON INTELLIGENCE ANALYSIS" and "No. 51146". A handwritten signature "J. H. Hall" and date "2-23-20" are overlaid on the seal.

Office of
Construction and
Facilities
Management


VA | U.S. Department of
Veterans Affairs


Drawing Title:	DEMOLITION AND FRAMING PLANS
Approved Project Director	
f	

Phase	BID DOCUMENTS
	FULLY SPRINKLERED

Project Title: UPGRADE PHARMACY IV MIXING ROOM USP 797/800		
Location CAPE CORAL, FLORIDA		
Issue Date 12-23-2025	Checked SLW	Drawn DCA

Project Number
516-22-112
Building Number
01
Drawing Number
S101

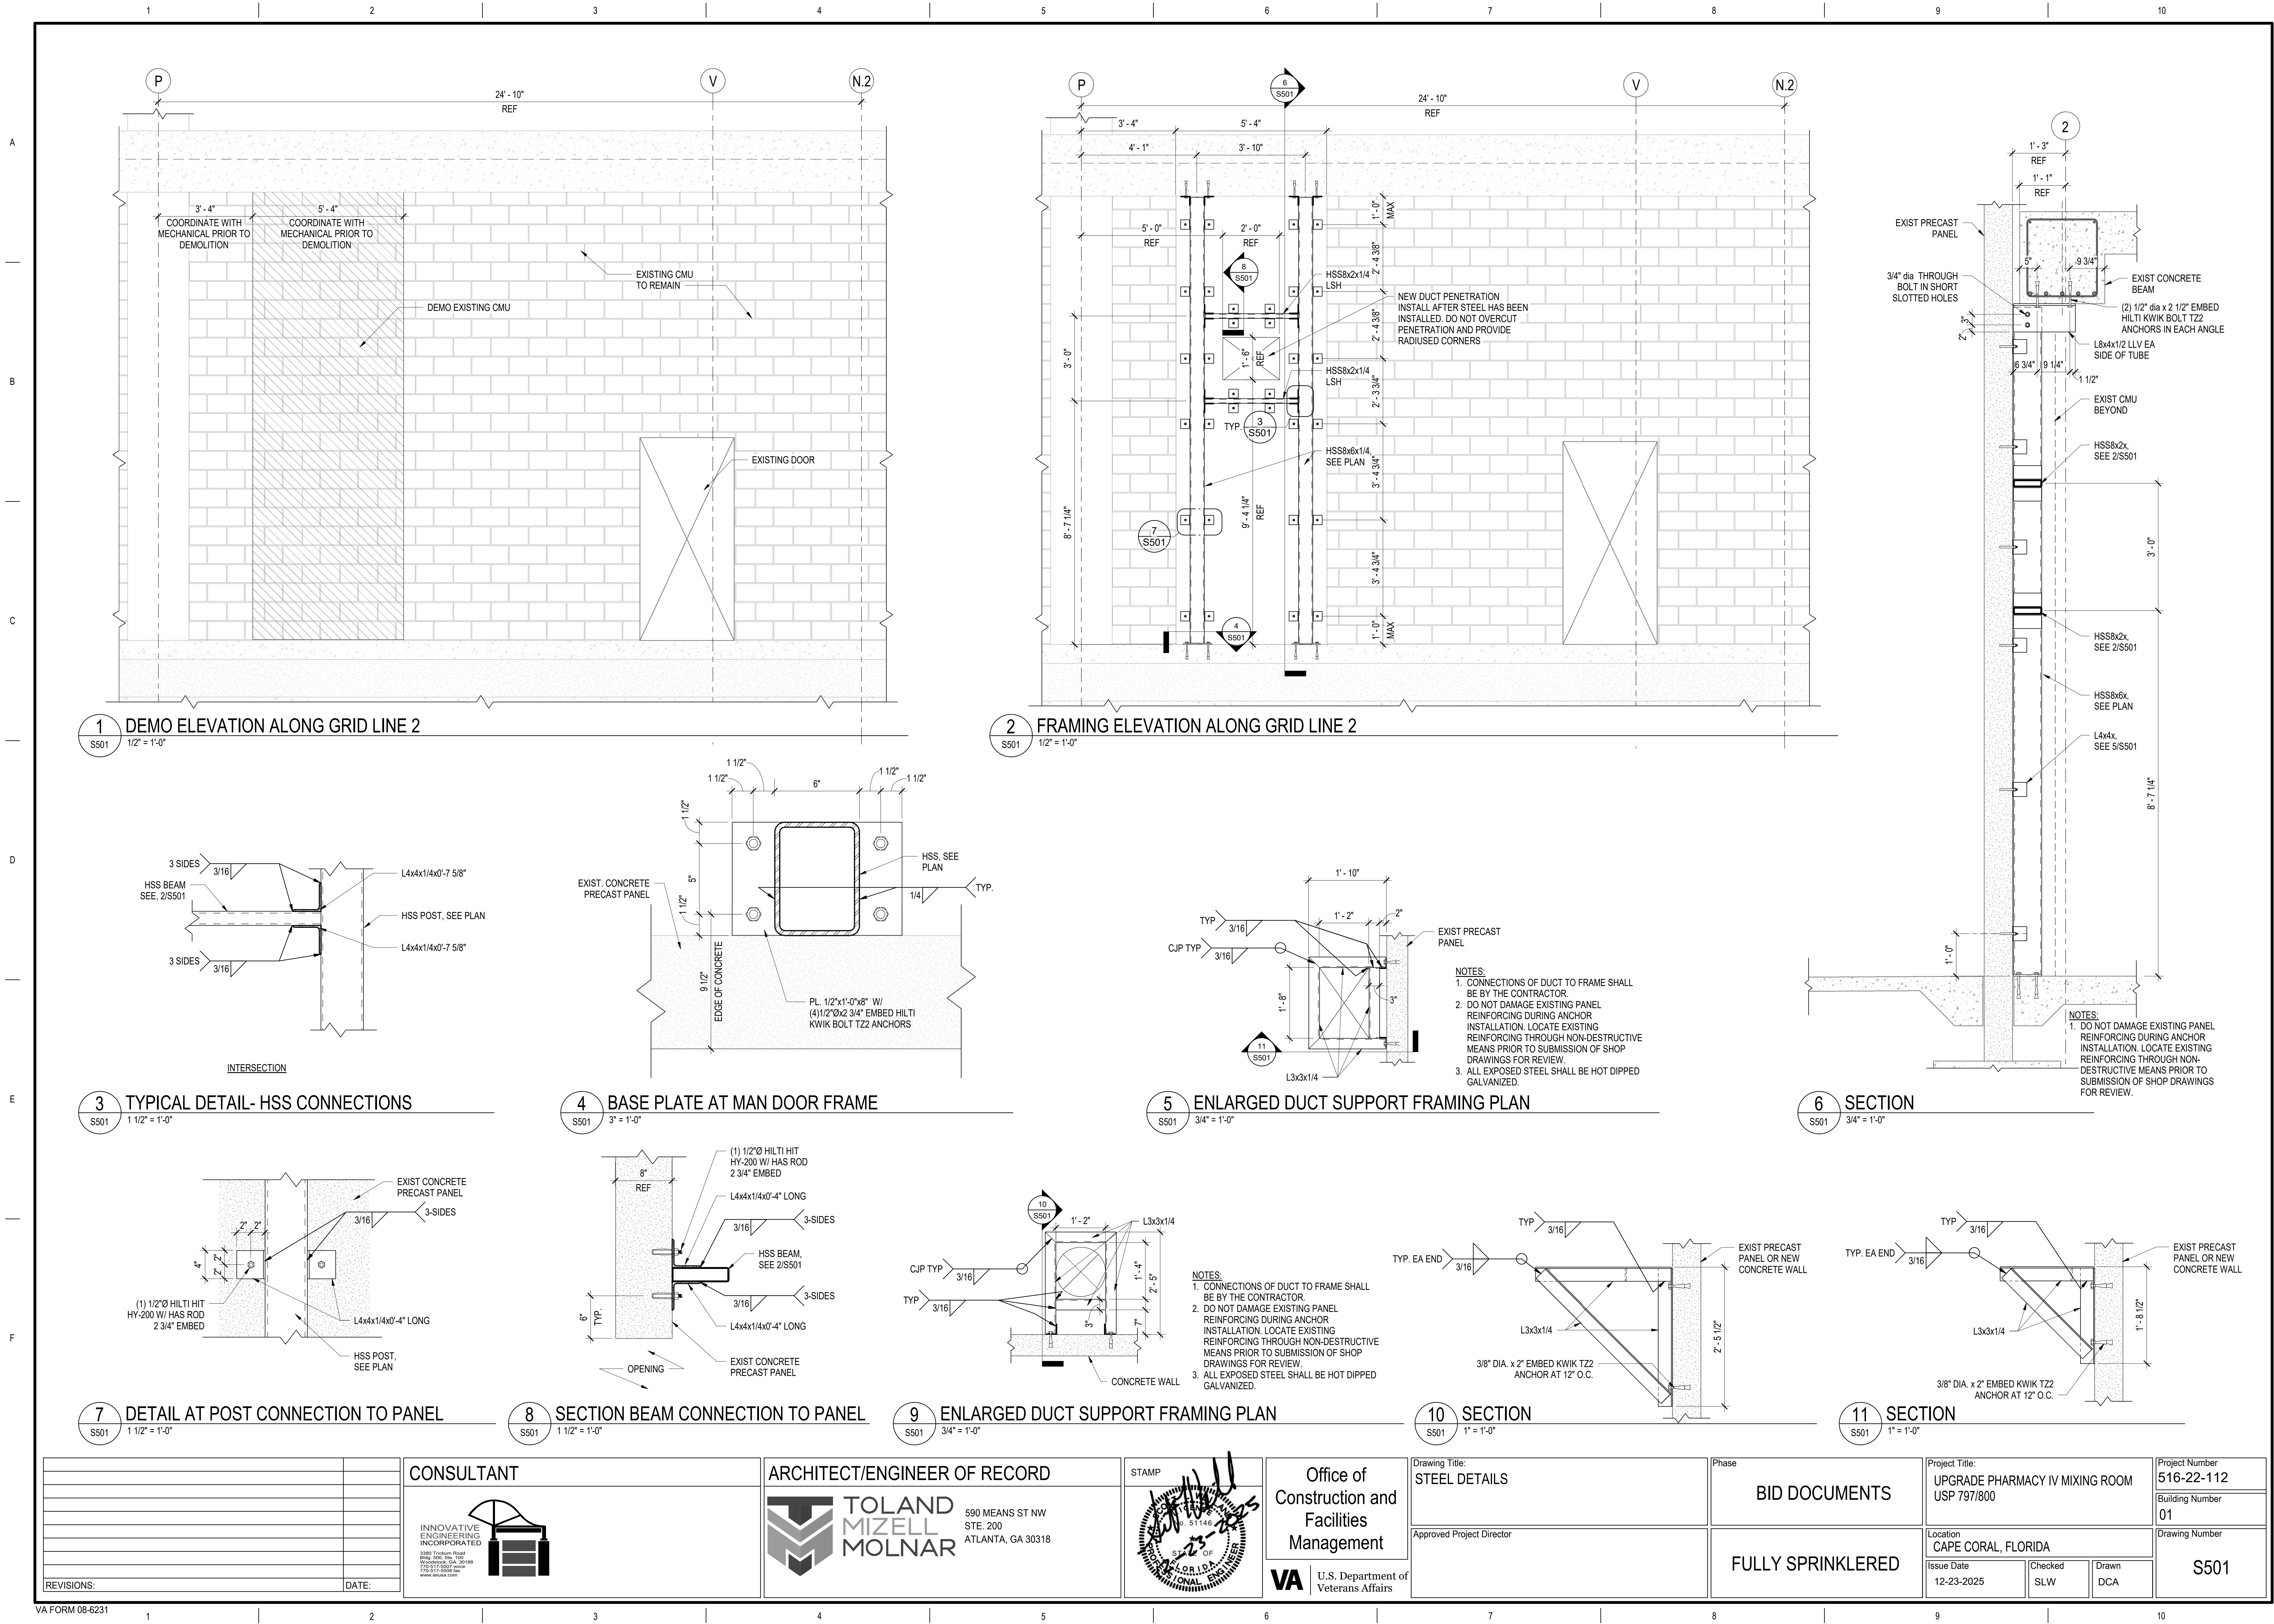

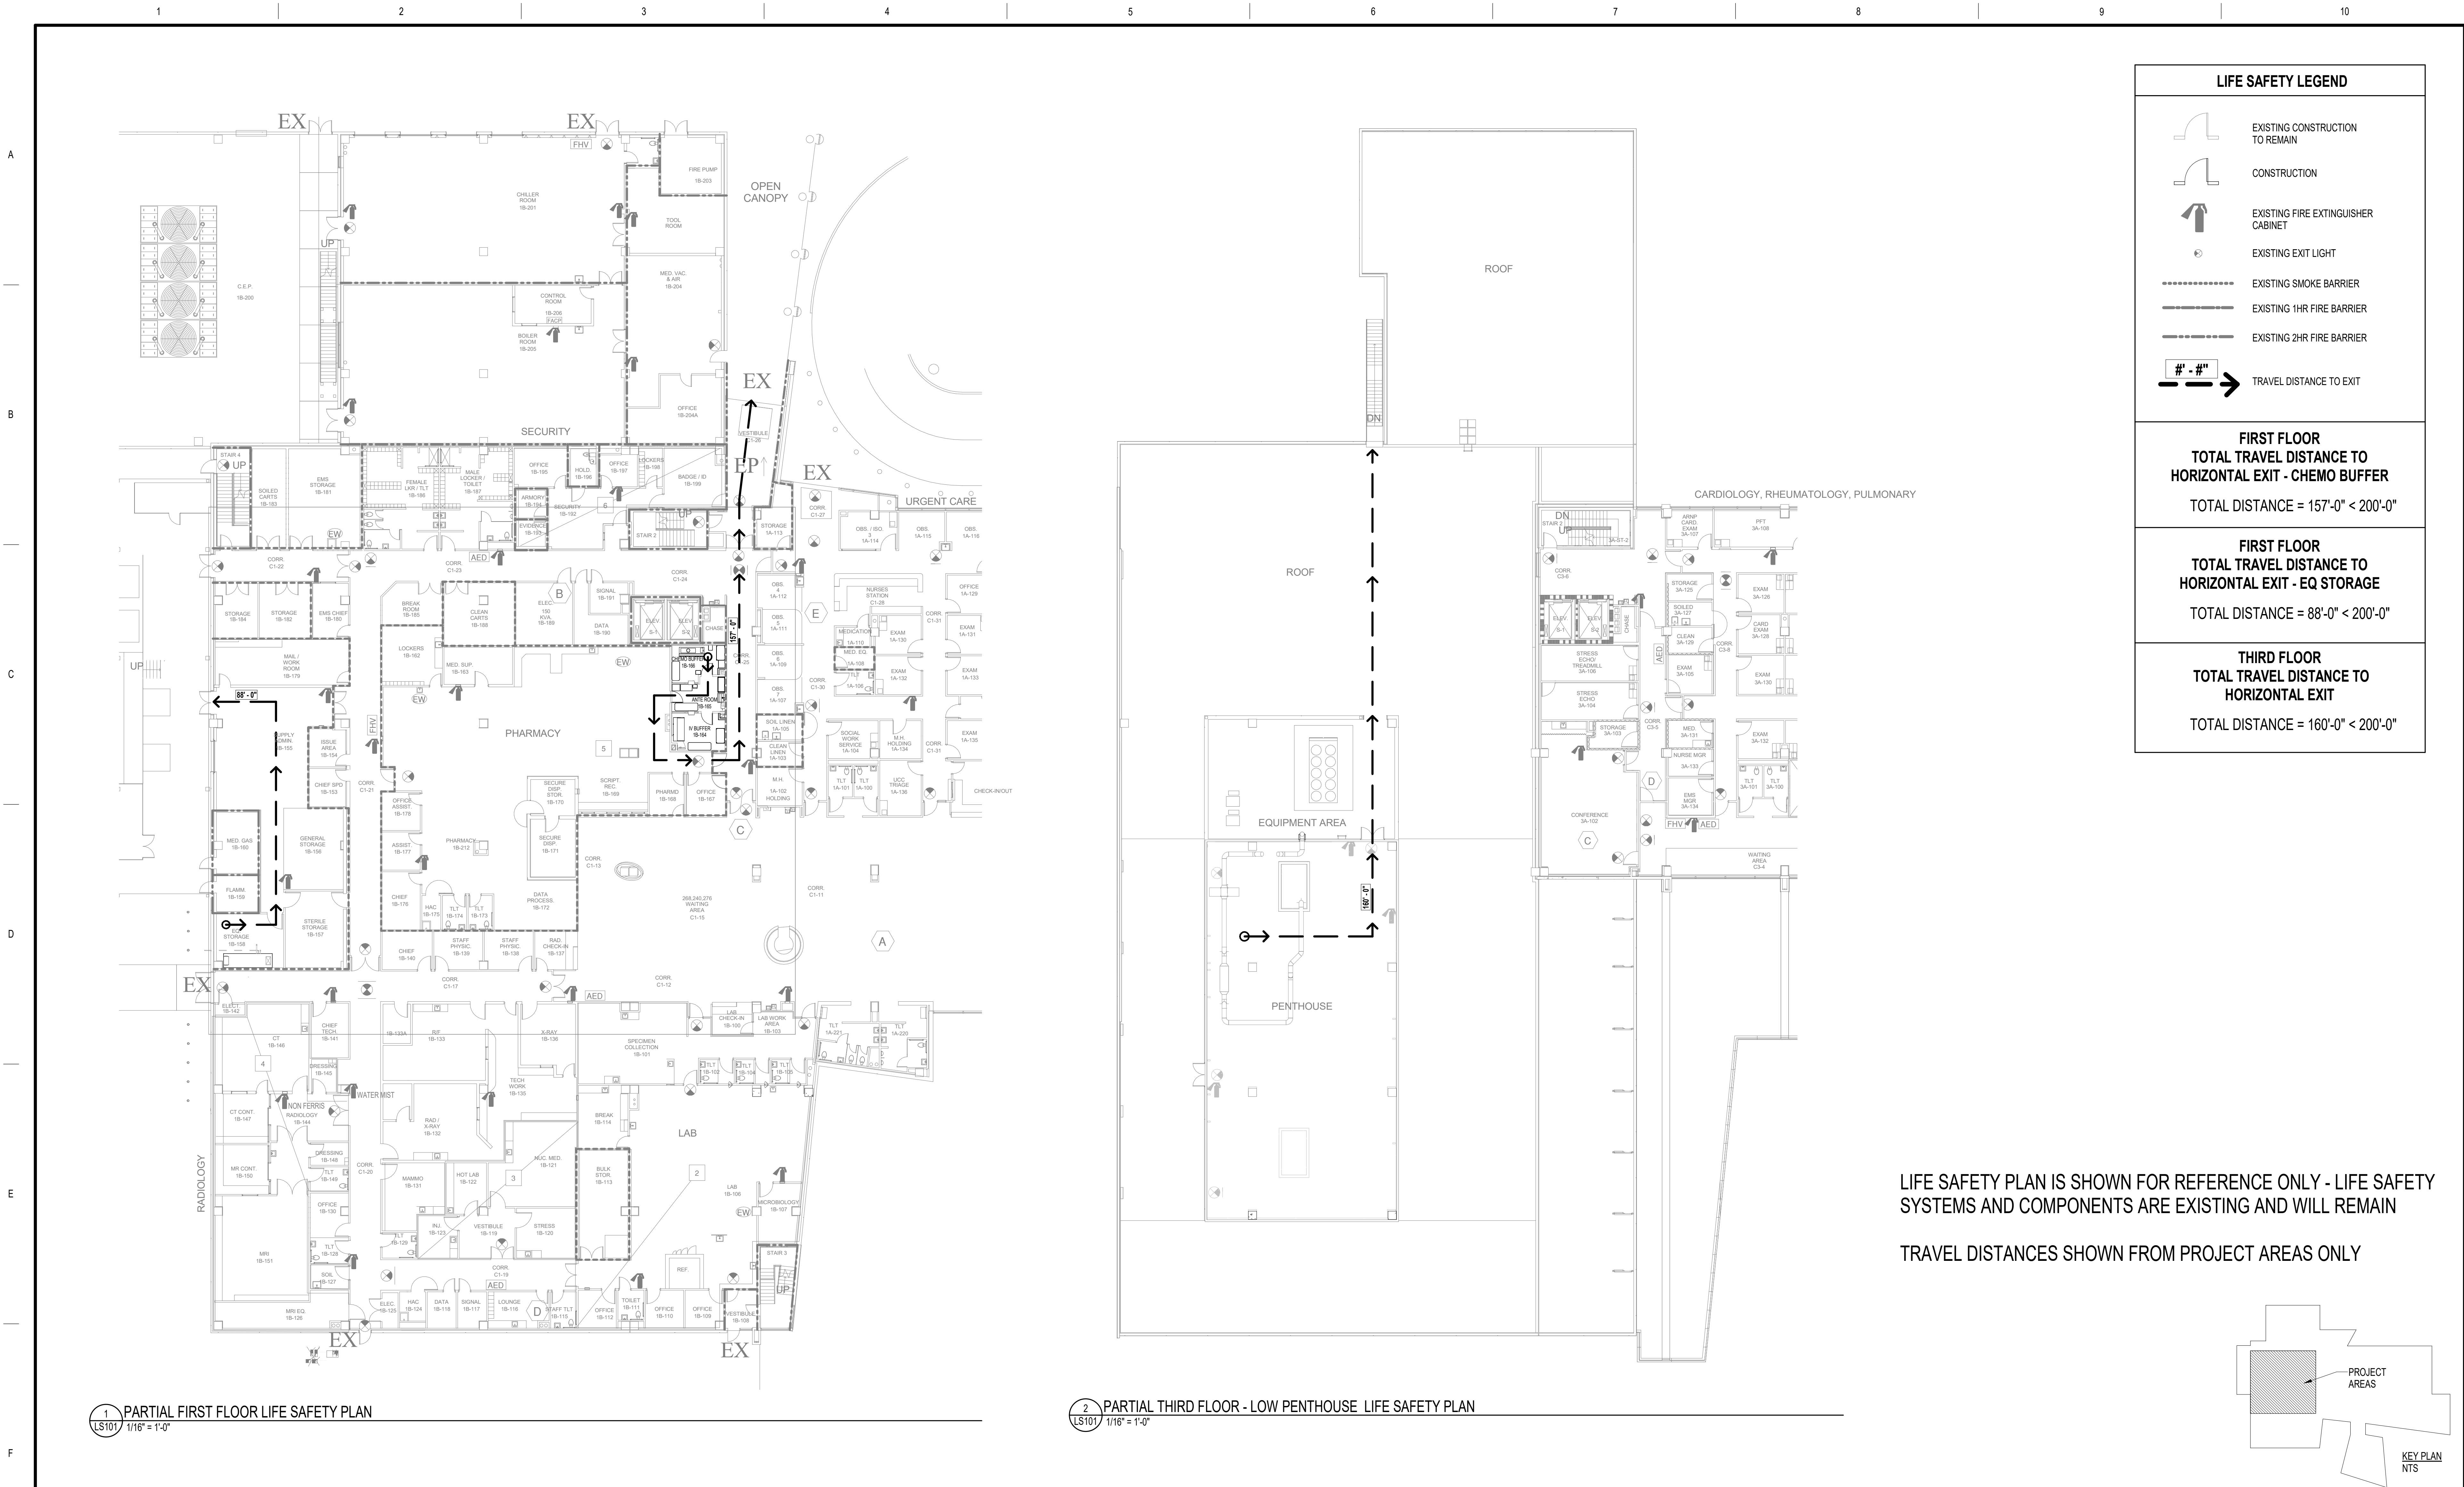


LIFE SAFETY PLAN IS SHOWN FOR REFERENCE ONLY - LIFE SAFETY SYSTEMS AND COMPONENTS ARE EXISTING AND WILL REMAIN

TRAVEL DISTANCES SHOWN FROM PROJECT AREAS ONLY


1 PARTIAL FIRST FLOOR LIFE SAFETY PLAN
1/16" = 1'-0"

2 PARTIAL THIRD FLOOR - LOW PENTHOUSE LIFE SAFETY PLAN
1/16" = 1'-0"


0' 8' 16' 32' 48'
SCALE: 1/16" = 1' - 0"




REVISIONS: DATE:		CONSULTANT	ARCHITECT/ENGINEER OF RECORD TOLAND MIZELL MOLNAR 590 MEANS ST NW STE. 200 ATLANTA, GA 30318		STAMP STATE OF FLORIDA RICHARD S. JONES REGISTERED ARCHITECT 15-2254 AR0095604	Office of Construction and Facilities Management VA U.S. Department of Veterans Affairs	Drawing Title: PARTIAL FIRST FLOOR AND THIRD FLOOR LIFE SAFETY PLANS Approved Project Director	Phase BID DOCUMENTS FULLY SPRINKLERED	Project Title: UPGRADE PHARMACY IV MIXING ROOM USP 797/800 Location CAPE CORAL, FLORIDA Issue Date 12-23-2025 Checked SV Drawn SJK/KB	Project Number 516-22-112 Building Number 01 Drawing Number LS101
--	--	------------	--	--	--	---	--	--	--	--

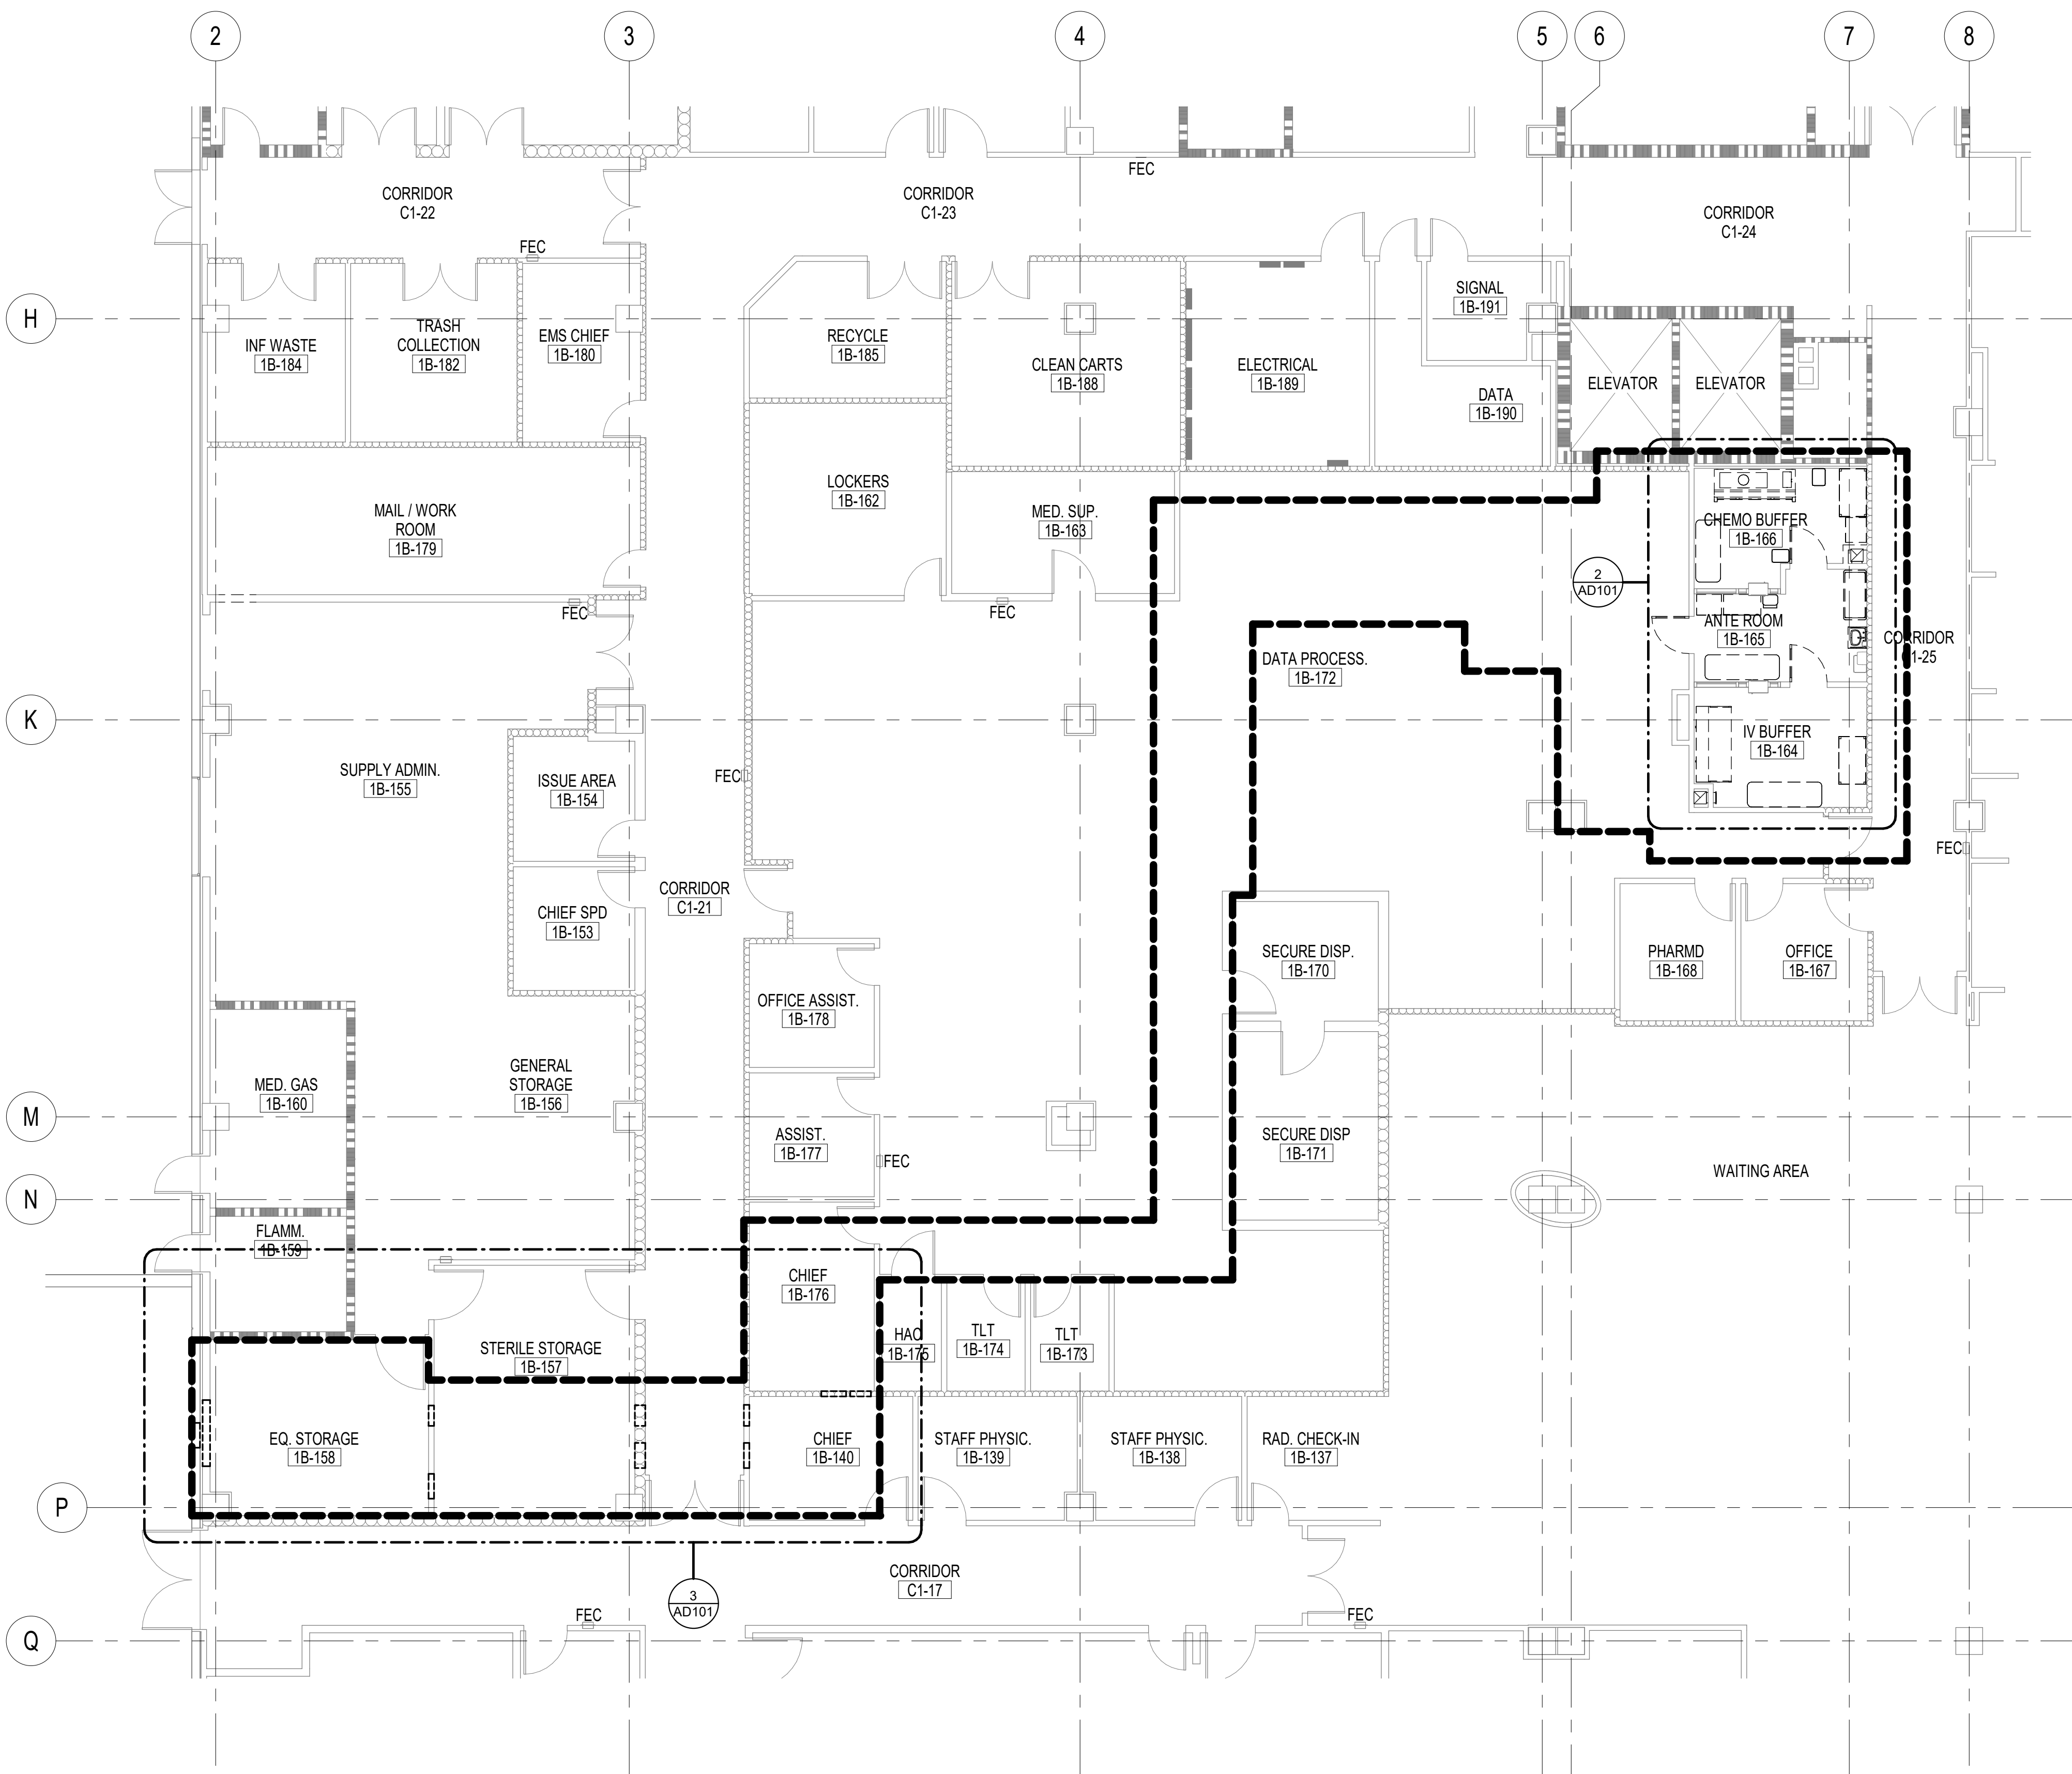

1 PARTIAL FIRST FLOOR PLAN - DEMOLITION
AD101 1/8" = 1'-0"

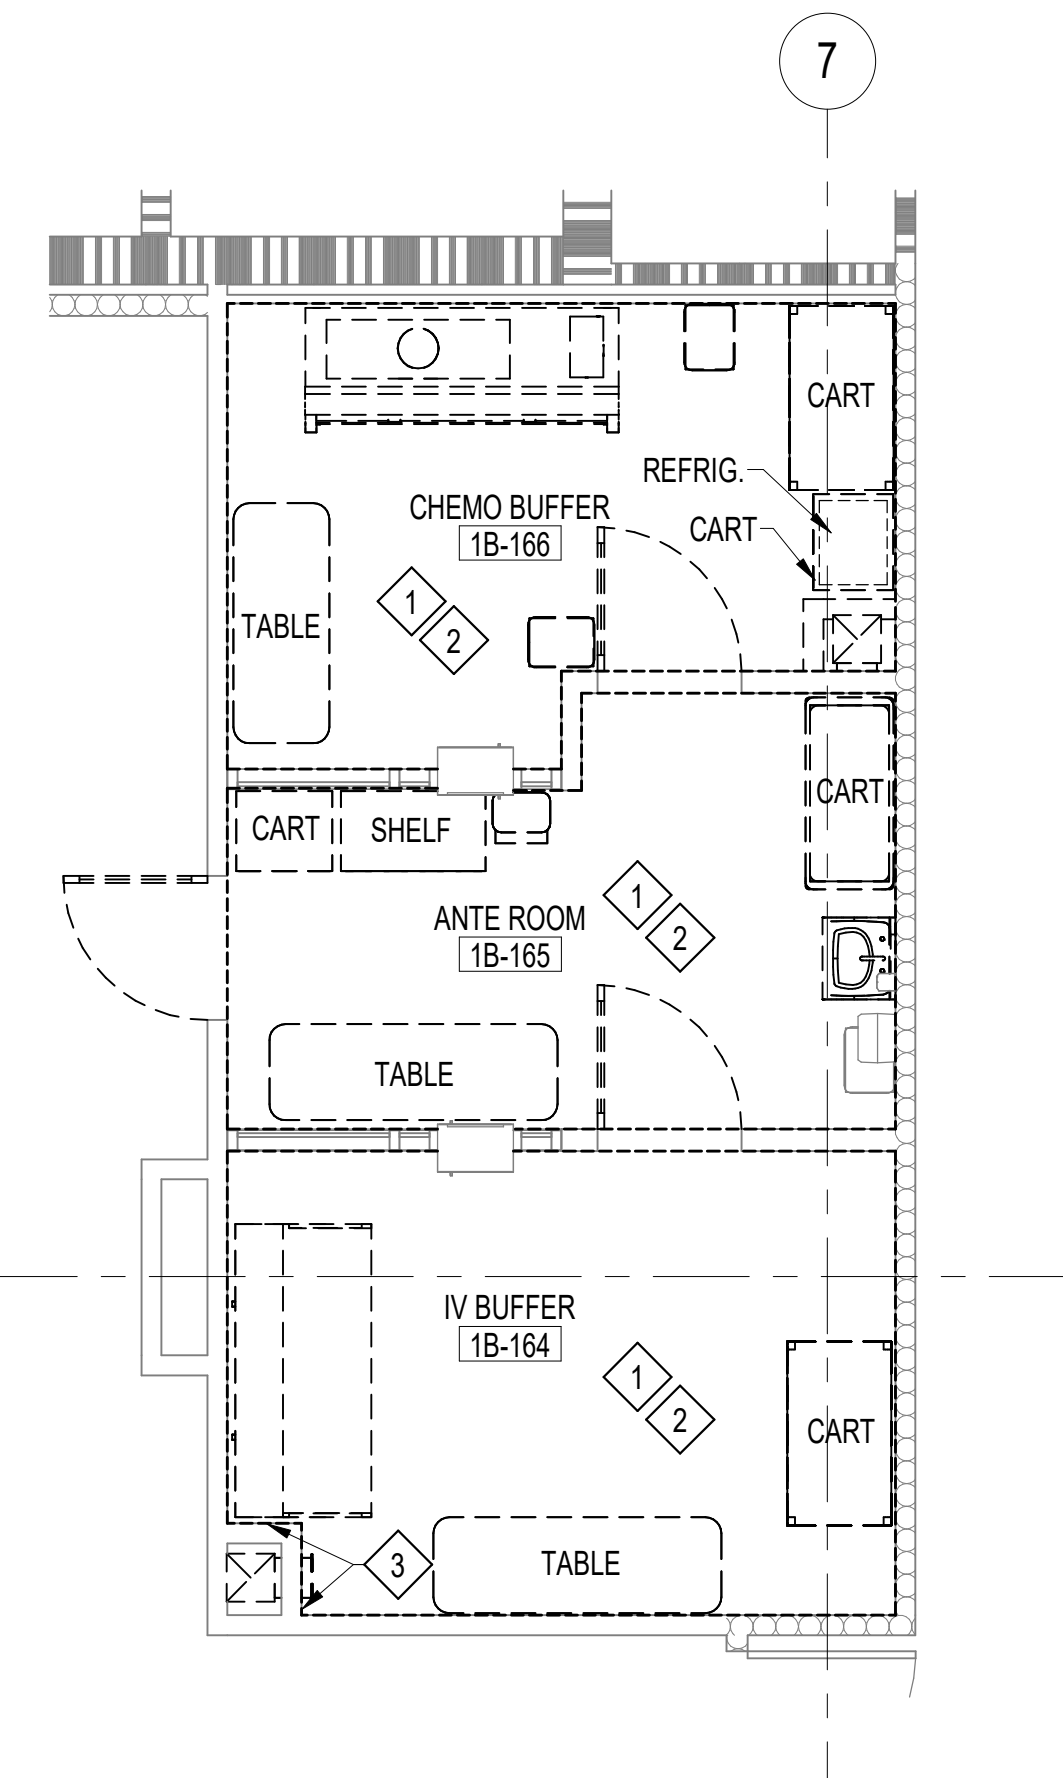

2 ENLARGED PARTIAL FIRST FLOOR PLAN - DEMOLITION
AD101 1/4" = 1'-0"

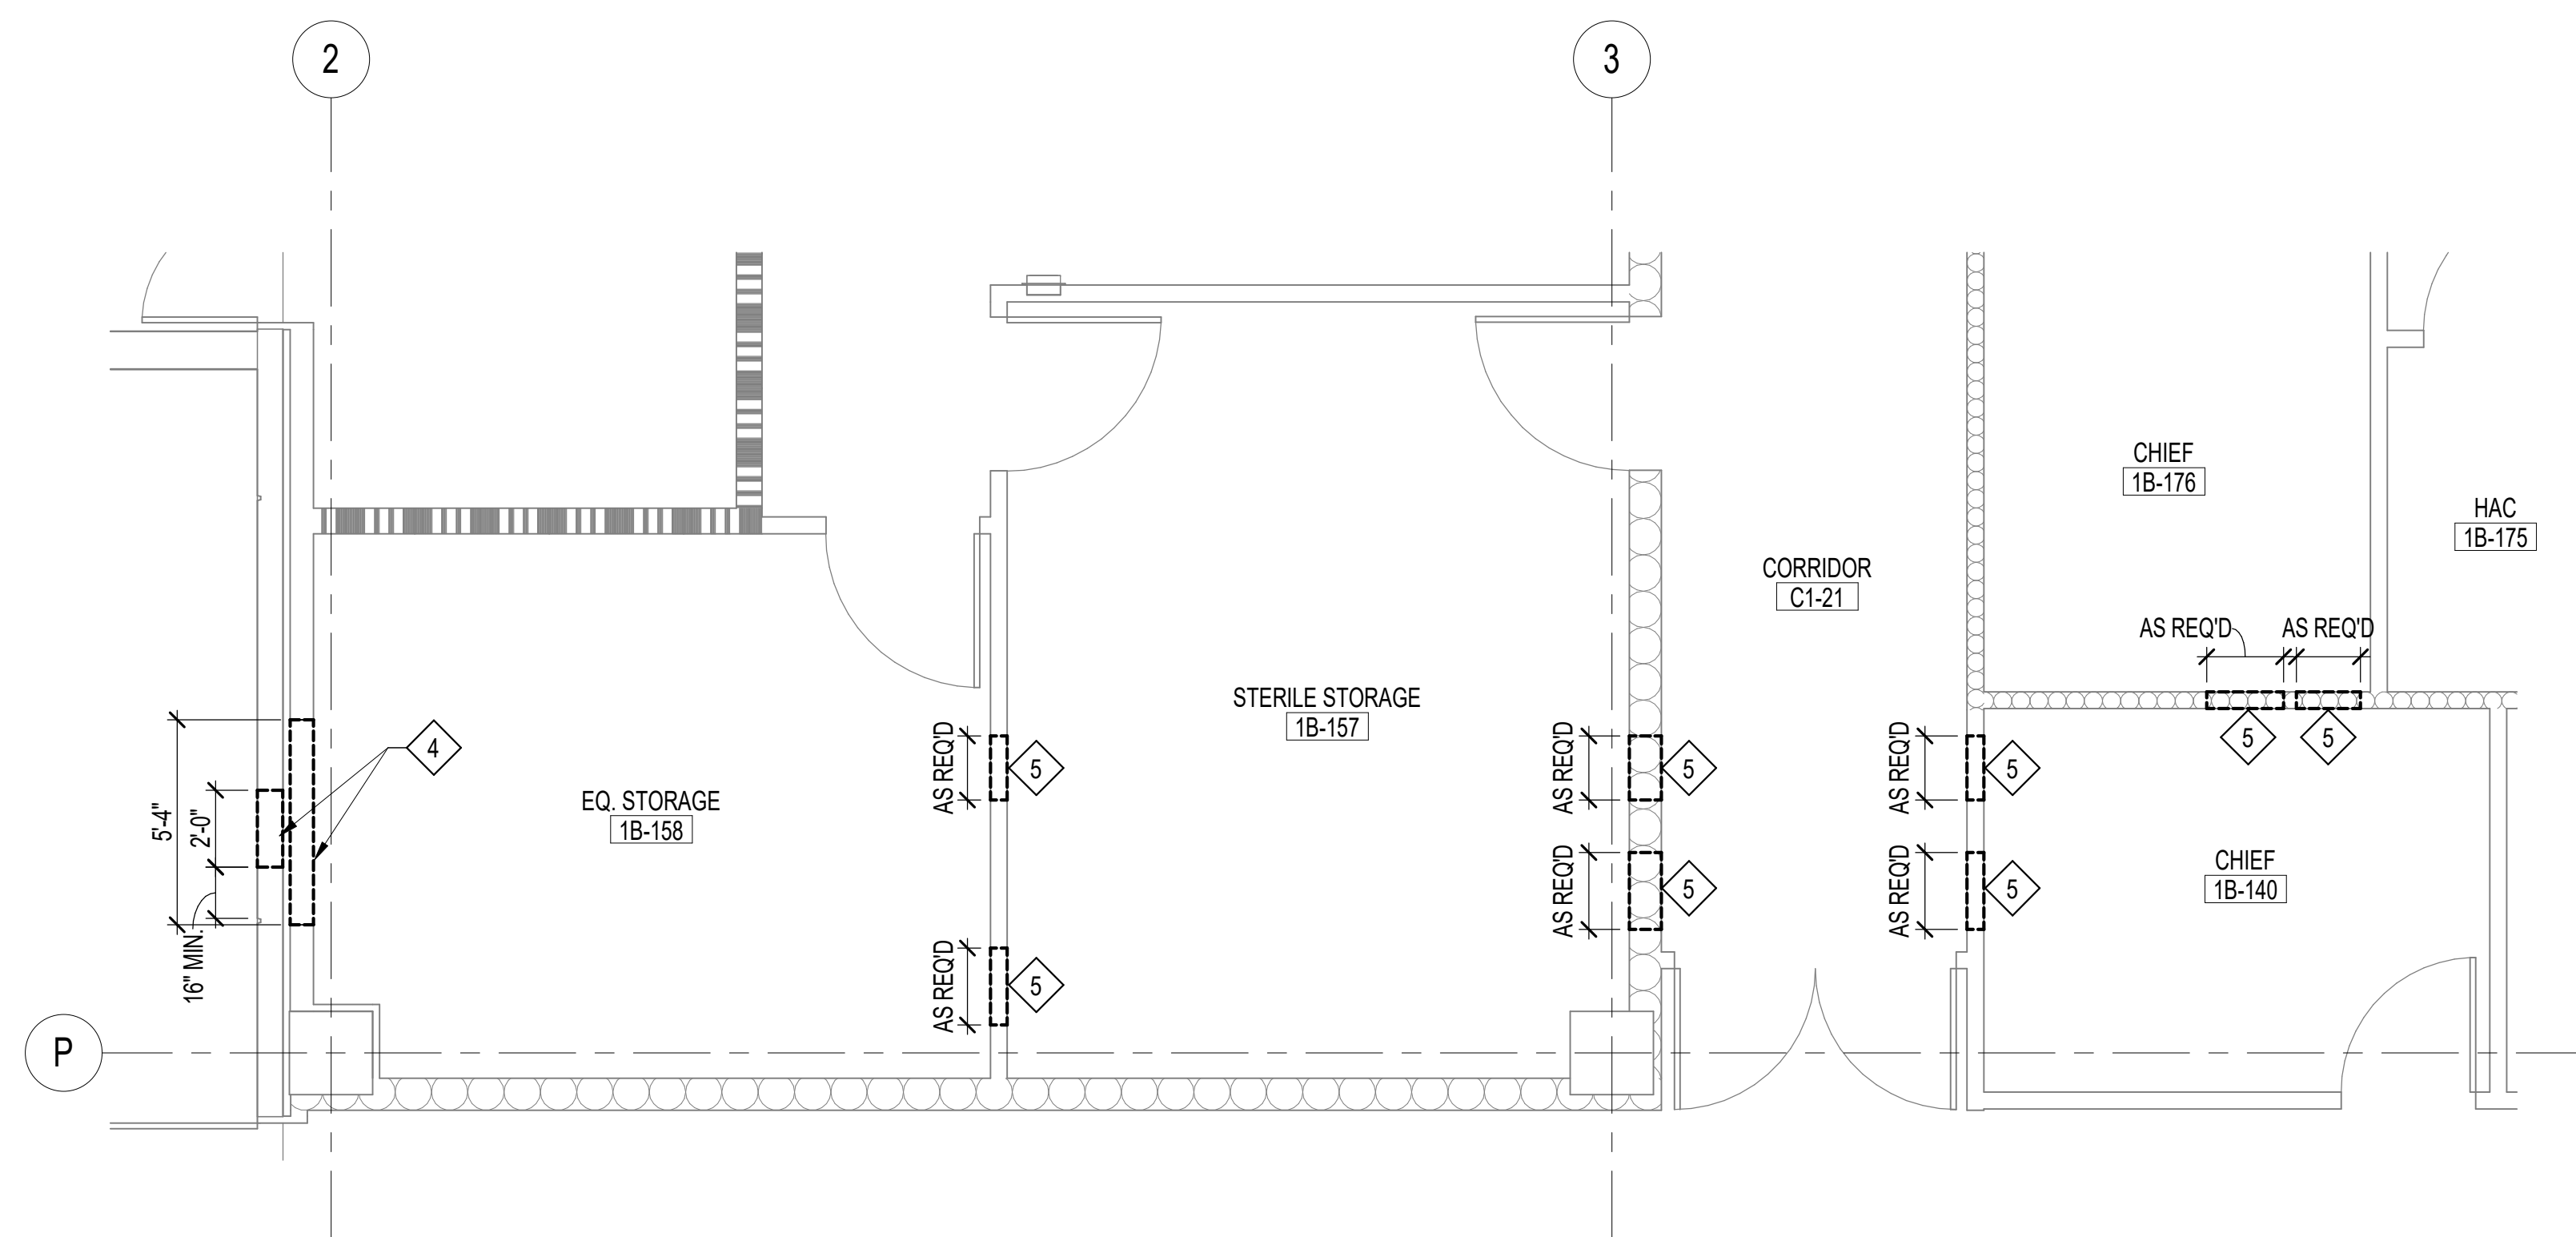

3 ENLARGED EQ. STORAGE ROOM - DEMOLITION
AD101 1/4" = 1'-0"

DEMOLITION PLAN GENERAL NOTES


- REMOVE ALL EXISTING CONSTRUCTION AS INDICATED OR REQUIRED AND SHALL DISPOSE OF ALL DEMOLISHED MATERIALS IN AN APPROVED, OFFSITE LANDFILL EXCEPT WHERE OTHERWISE REQUIRED FOR SALVAGE OR RECYCLING.
- INDICATED EXISTING CONDITIONS ARE BASED UPON LIMITED FIELD INVESTIGATION. CONTRACTOR SHALL VERIFY ALL EXISTING CONDITIONS INCLUDING DIMENSIONS OF INSTALLED CONSTRUCTION PRIOR TO COMMENCING WITH THE WORK. IN THE EVENT THAT ANY DISCREPANCIES BETWEEN THE INDICATED DEMOLITION WORK AND EXISTING CONDITIONS ARE DISCOVERED, THE CONTRACTOR SHALL NOTIFY THE COR FOR INTERPRETATION AND DIRECTION PRIOR TO PROCEEDING WITH THE WORK.
- MAINTAIN ALL FIRE-RATED ASSEMBLIES WITHIN THE PROJECT AREA DURING PERFORMANCE OF THE WORK.
- MAINTAIN ALL REQUIRED EXITS WITH THE PROJECT AREA DURING PERFORMANCE OF THE WORK.
- PROTECT ALL SITE AND BUILDING AREAS SUBJECT TO PROJECT-RELATED VEHICULAR TRAFFIC AND DEMOLITION WORK.

DEMOLITION PLAN KEY NOTES


- REMOVE EXISTING CONSTRUCTION AND FINISHES AS REQUIRED TO INSTALL WORK. REFER TO AND COORDINATE WITH OTHER DISCIPLINES DRAWINGS AND DOCUMENTS FOR ADDITIONAL INSTRUCTIONS.
- DISCONNECT, RELOCATE AND STORE EXISTING EQUIPMENT FOR REINSTALLATION TO A COR APPROVED LOCATION.
- REMOVE EXISTING CONSTRUCTION AS REQUIRED TO INSTALL WORK. REFER TO AND COORDINATE WITH OTHER DISCIPLINES DRAWINGS AND DOCUMENTS FOR ADDITIONAL INSTRUCTIONS. REMOVE WALL STUD WHERE REQUIRED TO ACCESS THE WORK.
- CUT OPENING IN EXISTING CMU WALL AND PRECAST CONCRETE WALL AS REQUIRED TO INSTALL THE WORK. SEE OTHER DISCIPLINES DRAWINGS FOR ADDITIONAL INFORMATION.
- CUT OPENING IN EXISTING WALL AS REQUIRED TO INSTALL WORK. SEE OTHER DISCIPLINES DRAWINGS FOR ADDITIONAL INFORMATION.

DEMOLITION PLAN LEGEND


- EXISTING CONSTRUCTION TO REMAIN
- EXISTING CONSTRUCTION TO BE REMOVED
- EXISTING 2-HOUR FIRE BARRIER
- EXISTING 1-HOUR FIRE BARRIER
- EXISTING 1 HOUR RATED SMOKE PARTITION
- EXISTING SMOKE ENCLOSURE
- LIMITS OF CONSTRUCTION UNLESS NOTED OTHERWISE



0' 4' 8' 16' 24'
SCALE: 1/8" = 1' - 0"



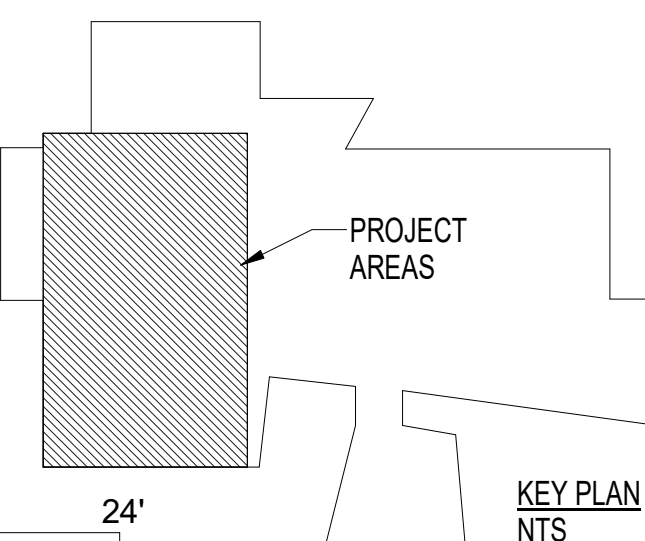


--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

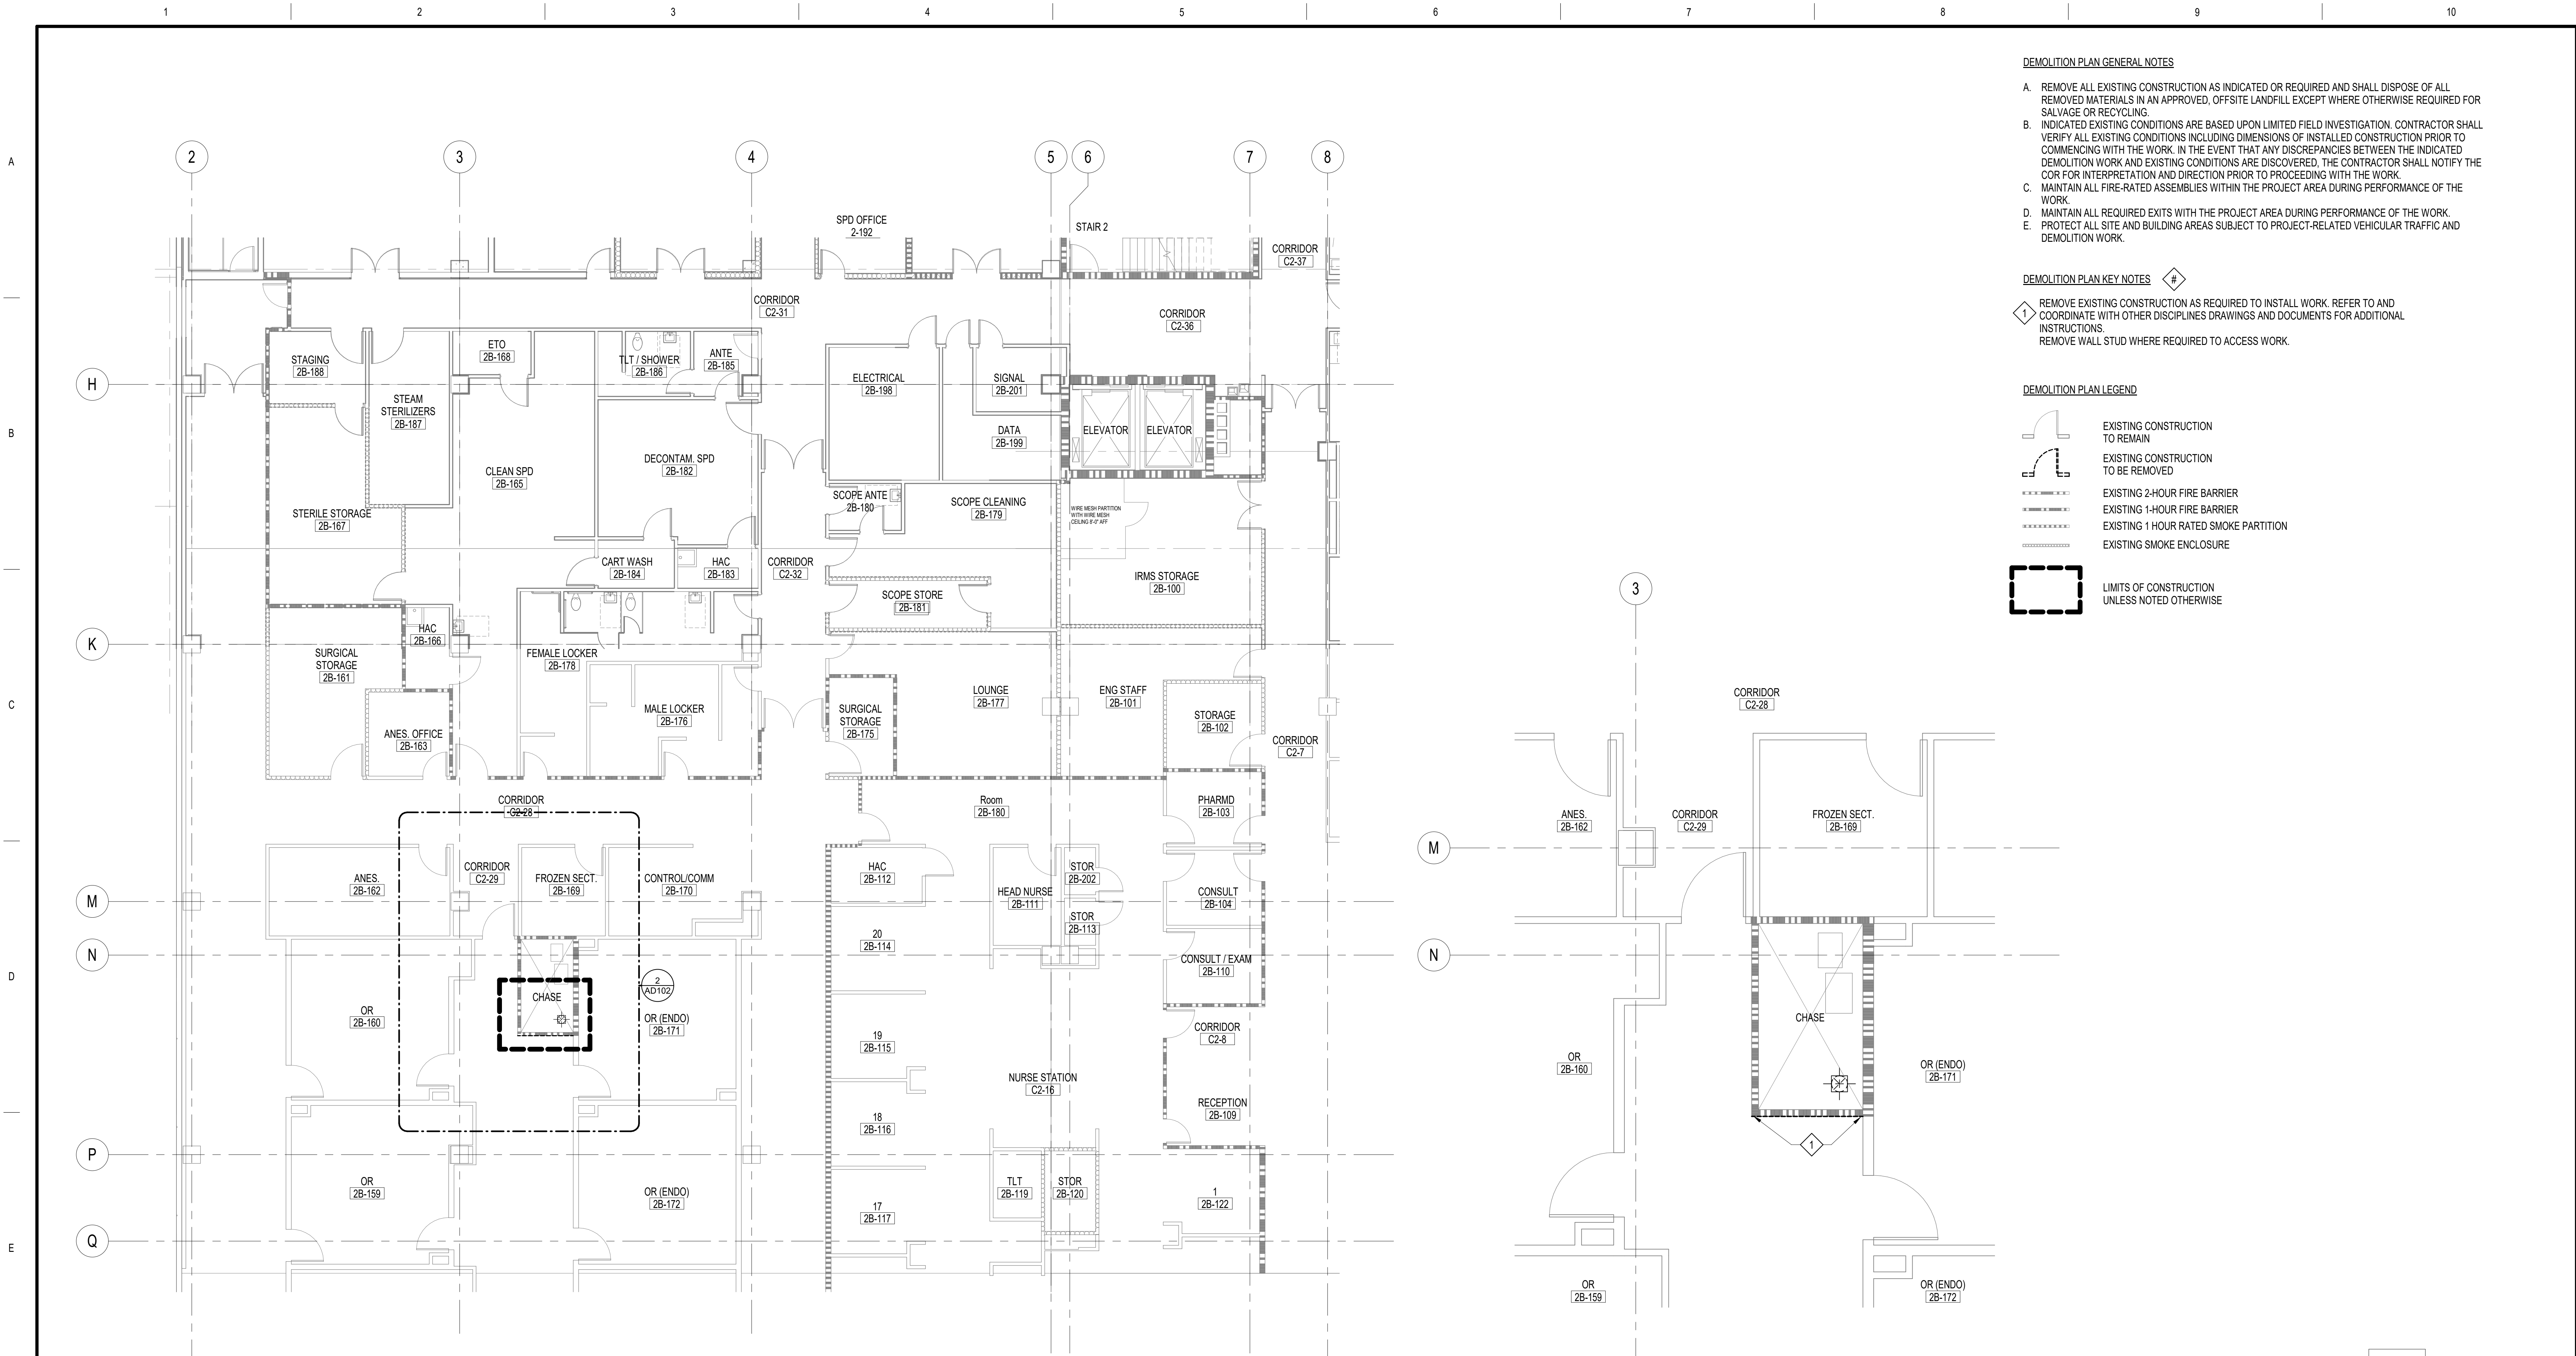


1 PARTIAL SECOND FLOOR PLAN - DEMOLITION
AD102 1/8" = 1'-0"

2 ENLARGED PARTIAL SECOND FLOOR PLAN - DEMOLITION
AD102 1/4" = 1'-0"

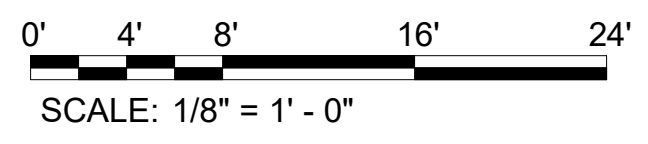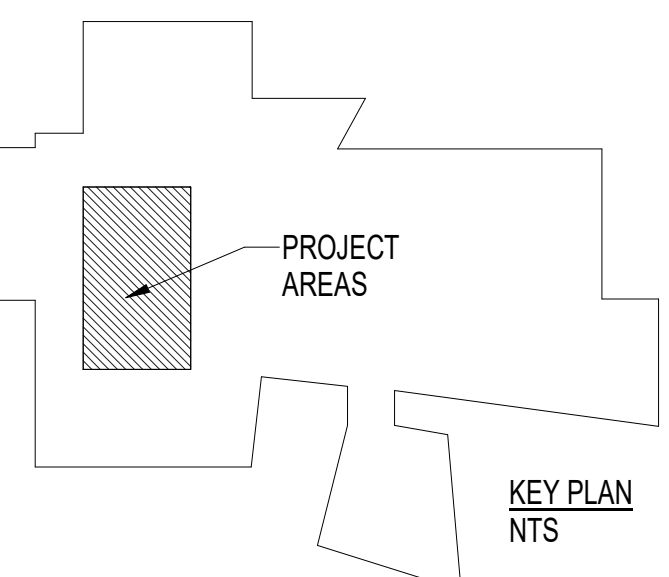


		CONSULTANT	ARCHITECT/ENGINEER OF RECORD TOLAND MIZELL MOLNAR 590 MEANS ST NW STE. 200 ATLANTA, GA 30318	STAMP STATE OF FLORIDA RICHARD J. TOLAND 1-15-2024 REGISTERED ARCHITECT AR009664 <td rowspan="5"> Office of Construction and Facilities Management VAU.S. Department of Veterans Affairs </td> <td> Drawing Title: PARTIAL SECOND FLOOR AND ENLARGED PLANS - DEMOLITION </td> <td> Phase BID DOCUMENTS </td> <td> Project Title: UPGRADE PHARMACY IV MIXING ROOM USP 797/800 </td> <td> Project Number 516-22-112 </td>	Office of Construction and Facilities Management VAU.S. Department of Veterans Affairs	Drawing Title: PARTIAL SECOND FLOOR AND ENLARGED PLANS - DEMOLITION	Phase BID DOCUMENTS	Project Title: UPGRADE PHARMACY IV MIXING ROOM USP 797/800	Project Number 516-22-112
						Building Number 01			
REVISIONS:	DATE:				Approved Project Director	FULLY SPRINKLERED	Location CAPE CORAL, FLORIDA	Drawing Number AD102	
							Issue Date 12-23-2025	Checked SV	Drawn SJ/KB

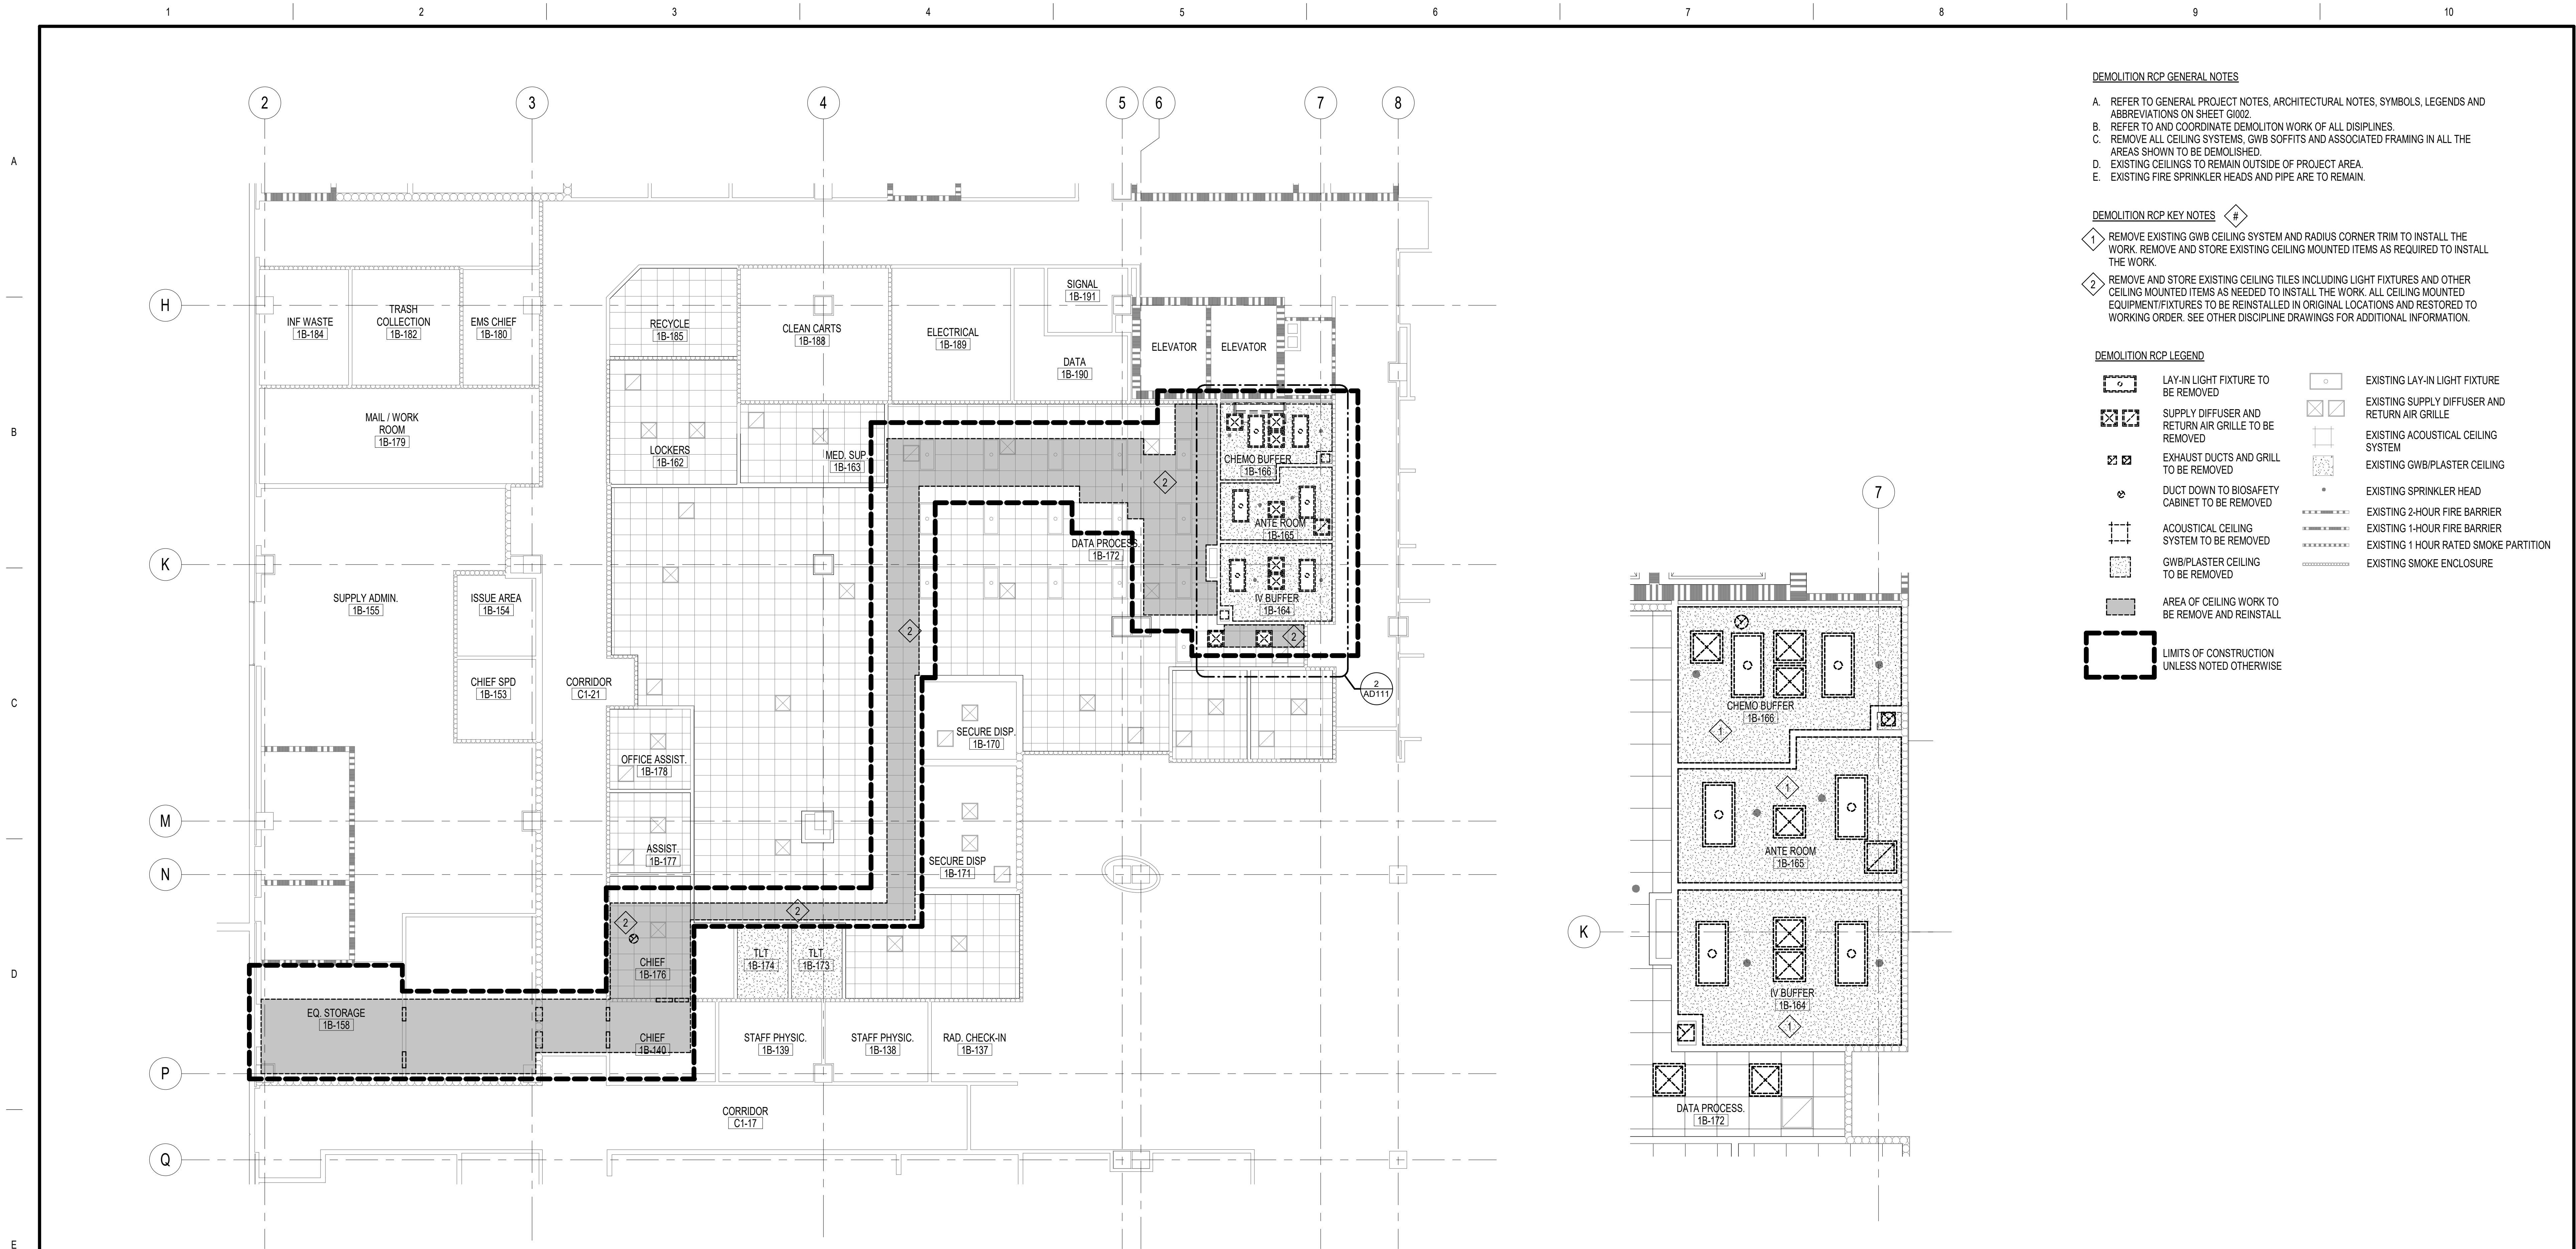


1 PARTIAL FIRST FLOOR REFLECTED CEILING PLAN - DEMOLITION
AD111 1/8" = 1'-0"

2 ENLARGED PARTIAL FIRST FLOOR REFLECTED CEILING PLAN - DEMOLITION
AD111 1/4" = 1'-0"

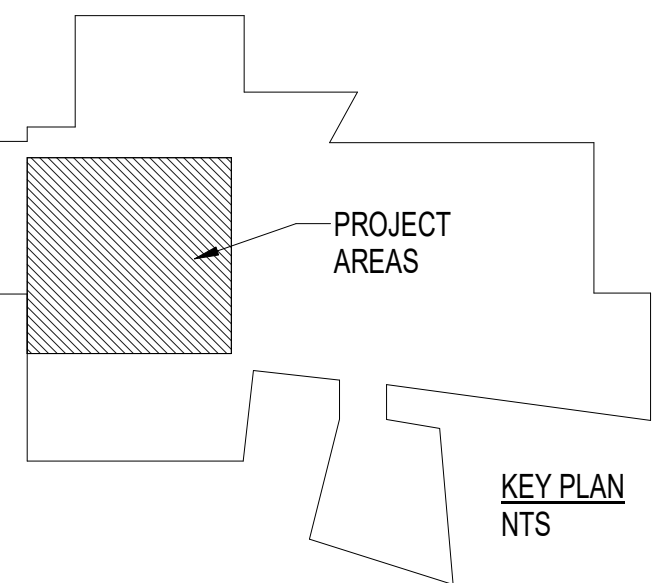



0' 2' 4' 8' 12' 0' 4' 8' 16' 24'
SCALE: 1/4" = 1' - 0" SCALE: 1/8" = 1' - 0"



CONSULTANT		ARCHITECT/ENGINEER OF RECORD		STAMP		Office of Construction and Facilities Management		Drawing Title: PARTIAL FIRST FLOOR REFLECTED CEILING PLANS - DEMOLITION		Phase BID DOCUMENTS		Project Title: UPGRADE PHARMACY IV MIXING ROOM USP 797/800		Project Number 516-22-112	
REVISIONS:		TOLAND MIZELL MOLNAR		590 MEANS ST NW STE. 200 ATLANTA, GA 30318		VA U.S. Department of Veterans Affairs		Approved Project Director		FULLY SPRINKLERED		Location CAPE CORAL, FLORIDA		Building Number 01	
DATE:												Issue Date 12-23-2025		Drawing Number AD111	
												Checked SV		Drawn SJKB	



- FLOOR PLAN LEGEND**
- | | |
|---|--|
|  | EXISTING CONSTRUCTION TO REMAIN |
|  | CONSTRUCTION |
|  | EXISTING 2-HOUR FIRE BARRIER |
|  | EXISTING 1-HOUR FIRE BARRIER |
|  | EXISTING 1 HOUR RATED SMOKE PARTITION |
|  | EXISTING SMOKE ENCLOSURE |
|  | LIMITS OF CONSTRUCTION
UNLESS NOTED OTHERWISE |

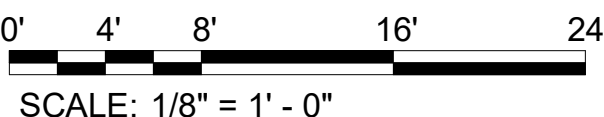VA FORM 08-6231


ROOM FINISH SCHEDULE										
ROOM NO.	ROOM NAME	FLOOR	BASE	EAST WALL	NORTH WALL	SOUTH WALL	WEST WALL	CEILING	CLG. HT.	REMARKS
1B-158	EQ. STORAGE	EXIST	EXIST	EXIST	EXIST	EXIST	EXIST	ES	-	
1B-164	IV BUFFER	RES-3	RES-3	PSC-1	PSC-1	PSC-1	PSC-1	PSC-1	9'-0"	1.2
1B-165	ANITE ROOM	RES-3	RES-3	PSC-1	PSC-1	PSC-1	PSC-1	PSC-1	9'-0"	1.2
1B-166	CHEMO BUFFER	RES-3	RES-3	PSC-1	PSC-1	PSC-1	PSC-1	PSC-1	9'-0"	1.2

ROOM FINISH SCHEDULE GENERAL NOTES:
A. FINISH COLOR SELECTIONS AND THEIR LOCATIONS TO BE VERIFIED AND APPROVED BY VA INTERIOR DESIGNER AND COR.
B. CONTRACTOR SHALL PROVIDE A COLOR BOARD TO COR AFTER SUBMITTALS ARE APPROVED.
C. DOORS AND DOOR FRAMES SHALL BE EPOXY PAINT ON ALL SIDES; INCLUDING TOP AND BOTTOM EDGE TO FACILITATE CLEANING.

ROOM FINISH SCHEDULE REMARKS:
1. PROVIDE SMOOTH EPOXY PAINT AT CEILING.
2. PROVIDE RADIUS CORNER TRIM AT TRANSITION OF CEILING TO WALL. BASIS OF DESIGN: CLARKDETRICH 3/4" INSIDE CORNER COVE.



FINISH DESCRIPTION (BASIS OF DESIGN)					
SYMBOL	MANUFACTURER	SERIES/ PATTERN	MODEL NO.	FINISH/ COLOR	REMARKS
RESINOUS FLOORING (RES-3)					
RES-3	STONHARD	STONBLEND	GSi-G	LUNA	RES FLOOR AND BASE- REFER TO MANF. INSTRUCTIONS
RES-3	STONHARD	STONBLEND	GSi-G	CLAY	LINE OF DEMARCATION
PAINT SPECIAL COATING (PSC)					
PSC-1	SHERWIN WILLIAMS	PROINDUSTRIAL EPOXY PAINT	SW 7636	ORIGAMI WHITE	WALL AND CEILING EPOXY PAINT
PSC-2	SHERWIN WILLIAMS	PROINDUSTRIAL EPOXY PAINT	SW 7030	ANEW GREY	DOOR AND FRAME EPOXY PAINT

FINISH DESCRIPTION GENERAL NOTES:
A. ALL FINISH AND COLOR SELECTIONS AND THEIR LOCATIONS SHALL BE VERIFIED AND APPROVED BY THE COR AND VA INTERIOR DESIGNER. ALL PRODUCTS LISTED ARE PROVIDED AS A BASIS OF DESIGN.
B. PROVIDE TRANSITION STRIP AT FLOORING FINISH CHANGE.

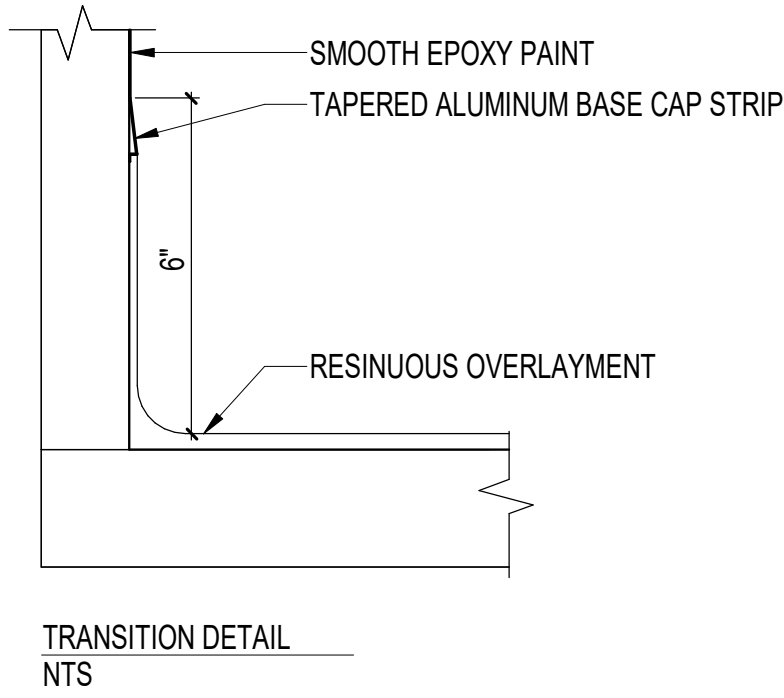


DOOR & FRAME SCHEDULE												
DOOR NO.	WIDTH	HEIGHT	DOOR TYPE	DOOR MATERIAL	FRAME TYPE	FRAME MATERIAL	HEAD DETAIL	JAMB DETAIL	SILL DETAIL	FIRE RATING	HARDWARE SET	REMARKS
1B-164	3'-0"	7'-0"	A	HM	1	HM	H1	J1	S1	--	HW-P2	1
1B-165	3'-0"	7'-0"	A	HM	1	HM	H1	J1	S1	--	HW-P1	1
1B-166	3'-0"	7'-0"	A	HM	1	HM	H1	J1	S1	--	HW-P3	1


DOOR AND FRAME SCHEDULE REMARKS:
1. WAVE SENSOR, HARD-WIRED

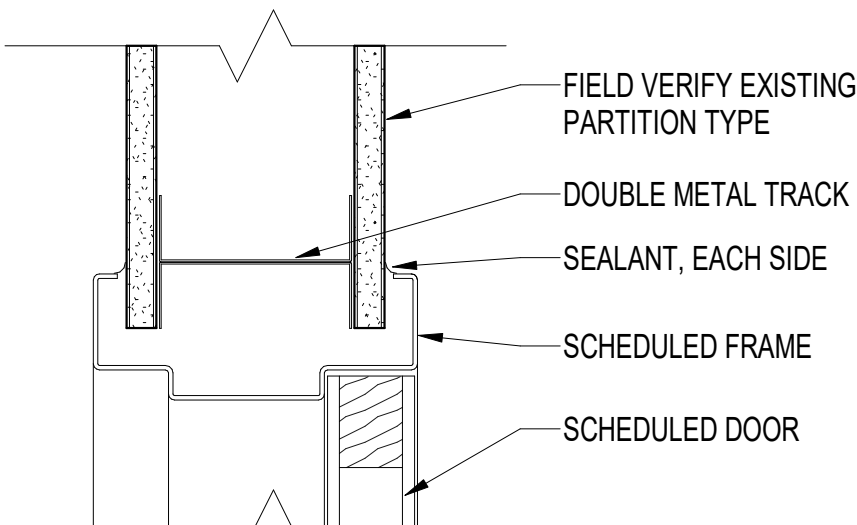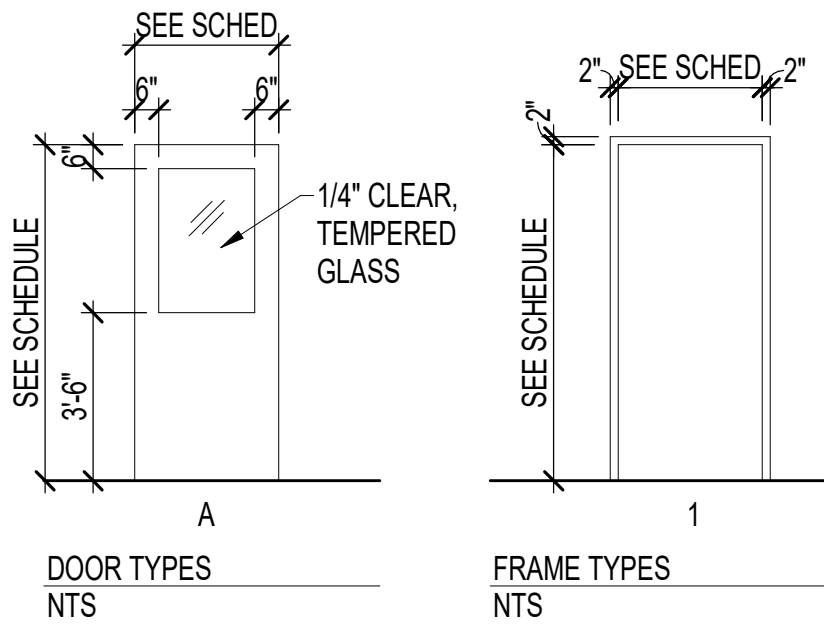


H1 HEAD DETAIL
SCALE: 3"=1'-0"

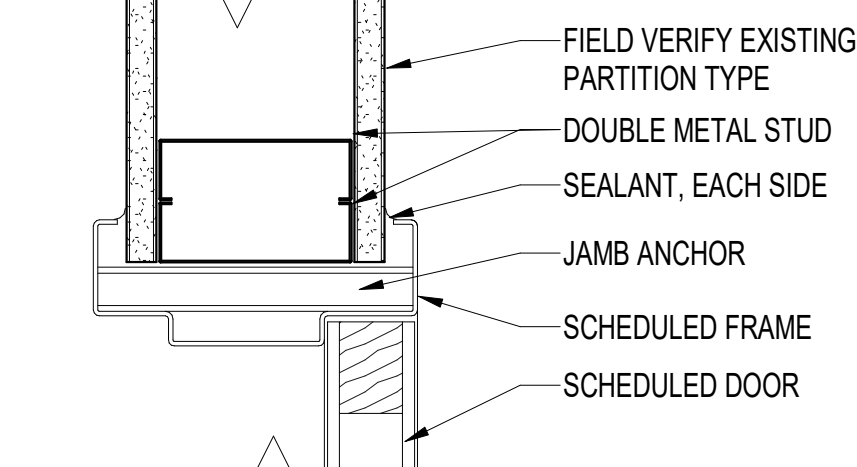

J1 JAMB DETAIL
SCALE: 3"=1'-0"

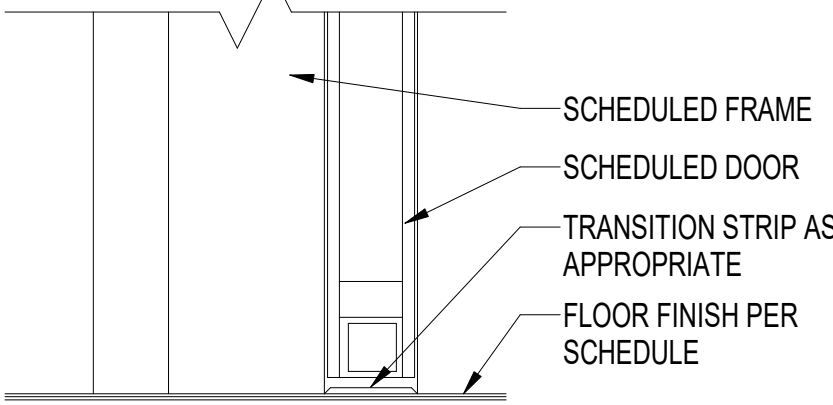

S1 SILL DETAIL
SCALE: 3"=1'-0"

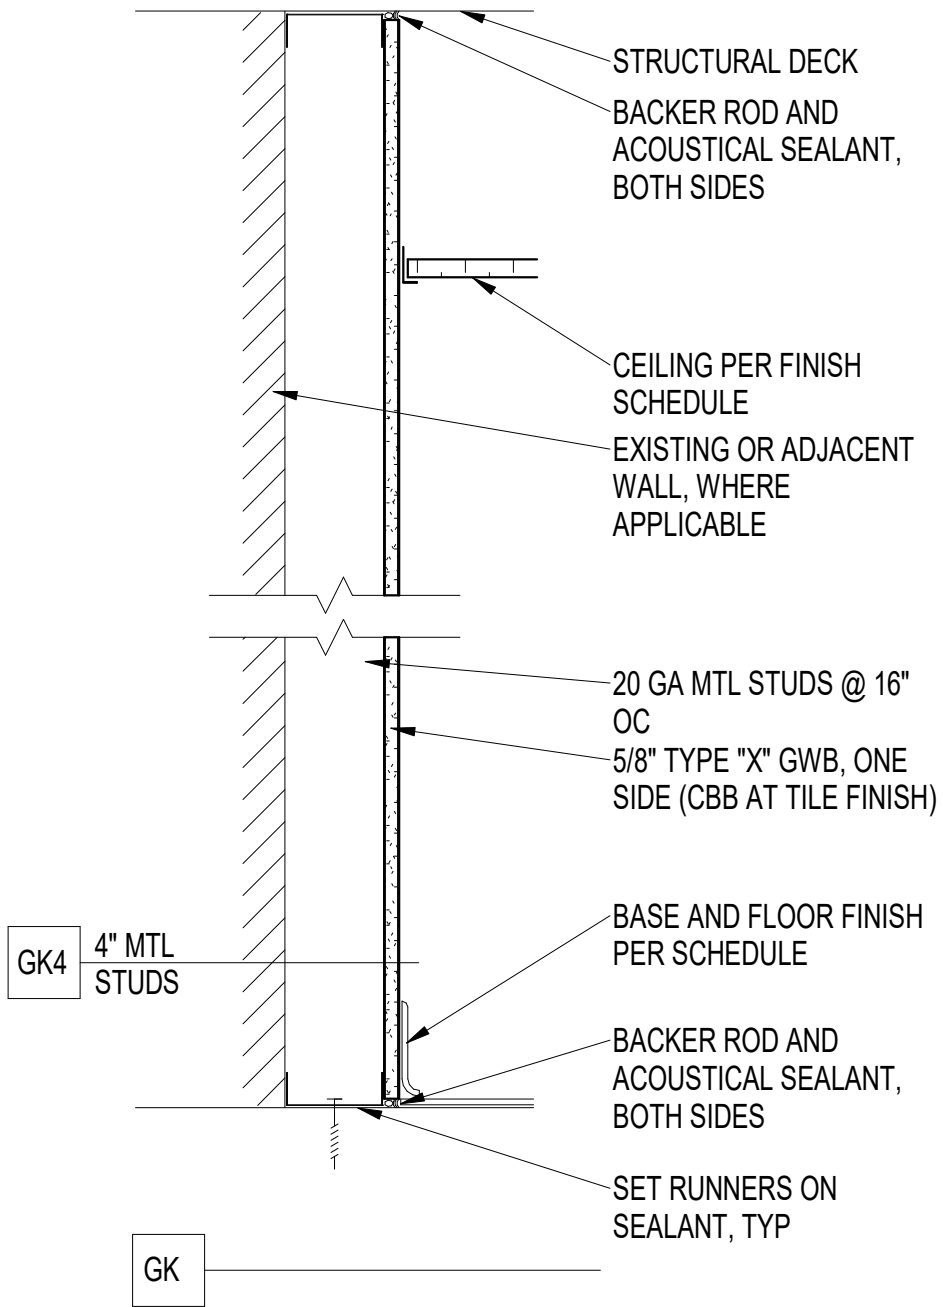

PARTITION TYPE
NTS

		CONSULTANT	ARCHITECT/ENGINEER OF RECORD	STAMP	Office of Construction and Facilities Management	Drawing Title: ROOM FINISH, DOOR AND FRAME SCHEDULES AND DETAILS	Phase BID DOCUMENTS	Project Title: UPGRADE PHARMACY IV MIXING ROOM USP 797/800	Project Number 516-22-112
			 TOLAND MIZELL MOLNAR		590 MEANS ST NW STE. 200 ATLANTA, GA 30318	Approved Project Director	FULLY SPRINKLERED	Location CAPE CORAL, FLORIDA	Building Number 01
REVISIONS:	DATE:				VA U.S. Department of Veterans Affairs			Issue Date 12-23-2025	Drawing Number AE601
								Checked SV	
								Drawn SJK/B	

A

B

C

D

E

F

A

B

C

D

E


F

EQUIPMENT ABBREVIATIONS				PLUMBING SYSTEM ABBREVIATION		PLUMBING GENERAL NOTES		DEMOLITION PLUMBING NOTES	
AC	AIR CONDITIONING UNIT	ET	EXPANSION TANK	CW	DOMESTIC COLD WATER	A. REMOVE ALL UNUSED PIPING, DUCTWORK AND ACCESSORIES. B. THE PLUMBING CONTRACTOR SHALL BE RESPONSIBLE FOR FIELD VERIFYING, PRIOR TO STARTING WORK, ALL EXISTING CONDITIONS FOR PLUMBING AND MECHANICAL SYSTEMS. C. WHERE FLOOR DRAINS OCCUR WITHIN THE LIMITS OF CONSTRUCTION, PREVENT CONSTRUCTION DEBRIS FROM ENTERING DRAIN BODY BY SEALING DRAIN OPENING PRIOR TO START OF WORK. UNSEAL DRAINS AT COMPLETION OF CONSTRUCTION. D. COORDINATE INSTALLATION OF PIPING, DUCTWORK, CONDUIT, LIGHTS, CABLE TRAY, STRUCTURE, AND EQUIPMENT TO PREVENT CONFLICTS. E. THE CONTRACTOR SHALL BE FAMILIAR WITH ALL THE CONDITIONS BOTH EXISTING AND THOSE ILLUSTRATED BY THESE DOCUMENTS AS WELL AS THOSE WHICH CAN BE REASONABLY ANTICIPATED INCLUDING, BUT NOT LIMITED TO ARCHITECTURAL, ELECTRICAL, VENTILATION, MECHANICAL, AND OTHER SYSTEMS INVOLVED ON THIS PROJECT. F. FINAL PRODUCT SHALL BE A COMPLETE AND FUNCTIONING SYSTEM, AND SHALL CONFORM TO ALL REQUIREMENTS OF APPLICABLE FEDERAL, STATE, AND LOCAL CODES, INCLUDING BUT NOT LIMITED TO THE INTERNATIONAL BUILDING CODE AND INTERNATIONAL MECHANICAL CODE. G. LOCATE EQUIPMENT REQUIRING ACCESS 2'-0" MAXIMUM ABOVE CEILING. H. LOCATE PIPING AND PLUMBING EQUIPMENT AWAY FROM THE SPACE ABOVE ELECTRICAL PANELS, TRANSFORMERS AND OTHER ELECTRICAL EQUIPMENT. I. FIRE SEAL AROUND PIPING PENETRATIONS OF FIRE RATED WALLS. J. PROVIDE SLEEVES AND/OR OPENINGS TO RUN PIPES THROUGH FOUNDATIONS, FLOORS, WALLS, AND ROOF. K. ADJUST PIPING SIZES TO PROPERLY CONNECT TO EQUIPMENT. L. PIPE SIZES SHOWN SHALL BE CONTINUED IN THE DIRECTION OF FLOW UNTIL ANOTHER SIZE IS SHOWN. M. INSTALL ALL EQUIPMENT IN ACCORDANCE WITH THE RESPECTIVE MANUFACTURER'S WRITTEN INSTALLATION INSTRUCTIONS, AT A LEVEL OF QUALITY AND WORKMANSHIP CONSISTENT WITH THESE DOCUMENTS. N. LOCATIONS OF PIPING, DUCTWORK AND EQUIPMENT AS INDICATED ON THE DRAWING ARE APPROXIMATE AND SUBJECT TO MINOR ADJUSTMENTS IN THE FIELD. WORK SHALL BE COORDINATED WITH ALL OTHER TRADES TO AVOID INTERFERENCE IN THE FIELD. O. INSTALL EXPOSED PIPING AS HIGH AS PRACTICAL IN ROOMS WITHOUT CEILINGS. P. FIELD VERIFY ALL NEW WATER, WASTE, AND VENT PIPING CONNECTIONS AND PROVIDE NEW CONNECTIONS AS REQUIRED FOR PROPERLY OPERATING SYSTEMS. Q. PITCH UNDERFLOOR SANITARY WASTE PIPING AT 1/8" PER FOOT, UNLESS NOTED OTHERWISE. R. PITCH UNDERFLOOR STORM PIPING 3" AND GREATER AT 1/8 " PER FOOT, UNLESS NOTED OTHERWISE. PITCH ALL OTHER STORM PIPING AT 1/4" PER FOOT UNLESS OTHERWISE NOTED. S. FIELD VERIFY LOCATION AND INVERTS OF SITE UTILITIES PRIOR TO INSTALLATION. T. ROUTE DOMESTIC WATER, FIRE PROTECTION, SANITARY SEWER, AND STORM SEWER SERVICES TO SITE UTILITIES 5'-0 " FROM BUILDING UNLESS NOTED OTHERWISE. REFER TO CIVIL PLANS. U. WASTE AND VENT PIPING BELOW FLOOR AND THROUGH FLOOR SHALL BE 2 " MINIMUM. V. PROVIDE CLEANOUT IN ACCESSIBLE LOCATION AT THE BASE OF ALL PLUMBING RISERS.		A. EQUIPMENT INDICATED TO BE REMOVED SHALL BE REMOVED FROM THE PROJECT SITE IN ITS ENTIRETY INCLUDING ALL HANGERS, ELECTRICAL CONDUIT, WIRING, JUNCTION BOXES, PIPING, CONTROLS, ACCESSORIES AND ALL APPURTENANCES THAT ARE RENDERED USELESS OR ABANDONED BY THE REMOVAL OF THE INDICATED EQUIPMENT. B. WHERE THESE DOCUMENTS REQUIRE REMOVAL OF DUCTWORK, PIPING, EQUIPMENT OR ASSOCIATED APPURTENANCES, CONTRACTOR SHALL PROTECT ALL EXISTING-TO-REMAIN COMPONENTS FROM DAMAGE. CONTRACTOR SHALL COVER ALL OPENINGS IN DUCT, PIPING, EQUIPMENT, AND ANY OTHER DEVICE FROM CONSTRUCTION DUST AND DEBRIS. C. WHERE EQUIPMENT, DUCTWORK, OR PIPING IS TO BE REMOVED THAT IS IN-SERVICE, CONTRACTOR SHALL GIVE NOTICE TO THE COR OF ANY INTERRUPTIONS ANTICIPATED. IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO COORDINATE ALL SHUTDOWNS OR INTERRUPTIONS TO THE SATISFACTION OF THE COR AND HOSPITAL STAFF.	
ACCU	AIR COOLING CONDENSING UNIT	EW	ELECTRIC WATER HEATER	HW	HOT WATER (120°)				
AHU	AIR HANDLING UNIT	FCU	FAN COIL UNIT	HWR (120°)	HOT WATER RECIRCULING (140°)				
AS	AIR SEPARATOR	FP	FIRE PUMP	HW140	HOT WATER 140°				
B	BOILER	GI	GREASE INTERCEPTOR	HWR 140°	HOT WATER RECIRCULING 140°				
CH	CHILLER	GRV	GRAVITY ROOF VENTILATOR	V	SANITARY VENT				
CT	COOLING TOWER	HWP	HEATING WATER PUMP	SS	SANITARY SEWER				
CUH	CABINET UNIT HEATER	HRU	HEAT RECOVERY UNIT						
CHWP	CHILLED WATER PUMP	PRV	POWER ROOF VENTILATOR						
DBP	DOMESTIC WATER BOOSTER PUMP	RE	RETURN/EXHAUST FAN						
DC	DUCT MOUNTED COIL	RTU	ROOFTOP UNIT						
DCP	DOMESTIC WATER CIRCULATING PUMP	SP	SUMP PUMP						
EF	EXHAUST FAN	UH	UNIT HEATER						
EDC	ELECTRIC DUCT COIL	WH	WATER HEATER						
GENERAL ABBREVIATIONS				GENERAL PLUMBING SYMBOLS				PHASING PLUMBING NOTES	
Ø	ROUND	LVR	LOUVER	⊗ REVISION NUMBER - SHOWN ON PLANS				B. CONTRACTOR SHALL PHASE ALL WORK AS REQUIRED TO MAINTAIN CONTINUOUS OPERATION OF THE HOSPITAL. C. HOSPITAL OPERATIONS SHALL NOT BE INTERRUPTED DUE TO THE WORK OF THIS PROJECT EXCEPT FOR SCHEDULED SHUTDOWNS OF NO LONGER THAN ONE HOUR. CONTRACTOR SHALL GIVE REASONABLE NOTICE TO COR BEFORE ANY SUCH SHUTDOWN OR INTERRUPTION. D. WHERE LONGER SHUTDOWNS ARE REQUIRED TO COMPLETE THE WORK DESCRIBED IN THIS DOCUMENT, THE CONTRACTOR SHALL SCHEDULE THE EVENT A MINIMUM OF 3 WEEKS PRIOR TO COMMENCING WORK. ALL SUCH SHUTDOWNS AND INTERRUPTIONS SHALL BE MINIMIZED AND SHALL UTILIZE WEEKENDS, FEDERAL HOLIDAYS, NIGHTS, AND OTHER TIMES WHEN HOSPITAL OPERATIONS ARE MINIMIZED AND OTHER SUCH TIMES AGREEABLE TO THE COR. E. WHERE NECESSARY TO INTERRUPT CONTINUOUS OPERATION OF THE HOSPITAL, THE CONTRACTOR SHALL DIVIDE WORK INTO PHASED CONSTRUCTION THAT IS NOT NECESSARILY SHOWN ON THESE DOCUMENTS. AS PART OF SCHEDULING AN INTERRUPTION OR SHUTDOWN, THE CONTRACTOR SHALL PROVIDE THE COR WITH A DETAILED SHUTDOWN PLAN INDICATING THE SYSTEMS AFFECTED, INCLUDING BUT NOT LIMITED TO ARCHITECTURAL, ELECTRICAL, MECHANICAL, PLUMBING, FIRE PROTECTION, AND OTHER SYSTEMS INVOLVED. THE PLAN SHALL INCLUDE THE WORK TO BE PERFORMED, THE LENGTH OF INTERRUPTION, AND A DETAILED PHASING AND MANNING DESCRIPTION. THE PLAN SHALL INCLUDE AND ADDRESS CONTINGENCY FOR MITIGATING ANY DELAYS THAT MAY OCCUR IN THE PLANNED WORK. PROVIDE THIS PLAN TO THE COR 5 WEEKS BEFORE THE EVENT FOR APPROVAL.	
ABV	ABOVE	LWT	LEAVING WATER TEMPERATURE	⊙ POINT WHERE NEW CONNECTS TO EXISTING					
AC	AIR CONDITIONING	M/A	MIXED AIR	⊙ NUMBER OF DETAIL ON SHEET					
AD	AREA DRAIN	MAX	MAXIMUM	⊙ NUMBER OF SHEET WHERE DETAIL APPEARS					
ADD	ADDENDUM	MBH	ONE THOUSAND BTU PER HOUR	Ⓢ KEYNOTE					
AFF	ABOVE FINISHED FLOOR	MCF	ONE THOUSAND CUBIC FEET	Ⓢ CONTINUATION SYMBOL					
AFUE	ANNUAL FUEL UTILIZATION EFFICIENCY	MD	MOTORIZED DAMPER	Room 9					
ALT	ALTERNATE	MECH	MECHANICAL						
AP	ACCESS PANEL	MFR	MANUFACTURER						
ARCH	ARCHITECT/ARCHITECTURAL	MIN	MINIMUM						
BFF	BELOW FINISHED FLOOR	MISC	MISCELLANEOUS						
BLW	BELOW	MTR	MOTOR						
BTU	BRITISH THERMAL UNITS	MU/A	MAKE-UP/AIR						
BTUH	BRITISH THERMAL UNITS PER HOUR	NC	NOISE CRITERIA						
CAP	CAPACITY	NC	NORMALLY CLOSED						
CB	CATCH BASIN	NIC	NOT IN CONTRACT						
CFM	CUBIC FEET PER MINUTE	NO	NUMBER						
CLG	CEILING	NO	NORMALLY OPEN						
CO	CLEAN OUT	NTS	NOT TO SCALE						
CW	COLD WATER	O	OXYGEN						
D	DEGREE	O/A	OUTSIDE AIR						
DB	DRY BULB	ORD	OVERFLOW ROOF DRAIN						
DIA	DIAMETER	PD	PRESSURE DROP						
DN	DOWN	PIV	POST INDICATOR VALVE						
DW	DISTILLED WATER	PLBG	PLUMBING						
EA	EACH	PRESS	PRESSURE						
EAT	ENTERING AIR TEMPERATURE	PRV	PRESSURE REDUCING VALVE						
ELEC	ELECTRICAL	PSI	POUNDS PER SQUARE INCH						
EQUIP	EQUIPMENT	PSIG	POUNDS PER SQUARE INCH GAUGE						
EWC	ELECTRIC WATER COOLER	PWR	POWER						
EW	ENTERING WATER TEMPERATURE	R	DUCT RISER						
E/A	EXHAUST AIR	R/A	RETURN AIR						
EXIST	EXISTING	RCP	RADIANT CEILING PANEL						
F	DEGREES FAHRENHEIT	RD	ROOF DRAIN						
FCO	FLOOR CLEAN OUT	REC	RECESSED						
FD	FLOOR DRAIN	RED	REDUCER						
FD	FIRE DAMPER	RH	RELATIVE HUMIDITY						
FDV	FIRE DEPARTMENT VALVE	RL/A	RELIEF AIR						
FL	FLOOR	RM	ROOM						
FO	FUEL OIL	RPM	REVOLUTIONS PER MINUTE						
FOV	FUEL OIL VENT	RW	RAIN WATER						
FOR	FUEL OIL RETURN	SF	SQUARE FOOT						
FOS	FUEL OIL SUPPLY	S/A	SUPPLY AIR						
FPM	FEET PER MINUTE	SAN	SANITARY						
FS	FLOOR SINK	SF	SQUARE FOOT						
FT	FOOT/FEET	SD	SMOKE DAMPER						
FTR	FIN TUBE RADIATION	SM	SURFACE MOUNT						
GAL	GALLON	SP	STANDPIPE						
GC	GENERAL CONTRACTOR	SP	STATIC PRESSURE						
GPM	GALLONS PER MINUTE	STM	STEAM						
GW	GREASE WASTE	T	THERMOSTAT						
HB	HOSE BIB	TD	TEMPERATURE DROP						
HP	HORSE POWER	TDR	TRENCH DRAIN						
HTG	HEATING	TEMP	TEMPERATURE						
HTR	HEATER	TYP	TYPICAL						
HW	HOT WATER	UG	UNDERGROUND						
HYD	HYDRANT	VAC	VACUUM						
ID	INDIRECT	V	VENT						
IN	INCH	VAV	VARIABLE AIR VOLUME						
INV	INVERT	VENT	VENTILATION						
LB	POUND	VTR	VENT THROUGH ROOF						
LB/HR	POUNDS PER HOUR	W	WASTE						
LAT	LEAVING AIR TEMPERATURE	WB	WET BULB						
LP	LOW PRESSURE	WCO	WALL CLEAN OUT						
LPG	LIQUEFIED PETROLEUM GAS	WH	WALL HYDRANT						
GENERAL ABBREVIATIONS				GENERAL PLUMBING SYMBOLS					
Ø	ROUND	LVR	LOUVER	⊗ REVISION NUMBER - SHOWN ON PLANS					
ABV	ABOVE	LWT	LEAVING WATER TEMPERATURE	⊙ POINT WHERE NEW CONNECTS TO EXISTING					
AC	AIR CONDITIONING	M/A	MIXED AIR	⊙ NUMBER OF DETAIL ON SHEET					
AD	AREA DRAIN	MAX	MAXIMUM	⊙ NUMBER OF SHEET WHERE DETAIL APPEARS					
ADD	ADDENDUM	MBH	ONE THOUSAND BTU PER HOUR	Ⓢ KEYNOTE					
AFF	ABOVE FINISHED FLOOR	MCF	ONE THOUSAND CUBIC FEET	Ⓢ CONTINUATION SYMBOL					
AFUE	ANNUAL FUEL UTILIZATION EFFICIENCY	MD	MOTORIZED DAMPER	Room 9					
ALT	ALTERNATE	MECH	MECHANICAL						
AP	ACCESS PANEL	MFR	MANUFACTURER						
ARCH	ARCHITECT/ARCHITECTURAL	MIN	MINIMUM						
BFF	BELOW FINISHED FLOOR	MISC	MISCELLANEOUS						
BLW	BELOW	MTR	MOTOR						
BTU	BRITISH THERMAL UNITS	MU/A	MAKE-UP/AIR						
BTUH	BRITISH THERMAL UNITS PER HOUR	NC	NOISE CRITERIA						
CAP	CAPACITY	NC	NORMALLY CLOSED						
CB	CATCH BASIN	NIC	NOT IN CONTRACT						
CFM	CUBIC FEET PER MINUTE	NO	NUMBER						
CLG	CEILING	NO	NORMALLY OPEN						
CO	CLEAN OUT	NTS	NOT TO SCALE						
CW	COLD WATER	O	OXYGEN						
D	DEGREE	O/A	OUTSIDE AIR						
DB	DRY BULB	ORD	OVERFLOW ROOF DRAIN						
DIA	DIAMETER	PD	PRESSURE DROP						
DN	DOWN	PIV	POST INDICATOR VALVE						
DW	DISTILLED WATER	PLBG	PLUMBING						
EA	EACH	PRESS	PRESSURE						
EAT	ENTERING AIR TEMPERATURE	PRV	PRESSURE REDUCING VALVE						
ELEC	ELECTRICAL	PSI	POUNDS PER SQUARE INCH						
EQUIP	EQUIPMENT	PSIG	POUNDS PER SQUARE INCH GAUGE						
EWC	ELECTRIC WATER COOLER	PWR	POWER						
EW	ENTERING WATER TEMPERATURE	R	DUCT RISER						
E/A	EXHAUST AIR	R/A	RETURN AIR						
EXIST	EXISTING	RCP	RADIANT CEILING PANEL						
F	DEGREES FAHRENHEIT	RD	ROOF DRAIN						
FCO	FLOOR CLEAN OUT	REC	RECESSED						
FD	FLOOR DRAIN	RED	REDUCER						
FD	FIRE DAMPER	RH	RELATIVE HUMIDITY						
FDV	FIRE DEPARTMENT VALVE	RL/A	RELIEF AIR						
FL	FLOOR	RM	ROOM						
FO	FUEL OIL	RPM	REVOLUTIONS PER MINUTE						
FOV	FUEL OIL VENT	RW	RAIN WATER						
FOR	FUEL OIL RETURN	SF	SQUARE FOOT						
FOS	FUEL OIL SUPPLY	S/A	SUPPLY AIR						
FPM	FEET PER MINUTE	SAN	SANITARY						
FS	FLOOR SINK	SF	SQUARE FOOT						
FT	FOOT/FEET	SD	SMOKE DAMPER						
FTR	FIN TUBE RADIATION	SM	SURFACE MOUNT						
GAL	GALLON	SP	STANDPIPE						
GC	GENERAL CONTRACTOR	SP	STATIC PRESSURE						
GPM	GALLONS PER MINUTE	STM	STEAM						
GW	GREASE WASTE	T	THERMOSTAT						
HB	HOSE BIB	TD	TEMPERATURE DROP						
HP	HORSE POWER	TDR	TRENCH DRAIN						
HTG	HEATING	TEMP	TEMPERATURE						
HTR	HEATER	TYP	TYPICAL						
HW	HOT WATER	UG	UNDERGROUND						
HYD	HYDRANT	VAC	VACUUM						
ID	INDIRECT	V	VENT						
IN	INCH	VAV	VARIABLE AIR VOLUME						
INV	INVERT	VENT	VENTILATION						
LB	POUND	VTR	VENT THROUGH ROOF						
LB/HR	POUNDS PER HOUR	W	WASTE						
LAT	LEAVING AIR TEMPERATURE	WB	WET BULB						
LP	LOW PRESSURE	WCO	WALL CLEAN OUT						
LPG	LIQUEFIED PETROLEUM GAS	WH	WALL HYDRANT						
GENERAL ABBREVIATIONS				GENERAL PLUMBING SYMBOLS					
Ø	ROUND	LVR	LOUVER	⊗ REVISION NUMBER - SHOWN ON PLANS					
ABV	ABOVE	LWT	LEAVING WATER TEMPERATURE	⊙ POINT WHERE NEW CONNECTS TO EXISTING					
AC	AIR CONDITIONING	M/A	MIXED AIR	⊙ NUMBER OF DETAIL ON SHEET					
AD	AREA DRAIN	MAX	MAXIMUM	⊙ NUMBER OF SHEET WHERE DETAIL APPEARS					
ADD	ADDENDUM	MBH	ONE THOUSAND BTU PER HOUR	Ⓢ KEYNOTE					
AFF	ABOVE FINISHED FLOOR	MCF	ONE THOUSAND CUBIC FEET	Ⓢ CONTINUATION SYMBOL					
AFUE	ANNUAL FUEL UTILIZATION EFFICIENCY	MD	MOTORIZED DAMPER	Room 9					
ALT	ALTERNATE	MECH	MECHANICAL						
AP	ACCESS PANEL	MFR	MANUFACTURER						
ARCH	ARCHITECT/ARCHITECTURAL	MIN	MINIMUM						
BFF	BELOW FINISHED FLOOR	MISC	MISCELLANEOUS						
BLW	BELOW	MTR	MOTOR						
BTU	BRITISH THERMAL UNITS	MU/A	MAKE-UP/AIR						
BTUH	BRITISH THERMAL UNITS PER HOUR	NC	NOISE CRITERIA						
CAP	CAPACITY	NC	NORMALLY CLOSED						
CB	CATCH BASIN	NIC	NOT IN CONTRACT						
CFM	CUBIC FEET PER MINUTE	NO	NUMBER						
CLG	CEILING	NO	NORMALLY OPEN						
CO	CLEAN OUT	NTS	NOT TO SCALE						
CW	COLD WATER	O	OXYGEN						
D	DEGREE	O/A	OUTSIDE AIR						
DB	DRY BULB	ORD	OVERFLOW ROOF DRAIN						
DIA	DIAMETER	PD	PRESSURE DROP						
DN	DOWN	PIV	POST INDICATOR VALVE						
DW	DISTILLED WATER	PLBG	PLUMBING						
EA	EACH	PRESS	PRESSURE						
EAT	ENTERING AIR TEMPERATURE	PRV	PRESSURE REDUCING VALVE						
ELEC	ELECTRICAL	PSI	POUNDS PER SQUARE INCH						
EQUIP	EQUIPMENT	PSIG	POUNDS PER SQUARE INCH GAUGE						
EWC	ELECTRIC WATER COOLER	PWR	POWER						
EW	ENTERING WATER TEMPERATURE	R	DUCT RISER						
E/A	EXHAUST AIR	R/A	RETURN AIR						
EXIST	EXISTING	RCP	RADIANT CEILING PANEL						
F	DEGREES FAHRENHEIT	RD	ROOF DRAIN						
FCO	FLOOR CLEAN OUT	REC	RECESSED						
FD	FLOOR DRAIN	RED	REDUCER						
FD	FIRE DAMPER	RH	RELATIVE HUMIDITY						
FDV	FIRE DEPARTMENT VALVE	RL/A	RELIEF AIR						
FL	FLOOR	RM	ROOM						
FO	FUEL OIL	RPM	REVOLUTIONS PER MINUTE						
FOV	FUEL OIL VENT	RW	RAIN WATER						
FOR	FUEL OIL RETURN	SF	SQUARE FOOT						
FOS	FUEL OIL SUPPLY	S/A	SUPPLY AIR						
FPM	FEET PER MINUTE	SAN	SANITARY						
FS	FLOOR SINK	SF	SQUARE FOOT						
FT	FOOT/FEET	SD	SMOKE DAMPER						
FTR	FIN TUBE RADIATION	SM	SURFACE MOUNT						
GAL	GALLON	SP	STANDPIPE						
GC	GENERAL CONTRACTOR	SP	STATIC PRESSURE						
GPM	GALLONS PER MINUTE	STM	STEAM						
GW	GREASE WASTE	T	THERMOSTAT						
HB	HOSE BIB	TD	TEMPERATURE DROP						
HP	HORSE POWER	TDR	TRENCH DRAIN						
HTG	HEATING	TEMP	TEMP						



1
P101 1ST FLOOR PHARMACY PLAN - PLUMBING
1/4" = 1'-0"


0' 2' 4' 8' 12'
SCALE: 1/4" = 1' - 0"



REVISIONS:	DATE:

CONSULTANT

ARCHITECT/ENGINEER OF RECORD
 TOLAND MIZELL MOLNAR
590 MEANS ST NW STE. 200 ATLANTA, GA 30318

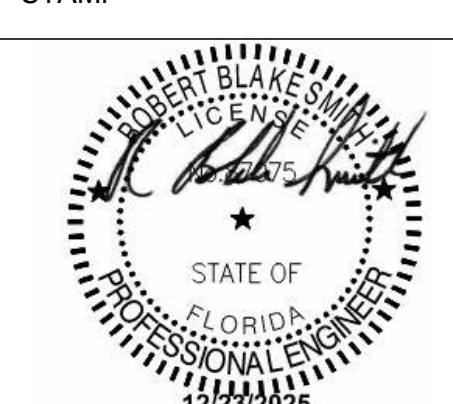STAMP


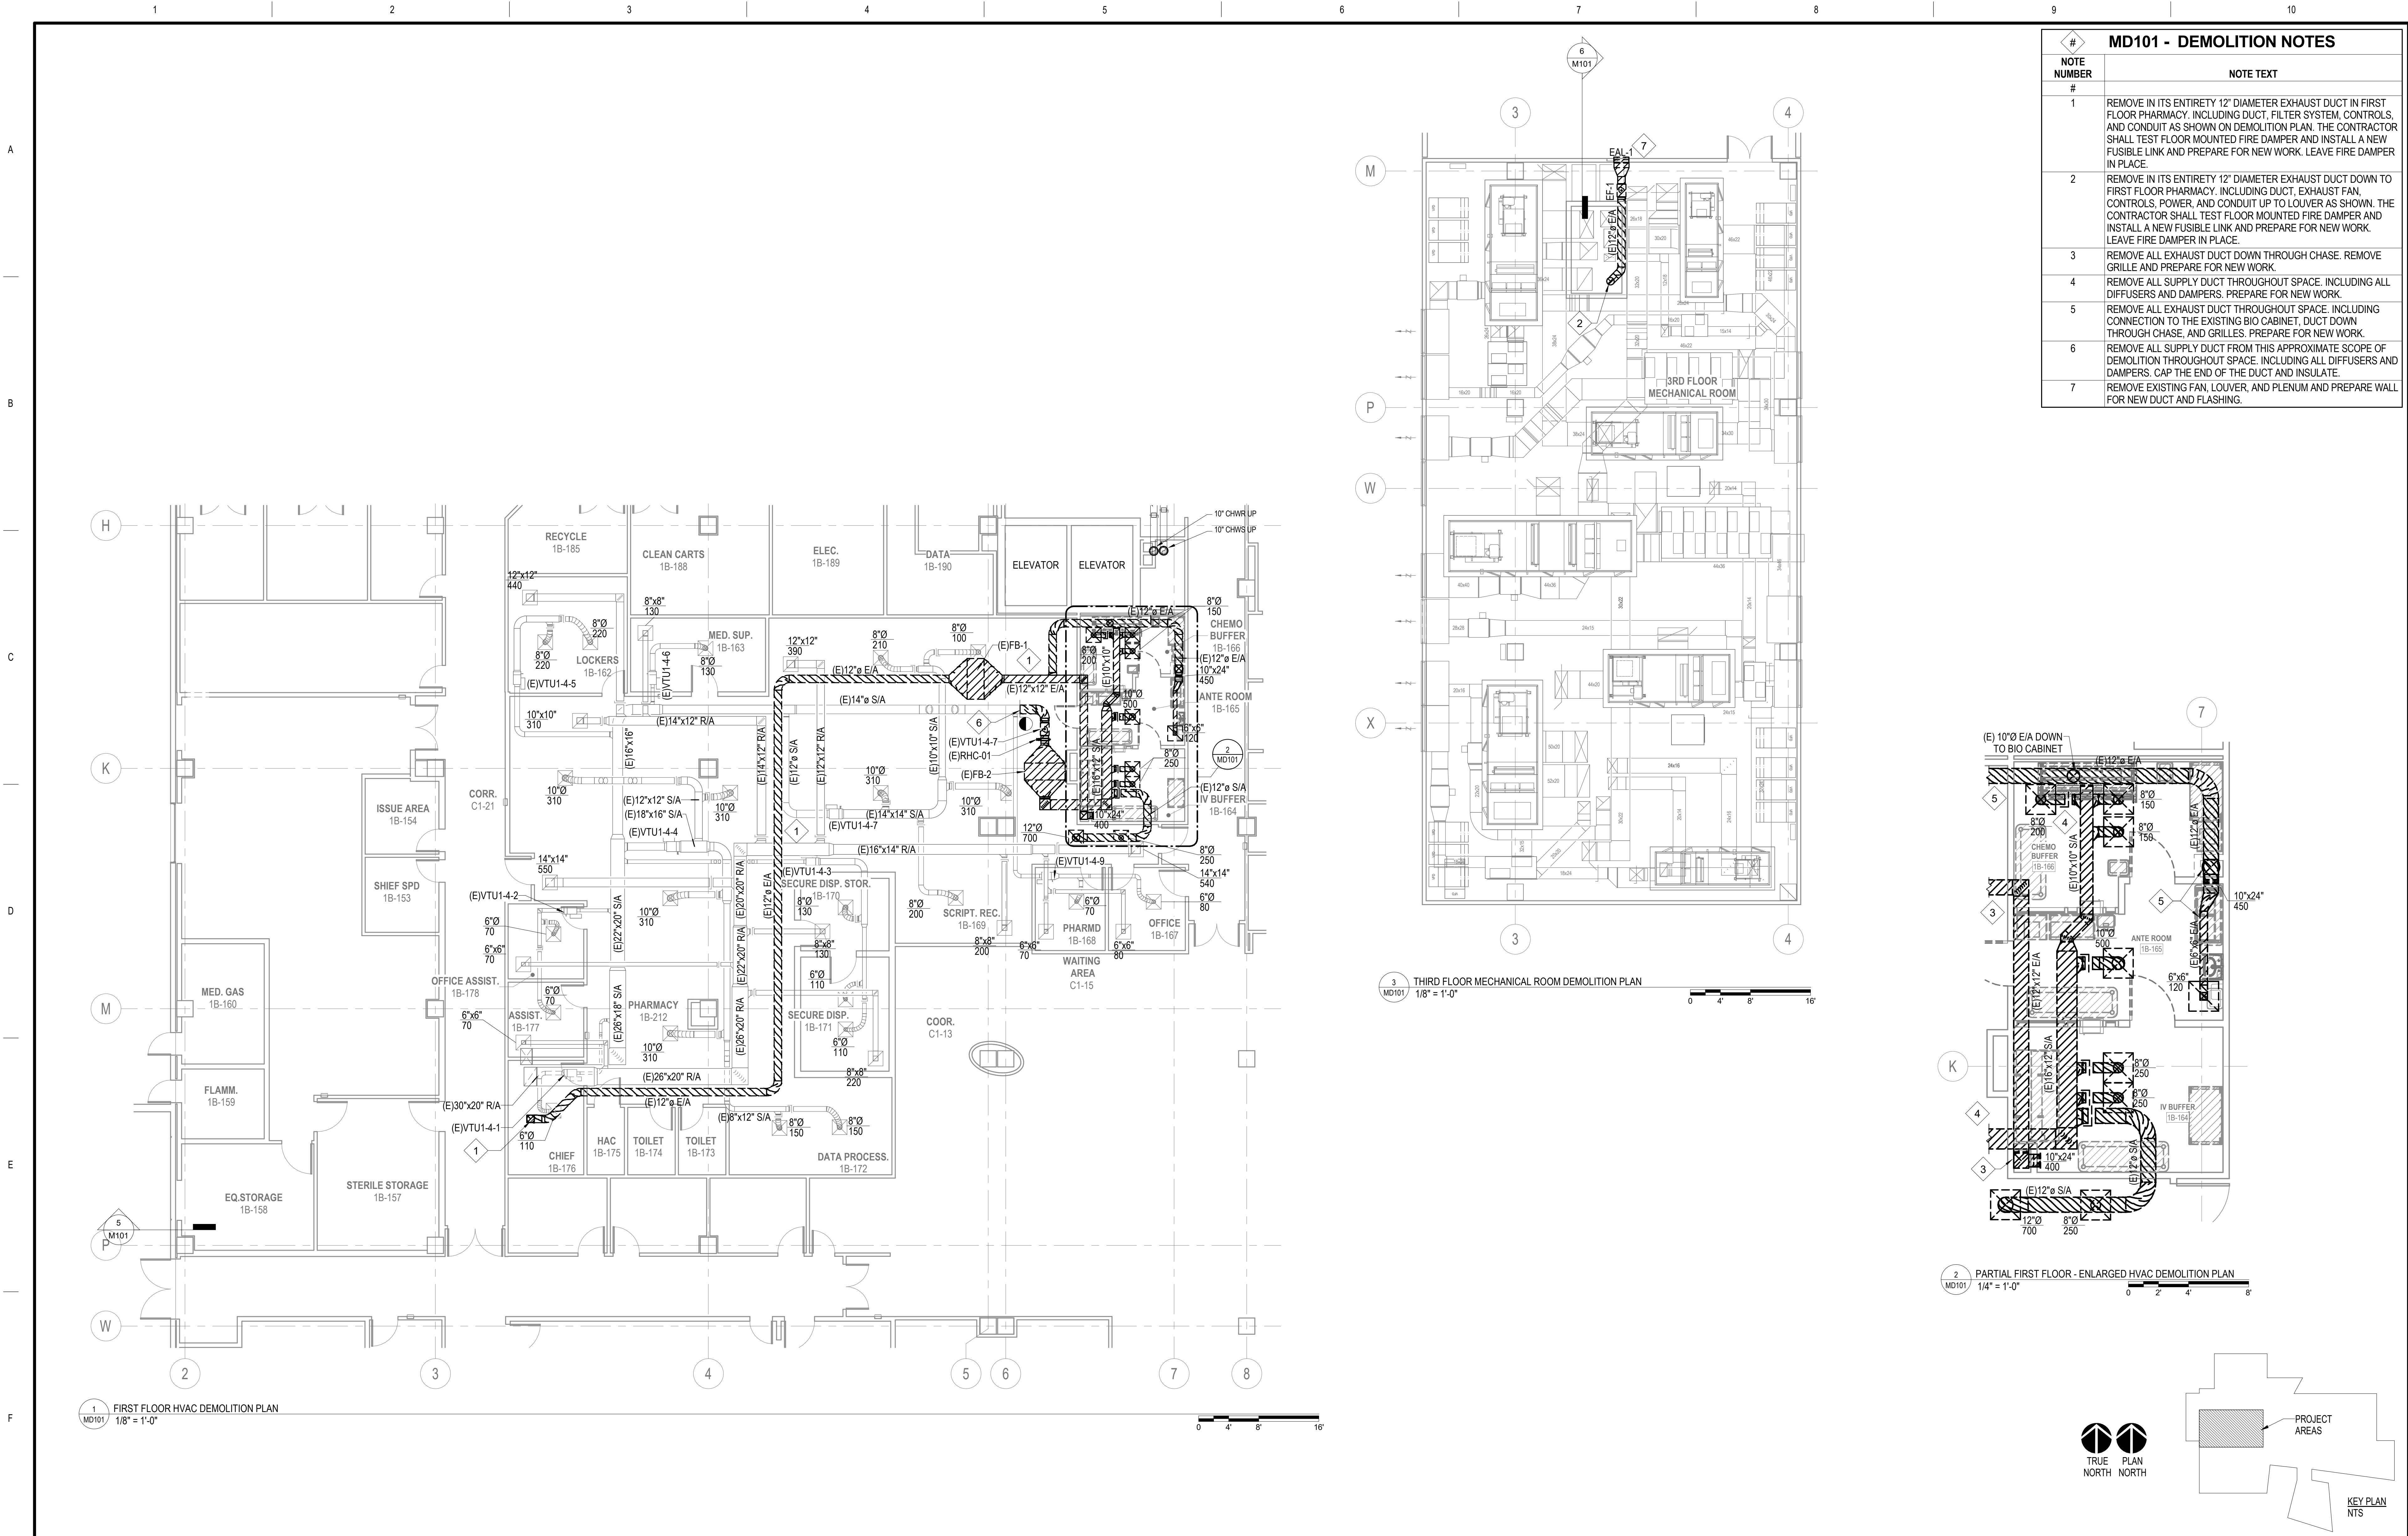
Office of Construction and Facilities Management
 U.S. Department of Veterans Affairs

Drawing Title: 1ST FLOOR PHARMACY PLAN - PLUMBING
Approved Project Director

Phase BID DOCUMENTS
FULLY SPRINKLERED


Project Title: UPGRADE PHARMACY IV MIXING ROOM USP 797/600
Location CAPE CORAL, FLORIDA
Issue Date 12-23-2025
Checked BS
Drawn DK

Project Number 516-22-112
Building Number 01
Drawing Number P101






		CONSULTANT	ARCHITECT/ENGINEER OF RECORD TOLAND MIZELL MOLNAR 590 MEANS ST NW STE. 200 ATLANTA, GA 30318	STAMP	Office of Construction and Facilities Management VA U.S. Department of Veterans Affairs	Drawing Title: PARTIAL FIRST FLOOR AND ENLARGED HVAC DEMOLITION PLAN	Phase	Project Title: UPGRADE PHARMACY IV MIXING ROOM USP 797/800	Project Number 516-22-112	
						BID DOCUMENTS	Building Number 01			
						FULLY SPRINKLERED	Location CAPE CORAL, FLORIDA	Drawing Number		
							Issue Date 12-23-2025	Checked RBS	Drawn JSW	MD101
REVISIONS:	DATE:									

#	NOTE
NUMBER	TEXT
1	REMOVE EXISTING PIPING AND DUCT MOUNTED HEATING COIL. CAP PIPE AND REINSULATE.








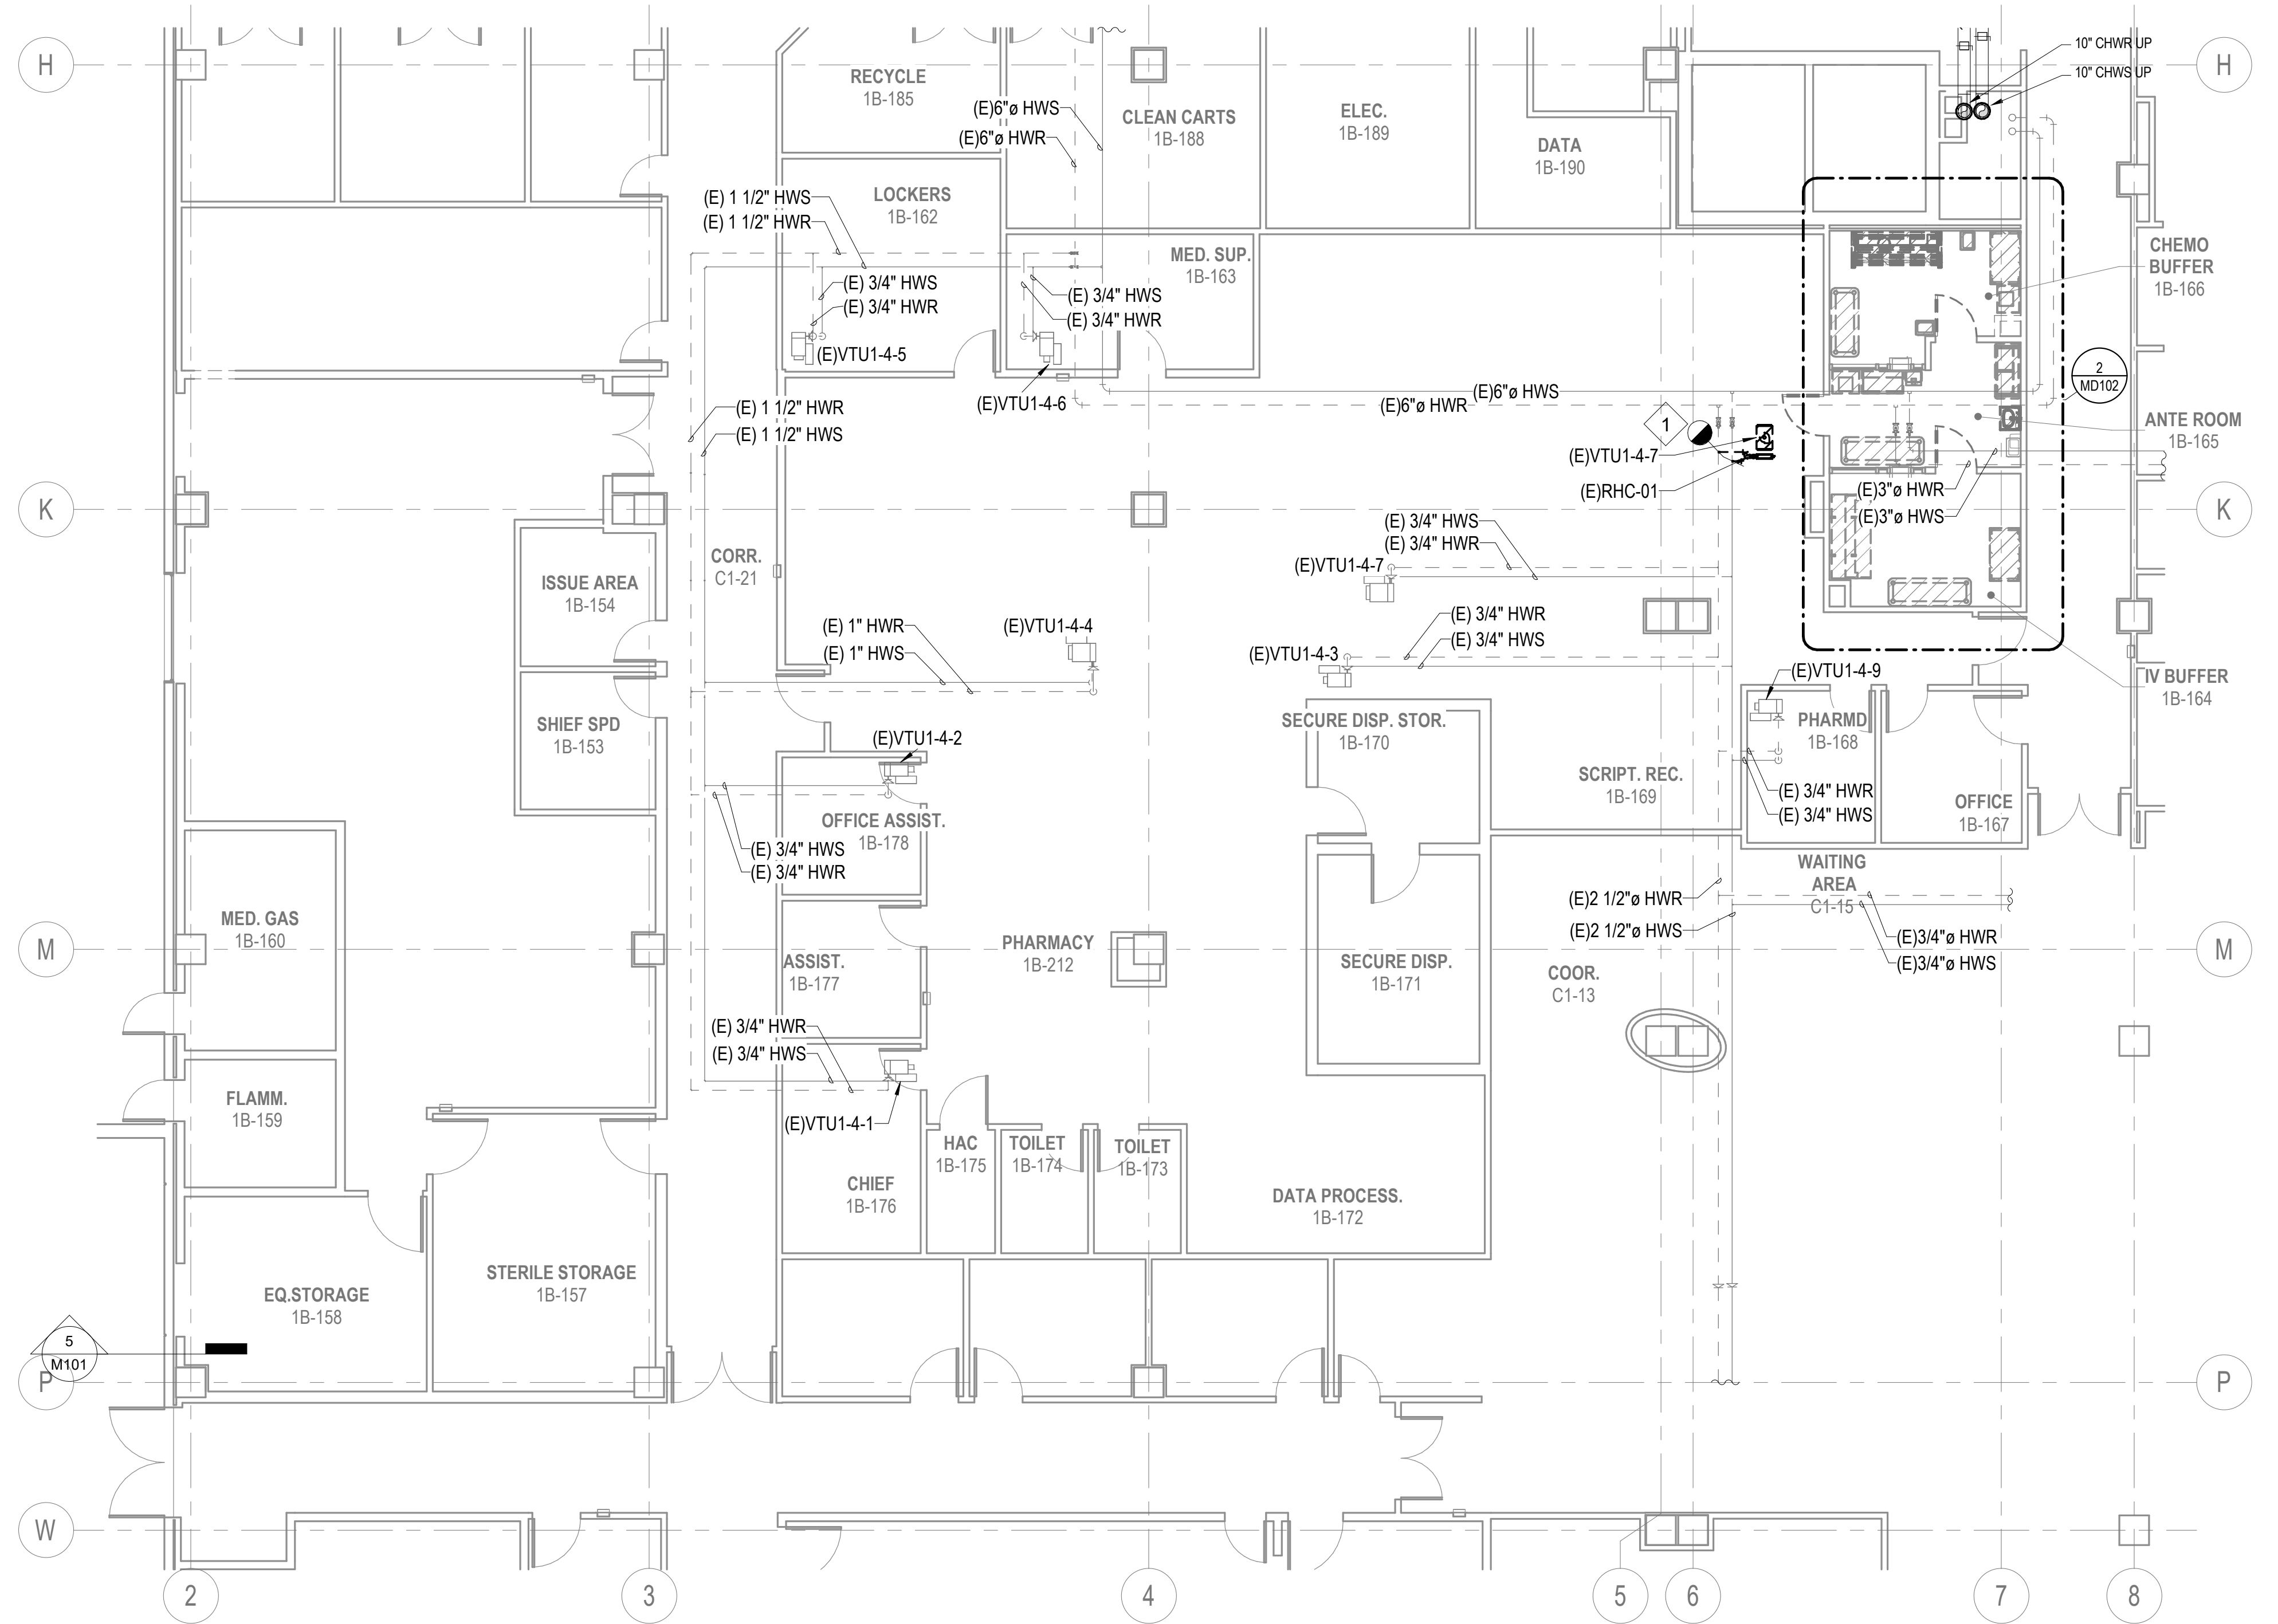


1 PARTIAL FIRST FLOOR PIPING DEMOLITION PLAN
MD102 1/8" = 1'-0"




2 PARTIAL FIRST FLOOR - ENLARGED PIPING DEMOLITION 1
MD102 1/4" = 1'-0"

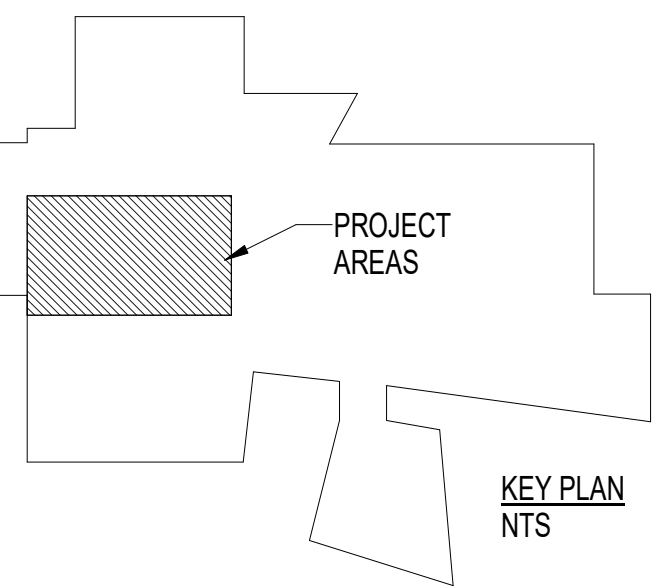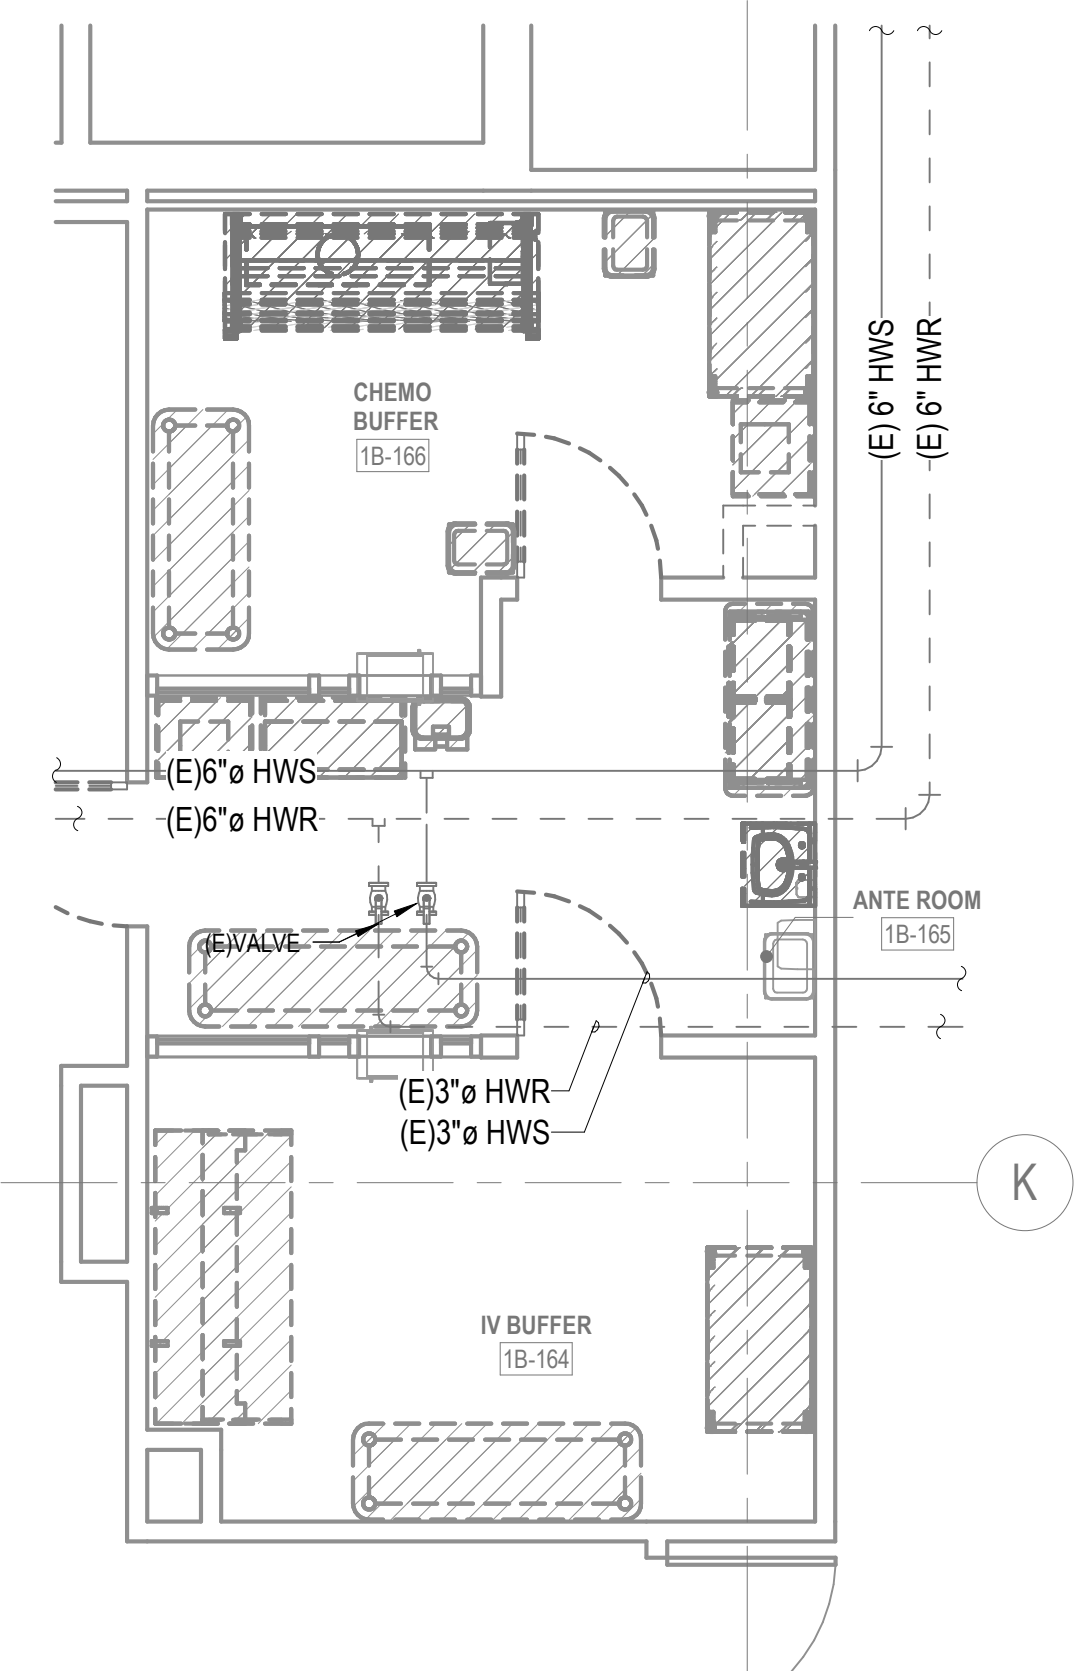


		CONSULTANT	TOLAND MIZELL MOLNAR 590 MEANS ST NW STE. 200 ATLANTA, GA 30318	STAMP STATE OF FLORIDA PROFESSIONAL ENGINEER 12423 12/23/2025	Office of Construction and Facilities Management VAU.S. Department of Veterans Affairs	Drawing Title: PARTIAL FIRST FLOOR AND ENLARGED PIPING DEMOLITION PLAN	Phase	Project Title: UPGRADE PHARMACY IV MIXING ROOM USP 797/800	Project Number 516-22-112		
Approved Project Director	BID DOCUMENTS					Location CAPE CORAL, FLORIDA	Building Number 01				
							FULLY SPRINKLERED	Issue Date 12-23-2025	Checked RBS	Drawn JSW	Drawing Number MD102

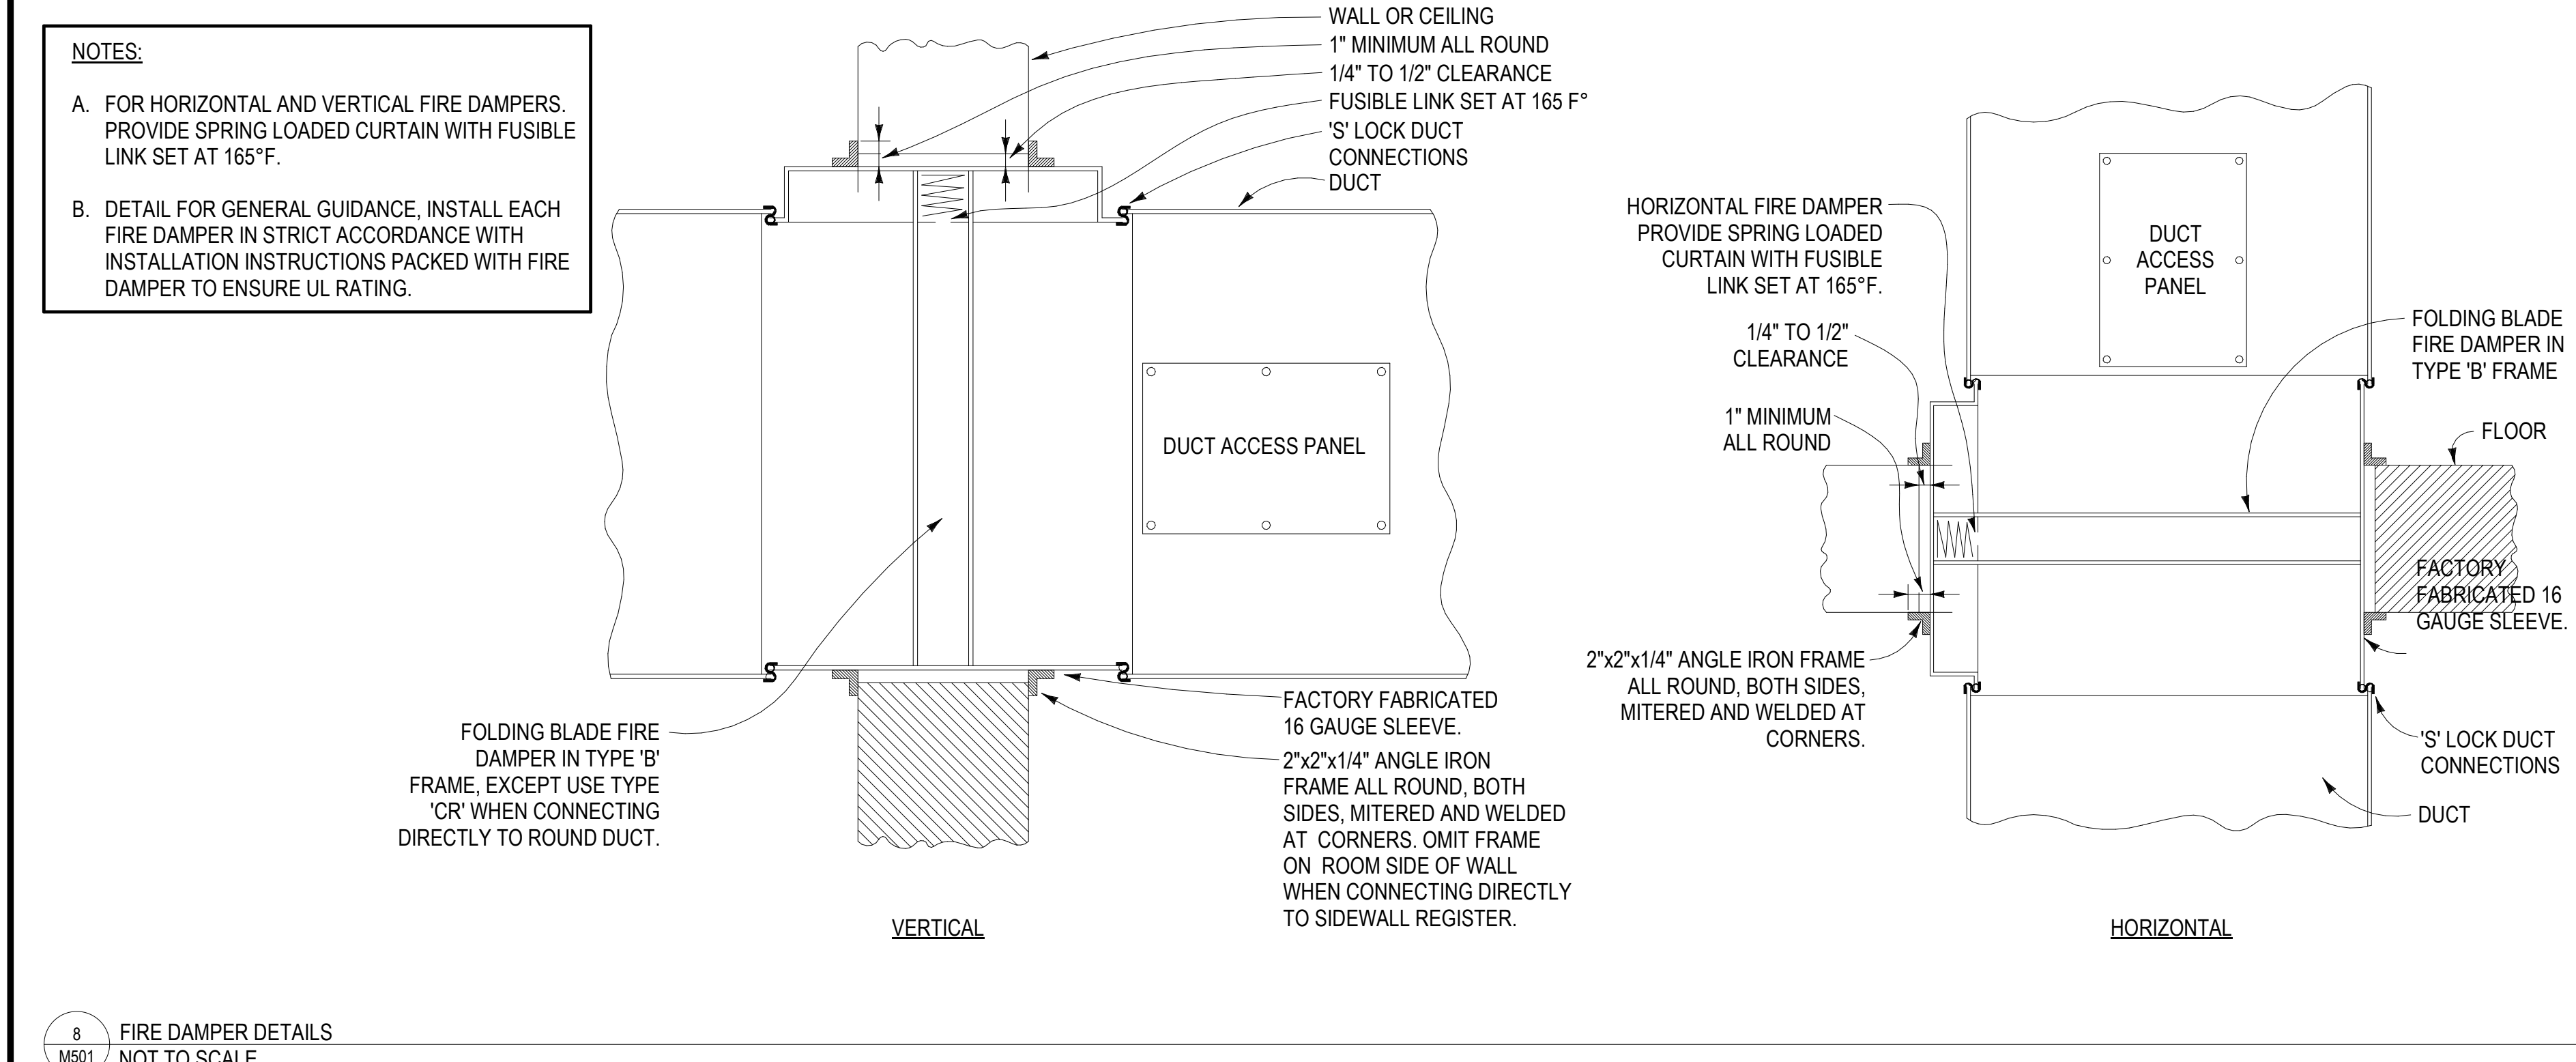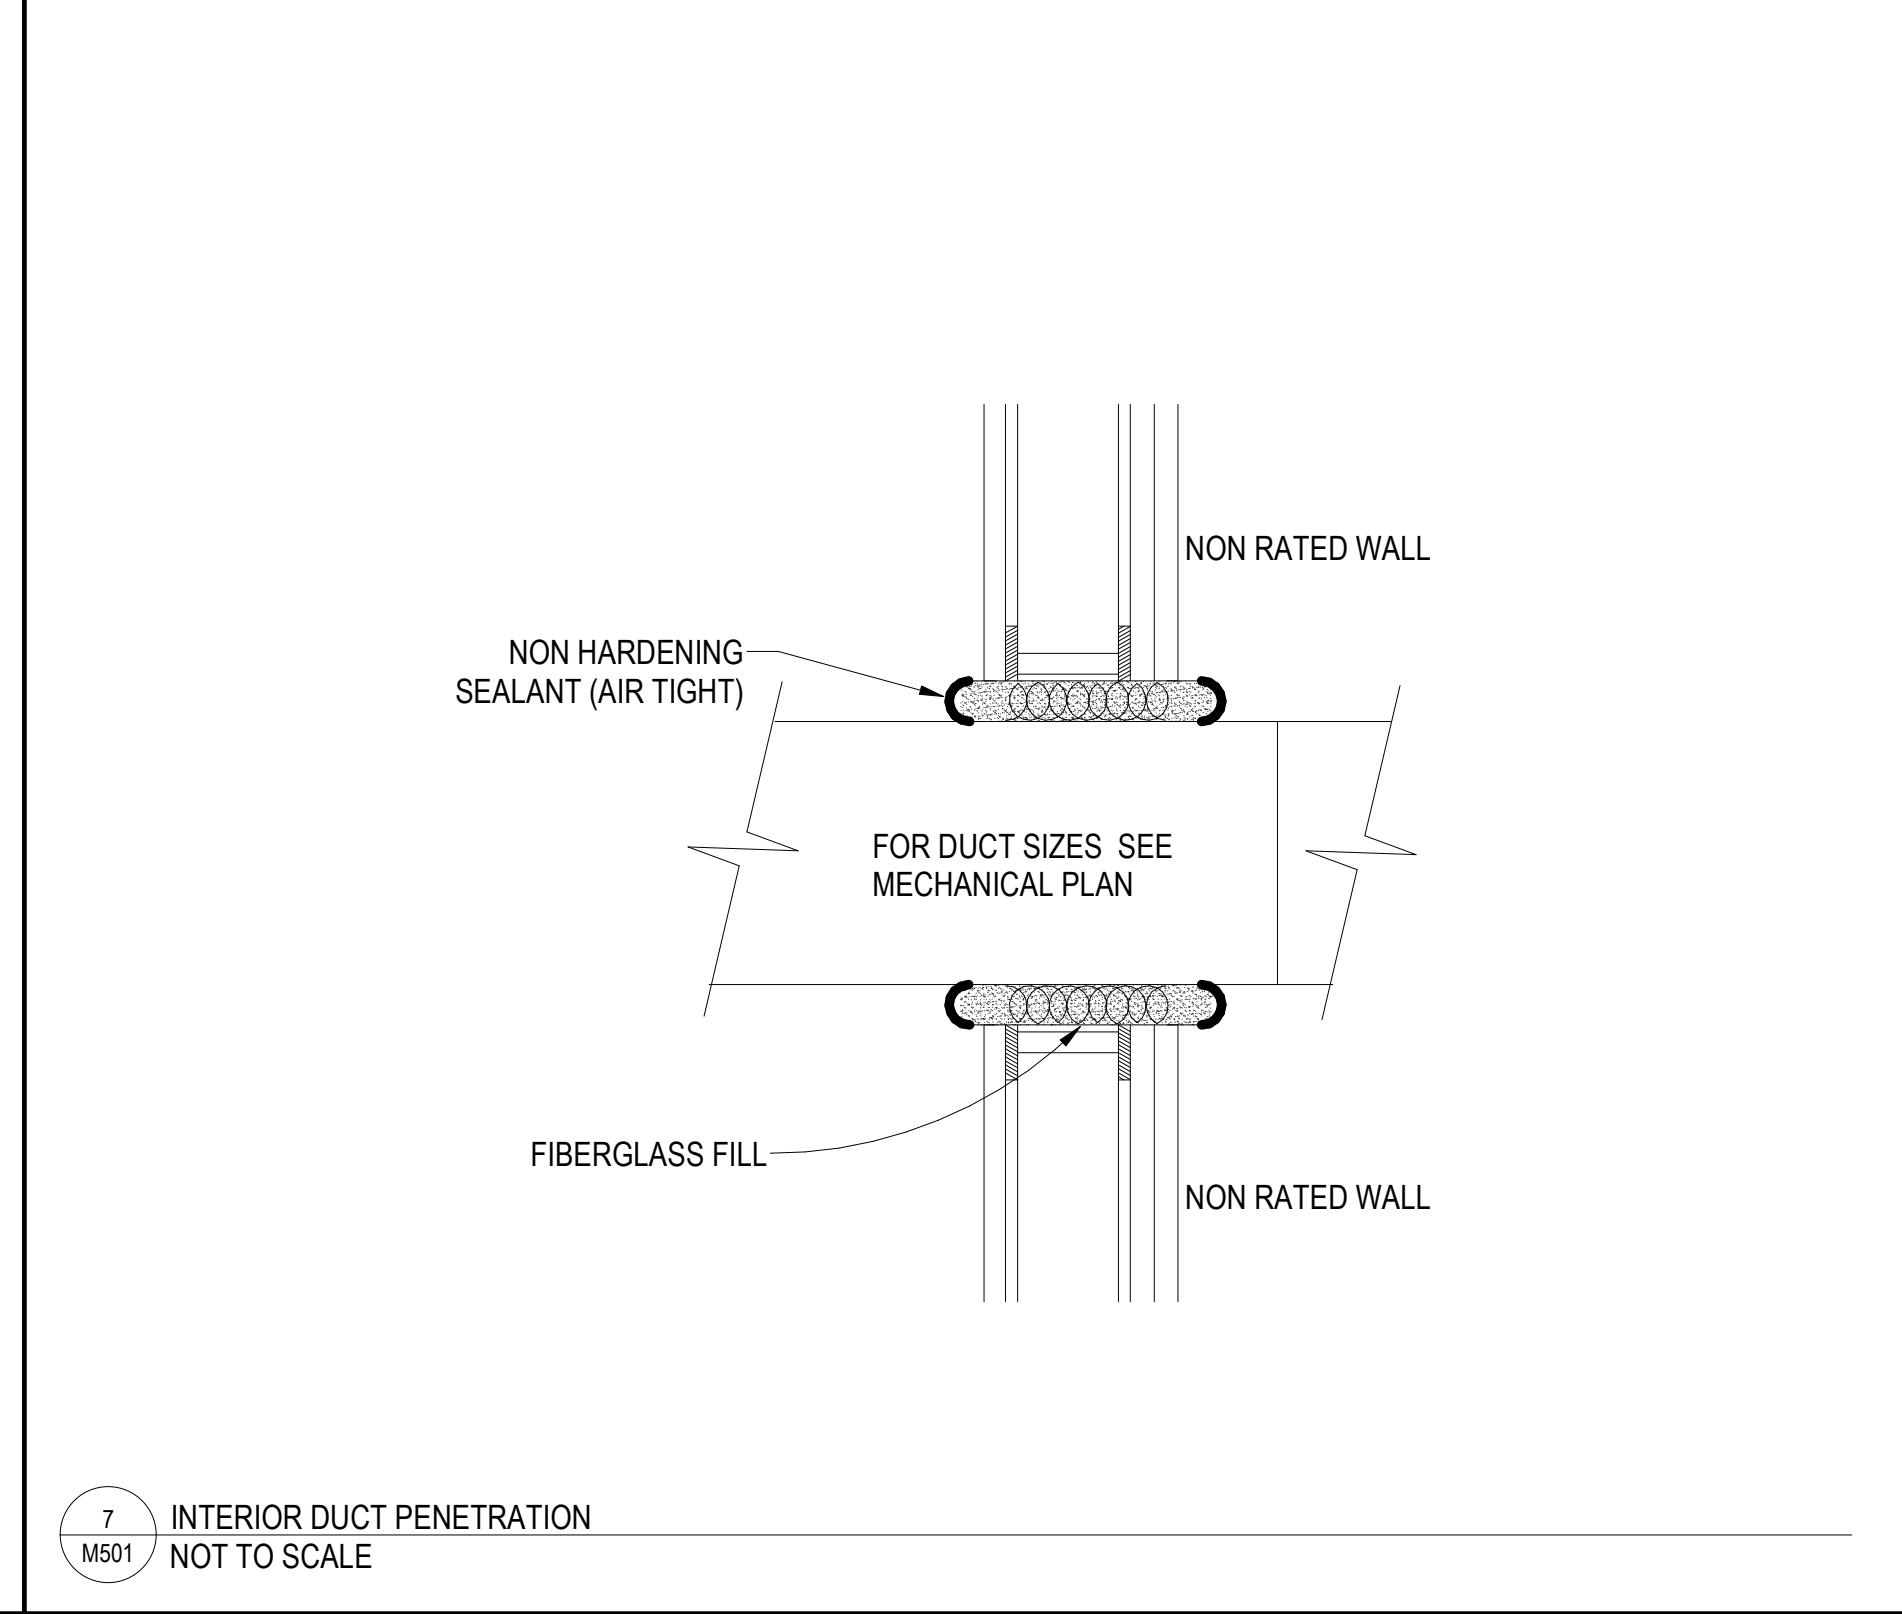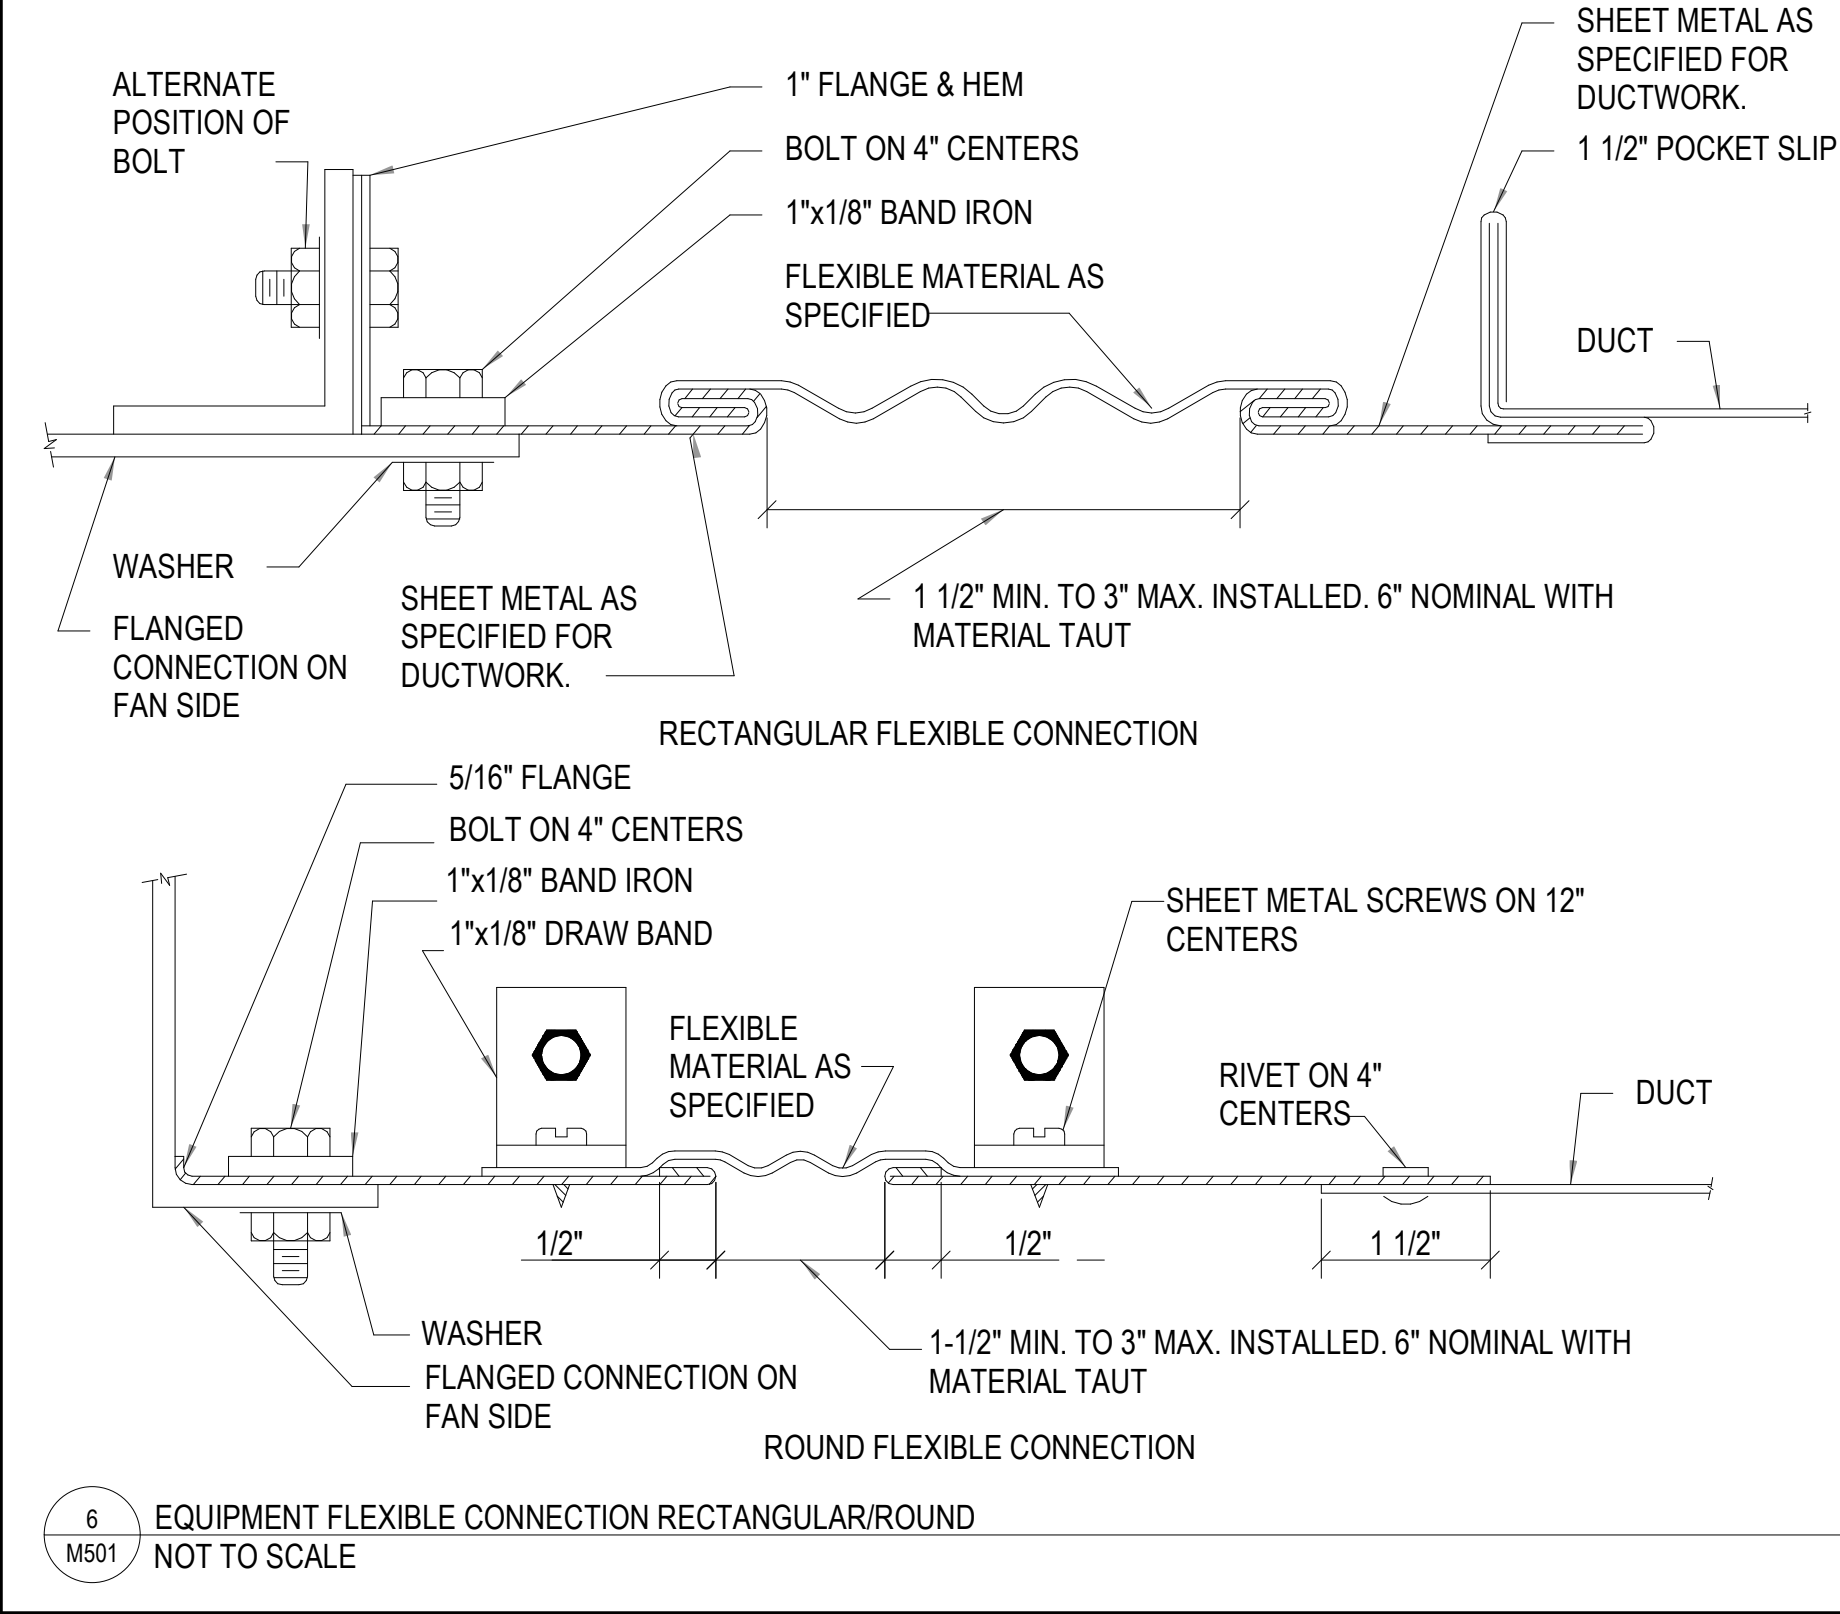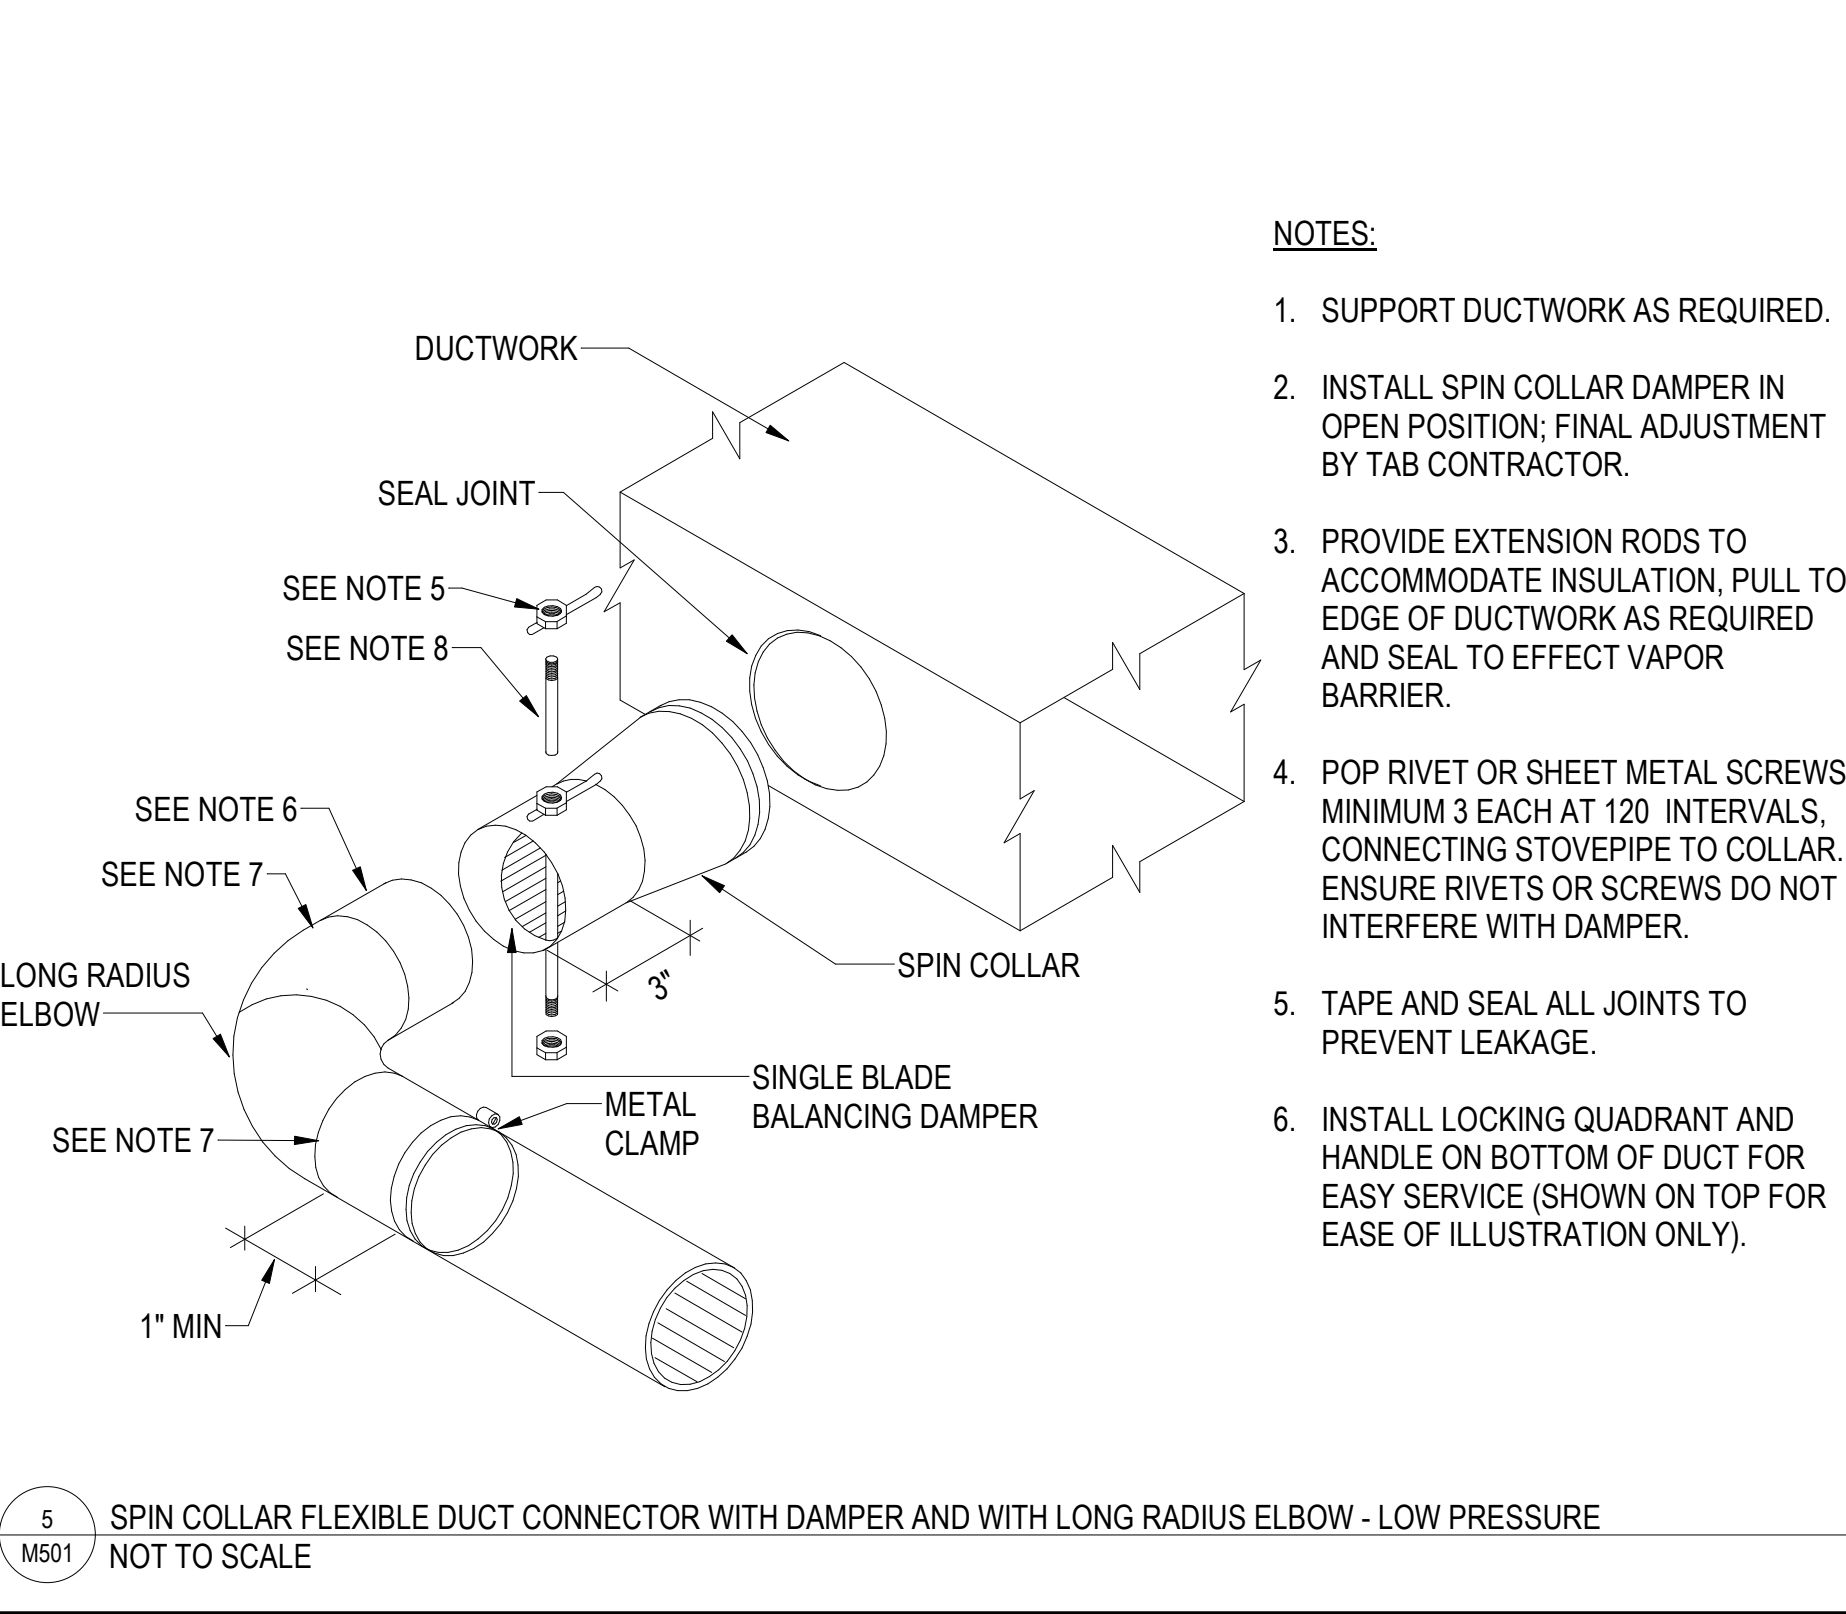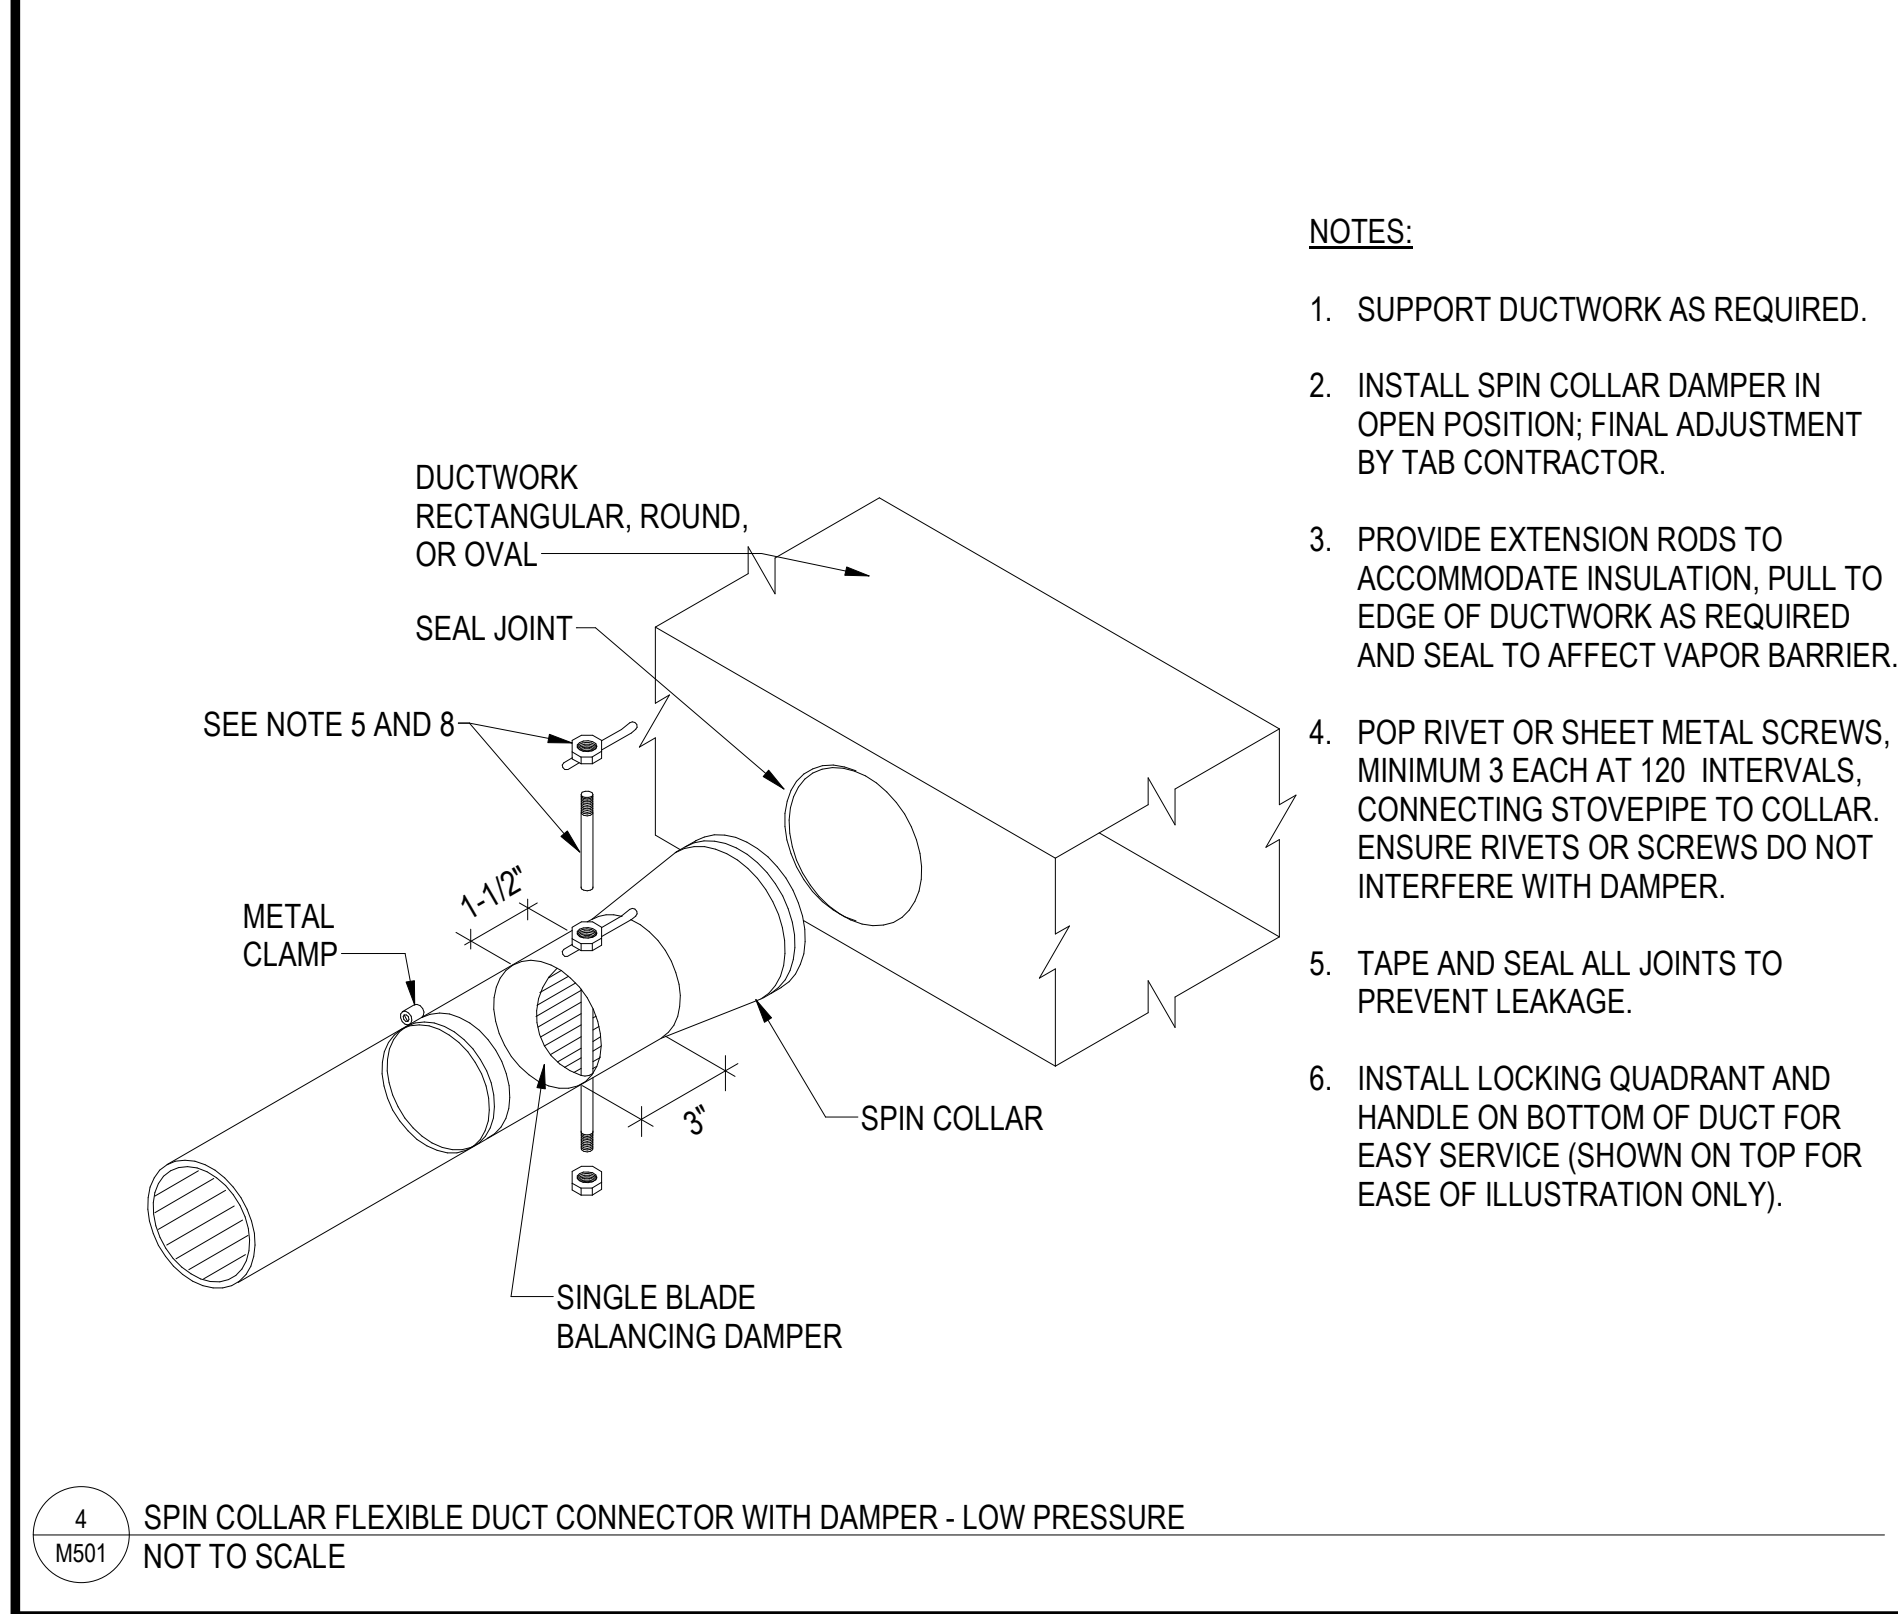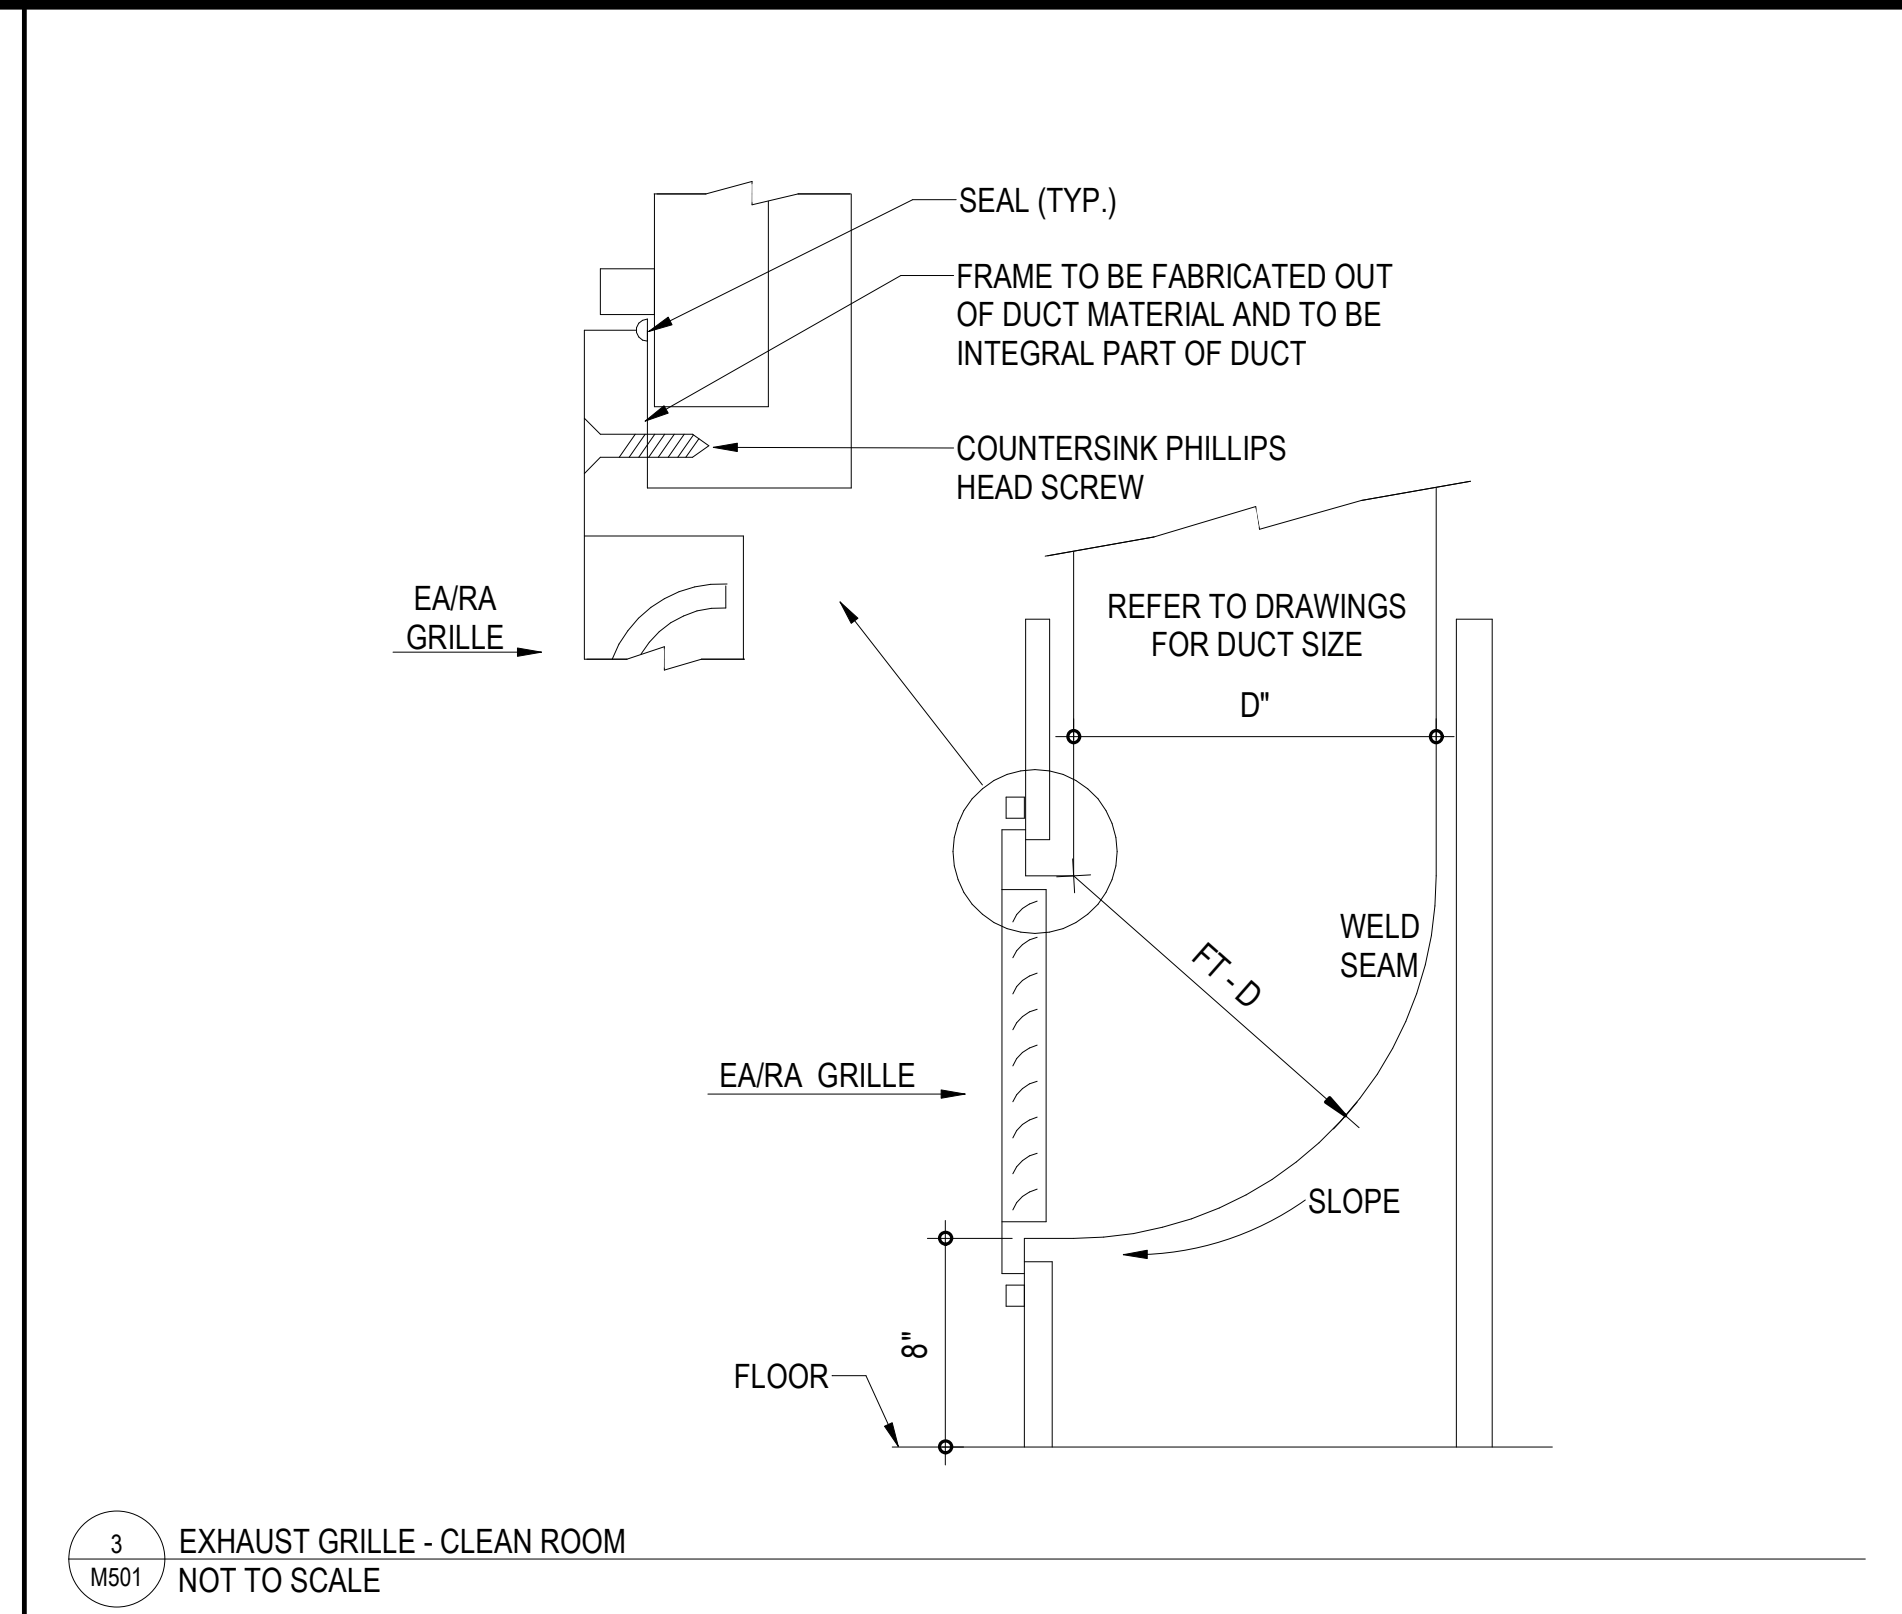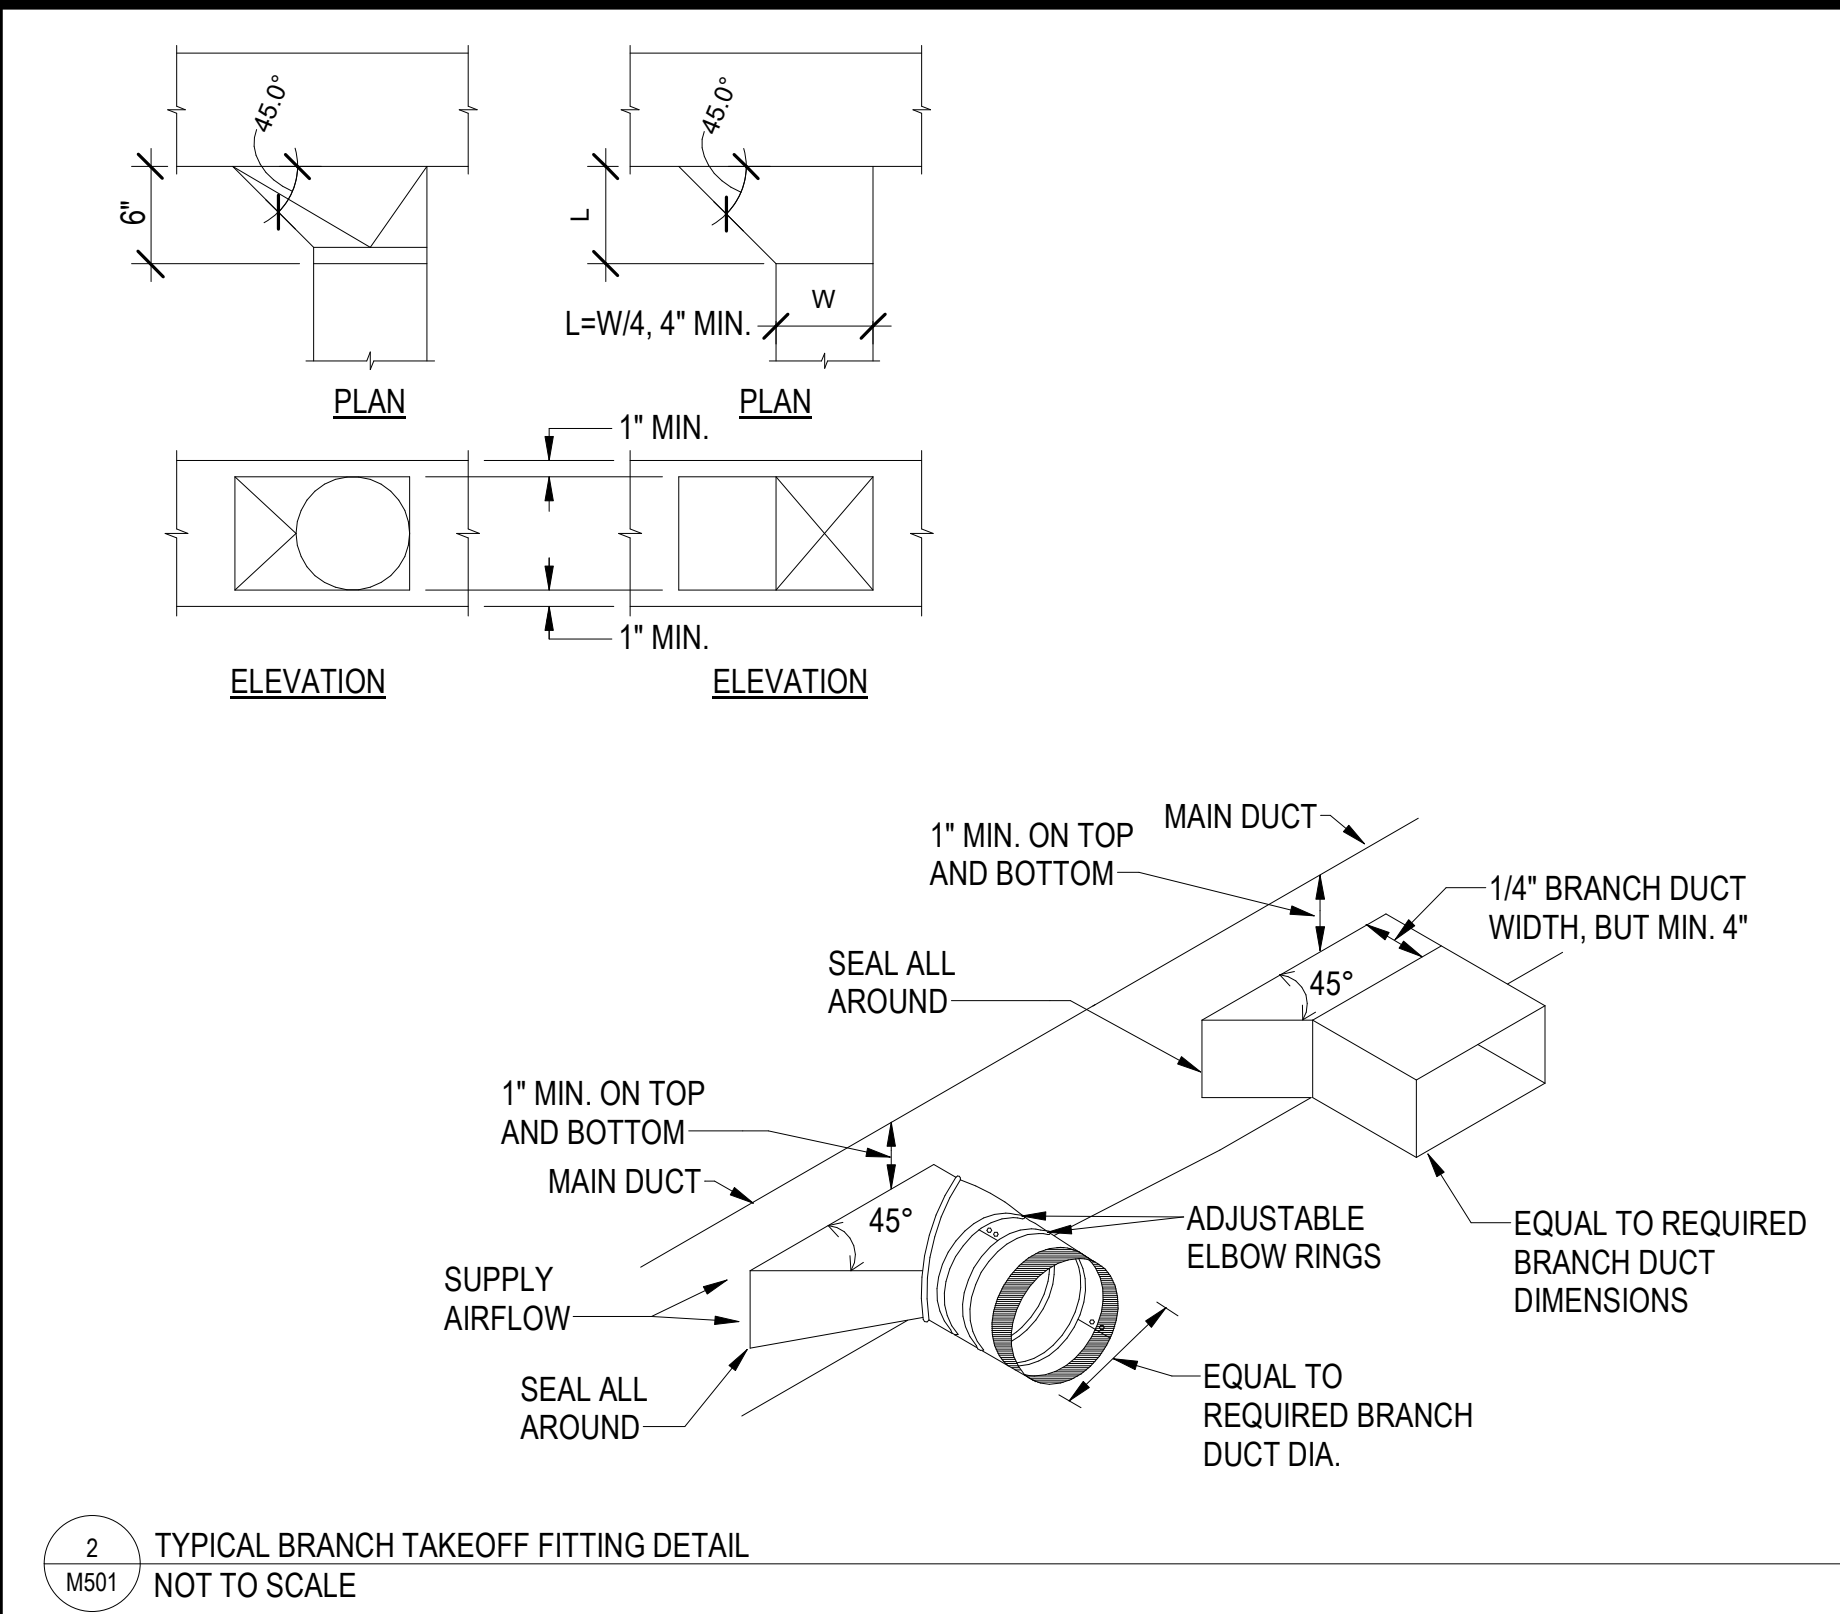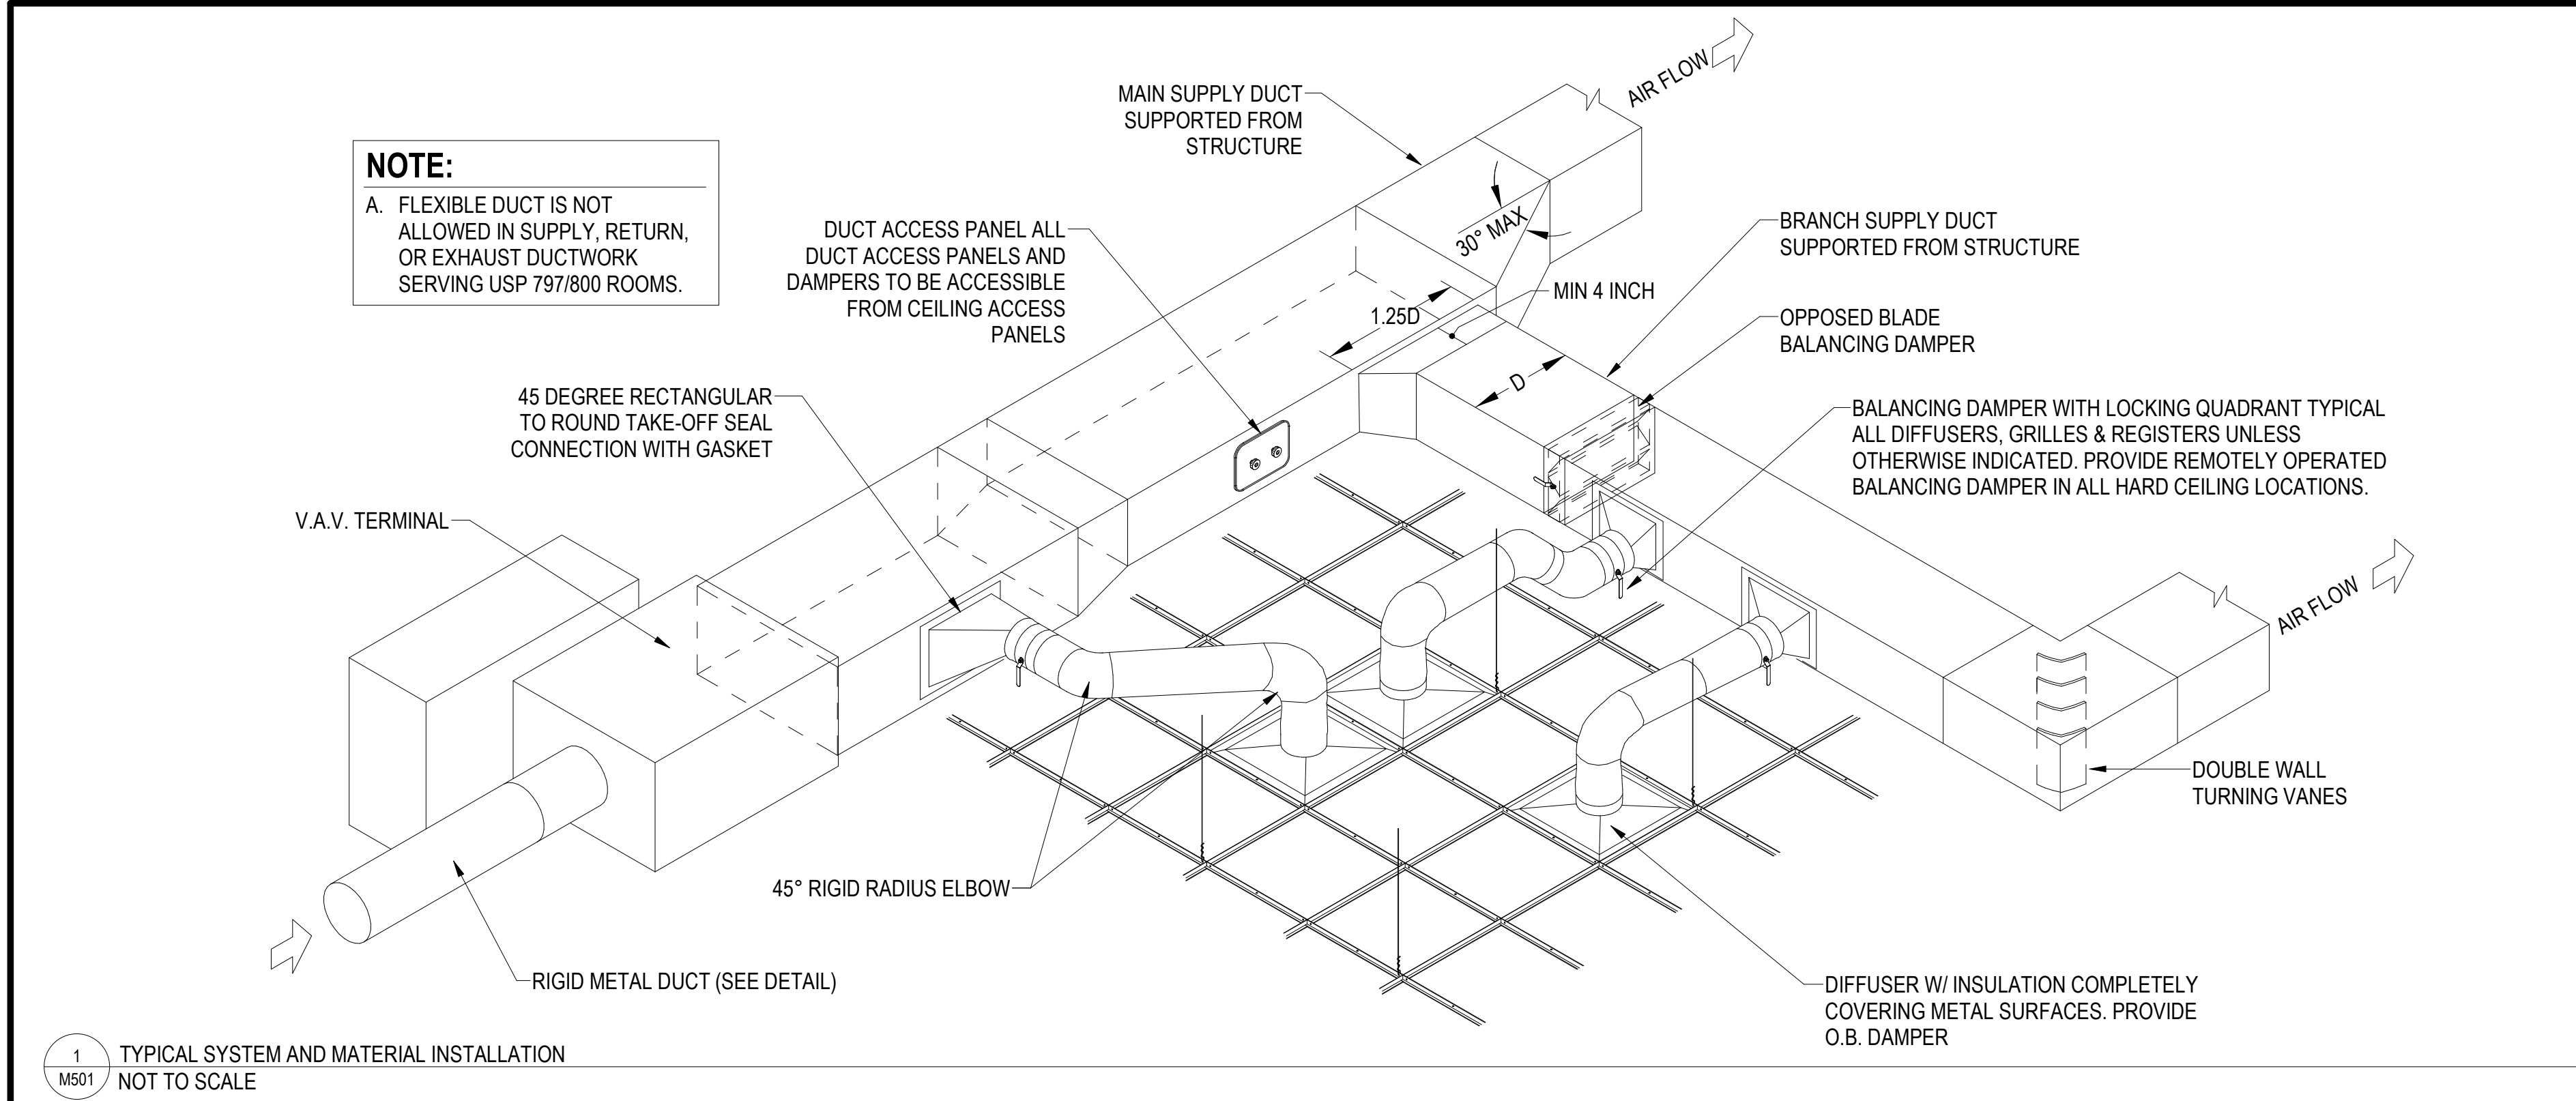


--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

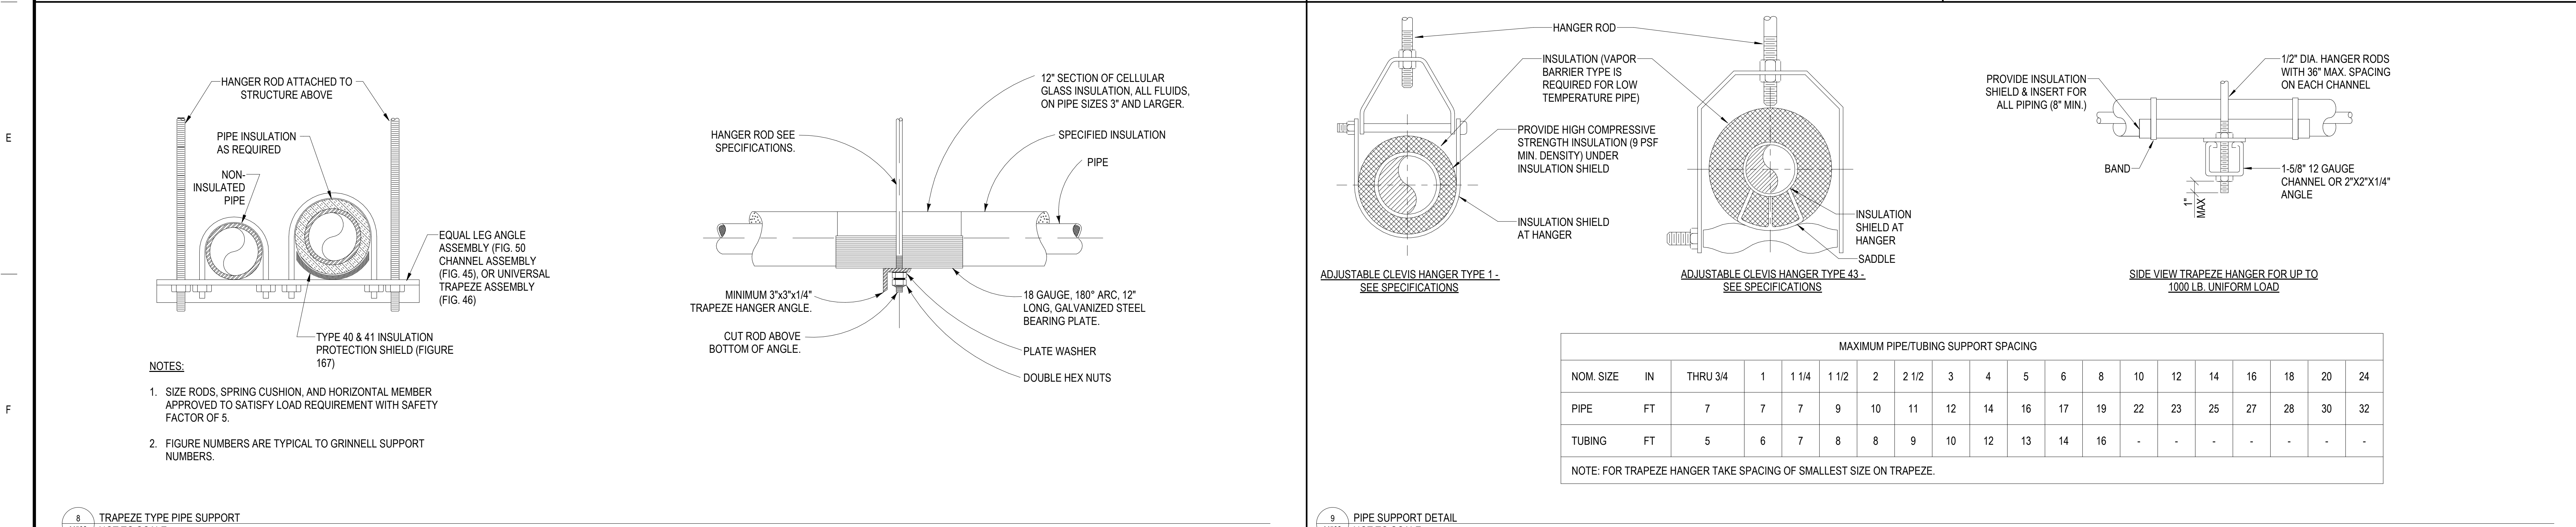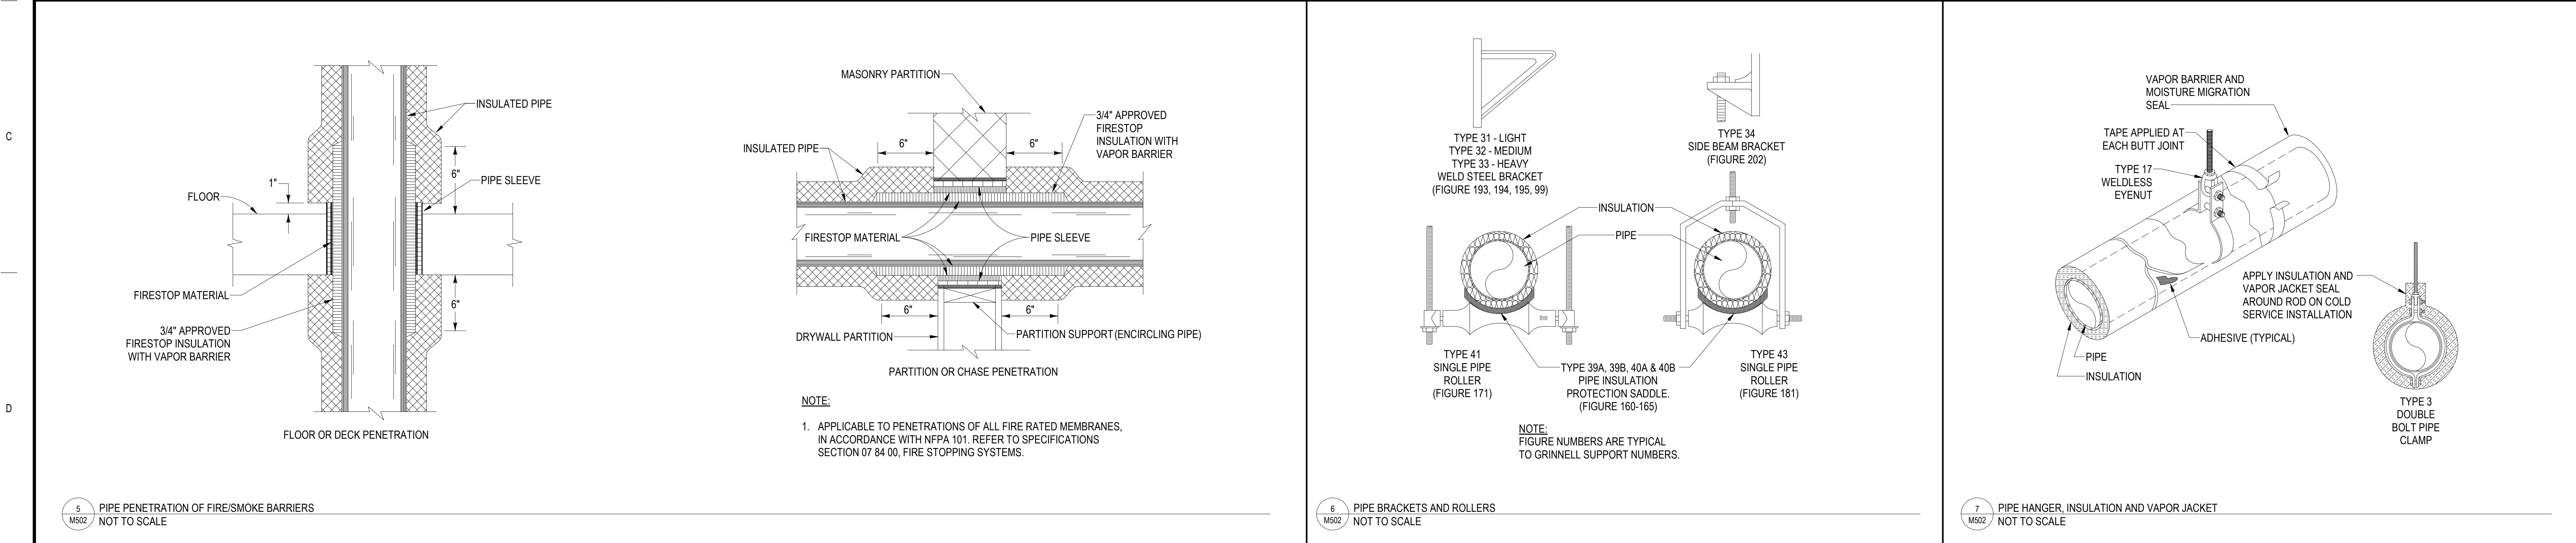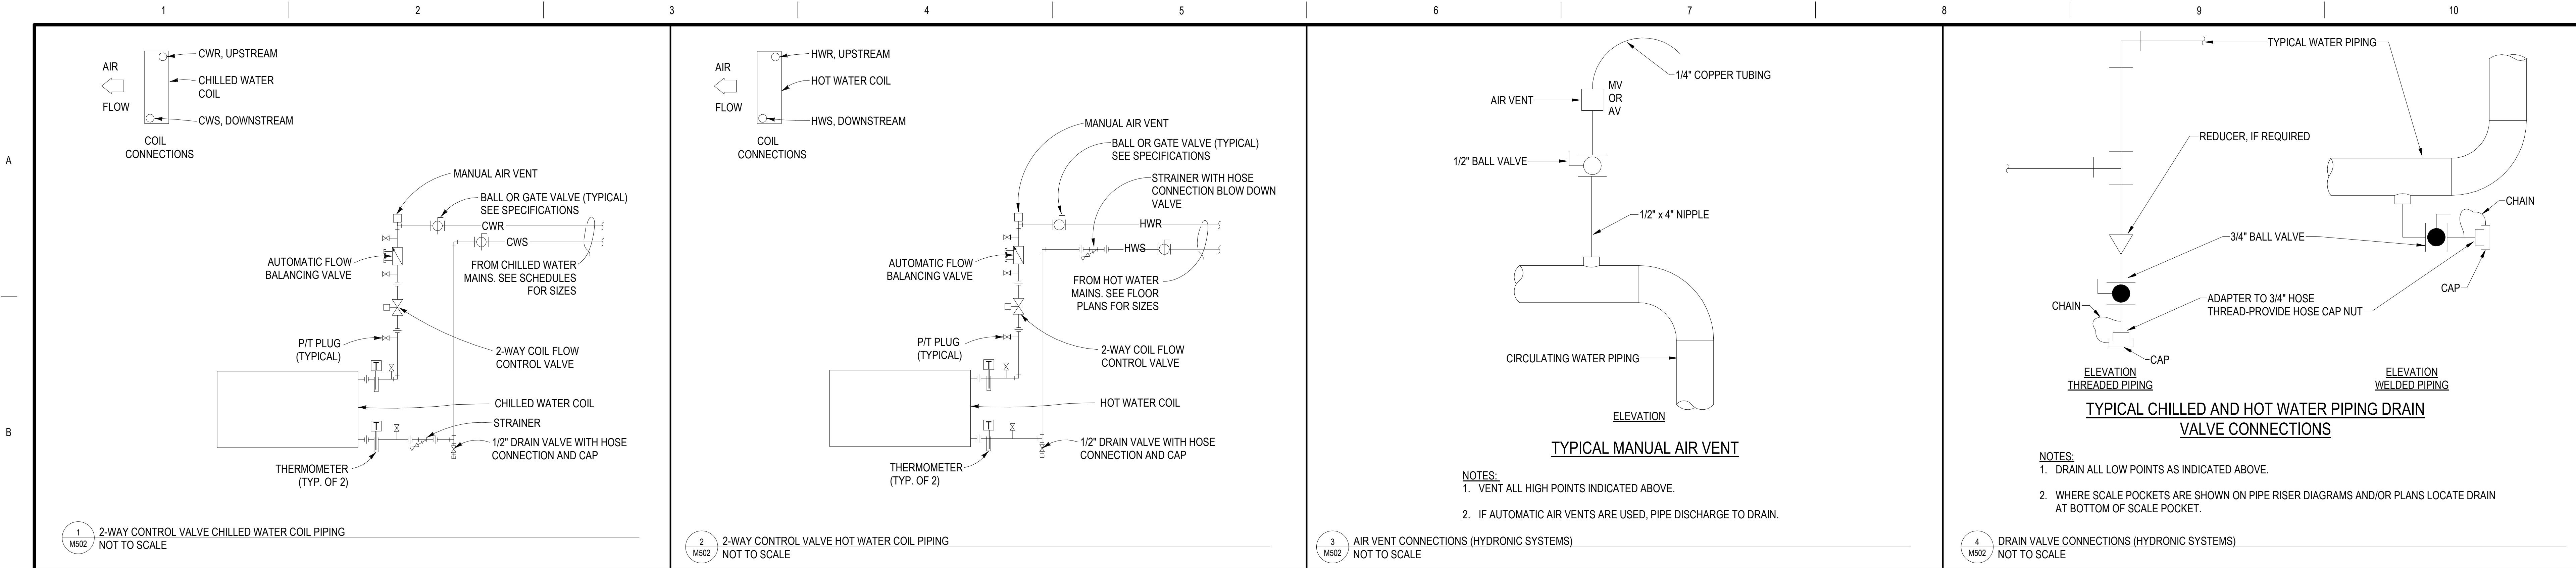


CONSULTANT		ARCHITECT/ENGINEER OF RECORD		STAMP	Office of Construction and Facilities Management	Drawing Title: MECHANICAL PIPING DETAILS	Phase	Project Title: UPGRADE PHARMACY IV MIXING ROOM USP 797/800	Project Number: 516-22-112
		TOLAND MIZELL MOLNAR		STATE OF FLORIDA PROFESSIONAL ENGINEER 121230025	VA U.S. Department of Veterans Affairs	Approved Project Director	FULLY SPRINKLERED	Location: CAPE CORAL, FLORIDA	Building Number: 01
REVISIONS:		DATE:						Issue Date: 12-23-2025	Drawing Number: M502
								Checked: RBS	Drawn: JSW



- | STRAINER BODY SIZE (IN) | DRAIN SIZE (IN) |
|-------------------------|-----------------|
| 2 1/2 | 3/4 |
| 3 | 3/4 |
| 4 | 3/4 |
| 6 | 1 |
| 8 | 1 1/4 |
| 10 | 1 1/2 |
| 12 | 2 |
| 14 | 2 |

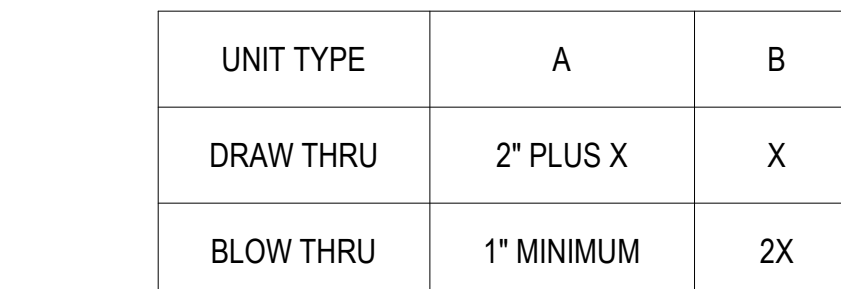

4 AIR HANDLING UNIT CONDENSATE DRAIN/TRAP DETAIL
M503 NOT TO SCALE



-

NOTE:
COORDINATE WITH HEPA FILTER TESTING
CONTRACTOR BEFORE PROCEEDING
WITH THE INSTALLATION.

[illegible]

TOLAND
MIZELL
MOLNAR

ROBERT BLAKE SMITH
LICENSE
12232025
STATE OF
FLORIDA
PROFESSIONAL ENGINEER

M503

SPACE	SUPPLY CFM	TOTAL EXHAUST CFM	TOTAL RETURN CFM	AIR CHANGE PER HOUR (ACH) MIN	PRESSURE IN IN. W.G. RELATIVE TO SPACE OUTSIDE ANTE ROOM	CLEAN ROOM ISO RATING
ANTE ROOM	685	-	580	35	MIN. +0.02	7
CHEMO	685	780	-	35	-0.01 TO -0.03	7
IV BUFFER	770	-	670	35	MIN. +0.04	7
TOTAL	2,140	880	1,250	-	-	

NOTES:

1. PRIOR TO OTHER TAB WORK CONTRACTOR SHALL CERTIFY THE BIOLOGICAL SAFETY CABINETS IN THE RENOVATED SPACES. SEE SPECIFICATION SECTION 23 05 93.
2. BALANCE SUPPLY AIR FLOW TO ± 5% OF INDICATED VALUES.
3. BALANCE EXHAUST TO OBTAIN INDICATED PRESSURE RELATIONSHIPS.
4. TOTAL EXHAUST CFM FROM CHEMO BUFFER INCLUDES APPROXIMATELY 680 CFM FROM EXISTING CHEMO HOOD.

AIR HANDLING UNIT SCHEDULE																															
NOTES:																															
1. FAN AIRFLOW SHOWN PER FAN.																															
MARK	LOCATION		BASIS OF DESIGN		AIRFLOW		FANS					COOLING COIL										FILTERS					NOTES				
	NAME	NUMBER	MANUFACTURER	MODEL NO.	TOTAL (CFM)	OUTSIDE (CFM)	FAN QUANTITY	SUPPLY FAN ARRAY				AIRSIDE PROPERTIES					WATER SIDE PROPERTIES					PREFILTER		FINAL FILTER							
								CFM (EA)	TSP (IN.WG)	ESP (IN.WG)	HP (EA)	EAT DB (F)	EAT WB (F)	LAT DB (F)	LAT WB (F)	TOTAL MBH	SENSIBLE MBH	APD (IN.WG)	MAX VELOCITY (FPM)	ROWS	FLUID	EWT (F)	LWT (F)	GPM	WPD (FT.H2O)	TYPE		APD (IN.WG)	TYPE	APD (IN.WG)	
AHU-1-4A	EQ STORAGE	1B-158	TRANE	CSAA006	2360	1430	1	2360	6.05	3.00	7.50	81.5	71.9	49.0	48.2	173.0	83.9	0.89	443	8	FLUID	42.0	56.0	25.0	2.7	MERV 8	0.59	MERV 13	0.07	1.	

FAN SCHEDULE															
NOTES:															
1. CFM INCLUDES DUCT LEAKAGE ALLOWANCE. BALANCE TO CONNECTED LOADS.															
2. MOTOR HP IS MAXIMUM VALUE.															
3. IGNORE ZERO VALUES UNLESS APPLICABLE.															
4. VFD PRE-LOADED WITH FAN AND MOTOR PARAMETERS.															
5. BASIS OF DESIGN FOR VFD - DANFOSS, FC102, 1 PER FAN, INPUT: 460 VOLTS - 3 PHASE, OUTPUT: 460 VOLTS - 3 PHASE, WITH NEMA-1 ENCLOSURE. INCLUDE VFD PACKAGE WITH EXHAUST FAN.															
LAYOUT BASIS				FAN PROPERTIES				AIRFLOW PROPERTIES				ELECTRICAL		WEIGHT (LB)	NOTES
MARK	MANUFACTURER	MODEL	TYPE	DRIVE TYPE	MIN OUTLET VELOCITY (FPM)	RPM	DISCHARGE POSITION	MAX AIRFLOW (CFM)	MIN AIRFLOW (CFM)	ESP (IN.WG)	CONTROLLER	POWER EA. (HP)			
EF-3K	GREENHECK	QEL-9	INLINE	BELT DRIVE	548	2266	HORIZONTAL	860	860	2.75	VFD	0.75	250	1:2:3:4:5	

GRILLES, REGISTERS AND DIFFUSERS SCHEDULE									
NOTES: 1. PAINT DUCT INTERIOR BLACK WHERE VISIBLE FROM BELOW. 2. GRILLES WITH OPPOSED BLADE DAMPER ACCESSED THROUGH GRILLE'S FACE. 3. BORDER TYPES SHALL BE COMPATIBLE WITH ARCHITECTURAL CEILING TYPE FOR THE ROOM IN WHICH THE AIR DEVICE IS LOCATED. 4. PROVIDE HEPA FILTER MINIMUM MERV 17. 5. INSTALL WITH PROVISIONS FOR HEPA FILTER TESTING AS DETAILED. SEE SHEET M503 DETAIL 6. 6. INSTALL BOTTOM OF GRILLE APPROXIMATELY 8" A.F.F. COORDINATE HEIGHT OF GRILLE WITH BASEBOARD HEIGHT.									
MARK	DESCRIPTION	MANUFACTURER	MODEL	MATERIAL	FINISH	FACE OR MODULE SIZE	NECK SIZE	NOTES	
A	LAMINAR FLOW FILTER DIFFUSER	TITUS	TLFR-SS	STAINLESS STEEL	POLISHED	48 x 24	10"	3:4.5:	
B	LOUVERED GRILLE	TITUS	350RL-SS	STAINLESS STEEL	POLISHED	SEE PLAN		1:2.6:	

DUCT MOUNTED HYDRONIC HEATING COIL SCHEDULE															
NOTES:															
1. CONFORM WITH ARI STANDARD 410.															
2. PROVIDE FULL SIZE PIPE RUNOUT UNLESS OTHERWISE INDICATED.															
MARK	DIMENSIONS		PIPE RUNOUT SIZE (IN)	CAPACITY (MBH)	ROWS / FPI	AIRSIDE PROPERTIES				WATERSIDE PROPERTIES					NOTES
	HEIGHT (IN)	WIDTH (IN)				AIRFLOW (CFM)	MAX VELOCITY (FPM)	APD (IN.WG)	EAT (F)	LAT (F)	EWTF (F)	LWT (F)	FLOW (GPM)	WPD (FT.H2O)	
RHC-01	14	12	3/4"	16.0	1/8	770	660	0.12	50.0	70.0	160.0	124.4	0.9	0.3	1:2:
RHC-02	12	12	3/4"	14.0	1/8	680	680	0.13	50.0	70.0	160.0	125.0	0.8	0.2	1:2:
RHC-03	12	12	3/4"	14.0	1/8	680	680	0.13	50.0	70.0	160.0	125.0	0.8	0.2	1:2:

LOUVER SCHEDULE

NOTES:

1.

BEGINNING POINT OF WATER PENETRATION – 1083 FPM.

2.

PRIME AND PAINT LOUVER SAME COLOR AS BUILDING.


3.

MANUFACTURER INSTALLED BIRD SCREEN.

MARK	LAYOUT BASIS		CFM	DUTY TYPE	AIR PD (IN-WG)	MAX VELOCITY FREE AREA (FPM)	LOUVER WIDTH (IN)	LOUVER HEIGHT (IN)	LOUVER DEPTH (IN)	NOTES
	MANUFACTURER	MODEL								
LVR-01	GREENHECK	EHV-550	1430	INTAKE	0.18	715	18	38	5	1:2:3

		CONSULTANT	ARCHITECT/ENGINEER OF RECORD	STAMP	Office of Construction and Facilities Management	Drawing Title: MECHANICAL SCHEDULES	Phase	Project Title: UPGRADE PHARMACY IV MIXING ROOM USP 797/800	Project Number 516-22-112		
			 TOLAND MIZELL MOLNAR 590 MEANS ST NW STE. 200 ATLANTA, GA 30318				BID DOCUMENTS		Building Number 01		
						Approved Project Director		Location CAPE CORAL, FLORIDA	Drawing Number		
					VA U.S. Department of Veterans Affairs		FULLY SPRINKLERED	Issue Date 12-23-2025	Checked RBS	Drawn JSW	M601
REVISIONS:		DATE:									

CONTROL LEGEND									
	FAN		TWO WAY ELECTRONIC CONTROL VALVE		REFRIGERANT GAS SENSOR		NORMALLY CLOSED		ISOLATION ROOM PRESSURE CONTROLLER KEY SWITCH
	FAN WITH INLET GUIDE VANES		THREE WAY ELECTRONIC CONTROL VALVE		OCCUPANCY SENSOR		NORMALLY OPEN		OPPOSED BLADE DAMPER
	PUMP		PARALLEL BLADE DAMPER		CURRENT TRANSDUCER		ELECTRIC HEAT SCR CONTROLLER		ROUND CONTROL DAMPER
	DX COIL		BACKDRAFT DAMPER		APPLICATION SPECIFIC CONTROLLER		FLUID FLOW METER		DAMPER ACTUATOR (ELECTRONIC)
	COOLING COIL		COMMON		STEAM PIT SUMP LEVEL SWITCH		PADDLE TYPE FLOW SWITCH		THERMOSTAT
	HEATING COIL		BINARY DATA LINK		FIRE THERMOSTAT		DIFFERENTIAL AIR PRESSURE SWITCH		FIRE ALARM CONTACTS
	HEAT EXCHANGER		DIGITAL INPUT		FREEZE PROTECTION THERMOSTAT		AFMS AIR FLOW MEASURING STATION		ANALOG INPUT
	SENSIBLE WHEEL		ELECTRIC HEAT STEP CONTROLLER		THERMAL OVERLOADS-NUMBER AS REQUIRED		PIPE MOUNTED TEMPERATURE SENSOR		ANALOG OUTPUT
	AIR FILTER		DUCT MOUNTED TEMP. SENSOR		SMOKE DETECTOR CONTACTS		DUCT MOUNTED, AVERAGING TEMP. SENSOR		EMERGENCY AIR SYSTEM TURN OFF BUTTON
	MOTOR STARTER		SHIELDED BULB AIR TEMPERATURE SENSOR		SMOKE DETECTOR		STROBE/HORN		PRESSURE INDEPENDENT CONTROL VALVE
	HAND-OFF-AUTO SWITCH		DUCT MOUNTED HUMIDITY SENSOR		AIR FLOW MEASUREMENT STATION		PROPORTIONAL HIGH LIMIT HUMIDISTAT		OXYGEN MONITORING SENSOR
	MOTOR START SOLENOID		SPACE HUMIDITY SENSOR		DIGITAL OUTPUT		UVC RADIATION SENSOR		TERMINAL EQUIPMENT CONTROLLER
	VARIABLE FREQUENCY DRIVE		SPACE TEMPERATURE SENSOR						

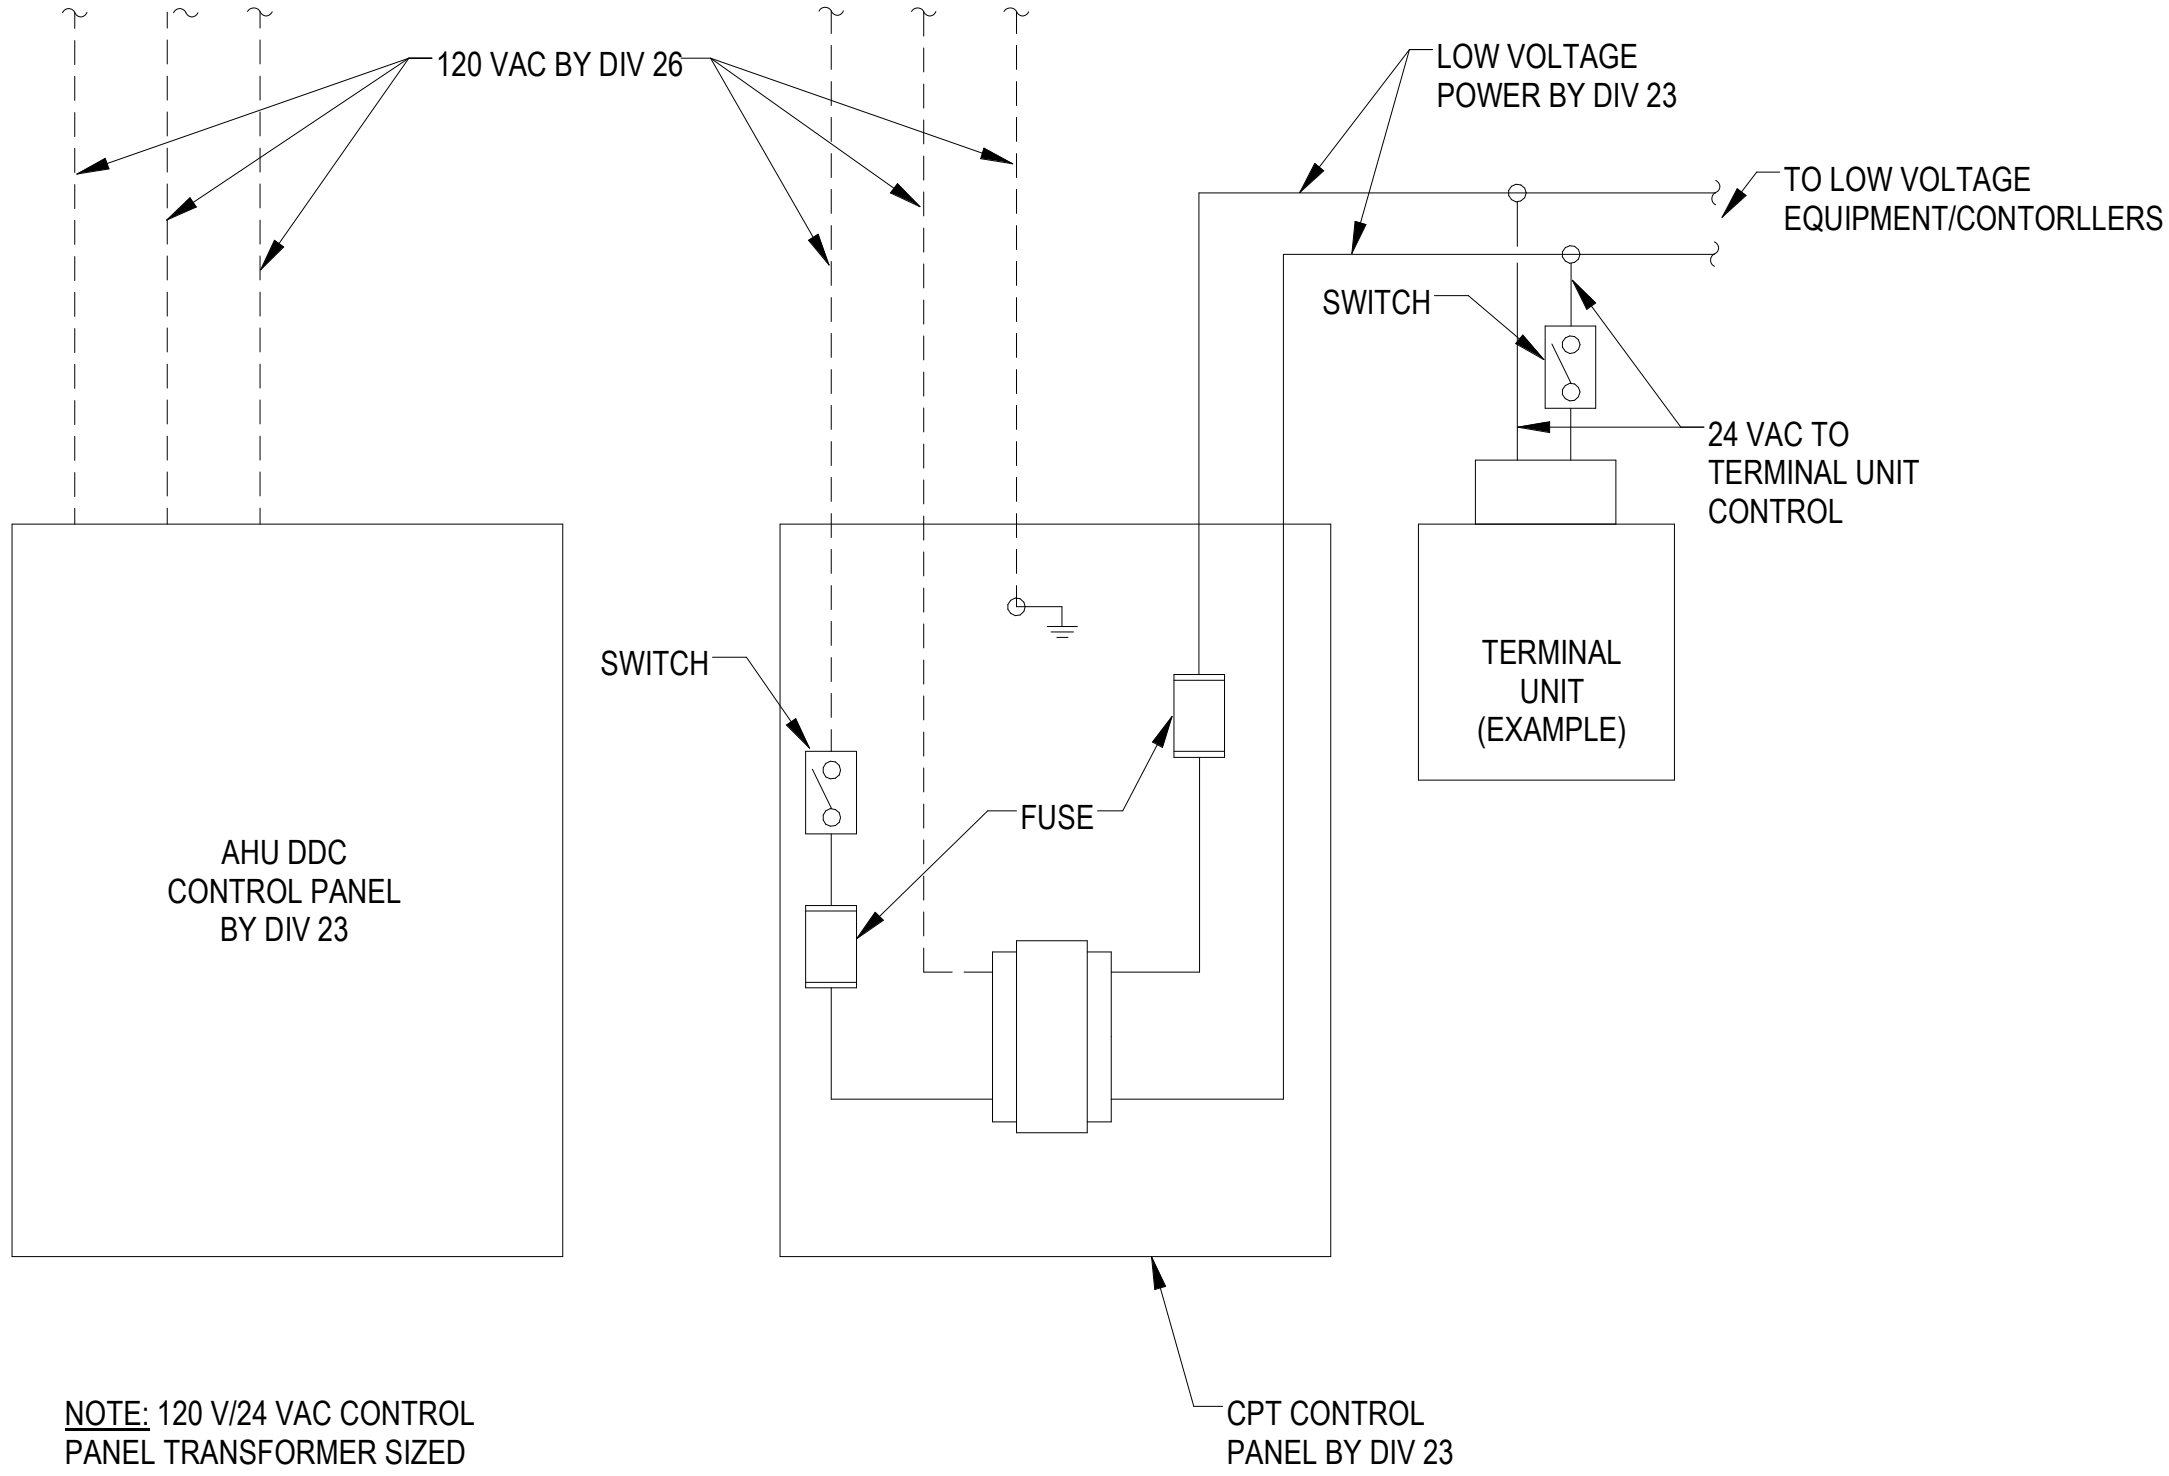

NOTE: 120 V/24 VAC CONTROL PANEL TRANSFORMER SIZED TO MEET LOAD REQUIREMENTS SERVED EQUIPMENT


1 M800 LOW VOLTAGE POWER WIRING DETAIL NOT TO SCALE

2 M800 ROOM CONDITION MONITORING DIGITAL DISPLAY PANEL NOT TO SCALE

	ANTE ROOM	IV BUFFER ROOM	CHEMO BUFFER ROOM
PRESSURE (INCH W.G.)	XXX W.G.	XXX W.G.	XXX W.G.
TEMPERATURE (*F)	XX*F	XX*F	XX*F
HUMIDITY (% RH)	XX%	XX%	XX%

- NOTES:
- TEMPERATURE INPUT FROM DDC PANEL.
 - PRESSURE AND HUMIDITY INPUTS DIRECTLY FROM SENSORS IN ROOMS. LOCATE SENSORS WHERE SHOWN ON FLOOR PLANS.
 - PANEL INDICATED TO SHOW ALL REQUIRED INFORMATION ON DISPLAY PANEL.
 - LOCATE PANEL OUTSIDE OF ANTE ROOM.

- ROOM MONITORING SEQUENCE OF CONTROL
- THE CONTROL SYSTEM SHALL TREND ROOM PRESSURE, ROOM RELATIVE HUMIDITY, AND ROOM TEMPERATURE EVERY HOUR.
 - THE CONTROL SYSTEM SHALL ALARM USER INTERFACE AND LOCAL IF ANY ROOM RH IS HIGHER THAN 60% RH OR LOWER THAN 20% RH.
 - THE CONTROL SYSTEM SHALL ALARM USER INTERFACE AND LOCAL IF ANY ROOM PRESSURE IS +/- 0.01 (ADJUSTABLE) FROM SETPOINT FOR 30 SECONDS (ADJUSTABLE) OR LONGER.
 - THE CONTROL SYSTEM SHALL ALARM USER INTERFACE AND LOCAL IF ANY ROOM TEMPERATURE IS +/- 1.5 DEGREE F (ADJUSTABLE) FROM SETPOINT FOR 5 MINUTES (ADJUSTABLE) OR LONGER.
 - THE CONTROL SYSTEM SHALL LOG THE MAGNITUDE AND DURATION OF EACH ALARM.

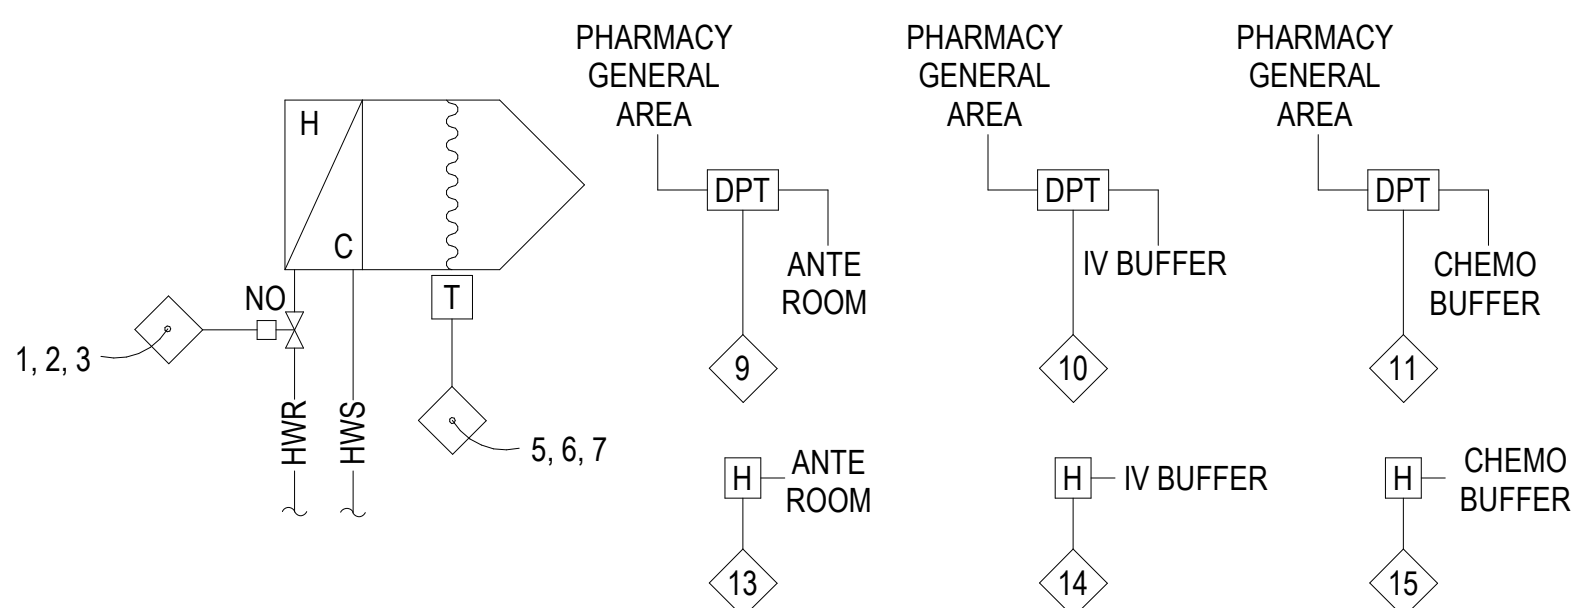


3 M800 RHC PIPING AND CONTROL SCHEMATIC - TYPICAL NOT TO SCALE

CONTROL POINTS SCHEDULE (DUCT MOUNTED REHEAT COIL ONLY)			
MARK ◇	TYPE	DESCRIPTION	NOTES
1	AO	RHC-1 - VALVE MODULATION AHU-1-4A	2:
2	AO	RHC-2 - VALVE MODULATION AHU-1-4A	2:
3	AO	RHC-3 - VALVE MODULATION AHU-1-4A	2:
4	SPARE		
5	AI	SUPPLY AIR TEMPERATURE (MONITOR AND DISPLAY ONLY)	2:
6	AI	SUPPLY AIR TEMPERATURE (MONITOR AND DISPLAY ONLY)	2:
7	AI	SUPPLY AIR TEMPERATURE (MONITOR AND DISPLAY ONLY)	2:
8	SPARE		
9	AI	DIFFERENTIAL PRESSURE (ANTE ROOM)	1,2,3:
10	AI	DIFFERENTIAL PRESSURE (IV BUFFER)	1,2,3:
11	AI	DIFFERENTIAL PRESSURE (CHEMO BUFFER)	1,2,3:
12	SPARE		
13	AI	ANTE ROOM RH	
14	AI	IV BUFFER RH	
15	AI	CHEMO BUFFER RH	

NOTES:

- MONITORING POINT ON DISPLAY PANEL.
- SEE FLOOR PLAN FOR LOCATIONS.
- ROOM STATIC PRESSURE PROBE BASIS OF DESIGN IS AIR MONITOR SAP/S STAINLESS STEEL.

- ROOM SEQUENCE OF CONTROL
- THE CONTROL SYSTEM SHALL MODULATE THE HOT WATER REHEAT VALVE TO MAINTAIN THE SPACE TEMPERATURE AT SETPOINT 68 DEGREES F (ADJUSTABLE).
 - SEE ROOM MONITORING SEQUENCE OF CONTROLS THIS SHEET.

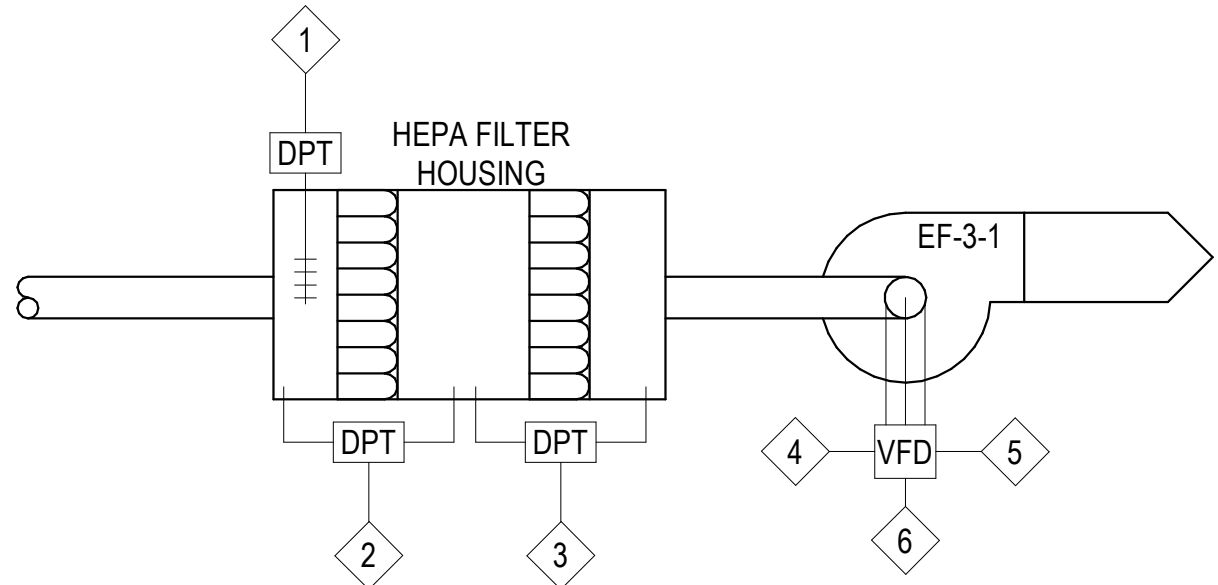

4 M800 EF-3-1 HOOD EXHAUST FAN CONTROL SCHEMATIC (HOOD EXHAUST) NOT TO SCALE

CONTROL POINTS SCHEDULE (HOOD EXHAUST FAN ONLY)			
MARK	TYPE	DESCRIPTION	NOTES
1	AI	DISCHARGE STATIC PRESSURE (4 POINT AVG) EF-3-1	1:
2	AI	PRE FILTER MONITORING HEPA FILTER HOUSING	2:
3	AI	FINAL FILTER MONITORING HEPA FILTER HOUSING	2:
4	DATA	EF-3-1 VFD STATUS	3:
5	AO	SUPPLY FAN SPEED CONTROL EF-3-1	
6	AO	SUPPLY FAN ENABLE/DISABLE EF-3-1	

NOTES:

- MULTI POINT STATIC PRESSURE PROBE BASIS OF DESIGN IS AIR MONITOR STAT-PROBE.
- PITOT-STATIC OR STATIC PROBE REQUIRED. OPEN END OF HOSE IS NOT ACCEPTABLE.
- DISPLAY ALL BACNET DATA AVAILABLE ON VFD. PROVIDE VFD WITH BACNET PROTOCOL.

- HOOD EXHAUST FAN SEQUENCE OF CONTROL
- EXHAUST FAN OPERATES AT ALL TIMES.
 - THE DDC CONTROL SYSTEM SHALL MONITOR THE EXHAUST FANS VFD STATUS AND ALARM THE USER INTERFACE WHEN EXHAUST FAN IS NOT OPERATING CORRECTLY DUE TO FAULTY MOTOR OR BROKEN FAN BELT AS DETERMINED BY THE VFD STATUS.
 - THE CONTROL SYSTEM SHALL MONITOR AND ALARM OF PRE-FILTER AND HEPA FILTER WHEN PRESSURE EXCEEDS MANUFACTURER STANDARDS.
 - AIR FLOW CAPACITY CONTROL: THE CONTROL SYSTEM SHALL MODULATE SUPPLY FAN SPEED TO MAINTAIN DISCHARGE STATIC PRESSURE AT STATIC PRESSURE AVERAGING SENSOR AT SETPOINT. THE SETPOINT SHALL BE DETERMINED DURING TEST AND BALANCE AND SHALL NOT BE ADJUSTABLE EXCEPT BY MAINTENANCE PERSONNEL.

REVISIONS:	DATE:	CONSULTANT	ARCHITECT/ENGINEER OF RECORD	STAMP	Office of Construction and Facilities Management	Drawing Title: VA STATION GENERAL CONTROL NOTES AND LEGEND	Phase	Project Title: UPGRADE PHARMACY IV MIXING ROOM USP 797/800	Project Number: 516-22-112
			TOLAND MIZELL MOLNAR		U.S. Department of Veterans Affairs	Approved Project Director	BID DOCUMENTS	Location: CAPE CORAL, FLORIDA	Building Number: 01
			590 MEANS ST NW STE. 200 ATLANTA, GA 30318				FULLY SPRINKLERED	Issue Date: 12-23-2025	Drawing Number: M800
								Checked: RBS	
								Drawn: JSW	

A

B

C

D

E

F

A

B

C

D

E

F

AIR HANDLING UNIT AHU-1-4A ONLY SEQUENCE

A. SUPPLY FAN OPERATING AND SAFETY CONTROLS SHALL INCLUDE

- UNIT MOUNTED DISCONNECT
- VARIABLE FREQUENCY MOTOR DRIVE
- SUPPLY AIR SMOKE DETECTOR
- INLET AIR DAMPER END SWITCH

B. THE SMOKE DETECTOR AND DAMPER END SWITCH SHALL BE HARD WIRED INTO THE VFD ENABLE / DISABLE INPUT. IN ADDITION, SMOKE DETECTOR STATUS SHALL BE MONITORED BY THE DDC CONTROL SYSTEM AND THE SMOKE DETECTOR SHALL BE MONITORED BY THE BUILDING FIRE ALARM SYSTEM.

FAN OPERATION

- A. ALL FANS SHALL OPERATE AT ALL TIMES.
- B. ON STARTUP, THE DAMPER END SWITCH SHALL ENSURE THE SUPPLY FAN AND RETURN FAN DO NOT START UNTIL THE DAMPER IS COMPLETELY OPEN.
- C. FAN OPERATION SOFTWARE INTERLOCK: IF EITHER FAN (SF-1-4A) FAILS AS DETERMINED BY ZERO STATIC PRESSURE AT THE RESPECTIVE STATIC PRESSURE AVERAGING SENSOR OR PROVE FLOW SWITCH THE CONTROL SYSTEM SHALL ALARM THE USER INTERFACE AND TURN OFF THE OTHER FAN. THE ALARM SHALL IDENTIFY WHICH FAN FAILED.
- D. AIR FLOW CAPACITY CONTROL: THE CONTROL SYSTEM SHALL MODULATE SUPPLY FAN SPEED TO MAINTAIN SUPPLY AIR FLOW CONSTANT.
- E. AIR FLOW AND CONTROLS INTERLOCK: UPON FAN SHUTDOWN AS DETERMINED BY NO AIR FLOW AT THE AVERAGING STATIC PRESSURE SENSORS, OR PROVE FLOW SWITCH. ALL CONTROLS ACTUATORS, INCLUDING EXHAUST AND INLET AIR DAMPERS SHALL GO TO THEIR NORMAL POSITION.

AHU-1-4A HYDRONIC COOLING COIL

A. THE CONTROL SYSTEM SHALL OPERATE THE COOLING COIL TO MAINTAIN SUPPLY AIR TEMPERATURE LEAVING THE AIR HANDLING UNIT AT SETPOINT. THE SETPOINT SHALL BE 49°F.

FILTER MONITORING

- A. HIGH LIMITS: THE CONTROL SYSTEM SHALL INDIVIDUALLY MONITOR ALL FILTER BANKS, INCLUDING ALL DIFFUSERS AND SHALL ALARM THE USER INTERFACE WHEN ANY FILTER BANK EXCEEDS FULLY LOADED FILTER CONDITION. THE PRESSURE SETPOINTS FOR THE FILTER BANKS SHALL BE DETERMINED DURING TEST AND BALANCE.
- B. LOW LIMIT: THE CONTROL SYSTEM SHALL INDIVIDUALLY MONITOR PRE FILTERS AND SHALL ALARM THE USER INTERFACE WHEN PRESSURE DROP IS 10% BELOW THE CLEAN FILTER CONDITIONS DETERMINED DURING TEST AND BALANCE.

ALARMS



- A. THE CONTROL SYSTEM SHALL TURN OFF THE AIR HANDLING UNIT SUPPLY FAN AND EXHAUST FAN EF-2-4 AND ALARM THE USER INTERFACE WHENEVER ANY OF THE FOLLOWING CONDITIONS OCCURS:
- NO AIR FLOW FOR 15 SECONDS (ADJUSTABLE) OR LONGER.
 - SMOKE DETECTED IN THE AIR HANDLING UNIT.
- B. THE CONTROL SYSTEM SHALL ALARM THE USER INTERFACE WHENEVER ANY OF THE FOLLOWING CONDITIONS OCCURS:
- COOLING COIL LEAVING AIR TEMPERATURE NOT AT SETPOINT FOR 5 MINUTES (ADJUSTABLE) OR LONGER.
 - EXHAUST DUCT HUMIDITY NOT AT SETPOINT FOR 30 MINUTES (ADJUSTABLE) OR LONGER.
 - ANY SPACE TEMPERATURE NOT AT SETPOINT FOR 5 MINUTES (ADJUSTABLE) OR LONGER.

CONTROL POINTS SCHEDULE (AIR HANDLING UNIT AHU-1-4A ONLY)

MARK	TYPE	DESCRIPTION	NOTES
1	AI	OUTSIDE AIR TEMPERATURE AHU-1-4A	
2	DO	OUTSIDE AIR DAMPER OPEN/CLOSE AHU-1-4A	
3	SPARE		
4	AI	PRE FILTER STATUS AHU-1-4A	5:
5	AI	INTERMEDIATE FILTER STATUS AHU-1-4A	5:
6	AI	FINAL FILTER STATUS AHU-1-4A	5:
7	AI	SUPPLY AIR TEMPERATURE AHU-1-4A	
8	DI	SMOKE DETECTOR STATUS AHU-1-4A	4:
9	DO	SUPPLY FAN ENABLE/DISABLE AHU-1-4A	
10	AO	SUPPLY FAN SPEED CONTROL AHU-1-4A	
11	DATA	AHU-1-4A VFD STATUS	7:
12	AO	COOLING COIL VALVE MODULATION AHU-1-4A	
13	AI	AHU-1-4A RETURN AIR TEMPERATURE	
14	AI	AHU-1-4A RETURN AIR HUMIDITY SENSOR	
15	AI	SUPPLY CFM MEASUREMENT	8:
16	SPARE		
17	SPARE		
18	SPARE		
19	AI	SPACE TEMPERATURE RHC-01 - AHU-1-4A (IV BUFFER)	1:2:6:
20	AI	SPACE TEMPERATURE RHC-02 - AHU-1-4A (ANTE ROOM)	1:2:6:
21	AI	SPACE TEMPERATURE RHC-03 - AHU-1-4A (CHEMO BUFFER)	1:2:6:
22	SPARE		
23	AI	SPACE HUMIDITY (IV BUFFER)	1:2:3:
24	AI	SPACE HUMIDITY (ANTE ROOM)	1:2:3:
25	AI	SPACE HUMIDITY (CHEMO BUFFER)	1:2:3:
26	SPARE		
27	AI	IV BUFFER HEPA FILTER STATUS	2:5:
28	AI	ANTE ROOM HEPA FILTER STATUS	2:5:
29	AI	CHEMO BUFFER HEPA FILTER STATUS	2:5:
30	SPARE		

NOTES:

- MONITORING POINT ON DISPLAY PANEL.
- SEE FLOOR PLAN FOR LOCATIONS.
- THESE POINTS FOR DISPLAY PANEL ONLY.
- LOCATE IN SUPPLY DUCT.
- PITOT-STATIC OR STATIC PROBE REQUIRED. OPEN END OF HOSE IS NOT ACCEPTABLE.
- PER SPECIFICATIONS, TEMPERATURE SENSOR SHALL HAVE $\pm 6^{\circ}\text{F}$ OF LOCAL ADJUSTMENT.
- DISPLAY ALL BACNET DATA AVAILABLE ON VFD. PROVIDE VFD WITH BACNET PROTOCOL.
- CONTROLLING SENSOR FOR SF-1-4A.

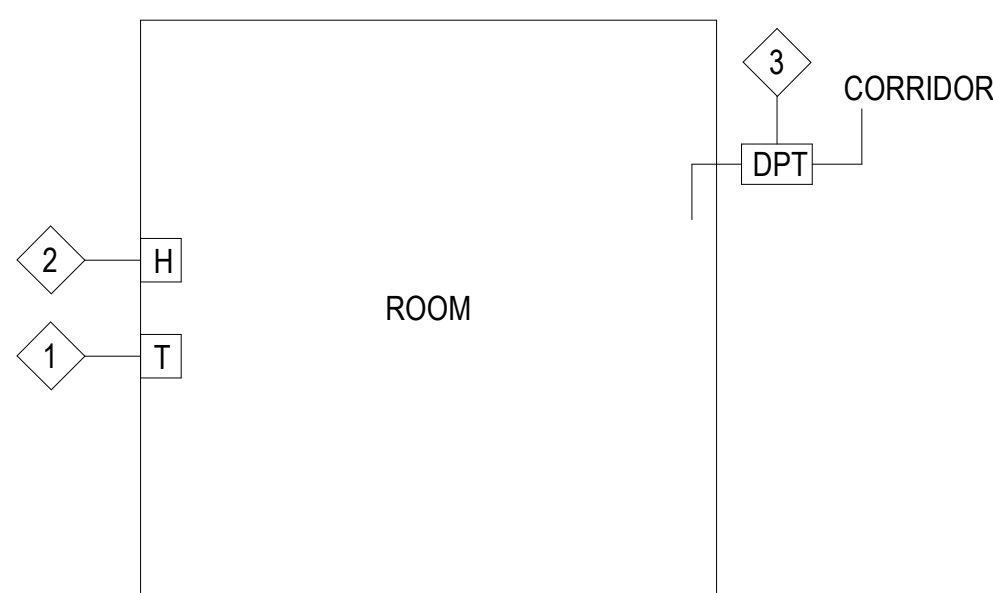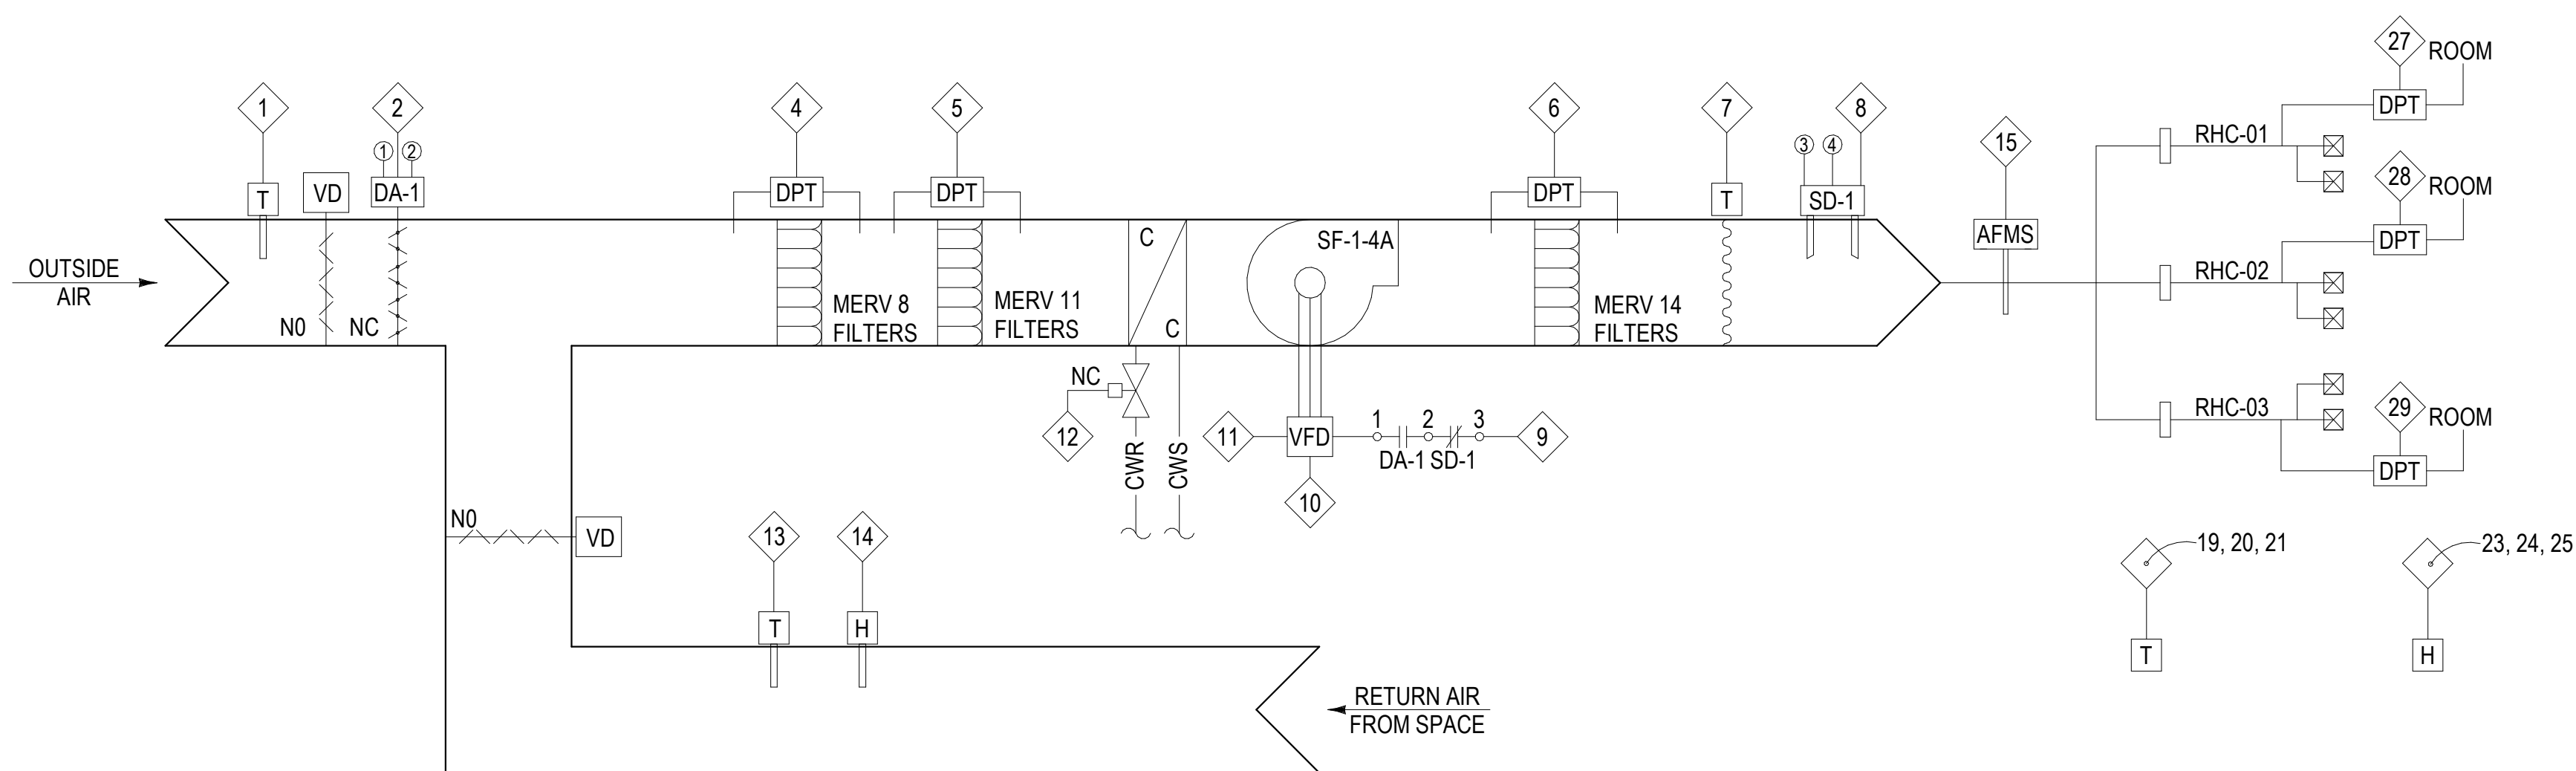

CONTROL POINTS SCHEDULE (PRESSURE/TEMPERATURE MONITORING ONLY)

MARK	TYPE	DESCRIPTION	NOTES
1	AI	ROOM SPACE TEMPERATURE	1:2:3:
2	AI	ROOM RELATIVE HUMIDITY SENSOR	1:2:3:
3	AI	ROOM DIFFERENTIAL PRESSURE SENSOR	1:2:3:
4	SPARE		
5	SPARE		

NOTES:

- SEE FLOOR PLANS FOR LOCATIONS.
- SEE ROOM MONITORING SEQUENCE OF CONTROLS ON SHEET M800.
- LOCAL DISPLAY ON DEVICE.

1 AHU-1-4A CONTROL SCHEMATIC
M801 NOT TO SCALE

2 PRESSURE/TEMPERATURE MONITORING
M801 NOT TO SCALE

REVISIONS:	DATE:


CONSULTANT

ARCHITECT/ENGINEER OF RECORD



590 MEANS ST NW
STE. 200
ATLANTA, GA 30318

STAMP

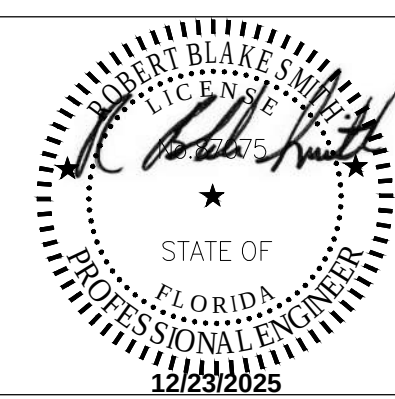

Office of
Construction and
Facilities
Management



U.S. Department of
Veterans Affairs

Drawing Title:
CONTROL SCHEMATIC, SEQUENCE OF
CONTROL, AND CONTROL POINT - MECHANICAL

Approved Project Director

Phase

BID DOCUMENTS

FULLY SPRINKLERED

Project Title:
UPGRADE PHARMACY IV MIXING ROOM
USP 797/800

Location
CAPE CORAL, FLORIDA

Issue Date
12-23-2025

Checked
RBS

Drawn
JSW

Project Number

516-22-112
Building Number
01

Drawing Number

M801

NOTE:


1. NOT ALL ABBREVIATIONS SHOWN WILL BE USED ON THIS PROJECT.

NOTES:

1. ALL EXISTING EQUIPMENT IS SHOWN IN HALFTONE LINEWORK. ALL DEMOLISHED EQUIPMENT IS SHOWN IN BOLD LINEWORK, DASHED AND HATCHED. ALL NEW OR RELOCATED EQUIPMENT IS SHOWN IN BOLD LINEWORK. BELOW IS AN EXAMPLE OF EACH:

 EXISTING EQUIPMENT

 NEW OR RELOCATED EQUIPMENT

 HATCH INDICATES EQUIPMENT TO BE DEMOLISHED

WIRE SIZE FOR ALL 120V, 20A CIRCUITS.
UIO:

FOR ALL ONE-WAY CIRCUITS OF LENGTH OF LESS THAN 75 FT, PROVIDE 2#12 & 1#12G, 3/4"C.

FOR ALL ONE-WAY CIRCUITS OF LENGTH OF LESS THAN 125 FT AND GREATER THAN OR EQUAL TO 75 FT, PROVIDE 2#10 & 1#10G, 3/4"C.

FOR ALL ONE-WAY CIRCUITS OF LENGTH OF LESS THAN 190 FT AND GREATER THAN OR EQUAL TO 125 FT, PROVIDE 2#8 & 1#8G, 3/4"C.

FOR ALL ONE-WAY CIRCUITS OF LENGTH OF LESS THAN 300 FT AND GREATER THAN OR EQUAL TO 190 FT, PROVIDE 2#6 & 1#6G, 3/4"C.

WIRE SIZE FOR ALL 277V, 20A CIRCUITS.
UIO:

FOR ALL ONE-WAY CIRCUITS OF LENGTH OF LESS THAN 170 FT, PROVIDE 2#12 & 1#12G, 3/4"C.

FOR ALL ONE-WAY CIRCUITS OF LENGTH OF LESS THAN 280 FT AND GREATER THAN OR EQUAL TO 170 FT, PROVIDE 2#10 & 1#10G, 3/4"C.

FOR ALL ONE-WAY CIRCUITS OF LENGTH OF LESS THAN 440 FT AND GREATER THAN OR EQUAL TO 280 FT, PROVIDE 2#8 & 1#8G, 3/4"C.

FOR ALL ONE-WAY CIRCUITS OF LENGTH OF LESS THAN 700 FT AND GREATER THAN OR EQUAL TO 440 FT, PROVIDE 2#6 & 1#6G, 3/4"C.

ELECTRICAL GENERAL NOTES:

- THE WORK SHALL CONFORM WITH ALL REQUIREMENTS OF:
A. NFPA 70-2023 (NATIONAL ELECTRICAL CODE)
B. ANSI C2-2023 (NATIONAL ELECTRICAL SAFETY CODE)
C. APPLICABLE LOCAL CODES AND FEDERAL AND STATE LAWS.
- MINIMUM RACEWAY SIZE SHALL BE 3/4". INCREASE RACEWAY SIZE AS REQUIRED TO LIMIT RACEWAY FILL RATIO TO LESS THAN 40% FULL.
- CONTRACTOR SHALL CAREFULLY COORDINATE WORK WITH OTHER TRADES THROUGH THE GENERAL CONTRACTOR AND SHALL BE RESPONSIBLE FOR SECURING SPACE REQUIREMENTS FOR ELECTRICAL EQUIPMENT CLEARANCE FOR RECESSED LUMINAIRES AND CORRECT ROUGH-IN LOCATIONS OF ELECTRICAL CONNECTIONS.
- CONTRACTOR SHALL BE RESPONSIBLE FOR VERIFYING CATALOG NUMBERS ON THESE DRAWINGS TO MATCH WITH MATERIAL DESCRIPTIONS INDICATED.
- VERIFY EXACT HEIGHT OF EACH COUNTERTOP AND BACKSPLASH ON ARCHITECTURAL DETAILS AND/OR CASE WORK SHOP DRAWINGS AND ADJUST SPECIFIED MOUNTING HEIGHT OF WALL OUTLETS TO LOCATE BOTTOM OF OUTLET BOX 4" ABOVE TOP OF BACKSPLASH. IF NO BACKSPLASH IS USED, LOCATE BOTTOM OF OUTLET BOX 6" ABOVE COUNTERTOP.
- VERIFY DOOR SWINGS WITH ARCHITECTURAL DRAWINGS BEFORE ROUGHING IN WALL SWITCHES. SWITCHES IN THE SAME LOCATION SHALL BE GANGED TOGETHER IN ONE COMMON BACKBOX AND SHALL HAVE ONE COMMON FACE PLATE.
- ALL FEEDERS AND BRANCH CIRCUITS SHALL INCLUDE A GREEN INSULATED GROUND CONDUCTOR, SIZE PER NATIONAL ELECTRICAL CODE, OR AS SHOWN, CONNECTED TO EACH DEVICE AND OUTLET BOX ON THE CIRCUIT AND TO THE PANELBOARD GROUND BUS. PROVIDE A DEDICATED NEUTRAL CONDUCTOR FOR EACH BRANCH CIRCUIT. MULTIPLE BRANCH CIRCUITS IN ONE RACEWAY REQUIRE ONLY ONE GROUND CONDUCTOR.
- VERIFY LUMINAIRE, CEILING MOUNTED OCCUPANCY SENSOR LOCATIONS WITH ARCHITECTURAL REFLECTED CEILING PLANS FOR EXACT LOCATIONS AND DIMENSIONS PRIOR TO INSTALLATION. VERIFY EXACT LOCATIONS OF MOTORS AND EQUIPMENT BEFORE ROUGHING-IN.
- EXISTING ELECTRICAL WORK (NOT SHOWN) SHALL REMAIN, UNLESS INDICATED OTHERWISE. SHOULD ANY EXISTING ELECTRICAL POWER, LIGHTING OR AUXILIARY CIRCUIT, FEEDER OR EQUIPMENT BE SEVERED, DISCONNECTED OR DELETED IN THE PROCESS OF CONSTRUCTION OR REMODELING WHICH IS DONE AS A RESULT OF CONTRACT PLANS AND SPECIFICATIONS, AND UNLESS SPECIFICALLY DESIGNATED BY THE DRAWINGS TO BE DELETED, THEN SAID CIRCUIT OR FEEDER SHALL BE RESTORED TO WORKING CONDITION. THE RESTORATION SHALL INCLUDE RE-ROUTING, RELOCATION, RECONNECTION OR REPLACEMENT AS MAY BE REQUIRED BY THE NEW WORK. ANY SUCH WORK REQUIRED SHALL BE INCLUDED IN THE CONTRACT AND NO EXTRA COMPENSATION WILL BE GRANTED.
- NEW WORK SHALL BE MADE TO TIE INTO THE EXISTING IN A UNIFORM MANNER. SIMILAR ITEMS OF NEW WORK SHALL BE CHECKED AGAINST EXISTING WORK FOR TYPE MOUNTING, MOUNTING HEIGHTS, ETC. ITEMS SHOWN IN NEW WORK AT VARIANCE FROM THE EXISTING SHALL BE REFERRED TO THE ARCHITECT FOR DECISION BEFORE ROUGH-IN.
- PROVIDE IS AN INCLUSIVE TERM USED TO DESCRIBE ASPECTS OF THE WORK TO BE ACCOMPLISHED, AND IS HEREBY DEFINED TO REQUIRE TO STORE, FURNISH, INSTALL, MOUNT, CONNECT, CONTROL AND POWER EQUIPMENT INDICATED, AS WELL AS ALL APPURTENANCES REQUIRED TO MAKE ELECTRICAL SYSTEMS OPERATE AS INDICATED WITHIN THESE DRAWINGS AND SPECIFICATIONS AND TO FULFILL THE SCOPE OF WORK.
- DEMOLISH IS AN INCLUSIVE TERM USED TO DESCRIBE ASPECTS OF THE WORK TO BE ACCOMPLISHED, AND IS HEREBY DEFINED TO REQUIRE CONTRACTOR TO DISCONNECT EQUIPMENT FROM ALL CONNECTIONS, REMOVE FROM THE OWNER'S SITE, AND DISPOSE OF IN ACCORDANCE WITH FEDERAL, STATE AND LOCAL LAWS AND ORDINANCES. COST OF DISPOSAL IS ENTIRELY THE CONTRACTOR'S RESPONSIBILITY.
- ALL CONDUCTORS ARE COPPER.
- CONTRACTOR SHALL FIELD VERIFY ALL EXISTING CONDITIONS, DIMENSIONS AND ELEVATIONS BEFORE PROCUREMENT OF ANY MATERIALS AND DEVELOPMENT OF ANY SHOP DRAWINGS OR SUBMITTALS.
- PROVIDE LABELS ON ALL RECEPTACLES, WALL MOUNTED LIGHT SWITCHES/OCCUPANCY SENSORS AND JUNCTION BOXES INDICATING THE SOURCE PANEL & CIRCUIT(S). TEXT SHALL BE BLACK, 1/8" IN HEIGHT PRINTED ON A CLEAR LABEL. HANDWRITTEN LABELS ARE NOT PERMITTED EXCEPT FOR JUNCTION BOXES LOCATED ABOVE FINISHED CEILING WHICH CAN BE HANDWRITTEN WITH AN INDELIBLE MARKER.
- ALL EQUIPMENT PADS FOR INTERIOR ELECTRICAL EQUIPMENT SHALL EXTEND 2" BEYOND THE FOOTPRINT OF THE EQUIPMENT.

ELECTRICAL DEMOLITION NOTES:

- ELECTRICAL CONNECTIONS TO HVAC EQUIPMENT SHALL BE DEMOLISHED, COORDINATE EXACT LOCATIONS WITH MECHANICAL DRAWINGS.
- ELECTRICAL WORK REQUIRING INTERRUPTION OF ELECTRICAL POWER WHICH WOULD ADVERSELY AFFECT THE NORMAL OPERATION OF OTHER PORTIONS OF THE FACILITY, SHALL BE DONE AT OTHER THAN NORMAL WORKING HOURS. COORDINATE ANY OUTAGES WITH VA.

ELECTRICAL ABBREVIATIONS

A OR AMP	AMPERE(S)	HWRP	HOT WATER RECIRCULATION PUMP
ACC	AIR COOLED CHILLER	HWSP	HEATING WATER SUPPLY PUMP IN A PRIMARY-SECONDARY SYSTEM
AC	ALTERNATING CURRENT		
AC	AIR COMPRESSOR / AIR CURTAIN	HWUH	HOT WATER UNIT HEATER
AF	AMP FRAME	HZ	HERTZ
AFF	ABOVE FINISHED FLOOR	IDS	INTRUSION DETECTION SYSTEM
AFG	ABOVE FINISHED GRADE	IMC	INTERMEDIATE METAL CONDUIT
AHU	AIR HANDLING UNIT	IRH	INFRARED HEATER
AIC	AMPERE INTERRUPTING CAPACITY	J OR JB	JUNCTION BOX
AL	ALUMINUM	K	KILO
AM	AMMETER	KAIC	THOUSAND AMPERE INTERRUPTING CAPACITY
ASYM	ASYMMETRICAL	KCM	THOUSAND OF CIRCULAR MILS
AT	AMP TRIP	KEF	KITCHEN EXHAUST FAN
ATS	AUTOMATIC TRANSFER SWITCH	KH	KITCHEN HOOD
AUTO	AUTOMATIC	KV	KILOVOLT
AWG	AMERICAN WIRE GAUGE	KVA	KILOVOLT-AMPERES
B	BOILER	KW	KILOWATT
BC	BRANCH CONTROLLER	KWHR	KILOWATT-HOUR
BCW	BARE COPPER WIRE	L	LENGTH
BFF	BELOW FINISHED FLOOR	LA	LIGHTNING ARRESTOR
BFG	BELOW FINISHED GRADE	LAN	LOCAL AREA NETWORK
BLDG	BUILDING	LAV	LAVATORY
C	CONDUIT	LTG	LIGHTING
CAT	CATEGORY	MAU	MAKE-UP AIR UNIT
CB	CIRCUIT BREAKER	MAX	MAXIMUM
CCT	CLOSED COLOR OR TEMPERATURE	MCA	MINIMUM CIRCUIT AMPACITY
CCTV	CLOSED CIRCUIT TELEVISION	MCB or MB	MAIN CIRCUIT BREAKER
CFCI	CONTRACTOR FURNISHED CONTRACTOR INSTALLED	MCC	MOTOR CONTROL CENTER
CH	CHILLER	MGB	MAIN GROUND BAR
CHWCP	CHILLED WATER CIRCULATING PUMP IN A PRIMARY-SECONDARY SYSTEM	MH	MANHOLE or MOUNTING HEIGHT
CHWP	CHILLED WATER PUMP	MIN	MINIMUM
CHWSP	CHILLED WATER SUPPLY PUMP IN A PRIMARY-SECONDARY SYSTEM	MLO	MAIN LUGS ONLY
		MT or MTD	MOTOR OPERATED DAMPER
		MRS	MOUNT or MOUNTED
CKT	CIRCUIT	N	MOTOR RATED SWITCH
CMH	COMMUNICATIONS MANHOLE	NEC	NEUTRAL
CP	CONDENSATE PUMP	NEMA	NATIONAL ELECTRICAL CODE
CPT	CONTROL POWER TRANSFORMER		NATIONAL ELECTRICAL MANUFACTURER'S ASSOCIATION
CRAC	COMPUTER ROOM AC UNIT	NFPA	NATIONAL FIRE PROTECTION ASSOCIATION
CRI	COLOR RENDERING INDEX	NCG	NORMALLY CLOSED
CT	CURRENT TRANSFORMER	NESC	NATIONAL ELECTRICAL SAFETY CODE
CT	COOLING TOWER	NL	NIGHT LIGHT
CU	COPPER OR CONDENSING UNIT	NO	NORMALLY OPEN
CWP	CONDENSER WATER PUMP	NTS	NOT TO SCALE
D	DEPTH	P	POLE(S) or PUMP
DF	DIRECT CURRENT	PA	PUBLIC ADDRESS
DH or DUH	DESTRATIFICATION FAN	PDU	POWER DISTRIBUTION UNIT
DHWCP	DUCT HEATERS	PF	POWER FACTOR
DISC	DISCONNECT SWITCH	PH	PHASE
DOAS	DEDICATED OUTSIDE AIR SYSTEM (UNIT)	PIU	VAV TERMINAL UNIT WITH PARALLEL OR SERIES FAN (PRIMARY INDUCTION UNIT)
DPST	DOUBLE POLE SINGLE THROW	PMT	PAD MOUNTED TRANSFORMER
DPDT	DOUBLE POLE DOUBLE THROW	PNL	PANEL OR PANELBOARD
DSCU	DUCTLESS SPLIT CONDENSING UNIT (POWERS THE DSS INDOOR UNIT)	PTC	PACKAGED THRU-WALL AIR CONDITIONER
DSHP	DUCTLESS SPLIT HEAT PUMP (POWERS THE DSS INDOOR UNIT)	PVC	POLYVINYL CHLORIDE
DSS	DUCTLESS SPLIT SYSTEM (INDOOR UNIT)	RECEPT or RECP	RECEPTACLE
DWBP	DOMESTIC WATER BOOSTER PUMP	RF	RETURN FAN
DX	DIRECT EXPANSION (DX) COOLING COIL	RH	RADIANT HEATERS (ELECTRIC)
EC	EMPTY CONDUIT	RMC	RIGID METAL CONDUIT
EF	EXHAUST FAN	RMS	ROOT MEAN SQUARE
ELEC	ELECTRICAL	RTU	ROOF TOP UNIT
EMH	ELECTRICAL MANHOLE	RVNR	REDUCED VOLTAGE NON-REVERSING
EMT	ELECTRICAL METALLIC TUBING	SA	SURGE ARRESTOR
E or EMER	EMERGENCY	SCCR	SHORT CIRCUIT CURRENT RATING
EPA	EFFECTIVE PROJECTED AREA	SD	SMOKE DAMPER
EQUIP	EQUIPMENT	SF	SUPPLY FAN
ERV	ENERGY RECOVERY VENTILATOR	S/N	SOLID NEUTRAL
ERU	ENERGY RECOVERY UNIT	SP	SUMP PUMP
EXIST or EX	EXISTING	SPD	SURGE PROTECTIVE DEVICE
EUH	ELECTRIC UNIT HEATER	SPDT	SINGLE POLE DOUBLE THROW
EXP	EXPLOSION PROOF	SPEC	SPECIFICATIONS
EWC	ELECTRIC WATER COOLER	SPST	SINGLE POLE SINGLE THROW
EWH	ELECTRIC WATER HEATER	SWBD	SWITCHBOARD
F	FUSE	SWGR	SWITCHGEAR
FACP	FIRE ALARM CONTROL PANEL	TMGB	TELECOMMUNICATIONS MAIN GROUNDING BUSBAR
FCU	FAN COIL UNIT	TOL	THERMAL OVERLOAD
FLEX	FLEXIBLE	TP	TWISTED PAIR
FW	FURNISHED WITH EQUIPMENT	TYP	TYPICAL
G OR GND	GROUND	U	URINAL
GFGI	GOVERNMENT FURNISHED GOVERNMENT INSTALLED	UH	UNIT HEATER
GFI	GROUND FAULT INTERRUPTER	UG	UNDERGROUND
GRS	GALVANIZED RIGID STEEL CONDUIT	UIO	UNLESS INDICATED OTHERWISE
GUH	GAS UNIT HEATER	UL	UNDERWRITERS LABORATORY
GW	GAS WATER HEATER	UTP	UNSHIELDED TWISTED PAIR
H or HT	HEIGHT	V	VOLTS
HAC	HEATED AIR CURTAIN	VA	VOLT AMPERES
HOA	HAND-OFF AUTOMATIC	VAV	VAV TERMINAL UNIT
HP	HORSE POWER	VEF	VEHICLE EXHAUST FAN
HP	HEAT PUMP (OUTDOOR PORTION OF SPLIT SYSTEM HEAT PUMP, USE CU FOR STANDARD DX OUTDOOR UNIT)	VM	VOLTMETER
HT	HEAT TRACKING	VRF	VARIABLE REFRIGERANT FLOW SYSTEM
HVU	HEATING/VENTILATING UNIT	W	WATTS or WIRE or WIDTH
HWCP	HEATING WATER CIRCULATING PUMP IN A PRIMARY-SECONDARY SYSTEM	WC	WATER CLOSET
HWP	HEATING WATER SUPPLY IN A PRIMARY-ONLY SYSTEM	WEF	WELDING EXHAUST FAN
		WH	WATER HEATER
		WHD	WATTHOUR DEMAND METER
		WSHP	WATER SOURCE HEAT PUMP
		WP	WEATHERPROOF
		XFMR	TRANSFORMER
		Z	IMPEDANCE

		CONSULTANT	ARCHITECT/ENGINEER OF RECORD	STAMP	Office of Construction and Facilities Management	Drawing Title: ELECTRICAL GENERAL NOTES AND ABBREVIATIONS	Phase BID DOCUMENTS	Project Title: UPGRADE PHARMACY IV MIXING ROOM USP 797/800	Project Number 516-22-112
					590 MEANS ST NW STE. 400 ATLANTA, GA 30318	Approved Project Director	FULLY SPRINKLERED	Location CAPE CORAL, FLORIDA	Building Number 01
REVISIONS:	DATE:				VA U.S. Department of Veterans Affairs			Issue Date 12-23-2025	Checked FAK
								Drawn CTB	E-001

NOTE:
1. NOT ALL SYMBOLS SHOWN WILL BE USED ON THIS PROJECT.

ELECTRICAL LEGEND

LUMINAIRES

	LUMINAIRE AND OUTLET BOX. LETTER INDICATES LUMINAIRE TYPE. SEE LUMINAIRE SCHEDULE.
	LUMINAIRE AND OUTLET BOX WIRED FOR MULTILEVEL SWITCHING, LOWER CASE LETTER INDICATES SWITCHLEG DESTINATION.
	LUMINAIRE AND OUTLET BOX, WITH PROVISIONS FOR EMERGENCY LIGHTING. LETTER INDICATES LUMINAIRE TYPE. SEE LUMINAIRE SCHEDULE.
	WALL MOUNTED LUMINAIRE AND OUTLET BOX. LETTER INDICATES LUMINAIRE TYPE. SEE LUMINAIRE SCHEDULE.
	CEILING OR WALL MOUNTED EXIT SIGN AND OUTLET BOX. PROVIDE NUMBER OF ARROWS AND FACES INDICATED. LETTER INDICATES LUMINAIRE TYPE. SEE LUMINAIRE SCHEDULE. WALL MOUNT AT 96" ABOVE FINISHED FLOOR.
	RECESSED OR PENDANT MOUNTED LUMINAIRE AND OUTLET BOX. LETTER INDICATES LUMINAIRE TYPE. SEE LUMINAIRE SCHEDULE.
	WALL MOUNTED LUMINAIRE AND OUTLET BOX. LETTER INDICATES LUMINAIRE TYPE. SEE LUMINAIRE SCHEDULE.
	CEILING OR WALL MOUNTED LUMINAIRE AND OUTLET BOX WITH PROVISIONS FOR EMERGENCY LIGHTING. LETTER INDICATES LUMINAIRE TYPE. SEE LUMINAIRE SCHEDULE.
	EMERGENCY LIGHT UNIT. LETTER INDICATES LUMINAIRE TYPE. SEE LUMINAIRE SCHEDULE.
	REMOTE HEAD OR FLOOD LUMINAIRE. LETTER INDICATES LUMINAIRE TYPE. SEE LUMINAIRE SCHEDULE.
	WALL WASH DOWNLIGHT. LETTER INDICATES LUMINAIRE TYPE. SEE LUMINAIRE SCHEDULE.
	POLE MOUNTED LUMINAIRE. LETTER INDICATES LUMINAIRE TYPE. SEE LUMINAIRE SCHEDULE.
	POST-TOP OR BOLLARD LUMINAIRE. LETTER INDICATES LUMINAIRE TYPE. SEE LUMINAIRE SCHEDULE.
EQUIPMENT	
	MOTOR, HORSEPOWER AS INDICATED
	MOTORIZED DAMPER
	3-POLE COMBINATION MAGNETIC MOTOR STARTER/ DISCONNECT (NEMA SIZE/ FUSE SIZE/ NEMA ENCLOSURE) NF = NONFUSED
	DISCONNECT SWITCH, (SWITCH AMPS/ FUSE SIZE/ POLES/ NEMA ENCLOSURE) NF = NON-FUSED
	INDIVIDUALLY MOUNTED CIRCUIT BREAKER, (CIRCUIT BREAKER SIZE/ POLES/ NEMA ENCLOSURE)
	DRY TYPE TRANSFORMER, KVA AS INDICATED
	METER
	ELECTRONIC METER
	PANELBOARD, SEE SCHEDULES
	DISTRIBUTION PANELBOARD, SEE SCHEDULES
	EQUIPMENT AS INDICATED
	CEILING OR WALL MOUNTED JUNCTION BOX
	PULL OR JUNCTION BOX
	CEILING MOUNTED BLUE LIGHT SYSTEM ROTATING BEACON
	WHITE NOISE PLENUM SPEAKER; MOUNT ABOVE DROP CEILING
	BLUE LIGHT LOCAL CONTROL SWITCH; MOUNT 48" ABOVE FINISHED FLOOR, UNLESS INDICATED OTHERWISE
	WHITE NOISE ROTARY VOLUME CONTROL; MOUNT 48" ABOVE FINISHED FLOOR, UNLESS INDICATED OTHERWISE.

WIRING DEVICES

	SIMPLEX RECEPTACLE NEMA 5-20R, MOUNT 18" ABOVE FINISHED FLOOR, UNLESS INDICATED OTHERWISE.
	DUPLEX RECEPTACLE NEMA 5-20R, MOUNT 18" ABOVE FINISHED FLOOR, UNLESS INDICATED OTHERWISE
	DUPLEX RECEPTACLE, NEMA 5-20R, MOUNT 48" ABOVE FINISHED FLOOR OR ABOVE COUNTER TOP/BACKSPLASH
	DUPLEX GFI RECEPTACLE NEMA 5-20R, MOUNT 18" ABOVE FINISHED FLOOR, UNLESS INDICATED OTHERWISE
	DUPLEX GFI RECEPTACLE NEMA 5-20R, MOUNT 48" ABOVE FINISHED FLOOR OR ABOVE COUNTER TOP/BACKSPLASH
	DOUBLE-DUPLEX RECEPTACLE NEMA 5-20R, MOUNT 18" ABOVE FINISHED FLOOR, UNLESS INDICATED OTHERWISE
	SWITCHED DUPLEX RECEPTACLE NEMA 5-20R, MOUNT 18" ABOVE FINISHED FLOOR, UNLESS INDICATED OTHERWISE
	SWITCHED DUPLEX RECEPTACLE NEMA 5-20R, MOUNT 48" ABOVE FINISHED FLOOR OR ABOVE COUNTER TOP/BACKSPLASH
	SWITCHED DUPLEX GFI RECEPTACLE NEMA 5-20R, MOUNT 18" ABOVE FINISHED FLOOR, UNLESS INDICATED OTHERWISE
	SWITCHED DUPLEX GFI RECEPTACLE NEMA 5-20R, MOUNT 48" ABOVE FINISHED FLOOR OR ABOVE COUNTER TOP/BACKSPLASH
	DOUBLE-DUPLEX GFI RECEPTACLE, NEMA 5-20R, MOUNTED CONCEALED BEHIND ELECTRIC WATER COOLER
	FLOOR BOX WITH DUPLEX RECEPTACLE NEMA 5-20R, PROVIDE FIRE RATED POKE THRU DEVICES ON ALL FLOORS ABOVE GROUND LEVEL.
	SPECIAL RECEPTACLE, NEMA TYPE AS INDICATED, MOUNT 18" ABOVE FINISHED FLOOR, UNLESS INDICATED OTHERWISE
	CEILING BOX WITH DUPLEX RECEPTACLE, NEMA 5-20R
RECEPTACLE SUBSCRIPTS	
	WP = IN-USE WEATHER PROOF TR = TAMPER RESISTANT TV = TELEVISION, MOUNT AT 60" ABOVE FINISHED FLOOR AFCI = ARC FAULT CIRCUIT INTERRUPTER
	FLOOR BOX SUITABLE FOR CONCRETE FLOOR POUR; TWO COMPARTMENTS - POWER AND TELECOMMUNICATIONS; FLUSH COVER/FLANGE WITH HINGED ACCESS TO RECEPTACLES AND JACKS RECESSED BELOW COVER IN FLOOR BOX. PROVIDE 8" FIRE RATED POKE THRU ABOVE GROUND FLOOR.
	WALL SWITCH, AC TYPE, SPST, MOUNT 48" ABOVE FINISHED FLOOR
	WALL SWITCH, AC TYPE, DPDT, MOUNT 48" ABOVE FINISHED FLOOR
	3-WAY WALL SWITCH, MOUNT 48" ABOVE FINISHED FLOOR
	4-WAY WALL SWITCH, MOUNT 48" ABOVE FINISHED FLOOR
	SLIDE DIMMER, MOUNT 48" ABOVE FINISHED FLOOR
	MOTOR RATED DISCONNECT SWITCH WITH THERMAL OVERLOADS. SINGLE POLE SINGLE THROW, MOUNT ON UNIT, UNLESS INDICATED OTHERWISE.
	WALL MOUNTED, DUAL TECHNOLOGY VACANCY SWITCH, MOUNT 48" ABOVE FINISHED FLOOR
	WALL MOUNTED, DUAL TECHNOLOGY OCCUPANCY SWITCH, MOUNT 48" ABOVE FINISHED FLOOR

WIRING DEVICES

	LOW VOLTAGE ON/OFF WALL SWITCH, WALL MOUNT 48" ABOVE FINISHED FLOOR. PROVIDE DIMMER CONTROL WITH DIMMABLE FIXTURES INTEGRAL WITH SWITCH.
	CEILING MOUNTED DUAL TECHNOLOGY OCCUPANCY SENSOR
	CEILING MOUNTED DUAL TECHNOLOGY VACANCY SENSOR
	CEILING MOUNTED DAYLIGHT SENSOR
	PHOTOELECTRIC CELL
WIRING	
	CIRCUIT HOMERUN TO PANELBOARD. LA-1,3,5 ADJACENT TO ARROW INDICATES HOMERUN OF CIRCUITS, 1,3,5 TO PANEL LA. MARKS ACROSS RACEWAY INDICATE THE NUMBER OF PHASE CONDUCTORS AND NEUTRAL IN RACEWAY. GROUND CONDUCTORS ARE INDICATED BY LONGER HASHMARKS. NO MARKS ACROSS RACEWAY INDICATES 2#12 CONDUCTORS AND 1 #12 GROUND CONDUCTOR. CONDUCTOR SIZE # 12 UNLESS INDICATED OTHERWISE. MINIMUM RACEWAY SIZE SHALL BE 3/4"
	RACEWAY EXPOSED TO VIEW
	CONCEALED RACEWAY, LOCATED IN WALL OR ABOVE FINISHED CEILING
	UNDERGROUND RACEWAY, LOCATED BELOW GRADE OR CONCRETE SLAB
	FLEXIBLE RACEWAY
	RACEWAY TURNED TOWARD VIEWER
	RACEWAY TURNED AWAY FROM VIEWER
	RACEWAY TERMINATION, STUB-OUT AND CAP
	PLUG-IN BUSWAY, UNLESS INDICATED OTHERWISE
	SURFACE METAL RACEWAY OR MULTIOUTLET ASSEMBLY AS INDICATED
	LADDER TYPE CABLE TRAY (SIZE AS INDICATED ON PLAN)
	DUCTBANK, TEXT INDICATES QUANTITY AND SIZE OF DUCTS (I.E. 2W4" = TWO 4" DUCTS)

LIGHTNING PROTECTION

	3/4" x 10'-0" COPPERCLAD GROUND ROD, 18" BFG
	GROUND ROD TEST WELL
	BARE COPPER GROUND CONDUCTOR, 1/0 UNLESS INDICATED OTHERWISE.
	4/0 BARE COPPER GROUND CONDUCTOR
	LIGHTNING PROTECTION SYSTEM AIR TERMINAL
	LIGHTNING PROTECTION ROOF CONDUCTOR
	ELECTRICAL CONNECTION
SITE	
	ELECTRICAL MANHOLE
	ELECTRICAL HANDHOLE
	PAD MOUNTED TRANSFORMER
	POWER POLE
	DOWN GUY AND ANCHOR (QUANTITY AS INDICATED)

ONE-LINE

	TRANSFORMER
	CURRENT TRANSFORMER
	FUSE
	ELECTRICAL CONNECTION
	CIRCUIT BREAKER
	SWITCH
	SURGE ARRESTORS
	SEPARABLE CONNECTION
	DRY TYPE TRANSFORMER, K-4 RATED, KVA AS INDICATED
	GROUND
SCHEMATIC	
	PILOT LIGHT (G=GREEN, R=RED, Y=AMBER)
	CONTROL RELAY COIL
	SHUNT TRIP COIL
	TIME DELAY RELAY COIL
	MOTOR STARTER COIL

REVISIONS:	DATE:

CONSULTANT

ARCHITECT/ENGINEER OF RECORD



STAMP



Office of
Construction and
Facilities
Management



Drawing Title: ELECTRICAL LEGEND
Approved Project Director

Phase BID DOCUMENTS
FULLY SPRINKLERED

Project Title: UPGRADE PHARMACY IV MIXING ROOM USP 797/800
Location CAPE CORAL, FLORIDA
Issue Date 12-23-2025
Checked FAK
Drawn CTB


Project Number 516-22-112
Building Number 01
Drawing Number E-002

SHEET NOTES:

- REFER TO E-001 & E-002 FOR ELECTRICAL GENERAL NOTES, ABBREVIATIONS & LEGEND.
- REFER TO ARCHITECTURE AND MECHANICAL FOR EXACT SCOPE OF DEMOLITION.
- EQUIPMENT AND DEVICES DENOTED "(E)" ARE EXISTING TO REMAIN.


KEYNOTES:

- LIGHTING IN ROOM IS EXISTING TO REMAIN.
- PROVIDE AND INSTALL NEW DATA RECEPTACLE FOR DDC CONTROL MONITORING. CONNECT TO NEAREST DDC CONTROL PANEL SERVING AREA.
- NEW ACCESS CONTROL DOOR LOCATION. CONTRACTOR SHALL PROVIDE AND INSTALL NEW CONTROL PANEL AND TIE NEW DOORS INTO EXISTING ACCESS CONTROL SYSTEM. PROVIDE AND INSTALL NEW 120V, 20A/1P CIRCUIT FROM EXISTING PANEL C1L1A FOR ACCESS CONTROL PANEL.
- NEW LIGHT FIXTURES SHALL BE RECONNECTED TO EXISTING LIGHTING CIRCUIT SERVING AREA. MAINTAIN CIRCUIT CONTINUITY. CONNECT TO EXISTING LIGHTING CONTROLS SERVING AREA.
- CONNECT NEW EGRESS LIGHT FIXTURE TO EXISTING LIFE SAFETY BRANCH CIRCUIT SERVING AREA.
- NEW ACCESS CONTROL PANEL/CONTROLS. CONFIRM LOCATION WITH STATION IT DEPARTMENT
- NEW HVAC CONTROL PANEL FOR NEW HVAC SYSTEM IN PROJECT SCOPE. REFER TO VA DESIGN GUIDE REQUIREMENTS TO BE OPERATIONAL 24/7/365 AND NOUNOCCUPIED SETBACK SETTING ARE ALLOWED. NEW CIRCUIT C1L1B:40 SHALL POWER THE NEW CONTROL PANEL.

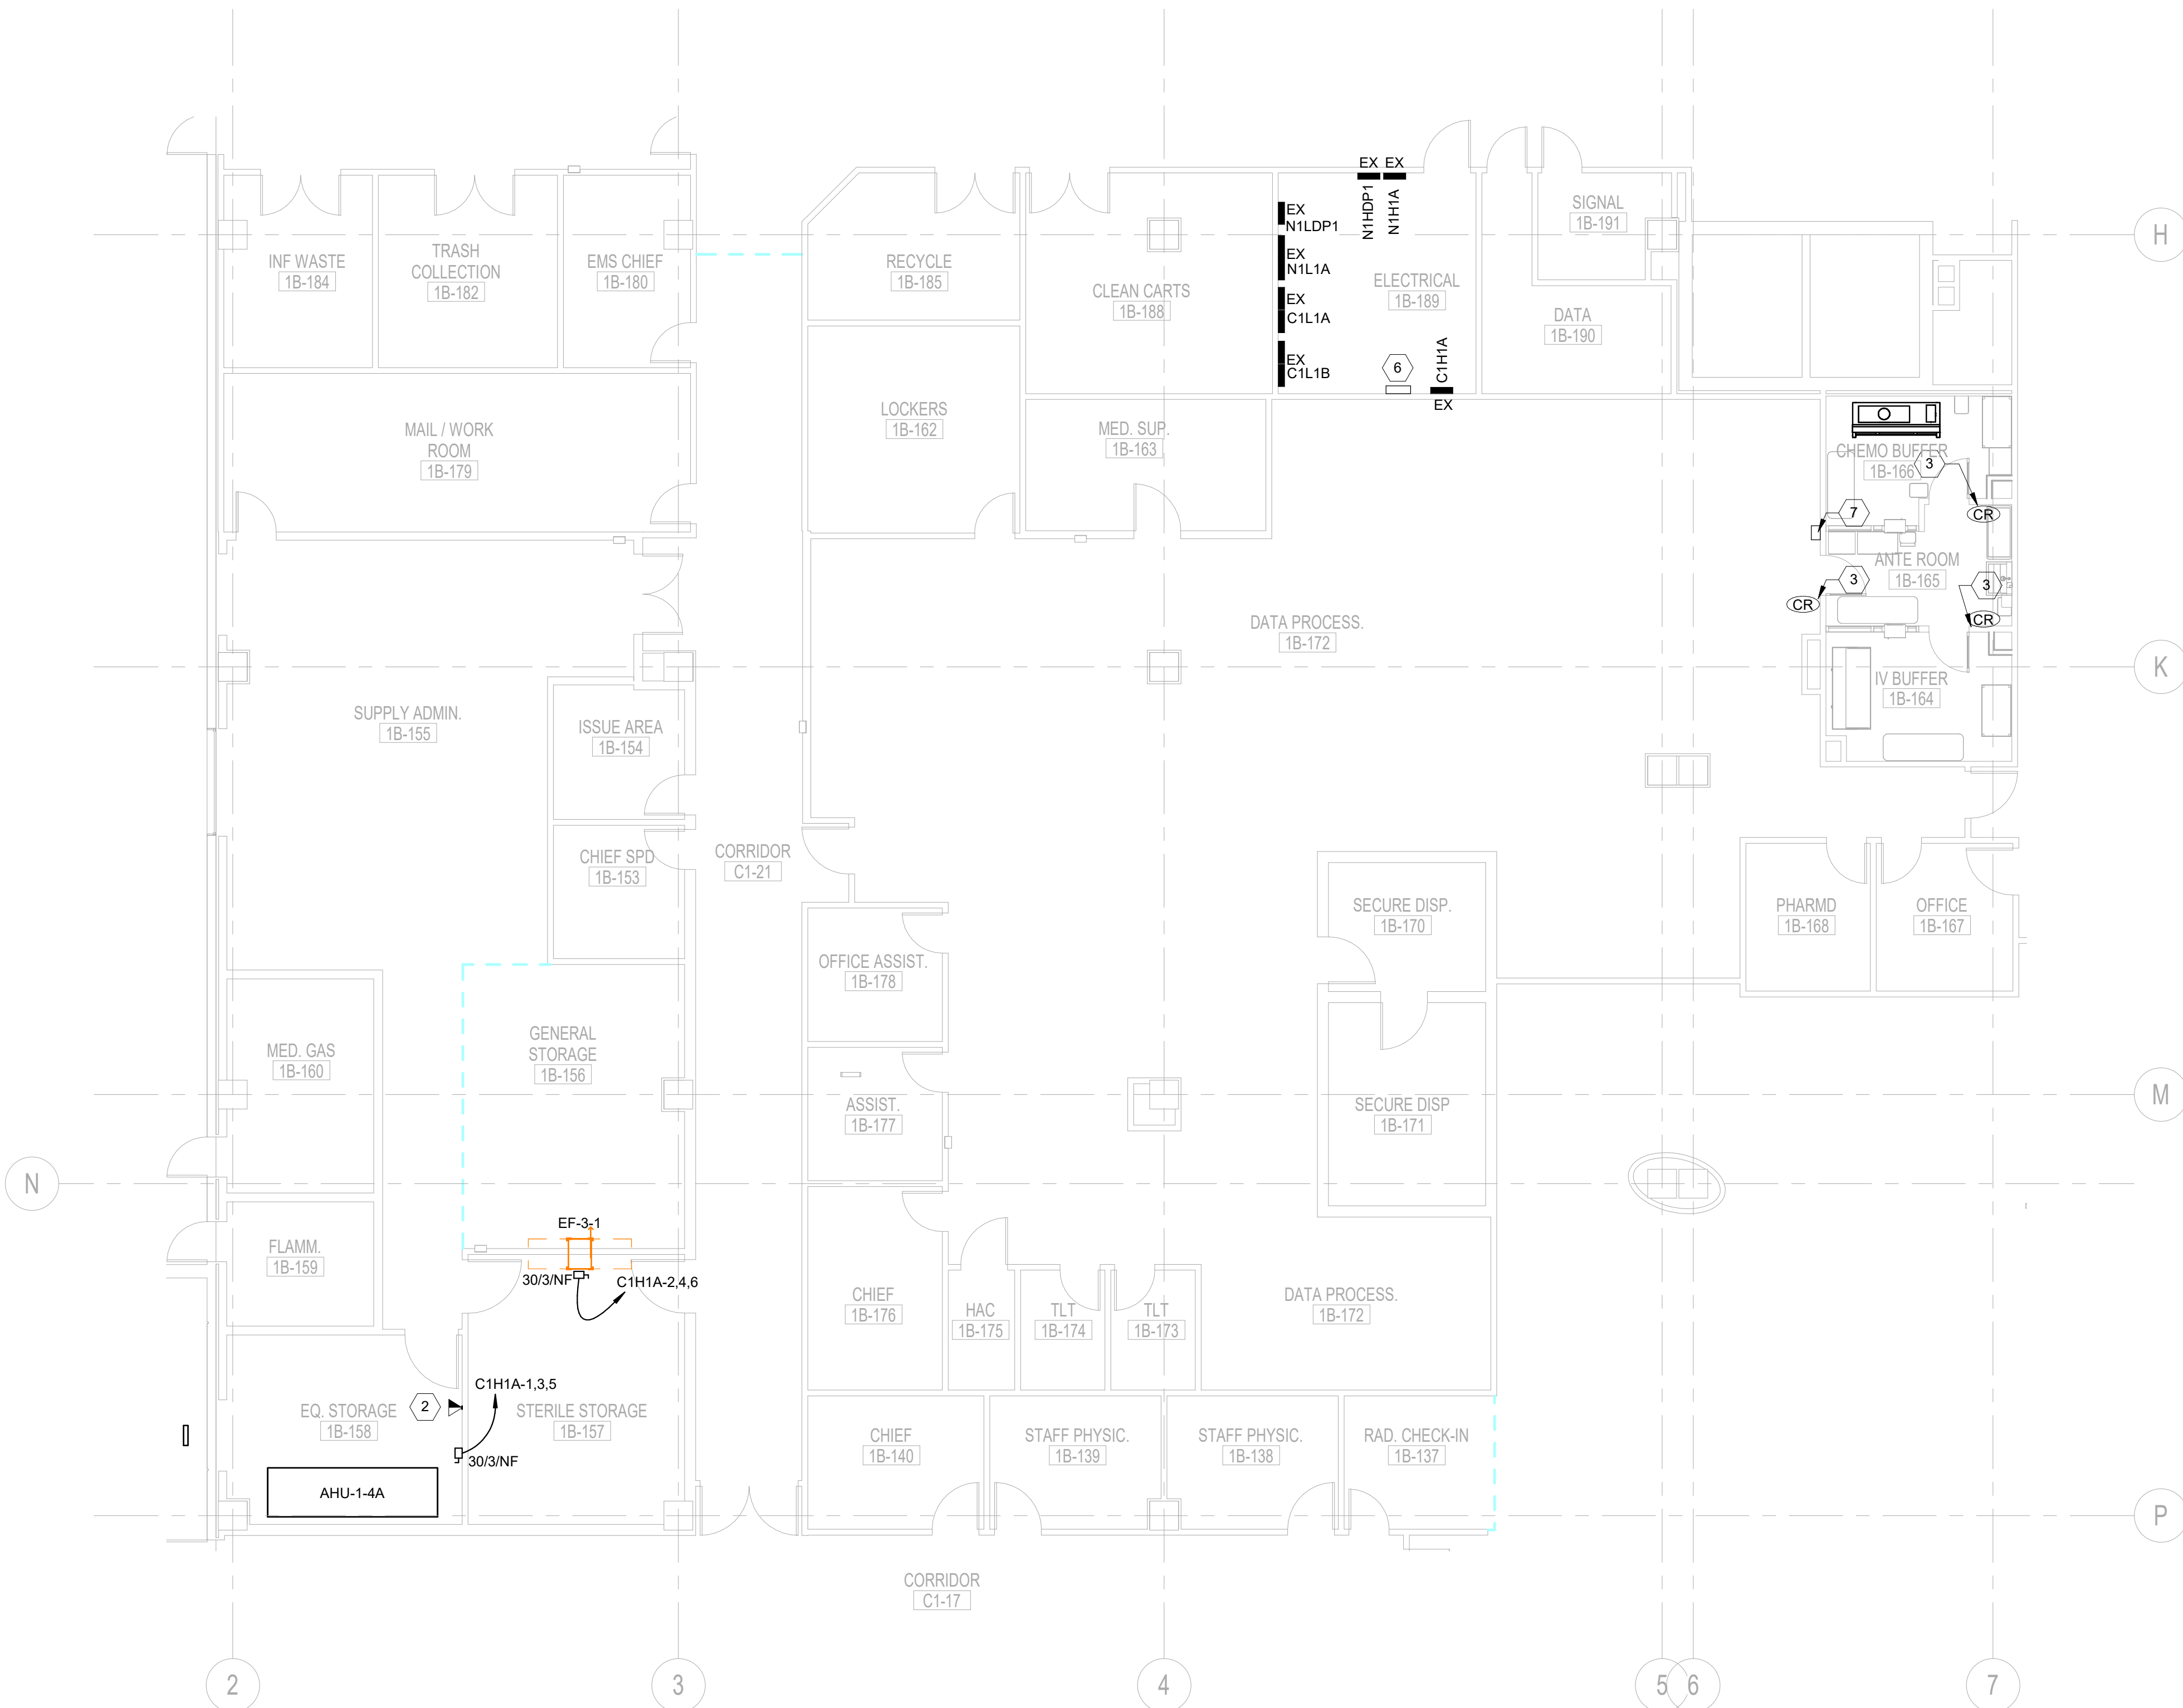


2 NEW ELECTRICAL WORK PLAN

SCALE: 1/8" = 1'-0"

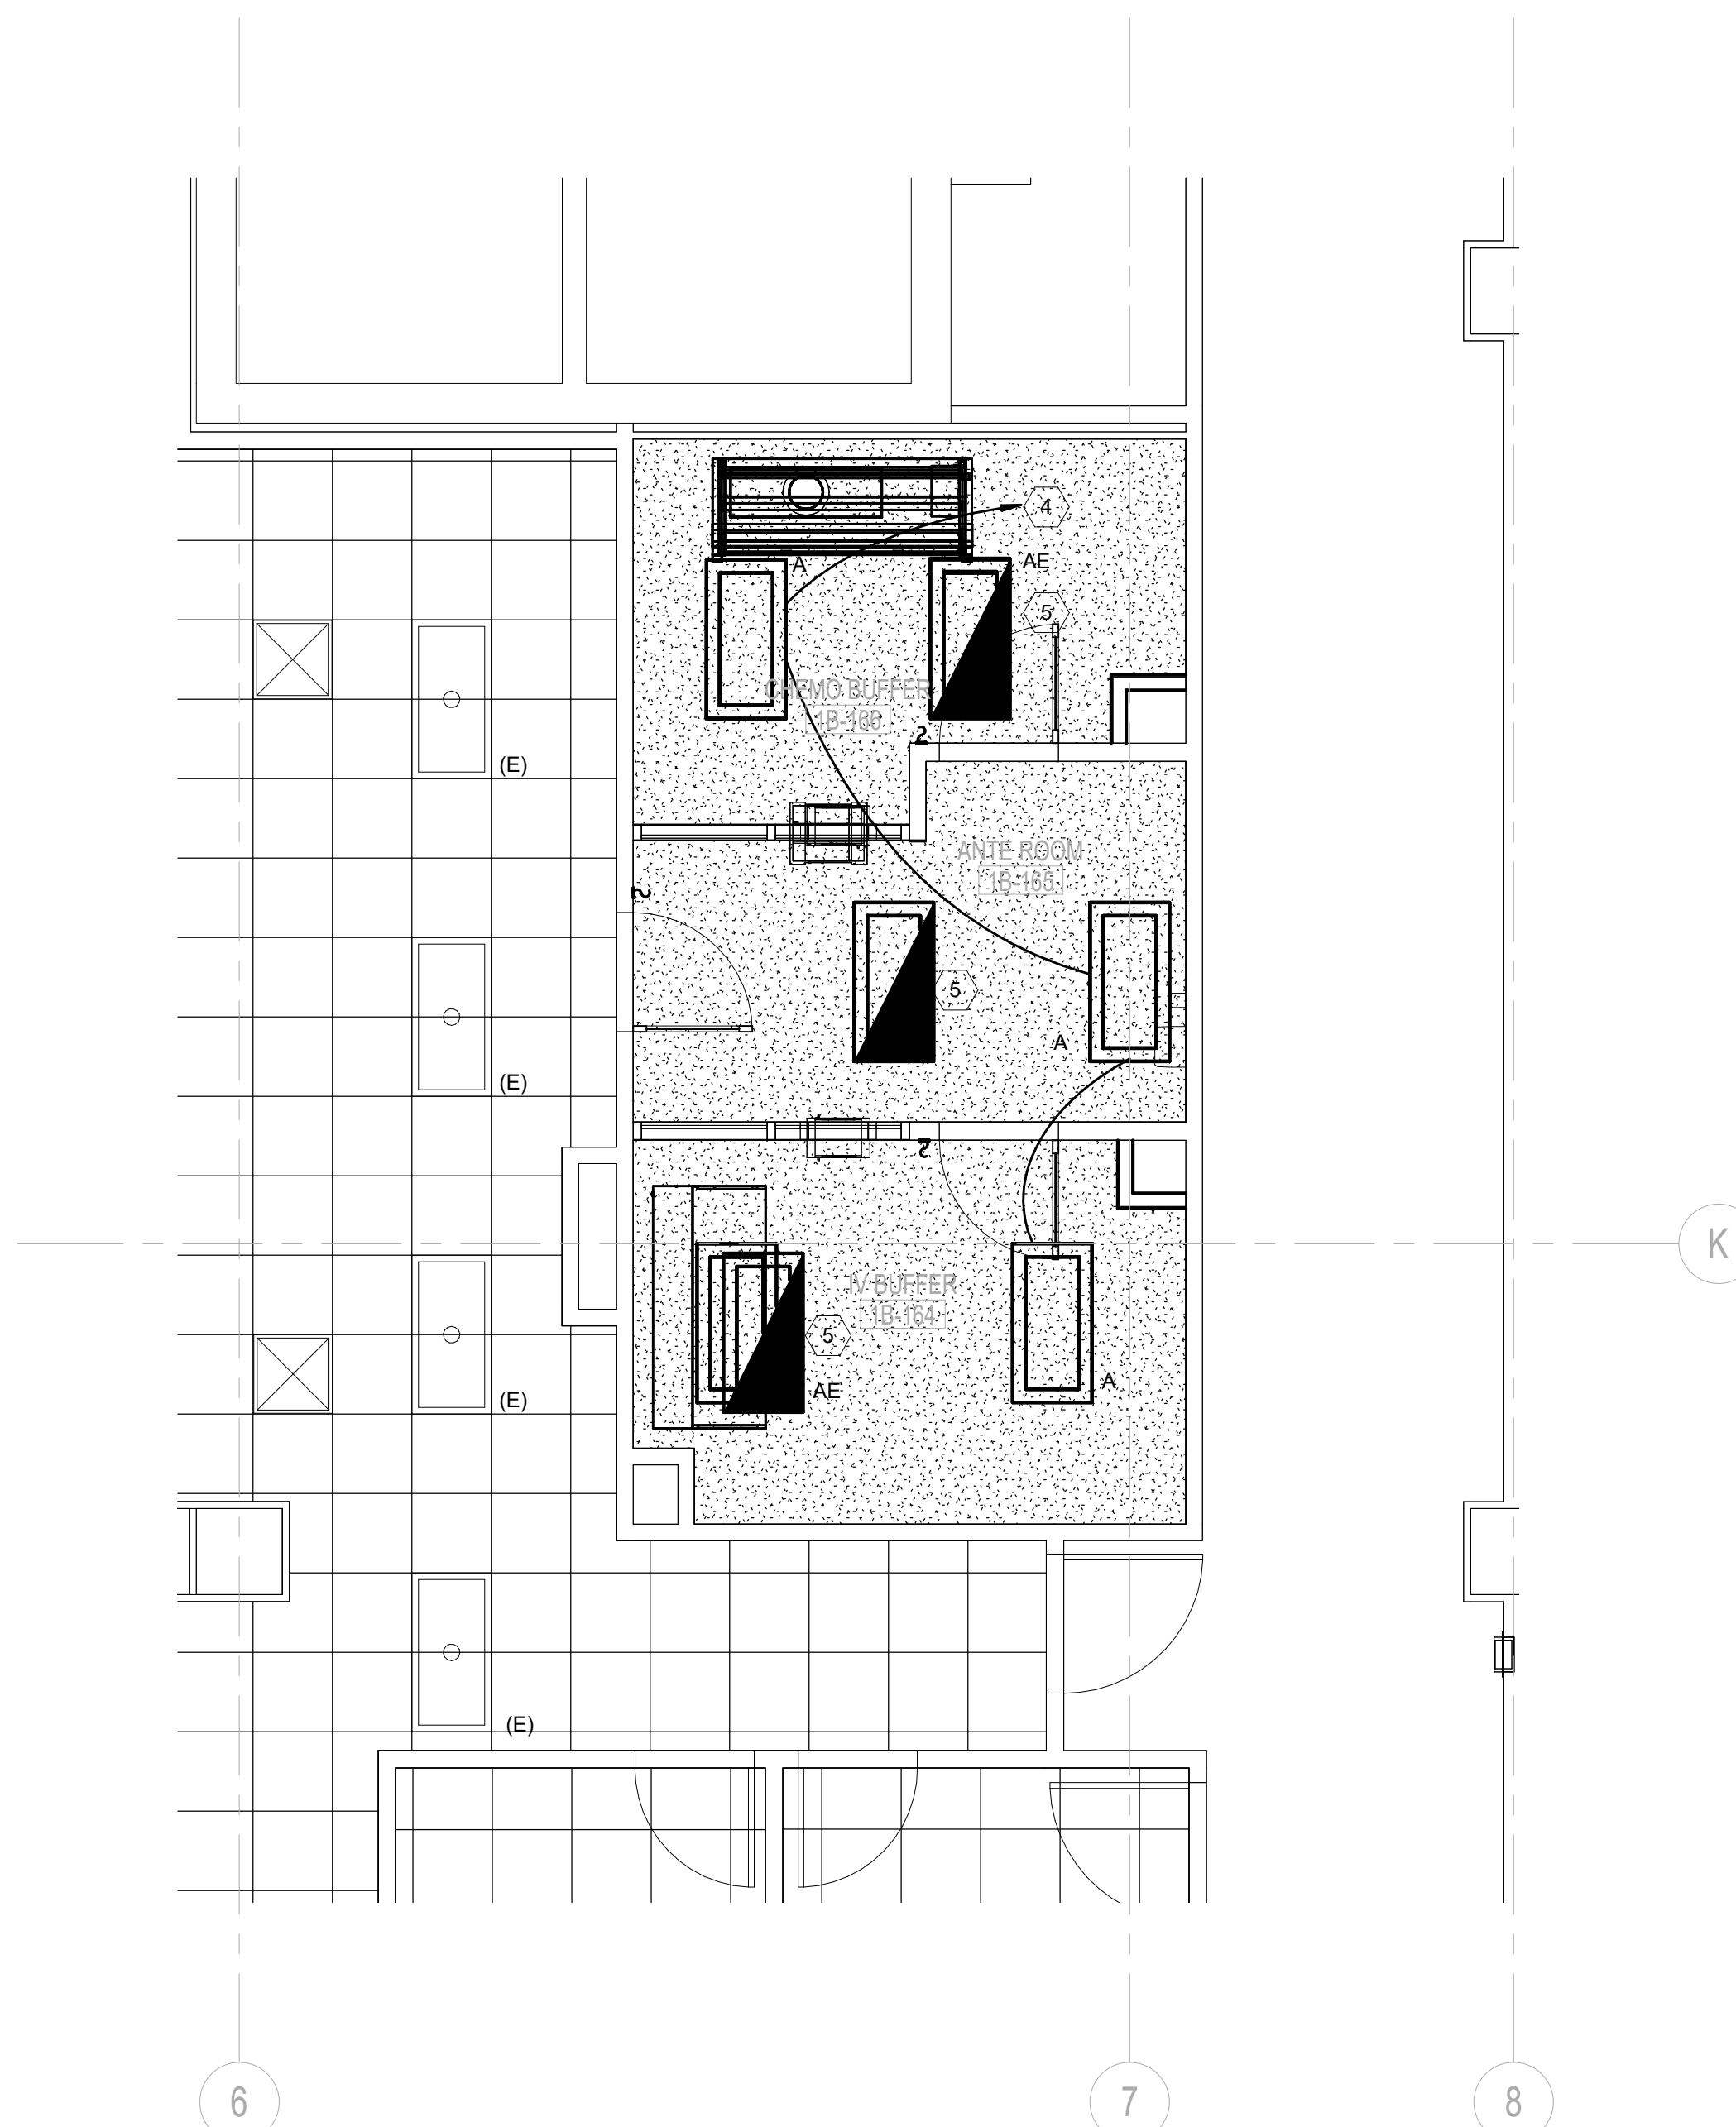


1 ELECTRICAL - NEW RCP PLAN

SCALE: 1/4" = 1'-0"



0' 2' 4' 8' 12' 0' 4' 8' 16' 24'
SCALE: 1/4" = 1' - 0"
SCALE: 1/8" = 1' - 0"

																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					</
--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	----

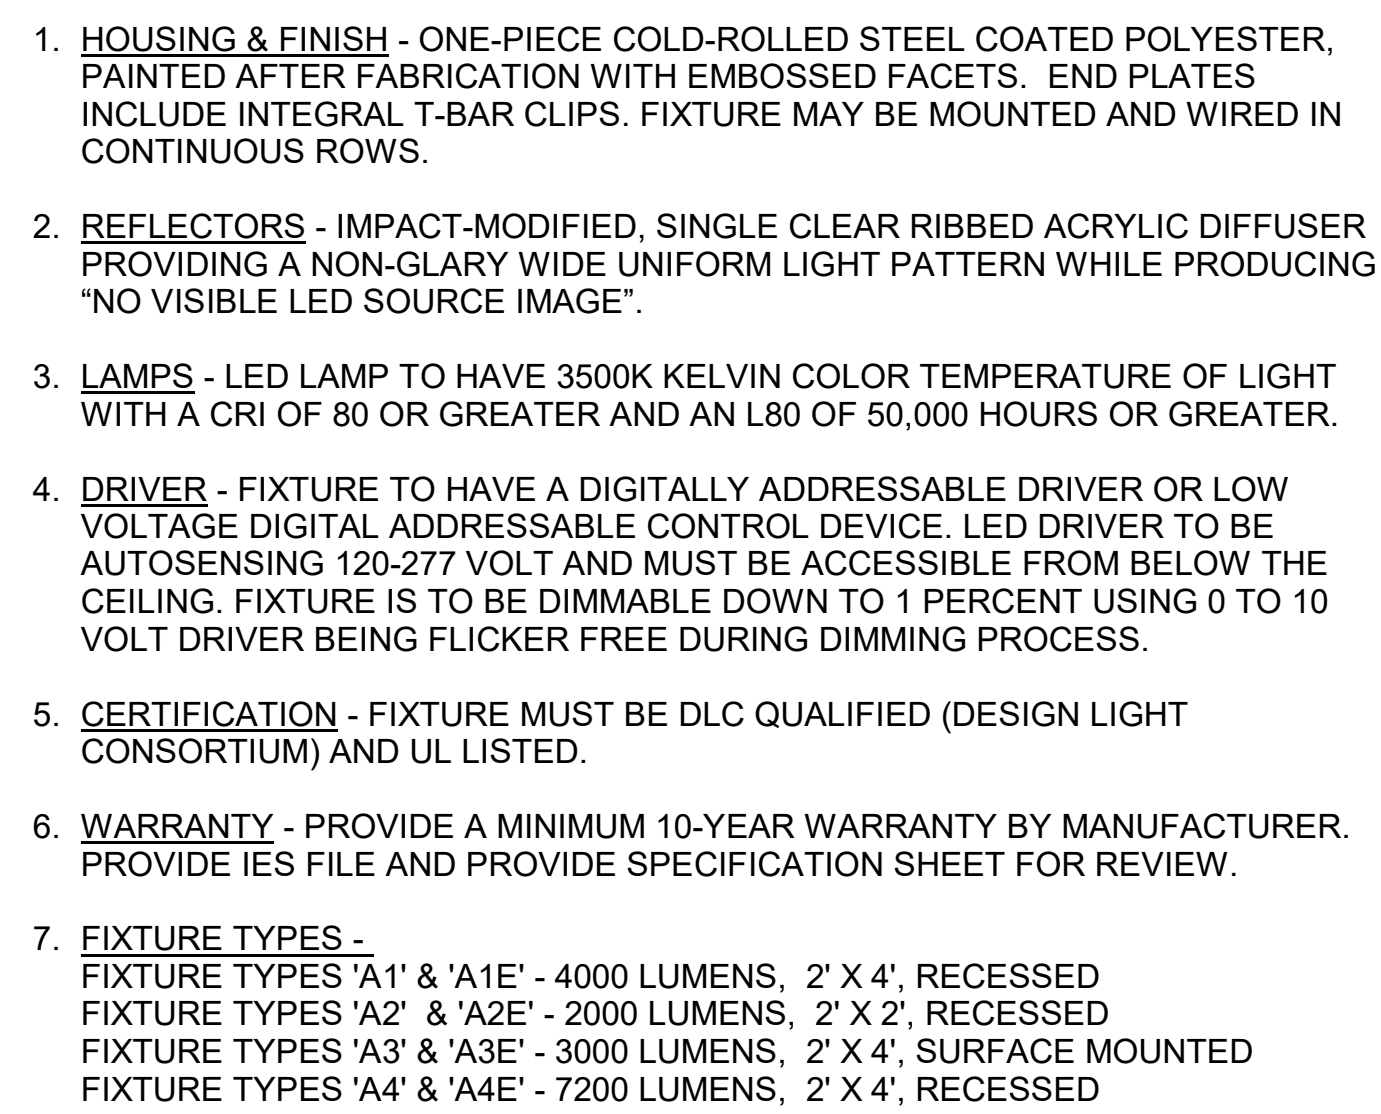

3 ARCH
SCALE: N.T.S.

VA FORM 08-6231

SHEET NOTES:

1. REFER TO E-001 & E-002 FOR ELECTRICAL GENERAL NOTES, ABBREVIATIONS & LEGEND.

PANELBOARD SCHEDULE: C1H1A															
LOCATION: ELECTRICAL 1B-189				MAINS RATING: 225A MCB				MINIMUM BREAKER SCCR:							
SUPPLY FROM:				VOLTAGE: 480Y/277											
MOUNTING: SURFACE				PHASES: 3											
ENCLOSURE: NEMA 1				WIRES: 4											
CONNECTED LOAD KVA															
CKT	CIRCUIT DESCRIPTION	TRIP	POLE	A	B	C	POLE	TRIP	CIRCUIT DESCRIPTION	CKT					
1	AHU-1-4A	20 A	3	2.50	0.33		3	20 A	EF-3-1	2					
-- 3	--	--	--		2.50	0.33	--	--	--	4	--				
-- 5	--	--	--			2.50	0.33	--	--	6	--				
7										8					
9										10					
11										12					
13										14					
15										16					
17										18					
19										20					
21										22					
23										24					
25										26					
27										28					
29										30					
31										32					
33										34					
35										36					
37										38					
39										40					
41										42					
TOTAL LOAD:				2.83	2.83	2.83	TOTAL CONNECTED CURRENT: 10 A								
				TOTAL EST. DESIGN CURRENT: 10 A											
NOTES:															

MECHANICAL EQUIPMENT SCHEDULE											
UNIT NUMBER	UNIT DESCRIPTION	ELEC. CHARACTERISTICS					PANEL/CIRCUIT DESIGNATION	MOC PD	CIRCUIT DESCRIPTION	DISCONNECT SWITCH	NOTES
		KW	HP	FLA	V	PH					
AHU-1-4A	AIR HANDLING UNIT			9.0	480	3	C1H1A:	20A/3P	3#10, 1#10G-3/4"C	30/3/NF	
EF-3-1	EXHAUST FAN		1		480	3	C1H1A:	20A/3P	3#10, 1#10G-3/4"C	30/3/NF	

LIGHT FIXTURE SCHEDULE									
MARK	MANUFACTURER	MODEL NUMBER	FIXTURE	SERIES	LAMP	LAMP QTY	WATTAGE	COLOR TEMP	COMMENTS
A	LITHONIA LIGHTING	2SRTL-F-L48-5000LM-AFL-MVOLT-GZ1-35K-90CRI	2X4 LED CLEAN ROOM TROFFER	2RTL	LED	1	38	3500	OR EQUAL BY OTHER MANUFACTURER
AE	SAME AS TYPE 'A' WITH CONNECTION TO LIFE SAFETY CIRCUIT								

SCHEDULE OF EXISTING PANEL C1L1B											
VOLTAGE: 208 / 120				PHASE: 3				WIRE: 4			
BUS AMPS: 225 A				DEVICE AMPS: 150 A MLO				NEMA: 1			
A.L.C RATING: 10,000 A				MOUNTING: SURFACE							
LOCATION DESCRIPTION		LOAD (KVA)	LOAD TYPE	TRIP POLE	#	PH	#	TRIP POLE	LOAD TYPE	LOAD (KVA)	LOCATION DESCRIPTION
EX REC 1A-116		0.2	B	20/1	1	A	2	20/1	B	0.2	EX REC 1B-109
EX REC 1A-116		0.2	B	20/1	3	B	4	20/1	B	0.4	EX REC 1B-109
EX REC 1A-116		0.2	B	20/1	5	C	6	20/1	B	0.2	EX REC 1B-109
EX REC 1A-116		0.4	B	20/1	7	A	8	20/1	B	0.2	EX REC 1B-109
EX REC 1A-115		0.4	B	20/1	9	B	10	20/1	B	0.4	EX REC 1B-109
EX REC 1A-115		0.4	B	20/1	11	C	12	20/1	B	0.2	EX REC 1B-107
EX REC 1A-115		0.2	B	20/1	13	A	14	20/1	B	0.8	EX REC 1B-107
EX REC 1A-115		0.2	B	20/1	15	B	16	20/1	B	0.8	EX REC 1B-107
EX REC 1A-115		0.4	B	20/1	17	C	18	20/1	B	0.8	EX REC 1B-107
EX REC 1A-115		0.4	B	20/1	19	A	20	20/1	B	0.5	EX REC 1B-107
EX REC 1A-114		0.4	B	20/1	21	B	22	20/1	B		EX SPARE
EX REC 1A-114		0.2	B	20/1	23	C	24	20/1	B		EX SPARE
EX REC 1A-114		0.2	B	20/1	25	A	26	20/1	B		EX SPARE
EX REC 1A-114		0.4	B	20/1	27	B	28	20/1	B		EX SPARE
EX REC 1A-114		0.4	B	20/1	29	C	30	20/1	B		EX SPARE
EX REC 1A-112		0.4	B	20/1	31	A	32	20/1	B		EX SPARE
EX REC 1A-112		0.2	B	20/1	33	B	34	20/1	B		EX SPARE
EX REC 1A-112		0.4	B	20/1	35	C	36	20/1	B		EX SPARE
EX REC 1A-112		0.2	B	20/1	37	A	38	20/1	B		EX SPARE
EX REC 1A-112		0.2	B	20/1	39	B	40	20/1	B	0.5	NEW HVAC CONTROL
Load Type	DESCRIPTION	Conn. KVA	Demand KVA	2023 NEC Reference	Load Type	DESCRIPTION	Conn. KVA	Demand KVA	2023 NEC Reference		
A	Lighting	0.0	0.0	NEC Article 220.43	E	Heating	0.0	0.0	NEC Article 220.60		
B	Receptacles	11.0	10.5	NEC Table 220.44	F	Largest Motor	0.0	0.0	NEC Article 440.7		
C	Kitchen Equipment	0.0	0.0	NEC Table 220.56	G	Other Motors	0.0	0.0	NEC Article 440.7		
D	Air-Conditioning	0.0	0.0	NEC Article 440.32	H	Other Loads	0.0	0.0			
Phase A Connected Load		3.7 KVA	Notes: FIELD VERIFY CIRCUITS BREAKERS IN FIELD		TOTAL CONNECTED LOAD		11.0 KVA	30.5	AMPS		
Phase B Connected Load		4.1 KVA			TOTAL DEMAND LOAD		10.5 KVA	29.1	AMPS		
Phase C Connected Load		3.2 KVA									

																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																								</
--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	----