


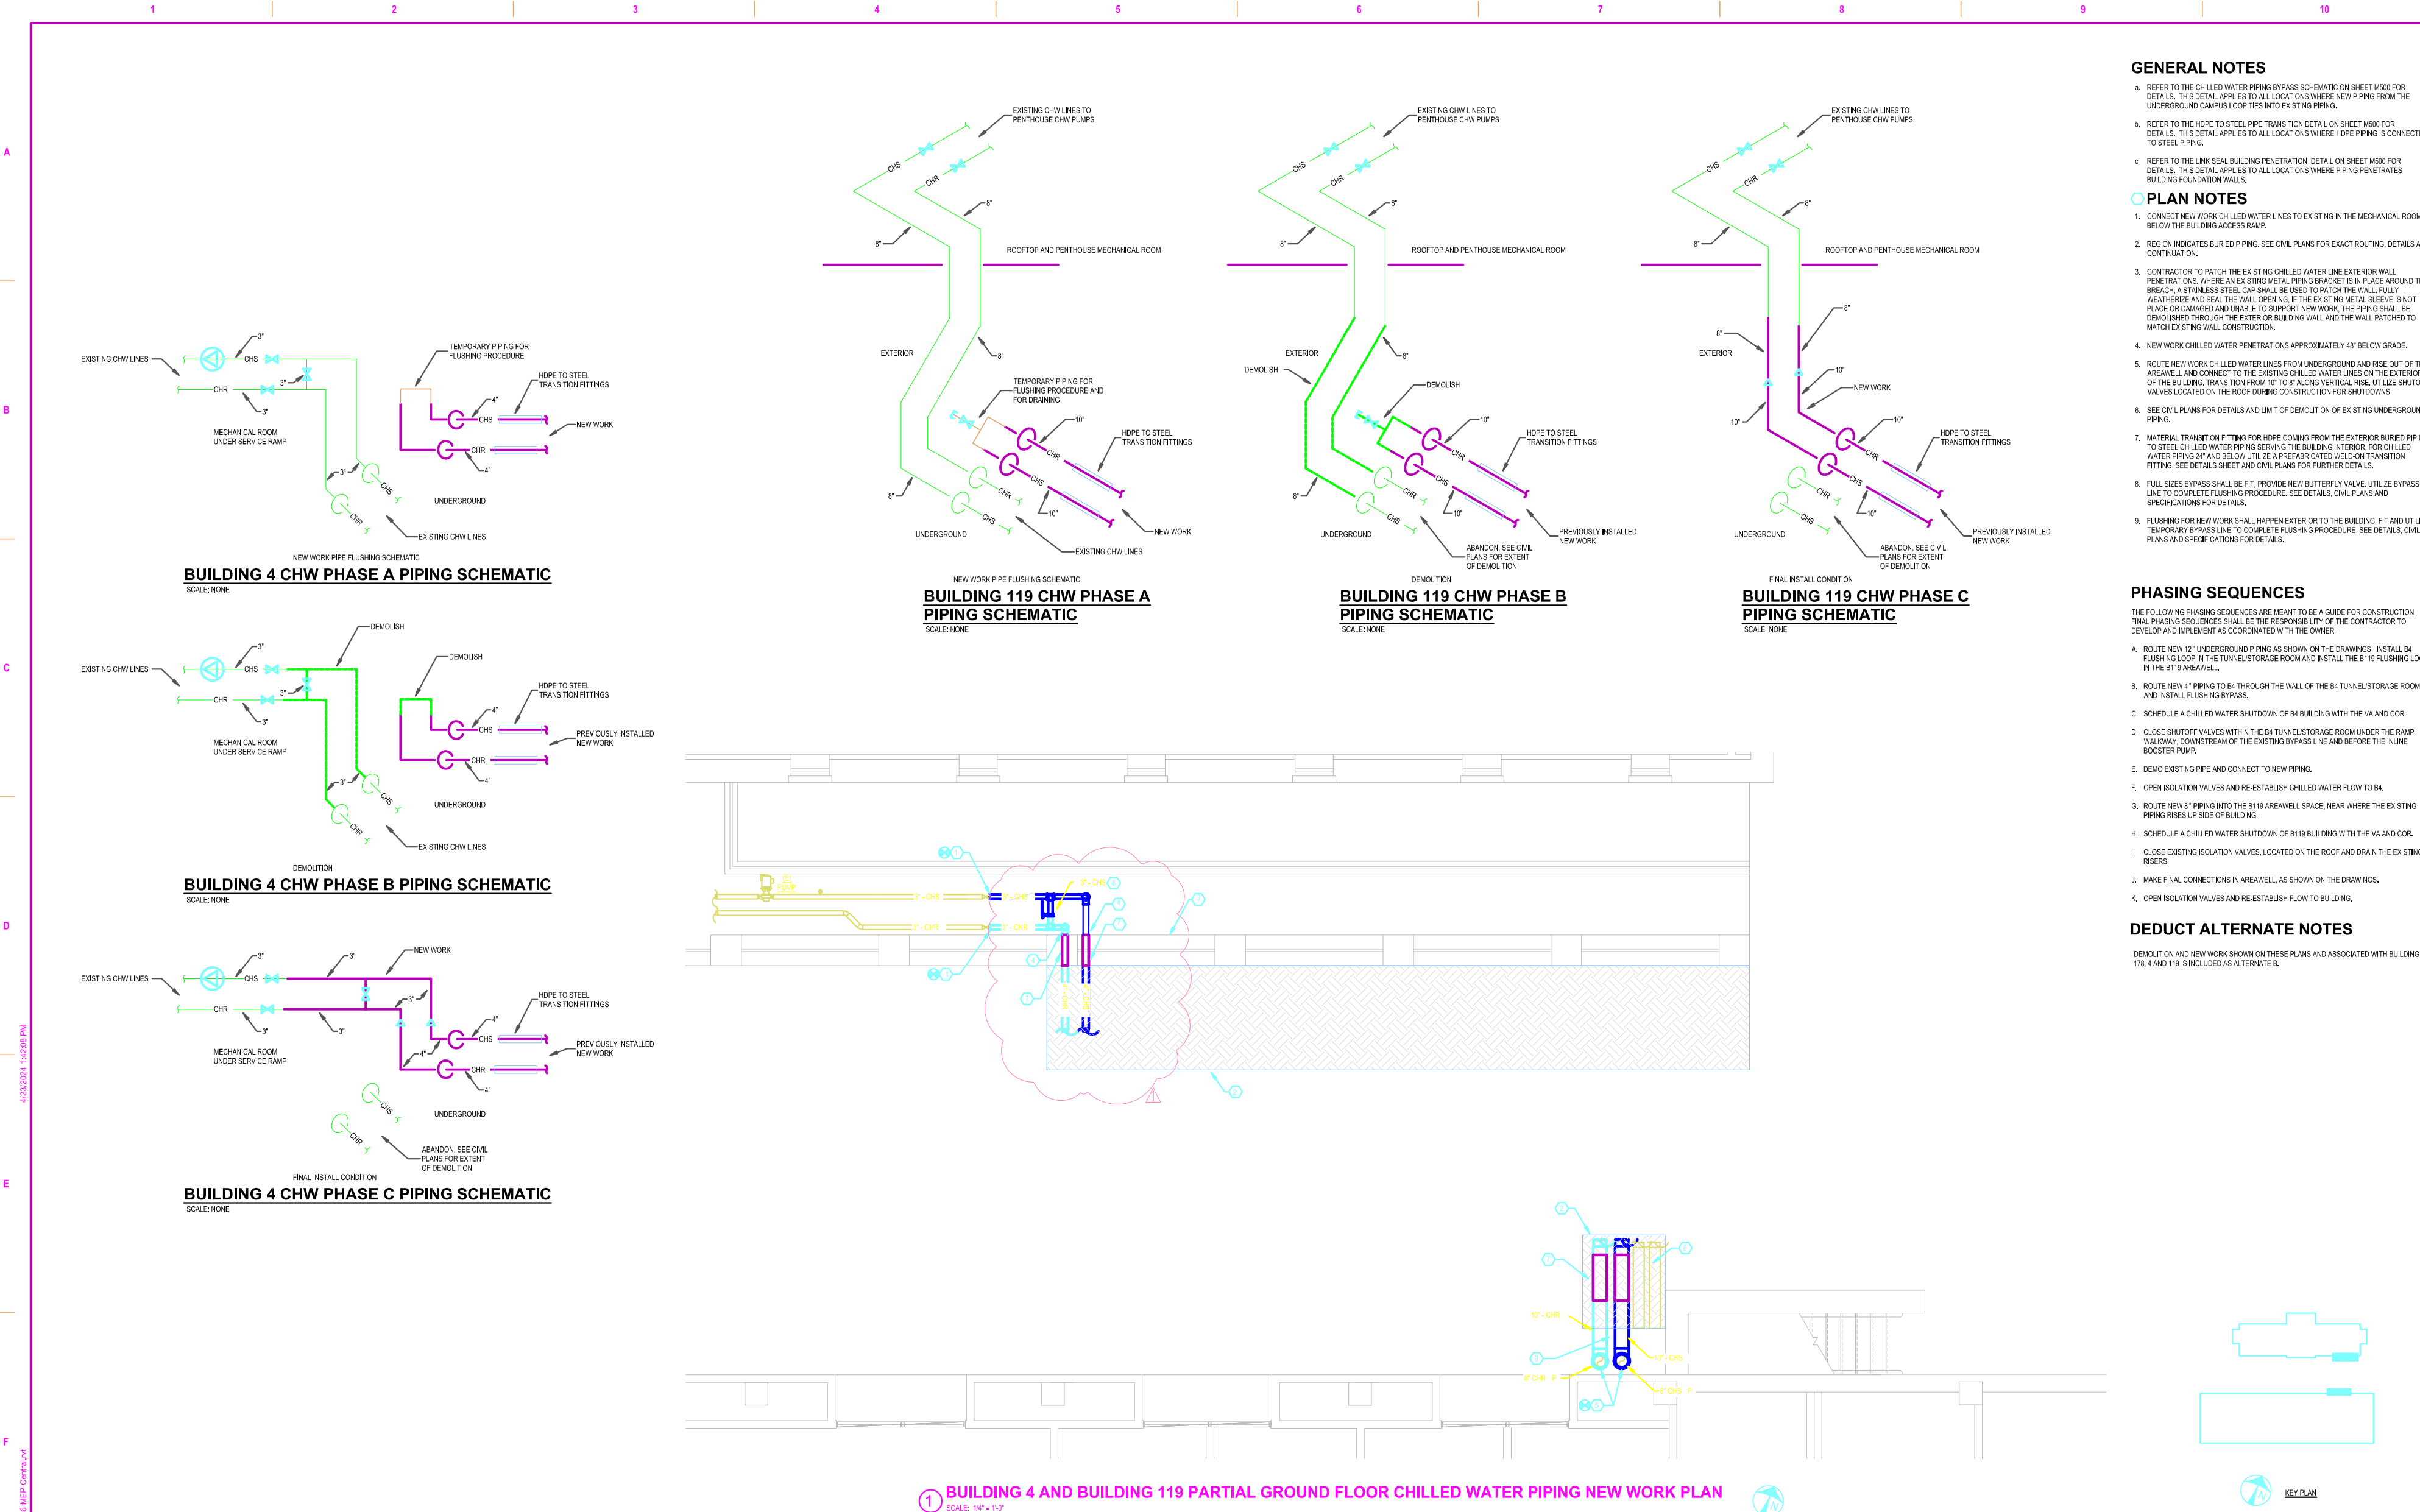

- ### GENERAL NOTES
- REFER TO THE CHILLED WATER PIPING BYPASS SCHEMATIC ON SHEET M500 FOR DETAILS. THIS DETAIL APPLIES TO ALL LOCATIONS WHERE NEW PIPING FROM THE UNDERGROUND CAMPUSS LOOPS TIES INTO EXISTING PIPING.
 - REFER TO THE HOPE TO STEEL PIPE TRANSITION DETAIL ON SHEET M500 FOR DETAILS. THIS DETAIL APPLIES TO ALL LOCATIONS WHERE HOPE PIPING IS CONNECTED TO STEEL PIPING.
 - REFER TO THE LINK SEAL BUILDING PENETRATION DETAIL ON SHEET M500 FOR DETAILS. THIS DETAIL APPLIES TO ALL LOCATIONS WHERE PIPING PENETRATES BUILDING FOUNDATION WALLS.
- ### PLAN NOTES
- CONNECT NEW WORK CHILLED WATER LINES TO EXISTING IN THE MECHANICAL ROOM BELOW THE BUILDING ACCESS RAMP.
 - REGION INDICATES BURIED PIPING. SEE CIVIL PLANS FOR EXACT ROUTING, DETAILS AND CONTINUATION.
 - CONTRACTOR TO PATCH THE EXISTING CHILLED WATER LINE EXTERIOR WALL PENETRATIONS. WHERE AN EXISTING METAL PIPING BRACKET IS IN PLACE AROUND THE BREACH, A STAINLESS STEEL CAP SHALL BE USED TO PATCH THE WALL. FULLY WEATHERIZE AND SEAL THE WALL OPENING. IF THE EXISTING METAL SLEEVE IS NOT IN PLACE OR DAMAGED AND UNABLE TO SUPPORT NEW WORK, THE PIPING SHALL BE DEMOLISHED THROUGH THE EXTERIOR BUILDING WALL AND THE WALL PATCHED TO MATCH EXISTING WALL CONSTRUCTION.
 - NEW WORK CHILLED WATER PENETRATIONS APPROXIMATELY 48" BELOW GRADE.
 - ROUTE NEW WORK CHILLED WATER LINES FROM UNDERGROUND AND RISE OUT OF THE AREAWELL AND CONNECT TO THE EXISTING CHILLED WATER LINES ON THE EXTERIOR OF THE BUILDING. TRANSITION FROM 10" TO 8" ALONG VERTICAL RISE. UTILIZE SHUTOFF VALVES LOCATED ON THE ROOF DURING CONSTRUCTION FOR SHUTDOWNS.
 - SEE CIVIL PLANS FOR DETAILS AND LIMIT OF DEMOLITION OF EXISTING UNDERGROUND PIPING.
 - MATERIAL TRANSITION FITTING FOR HOPE COMING FROM THE EXTERIOR BURIED PIPING TO STEEL CHILLED WATER PIPING SERVING THE BUILDING INTERIOR. FOR CHILLED WATER PIPING 24" AND BELOW UTILIZE A PREFABRICATED WELD-ON TRANSITION FITTING. SEE DETAILS SHEET AND CIVIL PLANS FOR FURTHER DETAILS.
 - FULL SIZES BYPASS SHALL BE FIT. PROVIDE NEW BUTTERFLY VALVE. UTILIZE BYPASS LINE TO COMPLETE FLUSHING PROCEDURE. SEE DETAILS, CIVIL PLANS AND SPECIFICATIONS FOR DETAILS.
 - FLUSHING FOR NEW WORK SHALL HAPPEN EXTERIOR TO THE BUILDING. FIT AND UTILIZE TEMPORARY BYPASS LINE TO COMPLETE FLUSHING PROCEDURE. SEE DETAILS, CIVIL PLANS AND SPECIFICATIONS FOR DETAILS.

- ### PHASING SEQUENCES
- THE FOLLOWING PHASING SEQUENCES ARE MEANT TO BE A GUIDE FOR CONSTRUCTION. FINAL PHASING SEQUENCES SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO DEVELOP AND IMPLEMENT AS COORDINATED WITH THE OWNER.
- ROUTE NEW 12" UNDERGROUND PIPING AS SHOWN ON THE DRAWINGS. INSTALL B4 FLUSHING LOOP IN THE TUNNEL/STORAGE ROOM AND INSTALL THE B119 FLUSHING LOOP IN THE B119 AREAWELL.
 - ROUTE NEW 4" PIPING TO B4 THROUGH THE WALL OF THE B4 TUNNEL/STORAGE ROOM AND INSTALL FLUSHING BYPASS.
 - SCHEDULE A CHILLED WATER SHUTDOWN OF B4 BUILDING WITH THE VA AND COR.
 - CLOSE SHUTOFF VALVES WITHIN THE B4 TUNNEL/STORAGE ROOM UNDER THE RAMP WALKWAY. DOWNSTREAM OF THE EXISTING BYPASS LINE AND BEFORE THE INLINE BOOSTER PUMP.
 - DEMO EXISTING PIPE AND CONNECT TO NEW PIPING.
 - OPEN ISOLATION VALVES AND RE-ESTABLISH CHILLED WATER FLOW TO B4.
 - ROUTE NEW 8" PIPING INTO THE B119 AREAWELL SPACE. NEAR WHERE THE EXISTING PIPING RISES UP SIDE OF BUILDING.
 - SCHEDULE A CHILLED WATER SHUTDOWN OF B119 BUILDING WITH THE VA AND COR.
 - CLOSE EXISTING ISOLATION VALVES. LOCATED ON THE ROOF AND DRAIN THE EXISTING RISERS.
 - MAKE FINAL CONNECTIONS IN AREAWELL, AS SHOWN ON THE DRAWINGS.
 - OPEN ISOLATION VALVES AND RE-ESTABLISH FLOW TO BUILDING.

DEDUCT ALTERNATE NOTES

DEMOLITION AND NEW WORK SHOWN ON THESE PLANS AND ASSOCIATED WITH BUILDING 178, 4 AND 119 IS INCLUDED AS ALTERNATE B.

CONSULTANT		ARCHITECT/ENGINEER OF RECORD		STAMP	JAMES H. QUILLEN VA MEDICAL CENTER	Drawn Title BUILDING 4 & 119 - CHILLED WATER PIPING NEW WORK PLAN	Phase FINAL CONSTRUCTION BID DOCUMENTS	Project Title REPLACE SITE UG CHW PIPING	Project Number 621-22-108
RMF Engineering		FFE HEAPY			VA U.S. Department of Veterans Affairs	Approved: Owner	FULLY SPRINKLERED	Location LAMONT ST AND VETERANS WAY, MT. HOME, TN	Building Number 4
1 CHANGED LOCATION OF NEW CHILLED WATER LINE BUILDING ENTRY 02/25/2024								Issue Date 04/08/2024	Drawing Number 4_119-M100
0 ISSUE FOR BID 04/08/2024								Checked DTR	
No. Revisions: Date:								Drawn GDS	