

Welcome

TCA Sector

TI Maintenance (TIM) Kick Off

March 31, 2026

Agenda

- **Welcome**
- **Introductions**
- **Procurement Brief**
 - POC's
 - Evaluation Criteria
 - Deliverable Dates for Submittals
 - RFI Request
- **Technical Brief**
 - SOW Highlights
 - Schedule
- **Site visit overview:**
 - 3/31/2026 @ 8 AM – Kickoff Meeting / TCA Site Visit 6692 S, Memorial Pl Tucson, AZ 85756
 - 3/31/2026 @ TBD – NGL Station site visit Dirt lot below BTS Group (31.33300, -110.969700)
 - 4/1/2026 @ 8:30 – AJO Granny's Kitchen Parking lot in Why (32.264500,-112.74070)
 - 4/2/2026 @ 8 AM – NCO Station site visit Dirt lot (31.33477, -109.95377)

Meeting Point

Evaluation Factors and Methodology

Evaluation Factors

a. Factor Identification – This evaluation will evaluate the offerors by the proposals received in response to the *TI Maintenance – TCA Sector* Request for Proposals using the following factors:

- **Factor 1**– *Experience*
 - Down-Select
- **Factor 2** – *Written Proposal for Management Approach* not to exceed 17 pages
- **Factor 3** – *Written Proposal for Technical Capabilities* not to exceed 25 pages
- **Factor 4** – Price

b. Order of Importance –

This procurement is based on a FFP, best value trade off evaluation. Factor 2 is more important than Factor 3, and Factor 3 is more important than Factor 1. Factors 1-3, when combined are significantly more important than Price (Factor 4).

As the technical evaluation of proposals approaches equality, price becomes more important in making the award determination. The importance of price will increase as the difference in confidence rating for non-price factors between the Offerors decreases. If two or more proposals are determined not to have any substantial technical differences for non-price factors (i.e., are technically equivalent), award may be made to the lowest priced proposal.

Proposal submissions are page limited. If a Quoter exceeds the page limit for Factors 2 or 3, the excess pages will not be included for consideration.

Factor 1 – Experience:

(a) Method: Microsoft Teams Presentation

(b) Duration: 60-minute estimate: 45 Minutes to Brief and 15 Minutes for Questions following the briefing.

(c) Process:

(i) Each Quoter must request to schedule a Phase 1 Microsoft Teams Presentation. The presentation will evaluate Factor One- Experience. Failure to participate in Phase 1 of the procurement denies further consideration of a Quoter to proceed to Phase 2. Based on the Government's evaluation of the Quoter's experience, a down-select will then be issued by the Government, whereby Quoters will be advised whether they are invited to participate in Phase 2. Quoters shall not record the call. The Government may record the call.

(ii) In the presentation, the Quoter shall identify a Minimum of three (3) past contracts/orders that are most similar in size and scope to the work of this RFP. The Quoter shall also describe the following corporate experience relevant to this requirement:

(A) Offeror will describe their past performance within the past 8 years in relevant (similar in size, scope, and complexity) to the requirements contained in the RFP. The presentation should include any lessons learned, best management practices, and innovations that improved their execution of maintenance requirements.

(B) Offeror will describe their organizational structure, approach, and key personnel's qualifications to effectively execute the requirements contained in the RFP.

(C) Offeror will describe its capability and intent to Self-Perform work based on % related to the following categories: roads and bridges (including boat ramps and floating boat slip); fences and gates (including concertina wire), vegetation control, debris removal (including Carrizo Cane and Hyacinth/Hydrilla), border lighting and electrical, drainage and grate systems, tunnel remediation, TI attributes including shelters, and generators.

(d) The Government will allow up to 45 minutes for presentation of the above information (A-C) and any additional information the Offeror would like to include, and the Government may ask additional questions following the presentation. Any written materials (i.e. slide deck) used for briefing the government must be provided prior to oral presentation. The Government's focus is on oral presentation, and the written materials are considered supplemental.

(e) Down-Select Notification:

- (i) Based on its evaluation of Phase 1 - Factor One, the Government intends to invite the most highly rated for Factor One (based on the confidence rating system described in section I.6 Evaluation Criteria) to proceed to Phase 2.
- (ii) After the Government completes evaluation of Factor One, Quoters will receive a down-select notification via e-mail from the CO. Quoters who are rated most highly for Factor One will be selected to proceed to Phase 2 of the quote submission process. (iii) For Quoters rated most highly and advised to proceed to Phase 2 of the quote submission process, the CO will include the Phase 2 submission instructions on the down-select notification, and the due date for the written portion of the Phase 2 submission. The Phase 2 written submission due date will be a minimum of two (2) weeks from the date of the down-select notification. The Government recommends that Quoters begin preparation of Phase 2 quotations only after the Phase 1 down-select notice process is complete. The notices will provide the date and time by which Quoters participating in Phase 2 must submit the Phase 2 quotation.

Down-Select

Written Proposal Evaluations Factors 2 & 3: Limited to 17 pages covering Factor 2: Management Approach and 25 pages covering Factor 3: Technical & Resource Capabilities Approach

Submittal Instructions:

- *Offerors shall use Times New Roman font, with a minimum 12-point font size*
- *Submit a standalone document containing the Management Approach information.*
- *Submit a separate document containing the Technical & Resource Capabilities and the Key Personnel resumes.*
- *Proposal submissions are page limited. If a Quoter exceeds the page limit for Factors 2 or 3, the excess pages will not be included for consideration.*

Factor 2: Management Approach (Management Approach is limited to 15 pages in length):

The Government will evaluate this factor based on following:

Self-Performance

Submission Requirements: Offeror shall submit documentation describing ability to self-perform work and at what percentage. The Offeror shall state the percentage of work that will be subcontracted.

Evaluation: Offeror describes ability with percentages, to self-perform work in all six (6) work area categories – 1) fence and gates; 2) roads and bridges; 3) drainage and grate systems; 4) lighting and electrical system; and 5) vegetation control and debris removal 6) TI attributes: structures and generators. An offeror who self-performs more of the work will be viewed more favorably.

Organizational Structure

Submission Requirements: Offeror shall furnish a company organizational chart, with titles indicating roles and responsibilities in delivering TI Maintenance services under the SOW.

Evaluation: A viable organizational structure, including partnering with subcontractors, and a sound approach to working effectively with the TI Program Management Office (PMO) sector. Organization structure presented as a simple chart showing titles indicating roles and responsibilities delivering innovative TI Maintenance services and developing work plan. Provide narrative on organization structure and how offeror intends to meet the requirements of the SOW.

Work Plan Management & Execution

Submission Requirements: Offeror shall submit documentation indicating their proposed approach to managing and executing requirements on schedule and within budget, how performance issues are identified and addressed; including responding to urgent and routine requirements by work category.

Offeror's approach should lay out a plan to manage and execute work that:

- Identifies procedures for executing urgent and routine work.
- Identifies controls to be used in directing work.
- Identifies procedures for managing changes directed to the work plan.
- Identifies work to be performed by subcontractors.

Evaluation: Offeror shall demonstrate a sound approach in the development of an effective work plan and shall demonstrate a realistic approach to planning and performing urgent and routine work requirements.

Quality Control & Safety Programs

Submission Requirements: Offeror shall submit documentation indicating their proposed approach to quality control and safety, including how their programs are implemented, how quality and safety issues are identified and addressed, and the impact to performance under this contract.

Evaluation: Offeror shall demonstrate a sound approach in the implementation of an effective quality control and safety program and how the offeror intends to meet the requirements in the SOW.

Risk Management

Submission Requirements: Offeror must describe risks to the Government and Offer will face in undertaking the requirements in the RFP and how to achieve success.

Evaluation: Offeror shall submit a narrative describing relevant risks the Government and Offeror may face, how risks will be identified and mitigated, and how this will allow the Offeror to achieve success.

Factor 3: Technical and Resource Capabilities and Key Personnel Resumes (Limited to 25 pages for the Technical and Resource Capabilities and Key Personnel resumes should not exceed 4 pages in length, per role, inclusive of references):

The Government will evaluate this factor based on the offeror's response to the following:

Technical and Resource Capabilities

Submission Requirements: Offeror shall demonstrate knowledge of SOW requirements and Tactical Infrastructure Design Standards (TIDS), and how the standards comply with work identified on the work plan. In addition, the Offeror shall demonstrate its ability in resource allocation and capability to support routine and urgent work requirements across the Sector's Area of Responsibility (AOR).

Evaluation: The Government will evaluate depth and breadth of offeror's understanding and knowledge of SOW requirements and TIDS. In addition, the degree to which the Offeror's resources, including people, materials, equipment, and financing, provide sufficient capability and capacity to support routine and urgent work requirements by work category across a sector. The Offeror shall have an office within each sector AOR. Resources may include Agreements with specific subcontractors to leverage response capacity.

Key Personnel Qualifications (Resumes and references, not exceeding 4 pages total per key personnel role)

Submission Requirements: Offeror shall provide resumes for Key Personnel.

Evaluation: The resumes of the Key Personnel identified in the RFP, Section H, must demonstrate that they meet or exceed the requirements set out in the RFP/SOW and will be evaluated for their depth and breadth of qualifications.

Factor 4 - Price:

Separately and apart from the technical evaluation, the Government will conduct a price evaluation of the Quoter's price quote the Government will use the information in the Quoter's Proposed Unit Price Rate Worksheet and line-item summary for each sector to conduct the price evaluation. A price analysis will be conducted to determine fairness and reasonableness in accordance with FAR part 15 procedures.

Failure by a Quoter to comply with Pricing Worksheet Instructions requirements may result in an elimination from consideration.

The evaluation of pricing shall be as follows:

Submission Requirements: Offeror shall complete and submit a Scheduled Work Task Order/Sector cost, Program management (PMO) cost, Unit Price Rate Work Sheet, and the Line-Item summary Sheet included in RFP. The Total Price shall include the Base Period plus Option Periods.

Evaluation Methodology

Ratings for Management Approach and Technical and Resource Capabilities

(Non-Price Factors)

High Confidence: The Government has **high confidence** that the Offeror understands the requirement, proposes a sound approach, and will be successful in performing the contract with **little or no** Government intervention.

Some Confidence: The Government has **some confidence** that the Offeror understands the requirement, proposes a sound approach, and will be successful in performing the contract with **some** Government intervention.

Low Confidence: The Government has **low confidence** that the Offeror understands the requirement, proposes a sound approach, or will be successful in performing the contract **even with** Government intervention.

Ratings for Experience

High Confidence: *Based on an offeror's past performance record, extreme confidence that the offeror will successfully perform the required effort.*

Some Confidence: *Based on an offeror's past performance record, little doubt exists that the offeror will successfully perform the required effort.*

Low Confidence: *Based on an offeror's past performance record, extreme doubt exists that the offeror will successfully perform the required effort.*

Basis for Award on Initial Responses

The Government anticipates selecting the best-suited Contractor based on initial submissions, without engaging in exchanges with Contractors. Therefore, initial submissions should contain the Contractor's best terms from a technical and price perspective. The Government, however, reserves the right to enter into exchanges/negotiations with offerors. Once the Government determines the Offeror that is the best-suited (i.e., the apparent successful Offeror), the Government reserves the right to communicate/negotiation with only that Offeror to address any remaining issues, if necessary, and finalize a contract with that Offeror. These issues may include technical and price. If the parties cannot successfully address any remaining issues, as deemed pertinent at the sole discretion of the Government, the Government reserves the right to communicate/negotiate with the next best-suited Offeror based on the original analysis and address any remaining issues.

Award Based on Best Value

The Government anticipates establishing a single-award contract with one contractor whose quote is determined to best meet the needs of the Government after consideration of all factors-- i.e., provides the "best value." Accordingly, the Government may award the contract to other than the lowest priced Quoter or other than the Quoter with the highest Confidence rating.

RELATIVE IMPORTANCE OF EVALUATION FACTORS

For this solicitation, the evaluation factors are:

Factor 1: Experience

Factor 2: Written Proposal for Management Approach

Factor 3: Written Proposal for Technical and Resource Capabilities

Factor 4: Price

Factor 2 is more important than Factor 3, and Factor 3 is more important than Factor 1. Factors 1-3, when combined are significantly more important than Price (Factor 4). The Government is more concerned with obtaining superior technical performance capability (represented by the non-cost evaluation categories) than with making an award at the lowest overall evaluated price.

Award of an FFP contract can only be made to a Quoter:

1. Whose technical presentation and pricing represents the best value; and
2. Whose proposed price is determined to be fair and reasonable.

EVALUATION CRITERIA

1. The Government will evaluate the Quoters on:

Factor 1: Experience

Factor 2: Written Proposal for Management Approach

Factor 3: Written Proposal for Technical and Resource Capabilities & Key Personnel Resumes

The Government will assess its level of confidence that the Quoter will be successful in performing the work based on the information submitted and presented for all non-price factors, utilizing the confidence level ratings: High Confidence, Some Confidence, and Low Confidence. The non-price factors are ***Management Approach, Technical and Resource Capabilities, and Experience (Non-Price Factors), listed above.***

FACTOR 4 – Price

Separately and apart from the technical evaluation, the Government will conduct a price evaluation of the Quoter's price quote the Government will use the information in the Quoter's Scheduled Work Task Order/Sector cost, Program management (PMO) cost, Unit Price Rate Worksheet, and the Line-Item summary Sheet included in RFP to conduct the price evaluation. A price analysis will be conducted to determine fairness and reasonableness in accordance with FAR part 15 procedures.

Failure by a Quoter to comply with Pricing Worksheet Instructions requirements may result in an elimination from consideration.

The evaluation of pricing shall be as follows:

Submission Requirements: Offeror shall complete and submit a Scheduled Work Task Order/Sector cost, Program management (PMO) cost, Unit Price Rate Work Sheet, and the Line-Item summary Sheet included in RFP.

The Total Price shall include the Base Period plus four (4) Option Periods.

TI PM/COR

STATEMENT OF WORK TCA Sector TI Maintenance

C.1.0 INTRODUCTION

U.S. Customs and Border Protection (CBP) is the Nation's primary border security agency and its largest uniformed law enforcement organization. CBP's mission covers a very broad spectrum of issues, from the apprehension of undocumented border crossers to collection of almost \$50 billion in revenue for the U.S. Treasury. With more than 60,000 employees, CBP's charge is to keep terrorists and their weapons out of the U.S. while facilitating lawful international travel and trade.

Under the executive direction of U.S. Border Patrol (USBP), the Program Management Office Directorate (PMOD) is responsible for developing and implementing construction, and sustainment services for CBP Tactical Infrastructure (TI) assets.

CBP is acquiring contractor services to perform maintenance, repair and improvement services for TI assets in the Tucson Sector, in the following categories: roads and bridges; fence and gates (including concertina/razor wire); vegetation control; debris removal; border lighting and electrical; drainage and grate systems; TI attributes including shelters, Air Conditioning and generators and tunnel remediation. These services will be required for CBP's tactical infrastructure (TI) assets within the Tucson Sector in Arizona.

This contract contains a ceiling price that is not to be exceeded. The Contract Ceiling Price can be found in the Contract description page. All priced line items can be found in Schedule B of each task order.

Maintenance:

- Work required to preserve TI assets or equipment in such a condition that it may be effectively utilized for its designated purpose.
- Work to restore an existing asset to pre-existing condition so that it may be effectively utilized for its designated purpose.
- Work that enhances the mission and functional capabilities of an asset through an addition, expansion, or adaptation. Work effort will be confined to the existing TI footprint.
- Unscheduled (see below) work that exceeds \$750,000.00 per activity will not be executed under this contract.

This is a Contract with two (2) execution tiers: 1. Scheduled Maintenance and 2. Unscheduled Maintenance.

C.2.0 ORDERING PERIOD

Twelve (12) month Base Period plus Four (4), Twelve (12) month option periods.

C.3.0 STATEMENT OF NEED

General. This contract includes all labor, supervision, tools, materials, parts, equipment, transportation, licenses, permits, certifications, and management necessary to perform Maintenance services for TI assets in the Tucson Sector. The Contractor shall furnish all the necessary services, qualified personnel, material, equipment, and facilities, not otherwise provided by the Government, as needed to perform all services delineated in, and in accordance with Contract requirements within the scope addressed in Section C.4.0. All work shall be performed by qualified, licensed and insured, properly trained and/or certified personnel.

If the contractor decides to use contractor owned equipment, the rate cannot exceed the rental rate of a local rental company. Government will not pay for equipment down time, for contractor owned equipment.

The Contractor shall provide technical expertise to accomplish the maintenance task order services specifically, performing task order activities for maintaining the TI portfolio within the Tucson Sector in Arizona. The technical expertise provides support to skilled laborers required to perform maintenance and replacements of roads and bridges, fences and gates (including associated concertina wire), vegetation control, debris removal, border lighting and electrical, and clearing and repairing drainage and grate systems, tunnel remediation and TI attributes including but not limited to: shelters, air conditioning, generators and cameras.

The Contractor shall ensure effective performance of all services described herein and shall tender for acceptance only those items that conform to the requirements of this SOW. The Contractor shall be capable of handling multiple work activities simultaneously.

Excluded: Architectural and Engineering (AE) services are not within scope of this contract. Security cameras and associated technology, communications equipment, tower structures and other assets inside the perimeter fencing of tower locations within the TI assets portfolio are not within scope of this contract.

C.4.0 SCOPE OF SERVICES

Contractor shall provide expert technical solutions and services to maintain: (a) fence and gates (including concertina wire), (b) roads and bridges, (c) clearing and repairing drainage and grate systems, (d) border lighting and electrical, (e) vegetation control and debris removal, (f) tunnel remediation (g) TI attributes including but not limited to shelters, air conditioning, generators and cameras.

C.4.1 Scheduled Maintenance

Scheduled requirements can be planned in advance and scheduled at a designated frequency. The contract will include the Scheduled work at firm fixed prices. The Government intends to de-obligate any unused maintenance funds which may be available due to any scheduled maintenance actions which did not occur during the performance period. Any such action would be done through bilateral modification to the contract. Within the contract ceiling amount, the Government may direct the contractor to perform scheduled maintenance in excess of the quantities in the Line-Item Summary at the fixed unit prices established in Attachment 2 - Line-Item Summary Sheet as long as all work stays under the total contract NTE. Scheduled work requirements are then executed from the approved work plans. The Contractor shall notify the Contracting Officer Representative (COR) in writing no less than three days prior to the scheduled service, should rescheduling be necessary, proposing a revised schedule to successfully complete the service activity.

Note: The Service Contract Wage Determinations Act will apply to this contract.

C.4.2 Unscheduled Maintenance

Unscheduled maintenance activities result from willful destruction, a natural event such as severe weather, or premature failure of the TI asset, and is further defined as a requirement that if unresolved immediately may interrupt or otherwise adversely impact security operations. Examples of unscheduled maintenance requirements include fence breaches, gate failures and blocked grates. Other examples of unscheduled maintenance include repairs following a severe weather event, border and access road washouts, electrical outages, and falling trees blocking roads due to severe winds. The Contractor shall respond immediately to urgent work requirements to support mission requirements. The Contractor shall provide a mobilization response within 30-minutes from notification by the COR. Upon COR approval of the mobilization response, the Contractor shall respond within 24-hours and work continuously without interruption to complete the service call. Within two (2) hours of arriving at the repair site, the Contractor shall notify the COR of the estimated completion time and thereafter notify the COR when the work is completed.

If work is not on Government-owned property, Government will coordinate all unscheduled maintenance or direct contractor to contact landowners to obtain authorization and approval prior to proceeding, in addition to obtaining any necessary permits/approvals/agreement to perform the work. Any such costs should be incorporated into the contractor's proposal and will be included within the firm fixed price contract.

Note: The Davis Bacon Act and/or Service Contract Act wage determinations will apply to work performed under this contract. The COR will notify the Contractor of the applicable wage determination for each project.

Overtime approval process and 40- hour work week. Overtime hours will be in support of unscheduled maintenance only and must be approved by the COR in advance. Fence breach repairs will be performed seven (7) days a week. Contractor shall not exceed a 40-hour work week, unless approved by the COR in advance.

The following are examples of the types of maintenance services the Contractor may perform under this contract. These examples are not all inclusive or restricted in nature and do not constitute relief from exercising professional judgment in the performance of maintenance services.

TCA Sector

Tucson Sector Assets

Station	Road Mileage	FC1 Asphaltic	Normandy (Miles)	Post and Rail Fence (Miles)	Flood Gates	Culverts and Grates	Cattle Guards	Connected Light Fixtures	Meters and Transformers	Vegetation (Acres)	Vegetation (Miles)
AJO	150.52				433	425	1				
CAG	114.37			23.25		14	1				
TPS	67.98		7.22	11.65		64	29				
TUS	161.32	9.03			57	58	27				
NGL	41.28	2.64			203	112	22	145	13		
SON	23.77					2	1				
NCO	46.95	4.54			433	233	24	320	21		
DGL	50.45	1.71			470	188	12	266	22		
FSR	100										
Total	756.64	17.92	7.22	34.9	1596	1096	117	731	56	12.4	643

TCA Scheduled Work

BASE PERIOD: TCA SCHEDULED MAINT (FFP)	Description of Service	Qty of Asset	Count of Events
Naco, AZ (NCO) HySecurity 50VF200 Motorized Slide Driver Maintenance	Routine: Perform factory recommended quarterly,semi annual and annual maintenance. Remove all dust, dirt and debris. Lubricate all components on the gate and operator that require it and inspect for proper alignment. Check for proper operation and report any deficiencies	2	4
Nogales, AZ (NCO) HySecurity 50VF200 Motorized Slide Driver Maintenance	Routine: Perform factory recommended quarterly,semi annual and annual maintenance. Remove all dust, dirt and debris. Lubricate all components on the gate and operator that require it and inspect for proper alignment. Check for proper operation and report any deficiencies	1	4
Nogales, AZ (NCO) HydraSwing Linear Swing Gate Operator	Routine: Perform factory recommended quarterly,semi annual and annual maintenance. Remove all dust, dirt and debris. Lubricate all components on the gate and operator that require it and inspect for proper alignment. Check for proper operation and report any deficiencies	3	4
Three Points (TON) Vamori Wash - Normandy Vehicle Barrier	Routine: Remove barriers premonsoon / replace post monsoon. Includes removing sleeves and welding back in place	125 feet	2
Douglas, AZ (DGL) Lighting inspections	Routine: Visually inspect lighting for proper operation and alignment. Verify all disconnect lids are closed and there are no electrical safety issues. Inspect pole condition and that pole mounting hardware is in place and secure. Inspect guy wires for proper tension and augers are in good condition. Provide detailed written report and pictures of deficiencies	266	4
Naco, AZ (NCO) Lighting Inspections	Routine: Visually inspect lighting for proper operation and alignment. Verify all disconnect lids are closed and there are no electrical safety issues. Inspect pole condition and that pole mounting hardware is in place and secure. Inspect guy wires for proper tension and augers are in good condition. Provide detailed written report and pictures of deficiencies	324	4
Nogales, AZ (NGL) Lighting Inspections	Routine: Visually inspect lighting for proper operation and alignment. Verify all disconnect lids are closed and there are no electrical safety issues. Inspect pole condition and that pole mounting hardware is in place and secure. Inspect guy wires for proper tension and augers are in good condition. Provide detailed written report and pictures of deficiencies	113	4

TCA Scheduled Work

BASE PERIOD: TCA SCHEDULED MAINT (FFP)	Description of Service	Qty of Asset	Count of Events
Casa Grande Fence Inspection	Routine: Inspect fence post and rail, post and cable and normandy style vehicle barrier for cut or broken cable, cut rail and eroded areas where animals or vehicles could cross. Inspect washes for debris build up on fence. Provide detailed written report with supporting pictures of deficiencies	42 Miles	4
Casa Grande Culvert inspections	Routine: Inspect culverts for sedimentation and debris accumulation and proper drainage	37	1
Douglas, AZ (DGL) Culvert/Cattleguard/Grates	Routine: Inspect for sedimentation and debris accumulation and proper drainage. Provide written report and pictures of noted work required	167	1
Naco, AZ (NCO) Culvert/Cattleguard/Grates	Routine: Inspect for sedimentation and debris accumulation and proper drainage. Provide written report and pictures of noted work required	248	1
Nogales, AZ (NGL) Culvert/Cattleguard/Grates	Routine: Inspect for sedimentation and debris accumulation and proper drainage. Provide written report and pictures of noted work required	143	1
Tucson, AZ (TUS)) Culvert/Cattleguard/Grates	Routine: Inspect for sedimentation and debris accumulation and proper drainage. Provide written report and pictures of noted work required	85	1
Ajo, AZ (AJO) Culvert/Cattleguard/Grates	Routine: Inspect for sedimentation and debris accumulation and proper drainage. Provide written report and pictures of noted work required	410	1
Three Points, AZ (TPS) Culvert/Cattleguard/Grates	Routine: Inspect for sedimentation and debris accumulation and proper drainage. Provide written report and pictures of noted work required	17	1

AJO Station (AJO) Asset Overview (32.03797-113.33051; 31.84934;-112.71681)

- **Road Miles:** 150.52
- **Gates**
 - Type
 - Swing Flood Gates
 - Locations: 159
 - Total Number: 433
- **Culverts**
 - Type
 - RCP
 - CMP
 - Box
 - Locations: 234
 - Total Number: 433
- **Cattleguard:** 1

AJO Gate Locations

Gate	Zone	Quantity	Longitude	Latitude	Information
1A	1	2	Gates Manuel	32.0380	-113.3305
1B	1	8	Gates Manuel	32.0312	113.3091
1C	1	3	Gates Manuel	32.0306	113.3072
1D	1	6	Gates Manuel	32.0295	-113.3037
1E	1	5	Gates Manuel	32.0285	-113.3307
1F	1	5	Gates Manuel	32.0268	-113.2953
1G	1	16	Gates Manuel	32.0230	-113.2830
1H	1	3	Gates Manuel	32.0215	-113.2782
1I	1	10	Gates Manuel	32.0210	-113.2766
1J	1	3	Gates Manuel	32.0197	-113.2725
1K	1	10	Gates Manuel	32.0188	-113.2698
1L	1	9	Gates Manuel	32.0167	-113.2632
1M	1	1	Gates Manuel	32.0160	-113.2607
1N	1	2	Gates Manuel	32.0149	-113.2574
2A	2	1	Gates Manuel	32.0121	-113.2485
2AA	2	1	Gates Manuel	31.9898	-113.1780
2AB	2	1	Gates Manuel	31.9888	-113.1750
2AC	2	1	Gates Manuel	31.9885	-113.1741
2AD	2	6	Gates Manuel	31.9877	113.1715
2AE	2	1	Gates Manuel	31.9868	-113.1686
2AF	2	3	Gates Manuel	31.9860	-113.1661
2AG	2	1	Gates Manuel	31.9847	-113.1620
2AH	2	1	Gates Manuel	31.9845	-113.1615
2AI	2	5	Gates Manuel	31.9841	-113.1601
2AJ	2	1	Gates Manuel	31.9830	-113.1564

Gate	Zone	Quantity	Longitude	Latitude	Information
2AK	2	2	Gates Manuel	31.9829	-113.1559
2AL	2	1	Gates Manuel	31.9819	-113.1524
2AM	2	2	Gates Manuel	31.9818	-113.1522
2AN	2	1	Gates Manuel	31.9805	-113.1482
2AO	2	3	Gates Manuel	31.9799	-113.1479
2AP	2	1	Gates Manuel	31.9793	-113.1441
2AQ	2	1	Gates Manuel	31.9781	-113.1403
2AR	2	2	Gates Manuel	31.9761	-113.1340
2AS	2	4	Gates Manuel	31.9767	-113.1263
2B	2	1	Gates Manuel	32.0117	-113.2471
2C	2	1	Gates Manuel	32.0113	-113.2460
2D	2	1	Gates Manuel	32.0104	-113.2431
2E	2	2	Gates Manuel	32.0010	-113.2412
2F	2	2	Gates Manuel	32.0095	-113.2403
2G	2	1	Gates Manuel	32.0089	-113.2384
2H	2	1	Gates Manuel	32.0086	-113.2374
2I	2	1	Gates Manuel	32.0084	-113.2368
2J	2	1	Gates Manuel	32.0073	-113.2332
2K	2	2	Gates Manuel	32.0055	-113.2278
2L	2	1	Gates Manuel	32.0047	-113.2250
2M	2	2	Gates Manuel	32.0036	-113.2215
2N	2	2	Gates Manuel	32.0028	-113.2189
2O	2	3	Gates Manuel	32.0023	-113.2176
2P	2	4	Gates Manuel	31.9998	-113.2096
2Q	2	2	Gates Manuel	31.9996	-113.2088
2R	2	1	Gates Manuel	31.9981	-113.2042

AJO Gate Locations (Cont)

Gate	Zone	Quantity	Longitude	Latitude	Information
2S	2	1	Gates Manuel	31.9974	-113.2020
2T	2	1	Gates Manuel	31.9971	-113.2009
2U	2	2	Gates Manuel	31.9960	-113.1978
2V	2	1	Gates Manuel	31.9959	-113.1972
2W	2	1	Gates Manuel	31.9952	-113.1950
2X	2	3	Gates Manuel	31.9922	-113.1857
2Y	2	1	Gates Manuel	31.9907	-113.1810
2Z	2	6	Gates Manuel	31.9903	-113.1795
3A	3	4	Gates Manuel	31.9726	-113.1228
3B	3	4	Gates Manuel	31.9710	-113.1170
3C	3	2	Gates Manuel	31.9700	-113.1133
3D	3	3	Gates Manuel	31.9689	-113.1100
3E	3	2	Gates Manuel	31.9677	-113.1061
3F	3	4	Gates Manuel	31.9672	-113.1043
3G	3	1	Gates Manuel	31.9664	-113.1016
3H	3	2	Gates Manuel	31.9646	-113.0959
3I	3	2	Gates Manuel	31.9638	-113.0932
3J	3	1	Gates Manuel	31.9629	-113.0900
3K	3	6	Gates Manuel	31.9615	-113.0856
3L	3	5	Gates Manuel	31.9605	-113.0823
3M	3	1	Gates Manuel	31.9601	-113.0809
3N	3	2	Gates Manuel	31.9581	-113.0746
3O	3	2	Gates Manuel	31.9582	-113.0741
3P	3	2	Gates Manuel	31.9562	-113.0687
3Q	3	6	Gates Manuel	31.9547	-113.0631
3R	3	2	Gates Manuel	31.9538	-113.0603

Gate	Zone	Quantity	Longitude	Latitude	Information
3S	3	3	Gates Manuel	31.9474	-113.0391
3T	3	2	Gates Manuel	31.9471	-113.0379
3U	3	3	Gates Manuel	31.9427	-113.0233
3V	3	2	Gates Manuel	31.9404	-113.0158
3W	3	1	Gates Manuel	31.9396	-113.0133
3X	3	5	Gates Manuel	31.9394	-113.0126
3Y	3	7	Gates Manuel	31.9392	-113.0119
3Z	3	2	Gates Manuel	31.9379	-113.0079
4A	4	1	Gates Manuel	31.9339	-112.9945
4B	4	2	Gates Manuel	31.9269	-112.9715
4C	4	2	Gates Manuel	31.9182	-112.9424
4D	4	2	Gates Manuel	31.9178	-112.9409
4E	4	5	Gates Manuel	31.9173	-112.9396
4F	4	2	Gates Manuel	31.9169	-112.9379
4G	4	1	Gates Manuel	31.9158	-112.9346
4H	4	1	Gates Manuel	31.9152	-112.9329
4I	4	1	Gates Manuel	31.9144	-112.9304
4J	4	1	Gates Manuel	31.9139	-112.9289
4K	4	1	Gates Manuel	31.9131	-112.9258
4L	4	2	Gates Manuel	31.9118	-112.9215
4M	4	1	Gates Manuel	31.9115	-112.9204
4N	4	5	Gates Manuel	31.9110	-112.9189
4O	4	3	Gates Manuel	31.9099	-112.9155
4P	4	5	Gates Manuel	31.9085	-112.9108
4Q	4	1	Gates Manuel	31.9079	-112.9087
4R	4	2	Gates Manuel	31.9035	-112.8946

AJO Gate Locations (Cont)

Gate	Zone	Quantity	Longitude	Latitude	Information
4S	4	2	Gates Manuel	31.9035	-112.8945
4T	4	2	Gates Manuel	31.9032	-112.8933
4U	4	2	Gates Manuel	31.9023	-112.8903
4V	4	4	Gates Manuel	31.9015	-112.8880
4W	4	1	Gates Manuel	31.8995	-112.8814
5A	5	4	Gates Manuel	31.8964	-112.8713
5B	5	4	Gates Manuel	31.8961	-112.8702
5C	5	4	Gates Manuel	31.8956	-112.8684
5D	5	2	Gates Manuel	31.8952	-112.8674
5E	5	2	Gates Manuel	31.8950	-112.8663
5F	5	1	Gates Manuel	31.8937	-112.8622
5G	5	2	Gates Manuel	31.8920	-112.8563
5H	5	1	Gates Manuel	31.8909	-112.8528
5I	5	2	Gates Manuel	31.8880	-112.8433
5J	5	3	Gates Manuel	31.8854	-112.8349
5K	5	7	Gate Manuel	31.8845	-112.8317
5L	5	2	Gate Manuel	31.8804	-112.8186
5M	5	11	Gate Manuel	31.8793	-112.8183
5N	5	2	Gate Manuel	31.8773	-112.8081
5O	5	12	Gate Manuel	31.8734	-112.7956
5P	5	8	Gate Manuel	31.8714	-112.7888
5Q	5	2	Gates Manuel	31.8685	-112.7793
5R	5	2	Gates Manuel	31.8679	-112.7776
5S	5	2	Gates Manuel	31.8675	-112.7759
5T	5	2	Gates Manuel	31.8660	-112.7713
5U	5	2	Gates Manuel	31.8647	-112.7669
5V	5	2	Gates Manuel	31.8641	-112.7650
5W	5	2	Gates Manuel	31.8621	-112.7581

Gate	Zone	Quantity	Longitude	Latitude	Information
5X	5	4	Gates Manuel	31.8612	-112.7557
5Y	5	1	Gates Manuel	31.8594	-112.7550
6A	6	2	Gates Manuel	31.8577	-112.7441
6B	6	2	Gates Manuel	31.8571	-112.7420
6C	6	4	Gates Manuel	31.8568	-112.7413
6D	6	2	Gates Manuel	31.8532	-112.7293
6E	6	2	Gates Manuel	31.8530	-112.7286
6F	6	6	Gates Manuel	31.8516	-112.7242
6G	6	2	Gates Manuel	31.8510	-112.7222
6H	6	2	Gates Manuel	31.8505	-112.7204
6I	6	2	Gates Manuel	31.8500	-112.7188
6K	6	2	Gates Manuel	31.8485	-112.7142
6L	6	2	Gates Manuel	31.8444	-112.7006
6M	6	1	Gates Manuel	31.8437	-112.6986
6N	6	1	Gates Manuel	31.8426	-112.6948
6O	6	1	Gates Manuel	31.8416	-112.6917
6Q	6	1	Gates Manuel	31.8392	-112.6836
6R	6	2	Gates Manuel	31.8386	-112.6817
6S	6	2	Gates Manuel	31.8378	-112.6792
6T	6	2	Gates Manuel	31.8375	-112.6782
6U	6	2	Gates Manuel	31.8365	-112.6751
6V	6	1	Gates Manuel	31.8343	-112.6677
6W	6	2	Gates Manuel	31.8305	-112.6553
6X	6	4	Gates Manuel	31.8293	-112.6515
6Y	6	1	Gates Manuel	31.8293	-112.6457
6Z	6	3	Gates Manuel	31.8252	-112.6381
6J	6	2	Gates Manuel	31.8493	112.7168
6P	6	1	Gates Manuel	31.8406	112.6882

AJO Culvert Locations

Zone	Asset	Quantity	Longitude	Latitude	Information	Location Information
1	Culvert	4	32.01599	-113.26053	24" RCP 30ft	
1	Culvert	2	32.01565	-113.25999	24" RCP 50ft	
1	Culvert	2	32.0151	-113.25821	24" RCP 35ft	
1	Culvert	2	32.01482	-113.25691	24" RCP 35ft	
1	Culvert	2	32.01463	-113.25625	24" RCP 30ft	
1	Culvert	3	32.01415	-113.25474	24" RCP 30ft	
1	Culvert	3	32.01361	-113.253	24" RCP 30ft	
2	Culvert	3	32.01219	-113.24856	24" RCP 20ft	2A
2	Culvert	3	32.01173	-113.24703	24" RCP 30ft	2B
2	Culvert	3	32.01136	-113.24584	36" RCP 30ft	2C
2	Culvert	1	32.0108	-113.24412	36" RCP 30ft	
2	Culvert	1	32.01045	-113.24303	36" RCP 30ft	2D
2	Culvert	3	32.00973	-113.24123	36" RCP 30ft	2E
2	Culvert	5	32.00953	-113.2401	46" RCP 30ft	2G
2	Culvert	1	32.00897	-113.23838	24" RCP 30ft	2H
2	Culvert	2	32.00865	-113.23733	24" RCP 30ft	
2	Culvert	3	32.00844	-113.23669	24" RCP 30ft	2I
2	Culvert	2	32.00775	-113.23451	24" RCP 30ft	
2	Culvert	2	32.00735	-113.23317	48" RCP 30ft	2J
2	Culvert	1	32.00651	-113.23054	36" RCP 30ft	
2	Culvert	1	32.00634	-113.23004	36" RCP 30ft	
2	Culvert	1	32.0046	-113.22461	24" RCP 30ft	
2	Culvert	1	32.00363	-113.22153	24" RCP 30ft	2M
2	Culvert	1	32.00133	-113.2141	24" RCP 30ft	
2	Culvert	1	32.00091	-113.21294	36" RCP 40ft	
2	Culvert	2	32.00027	-113.21085	24" RCP 30ft	

Zone	Asset	Quantity	Longitude	Latitude	Information	Location Information
2	Culvert	1	31.99985	-113.20955	24" RCP 30ft	2P
2	Culvert	1	31.99925	-113.20763	36" RCP 30ft	
2	Culvert	1	31.99884	-113.2064	24" RCP 45ft	
2	Culvert	1	31.99862	-113.20613	24" RCP 45ft	
2	Culvert	1	31.99815	-113.20415	24" RCP 45ft	2R
2	Culvert	1	31.99733	-113.20202	34" RCP 30ft	2S
2	Culvert	1	31.99712	-113.20084	60" RCP 30ft	2T
2	Culvert	1	31.99646	-113.1991	WEST IBR	
2	Culvert	2	31.99586	-113.19686	60" RCP 60ft	
2	Culvert	1	31.99521	-113.19484	60" RCP 30ft	
2	Culvert	3	31.99431	-113.19199	36" RCP 32ft	
2	Culvert	2	31.99403	-113.19107	24" RCP 30ft	
2	Culvert	2	31.99336	-113.18896	34" RCP 30ft	
2	Culvert	1	31.99322	-113.18871	42" RCP 30ft	
2	Culvert	1	31.99232	-113.18568	34" RCP 30ft	2X
2	Culvert	3	31.9917	-113.18369	18" RCP 30ft	
2	Culvert	1	31.99135	-113.18272	18" RCP 30ft	
2	Culvert	5	31.99092	-113.18113	18" RCP 30ft	
2	Culvert	6	31.99042	-113.17948	60" RCP 30ft	2Z
2	Culvert	1	31.98993	-113.17808	46" RCP 30ft	
2	Culvert	1	31.98969	-113.17734	36" RCP 30ft	
2	Culvert	1	31.98891	-113.17491	60" RCP 30ft	2AB
2	Culvert	1	31.98861	-113.1739	48" RCP 30ft	
2	Culvert	1	31.98823	-113.17284	18" RCP 30ft	
2	Culvert	1	31.98729	-113.17033	42" RCP 30ft	
2	Culvert	1	31.98723	-113.16956	28" RCP 30ft	

AJO Culvert Locations (Cont)

Zone	Asset	Quantity	Longitude	Latitude	Information	Location Information
2	Culvert	1	31.98686	-113.16848	40" RCP 30ft	2AE
2	Culvert	1	31.98651	-113.16749	WEST IBR	
2	Culvert	2	31.98599	-113.16628	36" RCP 30ft	2AF
2	Culvert	1	31.98579	-113.16563	18" RCP 30ft	
2	Culvert	1	31.98538	-113.16436	18" RCP 30ft	
2	Culvert	1	31.98527	-113.16401	18" RCP 30ft	
2	Culvert	3	31.98409	-113.1631	36" RCP 30ft	
2	Culvert	1	31.98459	-113.16184	36" RCP 30ft	
2	Culvert	1	31.98452	-113.16162	36" RCP 30ft	2AH
2	Culvert	1	31.98293	-113.15667	36" RCP 30ft	
2	Culvert	2	31.98164	-113.15248	36" RCP 30ft	2AL
2	Culvert	2	31.98164	-113.15196	48" RCP 30ft	
2	Culvert	1	31.98125	-113.15096	WEST IBR	
2	Culvert	1	31.98054	-113.14828	Exposed Culvert	
2	Culvert	5	31.97972	-113.1461	60" RCP 30ft	
2	Culvert	1	31.97941	-113.14514	18" RCP 30ft	
2	Culvert	2	31.97929	-113.14424	Exposed Culvert	
2	Culvert	1	31.97874	-113.14281	18" RCP 30ft	
2	Culvert	2	31.97793	-113.14015	60" RCP 30ft	
2	Culvert	1	31.97771	-113.13939	24" RCP 30ft	
2	Culvert	1	31.9762	-113.13448	24" RCP 30ft	
2	Culvert	1	31.97533	-113.1315	24" RCP 30ft	
2	Culvert	1	31.9754	-113.13122	48" RCP 30ft	
2	Culvert	1	31.9747	-113.12942	24" RCP 30ft	
2	Culvert	1	31.97435	-113.12825	24" RCP 30ft	
2	Culvert	2	231.97348	-113.12543	48" RCP 30ft	

Zone	Asset	Quantity	Longitude	Latitude	Information	Location Information
3	Culvert	1	31.97315	-113.12429	48" RCP 30ft	
3	Culvert	2	31.97226	-113.12138	60" RCP 30ft	
3	Culvert	1	31.97167	-113.11938	60" RCP 30ft	
3	Culvert	1	31.97086	-113.11624	WEST IBR	
3	Culvert	2	31.97049	-113.11498	WEST IBR	
3	Culvert	1	31.96877	-113.10959	WEST IBR	
3	Culvert	1	31.96786	-113.10659	WEST IBR	
3	Culvert	1	31.96705	-113.10388	WEST IBR	
3	Culvert	1	31.96669	-113.10285	32" RCP 66ft	
3	Culvert	2	31.96649	-113.10166	48" RCP 30ft	3G
3	Culvert	3	31.96628	-113.10166	48" RCP 30ft	
3	Culvert	1	31.96603	-113.10075	24" RCP 30ft	
3	Culvert	1	31.96573	-113.09982	36" RCP 30ft	
3	Culvert	1	31.96536	-113.0984	36" RCP 30ft	
3	Culvert	1	31.96539	-113.09808	36" RCP 30ft	
3	Culvert	1	31.96345	-113.0922	24" RCP 30ft	
3	Culvert	1	31.96255	-113.08916	18" RCP 30ft	
3	Culvert	1	31.96237	-113.08834	WEST IBR	
3	Culvert	1	31.9623	-113.0883	18" RCP 30ft	
3	Culvert	1	31.96206	-113.0875	18" RCP 30ft	
3	Culvert	1	31.9618	-113.08676	18" RCP 30ft	
3	Culvert	1	31.9613	-113.08501	18" RCP 30ft	
3	Culvert	2	31.96097	-113.08343	18" RCP 30ft	
3	Culvert	1	31.96028	-113.08163	18" RCP 30ft	
3	Culvert	1	31.95953	-113.07916	18" RCP 30ft	
3	Culvert	1	31.95935	-113.07856	18" RCP 30ft	
3	Culvert	2	31.95815	-113.07457	24" RCP 30ft	3N
3	Culvert	1	31.9568	-113.07003	24" RCP 30ft	
3	Culvert	2	31.95664	-113.0696	24" RCP 30ft	

AJO Culvert Locations (Cont)

Zone	Asset	Quantity	Longitude	Latitude	Information	Location Information
3	Culvert	4	31.95482	-113.0631	Box Culvert 5X9	3Q
3	Culvert	6	31.95159	-113.05229	60" RCP 30ft	
3	Culvert	1	31.94516	-113.03162	24" RCP 30ft	
3	Culvert	1	31.94361	-113.02657	24" RCP 30ft	
3	Culvert	3	31.94337	-113.02576	24" RCP 30ft	
3	Culvert	1	31.94293	-113.02432	24" RCP 30ft	
3	Culvert	1	31.94142	-113.01912	24" RCP 30ft	
3	Culvert	1	31.94057	-113.01652	24" RCP 30ft	
3	Culvert	1	31.94186	-113.01628	QUITOBAQUITO SPRINGS	
3	Culvert	3	31.93963	-113.0133	WEST IBR	
3	Culvert	2	31.93949	-113.0125	24" RCP 30ft	3X
3	Culvert	2	31.93941	-113.0125	WEST IBR	
3	Culvert	1	31.93739	-113.006	24" RCP 30ft	
4	Culvert	2	31.93516	-112.99866	24" RCP 30ft	
4	Culvert	1	31.93487	-112.99771	24" RCP 30ft	
4	Culvert	1	31.93024	-112.98204	24" RCP 30ft	
4	Culvert	1	31.92915	-112.97886	24" RCP 30ft	
4	Culvert	1	31.92842	-112.9765	24" RCP 30ft	
4	Culvert	1	31.92795	-112.9749	24" RCP 30ft	
4	Culvert	1	31.9276	-112.97382	24" RCP 30ft	
4	Culvert	1	31.9261	-112.96884	36" RCP 30ft	
4	Culvert	1	31.92579	-112.96777	24" RCP 30ft	
4	Culvert	2	31.92488	-112.96479	36" RCP 30ft	
4	Culvert	1	31.92462	-112.96398	36" RCP 30ft	
4	Culvert	1	31.9242	-112.96255	36" RCP 30ft	
4	Culvert	2	31.92381	-112.96127	24" RCP 30ft	
4	Culvert	3	31.92308	-112.95888	24" RCP 30ft	

Zone	Asset	Quantity	Longitude	Latitude	Information	Location Information
4	Culvert	3	31.92264	-112.95743	24" RCP 30ft	
4	Culvert	1	31.91939	-112.94672	24" RCP 30ft	
4	Culvert	2	31.91569	-112.93453	48" RCP 30ft	4G
4	Culvert	1	31.91536	-112.93324	WEST IBR	
4	Culvert	3	31.91397	-112.9288	36" RCP 30ft	
4	Culvert	2	31.91304	-112.92582	24" RCP 30ft	
4	Culvert	1	31.91217	-112.92293	24" RCP 30ft	
4	Culvert	3	31.91168	-112.92136	24" RCP 30ft	4L
4	Culvert	1	31.91133	-112.92019	24" RCP 30ft	
4	Culvert	1	31.90932	-112.91354	24" RCP 30ft	
4	Culvert	2	31.90912	-112.91291	24" RCP 30ft	
4	Culvert	2	31.90878	-112.91174	24" RCP 30ft	
4	Culvert	1	31.90823	-112.90956	24" RCP 30ft	
4	Culvert	1	31.90767	-112.90812	24" RCP 30ft	
4	Culvert	1	31.90826	-112.90755	24" CMP 30ft	South Puerto Blanco
4	Culvert	1	31.90741	-112.90728	24" RCP 30ft	
4	Culvert	1	31.90713	-112.90634	24" RCP 30ft	
4	Culvert	1	31.90754	-112.90592	36" CMP 30ft	
4	Culvert	3	31.9068	-112.90526	36" RCP 30ft	
4	Culvert	1	31.90558	-112.90128	24" RCP 30ft	
4	Culvert	1	31.90517	-112.8999	24" RCP 30ft	
4	Culvert	2	31.90511	-112.89922	36" RCP 30ft	
4	Culvert	1	31.90539	-112.8991	36" CMP 30ft	South Puerto Blanco

AJO Culvert Locations (Cont)

Zone	Asset	Quantity	Longitude	Latitude	Information	Location Information
4	Culvert	1	31.90432	-112.89703	24" RCP 30ft	
4	Culvert	1	31.90463	-112.89596	18" CMP 30ft	South Puerto Blanco
4	Culvert	1	31.90367	-112.89491	24" RCP 30ft	
4	Culvert	1	31.9024	-112.89076	24" RCP 30ft	
4	Culvert	2	31.90214	-112.88994	24" RCP 30ft	
4	Culvert	1	31.90071	-112.88523	24" RCP 30ft	
4	Culvert	2	31.90002	-112.88302	24" RCP 30ft	
4	Culvert	2	31.89951	-112.88134	24" RCP 30ft	
4	Culvert	1	31.89883	-112.87902	24" RCP 30ft	
4	Culvert	3	31.89846	-112.87784	24" RCP 30ft	
4	Culvert	1	31.89826	-12.87674	24" RCP 30ft	
4	Culvert	1	31.89787	-112.87591	24" RCP 30ft	
4	Culvert	1	31.89774	-112.87552	24" RCP 30ft	
5	Culvert	1	31.89749	-112.87461	24" RCP 30ft	
5	Culvert	1	31.8973	-112.87397	24" RCP 30ft	
5	Culvert	1	31.89701	-112.87302	24" RCP 30ft	
5	Culvert	1	31.8968	-112.87228	24" RCP 30ft	
5	Culvert	2	31.89609	-112.87001	18" RCP 30ft	
5	Culvert	2	31.89421	-112.86383	18" RCP 30ft	
5	Culvert	1	31.89368	-112.86208	18" RCP 30ft	
5	Culvert	1	31.89271	-112.85901	24" RCP 30ft	
5	Culvert	1	31.89239	-112.85785	24" RCP 30ft	
5	Culvert	2	31.89181	-112.85599	24" RCP 30ft	
5	Culvert	1	31.89141	-112.85475	42" RCP 30ft	
5	Culvert	1	31.89103	-112.8533	WEST IBR	
5	Culvert	3	31.89084	-112.85283	24" RCP 30ft	5H
4	Culvert	2	31.89787	-112.84935	18" CMP 30ft	South Puerto Blanco

Zone	Asset	Quantity	Longitude	Latitude	Information	Location Information
5	Culvert	11	31.88437	-112.83164	60" RCP 30ft	
5	Culvert	4	31.8835	-112.82821	18" RCP 30ft	
5	Culvert	1	31.8825	-112.82547	42" RCP 30ft	
5	Culvert	4	31.8051	-112.81852	6x5 Box Culvert	5M
5	Culvert	2	31.87725	-112.8081	24" RCP 30ft	5N
5	Culvert	12	31.87587	-112.80377	36" RCP 30ft	
5	Culvert	2	31.87488	-112.80044	24" RCP 30ft	
5	Culvert	10	31.87358	-112.79562	Box Culvert	5O
5	Culvert	1	31.86943	-112.78271	48" RCP 30ft	
5	Culvert	1	31.869	-112.78086	24" RCP 30ft	
5	Culvert	2	31.86786	-112.7775	18" RCP 20ft	5R
5	Culvert	6	31.8636	-112.76366	18" RCP 20ft	
5	Culvert	2	31.86204	-112.75848	36" RCP 30ft	
5	Culvert	2	31.8612	-112.75575	18" RCP 30ft	5X
5	Culvert	1	31.86075	-112.75423	18" RCP 30ft	
5	Culvert	4	31.85951	-112.75026	18" RCP 30ft	
6	Culvert	1	31.85791	-112.745	18" RCP 30ft	
6	Culvert	4	31.85659	-112.74107	48" RCP 30ft	
6	Culvert	1	31.8545	-112.73376	EAST IBR	
6	Culvert	2	31.85372	-112.73128	18" RCP 30ft	
6	Culvert	2	31.85307	-112.72925	60" RCP 30ft	6D
6	Culvert	2	31.85153	-112.72417	24" RCP 30ft	6F
6	Culvert	2	31.85092	-112.72223	24" RCP 30ft	6G
6	Culvert	2	31.85035	-112.72036	24" RCP 30ft	6H
6	Culvert	2	31.84989	-112.71868	32" RCP 30ft	
6	Culvert	2	31.8492	-112.71658	32" RCP 30ft	
6	Culvert	2	31.84709	-112.70972	32" RCP 30ft	

AJO Culvert (Cont) /Cattleguard Locations

Zone	Asset	Quantity	Longitude	Latitude	Information	Location Information
6	Culvert	6	31.8449	-112.7026	32" RCP 30ft	
6	Culvert	4	31.84365	-112.69847	32" RCP 30ft	6M
6	Culvert	1	31.84269	-112.69585	18" RCP 30ft	
6	Culvert	3	31.83997	-112.68647	18" RCP 30ft	
6	Culvert	3	31.83905	-112.68349	48" RCP 30ft	
6	Culvert	2	31.83825	-112.68082	48" RCP 30ft	
6	Culvert	1	31.83707	-112.67687	EAST IBR	
6	Culvert	1	31.83597	-112.67327	EAST IBR	
6	Culvert	1	31.83451	-112.66856	EAST IBR	
6	Culvert	1	31.83418	-112.66747	EAST IBR	
6	Culvert	2	31.833545	-112.665585	EAST IBR	
6	Culvert	1	31.83255	-112.66217	60" RCP 30ft	
6	Culvert	2	31.8321	-112.66078	36" RCP 30ft	
6	Culvert	2	31.83134	-112.65824	48" RCP 30ft	
6	Culvert	3	31.83069	-112.65614	36" RCP 30ft	
6	Culvert	2	31.83054	-112.65519	36" RCP 30ft	6W
6	Culvert	1	31.83035	-112.65502	24" RCP 30ft	
6	Culvert	2	31.82927	-112.65152	48" RCP 30ft	6X
6	Culvert	1	31.82786	-112.64689	24" RCP 30ft	
6	Culvert	2	31.82744	-112.64558	24" RCP 30ft	
6	Culvert	2	31.82636	-112.64207	48" RCP 30ft	
6	Culvert	2	31.82583	-112.64032	32" RCP 30ft	
49.5	Culvert	1	32.31798	-112.86069	30" RCP 30ft	Darby Wells

Zone	Asset	Quantity	Longitude	Latitude	Location Information
49.5	1	Cattleguard	32.20059	-112.90546	Darby, Bates and Alamo Canyon Intersection

CAG Station Asset Overview

(31.7832; 31.5002; 31.6272,-112.0000)

- **Road Miles:** 114.37
- **Gates:** 0
- **Fence Type:**
 - Post and Rail: 23.25
- **Culverts:**
 - Locations: 11
 - Total Number: 14
- **Cattleguard:** 1

CAG Culvert/Cattleguard Locations

Zone	Asset	Quantity	Longitude	Latitude	Information
10	2	Culvert	31.67098	-112.13983	TBR
10	1	Culvert	31.66972	-112.13573	TBR
10	1	Culvert	31.66551	-112.12231	TNR
10	1	Culvert	31.63330	-112.01954	TBR
11	1	Culvert	31.66127	-112.10884	TBR
11	1	Culvert	31.66009	-112.10502	TNR
11	1	Culvert	31.74627	-112.09805	Old FR 2
11	1	Culvert	31.74630	-112.09796	Old FR 2
11	1	Culvert	31.75269	-112.08684	FR 12
11	1	Culvert	31.71623	-112.07395	Torros/Tecolote
11	1	Culvert	31.71494	-112.07301	Torros/Tecolote
11	1	Culvert	31.75940	-112.07054	FR-12
11	3	Culvert	31.69949	-112.05748	Torros/Tecolote

Zone	Asset	Quantity	Longitude	Latitude	Information
11	1	Cattle Guard	31.78686	-112.02633	IR 12

TPS Station Asset Overview

(32.6270,-112.0000; -31.5090,-111.6189)

- **Road Miles:** 67.98
- **Gates:** 0
- **Fence Type:**
 - Post and Rail: 11.65
 - Normandy: 7.22
- **Culverts:**
 - Types
 - RCP
 - CMP
 - Box
 - Locations: 22
 - Total Number: 53
- **Cattleguard:** 2

TPS Culvert/Cattleguard Locations

Zone	Asset	Quantity	Longitude	Latitude	Information
12	2	Culvert	31.62438	-111.99125	36"
12	1	Culvert	31.624415	-111.991069	TNR
12	2	Culvert	31.62386	-111.98902	HWC Box Culvert
12	1	Culvert	31.62386	-111.98902	CMP 36"
12	1	Culvert	31.63787	-111.98483	42"
13	3	Culvert	31.61483	-111.87282	TPS/Wrap Around
13	1	Culvert	31.58479	-111.86563	
13	1	Culvert	31.5846	-111.8652	
13	1	Culvert	31.5861	-111.85737	White House
13	1	Culvert	31.58372	-111.8572	White House
13	1	Culvert	31.58317	-111.85716	White House
13	1	Culvert	31.58238	-111.85709	White House
13	2	Culvert	31.59975	-111.83949	TPS/Wrap Around
13	1	Culvert	31.56919	-111.81606	TPS/E. Horse Peak on IBR
13	3	Culvert	31.55898	-111.78406	TNR
13	21	Culvert	31.55854	-111.78254	TNR
13	5	Culvert	31.5582	-111.78134	TNR
13	1	Culvert	31.55808	-111.78085	TNR
14	1	Culvert	31.55075	-111.75767	TNR
14	1	Culvert	31.53331	-111.70255	TPS/TNR
14	2	Culvert	31.5326	-111.70001	

Zone	Asset	Quantity	Longitude	Latitude	Information
13	1	Cattle Guard	31.60518	-111.83964	Horse Peak
14	1	Cattle Gurad	31.54493	-111.68462	Trading Post

TUS Station Asset Overview

(31.49675, -111.58765; 31.38895,-111.25032)

- **Road Miles:** 161.32
- **Gates**
 - Type:
 - Swing Flood Gates
 - Locations: 15
 - Total Number: 51
- **Culverts**
 - Locations: 31
 - Total Number: 64
- **Cattle Guard:** 29

TUS Gate Locations

Gate	Zone	Quantity	Longitude	Latitude	Information
15A	15	1	Gates Manual	31.4968	-111.5877
15B	15	9	Gates Manual	31.4719	-111.5097
15C	15	2	Gates Manual	31.4708	-111.5063
17A	17	1	Gates Manual	31.4563	-111.4608
17B	17	6	Gates Manual	31.4502	-111.4417
17C	17	1	Gates Manual	31.4353	-111.3950
17D	17	5	Gates Manual	31.4312	-111.3822
18A	18	2	Gates Manual	31.4235	-111.3579
18C	18	1	Gates Manual	31.4167	-111.3369
18B	18	2	Gates Manual	31.4215	-111.3352
18D	18	1	Gates Manual	31.4156	-111.3331
18E	18	1	Gates Manual	31.4060	-111.3034
18F	18	2	Gates Manual	31.3981	-111.2787
18G	18	3	Gates Manual	31.3939	-111.2655
18H	18	14	Gates Manual	31.3890	-111.2503

TUS Culvert Locations

Zone	Asset	Quantity	Longitude	Latitude	Information
15	Culvert	2	31.4926	-111.5747	IBR, W. Side of POE
15	Culvert	6	31.4893	-111.5638	IBR, W. Side of POE
15	Culvert	2	31.4891	-111.5638	IBR, W. Side of POE
15	Culvert	1	31.4884	-111.5612	IBR, W. Side of POE
15	Culvert	1	31.4883	-111.5612	IBR, W. Side of POE
15	Culvert	2	31.4877	-111.5595	IBR, W. Side of POE
15	Culvert	2	31.4869	-111.5567	IBR, W. Side of POE
15	Culvert	2	31.4867	-111.5560	IBR, W. Side of POE
15	Culvert	2	31.4837	-111.5470	IBR, W. Side of POE
15	Culvert	4	31.4835	-111.5462	IBR, W. Side of POE
15	Culvert	1	31.4812	-111.5389	IBR, E. Side of the POE
15	Culvert	1	31.5898	-111.5708	Aeros Rd
15	Culvert	1	31.5874	-111.5759	Aros Ranch Rd
15	Culvert	1	31.4886	-111.5384	Fresnal E. end
15	Culvert	3	31.4698	-111.5033	IBR, E. Side of the POE
15	Culvert	1	31.5075	-111.5834	Mirador Ranch Rd
15	Culvert	3	31.5073	-111.5827	Mirador Ranch Rd
15	Culvert	9	31.5133	-111.5837	Presumido Canyon
15	Culvert	1	31.5141	-111.5836	Presumido Canyon
15	Culvert	1	31.5147	-111.5831	Presumido Canyon
15	Culvert	1	31.5146	-111.5829	Presumido Canyon
15	Culvert	1	31.5157	-111.5807	Presumido Canyon
15	Culvert	3	31.5216	-111.5805	Presumido Canyon
15	Culvert	5	31.5226	-111.5804	Presumido Canyon
15	Culvert	1	31.5088	-111.5862	Presumido Canyon/ Mirador Ranch Rd

Zone	Asset	Quantity	Longitude	Latitude	Information
17	Culvert	1	31.4657	-111.4904	IBR, E. Side of the POE
17	Culvert	1	31.4590	-111.4691	IBR, E. Side of the POE
17	Culvert	1	31.4590	-111.4690	IBR, E. Side of the POE
17	Culvert	3	31.4532	-111.4509	IBR, E. Side of the POE
18	Culvert	1	31.5799	-111.3627	Louisiana Tank

TUS Cattleguard Locations

Zone	Quantity	Asset	Longitude	Latitude	Information
15	1	Cattle Guard	31.49182	-111.57230	IBR
15	1	Cattle Guard	31.49174	-111.57205	IBR
15	1	Cattle Guard	31.58822	-111.57229	Aeros Rd
15	1	Cattle Guard	31.61219	-111.60539	Caponara Tank
15	1	Cattle Guard	31.49807	-111.54648	De La Oso
15	1	Cattle Guard	31.50118	-111.55860	De La Oso/Mirador Ranch Rd
15	1	Cattle Guard	31.48859	-111.53844	Fresnal
15	1	Cattle Guard	31.48730	-111.50919	Fresnal
15	1	Cattle Guard	31.50958	-111.58593	Presimudo
15	1	Cattle Guard	32.45186	-111.54071	Sierra Vista Ranch Rd
17	1	Cattle Guard	31.452881	-111.450139	IBR
17	1	Cattle Guard	31.44484	-111.42467	IBR
17	1	Cattle Guard	31.43350	-111.38921	IBR
17	1	Cattle Guard	31.52314	-111.45059	Arrieta Wash
17	1	Cattle Guard	31.49708	-111.45054	Canoa Cemetery/BA 214
17	1	Cattle Guard	31.56276	-111.41974	Dump Rd
17	1	Cattle Guard	31.46852	-111.45083	Garcia Ranch
18	1	Cattle Guard	31.42839	-111.37290	IBR
18	1	Cattle Guard	31.42117	-111.35050	IBR
18		Cattle Guard	31.41775	-111.34001	IBR
18	1	Cattle Guard	31.41775	-111.33991	IBR
18	1	Cattle Guard	31.41088	-111.31824	IBR
18	1	Cattle Guard	31.40665	-111.30508	IBR
18	1	Cattle Guard	31.3891	-111.25068	IBR
18	1	Cattle Guard	31.38896	-111.25025	IBR

Zone	Quantity	Asset	Longitude	Latitude	Information
47.1	1	Cattle Guard	31.84872	-111.39776	Black Hills Rd
47.1	1	Cattle Guard	31.77908	-111.36874	Pozo
47.1	1	Cattle Guard	31.81247	-111.35836	Black Hills Rd
47.1	1	Cattle Guard	31.65837	-111.31556	Las Guijas

NGL Assets

(31.33267,-111.07433; 31.33378,-110.86870)

- **Road Miles:** 41.28
- **Gates**
 - Type
 - Swing Flood Gates
 - Electric Slide Gate
 - Lift Gates
 - Electric Swing Gate
 - Locations: 38
 - Total Number: 203
- **Culverts**
 - Locations: 67
 - Total Number: 112
- **Cattle Guards:** 22
- **Lighting**
 - Type
 - LED
 - Ballast
 - Poles: 41
 - Fixtures:
 - On poles: 145
 - Tunnel: 6

NGL Gate Locations

Gate	Zone	Quantity	Asset	Longitude	Latitude
20A	20	1	Gates, Manuel Swing	31.33267	-111.07433
20B	20	1	Gates, Manuel Swing	31.33264	-111.02559
20C	20	12	Gates, Manuel Swing	31.33264	-111.01314
20D	20	1	Motorized Gate	31.33274	-111.00832
20E	20	2	Gates, Manuel Swing	31.33274	-111.00095
21A	21	40	Gates, Manuel Swing	31.33279	-110.99892
21B	21	2	Gates, Manuel Swing	31.32793	-110.99817
21C	21	1	Motorized Gate	31.33269	-110.97654
21D	21	1	Gates, Manuel Swing	31.33264	-110.97588
21E	21	2	Gates, Manuel Swing	31.33262	-110.97238
21G	21	1	Gates, Manuel Swing	31.33267	-110.96173
21H	21	2	Gates, Manuel Swing	31.33268	-110.9614
21N	21	1	Motorized Gate	31.3327	-110.94223
21O	21	1	Gates, Manuel Swing	31.33281	-110.93895
21F	21	26	Gates, Manuel Swing	31.33272	-110.9656
21I	21	1	Gates, Manuel Swing	31.33277	-110.95842
21K	21	8	Gates, Manuel Swing	31.33278	-110.95582
21L	21	1	Gates, Manuel Swing	31.33275	-110.95087
21M	21	1	Gates, Manuel Swing	31.33279	-110.94737
21S	21	1	Gates, Manuel Swing	31.33291	-110.92763
21T	21	1	Gates, Manuel Swing	31.33295	-110.92674
21P	21	2	Gates, Manuel Swing	31.33282	-110.93703
21Q	21	7	Gates, Manuel Swing	31.33289	-110.93373
21R	21	2	Gates, Manuel Swing	31.33289	-110.93228
21U	21	2	Gates, Manuel Swing	31.33315	-110.92498
21V	21	4	Gates, Manuel Swing	31.33313	-110.92498
21Z	21	14	Gates, Manuel Swing	31.33339	-110.91383
21Y	21	24	Gates, Manuel Lift	31.33317	-110.91383
21Z	21	14	Gates, Manuel Lift	31.33314	-110.91313
21AA	21	1	Gates, Manuel Swing	31.33323	-110.90205
21AC	21	1	Gates, Manuel Swing	31.33342	-110.89184
21AD	21	1	Gates, Manuel Lift	31.33337	-110.88987

Gate	Zone	Quantity	Longitude	Latitude	Information
22A	22	1	Gates, Manuel Swing	31.33381	-110.84496
22B	22	19	Gates, Manuel Lift	31.33378	-110.86870
22C	22	1	Gates, Manuel Swing	31.33388	-110.85313
22D	22	1	Gates, Manuel Swing	31.33394	-110.84501
22E	22	1	Gates, Manuel Swing	31.33380	-110.82809
22F	22	1	Gates, Manuel Swing	31.33371	-110.79813

NGL Culvert Locations

Zone #	Quantity	TYPE	Latitude	Longitude	Location
20	1	Culvert	31.33518	-111.00962	North Target Range Road
20	1	Culvert	31.33557	-111.00917	North Target Range Road
20	1	Culvert	31.33536	-111.00844	North Target Range Road
20	1	Culvert	31.33533	-111.00804	North Target Range Road
20	1	Culvert	31.33499	-111.00736	North Target Range Road
20	1	Culvert	31.33482	-111.00657	North Target Range Road
20	1	Culvert	31.33484	-111.00611	North Target Range Road
21	1	Culvert	31.33326	-110.9207	Between IBR and TNR
21	1	Culvert	31.33331	-110.9151	Between IBR and TNR
21	3	Culvert	31.33329	-110.99841	Culverts on TNR
21	4	Culvert	31.33297	-110.98745	IBR
21	1	Culvert	31.33281	-110.9416	By POE
21	1	Culvert	31.33303	-110.92415	Smugglers
21	1	Culvert	31.33315	-110.91998	Smugglers
21	1	Culvert	31.33341	-110.91992	IBR
21	1	Culvert	31.33309	-110.91946	IBR
21	1	Culvert	31.33309	-110.91946	IBR
21	1	Culvert	31.33325	-110.9188	IBR
21	1	Culvert	31.33328	-110.91662	IBR
21	2	Culvert	31.33314	-110.91159	TNR
21	1	Culvert	31.33333	-110.90794	TNR
21	2	Culvert	31.33334	-110.90792	TNR
21	1	Culvert	31.33331	-110.90452	IBR
21	1	Culvert	31.33323	-110.90381	IBR
21	1	Culvert	31.33353	-110.88918	IBR

Zone #	Quantity	TYPE	Latitude	Longitude	Location
21	1	Culvert	31.33334	-110.88914	IBR
21	1	Culvert	31.33366	-110.88271	TNR
21	1	Culvert	31.33337	-110.88151	TNR
21	1	Culvert	31.33337	-110.8815	TNR
21	1	Culvert	31.33372	-110.88054	TNR
21	1	Culvert	31.3336	-110.88045	TNR
21	1	Culvert	31.33373	-110.87962	TNR
21	1	Culvert	31.33357	-110.87769	IBR
21	1	Culvert	31.33378	-110.87528	TNR
21	4	Culvert	31.33382	-110.77443	IBR
21	4	Culvert	31.33502	-110.896	240 Rd
21	4	Culvert	31.3354	-110.89573	240 Rd
21	1	Culvert	31.35118	-110.90025	A Rd
21	1	Culvert	31.35632	-110.88718	A Rd
21	1	Culvert	31.35616	-110.88647	A Rd
21	5	Culvert	31.35587	-110.88638	A Rd
21	1	Culvert	31.33479	-111.00557	North Target Range Road
21	2	Culvert	31.33354	-110.99975	North Target Range Road
21	1	Culvert	31.33354	-110.99466	North Target Range Road
21	1	Culvert	31.33413	-110.99237	North Target Range Road
22	1	Culvert	31.33382	-110.87331	TNR
22	1	Culvert	31.33382	-110.87331	TNR
22	1	Culvert	31.33376	-110.87028	TNR
22	1	Culvert	31.33376	-110.87028	TNR
22	1	Culvert	31.33371	-110.86499	TNR
22	1	Culvert	31.33371	-110.86499	TNR

NGL Culvert/Cattleguard Locations

Zone #	Quantity	Type	Latitude	Longitude	Location
22	1	Culvert	31.33368	-110.86205	TNR
22	1	Culvert	31.33374	-110.85915	TNR
22	23	Culvert	31.33398	-110.84971	IBR
22	1	Culvert	31.33347	-110.8446	IBR
22	2	Culvert	31.33408	-110.84276	IBR
22	1	Culvert	31.33383	-110.84049	IBR
22	1	Culvert	31.33381	-110.83949	IBR
22	1	Culvert	31.33385	-110.83827	IBR
22	1	Culvert	31.33385	-110.83765	IBR
22	1	Culvert	31.33398	-110.8304	IBR
22	1	Culvert	31.33385	-110.78355	IBR
22	5	Culvert	31.33391	-110.7793	IBR
22	1	Culvert	31.39197	-110.83787	Froggy Knob

Zone #	Quantity	Type	Latitude	Longitude	Location Information
20	1	Cattle Guard	31.33254	-111.05472	IBR
20	1	Cattle Guard	31.33267	-111.02826	IBR
20	1	Cattle Guard	31.33266	-111.0133	IBR
20	1	Cattle Guard	31.33479	-111.01315	IBR
21	1	Cattle Guard	31.33278	-110.97683	IBR
21	1	Cattle Guard	31.33339	-110.97675	IBR
21	2	Cattle Guard	31.33323	-110.90894	IBR
21	1	Cattle Guard	31.33351	-110.90882	TNR
21	1	Cattle Guard	31.33327	-110.90054	IBR
21	1	Cattle Guard	31.33372	-110.87944	TNR
21	1	Cattle Guard	31.34823	-110.87772	A Rd
21	1	Cattle Guard	31.3375	-110.92975	C Rd
21	2	Cattle Guard	31.33393	-110.92594	C Rd
22	1	Cattle Guard	31.33395	-110.8514	IBR
22	1	Cattle Guard	31.33391	-110.84756	IBR
22	1	Cattle Guard	31.334	-110.84499	IBR
22	1	Cattle Guard	31.33371	-110.79574	IBR
22	1	Cattle Guard	31.34823	-110.87466	A Rd
22	1	Cattle Guard	31.34623	-110.86403	A Rd
22	1	Cattle Guard	31.34624	-110.86403	A Rd
22	1	Cattle Guard	31.33358	-110.92587	C Rd
22	1	Cattle Guard	31.38051	-110.83871	Froggy Knob

SON Assets

(31.3334;-110.7500 Stop: 31.3442;-110.3003)

- **Road Miles:** 23.77
- **Gates:** 0
- **Culverts:** 2
- **Cattle Guard:** 1

NCO Asset Overview

(31.33377,-110.25053; 31.33414,- 109.75443)

- **Road Miles:** 46.95
- **Gates**
 - Type
 - Swing Flood Gates
 - Lift Gates
 - Electric Slide Gate
 - Box
 - Locations: 71
 - Total Number: 433
- **Culverts**
 - Locations: 53
 - Number: 233
- **Cattle Guard:** 24
- **Lighting**
 - Poles: 165
 - Fixtures: 320

NCO Gate Locations

Asset #	Zone	Quantity	Asset	Latitude	Longitude
27A	27	2	Gates	31.33377	-110.25053
28A	28	4	Gates, Manuel Lift	31.33390	-110.24142
28B	28	2	Gates, Manuel Swing	31.33390	-110.23031
28C	28	16	Gates, Manuel Lift	31.33390	-110.22798
28D	28	2	Gates, Manuel Swing	31.33395	-110.20891
28E	28	1	Gates, Manuel Swing	31.33421	-110.15652
28F	28	2	Gates, Manuel Swing	31.33421	-110.14813
28G	28	73	Gates, Manuel Swing	31.33421	-110.14813
28H	28	2	Gates, Manuel Swing	31.33423	-110.14720
28I	28	6	Gates, Manuel Swing	31.33422	-110.14025
28J	28	2	Gates, Manuel Swing	31.33423	-110.13976
28K	28	2	Gates, Manuel Swing	31.33422	-110.13929
28L	28	6	Gates, Manuel Swing	31.33413	-110.13906
28M	28	6	Gates, Manuel Swing	31.33422	-110.13872
28N	28	6	Gates, Manuel Swing	31.33422	-110.13836
28O	28	2	Gates, Manuel Swing	31.33420	-110.13793
28P	28	2	Gates, Manuel Swing	31.33420	-110.13700
28Q	28	5	Gates, Manuel Swing	31.33422	-110.13456
28R	28	3	Gates, Manuel Swing	31.33422	-110.13456
28S	28	3	Gates, Manuel Swing	31.33423	-110.12781
29A	29	2	Gates, Manuel Swing	31.33420	-110.12138
29B	29	10	Gates, Manuel Swing	31.33394	-110.11756
29C	29	20	Gates, Manuel Swing	31.33404	-110.11128
29D	29	3	Gates, Manuel Swing	31.33402	-110.11014
29E	29	1	Gates, Manuel Swing	31.33401	-110.10501

Asset #	Zone	Quantity	Asset	Latitude	Longitude
29F	29	10	Gates, Manuel Swing	31.33411	-110.10354
29G	29	22	Gates, Manuel Swing	31.33408	-110.10188
29H	29	2	Gates, Manuel Swing	31.33415	-110.08332
29I	29	1	Gates, Manuel Swing	31.33412	-110.07823
29J	29	4	Gates, Manuel Swing	31.33418	-110.07672
29K	29	17	Gates, Manuel Swing	31.33403	-110.07576
29L	29	10	Gates, Manuel Swing	31.33395	-110.05880
29M	29	2	Gates, Manuel Swing	31.33416	-110.05109
29N	29	14	Gates, Manuel Swing	31.33405	-110.03063
29O	29	2	Gates, Manuel Swing	31.33412	-110.01449
30A	30	6	Gates, Manuel Swing	31.33410	-109.99892
30B	30	3	Gates, Manuel Swing	31.33411	-109.99311
30C	30	2	Gates, Manuel Swing	31.33411	-109.98850
30D	30	2	Gates, Manuel Swing	31.33411	-109.98635
30E	30	2	Gates, Manuel Swing	31.33414	-109.97971
30F	30	2	Gates, Manuel Swing	31.33411	-109.97604
30G	30	5	Gates, Manuel Swing	31.33411	-109.97333
30H	30	2	Gates, Manuel Swing	31.33411	-109.97047
30I	30	2	Gates, Manuel Swing	31.33413	-109.96417
30J	30	10	Gates, Manuel Swing	31.33402	-109.96212
30K	30	8	Gates, Manuel Swing	31.33403	-109.95720
30L	30	22	Gates, Manuel Swing	31.33402	-109.95437
30M	30	1	Gates, Manuel Swing	31.33416	-109.94898
30N	30	1	Gates, Manuel Swing	31.33416	-109.94898
30O	30	1	Gates, Manuel Swing	31.33419	-109.94575
30P	30	5	Gates, Manuel Swing	31.33421	-109.94432

NCO Gate Locations

Asset #	Zone	Quantity	Asset	Location	
30Q	30	2	Gates, Manuel Swing	31.33424	-109.94306
30R	30	6	Gates, Manuel Swing	31.33402	-109.93920
30S	30	6	Gates, Manuel Swing	31.33418	-109.93463
30T	30	5	Gates, Manuel Swing	31.33402	-109.93446
30U	30	2	Gates, Manuel Swing	31.33411	-109.93283
31A	31	2	Gates, Manuel Swing	31.33411	-109.87297
31B	31	6	Gates, Manuel Swing	31.33411	-109.85423
31C	31	3	Gates, Manuel Swing	31.33402	-109.83411
31D	31	4	Gates, Manuel Swing	31.33405	-109.81909
31E	31	2	Gates, Manuel Swing	31.33413	-109.81892
31G	31	18	Gates, Manuel Swing	31.33428	-109.79066
31H	31	5	Gates, Manuel Swing	31.33419	-109.78719
31I	31	2	Gates, Manuel Swing	31.33418	-109.77711
31J	31	1	Gates, Manuel Swing	31.33405	-109.77200
31K	31	1	Gates, Manuel Swing	31.33429	-109.76356
31L	31	15	Gates, Manuel Swing	31.33414	-109.75443

NCO Culvert Locations

Asset #	Zone	Quantity	Asset	Location		End Location
C1	27	14	Culvert	31.33417	-110.58526	IBR
C2	28	3	Culvert	31.33379	-110.24615	
C3	28	4	Culvert	31.33418	-110.2375	IBR
C4	28	1	Culvert	31.33973	-110.23582	
C5	28	2	Culvert	31.34460	-110.22667	
C6	28	2	Culvert	31.33417	-110.18443	IBR
C7	28	2	Culvert	31.33417	-110.13443	IBR
C8	28	1	Culvert	31.33417	-110.13438	Wash 53/28R
C9	28	1	Culvert	31.33416	-110.13293	IBR
C10	28	1	Culvert	31.33419	-110.13288	IBR
C11	28	2	Culvert	31.33421	-110.12985	IBR
C12	29	2	Culvert	31.33415	-110.11967	IBR
C13	29	1	Culvert	31.33418	-110.11910	IBR
C14	29	2	Culvert	31.33413	-110.11370	IBR
C15	29	19	Culvert	31.33415	-110.11233	IBR
C16	29	4	Culvert	31.33418	-110.10634	IBR
C17	29	4	Culvert	31.33416	-110.10631	Wash 41
C18	29	3	Culvert	31.33416	-110.10499	IBR
C19	29	25	Culvert	31.33432	-110.10221	IBR
C20	29	1	Culvert	31.33416	-110.08163	
C21	29	9	Culvert	31.33418	-110.07672	29J
C22	29	6	Culvert	31.33413	-110.06435	Wash 31
C23	29	6	Culvert	31.33421	-110.04934	IBR
C24	29	6	culvert	31.33421	-110.03413	IBR
C25	29	4	Culvert	31.33418	-110.02375	IBR
C26	29	4	Culvert	31.33417	-110.02051	IBR

Asset #	Zone	Quantity	Asset	Location		End Location
C27	29	7	Culvert	31.33415	-110.02051	Wash 21
C28	29	7	culvert	31.33414	-110.01617	IBR
C29	29	8	Culvert	31.33418	-110.01362	IBR
C30	29	8	Culvert	31.33415	-110.01334	IBR
C31	29	3	Culvert	31.33415	-110.01142	IBR
C32	29	5	Culvert	31.33415	-110.01055	IBR
C33	29	7	Culvert	31.33415	-110.00505	IBR
C34	30	1	Culvert	31.33423	-109.98326	IBR
C35	30	3	Culvert	31.33411	-109.98118	IBR
C36	30	1	Culvert	31.33410	-109.97788	
C37	30	1	Culvert	31.33980	-109.92020	
C38	30	2	Culvert	31.33419	-109.9192	IBR
C39	31	2	Culvert	31.33415	-109.86575	IBR
C40	31	3	Culvert	31.33412	-109.85621	IBR/HWC Arnie's Wash
C41	31	4	Culvert	31.33408	-109.85300	IBR/HWC Arnie's Wash Cul 2063
C42	31	2	Culvert	31.33411	-109.84821	IBR
C43	31	4	Culvert Box	31.33408	-109.83424	IBR/ Giacolettis HWC 2261
C44	31	2	Culvert	31.33407	-109.82361	IBR
C45	31	2	Culvert	31.33409	-109.82358	IBR
C46	31	3	Culvert	31.33407	-109.82102	IBR
C47	31	9	Culvert Box	31.33414	-109.79112	IBR/Christiansens Wash
C48	31	6	Culvert	31.33408	-109.78713	IBR
C49	31	4	Culvert	31.33411	-109.77963	IBR
C50	31	3	Culvert	31.33408	-109.77558	IBR
C51	31	3	Culvert	31.33429	-109.77549	IBR
C52	31	4	Culvert	31.33416	-109.76877	IBR

NCO Cattleguard Locations

Zone	Quantity	Asset	Latitude	Longitude	Location Information
28	1	Cattle Guard	31.33393	-110.22382	IBR
28	1	Cattle Guard	31.3341	-110.18154	IBR
29	1	Cattle Guard	31.33416	-110.12242	IBR
30	1	Cattle Guard	31.33415	-109.961291	IBR W. of POE
30	1	Cattle Guard	31.33418	-109.93599	IBR
30	1	Cattle Guard	31.33985	-109.92012	IBR
30	1	Cattle Guard	31.33417	-109.91712	IBR
30	1	Cattle Guard	31.33416	-109.91374	IBR
30	1	Cattle Guard	31.33414	-109.90217	IBR
30	1	Cattle Guard	31.33415	-109.8861	IBR
31	1	Cattle Guard	31.3341	-109.85963	IBR
31	1	Cattle Guard	31.3543	-109.85252	Shell Rock
31	1	Cattle Guard	31.33409	-109.85141	IBR
31	1	Cattle Guard	31.33411	-109.85093	IBR
31	1	Cattle Guard	31.344075	-109.84846	Shell Rock
31	1	Cattle Guard	31.33412	-109.84732	IBR
31	1	Cattle Guard	31.3341	-109.84697	IBR
31	1	Cattle Guard	31.33411	-109.83047	IBR
31	1	Cattle Guard	31.33411	-109.83018	IBR
31	1	Cattle Guard	31.33413	-109.80152	IBR
31	1	Cattle Guard	31.33414	-109.80127	IBR
31	1	Cattle Guard	31.33408	-109.75560	IBR
31	1	Cattle Guard	31.3341	-109.75537	IBR
31	1	Cattle Guard	31.3341	-109.74948	IBR NCO DGL Line

DGL Assets

(31.33408-109.74377, 31.33242,-109.09182)

- **Road Miles:** 50.45
- **Gates:**
 - Type
 - Swing Flood Gates
 - Locations: 64
 - Total Number: 470
- **Culverts:**
 - Locations: 96
 - Number: 188
- **Cattleguard:** 12
- **Lighting**
 - Poles: 133
 - Fixtures: 266

DGL Gate Locations

Asset #	Zone	Quantity	Asset	Latitude	Longitude
32A	32	1	Gates, Manuel Swing	31.33408	-109.74377
32B	32	2	Gates, Manuel Swing	31.3341	-109.7407
32C	32	2	Gates, Manuel Swing	31.33413	-109.7234
32D	32	2	Gates, Manuel Swing	31.33406	-109.6707
33B	33	1	Gates, Manuel Swing	31.33411	-109.60417
33A	33	1	Gates, Manuel Swing	31.33411	-109.60398
33D	33	1	Gates, Manuel Swing	31.33412	-109.58247
33C	33	1	Gates, Manuel Swing	31.4334	-109.58122
33E	33	45	Gates, Manuel Swing	31.33412	-109.57976
33F	33	1	Gates, Manuel Swing	31.3341	-109.57439
33G	33	6	Gates, Manuel Swing	31.33416	-109.56856
33H	33	1	POE	31.33415	-109.56091
33I	33	1	Gates, Manuel Swing	31.33406	-109.53734
33J	33	1	Gates, Manuel Swing	31.33409	-109.51552
33K	33	10	Gates, Manuel Swing	31.33415	-109.50633
33L	33	16	Gates, Manuel Swing	31.33413	-109.5034
34A	34	2	Gates, Manuel Swing	31.33406	-109.49376
34K	34	2	Gates, Manuel Swing	31.33408	-109.49074
34B	34	13	Gates, Manuel Swing	31.33407	-109.48553
34C	34	2	Gates, Manuel Swing	31.334	-109.45186
34D	34	4	Gates, Manuel Swing	31.33403	-109.44913
34E	34	3	Gates, Manuel Swing	31.33408	-109.4434
34F	34	1	Gates, Manuel Swing	31.33401	-109.4397
34G	34	2	Gates, Manuel Swing	31.33406	-109.43233
34H	34	9	Gates, Manuel Swing	31.33409	-109.43025
34I	34	1	Gates, Manuel Swing	31.33405	-109.4212

Asset #	Zone	Quantity	Asset	Latitude	Longitude
34J	34	2	Gates, Manuel Swing	31.3341	-109.4134
34L	34	2	Gates, Manuel Swing	31.33406	-109.39964
34M	34	1	Gates, Manuel Swing	31.33406	-109.3951
34N	34	1	Gates, Manuel Swing	31.33406	-109.39111
34O	34	1	Gates, Manuel Swing	31.33402	-109.38189
35A	35	18	Gates, Manuel Swing	31.33407	-109.37447
35B	35	2	Gates, Manuel Swing	31.33388	-109.35062
35C	35	7	Gates, Manuel Swing	31.33402	-109.33991
35D	35	2	Gates, Manuel Swing	31.33403	-109.33803
35E	35	1	Gates, Manuel Swing	31.33389	-109.3095
35F	35	1	Gates, Manuel Swing	31.33405	-109.3052
35G	35	4	Gates, Manuel Swing	31.33402	-109.30121
35H	35	30	Gates, Manuel Swing	31.33401	-109.30037
35I	35	2	Gates, Manuel Swing	31.33402	-109.28992
35J	35	1	Gates, Manuel Swing	31.33401	-109.28767
35K	35	1	Gates, Manuel Swing	31.33397	-109.28201
35L	35	54	Gates, Manuel Swing	31.33403	-109.27338
35M	35	2	Gates, Manuel Swing	31.33397	-109.26689
35N	35	42	Gates, Manuel Swing	31.33398	-109.26456
35O	35	30	Gates, Manuel Swing	31.33396	-109.26195
35P	35	13	Gates, Manuel Swing	31.33397	-109.26004
35Q	35	52	Gates, Manuel Swing	31.3339	-109.25725
35R	35	30	Gates, Manuel Swing	31.33391	-109.25312
36A	36	3	Gates, Manuel Swing	31.33366	-109.23813
36B	36	2	Gates, Manuel Swing	31.33364	-109.23042

DGL Gate Locations

Asset #	Zone	Quantity	Asset	Latitude	Longitude
36C	36	3	Gates, Manuel Swing	31.33343	-109.21163
36D	36	4	Gates, Manuel Swing	31.33356	-109.20836
36E	36	5	Gates, Manuel Swing	31.33343	-109.20148
36F	36	4	Gates, Manuel Swing	31.33341	-109.19434
36G	36	2	Gates, Manuel Swing	31.3332	-109.18789
36H	36	1	Gates, Manuel Swing	31.3331	-109.18519
36I	36	1	Gates, Manuel Swing	31.3332	-109.18288
36J	36	1	Gates, Manuel Swing	31.3332	-109.1807
36K	36	3	Gates, Manuel Swing	31.3331	-109.1657
36L	36	4	Gates, Manuel Swing	31.333	-109.1602
36M	36	4	Gates, Manuel Swing	31.3327	-109.1319
36N	36	2	Gates, Manuel Swing	31.33242	-109.12834
37A	37	1	Gates, Manuel Swing	31.33242	-109.09182

DGL Culvert Locations

Asset #	Zone	# per area		Latitude	Longitude	Location	Misc info
C1	33	1	Culvert	31.33409	-109.60022	IBR	Near Gate 33B
C2	33	1	Culvert	31.33414	-109.59876	IBR	Abandoned
C3	33	1	Culvert	31.33422	-109.58241	IBR	33C/Abandoned
C4	33	1	Culvert	31.3425	-109.58185	IBR	
C5	33	1	Culvert	31.33420	-109.58107	IBR	Gate 33D
C6	33	2	Culvert	31.33416	-109.57934	IBR	33E
C7	33	1	Culvert	31.33427	-109.56076	IBR	POE
C8	33	2	Culvert	31.33436	-109.53865	IBR	Rose Ditch
C9	34	3	Culvert	31.33415	-109.46066	IBR	
C10	34	1	Culvert	31.33415	-109.44455	IBR	
C11	34	2	Culvert	31.3341	-109.44324	IBR	34E
C12	34	3	Culvert	31.33402	-109.44026	IBR	
C13	34	1	Culvert	31.33413	-109.43484	IBR	
C14	34	4	Culvert	31.33412	-109.43349	IBR	
C15	34	3	Culvert	31.33410	-109.42528	IBR	
C16	34	1	Culvert	31.33407	-109.42284	IBR	
C17	34	2	Culvert	31.33409	-109.41780	IBR	
C18	34	2	Culvert	31.33407	-109.4095	IBR	34k -Sediment
C19	34	2	Culvert	31.33401	-109.4062	IBR	
C20	34	1	Culvert	31.33397	-109.40419	IBR	
C21	34	2	Culvert	31.33408	-109.39486	IBR	34M
C22	34	1	Culvert	31.33406	-109.39084	IBR	
C23	34	1	Culvert	31.33412	-109.38923	IBR	
C24	34	3	Culvert	31.33408	-109.38577	IBR	

Asset #	Zone	# per area		Latitude	Longitude	Location	Misc info
C25	34	2	Culvert	31.33413	-109.37767	IBR	
C26	34	5	Culvert	31.33411	-109.37637	IBR	
C27	35	4	Culvert	31.33413	-109.36521	IBR	
C28	35	2	Culvert	31.33414	-109.36497	IBR	
C29	35	2	Culvert	31.33413	-109.36207	IBR	
C30	35	2	Culvert	31.33415	-109.36066	IBR	
C31	35	4	Culvert	31.33398	-109.35241	IBR	
C32	35	1	Culvert	31.33400	-109.35203	IBR	
C33	35	2	Culvert	31.33417	-109.33752	IBR	
C34	35	1	Culvert	31.33398	-109.32917	IBR	
C35	35	2	Culvert	31.33416	-109.32817	IBR	
C36	35	2	Culvert	31.33397	-109.32698	IBR	
C37	35	2	Culvert	31.33409	-109.32640	IBR	
C38	35	3	Culvert	31.33414	-109.32373	IBR	
C39	35	2	Culvert	31.33408	-109.31986	IBR	
C40	35	2	Culvert	31.33402	-109.30943	IBR	Gate 35E
C41	35	1	Culvert	31.3342	-109.3073	IBR	GTR
C42	35	17	Culvert	31.33407	-109.30000	IBR	Gate 35H
C43	35	3	Culvert	31.33406	-109.28574	IBR	
C44	35	2	Culvert	31.33408	-109.28195	IBR	
C45	35	3	Culvert	31.33400	-109.26844	IBR	
C46	35	13	Culvert	31.33388	-109.25304	IBR	Hay Hollow Gate 35R
C47	36	1	Culvert	31.33387	-109.24690	IBR	
C48	36	1	Culvert	31.33382	-109.24518	IBR	
C49	36	1	Culvert	31.33378	-109.24363	IBR	
C50	36	2	Culvert	31.33381	-109.24272	IBR	

DGL Culvert Locations

Zone	# per area		Latitude	Longitude	Location	Misc info
36	1	Culvert	31.33381	-109.24181	IBR	
36	2	Culvert	31.33374	-109.23687	IBR	
36	1	Culvert	31.33366	-109.23526	IBR	
36	1	Culvert	31.33369	-109.23495	IBR	
36	1	Culvert	31.33365	-109.23404	IBR	
36	1	Culvert	31.33364	-109.23350	IBR	
36	1	Culvert	31.33372	-109.23340	IBR	
36	1	Culvert	31.33369	-109.23078	IBR	
36	1	Culvert	31.33356	-109.22319	IBR	
36	2	Culvert	31.33358	-109.21734	IBR	
36	1	Culvert	31.33358	-109.21477	IBR	
36	1	Culvert	31.33358	-109.21170	IBR	Gate 36C
36	3	Culvert	31.37213	-109.20892	Hedglen	
36	2	Culvert	31.33358	-109.20810	IBR	Gate 36D
36	2	Culvert	31.37283	-109.20745	Hedglen	
36	2	Culvert	31.37437	-109.20613	Hedglen	
36	2	Culvert	31.33351	-109.20433	IBR	
36	3	Culvert	31.33346	-109.19812	IBR	
36	2	Culvert	31.33345	-109.19701	IBR	
36	1	Culvert	31.33340	-109.18711	IBR	
36	3	Culvert	31.33323	-109.17000	IBR	
36	2	Culvert	31.33316	-109.16642	IBR	
36	1	Culvert	31.33319	-109.16568	IBR	Gate36K
36	3	Culvert	31.33306	-109.16182	IBR	
36	1	Culvert	31.33303	-109.16028	IBR	36L
36	2	Culvert	31.33314	-109.15870	IBR	
36	1	Culvert	31.33303	-109.15698	IBR	
36	1	Culvert	31.33299	-109.14022	IBR	

Zone	# per area		Latitude	Longitude	Location	Misc info
36	2	Culvert	31.33314	-109.15870	IBR	
36	1	Culvert	31.33303	-109.15698	IBR	
36	1	Culvert	31.33299	-109.14022	IBR	
36	1	Culvert	31.33279	-109.13199	IBR	Gate 36M
36	1	Culvert	31.33427	-109.12942	IBR	
36	1	Culvert	31.33286	-109.12416	IBR	
37	1	Culvert	31.33276	-109.12318	IBR	37A
37	1	Culvert	31.33274	-109.12206	IBR	
37	1	Culvert	31.33273	-109.11908	IBR	
37	1	Culvert	31.33271	-109.11823	IBR	
37	1	Culvert	31.33280	-109.11820	IBR	
37	1	Culvert	31.33282	-109.11683	IBR	
37	1	Culvert	31.33268	-109.1159	IBR	
37	1	Culvert	31.33266	-109.11052	IBR	
37	1	Culvert	31.33271	-109.10762	IBR	
37	1	Culvert	31.3328	-109.10693	IBR	
37	1	Culvert	31.33251	-109.100493	IBR	
37	1	Culvert	31.33252	-109.09933	IBR	
37	1	Culvert	31.33250	-109.09797	IBR	
37	1	Culvert	31.33245	-109.09350	IBR	
37	2	Culvert	31.33243	-109.09180	IBR	42"

TCA DGL Cattleguard Locations

Zone	Quantity	Asset	Latitude	Longitude	Location Information
32	1	Cattle Guard	31.33413	-109.70720	IBR
32	1	Cattle Guard	31.33411	-109.73268	IBR
32	1	Cattle Guard	31.33414	-109.68093	IBR
32	1	Cattle Guard	31.33413	-109.66464	IBR
32	1	Cattle Guard	31.34626	-109.63048	Kings Hwy
32	1	Cattle Guard	31.34923	-109.63042	North Kings Hwy
34	1	Cattle Guard	31.33408	-109.47759	IBR
35	1	Cattle Guard	31.33404	-109.36587	IBR E. of MM8
35	1	Cattle Guard	31.33405	-109.32726	IBR
35	1	Cattle Guard	31.33401	-109.30331	IBR West of Silver Creek
35	1	Cattle Guard	31.33401	-109.28511	IBR
36	1	Cattle Guard	31.33366	-109.23038	IBR
36	1	Cattle Guard	31.33358	-109.21720	IBR
36	1	Cattle Guard	31.33343	-109.20018	IBR
36	1	Cattle Guard	31.33288	-109.14107	IBR
36	1	Cattle Guard	31.33298	-109.13282	Entrance to E. side IBR/Mafioso Trail
36	1	Cattle Guard	31.33326	-109.10381	IBR

Site Visit Locations:

- 3/31/2026 @ 8 AM – Kickoff Meeting
 - 6692 S. Memorial Pl Tucson, AZ 85756
- 3/31/2026 @ TBD – NGL Station site visit
 - Dirt lot below BTS Group (31.33300, -110.969700)
- 4/1/2026 @ 8 AM – AJO Station site visit
 - Granny's Kitchen, 150 E Longacres RD AJO (32.26450, -112.74070)
- 4/2/2026 @ 8 AM – DGL Station site visit
 - NCO Station site visit Dirt lot (31.33477, -109.95377)

Gate Types

Electronic Swing Gate




Monument Swing Gate



Flood Swing Gate



Electronic Sliding Gate

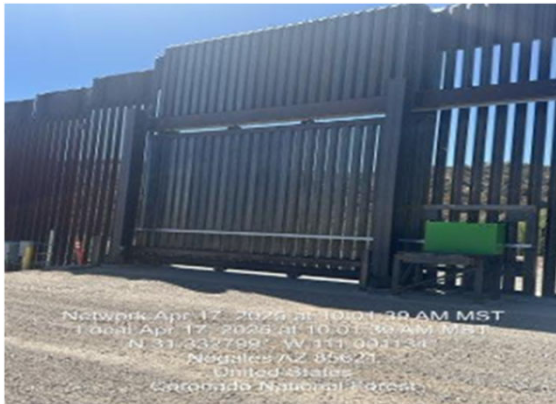

Flood Swing Gate



Fencing

Post and Rail Border Fencing



Post and Cable Border Fencing



TUSCON SECTOR (TCA)

Cement Culvert



RCP Culvert



Box Culvert



Metal Grate



TUSCON SECTOR (TCA)

Surface Mount Cattleguard



Precast Cattleguard



TUSCON SECTOR (TCA)

LED Lighting



Tunnel Lighting

