

1. SEE M-001 FOR MECHANICAL LEGENDS, ABBREVIATIONS AND GENERAL NOTES.
2. REMOVE ALL HVAC AND INDUSTRIAL PROCESS EQUIPMENT AND ASSOCIATED CONTROLS, WIRING AND PIPING THROUGHOUT THE SPACES SHOWN ON THIS SHEET, UNLESS OTHERWISE NOTED.
3. COORDINATE WITH ARCHITECTURAL DRAWINGS FOR PATCHING OF OPEN FLOOR, WALL, AND CEILING PENETRATIONS ASSOCIATED WITH REMOVALS.
4. MECHANICAL SUBCONTRACTOR SHALL IDENTIFY, MAKE SAFE CUT LOOSE AND CAP ALL ITEMS SPECIFIED TO BE DEMOLISHED. THE GENERAL CONTRACTOR SHALL BE RESPONSIBLE FOR DEMOLITION AND REMOVAL OFF SITE TO AN AUTHORIZED SALVAGE FACILITY.
5. REFER TO CLIN 002 FOR LIST OF INDUSTRIAL EQUIPMENT REMOVAL REQUIREMENTS.
6. COORDINATE REMOVAL WITH HAZMAT DRAWINGS AND REQUIREMENTS.
7. EXISTING MECHANICAL EQUIPMENT, DUCTWORK, AND PIPING THROUGHOUT THE BUILDING TO BE REMOVED, UNLESS OTHERWISE NOTED.
8. CONDUCT TESTING OF EXISTING PUMPED STEAM CONDENSATE SYSTEM RETURN LINE BACK PRESSURE AND REPORT RESULTS TO CONTRACTING OFFICER PRIOR TO COMMENCING WITH REMOVALS IN BUILDING 60.


- ① [CLIN 002] REMOVE EXHAUST DUCTWORK FROM PAINT BOOTH ON OUT TO THE WALL OR CEILING. PROVIDE TEMPORARY COVERS FOR WALL OPENINGS.
- ② [CLIN 002] REMOVE MAKE-UP AIR DUCTWORK IN ENTIRETY FROM SUPPLY AIR GRILLE TO ROOFTOP AIR HANDLER.
- ③ [CLIN 002] REMOVE SHOT BLAST COLLECTION SYSTEM, EXHAUST FAN, AND ASSOCIATED CONTROLS, WIRING, AND DUCTWORK.
- ④ [CLIN 002] REMOVE BLASTING ROOM EXHAUST AND DUST COLLECTION SYSTEM AND ASSOCIATED CONTROLS, WIRING, AND DUCTWORK.
- ⑤ [CLIN 002] REMOVE DUCTED EXHAUST SYSTEM WITH BAGHOUSE AIR FILTRATION, INCLUDING FAN, CONTROLS, WIRING, AND DUCTWORK.
- ⑥ [CLIN 002] REMOVE BLASTING BOOTH AND SHOT BLAST COLLECTION SYSTEM, INCLUDING ASSOCIATED CONTROLS, WIRING, AND DUCTWORK.
- ⑦ [CLIN 002] REMOVE PAINT BOOTH, AND ASSOCIATED CONTROLS, WIRING AND FILTERS.
- ⑧ [CLIN 002] REMOVE BAGHOUSE ASSEMBLY, INCLUDING CONTROLS, WIRING, AND DUCTWORK.
- ⑨ [CLIN 002] REMOVE EXHAUST FAN ON ELEVATED WALL MOUNTED PLATFORM AND ASSOCIATED DUCTWORK PLATFORM TO REMAIN IN PLACE.
- ⑩ [CLIN 002] REMOVE BLASTING ROOM AND ASSOCIATED EQUIPMENT AND DUCTWORK.
- ⑪ [CLIN 002] REMOVE SAND BLAST BOOTH AND ASSOCIATED DUCTWORK AND LOUVER.
- ⑫ [CLIN 002] REMOVE COMPRESSED AIR DRYING/FILTERING UNIT AND ASSOCIATED CONTROLS, WIRING, AND SYSTEM PIPING.
- ⑬ [CLIN 002] REMOVE MISCELLANEOUS PROCESS SUPPORT EQUIPMENT AND ASSOCIATED CONTROLS, WIRING, DUCTWORK AND PIPING.

Figure 1 shows a plan view of a building footprint. The footprint is a complex polygon with a central rectangular section and several protrusions. A dashed line labeled "MATCH LINE" is drawn across the footprint. To the right of the footprint is a circular symbol with a crosshair and a dashed line, labeled "PLAN NORTH".

1/8" = 1' - 0"

CHECK GRAPHIC SCALE BEFORE USING

		RSH	
		RSH DATE	03/29/2026
		RSH APPR	10/01/2026
		DESCRIPTION	AMENDMENT 010
		MARK	△
SEAL			
OAK POINT ASSOCIATES	APPROVED		
FOR COMMANDER NAVFAC ACTIVITY _____ 			
SATISFACTORY TO DATE _____			
DESIGNER RNC			
DRAWN BY CBM			
CHECKED BY MSA			
PROJECT MANAGER T. CARLETON L. LYONS			
FIRE PROTECTION S. RUCINSKI			
DEPARTMENT OF THE NAVY NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND ROCCC-ME PORTSMOUTH NAVAL SHIPYARD - KITTERY, ME B60 REPAIRS FIRST FLOOR MECHANICAL DUCTWORK REMOVALS PLAN - EAST			
EPROJCT NO.: 1740579			
NAVFAV DRAWING NO:			
SHEET 186 OF 282			
MD102			
DRAW/FORM REVISION: 14 SEP 2023			

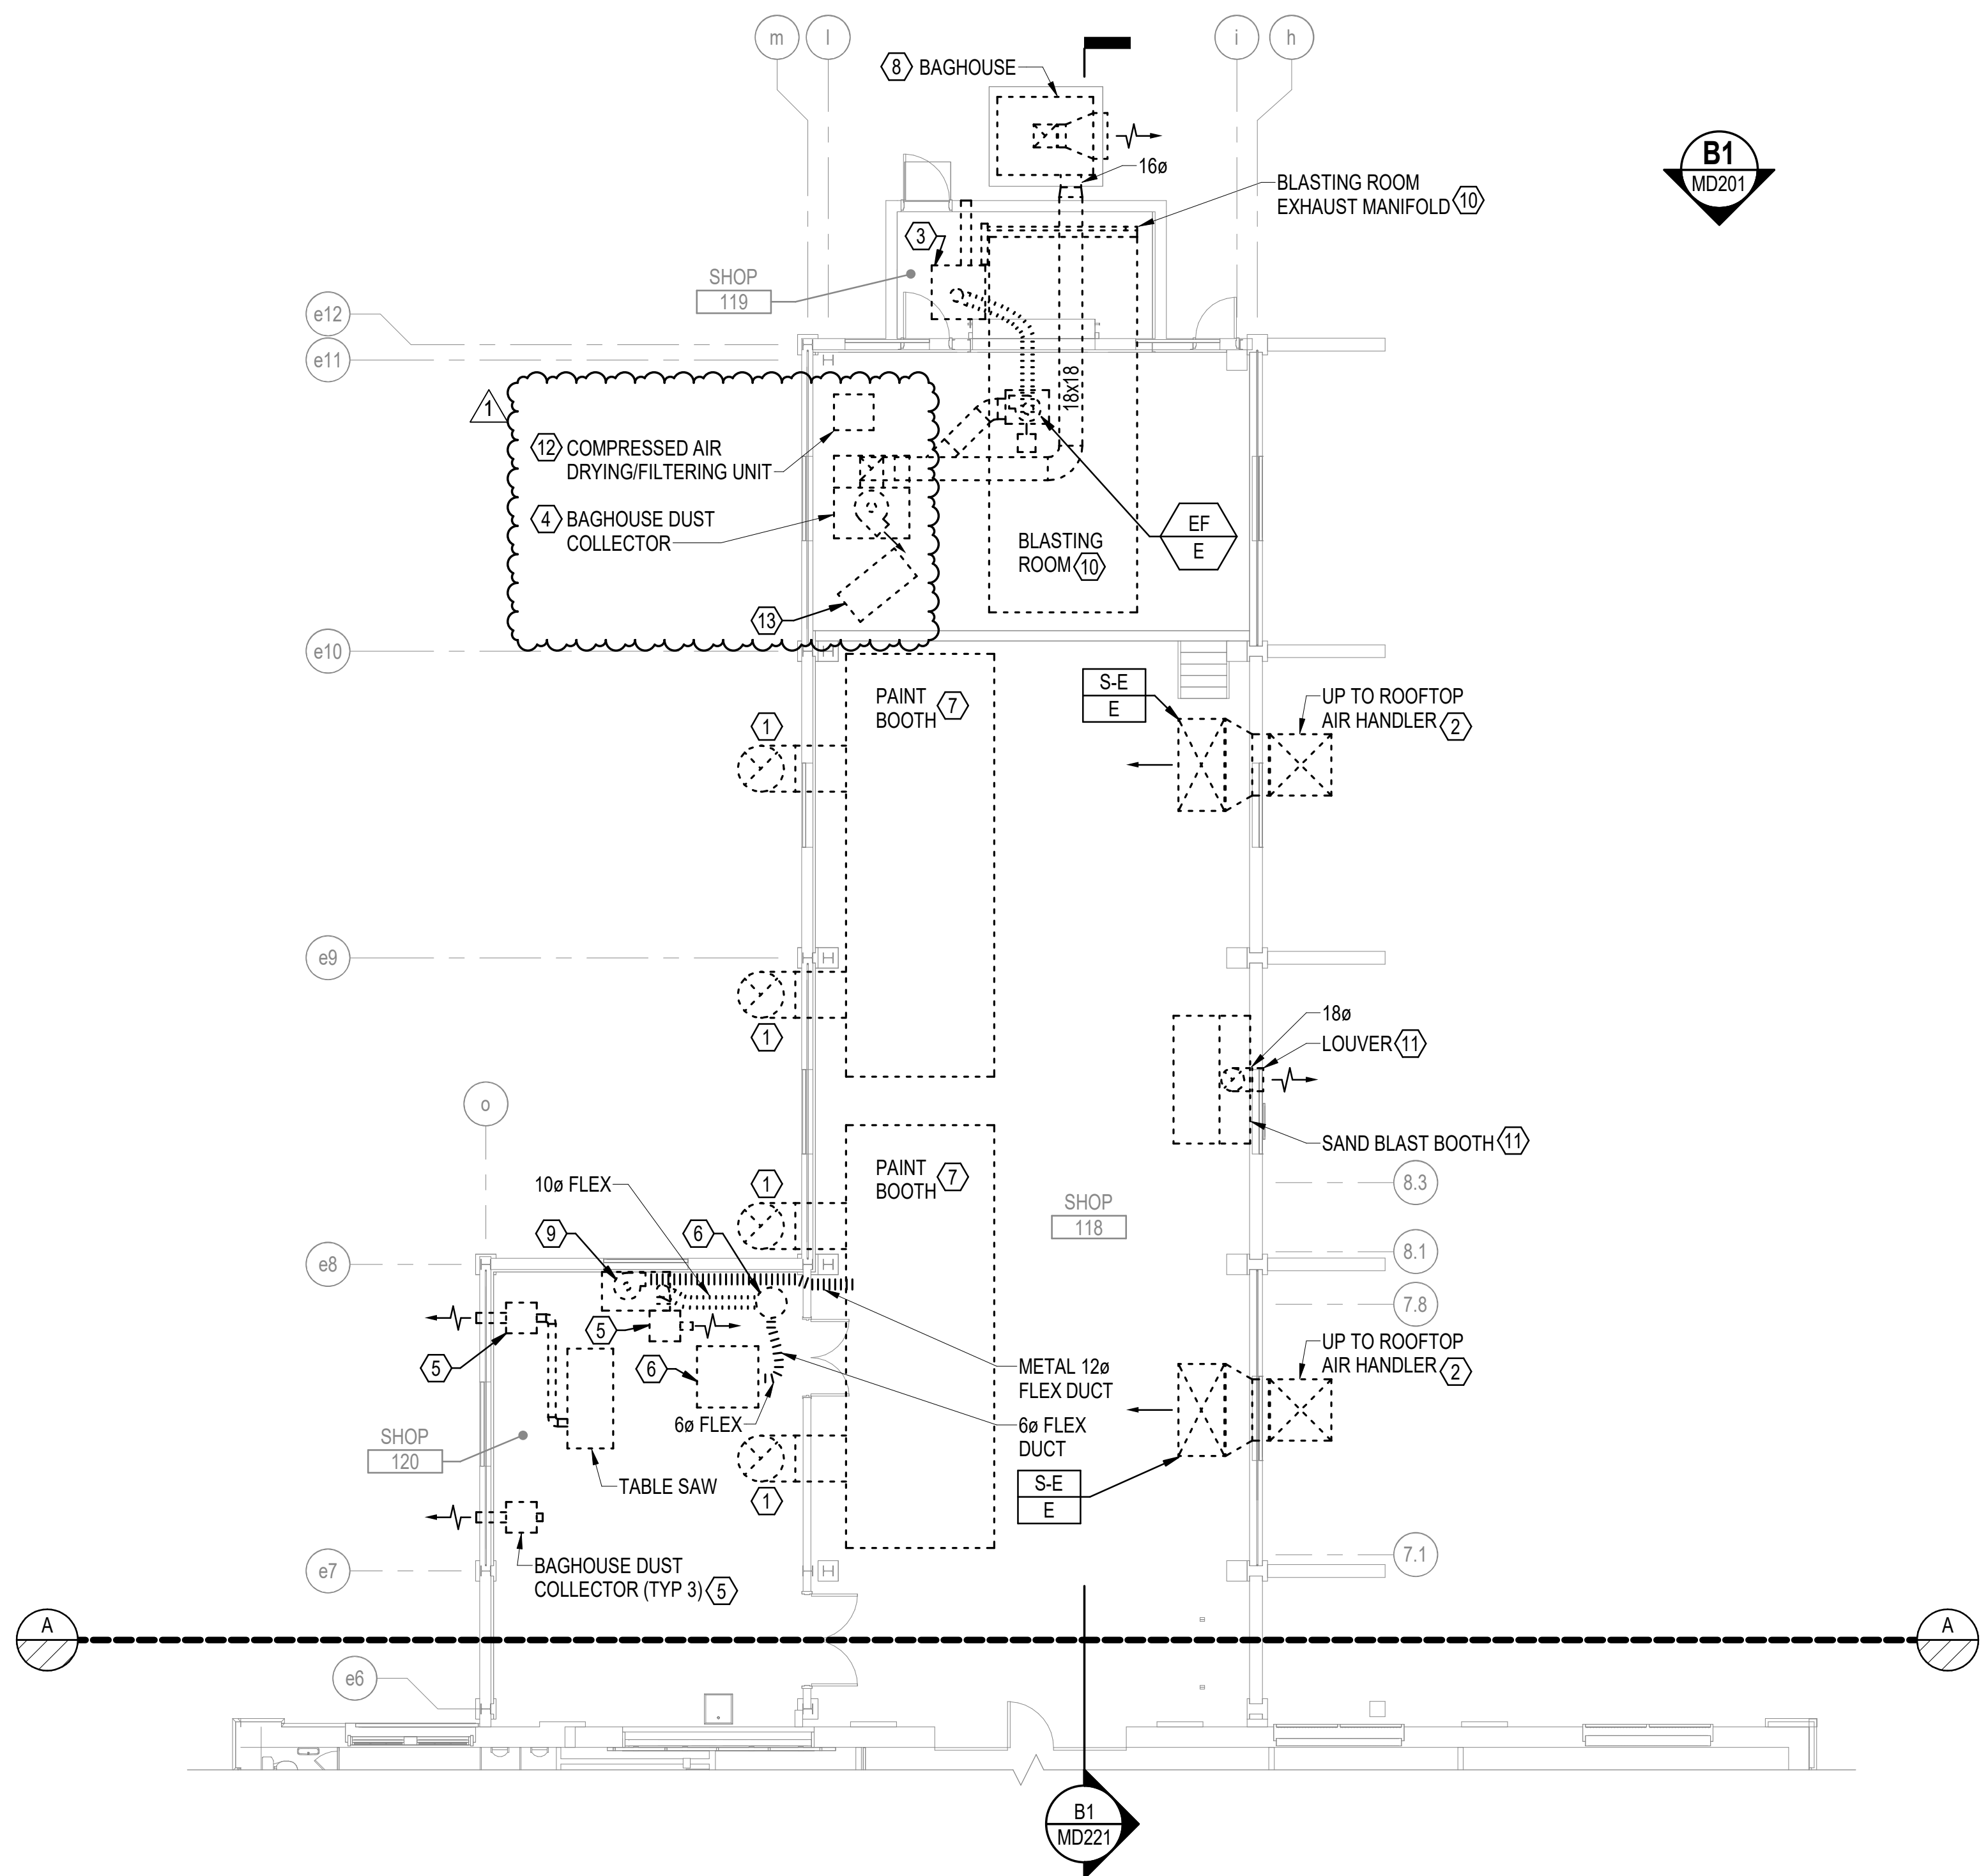

A1 FIRST FLOOR MECHANICAL DUCTWORK REMOVALS PLAN - EAST
SCALE: 1/8" = 1'-0"