

WebAIM Short Form TASK GROUP INSTRUCTION

21-JAN-2026 1554

20.15.6.0.9333 (July 2025)

ICN: 38K6112320 KeyOp: A01

TGI NO:	COMPONENT NAME: BERTH 6 STFG TUBE	TYPE: AY	PHASE: A	REPEAT: 0	CHG/VER: 1/1
SHIP/HULL NO: DDG-115	SHIP/HULL NAME: USS RAFAEL PERALTA	PROJECT: K61	SYSTEM:	PLANT ID:	CASREP CAT:
CU PHASE TITLE: *F/O – REPL PKG ASSY OF STFG TUBE FOR CBL ASSY, FTK TLI SYS FOR TK GP-5					
PREPARING ACTIVITY:		STATUS: APP		WORKING STATUS:	
PREPARED BY: OGAWA, SHINYA		CODE: 233	PHONE: 9061708579	DATE: 27-NOV-2025	
APPROVED BY: KURIHARA, TAKASHI		CODE: 233	PHONE: 8093501437	DATE: 17-JAN-2026	
CONCURRED BY:		CODE:	PHONE:	DATE:	
REASON FOR WORK/NEED FOR CHANGE: EB140635					
JCN: EB14-0635					
SPECIAL REQUIREMENTS: TGI Short Form					
CU PHASE DESCRIPTION: 1. SCOPE/PURPOSE: 1.1 Title: Packing Assembly of Stuffing Tube for Cable Assembly, Fuel Tank Level Indicator System for Tank Group-5; replace 1.2 Location of Work: 1.2.1 Crew Living Space No. 6 (3-338-3-L) 1.2.2 Fuel Receiving Tank Group 5 (5-308-1-F) 1.2.3 Access Trunk (3-308-2-T) 1.2.4 Fuel Tank Group 5 (5-354-0-F) 1.2.5 Crew Living Space No. 4 (3-300-1-L) 1.2.6 Crew Living Space No. 7 (3-350-2-L)					
ZONE MANAGER: SAITO, KAZUNOBU		ZONE:	COMPARTMENT:	LEVEL:	FRAME: SIDE:
JOB SUMMARY ID: 123A1120	TOT MAN HR.:	TOT DUR:	TOT JML COST:	PLANNING ACCEPTANCE:	

WORK CERTIFICATION SIGNATURES:	DLs												
COMPLETION OF WORK REVIEW:				BADGE NO:	SHOP/CODE:	PHONE:	DATE:						
RECORDS REVIEW:				BADGE NO:	SHOP/CODE:	PHONE:	DATE:						



WebAIM Short Form TASK GROUP INSTRUCTION

21-JAN-2026 1554

20.15.6.0.9333 (July 2025)

(Continued)

ICN: 38K6112320

KeyOp: A01

TGI NO:	COMPONENT NAME: BERTH 6 STFG TUBE	TYPE: AY	PHASE: A	REPEAT: 0	CHG/VER: 1/1
SHIP/HULL NO: DDG-115	SHIP/HULL NAME: USS RAFAEL PERALTA	PROJECT: K61	SYSTEM:	PLANT ID:	CASREP CAT:
CU PHASE TITLE: *F/O – REPL PKG ASSY OF STFG TUBE FOR CBL ASSY, FTK TLI SYS FOR TK GP-5					

CU PHASE DESCRIPTION (Cont.)

- 1.2.7 Passage (3-338-6-L)
- 1.2.8 Generator Room (3-370-0-E)
- 1.2.9 Air Conditioning Machinery and Pump Room (5-300-01-E)
- 1.3 Identification:
 - 1.3.1 Quantity (One EA), Stuffing Tube for Cable Assembly of Fuel Receiving Tank Level Indicator System for Tank 5-308-1-F
Remarks: See Sketch Enclosure-01 for location detail
 - 1.3.2 Quantity (One EA), Stuffing Tube for Cable Assembly of Fuel Stowage Tank Level Indicator System for Tank 5-354-0-F
Remarks: See Sketch Enclosure-01 for location detail
 - 1.3.3 Quantity (One EA), Fuel Receiving Tank Group-5
Tank No.: 5-308-1-F
Capacity: 30,038 Gallons
 - 1.3.4 Quantity (One EA), Fuel Tank Group-5
Tank No.: 5-354-0-F
Capacity: 38,127 Gallons
 - 1.3.5 Quantity (One Lot/3 Tanks), Fuel Tank Group-5
Total Capacity: 69,695 Gallons
Required amount of water to dewater: 69,695 Gallons
 - 1.3.5.1 Fuel Receiving Tank Group-5
Tank No.: 5-308-1-F
Capacity: 30,038 Gallons
 - 1.3.5.2 Fuel Tank Group-5
Tank No.: 5-354-0-F
Capacity: 38,127 Gallons
 - 1.3.5.3 Fuel Expansion Seawater Overflow Tank Group-5
Tank No.: 4-370-3-F
Capacity: 1,530 Gallons
 - 1.3.6 Quantity (One Lot/3 Tanks), Fuel Tank Group-6
Total Capacity: 63,450 Gallons
Required amount of water to dewater: 63,450 Gallons
 - 1.3.6.1 Fuel Receiving Tank Group-6
Tank No.: 5-308-2-F
Capacity: 30,032 Gallons
 - 1.3.6.2 Fuel Tank Group-6
Tank No.: 5-370-0-F

WebAIM Short Form TASK GROUP INSTRUCTION

21-JAN-2026 1554

20.15.6.0.9333 (July 2025)

(Continued)

ICN: 38K6112320

KeyOp: A01

TGI NO:	COMPONENT NAME: BERTH 6 STFG TUBE	TYPE: AY	PHASE: A	REPEAT: 0	CHG/VER: 1/1
SHIP/HULL NO: DDG-115	SHIP/HULL NAME: USS RAFAEL PERALTA	PROJECT: K61	SYSTEM:	PLANT ID:	CASREP CAT:
CU PHASE TITLE: *F/O – REPL PKG ASSY OF STFG TUBE FOR CBL ASSY, FTK TLI SYS FOR TK GP-5					

CU PHASE DESCRIPTION (Cont.)

Capacity: 31,545 Gallons

1.3.6.3 Fuel Expansion Seawater Overflow Tank Group-6

Tank No.: 4-370-4-F

Capacity: 1,873 Gallons

1.4 Security Classification: None.

1.5 Initial Condition: None.

1.6 Contractor work start date: 7/27/2026

1.7 Contractor work completion date: 9/4/2026

2. PROCEDURE:

2.1 Accomplish the requirements of 099-902YO of Ref. No. 2 for each tank listed in 1.3.3 and 1.3.4.

2.1.1 Accomplish the requirements of 099-909YO of Ref. No. 2 for each tank listed in 1.3.5 and 1.3.6.

2.1.1.1 Accomplish the requirements of 009-009 of Ref. No. One

2.1.2 Ensure General Cleaning must be Level III.

2.2 Remove existing and install new packing assembly of the equipment listed in 1.3.1 and 1.3.2 in accordance with Part 3 of Ref. No. 3, using Ref. No. 4 for guidance.

2.3 Notes:

2.3.1 Planner: Code 233 S. Ogawa, 090-6170-8579

Planner: Code 231B A. Suzuki, 243-0968

2.3.2 Work Integration Manager (WIM): Code 333 T. Yaginuma, 080-5419-0598

2.3.3 JCN EB14-0635 is related to this TGI.

2.4 Government Furnished Material (GFM):

2.4.1 SRF-JRMC will provide GFM listed in Appendix "M".

2.5 SRF-JRMC will provide the following service work: (TGI No. 38K6112320S01).

2.5.1 [C740] Crane and crane rigging service.

2.5.2 [X99E] Utility service, electrical.

2.5.3 [X99M] Utilities service, including low pressure air supply, water supply, and steam supply.

2.5.4 [C106.1] Safety inspection for SRF-JRMC employees.

WebAIM Short Form TASK GROUP INSTRUCTION

21-JAN-2026 1554

20.15.6.0.9333 (July 2025)

(Continued)

ICN: 38K6112320

KeyOp: A01

TGI NO:	COMPONENT NAME: BERTH 6 STFG TUBE	TYPE: AY	PHASE: A	REPEAT: 0	CHG/VER: 1/1
SHIP/HULL NO: DDG-115	SHIP/HULL NAME: USS RAFAEL PERALTA	PROJECT: K61	SYSTEM:	PLANT ID:	CASREP CAT:
CU PHASE TITLE: *F/O – REPL PKG ASSY OF STFG TUBE FOR CBL ASSY, FTK TLI SYS FOR TK GP-5					

CU PHASE DESCRIPTION (Cont.)

2.5.5 [C106.2] Gas free inspection for SRF-JRMC employees.

2.5.6 [C133] QA inspection for (G) symbol(s).

WebAIM Short Form TASK GROUP INSTRUCTION

21-JAN-2026 1554

20.15.6.0.9333 (July 2025)

(Continued)

ICN: 38K6112320

KeyOp: A01

TGI NO:	COMPONENT NAME: BERTH 6 STFG TUBE	TYPE: AY	PHASE: A	REPEAT: 0	CHG/VER: 1/1
SHIP/HULL NO: DDG-115	SHIP/HULL NAME: USS RAFAEL PERALTA	PROJECT: K61	SYSTEM:	PLANT ID:	CASREP CAT:
CU PHASE TITLE: *F/O – REPL PKG ASSY OF STFG TUBE FOR CBL ASSY, FTK TLI SYS FOR TK GP-5					

OTHER SPECIAL REQUIREMENTS:
CLEANLINESS FOR PIPING SYSTEM/EQUIPMENT LEVEL III

Ref. No.	Document/Drawing Number	DOCUMENT/DRAWING TITLE	REV	CHG NO.	CPY REQ	PARAGRAPH	SECT	PG	CHPT
1	NSI FY-26	NAVSEA Standard Items	-	1	N				
2	LI FY-26	Local Standard Items	-	ORG	N				
3	MIL MIL-STD-2003	Electric Plant Installation Standard Methods for Surface Ships and Submarines	B		N				
4	TM SN572-AL-MMA-010	Tank Level Indicators	2		N				

TASK NAME / TASK DESCRIPTION	SHOP/ TSD	TS	SF WC	CREW #	MHRS	RWRK

MATERIAL REFERENCES			
REF NO.	DOCUMENT/DRAWING NUMBER	DOCUMENT/DRAWING TITLE	REV

ICN: 38K6112320	KEY OP: A01
-----------------	-------------

MATERIAL LIST											
ITEM NO.	PC NO.	REF NO.	M / C	DESCRIPTION	STOCK NUMBER	GENERIC MATL TYPE	LVL	HAZ	DOC NO.	QTY REQD/ UNIT	QTY USED/ UNIT

WebAIM Short Form TASK GROUP INSTRUCTION

21-JAN-2026 1554

20.15.6.0.9333 (July 2025)

(Continued)

ICN: 38K6112320


KeyOp: A01

TGI NO:	COMPONENT NAME: BERTH 6 STFG TUBE	TYPE: AY	PHASE: A	REPEAT: 0	CHG/VER: 1/1
SHIP/HULL NO: DDG-115	SHIP/HULL NAME: USS RAFAEL PERALTA	PROJECT: K61	SYSTEM:	PLANT ID:	CASREP CAT:
CU PHASE TITLE: *F/O – REPL PKG ASSY OF STFG TUBE FOR CBL ASSY, FTK TLI SYS FOR TK GP-5					

MATERIAL LIST												
ITEM NO.	PC NO.	REF NO.	M / C	DESCRIPTION	STOCK NUMBER	GENERIC MATL TYPE	LVL	QA	HAZ MAT	DOC NO.	QTY REQD/ UNIT	QTY USED/ UNIT
001			M	PACKING ASSEMBLY, PACKING ASSEMBLY, FOR SIZE 4A STUFFING TUBE & 1/4" DIA CABLE, MFR DWG: 162160, REV.A, INCLUDED PARTS NUMBER: 162607(WASHER - 1EA), 149457 (BUSHING - 1EA) & 162157 (WASHER - 2EA), ORDERED FOR CONTRACTOR ORIG: CODE 233 S.OGAWA 090-6170-8579	9B 5330 LL4463061		NA	4	N		2/EA	

ATTACHMENT LIST

TITLE	FILE NAME	SAVED DATE
ENCLOSURE-01	38K6112320A01-Sketch.pdf	25-NOV-2025 0000

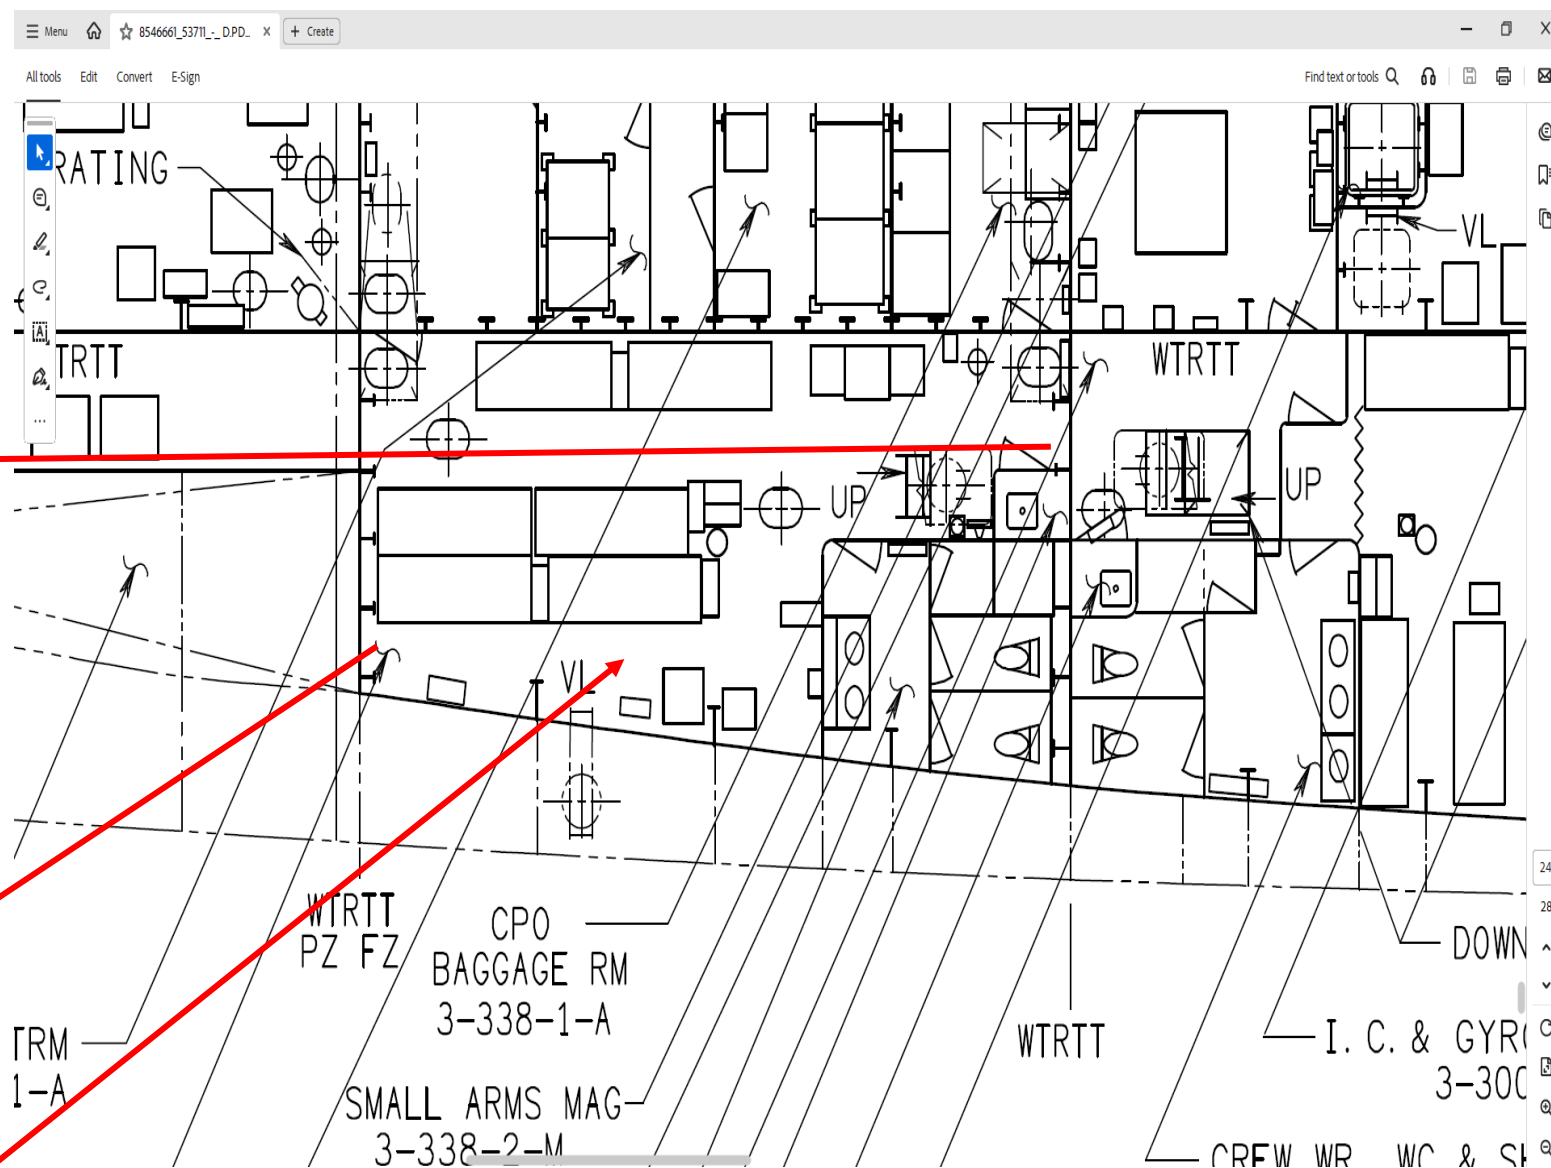

CREW LIVING SPACE NO.6 (3-338-3-L)

SKETCH

ENCLOSURE-01

38K6112320A01

Sheet 1 of 1