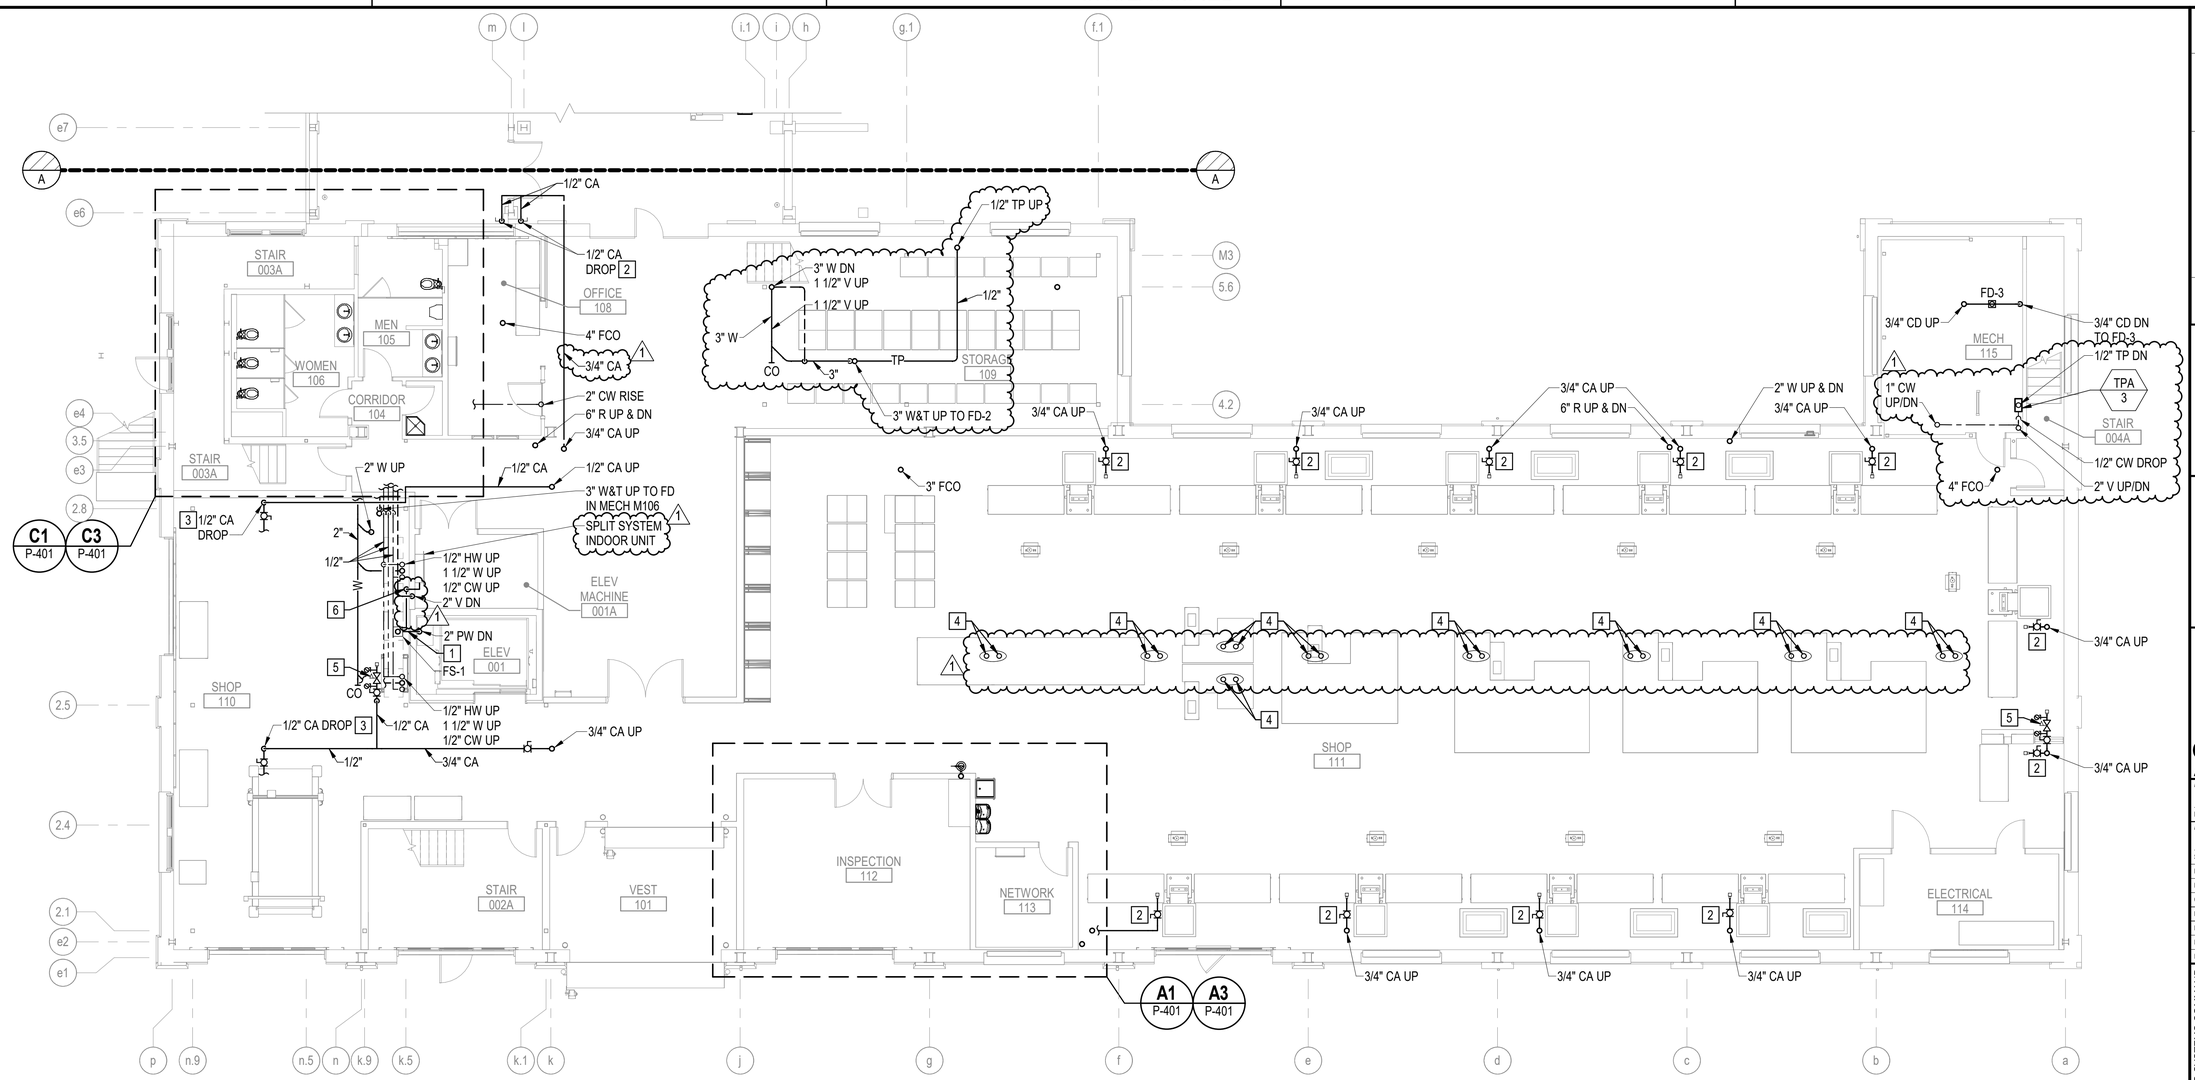


B1 FIRST FLOOR PLUMBING PLAN - WEST

SCALE: 1/8" = 1'-0"


GENERAL NOTES

1. SEE P-001 FOR PLUMBING LEGENDS, ABBREVIATIONS AND GENERAL NOTES.
2. COORDINATE WITH CONTRACTING OFFICER THE LOCATIONS FOR COMPRESSED AIR BRANCH SERVICE PIPING OUTLETS, CONSISTENT WITH THE FINAL SHOP EQUIPMENT LAYOUT.
3. COORDINATE THE INSTALLATION OF PIPING AND EQUIPMENT TO MAINTAIN MANDATORY CLEARANCE ZONES AROUND CRANE RAILS AND BRIDGE CRANE OPERATIONAL TRAVEL PATH.
4. INDUSTRIAL EQUIPMENT SHOWN FOR REFERENCE.

KEYNOTES (THIS SHEET ONLY)

1. 2" PUMPED WASTE WATER FROM ELEVATOR SUMP PUMP (SP-1). PIPE WILL RUN EXPOSED ALONG FLOOR AND DISCHARGE INTO FS-1.
2. PROVIDE 1/2" CA WITH ISOLATION BALL VALVE AND QUICK CONNECT FEMALE HOSE CONNECTION FITTING 80" AFF. COORDINATE QUICK CONNECT FITTING SELECTION WITH CONTRACTING OFFICER.
3. COMPRESSED AIR SERVICE FOR CNC DOWNDRAFT TABLE OPERATIONS. COORDINATE CA OUTLET LOCATION WITH CONTRACT OFFICER TO ALIGN WITH DOWNDRAFT TABLE INSTALLATION REQUIREMENTS.
4. 3/8" COMPRESSED AIR HOSE AND ELECTRICAL POWER EXTENSION CHORD FROM RETRACTABLE REELS OVERHEAD. SET AIR HOSE AND ELECTRICAL CHORD STOPS TO POSITION THEIR ENDS 7'-0" AFF(ADJUSTABLE). SEE SHEET P-106 FOR OVERHEAD REEL INSTALLATION REQUIREMENTS.
5. PROVIDE CA OUTLET 60" AFF WITH ISOLATION BALL VALVE, CA PRESSURE REGULATOR, PRESSURE GAUGES UPSTREAM AND DOWNSTREAM OF REGULATOR AND QUICK CONNECT HOSE FITTING. COORDINATE QUICK CONNECT FITTING SELECTION WITH CONTRACTING OFFICER.
6. RUN 3/4" IU-1 CONDENSATE DRAIN EXPOSED ON WALL TO NEARBY FLOOR SINK. PROVIDE PVC JACKET ON EXPOSED PIPE INSULATION.

KEY PLAN

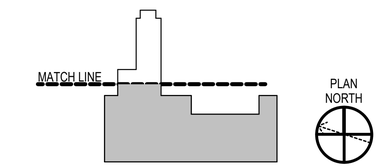

GRAPHIC SCALE

1/8" = 1' - 0" 0 5' 10' 15' 30'

CHECK GRAPHIC SCALE BEFORE USING

MARK	DESCRIPTION	DATE	APPR
1	AMENDMENT 010	03/20/2026	RSH
	FINAL SUBMISSION	10/01/2025	RSH

NAVFAC

STATE OF MAINE
RICHARD CRESWELL
No. 13178
10-01-25
LICENSED PROFESSIONAL ENGINEER
SEAL

OAK POINT ASSOCIATES

APPROVED
FOR COMMANDER NAVFAC
ACTIVITY
SATISFACTORY TO DATE
DESIGNER RNC
DRAWN BY SRW
CHECKED BY MSA
DESIGN MANAGER T. CARLETON
PROJECT MANAGER L. LYONS
FEAD/PM&E
FIRE PROTECTION S. RUCINSKI

DEPARTMENT OF THE NAVY
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND
ROICC:ME
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - MID-ATLANTIC
PORTSMOUTH NAVAL SHIPYARD - KITTERY, ME
PORTSMOUTH NAVAL SHIPYARD
KITTERY, ME
B60 REPAIRS
FIRST FLOOR PLUMBING PLAN - WEST

EPROJECT NO.: 1740579
NAVFAC DRAWING NO.
SHEET 172 OF 282
P-104
DRAWFORM REVISION: 14 SEP 2023

3/20/2026 1:29:20 PM P-104
C:\Users\sichards\Documents\22103.25_BLDG60_MECHANICAL-V23_swhiteG822D.rvt