


D

C

B

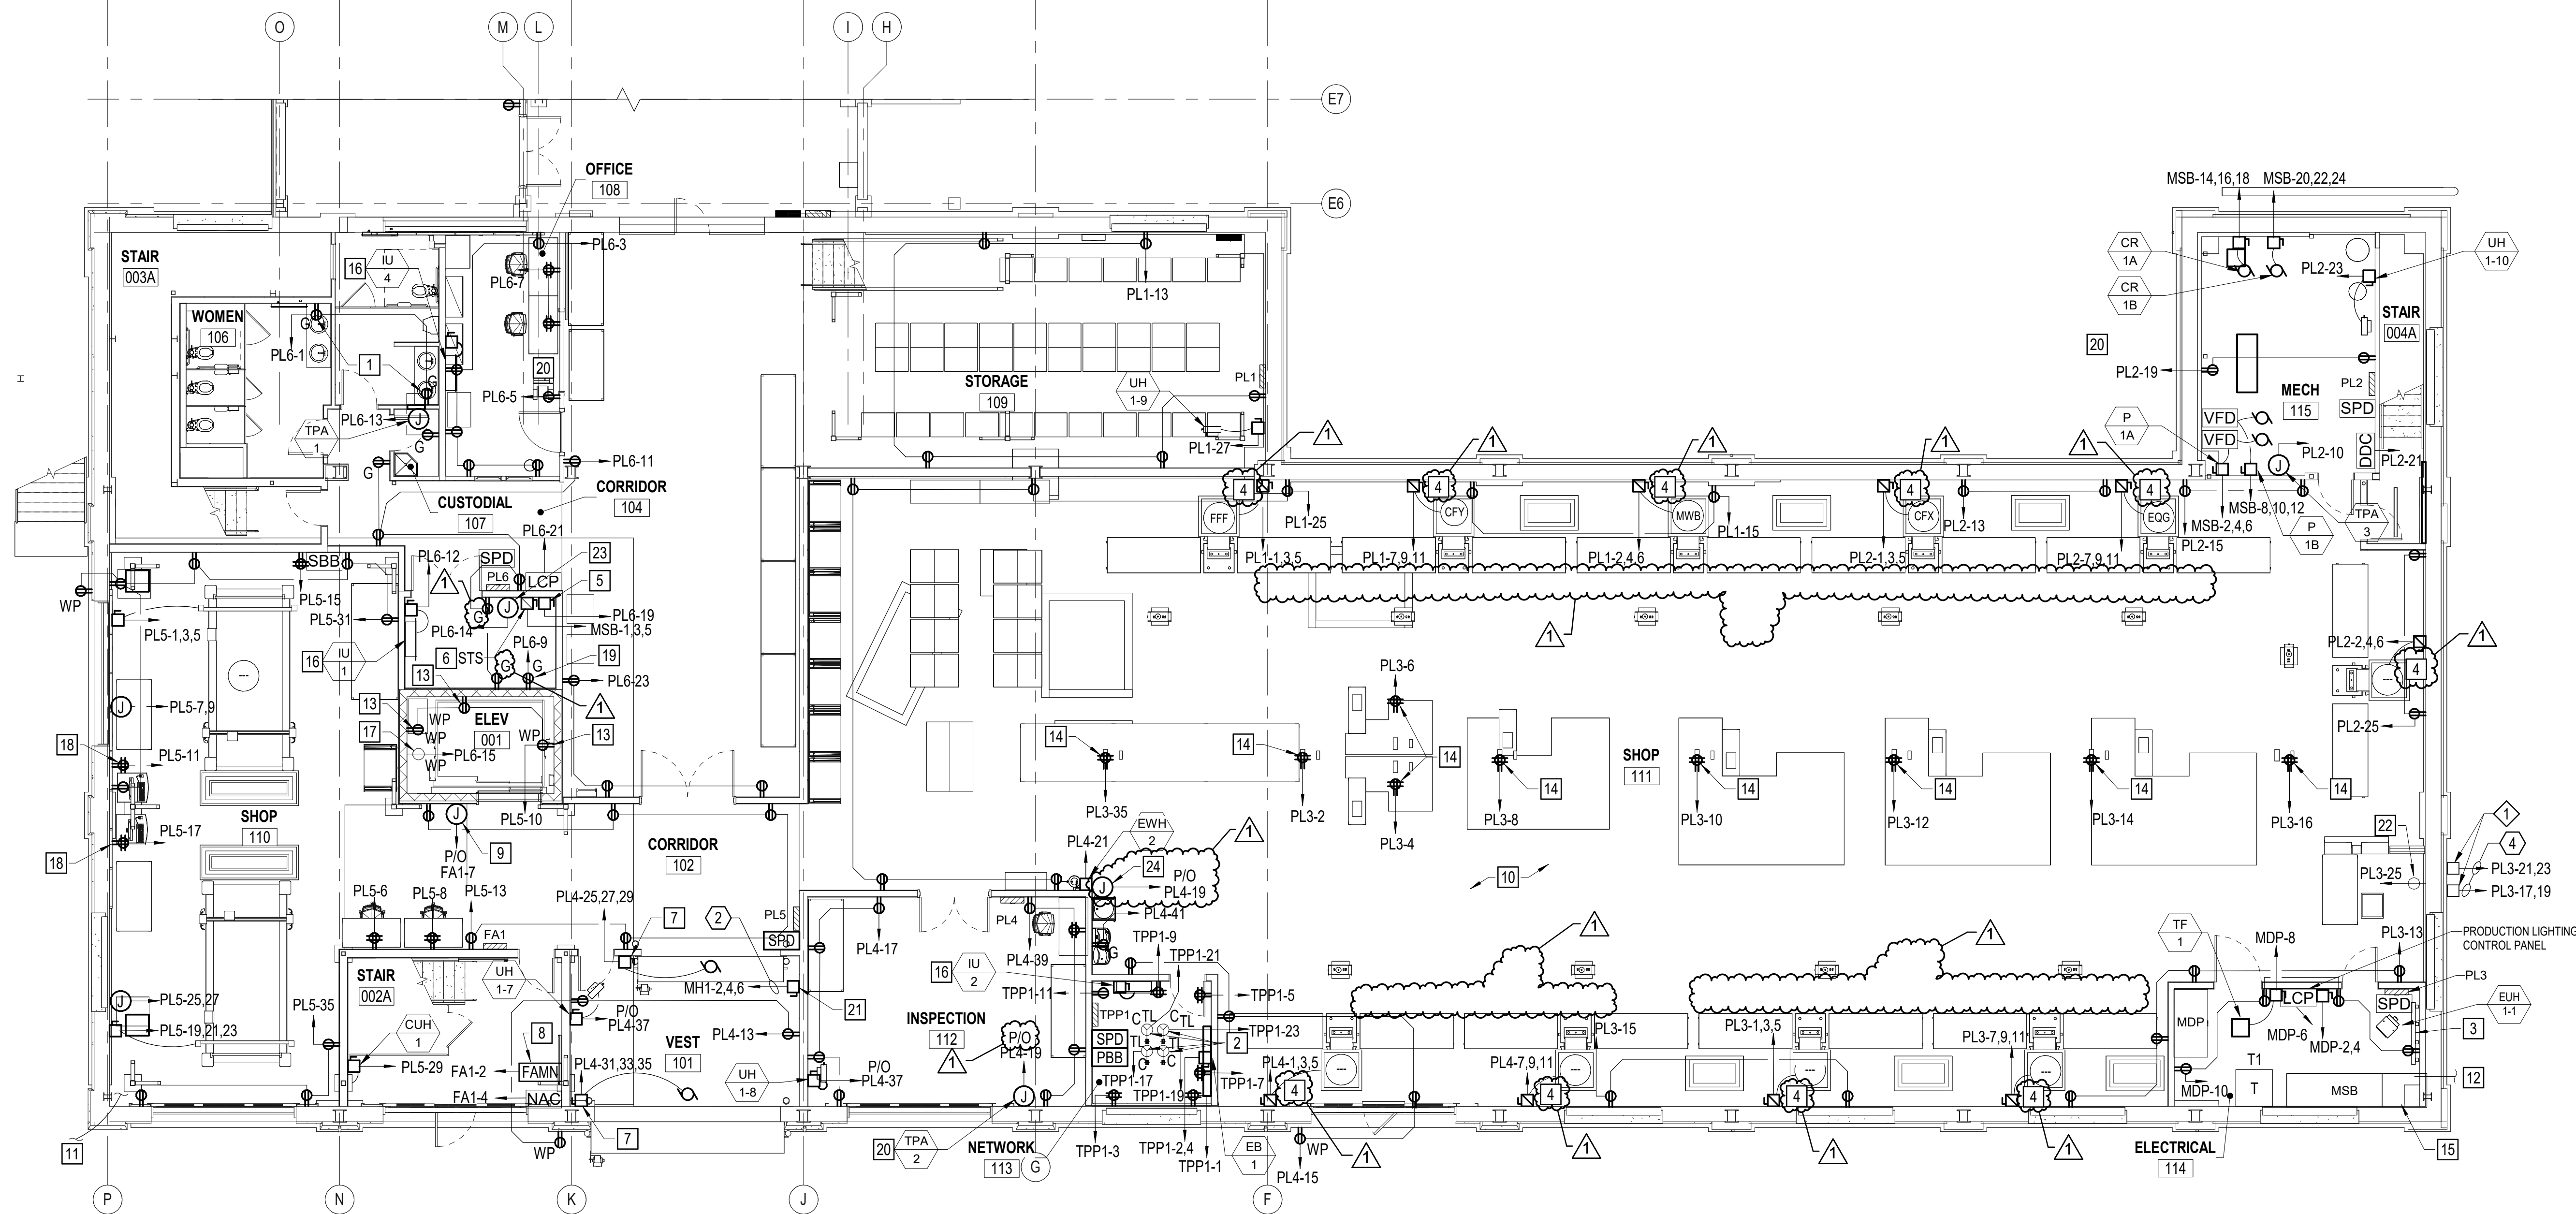

B1 FIRST FLOOR POWER PART PLAN - WEST
SCALE: 1/8" = 1'-0"

GENERAL NOTES

1. REFER TO SHEETS EP503 AND EP504 FOR MECHANICAL, PLUMBING, AND MISCELLANEOUS EQUIPMENT WIRING SCHEDULE.
2. REFER TO SHEETS EP601 - EP604 FOR PANELBOARD SCHEDULES.
3. REFER TO SHEET EP501 FOR ONE-LINE DIAGRAM AND SCHEDULES.
4. REFER TO SHEET EP701 FOR SHOP EQUIPMENT SCHEDULE.


EXISTING KEYNOTES

- EXISTING ELECTRIC VEHICLE CHARGERS.

KEYNOTES

1. INSTALL 4" ABOVE COUNTERTOP BACKSPASH.
2. INSTALL THE TWIST LOCK RECEPTACLE SERVING THE DATA CABINET WITHIN THE CABINET.
3. PROVIDE COPPER GROUND BAR. REFER TO DETAIL A4/EP502.
4. PROVIDE COPPER GROUND BAR, AND GROUND WIRE BACK TO THE SERVICE GROUND. COORDINATE EXACT INSTALLATION HEIGHT AND LOCATION IN THE FIELD WITH THE CONTRACTING OFFICER. REFER TO GROUNDING DETAIL A4/EP502.
5. PROVIDE FOR ELEVATOR CAB LIGHTING AND RECEPTACLES.
6. PROVIDE 480V, 3 POLE, FUSIBLE, SHUNT TRIP SWITCH FOR ELEVATOR. PROVIDE 120V CONTROL CIRCUIT. REFER TO ONE-LINE DIAGRAM ON SHEET EP501.
7. PROVIDE POWER TO THE OVERHEAD DOOR. COORDINATE WITH THE ARCHITECTURAL TRADE.
8. PROVIDE POWER TO THE FIRE ALARM, MASS NOTIFICATION CONTROL PANEL AND ASSOCIATED TRANSMITTER. COORDINATE EXACT LOCATION WITH THE CONTRACTING OFFICER.
9. FOR ELEVATOR LOBBY 2 WAY COMMUNICATIONS SYSTEM. REFER TO DETAIL A3/ET501.
10. ROUTE CONDUIT THAT IS NOT SERVING THE HEAT SEALERS OR ADJACENT RECEPTACLES A MINIMUM OF 15 FEET AWAY FROM THE HEAT SEALERS IN SHOP 111.
11. UTILIZE THE EXISTING TEMPORARY EQUIPMENT (100A DISCONNECT AND 37.5KVA TRANSFORMER) AND CONNECT EXISTING TRAILER 1 TEMPORARY POWER TO THE NEW BUILDING 60 DISTRIBUTION SYSTEM AT THE COMPLETION OF CONSTRUCTION. REFER TO SHEET EP501. COORDINATE WITH THE CONTRACTING OFFICER.
12. EXTEND 3 EXISTING CONDUITS AND ASSOCIATED CONDUCTORS BETWEEN EXTERIOR WALL AND SWITCHBOARD. SEAL CONDUIT INTERIORS.
13. INSTALL 3" ABOVE PIT FLOOR.
14. PROVIDE RECEPTACLE, MOUNTED TO STEEL SLOTTED STRUT SUPPORT, FOR ELECTRICAL CORD REEL. INSTALL RECEPTACLE AND CORD REEL ADJACENT TO COMPRESSED AIR CORD REEL. REFER TO DETAIL C5/SF506 FOR MOUNTING. COORDINATE EXACT LOCATION WITH THE CONTRACTING OFFICER. ADJUST THE ELECTRICAL CORD REEL STOP SO THE CORD IS 7" AFF. CONFIRM FINAL STOP HEIGHT WITH THE CONTRACTING OFFICER.
15. FIRE PUMP FEEDER SECTION OF THE SWITCHBOARD. REFER TO SHEET EP501. REFER TO SHEET CS101 FOR EXISTING, INCOMING, DUCTBANK. PROVIDE FIRE PUMP FEEDER THAT EXITS THE BOTTOM OF THE SWITCHBOARD. ROUTE WITHIN CONCRETE ENCASED DUCTBANK. REFER TO SHEETS SB101 AND SB102.
16. INDOOR UNIT IS POWERED FROM THE OUTDOOR UNIT. COORDINATE WITH THE MECHANICAL TRADE.
17. FOR ELEVATOR SUMP PUMP, SP-1, MOUNT 5' ABOVE ELEVATOR PIT FLOOR. PROVIDE LED LIGHT TO VERIFY CIRCUIT IS ENERGIZED. COORDINATE WITH THE PLUMBING TRADE.
18. FOR CNC COMPUTER. COORDINATE EXACT LOCATION WITH THE CONTRACTING OFFICER.
19. FOR SUMP PUMP CONTROL SYSTEM. COORDINATE WITH THE PLUMBING TRADE.
20. PROVIDE POWER TO THE TRAP PRIMER. COORDINATE EXACT LOCATION WITH THE PLUMBING TRADE.
21. FORK TRUCK CHARGER DISCONNECT. COORDINATE EXACT LOCATION WITH THE CONTRACTING OFFICER.
22. PROVIDE SIMPLEX RECEPTACLE FOR POLYBAG SEALER.
23. FOR ELEVATOR SHUNT TRIP CONTROL POWER.
24. PROVIDE POWER TO EMERGENCY EYEWASH ALARM SYSTEM. COORDINATE WITH THE PLUMBING TRADE.

KEY PLAN

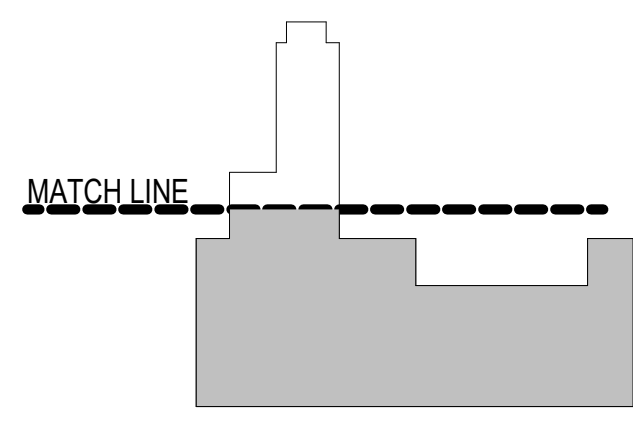

GRAPHIC SCALE(S)

1/8" = 1' - 0"

B UNCLASSIFIED

A

APPROVED	03/16/2026	RSH
AMENDMENT 009	10/07/2025	RSH
FINAL SUBMISSION		APR
MARK DESCRIPTION		

FOR COMMANDER NAVFAC
ACTIVITY

SATISFACTORY TO DATE
DESIGNER HRM
DRAWN BY BPD
CHECKED BY DCL
DESIGN MANAGER T. CARLETON
PROJECT MANAGER L. LYONS
LEADNAME
FIRE PROTECTION S. RUCINSKI

DEPARTMENT OF THE NAVY
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - MID-ATLANTIC
PORTSMOUTH NAVAL SHIPYARD - KITTERY, ME
PORTSMOUTH NAVAL SHIPYARD
KITTERY, ME

B60 REPAIRS

FIRST FLOOR POWER PART PLAN - WEST

PROJECT NO. 1740579
NAVFAC DRAWING NO.

SHEET 249 OF 282
EP102

DRAWN FORM REVISION: 14 SEP 2023