

WebAIM Short Form TASK GROUP INSTRUCTION

21-JAN-2026 1543

20.15.6.0.9333 (July 2025)

ICN: 38K6112304 KeyOp: A01

TGI NO:	COMPONENT NAME: #1A GTM INTAKE	TYPE: IT	PHASE: A	REPEAT: 1	CHG/VER: 0/0
SHIP/HULL NO: DDG-115	SHIP/HULL NAME: USS RAFAEL PERALTA	PROJECT: K61	SYSTEM: 25131	PLANT ID:	CASREP CAT:
CU PHASE TITLE: F/O – INSTALL 1A GTM INTAKE MOISTURE SEPARATOR BONDING STRAP, 02-174-1-Q					
PREPARING ACTIVITY:		STATUS: APP		WORKING STATUS:	
PREPARED BY: WATANABE, YOSHIO		CODE: 232	PHONE: 3152432375	DATE: 29-NOV-2025	
APPROVED BY: SENDA, HIDEKI		CODE: 232	PHONE: 3152432496	DATE: 29-NOV-2025	
CONCURRED BY:		CODE:	PHONE:	DATE:	
REASON FOR WORK/NEED FOR CHANGE: ES01NA5U					
JCN: ES01-NA5U					
SPECIAL REQUIREMENTS: TGI Short Form					
CU PHASE DESCRIPTION: 1 SCOPE/PURPOSE: 1.1 Title: 1A Gas Turbine Module (GTM) Moisture Separator Bonding Strap; install 1.2 Location of Work: 1.2.1 Intake Engine Room No. One Dirty Side (02-174-1-Q) 1.2.2 Passage (01-118-1-L) 1.2.3 Deck Gear Locker (01-174-1-A) 1.3 Identification: 1.3.1 Quantity (One AY), Bonding Strap Assembly of Blow in Door Panel, Moisture Separator, Type-C in 02-174-1-Q, Frames between 186 and 188, Starboard					
ZONE MANAGER: SAITO, KAZUNOBU		ZONE:	COMPARTMENT: VARIOUS	LEVEL:	FRAME:
SIDE: U					
JOB SUMMARY ID: 123A2104	TOT MAN HR.:	TOT DUR:	TOT JML COST:	PLANNING ACCEPTANCE:	

WORK CERTIFICATION SIGNATURES:	DLs														
COMPLETION OF WORK REVIEW:			BADGE NO:		SHOP/CODE:		PHONE:		DATE:						
RECORDS REVIEW:			BADGE NO:		SHOP/CODE:		PHONE:		DATE:						



WebAIM Short Form TASK GROUP INSTRUCTION

21-JAN-2026 1543

20.15.6.0.9333 (July 2025)

(Continued)

ICN: 38K6112304

KeyOp: A01

TGI NO:	COMPONENT NAME: #1A GTM INTAKE	TYPE: IT	PHASE: A	REPEAT: 1	CHG/VER: 0/0
SHIP/HULL NO: DDG-115	SHIP/HULL NAME: USS RAFAEL PERALTA	PROJECT: K61	SYSTEM: 25131	PLANT ID:	CASREP CAT:
CU PHASE TITLE: F/O – INSTALL 1A GTM INTAKE MOISTURE SEPARATOR BONDING STRAP, 02-174-1-Q					

CU PHASE DESCRIPTION (Cont.)

Attachment Method: Method 3 on Figure 11 of Ref. No. 5, Welded

Weld Joint Design of Boss: PT1S.1 of MIL-STD-22D

Fillet Weld Size: 1/8 Inch

Remarks: See Sketch Enclosure-01 for location detail

1.3.1.1 Quantity (One EA), Bonding Strap

Material: CRES, Type-I, Standard Size B of MIL-DTL-24749C

1.3.1.2 Quantity (One EA), Boss on 02 Level Deck Plating

Material: CRES 316L

1.4 Security Classification: None.

1.5 Initial Condition:

1.5.1 Potential Asbestos Hazard

1.6 Contractor work start date: 7/27/2026

1.7 Contractor work completion date: 9/4/2026

2 PROCEDURE:

2.1 Accomplish the requirements of Ref. No. 3.

(V)(G) "GAS TURBINE MAINTENANCE PROCEDURE"

2.2 Install each new bonding strap assembly listed in 1.3.1 in accordance with Ref. No. 4 and Ref. No. 5, using Ref. No. 6 for guidance.

2.2.1 Accomplish the requirements of 009-012 of Ref. No. One, including Table 2, Column(s) D, Lines One through 7.

2.3 Accomplish the requirements of 009-032 of Ref. No. One for each new and disturbed surface.

2.4 Notes:

2.4.1 Planner: Code 232 Y. Watanabe, 243-2375

Planner: Code 231B Y. Koyama, 243-9937

Engineer: Code 260 T. Ito, 243-4173

2.4.2 Work Integration Manager (WIM): Code 333 T. Yaginuma, 080-5419-0598

2.4.3 Work per this instruction involves cutting an access (or removal of a door) through a fire zone bulkhead, through the hull of the ship above the turn of the bilge, through ventilation components (ducting, plenums, etc.), or through any air-tight, fume-tight or watertight bulkheads normally used to control air flow in the event of a shipboard fire. A nonflammable closure is required in accordance with COMNAVSEASYS COM MSG R 261400Z JUL 12. The closure, if not continuously in use, shall be staged near the access, readily visible and accessible, so that any emergency responder can install the closure to affect proper

WebAIM Short Form TASK GROUP INSTRUCTION

21-JAN-2026 1543

20.15.6.0.9333 (July 2025)

(Continued)

ICN: 38K6112304

KeyOp: A01

TGI NO:	COMPONENT NAME: #1A GTM INTAKE	TYPE: IT	PHASE: A	REPEAT: 1	CHG/VER: 0/0
SHIP/HULL NO: DDG-115	SHIP/HULL NAME: USS RAFAEL PERALTA	PROJECT: K61	SYSTEM: 25131	PLANT ID:	CASREP CAT:
CU PHASE TITLE: F/O – INSTALL 1A GTM INTAKE MOISTURE SEPARATOR BONDING STRAP, 02-174-1-Q					

CU PHASE DESCRIPTION (Cont.)

air flow onboard the ship.

2.4.4 WPC will copy the following pages in reference.

2.4.5 JCN ES01-NA5U is related to this TGI.

2.5 Government Furnished Material (GFM):

2.5.1 SRF-JRMC will provide GFM listed in the Material List.

2.6 SRF-JRMC will provide the following service work: (TGI No. 38K61123S02)

2.6.1 [C740] Crane and rigging service.

2.6.2 [X99E] Utility service, electrical.

2.6.3 [X99M] Provide utility service, including low pressure air supply, water supply, and steam supply.

2.6.4 [C106.1] Safety inspection for SRF-JRMC employees.

2.6.5 [C106.2] Gas free inspection for SRF-JRMC employees.

2.6.6 [C133] QA inspection for (G) symbol(s).

2.6.7 [C285] Inspection for (G) symbol(s).

Ref. No.	Document/Drawing Number	DOCUMENT/DRAWING TITLE	REV	CHG NO.	CPY REQ	PARAGRAPH	SECT	PG	CHPT
----------	-------------------------	------------------------	-----	---------	---------	-----------	------	----	------

WebAIM Short Form TASK GROUP INSTRUCTION

21-JAN-2026 1543

20.15.6.0.9333 (July 2025)

(Continued)

ICN: 38K6112304

KeyOp: A01

TGI NO:	COMPONENT NAME: #1A GTM INTAKE	TYPE: IT	PHASE: A	REPEAT: 1	CHG/VER: 0/0
SHIP/HULL NO: DDG-115	SHIP/HULL NAME: USS RAFAEL PERALTA	PROJECT: K61	SYSTEM: 25131	PLANT ID:	CASREP CAT:
CU PHASE TITLE: F/O – INSTALL 1A GTM INTAKE MOISTURE SEPARATOR BONDING STRAP, 02-174-1-Q					

Ref. No.	Document/Drawing Number	DOCUMENT/DRAWING TITLE	REV	CHG NO.	CPY REQ	PARAGRAPH	SECT	PG	CHPT
1	NSI FY-26	NAVSEA Standard Items	-	1	N				
2	LI FY-26	Local Standard Items	-	ORG	N				
3	MP LM24-K6112304-ES01NA5U	1A GTM INTAKE SYSTEM FOD PROTECTION FOR MOISTURE SEPARATOR/BLOW-IN PANEL BONDING	-		Y			ALL	
4	DWG 300-7028673	SCHEDULE OF BONDING AND GROUNDING (INCLUDING CONDUCTIVE CAULKING)	C		Y			SH: 208	
5	MIL MIL-STD-1310	Shipboard Bonding, Grounding, and Other Techniques for EMP Mitigation and Safety	H		N				
6	DWG 150-7026722	UNIT STRL ARR DWG ASSY UNIT 4310	H		Y			SH 3-18	

TASK NAME / TASK DESCRIPTION	SHOP/ TSD	TS	SF WC	CREW #	MHRS	RWRK
2.1. FOD Protection Work 24HRs						

MATERIAL REFERENCES			
REF NO.	DOCUMENT/DRAWING NUMBER	DOCUMENT/DRAWING TITLE	REV

ICN: 38K6112304	KEY OP: A01
-----------------	-------------

MATERIAL LIST												
ITEM NO.	PC NO.	REF NO.	M / C	DESCRIPTION	STOCK NUMBER	GENERIC MATL TYPE	LVL	QA	HAZ MAT	DOC NO.	QTY REQD/ UNIT	QTY USED/ UNIT
100			M	STRIP,EL, ORIG: C231B, Y. KOYAMA 070-7787-2059 ORDERED FOR KTR	9B 5999 013438667		NA	4	N	53175503	1/EA	
101			M	SCREW,CA, ORIG: C231B, Y. KOYAMA 070-7787-2059 ORDERED FOR KTR	9B 5305 014535741		NA	4	N	53175380	1/EA	

WebAIM Short Form TASK GROUP INSTRUCTION

21-JAN-2026 1543

20.15.6.0.9333 (July 2025)

(Continued)

ICN: 38K6112304

KeyOp: A01


TGI NO:	COMPONENT NAME: #1A GTM INTAKE	TYPE: IT	PHASE: A	REPEAT: 1	CHG/VER: 0/0
SHIP/HULL NO: DDG-115	SHIP/HULL NAME: USS RAFAEL PERALTA	PROJECT: K61	SYSTEM: 25131	PLANT ID:	CASREP CAT:
CU PHASE TITLE: F/O – INSTALL 1A GTM INTAKE MOISTURE SEPARATOR BONDING STRAP, 02-174-1-Q					

MATERIAL LIST												
ITEM NO.	PC NO.	REF NO.	M / C	DESCRIPTION	STOCK NUMBER	GENERIC MATL TYPE	LVL	QA	HAZ MAT	DOC NO.	QTY REQD/ UNIT	QTY USED/ UNIT
102			M	NUT,SLEE, ORIG: C231B, Y. KOYAMA 070-7787-2059 ORDERED FOR KTR	9B 5310 014231667		NA	4	N	53175506	1/EA	
103			M	INSULATI, ORIG: C231B, Y. KOYAMA 070-7787-2059 ORDERED FOR KTR	9Q 5640 013713262		NA	4	N	53175510	1/SH	
104			M	INSULATI, ORIG: C231B, Y. KOYAMA 070-7787-2059 ORDERED FOR KTR	9Q 5640 013713263		NA	4	N	53175513	1/SH	

ATTACHMENT LIST

TITLE	FILE NAME	SAVED DATE
ENCLOSURE-01	38K6112304A01-Sketch.pdf	22-NOV-2025 0000

LOCATION DETAIL OF BOSS FOR BONDING STRAP

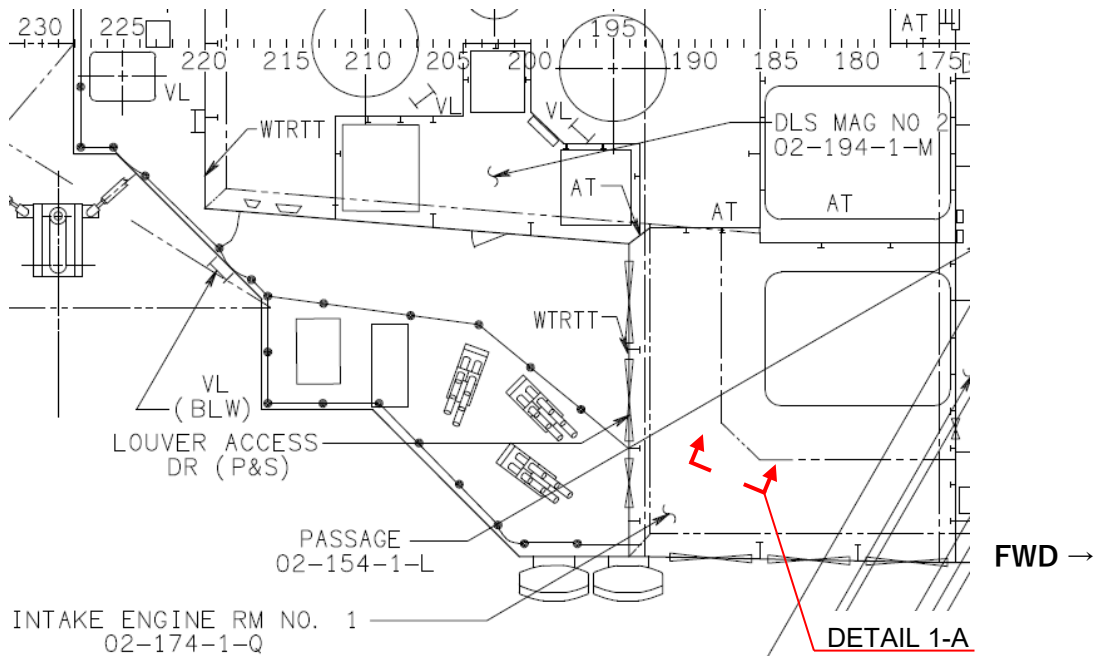

PLAN VIEW
02 LEVEL DECK WEATHER, FR 175 – 230, STBD



DETAIL 1-A
BOSS FOR BONDING STRAP ON 02 LEVEL DECK PLATING