



3/31/2026 4:08:47 PM ET102 C:\Users\williams\Documents\22103.25_BLDG60_ELEC-V23_RandolphWilliams.rvt

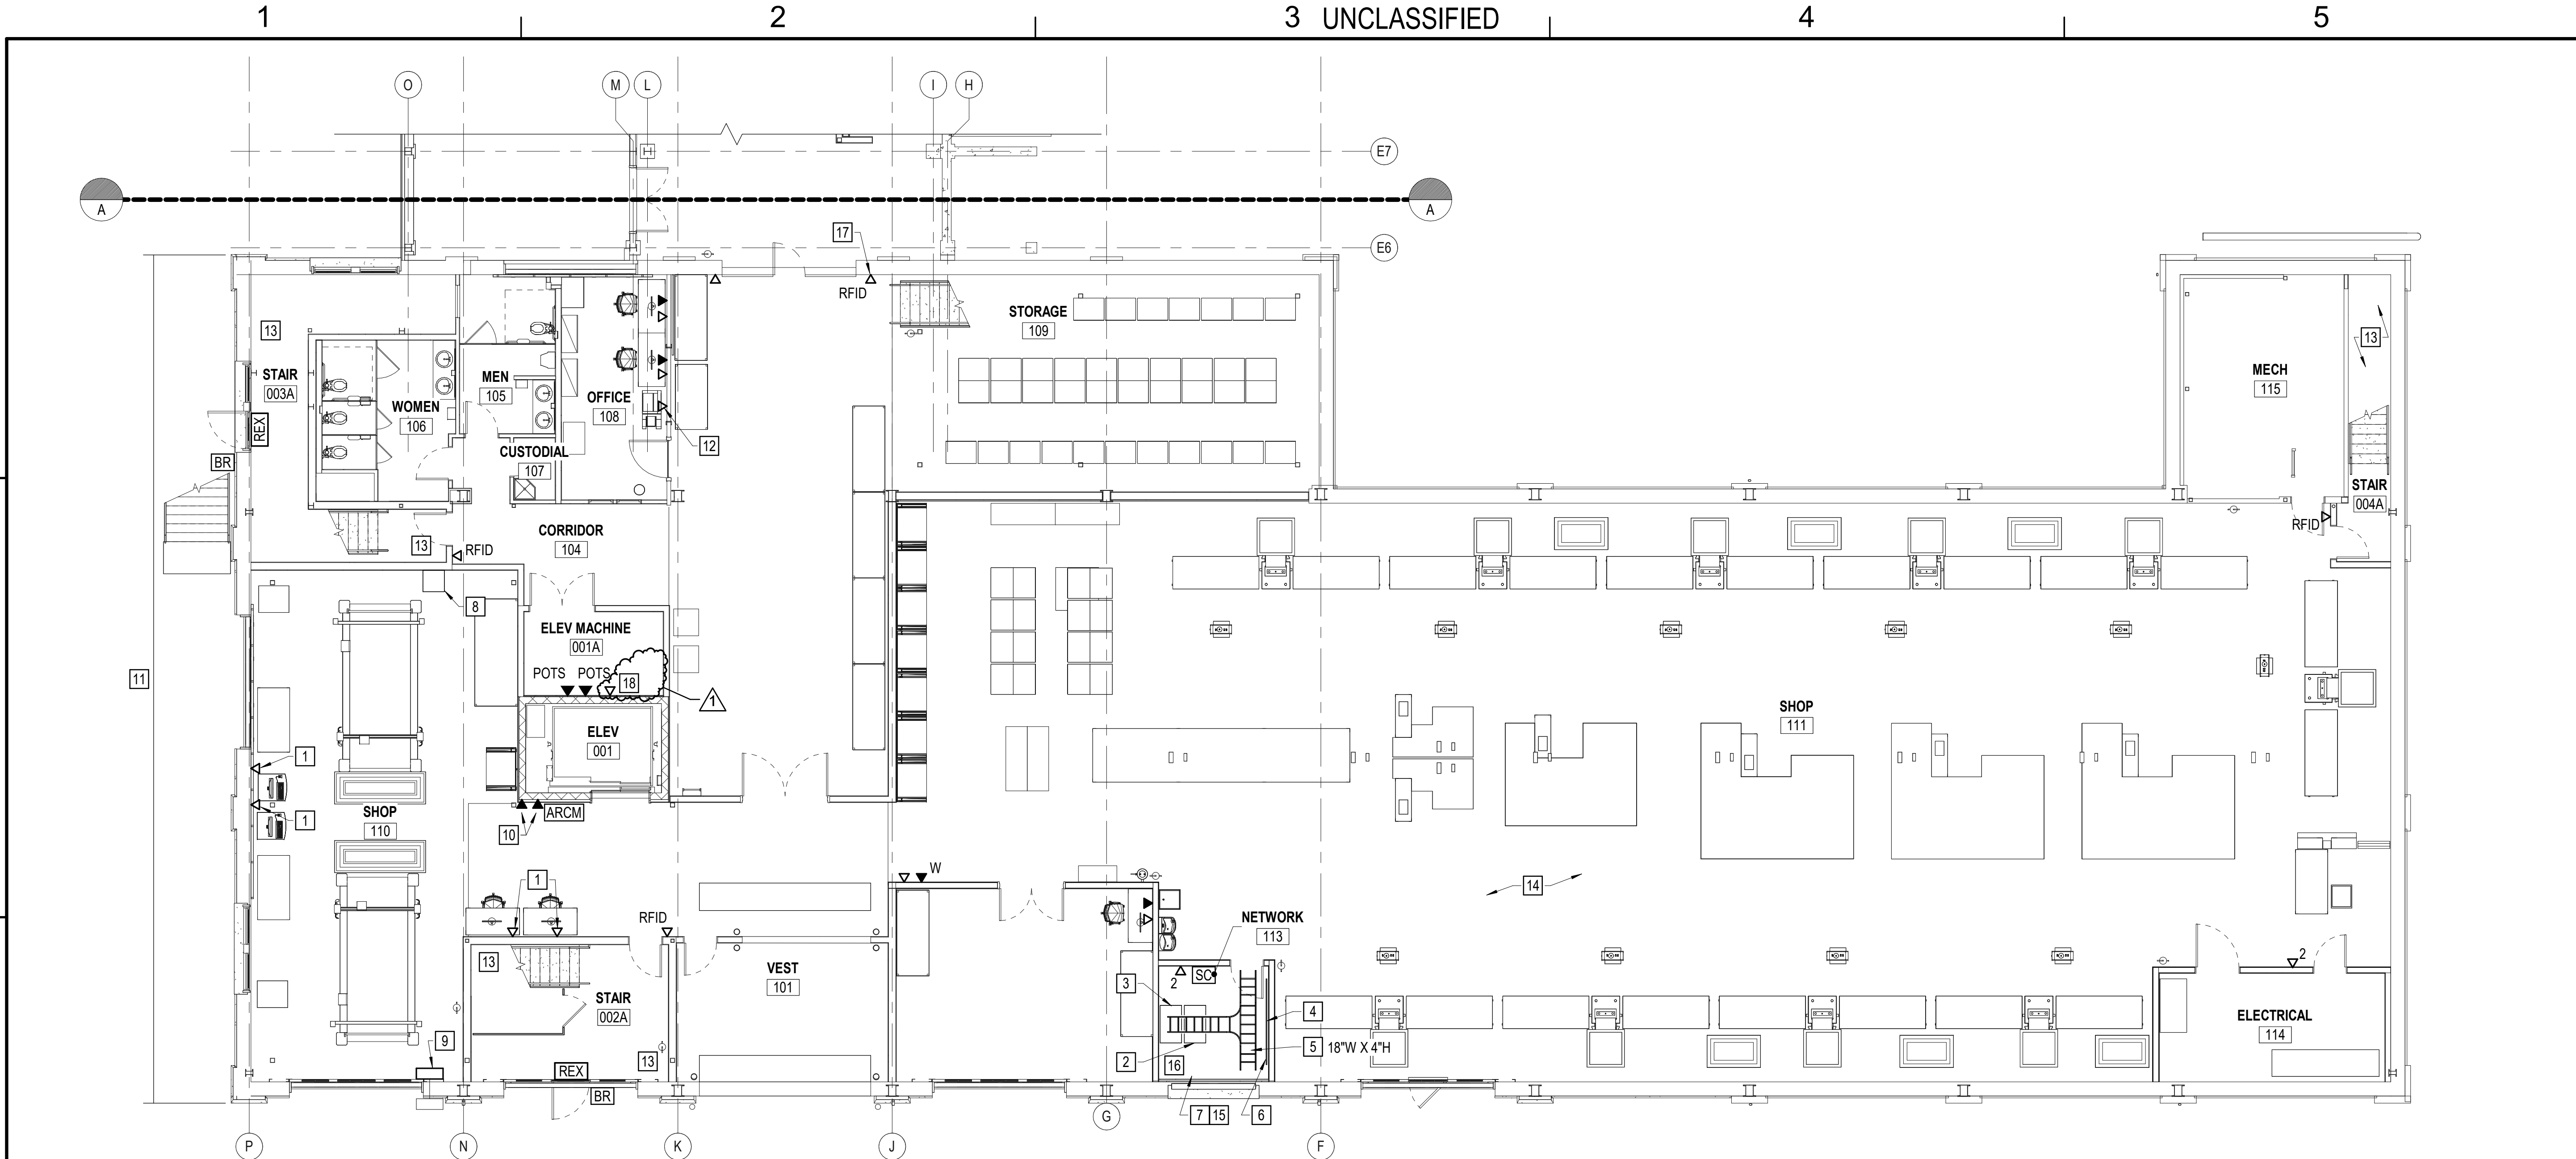

B1 FIRST FLOOR TECHNOLOGY AND SECURITY PART PLAN - WEST
SCALE: 1/8" = 1'-0"

GENERAL NOTES		KEYNOTES		KEY PLAN
1. REFER TO SHEETS ET501-ET502 FOR TELECOMMUNICATIONS RISER DIAGRAM AND DETAILS.	1. COORDINATE EXACT LOCATION WITH THE CONTRACTING OFFICER. ROUTE CONDUIT AND CABLE BACK TO GOVERNMENT FURNISHED WALL MOUNTED NETWORK P CABINET. OUTLET MUST CONTAIN 1 NETWORK P SHIELDED JACK AND CABLE.	8. INSTALL GOVERNMENT FURNISHED WALL MOUNTED NETWORK P CABINET. CABINET SERVES FOUR OUTLETS WITHIN THE CNC/GERBER MACHINE AREA. COORDINATE EXACT LOCATION WITH THE CONTRACTING OFFICER AND ADJACENT EQUIPMENT.	14. ROUTE CONDUIT A MINIMUM OF 15 FEET AWAY FROM THE HEAT SEALERS IN SHOP 111.	PLAN NORTH
2. [BASE BID]: PROVIDE PATHWAYS FOR ACCESS CONTROL SYSTEM. [OPTION 4]: PROVIDE ACCESS CONTROL SYSTEM DEVICES, EQUIPMENT, CABLING, AND TESTING.	2. PROVIDE NETWORK N CABINET. REFER TO DETAIL A2/ET502. COORDINATE EXACT LOCATION TO AVOID EXISTING PIT. ENSURE PIT COVER IS REMOVABLE AFTER CABINET INSTALLATION.	9. [BASE BID]: PROVIDE JUNCTION BOX AT EXISTING COMMUNICATIONS ENTRANCE. PROVIDE IN SIZE TO ACCOMMODATE SPLICE OF EXISTING NETWORK N AND NETWORK P OUTSIDE PLANT CABLES. COORDINATE EXACT LOCATION IN THE FIELD. PROVIDE LABEL INDICATING "NETWORK N AND NETWORK P OUTSIDE PLANT CABLE ENTRANCE". REFER TO SHEET ET501.	15. [BASE BID]: DUCT BANK ENTRY POINT FOR 6-STRAND MULTIMODE NETWORK P FIBER OPTIC CABLE FROM BUILDING 59. EXTEND CABLE TO GOVERNMENT PROVIDED NETWORK P CABINET IN SHOP 110. [OPTION 11]: DUCT BANK ENTRY POINT FOR (2) 36 STRAND CABLES FOR NETWORKS N AND P.	
3. REFER TO SHEET EY501 FOR SECURITY DETAILS.	3. PROVIDE NETWORK P CABINET. REFER TO DETAIL A2/ET502. COORDINATE EXACT LOCATION TO AVOID EXISTING PIT. ENSURE PIT COVER IS REMOVABLE AFTER CABINET INSTALLATION.	10. FOR ELEVATOR LOBBY 2 WAY COMMUNICATIONS SYSTEM. REFER TO DETAIL A3/ET501.	16. BOND SHIELDED CABLES, PATCH PANELS, RACKS, AND CABLE TRAY TO TELECOMMUNICATIONS GROUNDING SYSTEM. REFER TO SHEET EP102 FOR PRIMARY GROUNDING BUSBAR.	
	4. PROVIDE WALL MOUNTED TELEPHONE BACKBOARD AND PUNCHDOWN BLOCKS.	11. PROVIDE SHIELDED TELECOMMUNICATIONS CABLING AND [OPTION 4]: SECURITY CABLING ON THIS LEVEL.	17. COORDINATE EXACT LOCATION AND MOUNTING HEIGHT WITH THE SLIDING DOOR.	
	5. PROVIDE LADDER CABLE TRAY AND ACCESSORIES.	12. FOR PRINTER. COORDINATE EXACT LOCATION WITH THE CONTRACTING OFFICER.	18. PROVIDE VIEWING PANEL IN THE ELEVATOR MACHINE ROOM. COORDINATE EXACT LOCATION WITH THE ELEVATOR INSTALLER AND CONTRACTING OFFICER. REFER TO THE ELEVATOR SPECIFICATION FOR ADDITIONAL INFORMATION.	
	6. PROVIDE WALL MOUNTED TELEPHONE BACKBOARD AND BUILDING PROTECTOR ASSEMBLY.	13. COMMUNICATIONS CABLES AND CONDUITS MUST NOT BE ROUTED THROUGH THE STAIR UNLESS THEY ARE DIRECTLY RELATED TO AN ITEM SERVING THE STAIR.		
	7. DUCT BANK ENTRY POINT FOR EXISTING TELEPHONE OUTSIDE PLANT CABLE. ROUTE CABLES THROUGH THE EXISTING PIT AND TERMINATE ON BUILDING PROTECTOR ASSEMBLY.			

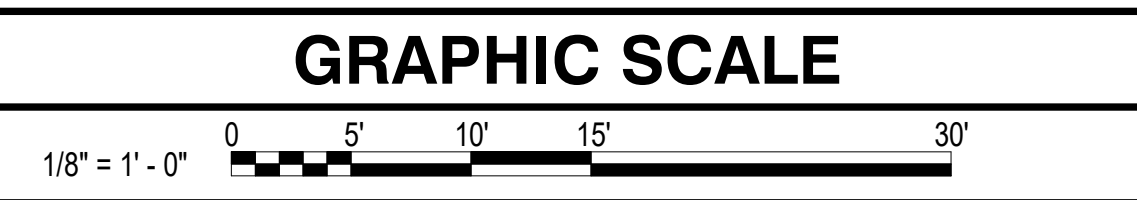

APPROVED	FOR COMMANDER NAVFAC	ACTIVITY	SATISFACTORY TO DATE	DESIGNER	HRM	DRAWN BY	BPD	CHECKED BY	JAT	DESIGN MANAGER	T. CARLETON	PROJECT MANAGER	L. LYONS	HEADLINE	S. RUCINSKI	FIRE PROTECTION	S. RUCINSKI	NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - MID-ATLANTIC	PORTSMOUTH NAVAL SHIPYARD - KITTEERY, ME	B60 REPAIRS	FIRST FLOOR TECHNOLOGY AND SECURITY PART PLAN - WEST	ET102	275 OF 282	14 SEP 2023
----------	----------------------	----------	----------------------	----------	-----	----------	-----	------------	-----	----------------	-------------	-----------------	----------	----------	-------------	-----------------	-------------	---	--	-------------	--	-------	------------	-------------