

3/20/2026 1:29:23 PM P-106
C:\Users\richards\Documents\22103.25_BLDG60_MECHANICAL-V23_swhic882ZD.rvt

1

2

3 UNCLASSIFIED

4


5

D

C

B

A

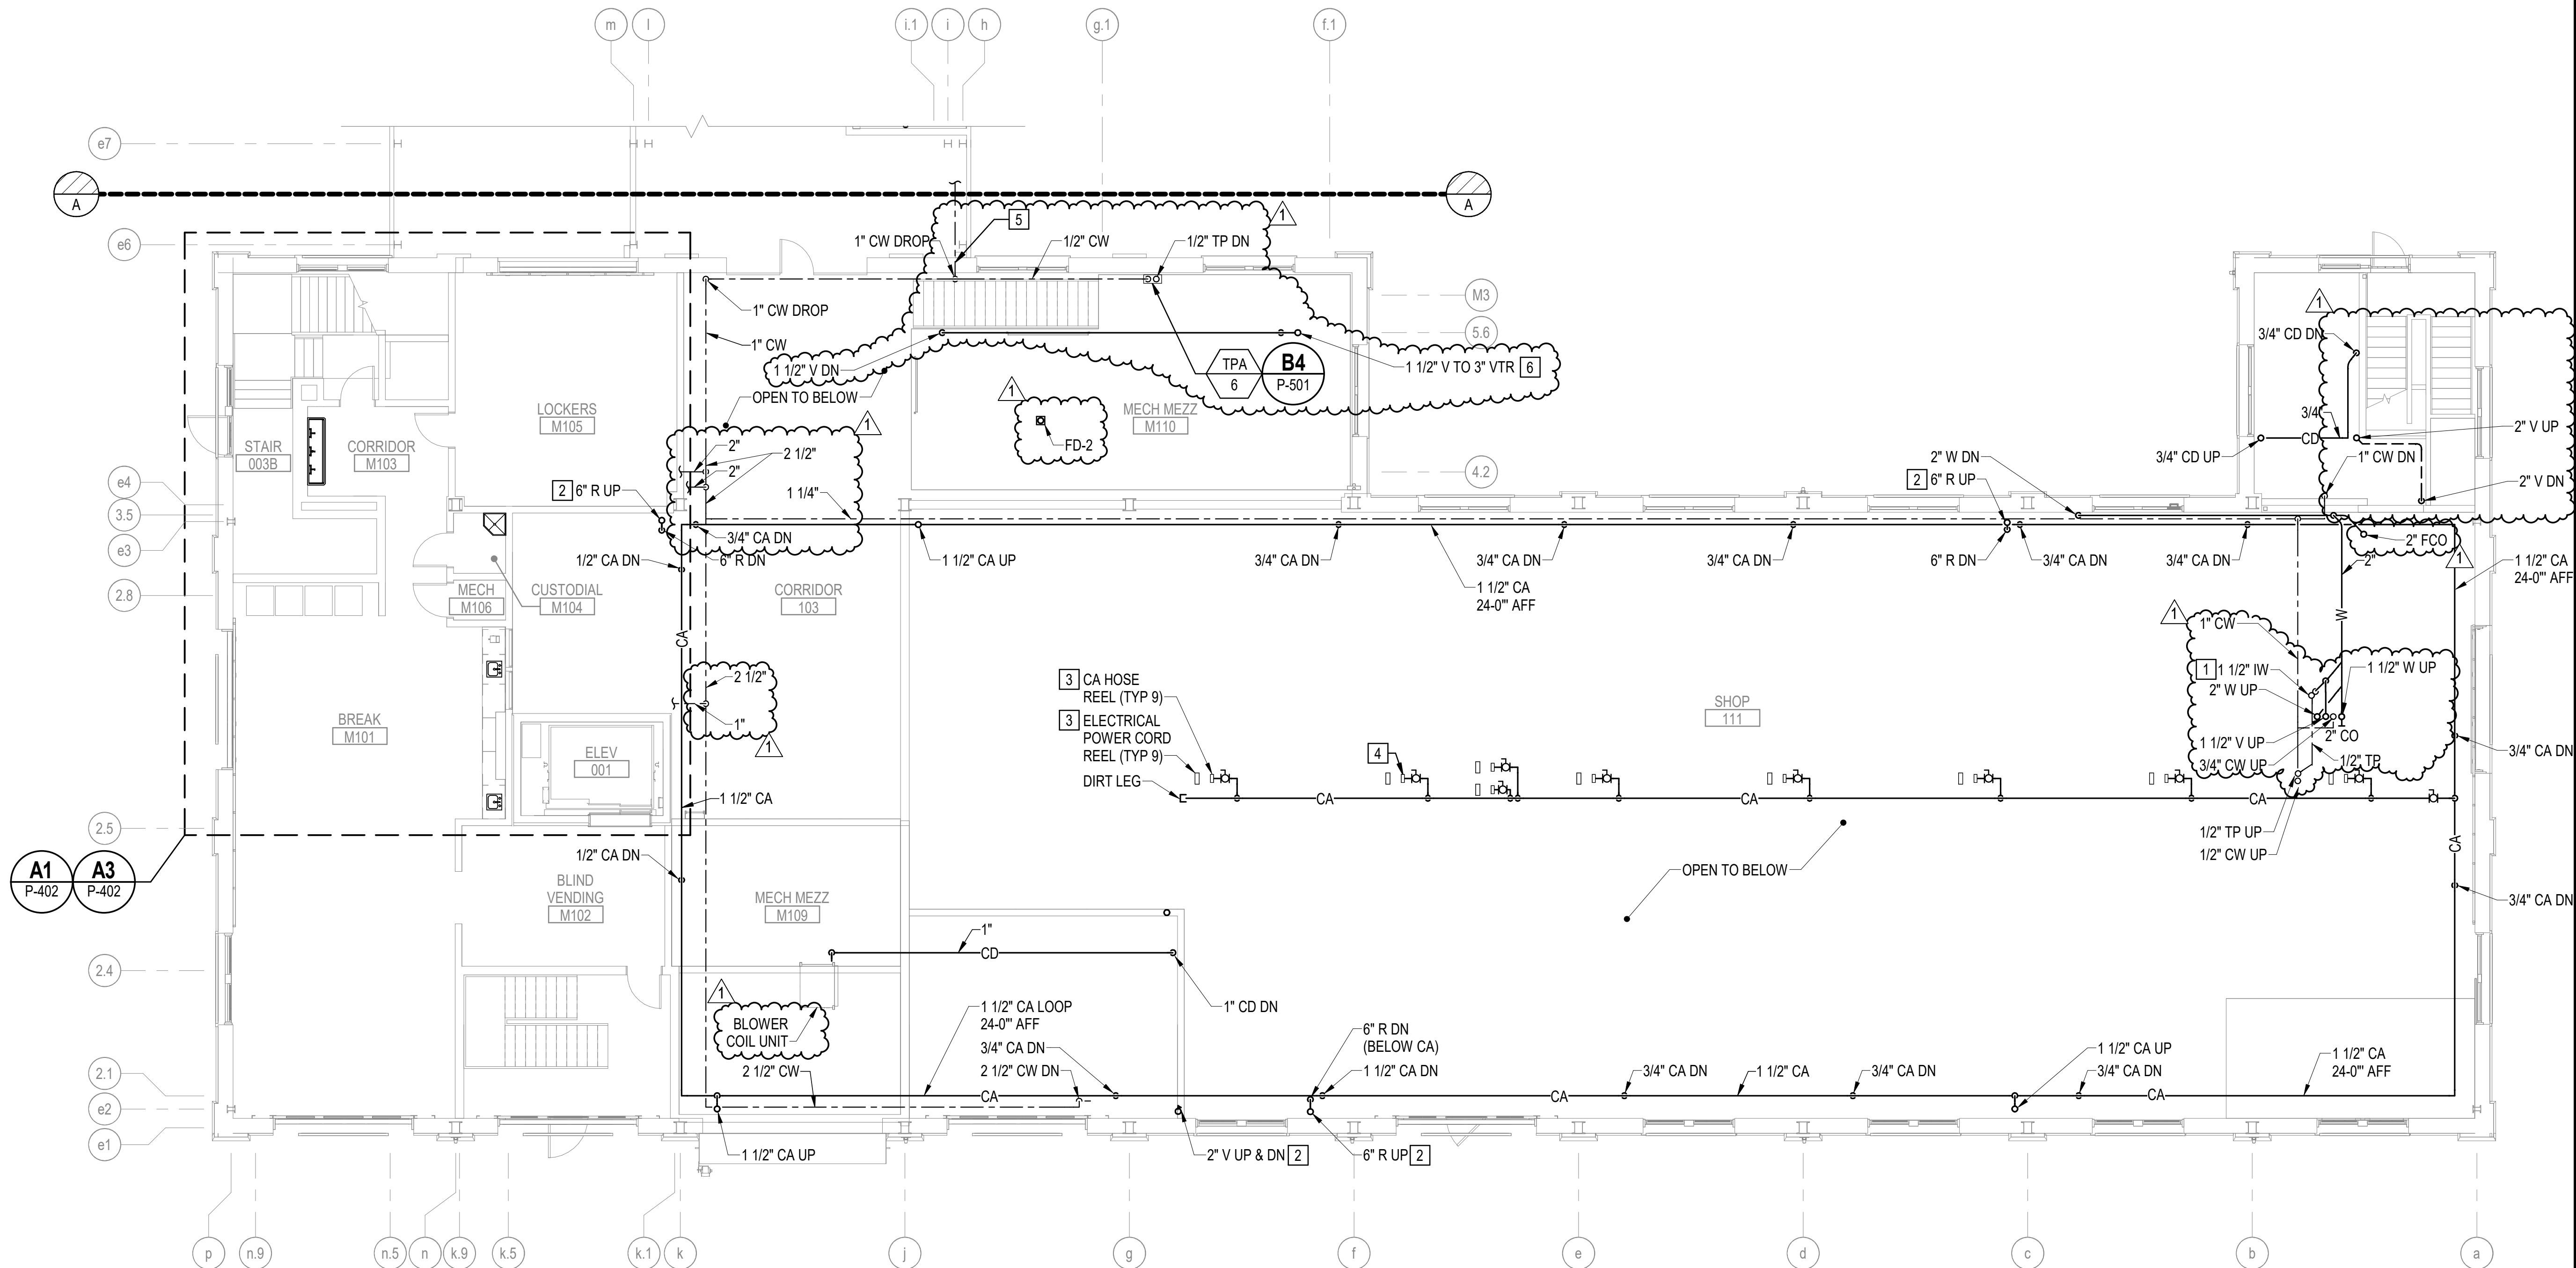

B1 FIRST FLOOR MEZZANINE PLUMBING PLAN - WEST
SCALE: 1/8" = 1'-0"


GENERAL NOTES

- SEE P-001 FOR PLUMBING LEGENDS, ABBREVIATIONS AND GENERAL NOTES.
- CORRDINATE WITH CONTRACTING OFFICER THE LOCATIONS FOR COMPRESSED AIR BRANCH SERVICE PIPING OUTLETS, CONSISTENT WITH THE FINAL SHOP EQUIPMENT LAYOUT.
- COORDINATE THE INSTALLATION OF PIPING AND EQUIPMENT TO MAINTAIN MANDATORY CLEARANCE ZONES AROUND CRANE RAILS AND BRIDGE CRANE OPERATIONAL TRAVEL PATH.


KEYNOTES (THIS SHEET ONLY)

- 1-1/2" INDIRECT WASTE DRAIN WITH TRAP PRIMER PORT. PROVIDE AIR GAP FITTING FOR 3/4" DRAIN FROM WATER HEATER DRAIN PAN.
- PROVIDE OFFSET IN RISER TO AVOID EXISTING CRANE RAILS ON THE FIRST AND SECOND FLOORS.
- PROVIDE 1/2" COMPRESSED AIR BRANCH SERVICE WITH ISOLATION VALVE AND HARD PIPE HOSE REEL CONNECTION FITTINGS TO HOSE REEL. THE HOSE REELS ARE PROVIDED AS PART OF EQUIPMENT PACKAGE OPTION 2, AND SUSPENDED FROM STRUCTURAL RAILS LOCATED APPROXIMATELY 24'-0" AFF. RUN COMPRESSED AIR MAIN ABOVE THE STRUCTURAL RAIL ON STRUCTURAL STEEL CHANNEL ACROSS THE RAILS WITH PIPE CONNECTION FITTINGS. THE COMPRESSED AIR HOSE REELS WILL BE PAIRED WITH ELECTRICAL CORD REELS. COORDINATE REEL PAIRING ARRANGEMENTS AND LOCATIONS WITH THE CONTRACTING OFFICER TO ALIGN WITH THE SHOP'S FINAL EQUIPMENT LAYOUT. ALSO, COORDINATE PLACEMENT OF COMPRESSED AIR MAIN WITH ELECTRICAL SERVICE CONDUIT SERVING THE ELECTRIC CORD REELS. REFER TO XX### FOR STRUCTURAL RAIL DETAILS.
- FOR THE CA SERVICE LINE TO THIS CA REEL, PROVIDE ISOLATION BALL VALVE, PRESURE REGULATOR AND PRESURE GAUGE UPSTREAM AND DOWNSTREAM OF REGULATOR.
- COORDINATE WALL PENETRATION WITH HISTORIC SLIDING DOOR. THE DOOR MUST REMAIN FUNCTIONAL.
- 3" VTR MUST BE A MINIMUM OF 10 FEET AWAY FROM EDGE DOAS-1 ROOF CURB MOUNTED GRAVITY INLET HOOD GIV-1. SEE SHEET MH103 FOR INLET HOOD LOCATION REFERENCE.

KEY PLAN

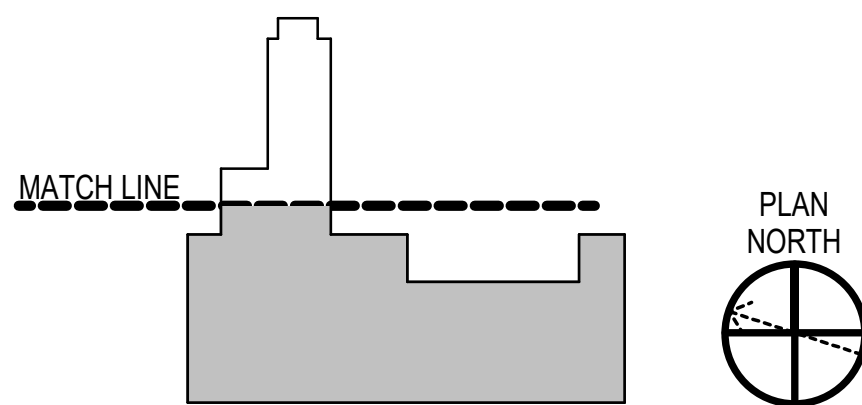

GRAPHIC SCALE

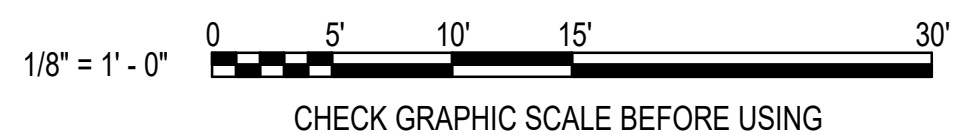

MARK	DESCRIPTION	DATE
ASH	AMENDMENT 010	03/20/2026
ASH	FINAL SUBMISSION	10/07/2025
ASH		



FOR COMMANDER NAVFAC
ACTIVITY
SATISFACTORY TO DATE
DESIGNER RNC
DRAWN BY SRW
CHECKED BY MSA
DESIGN MANAGER T. CARLETON
PROJECT MANAGER L. LYONS
HEADLINE
FIRE PROTECTION S. RUCINSKI

DEPARTMENT OF THE NAVY	NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - MID-ATLANTIC	PORTSMOUTH NAVAL SHIPYARD - KITTERY, ME
ROCC-ME	
PORTSMOUTH NAVAL SHIPYARD	
B60 REPAIRS	
FIRST FLOOR MEZZANINE PLUMBING PLAN - WEST	

PROJECT NO. 1740579
NAVIFAC DRAWINGS NO.
SHEET 174 OF 282
P-106

DRAWING REVISION: 14 SEP 2023

1

2

3 UNCLASSIFIED

4

5