


TASK GROUP INSTRUCTION
 AIM REV 20.11.4.0 (OCTOBER 2020)

TGI NO.:	COMPONENT NAME: FWD UPTAKE RPR	TYPE: AY	PHASE: A	REPEAT: 0	CHANGE: 0
SHIP/HULL NO.: DDG-115	SHIP/HULL NAME: USS RAFAEL PERALTA	SYSTEM:		PROJ/WO NO: K61	CASREP CAT:
CU PHASE TITLE: *F/O – REPAIR FWD UPTAKE SPACE					
PREPARING ACTIVITY:					
PREPARED BY: REIYA KIMURA		CODE 234.	PHONE 070-7603-8983	DATE 28-NOV-2025	
APPROVED BY: HIDEO HARADA		CODE 234.	PHONE 315-243-5176	DATE 28-NOV-2025	
CONCURRED BY:		CODE	PHONE	DATE	
CONCURRED BY:		CODE	PHONE	DATE	
CONCURRED BY:		CODE	PHONE	DATE	
CONCURRED BY:		CODE	PHONE	DATE	
REASON FOR WORK/NEED FOR CHANGE:					
CHANGE INSTRUCTIONS:					
SPECIAL REQUIREMENTS: HOT WORK IN MAGAZINE AND ADJACENT SPACES IAW S6740-AA-SAF-010 AND NAVSEA OP 4					

WORK CERTIFICATION SIGNATURES

COMPLETION OF WORK REVIEW:		BADGE NO.:	SHOP/CODE:	PHONE:	DATE:
ACCEPTANCE OF COMPLETED WORK					
PHYSICAL INSPECTION REQUIRED: ☐ YES ☒ NO	PHYSICAL INSPECTION COMPLETED:	BADGE NO.:	SHOP/CODE:	PHONE:	DATE:
RECORDS REVIEW:		BADGE NO.:	SHOP/CODE:	PHONE:	DATE:



LIST OF EFFECTIVE PAGES									
SHT NO.	CHG NO.	SHT NO.	CHG NO.	SHT NO.	CHG NO.	SHT NO.	CHG NO.	SHT NO.	CHG NO.
1-6		Sketch-01 (1-4)							
J1-2		Sketch-02 (1-11)							
M1-3									
Engrg Inst (1-5)									

1. SCOPE/PURPOSE

1.1 Title: FWD Uptake Space; repair

1.2 Location of Work:

1.2.1 Uptake Engine Room No. One (02-186-0-Q)

1.2.2 Decoy Launching System (DLS) Magazine (MAG) No. One (02-186-2-M)

1.2.3 DLS MAG No. 2 (02-194-1-M)

1.2.4 02 Level Weather, Frames between 204 and 206, Port

1.2.5 05 Level Weather, Frames between 189 and 216, Port and Starboard (Stbd)

1.3 Identification:

1.3.1 Quantity (20 SF), Insulation and Lagging, Exhaust Duct, 1A Gas Turbine Module (GTM), Frame 210, Located in 1.2.1

Insulation: MIL-PRF-2818

Lagging: 1577CW-WME

Remarks: See Sketch Enclosure-02 for detail.

1.3.2 Quantity (20 SF), Insulation and Lagging, Exhaust Duct, 1B GTM, Frame 195, Located in 1.2.1

Insulation: MIL-PRF-2818

Lagging: 1577CW-WME

Remarks: See Sketch Enclosure-02 for detail.

1.3.3 Quantity (32 SF), Insulation and Lagging, Exhaust Duct, No. One Ship Service Gas Turbine Generator (SSGTG), Frame 202, Located in 1.2.1

Insulation: MIL-PRF-2818

Lagging: 1577CW-WME

Remarks: See Sketch Enclosure-02 for detail.

1.3.4 Quantity (13 EA in Total), Stud in 02-186-0-Q

Material: Steel

1.3.4.1 Quantity (2 EA), Stud on Web Frame 212, Stbd

Remarks: See Sheet 3 Detail 3-B of Sketch Enclosure-03 for location detail

1.3.4.2 Quantity (One EA), Stud on Transverse Bulkhead, Frame 212, Stbd

Remarks: See Sheet 3 Detail 3-C of Sketch Enclosure-03 for location detail

2 TGI NO.:

SHIP:

FWD UPTAKE RPR	AY	A	0
DDG-115	CHG/VER:		0/0

1.3.4.3 Quantity (7 EA), Stud on Horizontal Stiffener on Longitudinal Bulkhead of Forward Stack, Frames between 206 and 212, Port

Remarks: See Sheet 4 Detail 4-B and 4-C of Sketch Enclosure-03 for location detail

1.3.4.4 Quantity (One EA), Stud on Lateral Stiffener on Sloping Transverse Bulkhead, Frame 220, Port

Remarks: See Sheet 4 Detail 4-D of Sketch Enclosure-03 for location detail

1.3.4.5 Quantity (3 EA), Stud on Horizontal Stiffener on Longitudinal Bulkhead of Forward Stack, Frames between 204 and 206, Port

Remarks: See Sheet 5 of Sketch Enclosure-03 for location detail

1.3.5 Quantity (8 EA in Total), Padeye in 02-186-0-Q

Material: Steel

1.3.5.1 Quantity (4 EA), Padeye on Stack Top, Frames between 193 and 208, Port and Stbd

Remarks: See Sheet 11 of Sketch Enclosure-03 for location detail

1.3.5.2 Quantity (2 EA), Padeye on Horizontal Framing, Frames between 187 and 189, Port and Stbd

Remarks: See Sheet 8 Detail 8-A and 8-D of Sketch Enclosure-03 for location detail

1.3.5.3 Quantity (2 EA), Padeye on Flange Plate of Horizontal Framing, Frames between 188 and 189, Port and Stbd

Remarks: See Sheet 8 Detail 8-B and 8-C of Sketch Enclosure-03 for location detail

1.3.6 Quantity (4 EA in Total), Cable Stud in 02-186-0-Q

Material: Steel

1.3.6.1 Quantity (2 EA), Cable Stud on Horizontal Stiffener on Sloping Transverse Bulkhead, Frame 220, Stbd

Remarks: See Sheet 10 of Sketch Enclosure-03 for location detail

1.3.6.2 Quantity (One EA), Cable Stud on Vertical Stiffener on Sloping Transverse Bulkhead, Frame 186, Stbd

Remarks: See Sheet 9 Detail 9-B of Sketch Enclosure-03 for location detail

1.3.6.3 Quantity (One EA), Cable Stud on Horizontal Stiffener on Sloping Transverse Bulkhead, Frame 186, Stbd

Remarks: See Sheet 9 Detail 9-C of Sketch Enclosure-03 for location detail

1.3.7 Quantity (One EA), Cable Clamp with Stud on Horizontal Stiffener on Sloping Transverse Bulkhead in 02-186-0-Q, Frame 186, Stbd

Material: Steel

Remarks: See Sheet 9 Detail 9-D of Sketch Enclosure-03 for location detail

1.3.8 Quantity (4 EA), Stuffing Tube on Transverse Bulkhead in 02-186-0-Q, Frames between 204 and 205, Port

Material: Steel

Remarks: See Sheet 5 Section 5-A of Engrg Inst Enclosure-01 for location detail

1.3.9 Quantity (One Lot), Bulkhead Plating, Transverse Bulkhead in 02-186-0-Q, Frames between 204 and 205, Port
Base Material: HTS, MIL-S-22698 GR-DH36, 7.65 LBs Plate

Remarks: See Sheet 5 Section 5-A of Engrg Inst Enclosure-01

1.3.10 Quantity (One Lot), Cable Trunk in 02-186-0-Q, Port

Base Material: HTS, MIL-S-22698 GR-DH36, 7.65 LBs Plate

1.3.10.1 Quantity (13 EA), Stud for Access Cover Plate

Remarks: See Sheet 6 of Sketch Enclosure-03 for location detail

1.3.10.2 Quantity (16 EA), Stud for Access Cover Plate

3 TGI NO.:

SHIP:

FWD UPTAKE RPR	AY	A	0
DDG-115	CHG/VER:	0/0	

Parts No.: M24149/3-3

Material: CRES 316, MIL-24149/3D, Type V, Class One, Style B

Size: 1/4-20UNC-2A, One Inch Length

Remarks: See Detail 7C-4G of 2.7 and 2.8 for detail, and Sheet 6 of Sketch Enclosure-03 for location detail

1.3.11 Quantity (2 EA), Thermostat Switch

Mfr: Detroit Switch Inc

Part Number: 222-10NNM-2221375

NSN: 5930-01-023-9214

Remarks: Item No. One, See SECT 3-A and SECT 5-A of Engrg Inst Enclosure-01 for details.

1.3.12 Quantity (15 EA), Cable Hanger for Coaxial Cable (Ckt: R-RA96(R4)) in 02-186-0-Q

Material: Steel

Remarks: See Engrg Inst Enclosure-01 for details.

1.4 Security Classification:

1.4.1 Spaces - 1.2.2 and 1.2.3

1.5 Initial Condition:

1.5.1 Potential Asbestos Hazard.

1.6 Contractor work start date: 7/27/2026

1.7 Contractor work completion date: 9/4/2026

2. **REFERENCES:**

REF. NO.	DOCUMENT /DRAWING NUMBER	DOCUMENT/DRAWING TITLE	REV	CHG NO.	COPY REQ'D (Y/N)	SOURCE DOC (Y/N)	PARA	SEC	PG	CHP
1	NSI FY-26	NAVSEA Standard Items	-	1	N					
2	LI FY-26	Local Standard Items	-	ORG	N					
3	TM S9086-VH-STM-010/CH-635	Thermal, Fire, and Acoustic Insulation	3		N					
4	DWG 259-6218406	FAB & INSTL OF GTRB UPTAKE & AIR INTAKE ENG RM NO.1 & ABOVE	AF		N					
5	DWG 259-6218421	FAB & INSTL of SS GTRB Uptake & Air Intakes AUX MCHRY RM NO.1 & ABV	AH		N					
6	DWG 150-7026725	UNIT STRUCTURAL ARR DWG ASSY UNIT 4420	J		Y				SE E N O T E	
7	DWG 150-7026723	UNIT STRL ARR ASSY UNIT 4320	J		Y				7C -18	
8	DWG 100-6218863	STANDARD STRUCTURAL & WELDING DETAILS	AJ		Y				74	
9	DWG 301-7027056	INSTL ELEC EQUIP DZ 4420 FWD STACK	H		Y				23, 24	
10	DWG 331-7028051	One Line Diagram Lighting System	G		Y				59 E	
11	MIL MIL-STD-2003	Electric Plant Installation Standard Methods for Surface Ships and Submarines	B		N					

4 TGI NO.:

SHIP:

FWD UPTAKE RPR	AY	A	0
DDG-115	CHG/VER:	0/0	

3. **APPENDICES:**

- 3.1. ~~Appendix "J" TGI Job Summary Information Sheet~~ 1/26/2026 C1209.2 K. YOSHIDA
 3.2. Appendix "M" TGI Material List
 3.3. Appendix "D" Deficiency Form

4. **GENERAL REQUIREMENTS:**

- 4.1. Not Applicable.

5. **PROCEDURE:**

5.1 Remove each existing insulation and lagging listed in 1.3.1 through 1.3.3 from each exhaust duct, using 2.3 for guidance.

5.2 Accomplish the requirements of 009-011 of 2.1 for installation of each new insulation and lagging listed in 1.3.1 through 1.3.3 to each exhaust duct, using 2.4 and 2.5 for guidance.

5.3 Remove unused each existing stud, padeye, cable stud, cable clamp, and stuffing tube listed in 1.3.4 through 1.3.8 in accordance with Enclosure-01, using 2.6 for guidance.

5.3.1 Accomplish build up weld of remaining holes on each existing bulkhead plating listed in 1.3.9 where removal of unused each stuffing tube listed in 1.3.8.

5.3.1.1 Accomplish the requirements of 009-012 of 2.1, including Table 2, Column(s) A, Lines One through 7.

5.3.1.2 Accomplish the requirements of 009-025 of 2.1 for a local air hose test of each new weld of bulkhead plating listed in 1.3.11. Allowable leakage: None.

5.4 Remove 2 each of access cover plate of each existing cable trunk listed in 1.3.10, using 2.7 for guidance.

5.4.1 Remove remaining portion of each existing stud listed in 1.3.10.1.

5.5 Accomplish build up weld of remaining bolt holes on each existing cable trunk listed in 1.3.10, using 2.7 for guidance.

5.5.1 Drill 1/2 inch diameter hole on each remaining hole.

5.5.2 Shape remaining hole to minimum 20 degrees countersink.

5.5.3 Accomplish the requirements of 009-012 of 2.1, including Table 2, Column(s) A, Lines One through 7.

5.5.4 Accomplish the requirements of 009-025 of 2.1 for a local air hose test of each new weld of cable trunk listed in 1.3.10. Allowable leakage: None.

5.6 Install each new stud listed in 1.3.10.2 in accordance with 2.7 and 2.8.

5.6.1 Accomplish the requirements of 009-012 of 2.1, including Table 2, Column(s) A, Lines One through 7.

5.7 Reinstall 2 each of access cover plate of each cable trunk listed in 1.3.10, using new gaskets, CRES self-locking nuts conforming to NASM17830, and new CRES washers conforming to FF-W-92, Type A, Grade One, Class B, using 2.7 for guidance.

FWD UPTAKE RPR	AY	A	0
DDG-115	CHG/VER:		0/0

5.7.1 Fabricate new gaskets conforming to MIL-PRF-2765.

5.8 Remove existing and install new each equipment listed in 1.3.11 in accordance with Enclosure-01, using 2.9 and Sheet 59E of 2.10 for guidance.

5.9 Remove existing, fabricate, and install new each cable hanger listed in 1.3.12 in accordance with 2.11 and Enclosure-01.

5.10 Accomplish the requirements of 009-032 of 2.1 for each new and disturbed surface.

5.11 Notes:

5.11.1 Planner: Code 234 R. Kimura, 070-7603-8983
 Planner: Code 231B C. Saito, 243-5840
 Planner: Code 232 T. Ogata, 243-1176
 Planner: Code 233 Y. Shinohara, 080-9350-1451
 Planner: Code 233 R. Nakamura, 080-9350-1445
 Engineer: Code 250 K. Ishiwata, 243-0092
 Engineer: Code 270 N. Kozaki, 243-1880

5.11.2 Work Integration Manager (WIM): Code 333 T. Yaginuma, 080-5419-0598

5.11.3 JCNs EM01-L034 and ES01-NA61 are related to this TGI.

5.11.4 WPC will copy the following pages in reference.

REF. 2.6: Pages 3N-6, 3-12, 3A-12, 3B-18, 3C-18, and 3D-18

5.11.5 Thermostat switches listed in 1.3.11 will be adjusted by S/F.

5.12 Government Furnished Material (GFM):

5.12.1 SRF-JRMC will provide GFM listed in the Material List.

5.13 SRF-JRMC will provide the following service work: (TGI No. 38K6112301S02)

5.13.1 [C740] Crane and crane rigging service.

5.13.2 [X99E] Utilities service.

5.13.3 [X99M] Utilities service, including low pressure air supply, water supply, and steam supply.

5.13.4 [C106.1] Safety inspection for SRF-JRMC employees.

5.13.5 [C106.2] Gas free inspection for SRF-JRMC employees.

5.13.6 [C133] QA Inspection for (G) symbol(s).

FWD UPTAKE RPR	AY	A	0
DDG-115	CHG/VER:		0/0

APPENDIX "M"
TGI MATERIAL LIST

SYSTEM:	PLANT NO.:	COMPONENT NAME:	TYPE:	PHASE:	REPEAT:	CU PH VERSION:	CASREP CAT:
		FWD UPTAKE RPR	AY	A	0	0	

CU PHASE TITLE:
*F/O – REPAIR FWD UPTAKE SPACE

MATERIAL REFERENCES			
REF NO.	DOCUMENT/DRAWING NUMBER	DOCUMENT/DRAWING TITLE	REV

JOB ORDER:	KEY OP:
38K6112301	A01

MATERIAL LIST												
ITEM NO.	PC NO.	REF NO.	M / C	DESCRIPTION	STOCK NUMBER	GENERIC MATL TYPE	LVL	QA	HAZ MAT	DOC NO.	QTY REQD/ UNIT	QTY USED/ UNIT
100			M	INSULATI, ORDER FOR KTR ORIG: C231B, C. SAITO, 243- 5840	9Q 5640 013713263		NA	4	N	53175486	3/SH	
101			M	INSULATI, ORDER FOR KTR ORIG: C231B, C. SAITO, 243- 5840	9Q 5640 013713262		NA	4	N	53175457	4/SH	
102			M	TAPE,TEX, ORDER FOR KTR ORIG: C231B, C. SAITO, 243- 5840	9B 8315 002671632		NA	4	N	53175126	1/RO	
103			M	CAP,SNAP, ORDER FOR KTR ORIG: C231B, C. SAITO, 243- 5840	9B 5325 007377648		NA	4	N	53175136	100/EA	
104			M	ADHESIVE, ORDER FOR KTR ORIG: C231B, C. SAITO, 243- 5840	9B 8040 002738708		NA	4	Y	53175147	1/GL	

NOTES:

M-1	TGI NO.:	FWD UPTAKE RPR	AY	A	0
	SHIP:	DDG-115	CHG/VER:	0/0	

MATERIAL LIST

ITEM NO.	PC NO.	REF NO.	M / C	DESCRIPTION	STOCK NUMBER	GENERIC MATL TYPE	LVL	QA	HAZ MAT	DOC NO.	QTY REQD/ UNIT	QTY USED/ UNIT
105			M	STUD WELDING, STUD WELDING WITH ARC SHIELD (FERRULE), SPEC:MIL-S-24149/3 TYPE V STYLE B (SOLID FLUX WELD-END) CLASS 1, SIZE:1/4"-20UNC-2A X 1"LG, MATL:CRES 316 ORDER FOR KTR ORIG: C231B, C. SAITO, 243-5840	LL9310282		NA	4	N		16/EA	
106			M	NUT,SELF, ORDER FOR KTR ORIG: C231B, C. SAITO, 243-5840	9B 5310 015126463		NA	4	N	53175491	40/EA	
107			M	WASHER,F, ORDER FOR KTR ORIG: C231B, C. SAITO, 243-5840	9B 5310 014476391		NA	4	N	53175386	40/EA	
108			M	RUBBER SHEET,SOLID, ORDER FOR KTR ORIG: C231B, C. SAITO, 243-5840	9B 9320 010199073		NA	4	N	53285143	2/SY	
200			M	SWITCH,THERMOSTATIC, ORDERED FOR KTR ORIG: C-232, T. OGATA 243-1176	3B 5930 010239214		NA	4	N	53175495	2/EA	
201			M	SCREW,CAP,HEXAGON H, ORDERED FOR KTR ORIG: C-232, T. OGATA 243-1176	9B 5305 015198464		NA	4	N	53175500	6/EA	
300			M	ANGLE DOWNCOMER, ANGLE DOWNCOMER, STEEL, 120-3/8"LG, UNIVERSAL TYPE, WELD STUD MOUNTING, PART NUMBER EQUALS ONE EACH. ORIG: C233.2 R. NAKAMURA, 080-9350-1445 ORDERED FOR KTR P/N: 3ADS-120U	9Q LL4660730		NA	4	N		1/EA	
301			M	CROSSTIER, NAVY STAN, CROSSTIER, NAVY STANDARD 7"LONG.CABLE HANGER, STEEL, USE FOR WIREWAY, UNIVERSAL TYPE ORIG: C233.2 R. NAKAMURA, 080-9350-1445 ORDERED FOR KTR P/N: 3CTS-07	LL9000947		NA	4	N		15/EA	
302			M	CHANNEL, DOWNCOMER, CHANNEL, DOWNCOMER, LENGTH: 10 FT, MATL: STEEL, ORIG: C233.2 R. NAKAMURA, 080-9350-1445 ORDERED FOR KTR P/N: 3CDS-120	9G 5975 LL4588937		NA	4	N	53287468	1/EA	

M-2

TGI NO.:	FWD UPTAKE RPR	AY	A	0
SHIP:	DDG-115	CHG/VER:	0/0	

MATERIAL LIST

ITEM NO.	PC NO.	REF NO.	M / C	DESCRIPTION	STOCK NUMBER	GENERIC MATL TYPE	LVL	QA	HAZ MAT	DOC NO.	QTY REQD/ UNIT	QTY USED/ UNIT
400			M	INSULATI, INSULATION BLANKET, THERMAL, MINERAL WOOL, SPEC: MIL-PRF-2818, SIZE: 24" X 48" X 2" THK, DENSITY: 8 LBS/CU FT, BIW CATALOG NO. 47111-030, ROCKWOOL P/N: SEAROX SL 620(128), REMARKS: OMIT METALLIC SUPPORT MEMBERS FROM BOTH SIDES, ORG: C234 R.KIMURA, 070-7603-8983 ORDERED FOR KTR	9B 5640 LL9606678		NA	4	N	53297746	10/SH	
401			M	INSULATION JKT TAPE, INSULATION JKT TAPE, 3M VENTURECLAD ENHANCED METAL JACKETING, SILVER SMOOTH, OVERALL WIDTH: 46", OVERALL LENGTH: 25 YARD, ADHESIVE TYPE: ACRYLIC, 3M ID: 7100311664 ORG: C234 R.KIMURA, 070-7603-8983 ORDERED FOR KTR	9B 5640 LL9609097		NA	4	N		1/RO	
402			M	TAPE INS, 3M 1577CW-3M (TM) VENTURECLAD (TM) INSULATION JACKETING TAPE 1577CW NATURAL ALUMINUM, OVERALL WIDTH: 4", OVERALL LENGTH: 50 YARD, ADHESIVE TYPE: ACRYLIC, UI: CASE (4 ROLL), C234 R.KIMURA, 070-7603-8983 ORDERED FOR KTR	9B 5640 LL9607166		NA	4	N	53297747	1/CS	

M-3

TGI NO.:	FWD UPTAKE RPR	AY	A	0
SHIP:	DDG-115	CHG/VER:	0/0	

☐ NUCLEAR☐ NON-NUCLEAR

APPENDIX "D"

DEFICIENCY FORM

1. SHIP/HULL NO.:	2a. DL or DR No. (Circle One)	2b. REVISION:	3a. COMPONENT NAME:	3b. TYPE:	3c. PHASE:	3d. REPEAT:
DDG-115			FWD UPTAKE RPR	AY	A	0
4a. ICN:		4b. KEY OP:	5. LOC SPACE/LVL:	FRAME:	P/S/C:	6. CAUSED BY:
38K6112301		A01				

7. DESCRIPTION:

8. ORIGINATOR:	NAME:	BADGE:	SHOP/CODE:	DATE:	PHONE NO.:
----------------	-------	--------	------------	-------	------------

9. CORRECTIVE ACTION:

10. EVALUATOR:	NAME:	BADGE:	SHOP/CODE:	DATE:	PHONE NO.:
----------------	-------	--------	------------	-------	------------

FOR NON-NUCLEAR USE ONLY

11. RFD/RFW REQ'D ☐	LAR REQ'D ☐	SRD/PLAN REV REQ'D ☐
ILS MOD REQ'D ☐	DWG NO.: _____ S/A NO.: _____	

12. ISOLATION SATISFACTORY:	SIGN:	BADGE:	SHOP/CODE:	DATE:	PHONE NO.:
--------------------------------	-------	--------	------------	-------	------------

13. SUBSAFE OQE RECORD?	SIGN:	BADGE:	SHOP/CODE:	DATE:	PHONE NO.
YES ☐ NO ☐					

14. CORRECTIVE ACTION COMPLETE:	SIGN:	BADGE:	SHOP/CODE:	DATE:	PHONE NO.

15. INSPECTION REQ'D?	INSPECTION COMPLETE/SIGN:	BADGE:	SHOP/CODE:	DATE:	PHONE NO.
:YES ☐ NO ☐					

16. RECORDS REVIEW COMPLETE (DR ONLY)	SIGN:	BADGE:	SHOP/CODE:	DATE:	PHONE NO.

DL's ISSUED
(DR ONLY)

☐ NON-NUCLEAR

1. SHIP/HULL NO.:	2a. DL or DR No. (Circle One)	2b. REVISION:	3a. COMPONENT NAME:	3b. TYPE:	3c. PHASE:	3d. REPEAT:
DDG-115			FWD UPTAKE RPR	AY	A	0

This image shows a full page of white paper with horizontal blue or grey ruling lines. The lines are evenly spaced and run across the width of the page, typical of notebook paper. There are no margins, text, or other markings on the page.

REFERENCES: ASTERISKED (*) REFERENCES ARE NOT REQUIRED FOR PRODUCTION WORK

- * (a). DDG51CL-331-7028051 "G": ONE LINE DIAGRAM LIGHTING SYSTEM
- (b). WCL FOR DDG115 "1": WIRE CONNECTION LIST FOR DDG115
- * (c). DDG51CL-441-6567479 "L": RADIO COMMUNICATIONS SYSTEM (INTER-SPACE) CABLE BLOCK DIAGRAM
- * (d). DDG51CL-150-7026725 "J": UNIT STRL ARR DWG ASSY UNIT 4420
- * (e). NAVSEA S9AA0-AB- GENERAL SPECIFICATIONS FOR OVERHAUL OF SURFACE SHIPS
GOS-010/GSO REV 11:

NOTES:


1. ELECTRICAL EQUIPMENT AND CABLING SHALL BE INSTALLED IN ACCORDANCE WITH MIL-STD-2003B(SH).
2. EQUIPMENT SHALL BE BONDED/GROUNDED IN ACCORDANCE WITH MIL-STD-1310H(NAVY).
3. AFTER REMOVAL OF THE UNUSED STUFFING TUBE, BLANK WITH BUILD UP WELD FOR THE REMAINING HOLE.
ALL WELDING AND INSPECTION FOR STEEL MATERIALS SHALL BE CONDUCTED IN ACCORDANCE WITH TABLE 2 OF NAVSEA STD ITEM (NSI) NO. 009-012.
4. EXISTING CAPILLARY TUBE AND CABLE FOR THERMOSTAT SHALL BE REUSED. THE TEMPERATURE SETTING OF THE REPLACED THERMOSTAT SHALL BE ADJUSTED BY S/F.
5. ITEM 1 SHALL NOT REQUIRE CALIBRATION.

TEST NOTE:

- T1. AFTER COMPLETION OF WORK, AIR HOSE TEST SHALL BE CONDUCTED APPLYING THE METHOD ON PARAGRAPH 192f OF REF (e) OR NAVSEA STD ITEM 009-025.

MATERIAL LIST

ITEM NO	DESCRIPTION	QTY	SPEC/MATERIAL	NSN	REMARKS
1	SWITCH, THERMOSTAT	2 EA	-	5930-01-023-9214	
2	CROSSTIER, STEEL, LG 7"	15 EA	STEEL	-	P/N: 3CTS-07 CAGE: 63044 OR EQL
3	ANGLE DOWNCOMER, STEEL, LG 120"	1 EA		-	P/N: 3ADS-120U CAGE: 63044 OR EQL SEE NOTE 5
4	CHANNEL DOWNCOMER, STEEL, LG 10'	1 EA		-	P/N: 3CDS-120 CAGE: 63044 OR EQL SEE NOTE 5

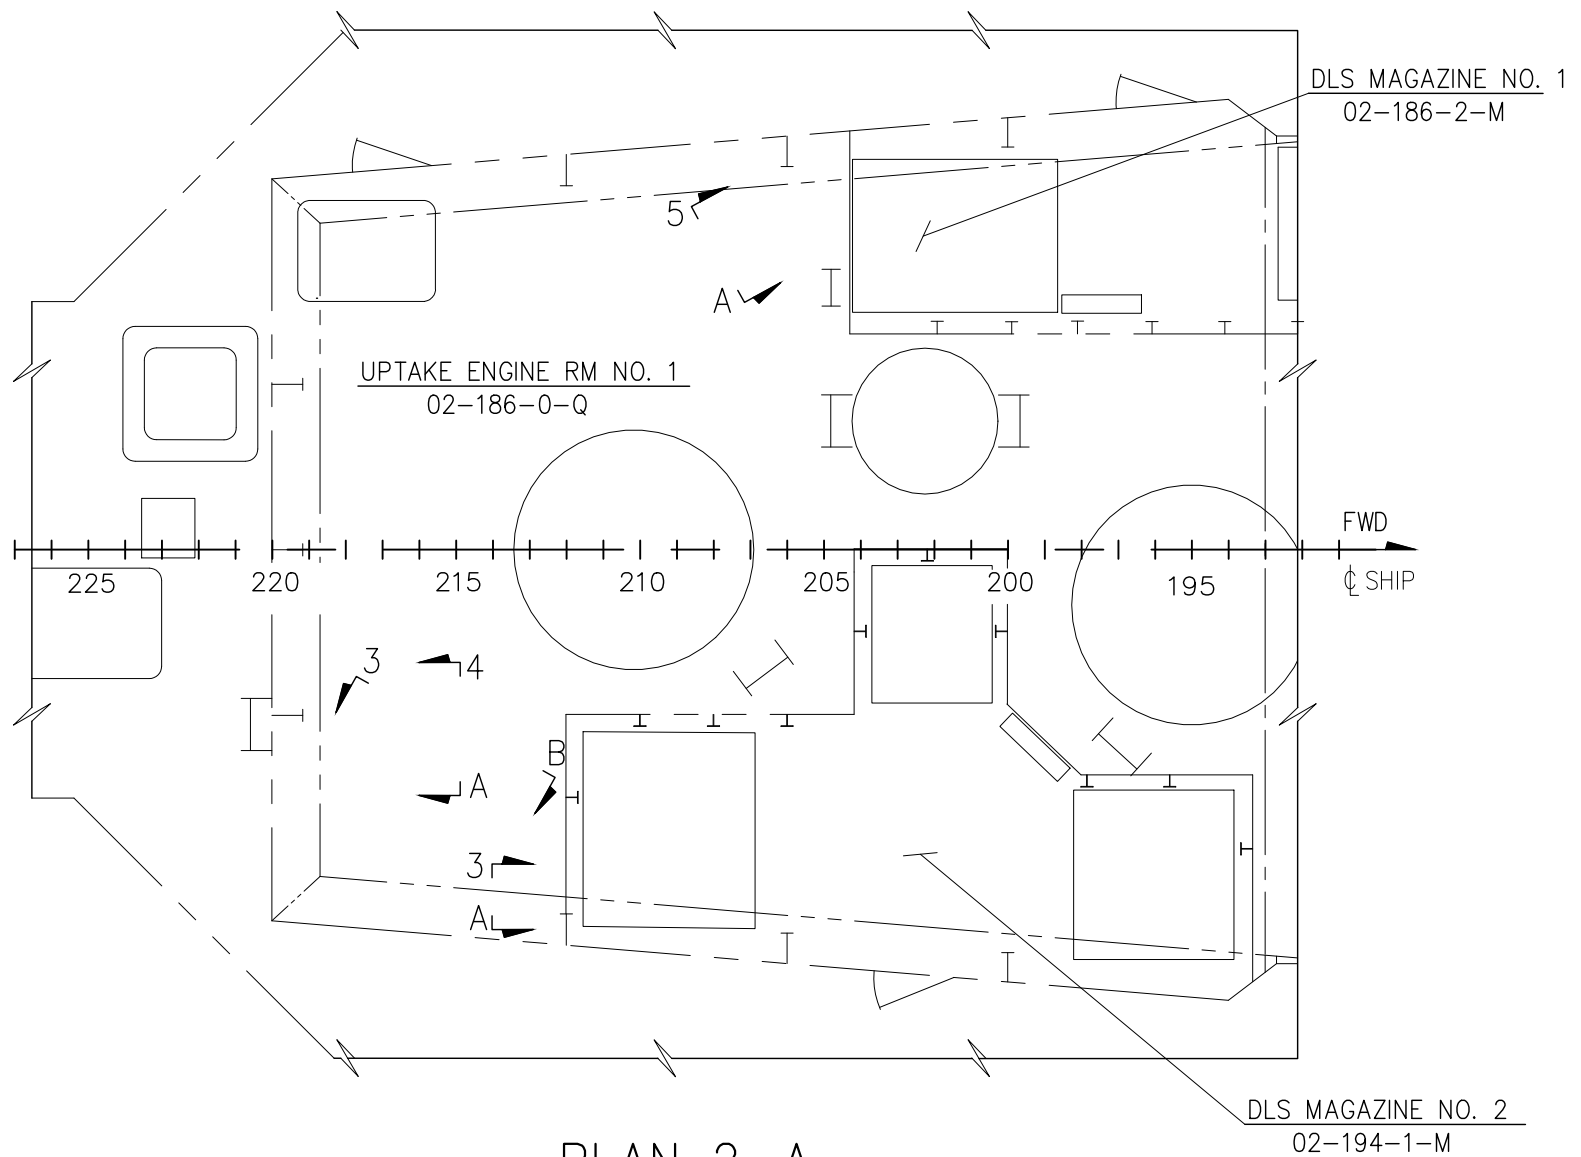



CABLE HANGER (9 EA)
 CKT R-RA96(R4)
 (REPLT)
 SEE DET 5-B FOR REPLT

②③④

EL 3-B

REPLT
 02 LVL UPTAKE ENGINE RM NO. 1
 LKG OUTBOARD
 - SCALE : NONE -



TUBING DRUM
 (EXST)

MTG PAD FOR DETROIT SW
 (EXST)

THERMOSTAT, CKT LC24-1L-D12(3)
 (REPLT)
 SEE NOTE 4

①

CAPILLARY TUBE
 (EXST)

SECT 3-A

REPLT
 02 LVL UPTAKE ENGINE RM NO. 1
 LKG FWD
 - SCALE : NONE -

④③② CABLE HANGER
CKT R-RA96(R4)
(REPLT)
SEE DET 5-B FOR REPLT

04 LVL DK



SECT 4-B

REPLT
04 LVL UPTAKE ENGINE RM NO. 1
LKG AFT
- SCALE : NONE -

FOR CABLE HANGER
CONTINUED TO SECT 4-B


④③② CABLE HANGER (5 EA)
CKT R-RA96(R4)
(REPLT)
SEE DET 5-B FOR REPLT

03 LVL DK




SECT 4-A

REPLT
03 LVL UPTAKE ENGINE RM NO. 1
LKG AFT
- SCALE : NONE -

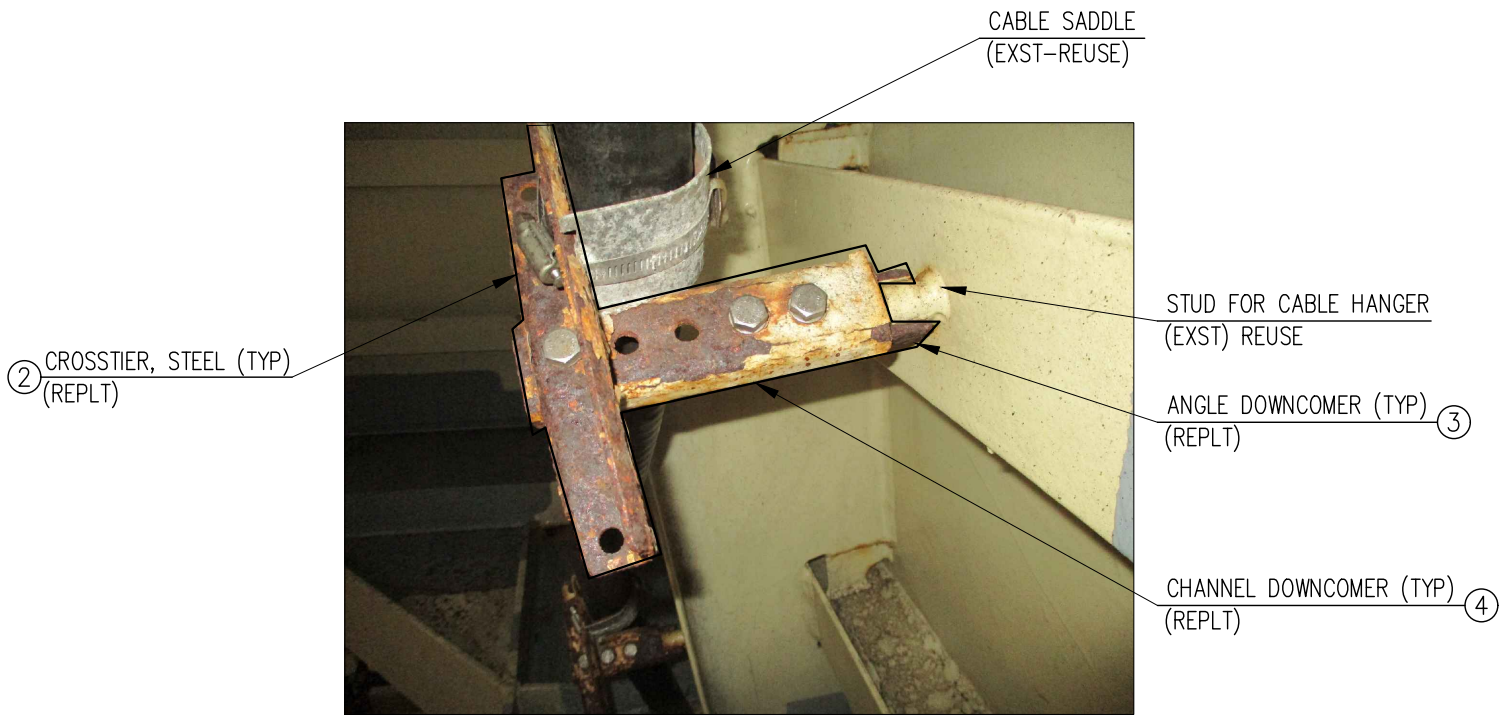

DET 5-B (TYP)

REPLT
CABLE HANGAR ASSY
- SCALE : NONE -

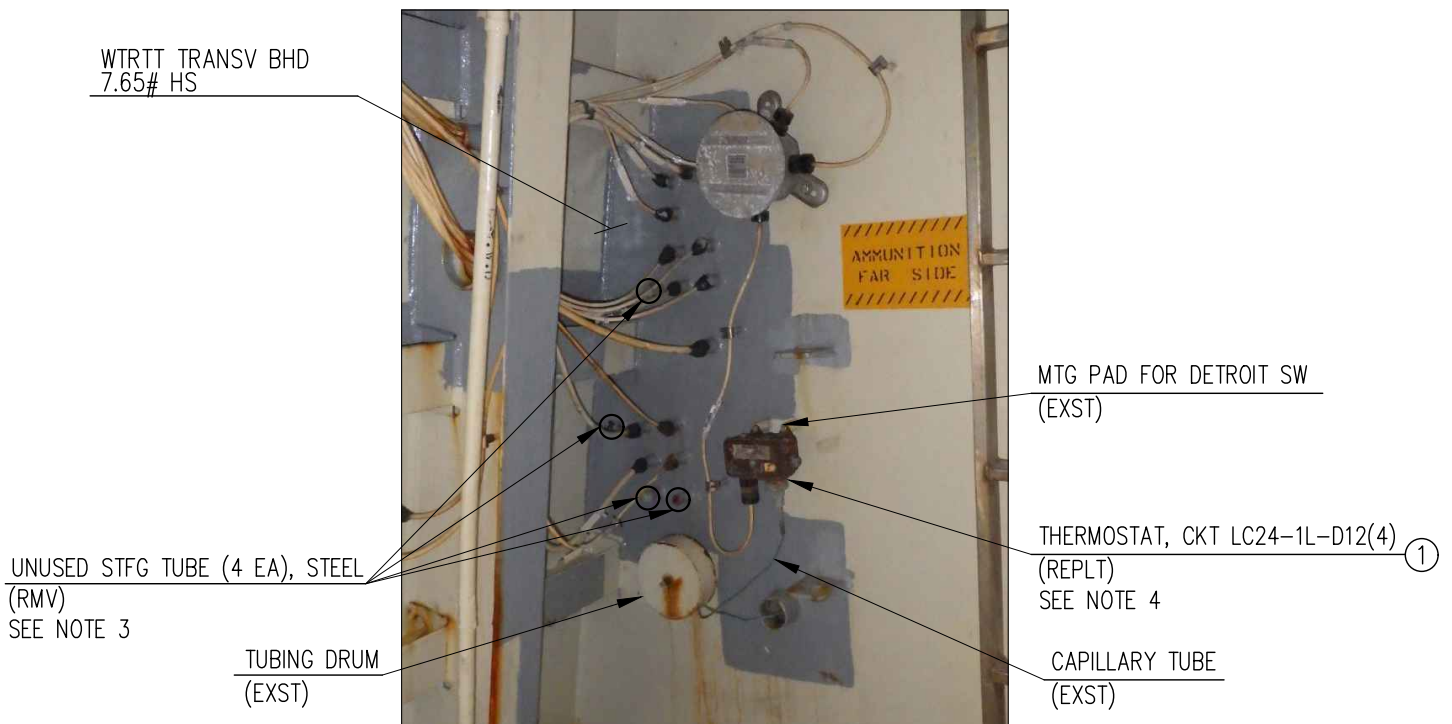


SECT 5-A

REPLT
02 LVL UPTAKE ENGINE RM NO. 1
LKG FWD
- SCALE : NONE -

DDG-115 RAFAEL PERALTA

Cited from TGI No. 3815C12310A01-DL005 Report-1

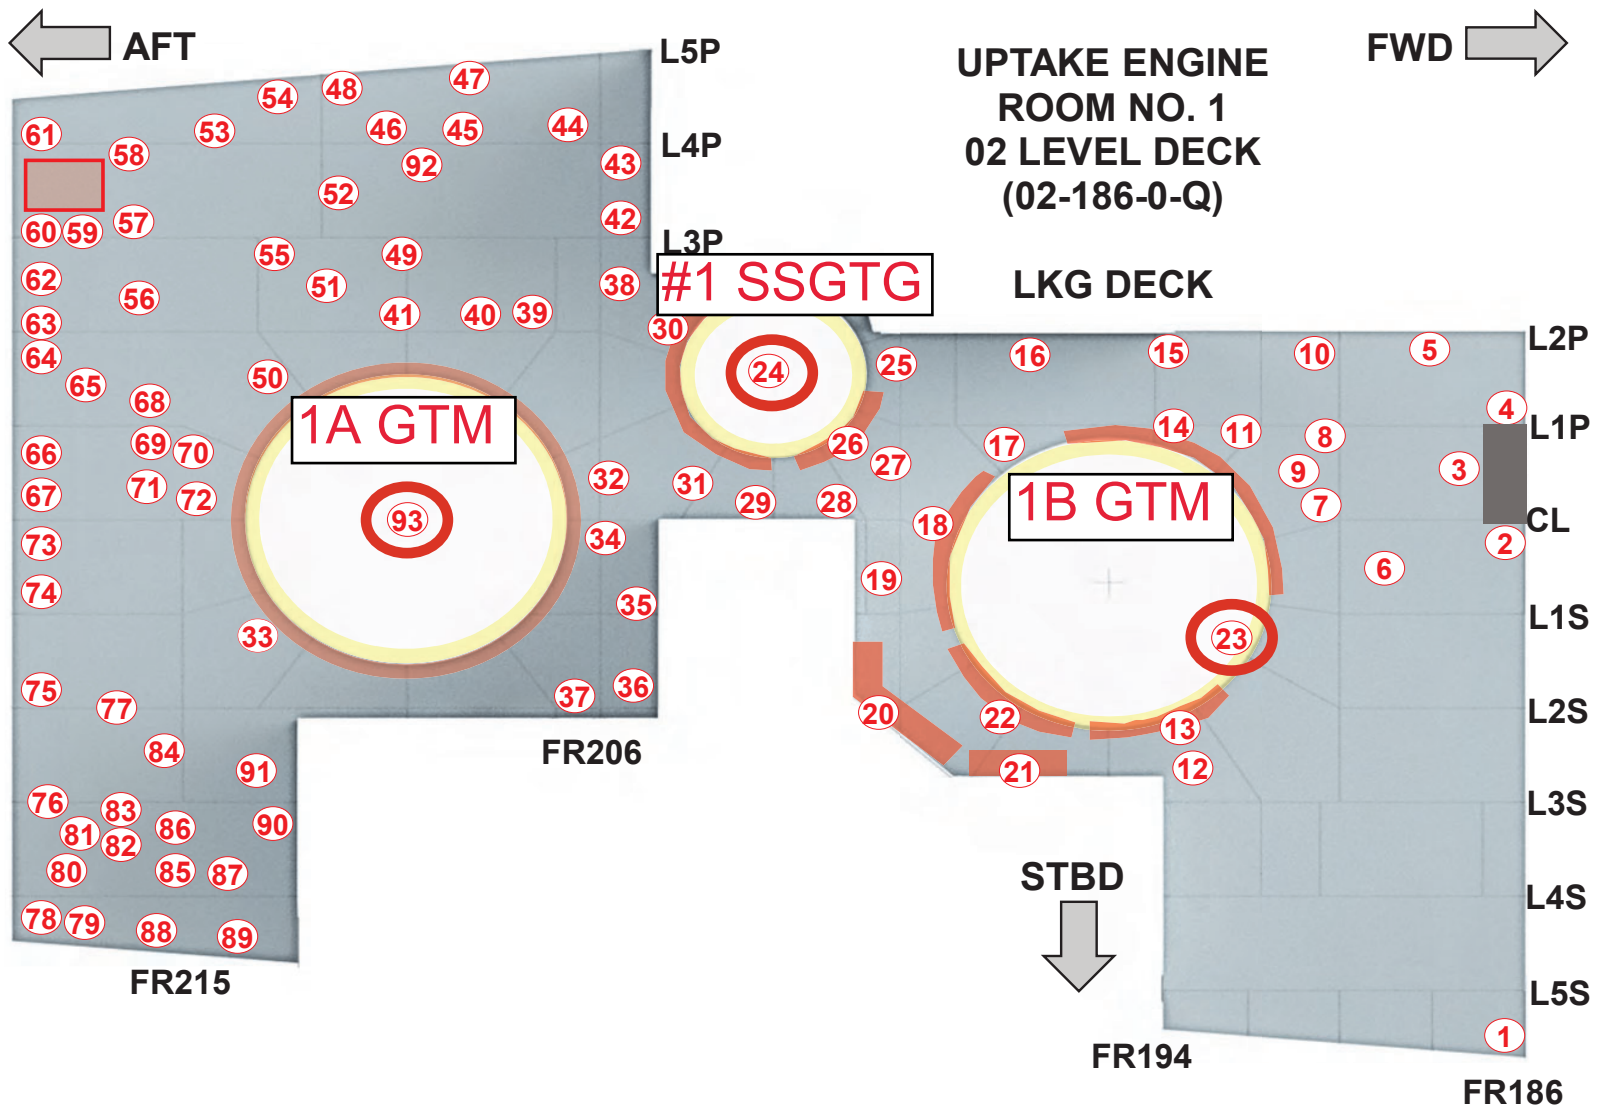

SKETCH

ENCLOSURE-02

Sheet 1 of 4


38K6112301A01

1.3.1 Quantity (20 SF), Insulation and Lagging, Exhaust Duct, 1A Gas Turbine Module (GTM)



SKETCH
ENCLOSURE-02

1.3.2 Quantity (20 SF), Insulation and Lagging, Exhaust Duct, 1B GTM

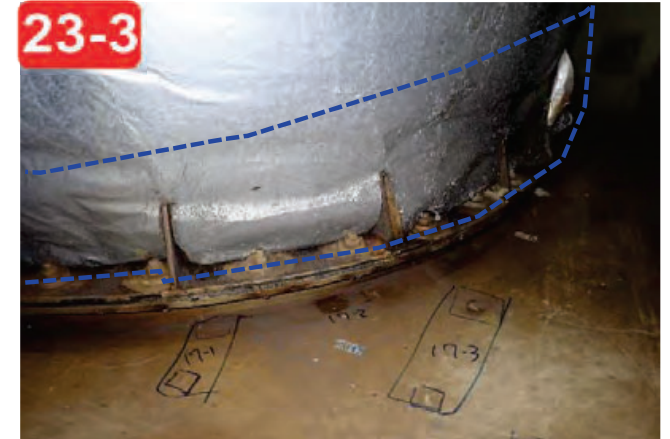

SKETCH
ENCLOSURE-02


38K6112301A01

Sheet 3 of 4

1.3.3 Quantity (32 SF), Insulation and Lagging, Exhaust Duct, No. One Ship Service Gas Turbine Generator (SSGTG)




FWD STACK

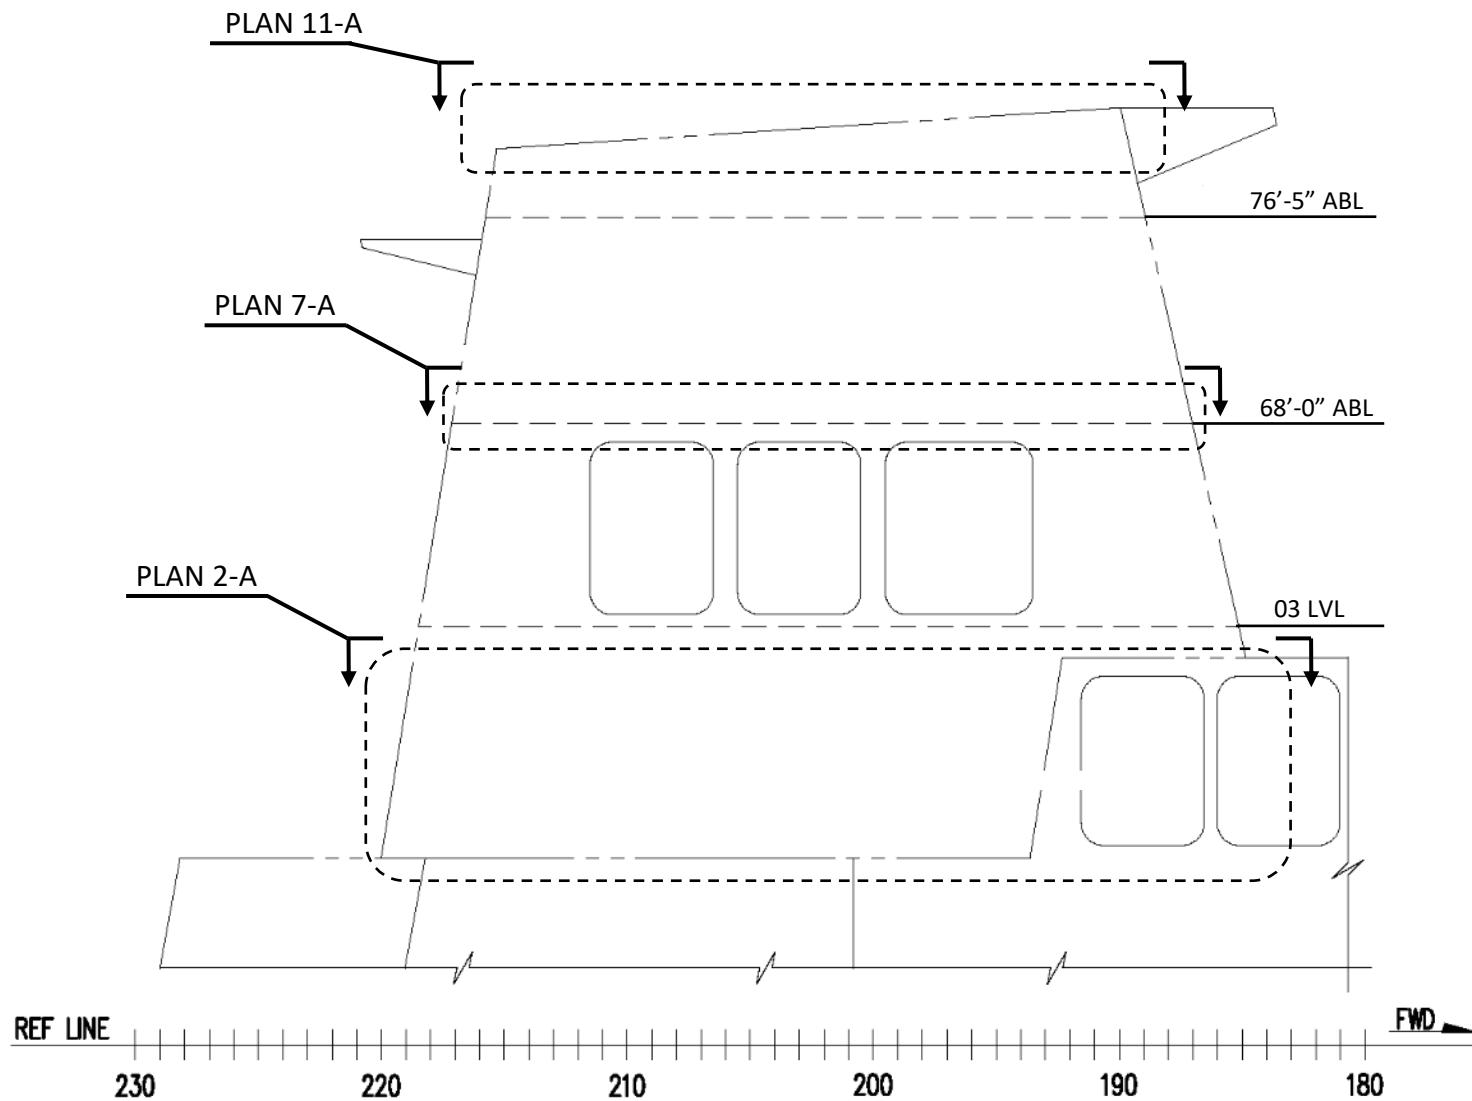

OUTBD PROFILE
FWD STACK, STBD
LKG INBD

SKETCH
ENCLOSURE-03


LOCATION MAP OF VARIOUS EQUIPMENT IN 02-186-0-Q, 02 LEVEL

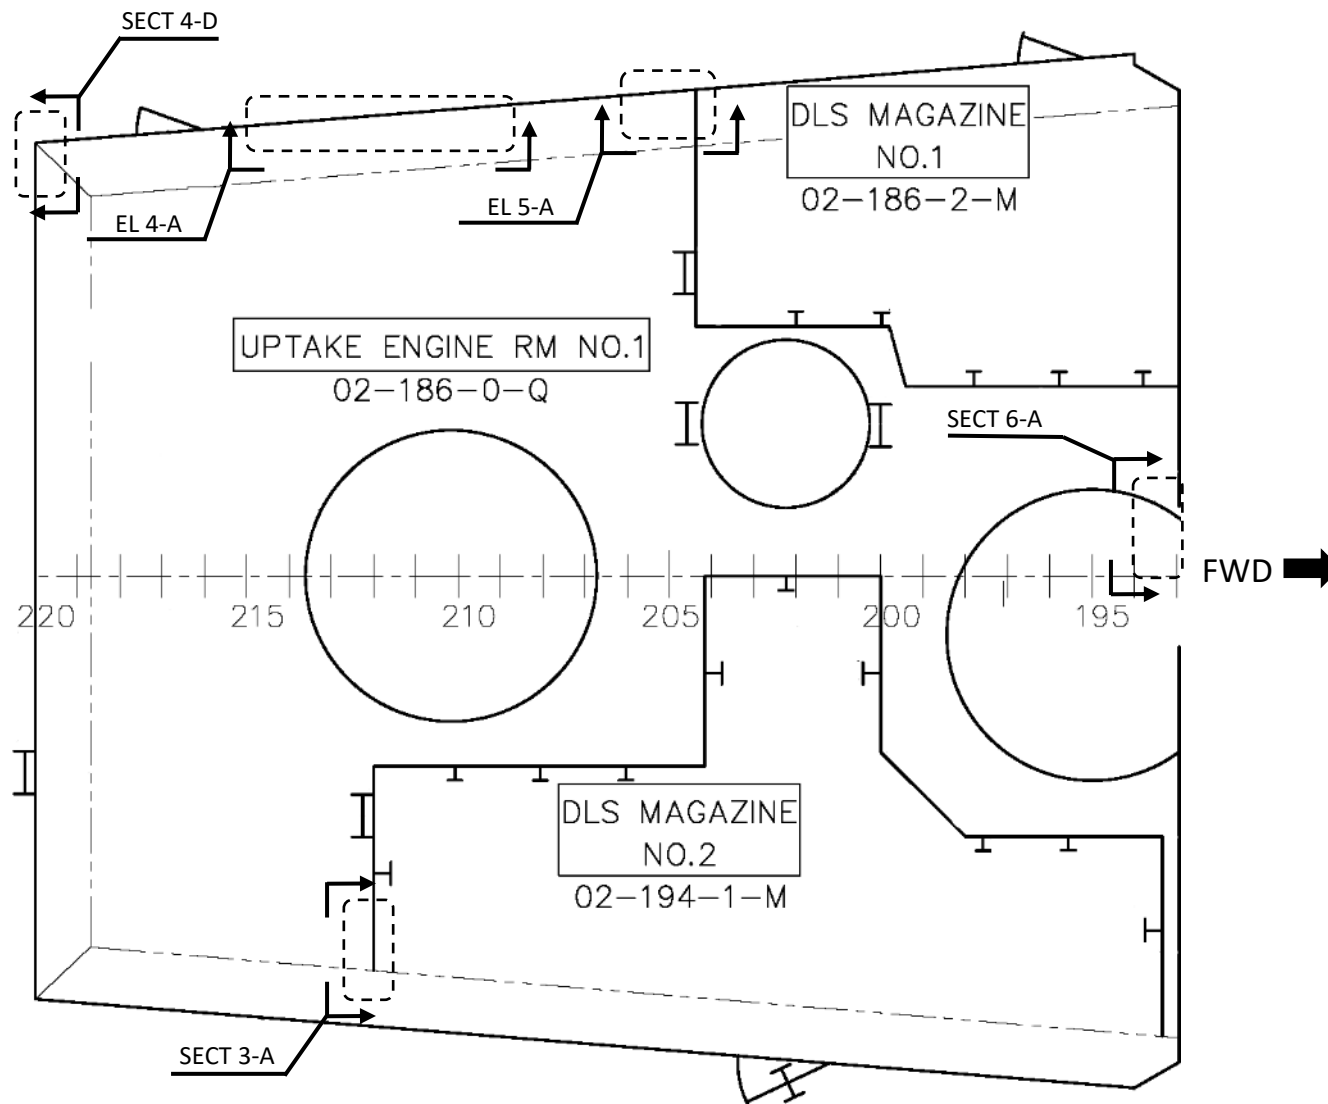


PLAN 2-A
02-186-0-Q, 02 LVL

SKETCH
ENCLOSURE-03

LOCATION OF UNUSED STUD LISTED IN 1.3.4.1 & 1.3.4.2

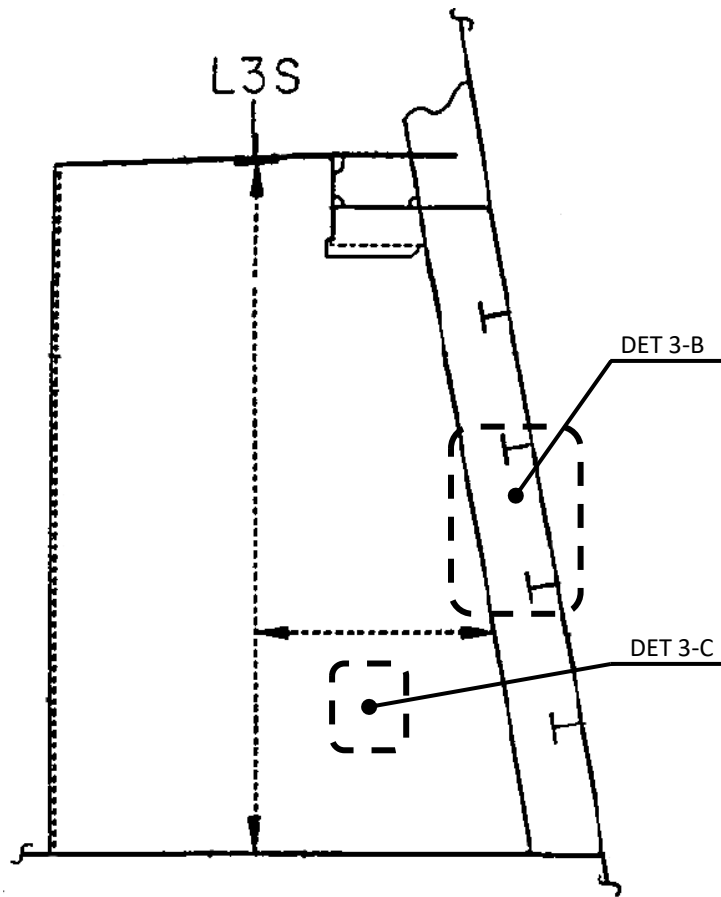

SECT 3-A
TRNSV BHD FR 212, STBD
LKG AFT

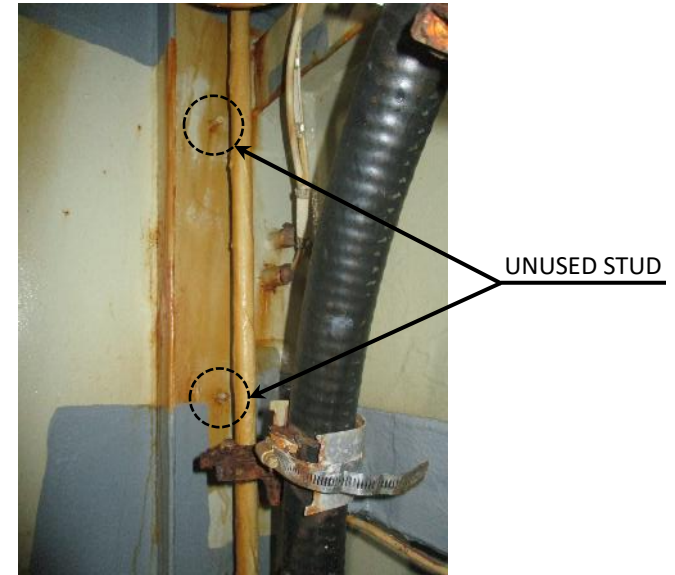


DET 3-B
UNUSED STUD LISTED IN 1.3.4.1




DET 3-C
UNUSED STUD LISTED IN 1.3.4.2

LOCATION OF UNUSED STUD LISTED IN 1.3.4.3 & 1.3.4.4

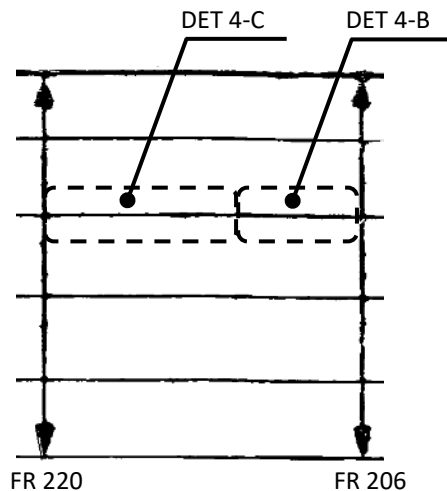


EL 4-A
LONG BHD, STACK SIDE
FR 206-212, PORT
LKG OUTBD


FWD →

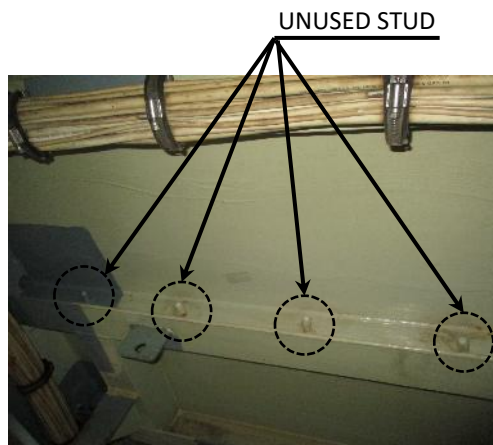

DET 4-C
UNUSED STUD LISTED IN 1.3.4.3

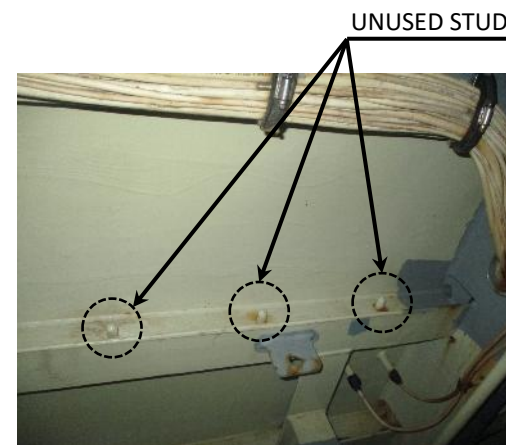

DET 4-B
UNUSED STUD LISTED IN 1.3.4.3

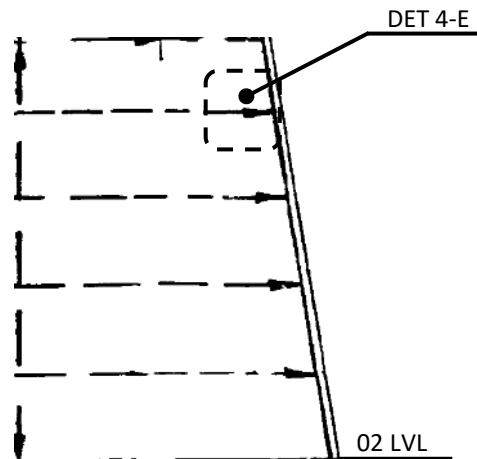


SECT 4-D
SLOPING TRANSV BHD
FR 220, PORT
LKG AFT




DET 4-E
UNUSED STUD LISTED IN 1.3.4.4

SKETCH
ENCLOSURE-03

LOCATION OF UNUSED STUD LISTED IN 1.3.4.5

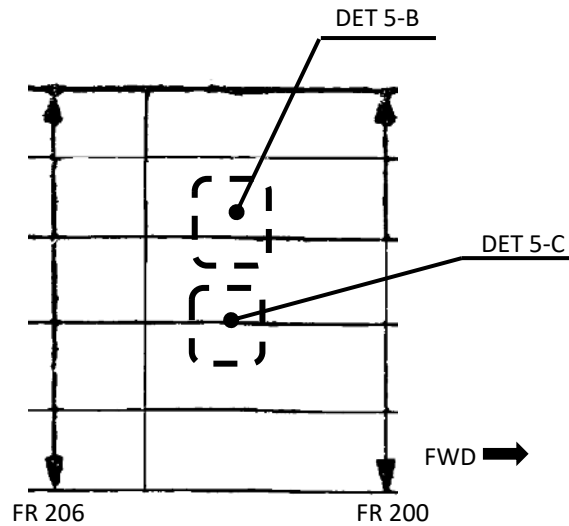

EL 5-A
LONG BHD, STACK SIDE
FR 200-206, PORT
LKG OUTBD

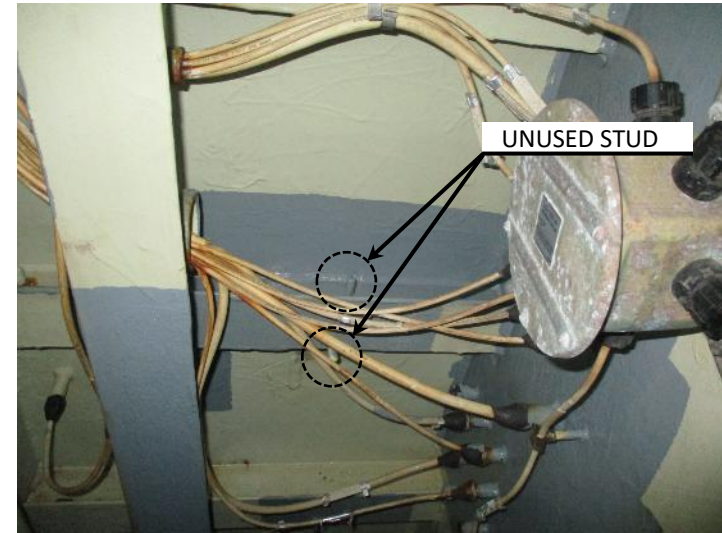


DET 5-B
UNUSED STUD LISTED IN 1.3.4.5



DET 5-C
UNUSED STUD LISTED IN 1.3.4.5

CABLE TRUNK LISTED IN 1.3.11

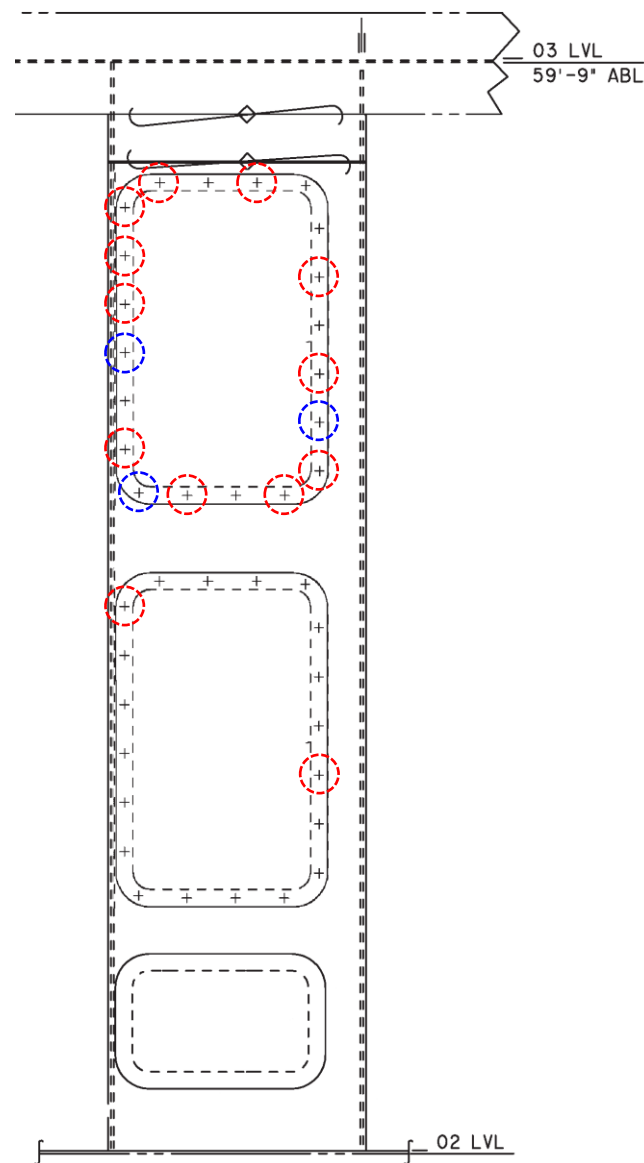


LEGEND

-  - REMAINING BOLT HOLE
-  - REMAINING PORTION OF STUD

SECT 6-A
CABLE TRK ON SLOPING TRANSV BHD
FR 186, LKG FWD
SKETCH
ENCLOSURE-03

LOCATION MAP OF VARIOUS EQUIPMENT IN 02-186-0-Q, BETW 03 & 04 LEVEL

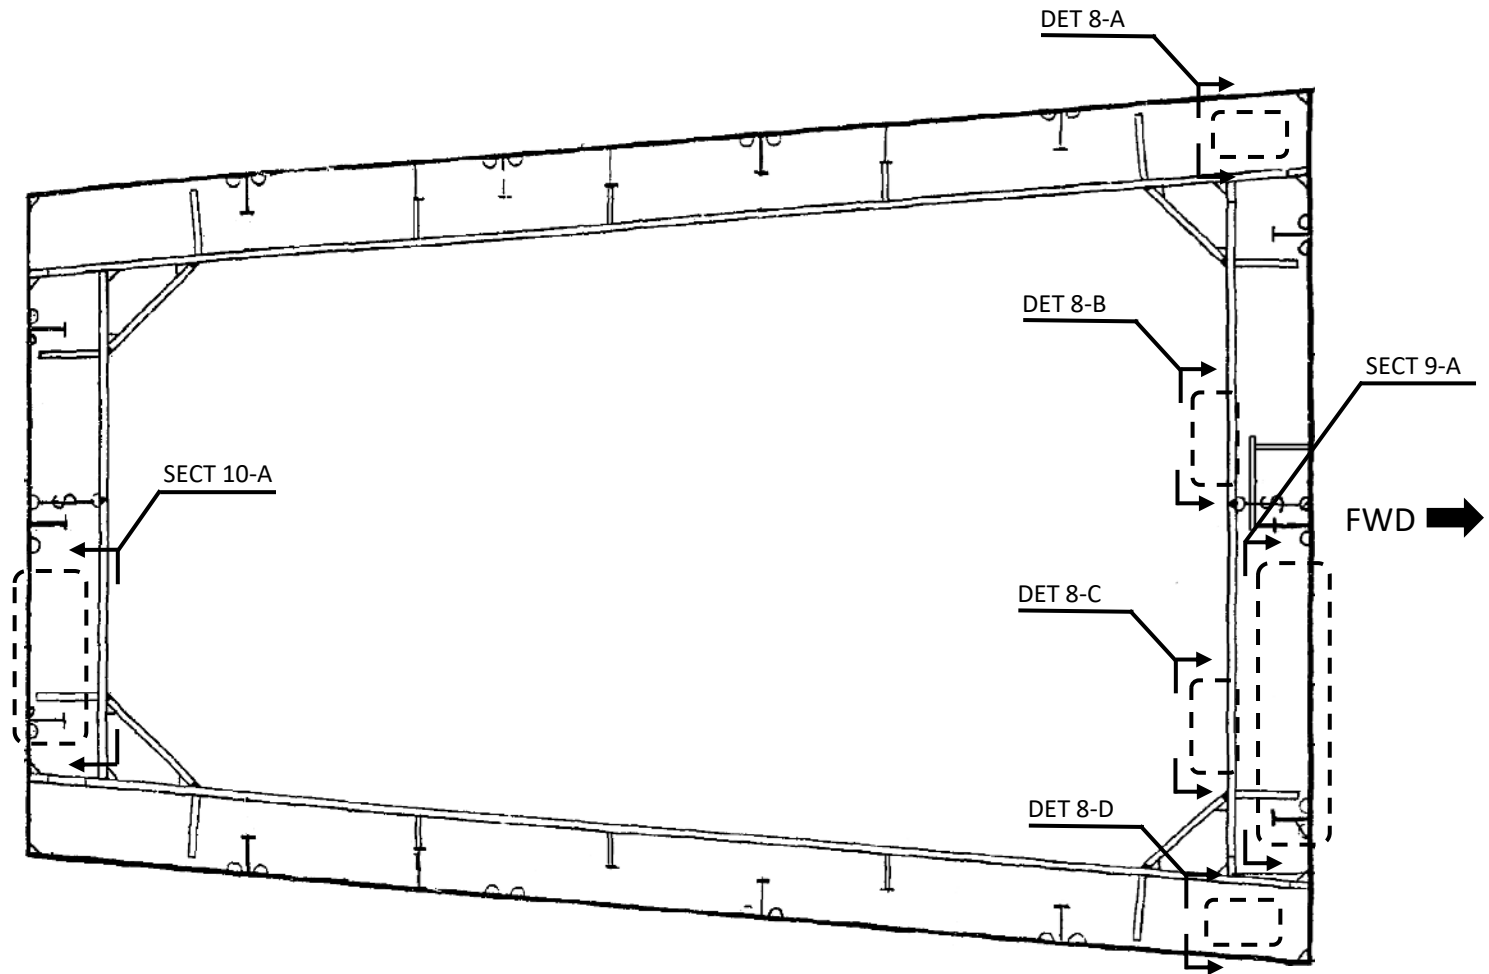

PLAN 7-A
HORIZ FRAMING 68'-0" ABL, 02-186-0-Q
BETW 03 & 04 LVL

SKETCH
ENCLOSURE-03

LOCATION OF UNUSED PADEYE LISTED IN 1.3.5.2 & 1.3.5.3



DET 8-B
UNUSED PADEYE LISTED IN 1.3.5.3
FLG PL OF HORIZ FRAMING, PORT
LKG FWD



DET 8-A
UNUSED PADEYE LISTED IN 1.3.5.2
LOWER SIDE OF HORIZ FRAMING, PORT
LKG FWD




DET 8-D
UNUSED PADEYE LISTED IN 1.3.5.2
LOWER SIDE OF HORIZ FRAMING, STBD
LKG FWD



DET 8-C
UNUSED PADEYE LISTED IN 1.3.5.3
FLG PL OF HORIZ FRAMING, STBD
LKG FWD

SKETCH
ENCLOSURE-03

LOCATION OF UNUSED CABLE STUD LISTED IN 1.3.6.2 & 1.3.6.3, AND CABLE CLAMP LISTED IN 1.3.7

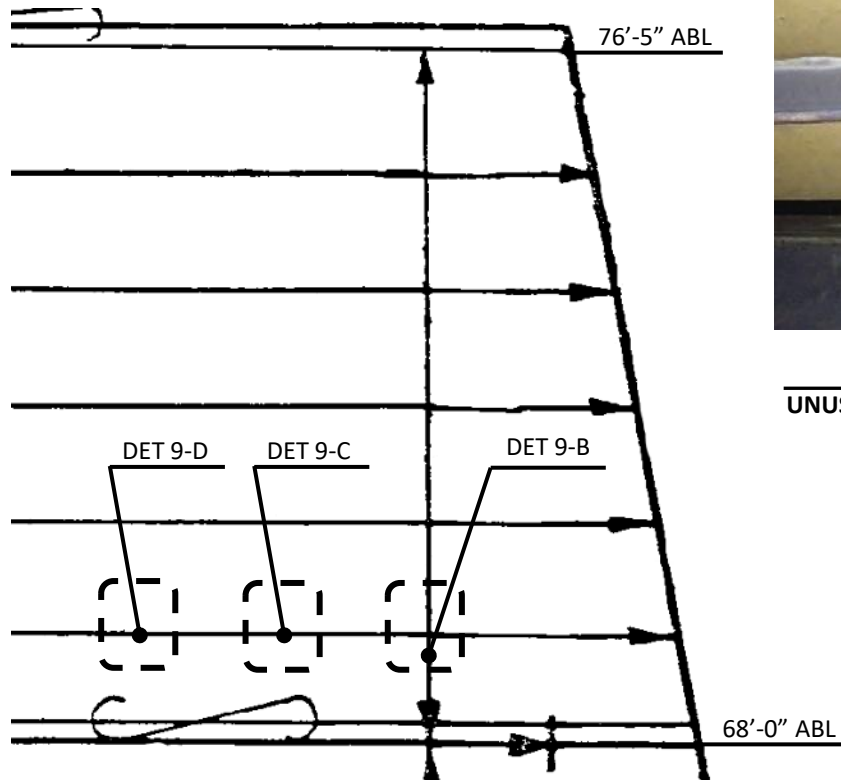

SECT 9-A
SLOPING TRANSV BHD
FR 186, STBD
LKG FWD



DET 9-C
UNUSED CABLE STUD LISTED IN 1.3.6.3




DET 9-B
UNUSED CABLE STUD LISTED IN 1.3.6.2




DET 9-D
UNUSED CABLE CLAMP LISTED IN 1.3.7

LOCATION OF UNUSED CABLE STUD LISTED IN 1.3.6.1

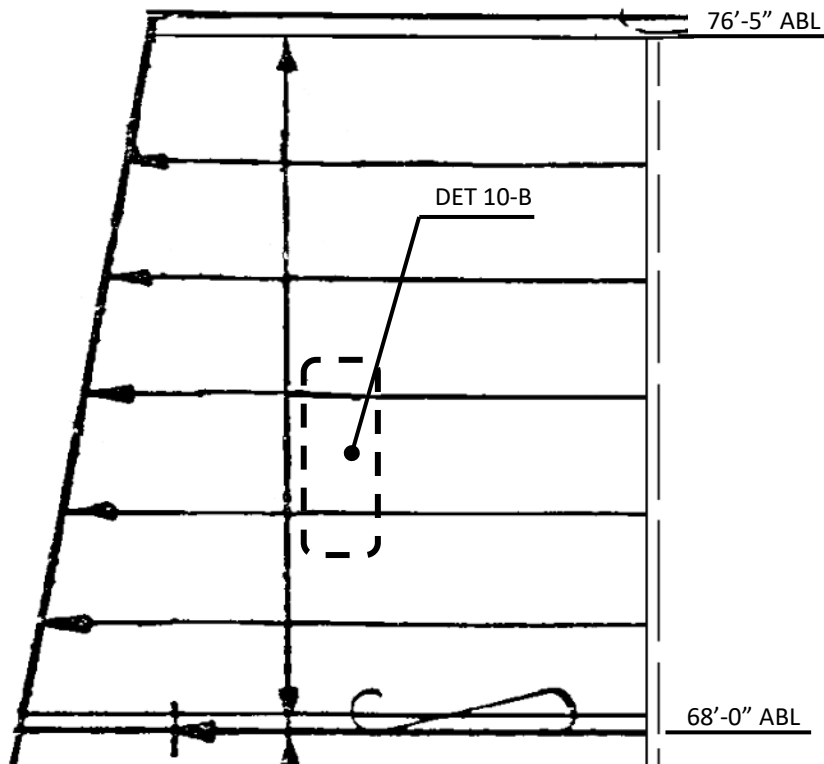


SECT 10-A
SLOPING TRANSV BHD
FR 220, PORT
LKG AFT

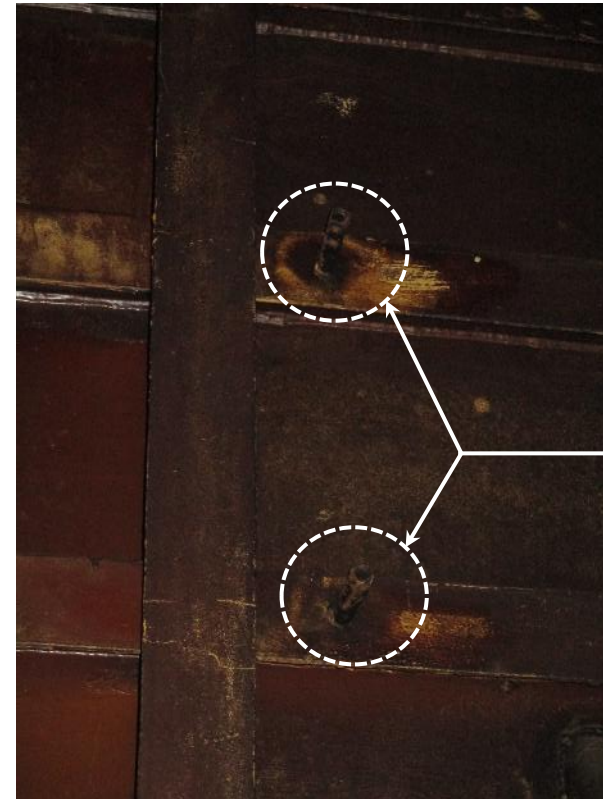

UNUSED CABLE STUD

DET 10-B
UNUSED CABLE STUD LISTED IN 1.3.6.1

LOCATION OF UNUSED PADEYE LISTED IN 1.3.5.1

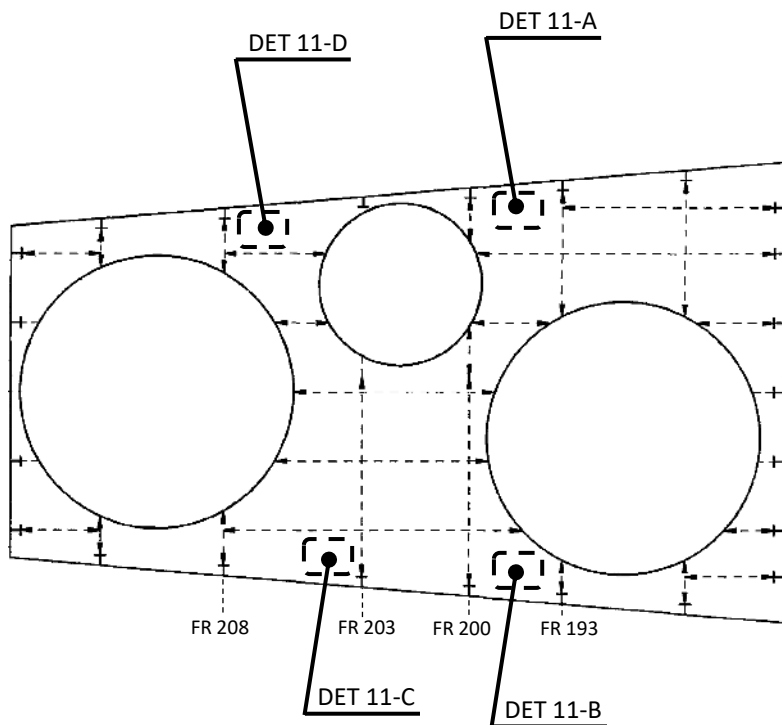

PLAN 11-A
STACK TOP 81'-3" ABL, 02-186-0-Q

FWD →



DET 11-B
UNUSED PADEYE
FR 197-200, STBD



DET 11-A
UNUSED PADEYE
FR 197-200, PORT



DET 11-D
UNUSED PADEYE
FR 205-208, PORT



DET 11-C
UNUSED PADEYE
FR 203-205, STBD

SKETCH
ENCLOSURE-03