

FINISH SCHEDULE											
ROOM		FLOOR FINISH	BASE FINISH	WALL				WAINSCOT		CEILING	Notes
NO.	NAME (ARCH)			NORTH FINISH	EAST FINISH	SOUTH FINISH	WEST FINISH	FINISH	HEIGHT	FINISH	
FIRST FLOOR											
001	ELEV	DIA PLATE	-	-	-	-	-	-	-	-	
001A	ELEV MACHINE	CONC	RWB	P3	P3	P3	P3	-	-	GYP BD/P4	
002A	STAIR	CONC	RWB	P3	P3	P3	P3	-	-	STRUCT/P4	1,2
003A	STAIR	EXIST	EXIST	P3	P3	P3	P3	-	-	STRUCT/P4	2,14
004A	STAIR	EXIST	EXIST	P3	P3	P3	P3	-	-	GYP BD/P4	2
101	VEST	EX CONC/CONC	RWB	P3	P3	P3	P3	-	-	GYP BD/P4	9
102	CORRIDOR	EX CONC/CONC	RWB	-	P3	P3	P3	-	-	GYP BD/P4	9
103	CORRIDOR	EX WD/EX CONC/CONC	RWB	P3	P3	P3	P3	-	-	STRUCT/P4	9,10,16
104	CORRIDOR	EX CONC/CONC	RWB	P3	P3	P3	P3	-	-	STRUCT/P4	8,9
105	MEN	CONC	PWT	PWT/P1	P1	PWT/P1	PWT/P1	PWT	6'-0"	STRUCT/P4	5,9
106	WOMEN	CONC	PWT	PWT/P1	PWT/P1	PWT/P1	PWT/P1	PWT	6'-0"	GYP BD/P4	5,9
107	CUSTODIAL	CONC	FRP	FRP/P4	FRP/P4	FRP/P4	FRP/P4	FRP	4'-0"	STRUCT/P4	9
108	OFFICE	CPTT	RWB	P3	P3	P3	P3	-	-	STRUCT/P4	9
109	STORAGE	CONC	RWB	P3	P3	P3	P3	-	-	STRUCT/P4	9
110	SHOP	CONC	RWB	P3	P3	P3	P3	-	-	STRUCT/P4	9
111	SHOP	EX CONC/CONC	RWB	P3	P3	P3	P3	-	-	STRUCT/P4	8,9
112	INSPECTION	EX CONC	RWB	P3	P3	P3	P3	-	-	STRUCT/P4	9
113	NETWORK	EX CONC	RWB	P3	P3	P3	P3	-	-	STRUCT/P4	9
114	ELECTRICAL	EX CONC	RWB	P3	P3	P3	P3	-	-	STRUCT/P4	9
115	MECH	EX CONC/CONC	RWB	P3	P3	P3	P3	-	-	GYP BD/P4	
116	ANNEX	EXIST	EXIST	EXIST	EXIST	EXIST	EXIST	-	-	EXIST	
117	ANNEX	EXIST	EXIST	EXIST	EXIST	EXIST	EXIST	-	-	EXIST	
118	ANNEX	EXIST	EXIST	EXIST	EXIST	EXIST	EXIST	-	-	EXIST	
FIRST FLOOR MEZZANINE											
002B	STAIR	CONC	RWB	P3	P3	P3	P3	-	-	STRUCT/P4	1,2,8
003B	STAIR	EXIST	EXIST	P3	P3	P3	P3	-	-	GYP BD/P4	2,14
004B	STAIR	EXIST	RWB	P3	P3	P3	P3	-	-	GYP BD/P4	2
M101	BREAK	SVT 1&2	RWB	P3	P3	P2	P3	-	-	STRUCT/P4	8,9,11
M102	BLIND VENDING	SVT 1&2	RWB	P3	P3	P2	P3	-	-	STRUCT/P4	8,9,11
M103	CORRIDOR	SVT 1&2	RWB	P3	P3	P2	P3	-	-	GYP BD/P4	11
M104	CUSTODIAL	CONC	FRP	FRP/P4	FRP/P4	FRP/P4	FRP/P4	FRP	4'-0"	STRUCT/P4	3,8,9
M105	LOCKERS	SVT 1	RWB	P3	P3	P3	P3	-	-	STRUCT/P4	8
M106	MECH	CONC	RWB	P3	P3	P3	P3	-	-	STRUCT/P4	8,9
M107	FIRE PUMP	-	-	-	-	-	-	-	-	-	-
M108	UTILITY	CONC	RWB	P3	P3	P3	P3	-	-	STRUCT/P4	
M109	MECH MEZZ	CONC	RWB	P3	P3	P3	P3	-	-	STRUCT/P4	8,10
M110	MECH MEZZ	CONC	RWB	P3	P3	P3	P3	-	-	STRUCT/P4	8
SECOND FLOOR											
003C	STAIR	EXIST/SVT-1	EXIST/RWB	P3	P3	P3	P3	-	-	GYP BD/P4	2, 13,14
004C	STAIR	EXIST	RWB	P3	P3	P3	P3	-	-	EX GYP/P4	2
005	STAIR	EXIST	EXIST	P3	P3	P3	P3	-	-	EX BEAD BOARD/P4	2,4,7
201	CORRIDOR	PFT/SVT-1	RWB	P1	P1	P1	P3	-	-	EX BEAD BOARD	4,7,12
202	CUSTODIAL	PFT	FRP	FRP/P4	FRP/P4	FRP/P4	FRP/P4	FRP	4'-0"	GYP BD/P4	3,12
203	WOMEN	PFT	PWT	PWT/P1	PWT/P1	PWT/P1	PWT/P1	PWT	6'-0"	GYP BD/P4	5,12
204	MEN	PFT	PWT	PWT/P1	PWT/P1	PWT/P1	PWT/P1	PWT	6'-0"	GYP BD/P4	5,12
205	EXPRESSING	PFT	RWB	P1	P1	P1	P1	-	-	GYP BD/P4	12
206	UPHOLSTERY	EX WD	RWB	P3	P3	P3	P3	-	-	EX BEAD BOARD	4,6,7
207	SHOP	EX WD	RWB	P3	P3	P3	P3	-	-	EX BEAD BOARD/P4	4,6,7
208	OPEN OFFICE	CPTT	RWB	P3	P3	P3	P3	-	-	EX BEAD BOARD/P4	4,7
209	TRAINING	EX WD	RWB	P3	P3	P3	P3	-	-	ACT	6,15
210	OFFICE	CPTT	RWB	P3	P3	P3	P3	-	-	ACT	15
211	MULTI-PURPOSE	EX WD	RWB	P3	P3	P3	P3	-	-	ACT	6,15
212	CORRIDOR	EX WD	RWB	P3	P3	P3	P3	-	-	ACT	6
213	ELECTRICAL	EX WD	RWB	P3	P3	P3	P3	-	-	EX GYP/P4	6
214	NETWORK	EX WD	RWB	P3	P3	P3	P3	-	-	EX GYP/P4	6
SECOND FLOOR MEZZANINE											
M201	MEZZANINE	EXIST	EXIST	EXIST	EXIST	EXIST	EXIST			EXIST	

RESINOUS FLOORING


CONCRETE

1 1/2"

A1

RESINOUS FLOORING TRANSITION


SCALE: 12" = 1'-0"

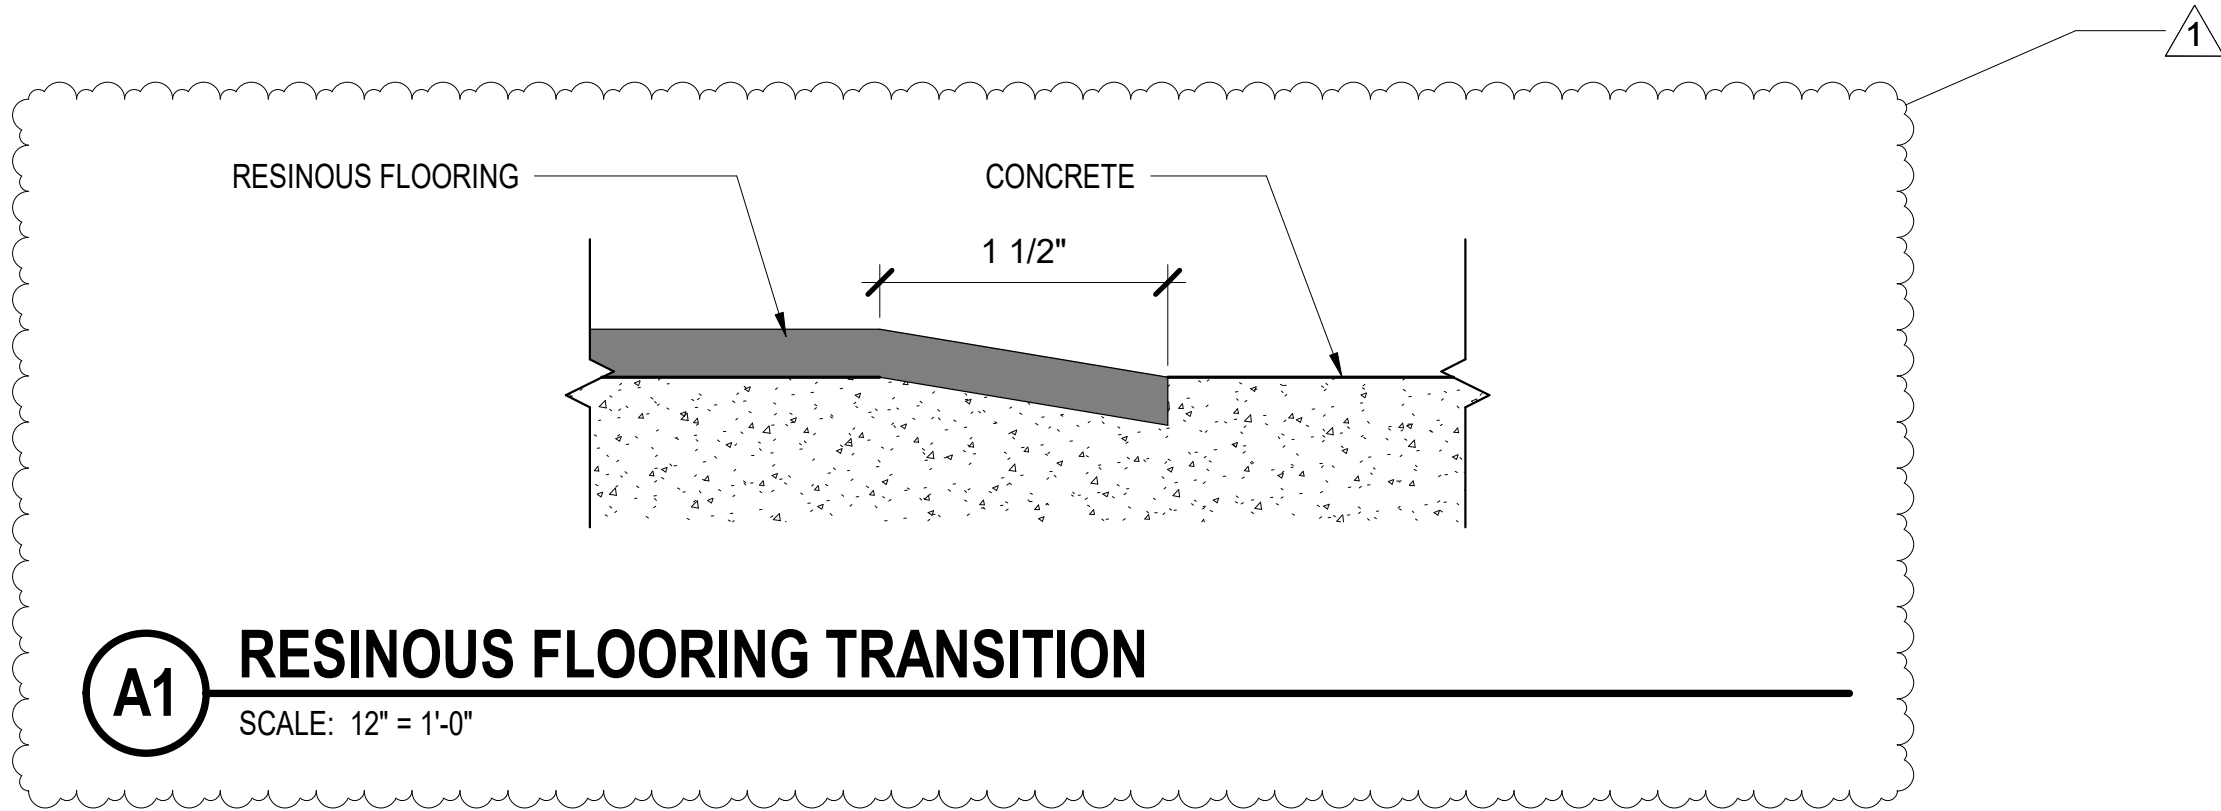

COLOR KEY/MANUFACTURER GUIDE		
MATERIAL	MANUFACTURER MODEL/TYPE	COLOR & FINISH
WALLS		
P1	SHERWIN WILLIAMS	PEARLY WHITE SW7009
P2	SHERWIN WILLIAMS	TEMPE STAR SW6229
P3	SHERWIN WILLIAMS	ARGOS SW7065
PWT	CROSSVILLE RETRO ACTIVE 2.0, 3"x12"	EMPRESS WHITE
FRP	MARLITE	LIGHT GRAY
FLOORS		
CPTT	INTERFACE JUMBO ROCK	NATURAL
PFT	DALTILE CALGARY	ARMOR
SVT 1	PATCRAFT ADMIX 18"x24"	SAND DOLLAR
SVT 2	PATCRAFT ADMIX 18"x24"	SHARK'S TOOTH
CONC	SEE DIVISION 3	HARDENER
RF 1	STONCLAD GS EPOXY MORTAR SYSTEM - 1/4" MORTAR COAT	SLATE
BASE		
RWB	JOHNSONITE 4" RUBBER BASE	THUNDER
CEILINGS		
ACT	ARMSTRONG 24"x24"	CIRRUS HIGH NRC
GYP BD - P4	SHERWIN WILLIAMS	HIGH REFLECTIVE WHITE SW7757
STRUCT	SHERWIN WILLIAMS	HIGH REFLECTIVE WHITE SW7757
MISCELLANEOUS		
SS- TOILET ROOMS	CORIAN	DOMINO TERRAZZO
SS-BREAK ROOMS	FORMICA	BIANCO MINERAL
PLAM	FORMICA	WINTER SKY - PLEX FINISH
TOILET PARTITIONS	SCRANTON HINY HIDERS	CONCRETE
METAL DOORS/FRAMES - P5	SHERWIN WILLIAMS	TIN LIZZIE SW9163

- ROOM FINISH GENERAL NOTES:
- A. MANUFACTURER'S NAMES, MODEL NUMBERS, AND COLOR IDENTIFICATIONS LISTED ARE USED FOR THE PURPOSE OF AESTHETICS COORDINATION ONLY. PRODUCTS FROM OTHER MANUFACTURERS ARE ACCEPTABLE IF THE PRODUCT APPROXIMATES THE PRODUCT INDICATED, CONFORMS TO THE SPECIFICATIONS, AND IS APPROVED BY THE CONTRACTING OFFICER.
- B. SEE SHEETS AE701-704 FOR REFLECTED CEILING PLANS.
- C. SEE SHEETS AE741 FOR INTERIOR ELEVATIONS.
- D. PROVIDE TRANSITION STRIP AT INTERSECTIONS OF DISSIMILAR FLOOR MATERIALS.
- E. CHANGE IN FLOOR MATERIALS SHALL OCCUR UNDER DOORS UNLESS OTHERWISE NOTED.


- ROOM FINISH SCHEDULE NOTES:
1. PROVIDE CONCRETE TREADS AND LANDINGS WITH ABRASIVE CAST METAL SAFETY NOSINGS.
2. PAINT STAIR COMPONENTS: RISERS, RAILING SYSTEM SKIRTING AND UNDERSIDE.
3. PROVIDE FRP WAINSCOT TO 4'-0" AFF, PAINT ABOVE.
4. IN ADDITION TO AREAS INDICATED ON DRAWINGS, PATCH EXISTING HISTORIC BEADBOARD CEILING WHERE SPRINKLER HEADS, LIGHT FIXTURES, AND OTHER ELEMENTS HAVE BEEN REMOVED AND NOT OTHERWISE REUSED/COVERED. REMOVE AND SALVAGE HISTORIC BEADBOARD FROM AREAS THAT WILL BE CONCEALED BY A CEILING SYSTEM FOR PATCHING. FOR BIDDING ASSUME 200 SQUARE FEET OF REMOVING AND REINSTALLING EXISTING BEADBOARD CEILING. PATCH THE CEILING AREAS ABOVE THE CEILING SYSTEMS WHERE SALVAGED BEADBOARD IS REMOVED WITH NEW BEADBOARD TO MATCH EXISTING BEADBOARD. SEE DETAIL D2/AE704 FOR EXISTING BEADBOARD PROFILE.
5. PAINT ABOVE PWT.
6. EXIST WD FLOORING TO BE REFINISHED, SEE SPEC SECTION 09 01 90.60 FOR THE PREPARATION OF WOOD STRIP FLOOR FOR REFINISHING.
7. REFINISH EXISTING BEAD BOARD CEILING [OPTION 8].
8. PAINT EXISTING CEILING/STRUCTURE [OPTION 8].
9. PROVIDE RESINOUS FLOORING UNDER, SEE A1/AE640 FOR RESINOUS FLOORING TRANSITIONS [OPTION 10].
10. WHERE EXIST WOOD CEILINGS ARE EXPOSED, DO NOT PAINT.
11. SEE A5/AE640 FOR FLOOR FINISH PATTERN.
12. INSTALL PFT IN RUNNING BOND PATTERN ENSURING OVERLAP OF THE JOINTS DOES NOT EXCEED 1/3 OF THE TILE TO AVOID LIPPAGE.
13. SEE A1/AE402 FOR FLOORING TRANSITION DETAIL.
14. NEW WOOD HANDRAIL TO MATCH EXIST WOOD HANDRAIL ON GUARDRAIL.
15. PATCH EXISTING WALL FINISHES AT REMOVED UTILITIES/DEVICES TO MATCH ADJACENT
16. REFINISH EXISTING WOOD STRIP FLOORING [OPTION 8].

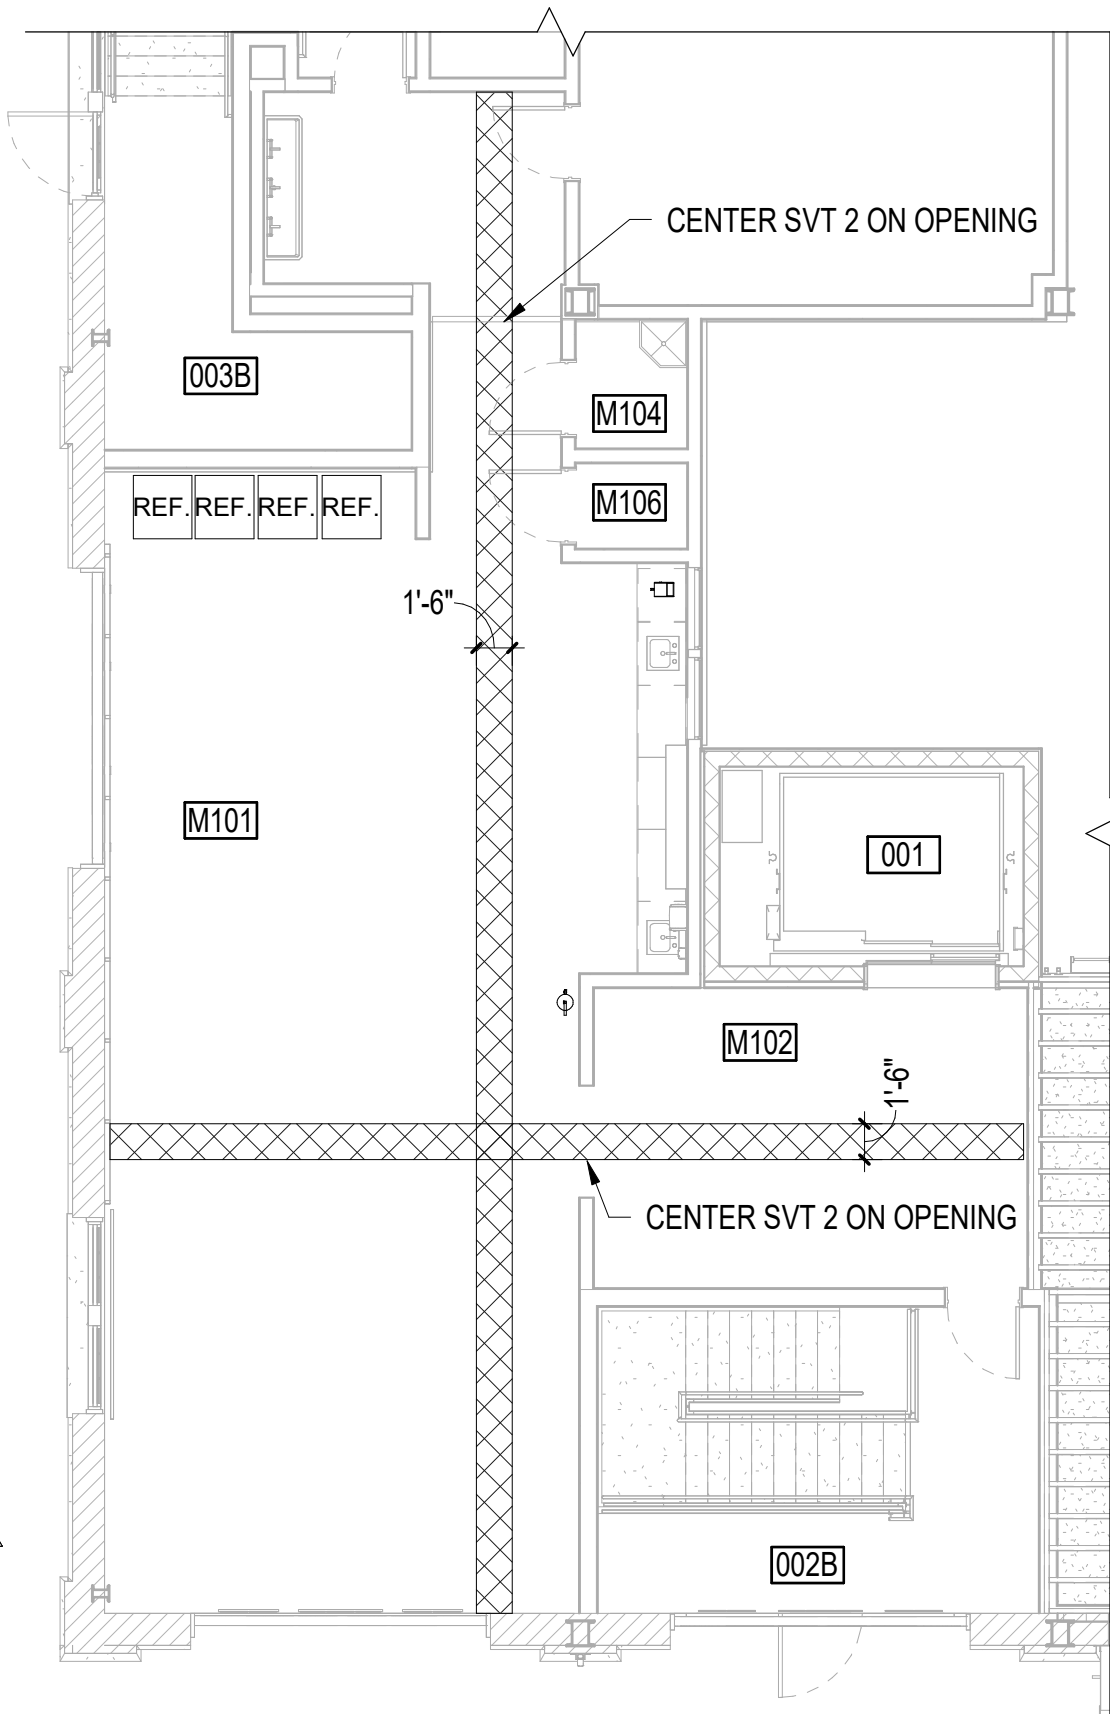

A5

BREAK ROOM M102 FLOOR PATTERN

SCALE: 1/8" = 1'-0" (AE104)

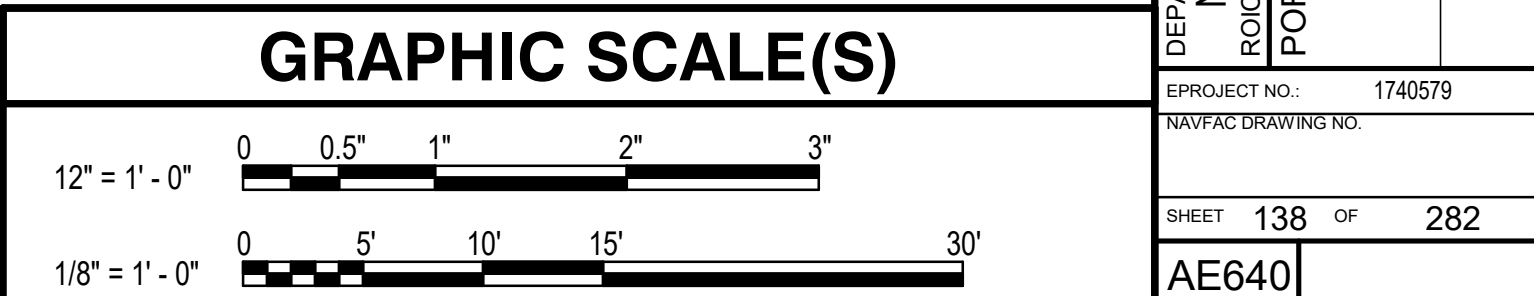

- ROOM FINISH LEGEND
- WALL FINISH
PWT = PORCELAIN WALL TILE
FRP = FIBER REINFORCED PLASTIC
P = PAINT
- FLOOR FINISH
CONC = CONCRETE - HARDENED AND SEALED
CPTT = CAREPET TILE
EX CONC = EXISTING CONCRETE
EX WD = EXISTING WOOD STRIP FLOORING
PFT = PORCELAIN FLOOR TILE
SVT = SOLID VINYL TILE
- BASE FINISH
RWB = RUBBER WALL BASE
- CEILING FINISH
ACT = ACOUSTICAL CEILING TILE
P = PAINT
STRUCT = CEILING STRUCTURE TO ALSO INCLUDE MECHANICAL, ELECTRICAL, PLUMBING AND SPRINKLER EQUIPMENT, PAINT
- MISCELLANEOUS FINISH
PLAM = PLASTIC LAMINATE
SS = SOLID SURFACE

APPROVED

FOR COMMANDER NAVFAC

ACTIVITY

SATISFACTORY TO DATE

DESIGNER JMR

DRAWN BY CJE

CHECKED BY RSH

DESIGN MANAGER T. CARLETON L. LYONS

READ/NAME

FIRE PROTECTION S. RUCINSKI

NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND

NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - MID-ATLANTIC

PORTSMOUTH NAVAL SHIPYARD - KITTEERY, ME

B60 REPAIRS

ROOM FINISH SCHEDULE

PROJECT NO. 1740579

NAVFAC DRAWING NO.

SHEET 138 OF 282

AE640

DRAWING REVISION: 14 SEP 2023