

D

C

B

A


D

C

B UNCLASSIFIED

A

10/1/2025 5:26:00 PM ED101
C:\Users\bdalgie\Documents\2025\BLDG00_ELEC-V23_bdaigie\QUXG8.rvt

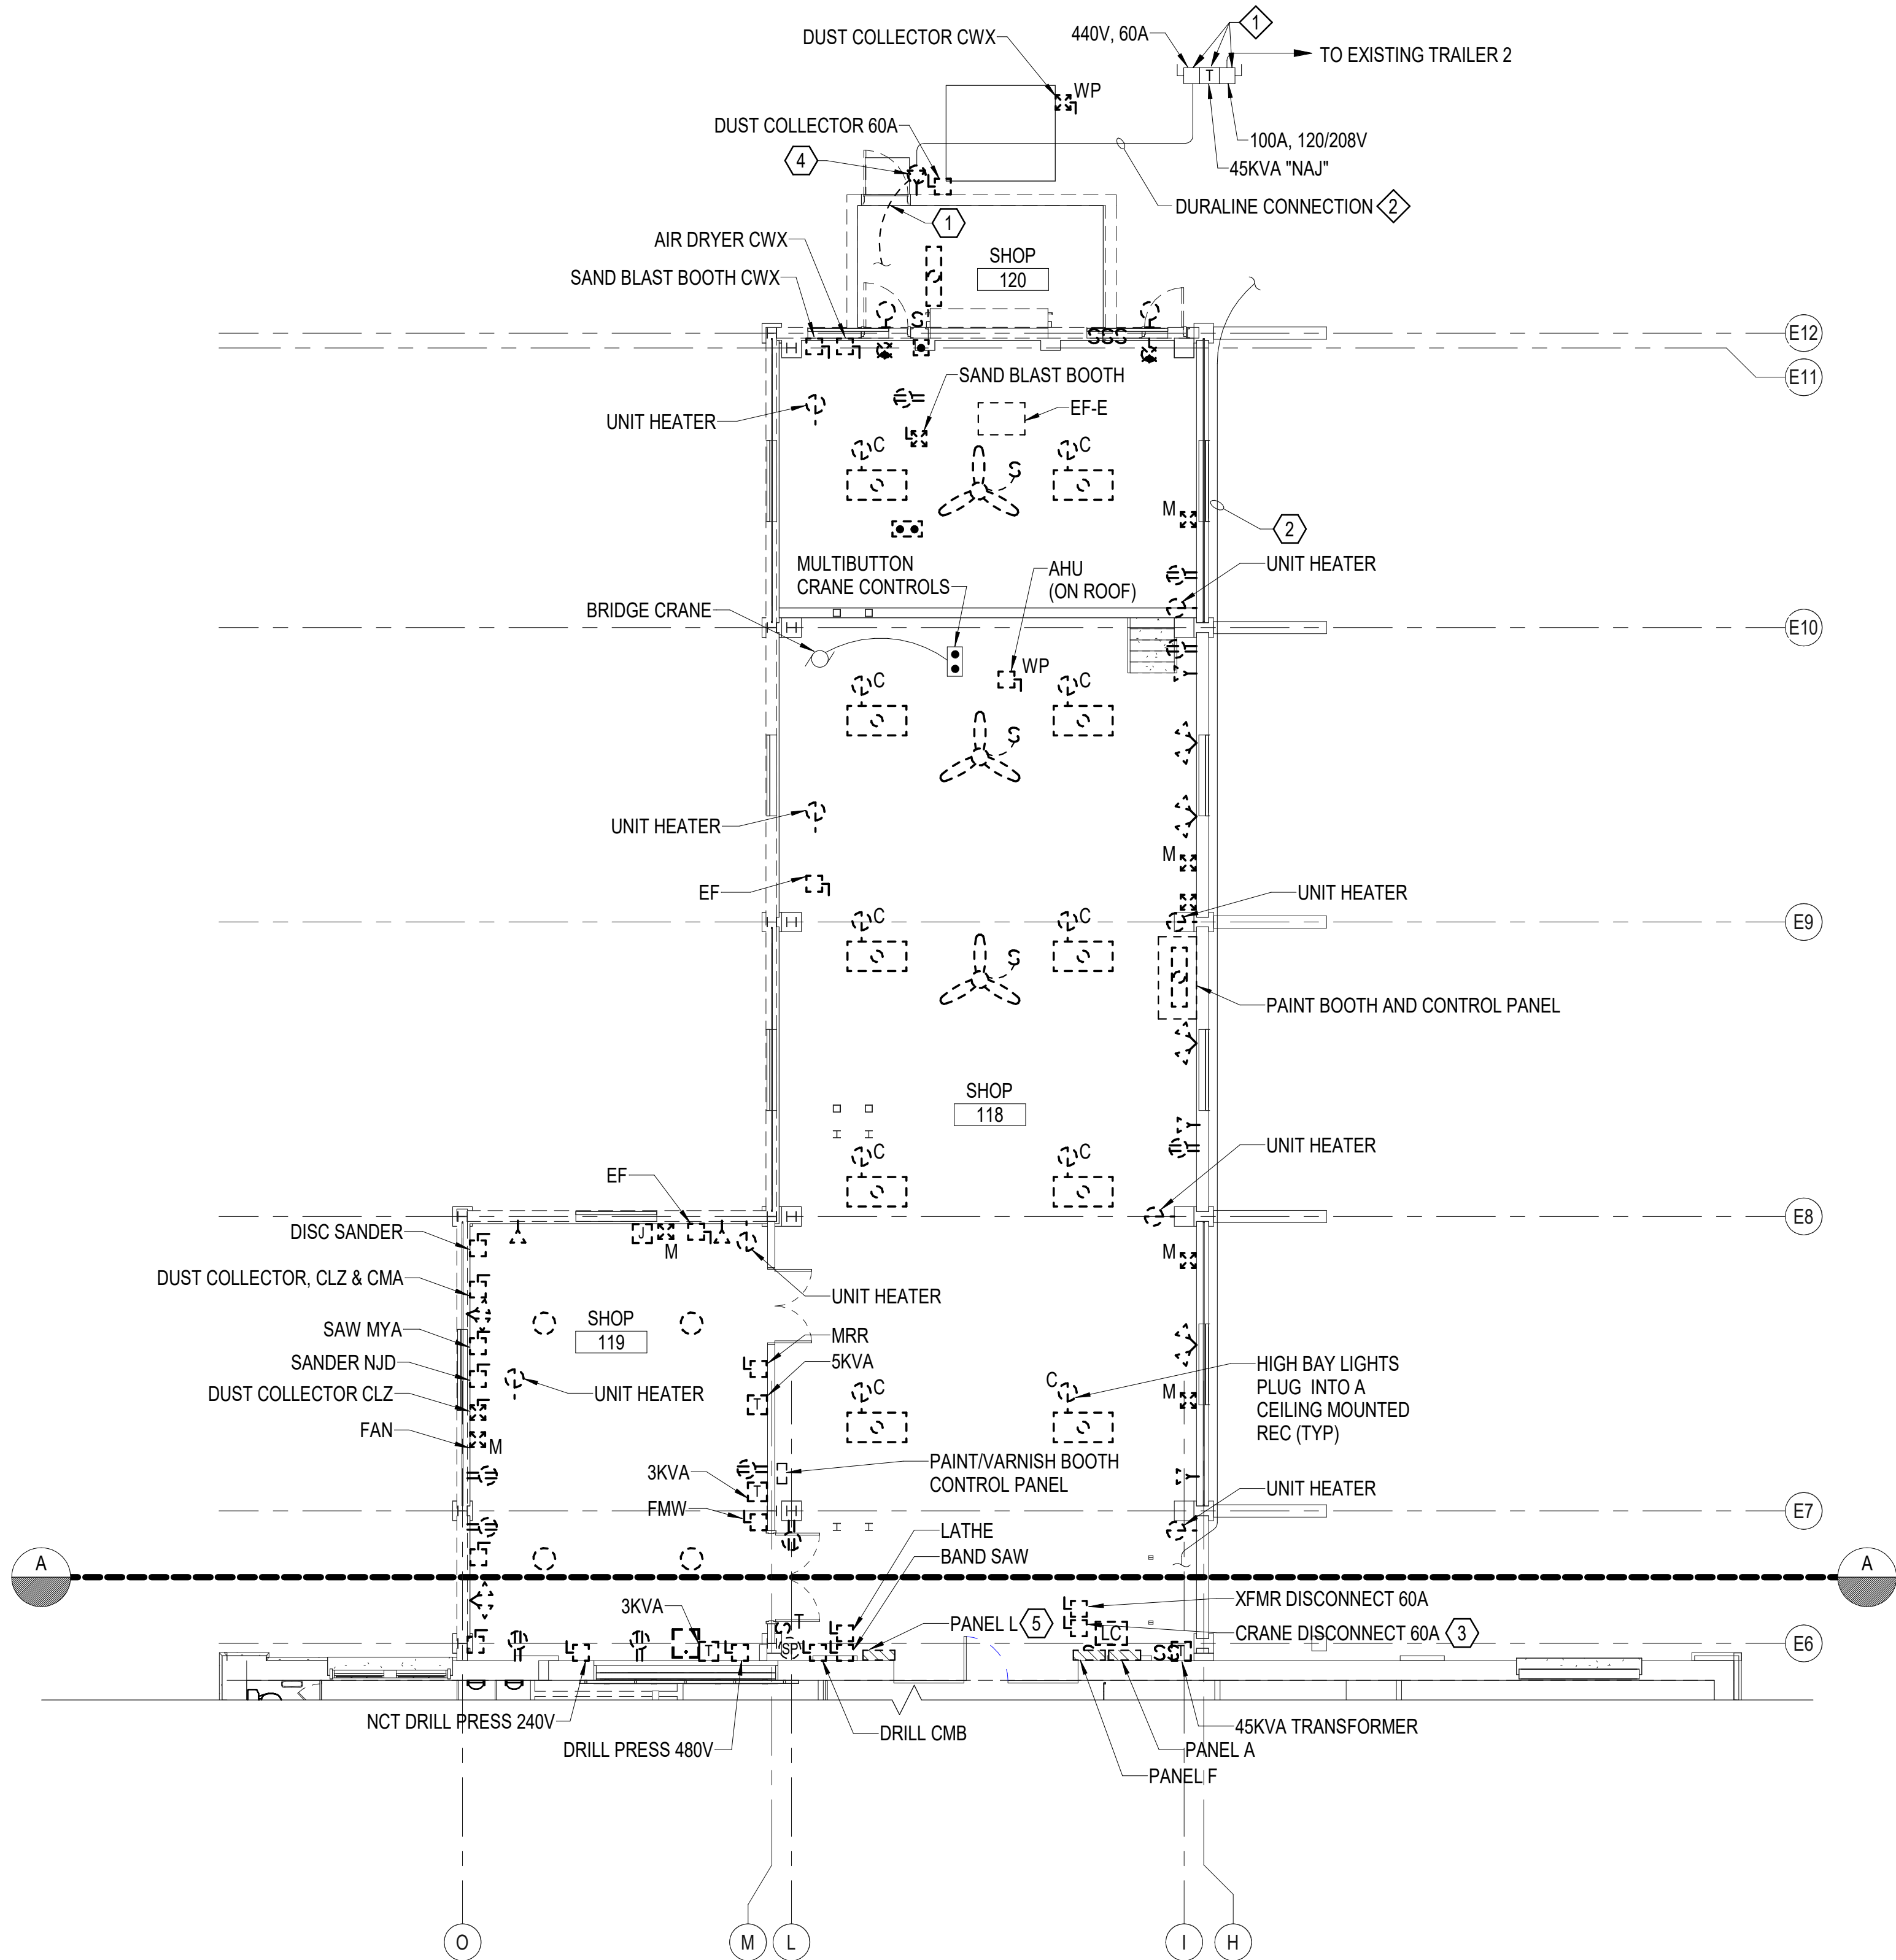

A1 FIRST FLOOR ELECTRICAL REMOVALS PART PLAN - EAST
SCALE: 1/8" = 1'-0"

GENERAL NOTES

1. REMOVE THE ENTIRETY OF THE ELECTRICAL, LIGHTING, AND TELECOMMUNICATIONS SYSTEMS, UNLESS OTHERWISE NOTED. REMOVALS INCLUDE, BUT ARE NOT LIMITED TO: PANELBOARDS, CONDUIT, WIRE, DISCONNECT SWITCHES, RECEPTACLES, LIGHTING FIXTURES, LIGHTING CONTROLS, TELEPHONE AND DATA OUTLETS WITH ASSOCIATED CONDUIT AND CABLING.
2. [CLIN 002]: REMOVE THE ENTIRETY OF THE ELECTRICAL CONNECTIONS SERVING INDUSTRIAL EQUIPMENT. REFER TO QD SHEETS FOR ADDITIONAL INFORMATION. REMOVALS INCLUDE, BUT ARE NOT LIMITED TO: CONDUIT, WIRE, DISCONNECT SWITCHES, RECEPTACLES, AND CONTROL PANELS.


EXISTING KEYNOTES

- ① EXISTING TRANSFORMER AND DISCONNECTS SERVING EXISTING TRAILER 2 TO REMAIN FOR REUSE. REFER TO SHEET EP501.
- ② EXISTING DURALINE CONNECTION SERVING EXISTING TRAILER 2 TO REMAIN FOR REUSE.


REMOVALS KEYNOTES

- ① [CLIN 004] PROVIDE TEMPORARY POWER TO EXISTING TRAILER 2. COORDINATE WITH THE CONTRACTING OFFICER. REMOVE EXISTING POWER FEEDER TO EXISTING TRAILER 2 AFTER TEMPORARY POWER IS ESTABLISHED. REFER TO SHEETS ES101 AND EP501. FOR BIDDING PURPOSES, ASSUME AN OFF HOURS OUTAGE OF 8 HOURS WILL BE PERMITTED TO ACCOMMODATE POWER SERVICE SWAP OVER.
- ② [CLIN 004] PROVIDE TEMPORARY PHONE SERVICE TO EXISTING TRAILER 2. COORDINATE WITH THE CONTRACTING OFFICER. TEMPORARILY RELOCATE EXISTING PHONE SERVICE SERVING EXISTING TRAILER 2 AFTER TEMPORARY SYSTEMS ARE ESTABLISHED. PROTECT EXISTING TELEPHONE BACKBONE CABLE FOR REUSE. REFER TO SHEETS ES101, ED104, AND ET501. FOR BIDDING PURPOSES, ASSUME AN OFF HOURS OUTAGE OF 8 HOURS WILL BE PERMITTED TO ACCOMMODATE TELEPHONE SERVICE SWAP OVER.
- ③ REMOVE EXISTING BRIDGE CRANE FEEDER. EXISTING CRANE TO REMAIN AND BE ABANDONED IN PLACE.
- ④ REMOVE AND SALVAGE EXISTING EXTERIOR RECEPTACLE SERVING EXISTING TRAILER 2.
- ⑤ EXISTING 480V PANELBOARD FEEDS EXISTING TRAILER 1 VIA A 100A CIRCUIT BREAKER AND EXISTING TRAILER 2 VIA A 60A CIRCUIT BREAKER.


KEY PLAN

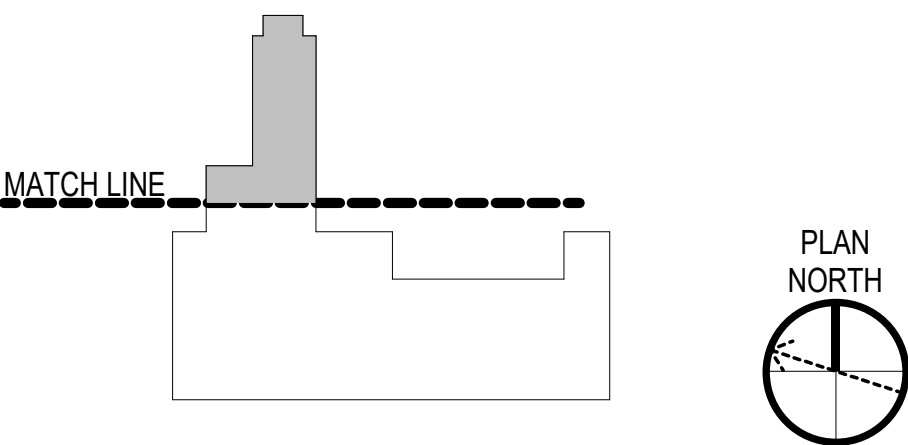

GRAPHIC SCALE(S)



SYN	DESCRIPTION	DATE	APP
	FINAL SUBMISSION	10/01/2025	RSH

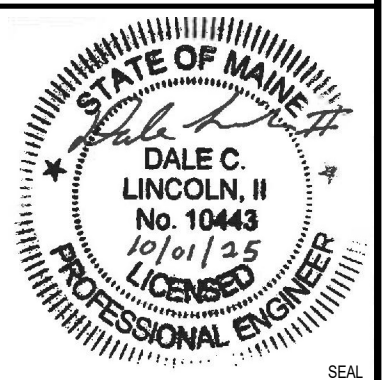

APPROVED	
FOR COMMANDER NAVFAC	
ACTIVITY	
SATISFACTORY TO DATE	
DESIGNER	HRM
DRAWN BY	BPD
CHECKED BY	DCL
DESIGN MANAGER	T. CARLETON
PROJECT MANAGER	L. LYONS
HEADLINE	
FIRE PROTECTION	S. RUCINSKI

DEPARTMENT OF THE NAVY NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - MID-ATLANTIC ROCC-ME PORTSMOUTH NAVAL SHIPYARD KITTEERY, ME	B60 REPAIRS FIRST FLOOR ELECTRICAL REMOVALS PART PLAN - EAST
PROJECT NO.	1740579
NAV-FAC DRAWING NO.	
SHEET	241 OF 282
ED101	

D

C

B


A

D

C

B UNCLASSIFIED

A

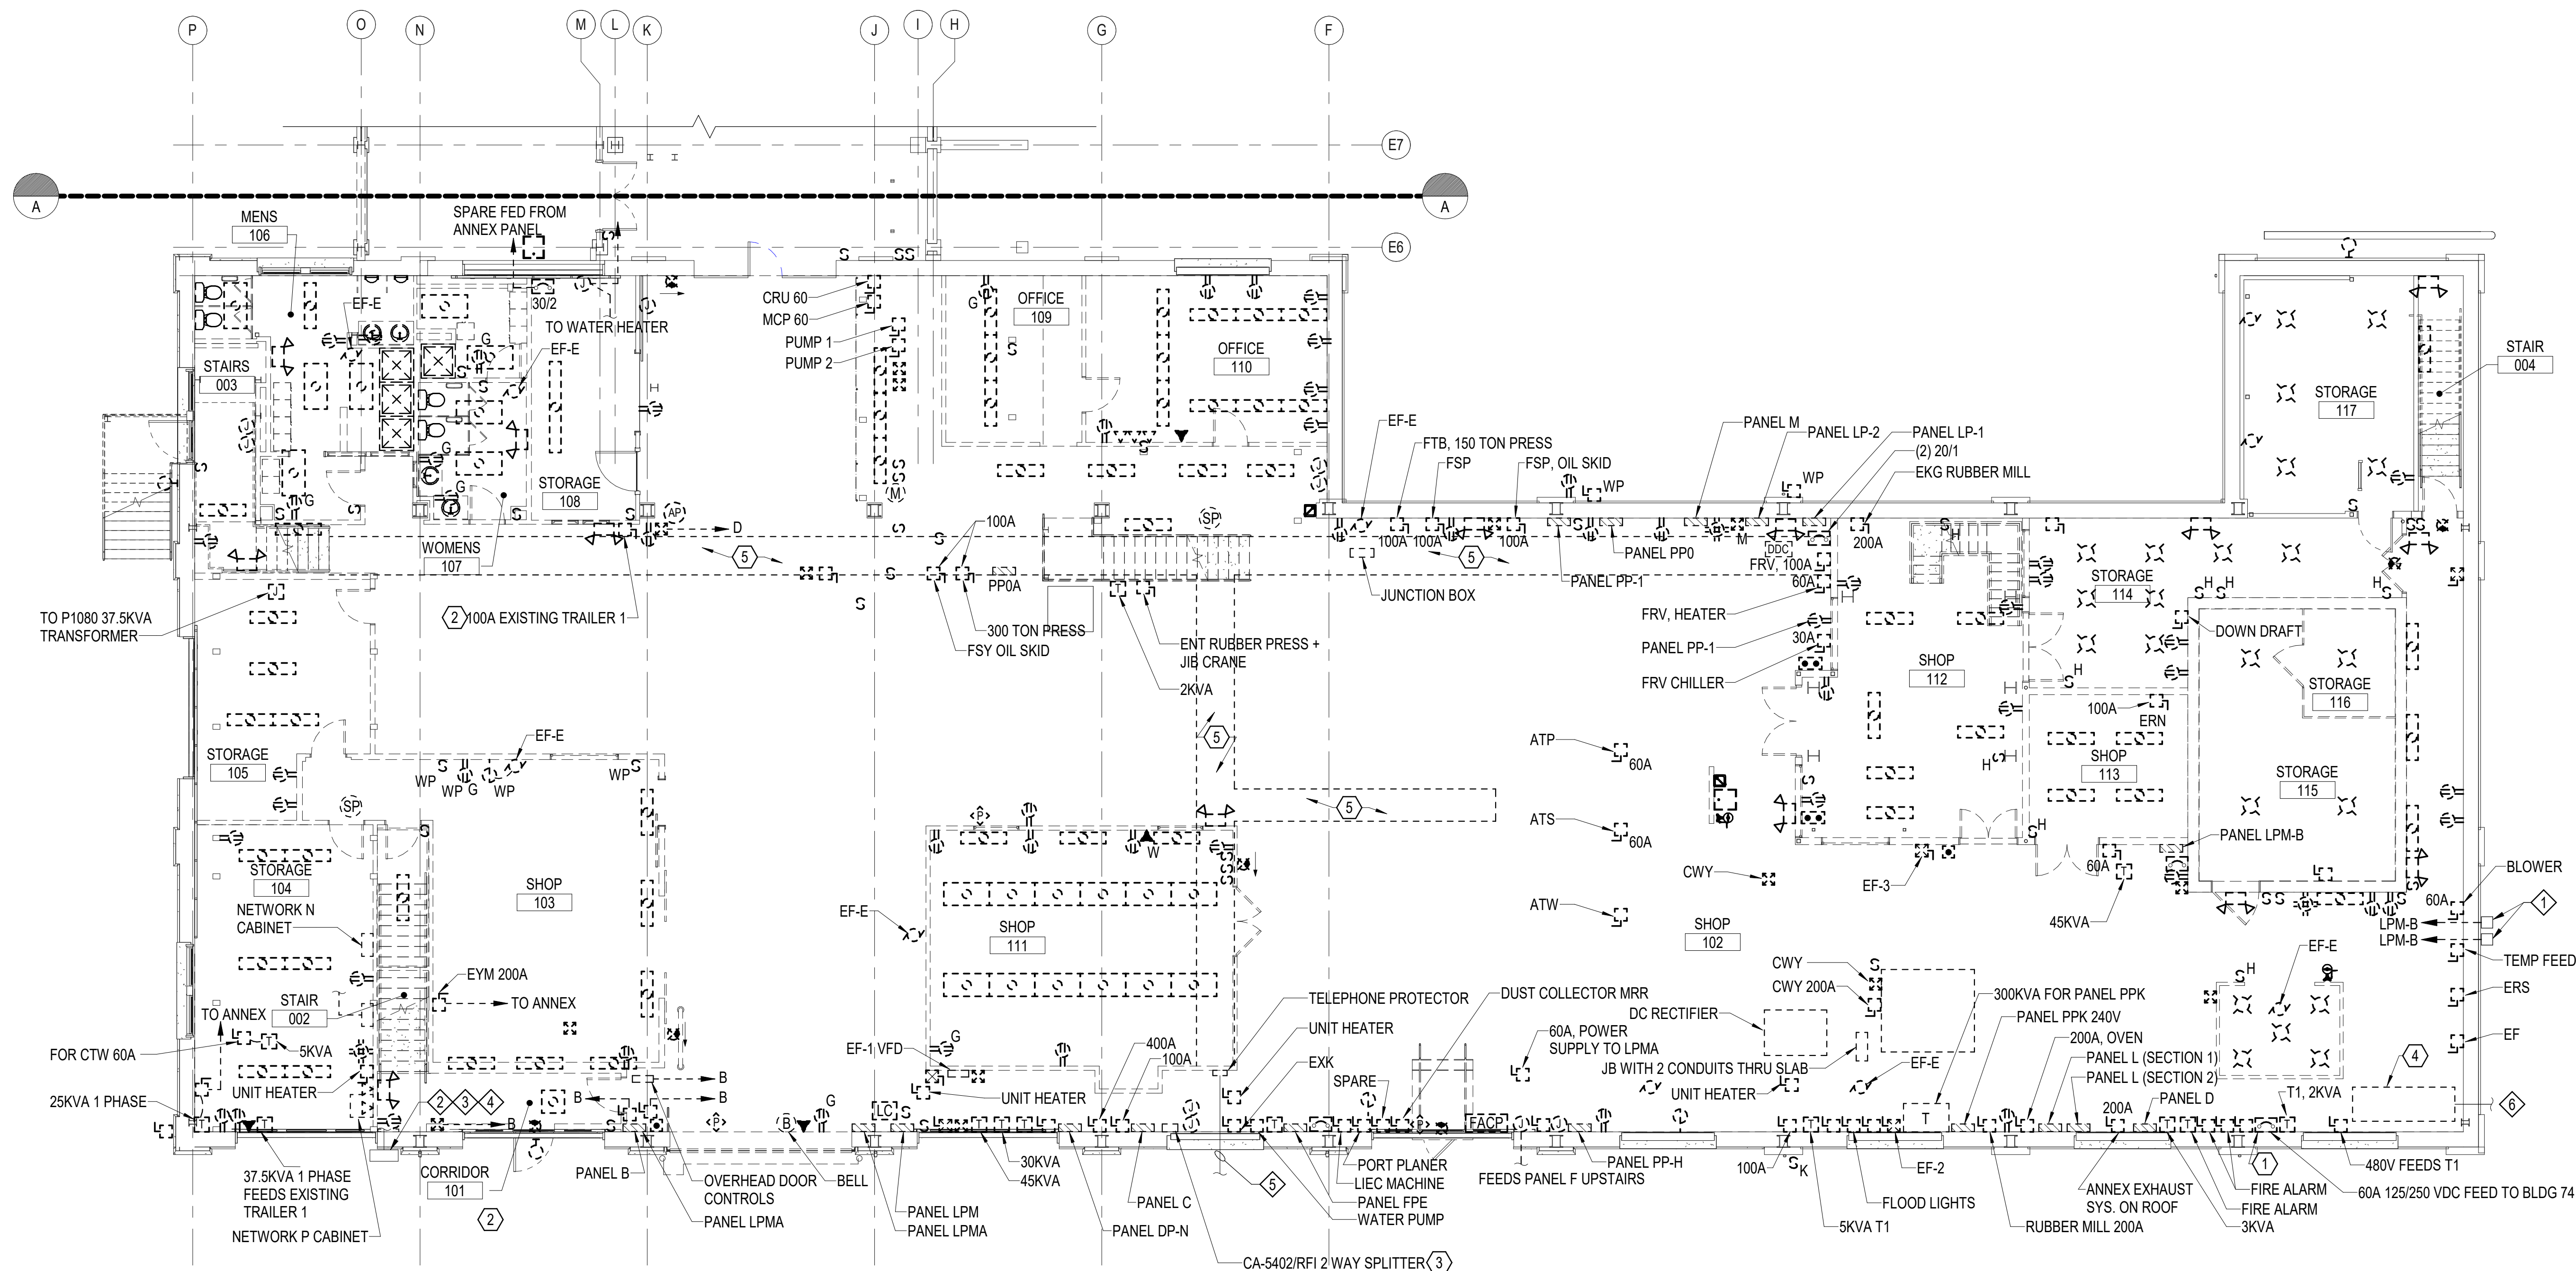

B1 FIRST FLOOR ELECTRICAL REMOVALS PART PLAN - WEST
SCALE: 1/8" = 1'-0"

GENERAL NOTES

- REMOVE THE ENTIRETY OF THE ELECTRICAL, LIGHTING, AND TELECOMMUNICATIONS SYSTEMS, UNLESS OTHERWISE NOTED. REMOVALS INCLUDE, BUT ARE NOT LIMITED TO: PANELBOARDS, SWITCHBOARDS, CONDUIT, WIRE, DISCONNECT SWITCHES, RECEPTACLES, LIGHTING FIXTURES, LIGHTING CONTROLS, TELEPHONE AND DATA OUTLETS WITH ASSOCIATED CONDUIT AND CABLING. WHERE CONDUITS EXTEND INTO THE FLOOR SLAB, CUT FLUSH WITH THE SLAB AND REMOVE ASSOCIATED WIRES. WHERE CONDUITS EXTEND INTO THE BELOW FLOOR TRENCH, REMOVE CONDUIT AND WIRE IN ITS ENTIRETY.
- REFER TO SHEETS EP501 AND ET501 FOR ONE-LINE AND RISER DIAGRAMS.
- [CLIN 002]: REMOVE THE ENTIRETY OF THE ELECTRICAL CONNECTIONS SERVING INDUSTRIAL EQUIPMENT. REFER TO QD SHEETS FOR ADDITIONAL INFORMATION. REMOVALS INCLUDE, BUT ARE NOT LIMITED TO: CONDUIT, WIRE, DISCONNECT SWITCHES, RECEPTACLES, AND CONTROL PANELS.


EXISTING KEYNOTES

- EXISTING ELECTRIC VEHICLE CHARGERS.
- EXISTING PULL BOX WITH CONDUIT/DUCTBANK TO MANHOLE AC603A AND CONDUIT THROUGH THE WALL. BOX CONTAINS EXISTING NETWORK N AND NETWORK P OUTSIDE PLANT CABLES.
- [BASE BID]: PROTECT EXISTING NETWORK N, 12 STRAND SINGLE MODE OUTSIDE PLANT FIBER OPTIC CABLE FOR REUSE.
- [BASE BID]: PROTECT EXISTING NETWORK P, 12 STRAND MULTIMODE, OUTSIDE PLANT FIBER OPTIC CABLE FOR REUSE.
- PROTECT EXISTING 25 PAIR OUTSIDE PLANT COPPER TELEPHONE CABLE FOR REUSE.
- TO MANHOLE AC811 AND LOAD CENTER 4. PROTECT EXISTING FEEDER FOR REUSE. CONDUITS TO REMAIN. REFER TO SHEETS ES101, EP102, AND EP501.


REMOVALS KEYNOTES

- REMOVE DC FEEDER BETWEEN BUILDING 60 AND BUILDING 74. FOR BIDDING PURPOSES ASSUME REMOVAL OF 1000 FEET OF CABLE AND ENTERING 4 MANHOLES. FIELD VERIFY.
- [CLIN 004]: MAINTAIN TEMPORARY POWER TO EXISTING TRAILER 1 DURING CONSTRUCTION. COORDINATE WITH THE CONTRACTING OFFICER. RELOCATE EXISTING TEMPORARY EQUIPMENT SERVING THE TRAILER, TO ACCOMMODATE B60 RENOVATION. REFER TO SHEETS ES101, EP102, AND G-007. FOR BIDDING PURPOSES, ASSUME AN OFF HOUR OUTAGE OF 8 HOURS WILL BE PERMITTED TO ACCOMMODATE POWER SERVICE SWAP OVER.
- REMOVE EXISTING CABLE BACK TO BUILDING 59 VIA DUCTBANK LOCATED BETWEEN BUILDINGS 59 AND 60. REFER TO SHEET ES101.
- REMOVE MAIN DISTRIBUTION SWITCHBOARD AND ASSOCIATED PULL BOX, ABOVE.
- REMOVE CONDUIT AND WIRE ROUTED WITHIN THE BELOW FLOOR TRENCH.

KEY PLAN

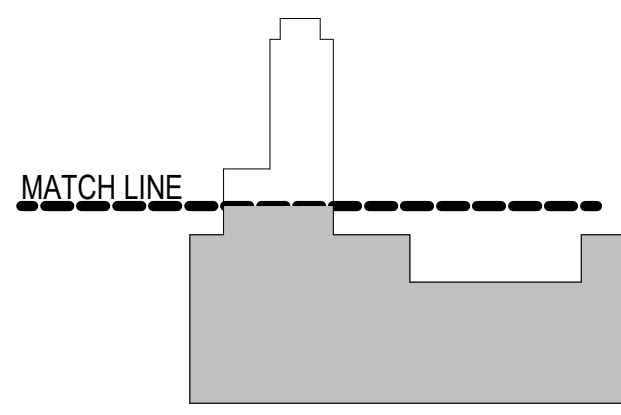

GRAPHIC SCALE(S)



NAVFAC		DALE C. LINCOLN, II No. 10443 Professional Engineer		OAK POINT ASSOCIATES		NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - MID-ATLANTIC PORTSMOUTH NAVAL SHIPYARD - KITTERY, ME		B60 REPAIRS FIRST FLOOR ELECTRICAL REMOVALS PART PLAN - WEST	
APPROVED		FOR COMMANDER NAVFAC		ACTIVITY		SATSFACTORY TO DATE		DESIGNER HRM	
DRAWN BY BPD		CHECKED BY DCL		DESIGN MANAGER T. CARLETON		PROJECT MANAGER L. LYONS		HEADLINE	
FIRE PROTECTION		S. RUCINSKI		KITTERY, ME		PROJECT NO. 1740579		NAVFAC DRAWING NO.	
SHEET 242 OF 282		ED102		DRAWN FORM REVISION: 14 SEP 2023					

1

2

3 UNCLASSIFIED

4

5

D

C

B


A

D

C

B

A

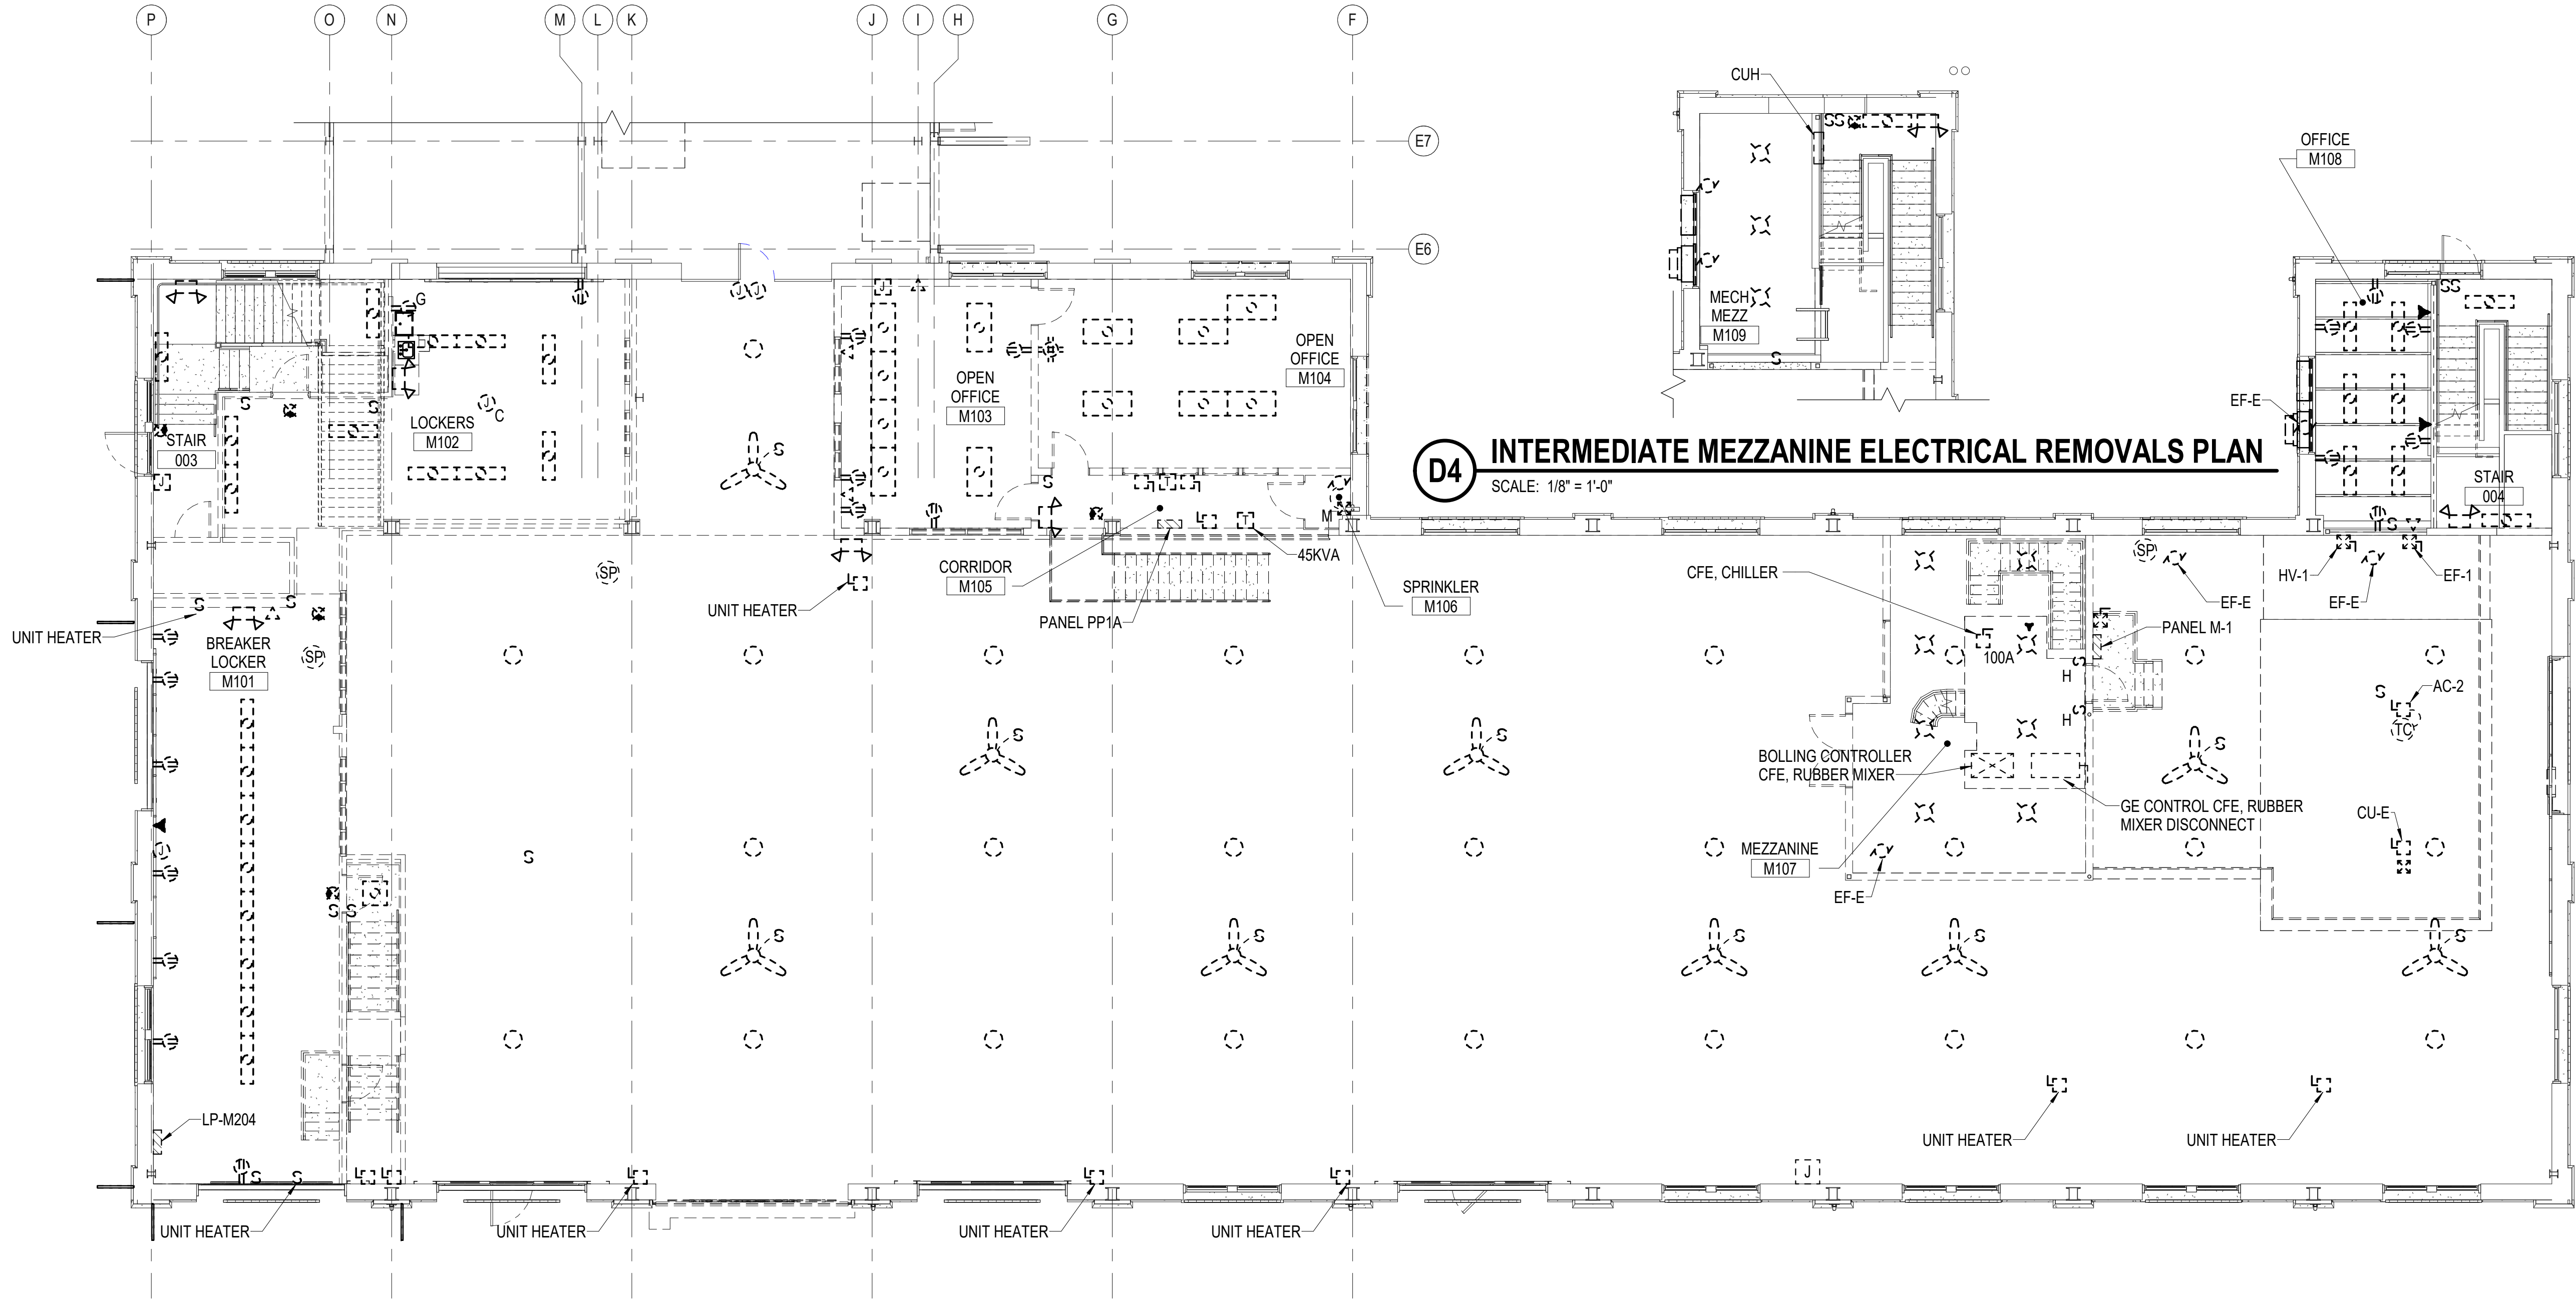



B1 FIRST FLOOR MEZZANINE ELECTRICAL REMOVALS PART PLAN
SCALE: 1/8" = 1'-0"

D4 INTERMEDIATE MEZZANINE ELECTRICAL REMOVALS PLAN
SCALE: 1/8" = 1'-0"

GENERAL NOTES

1. REMOVE THE ENTIRETY OF THE ELECTRICAL, LIGHTING, AND TELECOMMUNICATIONS SYSTEMS, UNLESS OTHERWISE NOTED. REMOVALS INCLUDE, BUT ARE NOT LIMITED TO: PANELBOARDS, CONDUIT, WIRE, DISCONNECT SWITCHES, RECEPTACLES, LIGHTING FIXTURES, LIGHTING CONTROLS, TELEPHONE AND DATA OUTLETS WITH ASSOCIATED CONDUIT AND CABLING.
2. [CLIN 002] REMOVE THE ENTIRETY OF THE ELECTRICAL CONNECTIONS SERVING INDUSTRIAL EQUIPMENT. REFER TO QD SHEETS FOR ADDITIONAL INFORMATION. REMOVALS INCLUDE, BUT ARE NOT LIMITED TO: CONDUIT, WIRE, DISCONNECT SWITCHES, RECEPTACLES, AND CONTROL PANELS.

KEY PLAN

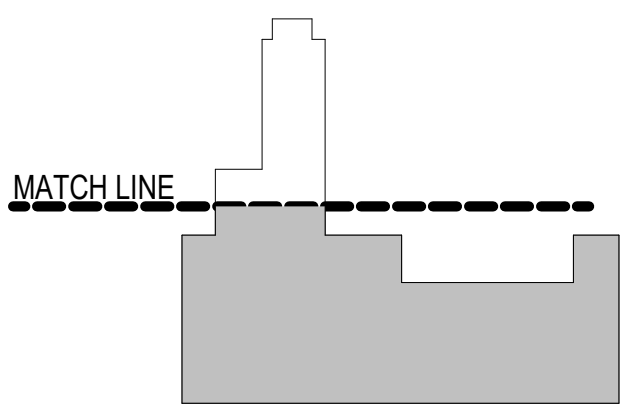

GRAPHIC SCALE(S)



1


2

3 UNCLASSIFIED

4

5

SYMBOL	DESCRIPTION	DATE	APPROVED
	FINAL SUBMISSION	10/01/2025	RSH

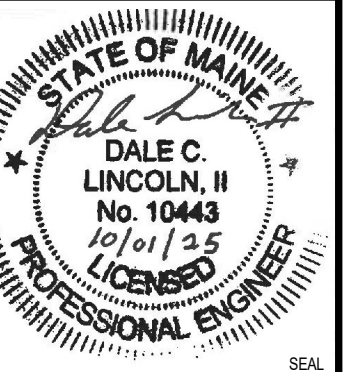

APPROVED	
FOR COMMANDER NAVFAC	
ACTIVITY	
SATISFACTORY TO DATE	
DESIGNER	HRM
DRAWN BY	BPD
CHECKED BY	DCL
DESIGN MANAGER	T. CARLETON
PROJECT MANAGER	L. LYONS
HEADLINE	
FIRE PROTECTION	S. RUCINSKI

DEPARTMENT OF THE NAVY	NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND	NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - MID-ATLANTIC	PORTSMOUTH NAVAL SHIPYARD - KITTERY, ME
PROJECT NO.	1740579	B60 REPAIRS	
FIRST FLOOR MEZZANINE ELECTRICAL REMOVALS PART PLAN			


SHEET	243	OF	282
ED103			

10/1/2025 5:28:21 PM ED104
C:\Users\bdalgie\Documents\2210325_BLDG00_ELEC-V23_bdaigie\QXG8.rvt

A

- GENERAL NOTES**
- REMOVE THE ENTIRETY OF THE ELECTRICAL, LIGHTING, AND TELECOMMUNICATIONS SYSTEMS, UNLESS OTHERWISE NOTED. REMOVALS INCLUDE, BUT ARE NOT LIMITED TO: PANELBOARDS, CONDUIT, WIRE, DISCONNECT SWITCHES, RECEPTACLES, LIGHTING FIXTURES, LIGHTING CONTROLS, TELEPHONE AND DATA OUTLETS WITH ASSOCIATED CONDUIT AND CABLING. WHERE CONDUITS EXTEND BELOW THE WOOD FLOOR, CUT FLUSH WITH THE FLOOR AND REMOVE ASSOCIATED WIRES.
 - [CLIN 002]: REMOVE THE ENTIRETY OF THE ELECTRICAL CONNECTIONS SERVING INDUSTRIAL EQUIPMENT. REFER TO QD SHEETS FOR ADDITIONAL INFORMATION. REMOVALS INCLUDE, BUT ARE NOT LIMITED TO: CONDUIT, WIRE, DISCONNECT SWITCHES, RECEPTACLES, AND CONTROL PANELS.

- REMOVALS KEYNOTES**
- REMOVE COPPER TELEPHONE CABLE, "AMI B60 TO B74-1". COORDINATE WITH THE CONTRACTING OFFICER.
 - REMOVE FLEXIBLE CONDUIT WHIP.
 - REMOVE EXISTING BRIDGE CRANE FEEDER. DOCUMENT EXISTING FEEDER SIZE. PREPARE TO REFEED EXISTING CRANE. CRANE NOT SHOWN FOR CLARITY.
 - ORIGIN OF THE TELEPHONE BACKBONE CABLE SERVING EXISTING TRAILER 2. PROVIDE TEMPORARY TELEPHONE SERVICE TO THE TRAILER DURING CONSTRUCTION. PROTECT EXISTING CABLE FOR RECONNECTION AT THE COMPLETION OF CONSTRUCTION. REFER TO SHEETS ED101 AND ET501.

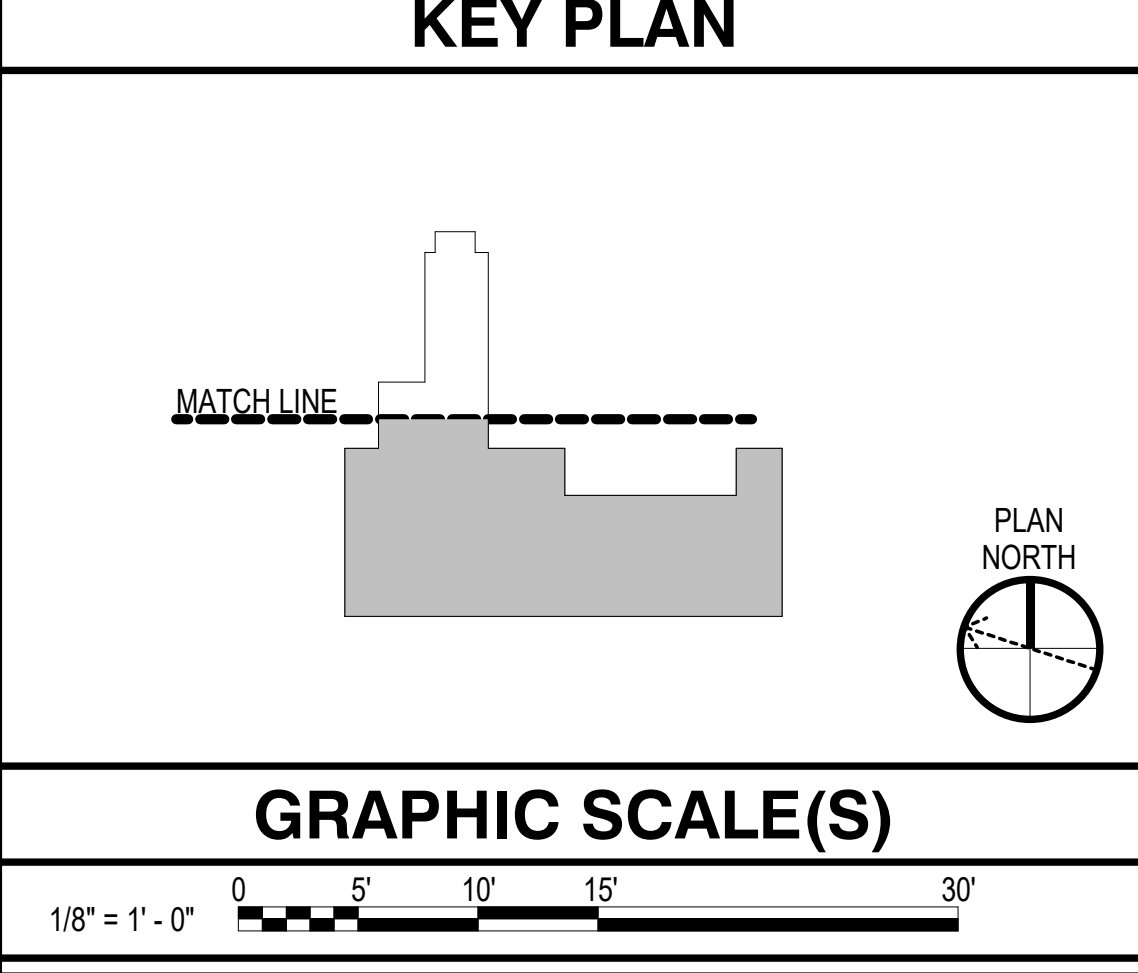

PROJECT NO. 1740579
NAVFAC DRAWING NO.
SHEET 244 OF 282
ED104

DEPARTMENT OF THE NAVY
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - MID-ATLANTIC
PORTSMOUTH NAVAL SHIPYARD - KITTERY, ME
PORTSMOUTH NAVAL SHIPYARD
B60 REPAIRS
SECOND FLOOR ELECTRICAL REMOVALS PLAN

NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - MID-ATLANTIC
PORTSMOUTH NAVAL SHIPYARD - KITTERY, ME
KITTERY, ME
S. RUCINSKI
FIRE PROTECTION
HEADNAME
PROJECT MANAGER
DESIGN MANAGER
CHECKED BY
DRAWN BY
DESIGNER
SATISFACTORY TO DATE
ACTIVITY
FOR COMMANDER NAVFAC

APPROVED
FOR COMMANDER NAVFAC
ACTIVITY
T. CARLETON
L. LYONS
DALE C. LINCOLN, II
No. 10443
10/01/2025
PROFESSIONAL ENGINEER
SEAL



FINAL SUBMISSION
SYN
DESCRIPTION
DATE
10/01/2025
RSH
APPR

D

C

B

B UNCLASSIFIED

A

D

1


2

3 UNCLASSIFIED

4

5

10/1/2025 5:28:25 PM ED105
C:\Users\bdalgie\Documents\22103.25_BLDG00_ELEC-V23_bdaigie\QUXG8.rvt

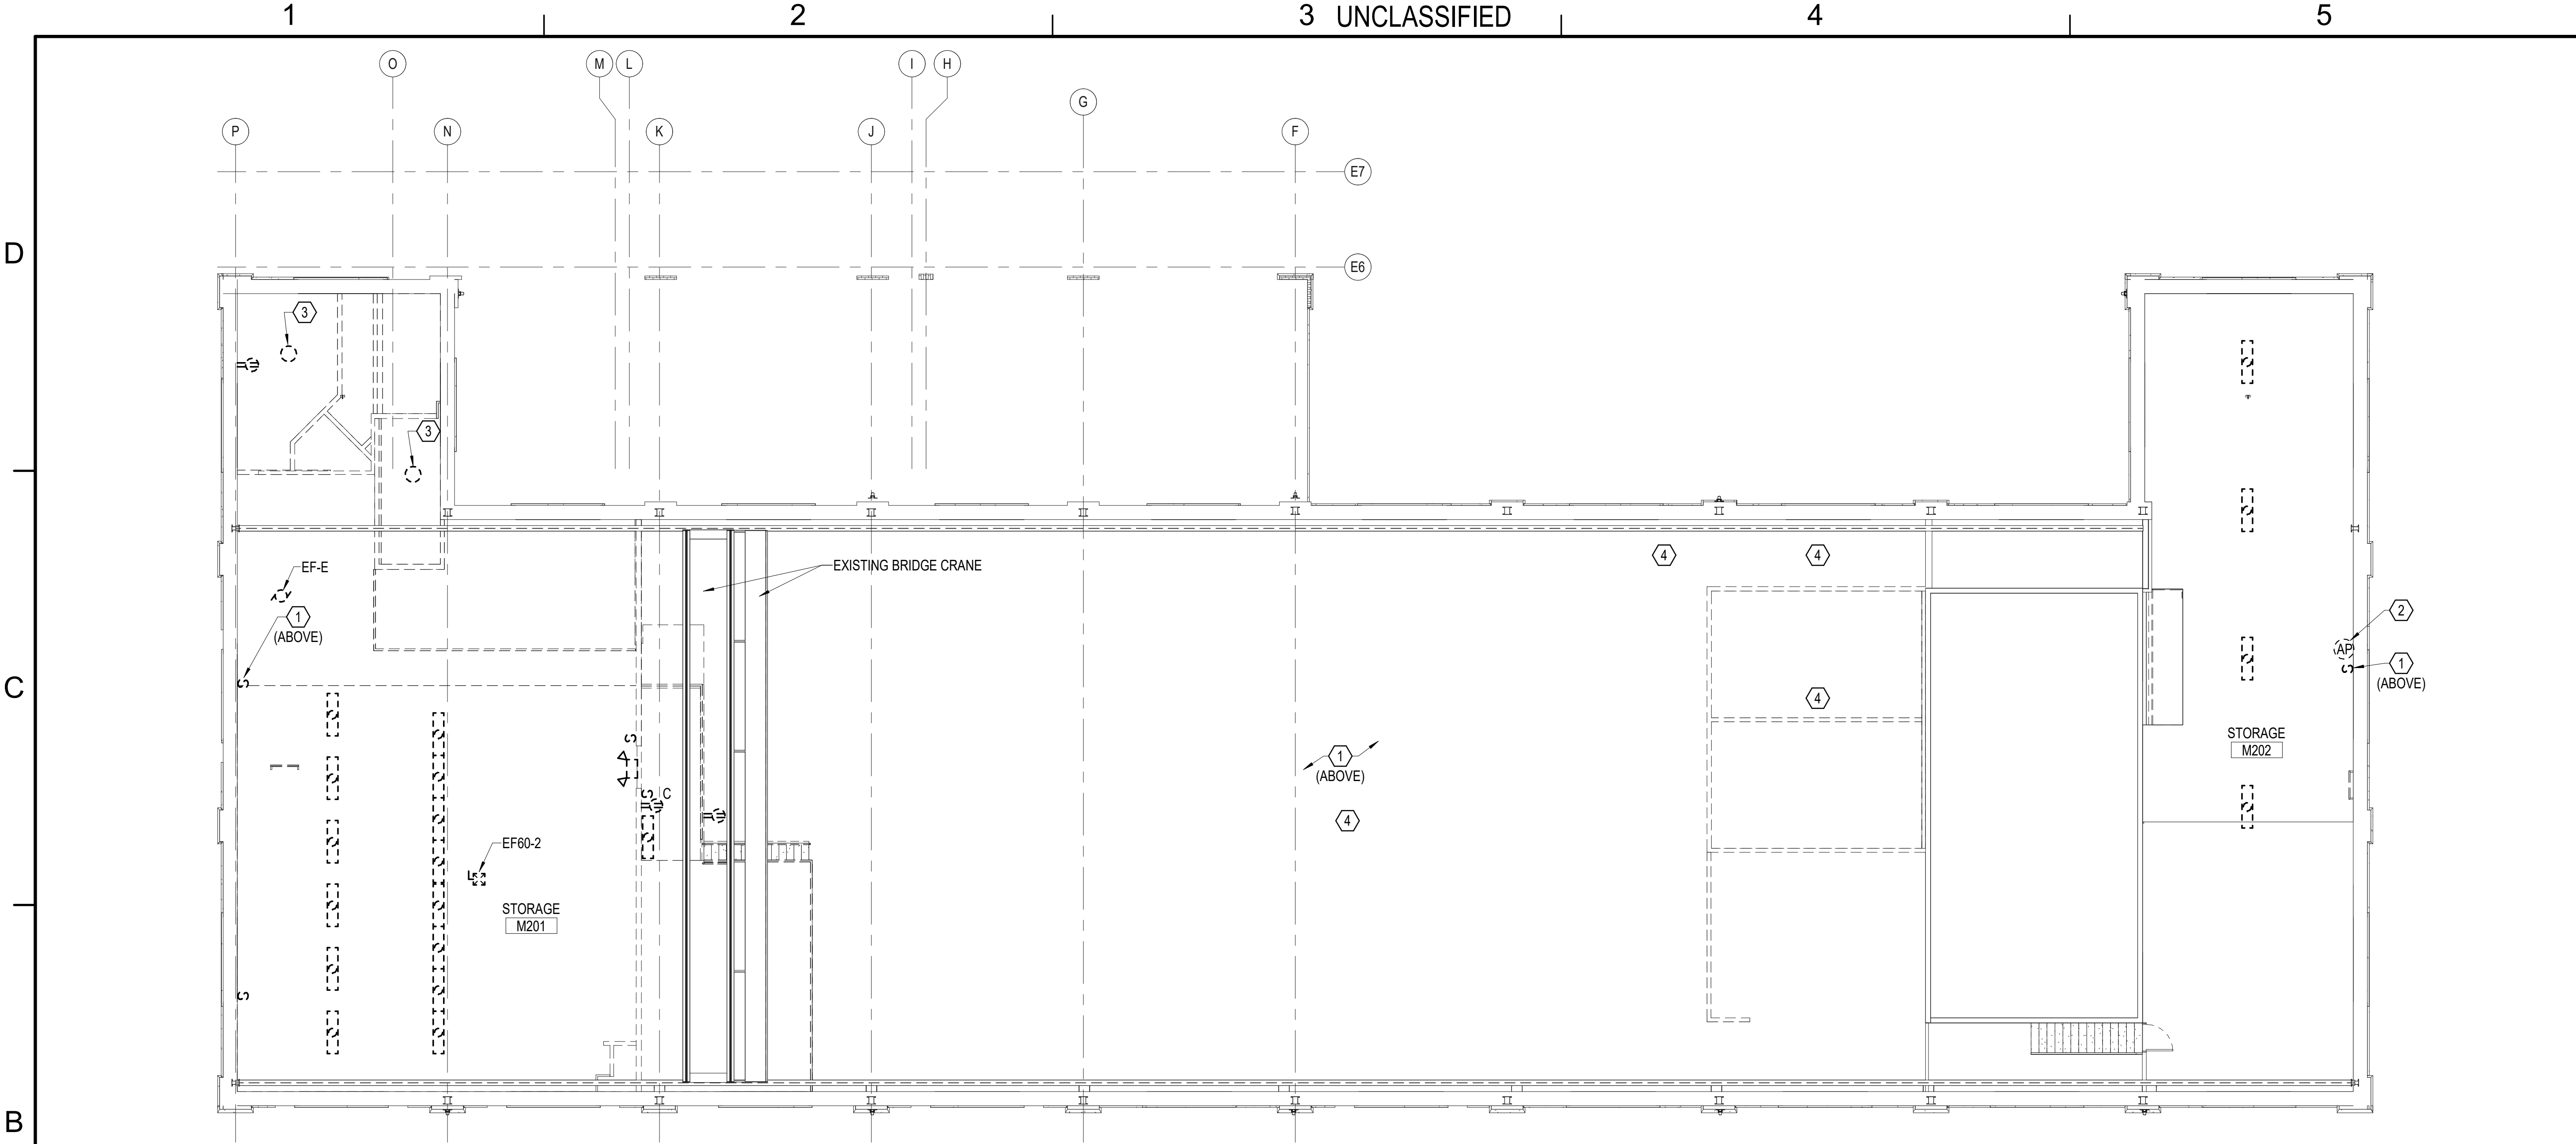

B1 SECOND FLOOR MEZZANINE ELECTRICAL REMOVALS PLAN
SCALE: 1/8" = 1'-0"

GENERAL NOTES



1. REMOVE THE ENTIRETY OF THE ELECTRICAL, LIGHTING, AND TELECOMMUNICATIONS SYSTEMS, UNLESS OTHERWISE NOTED. REMOVALS INCLUDE, BUT ARE NOT LIMITED TO: PANELBOARDS, CONDUIT, WIRE, DISCONNECT SWITCHES, RECEPTACLES, LIGHTING FIXTURES, LIGHTING CONTROLS, TELEPHONE AND DATA OUTLETS WITH ASSOCIATED CONDUIT AND CABLING.




1. REMOVE SWITCH AND ASSOCIATED LIGHTS, CONDUIT, BOXES, AND WIRE IN THE ATTIC. FOR BIDDING PURPOSES ASSUME (10) TYPE A SOCKET TYPE FIXTURES WITH COMPACT FLUORESCENT SCREW IN LAMPS.
2. COORDINATE WITH THE MECHANICAL TRADE BEFORE REMOVAL OF THE JACE ANTENNA.
3. DISCONNECT HISTORICAL LIGHTING FIXTURE AND SALVAGE FOR REINSTALLATION.
4. DISCONNECT AND REMOVE POWER TO EXHAUST FAN IN THE ATTIC. COORDINATE WITH THE MECHANICAL TRADE.

REMOVALS KEYNOTES

KEY PLAN

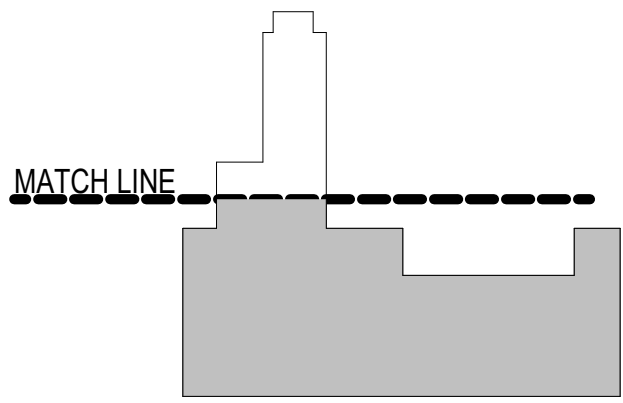

GRAPHIC SCALE(S)



SYMBOL		DESCRIPTION		DATE	APPROVED
SYMBOL		DESCRIPTION		10/01/2025	RSH
FINAL SUBMISSION					
NAVFAC					
STATE OF MAINE DALE C. LINCOLN, II No. 10443 10/01/25 LICENSED PROFESSIONAL ENGINEER					
OAK POINT ASSOCIATES					
APPROVED FOR COMMANDER NAVFAC					
ACTIVITY					
SATISFACTORY TO DATE					
DESIGNER HRM					
DRAWN BY BPD					
CHECKED BY DCL					
DESIGN MANAGER T. CARLETON					
PROJECT MANAGER L. LYONS					
FIRE PROTECTION S. RUCINSKI					
DEPARTMENT OF THE NAVY NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - MID-ATLANTIC PORTSMOUTH NAVAL SHIPYARD - KITTERY, ME					
PROJECT NO. 1740579					
NAVFAC DRAWING NO.					
SHEET 245 OF 282					
ED105					
DRAWING REVISION: 14 SEP 2023					

A

1

2

3 UNCLASSIFIED

4

5

A

B UNCLASSIFIED

C

D

GENERAL NOTES (THIS SHEET ONLY)

1. REFER TO SHEET CS101 FOR LIMITS OF WORK REQUIRING A NRPA PERMIT BY RULE.
2. REFER TO SHEET ET501 FOR TELECOMMUNICATIONS RISER DIAGRAMS.
3. REFER TO SHEET EP501 FOR ONE-LINE DIAGRAM.
4. REFER TO SHEET ES102 FOR TELECOMMUNICATIONS SITE PLAN SCOPE.

1 FIELD VERIFY AND REMOVE CABLES WITHIN EXISTING DUCTBANK LOCATED BETWEEN LOAD CENTER 4 VAULT AND BUILDING 60. FOR BIDDING PURPOSES, ASSUME REMOVAL OF 1,000 LINEAR FEET OF COPPER CABLE. COORDINATE WITH THE CIVIL TRADE. (OPTION 9): THE DUCTBANK IS BEING REMOVED IN PREPARATION FOR A NEW DUCTBANK TO BE INSTALLED.

- 1 PROVIDE DIESEL GENERATOR WITH SUB BASE FUEL TANK. REFER TO SHEET EP501.
- 2 PROVIDE LIGHTNING PROTECTION SYSTEM. REFER TO LIGHTNING PROTECTION SYSTEM NOTES, THIS SHEET.
- 3 [BASE BID]: PROVIDE FUSION SPLICE TO EXISTING 6MM NETWORK P CABLE IN BUILDING 59. COORDINATE EXACT ROUTING THROUGH B59 WITH THE CONTRACTING OFFICER. REFER TO SHEET ET106.

- 4 [CLIN 004]: PROVIDE TEMPORARY POWER TO EXISTING TRAILER 2 DURING CONSTRUCTION. REESTABLISH POWER, FROM BUILDING 60, TO THE EXISTING TRAILER. REFER TO SHEET EP501 ONE-LINE DIAGRAM.
- 5 [BASE BID]: ROUTE 6 STRAND MULTIMODE FIBER OPTIC NETWORK P CABLE BETWEEN B59 AND B60. REFER TO SHEETS ET106 AND ET501. [OPTION 11]: ROUTE 36 STRAND SINGLE MODE FIBER OPTIC NETWORK N AND NETWORK P CABLES BETWEEN B59 AND B60. REFER TO SHEETS ES102, ET106, AND ET501.
- 6 UTILIZE ONE SET OF EXISTING CONDUCTORS FEEDING B60 TO MAINTAIN POWER TO EXISTING TRANSFORMER SERVING EXISTING TRAILER 2. PROVIDE TEMPORARY POWER TO BUILDING 60 CONSTRUCTION TRAILER VIA EXISTING TRANSFORMER. REFER TO SHEET G-008 FOR OUTAGE SCHEDULE. COORDINATE WITH THE CONTRACTING OFFICER.
- 7 [CLIN 004]: MAINTAIN TEMPORARY POWER TO EXISTING TRAILER 1. RELOCATE EXISTING TEMPORARY EQUIPMENT SERVING THE TRAILER, AS REQUIRED, TO ACCOMMODATE B60 RENOVATION. REFER TO SHEETS ED102 AND EP102.
- 8 SEAL CONDUIT INTERIORS.

1. DELEGATED DESIGN: PROVIDE LIGHTNING PROTECTION SYSTEM DESIGNED BY A CERTIFIED LIGHTNING PROTECTION SYSTEM MASTER DESIGNER IN ACCORDANCE WITH NFPA 780 AND UFC 5-575-01. PROVIDE UL LIGHTNING PROTECTION INSPECTION CERTIFICATE FOR THE BUILDING, CERTIFIED TO NFPA 780. INSTALL LIGHTING PROTECTION SYSTEM IN ACCORDANCE WITH APPROVED SHOP DRAWINGS.


2. SEE ARCHITECTURAL SHEETS FOR ROOF PLAN, BUILDING SECTIONS, AND EXTERIOR BUILDING ELEVATIONS. SEE CIVIL SHEETS FOR UNDERGROUND UTILITIES AND PERMIT INFORMATION.
3. PROVIDE LIGHTNING PROTECTION SYSTEM SHOP DRAWINGS, INCLUDING ROOF PLAN, AND BUILDING EXTERIOR ELEVATIONS, AND CLEARLY INDICATE DOWN CONDUCTOR LOCATIONS FOR GOVERNMENT REVIEW AND APPROVAL. DOWN CONDUCTORS MUST BE ROUTED ALONG BUILDING CONTOURS AND MUST NOT CROSS IN FRONT OF WINDOWS, SILLS, OR LINTELS. EXTERIOR ELEVATIONS INDICATE POTENTIAL DOWN CONDUCTOR LOCATIONS. FINAL LOCATIONS MUST BE DETERMINED BY THE DELEGATED DESIGNER AND APPROVED BY THE GOVERNMENT.
4. REFER TO SHEETS CR101 AND CS101 FOR LOCATIONS WHERE PAVEMENT IS BEING REPAIRED. SUCH AREAS ARE SUGGESTED LOCATIONS FOR PLACING GROUND RODS/PLATES. IN AREAS WHERE PAVEMENT IS NOT IDENTIFIED FOR PAVEMENT REPAIR, REPAIR THE PAVEMENT AFTER GROUND ROD/PLATE INSTALLATION IN ACCORDANCE WITH DETAIL C1/C502. THE WORK REQUIRED TO INSTALL GROUND RODS/PLATES IS NOT PERMITTED BELOW THE TOP OF THE SLOPE/RIVER BANK. REFER TO SHEET CX101.
5. REFER TO GENERAL CONSTRUCTION NOTES ON SHEET G-004A FOR WORK RELATED TO HISTORIC BUILDINGS.
6. FASTEN LIGHTNING PROTECTION DOWN CONDUCTORS TO CENTER OF BRICK, NOT WITHIN MORTAR JOINTS. PER REQUIREMENTS OF NFPA 780 AND UL. PROVIDE BRICK DRILLING AT EXISTING BRICK.

1"=20' 20' 10' 0 20' 40' 50'


CHECK GRAPHIC SCALE BEFORE USING



SCALE: 1"=20'



01 Oct, 2025 -- 5:33pm
C:\dfile\22103.25-ES102.dwg

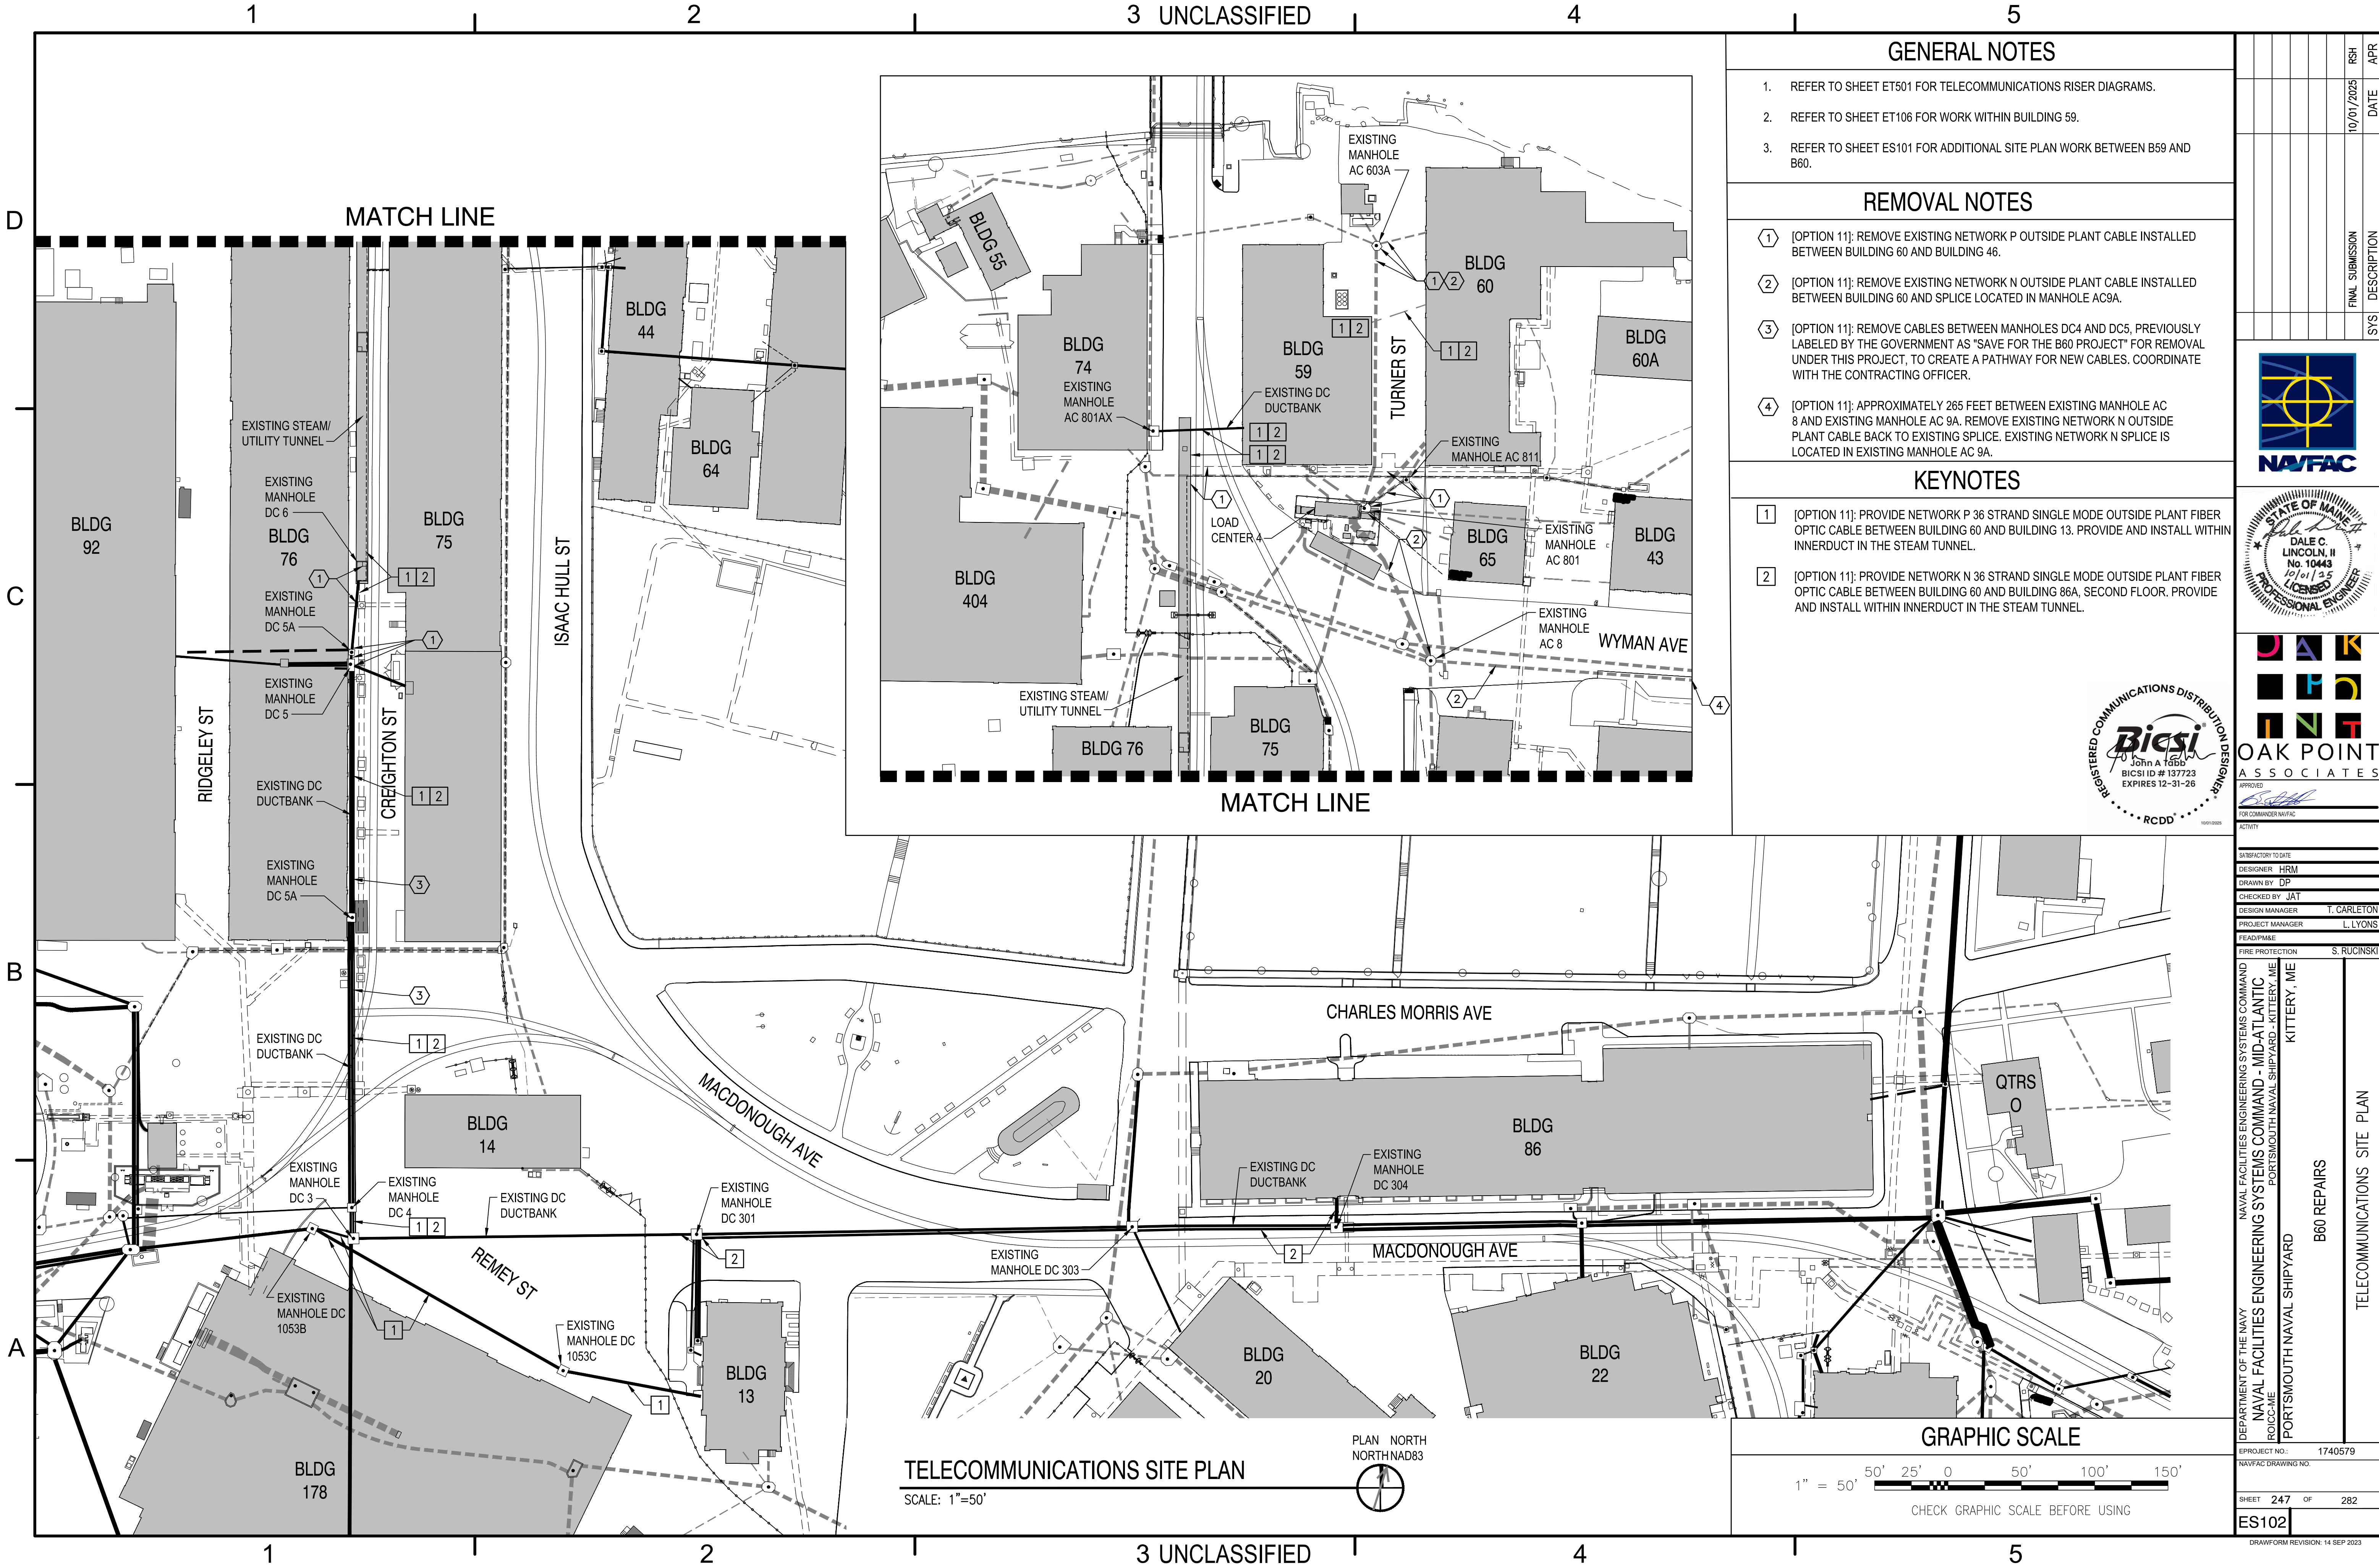

GENERAL NOTES



- REFER TO SHEET ET501 FOR TELECOMMUNICATIONS RISER DIAGRAMS.
- REFER TO SHEET ET106 FOR WORK WITHIN BUILDING 59.
- REFER TO SHEET ES101 FOR ADDITIONAL SITE PLAN WORK BETWEEN B59 AND B60.

REMOVAL NOTES

- [OPTION 11]: REMOVE EXISTING NETWORK P OUTSIDE PLANT CABLE INSTALLED BETWEEN BUILDING 60 AND BUILDING 46.
- [OPTION 11]: REMOVE EXISTING NETWORK N OUTSIDE PLANT CABLE INSTALLED BETWEEN BUILDING 60 AND SPLICE LOCATED IN MANHOLE AC9A.
- [OPTION 11]: REMOVE CABLES BETWEEN MANHOLES DC4 AND DC5, PREVIOUSLY LABELED BY THE GOVERNMENT AS "SAVE FOR THE B60 PROJECT" FOR REMOVAL UNDER THIS PROJECT, TO CREATE A PATHWAY FOR NEW CABLES. COORDINATE WITH THE CONTRACTING OFFICER.
- [OPTION 11]: APPROXIMATELY 265 FEET BETWEEN EXISTING MANHOLE AC 8 AND EXISTING MANHOLE AC 9A. REMOVE EXISTING NETWORK N OUTSIDE PLANT CABLE BACK TO EXISTING SPLICE. EXISTING NETWORK N SPLICE IS LOCATED IN EXISTING MANHOLE AC 9A.

KEYNOTES

- [OPTION 11]: PROVIDE NETWORK P 36 STRAND SINGLE MODE OUTSIDE PLANT FIBER OPTIC CABLE BETWEEN BUILDING 60 AND BUILDING 13. PROVIDE AND INSTALL WITHIN INNERDUCT IN THE STEAM TUNNEL.
- [OPTION 11]: PROVIDE NETWORK N 36 STRAND SINGLE MODE OUTSIDE PLANT FIBER OPTIC CABLE BETWEEN BUILDING 60 AND BUILDING 86A, SECOND FLOOR. PROVIDE AND INSTALL WITHIN INNERDUCT IN THE STEAM TUNNEL.

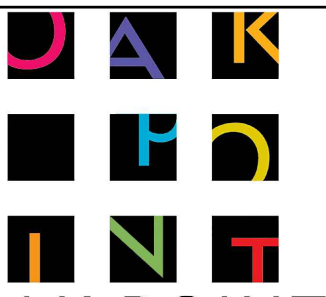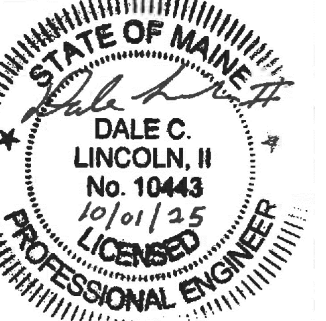

SATISFACTORY TO DATE	
DESIGNER	HRM
DRAWN BY	DP
CHECKED BY	JAT
DESIGN MANAGER	T. CARLETON
PROJECT MANAGER	L. LYONS
LEAD/PM	
FIRE PROTECTION	S. RUCINSKI

NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - MID-ATLANTIC
PORTSMOUTH NAVAL SHIPYARD - KITTEERY, ME
PORTSMOUTH NAVAL SHIPYARD

B60 REPAIRS
TELECOMMUNICATIONS SITE PLAN

PROJECT NO. 1740579
NAVFAC DRAWING NO.

SHEET 247 OF 282
ES102

DRAWING REVISION: 14 SEP 2023




1/8" = 1' - 0"

A horizontal graphic scale bar with a black and white checkered pattern. It is marked with 0, 5', 10', 15', and 30'.

EP101

DRAWFORM REVISION: 14 SEP 2023

10/1/2025 5:27:42 PM EP103
C:\Users\bdagle\Documents\2025\BLDG00_ELEC-V23_bdaigle\QU68.rvt

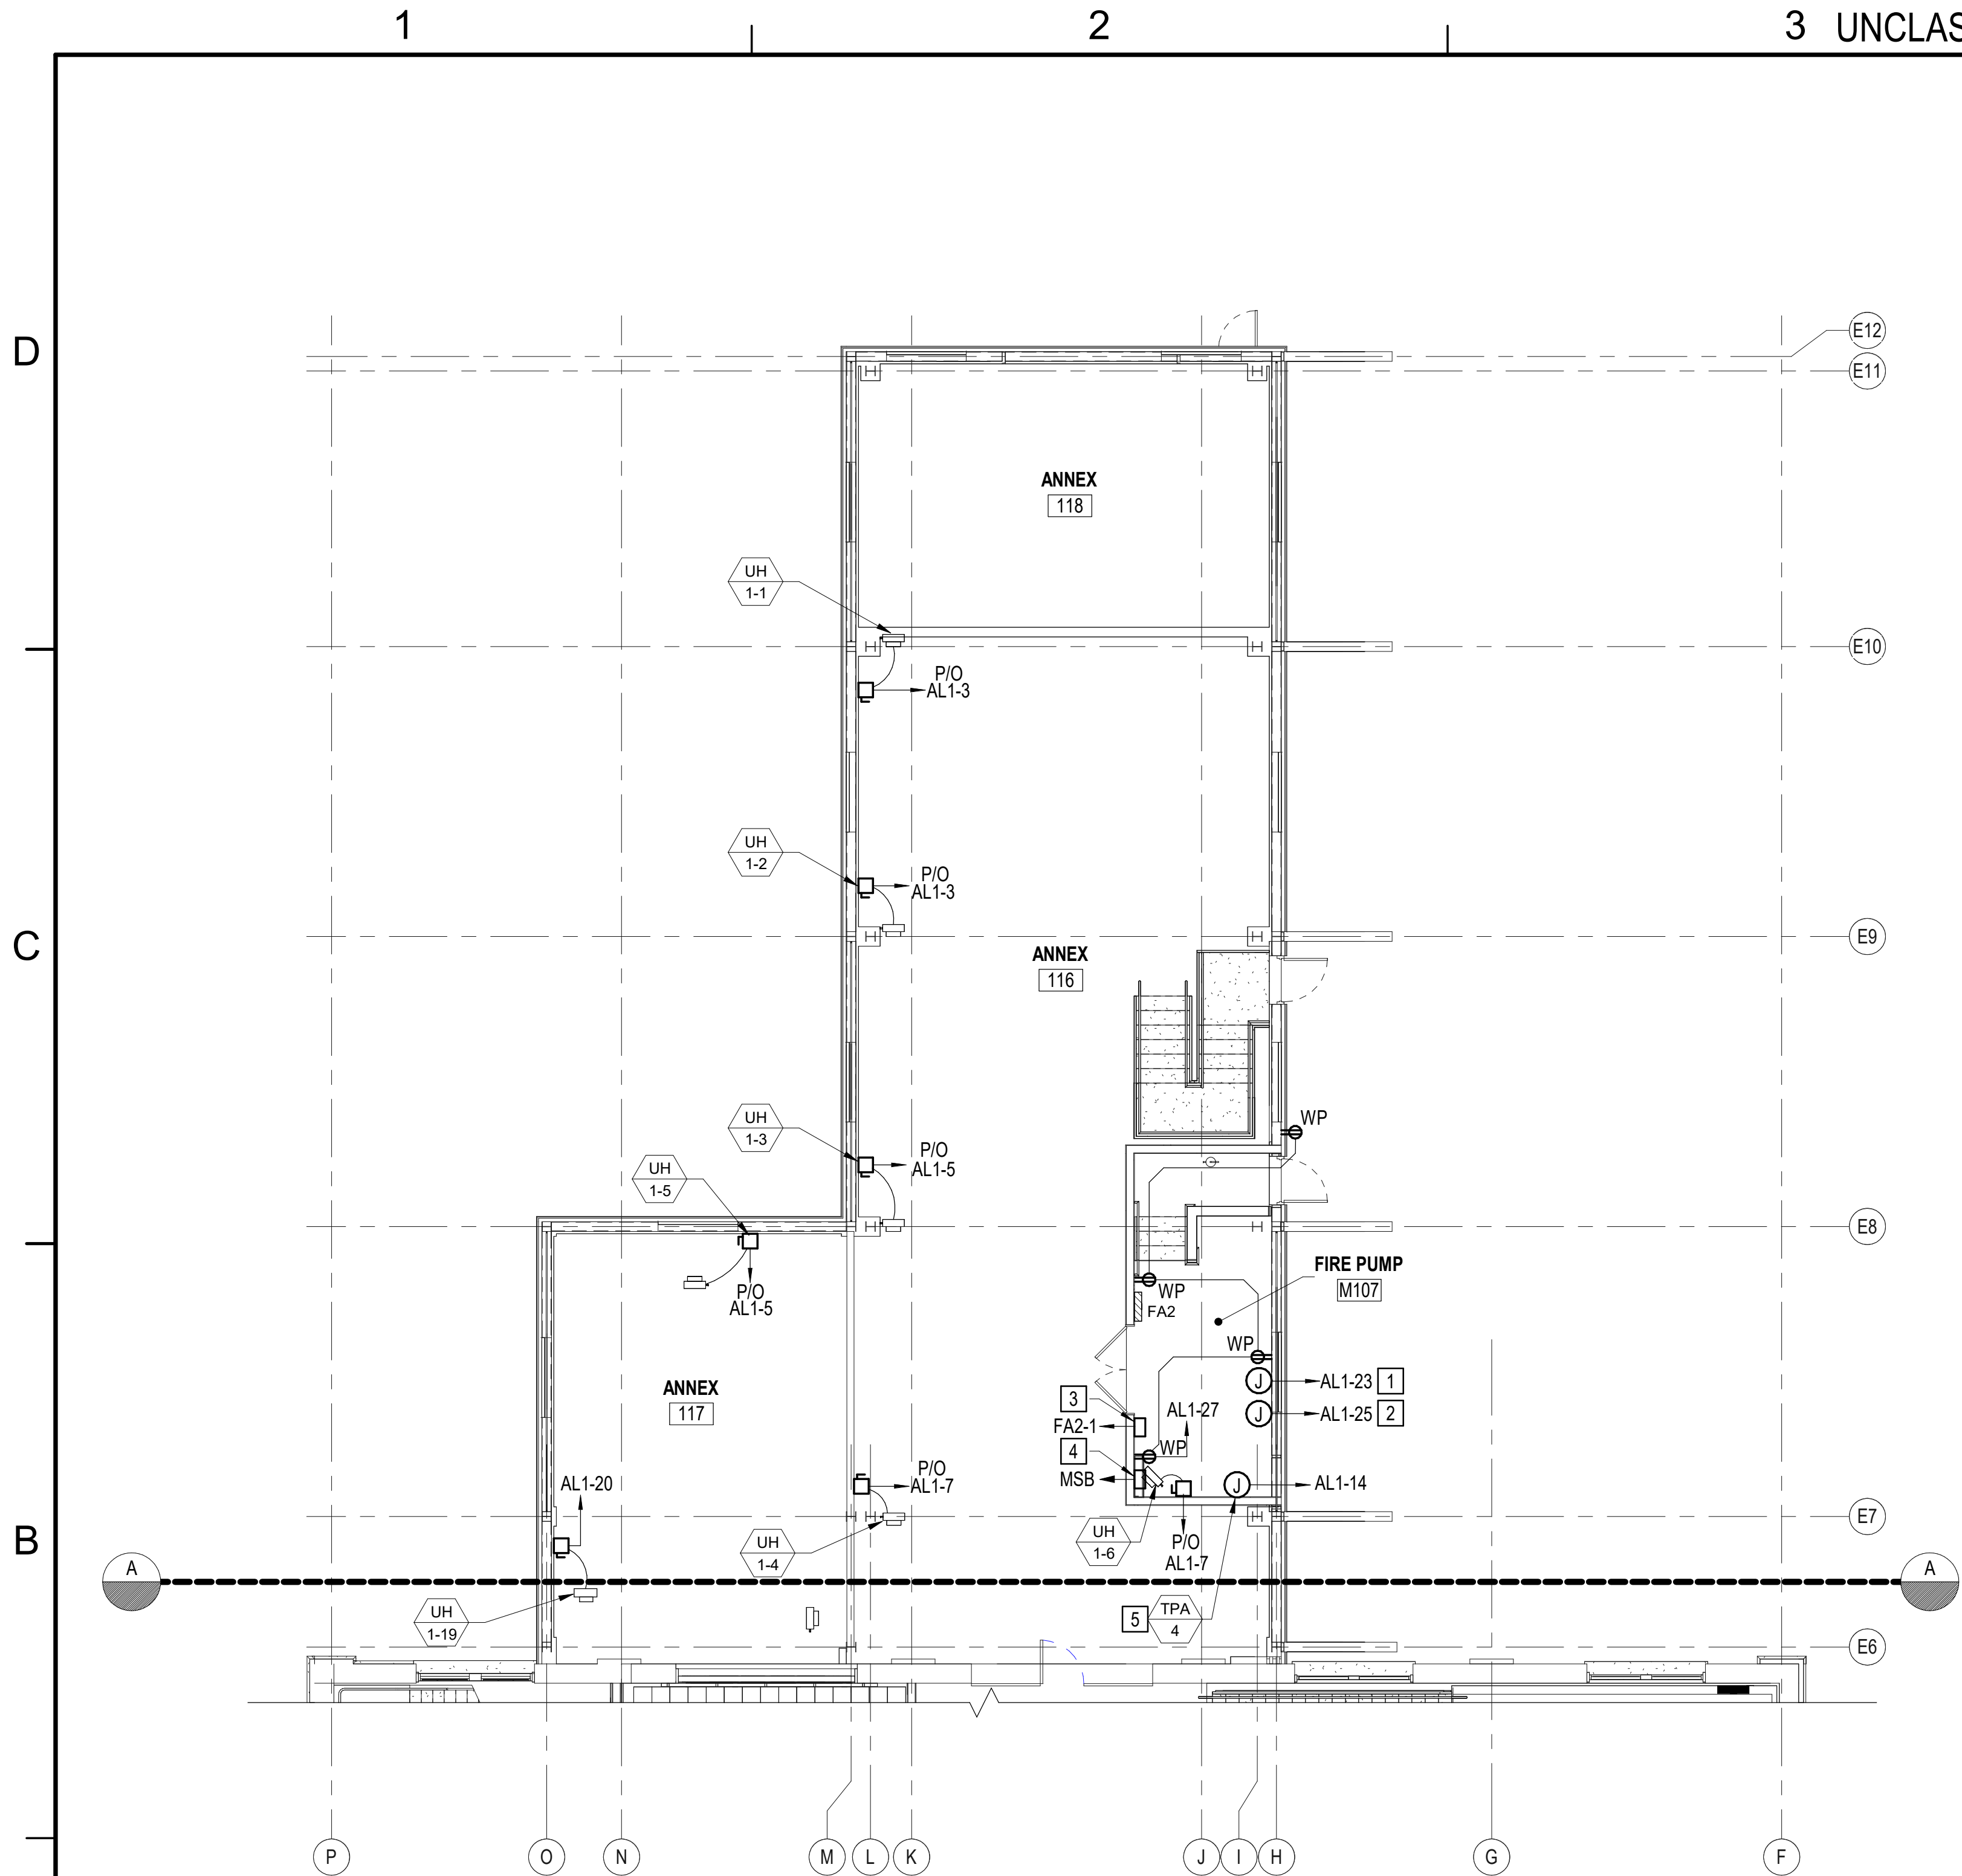

A1 **FIRST FLOOR MEZZANINE POWER PART PLAN - EAST**
SCALE: 1/8" = 1'-0"


GENERAL NOTES

1. REFER TO SHEETS EP503 AND EP504 FOR MECHANICAL, PLUMBING, AND MISCELLANEOUS EQUIPMENT WIRING SCHEDULE.
2. REFER TO SHEETS EP601 - EP604 FOR PANELBOARD SCHEDULES.
3. REFER TO SHEET EP501 FOR ONE-LINE DIAGRAM AND SCHEDULES.
4. REFER TO SHEET EP701 FOR SHOP EQUIPMENT SCHEDULE.


KEYNOTES

1. PROVIDE POWER TO GENERATOR BLOCK HEATER. COORDINATE EXACT LOCATION WITH THE ARCHITECTURAL, CIVIL, AND FIRE PROTECTION TRADES.
2. PROVIDE POWER TO GENERATOR BATTERY CHARGER. COORDINATE EXACT LOCATION WITH THE ARCHITECTURAL, CIVIL, AND FIRE PROTECTION TRADES.
3. PROVIDE POWER TO THE JOCKEY PUMP CONTROLLER. COORDINATE WITH THE FIRE PROTECTION TRADE.
4. PROVIDE POWER TO THE FIRE PUMP CONTROLLER. COORDINATE WITH THE FIRE PROTECTION TRADE. PROVIDE CONCRETE ENCASED FEEDER THAT RISES UP WITHIN RATED CHASE FROM BELOW THE MEZZANINE. REFER TO SHEETS AE101 AND EP501.
5. PROVIDE POWER TO THE TRAP PRIMER. COORDINATE EXACT LOCATION WITH THE PLUMBING TRADE.


KEY PLAN

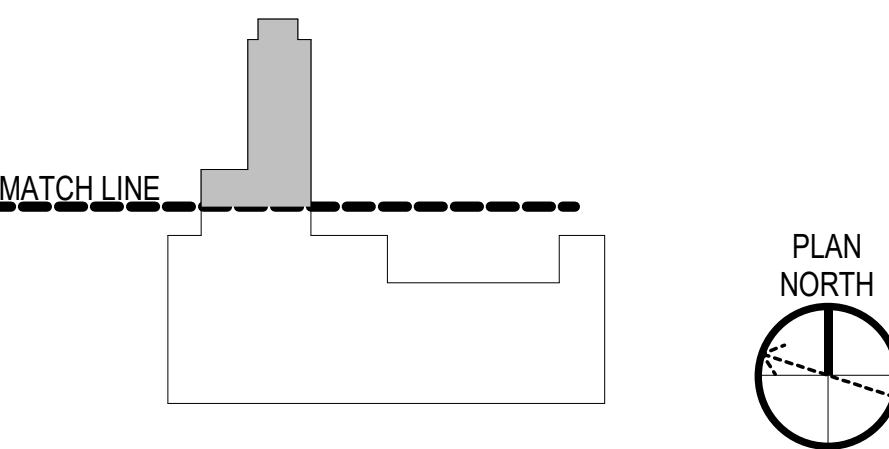

GRAPHIC SCALE(S)



SYN	DESCRIPTION	DATE	APP
	FINAL SUBMISSION	10/01/2025	RSH

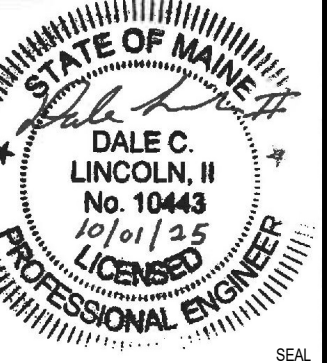

APPROVED
FOR COMMANDER NAVFAC

ACTIVITY

SATISFACTORY TO DATE

DESIGNER HRM

DRAWN BY BPD

CHECKED BY DCL

DESIGN MANAGER T. CARLETON

PROJECT MANAGER L. LYONS

HEADLINE S. RUCINSKI

FIRE PROTECTION

PORTSMOUTH NAVAL SHIPYARD - KITTEERY, ME

PORTSMOUTH NAVAL SHIPYARD

B60 REPAIRS

FIRST FLOOR MEZZANINE POWER PART PLAN - EAST

PROJECT NO. 1740579

NAV-FAC DRAWING NO.

SHEET 250 OF 282


EP103

DRAWING REVISION: 14 SEP 2023

D

C

B

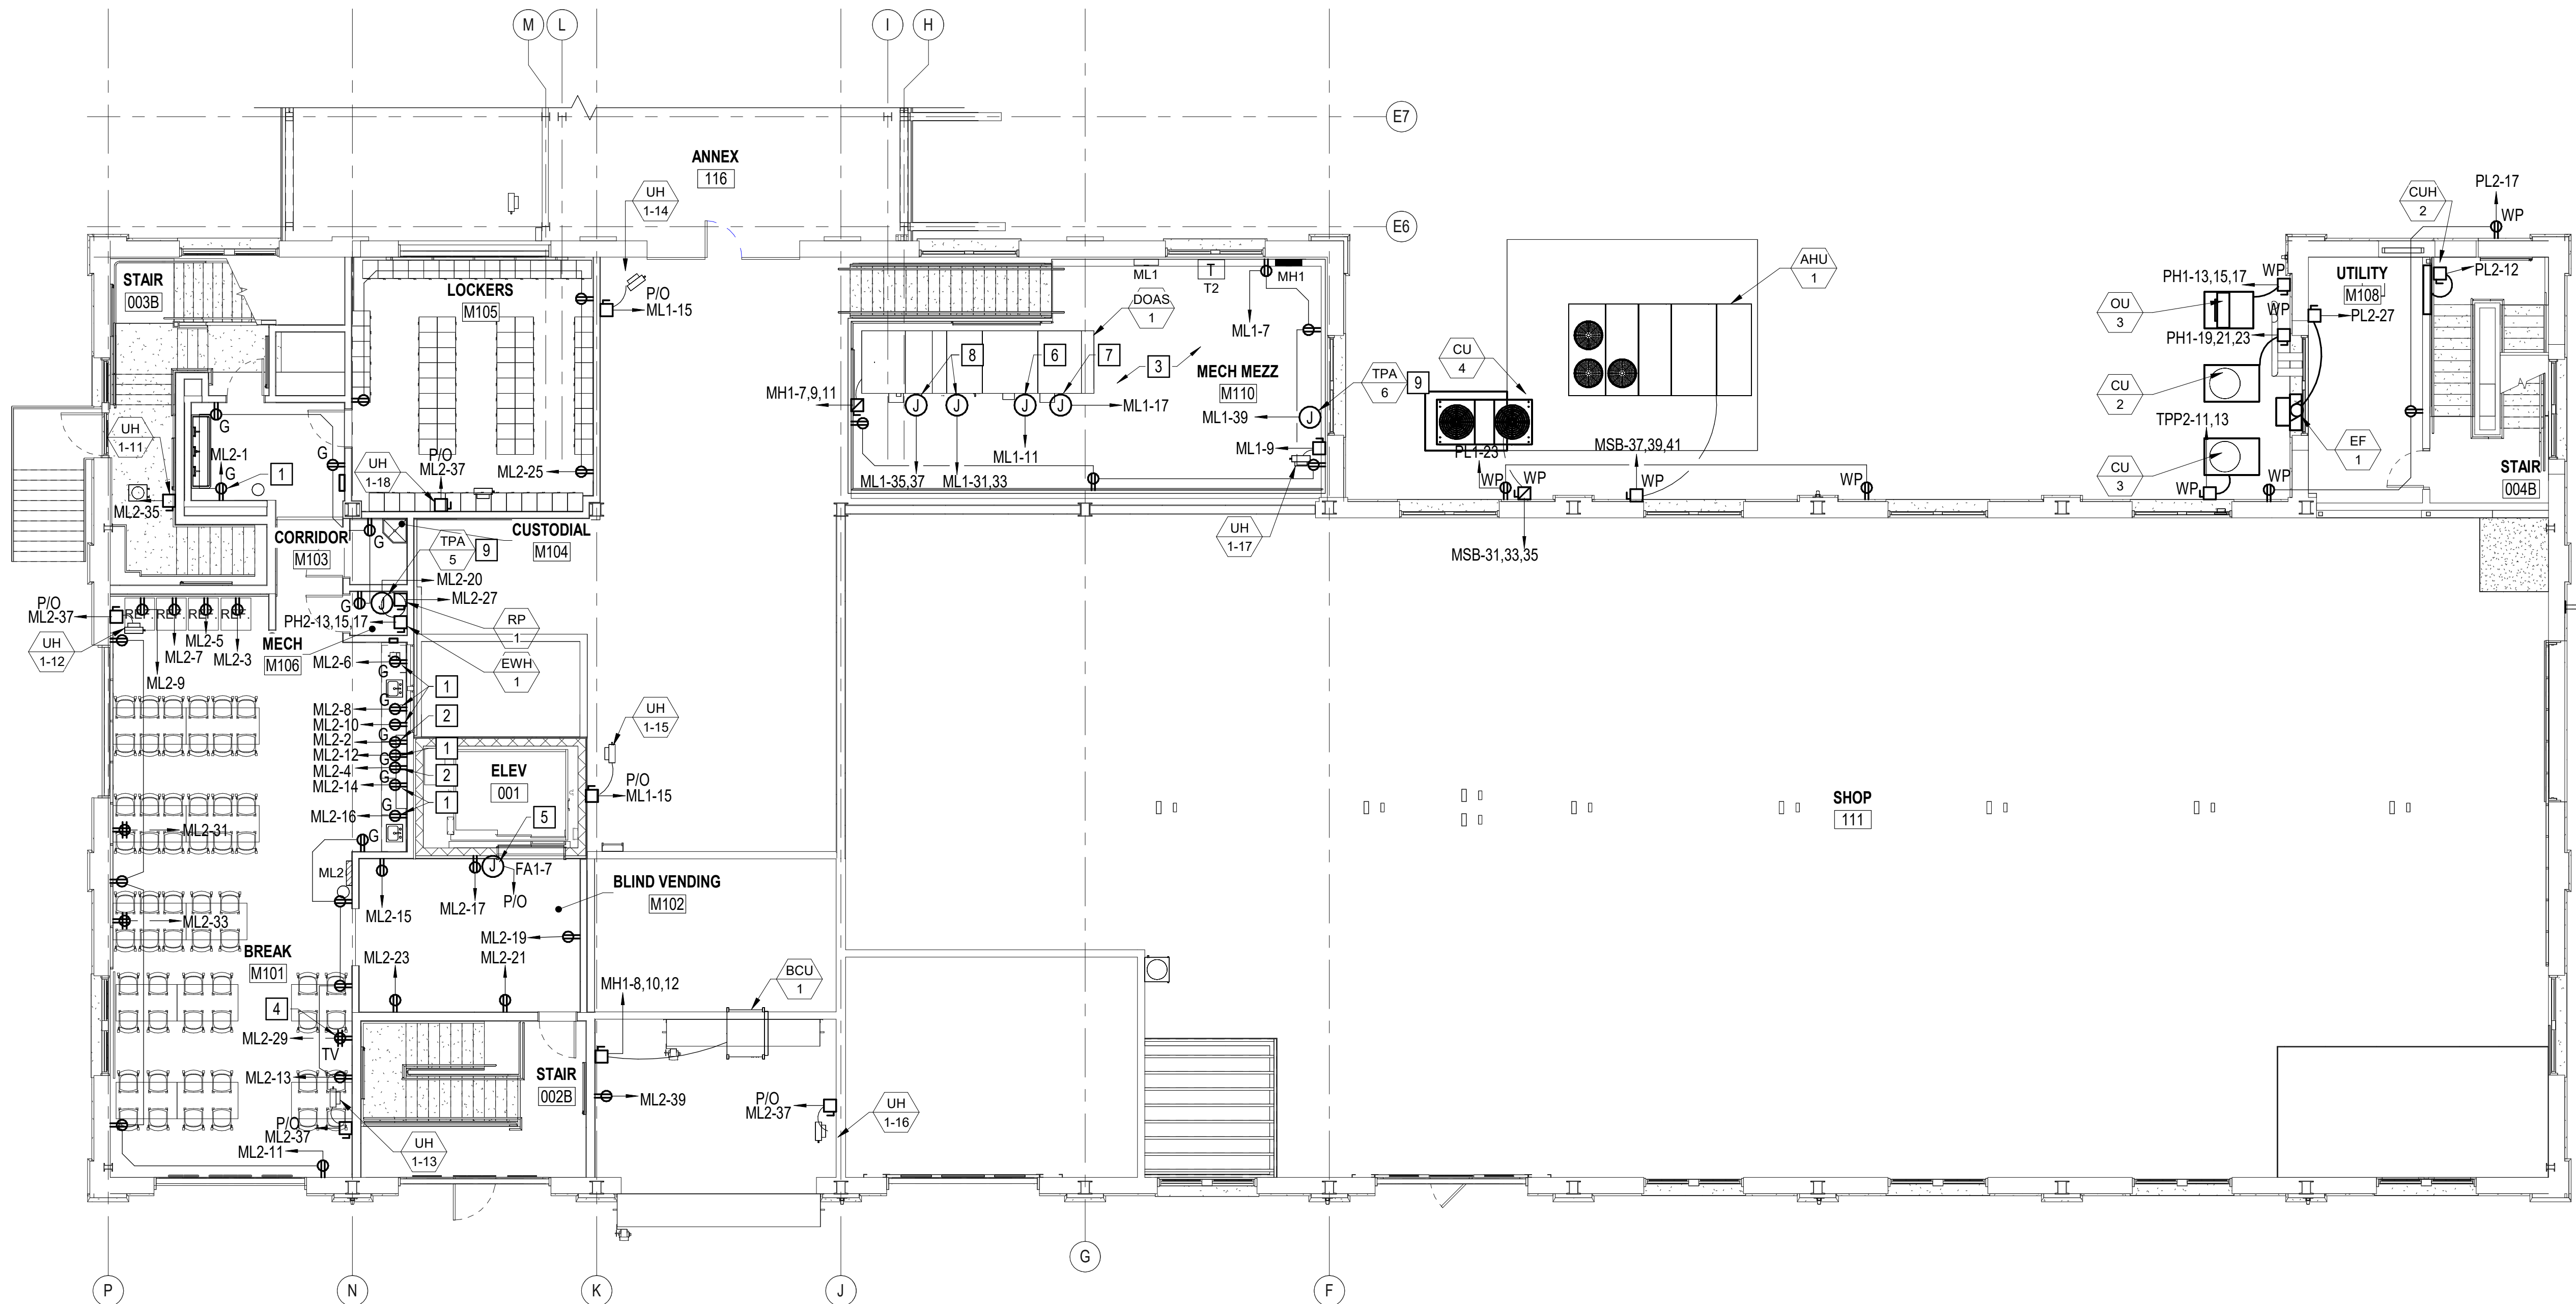

B1 FIRST FLOOR MEZZANINE POWER PLAN - WEST
SCALE: 1/8" = 1'-0"


GENERAL NOTES

1. REFER TO SHEETS EP503 AND EP504 FOR MECHANICAL, PLUMBING, AND MISCELLANEOUS EQUIPMENT WIRING SCHEDULE.
2. REFER TO SHEETS EP601 - EP604 FOR PANELBOARD SCHEDULES.
3. REFER TO SHEET EP501 FOR ONE-LINE DIAGRAM AND SCHEDULES.


KEYNOTES

- | | | | |
|---|---|--------------|---|
| <div>1</div> <div>2</div> <div>3</div> <div>4</div> <div>5</div> <div>6</div> <div>7</div> <div>8</div> | <div>INSTALL 4" ABOVE COUNTERTOP BACKSPLASH.</div> <div>INSTALL 4" ABOVE MICROWAVE SHELF. COORDINATE EXACT LOCATION WITH THE CONTRACTING OFFICER.</div> <div>PROVIDE STEEL SLOTTED STRUT SUPPORT FOR MOUNTING EQUIPMENT AND DEVICES ON THE MECHANICAL MEZZANINE.</div> <div>REFER TO DETAIL C1/ET502 FOR TV MONITOR AND AV INSTALLATION DETAIL.</div> <div>FOR ELEVATOR LOBBY 2 WAY COMMUNICATIONS SYSTEM. REFER TO DETAIL A3/ET501.</div> <div>FOR DOAS LIGHTS AND SWITCH. COORDINATE WITH THE MECHANICAL TRADE.</div> <div>FOR DOAS RECEPTACLE. COORDINATE WITH THE MECHANICAL TRADE.</div> <div>FOR DOAS LEV CONTROLLER. COORDINATE WITH THE MECHANICAL TRADE.</div> | <div>9</div> | <div>PROVIDE POWER TO THE TRAP PRIMER. COORDINATE EXACT LOCATION WITH THE PLUMBING TRADE.</div> |
|---|---|--------------|---|

KEY PLAN

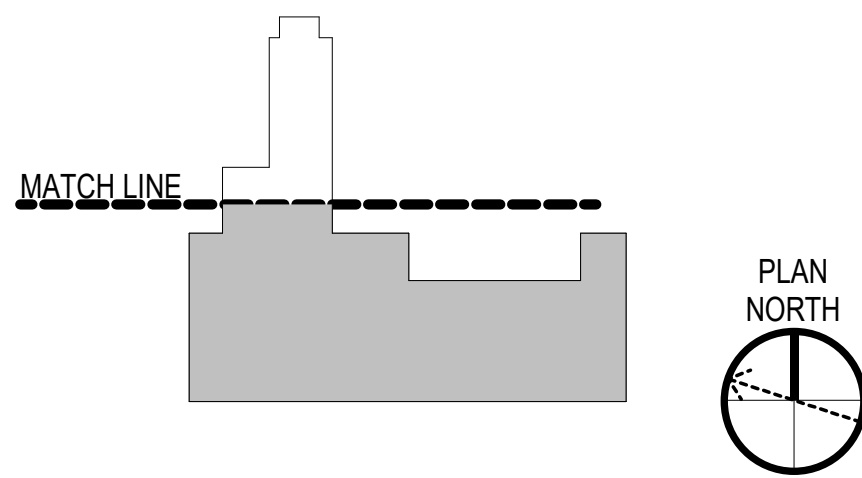

GRAPHIC SCALE(S)




D

C

B UNCLASSIFIED

A

SYMBOL	DESCRIPTION	DATE	APPROVED
	FINAL SUBMISSION	10/01/2025	RSH

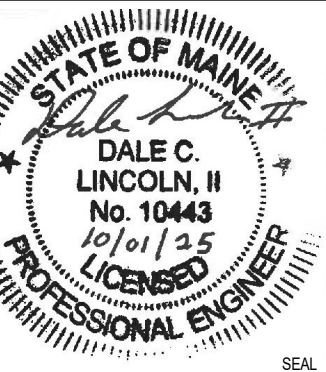

APPROVED	
FOR COMMANDER NAVFAC	
ACTIVITY	
SATISFACTORY TO DATE	
DESIGNER	HRM
DRAWN BY	BPD
CHECKED BY	DCL
DESIGN MANAGER	T. CARLETON
PROJECT MANAGER	L. LYONS
HEADLINE	
FIRE PROTECTION	S. RUCINSKI


NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND	NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - MID-ATLANTIC	PORTSMOUTH NAVAL SHIPYARD - KITTEERY, ME
DEPARTMENT OF THE NAVY	NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - MID-ATLANTIC	PORTSMOUTH NAVAL SHIPYARD
ROIC-CME	B60 REPAIRS	FIRST FLOOR MEZZANINE POWER PART PLAN - WEST

PROJECT NO.	1740579
NAVFAC DRAWING NO.	
SHEET	251 OF 282
EP104	




KEY PLAN


- | | |
|----|--|
| 15 | INSTALL ROLL SLITTER TRANSFORMER. REFER TO SHEET EP701.
COORDINATE EXACT LOCATION IN THE FIELD. |
| 16 | PROVIDE POWER TO THE TRAP PRIMER. COORDINATE EXACT
LOCATION WITH THE PLUMBING TRADE. |

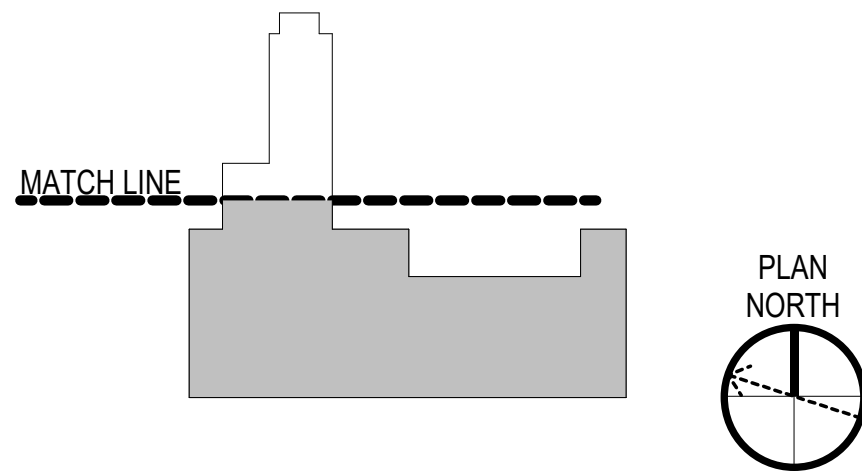

GRAPHIC SCALE(S)




10/1/2025 5:28:06 PM EP106
C:\Users\bdagle\Documents\22103.25_BLDG00_ELEC-V23_bdagle\QUXG8.rvt

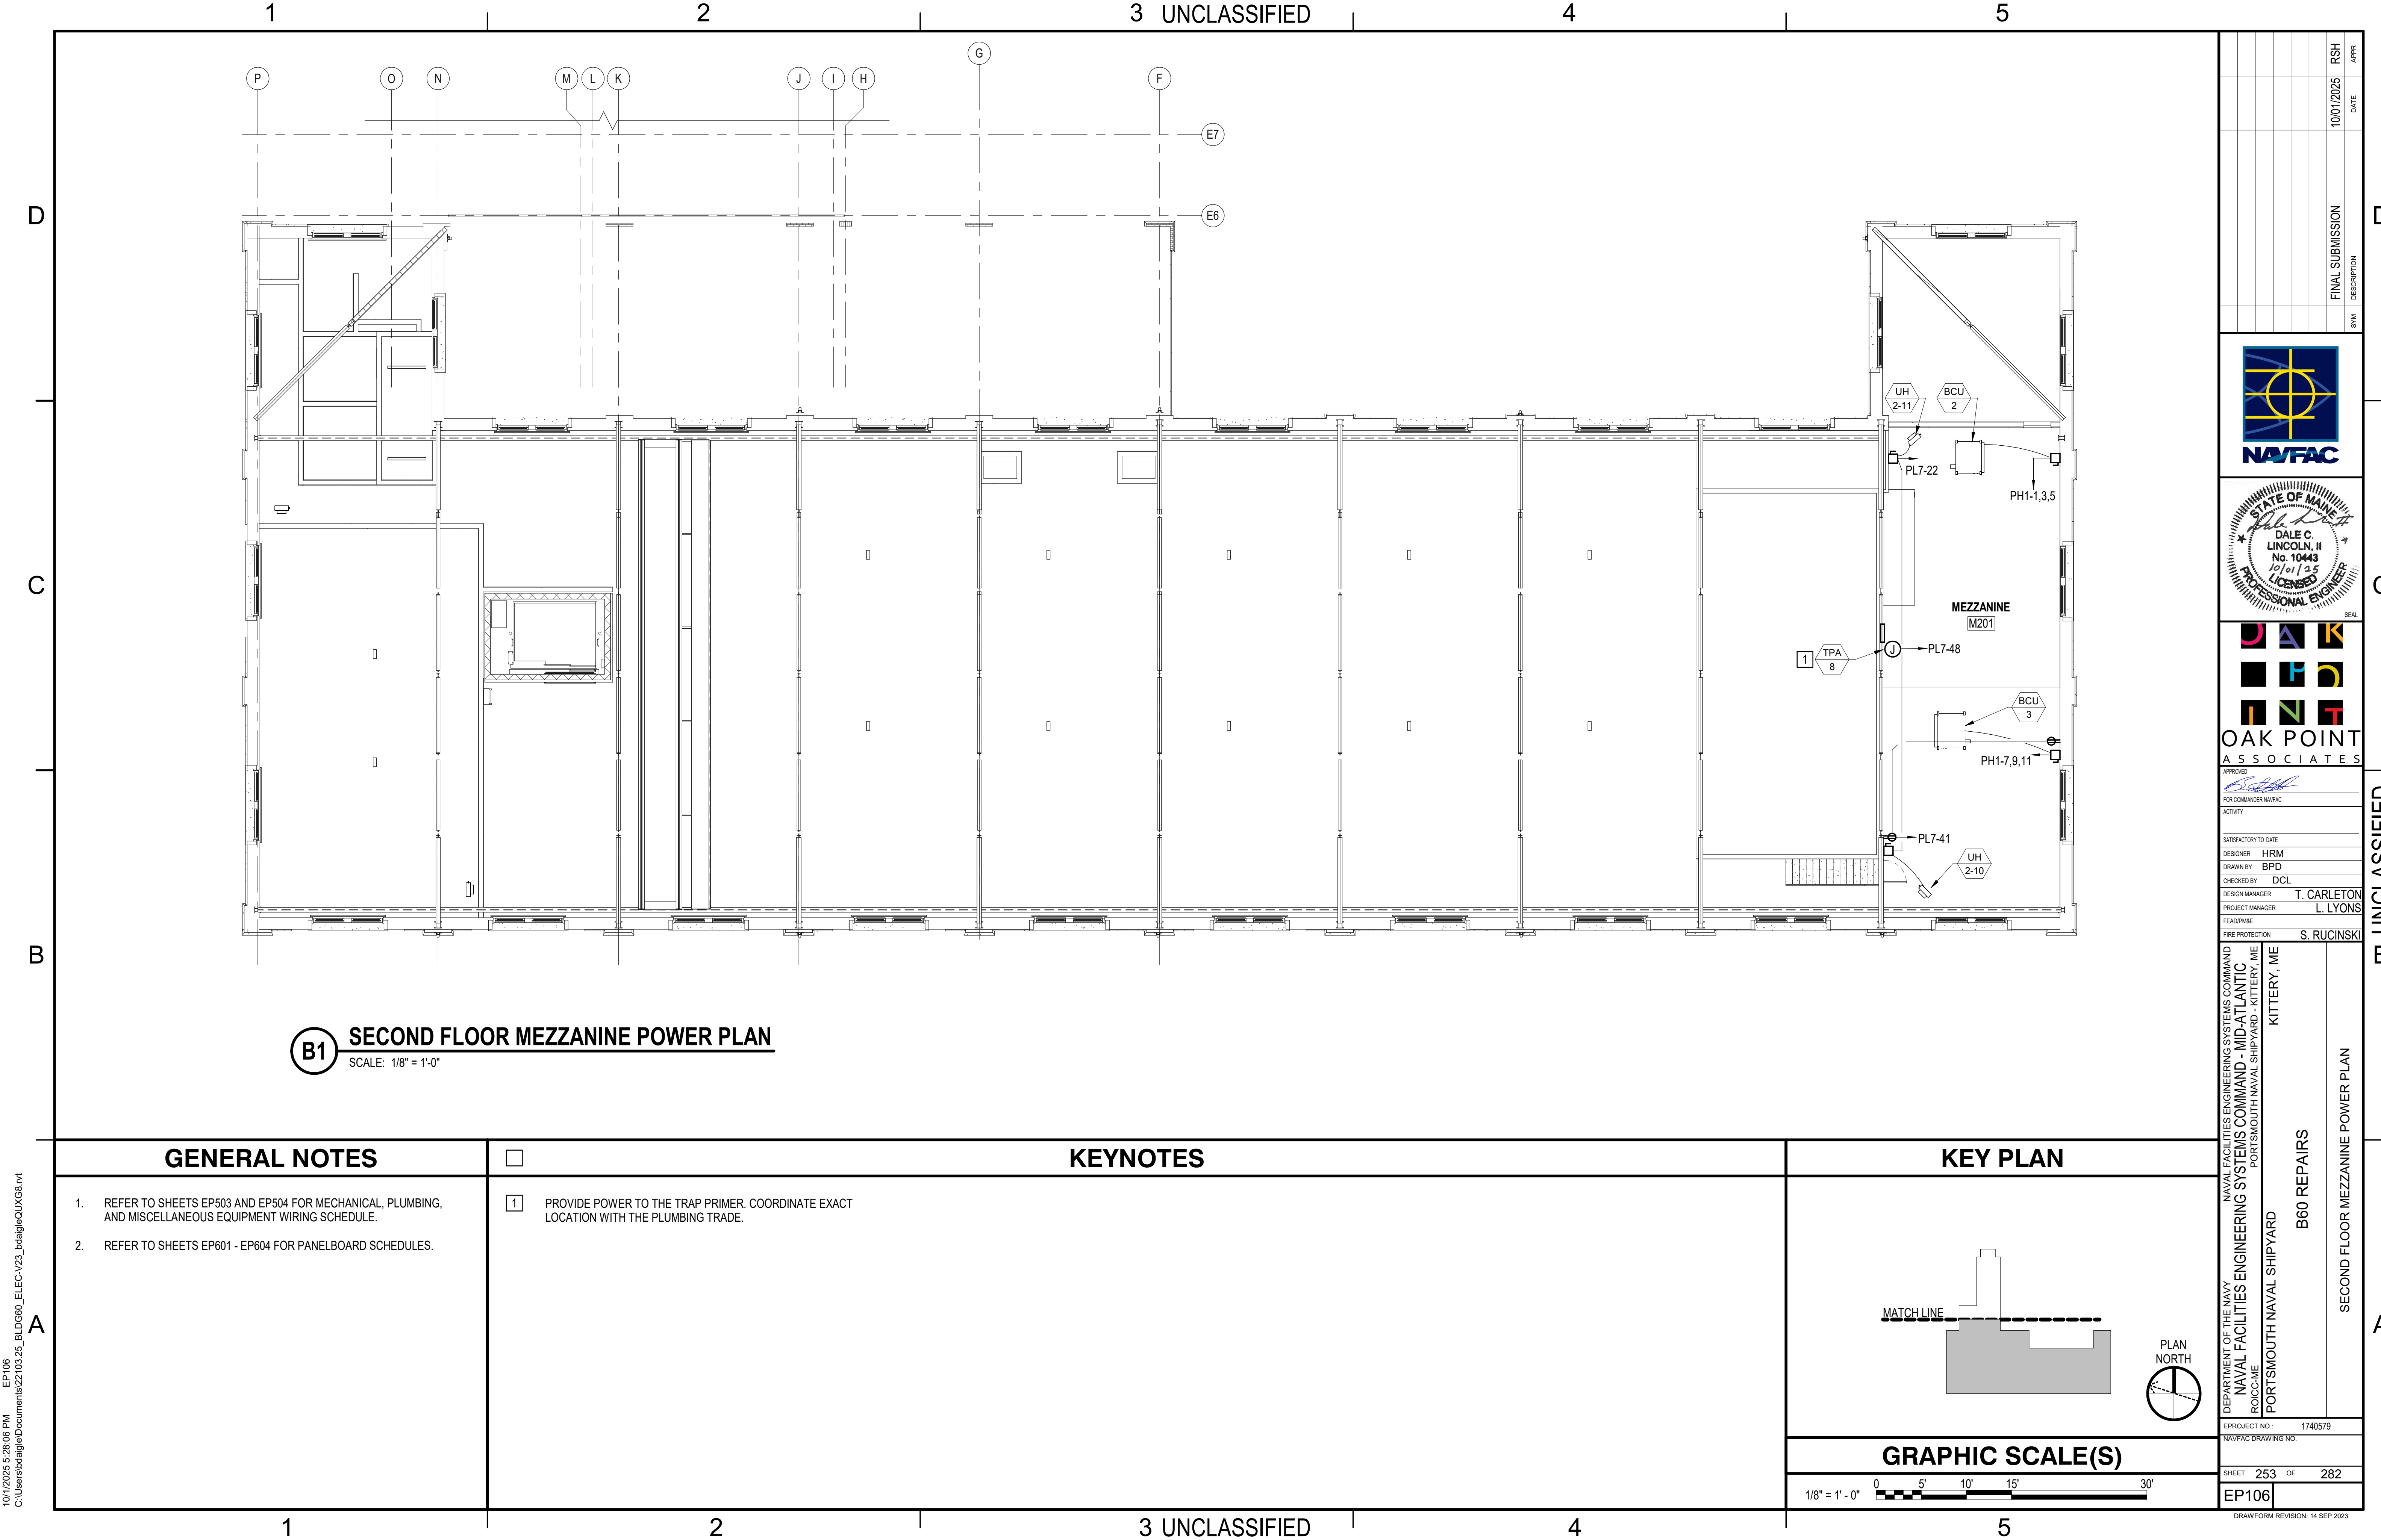

10/1/2025 5:28:06 PM EP106
C:\Users\bdagle\Documents\22103.25_BLDG00_ELEC-V23_bdagle\QUXG8.rvt

10/1/2025 5:28:10 PM EP107
C:\Users\bdagle\Documents\22103.25_BLDG00_ELEC-V23_bdaigle\QUXG8.rvt

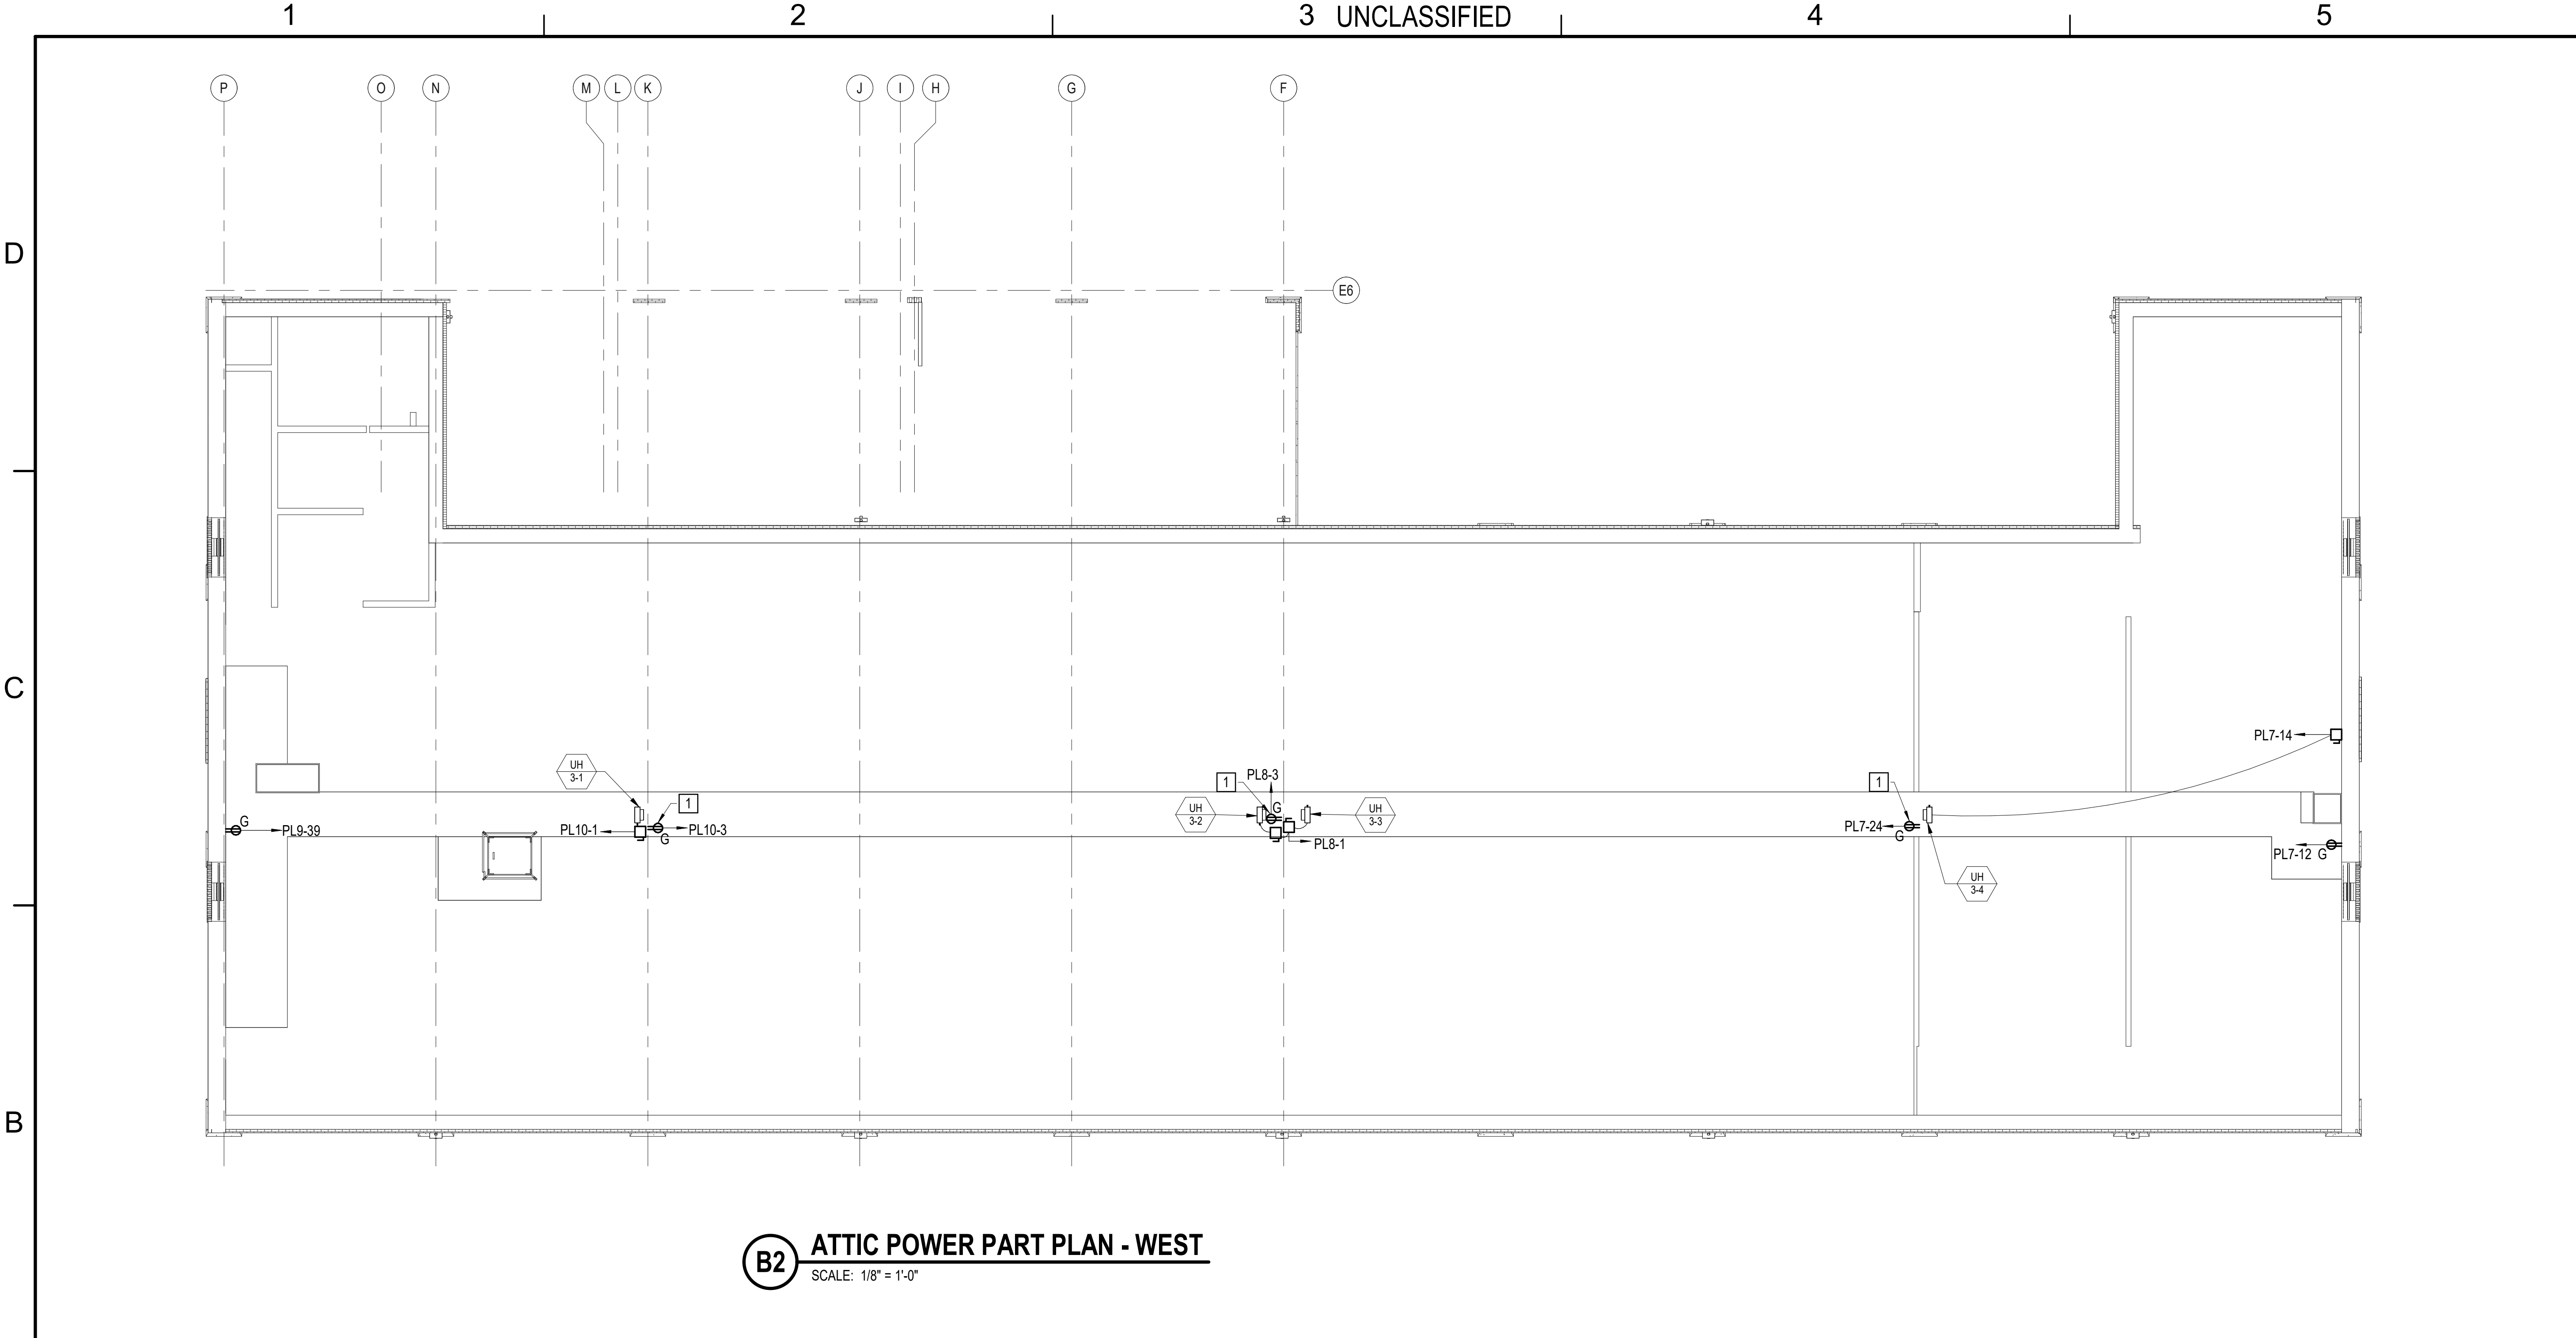

B2 ATTIC POWER PART PLAN - WEST
SCALE: 1/8" = 1'-0"


GENERAL NOTES

- REFER TO SHEETS EP503 AND EP504 FOR MECHANICAL, PLUMBING, AND MISCELLANEOUS EQUIPMENT WIRING SCHEDULE.
- REFER TO SHEETS EP601 - EP604 FOR PANELBOARD SCHEDULES.


KEYNOTES

- 1** [BASE BID]: PROVIDE RECEPTACLE. FOR BIDDING PURPOSES ASSUME PROVISION OF 20" STEEL SLOTTED SUPPORT FOR MOUNTING. [OPTION 3]: PROVIDE THE RECEPTACLE WITHIN 6' OF THE RADON FAN. PROVIDE LABEL, "RADON FAN". COORDINATE EXACT LOCATION AND MOUNTING WITH THE PLUMBING TRADE.

KEY PLAN

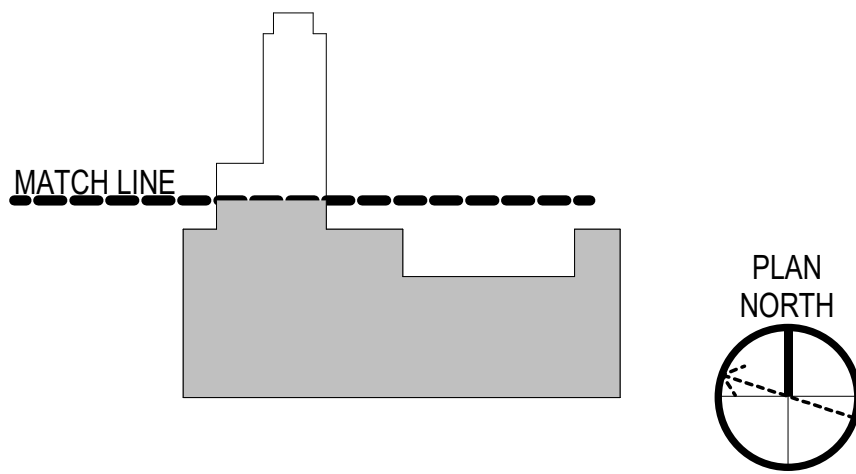

GRAPHIC SCALE(S)



RSH		APPR	
10/01/2025		DATE	
FINAL SUBMISSION		DESCRIPTION	
SYM		SYMBOL	

APPROVED

FOR COMMANDER NAVFAC

ACTIVITY

SATISFACTORY TO DATE

DESIGNER HRM

DRAWN BY BPD

CHECKED BY DCL

DESIGN MANAGER T. CARLETON

PROJECT MANAGER L. LYONS

FEAD/PNAME

FIRE PROTECTION S. RUCINSKI

DEPARTMENT OF THE NAVY

NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND

NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - MID-ATLANTIC

PORTSMOUTH NAVAL SHIPYARD - KITTERY, ME

PORTSMOUTH NAVAL SHIPYARD

B60 REPAIRS

ATTIC POWER PART PLAN - WEST

PROJECT NO. 1740579

NAV-FAC DRAWING NO.

SHEET 254 OF 282

EP107

DRAWING REVISION: 14 SEP 2023

10/1/2025 5:28:20 PM EP503
C:\Users\bdalgie\Documents\22103.25_BLDG00_ELEC-V23_bdaigieQUXG8.rvt

D

C

B

A

MECHANICAL, PLUMBING, AND MISCELLANEOUS EQUIPMENT WIRING SCHEDULE										
EQUIPMENT	SHEET #	VOLTS	PHASE	WATTS/ HP	FLA	SERVING PANELBOARD	WIRE AND CONDUIT SIZE	DISCONNECT	FUSE	NOTES
CU-4	EP104	480	3	-	28A	MSB	3#8, 1#10G, 3/4"C	60A, WP	40	-
AHU-1	EP104	480	3	10	67A	MSB	3#2, 1#8G, 1-1/4"C	100A, WP	-	-
DOAS-1	EP104	480	3	-	16.1A	MH1	3#10, 1#10G, 3/4"C	30A	25A	-
DOAS-1, LIGHTS	EP104	120	1	-	2.61A	ML1	2#12, 1#12G, 3/4"C	-	-	-
DOAS-1, RECEPTACLE	EP104	120	1	-	8A	ML1	2#12, 1#12G, 3/4"C	-	-	-
CU-1	EP105	480	3	-	7.5A	MH1	3#12, 1#12G, 3/4"C	30A, WP	-	-
CU-2	EP104	480	3	-	6.7A	PH1	3#12, 1#12G, 3/4"C	30A, WP	-	-
CU-3	EP104	480	3	-	7.5A	PH1	3#12, 1#12G, 3/4"C	30A, WP	-	-
EF-1	EP104	120	1	1/4HP	5.8A	PL2	2#12, 1#12G, 3/4"C	30A	-	-
IU-1	EP102	208	1	-	-		PER MANUFACTURERS REQUIREMENTS	30A	-	1
IU-2	EP102	208	1	-	-		PER MANUFACTURERS REQUIREMENTS	30A	-	1
IU-3	EP105	208	1	-	-		PER MANUFACTURERS REQUIREMENTS	30A	-	1
IU-4	EP102	208	1	-	-		PER MANUFACTURERS REQUIREMENTS	30A	-	1
OU-1	EP105	208	1	-	12A	PL6	2#10, 1#10G, 3/4"C	30A, WP	-	-
OU-2	EP105	208	1	-	12A	TPP1	2#10, 1#10G, 3/4"C	30A, WP	-	-
OU-3	EP104	208	1	-	12A	TPP2	2#10, 1#10G, 3/4"C	30A, WP	-	-
OU-4	EP105	208	1	-	16A	PL6	2#10, 1#10G, 3/4"C	30A, WP	-	-
BCU-1	EP104	480	3	-	3.3A	MH1	3#12, 1#12G, 3/4"C	30A	-	-
BCU-2	EP106	480	3	-	2.5A	PH1	3#12, 1#12G, 3/4"C	30A	-	-
BCU-3	EP106	480	3	-	2.5A	PH1	3#12, 1#12G, 3/4"C	30A	-	-
P-1A	EP102	480	3	7.5 HP	11A	MSB	3#12, 1#12G, 3/4"C	30A	-	-
P-1B	EP102	480	3	7.5 HP	11A	MSB	3#12, 1#12G, 3/4"C	30A	-	-
CR-1 (A)	EP102	480	3	3 HP	4.8A	MSB	3#12, 1#12G, 3/4"C	30A	-	-
CR-1 (B)	EP102	480	3	3 HP	4.8A	MSB	3#12, 1#12G, 3/4"C	30A	-	-
UH 1-1	EP103	120	1	1/12	3.2A	AL1	2#12, 1#12G, 3/4"C	-	-	2
UH 1-2	EP103	120	1	1/12	3.2A	AL1	2#12, 1#12G, 3/4"C	-	-	2
UH 1-3	EP103	120	1	1/12	3.2A	AL1	2#12, 1#12G, 3/4"C	-	-	2
UH 1-4	EP103	120	1	1/12	3.2A	AL1	2#12, 1#12G, 3/4"C	-	-	2
UH 1-5	EP103	120	1	1/12	3.2A	AL1	2#12, 1#12G, 3/4"C	-	-	2
UH 1-6	EP103	120	1	25W	0.2A	AL1	2#12, 1#12G, 3/4"C	-	-	2
UH 1-7	EP102	120	1	1/20	2.2A	PL4	2#12, 1#12G, 3/4"C	-	-	2
UH 1-8	EP102	120	1	25W	0.2A	PL4	2#12, 1#12G, 3/4"C	-	-	2
UH 1-9	EP102	120	1	25W	0.2A	PL1	2#12, 1#12G, 3/4"C	-	-	2
UH 1-10	EP102	120	1	25W	0.2A	PL2	2#12, 1#12G, 3/4"C	-	-	2
UH 1-11	EP104	120	1	1/8	4A	ML2	2#12, 1#12G, 3/4"C	-	-	2
UH 1-12	EP104	120	1	25W	0.2A	ML2	2#12, 1#12G, 3/4"C	-	-	2
UH 1-13	EP104	120	1	25W	0.2A	ML2	2#12, 1#12G, 3/4"C	-	-	2
UH 1-14	EP104	120	1	25W	0.2A	ML1	2#12, 1#12G, 3/4"C	-	-	2
UH 1-15	EP104	120	1	25W	0.2A	ML1	2#12, 1#12G, 3/4"C	-	-	2
UH 1-16	EP104	120	1	25W	0.2A	ML2	2#12, 1#12G, 3/4"C	-	-	2
UH 1-17	EP104	120	1	1/20	2.2A	ML1	2#12, 1#12G, 3/4"C	-	-	2
UH 1-18	EP104	120	1	25W	0.2A	ML2	2#12, 1#12G, 3/4"C	-	-	2
UH 1-19	EP103	120	1	1/20	2.2A	AL1	2#12, 1#12G, 3/4"C	-	-	2
UH 2-1	EP105	120	1	25W	0.2A	PL10	2#12, 1#12G, 3/4"C	-	-	2
UH 2-2	EP105	120	1	25W	0.2A	PL10	2#12, 1#12G, 3/4"C	-	-	2
UH 2-3	EP105	120	1	25W	0.2A	PL10	2#12, 1#12G, 3/4"C	-	-	2
UH 2-4	EP105	120	1	1/20	2.2A	PL9	2#12, 1#12G, 3/4"C	-	-	2
UH 2-5	EP105	120	1	1/20	2.2A	PL9	2#12, 1#12G, 3/4"C	-	-	2
UH 2-6	EP105	120	1	1/20	2.2A	PL8	2#12, 1#12G, 3/4"C	-	-	2
UH 2-7	EP105	120	1	1/20	2.2A	PL8	2#12, 1#12G, 3/4"C	-	-	2
UH 2-8	EP105	120	1	1/20	2.2A	PL8	2#12, 1#12G, 3/4"C	-	-	2
UH 2-9	EP105	120	1	1/20	2.2A	PL8	2#12, 1#12G, 3/4"C	-	-	2
UH 2-10	EP106	120	1	25W	0.2A	PL7	2#12, 1#12G, 3/4"C	-	-	2
UH 2-11	EP106	120	1	25W	0.2A	PL7	2#12, 1#12G, 3/4"C	-	-	2
UH 3-1	EP107	120	1	1/20	2.2A	PL10	2#12, 1#12G, 3/4"C	-	-	2
UH 3-2	EP107	120	1	1/20	2.2A	PL8	2#12, 1#12G, 3/4"C	-	-	2
UH 3-3	EP107	120	1	1/20	2.2A	PL8	2#12, 1#12G, 3/4"C	-	-	2
UH 3-4	EP107	120	1	1/20	2.2A	PL7	2#12, 1#12G, 3/4"C	-	-	2
TF-1	EP102	120	1	-	4A	MDP	2#12, 1#12G, 3/4"C	30A	-	2


(SCHEDULE CONTINUED ON SHEET EP504)

MECHANICAL, PLUMBING, AND MISCELLANEOUS EQUIPMENT WIRING SCHEDULE NOTES:

1. INDOOR UNIT IS POWERED BY THE OUTDOOR UNIT.
2. PROVIDE MOTOR RATED TOGGLE DISCONNECT SWITCH.
3. [OPTION 3] PROVIDE.

GENERAL NOTES

1. PROVIDE DISCONNECT AND STARTERS AS INDICATED IN THE SCHEDULE AND ON THE PLANS.
2. COORDINATE DISCONNECT AND STARTER LOCATIONS IN THE FIELD TO PROVIDE CLEARANCES REQUIRED BY NEC. PROVIDE MIN 30 INCHES WIDE, 36 INCHES DEEP (120/208V) OR 42 INCHES DEEP (480V), AND 6 FOOT-7 INCHES HIGH WORKER CLEARANCE. REFER TO NEC 110.26.
3. PROVIDE STARTERS, CONTACTORS, WIRING, AND ACCESSORIES AS REQUIRED TO ACHIEVE OPERATION AND SEQUENCE OF OPERATION PER THE CONTRACT DOCUMENTS.
4. PROVIDE BRANCH CIRCUITS INDICATED IN THE SCHEDULES AND ON THE PLANS.
5. PROVIDE FUSES. COORDINATE FINAL SIZES WITH EQUIPMENT PROVIDED.
6. COORDINATE WITH THE HVAC CONTROLS INSTALLER AND PROVIDE CONDUIT FOR CONTROLS WIRING.
7. PROVIDE FULL SIZE LIQUID TIGHT METAL FLEXIBLE CONDUIT ONLY FOR FINAL CONNECTION FROM STARTERS AND VFD'S TO MOTORS AND FROM DISCONNECTS TO VIBRATING EQUIPMENT AND MOTORS. MAXIMUM LENGTH OF LIQUID TIGHT METAL FLEXIBLE CONDUIT TO BE 6'.

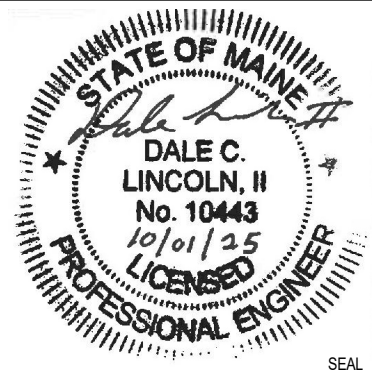

OAK POINT ASSOCIATES

APPROVED

FOR COMMANDER NAVFAC

ACTIVITY

SATISFACTORY TO DATE

DESIGNER HRM

DRAWN BY BPD

CHECKED BY DCL

DESIGN MANAGER T. CARLETON

PROJECT MANAGER L. LYONS

FEADNAME

FIRE PROTECTION S. RUCINSKI

DEPARTMENT OF THE NAVY

NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND

NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - MID-ATLANTIC

ROICC-ME

PORTSMOUTH NAVAL SHIPYARD - KITTEERY, ME

B60 REPAIRS

MECHANICAL, PLUMBING, AND MISCELLANEOUS EQUIPMENT WIRING SCHEDULE

PROJECT NO. 1740579

NAVFAC DRAWING NO.

SHEET 257 OF 282

EP503

DRAWING REVISION: 14 SEP 2023

10/1/2025 5:28:24 PM EP504
C:\Users\bdalgie\Documents\22103.25_BLDG00_ELEC-V23_bdaigie\OUXG8.rvt

D

C

B

A


MECHANICAL, PLUMBING, AND MISCELLANEOUS EQUIPMENT WIRING SCHEDULE (CONTINUATION)										
EQUIPMENT	SHEET #	VOLTS	PHASE	WATTS/ HP	FLA	SERVING PANELBOARD	WIRE AND CONDUIT SIZE	DISCONNECT	FUSE	NOTES
CUH-1	EP102	120	1	1/15 HP	3A	PL5	2#12, 1#12G, 3/4"C	-	-	2
CUH-2	EP104	120	1	1/15 HP	3A	PL2	2#12, 1#12G, 3/4"C	-	-	2
CUH-3	EP105	120	1	1/15 HP	3A	PL9	2#12, 1#12G, 3/4"C	-	-	2
CUH-4	EP105	120	1	1/15 HP	3A	PL7	2#12, 1#12G, 3/4"C	-	-	2
EUH 1-1	EP102	208	1	3KW	18A	MDP	2 #10, 1 #10G, 3/4"C	30A	-	-
EB-1	EP102	208	1	1.5KW	-	TPP1	2 #12, 1 #12G, 3/4"C	30A	-	-
EB-2	EP105	208	1	2KW	-	TPP2	2 #12, 1 #12G, 3/4"C	30A	-	-
EWH-1	EP104	480	3	12KW	18A	PH2	3 #10, 1 #10G, 3/4"C	30A	-	-
EWH-2	EP102	120	1	2KW	16.7A	PL4	2 #10, 1 #10G, 3/4"C	30A	-	-
EWH-3	EP105	120	1	1.44KW	12A	PL7	2 #12, 1 #12G, 3/4"C	GFCI REC	-	-
EWVC-1	VARIOUS	120	1	-	-	VARIOUS	2 #12, 1 #12G, 3/4"C	GFCI REC	-	-
RP-1	EP104	120	1	1/8 HP	4A	ML2	2#12, 1#12G, 3/4"C	-	-	2
SP-1	EP102	120	1	4/10 HP	-	PL6	2#12, 1#12G, 3/4"C	SIMPLEX WP REC	-	-
TPA-1	EP102	120	1	-	<1	PL6	2#12, 1#12G, 3/4"C	-	-	-
TPA-2	EP102	120	1	-	<1	PL4	2#12, 1#12G, 3/4"C	-	-	-
TPA-3	EP102	120	1	-	<1	PL2	2#12, 1#12G, 3/4"C	-	-	-
TPA-4	EP103	120	1	-	<1	AL1	2#12, 1#12G, 3/4"C	-	-	-
TPA-5	EP104	120	1	-	<1	ML2	2#12, 1#12G, 3/4"C	-	-	-
TPA-6	EP104	120	1	-	<1	ML1	2#12, 1#12G, 3/4"C	-	-	-
TPA-7	EP105	120	1	-	<1	PL9	2#12, 1#12G, 3/4"C	-	-	-
TPA-8	EP106	120	1	-	<1	PL7	2#12, 1#12G, 3/4"C	-	-	-
RF-1	EP107	120	1	175W	-	VARIOUS	2#12, 1#12G, 3/4"C	RECEPTACLE	-	3
OVERHEAD DOOR, EXTERIOR	EP102	208	3	5HP	17A	PL4	3 #8, 1 #10G, 3/4"C	60A	-	-
OVERHEAD DOOR, INTERIOR	EP102	208	3	5HP	17A	PL4	3 #8, 1 #10G, 3/4"C	60A	-	-
ELEVATOR	EP102	480	3	60HP	76.9A	MSB	3 #2/0, 1 #6G, 1-1/2"C	200A	100A	4
EXISTING BRIDGE CRANE, 2ND FLR	EP105	480	3	-	24A	PH2	3 #10, 1 #10G, 3/4"C	30A	-	-
EXISTING TRAILER 2	EP101,ES101 EP501	480	3	-	54A	AH1	REFER TO EP501	EXTERIOR REC, EXIST	-	-
EXISTING TRAILER 1	ED102,ES101 EP102	480	3	-	-	MSB	REFER TO EP501	EXIST DISCONNECT & TRANSFORMER	-	-

MECHANICAL, PLUMBING, AND MISCELLANEOUS EQUIPMENT WIRING SCHEDULE NOTES:

1. INDOOR UNIT IS POWERED BY THE OUTDOOR UNIT.
2. PROVIDE MOTOR RATED TOGGLE DISCONNECT SWITCH.
3. [OPTION 3] PROVIDE.
4. PROVIDE SHUNT TRIP DISCONNECT SWITCH WITH TYPE J FUSES. COORDINATE EXACT SIZE WITH THE ELEVATOR MANUFACTURER.

GENERAL NOTES

1. PROVIDE DISCONNECT AND STARTERS AS INDICATED IN THE SCHEDULE AND ON THE PLANS.
2. COORDINATE DISCONNECT AND STARTER LOCATIONS IN THE FIELD TO PROVIDE CLEARANCES REQUIRED BY NEC. PROVIDE MIN 30 INCHES WIDE, 36 INCHES DEEP (120/208V) OR 42 INCHES DEEP (480V), AND 6 FOOT-7 INCHES HIGH WORKER CLEARANCE. REFER TO NEC 110.26.
3. PROVIDE STARTERS, CONTACTORS, WIRING, AND ACCESSORIES AS REQUIRED TO ACHIEVE OPERATION AND SEQUENCE OF OPERATION PER THE CONTRACT DOCUMENTS.
4. PROVIDE BRANCH CIRCUITS INDICATED IN THE SCHEDULES AND ON THE PLANS.
5. PROVIDE FUSES. COORDINATE FINAL SIZES WITH EQUIPMENT PROVIDED.
6. COORDINATE WITH THE HVAC CONTROLS INSTALLER AND PROVIDE CONDUIT FOR CONTROLS WIRING.
7. PROVIDE FULL SIZE LIQUID TIGHT METAL FLEXIBLE CONDUIT ONLY FOR FINAL CONNECTION FROM STARTERS AND VFD'S TO MOTORS AND FROM DISCONNECTS TO VIBRATING EQUIPMENT. MAXIMUM LENGTH OF LIQUID TIGHT METAL FLEXIBLE CONDUIT TO BE 6'.

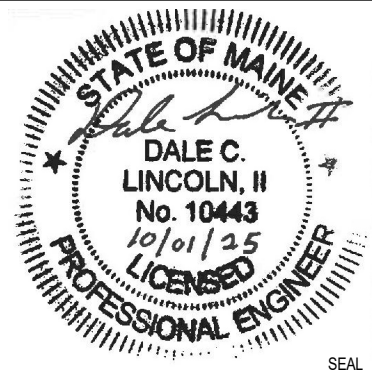

OAK POINT ASSOCIATES

APPROVED
[Signature]
FOR COMMANDER NAVFAC

ACTIVITY

SATISFACTORY TO DATE

DESIGNER HRM

DRAWN BY BPD

CHECKED BY DCL

DESIGN MANAGER T. CARLETON

PROJECT MANAGER L. LYONS

FEADIPAME

FIRE PROTECTION S. RUCINSKI

NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - MID-ATLANTIC
PORTSMOUTH NAVAL SHIPYARD - KITTERY, ME

PORTSMOUTH NAVAL SHIPYARD
B60 REPAIRS

MECHANICAL, PLUMBING, AND MISCELLANEOUS EQUIPMENT SCHEDULE
CONTINUATION

PROJECT NO. 1740579

NAVFAC DRAWING NO.

SHEET 258 OF 282

EP504


DRAWING REVISION: 14 SEP 2023

D

C

B

A

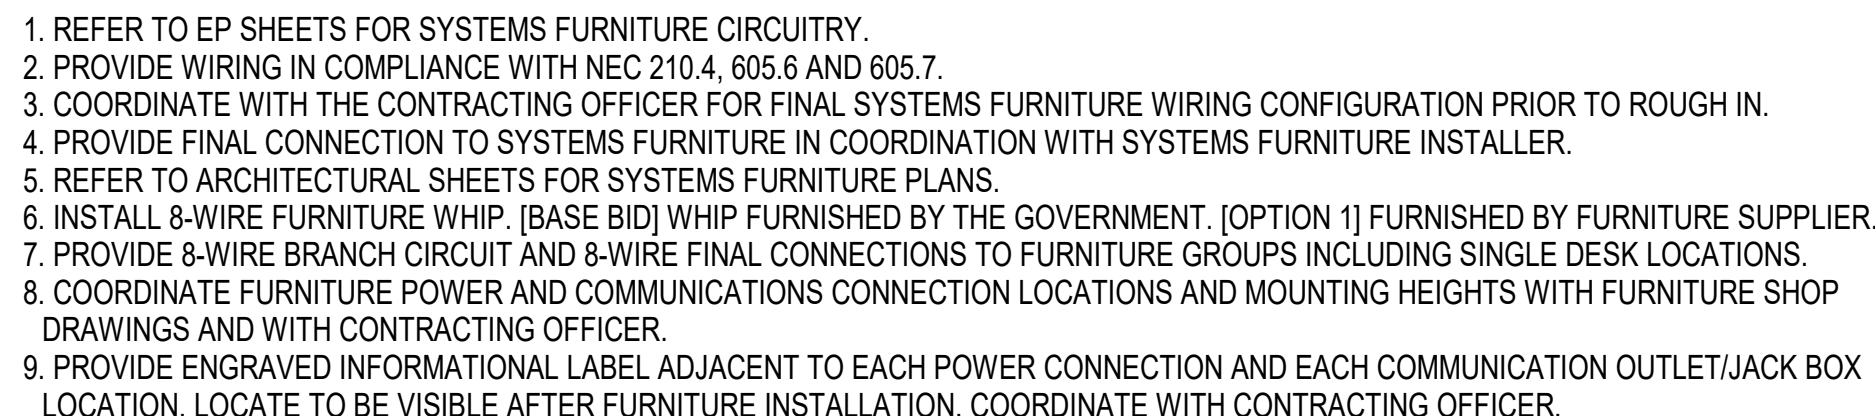


EP105



1. PROVIDE LOCATIONS IN TRAINING ROOM IN COMPLIANCE WITH NEC 210.65. FIELD VERIFY EXACT LOCATIONS. COORDINATE LOCATION TO AVOID EXISTING STRUCTURAL FRAMING, PIPING, DUCTWORK, CONDUITS, AND LIGHTING FIXTURES BELOW. PERFORM GROUND PENETRATING RADAR INVESTIGATIONS BEFORE CORE DRILLING TO AVOID CUTTING EXISTING REBAR. INSTALL POKE THROUGH BETWEEN EXISTING SLAB REINFORCING. NOTIFY CONTRACTING OFFICER OF CONCRETE REINFORCING OBSTRUCTIONS.
2. PROVIDE WITH FLUSH/FLAT STEEL COVER.
3. PAINT EXPOSED CONDUIT TO MATCH THE ADJACENT SURFACE.
4. ARRANGE ORIENTATION SO CONDUITS BELOW DO NOT CROSS OVER EACH OTHER.
5. PROVIDE TWO DUPLEX RECEPTACLES.
6. COVER PLATE COLOR TO BE SELECTED BY ARCHITECT FROM MANUFACTURERS COLOR OPTIONS.
7. CONFIRM HOLE SIZE THROUGH DECK WITH POKE THROUGH MANUFACTURER. PROVIDE CORE DRILLED HOLE THROUGH EXISTING FLOOR. FOR BIDDING PURPOSES, ASSUME 8-INCH DIAMETER ROUND CORE DRILL HOLE FOR COMBINATION POWER AND COMMUNICATIONS.
8. COORDINATE WITH THE STRUCTURAL TRADE FOR SUPPLEMENTARY FRAMING AND SUPPORTS.
9. PROVIDE POKE THROUGH DEVICE ASSEMBLY WITH MINIMUM 2-HOUR FIRE RATING.
10. PROVIDE ENGRAVED INFORMATIONAL SIGN ADJACENT TO POKE THROUGH. IDENTIFY ROOM ABOVE, POKE THROUGH DEVICE NUMBER, CIRCUIT BREAKER NUMBER, AND SERVICES WITHIN POKE THROUGH. COORDINATE LOCATION WITH THE CONTRACTING OFFICER.
11. PROVIDE DUST AND WATER PROTECTION FOR AREA BELOW FOR CORE DRILLING WORK.
12. PROVIDED DIVIDED COMPARTMENTS FOR POWER AND COMMUNICATIONS.

EP105, ET105

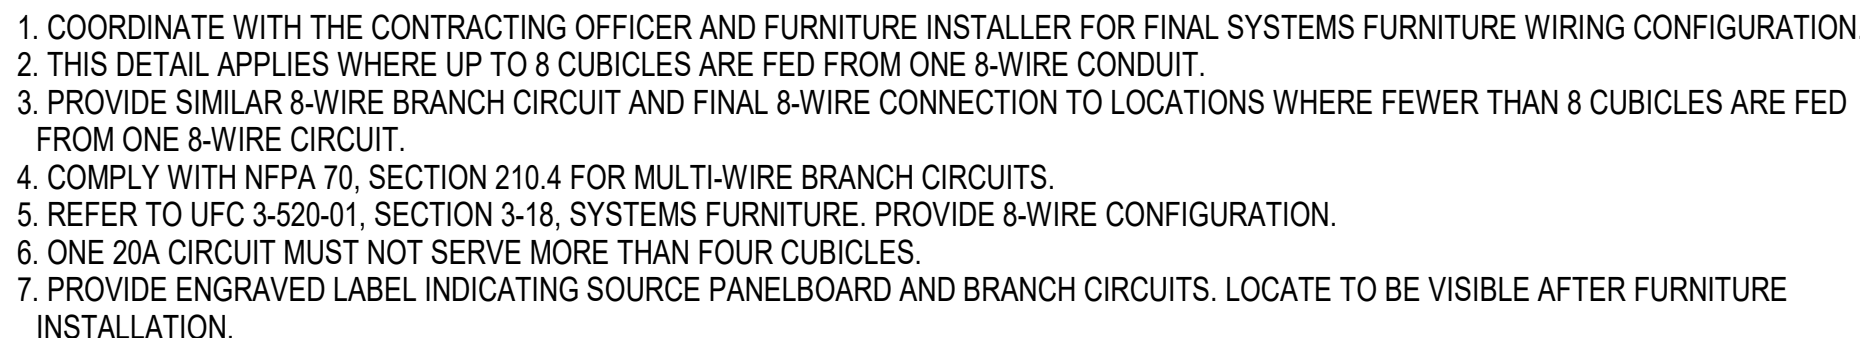

FP105 FP504

KEYNOTES

[illegible]

The image contains two distinct professional credentials. At the top is the NAVFAC logo, which consists of a blue square with a yellow circle and crosshairs, and the word "NAVFAC" in blue capital letters below it. Below the logo is a circular professional engineer seal for the State of Maine. The seal features the text "STATE OF MAINE" at the top, "DALE C. LINCOLN, II" in the center, "No. 10443" below the name, and "10/01/25" for the expiration date. The words "LICENSED" and "PROFESSIONAL ENGINEER" are written along the bottom inner edge of the seal. A signature is written across the seal, and two small stars are positioned on the left and right sides.

OAK POINT
ASSOCIATES

UNCLASSIFIED

PANEL PL1 SCHEDULE													LOCATION: STORAGE 109	
MLO RATING 250 A		208/120 Wye VOLTS			3PH, 4W, SN, 60HZ			MIN.		22KAIC SURFACE				
CKT NO.	LOAD DESCRIPTION	BKR TRIP	A	B	C	A	B	C	BKR TRIP	LOAD DESCRIPTION	CKT NO.			
1	RF HEAT SEALER FFF	100	60.0 A			60.0 A			100	RF HEAT SEALER MWB	2			
3							60.0 A				4			
5					60.0 A			60.0 A				6		
7	RF HEAT SEALER CFY	100	60.0 A			1.7 A			20	LTG - STORAGE 109	8			
9						0.0 A		20	SPARE	10				
11					60.0 A		0.0 A		20	SPARE	12			
13	REC -STORAGE 109	20	7.5 A			0.0 A			20	SPARE	14			
15	REC - AT RF HEAT SEALERS CFY & MWB	20		3.0 A			0.0 A		20	SPARE	16			
17	SPARE	20			0.0 A			0.0 A	20	SPARE	18			
19	SPARE	20	0.0 A			0.0 A			20	SPARE	20			
21	SPARE	20		0.0 A			0.0 A		20	SPARE	22			
23	REC - EXTERIOR	20			3.0 A			0.0 A	20	SPARE	24			
25	REC - SHOP 111 NORTH	20	7.5 A			0.0 A			20	SPARE	26			
27	UH-1-9 (25W)	15		0.2 A			0.0 A		20	SPARE	28			
29	SPARE	20			0.0 A			0.0 A	20	SPARE	30			
31	SPARE	20	0.0 A			0.0 A			15	SPARE	32			
33	SPARE	20		0.0 A			0.0 A		15	SPARE	34			
35	SPARE	20			0.0 A			0.0 A	15	SPARE	36			
37	SPACE	--	--			--			--	SPACE	38			
39	SPACE	--	--	--		--			--	SPACE	40			
41	SPACE	--	--	--	--	--	--	--	--	SPACE	42			
TOTAL CONNECTED AMPS:			A: 197.1		B: 183.6		C: 179.9							

PANEL PL3 SCHEDULE													LOCATION: ELECTRICAL 114		
MLO RATING		400 A		208/120 Wye VOLTS			3PH, 4W, SN, 60HZ			MIN.		42KAIC SURFACE			
CKT NO.	LOAD DESCRIPTION			BKR TRIP	A	B	C	A	B	C	BKR TRIP	LOAD DESCRIPTION		CKT NO.	
1	RF HEAT SEALER XXX			100	60.0 A			3.0 A			20	REC - CORD REEL 1		2	
3							60.0 A			3.0 A		20	REC - CORD REEL 2		4
5								60.0 A			3.0 A		20	REC - CORD REEL 3	
7	RF HEAT SEALER XXX			100	60.0 A			3.0 A			20	REC - CORD REEL 4		8	
9							60.0 A			3.0 A		20	REC - CORD REEL 5		10
11								60.0 A			3.0 A		20	REC - CORD REEL 6	
13	REC - AT PANEL PL3 AND RF HEAT...			20	6.0 A			3.0 A			20	REC - CORD REEL 7		14	
15	REC - AT RAMP & RF HEAT SEALER - 2			20		3.0 A			3.0 A		20	REC - CORD REEL 8		16	
17	ELECTRIC VEHICLE CHARGER 1			40			32.0 A			7.1 A	20	LTG - SHOP 111 - 1		18	
19					32.0 A			9.2 A			20	LTG - SHOP 111 - 2		20	
21	ELECTRIC VEHICLE CHARGER 2			40			32.0 A			9.2 A	20	LTG - SHOP 111 - 3		22	
23							32.0 A			10.2 A	20	LTG - SHOP 111 - 4		24	
25	REC - POLYBAG SEALER			20	12.0 A			9.2 A			20	LTG - SHOP 111 - 5		26	
27	SPARE			20		0.0 A			10.2 A		20	LTG - SHOP 111 - 6		28	
29	SPARE			20			0.0 A			7.1 A	20	LTG - SHOP 111 - 7		30	
31	SPARE			20	0.0 A			4.1 A			20	LTG - SHOP 111 VIA EMERGENCY INVERTER		32	
33	SPARE			20		0.0 A			0.0 A		20	SPARE		34	
35	REC - CORD REEL 9			20			3.0 A			0.0 A	20	SPARE		36	
37	SPARE			20	0.0 A			0.0 A						38	
39	SPARE			20		0.0 A			0.0 A		30	SPD		40	
41	SPARE			20			0.0 A		0.0 A					42	
TOTAL CONNECTED AMPS:					A: 199.8		B: 179.0		C: 211.6						

PANEL PL5 SCHEDULE													LOCATION: CORRIDOR 102	
MLO RATING 250 A		208/120 Wye VOLTS			3PH, 4W, SN, 60HZ			MIN.		22KAIC SURFACE				
CKT NO.	LOAD DESCRIPTION	BKR TRIP	A	B	C	A	B	C	BKR TRIP	LOAD DESCRIPTION	CKT NO.			
1			50.0 A			2.0 A			20	LTG - MECH MEZZ M109	2			
3	CNC MACHINE - 1	60		50.0 A			0.0 A		20	SPARE	4			
5					50.0 A			3.0 A	20	REC - SHOP 110 DESK 1	6			
7	CNC MACHINE XXX CONTROL	20	10.0 A			3.0 A			20	REC - SHOP 110 DESK 2	8			
9				10.0 A			1.5 A		20	REC - ELEV 001	10			
11	REC - AT CNC COMPUTER - 1	20			3.0 A			0.6 A	20	LTG - STAIR 002	12			
13	REC - CORR	20	7.5 A			0.0 A			20	SPARE	14			
15	REC - CNC DATA CABINET	20		5.0 A			0.0 A		20	SPARE	16			
17	REC - AT CNC COMPUTER - 2	20			3.0 A			0.0 A	20	SPARE	18			
19			50.0 A			0.0 A			20	SPARE	20			
21	CNC MACHINE - 2	60		50.0 A			0.0 A		20	SPARE	22			
23				50.0 A				0.0 A			24			
25	CNC MACHINE FPX CONTROL	20	10.0 A			0.0 A			20	SPARE	26			
27				10.0 A			0.0 A				28			
29	CUH-1	15			3.0 A			0.0 A	20	SPARE	30			
31	REC - SHOP 110 EAST	20	7.6 A			0.0 A			15	SPARE	32			
33	LTG - SHOP 110	20		2.8 A			0.0 A		15	SPARE	34			
35	REC - SHOP 110 WEST	20			4.5 A			0.0 A	15	SPARE	36			
37	SPACE	--	--			0.0 A					38			
39	SPACE	--		--			0.0 A		30	SPD	40	1		
41	SPACE	--			--			0.0 A			42			
TOTAL CONNECTED AMPS:			A: 138.8		B: 128.1		C: 117.1							

PANEL PL2 SCHEDULE													LOCATION: MECHANICAL 115	
MLO RATING 250 A		208/120 Wye VOLTS			3PH, 4W, SN, 60HZ			MIN.		22KAIC SURFACE				
CKT NO.	LOAD DESCRIPTION	BKR TRIP	A	B	C	A	B	C	BKR TRIP	LOAD DESCRIPTION	CKT NO.			
1		100	60.0 A			60.0 A			100	RF HEAT SEALER CFX	2			
3				60.0 A			60.0 A			RF HEAT SEALER XXX	4			
5					60.0 A			60.0 A				6		
7		100	60.0 A			1.2 A			20	LTG - MECH 115 & UTILITY 108	8			
9	RF HEAT SEALER EQG			60.0 A			1.0 A		20	TPA-3	10			
11					60.0 A			3.0 A	15	CUH-2	12			
13	REC - AT RF HEAT SEALER CFX	20	3.0 A			0.8 A			20	LTG - STAIR 004	14			
15	REC - AT PANEL PL2 & RF HEAT SEALER...	20		3.0 A			0.0 A		20	SPARE	16			
17	REC - EXTERIOR AT STAIR, UTILITY M108	20			4.5 A			0.0 A	20	SPARE	18			
19	REC - MECH 115	20	3.0 A			0.0 A			20	SPARE	20			
21	DDC CONTROL PANEL	20		5.0 A			0.0 A		20	SPARE	22			
23	UH-1-10 (25W)	15			0.2 A			0.0 A	20	SPARE	24			
25	REC - SHOP 111 SOUTH	20	3.0 A			0.0 A			20	SPARE	26			
27	EF-1 (1/4HP)	15		5.8 A			0.0 A		20	SPARE	28			
29	SPARE	20			0.0 A			0.0 A	20	SPARE	30			
31	SPARE	20	0.0 A			0.0 A			15	SPARE	32			
33	SPARE	20		0.0 A			0.0 A		15	SPARE	34			
35	SPARE	20			0.0 A			0.0 A	15	SPARE	36			
37	SPACE	--	--			0.0 A			30	SPD	38			
39	SPACE	--	--	--			0.0 A				40			
41	SPACE	--	--	--			0.0 A				42			
TOTAL CONNECTED AMPS:			A: 191.4		B: 195.2		C: 187.6							

PANEL PL4 SCHEDULE													LOCATION: INSPECTION 112	
MLO RATING 250 A		208/120 Wye VOLTS			3PH, 4W, SN, 60HZ			MIN.		22KAIC SURFACE				
CKT NO.	LOAD DESCRIPTION	BKR TRIP	A	B	C	A	B	C	BKR TRIP	LOAD DESCRIPTION	CKT NO.			
1			60.0 A			0.0 A					2			
3	RF HEAT SEALER XXX	100		60.0 A			0.0 A		30	SPARE	4			
5					60.0 A			0.0 A			6			
7			60.0 A			0.0 A					8			
9	RF HEAT SEALER XXX	100		60.0 A			0.0 A		30	SPARE	10			
11					60.0 A			0.0 A			12			
13	REC - VEST & EXTERIOR	20	4.5 A			2.0 A			20	LTG - INSPECTION 112 & NETWORK 113	14			
15	REC - AT RF HEAT SEALERS XXX & XXX...	20		6.0 A			0.0 A		20	SPARE	16			
17	REC - INSPECTION 112 NORTH	20			6.0 A			0.0 A	20	SPARE	18			
19	TPA-2	20	1.0 A			0.0 A			20	SPARE	20			
21	EWB-2	25		16.7 A			0.0 A		20	SPARE	22			
23	SPARE	20			0.0 A			0.0 A	20	SPARE	24			
25			17.5 A			0.0 A			20	SPARE	26			
27	OVERHEAD DOOR, INTERIOR (5HP)	40		17.5 A			0.0 A		20	SPARE	28			
29					17.5 A			0.0 A	20	SPARE	30			
31			17.5 A			0.0 A					32			
33	OVERHEAD DOOR, INTERIOR (5HP)	40		17.5 A		--		--	--	SPACE	34			
35					17.5 A		--	--	--	SPACE	36			
37	UH-1-7 (1/20 HP), UH-1-8 (25W)	15	2.4 A			--		--	--	SPACE	38			
39	REC - INSPECTION 112 SOUTH	20		7.5 A		--		--	--	SPACE	40			
41	REC - WATER COOLER	20			5.0 A		--	--	--	SPACE	42			
TOTAL CONNECTED AMPS:			A: 164.8		B: 185.3		C: 166.1							

||
||
||

10/1/2025 5:28:40 PM EP603
C:\Users\bdagle\Documents\22103.25_BLDG00_ELEC-V23_bdaigleQUX8.rvt

D

B

A

PANEL PL7 SCHEDULE													LOCATION: ELECTRICAL 213	
MCB RATING		250 A			208/120 Wye VOLTS			3PH, 4W, SN, 60HZ			MIN.	22KAIC	SURFACE	
CKT NO.	LOAD DESCRIPTION	BKR TRIP	A	B	C	A	B	C	BKR TRIP	LOAD DESCRIPTION	CKT NO.			
1			40.2 A			9.0 A					2			
3	PANELBOARD PL8	150		45.4 A			9.0 A		20	SYSTEMS FURNITURE OFFICE 208 NORTH - 1	4			
5					42.9 A			9.0 A			6			
7			40.7 A			9.0 A			20	SYSTEMS FURNITURE OFFICE 208 NORTH - 2	8			
9	PANELBOARD TPP2	70		40.3 A			14.6 A		20	EW-H-3 (IN CABINET)	10			
11					25.4 A			1.5 A	20	REC - ATTIC SOUTH	12			
13	REC - OFFICE 210	20	7.5 A			2.2 A			15	UH-3-4 (1/20 HP)	14			
15	REC - TRAINING AREA - 1	20		4.5 A			5.0 A		20	NAC, SECOND FLOOR	16			
17	REC - ELEC & CORRIDOR	20			6.0 A			5.0 A	20	REC - OFFICE 210	18			
19			3.0 A			5.0 A			20	REC - MULTI PURPOSE 211	20			
21	SYSTEMS FURNITURE OFFICE 210-1	20		3.0 A			0.4 A		15	UH-2-10 (25W) UH-2-11 (25W)	22			
23					3.0 A			9.8 A	20	REC - RADON FAN ATTIC SOUTH	24			
25	SYSTEMS FURNITURE OFFICE 210-2	20	3.0 A			5.0 A			20	REC - COUNTER RIGHT	26			
27	REC - REFRIGERATOR	1			5.0 A			3.0 A	15	CUH-4	28			
29	REC - MULTI PURPOSE	20			9.0 A			6.0 A	20	REC - OPEN OFFICE 208	30			
31			9.0 A			5.0 A			20	REC - COUNTER LEFT	32			
33	SYSTEMS FURNITURE OFFICE 208 SOUTH - 1	20		9.0 A			5.0 A		20	REC - OPEN OFFICE PRINTER	34			
35					9.0 A			5.0 A	20	REC - TRAINING AREA 202 TV	36			
37	SYSTEMS FURNITURE OFFICE 208 SOUTH - 2	20	6.0 A			6.0 A			20	REC - TRAINING AREA - 2	38			
39	LTG - SECOND FL SOUTH, CORR, ELEC, NETWORK	20		1.2 A			3.0 A		20	REC - TRAINING FLOOR BOX - 1	40			
41	REC - MEZZANINE M201	20			3.0 A			3.0 A	20	REC - TRAINING FLOOR BOX - 2	42			
43	REC - TRAINING QUAD	20	3.0 A			3.0 A			20	REC - TRAINING FLOOR BOX - 3	44			
45	LTG - ATTIC	20		1.3 A			3.0 A		20	REC - TRAINING FLOOR BOX - 4	46			
47	LTG - EXTERIOR EAST END	20			0.6 A			1.0 A	20	TPA-8	48			
49	LTG - OPEN OFFICE 208	20	4.2 A			0.0 A			20	SPARE	50			
51	SPARE	20			0.0 A			0.0 A	20	SPARE	52			
53	SPARE	20			0.0 A			0.0 A	20	SPARE	54			
55	SPARE	20	0.0 A			0.0 A					56			
57	SPARE	20			0.0 A			0.0 A	30	SPD	58			
59	SPARE	20			0.0 A			0.0 A			60			
TOTAL CONNECTED AMPS:			A: 158.6	B: 146.9			C: 126.7							

PANEL PL9 SCHEDULE													LOCATION: SHOP 207	
MCB RATING		150 A			208/120 Wye VOLTS			3PH, 4W, SN, 60HZ			MIN.	10KAIC	SURFACE	
CKT NO.	LOAD DESCRIPTION	BKR TRIP	A	B	C	A	B	C	BKR TRIP	LOAD DESCRIPTION	CKT NO.			
1	REC - WOMAN, MEN, CUST, CORR	20	7.5 A			9.2 A			20	LTG - SHOP 207 - 1	2			
3	REC - EXPRESSING	20		4.5 A			9.2 A		20	LTG - SHOP 207 - 2	4			
5	REC - EXPRESSING REFRIGERATOR	20			3.0 A			9.2 A	20	LTG - SHOP 207 - 3	6			
7			47.5 A			9.2 A			20	LTG - SHOP 207 - 4	8			
9	PANELBOARD PL10	125		44.5 A			10.2 A		20	LTG - SHOP 207 - 5	10			
11					42.5 A			1.0 A	20	LTG - ELEV LIGHT 2ND FL	12			
13			0.0 A			0.0 A			20	SPARE	14			
15	SPARE	20		0.0 A			3.1 A		20	LTG - SHOP 207 VIA EMERGENCY INVERTER	16			
17					0.0 A			8.1 A	20	LTG - SHOP 207 EAST	18			
19	SPARE	20	0.0 A			5.0 A			20	LIGHTING CONTROL PANEL	20			
21				0.0 A			0.1 A		20	LTG - RSTRMS, EXPRESSING, UPHOLSTERY	22			
23	TPA-7	20			1.0 A			0.0 A	30	SPARE	24			
25	REC - WATER COOLER	20	5.0 A			0.0 A			20		26			
27	REC - SHOP 107 NORTH	20		4.5 A			2.5 A		20	LTG - ATTIC	28			
29	REC - SHOP 207 EAST & ROOF	20			7.5 A			0.7 A	20	LTG - CORRIDOR 201	30			
31	REC - GROMMET MACH. - LEFT	20	9.8 A			10.2 A			20	LTG - UPHOLSTERY 206-1	32			
33	REC - GROMMET MACH. - RIGHT	20		9.8 A			5.1 A		20	LTG - UPHOLSTERY 206-2	34			
35	UH-2-4 (1/20HP) UH-2-5 (1/20HP)	15			4.4 A			0.5 A	20	LTG - EXTERIOR NORTH END	36			
37	CUH-3	15	3.0 A			0.0 A			38		38			
39	REC - ATTIC NORTH	20		1.5 A			0.0 A		30	SPD	40			
41	SPARE	20			0.0 A			0.0 A			42			
TOTAL CONNECTED AMPS:			A: 97.9	B: 87.2			C: 77.9							

PANEL PH1 SCHEDULE													LOCATION: ELECTRICAL 213	
MLO RATING		225 A			480V VOLTS			3PH, 3W, SN, 60HZ			MIN.	35KAIC	SURFACE	
CKT NO.	LOAD DESCRIPTION	BKR TRIP	A	B	C	A	B	C	BKR TRIP	LOAD DESCRIPTION	CKT NO.			
1			2.5 A			68.7 A					2			
3	BCU-2	15		2.5 A			63.7 A		200	PANELBOARD PL7 VIA T4	4			
5					2.5 A			54.9 A			6			
7			2.5 A			0.0 A					8			
9	BCU-3	15		2.5 A			0.0 A		20	SPARE	10			
11					2.5 A			0.0 A			12			
13			6.7 A			0.0 A					14			
15	OU-3	15		6.7 A			0.0 A		20	SPARE	16			
17					6.7 A			0.0 A			18			
19			7.5 A			0.0 A					20			
21	CU-2	15		7.5 A			0.0 A		15	SPARE	22			
23					7.5 A			0.0 A			24			
25			--			--					26			
27	SPACE	--		--			--		--	SPACE	28			
29					--			--			30			
31			--			--					32			
33	SPACE	--		--			--		--	SPACE	34			
35					--			--			36			
37			--			--			--		38			
39	SPACE	--		--			--		--	SPACE	40			
41					--			--			42			
TOTAL CONNECTED AMPS:			A: 87.9	B: 82.8			C: 74.0							

PANEL PL8 SCHEDULE

PANEL PL8 SCHEDULE													LOCATION: SHOP 207	
MLO RATING		150 A			208/120 Wye VOLTS			3PH, 4W, SN, 60HZ			MIN.	10KAIC	SURFACE	
CKT NO.	LOAD DESCRIPTION	BKR TRIP	A	B	C	A	B	C	BKR TRIP	LOAD DESCRIPTION	CKT NO.			
1	UH 3-2 (1/20HP) & UH 3-3 (1/20HP)	15	4.4 A			6.0 A			20	REC - CEILING - 5	2			
3	REC - RADON FAN ATTIC CENTER	2		9.8 A			6.0 A		20	REC - CEILING - 2	4			
5	REC - LONG ARM SEWING 2	20			6.0 A			6.0 A	20	REC - CEILING - 6	6			
7	REC - SHOP WEST	20	3.0 A			6.0 A			20	REC - CEILING - 3	8			
9	REC - LONG ARM SEWING 3	20		10.0 A			0.0 A		20	SPARE	10			
11	REC - LONG ARM SEWING 4	20			10.0 A			0.0 A	20	SPARE	12			
13	UH-2-7 (1/20HP) UH-2-9 (1/20HP)	15	4.4 A			0.0 A			20	SPARE	14			
15	REC - SEWING MACH. SOUTH 1	20		10.0 A			0.0 A		20	SPARE	16			
17	REC - SEWING MACH. SOUTH 2	20			10.0 A			0.0 A	20	SPARE	18			
19			0.0 A			0.0 A			20	SPARE	20			
21	SPARE	30		0.0 A			0.0 A		20	SPARE	22			
23					0.0 A			0.0 A	20	SPARE	24			
25			0.0 A			0.0 A			20	SPARE	26			
27	SPARE	30		0.0 A			0.0 A		20	SPARE	28			
29					0.0 A			0.0 A	20	SPARE	30			
31	REC - BOX STITCHER 120V - 2	20	12.0 A			0.0 A			20	SPARE	32			
33	REC - BOX STITCHER 120V - 1	20		12.0 A			0.0 A		20	SPARE	34			
35	REC - SHOP EAST	20			4.5 A			0.0 A	20	SPARE	36			
37	UH-2-6 (1/20HP) UH-2-8 (1/20HP)	15	4.4 A			--			--	SPACE	38			
39	REC - CEILING - 4	20		6.0 A			--		--	SPACE	40			
41	REC - CEILING - 1	20			6.0 A			--	--	SPACE	42			
TOTAL CONNECTED AMPS:			A: 40.2	B: 45.4			C: 42.9							

PANEL PL10 SCHEDULE

MLO RATING		125 A		208/120 Wye VOLTS			3PH, 4W, SN, 60HZ			MIN.		10KAIC		LOCATION: SHOP 207 SURFACE	
CKT NO.	LOAD DESCRIPTION			BKR TRIP	A	B	C	A	B	C	BKR TRIP	LOAD DESCRIPTION			CKT NO.
1	UH 3-1 ATTIC (1/20 HP)			15	2.2 A			0.0 A			20	SPARE			2
3	REC - RADON FAN, ATTIC NORTH			20		9.8 A			12.0 A		20	REC - POLYBAG SEALER			4
5	REC - UPHOLSTERY 1			20			3.0 A			0.0 A	30	SPARE			6
7	REC - SEWING MACH. CENTER 1			20	10.0 A			0.0 A							8
9	UH-2-1(25W) UH-2-2(25W) UH-2-3(25W)			15		0.6 A			0.0 A		20	SPARE			10
11	REC - UPHOLSTERY 2			20			4.5 A			0.0 A	20	SPARE			12
13	REC - SEWING MACH. CENTER 2			20	10.0 A			0.0 A			20	SPARE			14
15	REC - UPHOLSTERY 3			20		4.5 A				0.0 A	20	SPARE			16
17	REC - SEWING MACH WEST			20			10.0 A			0.0 A	20	SPARE			18
19	REC - STAND ALONE COMPUTER			20	3.0 A			0.0 A			20	SPARE			20
21	REC - EMBROIDERY MACH.			20		4.0 A			0.0 A		20	SPARE			22
23	REC - UPHOLSTERY CEILING 1			20			6.0 A			0.0 A	20	SPARE			24
25	REC - UPHOLSTERY CEILING 2			20	6.0 A			0.0 A			20	SPARE			26
27	REC - SEWING #			20		10.0 A			0.0 A		20	SPARE			28
29	REC - LONG ARM SEWING #			20			10.0 A			0.0 A	20	SPARE			30
31	REC - LONG ARM SEWING 1			20	10.0 A			0.0 A			20	SPARE			32
33	REC - CEILING - 3			20		6.0 A			0.0 A		20	SPARE			34
35	REC - CEILING - 1			20			6.0 A			0.0 A	20	SPARE			36
37	REC - CEILING - 4			20	6.0 A			--		--	--	SPACE			38
39	REC - CEILING - 2			20		6.0 A			--	--	--	SPACE			40
41	REC - SHOP 207 NORTHWEST			20			3.0 A			--	--	SPACE			42
TOTAL CONNECTED AMPS:				A: 47.5			B: 44.5			C: 42.5					

D

C

B

A

PANEL MH1 SCHEDULE													LOCATION: MECH MEZZANINE M107	
MLO RATING		150 A		480V VOLTS			3PH, 3W, SN, 60HZ			MIN.		18KAIC SURFACE		
CKT NO.	LOAD DESCRIPTION	BKR TRIP	A	B	C	A	B	C	BKR TRIP	LOAD DESCRIPTION	CKT NO.			
1	PANELBOARD ML1 VIA T2	125	31.0 A			24.0 A			30	VEST 101 FORK TRUCK CHARGER	2			
3				26.6 A			24.0 A				4			
5					23.7 A			24.0 A				6		
7	DOAS-1	25	16.1 A			3.3 A			15	BCU-1	8			
9				16.1 A			3.3 A				10			
11					16.1 A			3.3 A				12		
13	CU-1	15	7.5 A			0.0 A			15	SPARE	14			
15				7.5 A			0.0 A				16			
17					7.5 A			0.0 A				18		
19	SPARE	20	0.0 A			0.0 A			20	SPARE	20			
21				0.0 A			0.0 A				22			
23					0.0 A			0.0 A				24		
25	SPARE	30	0.0 A			0.0 A			30	SPARE	26			
27				0.0 A			0.0 A				28			
29					0.0 A			0.0 A				30		
31	SPACE	--	--			--			--	SPACE	32			
33	SPACE	--	--	--		--	--		--	SPACE	34			
35	SPACE	--	--		--	--		--	--	SPACE	36			
37	SPACE	--	--			--			--	SPACE	38			
39	SPACE	--	--	--		--	--		--	SPACE	40			
41	SPACE	--	--		--	--		--	--	SPACE	42			
TOTAL CONNECTED AMPS:			A: 81.8		B: 77.4		C: 74.6							

PANEL FA1 SCHEDULE													LOCATION: CORRIDOR 102	
MLO RATING		125 A		208/120 Wye VOLTS			3PH, 4W, SN, 60HZ			MIN.		10KAIC SURFACE		
CKT NO.	LOAD DESCRIPTION	BKR TRIP	A	B	C	A	B	C	BKR TRIP	LOAD DESCRIPTION	CKT NO.			
1	PANELBOARD FA2	60	10.6 A			5.0 A			20	FAMN & TRANSMITTER	2			
3				5.8 A			5.0 A		20	NAC FIRST FLOOR	4			
5					0.0 A							6		
7	ELEVATOR 2 WAY COMM.	20	15.0 A								8			
9											10			
11											12			
13											14			
15											16			
17											18			
19											20			
21											22			
23											24			
25											26			
27											28			
29											30			
TOTAL CONNECTED AMPS:			A: 31.3		B: 11.5		C: 0.0							

PANEL FA2 SCHEDULE													LOCATION: FIRE PUMP M107	
MLO RATING		125 A		208/120 Wye VOLTS			3PH, 4W, SN, 60HZ			MIN.		10KAIC SURFACE		
CKT NO.	LOAD DESCRIPTION	BKR TRIP	A	B	C	A	B	C	BKR TRIP	LOAD DESCRIPTION	CKT NO.			
1	JOCKEY PUMP CONTROLLER	20	9.8 A			0.0 A			20	SPARE	2			
3	NAC PANEL, ANNEX	15		5.0 A			0.0 A		20	SPARE	4			
5	SPARE	20			0.0 A			0.0 A	20	SPARE	6			
7	SPARE	20	0.0 A			0.0 A			20	SPARE	8			
9	SPARE	20		0.0 A			0.0 A		20	SPARE	10			
11	SPARE	20			0.0 A			0.0 A	20	SPARE	12			
13	SPARE	20	0.0 A			0.0 A			20	SPARE	14			
15	SPARE	20		0.0 A			0.0 A		20	SPARE	16			
17	SPARE	20			0.0 A			0.0 A	20	SPARE	18			
19	SPACE	--	--			--			--	SPACE	20			
21	SPACE	--		--			--		--	SPACE	22			
23	SPACE	--			--			--	--	SPACE	24			
25	SPACE	--	--			--			--	SPACE	26			
27	SPACE	--		--			--		--	SPACE	28			
29	SPACE	--			--			--	--	SPACE	30			
TOTAL CONNECTED AMPS:			A: 10.6		B: 5.8		C: 0.0							

PANEL ML1 SCHEDULE													LOCATION: MECH MEZZANINE M107	
MCB RATING		150 A		208/120 Wye VOLTS			3PH, 4W, SN, 60HZ			MIN.		10KAIC SURFACE		
CKT NO.	LOAD DESCRIPTION	BKR TRIP	A	B	C	A	B	C	BKR TRIP	LOAD DESCRIPTION	CKT NO.			
1			54.8 A								2			
3	PANELBOARD ML2	125		54.5 A			0.0 A		20	SPARE	4			
5					39.8 A			0.0 A	20	SPARE	6			
7	REC - MEZZANINE	20	7.5 A			0.0 A			20	SPARE	8			
9	UH-1-17 (1/20HP)	15		2.2 A			0.0 A		20	SPARE	10			
11	LTS - DOAS	15			2.6 A			0.0 A	20	SPARE	12			
13	LTS - MECH MEZZ M107	20	1.7 A			0.0 A			20	SPARE	14			
15	UH-1-14(25W) UH-1-15(25W)	15		0.4 A			0.0 A		20	SPARE	16			
17	REC - DOAS	15			8.0 A			0.0 A	20	SPARE	18			
19			0.0 A			0.0 A			15	SPARE	20			
21	SPARE	20		0.0 A			0.0 A		15	SPARE	22			
23					0.0 A			0.0 A	15	SPARE	24			
25	SPARE	20	0.0 A			--			--	SPACE	26			
27	SPARE	20		0.0 A			--		--	SPACE	28			
29	SPARE	15			0.0 A			--	--	SPACE	30			
31	DOAS LEV CONTROLLER - 1	20	5.0 A			--			--	SPACE	32			
33				5.0 A			--		--	SPACE	34			
35	DOAS LEV CONTROLLER - 2	20			5.0 A			--	--	SPACE	36			
37			5.0 A			--			--	SPACE	38			
39	TPA-6	20		1.0 A			--		--	SPACE	40			
41	SPARE	20			0.0 A			--	--	SPACE	42			
TOTAL CONNECTED AMPS:			A: 71.5		B: 61.3		C: 54.7							

PANEL ML2 SCHEDULE											LOCATION: BREAK RM M101	
MLO RATING		125 A	208/120 Wye VOLTS			3PH, 4W, SN, 60HZ			MIN.	10KAIC SURFACE		
CKT NO.	LOAD DESCRIPTION		BKR TRIP	A	B	C	A	B	C	BKR TRIP	LOAD DESCRIPTION	CKT NO.
1	REC - CUSTODIAN/CORR/MECH		20	7.5 A			10.0 A			20	REC - MICROWAVE - 1	2
3	REC - REFRIGERATOR 1		20		5.0 A			10.0 A		20	REC - MICROWAVE - 2	4
5	REC - REFRIGERATOR 2		20			5.0 A			5.0 A	20	REC - COUNTER - 1	6
7	REC - REFRIGERATOR 3		20	5.0 A			5.0 A			20	REC - COUNTER - 2	8
9	REC - REFRIGERATOR 4		20		5.0 A			5.0 A		20	REC - COUNTER - 3	10
11	REC - BREAK 1		20			6.0 A			5.0 A	20	REC - COUNTER - 4	12
13	REC - BREAK 2		20	6.0 A			5.0 A			20	REC - COUNTER - 5	14
15	REC - BLIND VENDING - 1		20		5.0 A			5.0 A		20	REC - COUNTER - 6	16
17	REC - BLIND VENDING - 2		20			5.0 A			1.8 A	20	LTG - M103, M104, M105, M106	18
19	REC - BLIND VENDING - 3		20	5.0 A			1.0 A			20	TPA-5	20
21	REC - BLIND VENDING - 4		20		5.0 A			4.0 A		20	LTG - NORTH MEZZANINE	22
23	REC - BLIND VENDING - 5		20			5.0 A			0.0 A	20	SPARE	24
25	REC - LOCKER ROOM		20	4.5 A			0.0 A			20	SPARE	26
27	RP-1 (1/8HP)		15		4.0 A			0.0 A		20	SPARE	28
29	REC - BREAK TV		20			3.0 A			0.0 A	20	SPARE	30
31	REC - NORTH RIGHT		20	3.0 A			0.0 A			15	SPARE	32
33	REC - NORTH LEFT		20		3.0 A			0.0 A		15	SPARE	34
35	UH-1-11 (1/8HP)		15			4.0 A			0.0 A	15	SPARE	36
37	UH-1-12 (25W) UH-1-13(25W) UH-1-16(25...		15	0.8 A			--			--	SPACE	38
39	REC - MECH MEZZANINE		20		1.5 A			--		--	SPACE	40
41	SPARE		20			0.0 A			--	--	SPACE	42
TOTAL CONNECTED AMPS:			A: 54.8			B: 54.5			C: 39.8			

D

C

B

A

BUILDING 60 SHOP EQUIPMENT SCHEDULE [OPTION 2]														
EQUIP TAG NO	DESCRIPTION	VOLTAGE	PHASE	AMPS	HP	BRANCH CIRCUIT		DISCONNECT				NOTES	PHASE ROTATION	
						CONDUCTORS	CONDUIT	AMPS	POLE	FUSE	CORD & PLUG		EXISTING	VERIFY AFTER INSTALLED
EQ100A	MEDIUM WEIGHT SEWING MACHINE	120	1	10	-	2-1/C #12, 1/C #12G	3/4"	-	-	-	YES	1	-	-
EQ100A	MEDIUM WEIGHT SEWING MACHINE	120	1	10	-	2-1/C #12, 1/C #12G	3/4"	-	-	-	YES	1	-	-
EQ100A	MEDIUM WEIGHT SEWING MACHINE	120	1	10	-	2-1/C #12, 1/C #12G	3/4"	-	-	-	YES	1	-	-
EQ100A	MEDIUM WEIGHT SEWING MACHINE	120	1	10	-	2-1/C #12, 1/C #12G	3/4"	-	-	-	YES	1	-	-
-	HEAVY WEIGHT SEWING MACHINE	120	1	10	-	2-1/C #12, 1/C #12G	3/4"	-	-	-	YES	1	-	-
EQ100C	LIGHT WEIGHT SEWING MACHINE	120	1	10	-	2-1/C #12, 1/C #12G	3/4"	-	-	-	YES	1	-	-
EQ100D & E	LONG ARM SEWING MACHINE	120	1	10	-	2-1/C #12, 1/C #12G	3/4"	-	-	-	YES	1	-	-
EQ100D & E	LONG ARM SEWING MACHINE	120	1	10	-	2-1/C #12, 1/C #12G	3/4"	-	-	-	YES	1	-	-
EQ100D & E	LONG ARM SEWING MACHINE	120	1	10	-	2-1/C #12, 1/C #12G	3/4"	-	-	-	YES	1	-	-
EQ100D & E	LONG ARM SEWING MACHINE	120	1	10	-	2-1/C #12, 1/C #12G	3/4"	-	-	-	YES	1	-	-
EQ100D & E	LONG ARM SEWING MACHINE	120	1	10	-	2-1/C #12, 1/C #12G	3/4"	-	-	-	YES	1	-	-
EQ100D & E	LONG ARM SEWING MACHINE	120	1	10	-	2-1/C #12, 1/C #12G	3/4"	-	-	-	YES	1	-	-
EQ100D & E	LONG ARM SEWING MACHINE	120	1	10	-	2-1/C #12, 1/C #12G	3/4"	-	-	-	YES	1	-	-
EQ100D & E	LONG ARM SEWING MACHINE	120	1	10	-	2-1/C #12, 1/C #12G	3/4"	-	-	-	YES	1	-	-
EQ100D & E	LONG ARM SEWING MACHINE	120	1	10	-	2-1/C #12, 1/C #12G	3/4"	-	-	-	YES	1	-	-
EQ100D & E	LONG ARM SEWING MACHINE	120	1	10	-	2-1/C #12, 1/C #12G	3/4"	-	-	-	YES	1	-	-
EQ100D & E	LONG ARM SEWING MACHINE	120	1	10	-	2-1/C #12, 1/C #12G	3/4"	-	-	-	YES	1	-	-
EQ100D & E	LONG ARM SEWING MACHINE	120	1	10	-	2-1/C #12, 1/C #12G	3/4"	-	-	-	YES	1	-	-
EQ100D & E	LONG ARM SEWING MACHINE	120	1	10	-	2-1/C #12, 1/C #12G	3/4"	-	-	-	YES	1	-	-
EQ101A	BOX STITCHER	120	1	10	-	2-1/C #12, 1/C #12G	3/4"	-	-	-	-	-	-	-
EQ101A	BOX STITCHER	120	1	10	-	2-1/C #12, 1/C #12G	3/4"	-	-	-	-	-	-	-
EQ102A	RF HEAT SEALER	208	3	60	-	3-1/C #2, 1/C #8G	1-1/4"	100	3	100	2	-	2	-
EQ102A	RF HEAT SEALER	208	3	60	-	3-1/C #2, 1/C #8G	1-1/4"	100	3	100	2	-	2	-
EQ102A	RF HEAT SEALER	208	3	60	-	3-1/C #2, 1/C #8G	1-1/4"	100	3	100	2	-	2	-
EQ102A	RF HEAT SEALER	208	3	60	-	3-1/C #2, 1/C #8G	1-1/4"	100	3	100	2	-	2	-
EQ102A	RF HEAT SEALER	208	3	60	-	3-1/C #2, 1/C #8G	1-1/4"	100	3	100	2	-	2	-
EQ102A	RF HEAT SEALER	208	3	60	-	3-1/C #2, 1/C #8G	1-1/4"	100	3	100	2	-	2	-
EQ102A	RF HEAT SEALER	208	3	60	-	3-1/C #2, 1/C #8G	1-1/4"	100	3	100	2	-	2	-
EQ102A	RF HEAT SEALER	208	3	60	-	3-1/C #2, 1/C #8G	1-1/4"	100	3	100	2	-	2	-
FSR	EMBROIDERY MACHINE	120	1	4	-	2-1/C #12, 1/C #12G	3/4"	-	-	-	YES	-	-	-
EQ104A	GROMMET MACHINE	120	1	10	1/2	2-1/C #12, 1/C #12G	3/4"	-	-	-	YES	2	-	-
EQ104A	GROMMET MACHINE	120	1	10	1/2	2-1/C #12, 1/C #12G	3/4"	-	-	-	YES	2	-	-
EQ105A & B	CUTTING TABLE	208	3	50	15	3-1/C#6, 1/C #10G	3/4"	60	3	60	-	1	-	-
EQ105A & B	CUTTING TABLE, CONTROL	208	1	10	-	2-1/C#12, 1/C#12N, 1/C #12G, 1/C #12IG	3/4"	30	2	-	-	3	-	-
EQ105A & B	CUTTING TABLE	208	3	50	15	3-1/C#6, 1/C #10G	3/4"	60	3	60	-	1	-	-
EQ105A & B	CUTTING TABLE, CONTROL	208	1	10	-	2-1/C #12, 1/C #12N, 1/#12G, 1/C#12IG	3/4"	30	2	-	-	3	-	-
GQU/ASJ	POLY BAG SEALER	120	1	-	-	2-1/C #12, 1/C #12G	3/4"	-	-	-	YES	2,5	-	-
GQU/ASJ	POLY BAG SEALER	120	1	-	-	2-1/C #12, 1/C #12G	3/4"	-	-	-	YES	2,5	-	-
MVF	ROLL SLITTER	208-230/460	3	-	2	3-1/C#12, 1/C #12G	3/4"	30	3	-	-	4	-	-

BUILDING 60 SHOP EQUIPMENT SCHEDULE NOTES:



1. TABLE CONTAINS INTEGRAL MOTOR CONTROLS FOR THE 15HP BLOWER. PROVIDE FINAL CONNECTIONS.
2. EQUIPMENT CONTAINS A MACHINE MOUNTED DISCONNECT OR CIRCUIT BREAKER.
3. PROVIDE DEDICATED, UNBROKEN, ISOLATED GROUND (IG) CONDUCTOR BETWEEN EQUIPMENT AND ASSOCIATED PANELBOARD GROUNDING BUS BAR.
4. EQUIPMENT IS EXISTING, OFF SITE, AND WILL BE RELOCATED TO BUILDING 60. EQUIPMENT HAS A SQUARE D 9T2F, 9KVA, 3 PHASE, 480V-208Y/120V TRANSFORMER ASSOCIATED WITH IT. CONNECT THE EQUIPMENT VIA THE TRANSFORMER. SET TRANSFORMER TAPS AS REQUIRED BY THE EQUIPMENT.
5. MACHINE CONTAINS A FLEXIBLE CORD WITH A HUBBEL HBL 8315C PLUG. PROVIDE MATCHING 5-20R SIMPLE RECEPTACLE ADJACENT TO THE MACHINE FOR CONNECTION.

GENERAL NOTES

1. NOTIFY CONTRACTING OFFICER OF DISCREPANCIES BETWEEN CONTRACT DOCUMENTS AND EXISTING MACHINE WIRING PRIOR TO COMMENCING MACHINE ROUGH-IN.
2. EQUIPMENT CONTROL PANELS, STARTERS, MOTOR PROTECTION AND OSHA/SAFETY RELATED DEVICES FOR EXISTING EQUIPMENT ARE EXISTING OR WILL BE PROVIDED BY GOVERNMENT.
3. FINAL CONNECTIONS TO EQUIPMENT MUST BE FULL SIZE OF FEEDER. PROVIDE 36" LIQUIDTIGHT METAL FLEX CONDUIT AT MACHINES WITH DISCONNECT SWITCHES UNLESS OTHERWISE NOTED.
4. BE PRESENT AT STARTUP OF EACH MACHINE. STARTUP BY GOVERNMENT, CONTRACTOR MUST CONFIRM VOLTAGE, PHASE ROTATION AND FUSE SIZE. DOCUMENT RESULTS.
5. REFER TO SHEET Q-601 FOR ADDITIONAL EQUIPMENT INFORMATION.
6. REFER TO SHEETS Q-102 AND Q-103 FOR EQUIPMENT LOCATIONS.

KEYNOTES

1. PROVIDE EQUIPMENT DISCONNECTS, RECEPTACLES, CONDUIT, WIRE, CONNECTIONS, AND TESTING AS PART OF [OPTION 2].
2. COORDINATE SIZE WITH EQUIPMENT MANUFACTURER'S RECOMMENDATIONS

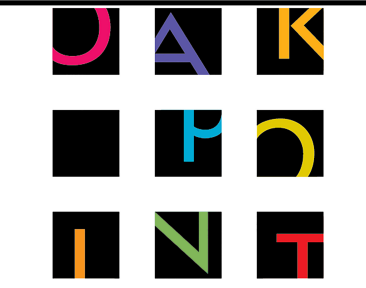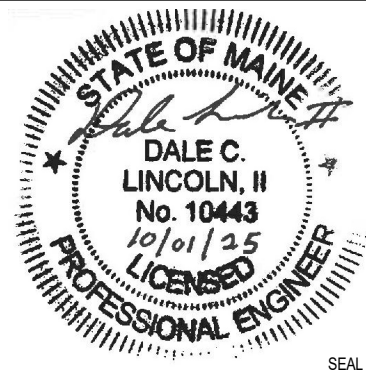

APPROVED
FOR COMMANDER NAVFAC

ACTIVITY

SATISFACTORY TO DATE

DESIGNER HRM

DRAWN BY RSW

CHECKED BY DCL

DESIGN MANAGER T. CARLETON

PROJECT MANAGER L. LYONS

LEAD/PM

FIRE PROTECTION S. RUCINSKI

NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - MID-ATLANTIC
PORTSMOUTH NAVAL SHIPYARD - KITTEERY, ME

PORTSMOUTH NAVAL SHIPYARD
B60 REPAIRS
ELECTRICAL EQUIPMENT SCHEDULES

PROJECT NO. 1740579

NAVFAC DRAWING NO.

SHEET 264 OF 282

EP701

DRAWING REVISION: 14 SEP 2023

10/1/2025 5:26:30 PM EL101
C:\Users\bdagle\Documents\22103.25_BLDG00_ELEC-V23_bdagle\QUXG8.rvt



A1 FIRST FLOOR LIGHTING PART PLAN - EAST
SCALE: 1/8" = 1'-0"


GENERAL NOTES

- REFER TO SHEETS EL701 AND EL702 FOR LIGHTING FIXTURE SCHEDULE AND DETAILS.
- EXPOSED CONDUIT AT EXTERIOR LIGHTING FIXTURES IS NOT PERMITTED. ROUTE CONDUIT THROUGH THE BACK OF THE FIXTURES.
- CONNECT EMERGENCY LIGHTING AND EXIT SIGNS TO LOCAL LIGHTING BRANCH CIRCUIT AHEAD OF SWITCHES, OCCUPANCY SENSORS, AND LIGHTING CONTROLS.


KEYNOTES

- REFER TO SHEET EL103 FOR LIGHTING ABOVE.
- PROVIDE LIGHTING BYPASS RELAY WITHIN THE PATHS OF EGRESS TO TURN LIGHTS ON UPON FIRE ALARM ACTIVATION. REFER TO DETAIL A2/EL702.
- REFER TO LOCAL AREA CONTROLLER DIAGRAM A3/EL702. THIS CONTROLLER AND ASSOCIATED SWITCHES MUST CONTROL THE FIXTURES WITHIN ANNEX 116 AND ANNEX 118.
- MOUNT FIXTURES BELOW MEZZANINE. COORDINATE EXACT MOUNTING HEIGHT AND LOCATION IN THE FIELD.
- PROVIDE EMERGENCY POWER VIA INVERTER. INSTALL WITHIN MANUFACTURER'S RECOMMENDED DISTANCE. COORDINATE EXACT LOCATION IN THE FIELD. PROVIDE LABEL.

KEY PLAN

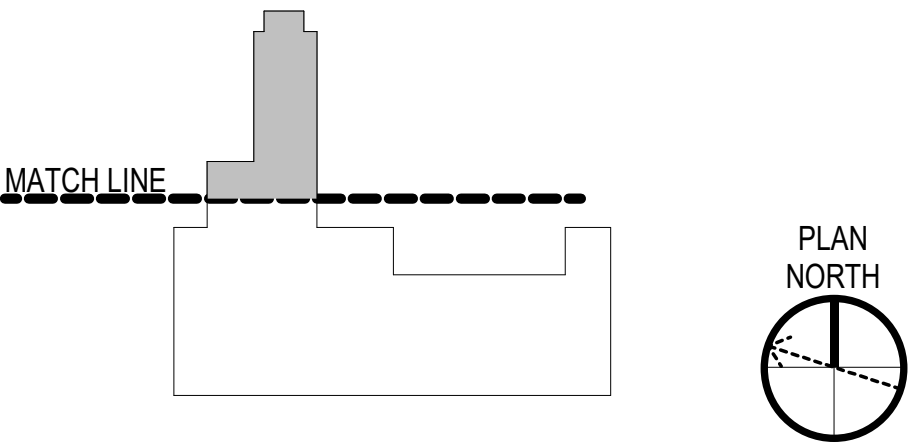

GRAPHIC SCALE(S)



SYN	DESCRIPTION	DATE	APPR
	FINAL SUBMISSION	10/01/2025	RSB

APPROVED
FOR COMMANDER NAVFAC
ACTIVITY
SATISFACTORY TO DATE
DESIGNER HRM
DRAWN BY RSW
CHECKED BY DCL
DESIGN MANAGER T. CARLETON
PROJECT MANAGER L. LYONS
FIELD NAME
FIRE PROTECTION S. RUCINSKI

NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - MID-ATLANTIC
PORTSMOUTH NAVAL SHIPYARD - KITTERY, ME
PORTSMOUTH NAVAL SHIPYARD
B60 REPAIRS
FIRST FLOOR LIGHTING PART PLAN - EAST

PROJECT NO. 1740579
NAVFAC DRAWING NO.
SHEET 265 OF 282
EL101

DRAWING REVISION: 14 SEP 2023

D

C


B

D

C

B UNCLASSIFIED

A

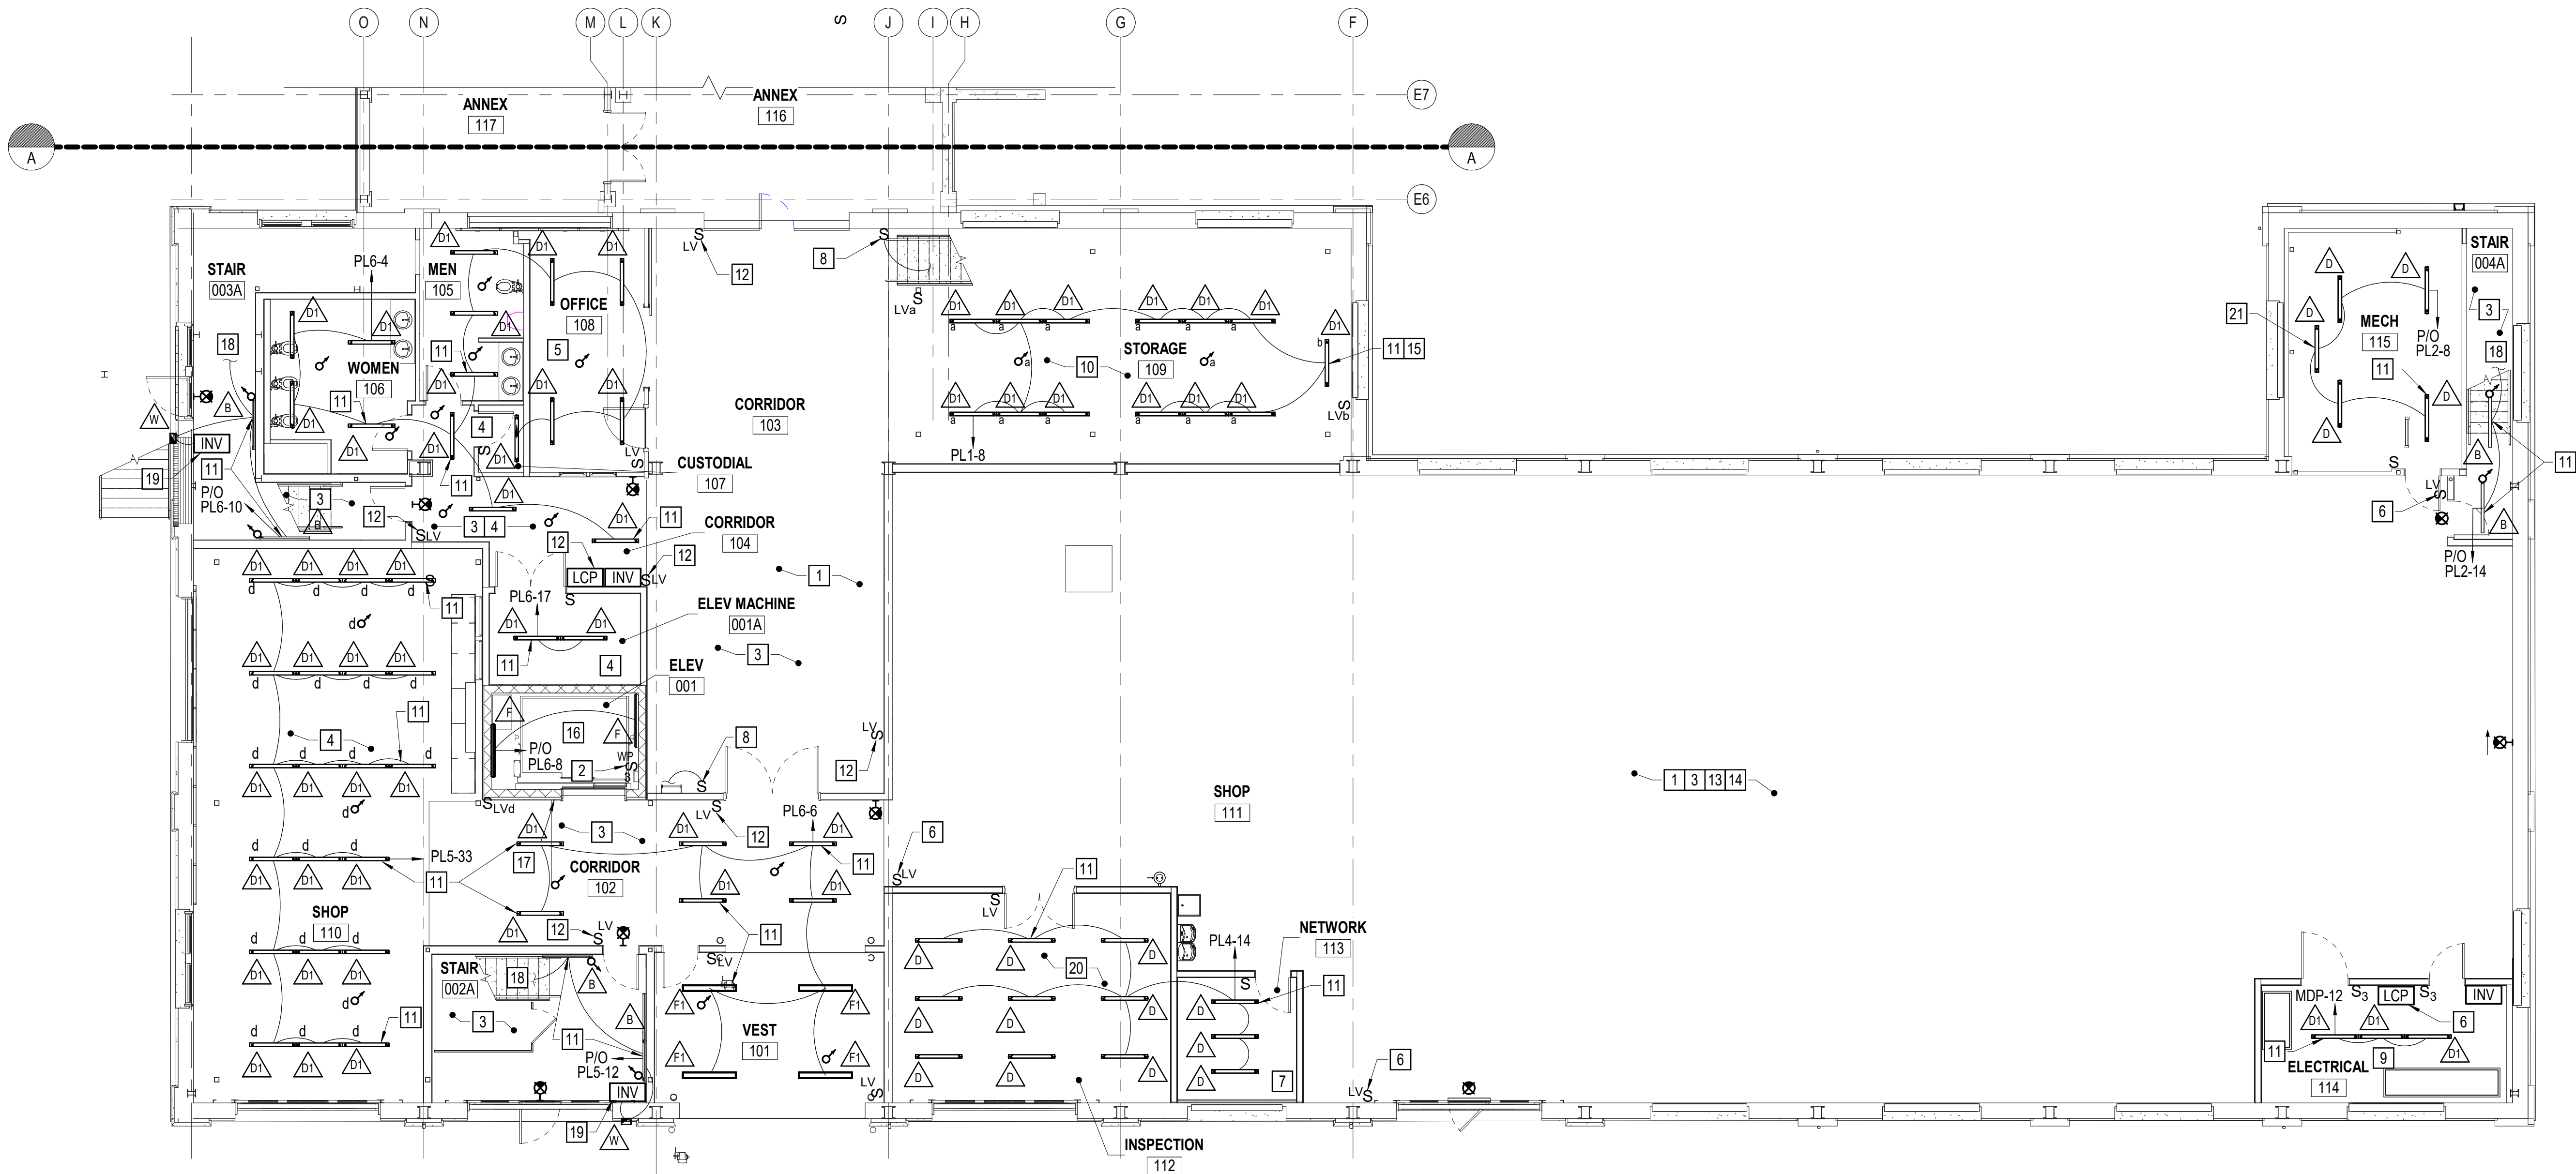

B1 FIRST FLOOR LIGHTING PART PLAN - WEST
SCALE: 1/8" = 1'-0"


GENERAL NOTES

1. REFER TO SHEETS EL701 AND EL702 FOR LIGHTING FIXTURE SCHEDULE AND DETAILS.
2. EXPOSED CONDUIT AT EXTERIOR LIGHTING FIXTURES IS NOT PERMITTED. ROUTE CONDUIT THROUGH THE BACK OF THE FIXTURES.
3. CONNECT EMERGENCY LIGHTING AND EXIT SIGNS TO LOCAL LIGHTING BRANCH CIRCUIT AHEAD OF SWITCHES, OCCUPANCY SENSORS, AND LIGHTING CONTROLS.


KEYNOTES

- 1 REFER TO SHEET EL104 FOR LIGHTING ABOVE.
- 2 INSTALL ADJACENT TO THE PIT LADDER. COORDINATE EXACT LOCATION IN THE FIELD.
- 3 PROVIDE LIGHTING BYPASS RELAY WITHIN THE PATHS OF EGRESS TO TURN LIGHTS ON UPON FIRE ALARM ACTIVATION. REFER TO DETAIL A2/EL702.
- 4 MOUNT FIXTURES AT 9' AFF. PROVIDE ACCESSORIES FOR PENDANT MOUNTING, AND COORDINATE WITH MECHANICAL EQUIPMENT, PIPING AND DUCTWORK.
- 5 MOUNT FIXTURES AT 8' AFF. PROVIDE ACCESSORIES FOR PENDANT MOUNTING, AND COORDINATE WITH MECHANICAL EQUIPMENT, PIPING AND DUCTWORK.
- 6 REFER TO LOCAL AREA CONTROLLER DIAGRAM A1/EL702. THIS CONTROLLER AND ASSOCIATED SWITCHES MUST CONTROL THE FIXTURES WITHIN SHOP 111.
- 7 COORDINATE EXACT LOCATION AND MOUNTING HEIGHT WITH THE COMMUNICATIONS CABINETS AND CABLE TRAY.
- 8 TO LIGHTING FIXTURES ON THE MEZZANINE. PROVIDE ENGRAVED LABEL INDICATING "MECHANICAL MEZZANINE LIGHTING". ADJACENT TO THE ANNEX, COORDINATE EXACT LOCATION TO AVOID THE SLIDING DOOR.
- 9 MOUNT FIXTURES AT APPROXIMATELY 9' AFF. PROVIDE ACCESSORIES FOR PENDANT MOUNTING AND COORDINATE EXACT LOCATION AND MOUNTING HEIGHT WITH THE EQUIPMENT WITHIN THE ROOM.
- 10 MOUNT FIXTURES AT 9' AFF, BELOW MEZZANINE.
- 11 PROVIDE INTEGRAL EMERGENCY DRIVER.
- 12 REFER TO LOCAL AREA CONTROLLER DIAGRAM A3/EL702. THIS CONTROLLER AND ASSOCIATED SWITCHES MUST CONTROL THE FIXTURES WITHIN CORRIDORS 102, 103, AND 104. EACH CORRIDOR MUST HAVE THE ABILITY TO BE SEPARATELY CONTROLLED.
- 13 ROUTE CONDUIT A MINIMUM OF 15 FEET AWAY FROM THE HEAT SEALERS IN SHOP 111.
- 14 PROVIDE SHIELDED LOW VOLTAGE LIGHTING CONTROL CABLES IN SHOP 111.
- 15 WIRE FIXTURE TO TOGGLE SWITCH, NOT OCCUPANCY SENSOR, FOR USE AT THE PANELBOARD.
- 16 PROVIDE TWO LIGHTING FIXTURES IN THE ELEVATOR PIT. PROVIDE ADDITIONAL LIGHTING FIXTURES EVERY 10 FEET, VERTICALLY, UP THE HOISTWAY. COORDINATE EXACT LOCATION WITH THE ELEVATOR INSTALLER. REFER TO SHEET AE411.
- 17 WIRE FIXTURE AS ALWAYS ON FOR ELEVATOR LOBBY LIGHTING.
- 18 FOR CONTINUATION, SEE SHEET EL104.
- 19 PROVIDE EMERGENCY POWER VIA INVERTER. INSTALL WITHIN MANUFACTURER'S RECOMMENDED DISTANCE. COORDINATE EXACT LOCATION IN THE FIELD. PROVIDE LABEL.
- 20 MOUNT LIGHTING FIXTURE AT APPROXIMATELY 9' AFF. COORDINATE EXACT LIGHTING FIXTURE PLACEMENT AND MOUNTING HEIGHT WITH THE CONTRACTING OFFICER TO AVOID CONFLICTS WITH THE INSPECTION RINGS LOCATED WITHIN THIS ROOM. PROVIDE ACCESSORIES FOR PENDANT MOUNTING.
- 21 INSTALL ABOVE PLATFORM. COORDINATE EXACT LOCATION AND MOUNTING HEIGHT IN THE FIELD.

KEY PLAN

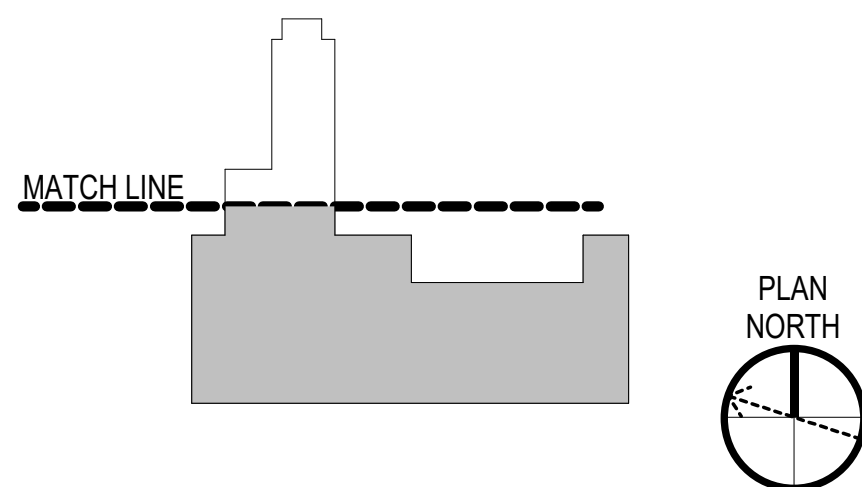

GRAPHIC SCALE(S)



NAVFAC		DALE C. LINCOLN, II No. 10443 10/01/2025 PROFESSIONAL ENGINEER		RSH 10/01/2025 DATE	
OAK POINT ASSOCIATES		T. CARLETON L. LYONS		S. RUCINSKI	
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - MID-ATLANTIC		PORTSMOUTH NAVAL SHIPYARD - KITTEERY, ME		B60 REPAIRS	
FIRST FLOOR LIGHTING PART PLAN - WEST		PROJECT NO. 1740579		SHEET 266 OF 282	
EL102		DRAWING NO.		14 SEP 2023	

D

C

B

A

D

C

B UNCLASSIFIED

A



A1 FIRST FLOOR MEZZANINE LIGHTING PART PLAN - EAST
SCALE: 1/8" = 1'-0"


GENERAL NOTES

1. REFER TO SHEETS EL701 AND EL702 FOR LIGHTING FIXTURE SCHEDULE AND DETAILS.
2. EXPOSED CONDUIT AT EXTERIOR LIGHTING FIXTURES IS NOT PERMITTED. ROUTE CONDUIT THROUGH THE BACK OF THE FIXTURES.
3. CONNECT EMERGENCY LIGHTING AND EXIT SIGNS TO LOCAL LIGHTING BRANCH CIRCUIT AHEAD OF SWITCHES, OCCUPANCY SENSORS, AND LIGHTING CONTROLS.


KEYNOTES

- 1 PROVIDE LIGHTING BYPASS RELAY WITHIN THE PATHS OF EGRESS TO TURN LIGHTS ON UPON FIRE ALARM ACTIVATION. REFER TO DETAIL A2/EL702.
- 2 PROVIDE SUPPLEMENTAL SUPPORTS FOR LIGHTING FIXTURES. MOUNT FIXTURES AT APPROXIMATELY 27' AFF.
- 3 PROVIDE SUPPLEMENTAL SUPPORTS FOR LIGHTING FIXTURES. MOUNT AT APPROXIMATELY 25' AFF.
- 4 REFER TO SHEET EL101 FOR LIGHTING CONTROLS.
- 5 PROVIDE EMERGENCY POWER VIA INVERTER. INSTALL INVERTER ADJACENT TO THE LIGHTING CONTROL PANEL. SEE SHEET EL101.
- 6 REFER TO LOCAL AREA CONTROLLER DIAGRAM A1/EL702. REFER TO SHEET EL101 FOR CONTROLLER LOCATION. THESE SWITCHES MUST CONTROL THE FIXTURES IN ANNEX 116 AND ANNEX 118.
- 7 COORDINATE EXACT FIXTURE MOUNTING HEIGHTS AND MOUNTING LOCATIONS WITH THE FIRE PROTECTION TRADE.
- 8 PROVIDE INTEGRAL EMERGENCY DRIVER.
- 9 PROVIDE EMERGENCY POWER VIA INVERTER. INSTALL WITHIN MANUFACTURER'S RECOMMENDED DISTANCE. COORDINATE EXACT LOCATION IN THE FIELD. PROVIDE LABEL.


KEY PLAN

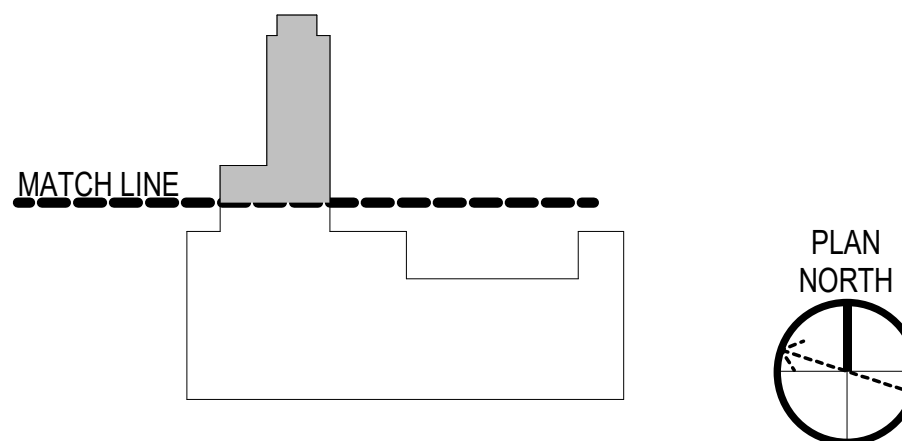

GRAPHIC SCALE(S)



SYN	DESCRIPTION	DATE	APP
	FINAL SUBMISSION	10/01/2025	RSB

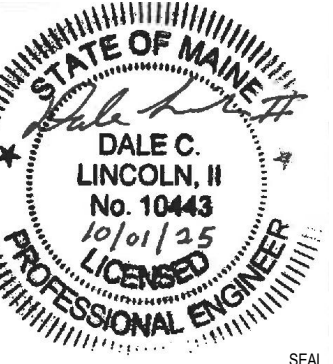

APPROVED	
FOR COMMANDER NAVFAC	
ACTIVITY	
SATISFACTORY TO DATE	
DESIGNER	HRM
DRAWN BY	RSW
CHECKED BY	DCL
DESIGN MANAGER	T. CARLETON
PROJECT MANAGER	L. LYONS
HEADLINE	
FIRE PROTECTION	S. RUCINSKI


DEPARTMENT OF THE NAVY	NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND	NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - MID-ATLANTIC	PORTSMOUTH NAVAL SHIPYARD - KITTERY, ME
ROCC-ME	PORTSMOUTH NAVAL SHIPYARD	B60 REPAIRS	FIRST FLOOR MEZZANINE LIGHTING PART PLAN - EAST

PROJECT NO.	1740579
NAV-FAC DRAWING NO.	
SHEET	267 OF 282
EL103	

D

C

B

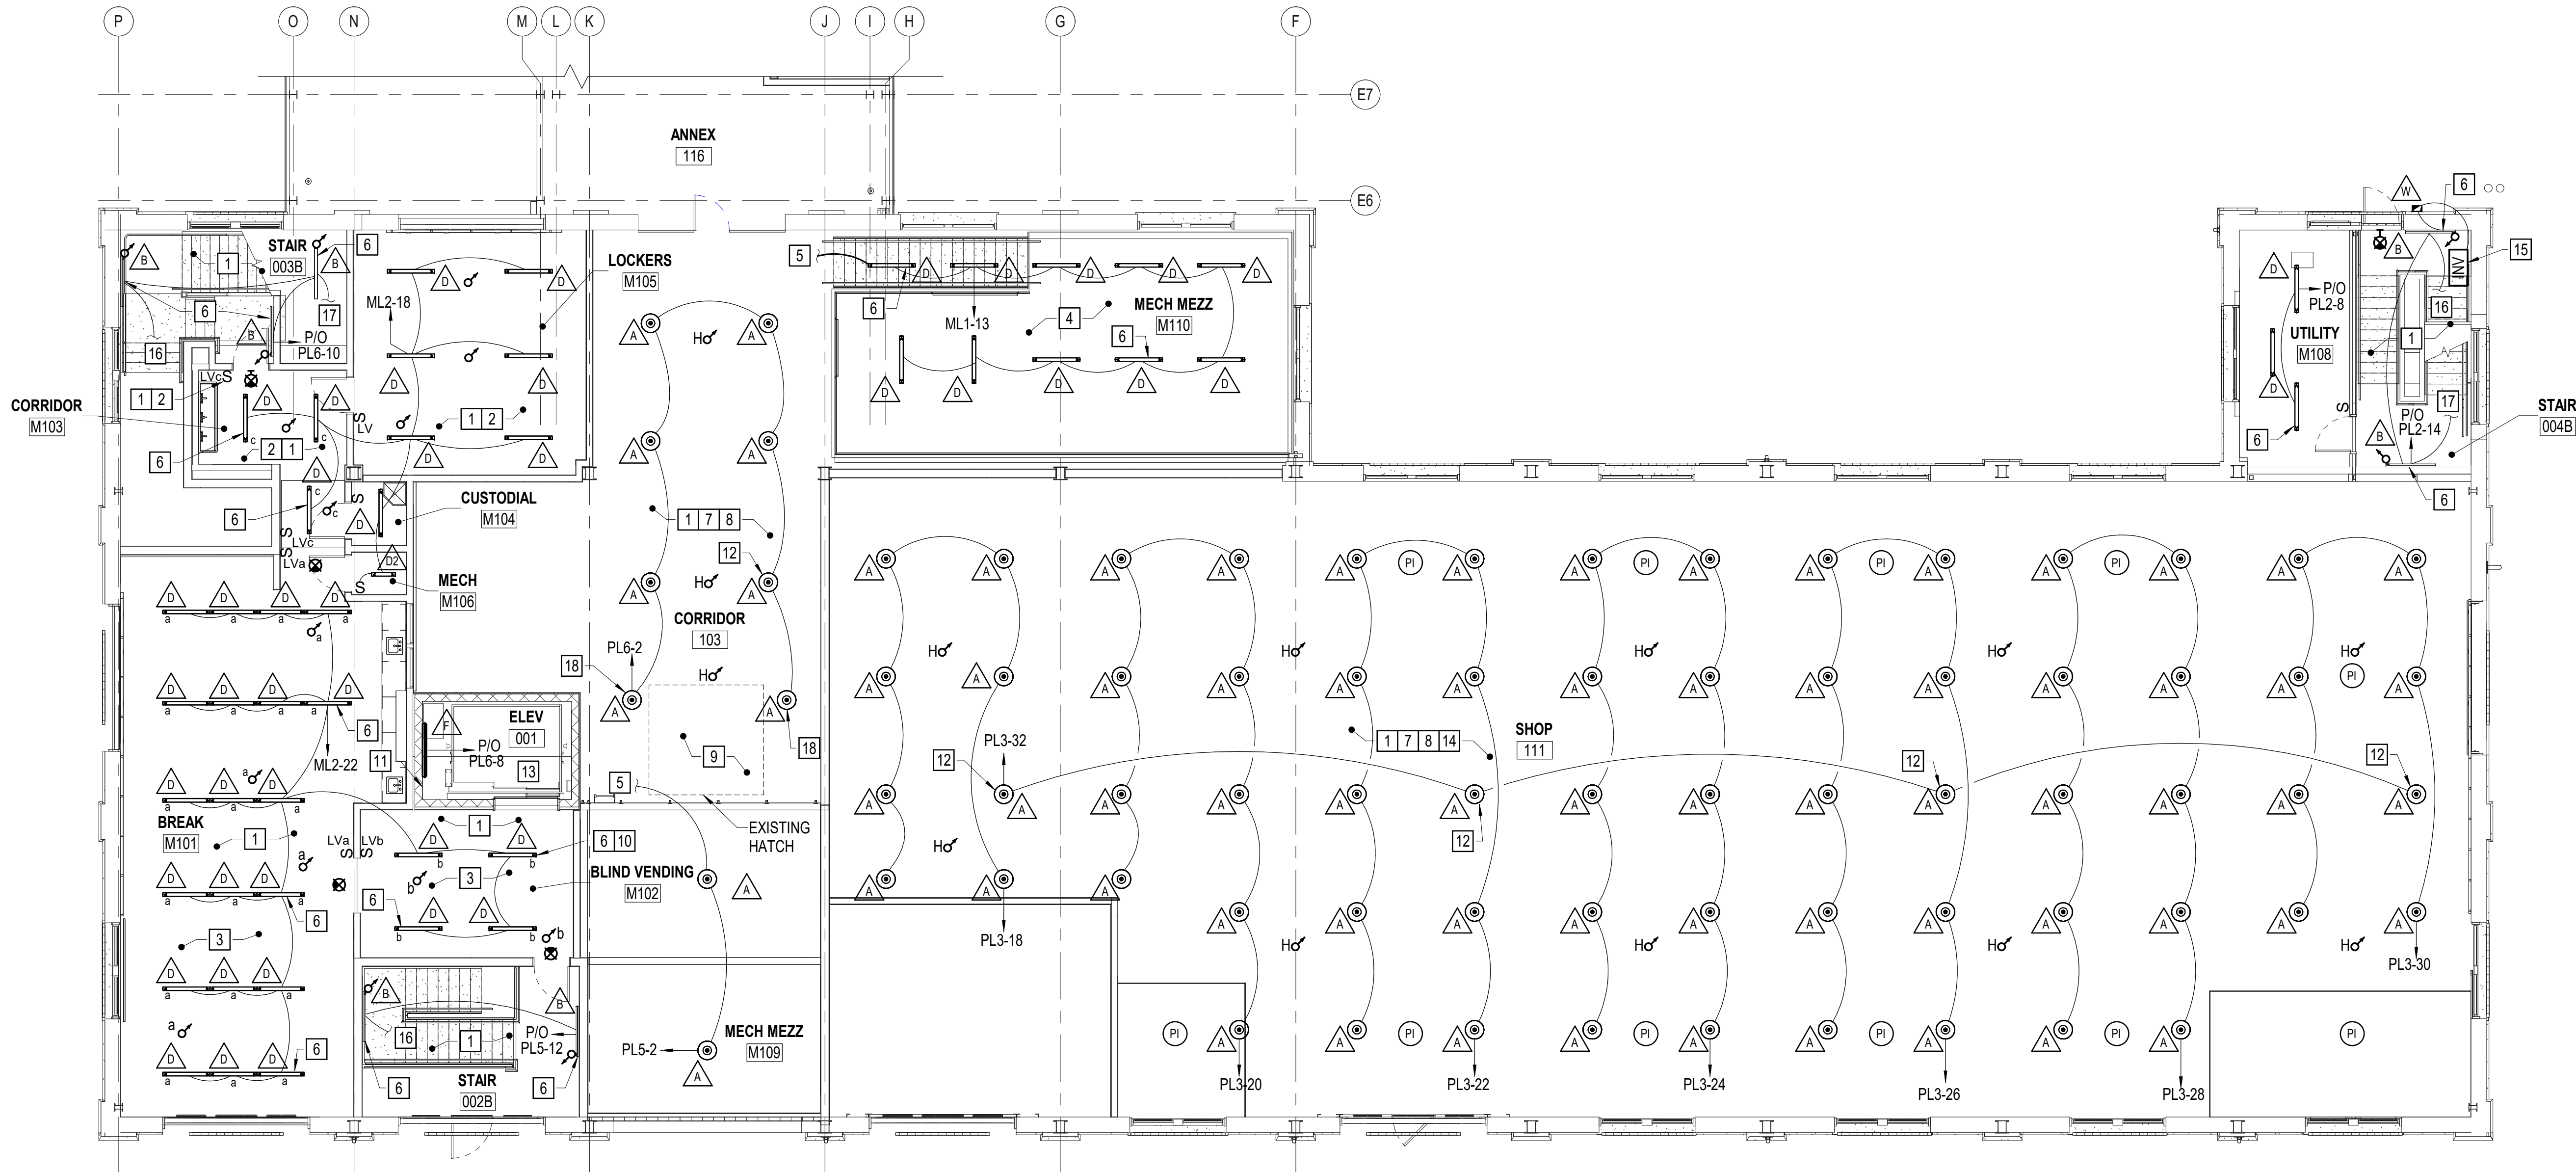

B1 FIRST FLOOR MEZZANINE LIGHTING PART PLAN - WEST
SCALE: 1/8" = 1'-0"


GENERAL NOTES

- REFER TO SHEETS EL701 AND EL702 FOR LIGHTING FIXTURE SCHEDULE AND DETAILS.
- EXPOSED CONDUIT AT EXTERIOR LIGHTING FIXTURES IS NOT PERMITTED. ROUTE CONDUIT THROUGH THE BACK OF THE FIXTURES.
- CONNECT EMERGENCY LIGHTING AND EXIT SIGNS TO LOCAL LIGHTING BRANCH CIRCUIT AHEAD OF SWITCHES, OCCUPANCY SENSORS, AND LIGHTING CONTROLS.


KEYNOTES

- | | | |
|---|---|--|
| <p>1 PROVIDE LIGHTING BYPASS RELAY WITHIN THE PATHS OF EGRESS TO TURN LIGHTS ON UPON FIRE ALARM ACTIVATION. REFER TO DETAIL A2/EL702.</p> <p>2 MOUNT FIXTURES AT 15' AFF. PROVIDE ACCESSORIES FOR PENDANT MOUNTING AND COORDINATE WITH MECHANICAL EQUIPMENT, PIPING AND DUCTWORK.</p> <p>3 MOUNT FIXTURES AT 12' AFF. PROVIDE ACCESSORIES FOR PENDANT MOUNTING, AND COORDINATE WITH MECHANICAL EQUIPMENT, PIPING AND DUCTWORK.</p> <p>4 MOUNT FIXTURES AT 10' AFF. PROVIDE ACCESSORIES FOR PENDANT MOUNTING, AND COORDINATE WITH MECHANICAL EQUIPMENT, PIPING AND DUCTWORK.</p> <p>5 TO SWITCH BELOW.</p> <p>6 PROVIDE INTEGRAL EMERGENCY DRIVER.</p> | <p>7 PROVIDE SUPPLEMENTAL SUPPORTS FOR LIGHTING FIXTURES. MOUNT FIXTURES AT APPROXIMATELY 20' AFF. COORDINATE WITH DUCTWORK AND THE MECHANICAL TRADE.</p> <p>8 REFER TO SHEET EL102 FOR ADDITIONAL LIGHTING CONTROLS INFORMATION.</p> <p>9 COORDINATE EXACT LOCATION OF FIXTURES AND SENSOR TO AVOID THE CEILING HATCH.</p> <p>10 WIRE FIXTURE AS ALWAYS ON FOR ELEVATOR LOBBY LIGHTING.</p> <p>11 PROVIDE LIGHTING FIXTURES EVERY 10 FEET, VERTICALLY, UP THE HOISTWAY. COORDINATE EXACT LOCATION WITH THE ELEVATOR INSTALLER.</p> <p>12 PROVIDE EMERGENCY POWER VIA INVERTER, INSTALL INVERTER ADJACENT TO THE LIGHTING CONTROL PANEL. SEE SHEET EL102.</p> <p>13 COORDINATE EXACT LIGHTING FIXTURE LOCATION IN THE ELEVATOR SHAFT WITH THE ELEVATOR INSTALLER. REFER TO SHEET AE411.</p> | <p>14 PROVIDE SHIELDED LOW VOLTAGE LIGHTING CONTROL CABLES IN SHOP 111.</p> <p>15 PROVIDE EMERGENCY POWER VIA INVERTER. INSTALL WITHIN MANUFACTURERS RECOMMENDED DISTANCE. COORDINATE EXACT LOCATION IN THE FIELD. PROVIDE LABEL.</p> <p>16 FOR CONTINUATION, SEE SHEET EL102.</p> <p>17 FOR CONTINUATION, SEE SHEET EL105.</p> <p>18 COORDINATE EXACT LOCATION WITH THE EXISTING HATCH.</p> |
|---|---|--|

KEY PLAN

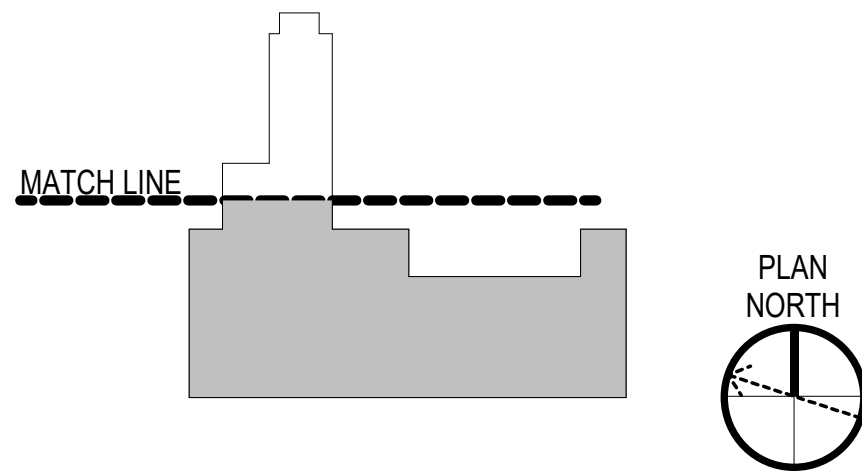

GRAPHIC SCALE(S)



B UNCLASSIFIED

A

NAVFAC		DALE C. LINCOLN, II No. 10443 10/01/2025 PROFESSIONAL ENGINEER		STATE OF MAINE	
OAK POINT ASSOCIATES		T. CARLETON L. LYONS		S. RUCINSKI	
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - MID-ATLANTIC		PORTSMOUTH NAVAL SHIPYARD - KITTEERY, ME		B60 REPAIRS	
FIRST FLOOR MEZZANINE LIGHTING PART PLAN - WEST		PROJECT NO. 1740579		SHEET 268 OF 282	
EL104		DATE 10/01/2025		RSH	
SYN		DESCRIPTION		APPR	
FINAL SUBMISSION		DATE		APPR	

10/1/2025 5:27:07 PM EL105
C:\Users\bdagle\Documents\2103.25_BLDG00_ELEC-V23_bdagle\QUXG8.rvt

A

D

C

B


1

2

3 UNCLASSIFIED

4

5

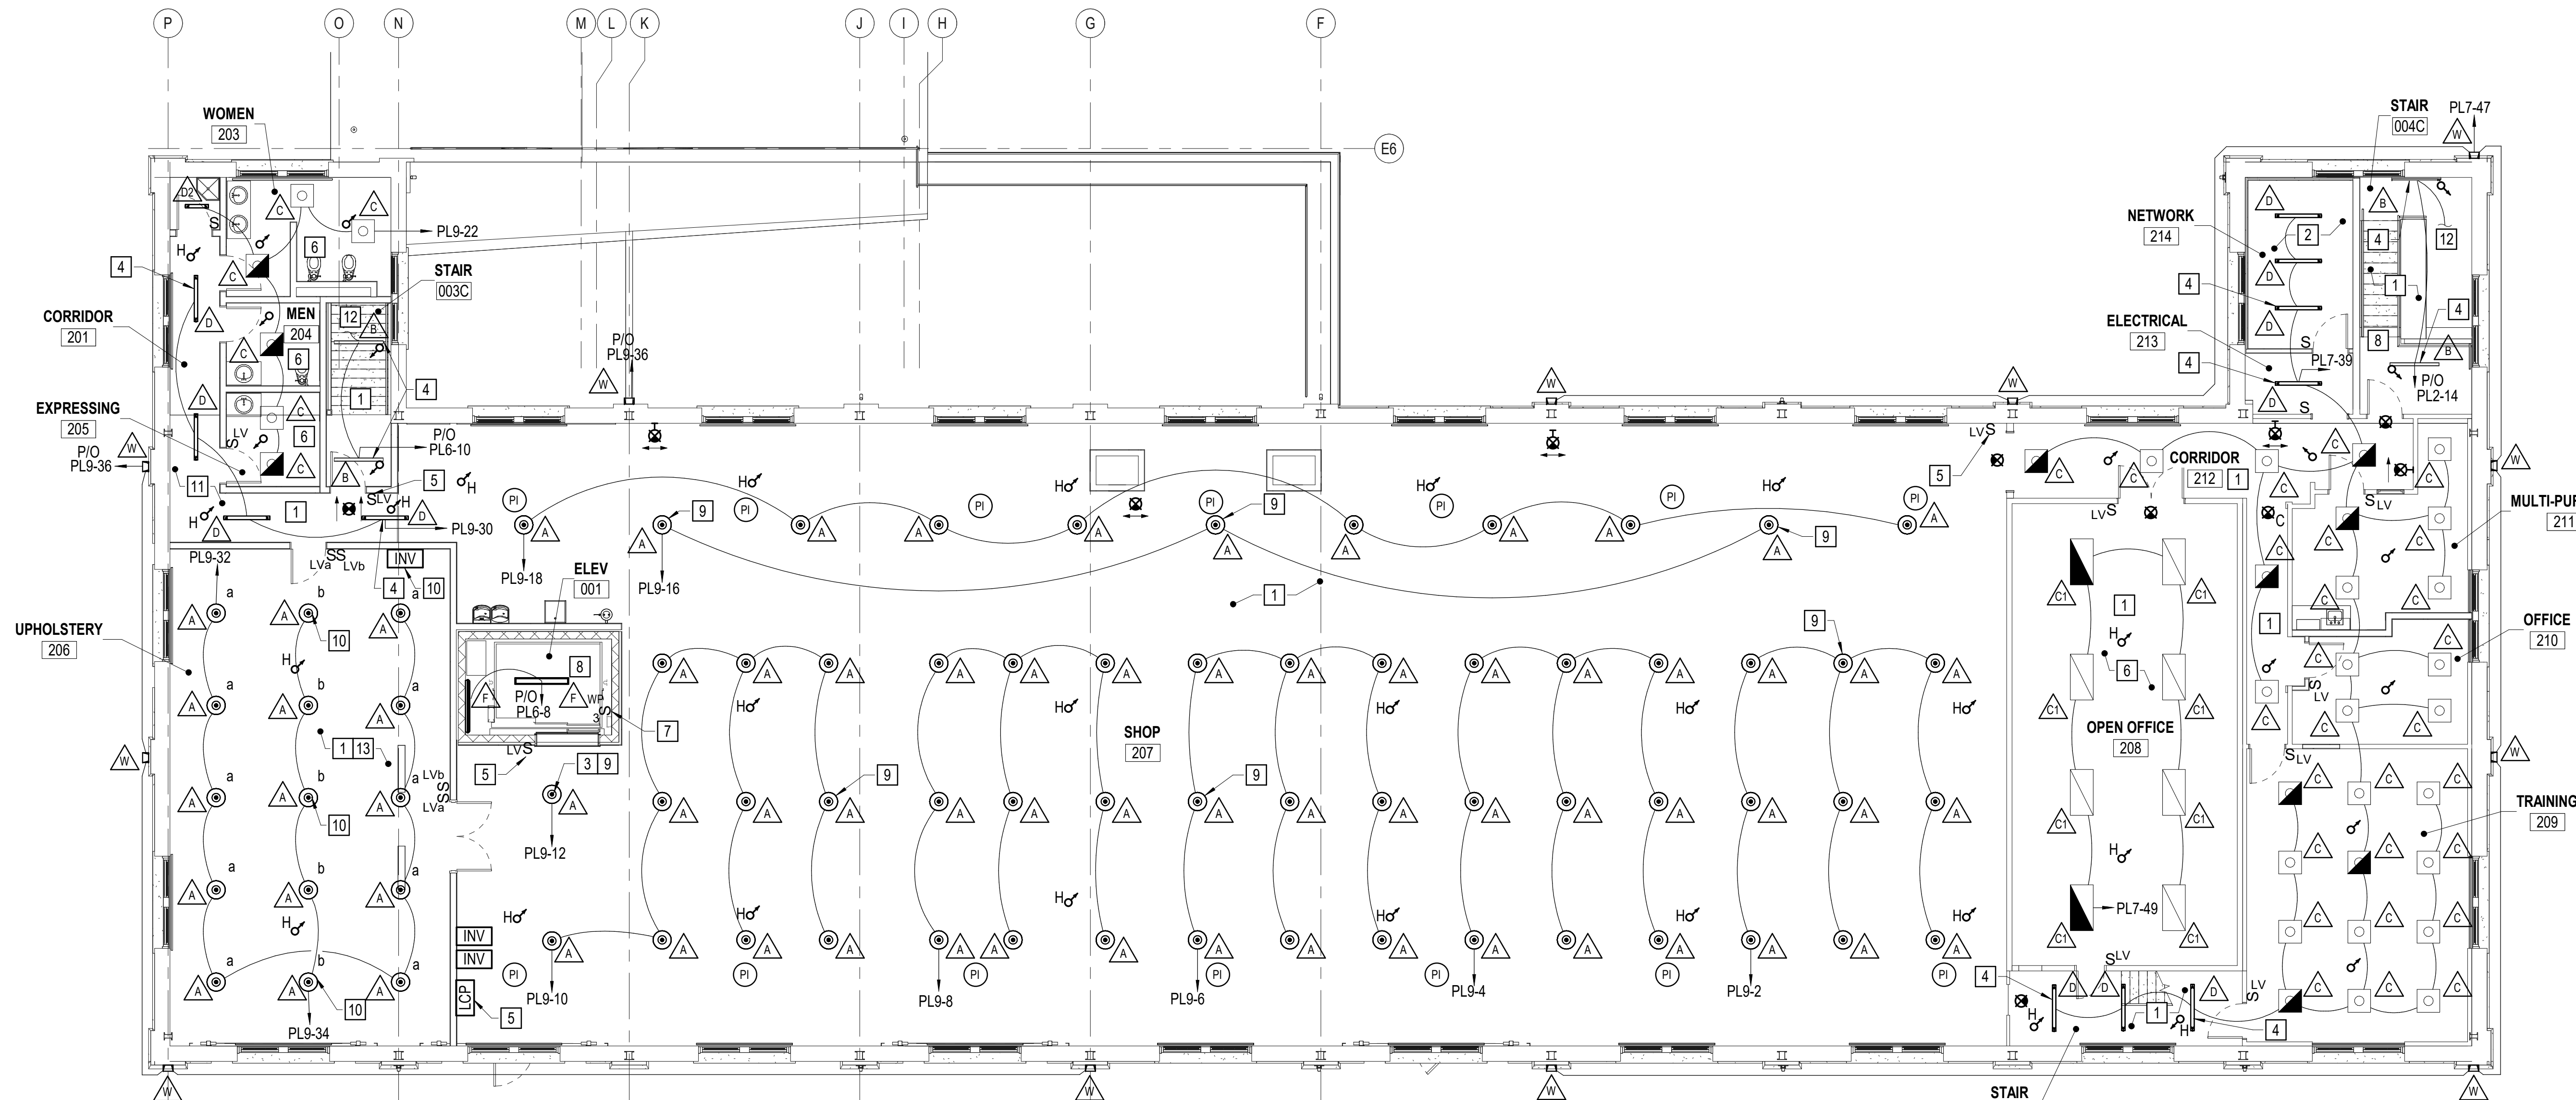

B1 SECOND FLOOR LIGHTING PLAN
SCALE: 1/8" = 1'-0"


GENERAL NOTES

- REFER TO SHEETS EL701 AND EL702 FOR LIGHTING FIXTURE SCHEDULE AND DETAILS.
- EXPOSED CONDUIT AT EXTERIOR LIGHTING FIXTURES IS NOT PERMITTED. ROUTE CONDUIT THROUGH THE BACK OF THE FIXTURES.
- MINIMIZE EXPOSED CONDUIT ON BEADBOARD CEILINGS. TO THE GREATEST EXTENT POSSIBLE, ROUTE CONDUIT WITHIN THE ATTIC AND MEZZANINES ABOVE.
- CONNECT EMERGENCY LIGHTING AND EXIT SIGNS TO LOCAL LIGHTING BRANCH CIRCUIT AHEAD OF SWITCHES, OCCUPANCY SENSORS, AND LIGHTING CONTROLS.

KEYNOTES

- | | |
|--|---|
| 1 PROVIDE LIGHTING BYPASS RELAY WITHIN THE PATHS OF EGRESS TO TURN LIGHTS ON UPON FIRE ALARM ACTIVATION. REFER TO DETAIL A2/EL702. | 8 COORDINATE EXACT LIGHTING FIXTURE LOCATION IN THE ELEVATOR SHAFT WITH THE ELEVATOR INSTALLER. REFER TO SHEET AE411. |
| 2 COORDINATE EXACT LOCATION AND MOUNTING HEIGHT WITH THE COMMUNICATIONS CABINETS AND CABLE TRAY. | 9 PROVIDE EMERGENCY POWER VIA INVERTER. INSTALL INVERTER ADJACENT TO THE LIGHTING CONTROL PANEL. |
| 3 WIRE FIXTURE AS ALWAYS ON FOR ELEVATOR LOBBY LIGHTING. | 10 PROVIDE EMERGENCY POWER VIA INVERTER FOR INDICATED FIXTURES IN UPHOLSTERY 206. COORDINATE EXACT LOCATION FOR THE INVERTER WITH THE CONTRACTING OFFICER AND EQUIPMENT WITHIN THE ROOM. |
| 4 PROVIDE INTEGRAL EMERGENCY DRIVER. | 11 PENDANT MOUNT AT 10' AFF. |
| 5 REFER TO LOCAL AREA CONTROLLER DIAGRAM A1/EL702. THIS CONTROLLER AND ASSOCIATED SWITCHES MUST CONTROL THE FIXTURES WITHIN SHOP 207. | 12 FOR CONTINUATION, SEE SHEET EL104. |
| 6 PROVIDE SURFACE MOUNTING KIT FOR FIXTURES IN THIS ROOM. | 13 PENDANT MOUNT AT APPROXIMATELY 14' 8" AFF. COORDINATE BOTTOM OF THE FIXTURE TO ALIGN WITH THE BOTTOM OF THE DUCTWORK IN THE SPACE. |
| 7 FOR HOISTWAY LIGHTING CONTROL. MOUNT 4' ABOVE THE TOP ELEVATOR LANDING, ADJACENT TO THE HOISTWAY ENTRANCE STRIKE JAMB. COORDINATE EXACT LOCATION WITH THE ELEVATOR INSTALLER. | |

KEY PLAN

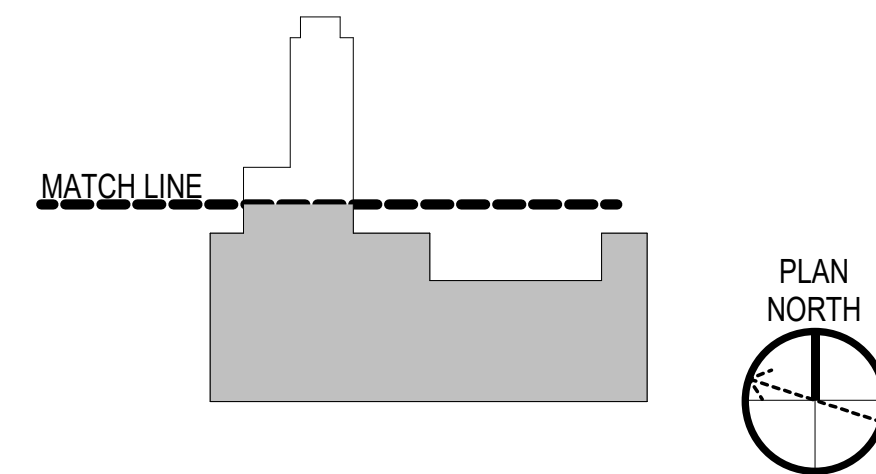

GRAPHIC SCALE(S)



SYMBOL	DESCRIPTION	DATE	APPROVED
	FINAL SUBMISSION	10/01/2025	RSJ



OAK POINT ASSOCIATES

APPROVED
FOR COMMANDER NAVFAC

ACTIVITY

SATISFACTORY TO DATE

DESIGNER HRM

DRAWN BY RSW

CHECKED BY DCL

DESIGN MANAGER T. CARLETON

PROJECT MANAGER L. LYONS

HEADLINE

FIRE PROTECTION S. RUCINSKI

NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND

NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - MID-ATLANTIC

PORTSMOUTH NAVAL SHIPYARD - KITTERY, ME

KITTERY, ME

B60 REPAIRS

SECOND FLOOR LIGHTING PLAN

PROJECT NO. 1740579

NAVFAC DRAWING NO.

SHEET 269 OF 282

EL105

DRAWING REVISION: 14 SEP 2023

1

2

3 UNCLASSIFIED

4

5

B UNCLASSIFIED

A




1. REFER TO SHEETS EL701 AND EL702 FOR LIGHTING FIXTURE SCHEDULE AND DETAILS.
2. CONNECT EMERGENCY LIGHTING AND EXIT SIGNS TO LOCAL LIGHTING BRANCH CIRCUIT AHEAD OF SWITCHES, OCCUPANCY SENSORS, AND LIGHTING CONTROLS.

1	COORDINATE EXACT LOCATION AND MOUNTING HEIGHT OF THE LIGHTING FIXTURES WITH THE MECHANICAL EQUIPMENT AND STRUCTURE.
2	PROVIDE INTEGRAL EMERGENCY DRIVER.

1/8" = 1' - 0"

A horizontal graphic scale bar with a black and white checkerboard pattern. It is marked with the values 0, 5', 10', 15', and 30'.

10/1/2025 5:27:17 PM EL107
C:\Users\bdagle\Documents\2103.25_BLDG00_ELEC-V23_bdagle\QUXG8.rvt

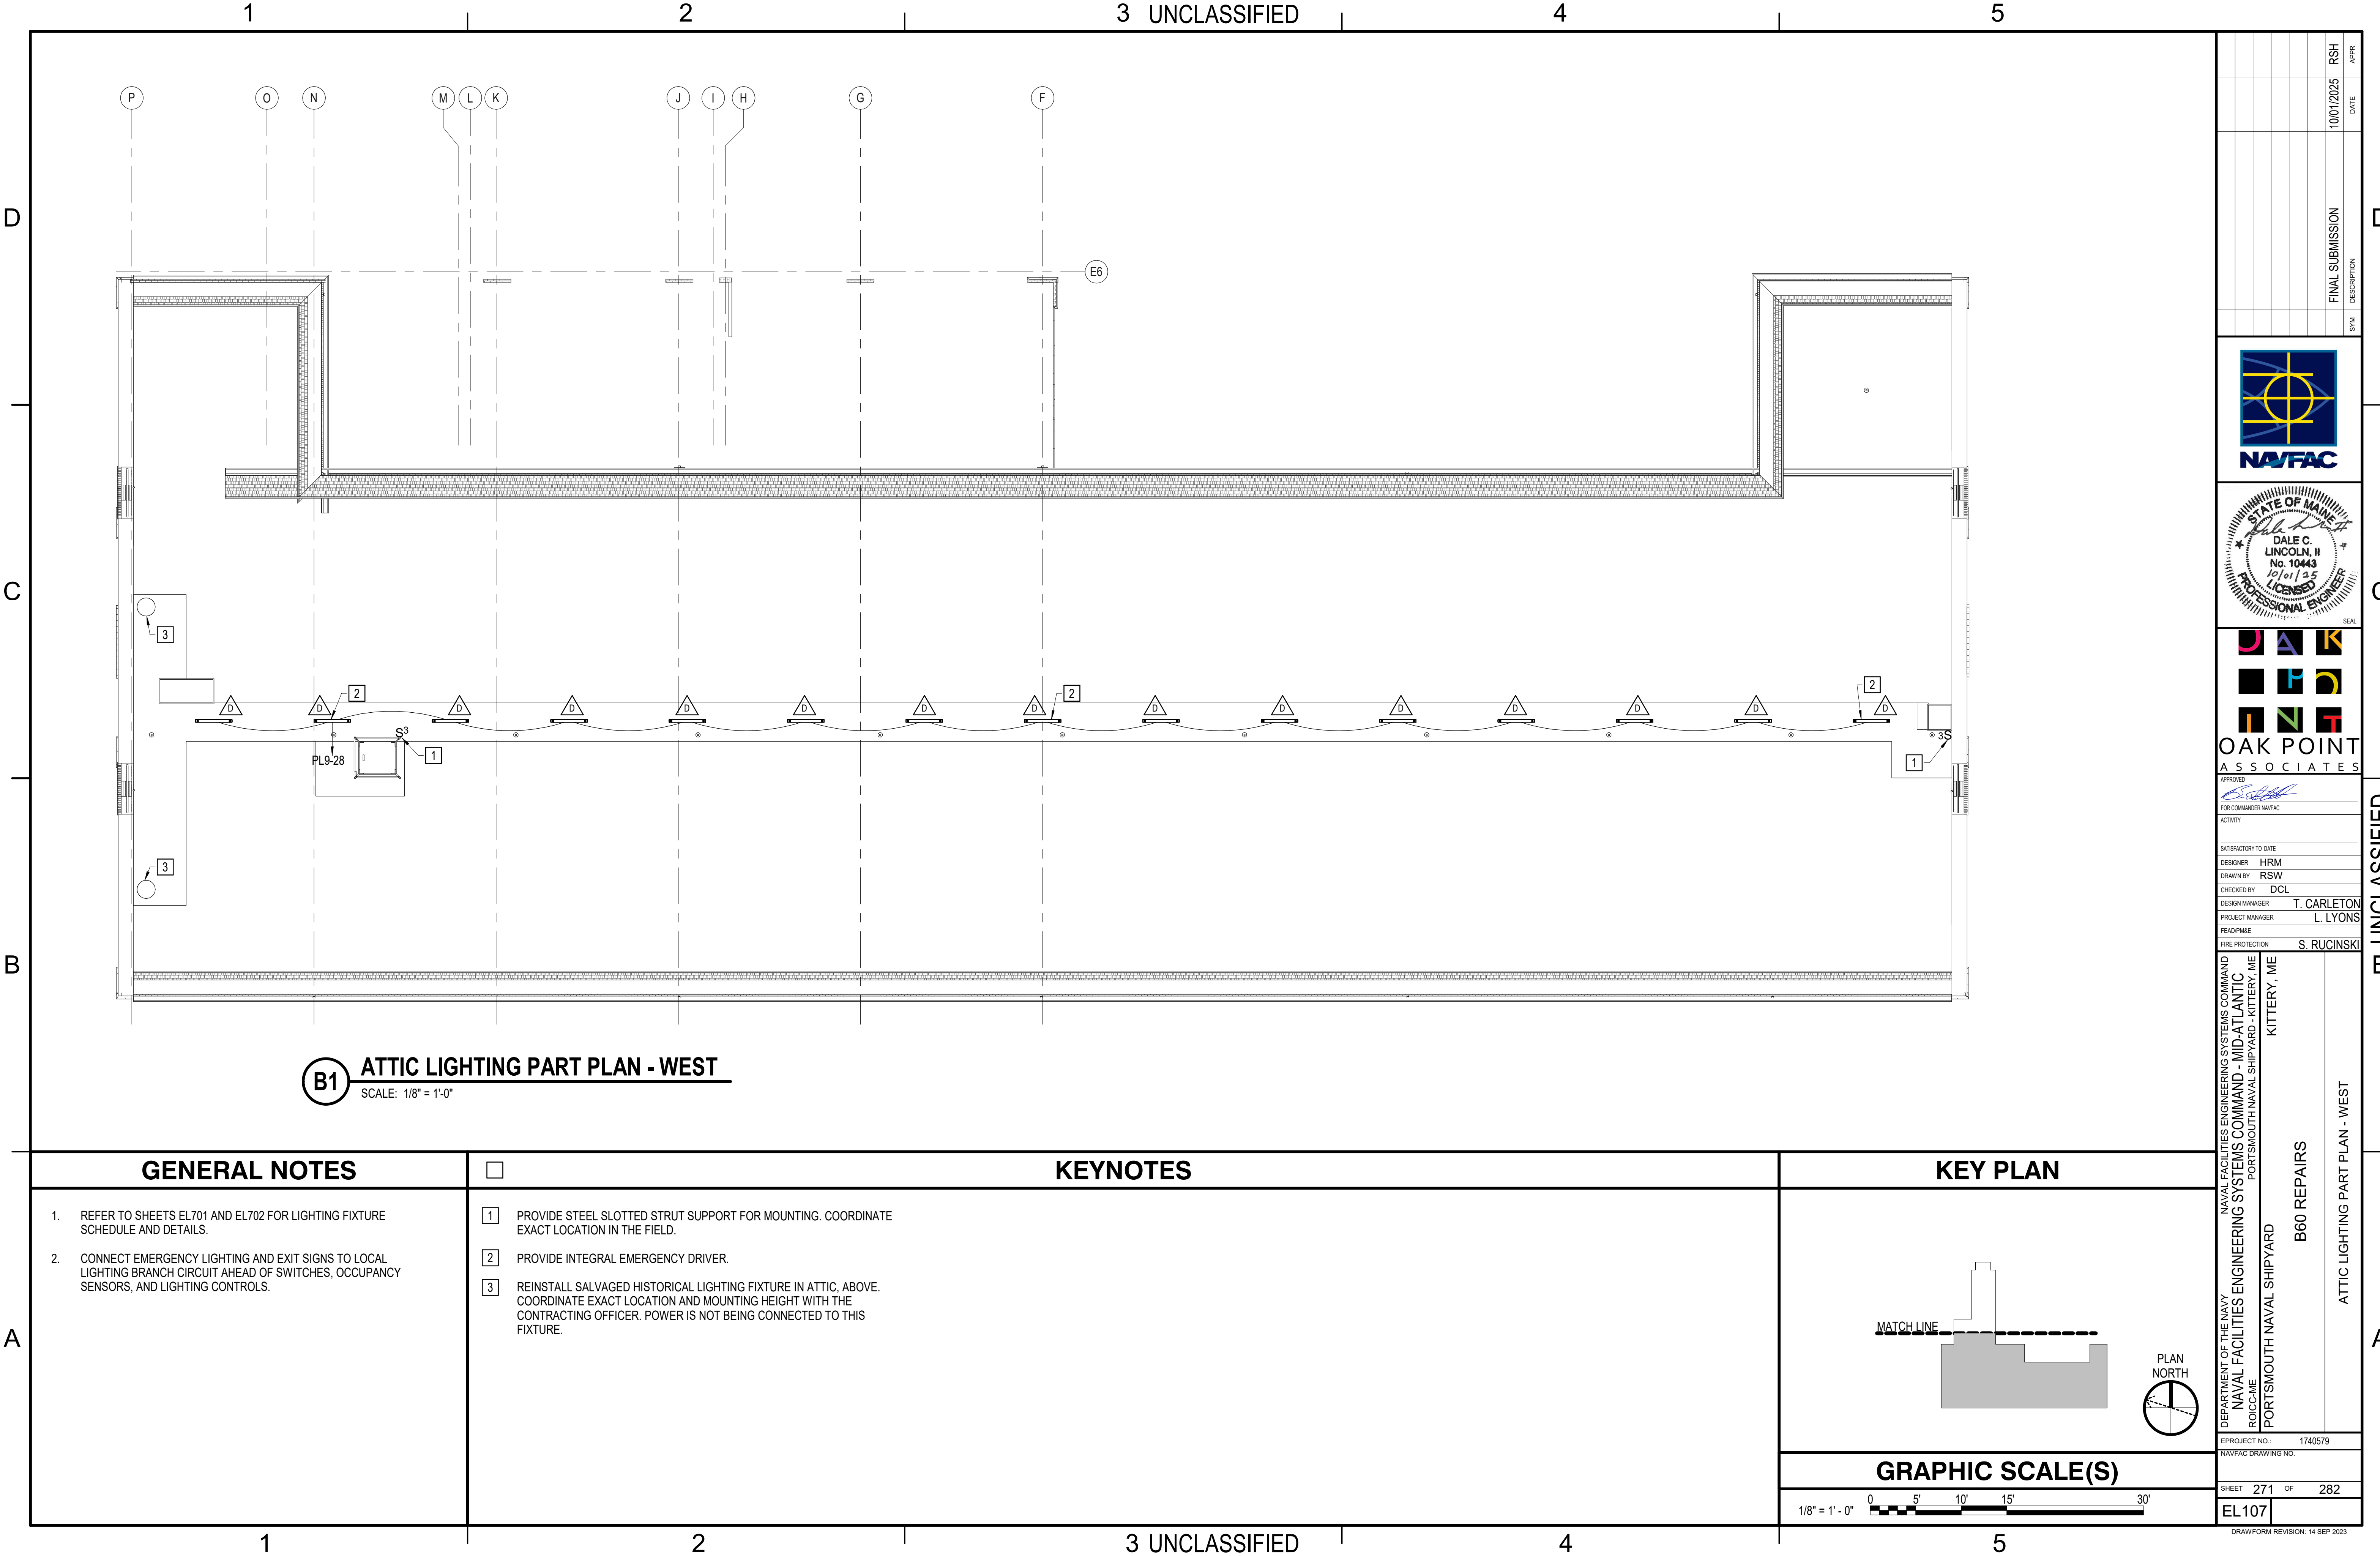

B1 **ATTIC LIGHTING PART PLAN - WEST**
SCALE: 1/8" = 1'-0"


GENERAL NOTES

- REFER TO SHEETS EL701 AND EL702 FOR LIGHTING FIXTURE SCHEDULE AND DETAILS.
- CONNECT EMERGENCY LIGHTING AND EXIT SIGNS TO LOCAL LIGHTING BRANCH CIRCUIT AHEAD OF SWITCHES, OCCUPANCY SENSORS, AND LIGHTING CONTROLS.

KEYNOTES

- 1** PROVIDE STEEL SLOTTED STRUT SUPPORT FOR MOUNTING. COORDINATE EXACT LOCATION IN THE FIELD.
- 2** PROVIDE INTEGRAL EMERGENCY DRIVER.
- 3** REINSTALL SALVAGED HISTORICAL LIGHTING FIXTURE IN ATTIC, ABOVE. COORDINATE EXACT LOCATION AND MOUNTING HEIGHT WITH THE CONTRACTING OFFICER. POWER IS NOT BEING CONNECTED TO THIS FIXTURE.

KEY PLAN

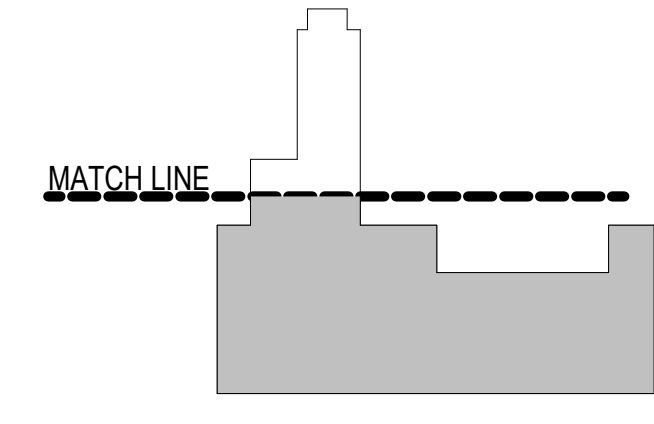

GRAPHIC SCALE(S)



RSH		APPR	
10/01/2025		DATE	
FINAL SUBMISSION		SYN	
DESCRIPTION		SYN	

APPROVED	
FOR COMMANDER NAVFAC	
ACTIVITY	
SATISFACTORY TO DATE	
DESIGNER	HRM
DRAWN BY	RSW
CHECKED BY	DCL
DESIGN MANAGER	T. CARLETON
PROJECT MANAGER	L. LYONS
FEAD/PNAME	
FIRE PROTECTION	S. RUCINSKI

DEPARTMENT OF THE NAVY
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - MID-ATLANTIC
ROICC-ME
PORTSMOUTH NAVAL SHIPYARD
KITTERY, ME

B60 REPAIRS

ATTIC LIGHTING PART PLAN - WEST

PROJECT NO.	1740579
NAV-FAC DRAWING NO.	
SHEET	271 OF 282
EL107	

DRAWING REVISION: 14 SEP 2023

UNCLASSIFIED

- D



A

A




A

A

A


A

DRAWFORM REVISION: 14 SEP 202



1. PROVIDE INTEGRAL BATTERY BACKUP WHERE INDICATED ON PLANS.
2. COORDINATE MOUNTING TYPE, GRID (SAT), FLANGE, GYPSUM OR SURFACE/SUSPENDED (NO CEILING) WITH CEILING.
3. PROVIDE FIXTURE WITH DIMMING CAPABILITIES.
4. FINAL COLOR SELECTION MUST BE MADE BY CONTRACTING OFFICER FROM MANUFACTURERS STANDARD RANGE OF COLOR OPTIONS.
5. REFER TO EXTERIOR ELEVATIONS. VERIFY MOUNTING WITH CONTRACTING OFFICER BEFORE INSTALLATION OF CONDUIT AND JUNCTION BOXES.
6. PROVIDE B-U-G OF 1-0-0. DIMENSIONS TO BE APPROXIMATELY 7-1/2" WIDE, 8" TALL, 3-5/8" DEEP. OVERALL DIMENSIONS AND FEATURES OF THE FIXTURE TO BE REVIEWED WITH THE ARCHITECTURAL TRADE TO BE AESTHETICALLY PLEASING AND ACCEPTABLE TO THE STATE HISTORIC PRESERVATION OFFICER (SHPO).
7. PROVIDE INTEGRAL DUSK-TO-DAWN PHOTOCELL CONTROL.
8. PROVIDE THERMOPLASTIC WITH RED LETTERS AND BATTERY BACKUP. PROVIDE PENDANT MOUNTED, WHERE INDICATED.
9. PROVIDE THE FOLLOWING: HIGH EFFICIENCY. 3500K. 90 CRI. FROSTED FLAT GLARE REDUCING LENS. WIDE DISTRIBUTION. ENDCAP WITHOUT KNOCKOUTS FOR FIXTURES AT ENDS OF ROWS. CONTINUOUS ROW ALIGNMENT BRACKET BETWEEN FIXTURES IN ROWS. COLOR: WHITE. DIMMABLE. FIELD REMOVABLE LENS SECTION FOR ACCESS TO DRIVER CHANNEL. 4" LONG.
10. PROVIDE STAIRWELL LUMINAIRE WITH INTEGRAL OCCUPANCY SENSOR AND EMERGENCY DRIVER. PROVIDE FROSTED ACRYLIC LENS AND WIDE DISTRIBUTION. DIMENSIONS OF 51.7" LONG X 3.4" HIGH X 3.45" DEEP. UL924 LISTED. AFTER 15 MINUTES OF NO OCCUPANCY, SENSOR DIMS LUMINAIRE TO 50% OUTPUT. ONCE OCCUPIED, LUMINAIRE RETURNS TO 100% OUTPUT
11. PROVIDE B-U-G OF 3-0-2. DIMENSIONS TO BE APPROXIMATELY 10-3/4" WIDE, 11-1/2" TALL, 4-7/8" DEEP. OVERALL DIMENSIONS AND FEATURES OF THE FIXTURE TO BE REVIEWED WITH THE ARCHITECTURAL TRADE TO BE AESTHETICALLY PLEASING AND ACCEPTABLE TO THE STATE HISTORIC PRESERVATION OFFICER (SHPO).
12. PROVIDE THE FOLLOWING: 2X2 SQUARE, SMOOTH REFLECTOR, HIGH EFFICIENCY (>130 LM/W), 3500K. 90 CRI. PROVIDE SURFACE MOUNT KIT, WHERE REQUIRED.
13. PROVIDE THE FOLLOWING: 19" ROUND, 3.75" TALL. RECESSED LENSE MINIMIZES HIGH ANGLE GLARE. MOLDED ACRYLIC LENS. SURFACE MOUNT, WITH NO UPLIGHT. TYPE V, MEDIUM DISTRIBUTION. 5400K. 80CRI.
14. PROVIDE THE FOLLOWING: 2X4 SQUARE, SMOOTH REFLECTOR, HIGH EFFICIENCY (>125 LM/W), 3500K. 90 CRI. PROVIDE SURFACE MOUNT KIT, WHERE REQUIRED.
15. PROVIDE THE FOLLOWING: HIGH EFFICIENCY. 3500K. 90 CRI. FROSTED FLAT GLARE REDUCING LENS. WIDE DISTRIBUTION. COLOR: WHITE. FIELD REMOVABLE LENS SECTION FOR ACCESS TO DRIVER CHANNEL. 2' LONG.
16. PROVIDE ONE-PIECE MOLDED, HIGH-IMPACT CLEAR ACRYLIC DIFFUSER WITH SECURE SEAL AGAINST DUST AND MOISTURE.
17. PROVIDE EMERGENCY POWER VIA INVERTER WHERE INDICATED ON THE PLANS.

REVISED:	NOVEMBER 2020	LIGHTING PLATE:	NI -7
----------	---------------	-----------------	-------

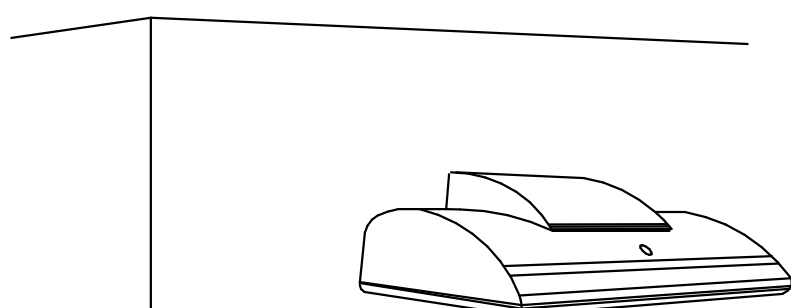


NOTE: THIS SKETCH IS A NON-PROPRIETARY GRAPHIC REPRESENTATION OF A LUMINAIRE THAT MAY MEET THE SPECIFICATION REQUIREMENTS. IT IS NOT INTENDED TO INDICATE A CERTAIN MANUFACTURER OR PREFERENCE.

LUMINAIRE REQUIREMENTS:

1. HOUSING - DIE-CAST OR EXTRUDED ALUMINUM WITH INTEGRAL PASSIVE COOLING MECHANISM. HEAT SINK INCORPORATED DIRECTLY INTO HOUSING OR DRIVER COMPARTMENT.
2. OPTICS - PRECISION MOLDED ACRYLIC LENS WITH TYPE II, III, OR IV DISTRIBUTIONS. BUG UPLIGHT RATING OF U0, WITH GLARE RATING AS DETERMINED BY LIGHTING ZONE INSTALLED.
3. LIGHT SOURCE - SOLID STATE LEDS, 3000K CCT UON, MINIMUM 70 CRI UON, AND MINIMUM EFFICACY OF 80 LUMENS/WATT UON. INITIAL LUMEN OUTPUT AS INDICATED IN LUMINAIRE SCHEDULE.
4. DRIVER - REPLACEABLE, INTEGRAL, HIGH-EFFICIENCY DIMMABLE DRIVER WITH MINIMUM 0.9 PF, OPERATING VOLTAGE OF 120-277V, THERMAL MANAGEMENT, AND < 20% THD. ON-OFF CONTROL AND FULLY DIMMABLE DOWN TO 10% MINIMUM OR AS INDICATED IN LUMINAIRE SCHEDULE.
5. CERTIFICATION - UL LISTED FOR WET LOCATION, ROHS COMPLIANT. COMPLIES WITH IES LM79, LM80 AND TM21 TESTING STANDARDS.
6. MOUNTING - SURFACE MOUNTED WITH STAINLESS STEEL MOUNTING HARDWARE.
7. OPTIONS - VARIOUS LIGHT DISTRIBUTIONS. INTEGRAL MOTION SENSOR, PHOTOCCELL, BATTERY BACK-UP.

LED WALL PACK

REVISED:	NOVEMBER 2020	LUMINAIRE PLATE:	XI-10
----------	---------------	------------------	--------------

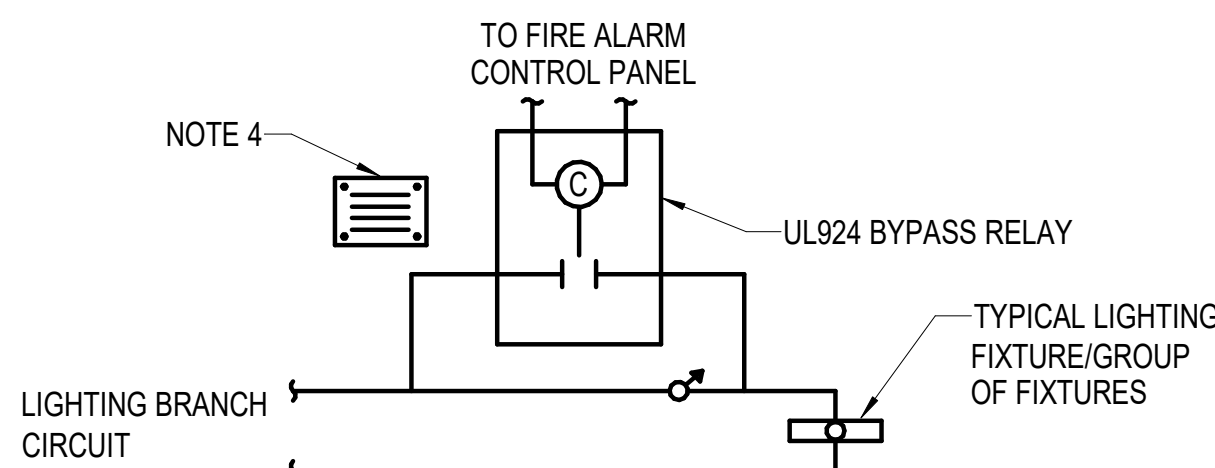

(TYP) H (TYP) A

A D1

LOCAL AREA CONTROLLER WITH TIME CLOCK

120V TYPICAL. REFER TO FLOOR PLANS FOR LOCATIONS

FACP NOTE 10

NOTE 8 SLV (TYP)

NOTE 4

1. WIRING, COMPONENTS AND INSTALLATION REQUIREMENTS WILL VARY DEPENDING ON SYSTEM.
2. INSTALLATION OF SENSORS, SWITCHES, AND WIRING MUST BE PER MANUFACTURER'S RECOMMENDATIONS.
3. CONTROL WIRING MUST BE PER MANUFACTURER'S RECOMMENDATION AND MUST BE INSTALLED WITHIN CONDUIT.
4. PROVIDE ENGRAVED INFORMATIONAL SIGN AT CONTROL PANEL INDICATING LIGHTING BRANCH CIRCUITS AND AREAS SERVED.
5. LOSS OF POWER TO CONTROLLER MUST TURN RELAYS ON.
6. DIAGRAM INDICATES TYPICAL CONTROL DEVICES. REFER TO LIGHTING PLANS FOR BRANCH CIRCUITS.
7. PROVIDE MINIMUM QUANTITY OF SENSORS AS INDICATED ON LIGHTING PLANS. PROVIDE MANUFACTURER'S RECOMMENDED SENSOR QUANTITIES AND SPACING FOR FULL COVERAGE OF SPACE IF MANUFACTURER RECOMMENDS ADDITIONAL SENSORS DUE TO CLOSER SENSOR SPACING.
8. EACH LIGHTING CONTROL SWITCH STATION MUST BE ABLE TO TURN LIGHTING ON/OFF WITHIN THE CONTROLLED AREA AND RAISE/LOWER LIGHTING LEVELS. PROVIDE SWITCH STATIONS WITH ENGRAVED PUSHBUTTONS INDICATING CONTROL PROVIDED (ON, OFF, RAISE, LOWER). ADDITIONALLY, PROVIDE A MELAMINE SIGN, COORDINATE WORDING WITH THE CONTRACTING OFFICER.
9. NOT ALL PARTS ARE SHOWN IN DIAGRAM. PROVIDE COMPONENTS FOR A COMPLETE WORKING SYSTEM.
10. ACTIVATION OF THE FIRE ALARM SYSTEM MUST TURN LIGHTING ON FULLY.
11. MUST BE UL 924 LISTED.
12. PROPOSED SEQUENCE OF OPERATION, COORDINATE WITH THE CONTRACTING OFFICER: LIGHTING IS INITIATED ON MANUALLY VIA LOW VOLTAGE SWITCH. LIGHTING IS LOWERED TO 50% ILLUMINATION LEVEL VIA HIGH BAY/OCCUPANCY/VACANCY SENSOR AFTER 20 MINUTES OF VACANCY. LIGHTING IS SCHEDULED TO FULL OFF AFTER HOURS. LOW VOLTAGE SWITCH MAY BE USED AFTER HOURS TO TURN LIGHTS ON MANUALLY. IF MANUAL ON AFTER HOURS IS INITIATED, HIGH BAY/OCCUPANCY/VACANCY SENSORS WILL TURN LIGHTS OFF AFTER 20 MINUTES OF VACANCY. EACH LOCAL SWITCH MUST CONTROL THE FIXTURES WITHIN THE SAME AREA.

1. PROVIDE 120V AC BYPASS RELAY WITH MINIMUM 20 AMP, 120V RATED NORMALLY OPEN AND NORMALLY CLOSED CONTACTS. NORMALLY CLOSED BYPASS RELAY CONTACTS MUST BE HELD OPEN BY 120 VOLT POWER. NORMALLY CLOSED CONTACT MUST CLOSE WHEN FIRE ALARM/MASS NOTIFICATION SYSTEM IS IN ALARM AND MUST BYPASS THE LIGHTING SWITCHES, CONTROLS AND OCCUPANCY/VACANCY SENSORS.
2. BYPASS RELAY MUST BE UL LISTED FOR EMERGENCY LIGHTING CONTROL USE.
3. PROVIDE ENGRAVED INFORMATIONAL SIGN TO LABEL BYPASS RELAY WITH CIRCUIT NUMBER, FIRE ALARM CONTROL MODULE ADDRESS AND LIGHTING AREA SERVED. INDICATE RELAY LOCATIONS ON RECORD DRAWINGS. INCLUDE A LISTING OF BYPASS RELAYS WITH FIRE ALARM INFORMATION, CONTROL CIRCUIT, AND AREA CONTROLLED IN TABLE FORMAT AND INCLUDE TABLE IN OPERATION AND MAINTENANCE MANUAL.
4. COORDINATE WORK, INCLUDING LOCATIONS OF LIGHTING BYPASS RELAYS, WITH FIRE ALARM INSTALLER.
5. INSTALL BYPASS RELAY ABOVE SUSPENDED/ACCESSIBLE CEILING IN AN ACCESSIBLE LOCATION WITHIN THE ROOM CONTROLLED. INDICATE RELAY LOCATIONS ON THE AS-BUILT DRAWINGS.
6. COORDINATE WITH FIRE ALARM INSTALLER. PROVIDE TESTING OF EACH RELAY. DOCUMENT TEST RESULTS ON RELAY SUMMARY TABLE.

LOCAL AREA CONTROLLER DIAGRAM - ANNEX & CORRIDORS

SCALE: NOT TO SCALE EI 101 EI 102



SCALE: 1/8" = 1'-0"

ET101	
-------	--

PLAN
NORTH


1/8" = 1' - 0"

A horizontal graphic scale bar with a black and white checkered pattern for the first 5 feet, followed by solid black segments. Tick marks are labeled 0, 5', 10', 15', and 30'.



KEY PLAN

- | | |
|----|---|
| 13 | COMMUNICATIONS CABLES AND CONDUITS MUST NOT BE ROUTED THROUGH THE STAIR UNLESS THEY ARE DIRECTLY RELATED TO AN ITEM SERVING THE STAIR. |
| 14 | ROUTE CONDUIT A MINIMUM OF 15 FEET AWAY FROM THE HEAT SEALERS IN SHOP 111. |
| 15 | [BASE BID]: DUCT BANK ENTRY POINT FOR 6-STRAND MULTIMODE NETWORK P FIBER OPTIC CABLE FROM BUILDING 59. EXTEND CABLE TO GOVERNMENT PROVIDED NETWORK P CABINET IN SHOP 110. [OPTION 11]: DUCT BANK ENTRY POINT FOR (2) 36 STRAND CABLES FOR NETWORKS N AND P. |
| 16 | BOND SHIELDED CABLES, PATCH PANELS, RACKS, AND CABLE TRAY TO TELECOMMUNICATIONS GROUNDING SYSTEM. REFER TO SHEET EP102 FOR PRIMARY GROUNDING BUSBAR. |
| 17 | COORDINATE EXACT LOCATION AND MOUNTING HEIGHT WITH THE SLIDING DOOR. |

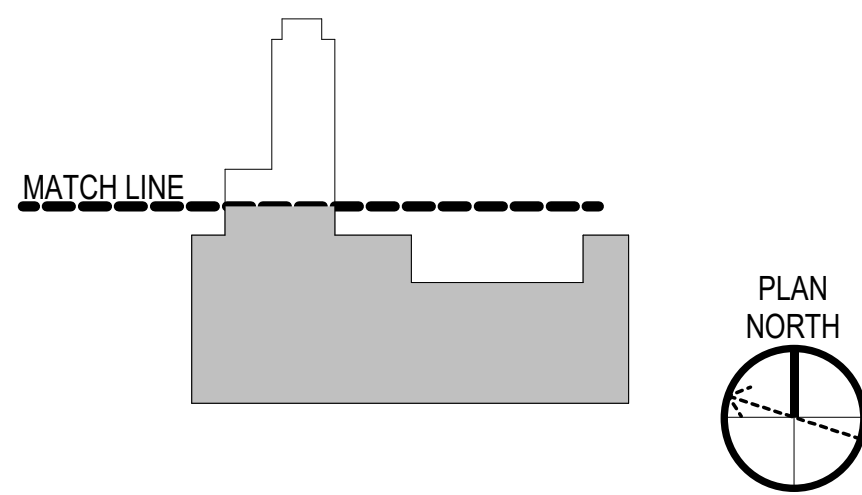


1/8" = 1' - 0"

A horizontal graphic scale bar with alternating black and white segments. It is marked with the values 0, 5', 10', 15', and 30 at the top. The bar represents a total length of 30 feet.

10/1/2025 5:29:03 PM ET103
C:\Users\bdagle\Documents\210325_BLDG00_ELEC-V23_bdagle\QUXG8.rvt

A
B
C
D

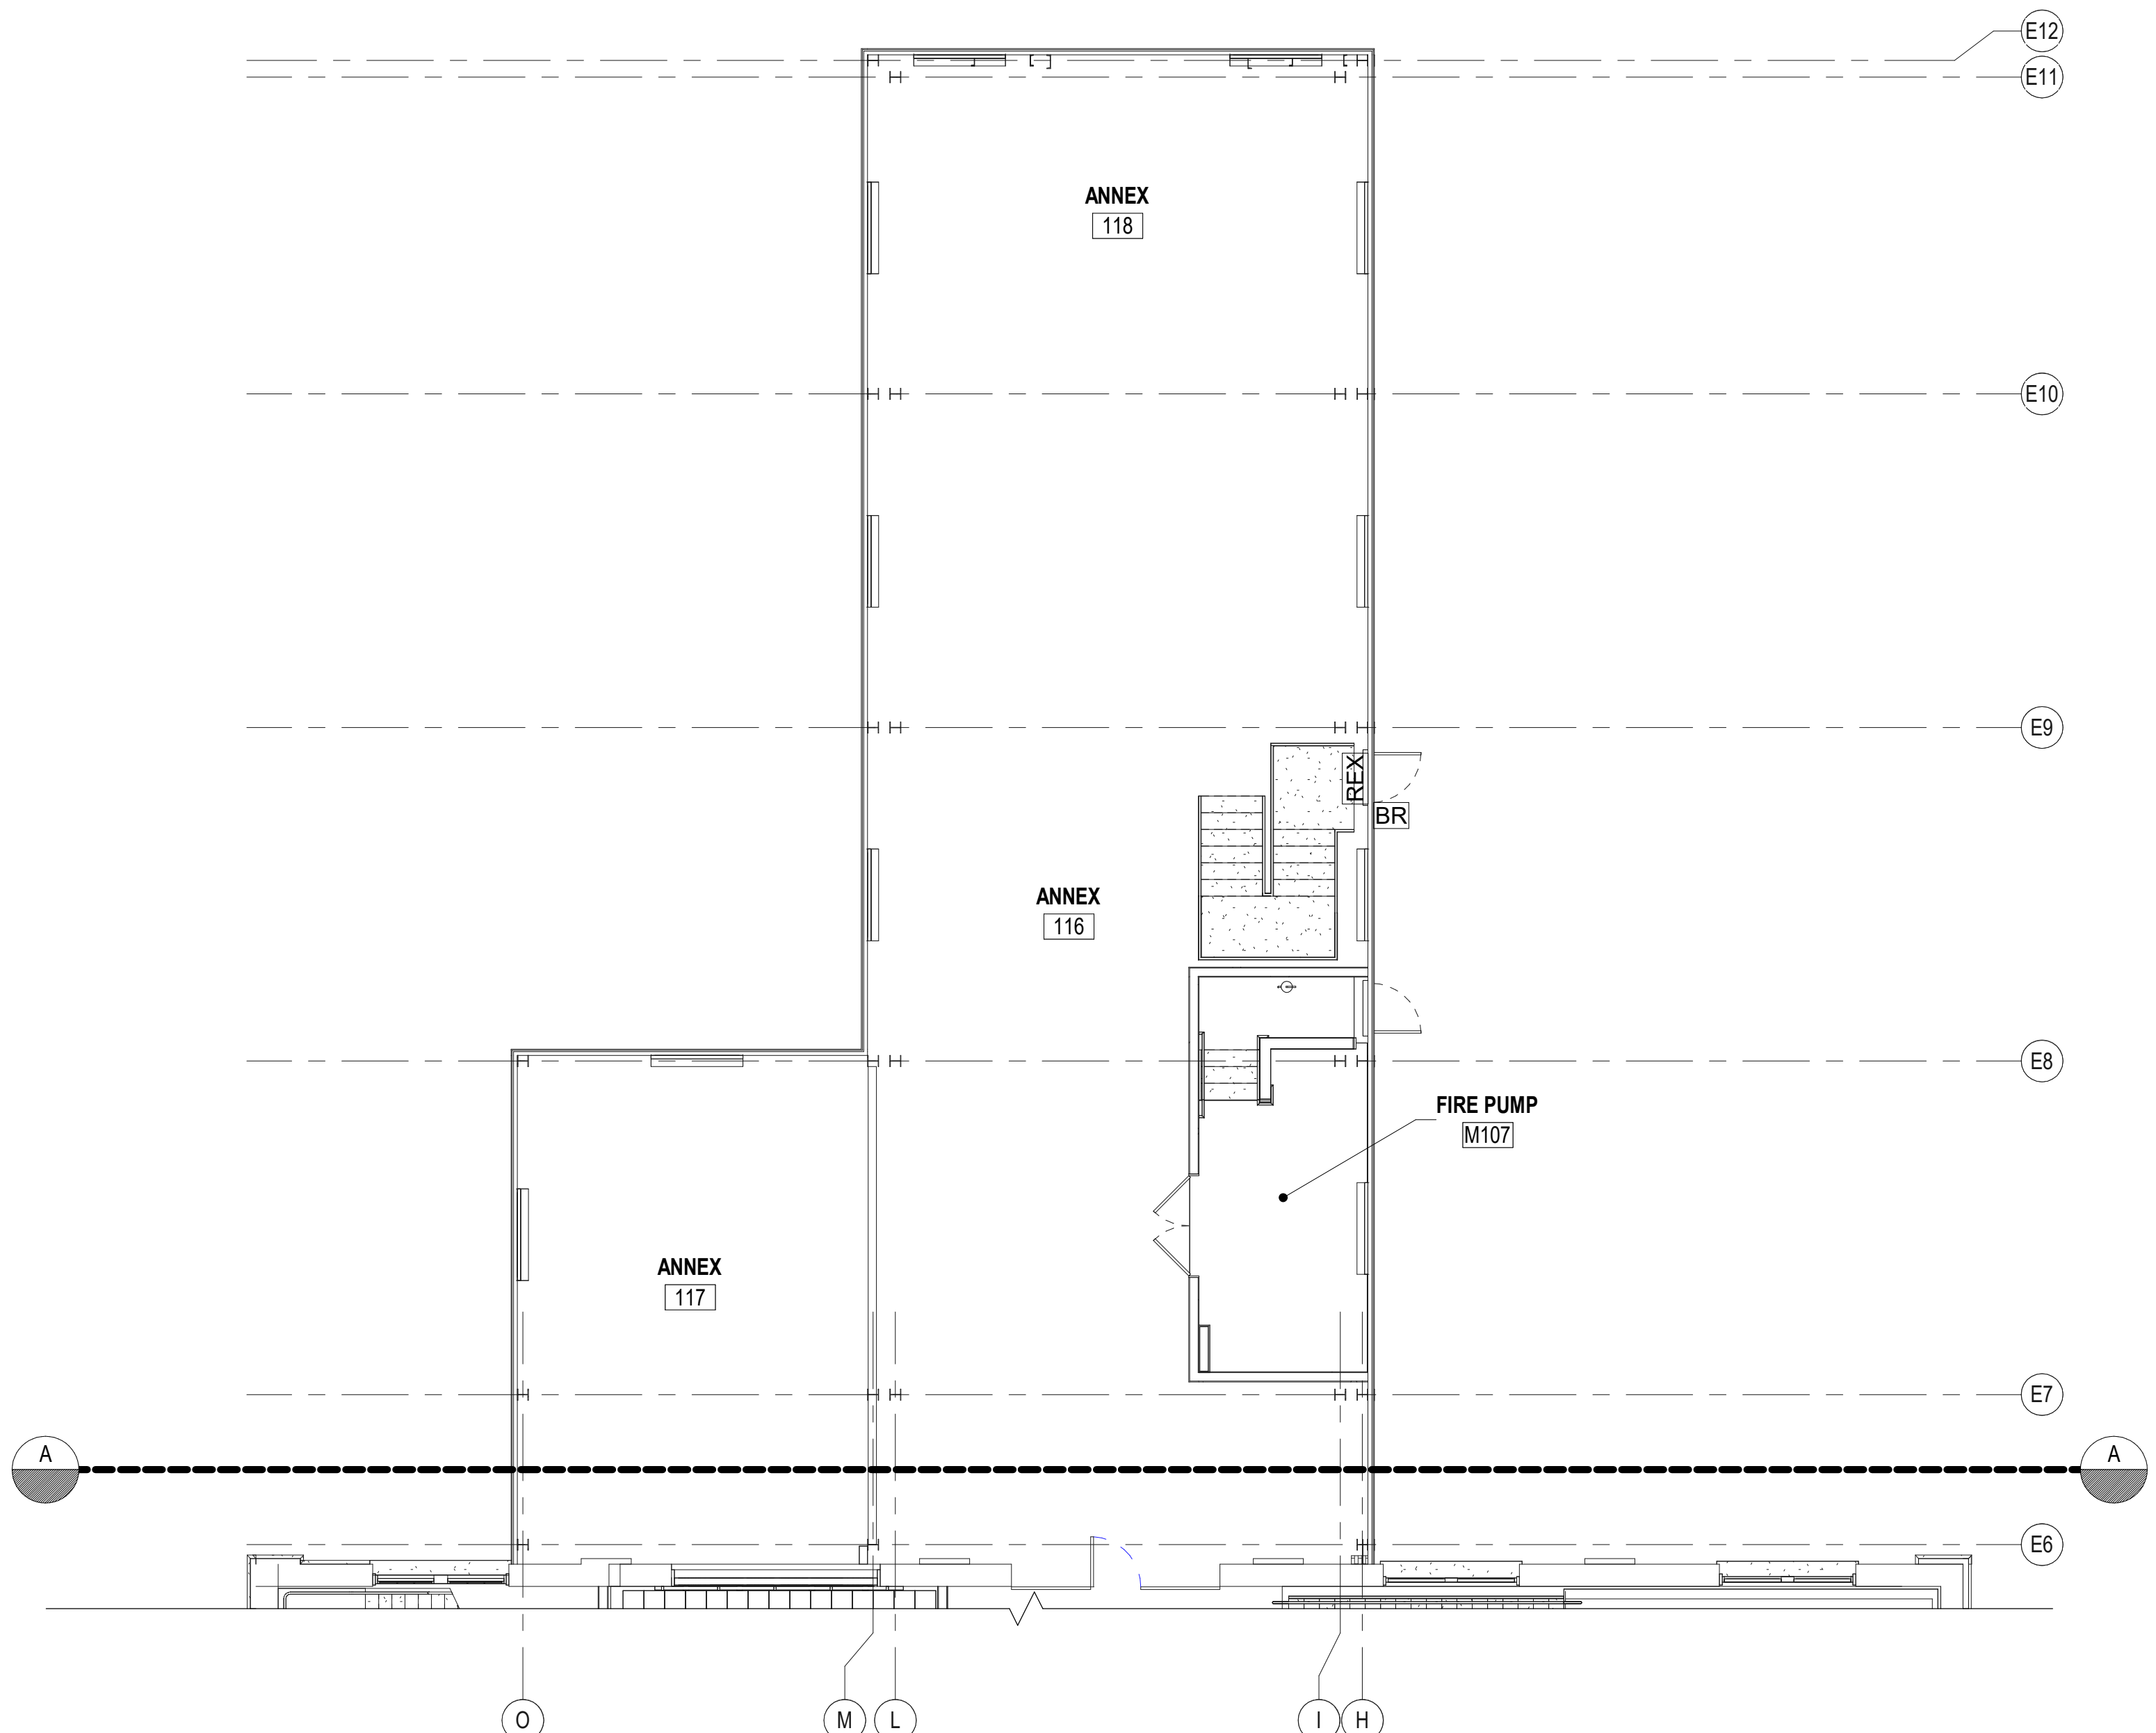

A1 FIRST FLOOR MEZZANINE TECHNOLOGY AND SECURITY PART PLAN - EAST
SCALE: 1/8" = 1'-0"


3 UNCLASSIFIED

3 UNCLASSIFIED

GENERAL NOTES

- REFER TO SHEETS ET501-ET502 FOR TELECOMMUNICATIONS RISER DIAGRAM AND DETAILS.
- REFER TO SHEET EY501 FOR SECURITY DETAILS.

SYN	DESCRIPTION	DATE	APPR
	FINAL SUBMISSION	10/01/2025	RSH

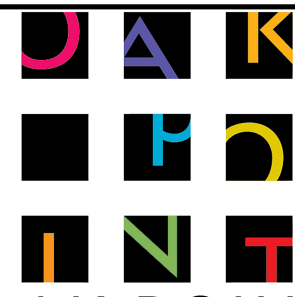

OAK POINT ASSOCIATES

APPROVED
FOR COMMANDER NAVFAC

ACTIVITY

SATISFACTORY TO DATE

DESIGNER HRM

DRAWN BY BPD

CHECKED BY JAT

DESIGN MANAGER T. CARLETON

PROJECT MANAGER L. LYONS

LEAD/NAME

FIRE PROTECTION S. RUCINSKI

NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND

NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - MID-ATLANTIC

PORTSMOUTH NAVAL SHIPYARD - KITTEERY, ME

PORTSMOUTH NAVAL SHIPYARD

B60 REPAIRS

FIRST FLOOR MEZZANINE TECHNOLOGY AND SECURITY PART PLAN - EAST

PROJECT NO. 1740579


NAVFAC DRAWING NO.

SHEET 276 OF 282


ET103

DRAWING REVISION: 14 SEP 2023

KEY PLAN

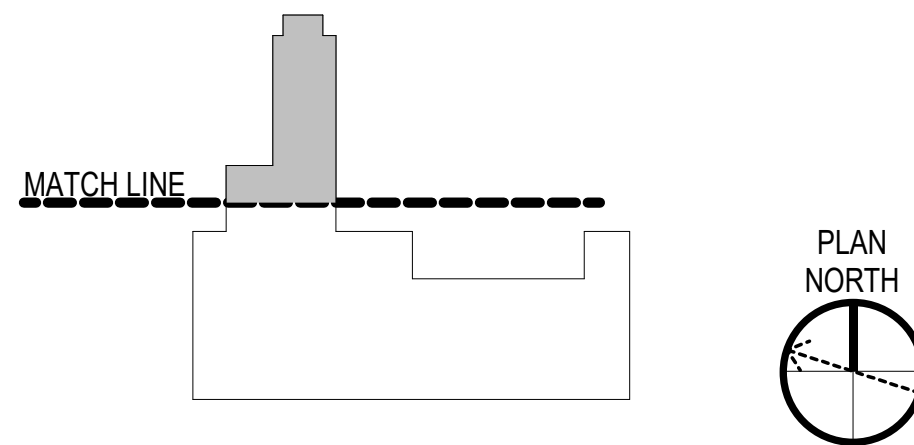

GRAPHIC SCALE



5

A
B
C
D

B UNCLASSIFIED

A




SCALE: 1/8" = 1'-0"




KEY PLAN

- 1 REFER TO DETAIL C1/ET502 FOR TV MONITOR AND AV INSTALLATION DETAIL.
- 2 FOR ELEVATOR LOBBY 2-WAY COMMUNICATIONS SYSTEM. REFER TO DETAIL A3/ET501.
- 3 TELECOMMUNICATIONS CONDUIT AND CABLING ON THIS LEVEL MUST BE ROUTED TO THE FIRST FLOOR TELECOMMUNICATIONS ROOM. REFER TO SHEET ET102.
- 4 SECURITY CONDUIT [BASE BID] AND CABLING [OPTION 4] MUST BE ROUTED TO THE FIRST FLOOR SECURITY PANEL. REFER TO SHEET ET102.
- 5 PROVIDE SHIELDED TELECOMMUNICATIONS CABLING AND [OPTION 4]: SECURITY CABLING ON THIS LEVEL.
- 6 COMMUNICATIONS CABLES AND CONDUITS MUST NOT BE ROUTED THROUGH THE STAIR UNLESS THEY ARE DIRECTLY RELATED TO AN ITEM SERVING THE STAIR.

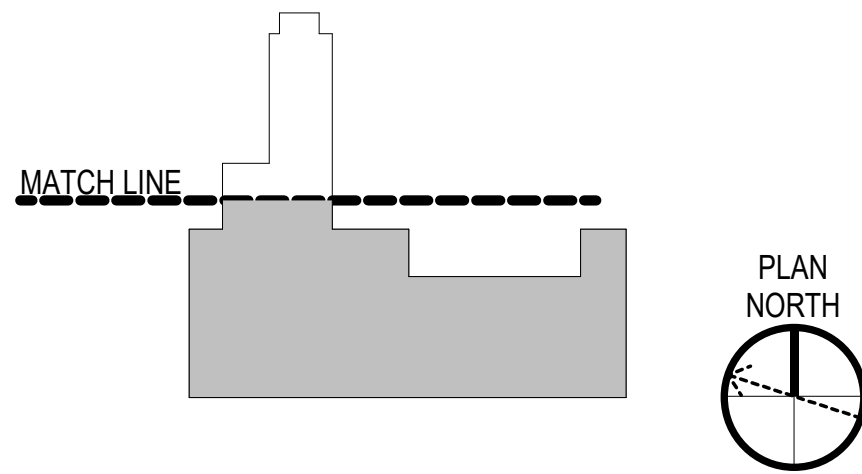

GRAPHIC SCALE(S)






KEYNOTES


- 1 REFER TO DETAIL C1/ET502 FOR TV MONITOR AND AV INSTALLATION DETAIL.
- 2 PROVIDE NETWORK N CABINET. REFER TO DETAIL A2/ET502.
- 3 PROVIDE NETWORK P CABINET. REFER TO DETAIL A2/ET502.
- 4 PROVIDE WALL MOUNTED TELEPHONE BACKBOARD AND PUNCHDOWN BLOCKS.
- 5 PROVIDE LADDER CABLE TRAY AND ACCESSORIES.
- 6 FOR ELEVATOR LOBBY 2-WAY COMMUNICATIONS SYSTEM. REFER TO DETAIL A3/ET501.
- 7 FOR PRINTER. COORDINATE EXACT LOCATION WITH THE CONTRACTING OFFICER.
- 8 SECURITY CONDUIT [BASE BID] AND CABLING [OPTION 4] MUST BE ROUTED TO THE FIRST FLOOR SECURITY PANEL. REFER TO SHEET ET102.

- | | |
|----|--|
| 9 | COMMUNICATIONS CABLES AND CONDUITS MUST NOT BE ROUTED THROUGH THE STAIR UNLESS THEY ARE DIRECTLY RELATED TO AN ITEM SERVING THE STAIR. |
| 10 | PROVIDE A MINIMUM OF 3' OF CLEARANCE BEHIND THE CABINETS. |
| 11 | PROVIDE COMBINATION POKE THROUGH DEVICE. REFER TO POKE THROUGH DETAIL A1/EP505. |
| 12 | PROVIDE OPEN TOP CABLE SUPPORTS (J-HOOKS), ABOVE THE SUSPENDED CEILING, AT 3' SPACING AROUND THE PERIMETER OF THE ROOM. |
| 13 | PROVIDE INDICATED EMT CONDUIT WITH NON-METALLIC BUSHINGS. COORDINATE EXACT MOUNTING HEIGHT AND LOCATION IN THE FIELD. |


KEY PLAN

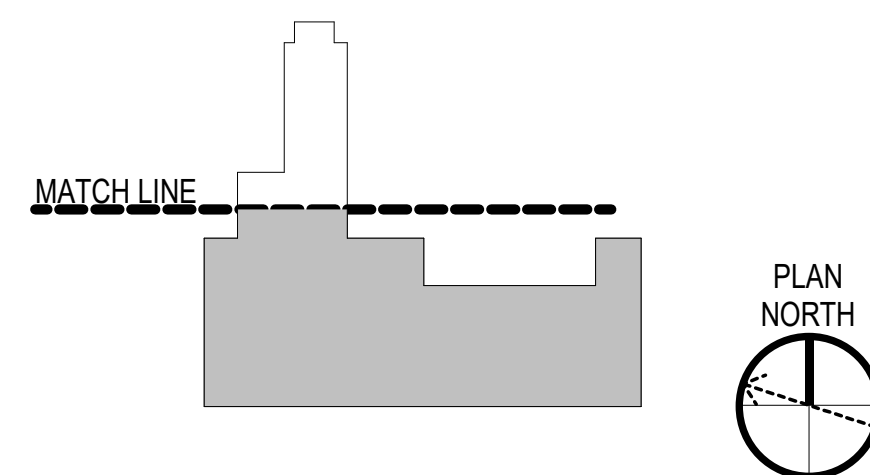

GRAPHIC SCALE(S)



10/1/2025 5:29:17 PM ET501
C:\Users\bdagle\Documents\22103.25_BLDG60_ELEC-V23_bdagle\QUXG8.rvt

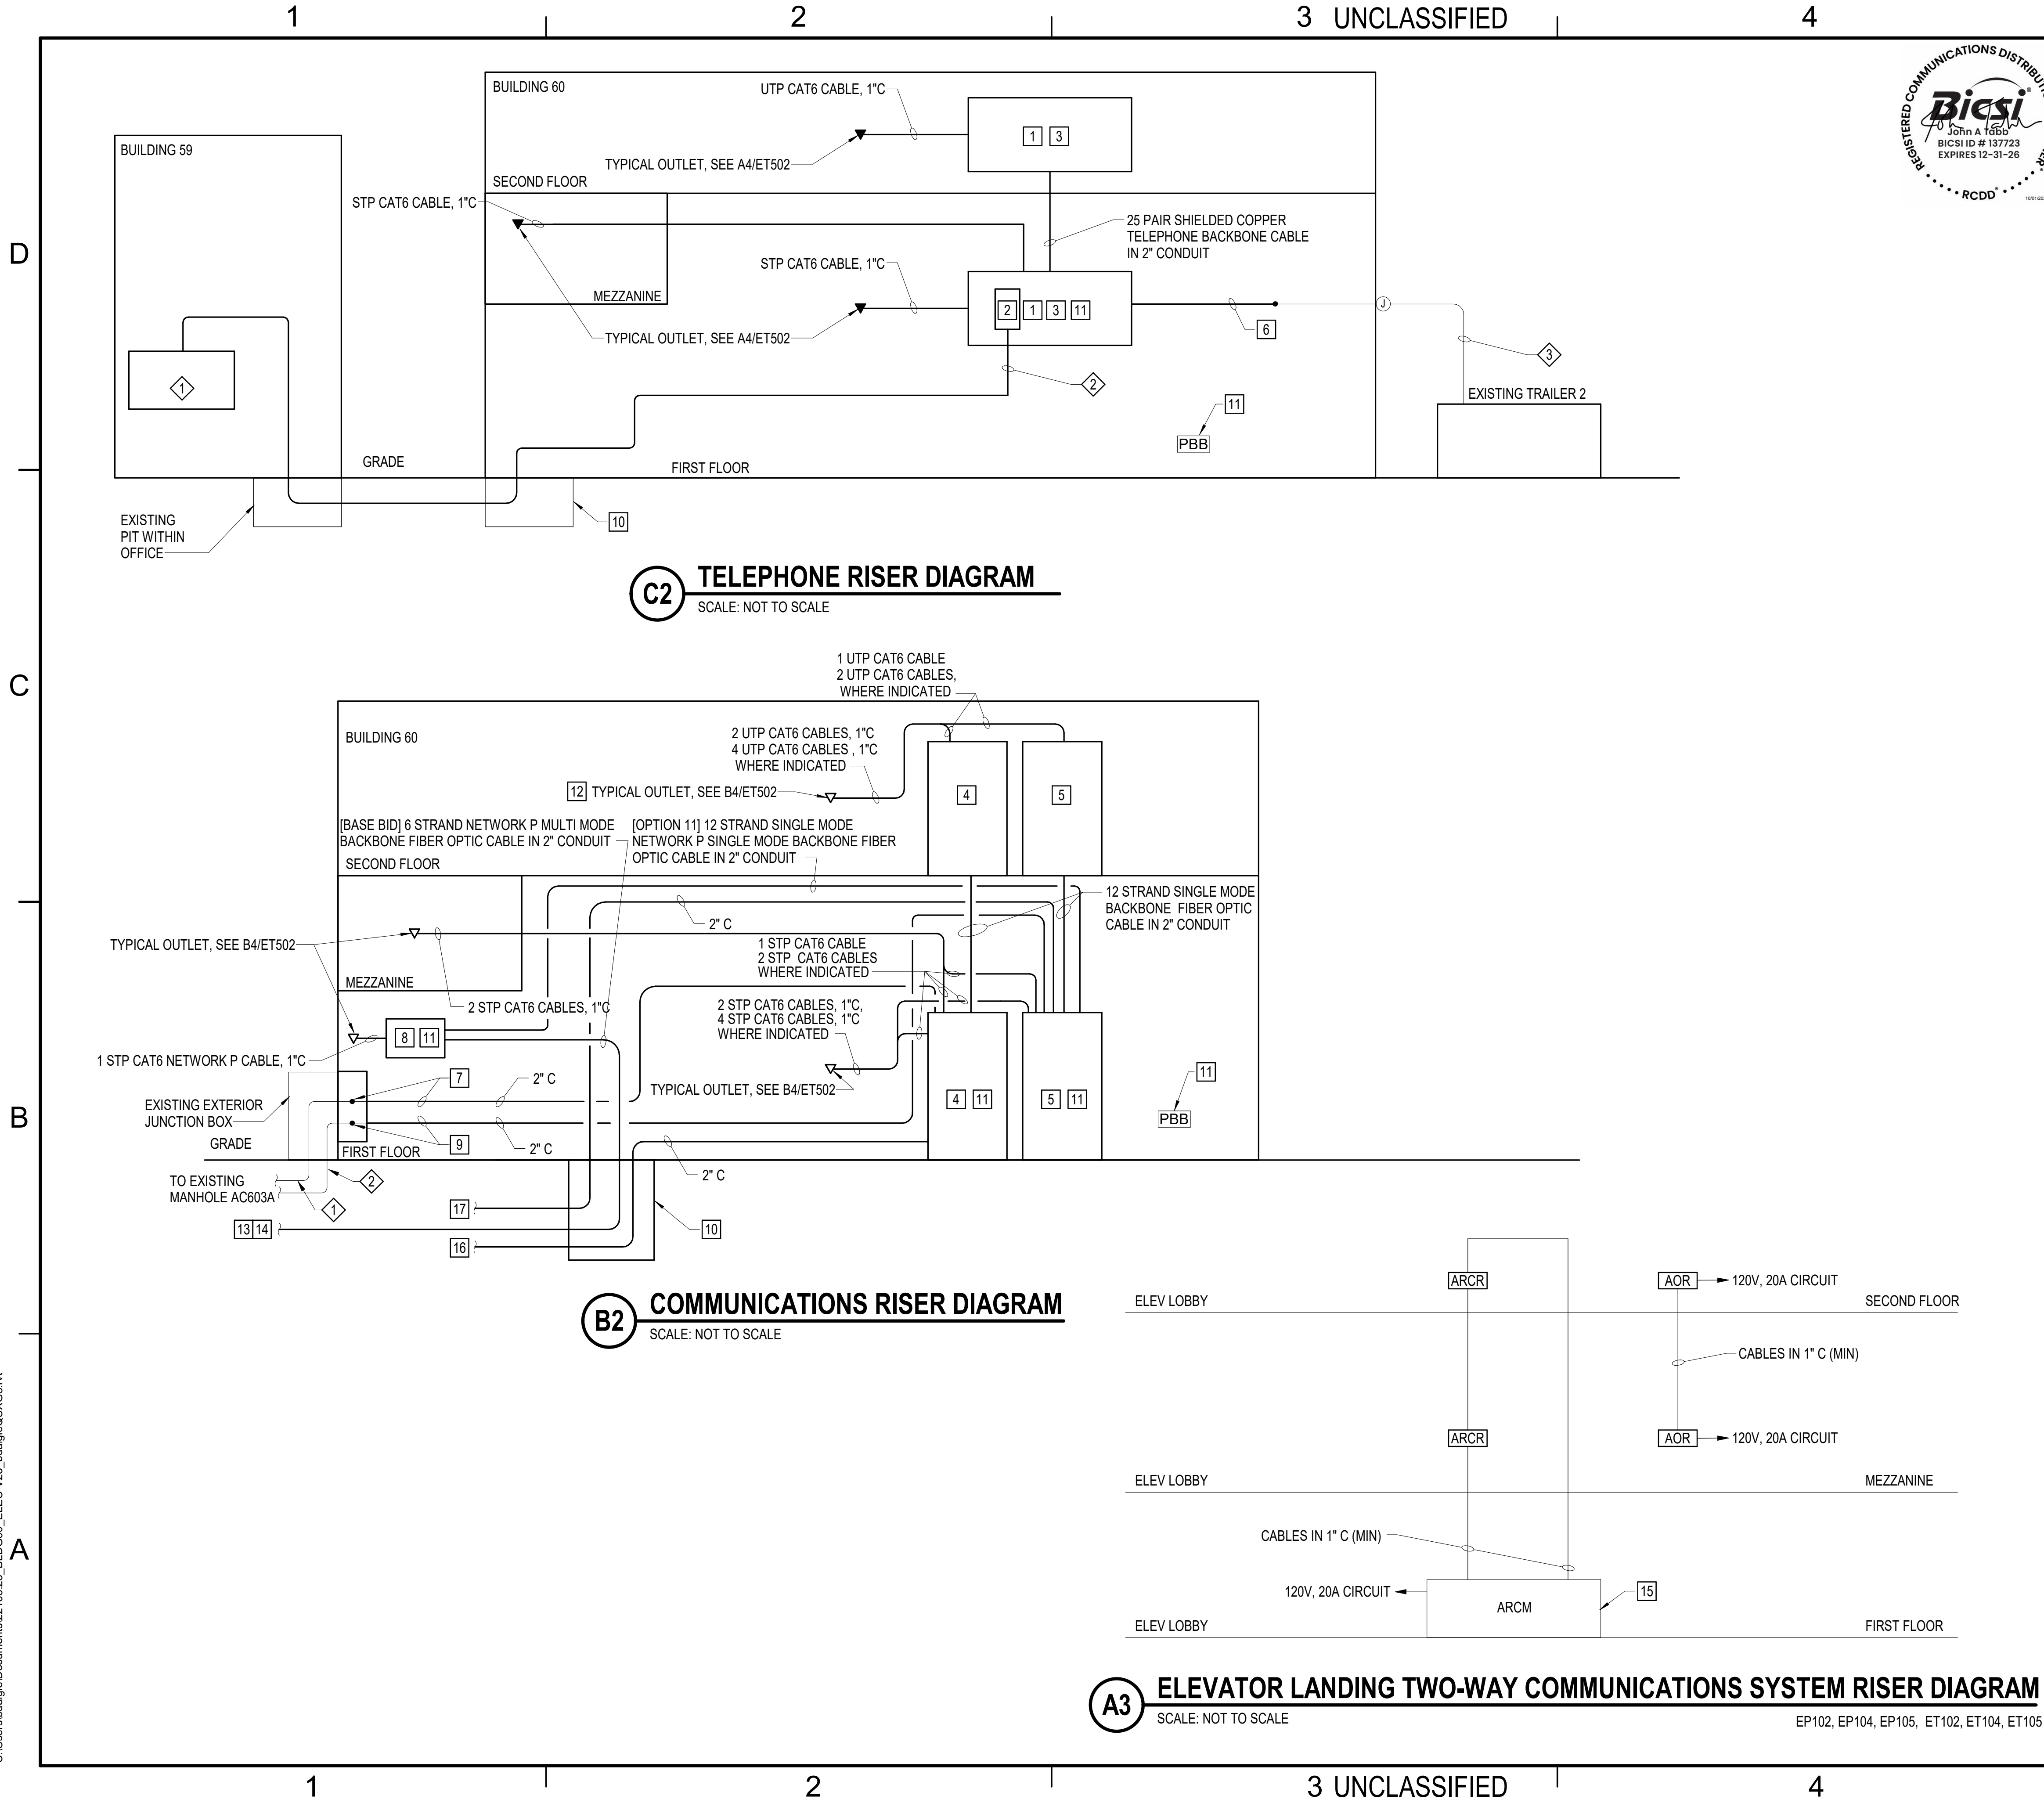

GENERAL NOTES

1. PROVIDE SHIELDED TWISTED PAIR (STP) CATEGORY 6 CABLE ON THE FIRST FLOOR AND MEZZANINE. PROVIDE UNSHIELDED TWISTED PAIR (UTP) CATEGORY 6 CABLE ON THE SECOND FLOOR.
2. REFER TO SHEET ES101 FOR EXISTING MANHOLES AND LOCATION OF BUILDING 59.
3. REFER TO SHEET ET106 FOR BUILDING 59 TECHNOLOGY PLAN.
4. REFER TO SHEET ES102 FOR TELECOMMUNICATIONS SITE PLAN.

EXISTING KEYNOTES

- 1 EXISTING PUNCHDOWN FOR B60 TELEPHONE CABLE TO REMAIN.
- 2 EXISTING 25-PAIR COPPER TELEPHONE BACKBONE CABLE BETWEEN B59-B60 TO REMAIN.
- 3 EXISTING 25-PAIR COPPER TELEPHONE BACKBONE CABLE BETWEEN B60 AND EXISTING TRAILER 2.

REMOVALS KEYNOTES

- 1 [OPTION 11]: REMOVE EXISTING NETWORK N OUTSIDE PLANT CABLE. REFER TO SHEET ES102.
- 2 [OPTION 11]: REMOVE EXISTING NETWORK P OUTSIDE PLANT CABLE. REFER TO SHEET ES102.

KEYNOTES

- 1 PROVIDE TELEPHONE BACKBOARD.
- 2 PROVIDE BUILDING PROTECTOR ASSEMBLY.
- 3 PROVIDE CATEGORY 6, 110 PUNCHDOWN BLOCKS.
- 4 PROVIDE NETWORK N FLOOR MOUNTED DATA CABINET. REFER TO DETAIL A1/ET502.
- 5 PROVIDE NETWORK P FLOOR MOUNTED DATA CABINET. REFER TO DETAIL A1/ET502.
- 6 [CLIN 004] REESTABLISH TELEPHONE SERVICE TO EXISTING TRAILER 2. SPLICE AND EXTEND EXISTING TELEPHONE BACKBONE CABLE. FOR BIDDING PURPOSES, ASSUME 25-PAIR. REMOVE TEMPORARY SERVICE ONCE PERMANENT SERVICE IS INSTALLED, TESTED, AND ACCEPTED.
- 7 [BASE BID]: TEST 12-STRANDS OF EXISTING FIBER BEFORE SPLICING. PROVIDE FUSION SPLICE TO EXISTING 12SM NETWORK N OUTSIDE PLANT CABLE AND PROVIDE BACKBONE CABLE TO FIRST FLOOR NETWORK N CABINET.
- 8 INSTALL GOVERNMENT FURNISHED WALL MOUNTED NETWORK P CABINET. CABINET SERVES FOUR OUTLETS IN THE CNC/GERBER MACHINE AREA.
- 9 [BASE BID]: TEST 12-STRANDS OF EXISTING FIBER BEFORE SPLICING. PROVIDE FUSION SPLICE TO EXISTING 12MM NETWORK P OUTSIDE PLANT CABLE AND PROVIDE BACKBONE CABLE TO FIRST FLOOR NETWORK P CABINET.
- 10 EXISTING PIT AND DC DUCTBANK ENTRANCE.
- 11 PROVIDE SHIELDED PATCH PANELS (COMMUNICATIONS) OR 110 BLOCKS (TELEPHONE) AND BOND SHIELDED CABLES, PATCH PANELS, RACKS, AND CABLE TRAY TO TELECOMMUNICATIONS GROUNDING SYSTEM.
- 12 PROVIDE AS PART OF POKE THROUGH ASSEMBLY, WHERE INDICATED.
- 13 [BASE BID]: PROVIDE FUSION SPLICE TO EXISTING 6 STRAND MULTIMODE NETWORK P CABLE IN BUILDING 59. REFER TO SHEET ET106.
- 14 [BASE BID]: PROVIDE FIBER OPTIC JUMPERS AND ASSOCIATED WORK IN BUILDING 46 TO CONNECT EXISTING 6 STRAND MULTIMODE NETWORK P CABLES. COORDINATE EXACT WORK WITH THE CONTRACTING OFFICER.
- 15 COORDINATE FLUSH OR SURFACE MOUNTED EQUIPMENT WITH REDUCED STUD DEPTH (2-1/2") AT THE FIRST FLOOR.
- 16 [OPTION 11]: PROVIDE 36 STRAND SINGLE MODE NETWORK N OUTSIDE PLANT CABLE BETWEEN BUILDING 86A, SECOND FLOOR AND BUILDING 60. REFER TO SHEETS ES102 AND ET106 FOR CONTINUATION.
- 17 [OPTION 11]: PROVIDE 36 STRAND SINGLE MODE NETWORK P OUTSIDE PLANT CABLE BETWEEN BUILDING 13 AND BUILDING 60. REFER TO SHEETS ES102 AND ET106 FOR CONTINUATION.

RS#	1001/2025	DATE	10/01/2025
SY#	DESCRIPTION	FINAL SUBMISSION	

DESIGNER	HRM
DRAWN BY	BPD
CHECKED BY	JAT
DESIGN MANAGER	T. CARLETON
PROJECT MANAGER	L. LYONS
FOOTPRINT	
FIRE PROTECTION	S. RUCINSKI

NAVFAC PROJECT NO. 1740579
NAVFAC DRAWING NO. ET501

SHEET 280 OF 282

10/1/2025 5:29:17 PM ET501
C:\Users\bdagle\Documents\22103.25_BLDG60_ELEC-V23_bdagle\QUXG8.rvt

UNCLASSIFIED

A

2

3 UNCLASSIFIED

5

DRAWFORM REVISION: 14 SEP 2023

